



TEST REPORT

APPLICANT	: Tiinlab Acoustic Technology Limited
PRODUCT NAME	1MORE ComfoBuds True Wireless Headphones
MODEL NAME	: ESS3001T
BRAND NAME	: 1MORE
FCC ID	: 2ASDIESS3001T
STANDARD(S)	: 47 CFR Part 15 Subpart C
RECEIPT DATE	: 2020-05-22
TEST DATE	: 2020-05-30 to 2020-06-01
ISSUE DATE	: 2020-07-10

Edited by:

Pong Mi

Peng Mi (Rapporteur)

Approved by:

eng

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn





DIRECTORY

1. Technical Information 3
1.1. Applicant and Manufacturer Information 3
1.2. Equipment Under Test (EUT) Description 3
1.3. The Channel Number and Frequency 5
1.4. Test Standards and Results ······ 6
1.5. Environmental Conditions 7
2. 47 CFR Part 15C Requirements ······ 8
2.1. Antenna Requirement ······ 8
2.2. Duty Cycle of Test Signal ······ 9
2.3. Maximum Peak Conducted Output Power ······10
2.4. Maximum Average Conducted Output Power ······13
2.5. 6 dB Bandwidth ······14
2.6. Conducted Spurious Emissions and Band Edge17
2.7. Power Spectral Density (PSD) ······21
2.8. Conducted Emission ······24
2.9. Restricted Frequency Bands ······26
2.10. Radiated Emission ····································
Annex A Test Uncertainty ·······37
Annex B Testing Laboratory Information

Change History					
Version Date Reason for Change					
1.0 2020-07-10		First edition			





1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Tiinlab Acoustic Technology Limited				
Applicant Address:	Tianliao Building 1403, Zone A Tianliao Industrial Park, Taoyuar				
	Str., Nanshan Dist., Shenzhen, P.R. China				
Manufacturer:	Tiinlab Acoustic Technology Limited				
Manufacturer Address:	Tianliao Building 1403, Zone A Tianliao Industrial Park, Taoyuan				
	Str., Nanshan Dist., Shenzhen, P.R. China				

1.2. Equipment Under Test (EUT) Description

Product Name:	1MORE ComfoBuds	1MORE ComfoBuds True Wireless Headphones			
Serial No.:	(N/A, marked #1 by te	est site)			
Hardware Version:	GT32-v1.2				
Software Version:	V1.3				
Equipment Type:	Bluetooth LE				
Bluetooth Version:	5.0				
Modulation Type:	GFSK				
Operating Frequency Range:	2402MHz - 2480MHz				
Antenna Type:	FPC Antenna				
Antenna Gain:	Left: -4.57dBi				
	Right: -4.72dBi				
	Battery cell (Headpho	nes)			
	Brand Name:	N/A			
	Model No.:	JHY1050			
Accessory Information:	Serial No.:	(N/A, marked #1 by test site)			
	Capacity: 35mAh				
	Rated Voltage:	3.7V			
	Charge Limit:	4.2V			



Fax: 86-755-36698525



	Battery cell (Headp	phones)		
	Brand Name:	N/A		
	Model No.:	M1050A		
	Serial No.:	(N/A, marked #1 by test site)		
	Capacity:	35mAh		
	Rated Voltage:	3.7V		
	Charge Limit:	4.2V		
	Battery (Charging Case)			
	Brand Name:	N/A		
Accessory Information:	Model No.:	682723		
Accessory mormation.	Serial No.:	(N/A, marked #1 by test site)		
	Capacity:	410mAh		
	Rated Voltage:	3.80V		
	Charge Limit:	4.35 V		
	Charging Case			
	Brand Name:	1MORE		
	Model No.:	ESS3001T		
	Serial No.:	(N/A, marked #1 by test site)		
	Rated Input:	5V-0.5A		
	Rated Output:	5V=0.2A		

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.3. The Channel Number and Frequency

Note: The lowest channel 0, middle 19 and highest 39 were selected for test in the report.



Fax: 86-755-36698525



1.4. Test Standards and Results


The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title	
1	47 CFR Part 15	Radio Frequency Devices	

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark	
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation	
2	N/A	Duty Cycle of Test Signal	Jun 01, 2020	Ouyang Feng	PASS	No deviation	
3	15.247(b)	Maximum Peak Conducted Output Power	Jun 01, 2020	Ouyang Feng	PASS	No deviation	
4	15.247(b)	Maximum Average Conducted Output Power	Jun 01, 2020	Ouyang Feng	PASS	No deviation	
5	15.247(a)	Bandwidth	Jun 01, 2020	Ouyang Feng	PASS	No deviation	
6	15.247(d)	Conducted Spurious Emission and Band Edge	Jun 01, 2020	Ouyang Feng	PASS	No deviation	
7	15.247(e)	Power Spectral Density (PSD)	Jun 01, 2020	Ouyang Feng	PASS	No deviation	
8	15.207	Conducted Emission	N/A	N/A	N/A _{Note 1}	N/A	
9	15.247(d)	Restricted Frequency Bands	Jun 01, 2020	Yang Jie	PASS	No deviation	
10	15.209, 15.247(d)	Radiated Emission	May 30, 2020	Yang Jie	PASS	No deviation	
	Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the						







AC power lines or contain provisions for operation while connected to the AC power lines. **Note 2:** The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r02.

Note 3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 2.0dB means the cable loss is 2.0dB.

Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.


1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



Fax: 86-755-36698525





2.47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1.Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2.Test Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn




2.2. Duty Cycle of Test Signal

2.2.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the testedmode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered). When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ±2%; otherwise, the duty cycle is considered to be non constant.

2.2.2.Test Description

Test Setup:



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

2.2.3.Test Result

Test Mode	Duty Cycle(%) (D)	Duty Factor (10*lg[1/D])	
GFSK	32.80	4.84	



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



2.3. Maximum Peak Conducted Output Power


2.3.1.Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.3.2.Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.3.3.Test Procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration.Following is the test procedure for Peak Output Power test on the spectrum analyzer: a) Set analyzer center frequency to channel center frequency

- b)Set RBW to1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time = auto couple
- f) Detector = peak
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use peak marker function to determine the peak amplitude level





2.3.4.Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A.Test Verdict:

Channel Frequency		Measured Outp	Measured Output Peak Power		nit	Vardiat
Channel	(MHz) dBm		W	dBm	W	Verdict
0	2402	4.49	0.0028			PASS
19	2440	4.29	0.0027	30	1	PASS
39	2480	5.52	0.0036			PASS

B.Test Plot:

RF 50 Ω .AC		SENSE:PULSE SOU		02:55:40 PM Jun 01, 2020	Peak Search
rker 1 2.402252000000	CHZ PNO: Fast IFGain:Low	Trig: Free Run Atten: 28 dB	Avg Type: Log-Pwr Avg Hold:>10/10	TRACE 123456 TYPE MWWWWW DET PINNNN	
Ref Offset 2 dB B/div Ref 20.00 dBm			Mkr	1 2.402 252 GHz 4.492 dBm	Next Pe
ņ			<u>1</u>		Next Pk Rig
					Next Pk Lo
				ALL BRIT	
					Marker De
					Mkr→0
					Mkr→RefL
					Mo
nter 2.402000 GHz es BW 1.0 MHz	#VBW	3.0 MHz	Sweep	Span 3.000 MHz 1.000 ms (1001 pts)	1 o


(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn





RF 50 Q AC	SENSE:PULSE SC	URCE OFF ALIGNAUTO 02: Avg Type: Log-Pwr	57:31 PM Jun 01, 2020	Peak Search
arker 1 2.43972100000	PNO: Fast Trig: Free Run FGain:Low Atten: 28 dB	Avg Hold:>10/10	TRACE 123456 TYPE MWWWWW DET PNNNNN	
Ref Offset 2 dB dB/div Ref 20.00 dBm		Mkr1 2.4	39 721 GHz 4.293 dBm	Next Pe
9 9	1			Next Pk Rig
				Next Pk Lo
.0				Marker De
.0				
.0				Mkr⊸
ο				Mkr→Refl
enter 2.440000 GHz		SI SI	oan 3.000 MHz ms (1001 pts)	M 0 1 o

(Channel 19,2440MHz)



(Channel 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



2.4. Maximum Average Conducted Output Power


2.4.1.Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

2.4.2.Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

Test Setup:



The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.4.3.Test Procedure

KDB 558074 Section 8.3.2 was used in order to prove compliance.

2.4.4.Test Result

			Averag	e Power				
Channel Frequency (MHz)		Measured	Measured Duty Factor		Duty Factor Calculated			Verdict
		dBm		dBm	W	dBm	W	
0	2402	-0.42		4.42	0.0028			PASS
19	2440	-0.84	4.84	4.00	0.0025	30	1	PASS
39	2480	0.06		4.90	0.0031			PASS



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




2.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

2.5.2.Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.5.3.Test Procedure

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize

h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission





The automatic bandwidth measurement capability of an instrument may be employed using the X dBbandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz,VBW \ge 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by anyintermediate power nulls in the fundamental emission that might be \ge 6 dB.

2.5.4.Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the module.

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
0	2402	0.672	≥500	PASS
19	2440	0.672	≥500	PASS
39	2480	0.672	≥500	PASS

B. Test Plot:



(Channel 0, 2402MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn

REPORT No.: SZ20050241W01





(Channel 19,2440 MHz)



(Channel 39, 2480MHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn

-






2.6. Conducted Spurious Emissions and Band Edge

2.6.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.6.2.Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

2.6.3.Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



2.6.4.Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A.Test Verdict:

-	Frequency	Measured Max. Out of	Limit		
Channel	(MHz)	Band Emission (dBm)	Carrier Level	Calculated	Verdict
			Carrier Lever	-20dBc Limit	
0	2402	-58.93	-9.69	-29.69	PASS
19	2440	-43.90	3.19	-16.81	PASS
39	2480	-43.35	4.61	-15.39	PASS


B.Test Plot:

arker 4		4000000 GH		SENSE:PULS	E SOURCE OFF	ALIGN AUTO Type: RMS		1Jun 01, 2020	Peak Search
	2 4.80426	PN	0: Fast 🔾	Trig: Free Run Atten: 28 dB		Hold:>10/10	TYP	E MWWWWW T A N N N N N	
-	_	FG	ain:Low	Atten: 28 dB		D.A.L.			NextPea
) dB/div	Ref Offse Ref 20.0					IVIN		3 GHz 26 dBm	
og	1(01 20.0								
0.0									Next Pk Righ
.00	01								3
0,0									
0.0									Next Pk Lei
0.0 0.0									Next I K Ec
0.0 0.0									
0.0 ·····							m	~~~~	Marker Delt
0.0	mun	m	~~~	- manun	~~~~~				Marker Deit
tart 30	MHz / 100 kHz		#\/D\/	V 300 kHz*		#Sweep 3	Stop 2	5.00 GHz	MI
Doc BlA		×	#VDV	Y 500 KH2	FUNCTION	FUNCTION WIDTH			Mkr→C
	TDC CCL		GHz	-9.687 dBm	FUNCTION	PONCTION WIDTH	PONCTIC		
KR MODE	1 f								
KR MODE 1		4.804 3	GHz	-58.926 dBm					
KR MODE (1 N 2 N 3 A 4	1 f		GHz	-58.920 dBm					Mkr→RefL
KR MODE 1 N 2 N 3 4 5 5 6	1 f		GHz	-58.920 dBm					Mkr→RefLv
KR MODE 1 1 N 2 N 3 4 5 5 6 7 8	1 f		GHz	-98.920 dBm				_	
KR MODE 1 N 2 N 3 4 5 6 6 7 8 9 0	1 f		GHz	-38.920 QBM					Mor
KR MODE	1 f		GHZ	-06.920 dBm					Mkr→RefLv More 1 of:

(Channel = 0, 30MHz to 25GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525








(Band Edge, Channel = 0)



(Channel = 19, 30MHz to 25GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn





	1 Jun 01, 2020	03:36:21 PM	ALIGN AUTO	SOURCE OFF	SENSE:PULS		vept SA 2 AC	nalyzer - Sv 50 :		ent Spe
Peak Search	E 123456 PE MWWWWW T P N N N N N	TYP	e: Log-Pwr d:>10/10		Trig: Free Rur Atten: 28 dB	GHz PNO: Fast FGain:Low		488115	2 24	rker
Next Peak	3 1 GHz 49 dBm	2 24.488	Mkr					f Offset 2 ef 20.00		dB/div
Next Pk Righ								>1		
Next Pk Lef	?									a a a
Marker Delta	~~~~		~~~~	an a				doin the se		
Mkr→Cf	5.00 GHz 0001 pts)	.081 s (1	#Sweep 3	FUNCTION	300 kHz Y		×		N 10	art 30 es Bi
Mkr→RefLv					4.612 dBm -43.349 dBm	9 6 GHz 8 1 GHz				NN
More 1 of 2										
			I STATUS		Ш		_	-		_

(Channel = 39, 30MHz to 25GHz)



(Band Edge, Channel = 39)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn






2.7. Power Spectral Density (PSD)

2.7.1.Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.7.2.Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

2.7.3.Test Procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration.Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW





2.7.4.Test Result

The lowest, middle and highest channels are tested.

A.Test Verdict:

	Spectral Power Density (dBm/3kHz)									
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict						
0	2402	-8.95	8	PASS						
19	2440	-9.43	8	PASS						
39	2480	-8.12	8	PASS						

B.Test Plot:



(Channel = 0, 2402MHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525





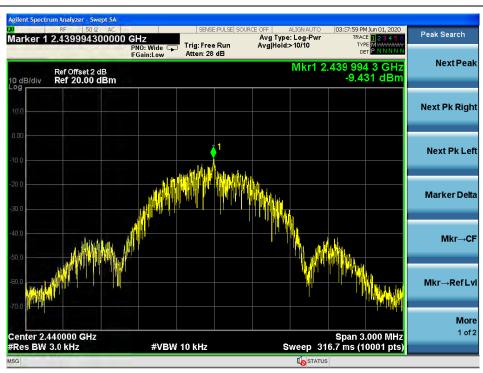

(Channel = 19, 2440MHz)



(Channel = 39, 2480MHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



2.8. Conducted Emission

2.8.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dBµV)					
Frequency range (initiz)	Quai-peak	Average				
0.15 - 0.50	66 to 56	56 to 46				
0.50 - 5	56	46				
5 - 30	60	50				


Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2.Test Description

Test Setup:

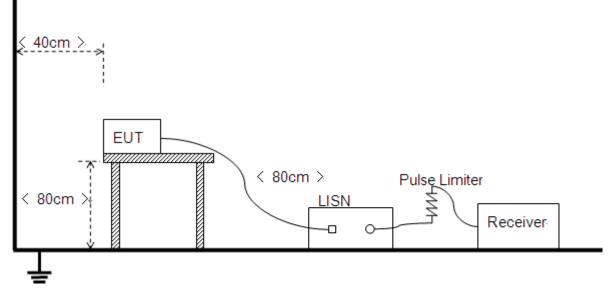

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.





REPORT No.: SZ20050241W01

2.8.3.Test Result

Note: This test case does not apply this kind of EUT.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn






2.9. Restricted Frequency Bands

2.9.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.9.2.Test Description

Test Setup

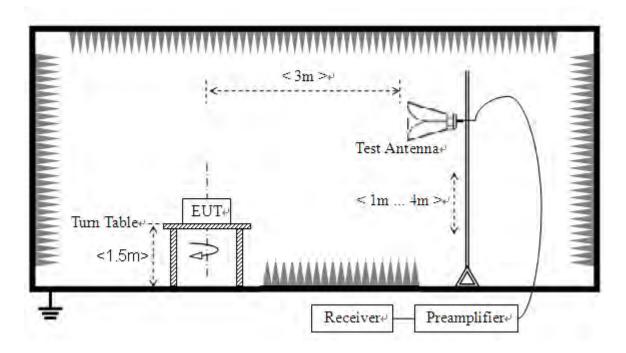

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.





2.9.3.Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

A.Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Ghanner	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	rordiot
0	2377.56	PK	46.67	-29.67	32.56	49.56	74	PASS
0	2377.98	AV	35.48	-29.67	32.56	38.37	54	PASS
39	2483.74	PK	49.11	-29.67	32.56	52.00	74	PASS
39	2483.50	AV	35.68	-29.67	32.56	38.57	54	PASS



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



B.Test Plot:

	ectrum Analyzer - Sw								
	RF PRESEL 50 Ω 2.3775640	DC 00000 GHz		SENSE:IN	Avg	ALIGN OFF Type: Voltage	TRACE	May 31, 2020	Marker
		PNO	: East	Trig: Free Rur Atten: 6 dB	n Avg l	Hold:>100/100	DE	PPNNN PPNNNN	Select Marker
10 dB/div	Ref 100.00	dBµV				Mkr2	2.377 5 46.67	64 GHz 3 dBµV	2
90.0 80.0								Α	Normal
70.0 60.0 50.0						↓ ²			Delta
40.0 30.0 20.0									Fixed⊳
· · · ·	CISPR) 1 MI		#VBW 3			Sweep 1		001 pts)	Off
2 N 1 3 4 5 5	f	× 2.390 000 0 2.377 564 0		Υ 5.852 dBμV 6.673 dBμV	FUNCTION	FUNCTION WIDTH	FUNCTIO	N VALUE	Properties▶
6 7 8 9 10 11									More 1 of 2
< [ш				•	
MSG						STATUS	5		

(PEAK, Channel = 0)

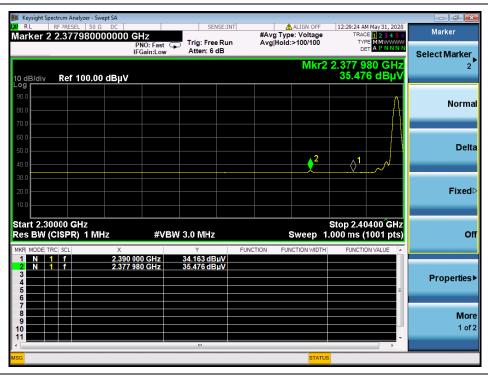

(AVG, Channel = 0)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



REPORT No.: SZ20050241W01

🎉 Keysight Spectrum Analyzer - Swept SA				
LXI RL RF PRESEL 50 Ω DC	SENSE:IN	ALIGN OFF	12:20:49 AM May 31, 2020	Marker
Marker 2 2.483742000000	PNO: Fast IFGain:Low Atten: 6 dB		TRACE 1 2 3 4 5 6 TYPE MMWWWW DET P P N N N N	Select Marker
10 dB/div Ref 100.00 dBµV		Mkr2	2.483 742 GHz 49.110 dBµV	2
Log 90.0 80.0 0 70.0 0				Normal
60.0 50.0 40.0	2 Wenterschaftensettenserverschuteren	eterselection to father territy and eterset of the pairs	รมาไรการเป็นการให้ไรการีกร่างส่งกระ _{เห} ลือ	Delta
30.0 20.0 10.0				Fixed▷
Start 2.47800 GHz Res BW (CISPR) 1 MHz	#VBW 3.0 MHz	Sweep 1	Stop 2.50000 GHz .000 ms (1001 pts)	Off
1 N 1 f 2.483	3 500 GHz 47.133 dBµV 3 742 GHz 49.110 dBµV			Properties▶
7 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9				More 1 of 2
MSG		STATUS	s	

(PEAK, Channel = 39)

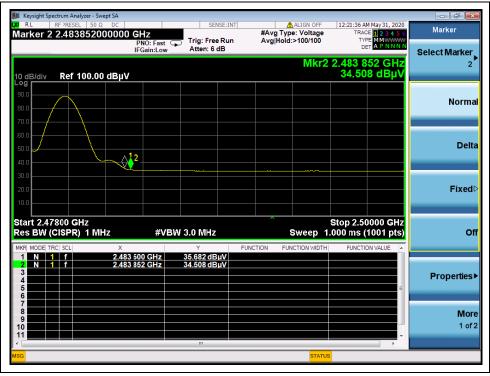

(AVG, Channel = 39)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



2.10. Radiated Emission

2.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).






REPORT No.: SZ20050241W01


2.10.2.Test Description

Test Setup:

1) For radiated emissions from 9kHz to 30MHz

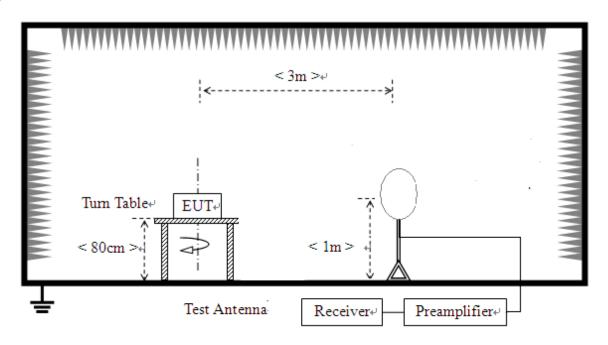

2) For radiated emissions from 30MHz to1GHz

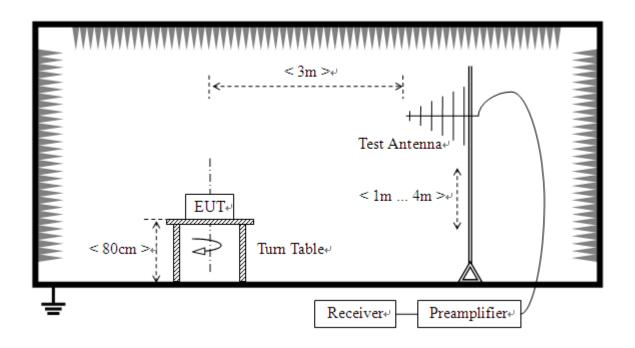




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn



3) For radiated emissions above 1GHz

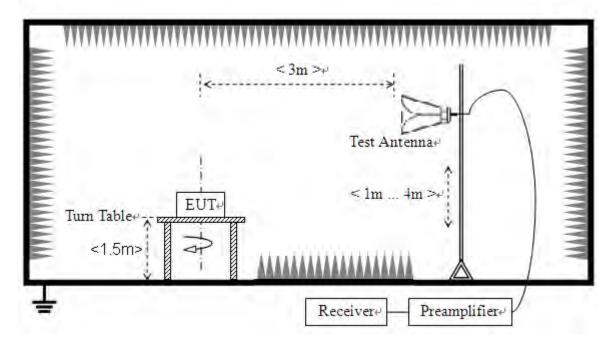

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, for radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

2.10.3.Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below: E $[dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ A_T : Total correction Factor except Antenna U_R : Receiver Reading G_{preamp} : Preamplifier Gain A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.








Plot for Channel = 0

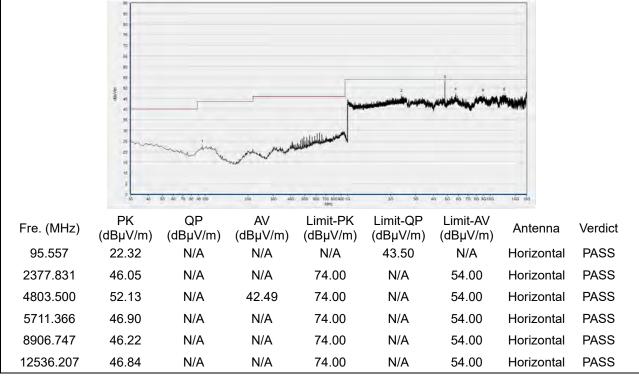

(Antenna Horizontal, 30MHz to 18GHz)

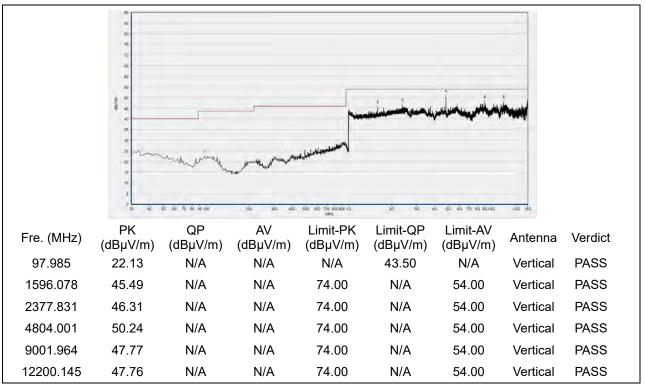


(Antenna Vertical, 30MHz to 18GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn






Plot for Channel = 19

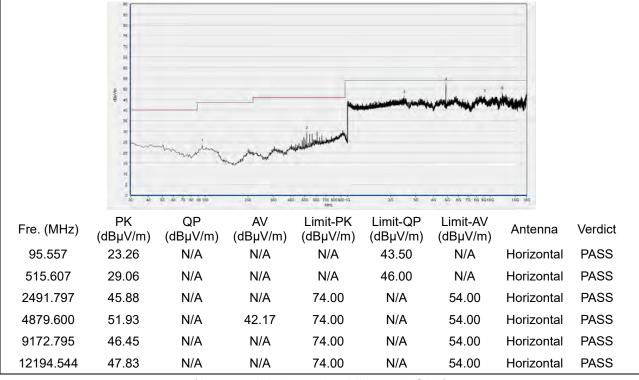

(Antenna Horizontal, 30MHz to 18GHz)

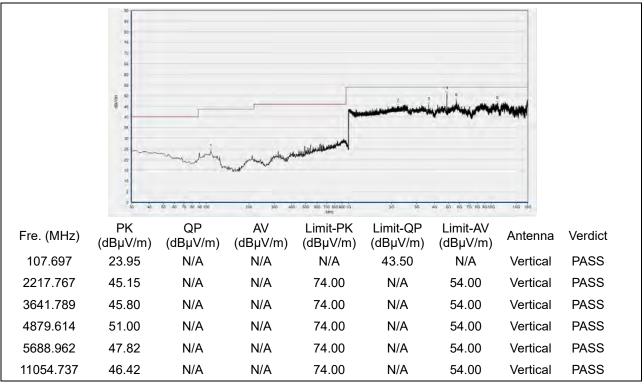

(Antenna Vertical, 30MHz to 18GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn




REPORT No.: SZ20050241W01

Plot for Channel = 39

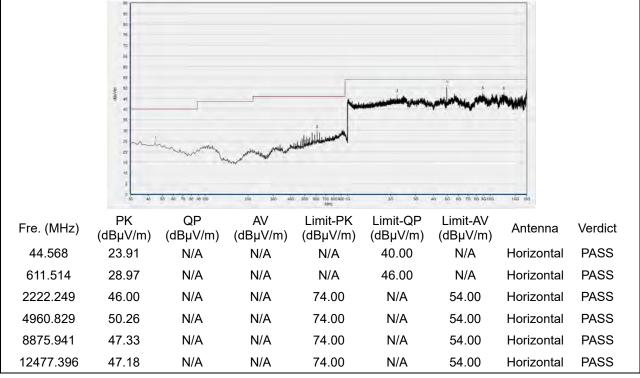

(Antenna Horizontal, 30MHz to 18GHz)

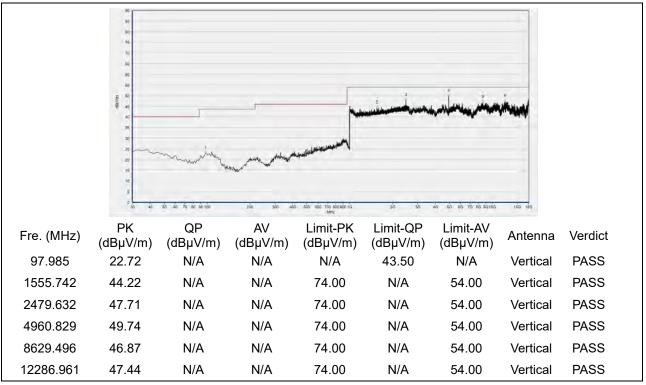

(Antenna Vertical, 30MHz to 18GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Peak Output Power	±2.22dB
Power Spectral Density (PSD)	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co.,			
	Ltd.MorlabLaboratory			
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang			
	Road, Block 67, BaoAn District, ShenZhen, GuangDong			
	Province, P. R. China			
Telephone:	+86 755 36698555			
Facsimile:	+86 755 36698525			

2. Identification of the Responsible Testing Location

Name: Shenzhen Morlab Communications Technology Co., Morlab Laboratory Morlab Laboratory		
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China	

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013and CISPR Publication 22; the FCC designation number is CN1192,the test firm registration number is 226174.





REPORT No.: SZ20050241W01

4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNE R	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
Morlab EMCR V1.2	Morlab	V1.0



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn



REPORT No.: SZ20050241W01

4.3 Radiated Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal.Due
Receiver	MY54130016	N9038A	Agilent	2019.07.29	2020.07.28
Test Antenna - Bi-Log	9163-520	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1520-022	FMZB1520	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2019.07.29	2020.07.28
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2019.07.29	2020.07.28
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	2019.12.01	2020.12.01
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

____ END OF REPORT ____



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn