



TEST REPORT

Applicant: Jiumao (Shenzhen) Industrial Co., LTD
Address of Applicant: 2nd Floor, Building 9, Jingxuan Industrial Park, Donghuan Road, Longhua District, Shenzhen
Manufacturer/Factory: Jiumao (Shenzhen) Industrial Co., LTD
Address of Manufacturer: 2nd Floor, Building 9, Jingxuan Industrial Park, Donghuan Road, Longhua District, Shenzhen
Product Name: Projector
Model No.: A10,M10PLUS,M10,M8,M7,M9,M6,M5,M3,M2,M1,M98,Q96,M11,M96,M95,X18,X10,H10,M10,H10PLUS,X10PLUS,X18PRO,X10PRO,E350,E450,A10PRO,A10PLUS,M10PRO,E450PLUS,E350PLUS
Trade Mark: JIUMAO
FCC ID: 2BB8K-A10
IC: 32496-A10
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247 RSS-247 Issue 3
Date of Test: Apr.24, 2024-May.08, 2024
Date of report issued: May.28, 2024

Remark:

The results shown in this test report refer only to the sample(s) tested , this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:

Reviewed by:

Approved by:

Project Engineer

Project Manager

Authorized Signature



Report Revision History		
Report No.	Description	Issue Date
ET-24040349E02	Original	May.28, 2024



Contents

Page

1. TEST SUMMARY	4
2. GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 TEST MODE	7
2.3 DESCRIPTION OF SUPPORT UNITS	7
2.4 DEVIATION FROM STANDARDS	7
2.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
2.6 TEST FACILITY	7
2.7 TEST LOCATION	7
2.8 ADDITIONAL INSTRUCTIONS	7
3. TEST INSTRUMENTS LIST	8
4. TEST RESULTS AND MEASUREMENT DATA	9
4.1 ANTENNA REQUIREMENT	9
4.2 CONDUCTED EMISSIONS	10
4.3 DUTY CYCLE	13
4.4 CONDUCTED PEAK OUTPUT POWER	15
4.5 6dB BANDWIDTH & 99% CHANNEL BANDWIDTH	16
4.6 POWER SPECTRAL DENSITY	21
4.7 BAND EDGES	24
Conducted Emission Method	24
Radiated Emission Method	27
4.8 SPURIOUS EMISSION	32
Conducted Emission Method	32
Radiated Emission Method	37
5. TEST SETUP PHOTO	54
6. EUT CONSTRUCTIONAL DETAILS	54

1. Test Summary

Test Item	Section	Result	Test by
Antenna requirement	FCC part 15.203/15.247 (c) RSS-Gen §6.8	Pass	/
AC Power Line Conducted Emission	FCC part 15.207 RSS-Gen §8.8	Pass	Yao zhou
Conducted Peak Output Power	FCC part 15.247 (b)(3) RSS-247 §5.4.b	Pass	Yvan Fan
6dB Bandwidth and 99% Bandwidth	FCC part 15.247 (a)(2) RSS-247 §5.2.a RSS-Gen § 6.7	Pass	Yvan Fan
Power Spectral Density	FCC part 15.247 (e) RSS-247 §5.2.b	Pass	Yvan Fan
Band Edge	FCC part 15.247(d) RSS-247 §5.5	Pass	Yvan Fan
Spurious Emission	FCC part 15.205/15.209 RSS-Gen §8.9 §8.10	Pass	Yao zhou

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013 and RSS-Gen.
3. Note: Compliance determination rules
 - 1).The Compliance determination of test results does not take into account measurement uncertainty. Measurement results are determined based on regulatory limitations or requirements specified by the applicant/manufacture. If measurement uncertainty is taken into account, the applicant/manufacture will bear all possible risks of non-compliance.
 - 2).The measurement uncertainty please refer to each test result in the "Measurement Uncertainty"

Measurement Uncertainty

Test Item	Uncertainty Criterion	Measurement Uncertainty	Notes
Occupied Channel Bandwidth	±5%	±0.55%	(1)
RF output power, conducted	±1.5dB	±0.99dB	(1)
Power Spectral Density, conducted	±3dB	±0.61dB	(1)
Unwanted Emissions, conducted	±3dB	±0.64dB	(1)
AC Power Line Conducted Emission	±6dB	± 2.64 dB	(1)
Radiated emissions Below 1GHz	±6dB	±4.32 dB	(1)
Radiated emissions Above 1GHz	±6dB	±4.56dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

2. General Information

2.1 General Description of EUT

Product Name:	Projector
Model No.:	A10,M10PLUS,M10,M8,M7,M9,M6,M5,M3,M2,M1,M98,Q96,M11,M96,M95,X18,X10,H10,M10,H10PLUS,X10PLUS,X18PRO,X10PRO,E350,E450,A10PRO,A10PLUS,M10PRO,E450PLUS,E350PLUS
Difference of model(s)	All the model are the same circuit and RF module, except the model names.
Test Model:	A10
Hardware version:	N/A
Software version:	N/A
Sample(s) Status	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Integrated antenna
Antenna gain:	3.13dBi(Note: Antenna information is provided by applicant, Testing lab is not responsible for the accuracy of the information.)
Battery:	N/A
Power supply:	AC 100-240V 50/60Hz

For more details, refer to the user's manual of the EUT.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

2.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

2.3 Description of Support Units

No.	Description	Manufacturer	Model	Serial Number
1	Notebook	Dell	Vostro 3520	/

2.4 Deviation from Standards

None.

2.5 Abnormalities from Standard Conditions

None.

2.6 Test Facility

Test laboratory:	Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number:	L11864
A2LA Certificate Number:	6640.01
FCC Designation Number:	CN1326
FCC Test Firm Registration:	183064
IC Company Number:	28440

2.7 Test Location

All tests were performed at:	
Laboratory location:	No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86 755 85259392
Fax:	+86 755 27219460

2.8 Additional Instructions

Test Software	COM Port Command
Power level setup	Default

3. Test Instruments list

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	100605	2024.3.012	2025.3.11
2	EMI Test Receiver	Rohde&schwarz	ESCI3	102696	2024.3.012	2025.3.11
3	Loop Antenna	schwarabeck	FMZB 1519 B	FMZB 1519 B	2024.3.19	2026.3.18
4	Broadband antenna	schwarabeck	VULB9168	1064	2024.3.19	2026.3.18
5	Horn antenna	schwarabeck	BBHA9120D	9120D-1145	2024.3.19	2026.3.18
6	amplifier	EMtrace	RP01A	50117	2024.3.012	2025.3.11
7	Artificial power network	schwarabeck	NSLK8127	8127483	2024.3.012	2025.3.11
8	Artificial power network	ETS	3186/2NM	1132	2024.3.012	2025.3.11
9	10dB attenuator	HUBER+SUHNER	10dB	/	2024.3.012	2025.3.11
10	amplifier	Space-Dtronics	EWLAN0118 G-P40	19113001	2024.3.012	2025.3.11
11	Filter	Xingbo	XBLBQ-GTA19	210410-3-1	2024.3.012	2025.3.11
12	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2024.3.012	2025.3.11
13	Power detector box	MWRFTtest	MW100-PSB	MW201020JYT	2024.3.012	2025.3.11
14	Power meter	Rohde&Schwarz	NRP-Z11	1138.3004.02-117725-vh	2024.3.012	2025.3.11
15	Amplifier	SKET	LNPA_1840-50	SK2019040302	2024.3.12	2025.3.11
16	Horn antenna	schwarabeck	BBHA 9170	946	2024.3.19	2026.3.18

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFTtest	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4. Test results and Measurement Data

4.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi. RSS-Gen 6.8: The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list. For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).	
EUT Antenna:	
<i>The antennas are Integrated antenna, the best case gain of the antennas are 3.13dBi, reference to the appendix II for details</i>	

4.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207, RSS-Gen §8.8						
Test Method:	ANSI C63.10:2013 and RSS-Gen						
Test Frequency Range:	150KHz to 30MHz						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane 40cm LISN AUX Equipment E.U.T Test table/Insulation plane 80cm LISN Filter AC power EMI Receiver Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.						
Test Instruments:	Refer to section 3.0 for details						
Test mode:	Refer to section 2.2 for details						
Test environment:	Temp.:	25.2°C	Humid.:	58%	Press.:	1012mbar	
Test voltage:	AC 120V, 60Hz						
Test results:	Pass						

Remark:

1. Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.
2. All mode have been tested, the report only shows the worst mode of 802.11n20 (2437MHz)


Measurement Result

Line:

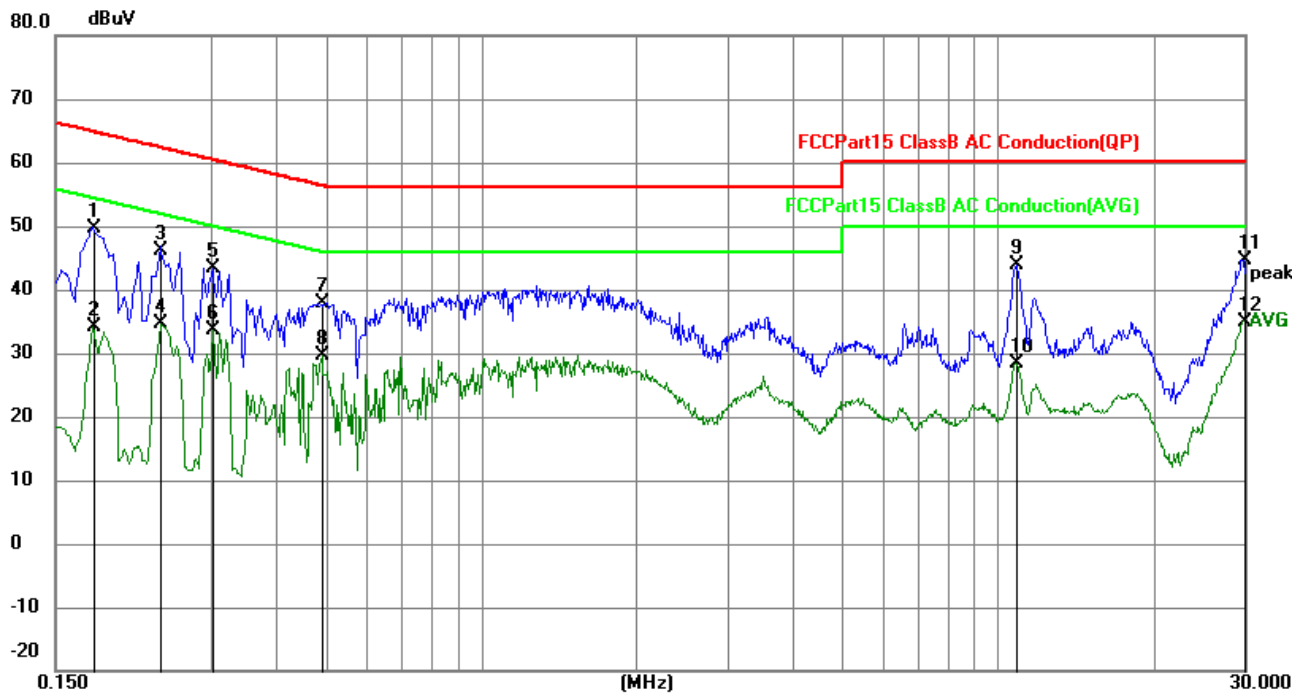

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1770	39.94	9.81	49.75	64.63	-14.88	QP
2	0.1770	24.29	9.81	34.10	54.63	-20.53	AVG
3	0.2400	36.21	9.82	46.03	62.10	-16.07	QP
4	0.2400	24.78	9.82	34.60	52.10	-17.50	AVG
5	0.3030	33.50	9.86	43.36	60.16	-16.80	QP
6	0.3030	23.87	9.86	33.73	50.16	-16.43	AVG
7	0.4920	27.97	9.94	37.91	56.13	-18.22	QP
8	0.4920	19.72	9.94	29.66	46.13	-16.47	AVG
9	10.8195	33.99	9.82	43.81	60.00	-16.19	QP
10	10.8195	18.66	9.82	28.48	50.00	-21.52	AVG
11	29.8770	35.22	9.49	44.71	60.00	-15.29	QP
12	29.8770	25.51	9.49	35.00	50.00	-15.00	AVG

Neutral:

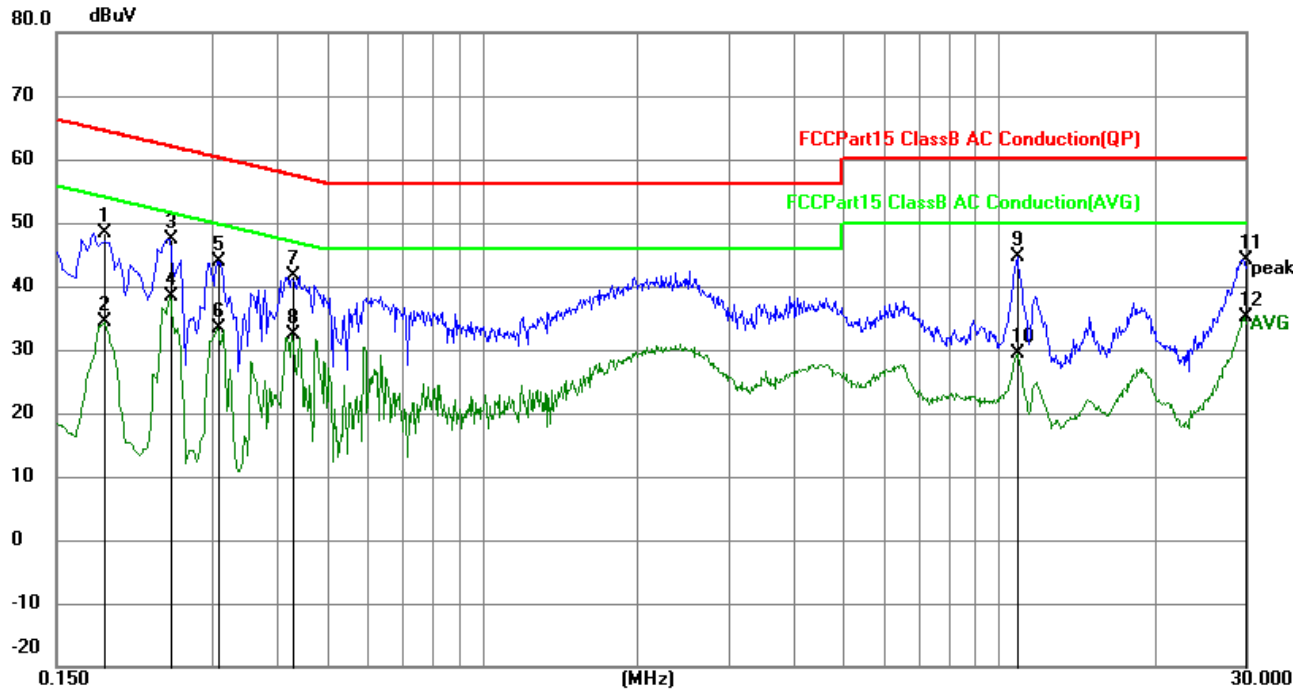


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1860	38.66	9.81	48.47	64.21	-15.74	QP
2	0.1860	24.60	9.81	34.41	54.21	-19.80	AVG
3	0.2490	37.51	9.83	47.34	61.79	-14.45	QP
4	0.2490	28.57	9.83	38.40	51.79	-13.39	AVG
5	0.3075	33.99	9.87	43.86	60.04	-16.18	QP
6	0.3075	23.42	9.87	33.29	50.04	-16.75	AVG
7	0.4290	31.66	9.91	41.57	57.27	-15.70	QP
8	0.4290	22.41	9.91	32.32	47.27	-14.95	AVG
9	10.8600	34.81	9.82	44.63	60.00	-15.37	QP
10	10.8600	19.64	9.82	29.46	50.00	-20.54	AVG
11	29.9490	34.74	9.49	44.23	60.00	-15.77	QP
12	29.9490	25.52	9.49	35.01	50.00	-14.99	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

4.3 Duty cycle

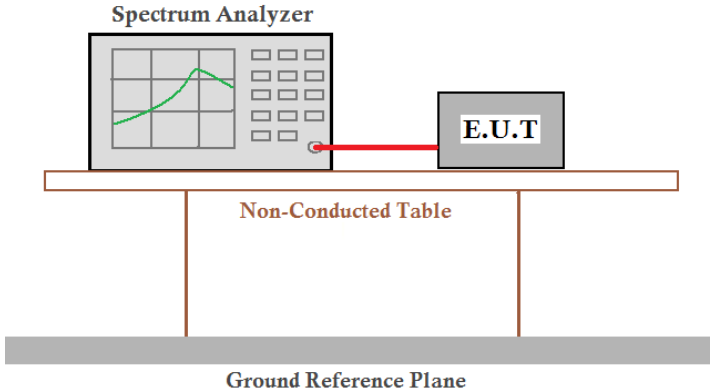
Test Method :	ANSI C63.10:2013	
Limit:	/	
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.9°C	Humid.: 53%RH
Test voltage:	AC 120V /60Hz	
Test results:	Pass	

Measurement Result


Mode	Duty cycle (%)	Correction Factor (dB)
802.11b	99.64	0.02
802.11g	97.90	0.09
802.11n(HT20)	97.74	0.10
802.11n(HT40)	95.59	0.20

Test plot as follows:

802.11b

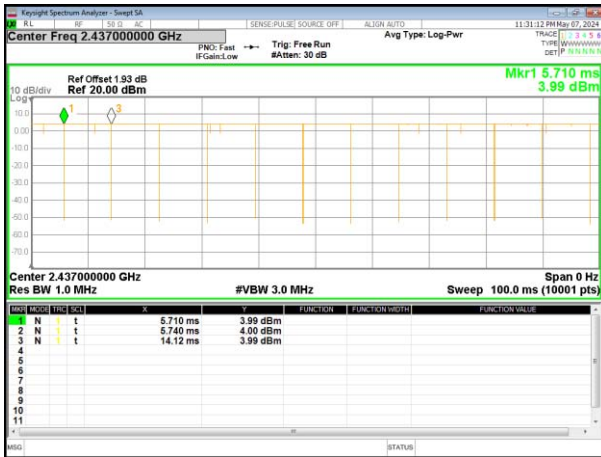

802.11g

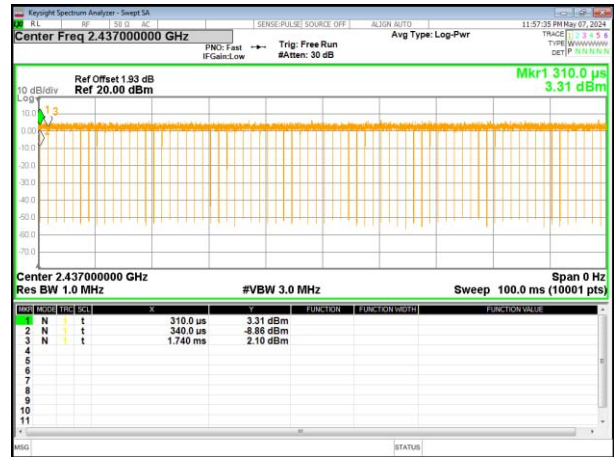


802.11n20



802.11n40




4.4 Conducted Peak Output Power

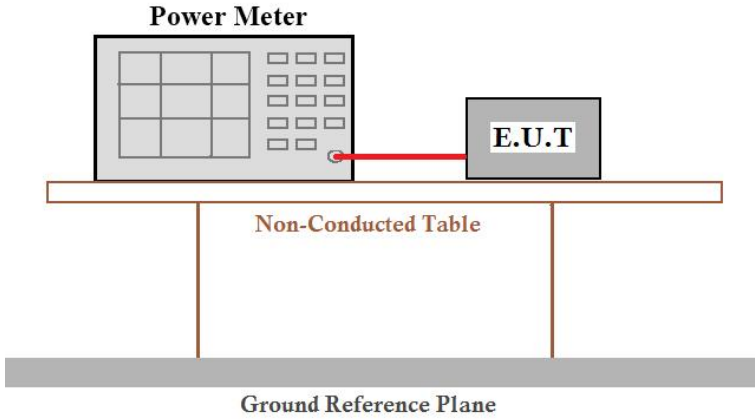Test Requirement :	FCC Part15 C Section 15.247 (b)(3), RSS-247 §5.4.b	
Test Method :	KDB 558074 D01 15.247 Meas Guidance v05r02, and RSS-Gen	
Limit:	30dBm	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.6°C	Humid.: 51%RH
Test voltage:	AC 120V, 60Hz	
Test results:	Pass	

Measurement Result

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	9.30	12.75	12.53	11.49	30.00	Pass
Middle	10.91	13.97	14.18	12.74		
Highest	11.52	13.79	13.92	14.29		

4.5 6dB Bandwidth & 99% Channel Bandwidth

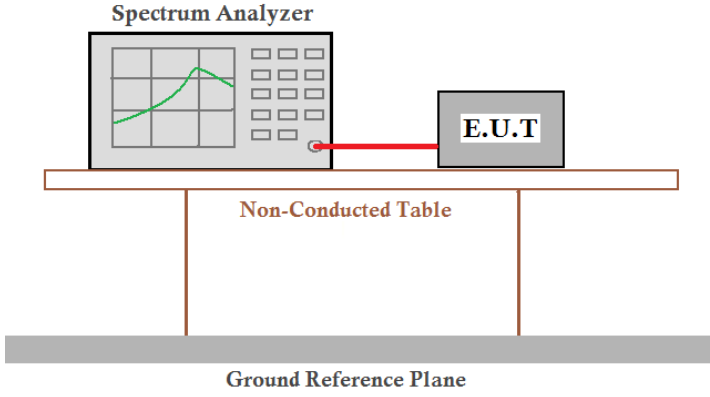Test Requirement :	FCC Part15 C Section 15.247 (a)(2), RSS-247 §5.2.a	
Test Method :	KDB 558074 D01 15.247 Meas Guidance v05r02 and RSS-Gen	
Limit:	>500KHz	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.6°C	Humid.: 51%RH
Test voltage:	AC 120V, 60Hz	
Test results:	Pass	

Measurement Result

Test CH	6dB Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	6.529	8.857	8.871	33.81	>500	Pass
Middle	8.055	14.49	15.13	12.60		
Highest	10.03	14.77	14.01	26.93		



Test CH	99% Bandwidth (MHz)				Limit	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	10.989	15.826	16.887	35.987	/	Pass
Middle	12.880	17.135	17.929	35.725		
Highest	14.398	16.584	17.692	35.988		

Test plot as follows:









802.11n20	Lowest channel	802.1120	Middle channel
-----------	----------------	----------	----------------

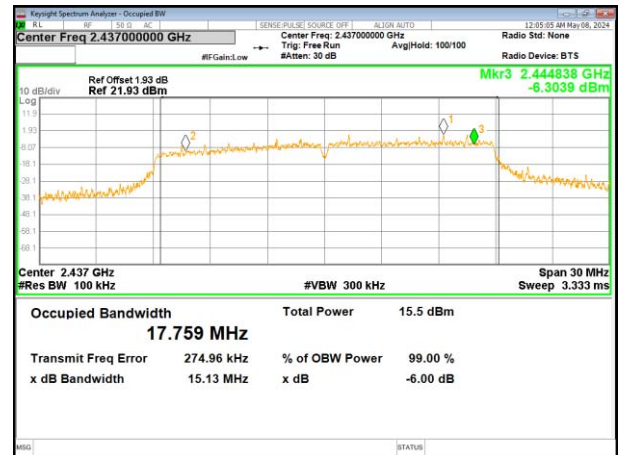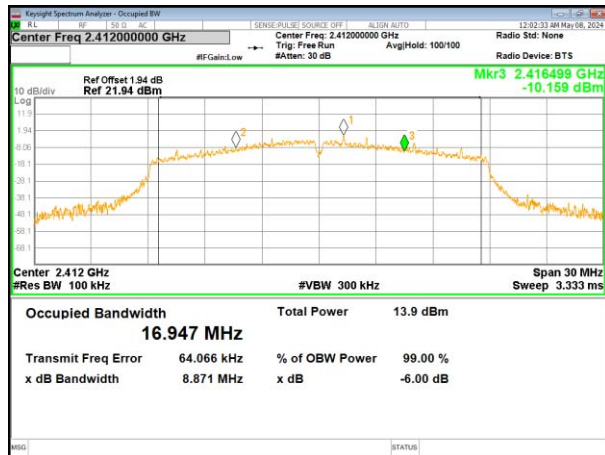


802.11n20	Highest channel	802.11n40	Lowest channel
-----------	-----------------	-----------	----------------

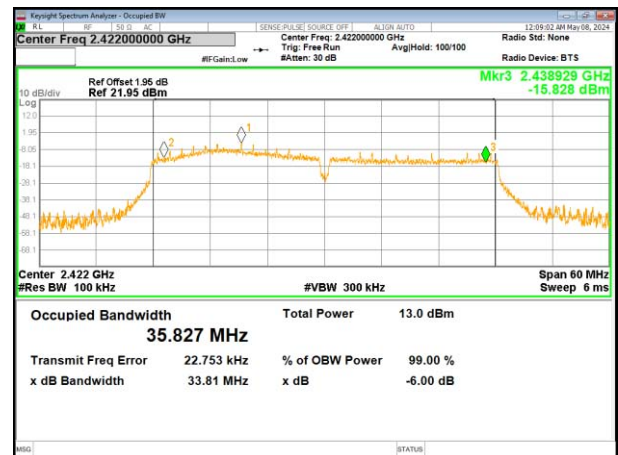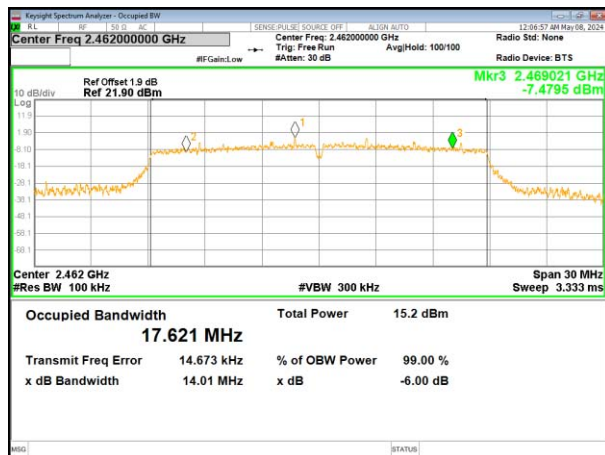

802.11n40	Middle channel	802.11n40	Highest channel
-----------	----------------	-----------	-----------------

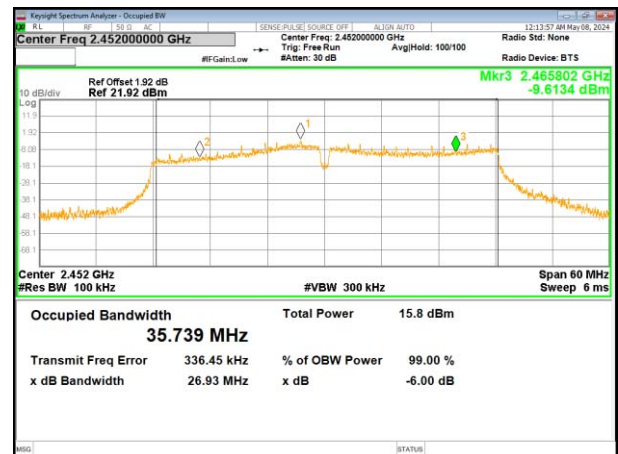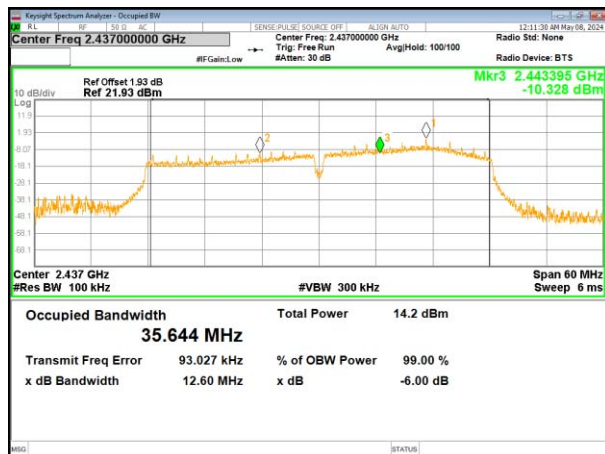

Test plot as follows: 99% Bandwidth Test plot as follows


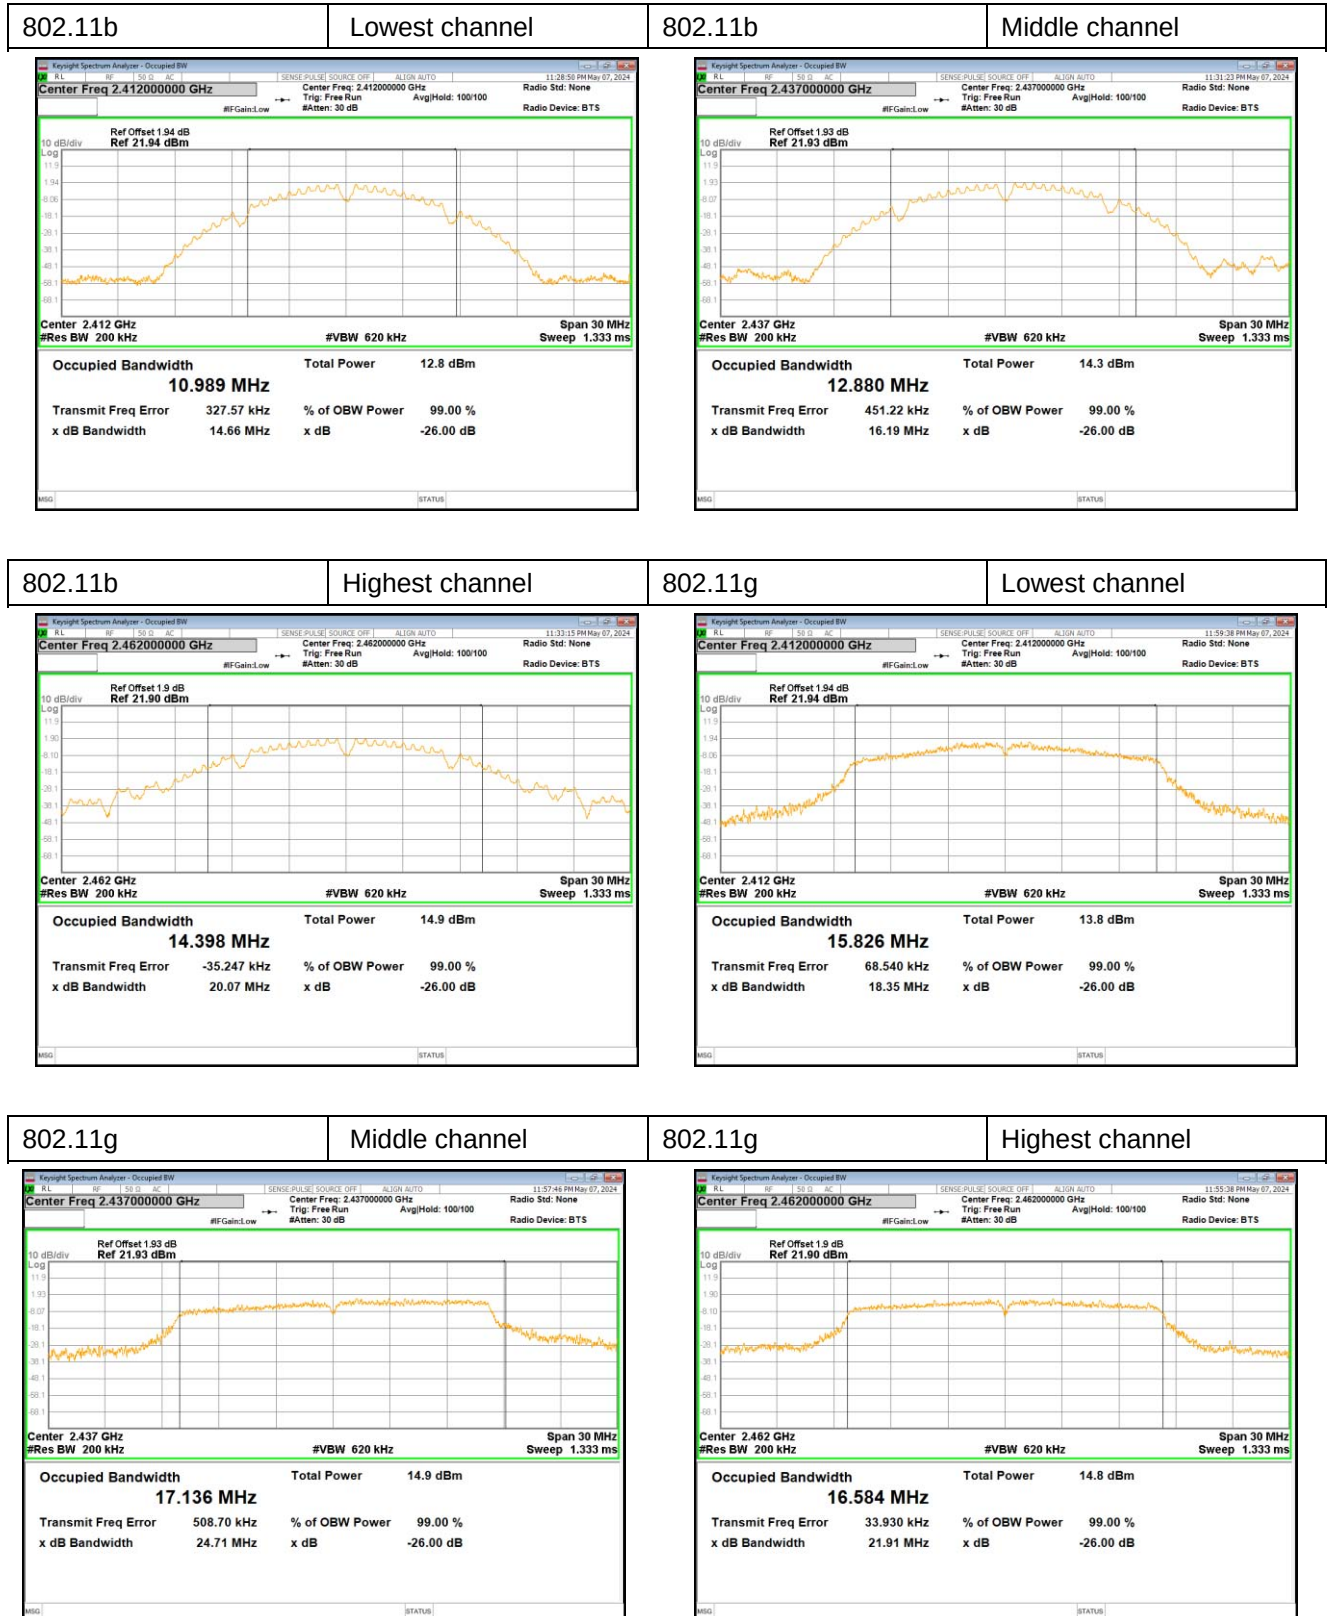


802.11n20

Lowest channel

802.1120

Middle channel

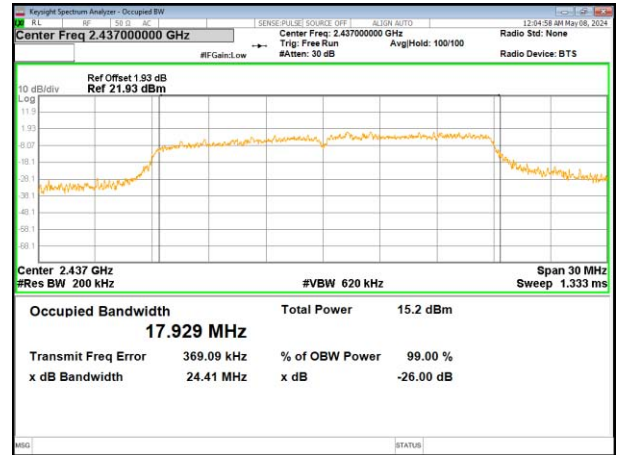
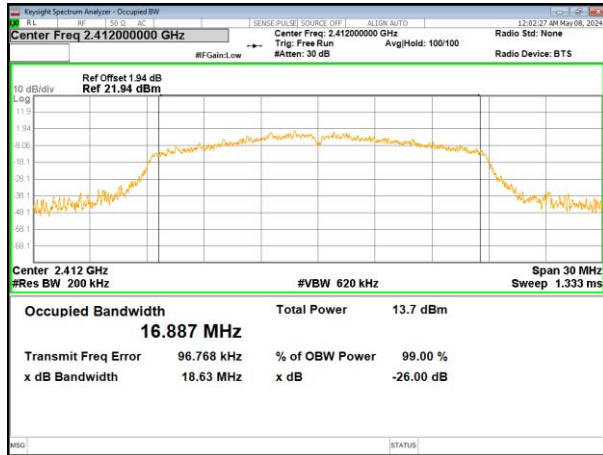


802.11n20

Highest channel

802.11n40

Lowest channel

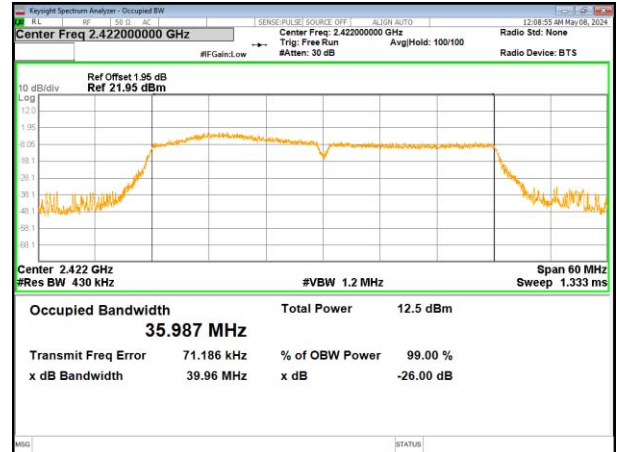
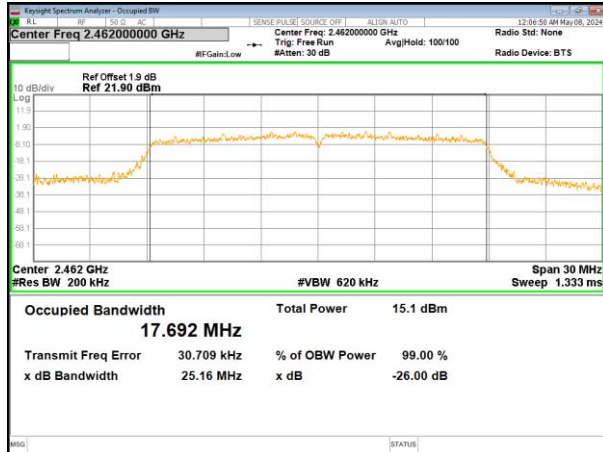


802.11n40


Middle channel

802.11n40

Highest channel

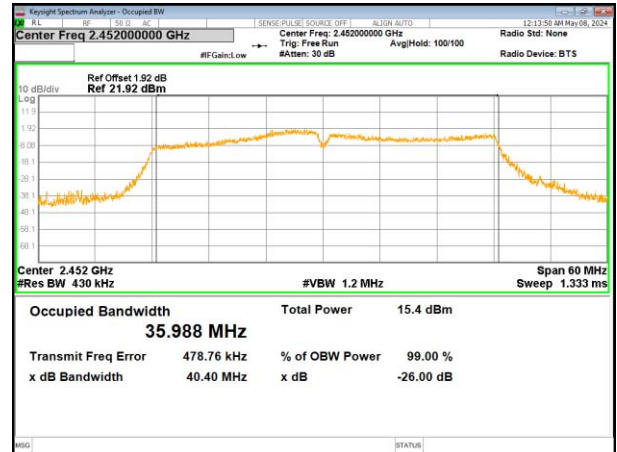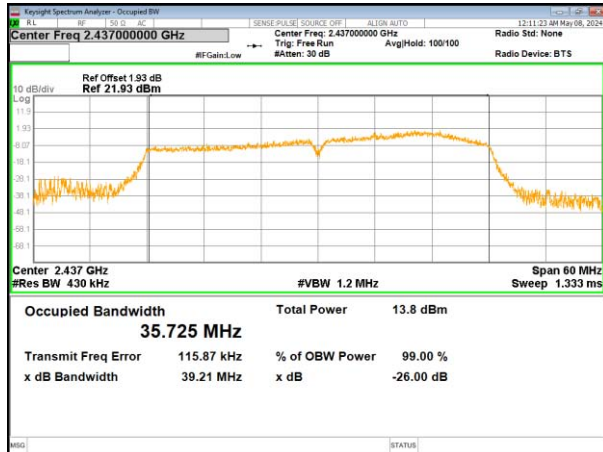

4.6 Power Spectral Density


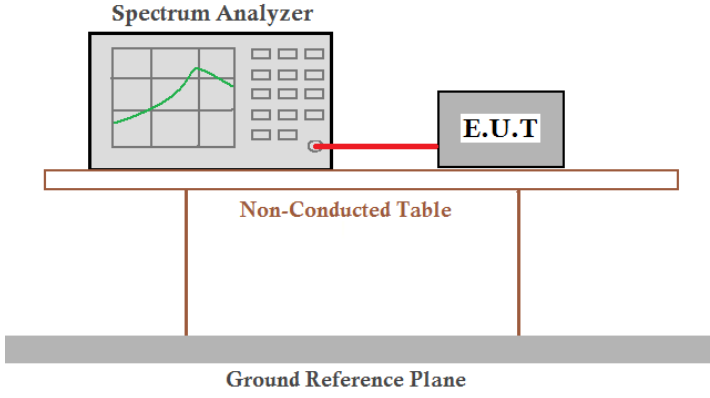
Test Requirement:	FCC Part15 C Section 15.247 (e) RSS-247 §5.2.b	
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02 and RSS-Gen	
Limit:	8dBm/3kHz	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.6°C	Humid.: 51%RH
Test voltage:	AC 120V, 60Hz	
Test results:	Pass	

Measurement Result


Test CH	Power Spectral Density (dBm/3kHz)				Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-12.768	-13.97	-13.216	-18.477	8.00	Pass
Middle	-11.735	-14.426	-14.688	-15.742		
Highest	-12.503	-14.122	-14.829	-15.250		

Test plot as follows:



802.11b	Lowest channel	802.11b	Middle channel
---------	----------------	---------	----------------

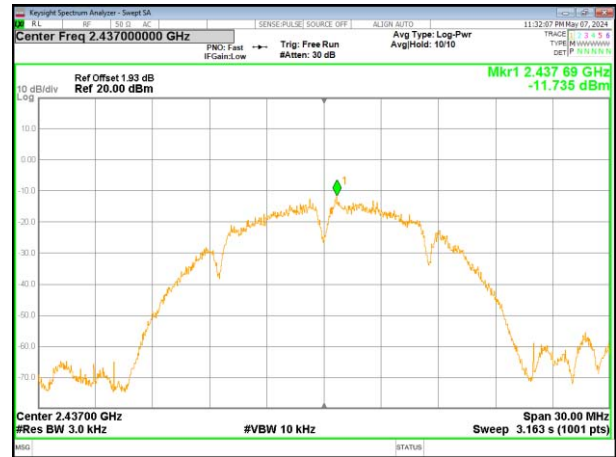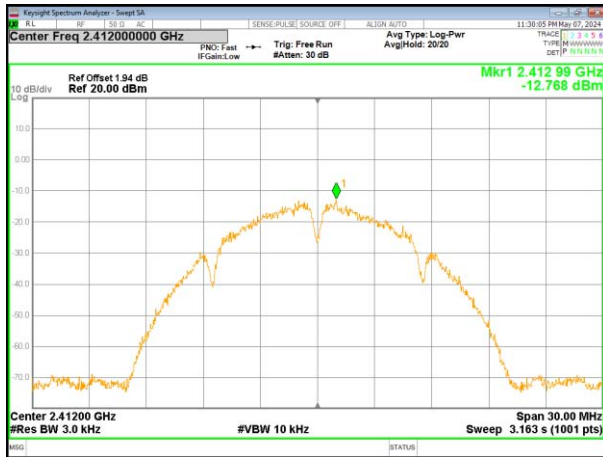


802.11b	Highest channel	802.11g	Lowest channel
---------	-----------------	---------	----------------

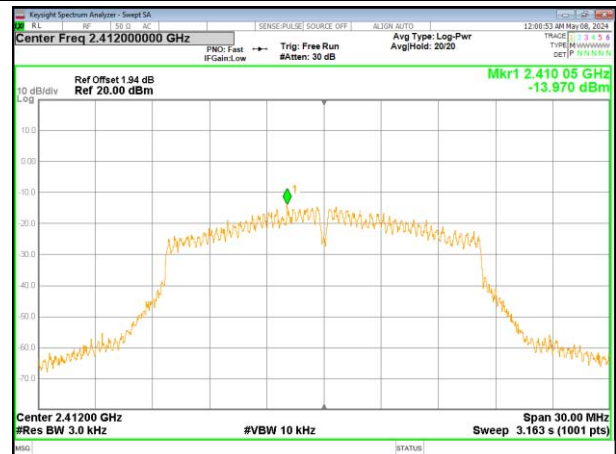

802.11g	Middle channel	802.11g	Highest channel
---------	----------------	---------	-----------------

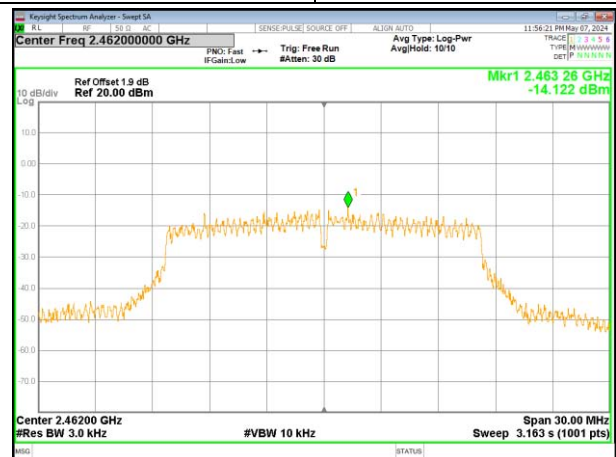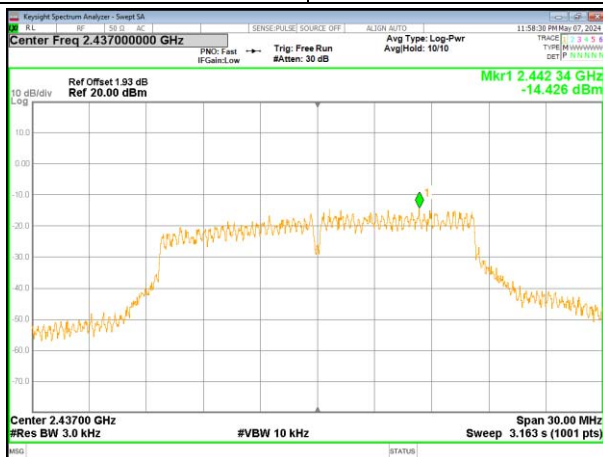


802.11n20	Lowest channel	802.11n20	Middle channel
-----------	----------------	-----------	----------------

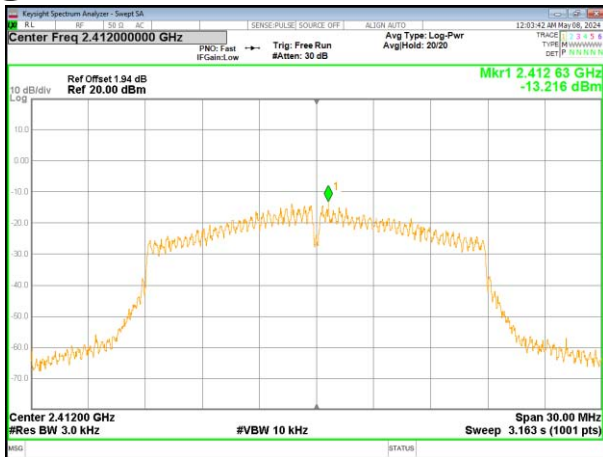


802.11n20

Highest channel

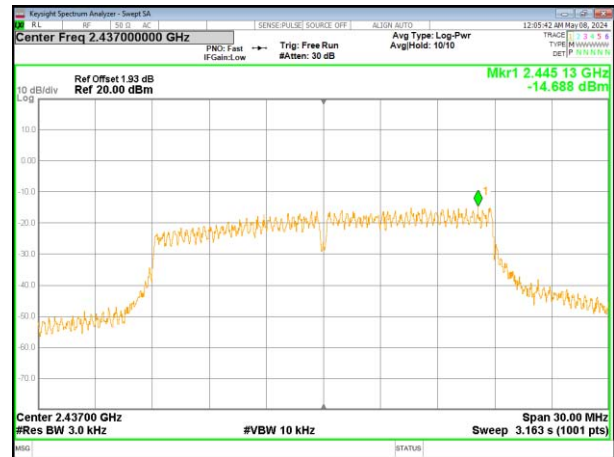


802.11n40

Lowest channel

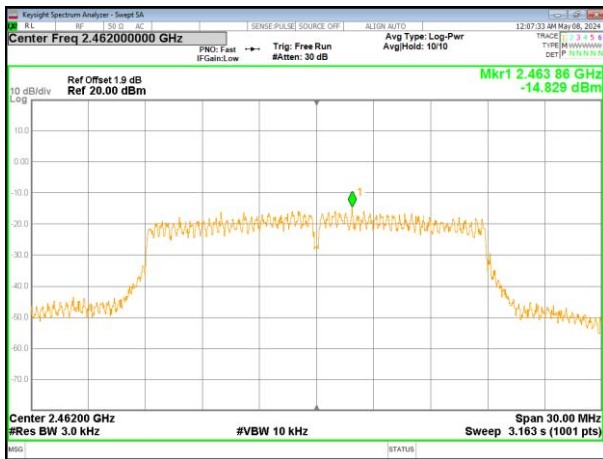



802.11n40

Middle channel

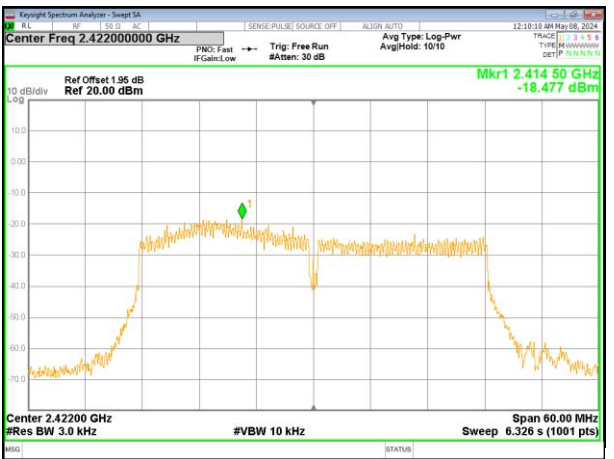


802.11n40

Highest channel

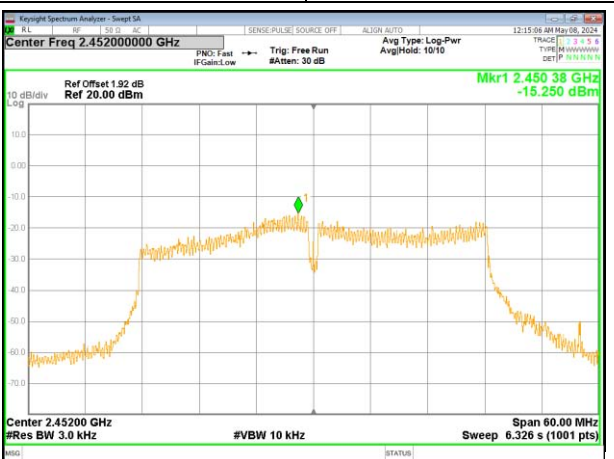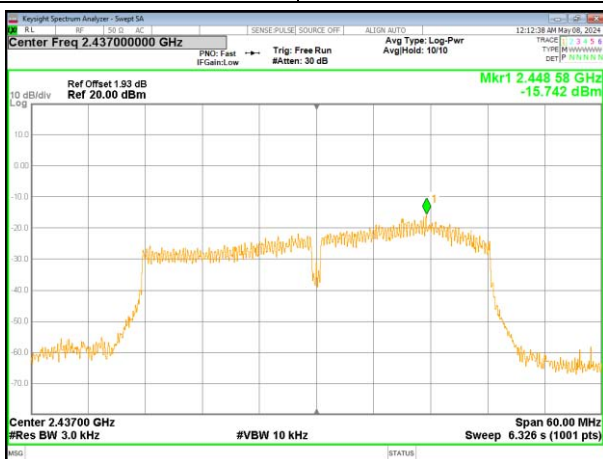

4.7 Band edges


Conducted Emission Method

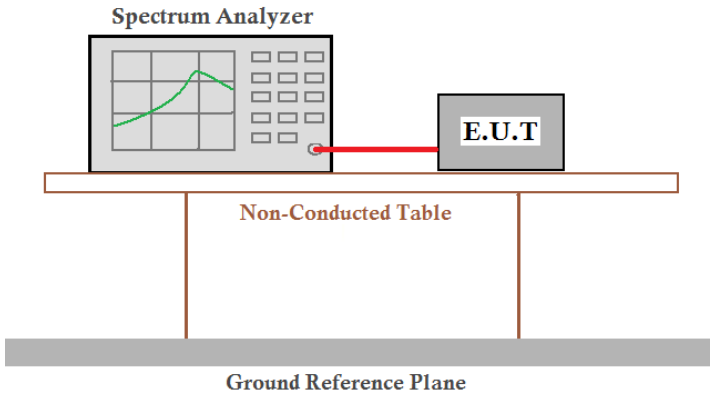Test Requirement:	FCC Part15 C Section 15.247 (d), RSS-247 §5.2.b	
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02 and RSS -Gen	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.6°C	Humid.: 51%RH
Test voltage:	AC 120V, 60Hz	
Test results:	Pass	


Test plot as follows:

Test mode:

802.11b

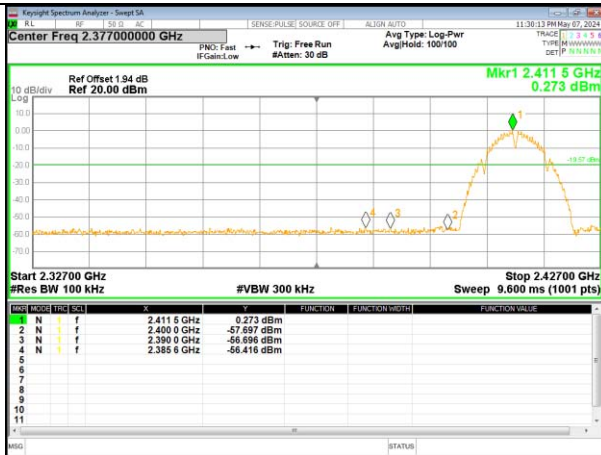


Lowest channel

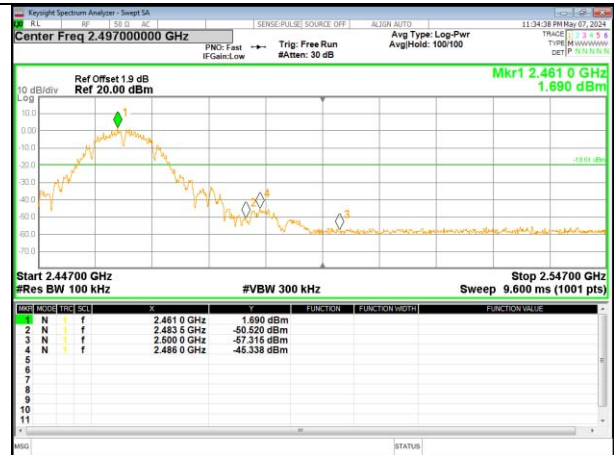

Highest channel

Test mode:

802.11g

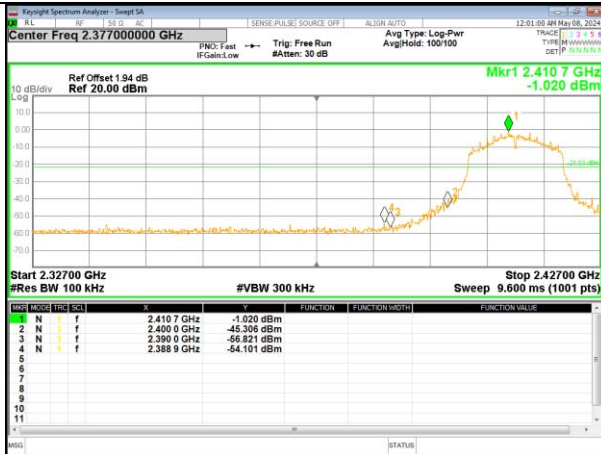


Lowest channel




Highest channel

802.11n20

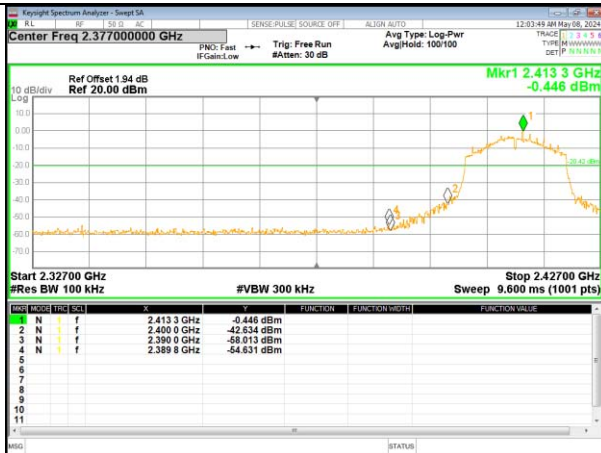

Lowest channel

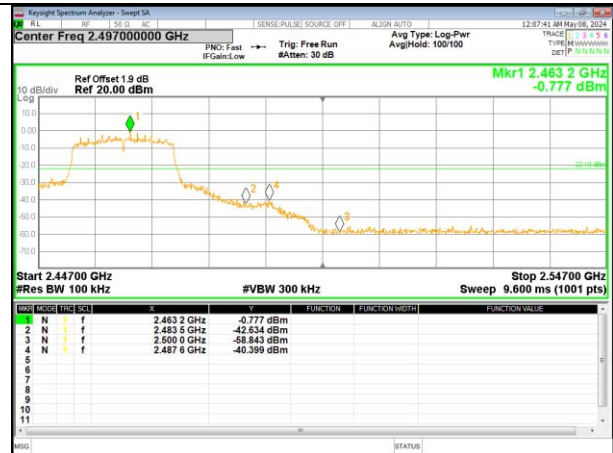


Highest channel

Test mode:

802.11n40




Lowest channel

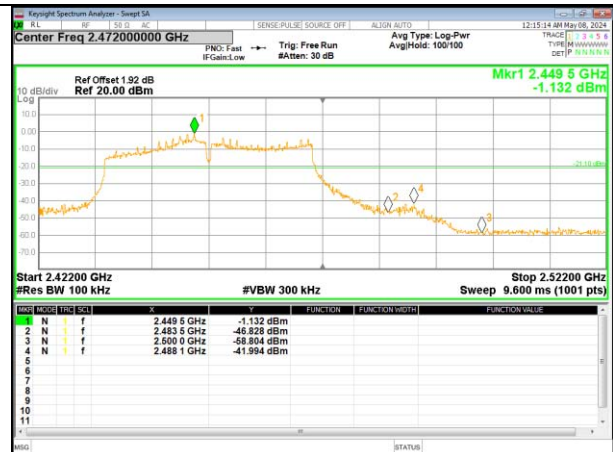

Highest channel

Radiated Emission Method

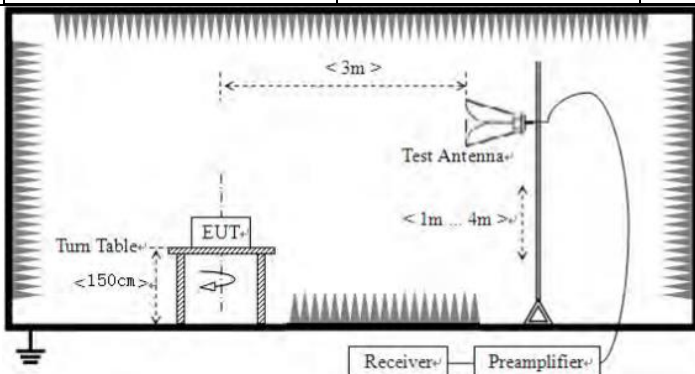Test Requirement:	FCC Part15 C Section 15.209 and 15.205, RSS-Gen §8.9 §8.10				
Test Method:	ANSI C63.10: 2013 and RSS-Gen				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.				
Test Instruments:	Refer to section 3.0 for details				
Test mode:	Refer to section 2.2 for details				
Test environment:	Temp.: 24.6°C		Humid.: 51%RH		
Test voltage:	AC 120V, 60Hz				
Test results:	Pass				

Measurement data:

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	64.20	27.40	4.61	44.50	49.63	74.00	-24.37	Horizontal
2390.00	67.02	27.50	4.61	44.50	52.15	74.00	-21.85	Horizontal
2310.00	65.34	27.40	4.61	44.50	50.77	74.00	-23.23	Vertical
2390.00	68.70	27.50	4.61	44.50	53.83	74.00	-20.17	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	52.92	27.40	4.61	44.50	38.35	54.00	-15.65	Horizontal
2390.00	56.05	27.50	4.61	44.50	41.18	54.00	-12.82	Horizontal
2310.00	54.94	27.40	4.61	44.50	40.37	54.00	-13.63	Vertical
2390.00	57.46	27.50	4.61	44.50	42.59	54.00	-11.41	Vertical

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	66.95	27.90	4.84	44.90	52.91	74.00	-21.09	Horizontal
2500.00	63.31	27.90	4.84	44.90	49.27	74.00	-24.73	Horizontal
2483.50	67.78	27.90	4.84	44.90	53.74	74.00	-20.26	Vertical
2500.00	65.15	27.90	4.84	44.90	51.11	74.00	-22.89	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	56.41	27.90	4.84	44.90	42.37	54.00	-11.63	Horizontal
2500.00	54.25	27.90	4.84	44.90	40.21	54.00	-13.79	Horizontal
2483.50	55.85	27.90	4.84	44.90	41.81	54.00	-12.19	Vertical
2500.00	53.69	27.90	4.84	44.90	39.65	54.00	-14.35	Vertical

Remarks:

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	64.96	27.40	4.61	44.50	50.39	74.00	-23.61	Horizontal
2390.00	68.70	27.50	4.61	44.50	53.83	74.00	-20.17	Horizontal
2310.00	64.31	27.40	4.61	44.50	49.74	74.00	-24.26	Vertical
2390.00	67.51	27.50	4.61	44.50	52.64	74.00	-21.36	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	54.40	27.40	4.61	44.50	39.83	54.00	-14.17	Horizontal
2390.00	56.98	27.50	4.61	44.50	42.11	54.00	-11.89	Horizontal
2310.00	54.09	27.40	4.61	44.50	39.52	54.00	-14.48	Vertical
2390.00	57.26	27.50	4.61	44.50	42.39	54.00	-11.61	Vertical

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	67.33	27.90	4.84	44.90	53.29	74.00	-20.71	Horizontal
2500.00	63.89	27.90	4.84	44.90	49.85	74.00	-24.15	Horizontal
2483.50	67.59	27.90	4.84	44.90	53.55	74.00	-20.45	Vertical
2500.00	64.16	27.90	4.84	44.90	50.12	74.00	-23.88	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	57.88	27.90	4.84	44.90	43.84	54.00	-10.16	Horizontal
2500.00	53.77	27.90	4.84	44.90	39.73	54.00	-14.27	Horizontal
2483.50	56.55	27.90	4.84	44.90	42.51	54.00	-11.49	Vertical
2500.00	52.87	27.90	4.84	44.90	38.83	54.00	-15.17	Vertical

Remarks:

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	63.94	27.40	4.61	44.50	49.37	74.00	-24.63	Horizontal
2390.00	67.74	27.50	4.61	44.50	52.87	74.00	-21.13	Horizontal
2310.00	64.71	27.40	4.61	44.50	50.14	74.00	-23.86	Vertical
2390.00	68.60	27.50	4.61	44.50	53.73	74.00	-20.27	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	53.14	27.40	4.61	44.50	38.57	54.00	-15.43	Horizontal
2390.00	56.71	27.50	4.61	44.50	41.84	54.00	-12.16	Horizontal
2310.00	51.92	27.40	4.61	44.50	37.35	54.00	-16.65	Vertical
2390.00	56.89	27.50	4.61	44.50	42.02	54.00	-11.98	Vertical

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	72.91	27.90	4.84	44.90	58.87	74.00	-15.13	Horizontal
2500.00	68.95	27.90	4.84	44.90	54.91	74.00	-19.09	Horizontal
2483.50	73.05	27.90	4.84	44.90	59.01	74.00	-14.99	Vertical
2500.00	66.55	27.90	4.84	44.90	52.51	74.00	-21.49	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	55.72	27.90	4.84	44.90	41.68	54.00	-12.32	Horizontal
2500.00	53.89	27.90	4.84	44.90	39.85	54.00	-14.15	Horizontal
2483.50	55.50	27.90	4.84	44.90	41.46	54.00	-12.54	Vertical
2500.00	54.17	27.90	4.84	44.90	40.13	54.00	-13.87	Vertical

Remarks:

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	64.90	27.40	4.61	44.50	50.33	74.00	-23.67	Horizontal
2390.00	68.73	27.50	4.61	44.50	53.86	74.00	-20.14	Horizontal
2310.00	64.28	27.40	4.61	44.50	49.71	74.00	-24.29	Vertical
2390.00	69.62	27.50	4.61	44.50	54.75	74.00	-19.25	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	53.89	27.40	4.61	44.50	39.32	54.00	-14.68	Horizontal
2390.00	57.08	27.50	4.61	44.50	42.21	54.00	-11.79	Horizontal
2310.00	52.98	27.40	4.61	44.50	38.41	54.00	-15.59	Vertical
2390.00	56.73	27.50	4.61	44.50	41.86	54.00	-12.14	Vertical

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	72.25	27.90	4.84	44.90	58.21	74.00	-15.79	Horizontal
2500.00	67.72	27.90	4.84	44.90	53.68	74.00	-20.32	Horizontal
2483.50	73.16	27.90	4.84	44.90	59.12	74.00	-14.88	Vertical
2500.00	66.22	27.90	4.84	44.90	52.18	74.00	-21.82	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	56.51	27.90	4.84	44.90	42.47	54.00	-11.53	Horizontal
2500.00	53.76	27.90	4.84	44.90	39.72	54.00	-14.28	Horizontal
2483.50	55.13	27.90	4.84	44.90	41.09	54.00	-12.91	Vertical
2500.00	53.13	27.90	4.84	44.90	39.09	54.00	-14.91	Vertical

Remarks:

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. Emissions more than 20 dB below the limit do not need to be reported.

4.8 Spurious Emission

Conducted Emission Method

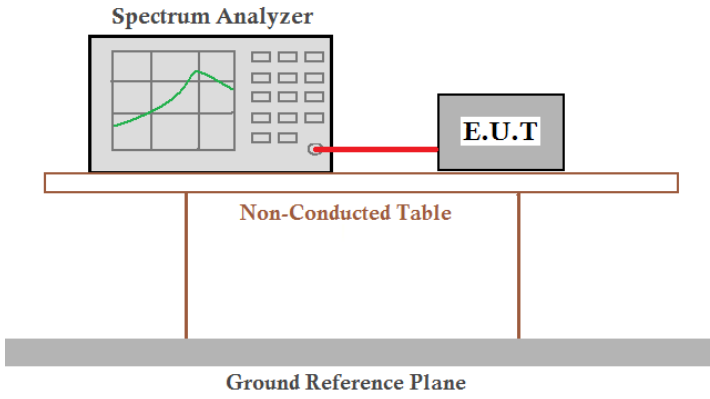
Test Requirement:	FCC Part15 C Section 15.247 (d), RSS-Gen §8.9 §8.10	
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02 and RSS-Gen	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Test setup:	 The diagram illustrates the test setup for conducted emission measurements. A Spectrum Analyzer is connected to an Equipment Under Test (E.U.T.) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane, which is represented by a thick grey bar at the bottom of the diagram.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.6°C	Humid.: 51%RH
Test voltage:	AC 120V, 60Hz	
Test results:	Pass	



Test plot as follows:


802.11b

Lowest channel

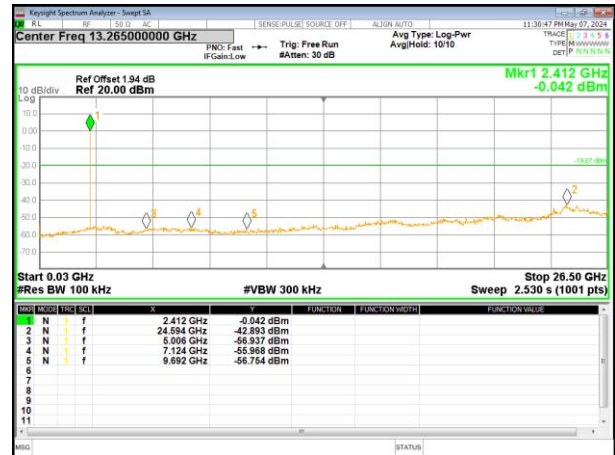


30MHz~25GHz

Middle channel

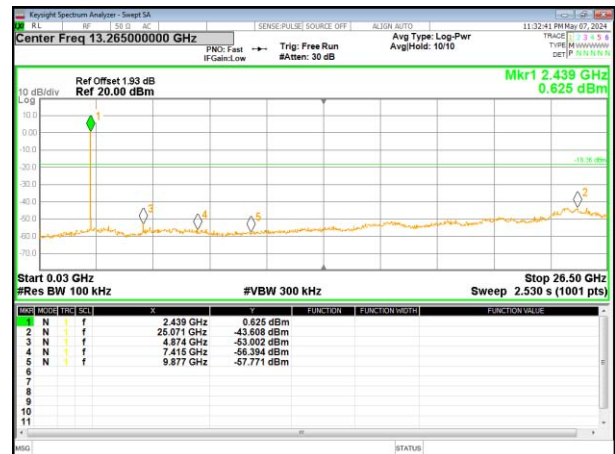

30MHz~25GHz


Highest channel

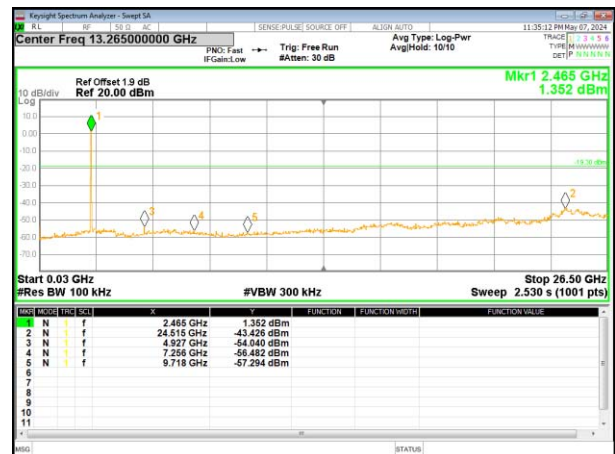

30MHz~25GHz


802.11g

Lowest channel

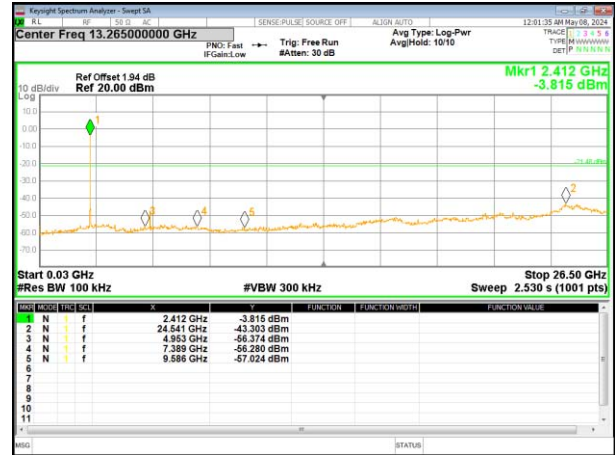


30MHz~25GHz

Middle channel

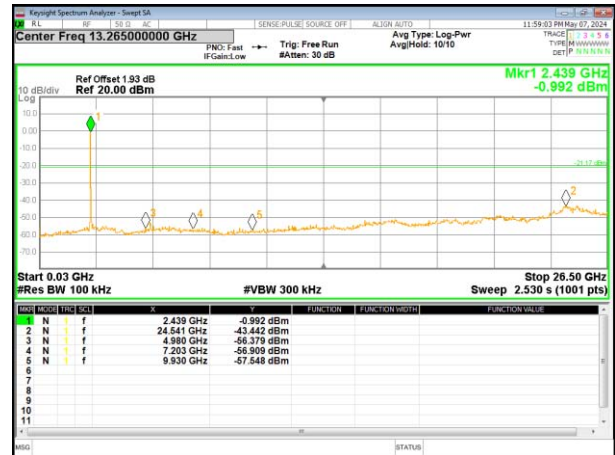

30MHz~25GHz


Highest channel

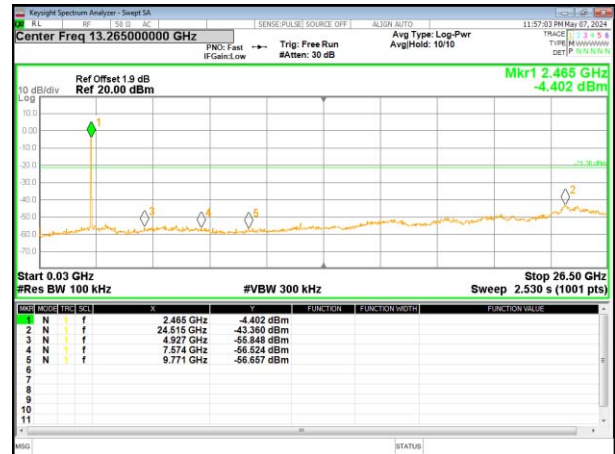

30MHz~25GHz



802.11n20

Lowest channel

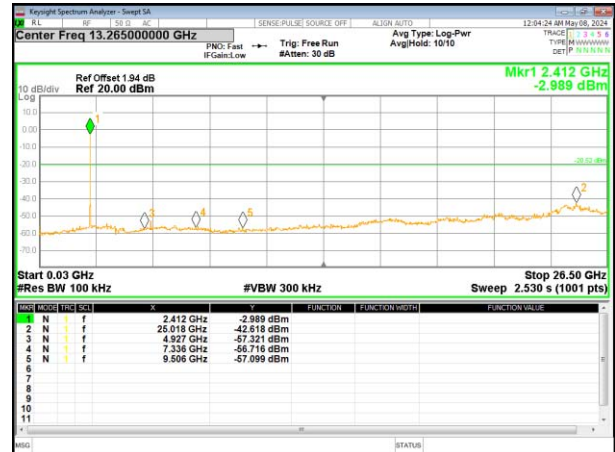



30MHz~25GHz

Middle channel

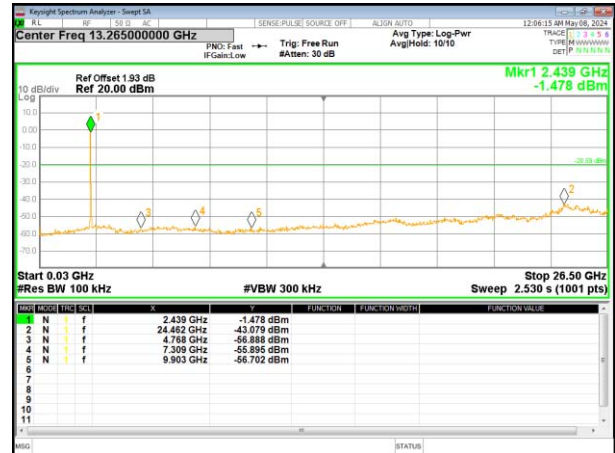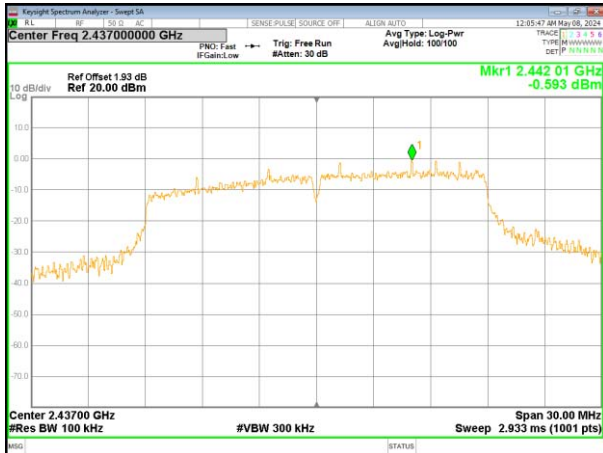

30MHz~25GHz



Highest channel

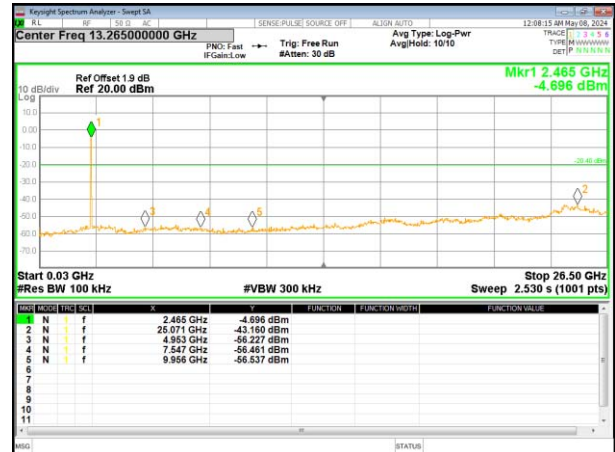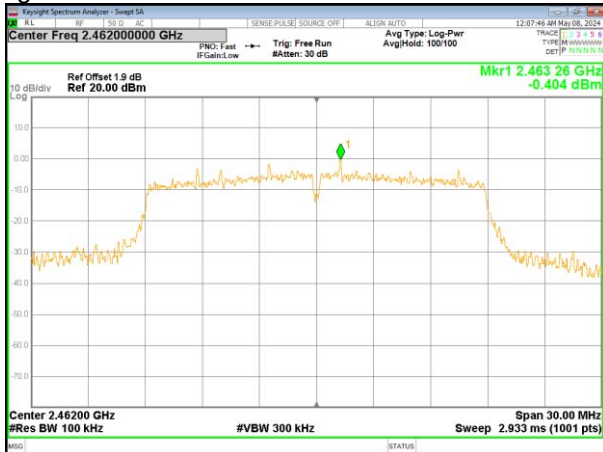

30MHz~25GHz



802.11n40

Lowest channel

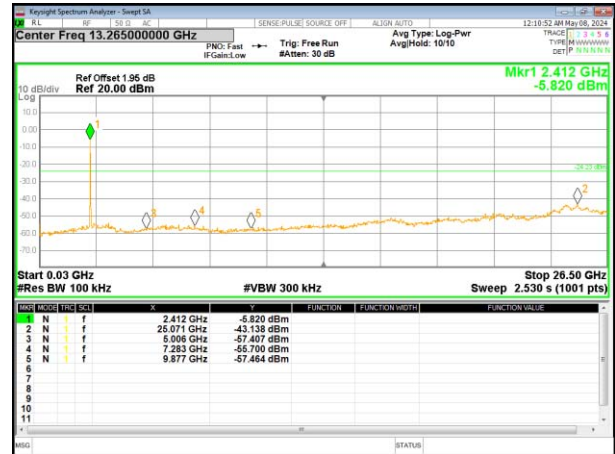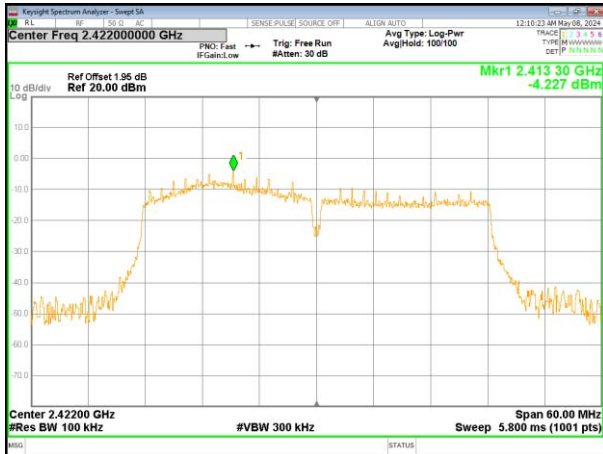


30MHz~25GHz

Middle channel

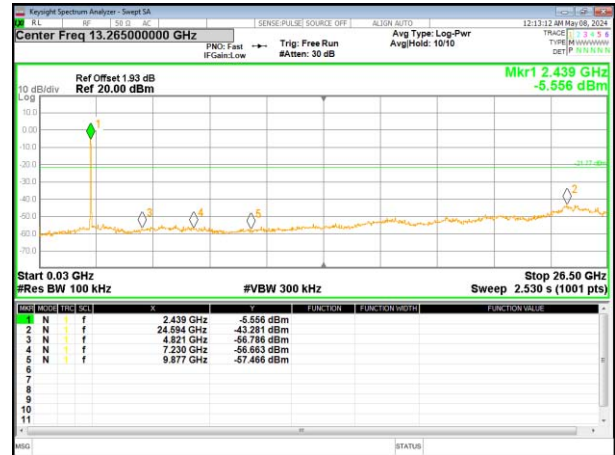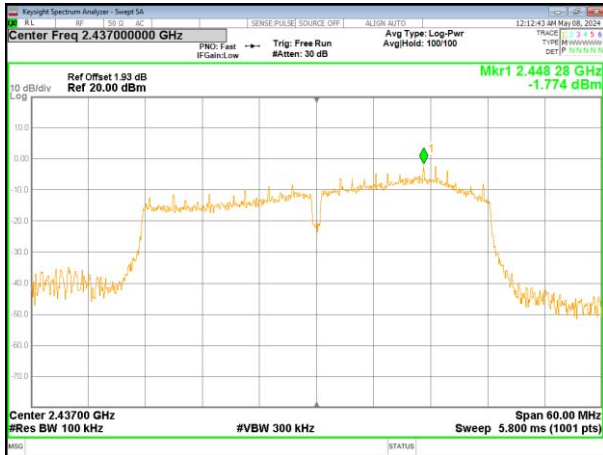



30MHz~25GHz


Highest channel

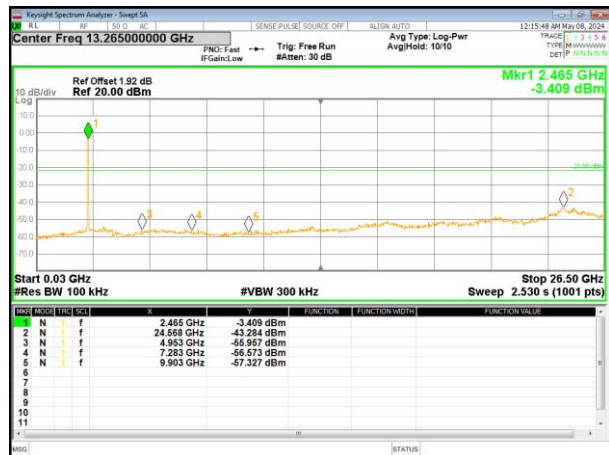

30MHz~25GHz

Radiated Emission Method

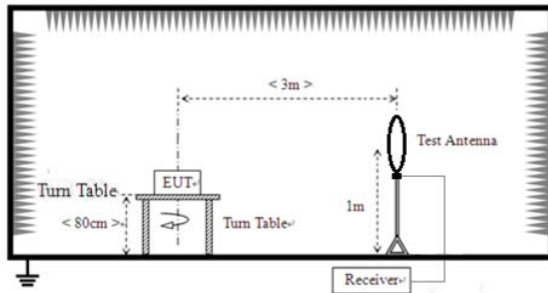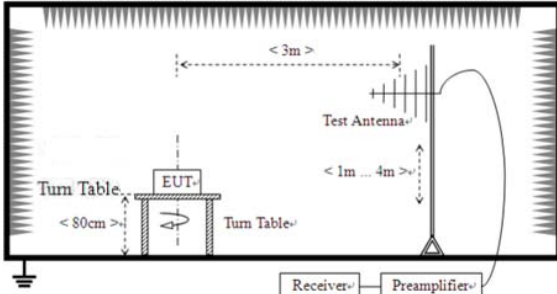Test Requirement:	FCC Part15 C Section 15.209 , RSS-Gen §8.9 §8.10				
Test Method:	ANSI C63.10: 2013 and RSS-Gen				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
	For radiated emissions from 30MHz to1GHz				
					
	For radiated emissions above 1GHz				

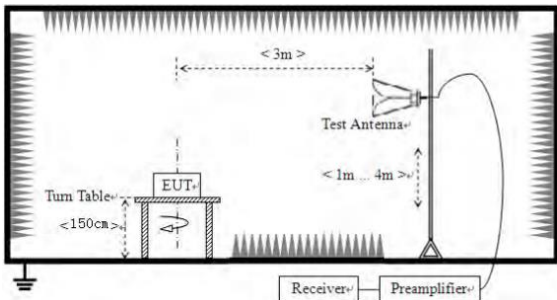						
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test Instruments:	Refer to section 3.0 for details					
Test mode:	Refer to section 2.2 for details					
Test environment:	Temp.:	23.7 °C	Humid.:	46%	Press.:	1012mbar
Test voltage:	AC 120V 60Hz					
Test results:	Pass					

Remarks:

1. The report only shows the worst mode.
2. Pre-scan all kind of the place mode (X-axis, Y-(axis, Z-axis), and found the Y-axis which it is worse case.

Measurement data:


■ **9kHz~30MHz**

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

■ **Below 1GHz**

All mode has been tested, the report only shows the worst mode of 802.11n20 (2437MHz).

Test polarization:	Vertical	Test voltage:	AC 120V 60Hz
--------------------	----------	---------------	--------------

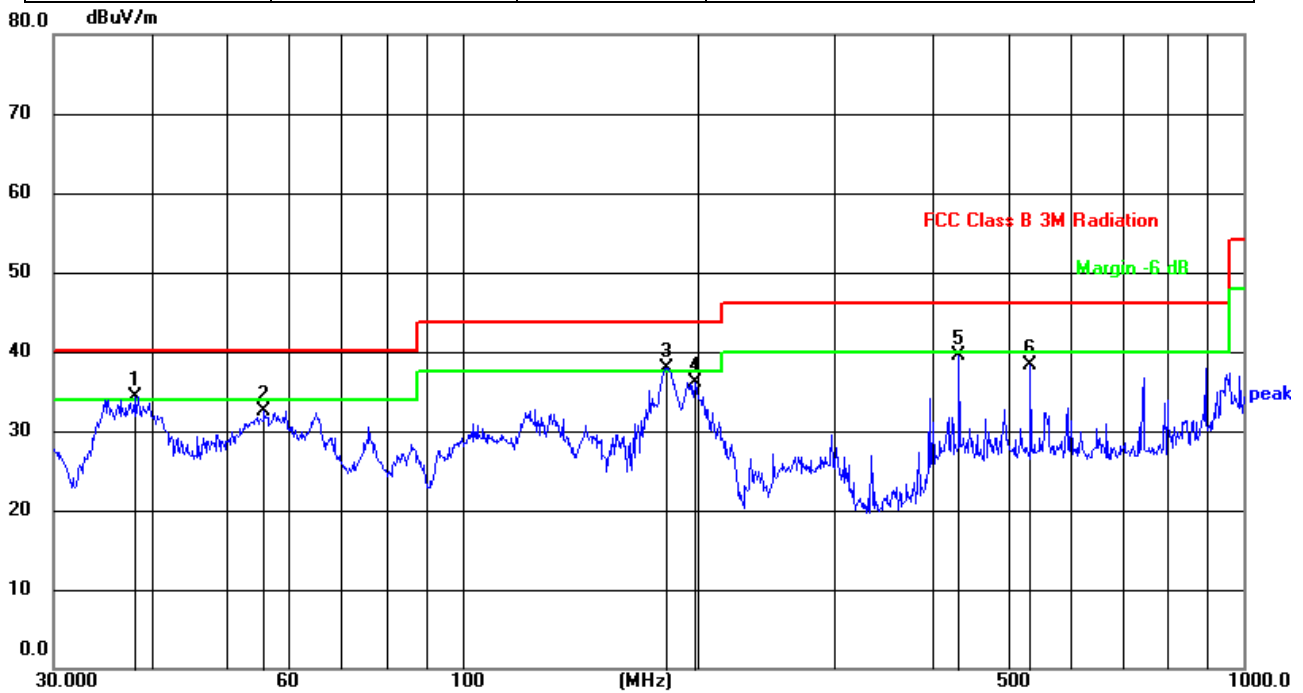


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38.0782	55.62	-21.24	34.38	40.00	-5.62	QP
2	55.8047	54.75	-22.23	32.52	40.00	-7.48	QP
3	182.5592	60.64	-22.68	37.96	43.50	-5.54	QP
4	198.5879	59.42	-23.34	36.08	43.50	-7.42	QP
5	432.5456	55.53	-16.05	39.48	46.00	-6.52	QP
6	533.8321	51.63	-13.27	38.36	46.00	-7.64	QP

Remarks:

Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Factor – Preamplifier Factor

Test polarization:	Horizontal	Test voltage:	AC 120V 60Hz
--------------------	------------	---------------	--------------

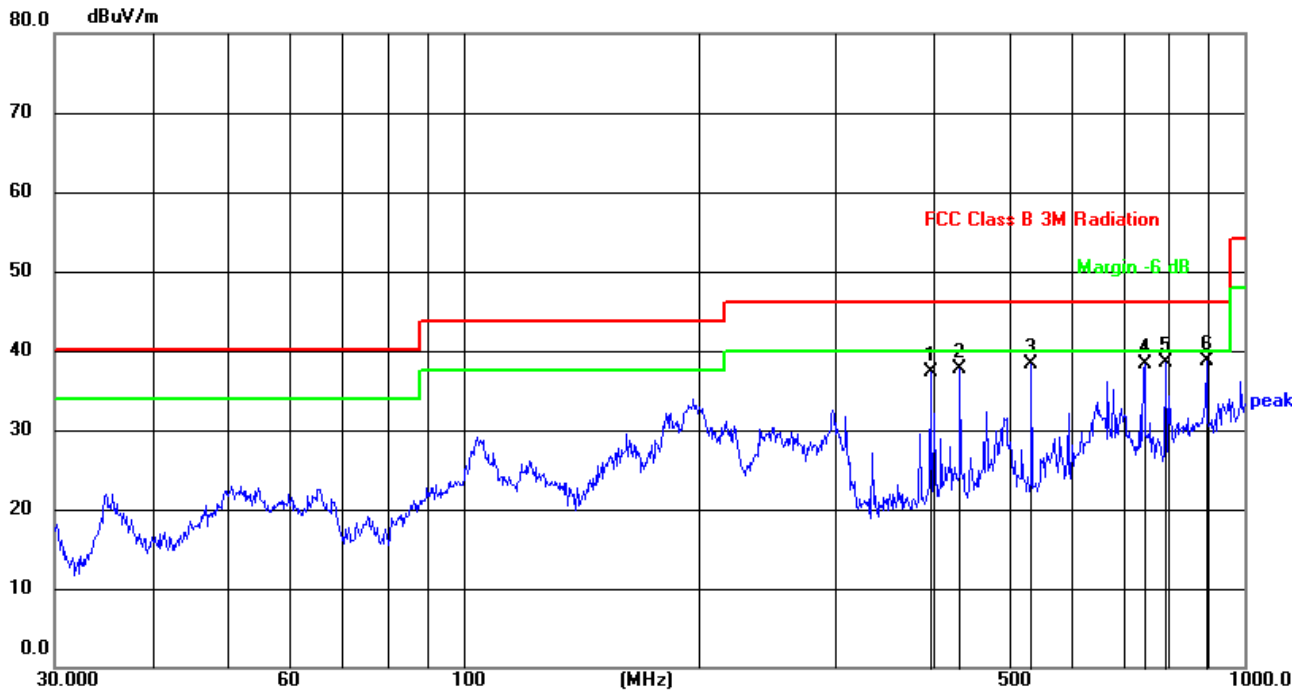

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	396.2414	54.81	-17.42	37.39	46.00	-8.61	QP
2	432.5455	53.78	-16.05	37.73	46.00	-8.27	QP
3	533.8320	51.54	-13.27	38.27	46.00	-7.73	QP
4	744.8659	46.59	-8.21	38.38	46.00	-7.62	QP
5	793.3958	45.12	-6.71	38.41	46.00	-7.59	QP
6	893.8565	44.32	-5.54	38.78	46.00	-7.22	QP

Remarks:

Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Factor – Preamplifier Factor

■ Above 1GHz

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	55.52	32.40	6.99	44.40	48.58	74.00	-25.42	Vertical
7236.00	54.21	36.60	8.15	42.30	51.54	74.00	-22.46	Vertical
9648.00	53.53	38.50	9.44	42.40	53.75	74.00	-20.25	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	56.11	32.40	6.99	44.40	32.40	74.00	-24.83	Horizontal
7236.00	55.01	36.60	8.15	42.30	36.60	74.00	-21.66	Horizontal
9648.00	53.65	38.50	9.44	42.40	38.50	74.00	-20.13	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	46.08	32.40	6.99	44.40	39.14	54.00	-14.86	Vertical
7236.00	44.42	36.60	8.15	42.30	41.75	54.00	-12.25	Vertical
9648.00	42.30	38.50	9.44	42.40	42.52	54.00	-11.48	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	46.68	32.40	6.99	44.40	39.74	54.00	-14.26	Horizontal
7236.00	44.31	36.60	8.15	42.30	41.64	54.00	-12.36	Horizontal
9648.00	42.37	38.50	9.44	42.40	42.59	54.00	-11.41	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	57.10	32.10	6.99	45.70	49.96	74.00	-24.04	Vertical
7311.00	54.83	36.80	8.15	45.50	52.76	74.00	-21.24	Vertical
9748.00	53.87	38.40	9.44	46.20	53.69	74.00	-20.31	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	56.78	32.10	6.99	45.70	49.64	74.00	-24.36	Horizontal
7311.00	55.92	36.80	8.15	45.50	53.85	74.00	-20.15	Horizontal
9748.00	52.92	38.40	9.44	46.20	52.74	74.00	-21.26	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	46.57	32.10	6.99	45.70	39.43	54.00	-14.57	Vertical
7311.00	43.60	36.80	8.15	45.50	41.53	54.00	-12.47	Vertical
9748.00	42.80	38.40	9.44	46.20	42.62	54.00	-11.38	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	46.65	32.10	6.99	45.70	39.51	54.00	-14.49	Horizontal
7311.00	44.24	36.80	8.15	45.50	42.17	54.00	-11.83	Horizontal
9748.00	42.01	38.40	9.44	46.20	41.83	54.00	-12.17	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	56.59	32.70	6.99	45.70	49.65	74.00	-24.35	Vertical
7386.00	54.18	36.40	8.15	45.50	51.71	74.00	-22.29	Vertical
9848.00	53.00	38.00	9.44	46.20	53.02	74.00	-20.98	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	55.93	32.70	6.99	45.70	48.99	74.00	-25.01	Horizontal
7386.00	53.36	36.40	8.15	45.50	50.89	74.00	-23.11	Horizontal
9848.00	53.22	38.00	9.44	46.20	53.24	74.00	-20.76	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	46.29	32.70	6.99	45.70	39.35	54.00	-14.65	Vertical
7386.00	43.91	36.40	8.15	45.50	41.44	54.00	-12.56	Vertical
9848.00	42.73	38.00	9.44	46.20	42.75	54.00	-11.25	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	45.82	32.70	6.99	45.70	38.88	54.00	-15.12	Horizontal
7386.00	45.58	36.40	8.15	45.50	43.11	54.00	-10.89	Horizontal
9848.00	42.19	38.00	9.44	46.20	42.21	54.00	-11.79	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11g	Test channel:	lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	57.66	32.40	6.99	44.40	50.22	74.00	-23.78	Vertical
7236.00	55.92	36.60	8.15	42.30	53.85	74.00	-20.15	Vertical
9648.00	53.73	38.50	9.44	42.40	54.15	74.00	-19.85	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	56.78	32.40	6.99	44.40	49.34	74.00	-24.66	Horizontal
7236.00	55.31	36.60	8.15	42.30	53.24	74.00	-20.76	Horizontal
9648.00	53.45	38.50	9.44	42.40	53.87	74.00	-20.13	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	47.46	32.40	6.99	44.40	38.69	54.00	-13.98	Vertical
7236.00	44.59	36.60	8.15	42.30	40.31	54.00	-11.48	Vertical
9648.00	43.03	38.50	9.44	42.40	41.49	54.00	-10.55	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	46.71	32.40	6.99	44.40	39.27	54.00	-14.73	Horizontal
7236.00	43.96	36.60	8.15	42.30	41.89	54.00	-12.11	Horizontal
9648.00	42.62	38.50	9.44	42.40	43.04	54.00	-10.96	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	57.69	32.10	6.99	45.70	50.55	74.00	-23.45	Vertical
7311.00	54.98	36.80	8.15	45.50	52.91	74.00	-21.09	Vertical
9748.00	54.77	38.40	9.44	46.20	54.59	74.00	-19.41	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	57.32	32.10	6.99	45.70	50.18	74.00	-23.82	Horizontal
7311.00	55.38	36.80	8.15	45.50	53.31	74.00	-20.69	Horizontal
9748.00	53.86	38.40	9.44	46.20	53.68	74.00	-20.32	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	46.09	32.10	6.99	45.70	38.95	54.00	-15.05	Vertical
7311.00	44.62	36.80	8.15	45.50	42.55	54.00	-11.45	Vertical
9748.00	42.06	38.40	9.44	46.20	41.88	54.00	-12.12	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	47.68	32.10	6.99	45.70	40.54	54.00	-13.46	Horizontal
7311.00	42.93	36.80	8.15	45.50	40.86	54.00	-13.14	Horizontal
9748.00	43.25	38.40	9.44	46.20	43.07	54.00	-10.93	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	57.26	32.70	6.99	45.70	50.32	74.00	-23.68	Vertical
7386.00	55.35	36.40	8.15	45.50	52.88	74.00	-21.12	Vertical
9848.00	53.42	38.30	9.44	46.20	53.44	74.00	-20.56	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	56.80	32.70	6.99	45.70	49.86	74.00	-24.14	Horizontal
7386.00	55.93	36.40	8.15	45.50	53.46	74.00	-20.54	Horizontal
9848.00	54.09	38.30	9.44	46.20	54.11	74.00	-19.89	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	46.77	32.70	6.99	45.70	39.83	54.00	-14.17	Vertical
7386.00	43.94	36.40	8.15	45.50	41.47	54.00	-12.53	Vertical
9848.00	43.16	38.30	9.44	46.20	43.18	54.00	-10.82	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	49.27	32.70	6.99	45.70	42.33	54.00	-11.67	Horizontal
7386.00	43.58	36.40	8.15	45.50	41.11	54.00	-12.89	Horizontal
9848.00	44.00	38.30	9.44	46.20	44.02	54.00	-9.98	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	57.32	32.40	6.99	44.40	49.88	74.00	-24.12	Vertical
7236.00	54.22	36.60	8.15	42.30	52.15	74.00	-21.85	Vertical
9648.00	53.04	38.50	9.44	42.40	53.46	74.00	-20.54	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	57.58	32.40	6.99	44.40	50.14	74.00	-23.86	Horizontal
7236.00	54.28	36.60	8.15	42.30	52.21	74.00	-21.79	Horizontal
9648.00	53.69	38.50	9.44	42.40	54.11	74.00	-19.89	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	47.30	32.40	6.99	44.40	39.86	54.00	-14.14	Vertical
7236.00	45.31	36.60	8.15	42.30	43.24	54.00	-10.76	Vertical
9648.00	43.99	38.50	9.44	42.40	44.41	54.00	-9.59	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	48.10	32.40	6.99	44.40	40.66	54.00	-13.34	Horizontal
7236.00	44.38	36.60	8.15	42.30	42.31	54.00	-11.69	Horizontal
9648.00	41.02	38.50	9.44	42.40	41.44	54.00	-12.56	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is too weak, instrument of signal is unable to test.
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	57.55	32.10	6.99	45.70	50.11	74.00	-23.89	Vertical
7311.00	54.55	36.80	8.15	45.50	52.48	74.00	-21.52	Vertical
9748.00	51.43	38.40	9.44	46.20	51.85	74.00	-22.15	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	56.70	32.10	6.99	45.70	49.26	74.00	-24.74	Horizontal
7311.00	54.26	36.80	8.15	45.50	52.19	74.00	-21.81	Horizontal
9748.00	51.49	38.40	9.44	46.20	51.91	74.00	-22.09	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	46.31	32.10	6.99	45.70	38.87	54.00	-15.13	Vertical
7311.00	42.45	36.80	8.15	45.50	40.38	54.00	-13.62	Vertical
9748.00	39.87	38.40	9.44	46.20	40.29	54.00	-13.71	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	46.86	32.10	6.99	45.70	39.42	54.00	-14.58	Horizontal
7311.00	43.36	36.80	8.15	45.50	41.29	54.00	-12.71	Horizontal
9748.00	40.44	38.40	9.44	46.20	40.86	54.00	-13.14	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	56.66	32.70	6.99	45.70	49.22	74.00	-24.78	Vertical
7386.00	53.94	36.40	8.15	45.50	51.87	74.00	-22.13	Vertical
9848.00	53.10	38.30	9.44	46.20	53.52	74.00	-20.48	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	56.30	32.70	6.99	45.70	48.86	74.00	-25.14	Horizontal
7386.00	52.98	36.40	8.15	45.50	50.91	74.00	-23.09	Horizontal
9848.00	51.02	38.30	9.44	46.20	51.44	74.00	-22.56	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	46.06	32.70	6.99	45.70	38.62	54.00	-15.38	Vertical
7386.00	42.31	36.40	8.15	45.50	40.24	54.00	-13.76	Vertical
9848.00	40.47	38.00	9.44	46.20	40.89	54.00	-13.11	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	45.62	32.70	6.99	45.70	38.18	54.00	-15.82	Horizontal
7386.00	42.92	36.40	8.15	45.50	40.85	54.00	-13.15	Horizontal
9848.00	40.19	38.30	9.44	46.20	40.61	54.00	-13.39	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1 Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “*”, means this data is too weak instrument of signal is unable to test.
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	56.10	32.40	6.99	44.40	48.66	74.00	-25.34	Vertical
7266.00	52.75	36.60	8.15	42.30	50.88	74.00	-23.12	Vertical
9688.00	55.04	38.50	9.44	42.40	54.96	74.00	-19.04	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4844.00	56.57	32.40	6.99	44.40	49.13	74.00	-24.87	Horizontal
7266.00	52.33	36.60	8.15	42.30	50.46	74.00	-23.54	Horizontal
9688.00	51.60	38.50	9.44	42.40	51.52	74.00	-22.48	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	46.39	32.40	6.99	44.40	38.95	54.00	-15.05	Vertical
7266.00	43.09	36.60	8.15	42.30	41.22	54.00	-12.78	Vertical
9688.00	43.60	38.50	9.44	42.40	43.52	54.00	-10.48	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4844.00	46.90	32.40	6.99	44.40	39.46	54.00	-14.54	Horizontal
7266.00	45.73	36.60	8.15	42.30	43.86	54.00	-10.14	Horizontal
9688.00	40.36	38.50	9.44	42.40	40.28	54.00	-13.72	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11n(HT40)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	56.55	32.10	6.99	45.70	49.11	74.00	-24.89	Vertical
7311.00	55.61	36.80	8.15	45.50	53.54	74.00	-20.46	Vertical
9748.00	54.19	38.40	9.44	46.20	54.61	74.00	-19.39	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	56.08	32.10	6.99	45.70	48.64	74.00	-25.36	Horizontal
7311.00	52.36	36.80	8.15	45.50	50.29	74.00	-23.71	Horizontal
9748.00	53.30	38.40	9.44	46.20	53.72	74.00	-20.28	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	46.29	32.10	6.99	45.70	38.85	54.00	-15.15	Vertical
7311.00	45.29	36.80	8.15	45.50	43.22	54.00	-10.78	Vertical
9748.00	40.79	38.40	9.44	46.20	41.21	54.00	-12.79	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	45.32	32.10	6.99	45.70	37.88	54.00	-16.12	Horizontal
7311.00	44.29	36.80	8.15	45.50	42.22	54.00	-11.78	Horizontal
9748.00	40.11	38.40	9.44	46.20	40.53	54.00	-13.47	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*” means this data is too weak instrument of signal is unable to test.*
3. *Emissions more than 20 dB below the limit do not need to be reported.*

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	55.60	32.70	6.99	45.70	48.66	74.00	-25.34	Vertical
7356.00	56.41	36.40	8.15	45.50	53.74	74.00	-20.26	Vertical
9808.00	51.13	38.30	9.44	46.20	51.35	74.00	-22.65	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4904.00	54.81	32.70	6.99	45.70	47.87	74.00	-26.13	Horizontal
7356.00	54.00	36.40	8.15	45.50	51.33	74.00	-22.67	Horizontal
9808.00	50.64	38.30	9.44	46.20	50.86	74.00	-23.14	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	46.36	32.70	6.99	45.70	39.42	54.00	-14.58	Vertical
7356.00	43.81	36.40	8.15	45.50	41.14	54.00	-12.86	Vertical
9808.00	42.11	38.30	9.44	46.20	42.33	54.00	-11.67	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4904.00	45.29	32.70	6.99	45.70	38.35	54.00	-15.65	Horizontal
7356.00	44.08	36.40	8.15	45.50	41.41	54.00	-12.59	Horizontal
9808.00	42.17	38.30	9.44	46.20	42.39	54.00	-11.61	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1 Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “*”, means this data is the too weak instrument of signal is unable to test.
3. Emissions more than 20 dB below the limit do not need to be reported.

5. Test Setup Photo

Reference to the **appendix I** for details.

6. EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----