


PSA

PASSIVE SYSTEM ALLIANCE
INPAQ TECHNOLOGY CO., LTD.



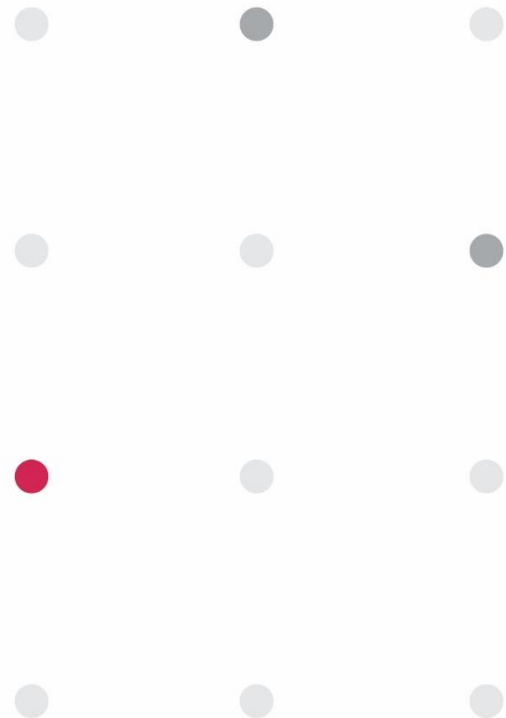

Presented by
陳彥吉 Ian Chen, **RF R&D Dept.**

INPAQ Technology Co., Ltd.

公司地址: 苗栗縣竹南鎮科義街38號一樓 台灣禾邦

Location: 1 F., No. 38, Keyi St., Zhunan Township, Miaoli County 35059, Taiwan (R.O.C.)

Last updated in Sep.12 2022

Contents

- **Product / Antenna Overview**

- **Test Results**

- Antenna S-parameter
- Antenna Isolation
- Efficiency & Peak Gain
- 3D Radiation Pattern

- **Conclusions**




Test Environment - OTA Chamber (I)

OTA chamber TEM-24 system (Multi-Probe)


1. Antenna passive test 700MHz~6000MHz
2. Long Term Evolution (LTE SISO) OTA Test
3. GSM/GPRS/EDGE on 850/900/1800/1900 OTA Test
4. WCDMA/HSDPA/HSUPA on FDD I~IX OTA Test
5. CDMA2000/1xEV-DO on 850/1900/AWS OTA Test
6. ECC
7. GPS Performance
8. Active Measurement: TRP, EIRP, EIS, TIS, Throughput, WiFi, BT, Non-Signaling

Test Environment - OTA Chamber (II)

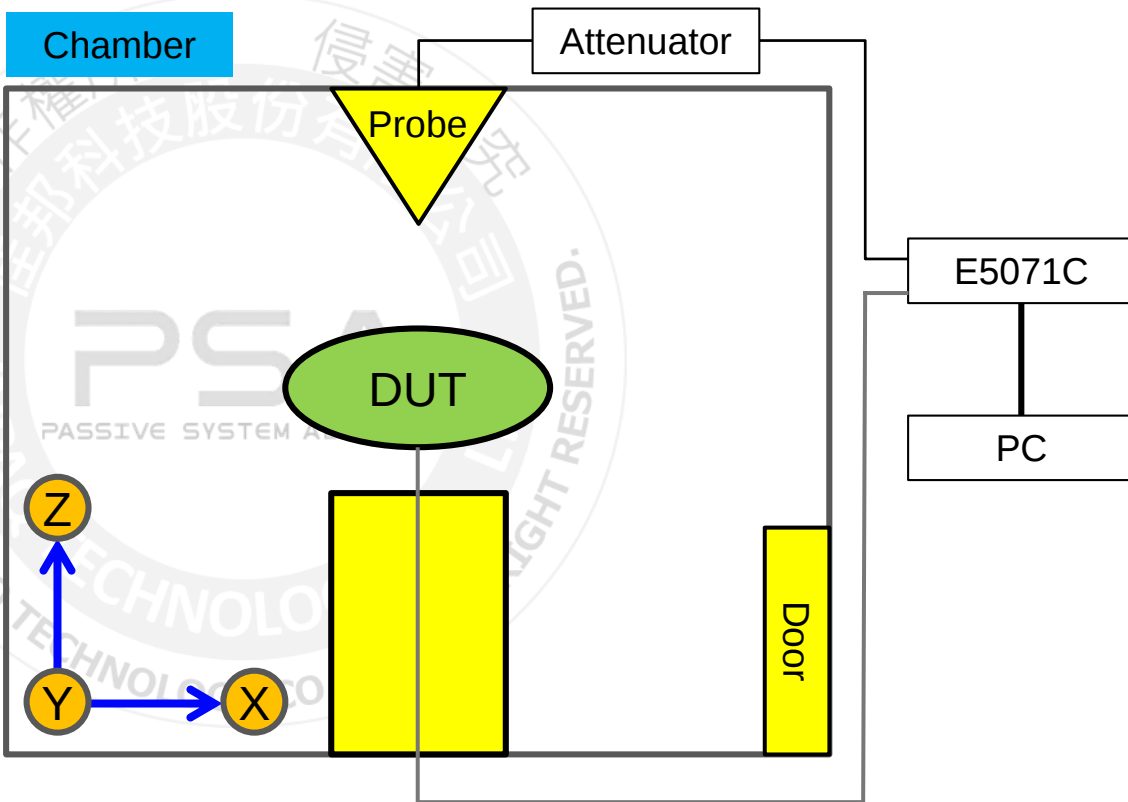

Test Environment - OTA Chamber (III)


Agilent E5071C

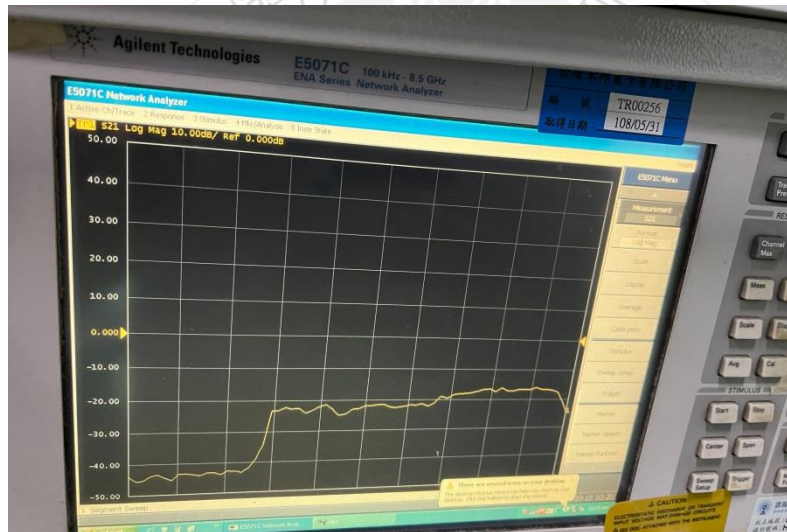


Antenna Matching circuit (INPAQ Proposed)

Matching Circuit

WIFI_ANT

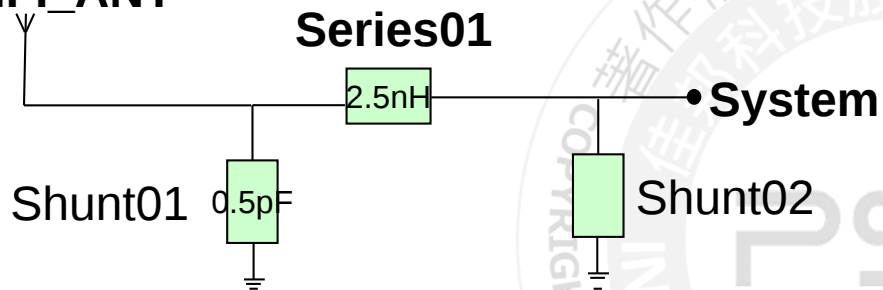

BT ANT

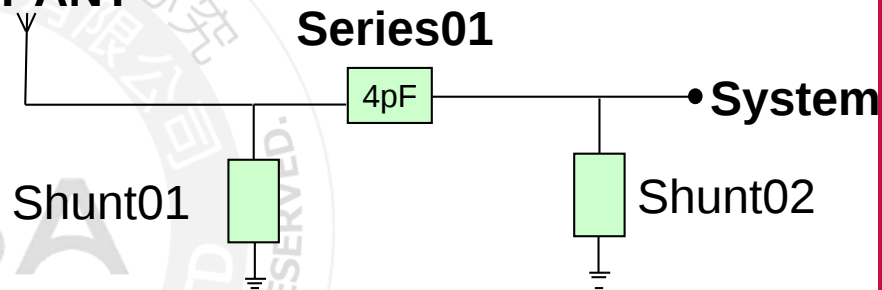


Location	Value	Series
Shunt01	0.5pF	GJM03
Series01	2.5nH	LQP03
Shunt02	NA	NA


Location	Value	Series
Shunt01	NA	NA
Series01	4pF	GJM03
Shunt02	NA	NA

Antenna S-parameter - 1st (INPAQ Proposed)

WIFI

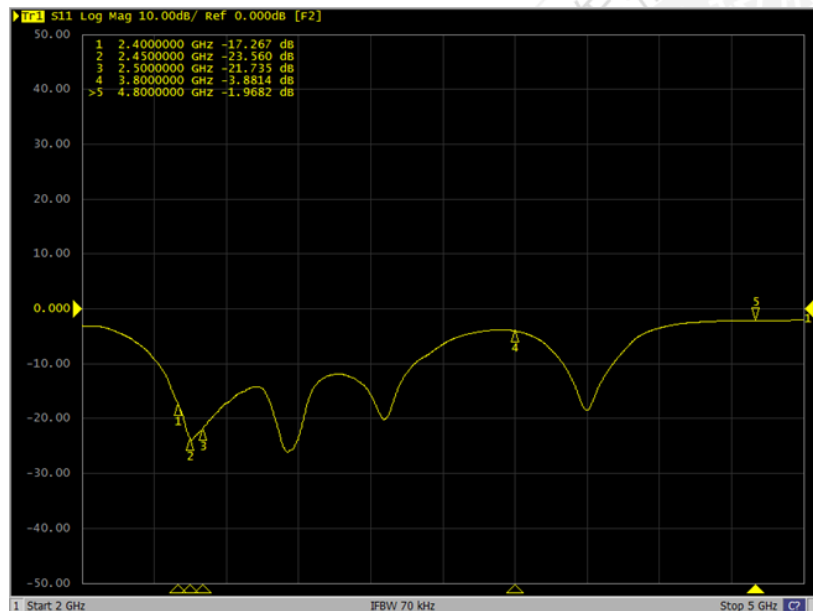


BT

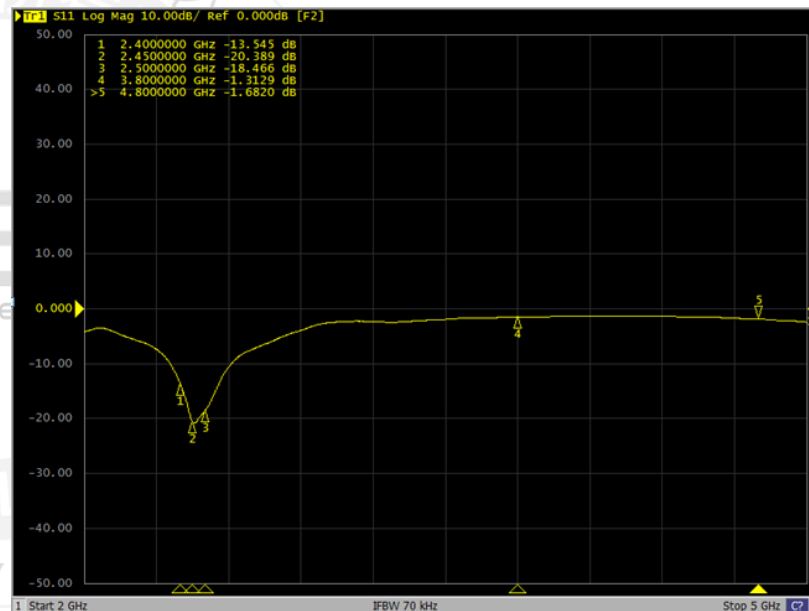

Antenna S-parameter - 1st (INPAQ Proposed)

WIFI-BT

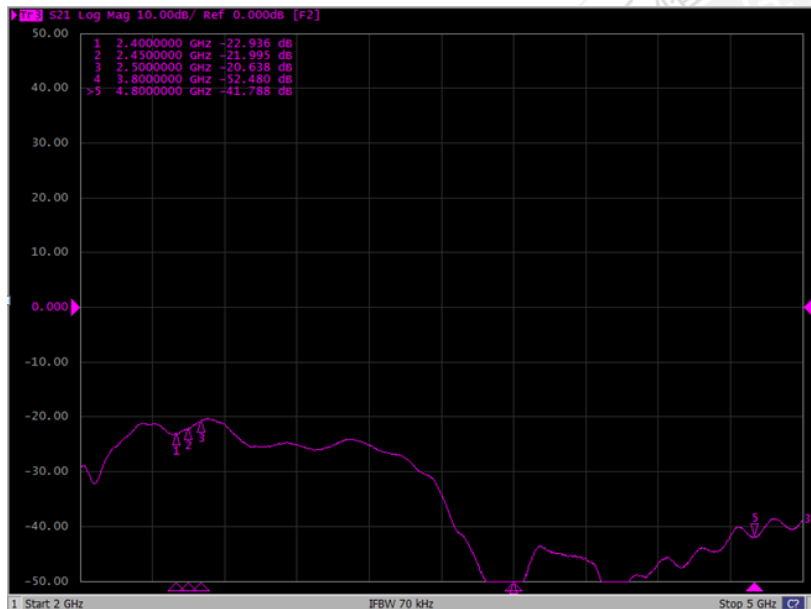

Antenna Information	Antenna Type	Model Number
WIFI	PIFA	WAG-M-LA-00-079
BT	PIFA	WAG-M-LA-00-080

Efficiency & Peak Gain - 1st (INPAQ Proposed)

WIFI




Frequency (MHz)	Efficiency (%)	Peak Gain (dBi)
2400	43.17	2.71
2410	45.32	2.54
2420	44.62	2.47
2430	45.75	2.58
2440	46.53	2.55
2450	47.79	2.63
2460	47.23	2.62
2470	46.21	2.86
2480	45.66	2.51
2490	43.81	2.47
2500	44.47	2.31
3800	26.98	-2.28
4800	5.36	-9.26

BT

Frequency (MHz)	Efficiency (%)	Peak Gain (dBi)
2400	38.54	0.48
2410	39.45	0.55
2420	40.25	0.50
2430	42.73	0.63
2440	41.62	0.72
2450	43.02	0.77
2460	43.35	0.87
2470	42.76	1.07
2480	41.11	0.62
2490	41.53	0.68
2500	40.17	0.62
3800	2.42	-12.32
4800	1.23	-15.02




3D Radiation Pattern - 1st (INPAQ Proposed)

WIFI-2400MHz

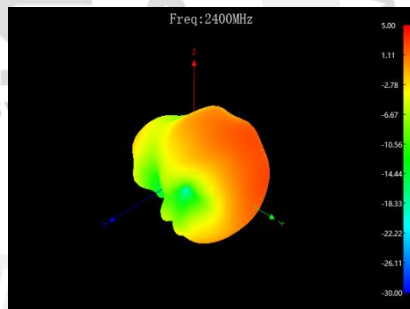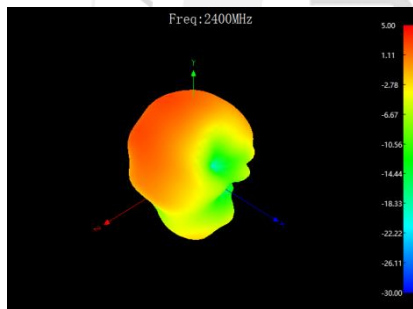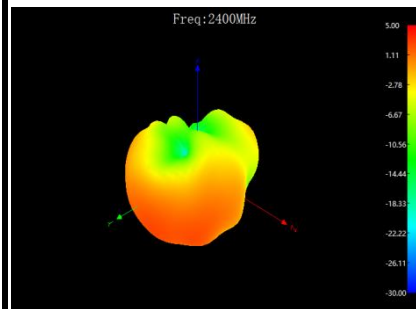




3D Radiation Pattern - 1st (INPAQ Proposed)

WIFI-2450MHz

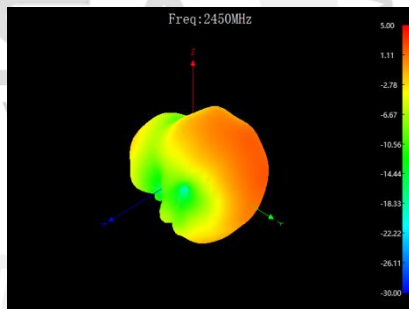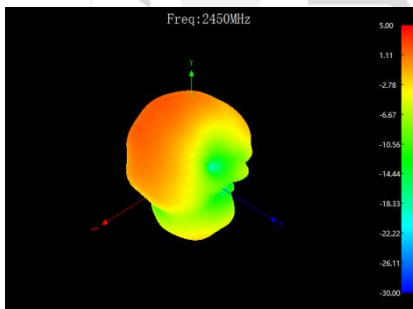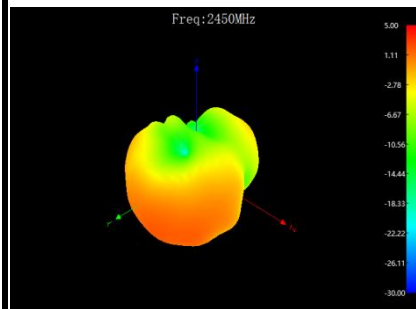




3D Radiation Pattern - 1st (INPAQ Proposed)

WIFI-2500MHz

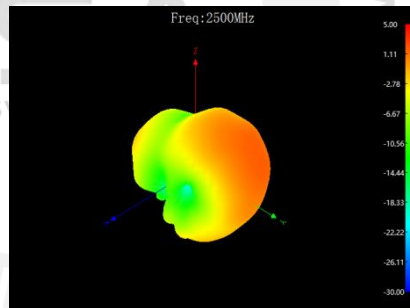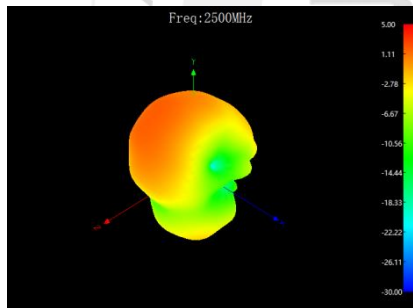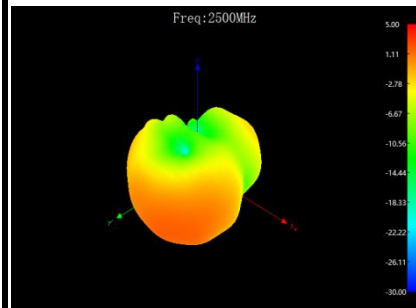




3D Radiation Pattern - 1st (INPAQ Proposed)

BT-2400MHz

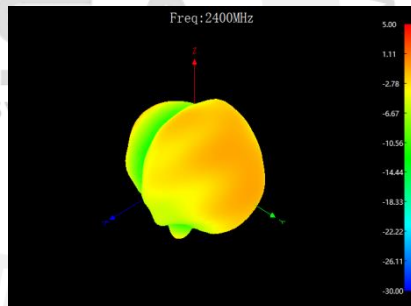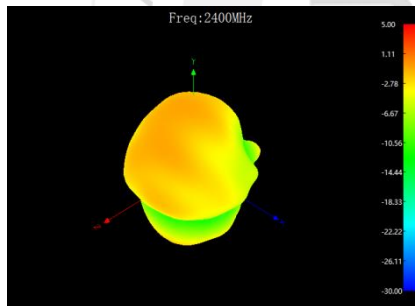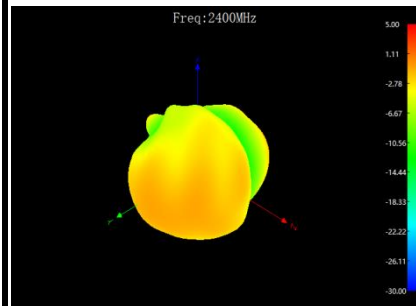


3D Radiation Pattern - 1st (INPAQ Proposed)

BT-2450MHz

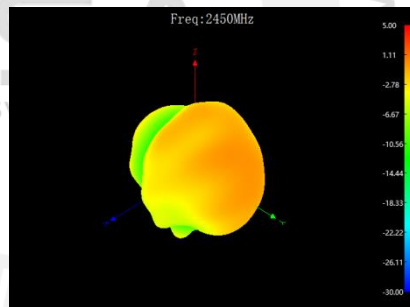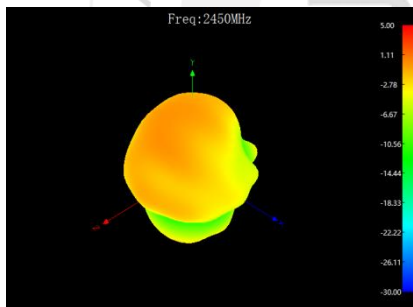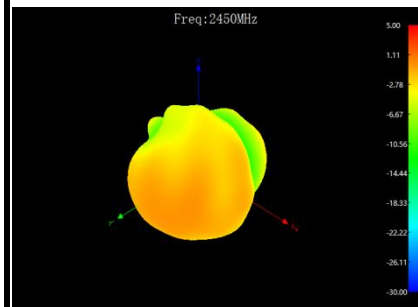

3D Radiation Pattern - 1st (INPAQ Proposed)

BT-2500MHz

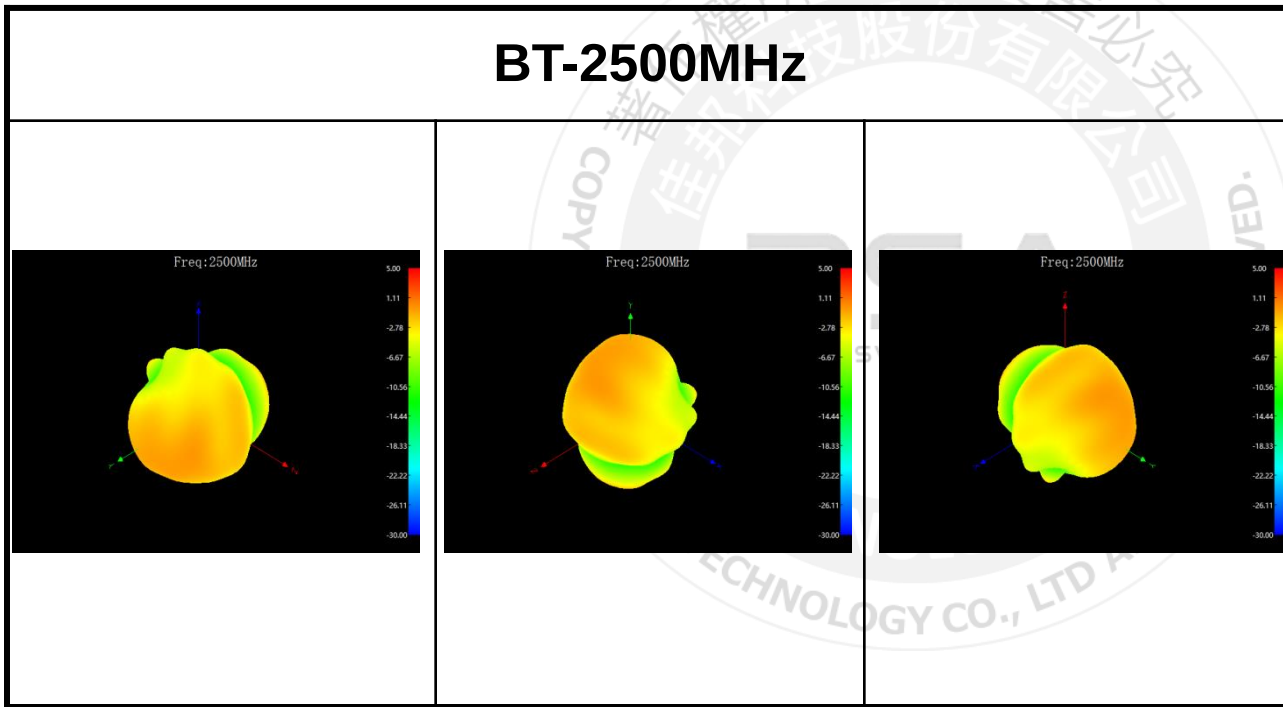

Conclusions

1. Tune the matching circuit to in band, the value are shown in page.7.
2. The efficiency of WIFI and BT antenna with are between 43-47% and 38-43% respectively.

