

FCC Measurement/Technical Report on Treon Gateway 2

FCC ID: 2AR86GW12

Contains:

| | | |
|------------------|----------------------|--------------------|
| U-blox Sara-R422 | FCC ID: XPYUBX20VA01 | (cellular) |
| U-blox Sara-R422 | IC: 8595A-UBX20VA01 | (cellular) |
| U-blox Nina B301 | FCC ID: XPYNINAB30 | (BLE/Wirepas mesh) |
| U-blox Lily-W131 | FCC ID: XPYLILYW1 | (WiFi) |

Simultaneous Transmissions

Test Report Reference: MDE_KIWA_2309_FCC_02

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-01
D-PL-12140-01-02
D-PL-12140-01-03

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Sebastian Doose
Bernhard Retka

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

a Bureau Veritas
Group Company
www.7layers.com

Table of Contents

| | | |
|----------|--|-----------|
| 1 | Applied Standards and Test Summary | 3 |
| 1.1 | Applied Standards | 3 |
| 1.2 | FCC-IC Correlation Table | 4 |
| 1.3 | Measurement Summary | 5 |
| 2 | Revision History / Signatures | 6 |
| 3 | Administrative Data | 7 |
| 3.1 | Testing Laboratory | 7 |
| 3.2 | Project Data | 7 |
| 3.3 | Applicant Data | 7 |
| 3.4 | Manufacturer Data | 7 |
| 4 | Test object Data | 8 |
| 4.1 | General EUT Description | 8 |
| 4.2 | EUT Main components | 8 |
| 4.3 | Ancillary Equipment | 8 |
| 4.5 | Auxiliary Equipment | 9 |
| 4.6 | EUT Setups | 9 |
| 4.7 | Operating Modes / Test Channels | 9 |
| 4.8 | Product labelling | 9 |
| 5 | Test Results | 10 |
| 5.1 | Field strength of spurious radiation | 10 |
| 6 | Test Equipment | 19 |
| 6.1 | Test Equipment Hardware | 19 |
| 6.2 | Test Equipment Software | 21 |
| 7 | Antenna Factors, Cable Loss and Sample Calculations | 22 |
| 7.1 | LISN R&S ESH3-Z5 (150 kHz – 30 MHz) | 22 |
| 7.2 | Antenna R&S HFH2-Z2 (9 kHz – 30 MHz) | 23 |
| 7.3 | Antenna R&S HL562 (30 MHz – 1 GHz) | 24 |
| 7.4 | Antenna R&S HF907 (1 GHz – 18 GHz) | 25 |
| 7.5 | Antenna EMCO 3160-09 (18 GHz – 26.5 GHz) | 26 |
| 7.6 | Antenna EMCO 3160-10 (26.5 GHz – 40 GHz) | 27 |
| 8 | Measurement Uncertainties | 28 |
| 9 | Photo Report | 29 |

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Industrial Signal Booster.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 22, 24,27 and 90 (10-1-22 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 27; Miscellaneous Wireless Communications Services
Subpart C – Technical standards

§ 27.50 – Power and duty cycle limits

§ 27.53 – Emission limits

§ 27.54 – Frequency stability

The tests were selected and performed with reference to:

- FCC Public Notice 971168 applying "Measurement guidance for certification of licensed digital transmitters" 971168 D01 v03r01, 2018-04-09
- ANSI C63.26: 2015

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for Cellular Mobile Devices from FCC and ISED Canada

| Measurement | FCC reference | ISED reference |
|--|---------------------|--|
| RF Output Power | § 2.1046 § 27.50 | RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.12 RSS-130 Issue 2, 4.6.2/4.6.3 RSS-139 Issue 4, 5.5 RSS-199 Issue 4, 5.5 |
| Peak to Average-Ratio | § 27.50 | RSS-130 Issue 2: 4.6.1 RSS 139 Issue 4: 5.5 RSS-199 Issue 4, 5.5 |
| Emission and Occupied bandwidth | § 2.1049 | RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.7 |
| Spurious Emission at Antenna Terminals | § 2.1051 § 27.53 | RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-130 Issue 2: 4.7.1/4.7.2 RSS-139 Issue 4, 5.6 RSS-199 Issue 4, 5.6 |
| Band Edge Compliance | § 2.1051 § 27.53 | RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-130 Issue 2: 4.7.1/4.7.2 RSS-139 Issue 4, 5.6 RSS-199 Issue 4, 5.6 |
| Frequency stability | § 2.1055 § 27.54 | RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.11 RSS-130 Issue 2: 4.5 RSS-139 Issue 4: 5.4 RSS-199 Issue 4, 5.4 |
| Field strength of spurious radiation | § 2.1053 § 27.53 | RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-130 Issue 2: 4.7.1/4.7.2 RSS-139 Issue 4: 5.6 RSS-199 Issue 4, 5.6 |

1.3 MEASUREMENT SUMMARY

47 CFR CHAPTER I FCC PART 27 Subpart C

§ 2.1053 § 27.53

Field strength of spurious radiation

The measurement was performed according to ANSI C63.26: 2015;

Final Result

5.5.2.3.1

OP-Mode

Radio Technology, Frequency range, Measurement method

Setup

Date

FCC

IC

CAT-M1 eFDD12 TX QPSK + BTLE TX 1 Mbit, 30 MHz – 1GHz, radiated.

S01_AB01

2024-04-08

Passed

Passed

CAT-M1 eFDD12 TX QPSK + BTLE TX 1 Mbit, 1GHz – 26 GHz, radiated.

S01_AB01

2024-04-11

Passed

Passed

CAT-M1 eFDD13 TX QPSK + BTLE TX 1 Mbit, 30 MHz – 1GHz, radiated.

S01_AB01

2024-04-08

Passed

Passed

CAT-M1 eFDD13 TX QPSK + BTLE TX 1 Mbit, 1GHz – 26 GHz, radiated.

S01_AB01

2024-04-11

Passed

Passed

2 REVISION HISTORY / SIGNATURES

| Report version control | | | |
|------------------------|--------------|--------------------|------------------|
| Version | Release date | Change Description | Version validity |
| initial | 2024-05-16 | -- | valid |
| -- | -- | -- | -- |

COMMENT: -



(responsible for accreditation scope)
Daniel Gall



(responsible for testing and report)
Mohamed Fraitat



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-01| -02 | -03
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier DE0007; ISED#: 3699A

Responsible for accreditation scope: Daniel Gall
Report Template Version: 2022-12-29

3.2 PROJECT DATA

Responsible for testing and report: Mohamed Fraitat
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2024-05-16
Testing Period: 2024-04-08 to 2024-04-11

3.3 APPLICANT DATA

Company Name: Treon Oy
Address: Visiokatu 3, 33720,
Tampere FINLAND
Contact Person: Janne Julkunen

3.4 MANUFACTURER DATA

Company Name: please see Applicant Data

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

| | |
|--|---|
| Kind of Device product description | Treon Gateway 2 collects, processes, and transmits data from sensors to any cloud backend over a wide range of wired and wireless connectivity. |
| Product name | Treon Gateway 2 |
| Type | - |
| Declared EUT data by the supplier | |
| General product description | The EUT is supporting Cellular LTE CAT-M1 Band 12 and 13 and Bluetooth Low energy. |
| Voltage Level | 120 V / 60 Hz |
| Voltage Type | AC |

4.2 EUT MAIN COMPONENTS

| Sample Name | Sample Code | Description |
|------------------|---------------|-----------------|
| EUT AB01 | DE1429008ab01 | radiated sample |
| Sample Parameter | Value | |
| Serial No. | f13b0fea | |
| HW Version | B5.1 | |
| SW Version | V7 | |
| Comment | | |

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

| Device | Details (Manufacturer, Type Model, OUT Code) | Description |
|--------|---|-------------|
| - | - | - |

4.5 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

| Device | Details (Manufacturer, Type Model, HW, SW, S/N) | Description |
|---------------|--|--------------------|
| | | |

4.6 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

| Setup | Combination of EUTs | Description and Rationale |
|--------------|----------------------------|----------------------------------|
| S01_AB01 | EUT AB01 | Setup for Radiated measurement |

4.7 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.

Simultaneous Transmissions:

- eFDD12 TX QPSK 5 MHz 1 Ressource Block+ Bluetooth LE TX 1 Mbit
- eFDD13 TX QPSK 1.4 MHz 1 Ressource Block + Bluetooth LE TX 1 Mbit

4.8 PRODUCT LABELLING

4.8.1 FCC ID LABEL

Please refer to the documentation of the applicant.

4.8.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

5 TEST RESULTS

5.1 FIELD STRENGTH OF SPURIOUS RADIATION

Standard **FCC PART 27 Subpart C**

The test was performed according to:


ANSI C63.26: 2015; 5.5.2.3.1

5.1.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable radiated spurious emission measurements per § 2.1053 and RSS-GEN 6.13. The limit and requirements come from the applicable rule part and ISED RSS-Standard for the operating band of the cellular device.


The EUT was connected to the test setup according to the following diagram:

Frequency Range: 30 MHz – 1 GHz:

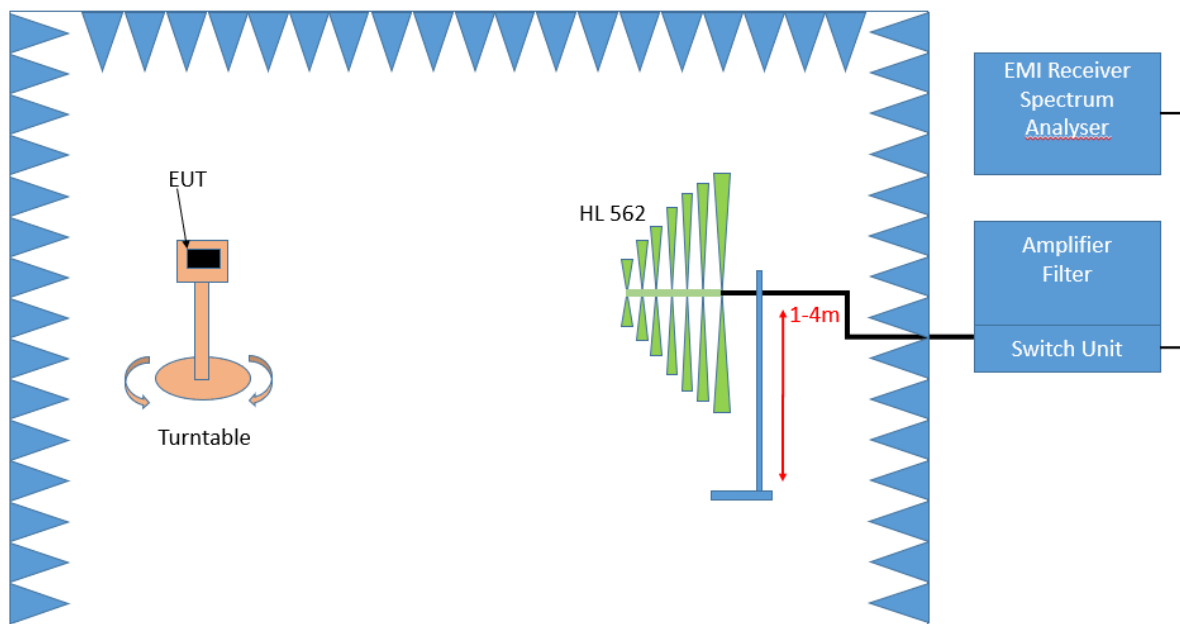

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

Frequency Range: 1 GHz – 26.5 GHz

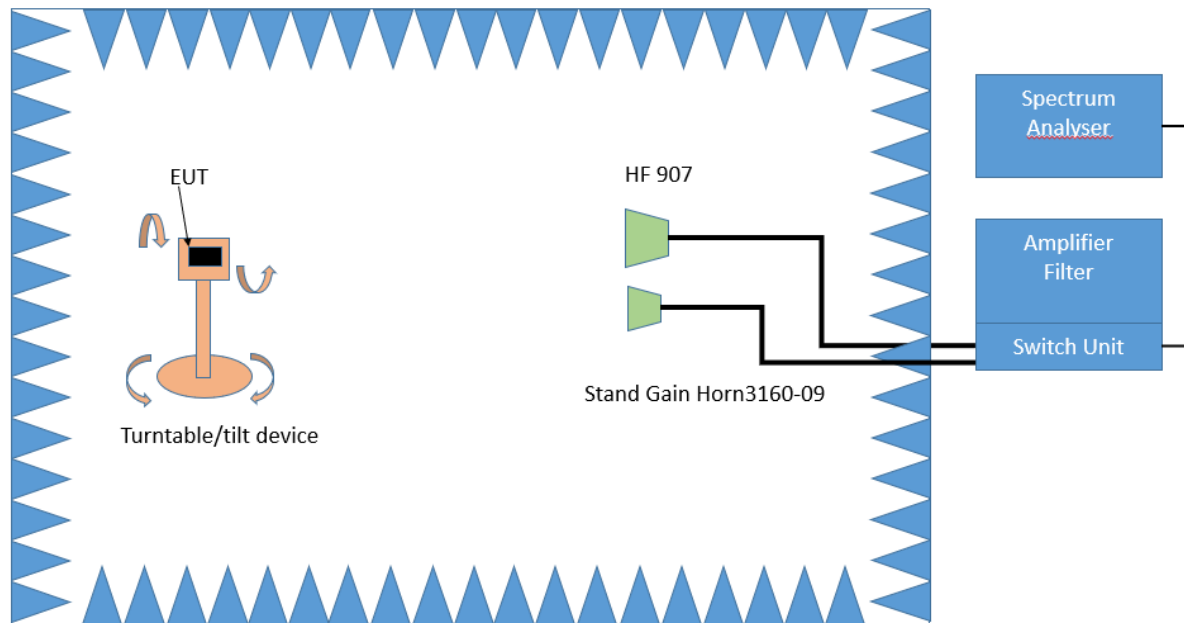

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

The test set-up was made in accordance to the general provisions of ANSI C63.26 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak
- RBW: 1 MHz
- VBW: 3 MHz
- Sweep time: coupled
- Turntable angle range: –180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^\circ$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak
- Measured frequencies: in step 1 determined frequencies
- RBW: 1 MHz
- VBW: 1 MHz
- Sweep time: 100 ms
- Turntable angle range: $\pm 45^\circ$ around the determined value
- Height variation range: ± 100 cm around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with RMS detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: RMQ
- Measured frequencies: in step 1 determined frequencies
- RBW: 1MHz
- VBW: 1 MHz
- Sweep time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90° .

The turn table step size (azimuth angle) for the preliminary measurement is 45° .

- Antenna distance: 3 m
- Detector: Peak
- RBW: 1 MHz
- VBW: 3 MHz
- Sweep time: coupled
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Polarisation: Horizontal + Vertical

Step 2:

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna in step 2 is omitted. Instead of this, a maximum search with a step size $\pm 45^\circ$ for the elevation axis is performed.

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak,
- RBW: 1 MHz
- VBW: 3 MHz
- Sweep time: 100 ms

Step 3:

Spectrum analyser settings for step 3:

- Detector: RMS
- Measured frequencies: in step 1 determined frequencies
- RBW: 1 MHz
- VBW: 3 MHz
- Sweep Time: 1 s

5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 2.1053; Measurement required: Field strength of spurious radiation:

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate.

FCC Part 27; Miscellaneous Wireless Communication Services**Subpart C – Technical standards****§27.53 – Emission limits****Band 4:**

(h) *AWS emission limits—(1) General protection levels.* Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

RSS-139; 6.6 Transmitter Unwanted Emissions

Equipment shall comply with the limits in (i) and (ii) below.

- i. In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.
- ii. After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} p$ (watts) dB.

5.1.3 TEST PROTOCOL

Ambient temperature: 23-24 °C
 Air Pressure: 1000-1011 hPa
 Humidity: 37-40 %

eFDD12 TX QPSK + BTLE TX 1 Mbit

| Spurious Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Limit [dBm] | Margin to Limit [dB] |
|----------------------|----------------------|----------|-----------|-------------|----------------------|
| 697.9 | -58.7 | RMS | 100 | -13 | 45.7 |
| 616.4 | -57.9 | RMS | 100 | -13 | 44.9 |
| 1414.000 | -48.6 | RMS | 1000 | -13 | 35.6 |
| 2121.600 | -32.1 | RMS | 1000 | -13 | 19.1 |
| 3534.667 | -42.7 | RMS | 1000 | -13 | 29.7 |


eFDD13 TX QPSK + BTLE TX 1 Mbit

| Spurious Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Limit [dBm] | Margin to Limit [dB] |
|----------------------|----------------------|----------|-----------|-------------|----------------------|
| 774.1 | -57.4 | RMS | 100 | -13 | 22.4 |

Remark: Please see next sub-clause for the measurement plot.

5.1.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Technology = E-UTRA, eFDD12 TX on CH 23095 + Bluetooth LE 1 Mbit TX on CH19,
 Frequency range = 30 MHz – 1GHz, Measurement method = radiated
 (S01_AB01)

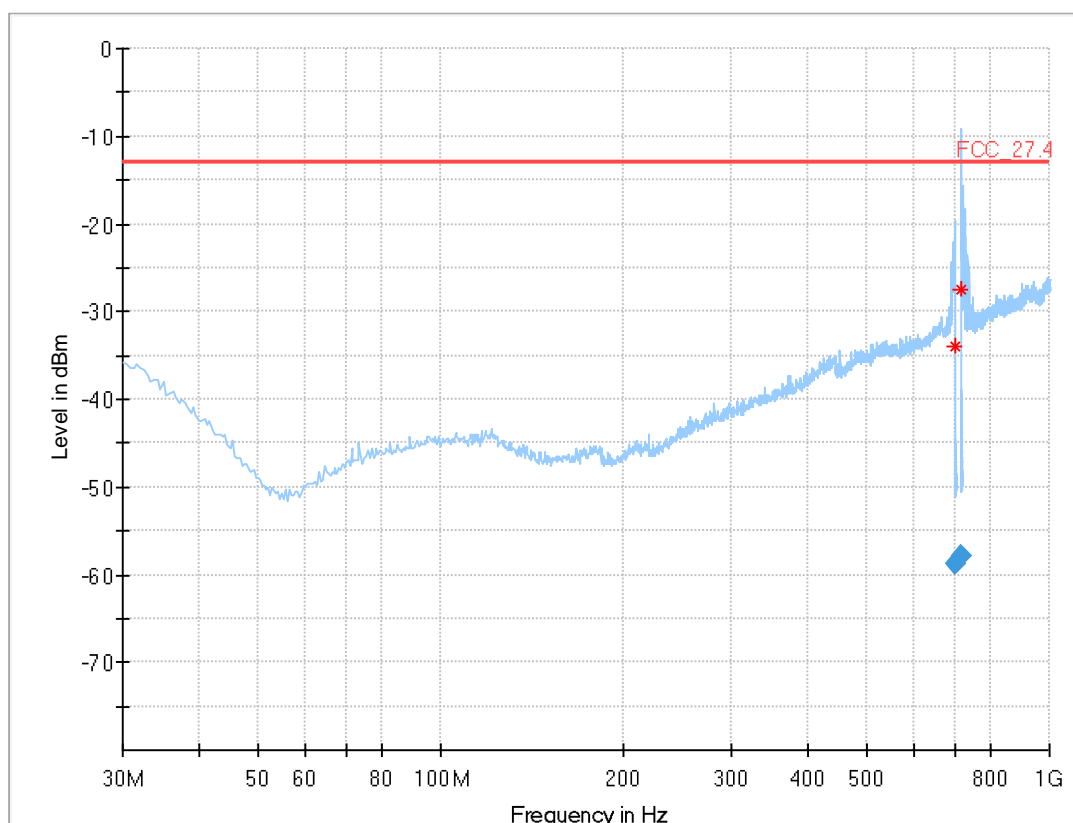

Final Result

| Frequency (MHz) | RMS (dBm) | Limit (dBm) | Margin | Meas. Time (ms) | Bandwidth (h) | Height | Pol | Azimuth (h) | Corr. (dB) |
|-----------------|-----------|-------------|--------|-----------------|---------------|--------|-----|-------------|------------|
| 697.900000 | -58.75 | -13.00 | 45.75 | 1000.0 | 100.000 | 136.0 | V | 0.0 | -73.1 |
| 716.383900 | -57.93 | -13.00 | 44.93 | 1000.0 | 100.000 | 233.0 | H | -98.0 | -72.6 |

Technology = E-UTRA, eFDD12 TX on CH 23095 + Bluetooth LE 1 Mbit TX on CH19,
 Frequency range = 1GHz – 26 GHz, Measurement method = radiated
 (S01_AB01)

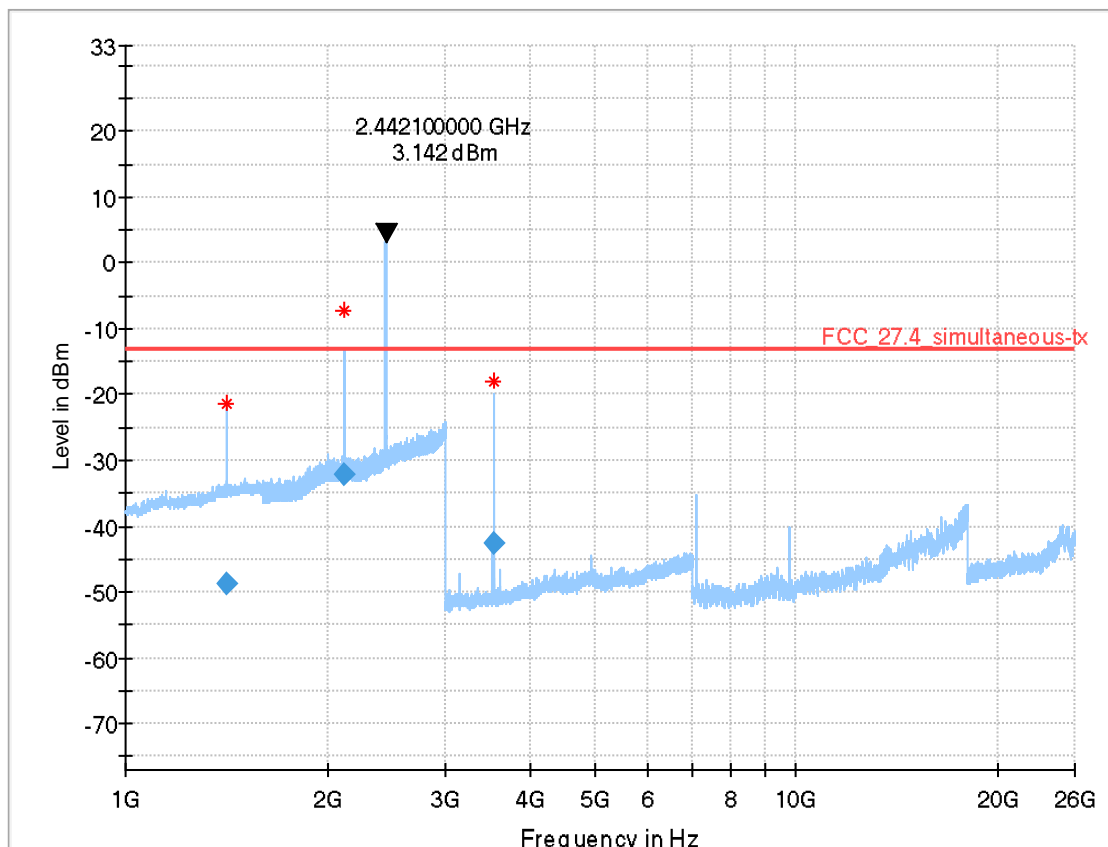


Remark: Marker on intentional transmitter BTLE

Final_Result

| Frequency (MHz) | RMS (dBm) | Limit (dBm) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) |
|-----------------|-----------|-------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|
| 1414.000 | -48.6 | -13.00 | 35.61 | 1000.0 | 1000.000 | 150.0 | V | -89.0 | 105.0 |
| 2121.600 | -32.1 | -13.00 | 19.06 | 1000.0 | 1000.000 | 150.0 | V | 331.0 | 82.0 |
| 3534.667 | -42.7 | -13.00 | 29.74 | 1000.0 | 1000.000 | 150.0 | V | 44.0 | 93.0 |


Technology = E-UTRA, eFDD12 TX on CH 23230 + Bluetooth LE 1 Mbit TX on CH19,
Frequency range = 30 MHz - 1GHz, Measurement method = radiated
(S01_AB01)

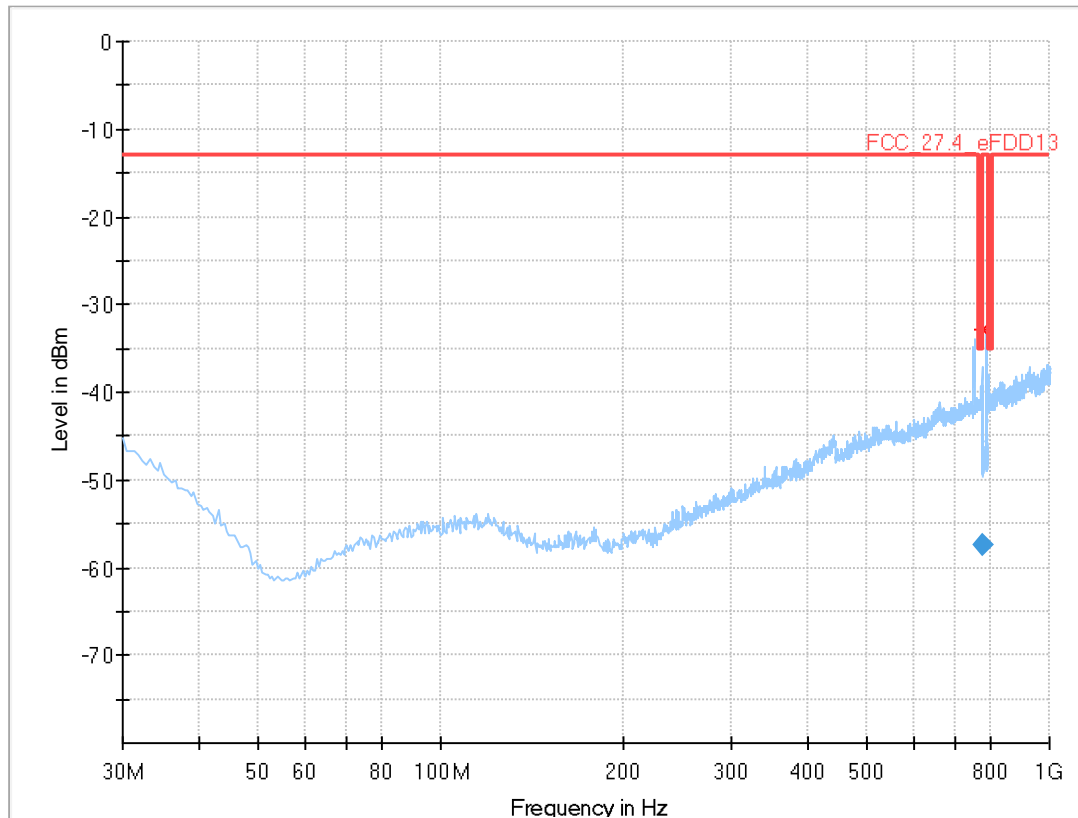

Final_Result

| Frequency (MHz) | RMS (dBm) | Limit (dBm) | Margin | Meas. Time (ms) | Bandwidth | Height | Pol | Azimuth | Corr. (dB) | Comment |
|-----------------|-----------|-------------|--------|-----------------|-----------|--------|-----|---------|------------|-----------------------|
| 774.099125 | -57.44 | -35.00 | 22.44 | 1000.0 | 100.000 | 193.0 | H | -87.0 | -71.8 | 17:47:58 - 2024-04-08 |

Technology = E-UTRA, eFDD13 TX on CH 23230 + Bluetooth LE 1 Mbit TX on CH19,
 Frequency range = 1GHz – 26 GHz, Measurement method = radiated
 (S01_AB01)

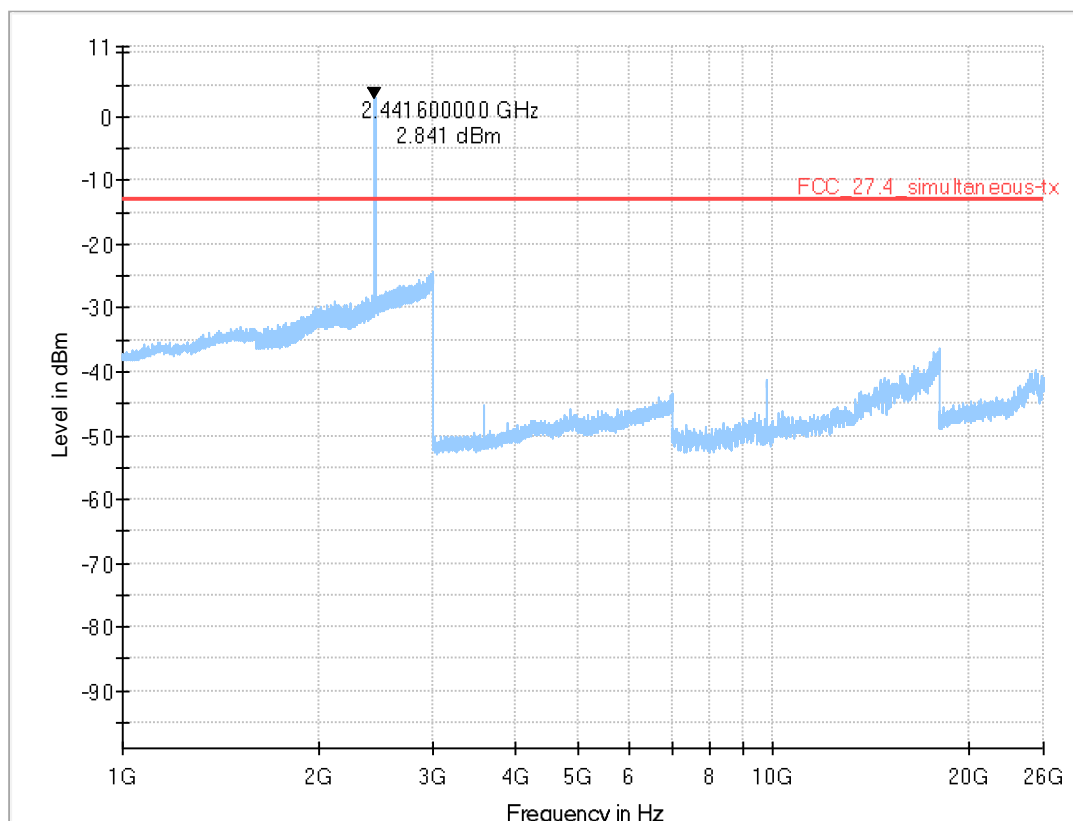

Remark: Marker on intentional transmitter BTLE

5.1.5 TEST EQUIPMENT USED

- Radiated Emissions FAR
- Radiated Emissions SAC up to 1 GHz

6 TEST EQUIPMENT

6.1 TEST EQUIPMENT HARDWARE

- 1 Radiated Emissions FAR
Radiated Emissions in a fully anechoic room

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|-------------------------|---|-----------------------------------|------------------------|------------------|-----------------|
| 1.1 | AMF-7D00101800-30-10P-R | Broadband Amplifier 100 MHz - 18 GHz | Miteq | | N/A | N/A |
| 1.2 | 5HC2700/12750-1.5-KK | High Pass Filter | Trilithic | 9942012 | N/A | N/A |
| 1.3 | ASP 1.2/1.8-10 kg | Antenna Mast | Maturo GmbH | - | N/A | N/A |
| 1.4 | Anechoic Chamber 03 | FAR, 8.80m x 4.60m x 4.05m (l x w x h) | Albatross Projects | P26971-647-001-PRB | N/A | N/A |
| 1.5 | Fluke 177 | Digital Multimeter 03 (Multimeter) | Fluke Europe B.V. | 86670383 | 2022-06 | 2024-06 |
| 1.6 | JS4-18002600-32-5P | Broadband Amplifier 18 GHz - 26 GHz | Miteq | 849785 | N/A | N/A |
| 1.7 | FSW43 | Spectrum Analyzer | Rohde & Schwarz GmbH & Co. KG | 103779 | 2022-11 | 2024-11 |
| 1.8 | 3160-09 | Standard Gain / Pyramidal Horn Antenna 26.5 GHz | EMCO Elektronik GmbH | 00083069 | N/A | N/A |
| 1.9 | WHKX 7.0/18G-8SS | High Pass Filter | Wainwright Instruments GmbH | 09 | N/A | N/A |
| 1.10 | 4HC1600/12750-1.5-KK | High Pass Filter | Trilithic | 9942011 | N/A | N/A |
| 1.11 | TT 1.5 WI | Turn Table | Maturo GmbH | - | N/A | N/A |
| 1.12 | HL 562 ULTRALOG | Biconical-log-per Antenna (30 MHz - 3 GHz) | Rohde & Schwarz GmbH & Co. KG | 100609 | 2022-06 | 2025-06 |
| 1.13 | VLFX-650+ | Low Pass Filter DC650 MHz | Mini-Circuits | 15542 | N/A | N/A |
| 1.14 | 5HC3500/18000-1.2-KK | High Pass Filter | Trilithic | 200035008 | N/A | N/A |
| 1.15 | Opus 20 THI (8120.00) | ThermoHygro Datalogger | Lufft Mess- und Regeltechnik GmbH | 115.0318.0802.033 | N/A | N/A |
| 1.16 | TD1.5-10kg | EUT Tilt Device (Rohacell) | Maturo GmbH | TD1.5-10kg/024/3790709 | N/A | N/A |
| 1.17 | PAS 2.5 - 10 kg | Antenna Mast | Maturo GmbH | - | N/A | N/A |
| 1.18 | AFS42-00101800-25-S-42 | Broadband Amplifier 25 MHz - 18 GHz | Miteq | 2035324 | N/A | N/A |
| 1.19 | HF 907 | Double-ridged horn | Rohde & Schwarz | 102444 | 2021-09 | 2024-09 |
| 1.20 | CMW500 | Callbox OIL-RE, SUW | Rohde & Schwarz GmbH & Co. KG | 155999-Ei | 2023-01 | 2026-01 |

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|-------------|--|----------------------------------|---------------|------------------|-----------------|
| 1.21 | CMU 200 | "CMU2" Universal Radio Communica tion Tester | Rohde & Schwarz GmbH & Co. KG | 837983/052 | 2021-11 | 2024-11 |

- 1 Radiated Emissions SAC up to 1 GHz
 Radiated emission tests up to 1 GHz in a semi anechoic room

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|-------------------------|--|---|------------------------|------------------|-----------------|
| 1.1 | N5000/NP | Filter for EUT, 2 Lines, 250 V, 16 A | ETS-LINDGREN | 241515 | N/A | N/A |
| 1.2 | Opus10 TPR (8253.00) | T/P Logger 13 | Lufth Mess- und Regeltechnik GmbH | 13936 | 2023-12 | 2025-12 |
| 1.3 | ESR 7 | EMI Receiver / Spectrum Analyzer | Rohde & Schwarz GmbH & Co. KG | 101424 | 2023-01 | 2025-01 |
| 1.4 | Anechoic Chamber 01 | SAC/FAR, 10.58 m x 6.38 m x 6.00 m | Frankonia Germany EMC Solution GmbH | none | N/A | N/A |
| 1.5 | HL 562 ULTRALOG | Biconical-log- per antenna (30 MHz - 3 GHz) with HL 562E biconicals | Rohde & Schwarz GmbH & Co. KG | 830547/003 | 2021-09 | 2024-09 |
| 1.6 | Fluke 177 | Digital Multimeter 03 (Multimeter) | Fluke Europe B.V. | 86670383 | 2023-08 | 2025-08 |
| 1.7 | Opus10 THI (8152.00) | T/H Logger 10 | Lufth Mess- und Regeltechnik GmbH | 12488 | 2023-12 | 2025-12 |
| 1.8 | EP 1200/B, NA/B1 | AC Source, Amplifier with integrated variable Oscillator | Spitzenberger & Spies GmbH & Co. KG | B6278 | N/A | N/A |
| 1.9 | DS 420S | Turn Table 2 m diameter | HD GmbH | 420/573/99 | N/A | N/A |
| 1.10 | CS-RUB6 | Rubidium Frequency Standard | Rohde & Schwarz GmbH & Co. KG | 100321 | 2023-10 | 2024-10 |
| 1.11 | AM 4.0 | Antenna Mast 4 m | Maturo GmbH | AM4.0/180/1192 0513 | N/A | N/A |

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

6.2 TEST EQUIPMENT SOFTWARE

| | |
|--------------------------------|----------|
| Semi-Anechoic Chamber: | |
| Software | Version |
| EMC32 Measurement Software | 10.60.10 |
| INNCO Mast Controller | 1.02.62 |
| MATURO Mast Controller | 12.19 |
| MATURO Turn-Table Controller | 30.10 |
| Fully-Anechoic Chamber: | |
| Software | Version |
| EMC32 Measurement Software | 10.60.10 |
| MATURO Turn-Unit Cotrolller | 11.10 |
| MATURO Mast Controller | 12.10 |
| MATURO Turntable Controller | 12.11 |
| Conducted AC Emissions: | |
| Software | Version |
| EMC32 Measurement Software | 10.60.20 |

7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

| Frequency | | Corr. | LISN insertion loss ESH3- Z5 | cable loss (incl. 10 dB atten- uator) |
|-----------|--|-------|--|--|
| MHz | | dB | dB | dB |
| 0.15 | | 10.1 | 0.1 | 10.0 |
| 5 | | 10.3 | 0.1 | 10.2 |
| 7 | | 10.5 | 0.2 | 10.3 |
| 10 | | 10.5 | 0.2 | 10.3 |
| 12 | | 10.7 | 0.3 | 10.4 |
| 14 | | 10.7 | 0.3 | 10.4 |
| 16 | | 10.8 | 0.4 | 10.4 |
| 18 | | 10.9 | 0.4 | 10.5 |
| 20 | | 10.9 | 0.4 | 10.5 |
| 22 | | 11.1 | 0.5 | 10.6 |
| 24 | | 11.1 | 0.5 | 10.6 |
| 26 | | 11.2 | 0.5 | 10.7 |
| 28 | | 11.2 | 0.5 | 10.7 |
| 30 | | 11.3 | 0.5 | 10.8 |

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

| Frequency MHz | AF HFH-Z2) dB (1/m) | Corr. dB | cable loss 1 (inside chamber) dB | cable loss 2 (outside chamber) dB | cable loss 3 (switch unit) dB | cable loss 4 (to receiver) dB | distance corr. (-40 dB/ decade) dB | d _{Limit} (meas. distance (limit) m | d _{used} (meas. distance (used) m |
|------------------|---------------------------|-------------|--|---|---|---|--|--|--|
| 0.009 | 20.50 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.01 | 20.45 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.015 | 20.37 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.02 | 20.36 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.025 | 20.38 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.03 | 20.32 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.05 | 20.35 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.08 | 20.30 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.1 | 20.20 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.2 | 20.17 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.3 | 20.14 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.49 | 20.12 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.490001 | 20.12 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 0.5 | 20.11 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 0.8 | 20.10 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 1 | 20.09 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 2 | 20.08 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 3 | 20.06 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 4 | 20.05 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 5 | 20.05 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 6 | 20.02 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 8 | 19.95 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 10 | 19.83 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 12 | 19.71 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 14 | 19.54 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 16 | 19.53 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 18 | 19.50 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 20 | 19.57 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 22 | 19.61 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 24 | 19.61 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 26 | 19.54 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 28 | 19.46 | -39.2 | 0.3 | 0.1 | 0.3 | 0.1 | -40 | 30 | 3 |
| 30 | 19.73 | -39.1 | 0.4 | 0.1 | 0.3 | 0.1 | -40 | 30 | 3 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

7.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

($d_{\text{Limit}} = 3 \text{ m}$)

| Frequency | AF R&S HL562 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 30 | 18.6 | 0.6 |
| 50 | 6.0 | 0.9 |
| 100 | 9.7 | 1.2 |
| 150 | 7.9 | 1.6 |
| 200 | 7.6 | 1.9 |
| 250 | 9.5 | 2.1 |
| 300 | 11.0 | 2.3 |
| 350 | 12.4 | 2.6 |
| 400 | 13.6 | 2.9 |
| 450 | 14.7 | 3.1 |
| 500 | 15.6 | 3.2 |
| 550 | 16.3 | 3.5 |
| 600 | 17.2 | 3.5 |
| 650 | 18.1 | 3.6 |
| 700 | 18.5 | 3.6 |
| 750 | 19.1 | 4.1 |
| 800 | 19.6 | 4.1 |
| 850 | 20.1 | 4.4 |
| 900 | 20.8 | 4.7 |
| 950 | 21.1 | 4.8 |
| 1000 | 21.6 | 4.9 |

| cable loss 1 (inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit) | cable loss 4 (to receiver) | distance corr. (-20 dB/ decade) | d_{Limit} (meas. distance (limit)) | d_{used} (meas. distance (used)) |
|--|---|-------------------------------------|-------------------------------------|--|--|--|
| dB | dB | dB | dB | dB | m | m |
| 0.29 | 0.04 | 0.23 | 0.02 | 0.0 | 3 | 3 |
| 0.39 | 0.09 | 0.32 | 0.08 | 0.0 | 3 | 3 |
| 0.56 | 0.14 | 0.47 | 0.08 | 0.0 | 3 | 3 |
| 0.73 | 0.20 | 0.59 | 0.12 | 0.0 | 3 | 3 |
| 0.84 | 0.21 | 0.70 | 0.11 | 0.0 | 3 | 3 |
| 0.98 | 0.24 | 0.80 | 0.13 | 0.0 | 3 | 3 |
| 1.04 | 0.26 | 0.89 | 0.15 | 0.0 | 3 | 3 |
| 1.18 | 0.31 | 0.96 | 0.13 | 0.0 | 3 | 3 |
| 1.28 | 0.35 | 1.03 | 0.19 | 0.0 | 3 | 3 |
| 1.39 | 0.38 | 1.11 | 0.22 | 0.0 | 3 | 3 |
| 1.44 | 0.39 | 1.20 | 0.19 | 0.0 | 3 | 3 |
| 1.55 | 0.46 | 1.24 | 0.23 | 0.0 | 3 | 3 |
| 1.59 | 0.43 | 1.29 | 0.23 | 0.0 | 3 | 3 |
| 1.67 | 0.34 | 1.35 | 0.22 | 0.0 | 3 | 3 |
| 1.67 | 0.42 | 1.41 | 0.15 | 0.0 | 3 | 3 |
| 1.87 | 0.54 | 1.46 | 0.25 | 0.0 | 3 | 3 |
| 1.90 | 0.46 | 1.51 | 0.25 | 0.0 | 3 | 3 |
| 1.99 | 0.60 | 1.56 | 0.27 | 0.0 | 3 | 3 |
| 2.14 | 0.60 | 1.63 | 0.29 | 0.0 | 3 | 3 |
| 2.22 | 0.60 | 1.66 | 0.33 | 0.0 | 3 | 3 |
| 2.23 | 0.61 | 1.71 | 0.30 | 0.0 | 3 | 3 |

($d_{\text{Limit}} = 10 \text{ m}$)

| | | |
|------|------|------|
| 30 | 18.6 | -9.9 |
| 50 | 6.0 | -9.6 |
| 100 | 9.7 | -9.2 |
| 150 | 7.9 | -8.8 |
| 200 | 7.6 | -8.6 |
| 250 | 9.5 | -8.3 |
| 300 | 11.0 | -8.1 |
| 350 | 12.4 | -7.9 |
| 400 | 13.6 | -7.6 |
| 450 | 14.7 | -7.4 |
| 500 | 15.6 | -7.2 |
| 550 | 16.3 | -7.0 |
| 600 | 17.2 | -6.9 |
| 650 | 18.1 | -6.9 |
| 700 | 18.5 | -6.8 |
| 750 | 19.1 | -6.3 |
| 800 | 19.6 | -6.3 |
| 850 | 20.1 | -6.0 |
| 900 | 20.8 | -5.8 |
| 950 | 21.1 | -5.6 |
| 1000 | 21.6 | -5.6 |

| | | | | | | |
|------|------|------|------|-------|----|---|
| 0.29 | 0.04 | 0.23 | 0.02 | -10.5 | 10 | 3 |
| 0.39 | 0.09 | 0.32 | 0.08 | -10.5 | 10 | 3 |
| 0.56 | 0.14 | 0.47 | 0.08 | -10.5 | 10 | 3 |
| 0.73 | 0.20 | 0.59 | 0.12 | -10.5 | 10 | 3 |
| 0.84 | 0.21 | 0.70 | 0.11 | -10.5 | 10 | 3 |
| 0.98 | 0.24 | 0.80 | 0.13 | -10.5 | 10 | 3 |
| 1.04 | 0.26 | 0.89 | 0.15 | -10.5 | 10 | 3 |
| 1.18 | 0.31 | 0.96 | 0.13 | -10.5 | 10 | 3 |
| 1.28 | 0.35 | 1.03 | 0.19 | -10.5 | 10 | 3 |
| 1.39 | 0.38 | 1.11 | 0.22 | -10.5 | 10 | 3 |
| 1.44 | 0.39 | 1.20 | 0.19 | -10.5 | 10 | 3 |
| 1.55 | 0.46 | 1.24 | 0.23 | -10.5 | 10 | 3 |
| 1.59 | 0.43 | 1.29 | 0.23 | -10.5 | 10 | 3 |
| 1.67 | 0.34 | 1.35 | 0.22 | -10.5 | 10 | 3 |
| 1.67 | 0.42 | 1.41 | 0.15 | -10.5 | 10 | 3 |
| 1.87 | 0.54 | 1.46 | 0.25 | -10.5 | 10 | 3 |
| 1.90 | 0.46 | 1.51 | 0.25 | -10.5 | 10 | 3 |
| 1.99 | 0.60 | 1.56 | 0.27 | -10.5 | 10 | 3 |
| 2.14 | 0.60 | 1.63 | 0.29 | -10.5 | 10 | 3 |
| 2.22 | 0.60 | 1.66 | 0.33 | -10.5 | 10 | 3 |
| 2.23 | 0.61 | 1.71 | 0.30 | -10.5 | 10 | 3 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$
 U = Receiver reading
 AF = Antenna factor
 Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$
 Linear interpolation will be used for frequencies in between the values in the table.
 Tables show an extract of values.

7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 1000 | 24.4 | -19.4 |
| 2000 | 28.5 | -17.4 |
| 3000 | 31.0 | -16.1 |
| 4000 | 33.1 | -14.7 |
| 5000 | 34.4 | -13.7 |
| 6000 | 34.7 | -12.7 |
| 7000 | 35.6 | -11.0 |

| cable loss 1 (relay + cable inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit, atten- uator & pre-amp) | cable loss 4 (to receiver) | | |
|--|---|--|----------------------------------|--|--|
| dB | dB | dB | dB | | |
| 0.99 | 0.31 | -21.51 | 0.79 | | |
| 1.44 | 0.44 | -20.63 | 1.38 | | |
| 1.87 | 0.53 | -19.85 | 1.33 | | |
| 2.41 | 0.67 | -19.13 | 1.31 | | |
| 2.78 | 0.86 | -18.71 | 1.40 | | |
| 2.74 | 0.90 | -17.83 | 1.47 | | |
| 2.82 | 0.86 | -16.19 | 1.46 | | |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 3000 | 31.0 | -23.4 |
| 4000 | 33.1 | -23.3 |
| 5000 | 34.4 | -21.7 |
| 6000 | 34.7 | -21.2 |
| 7000 | 35.6 | -19.8 |

| cable loss 1 (relay inside chamber) | cable loss 2 (inside chamber) | cable loss 3 (outside chamber) | cable loss 4 (switch unit, atten- uator & pre-amp) | cable loss 5 (to receiver) | used for FCC 15.247 |
|---|--|---|--|----------------------------------|------------------------------|
| dB | dB | dB | dB | dB | |
| 0.47 | 1.87 | 0.53 | -27.58 | 1.33 | |
| 0.56 | 2.41 | 0.67 | -28.23 | 1.31 | |
| 0.61 | 2.78 | 0.86 | -27.35 | 1.40 | |
| 0.58 | 2.74 | 0.90 | -26.89 | 1.47 | |
| 0.66 | 2.82 | 0.86 | -25.58 | 1.46 | |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------------|-------|
| MHz | dB (1/m) | dB |
| 7000 | 35.6 | -57.3 |
| 8000 | 36.3 | -56.3 |
| 9000 | 37.1 | -55.3 |
| 10000 | 37.5 | -56.2 |
| 11000 | 37.5 | -55.3 |
| 12000 | 37.6 | -53.7 |
| 13000 | 38.2 | -53.5 |
| 14000 | 39.9 | -56.3 |
| 15000 | 40.9 | -54.1 |
| 16000 | 41.3 | -54.1 |
| 17000 | 42.8 | -54.4 |
| 18000 | 44.2 | -54.7 |

| cable loss 1 (relay inside chamber) | cable loss 2 (High Pass) | cable loss 3 (pre- amp) | cable loss 4 (inside chamber) | cable loss 5 (outside chamber) | cable loss 6 (to receiver) |
|---|-----------------------------------|----------------------------------|--|---|-------------------------------------|
| dB | dB | dB | dB | dB | dB |
| 0.56 | 1.28 | -62.72 | 2.66 | 0.94 | 1.46 |
| 0.69 | 0.71 | -61.49 | 2.84 | 1.00 | 1.53 |
| 0.68 | 0.65 | -60.80 | 3.06 | 1.09 | 1.60 |
| 0.70 | 0.54 | -61.91 | 3.28 | 1.20 | 1.67 |
| 0.80 | 0.61 | -61.40 | 3.43 | 1.27 | 1.70 |
| 0.84 | 0.42 | -59.70 | 3.53 | 1.26 | 1.73 |
| 0.83 | 0.44 | -59.81 | 3.75 | 1.32 | 1.83 |
| 0.91 | 0.53 | -63.03 | 3.91 | 1.40 | 1.77 |
| 0.98 | 0.54 | -61.05 | 4.02 | 1.44 | 1.83 |
| 1.23 | 0.49 | -61.51 | 4.17 | 1.51 | 1.85 |
| 1.36 | 0.76 | -62.36 | 4.34 | 1.53 | 2.00 |
| 1.70 | 0.53 | -62.88 | 4.41 | 1.55 | 1.91 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

| Frequency | AF EMCO 3160-09 | Corr. | cable loss 1 (inside chamber) | cable loss 2 (pre- amp) | cable loss 3 (inside chamber) | cable loss 4 (switch unit) | cable loss 5 (to receiver) |
|-----------|-----------------------|-------|--|----------------------------------|--|-------------------------------------|-------------------------------------|
| MHz | dB (1/m) | dB | dB | dB | dB | dB | dB |
| 18000 | 40.2 | -23.5 | 0.72 | -35.85 | 6.20 | 2.81 | 2.65 |
| 18500 | 40.2 | -23.2 | 0.69 | -35.71 | 6.46 | 2.76 | 2.59 |
| 19000 | 40.2 | -22.0 | 0.76 | -35.44 | 6.69 | 3.15 | 2.79 |
| 19500 | 40.3 | -21.3 | 0.74 | -35.07 | 7.04 | 3.11 | 2.91 |
| 20000 | 40.3 | -20.3 | 0.72 | -34.49 | 7.30 | 3.07 | 3.05 |
| 20500 | 40.3 | -19.9 | 0.78 | -34.46 | 7.48 | 3.12 | 3.15 |
| 21000 | 40.3 | -19.1 | 0.87 | -34.07 | 7.61 | 3.20 | 3.33 |
| 21500 | 40.3 | -19.1 | 0.90 | -33.96 | 7.47 | 3.28 | 3.19 |
| 22000 | 40.3 | -18.7 | 0.89 | -33.57 | 7.34 | 3.35 | 3.28 |
| 22500 | 40.4 | -19.0 | 0.87 | -33.66 | 7.06 | 3.75 | 2.94 |
| 23000 | 40.4 | -19.5 | 0.88 | -33.75 | 6.92 | 3.77 | 2.70 |
| 23500 | 40.4 | -19.3 | 0.90 | -33.35 | 6.99 | 3.52 | 2.66 |
| 24000 | 40.4 | -19.8 | 0.88 | -33.99 | 6.88 | 3.88 | 2.58 |
| 24500 | 40.4 | -19.5 | 0.91 | -33.89 | 7.01 | 3.93 | 2.51 |
| 25000 | 40.4 | -19.3 | 0.88 | -33.00 | 6.72 | 3.96 | 2.14 |
| 25500 | 40.5 | -20.4 | 0.89 | -34.07 | 6.90 | 3.66 | 2.22 |
| 26000 | 40.5 | -21.3 | 0.86 | -35.11 | 7.02 | 3.69 | 2.28 |
| 26500 | 40.5 | -21.1 | 0.90 | -35.20 | 7.15 | 3.91 | 2.36 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

| Frequency GHz | AF EMCO 3160-10 dB (1/m) | Corr. dB | cable loss 1 (inside chamber) dB | cable loss 2 (outside chamber) dB | cable loss 3 (switch unit) dB | cable loss 4 (to receiver) dB | distance corr. (-20 dB/ decade) dB | d _{Limit} (meas. distance (limit) m | d _{used} (meas. distance (used) m |
|------------------|-----------------------------------|-------------|--|---|---|---|--|--|--|
| 26.5 | 43.4 | -11.2 | 4.4 | | | | -9.5 | 3 | 1.0 |
| 27.0 | 43.4 | -11.2 | 4.4 | | | | -9.5 | 3 | 1.0 |
| 28.0 | 43.4 | -11.1 | 4.5 | | | | -9.5 | 3 | 1.0 |
| 29.0 | 43.5 | -11.0 | 4.6 | | | | -9.5 | 3 | 1.0 |
| 30.0 | 43.5 | -10.9 | 4.7 | | | | -9.5 | 3 | 1.0 |
| 31.0 | 43.5 | -10.8 | 4.7 | | | | -9.5 | 3 | 1.0 |
| 32.0 | 43.5 | -10.7 | 4.8 | | | | -9.5 | 3 | 1.0 |
| 33.0 | 43.6 | -10.7 | 4.9 | | | | -9.5 | 3 | 1.0 |
| 34.0 | 43.6 | -10.6 | 5.0 | | | | -9.5 | 3 | 1.0 |
| 35.0 | 43.6 | -10.5 | 5.1 | | | | -9.5 | 3 | 1.0 |
| 36.0 | 43.6 | -10.4 | 5.1 | | | | -9.5 | 3 | 1.0 |
| 37.0 | 43.7 | -10.3 | 5.2 | | | | -9.5 | 3 | 1.0 |
| 38.0 | 43.7 | -10.2 | 5.3 | | | | -9.5 | 3 | 1.0 |
| 39.0 | 43.7 | -10.2 | 5.4 | | | | -9.5 | 3 | 1.0 |
| 40.0 | 43.8 | -10.1 | 5.5 | | | | -9.5 | 3 | 1.0 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$


Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

8 MEASUREMENT UNCERTAINTIES

| Test Case(s) | Parameter | Uncertainty |
|--|--------------------|--------------------------------|
| - Field strength of spurious radiation | Field Strength | ± 5.5 dB |
| - Emission and Occupied Bandwidth | Power Frequency | ± 2.9 dB ± 11.2 kHz |
| - RF Output Power - Peak to Average Ratio | Power | ± 2.2 dB |
| - Band Edge Compliance - Spurious Emissions at Antenna Terminal | Power Frequency | ± 2.2 dB ± 11.2 kHz |
| - Frequency Stability | Frequency | ± 25 Hz |

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

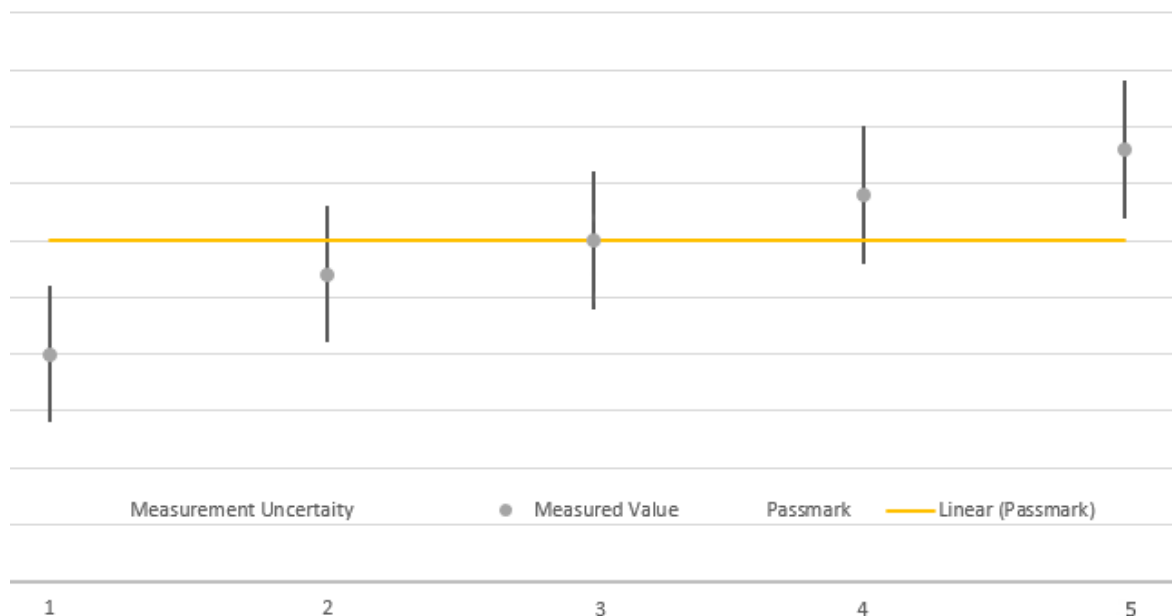

The verdicts in this test report are given according the above diagram:

| Case | Measured Value | Uncertainty Range | Verdict |
|------|-----------------|-------------------|---------|
| 1 | below pass mark | below pass mark | Passed |
| 2 | below pass mark | within pass mark | Passed |
| 3 | on pass mark | within pass mark | Passed |
| 4 | above pass mark | within pass mark | Failed |
| 5 | above pass mark | above pass mark | Failed |

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so called shared risk principle.

9 PHOTO REPORT

Please see separate photo report.