



Appendix E

RF Test Data for 5.8GWIFI(Conducted Measurement)

Product Name: Mini PC

Trade Mark: Blackview

Test Model: MP20

Environmental Conditions

Temperature:	24.4 °C
Relative Humidity:	52.3%
ATM Pressure:	101Kpa
Test Engineer:	Emiya lin
Supervised by:	Simba Haung



Contents

Page

COVER PAGE

1	Duty Cycle	3
1.1	Test Result	3
1.2	Test Graphs	5
2	Maximum Conducted Output Power	24
2.1	Test Result	24
3	-6dB Bandwidth	26
3.1	Test Result	26
3.2	Test Graphs	28
4	Occupied Channel Bandwidth	48
4.1	Test Result	48
4.2	Test Graphs	50
5	Maximum Power Spectral Density Level	70
5.1	Test Result	70
5.2	Test Graphs	72
6	Frequency Stability	92
6.1	Test Result	92
7	Conducted RF Spurious Emission	102
7.1	Test Result	102
7.2	Test Graphs	104



1 Duty Cycle

1.1 Test Result


Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
a	5745	Ant1	51.68	2.87	0.37
a	5785	Ant1	52.65	2.79	0.37
a	5825	Ant1	51.95	2.84	0.37
a	5745	Ant2	52.42	2.8	0.37
a	5785	Ant2	51.34	2.9	0.37
a	5825	Ant2	52.17	2.83	0.37
n20	5745	Ant1	50.24	2.99	0.4
n20	5785	Ant1	50.19	2.99	0.4
n20	5825	Ant1	50.15	3	0.4
n20	5745	Ant2	50.2	2.99	0.4
n20	5785	Ant2	50.15	3	0.4
n20	5825	Ant2	50.15	3	0.4
n40	5755	Ant1	48.37	3.15	0.41
n40	5795	Ant1	48.37	3.15	0.41
n40	5755	Ant2	49.1	3.09	100
n40	5795	Ant2	48.1	3.18	0.42
ac20	5745	Ant1	50.16	3	0.4
ac20	5785	Ant1	50.28	2.99	0.4
ac20	5825	Ant1	50.16	3	0.4
ac20	5745	Ant2	50.29	2.98	0.4
ac20	5785	Ant2	50.17	3	0.4
ac20	5825	Ant2	50.28	2.99	0.4
ac40	5755	Ant1	49.83	3.03	0.41
ac40	5795	Ant1	49.59	3.05	0.41
ac40	5755	Ant2	48.29	3.16	0.42
ac40	5795	Ant2	48.88	3.11	0.42
ac80	5775	Ant1	47.35	3.25	0.44
ac80	5775	Ant2	46.8	3.3	0.45
ax20	5745	Ant1	47.67	3.22	0.44
ax20	5785	Ant1	47.67	3.22	0.44
ax20	5825	Ant1	47.67	3.22	0.44
ax20	5745	Ant2	47.72	3.21	0.44
ax20	5785	Ant2	47.72	3.21	0.44
ax20	5825	Ant2	47.67	3.22	0.44
ax40	5755	Ant1	47.67	3.22	0.44
ax40	5795	Ant1	47.67	3.22	0.44
ax40	5755	Ant2	47.51	3.23	0.44



ax40	5795	Ant2	47.51	3.23	0.44
ax80	5775	Ant1	45.29	3.44	0.47
ax80	5775	Ant2	46.09	3.36	0.47




1.2 Test Graphs

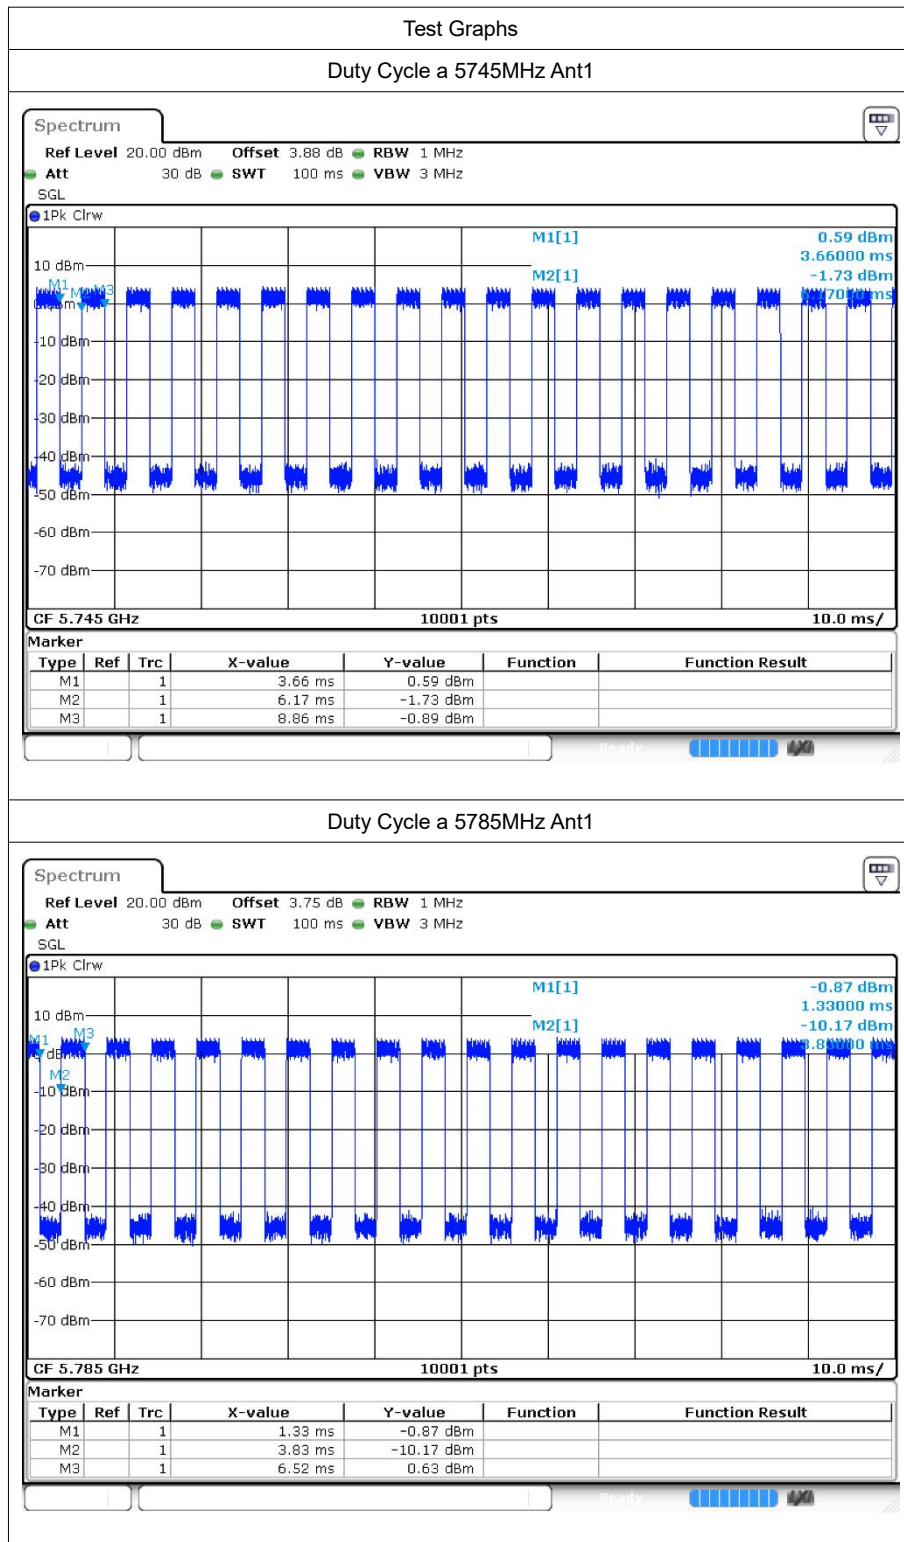




Duty Cycle a 5825MHz Ant1

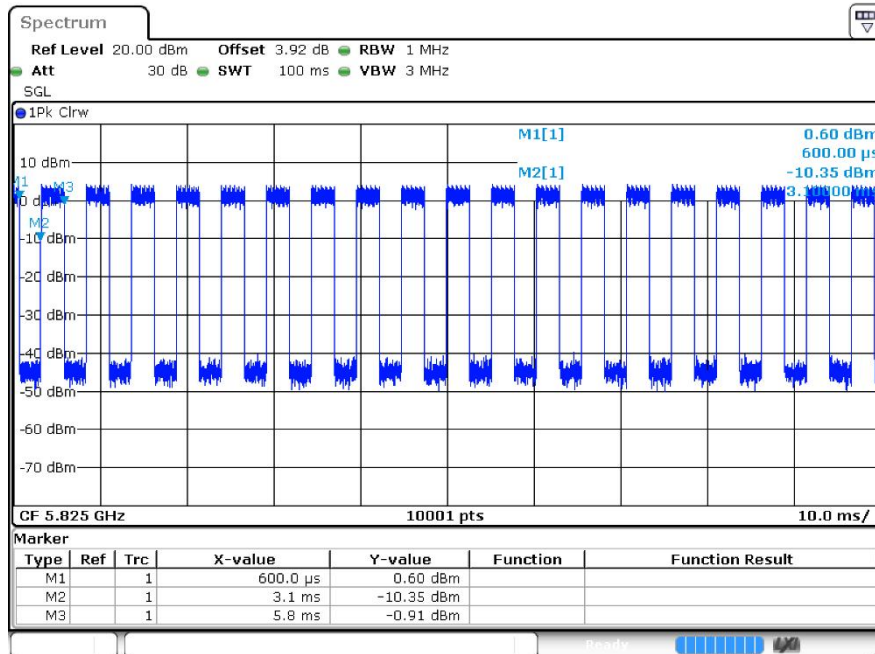


Duty Cycle a 5745MHz Ant2

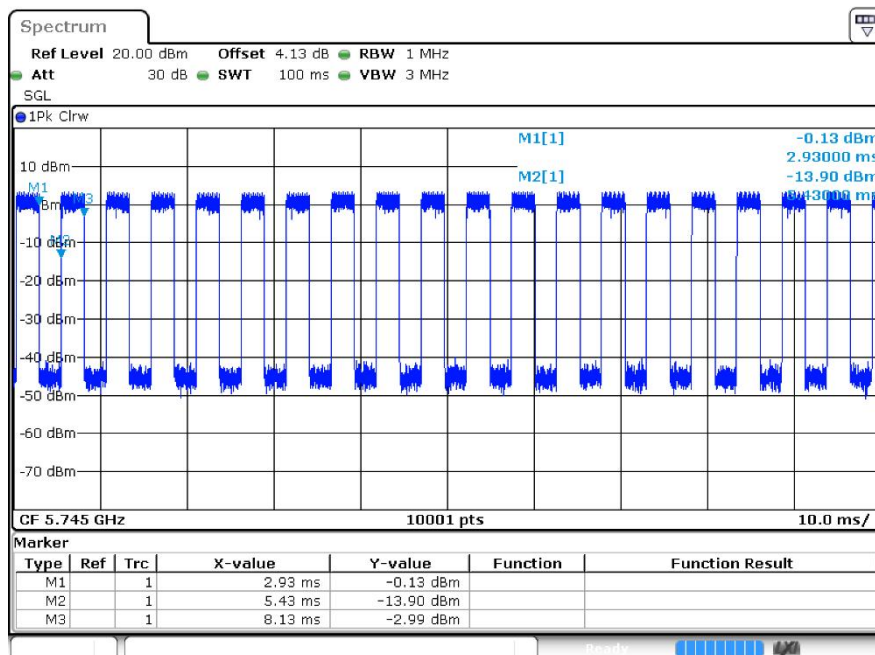




Duty Cycle a 5785MHz Ant2

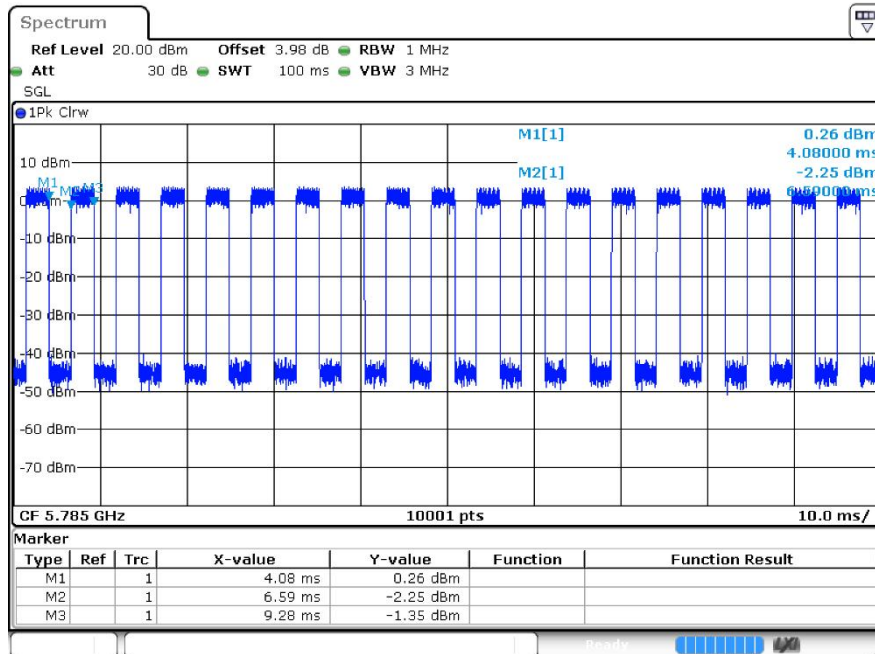


Duty Cycle a 5825MHz Ant2

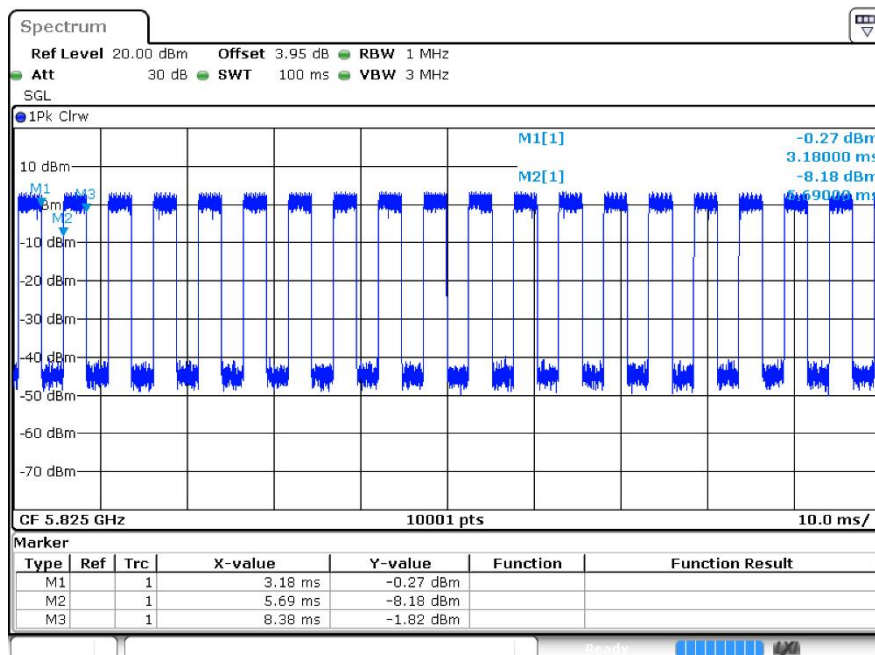





Duty Cycle n20 5745MHz Ant1

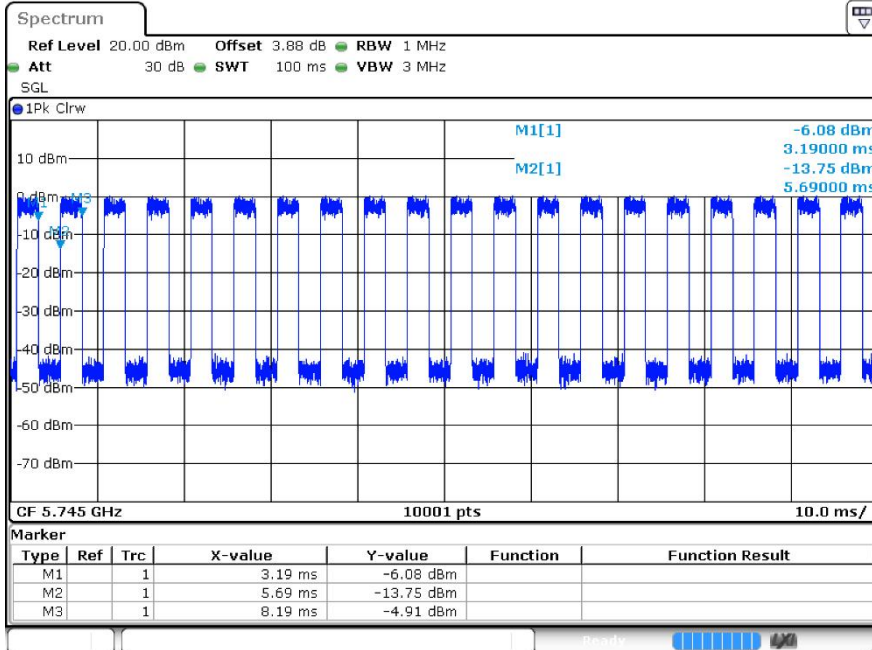


Duty Cycle n20 5785MHz Ant1

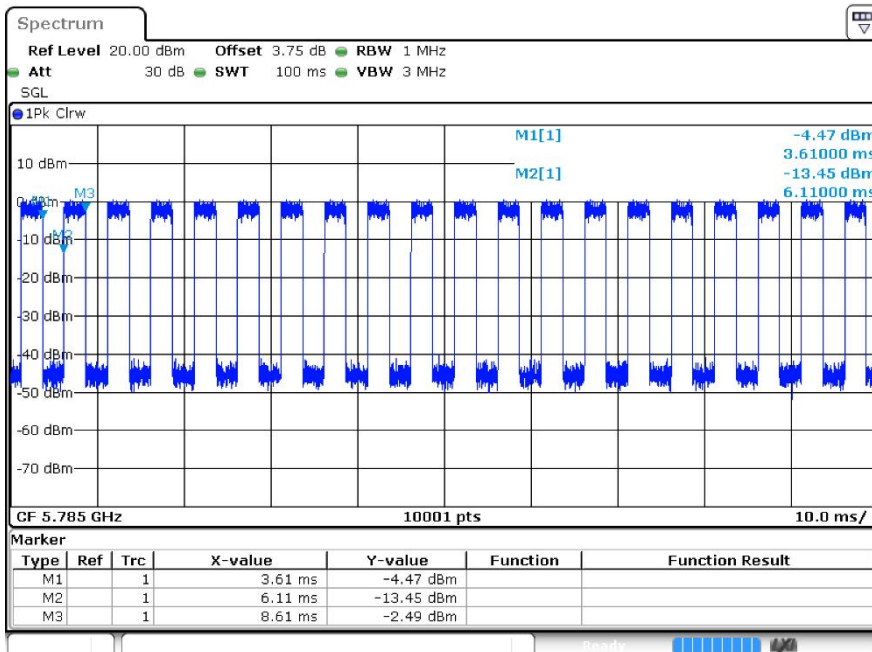


Duty Cycle n20 5825MHz Ant1

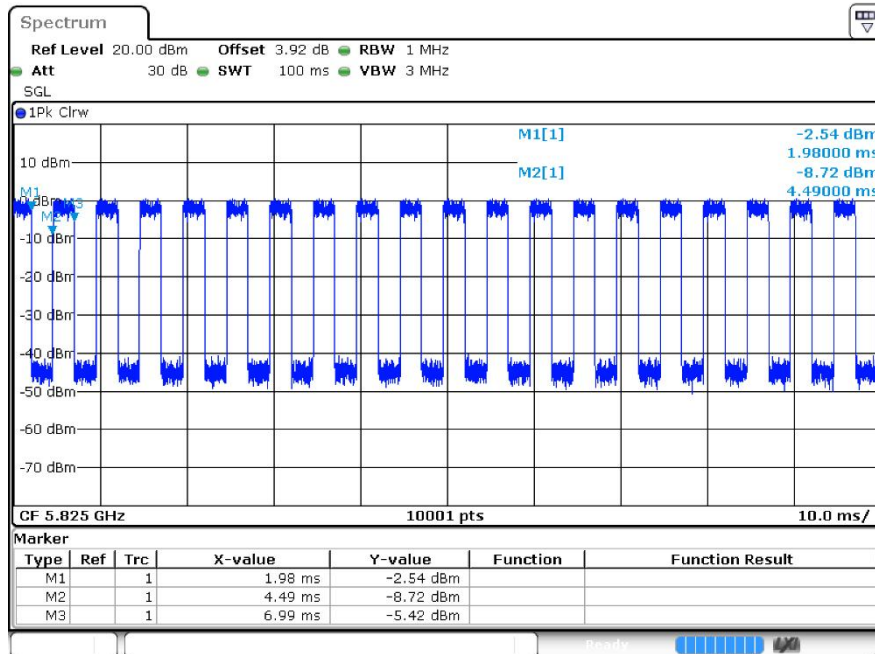


Duty Cycle n20 5745MHz Ant2

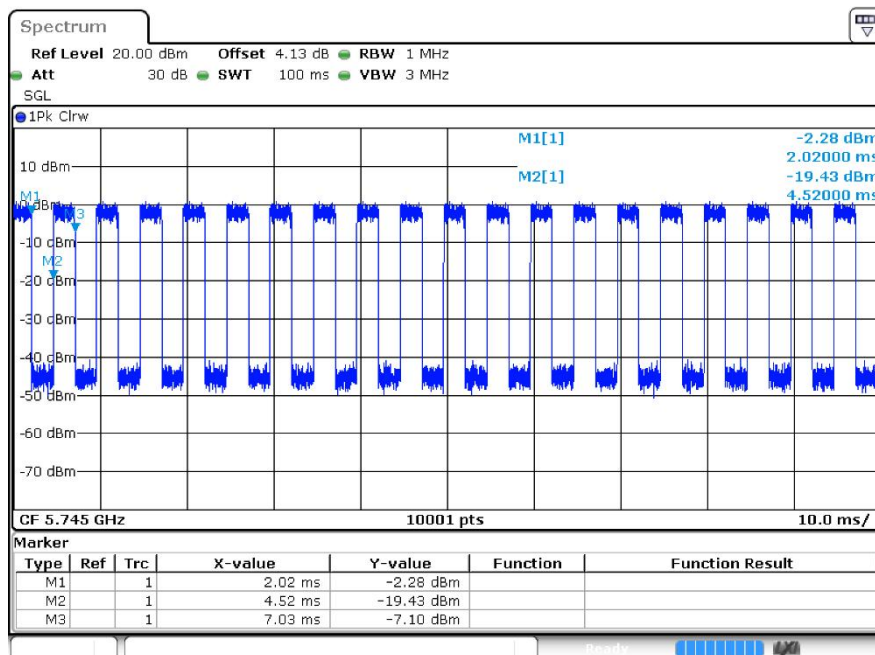

Duty Cycle n20 5785MHz Ant2

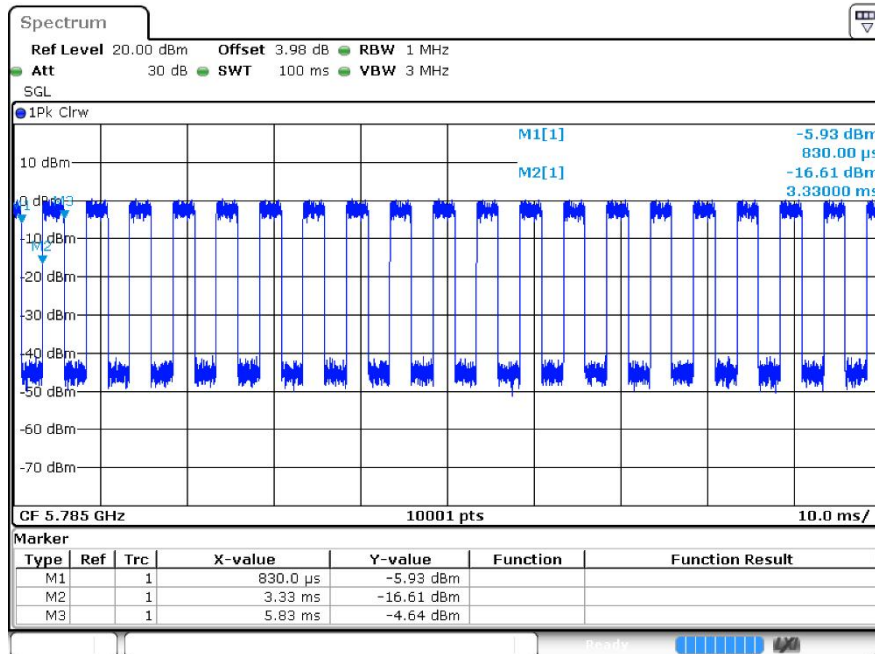


Duty Cycle n20 5825MHz Ant2

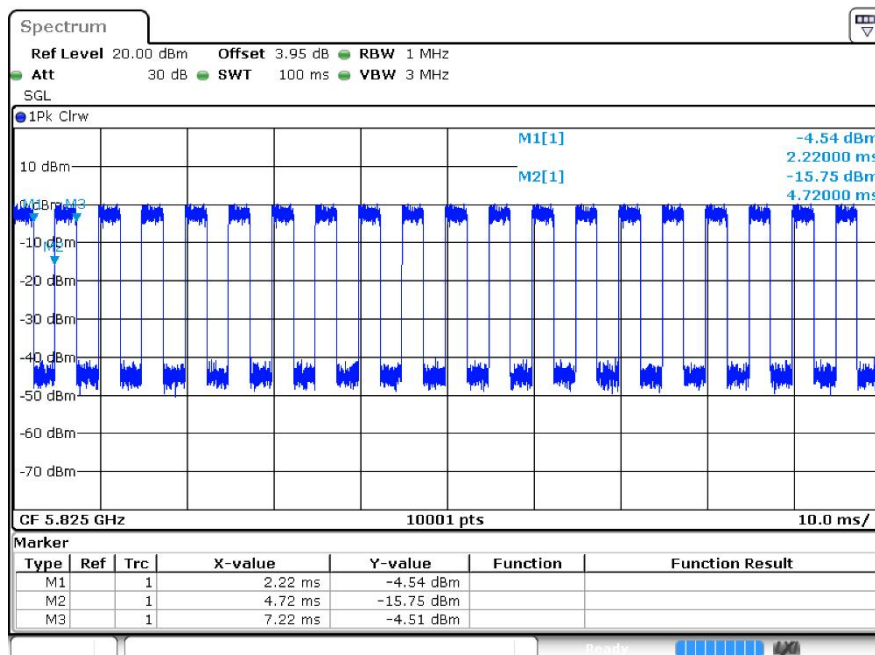




Duty Cycle n40 5755MHz Ant1

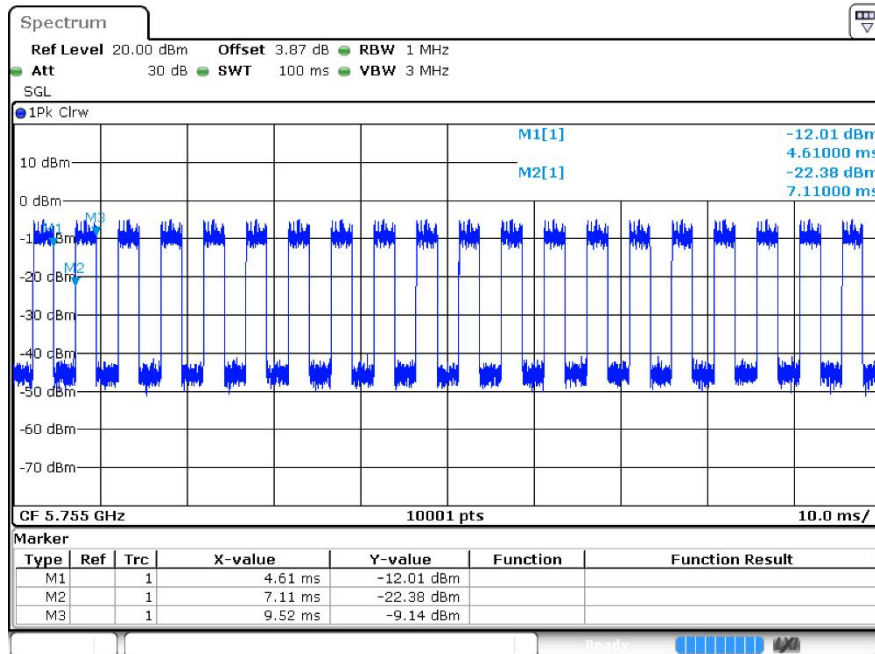


Duty Cycle n40 5795MHz Ant1

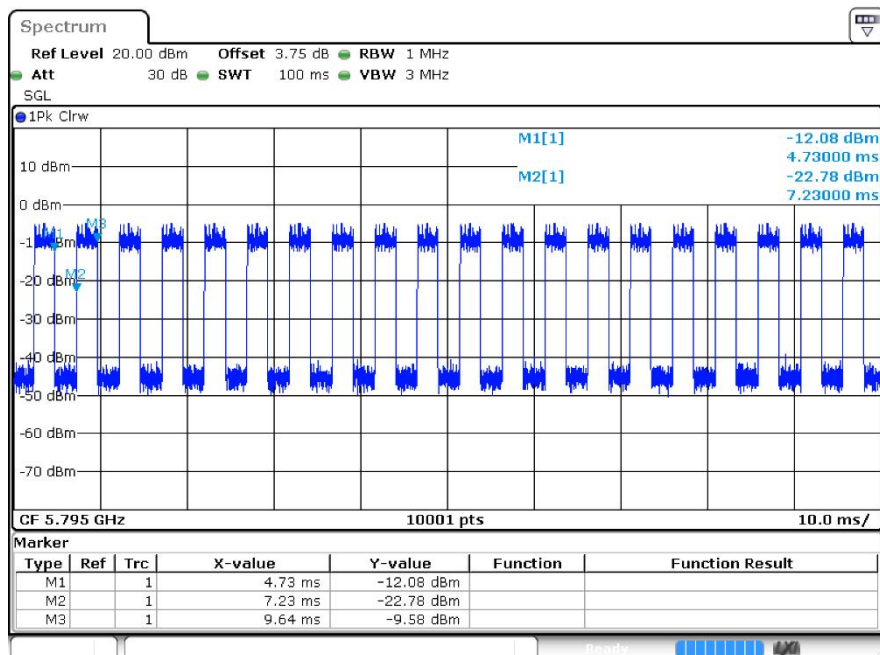




Duty Cycle n40 5755MHz Ant2

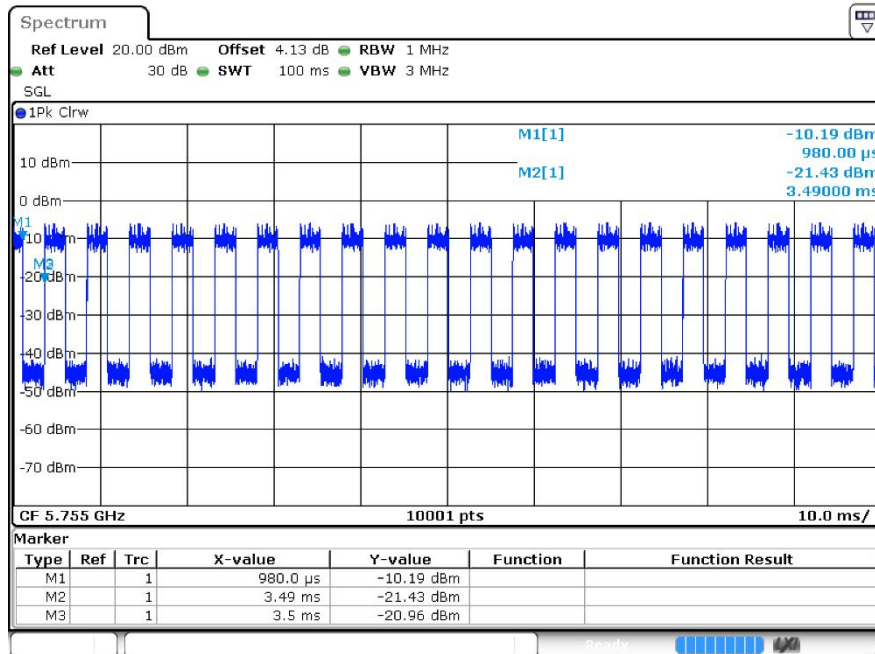


Duty Cycle n40 5795MHz Ant2

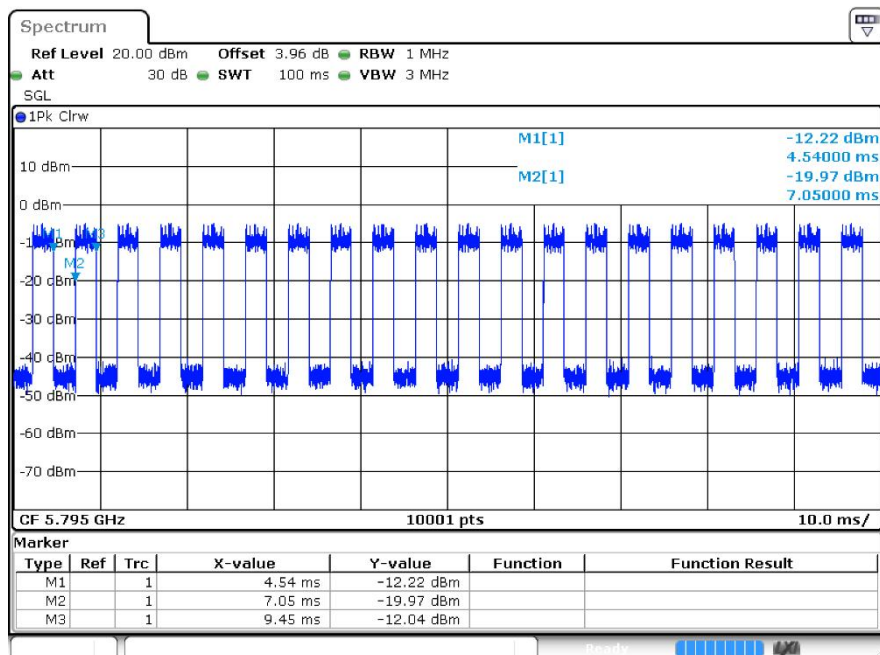




Duty Cycle ac20 5745MHz Ant1

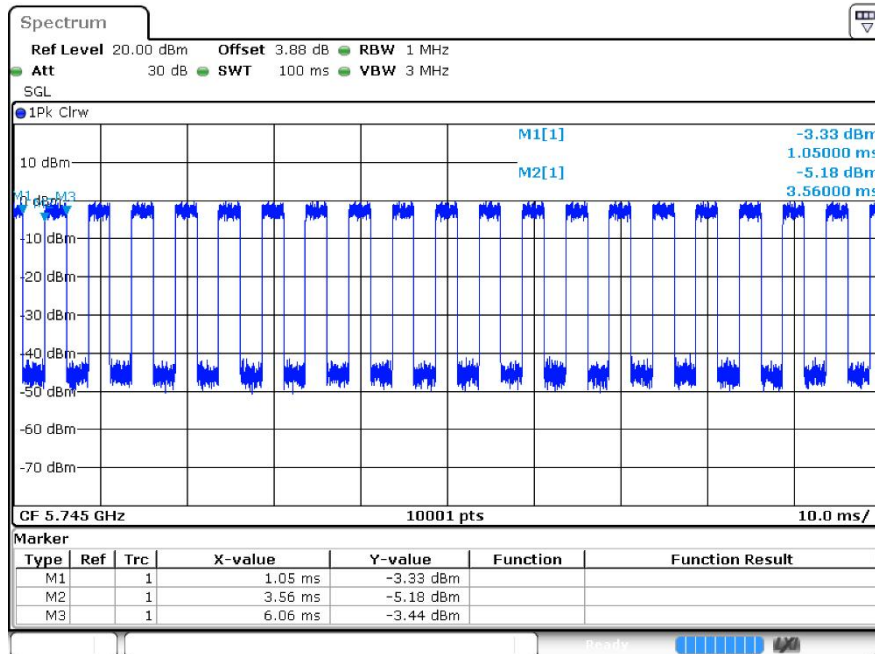


Duty Cycle ac20 5785MHz Ant1

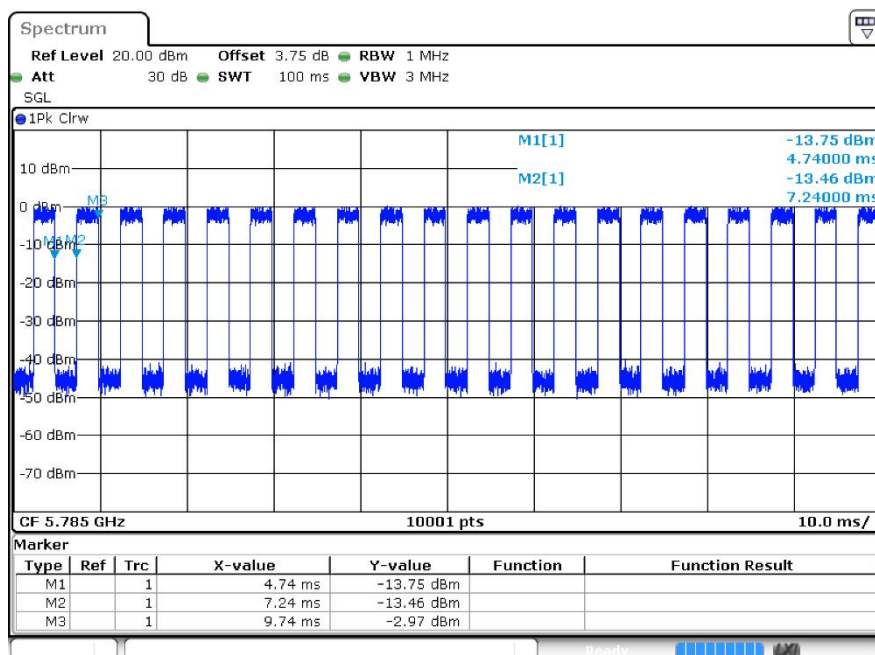





Duty Cycle ac20 5825MHz Ant1

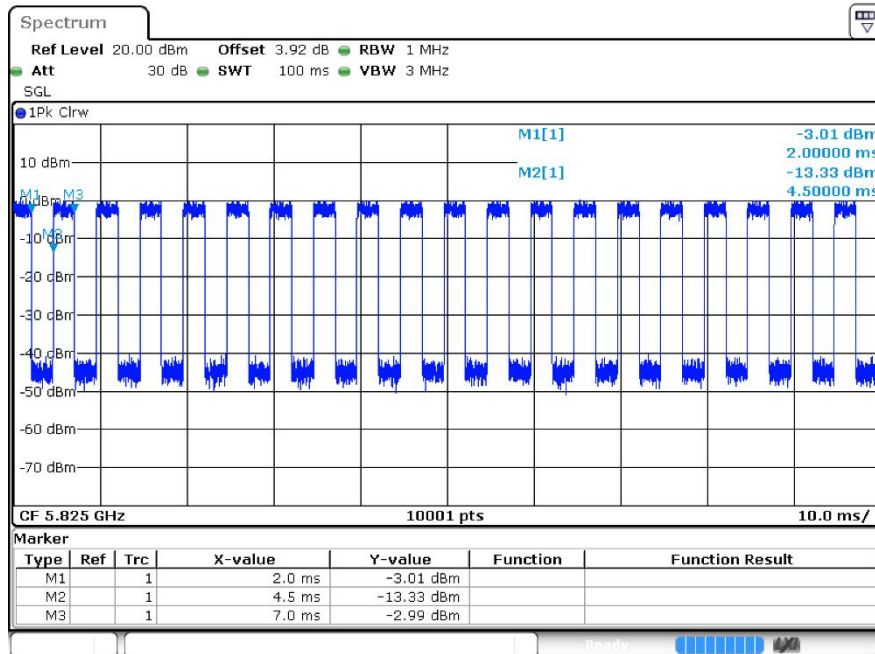


Duty Cycle ac20 5745MHz Ant2

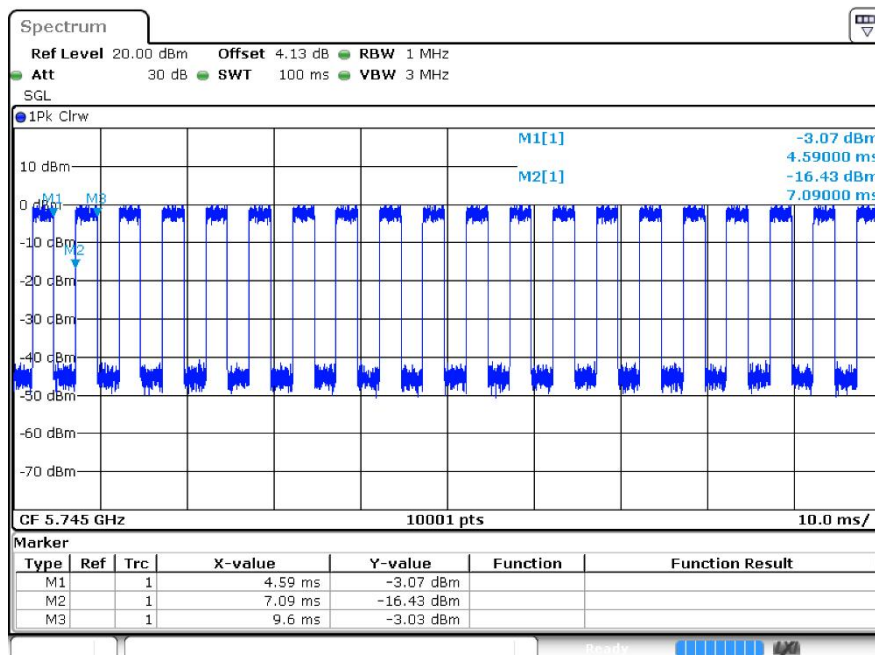

Duty Cycle ac20 5785MHz Ant2

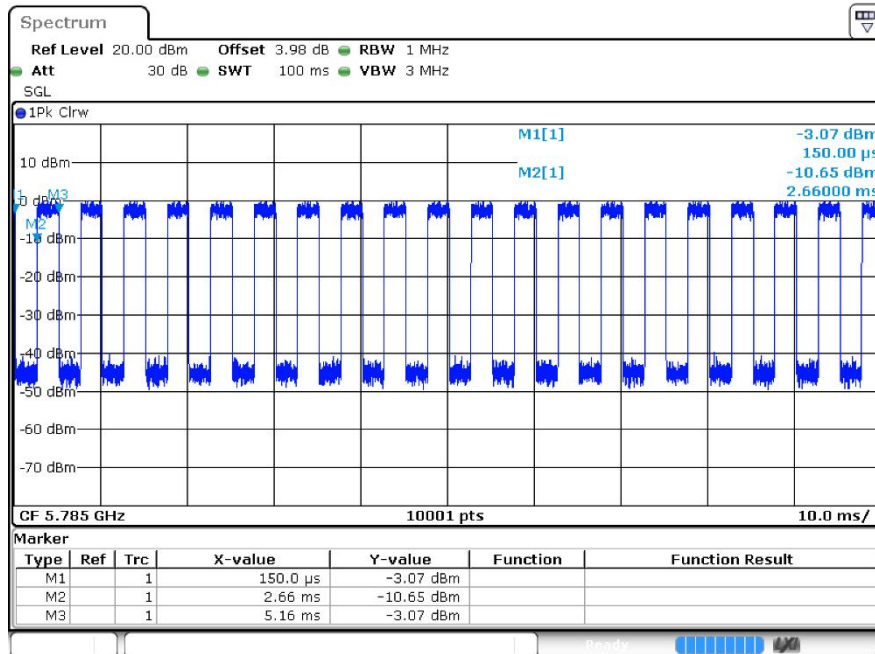


Duty Cycle ac20 5825MHz Ant2

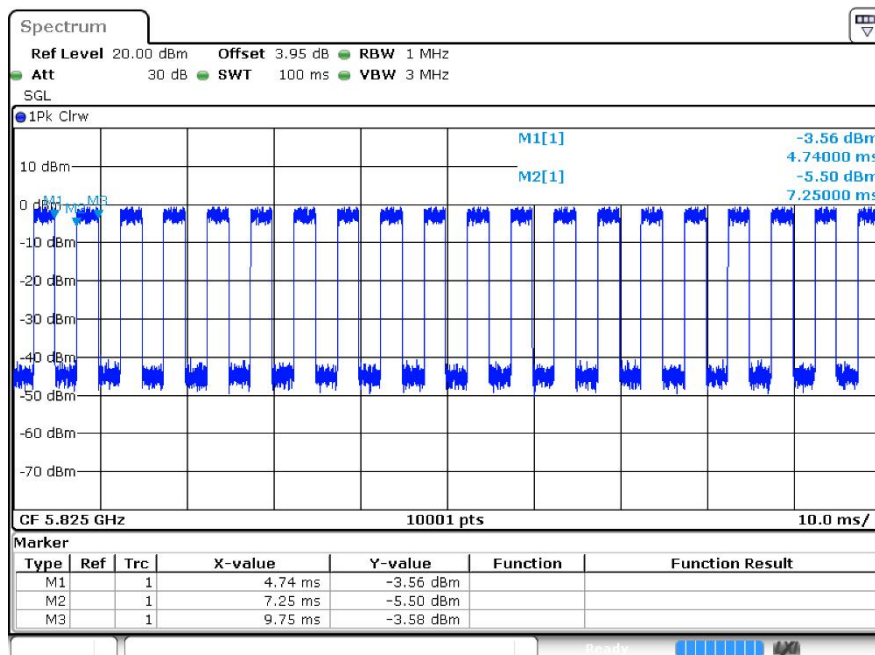




Duty Cycle ac40 5755MHz Ant1

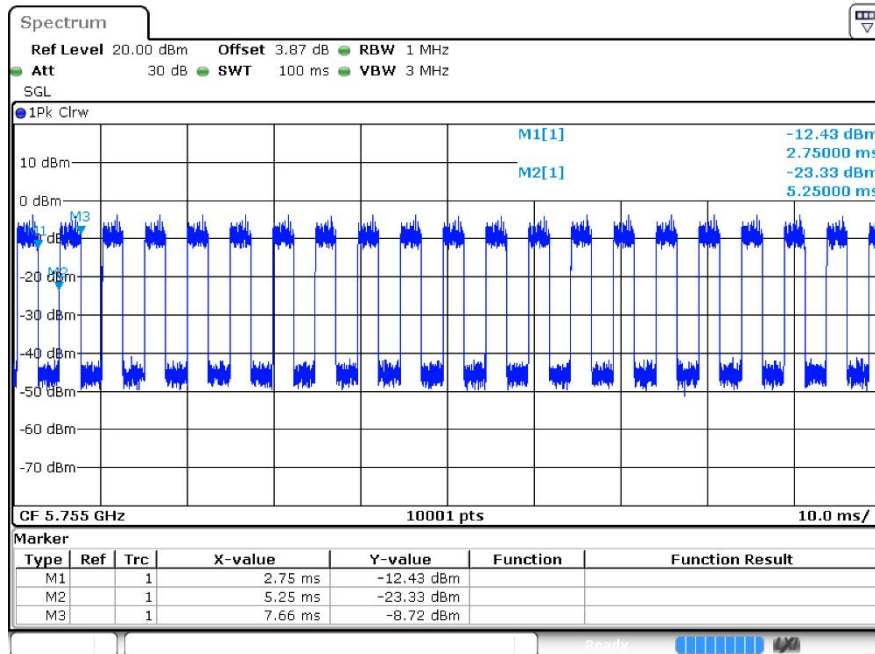


Duty Cycle ac40 5795MHz Ant1

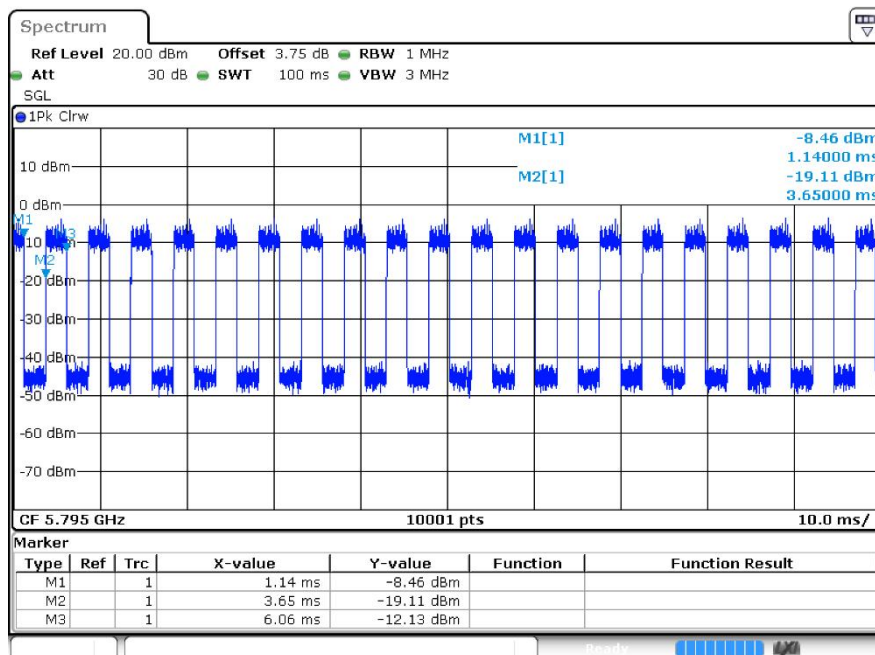





Duty Cycle ac40 5755MHz Ant2

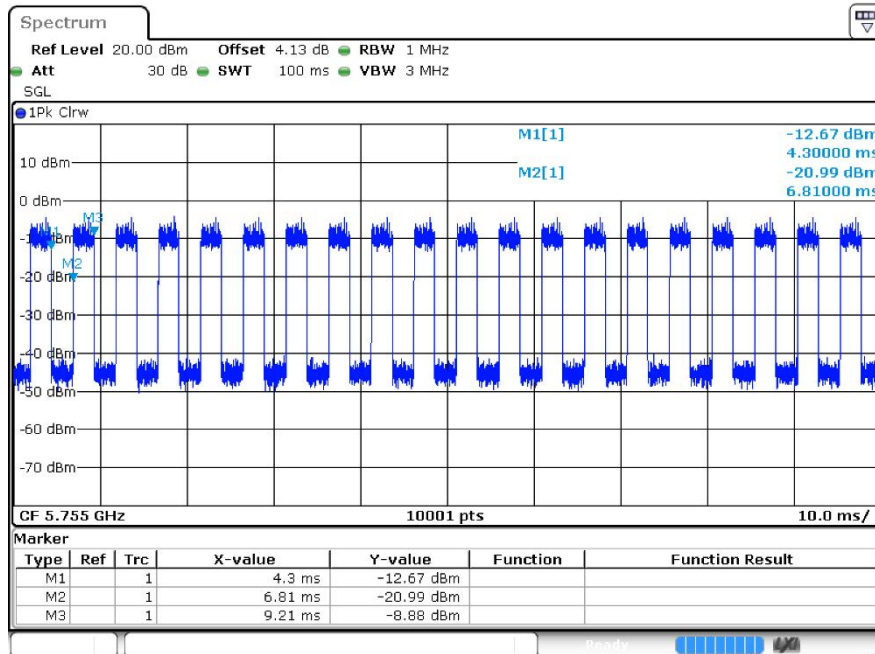


Duty Cycle ac40 5795MHz Ant2

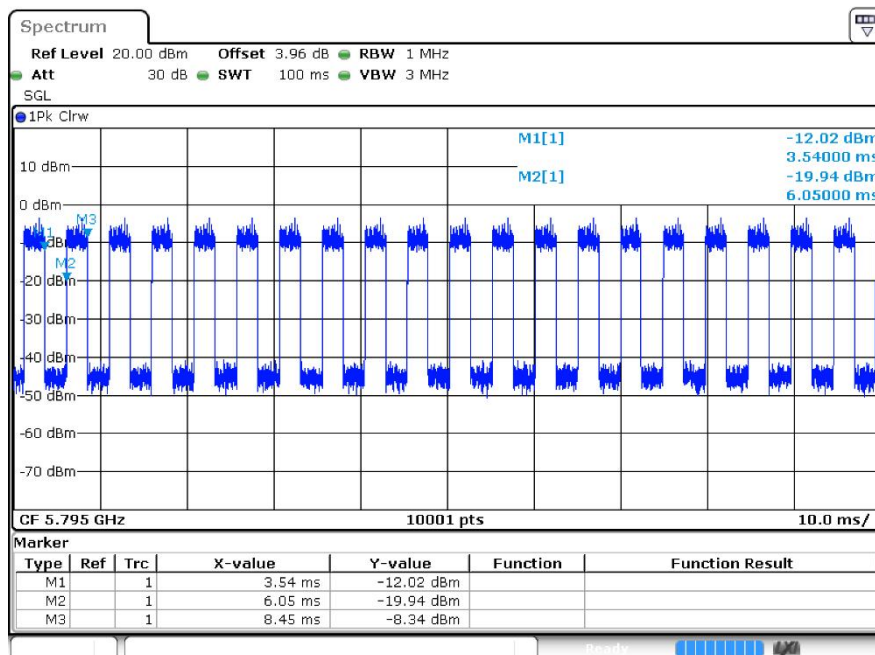


Duty Cycle ac80 5775MHz Ant1

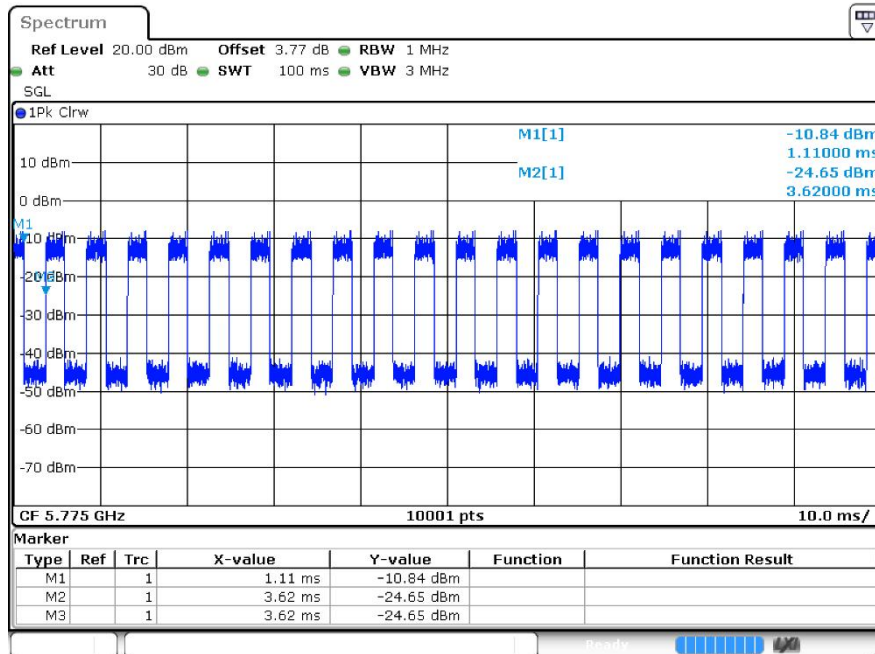


Duty Cycle ac80 5775MHz Ant2

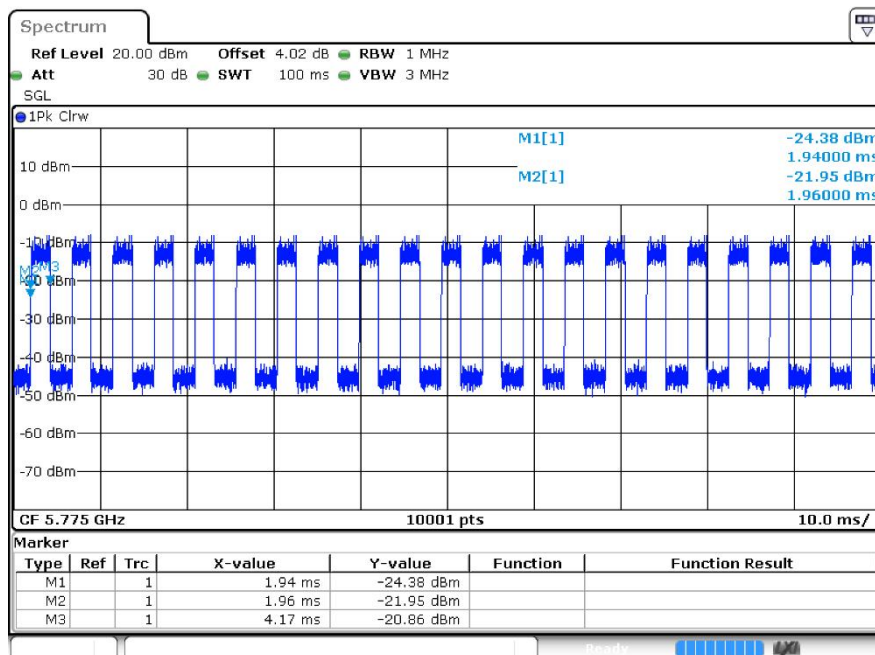


Duty Cycle ax20 5745MHz Ant1

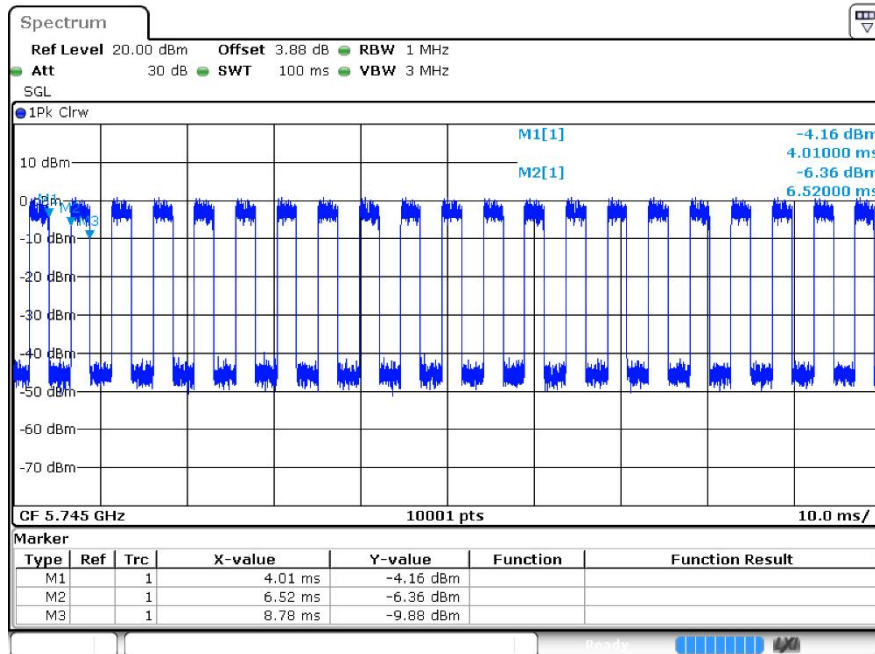


Duty Cycle ax20 5785MHz Ant1

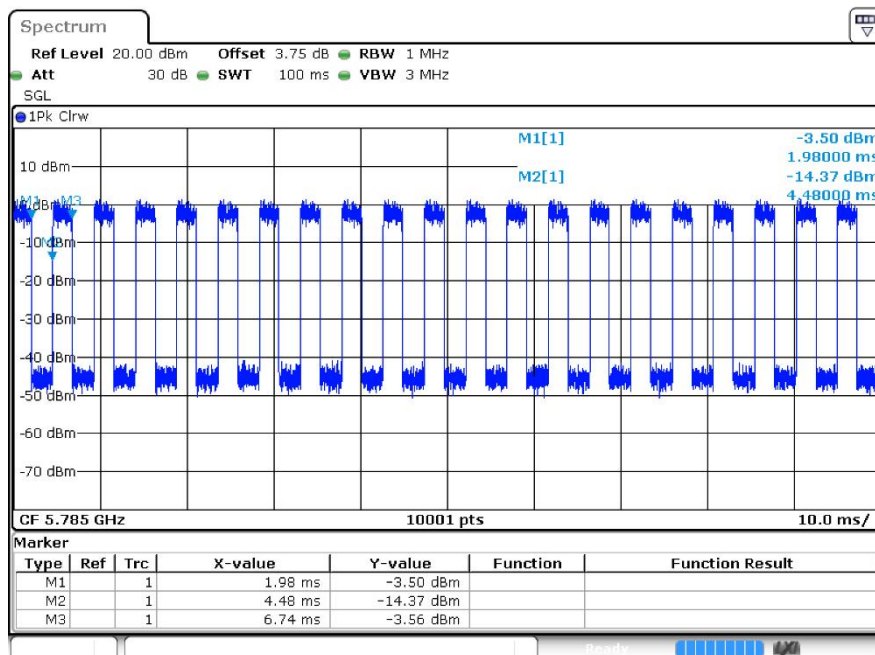


Duty Cycle ax20 5825MHz Ant1

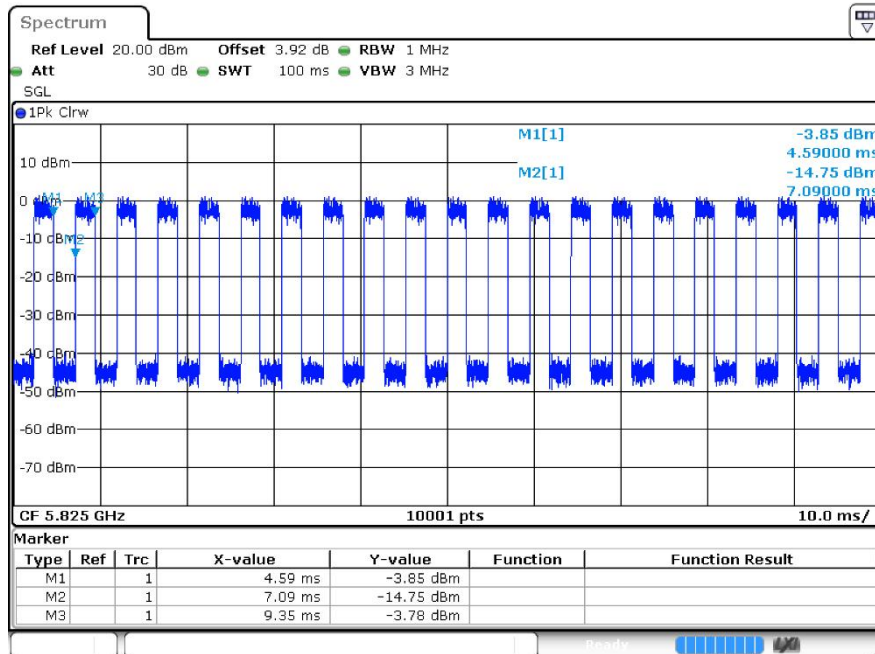


Duty Cycle ax20 5745MHz Ant2

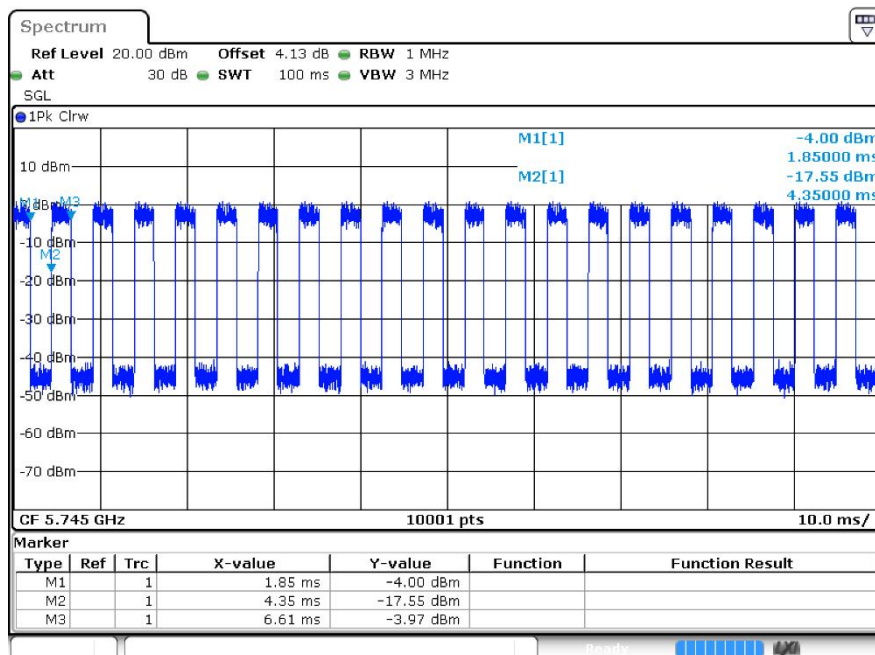

Duty Cycle ax20 5785MHz Ant2

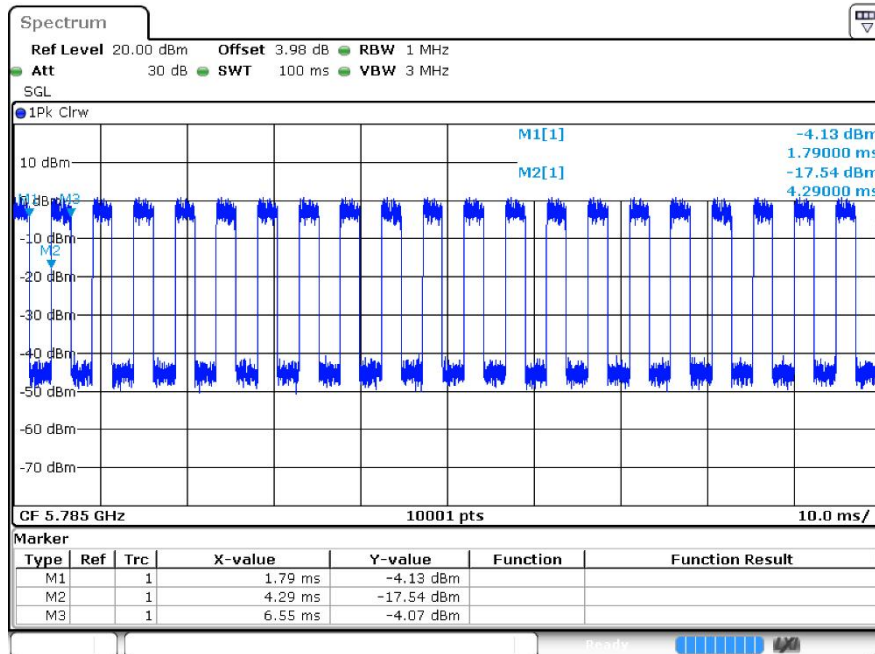


Duty Cycle ax20 5825MHz Ant2

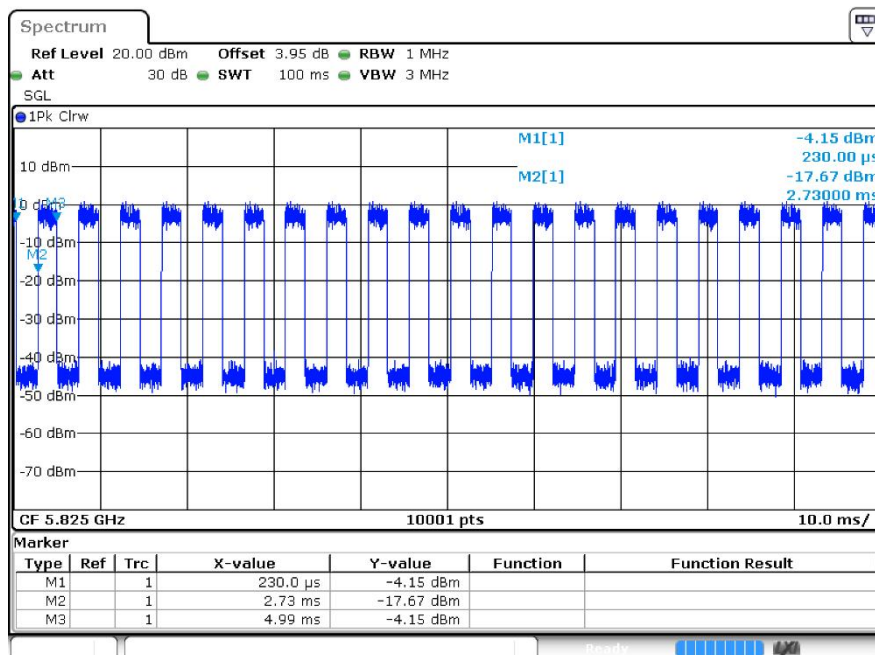





Duty Cycle ax40 5755MHz Ant1

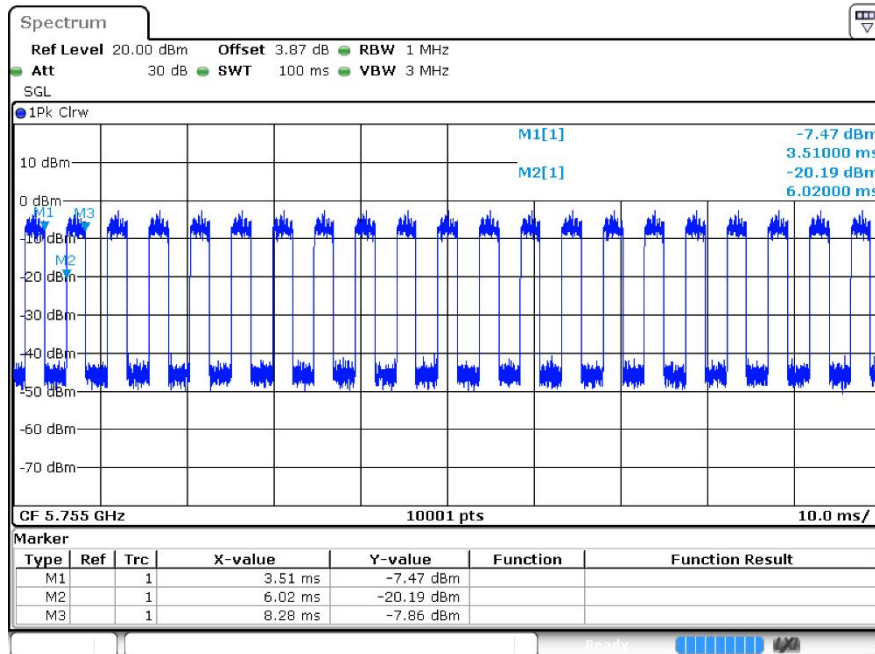


Duty Cycle ax40 5795MHz Ant1

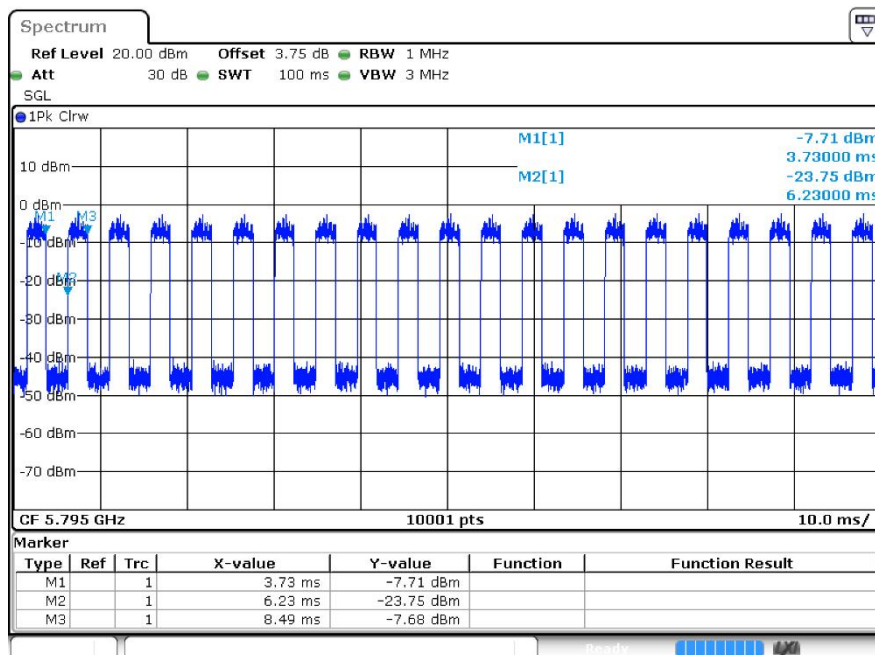

Duty Cycle ax40 5755MHz Ant2

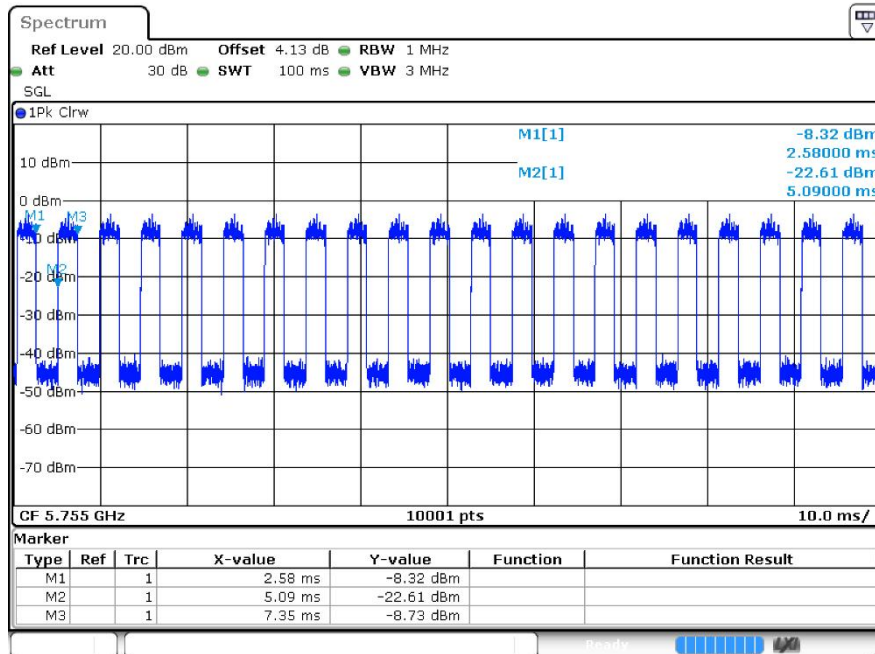

Duty Cycle ax40 5795MHz Ant2

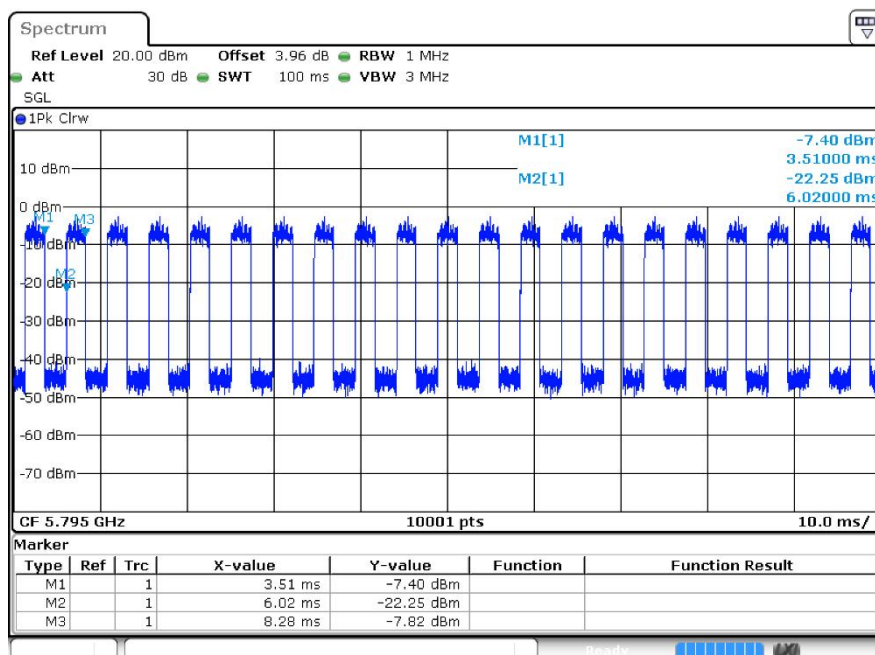

2 Maximum Conducted Output Power

2.1 Test Result

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
a	5745	Ant1	11.69	30	Pass
a	5785	Ant1	11.42	30	Pass
a	5825	Ant1	11.54	30	Pass
a	5745	Ant2	11.25	30	Pass
a	5785	Ant2	11.35	30	Pass
a	5825	Ant2	11.21	30	Pass
n20	5745	Ant1	8.13	30	Pass
n20	5745	Ant2	8.46	30	Pass
n20	5745	Sum	11.26	30	Pass
n20	5785	Ant1	8.56	30	Pass
n20	5785	Ant2	8.18	30	Pass
n20	5785	Sum	11.69	30	Pass
n20	5825	Ant1	8.41	30	Pass
n20	5825	Ant2	8.11	30	Pass
n20	5825	Sum	10.96	30	Pass
n40	5755	Ant1	7.73	30	Pass
n40	5755	Ant2	7.16	30	Pass
n40	5755	Sum	10.7	30	Pass
n40	5795	Ant1	7.9	30	Pass
n40	5795	Ant2	7.9	30	Pass
n40	5795	Sum	11.36	30	Pass
ac20	5745	Ant1	8.15	30	Pass
ac20	5745	Ant2	8.26	30	Pass
ac20	5745	Sum	11.07	30	Pass
ac20	5785	Ant1	8.42	30	Pass
ac20	5785	Ant2	8.19	30	Pass
ac20	5785	Sum	11.66	30	Pass
ac20	5825	Ant1	8.47	30	Pass
ac20	5825	Ant2	7.78	30	Pass
ac20	5825	Sum	11.01	30	Pass
ac40	5755	Ant1	7.56	30	Pass
ac40	5755	Ant2	7.42	30	Pass
ac40	5755	Sum	10.46	30	Pass
ac40	5795	Ant1	7.69	30	Pass
ac40	5795	Ant2	7.97	30	Pass
ac40	5795	Sum	10.98	30	Pass



ac80	5775	Ant1	7.57	30	Pass
ac80	5775	Ant2	7.44	30	Pass
ac80	5775	Sum	10.52	30	Pass
ax20	5745	Ant1	8.17	30	Pass
ax20	5745	Ant2	8.28	30	Pass
ax20	5745	Sum	11.26	30	Pass
ax20	5785	Ant1	8.94	30	Pass
ax20	5785	Ant2	8.08	30	Pass
ax20	5785	Sum	11.82	30	Pass
ax20	5825	Ant1	8.69	30	Pass
ax20	5825	Ant2	8.11	30	Pass
ax20	5825	Sum	11.06	30	Pass
ax40	5755	Ant1	7.7	30	Pass
ax40	5755	Ant2	7.08	30	Pass
ax40	5755	Sum	10.71	30	Pass
ax40	5795	Ant1	7.88	30	Pass
ax40	5795	Ant2	7.76	30	Pass
ax40	5795	Sum	11.14	30	Pass
ax80	5775	Ant1	7.41	30	Pass
ax80	5775	Ant2	7.71	30	Pass
ax80	5775	Sum	10.44	30	Pass

Note:

The duty factor has been compensated into the result.



3 -6dB Bandwidth


3.1 Test Result

Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
a	5745	Ant1	16.5	0.5	Pass
a	5785	Ant1	16.311	0.5	Pass
a	5825	Ant1	16.41	0.5	Pass
n20	5745	Ant1	17.589	0.5	Pass
n20	5785	Ant1	17.583	0.5	Pass
n20	5825	Ant1	17.661	0.5	Pass
n40	5755	Ant1	34.674	0.5	Pass
n40	5795	Ant1	35.052	0.5	Pass
ac20	5745	Ant1	17.631	0.5	Pass
ac20	5785	Ant1	17.628	0.5	Pass
ac20	5825	Ant1	17.616	0.5	Pass
ac40	5755	Ant1	36.306	0.5	Pass
ac40	5795	Ant1	36.366	0.5	Pass
ac80	5775	Ant1	76.284	0.5	Pass
ax20	5745	Ant1	19.068	0.5	Pass
ax20	5785	Ant1	18.96	0.5	Pass
ax20	5825	Ant1	19.044	0.5	Pass
ax40	5755	Ant1	36.714	0.5	Pass
ax40	5795	Ant1	38.088	0.5	Pass
ax80	5775	Ant1	76.956	0.5	Pass
a	5745	Ant2	16.395	0.5	Pass
a	5785	Ant2	16.368	0.5	Pass
a	5825	Ant2	16.38	0.5	Pass
n20	5745	Ant2	17.616	0.5	Pass
n20	5785	Ant2	17.622	0.5	Pass
n20	5825	Ant2	17.613	0.5	Pass
n40	5755	Ant2	36.42	0.5	Pass
n40	5795	Ant2	36.366	0.5	Pass
ac20	5745	Ant2	17.619	0.5	Pass
ac20	5785	Ant2	17.628	0.5	Pass
ac20	5825	Ant2	17.631	0.5	Pass
ac40	5755	Ant2	36.282	0.5	Pass
ac40	5795	Ant2	36.372	0.5	Pass
ac80	5775	Ant2	76.464	0.5	Pass
ax20	5745	Ant2	19.062	0.5	Pass
ax20	5785	Ant2	19.05	0.5	Pass
ax20	5825	Ant2	18.48	0.5	Pass




ax40	5755	Ant2	38.046	0.5	Pass
ax40	5795	Ant2	38.124	0.5	Pass
ax80	5775	Ant2	77.232	0.5	Pass


3.2 Test Graphs

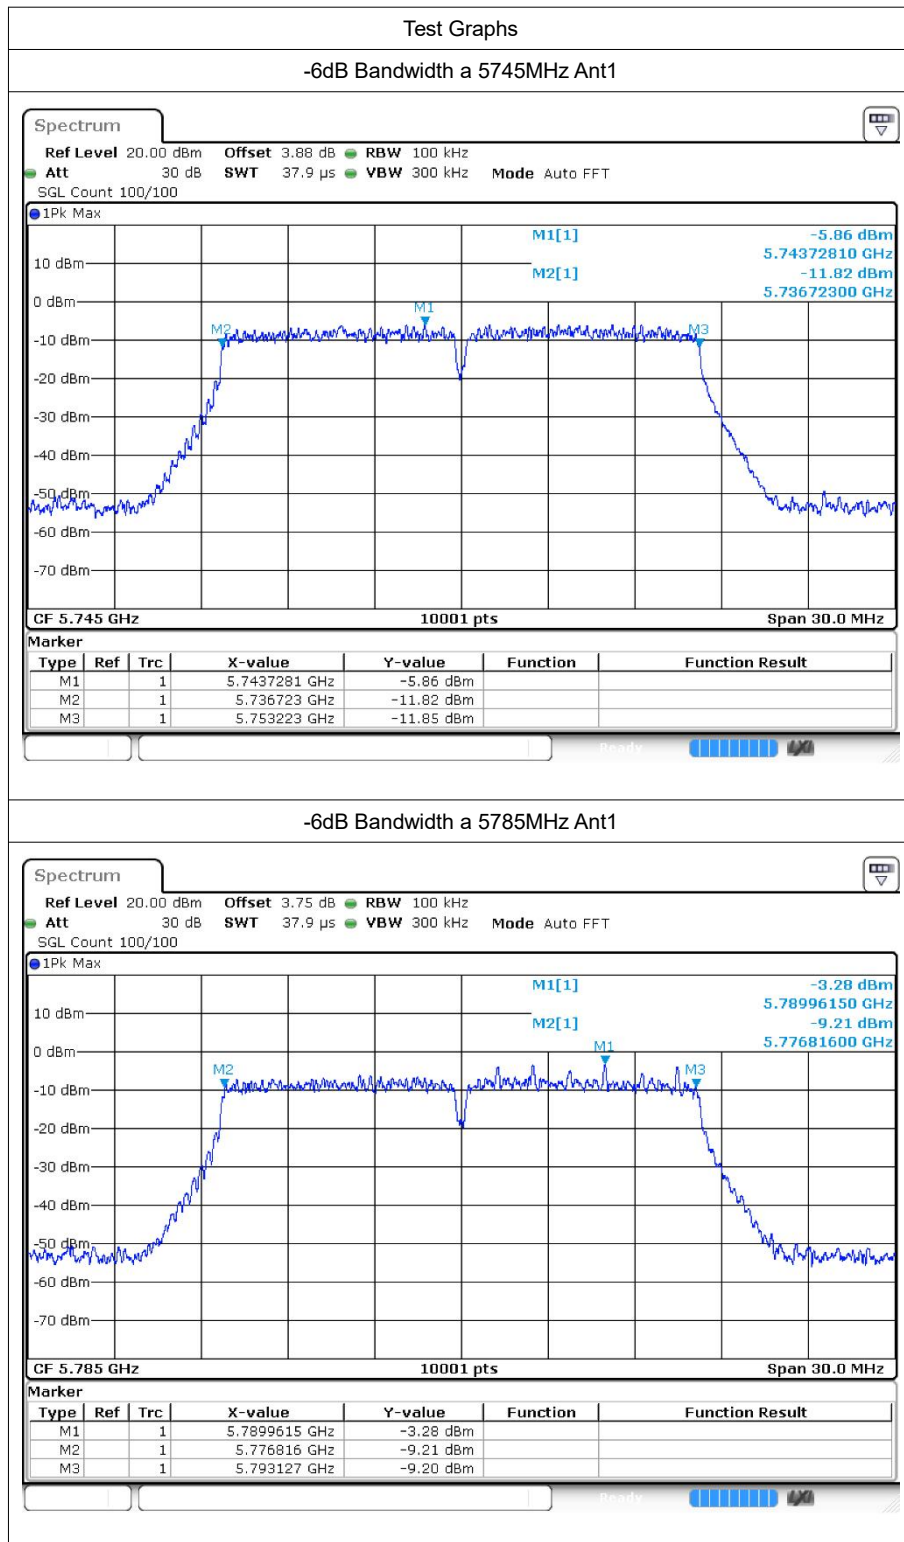


-6dB Bandwidth a 5825MHz Ant1

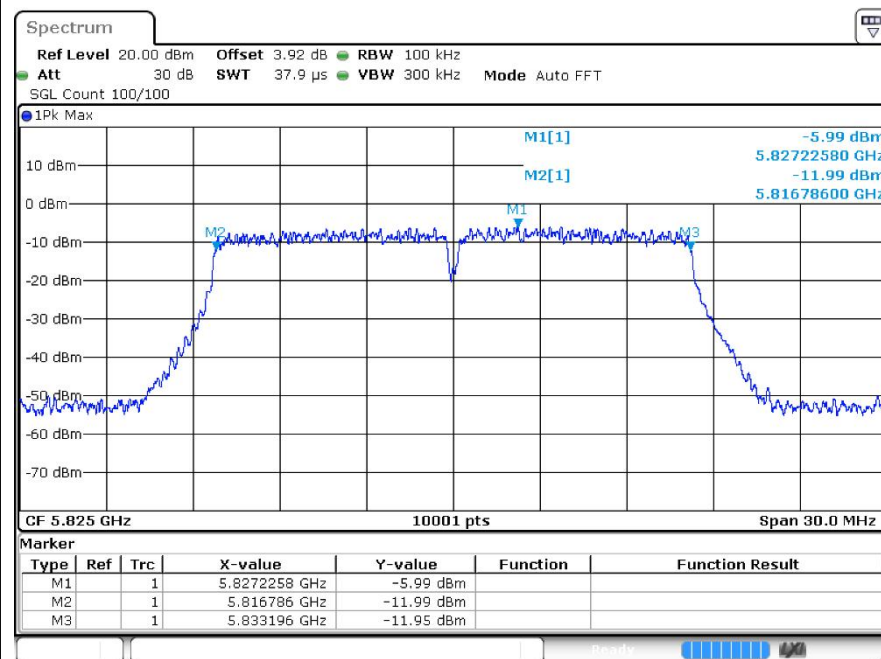

-6dB Bandwidth n20 5745MHz Ant1

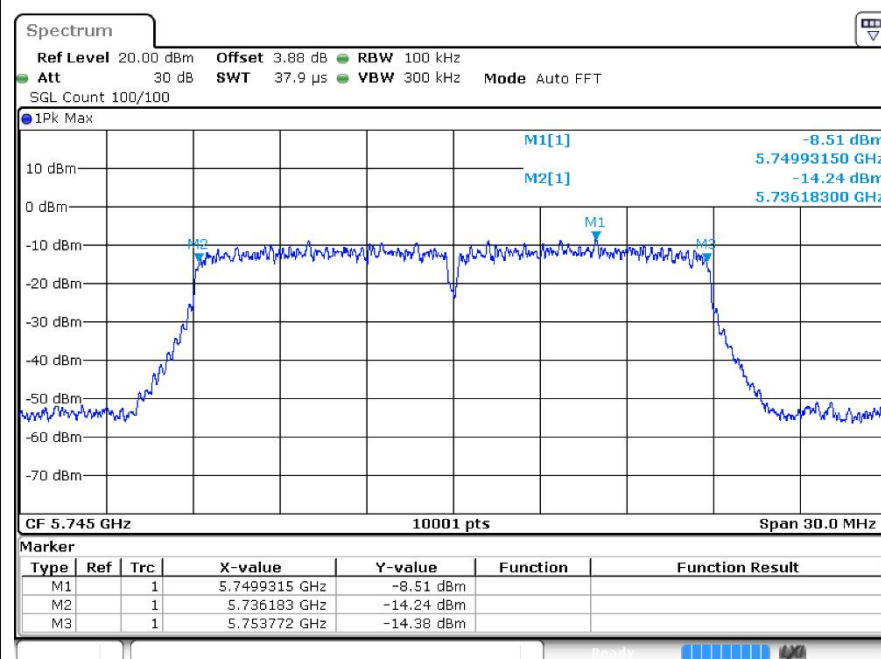

-6dB Bandwidth n20 5785MHz Ant1

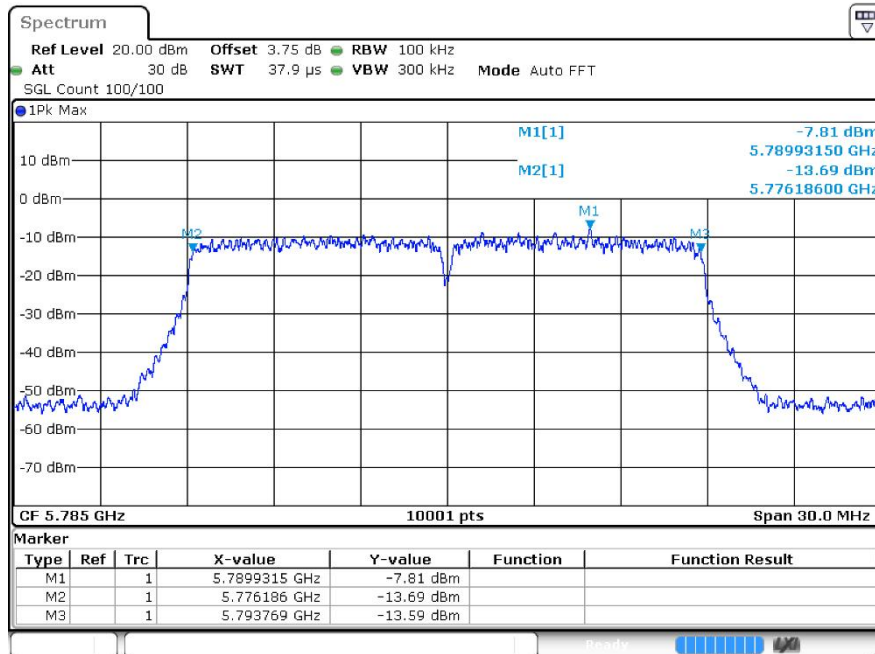

-6dB Bandwidth n20 5825MHz Ant1

