

TEST REPORT

Applicant : Sharp Corporation, Communication Systems Division
Address : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN

Products : Smart Phone
Model No. : 401SH
SERIAL NO. : 004401/11/526931/4
004401/11/526935/5

FCC ID : APYHRO00211

Test Standard : CFR 47 FCC Rules and Regulations Part 15

Test Results : **Passed**

Date of Test : September 10 ~ 18, 2014



A handwritten signature in black ink, appearing to read 'K. Shibata', is written over a horizontal line.

Kousei Shibata
Manager
Japan Quality Assurance Organization
KITA-KANSAI Testing Center
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

-
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
 - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
 - The test results presented in this report relate only to the offered test sample.
 - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
 - This test report shall not be reproduced except in full without the written approval of JQA.
 - VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
1 Description of the Equipment Under Test	3
2 Summary of Test Results	4
3 Test Procedure.....	5
4 Test Location	5
5 Recognition of Test Laboratory	5
6 Details of the Equipment Under Test	6
7 Details of the Test Item	9

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT**EUT** : Equipment Under Test**AE** : Associated Equipment**N/A** : Not Applicable**N/T** : Not Tested**EMC** : Electromagnetic Compatibility**EMI** : Electromagnetic Interference**EMS** : Electromagnetic Susceptibility☒ - indicates that the listed condition, standard or equipment is applicable for this report.☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

1 Description of the Equipment Under Test

1. Manufacturer : Sharp Corporation, Communication Systems Division
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN
2. Products : Smart Phone
3. Model No. : 401SH
4. Serial No. : 004401/11/526931/4
: 004401/11/526935/5
5. Product Type : Pre-production
6. Date of Manufacture : July, 2014
7. Power Rating : 4.0VDC (Lithium-ion Battery UBATIA251AFN1 2400mAh)
8. EUT Grounding : None
9. Transmitting Frequency : WLAN: 2412.0 MHz(01CH) –2462.0MHz(11CH)
: Bluetooth LE: 2402.0 MHz(00CH) – 2480.0MHz(39CH)
10. Receiving Frequency : WLAN: 2412.0 MHz(01CH) –2462.0MHz(11CH)
: Bluetooth LE: 2402.0 MHz(00CH) – 2480.0MHz(39CH)
11. Max. RF Output Power : 17.48dBm(Measure Value of IEEE802.11b)
: 20.87dBm(Measure Value of IEEE802.11g)
: 21.03dBm(Measure Value of IEEE802.11n)
: 5.00dBm(Measure Value of Bluetooth LE)
12. Antenna Type : Inverted-L Type Antenna (Integral)
13. Antenna Gain : 0 dBi
14. Category : DTS
15. EUT Authorization : Certification
16. Received Date of EUT : September 9, 2014

17. Channel Plan**WLAN:**

The carrier spacing is 5 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) = $2407.0 + 5 \cdot n$

Receiving Frequency (in MHz) = $2407.0 + 5 \cdot n$

where, n : channel number ($1 \leq n \leq 11$)

Bluetooth Low Energy Mode:

The carrier spacing is 2 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) = $2402.0 + 2 \cdot n$

Receiving Frequency (in MHz) = $2402.0 + 2 \cdot n$

where, n : channel number ($0 \leq n \leq 39$)

2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 15
Subpart C – Intentional Radiators

The EUT described in clause 1 was tested according to the applied standard shown above.
Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

- ☒ - The test result was **passed** for the test requirements of the applied standard.
- ☐ - The test result was **failed** for the test requirements of the applied standard.
- ☐ - The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita
Deputy Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch



Shigeru Osawa
Deputy Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch

3 Test Procedure

Test Requirements : §15.247, §15.207 and §15.209

Test Procedure : ANSI C63.10–2009

The tests were performed with reference to FCC KDB 558074 D01 DTS Meas Guidance v03r02, released June 5, 2014.

4 Test Location

Japan Quality Assurance Organization (JQA)

KITA-KANSAI Testing Center

7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2016)

VCCI Registration No. : A-0002 (Expiry date : March 30, 2016)

BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006
(Expiry date : September 14, 2016)

IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 16, 2017)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Expiry date : February 22, 2016)

6 Details of the Equipment Under Test

6.1 Operating Condition

Transmitting/Receiving

WLAN:

Transmitting frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)

Receiver frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)

Bluetooth Low Energy Mode(Bluetooth 4.0 + EDR + LE):

Transmitting frequency : 2402.0 MHz(0CH) – 2480.0 MHz(39CH)

Receiver frequency : 2402.0 MHz(0CH) – 2480.0 MHz(39CH)

Modulation Type

1. 802.11b : DSSS

2. 802.11g : OFDM

3. 802.11n : OFDM

4. LE Packet (Modulation Type : GFSK)

Other Clock Frequency

19.2 MHz

The tests were performed in the following worst condition.

Mode	Condition
IEEE802.11b	11 Mbps
IEEE802.11g	54 Mbps
IEEE802.11n	MCS0 (6.5 Mbps)

Note: The worst condition was determined based on the test result of Maximum Peak Output Power(Mid channel).

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.

The EUT with temporary antenna port was used in conducted measurement.

6.2 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Smart Phone	Sharp	401SH	004401/11/526931/4 *1) 004401/11/526935/5 *2)	APYHRO00211
B	AC Adapter	Sharp	SHCEJ1	--	N/A
C	Earphone	Softbank Mobile	ZTCAA1	--	N/A

*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission

*2) Used for Antenna Conducted Emission

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	DC Power Cord	--	--	NO	NO	1.5
2	Earphone Cable	--	--	NO	NO	0.5

6.3 Test Arrangement (Drawings)


a) Single Unit



b) AC Adapter used

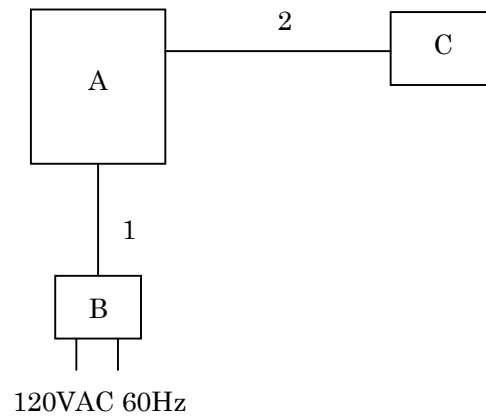

c) Earphone used

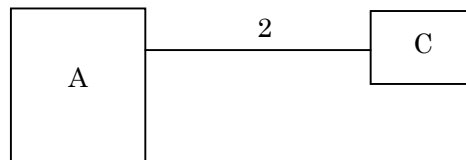

7 Details of the Test Item**7.0 Summary of the Test Results**

Test Item	FCC Specification	Reference of the Test Report	Results	Remarks
Antenna Requirement	Section 15.203	Section 1.12	Passed	-
Channel Separation	Section 15.247(a)(1)	-		-
Minimum Hopping Channel	Section 15.247(a)(1)(iii)	-	-	-
Occupied Bandwidth	Section 15.247(a)(2)	Section 7.3	Passed	-
Dwell Time	Section 15.247(a)(1)(iii)	-	-	-
Peak Output Power (Conduction)	Section 15.247(b)(3)	Section 7.5	Passed	-
Peak Power Density (Conduction)	Section 15.247(e)	Section 7.6	Passed	-
Spurious Emissions (Conduction)	Section 15.247(d)	Section 7.7	Passed	-
AC Powerline Conducted Emission	Section 15.207	Section 7.8	Passed	-
Radiated Emission	Section 15.247(d)	Section 7.9	Passed	-

7.1 Channel Separation

For the requirements, ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

For the limits, ☐ - Passed ☐ - Failed ☐ - Not judged

7.2 Minimum Hopping Channel

For the requirements, ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

For the limits, ☐ - Passed ☐ - Failed ☐ - Not judged

7.3 Occupied Bandwidth

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.3.1 Worst Point and Measurement Uncertainty

The 99% Bandwidth of IEEE802.11b is	<u>12.924</u>	MHz	at	<u>2412.0</u>	MHz
The 99% Bandwidth of IEEE802.11g is	<u>16.475</u>	MHz	at	<u>2437.0</u>	MHz
The 99% Bandwidth of IEEE802.11n is	<u>17.672</u>	MHz	at	<u>2437.0</u>	MHz
The 99% Bandwidth of Bluetooth LE is	<u>1088.2</u>	kHz	at	<u>2440.0</u>	MHz

The 6dB Bandwidth of IEEE802.11b is	<u>8.192</u>	MHz	at	<u>2437.0</u>	MHz
The 6dB Bandwidth of IEEE802.11g is	<u>16.561</u>	MHz	at	<u>2437.0</u>	MHz
The 6dB Bandwidth of IEEE802.11n is	<u>17.640</u>	MHz	at	<u>2437.0</u>	MHz
The 6dB Bandwidth of Bluetooth LE is	<u>675.4</u>	kHz	at	<u>2480.0</u>	MHz

Uncertainty of Measurement Results +/-0.9 %(2σ)

Remarks : _____

7.3.2 Test Site and Instruments

7.3.2.1 Test Site

KITA-KANSAI Testing Center

Test site : SAITO

☐ - Anechoic chamber (A1)

☐ - Measurement room (M2)

☐ - Shielded room (S1)

☐ - Shielded room (S3)

☐ - Measurement room (M1)

☐ - Measurement room (M3)

☐ - Shielded room (S2)


☒ - Shielded room (S4)

7.3.2.2 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2013/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2013/10	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2014/8	1 Year

7.3.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

	WLAN	Bluetooth
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Span	30 MHz	3 MHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold

7.3.4 Test Data

Mode of EUT : WLAN

Test Date : September 10, 2014

Temp.:26°C, Humi:48%

The resolution bandwidth was set to 100 kHz, -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

A) IEEE 802.11b

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	12.924	8.127	500
06	2437.0	12.890	8.192	500
11	2462.0	12.909	8.114	500

B) IEEE 802.11g

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	16.466	16.527	500
06	2437.0	16.475	16.561	500
11	2462.0	16.454	16.529	500

C) IEEE 802.11n


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	17.662	17.614	500
06	2437.0	17.672	17.640	500
11	2462.0	17.668	17.620	500

A) IEEE 802.11b

Low Channel

Agilent

R T

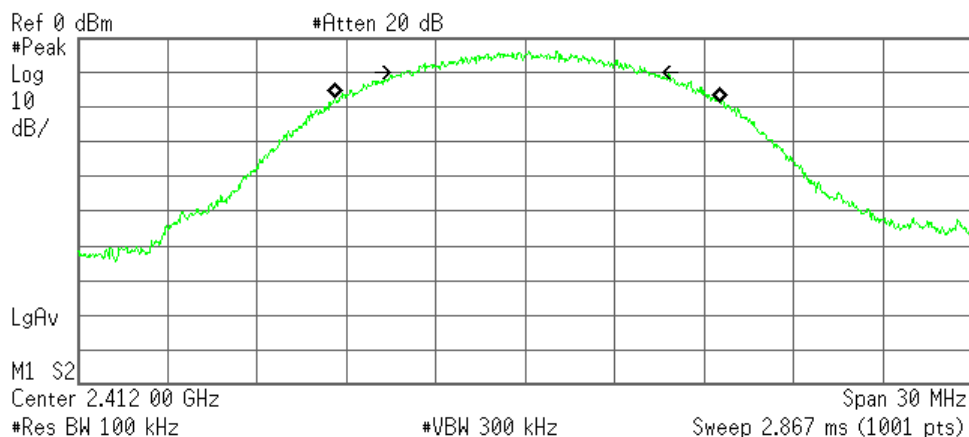

Occupied Bandwidth
12.9244 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 77.681 kHz
Occupied Bandwidth 8.127 MHz

Middle Channel

Agilent



R T

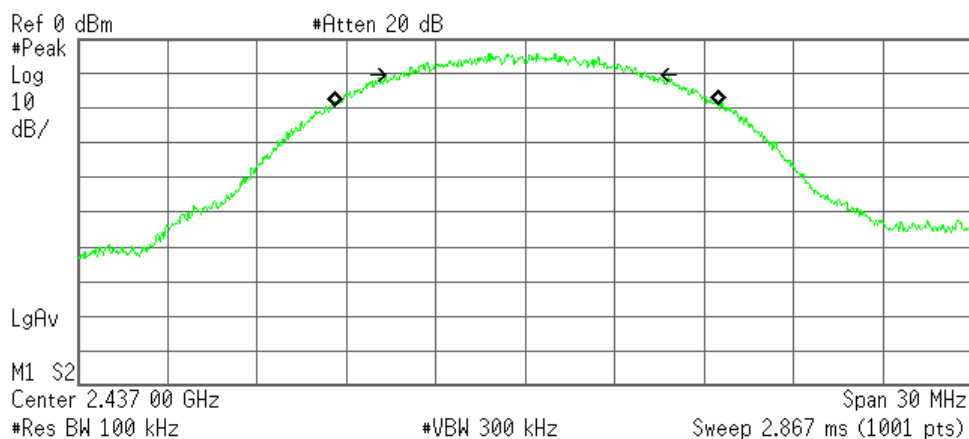

Occupied Bandwidth
12.8901 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 43.931 kHz
Occupied Bandwidth 8.192 MHz

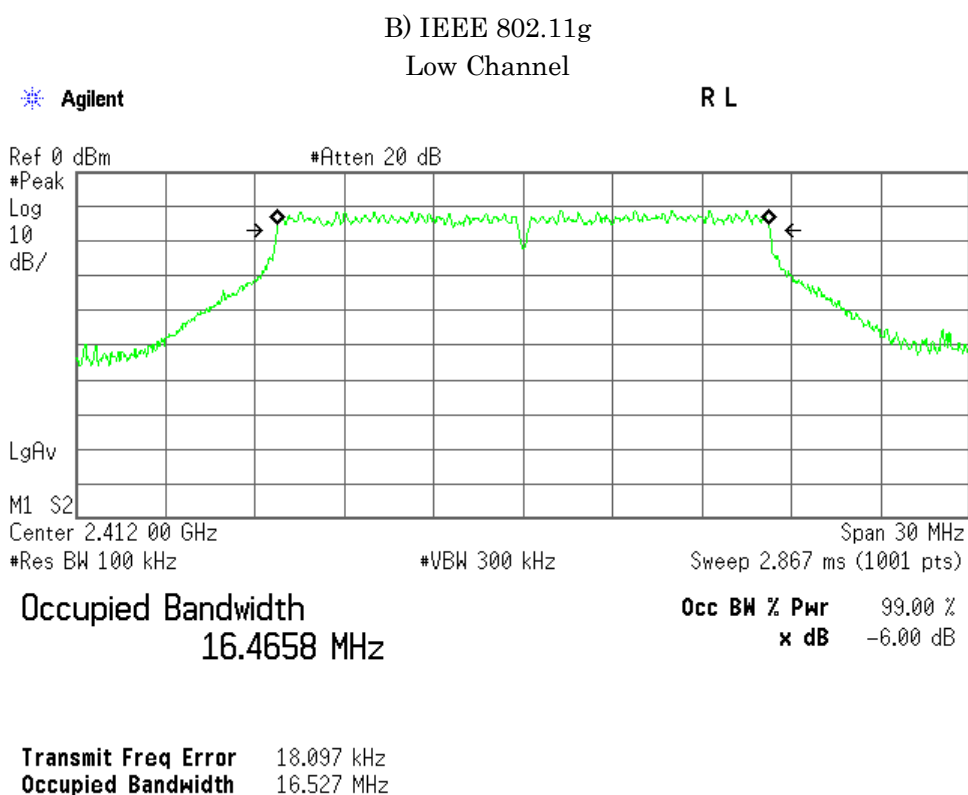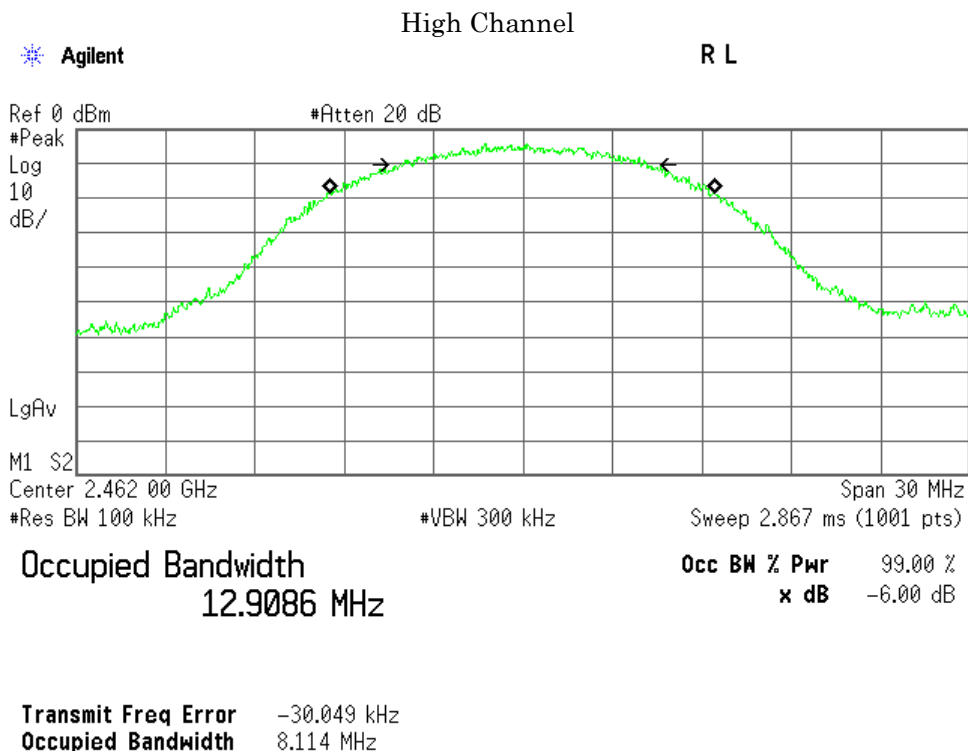

Middle Channel

Agilent

R L

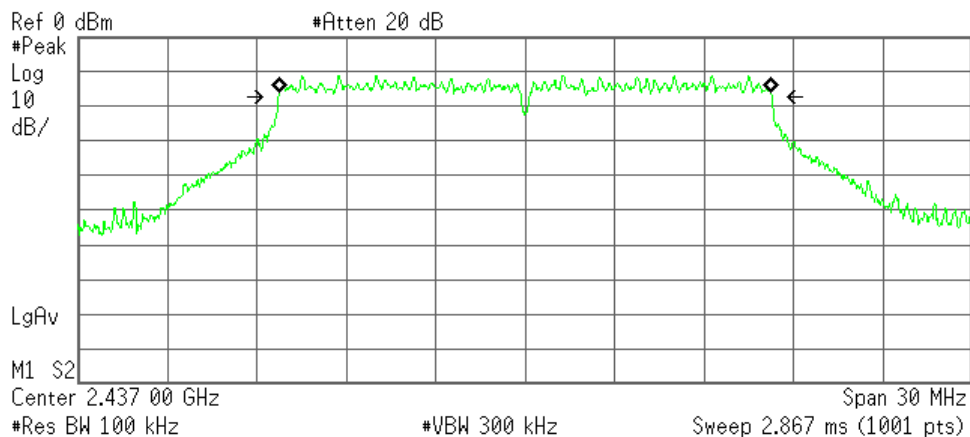

Occupied Bandwidth
16.4749 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 3.117 kHz
Occupied Bandwidth 16.561 MHz

High Channel

Agilent

R L

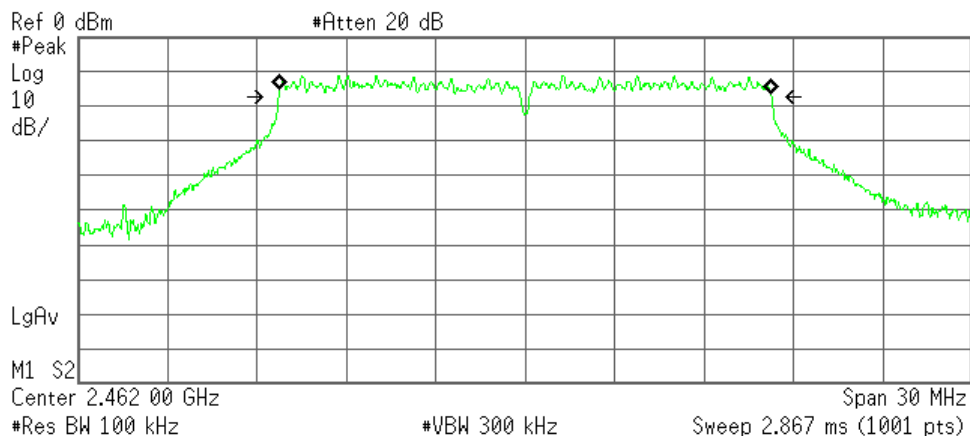

Occupied Bandwidth
16.4541 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 3.152 kHz
Occupied Bandwidth 16.529 MHz

C) IEEE 802.11n

Low Channel

Agilent

R L

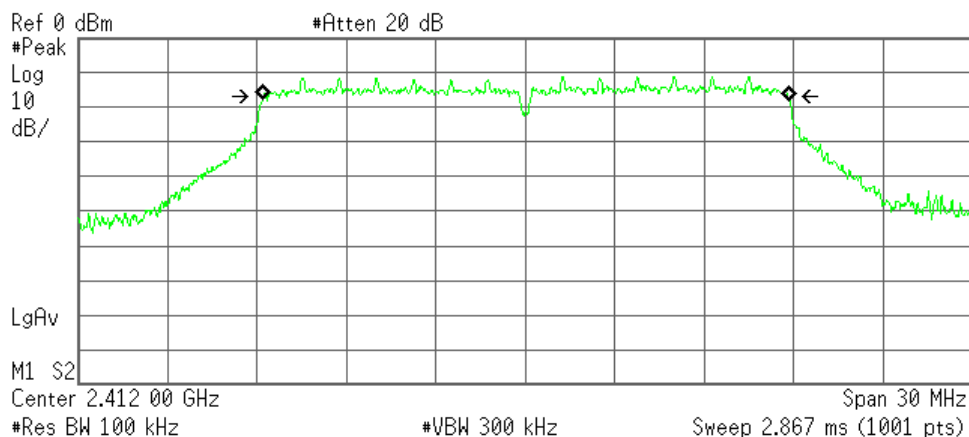

Occupied Bandwidth
17.6619 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 23.479 kHz
Occupied Bandwidth 17.614 MHz

Middle Channel

Agilent


R T

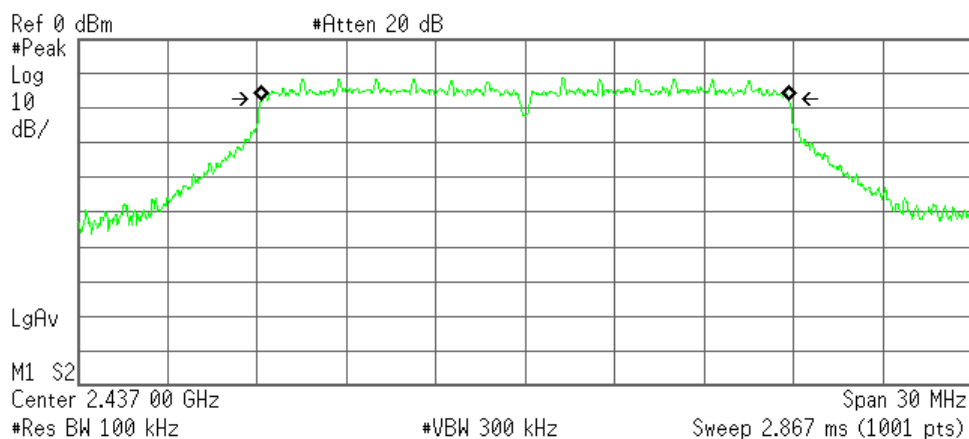

Occupied Bandwidth
17.6723 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -73.675 Hz
Occupied Bandwidth 17.640 MHz

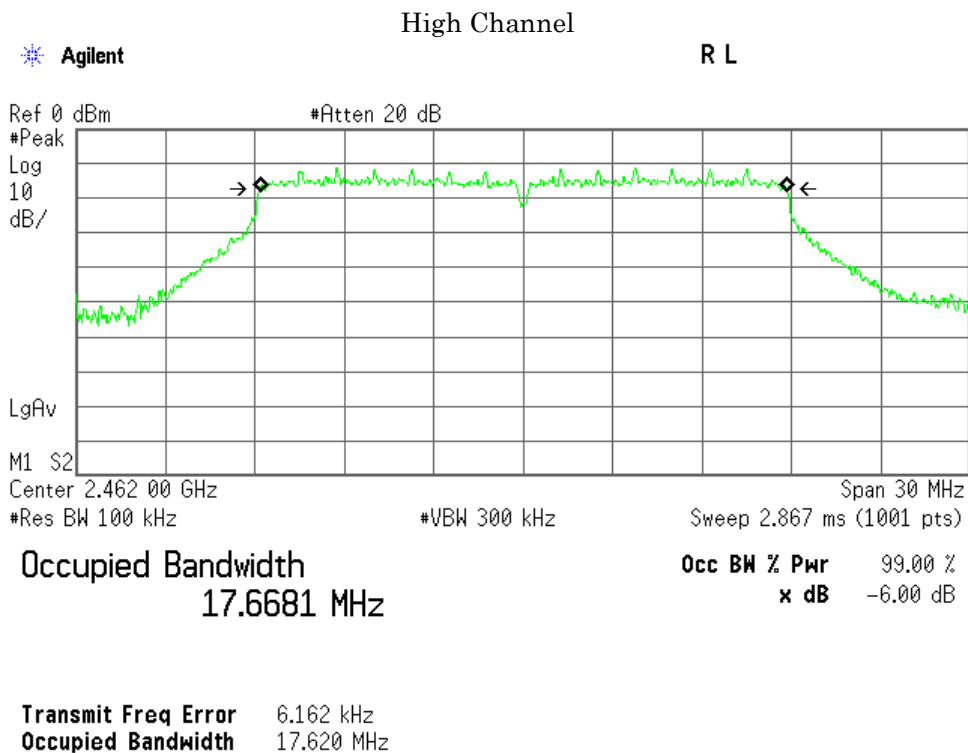

Mode of EUT : Bluetooth Low Energy

Test Date : September 11, 2014

Temp.:26°C, Humi:48%

The resolution bandwidth was set to 100 kHz, -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

1)Packet Setting : LE (Modulation type : GFSK)


Channel	Frequency (MHz)	99% Bandwidth (kHz)	-6dBc Bandwidth (kHz)	Minimum -6dBc Bandwidth Limit (kHz)
00	2402.0	1084.3	674.6	500
19	2440.0	1088.2	674.5	500
39	2480.0	1088.0	675.4	500

1)Packet Setting : LE (Modulation type : GFSK)

Low Channel

Agilent



R T

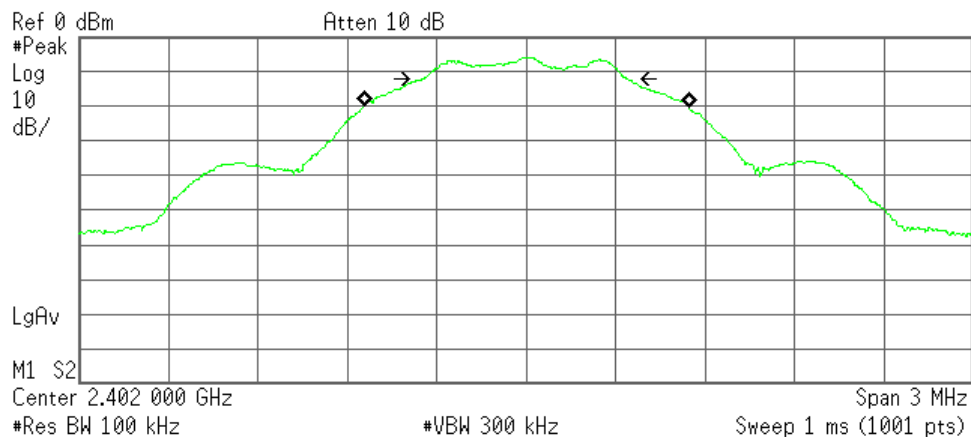

Occupied Bandwidth
1.0843 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 2.443 kHz
Occupied Bandwidth 674.637 kHz

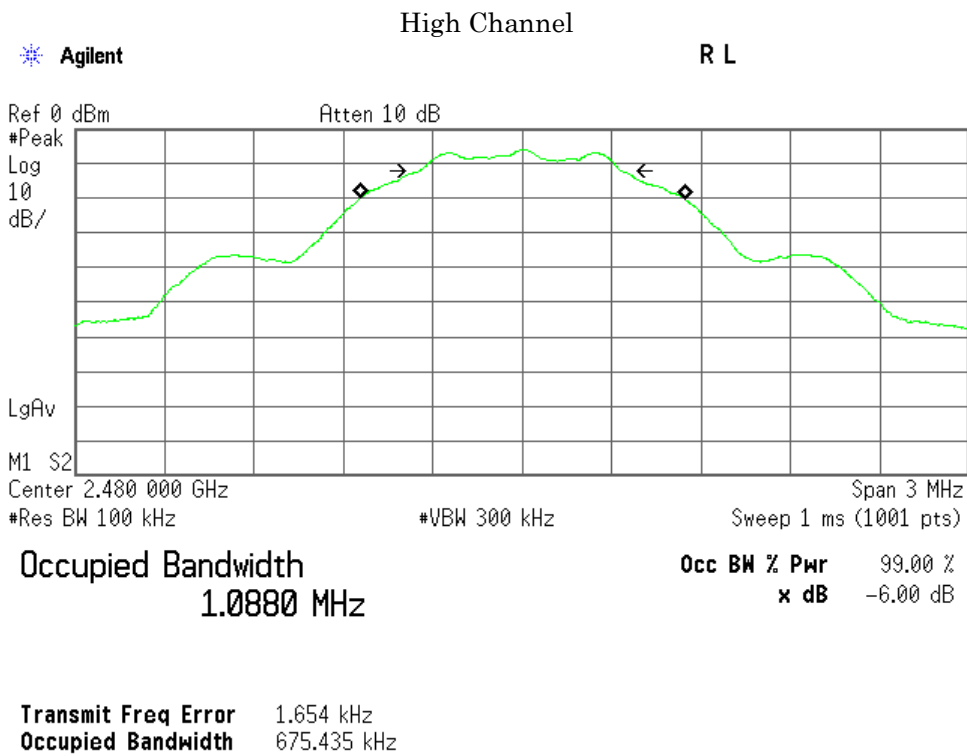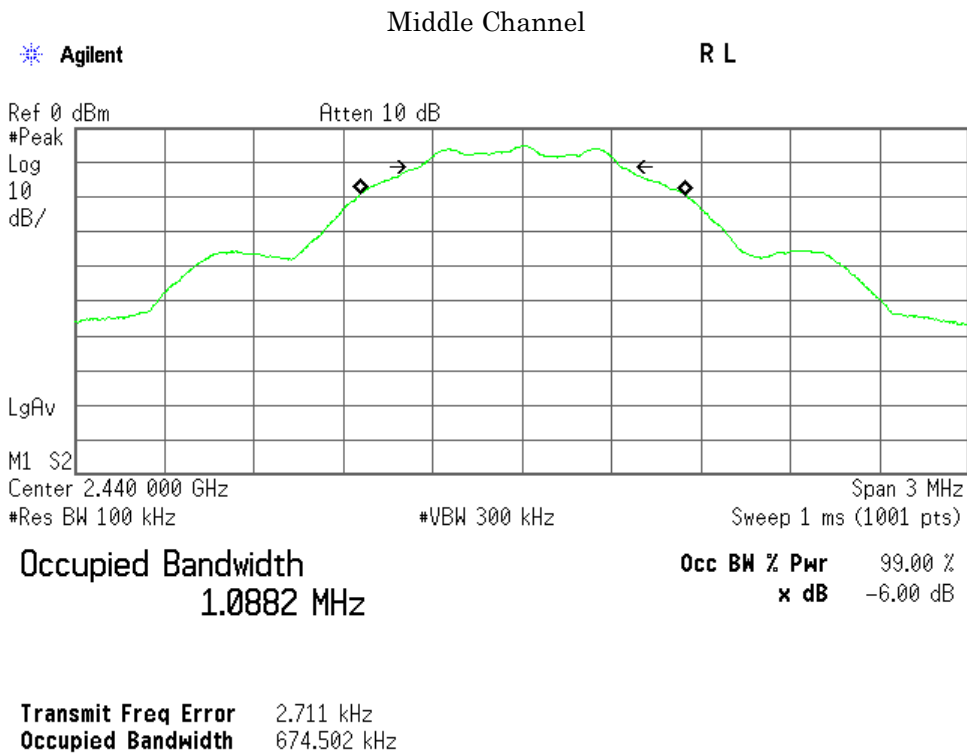

7.4 Dwell Time

For the requirements, ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

For the limits, ☐ - Passed ☐ - Failed ☐ - Not judged

7.5 Peak Output Power(Conduction)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.5.1 Worst Point and Measurement Uncertainty

Peak Output Power of IEEE802.11b is	<u>17.48</u>	dBm	at	<u>2412.0</u>	MHz
Peak Output Power of IEEE802.11g is	<u>20.87</u>	dBm	at	<u>2437.0</u>	MHz
Peak Output Power of IEEE802.11n is	<u>21.03</u>	dBm	at	<u>2437.0</u>	MHz
Peak Output Power of Bluetooth LE is	<u>5.00</u>	dBm	at	<u>2440.0</u>	MHz

Uncertainty of Measurement Results at Amplitude +/-1.2 dB(2 σ)

Remarks : _____

7.5.2 Test Site and Instruments

7.5.2.1 Test Site

KITA-KANSAI Testing Center

Test site : SAITO


<input type="checkbox"/> - Anechoic chamber (A1)	<input type="checkbox"/> - Measurement room (M1)
<input type="checkbox"/> - Measurement room (M2)	<input type="checkbox"/> - Measurement room (M3)
<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)

7.5.2.2 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Power Meter	N1911A	Agilent	B-63	2014/7	1 Year
Power Sensor	N1921A	Agilent	B-64	2014/7	1 Year
Attenuator	54A-10	Weinschel	D-28	2013/10	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2014/8	1 Year

7.5.3 Test Method and Test Setup (Diagrammatic illustration)

The Conducted RF Power Output was measured with a power meter, one 10dB attenuator and a short, low loss cable.

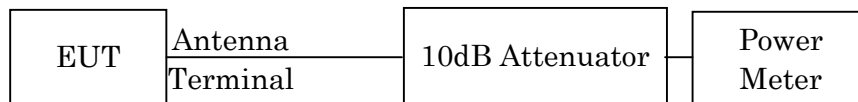

7.5.4 Test Data

1) IEEE 802.11b

Data Rate : 11Mbps

Test Date: September 10, 2014

Temp.: 26 °C, Humi: 48 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	10.09	7.39	17.48	55.98	30.00	+12.52
06	2437	10.09	7.27	17.36	54.45	30.00	+12.64
11	2462	10.09	7.35	17.44	55.46	30.00	+12.56

Calculated result at 2412.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.09 dB
+) Meter Reading	=	7.39 dBm
Result	=	17.48 dBm = 55.98 mW

Minimum Margin: 30.00 - 17.48 = 12.52 (dB)

NOTES

1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

2. Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH
06 [MHz]
2437

Rate	Meter Reading [dBm]	Remark
1Mbps	7.12	
2Mbps	7.05	
5.5Mbps	7.05	
11Mbps	7.27	*

* : Worst Rate

All comparison were performed on the same measurement condition.

2) IEEE 802.11g

Data Rate : 54Mbps

Test Date: September 10, 2014

Temp.: 26 °C, Humi: 48 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	10.09	10.60	20.69	117.22	30.00	+ 9.31
06	2437	10.09	10.78	20.87	122.18	30.00	+ 9.13
11	2462	10.09	10.58	20.67	116.68	30.00	+ 9.33

Calculated result at 2437.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.09 dB
+) Meter Reading	=	10.78 dBm
Result	=	20.87 dBm = 122.18 mW

Minimum Margin: 30.00 - 20.87 = 9.13 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH
06 [MHz]
2437

Rate	Meter Reading [dBm]	Remark
6Mbps	10.64	
9Mbps	10.49	
12Mbps	10.42	
18Mbps	10.55	
24Mbps	10.63	
36Mbps	10.72	
48Mbps	10.66	
54Mbps	10.78	*

* : Worst Rate

All comparison were performed on the same measurement condition.

3) IEEE 802.11n

Data Rate : MCS0(6.5Mbps)

Test Date: September 10, 2014

Temp.: 26 °C, Humi: 48 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	10.09	10.82	20.91	123.31	30.00	+ 9.09
06	2437	10.09	10.94	21.03	126.77	30.00	+ 8.97
11	2462	10.09	10.80	20.89	122.74	30.00	+ 9.11

Calculated result at 2437.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.09 dB
+) Meter Reading	=	10.94 dBm
Result	=	21.03 dBm = 126.77 mW

Minimum Margin: 30.00 - 21.03 = 8.97 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH	[MHz]	
06	2437	
Rate	Meter Reading	Remark
	[dBm]	
MCS0 (6.5Mbps)	10.94	*
MCS1 (13Mbps)	10.76	
MCS2 (19.5Mbps)	10.82	
MCS3 (26Mbps)	10.82	
MCS4 (39Mbps)	10.88	
MCS5 (52Mbps)	10.91	
MCS6 (58.5Mbps)	10.65	
MCS7 (65Mbps)	10.83	

* : Worst Rate

All comparison were performed on the same measurement condition.

4) Bluetooth LE(Modulation type : GFSK)

Test Date: September 10, 2014
Temp.: 26 °C, Humi: 48 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
00	2402	10.09	-5.71	4.38	2.74	30.00	+25.62
19	2440	10.09	-5.09	5.00	3.16	30.00	+25.00
39	2480	10.09	-5.93	4.16	2.61	30.00	+25.84

Calculated result at 2440.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.09 dB
+) Meter Reading	=	-5.09 dBm
Result	=	5.00 dBm = 3.16 mW

Minimum Margin: 30.00 - 5.00 = 25.00 (dB)

NOTES

1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

2. Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

7.6 Peak Power Density(Conduction)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.6.1 Worst Point and Measurement Uncertainty

Peak Power Density of IEEE802.11b is	<u>-7.94</u>	dBm	at	<u>2462.0</u>	MHz
Peak Power Density of IEEE802.11g is	<u>-15.02</u>	dBm	at	<u>2437.0</u>	MHz
Peak Power Density of IEEE802.11n is	<u>-15.41</u>	dBm	at	<u>2462.0</u>	MHz
Peak Power Density of Bluetooth LE is	<u>-8.22</u>	dBm	at	<u>2440.0</u>	MHz

Uncertainty of Measurement Results at Amplitude +/-1.2 dB(2 σ)

Remarks : _____

7.6.2 Test Site and Instruments

7.6.2.1 Test Site

KITA-KANSAI Testing Center

Test site : SAITO


<input type="checkbox"/> - Anechoic chamber (A1)	<input type="checkbox"/> - Measurement room (M1)
<input type="checkbox"/> - Measurement room (M2)	<input type="checkbox"/> - Measurement room (M3)
<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)

7.6.2.2 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2013/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2013/10	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2014/8	1 Year

7.6.3 Test Method and Test Setup (Diagrammatic illustration)

The Conducted RF Power Output was measured with a power meter, one 10dB attenuator and a short, low loss cable.

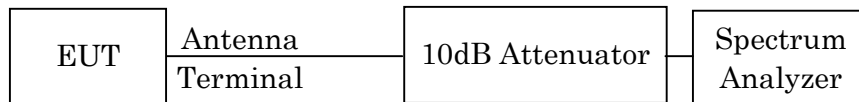

7.6.4 Test Data

1) IEEE 802.11b

Test Date: September 10, 2014

Temp: 26 °C, Humi: 48 %

Data Rate : 11Mbps

CH	Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading [dBm]	Conducted Peak Power Density		Limits [dBm]	Margin [dB]
	[MHz]					[dBm]	[mW]		
01	2412		10.09	-10.00	-8.05	-7.96	0.16	8.00	+15.96
06	2437		10.09	-10.00	-8.21	-8.12	0.15	8.00	+16.12
11	2462		10.09	-10.00	-8.03	-7.94	0.16	8.00	+15.94

Calculated result at 2462.000 MHz, as the worst point shown on underline:


Correction Factor	=	10.09 dB
BWCF	=	-10.00 dB
+) Meter Reading	=	-8.03 dBm
Result	=	-7.94 dBm = 0.16 mW

Minimum Margin: 8.00 - -7.94 = 15.94 (dB)

NOTES

1. The peak power density complied with the limit without BWCF.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. BWCF(bandwidth correction factor) = $10 \log (3 \text{ kHz}/30 \text{ kHz}) = -10.0 \text{ dB}$
4. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

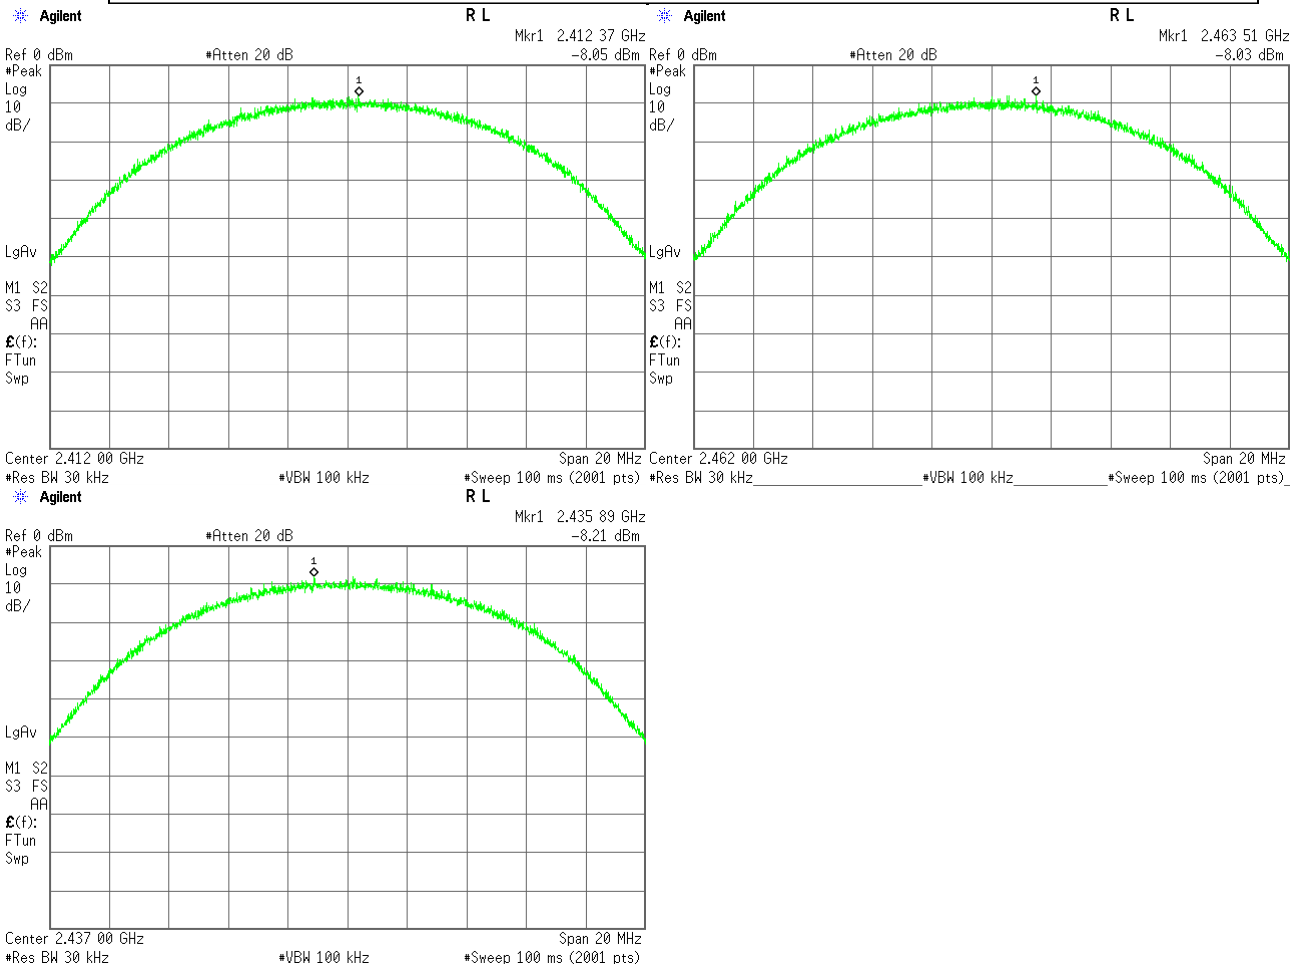

2) IEEE 802.11g

Test Date: September 10, 2014

Temp.: 26 °C, Humi: 48 %

Data Rate : 54Mbps

Transmitting Frequency		Correction Factor	BWCF	Meter Reading	Conducted Peak Power Density		Limits	Margin
CH	[MHz]	[dB]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	10.09	-10.00	-15.17	-15.08	0.03	8.00	+23.08
06	2437	10.09	-10.00	-15.11	-15.02	0.03	8.00	+23.02
11	2462	10.09	-10.00	-15.45	-15.36	0.03	8.00	+23.36

Calculated result at 2437.000 MHz, as the worst point shown on underline:


Correction Factor	=	10.09 dB
BWCF	=	-10.00 dB
+) Meter Reading	=	-15.11 dBm
Result	=	-15.02 dBm = 0.03 mW

Minimum Margin: 8.00 - -15.02 = 23.02 (dB)

NOTES

1. The peak power density complied with the limit without BWCF.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. BWCF(bandwidth correction factor) = $10 \log(3 \text{ kHz}/30 \text{ kHz}) = -10.0 \text{ dB}$
4. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

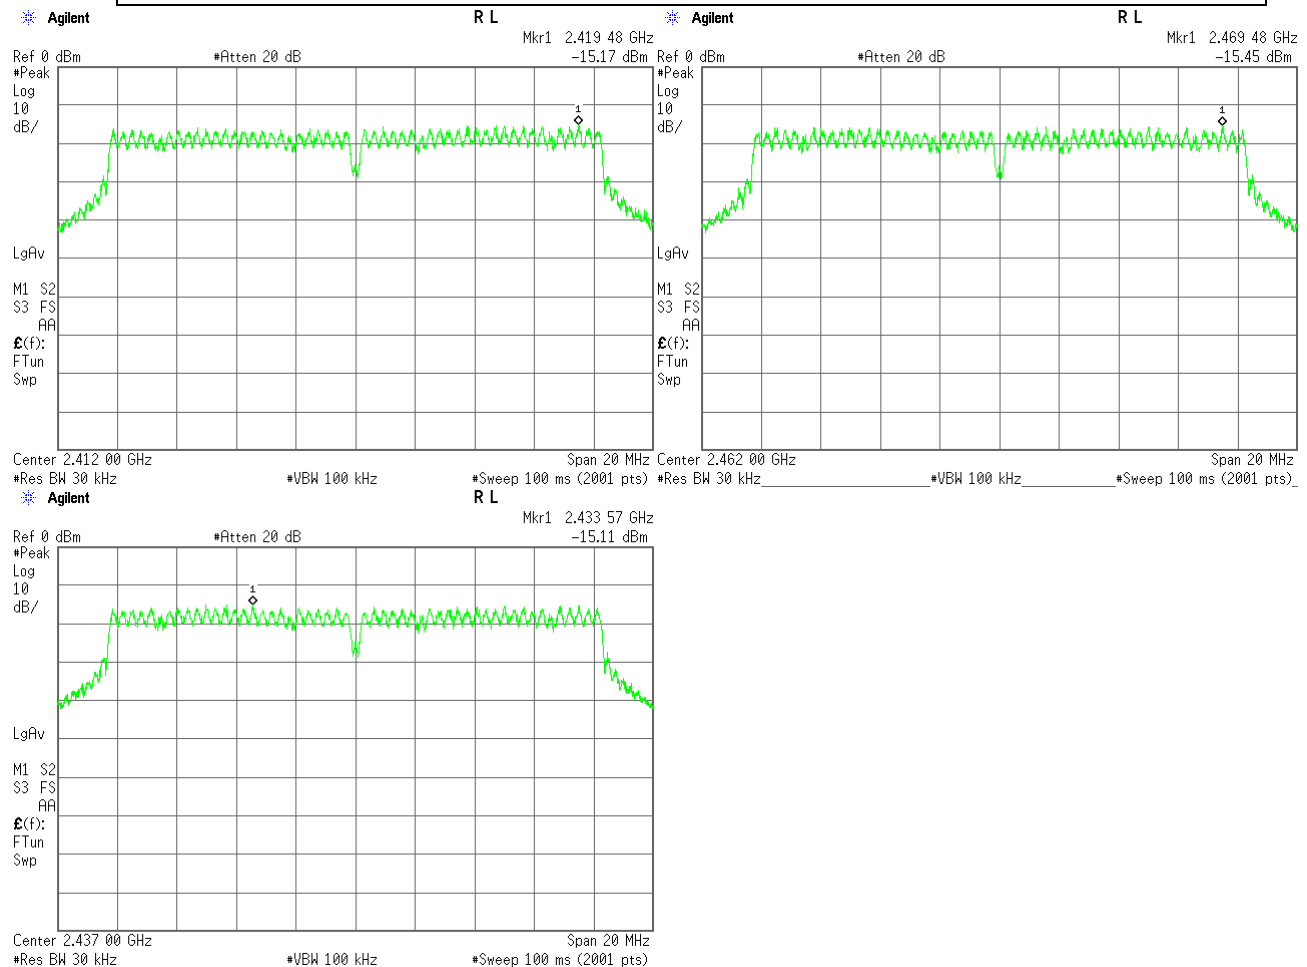

3) IEEE 802.11n

Test Date: September 10, 2014

Temp.: 26 °C, Humi: 48 %

Data Rate : MCS0(6.5Mbps)

Transmitting Frequency		Correction Factor	BWCF	Meter Reading	Conducted Peak Power Density		Limits	Margin
CH	[MHz]	[dB]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
01	2412	10.09	-10.00	-15.81	-15.72	0.03	8.00	+23.72
06	2437	10.09	-10.00	-16.06	-15.97	0.03	8.00	+23.97
11	2462	10.09	-10.00	-15.50	-15.41	0.03	8.00	+23.41

Calculated result at 2462.000 MHz, as the worst point shown on underline:


Correction Factor	=	10.09 dB
BWCF	=	-10.00 dB
+) Meter Reading	=	-15.50 dBm
Result	=	-15.41 dBm = 0.03 mW

Minimum Margin: 8.00 - -15.41 = 23.41 (dB)

NOTES

1. The peak power density complied with the limit without BWCF.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. BWCF(bandwidth correction factor) = $10 \log(3 \text{ kHz}/30 \text{ kHz}) = -10.0 \text{ dB}$
4. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

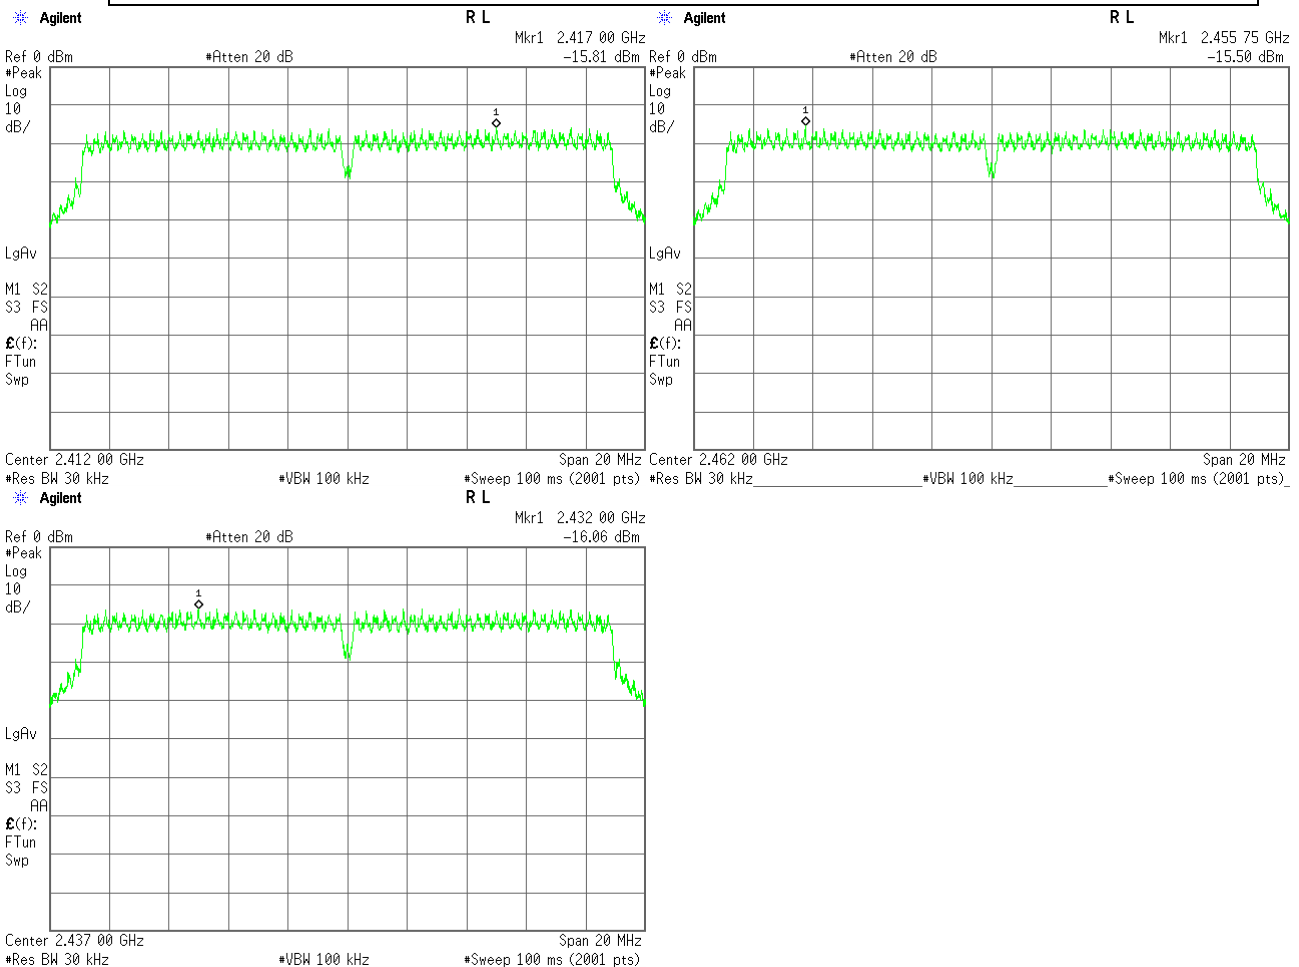

4) Bluetooth LE(Modulation type : GFSK)

Test Date: September 11, 2014

Temp: 27 °C, Humi: 63 %

Transmitting Frequency	Correction Factor	BWCF	Meter Reading	Conducted Peak Power Density	Limits	Margin
CH	[MHz]	[dB]	[dB]	[dBm]	[dBm]	[dB]
00	2402	10.09	-10.00	-8.99	-8.90	0.13
19	2440	10.09	-10.00	-8.31	-8.22	0.15
39	2480	10.09	-10.00	-9.19	-9.10	0.12

Calculated result at 2440.000 MHz, as the worst point shown on underline:

Correction Factor = 10.09 dB

BWCF = -10.00 dB

+) Meter Reading = -8.31 dBm


Result = -8.22 dBm = 0.15 mW

Minimum Margin: 8.00 - -8.22 = 16.22 (dB)

NOTES

1. The peak power density complied with the limit without BWCF.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. BWCF(bandwidth correction factor) = $10 \log (3 \text{ kHz}/30 \text{ kHz}) = -10.0 \text{ dB}$
4. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

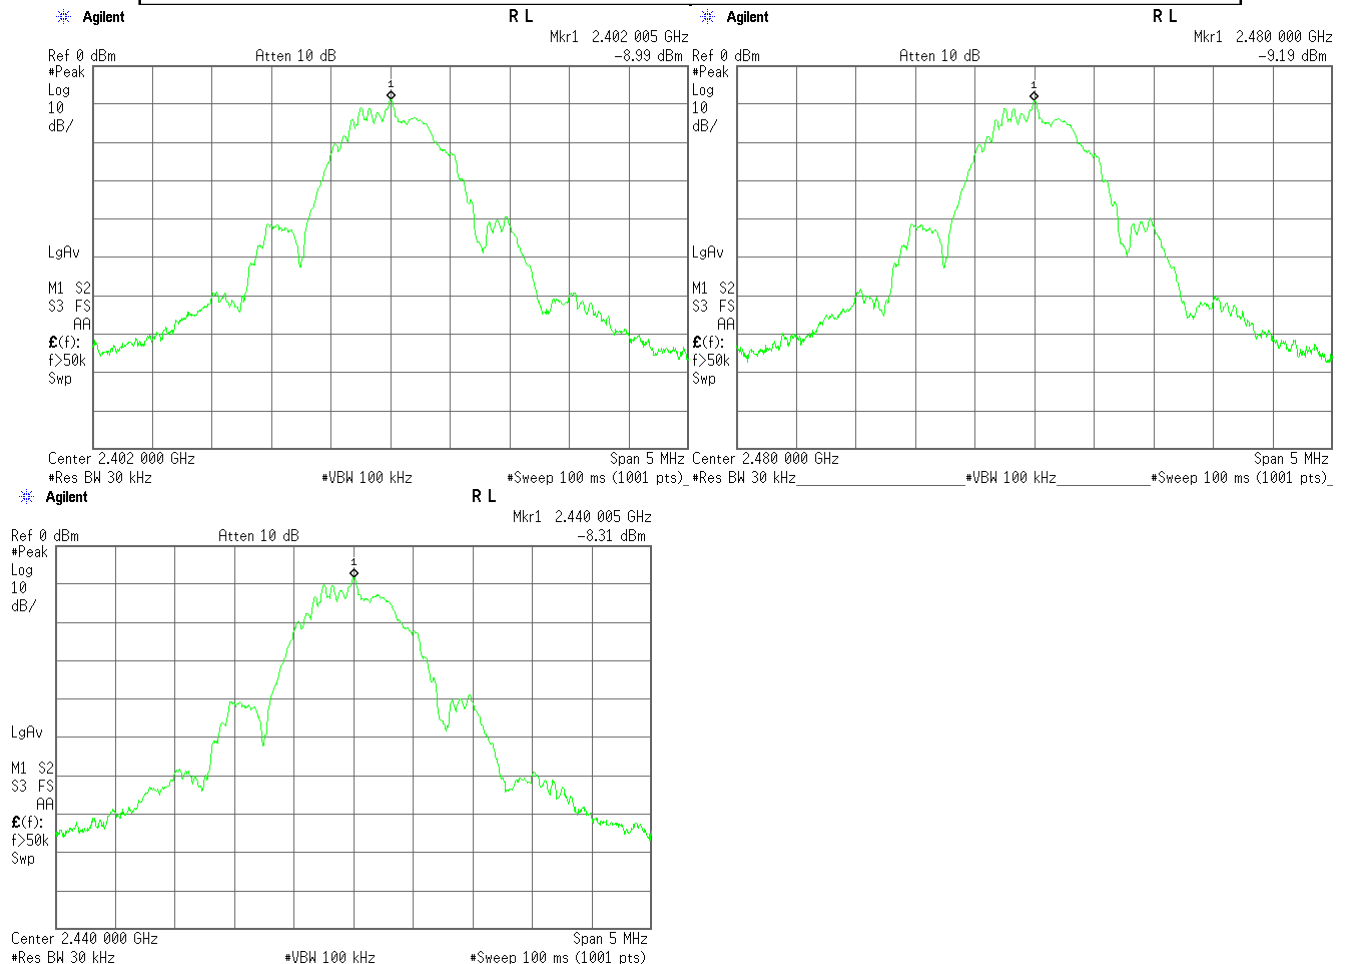

7.7 Spurious Emissions(Conduction)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.7.1 Worst Point and Measurement Uncertainty

Uncertainty of Measurement Results

9 kHz – 1GHz	<u>+/-1.0</u>	dB(2σ)
1GHz – 18GHz	<u>+/-1.2</u>	dB(2σ)
18GHz – 40GHz	<u>+/-1.6</u>	dB(2σ)

Remarks : _____

7.7.2 Test Site and Instruments

7.7.2.1 Test Site

KITA-KANSAI Testing Center

Test site : SAITO


<input type="checkbox"/> - Anechoic chamber (A1)	<input type="checkbox"/> - Measurement room (M1)
<input type="checkbox"/> - Measurement room (M2)	<input type="checkbox"/> - Measurement room (M3)
<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)

7.7.2.2 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2013/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2013/10	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2014/8	1 Year

7.7.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:

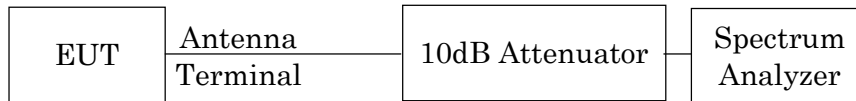

The setting of the spectrum analyzer are shown as follows:

Frequency Range	30 MHz - 25 GHz	Band-Edge
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold


7.7.4 Test Data

Test Date : September 10, 2014


Temp.:26°C, Humi:48%

1) IEEE 802.11b


Low Channel

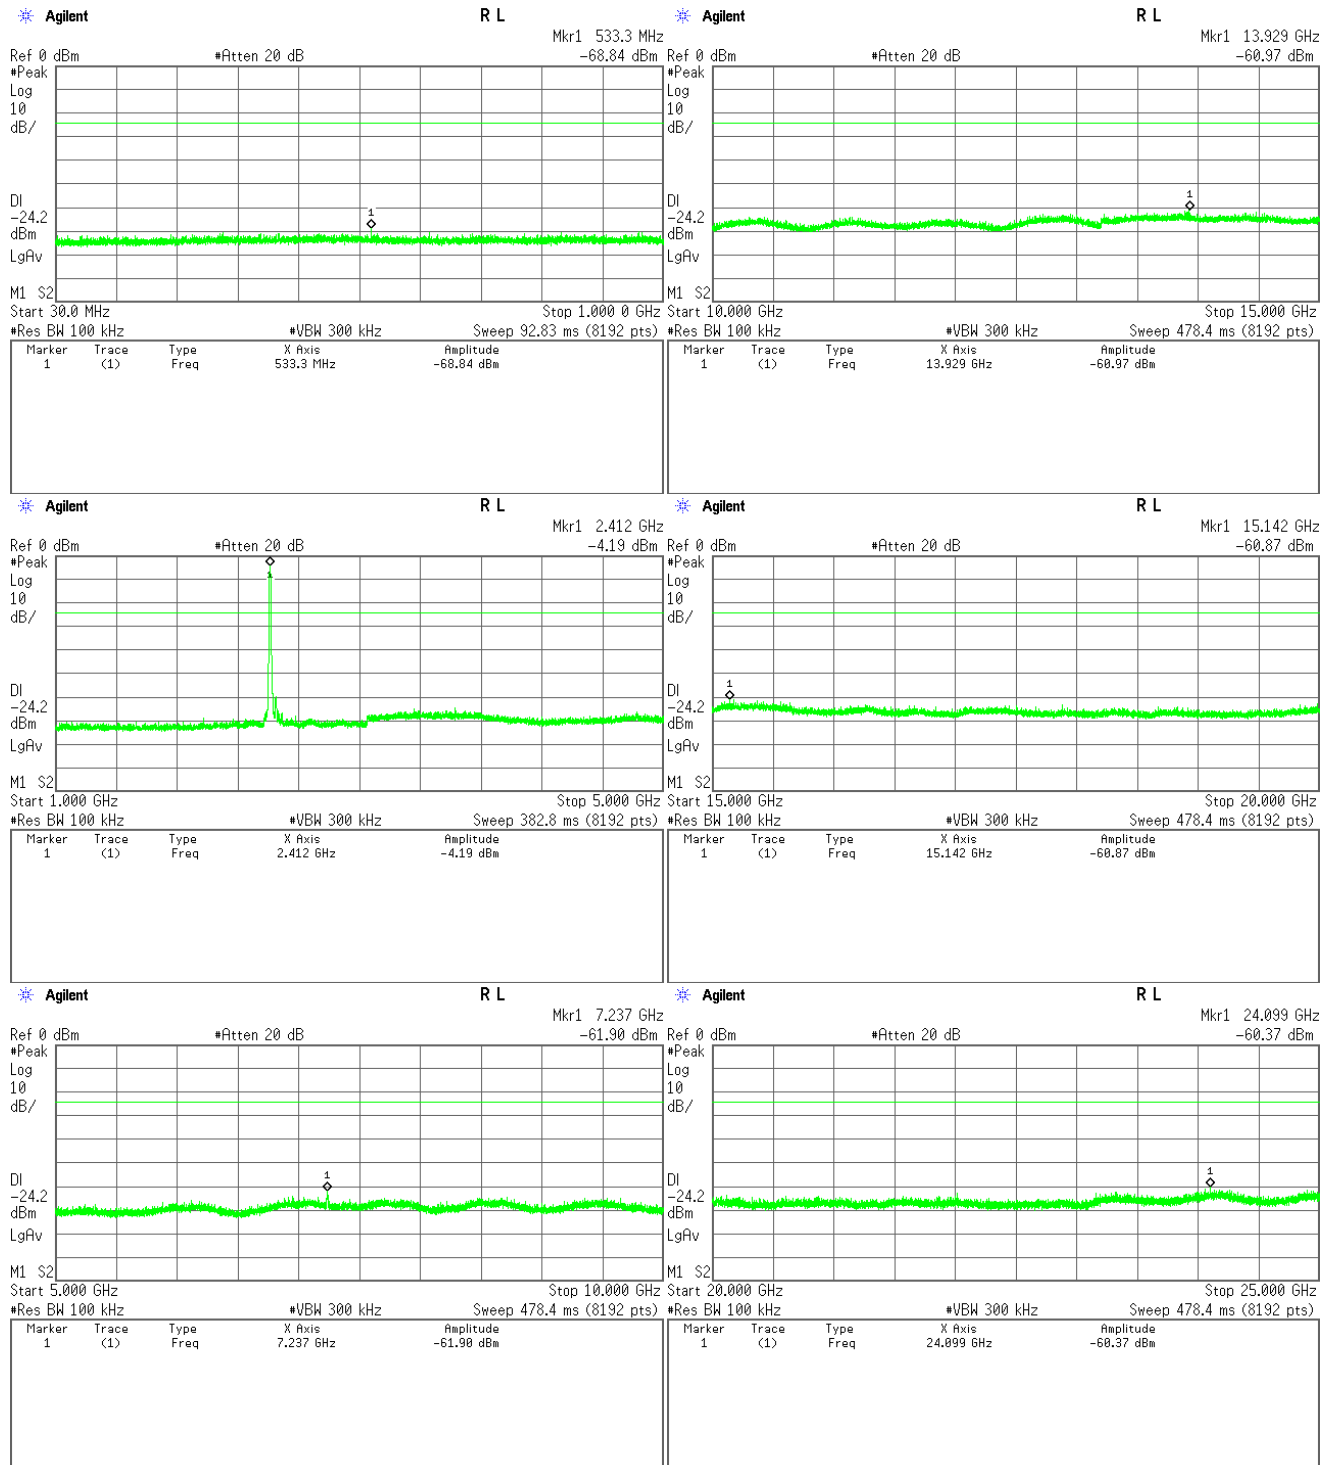

Middle Channel

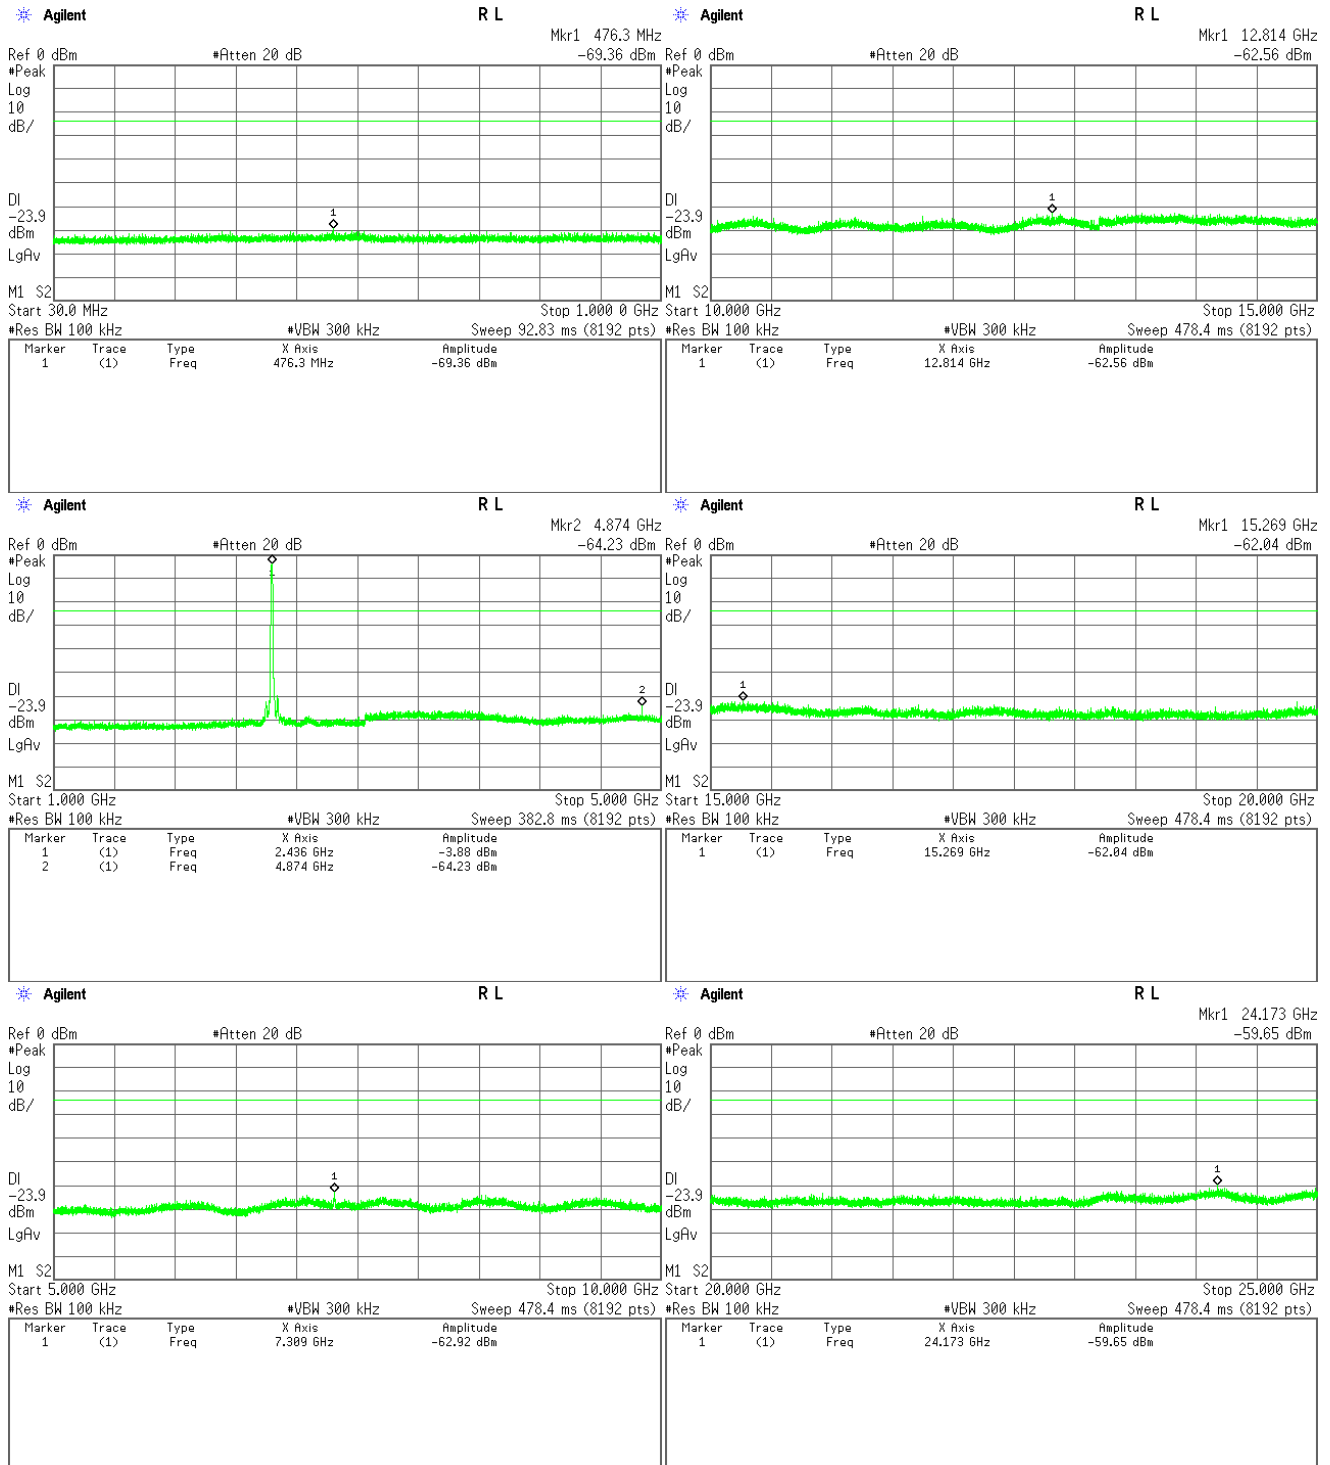


High Channel

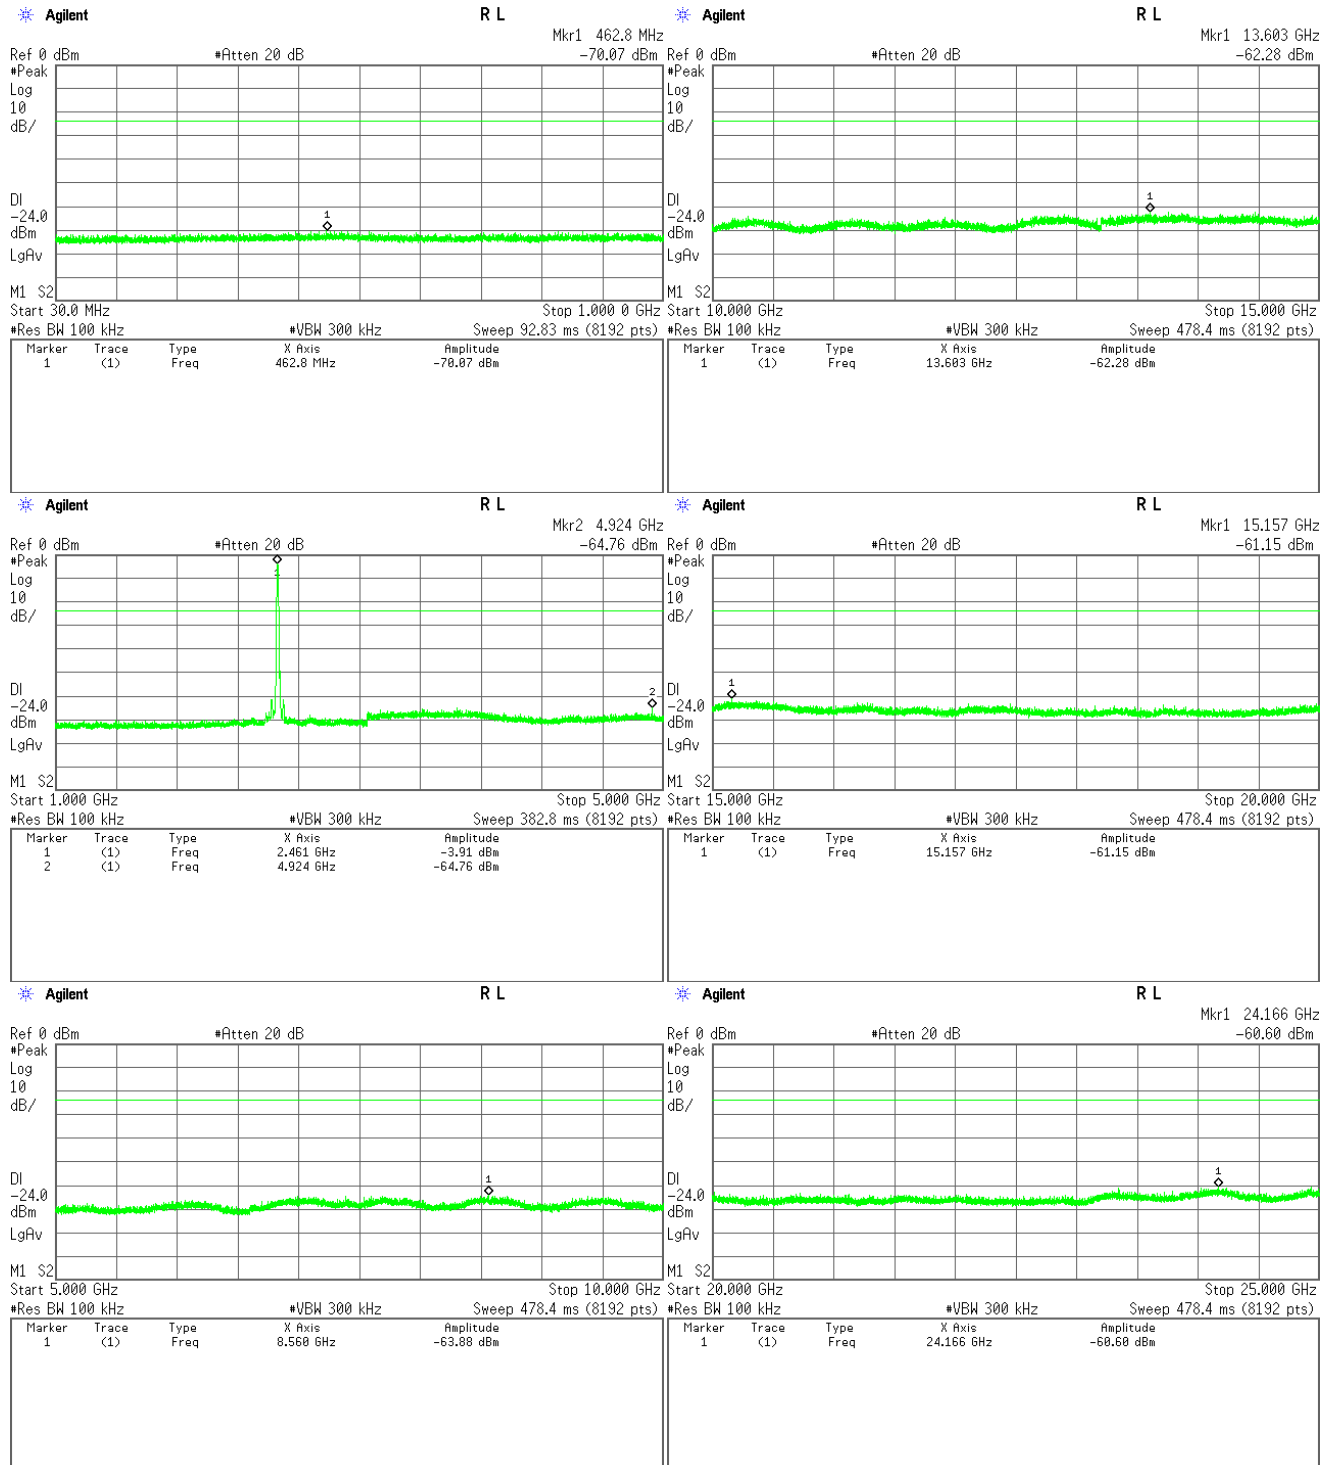


2) IEEE 802.11g


Low Channel

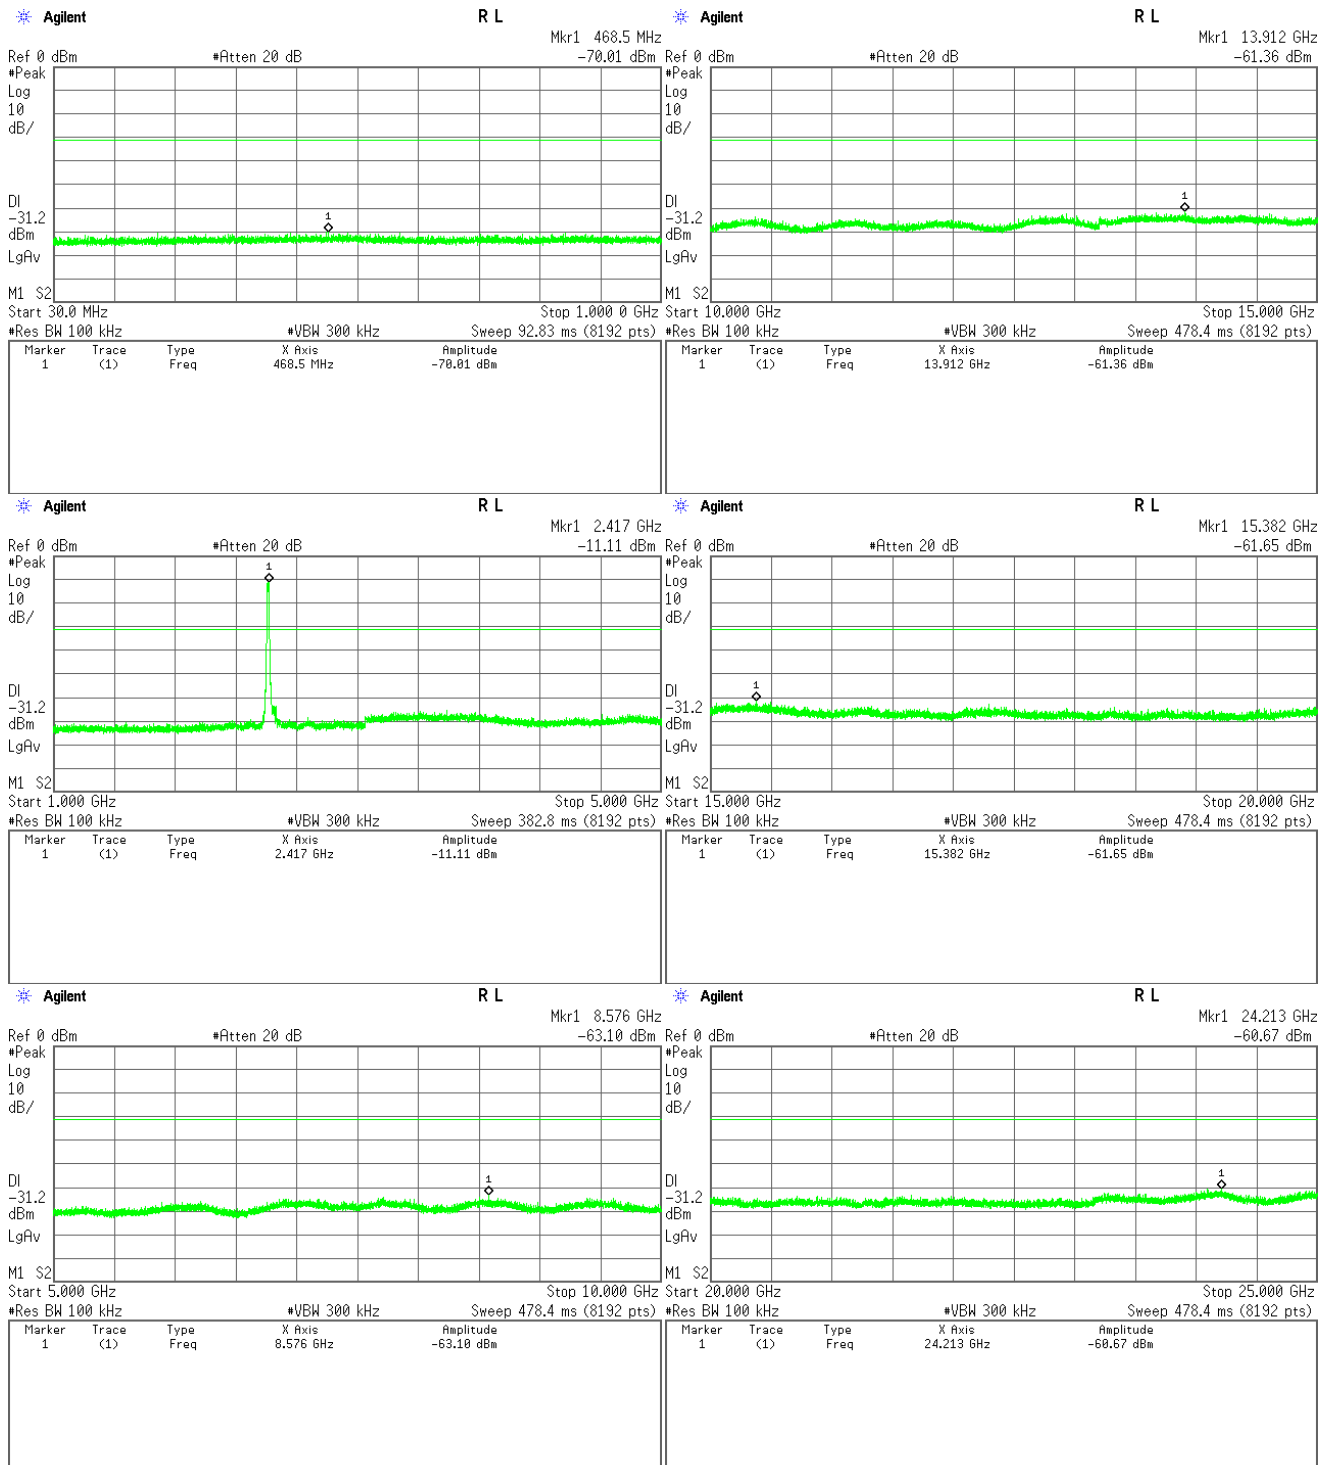

Middle channel

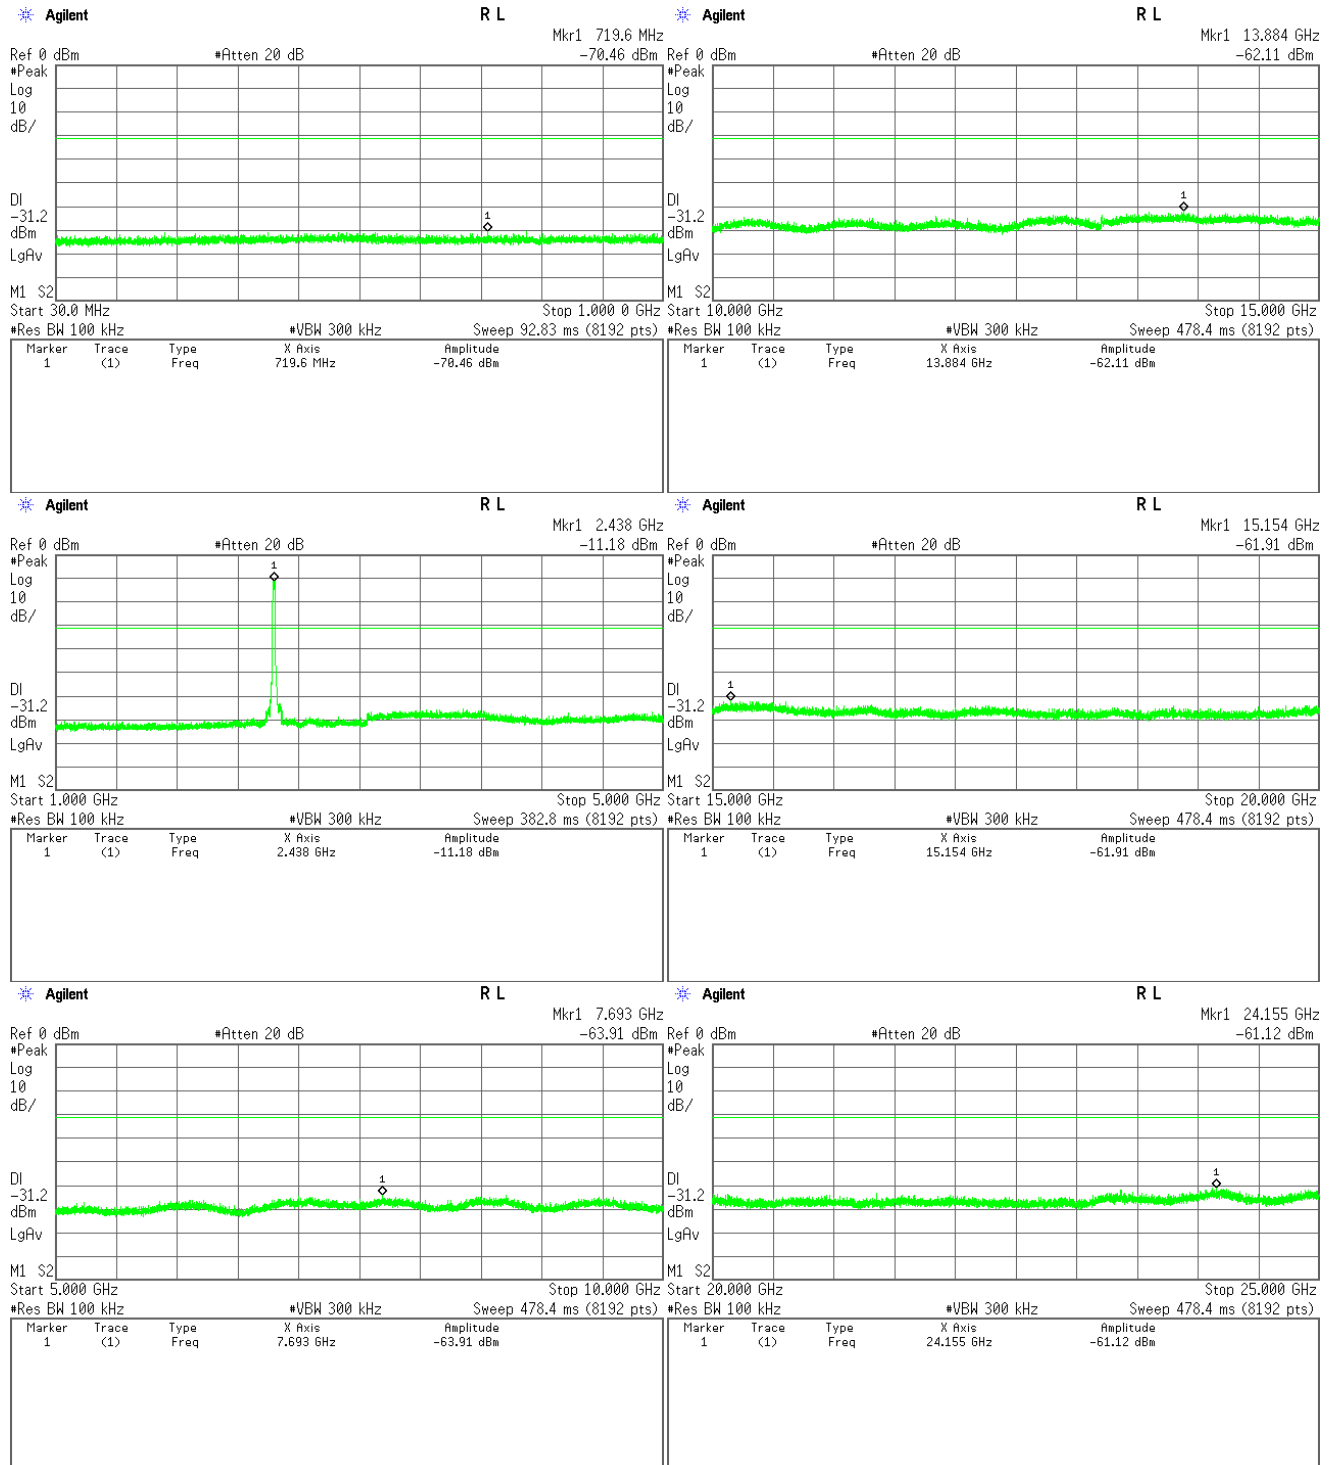


High Channel

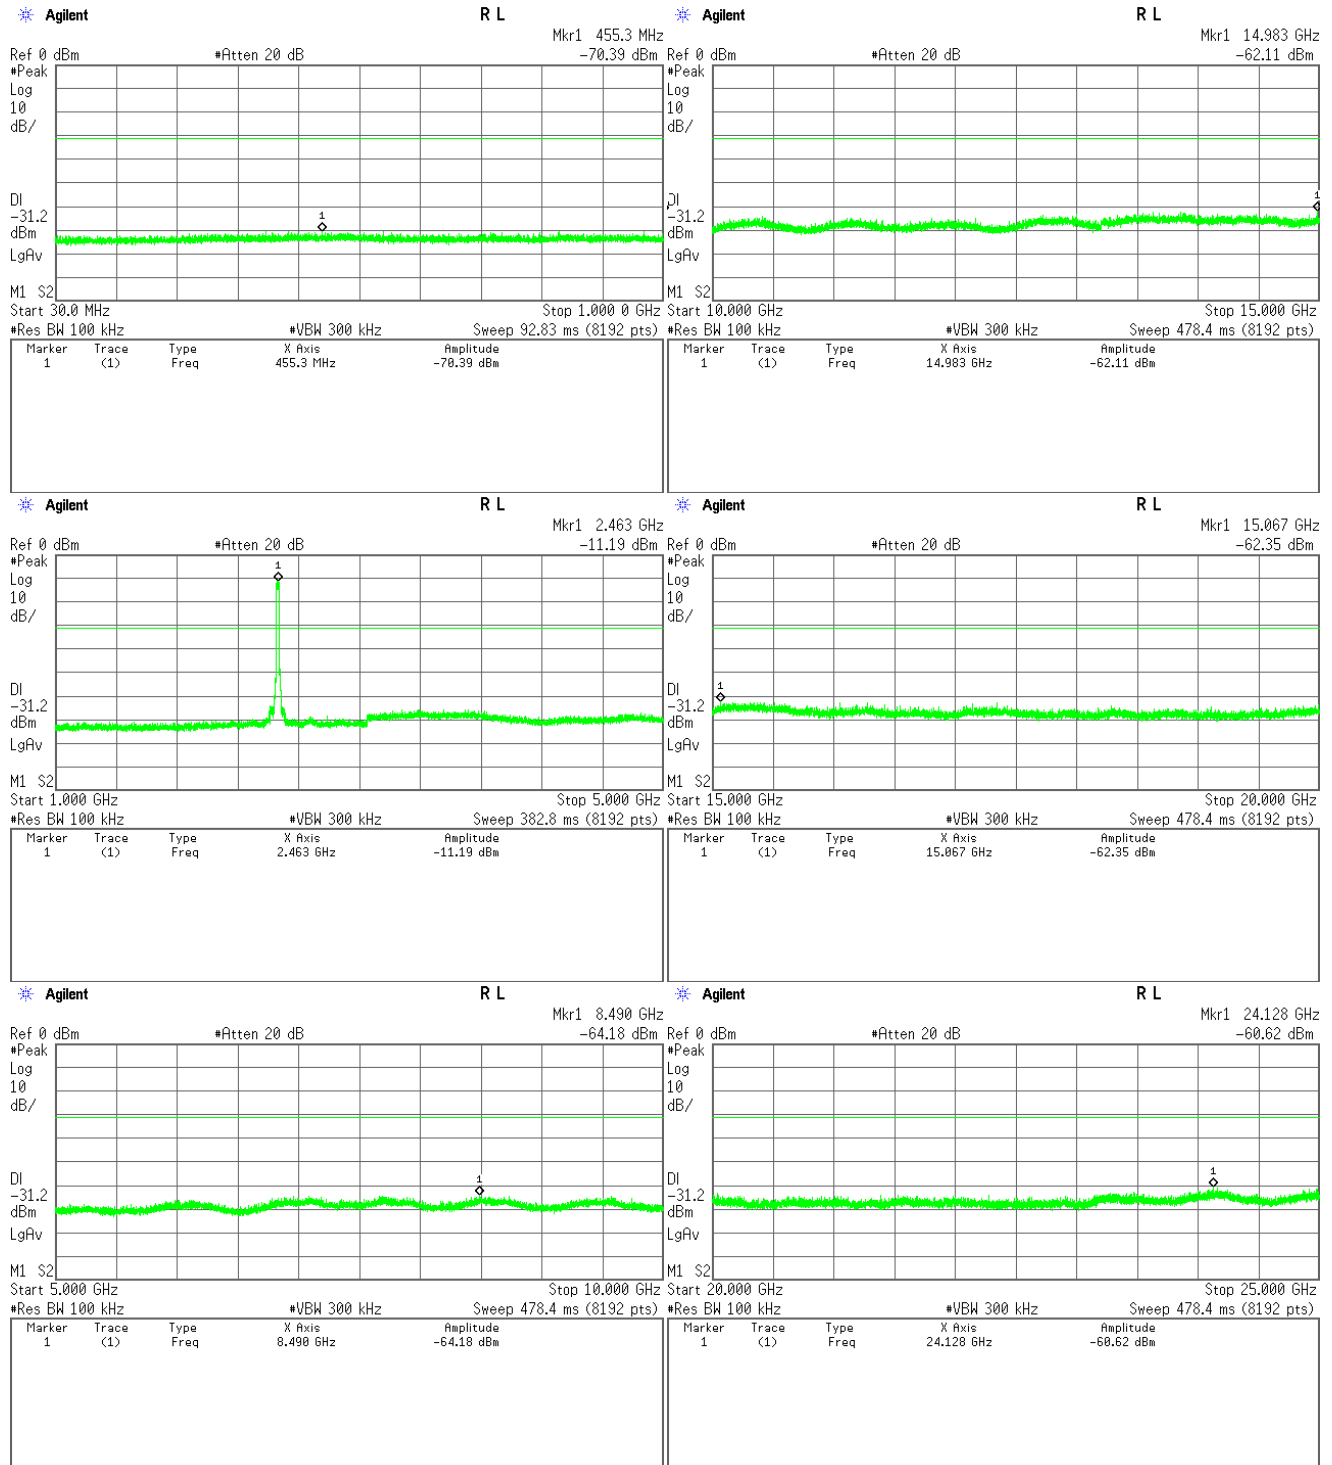


3) IEEE 802.11n


Low Channel

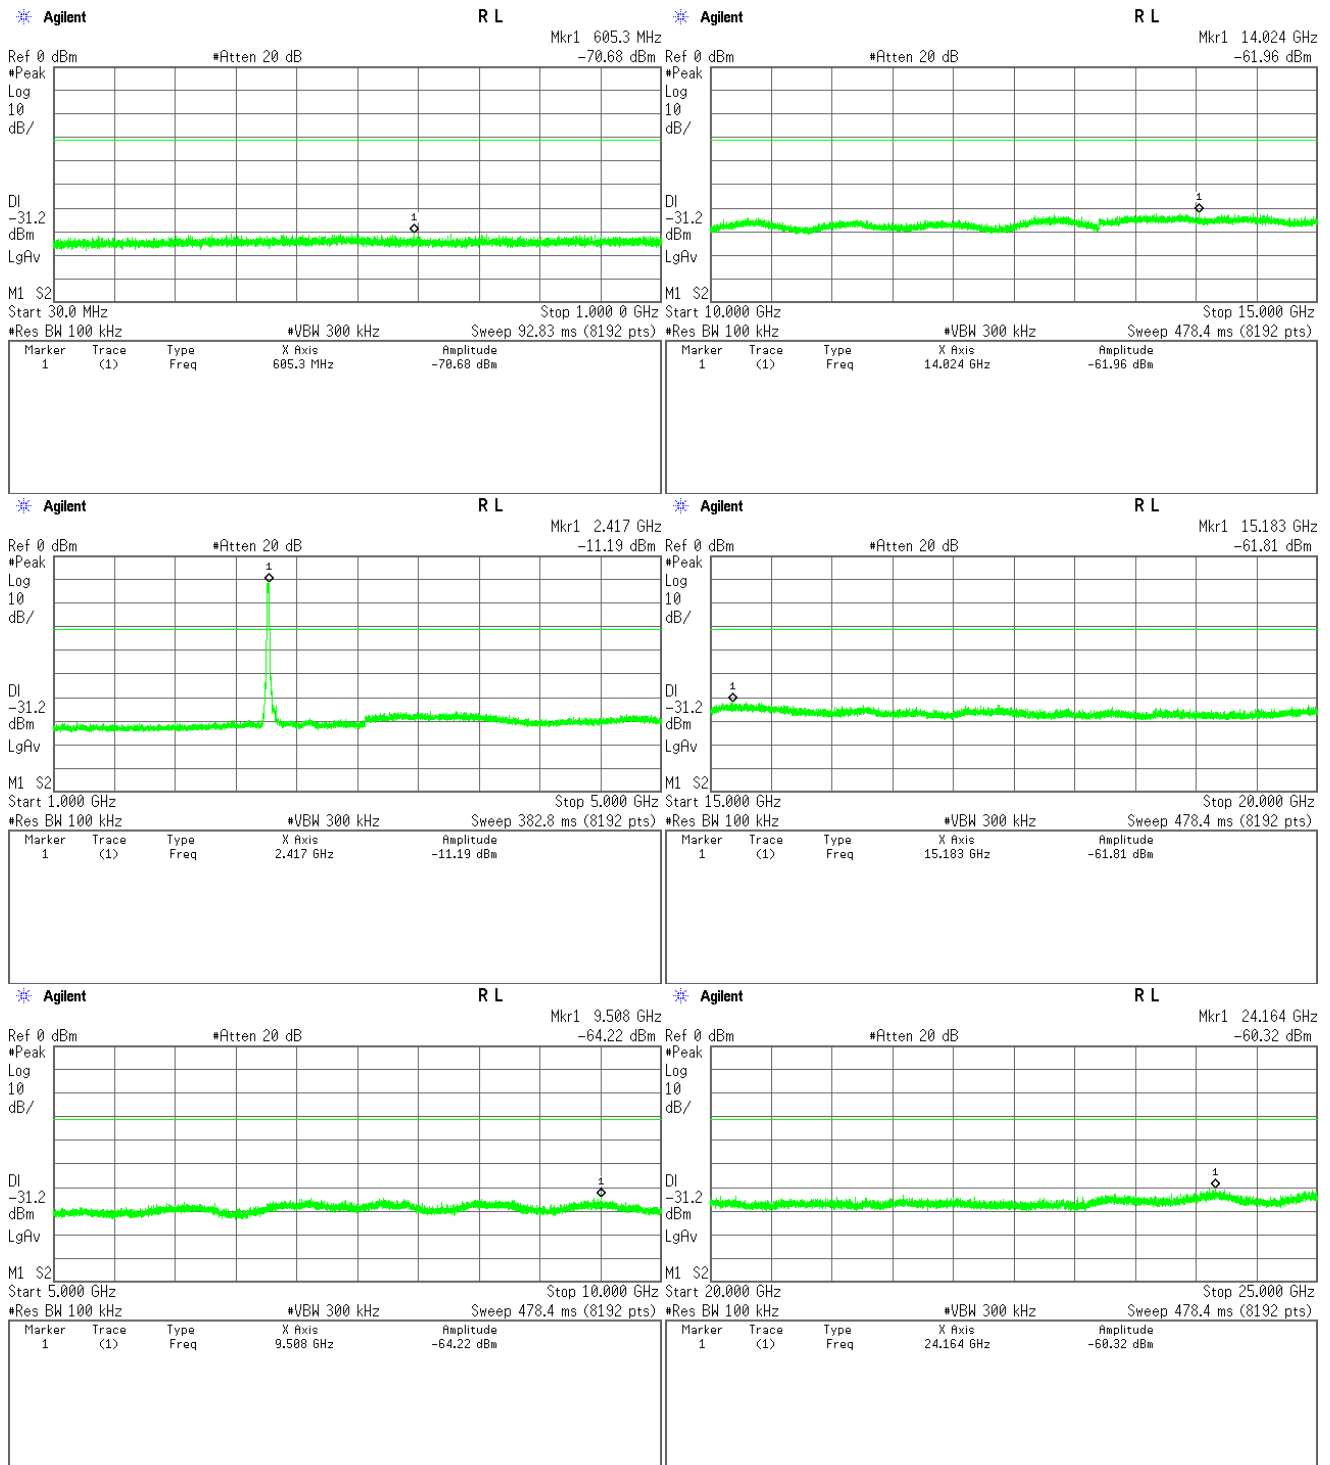

Middle Channel

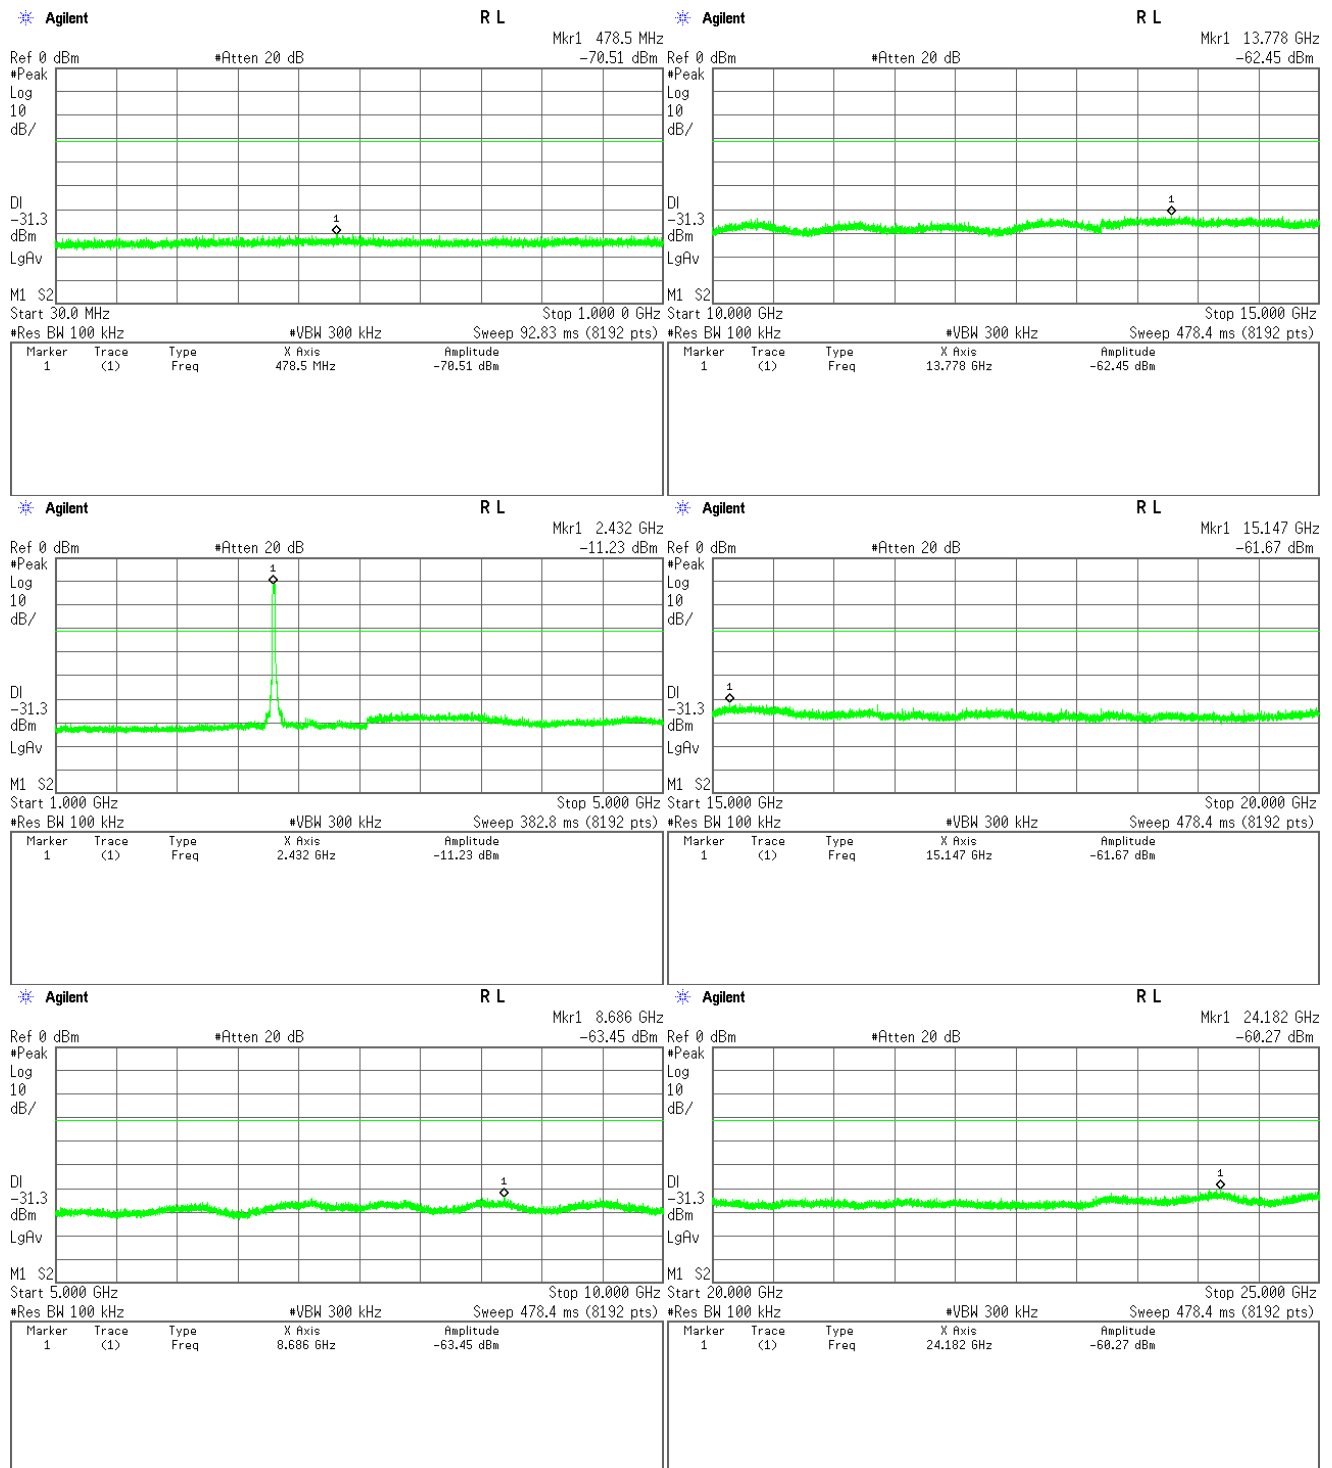


High Channel

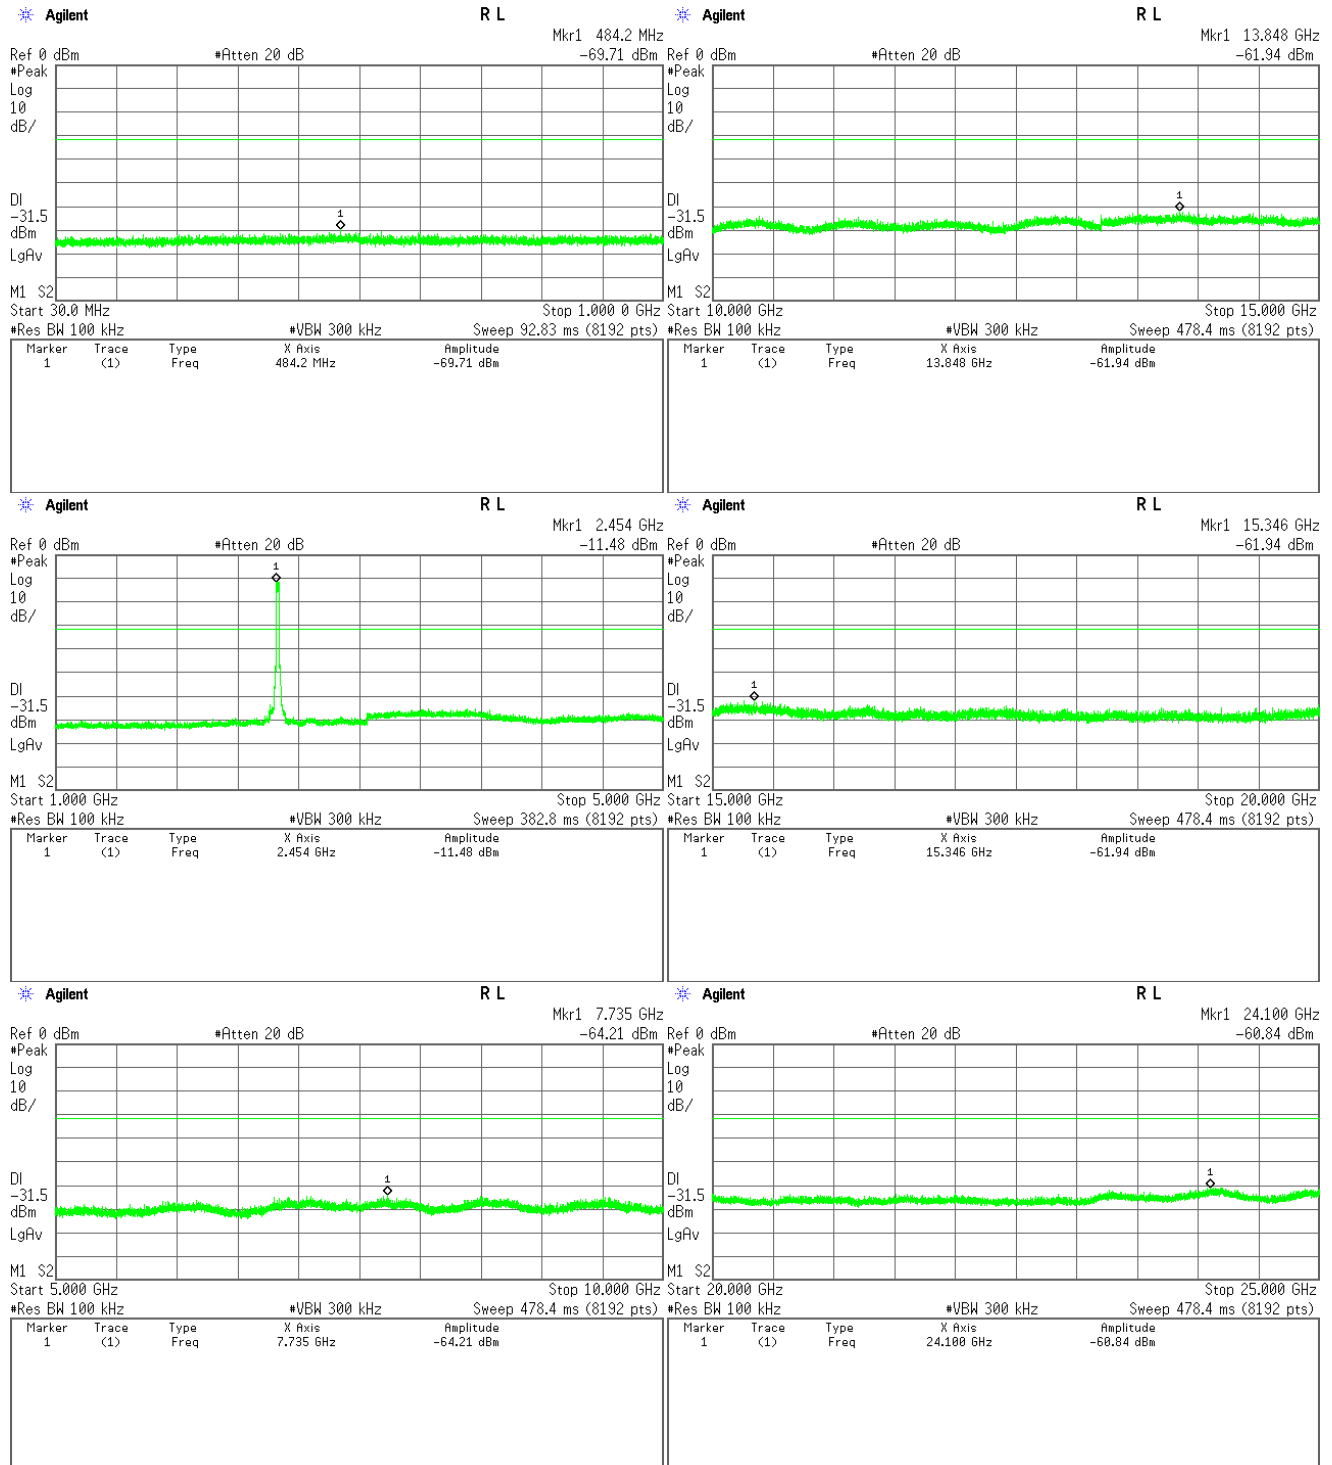


4) Bluetooth Low Energy


Low Channel

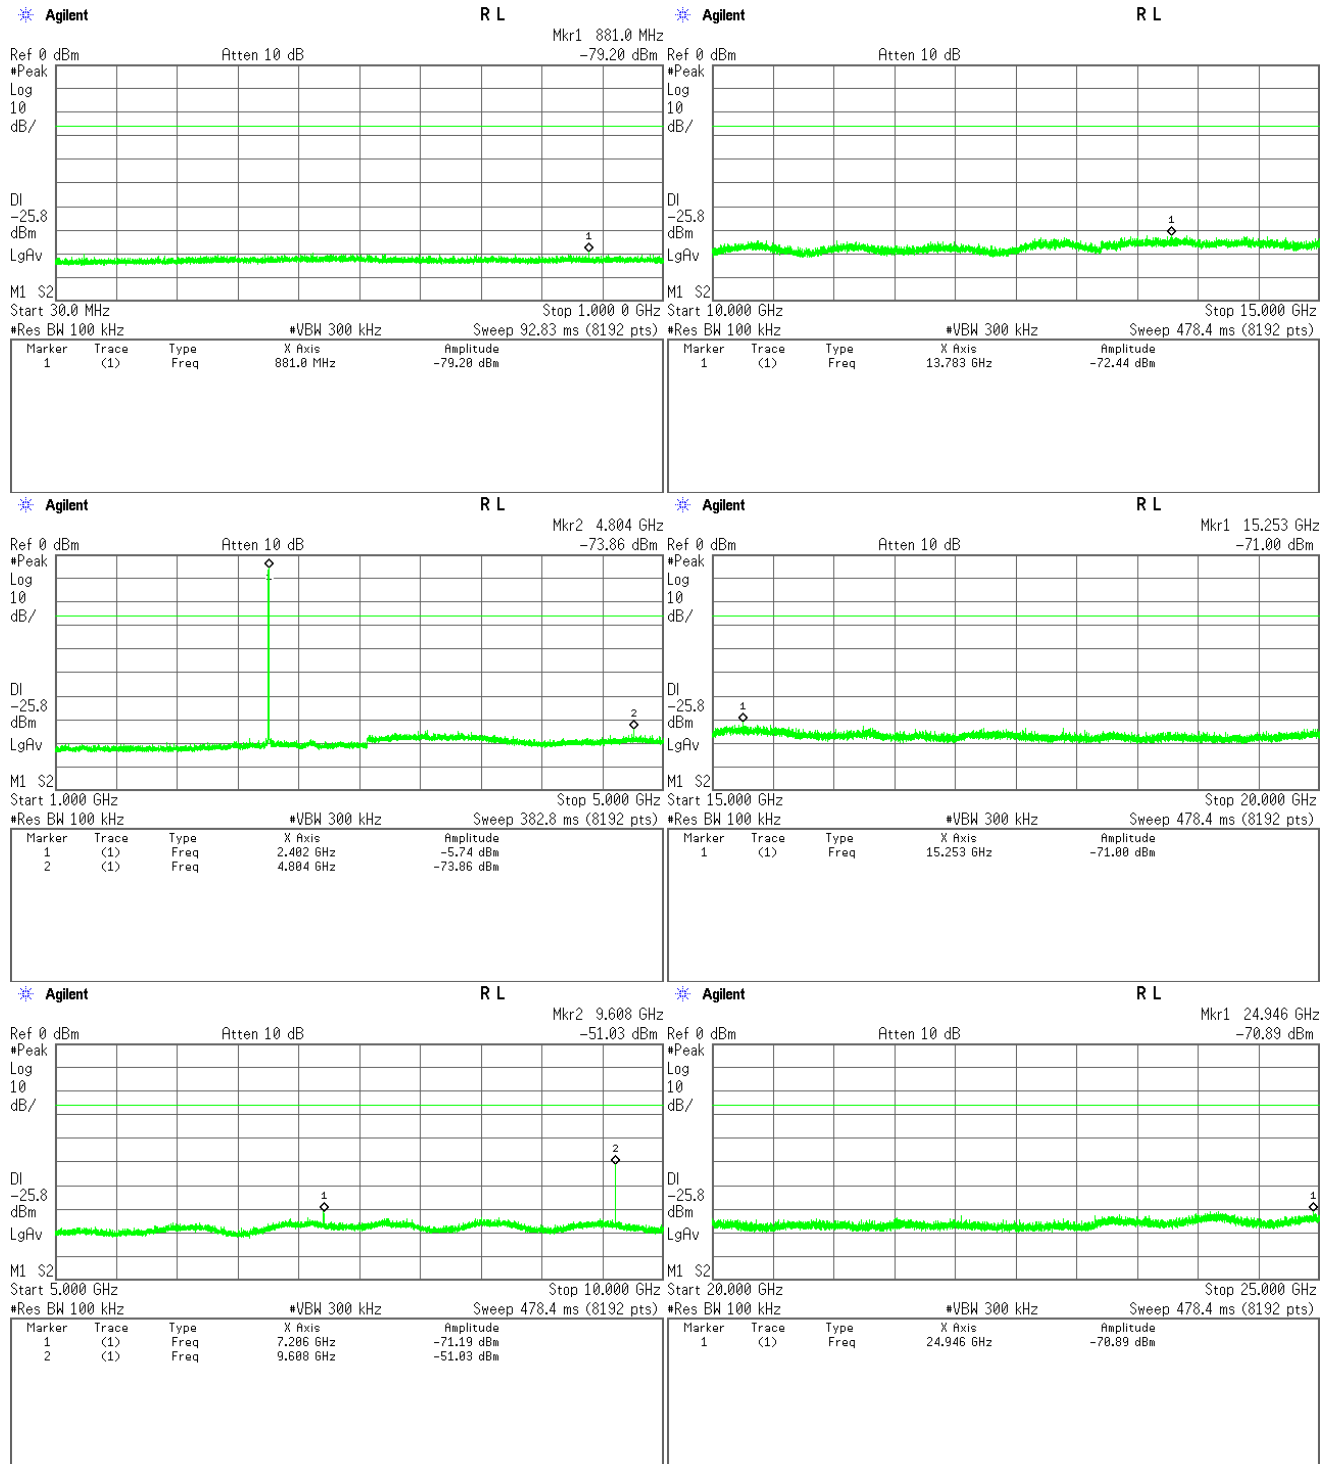

Middle Channel

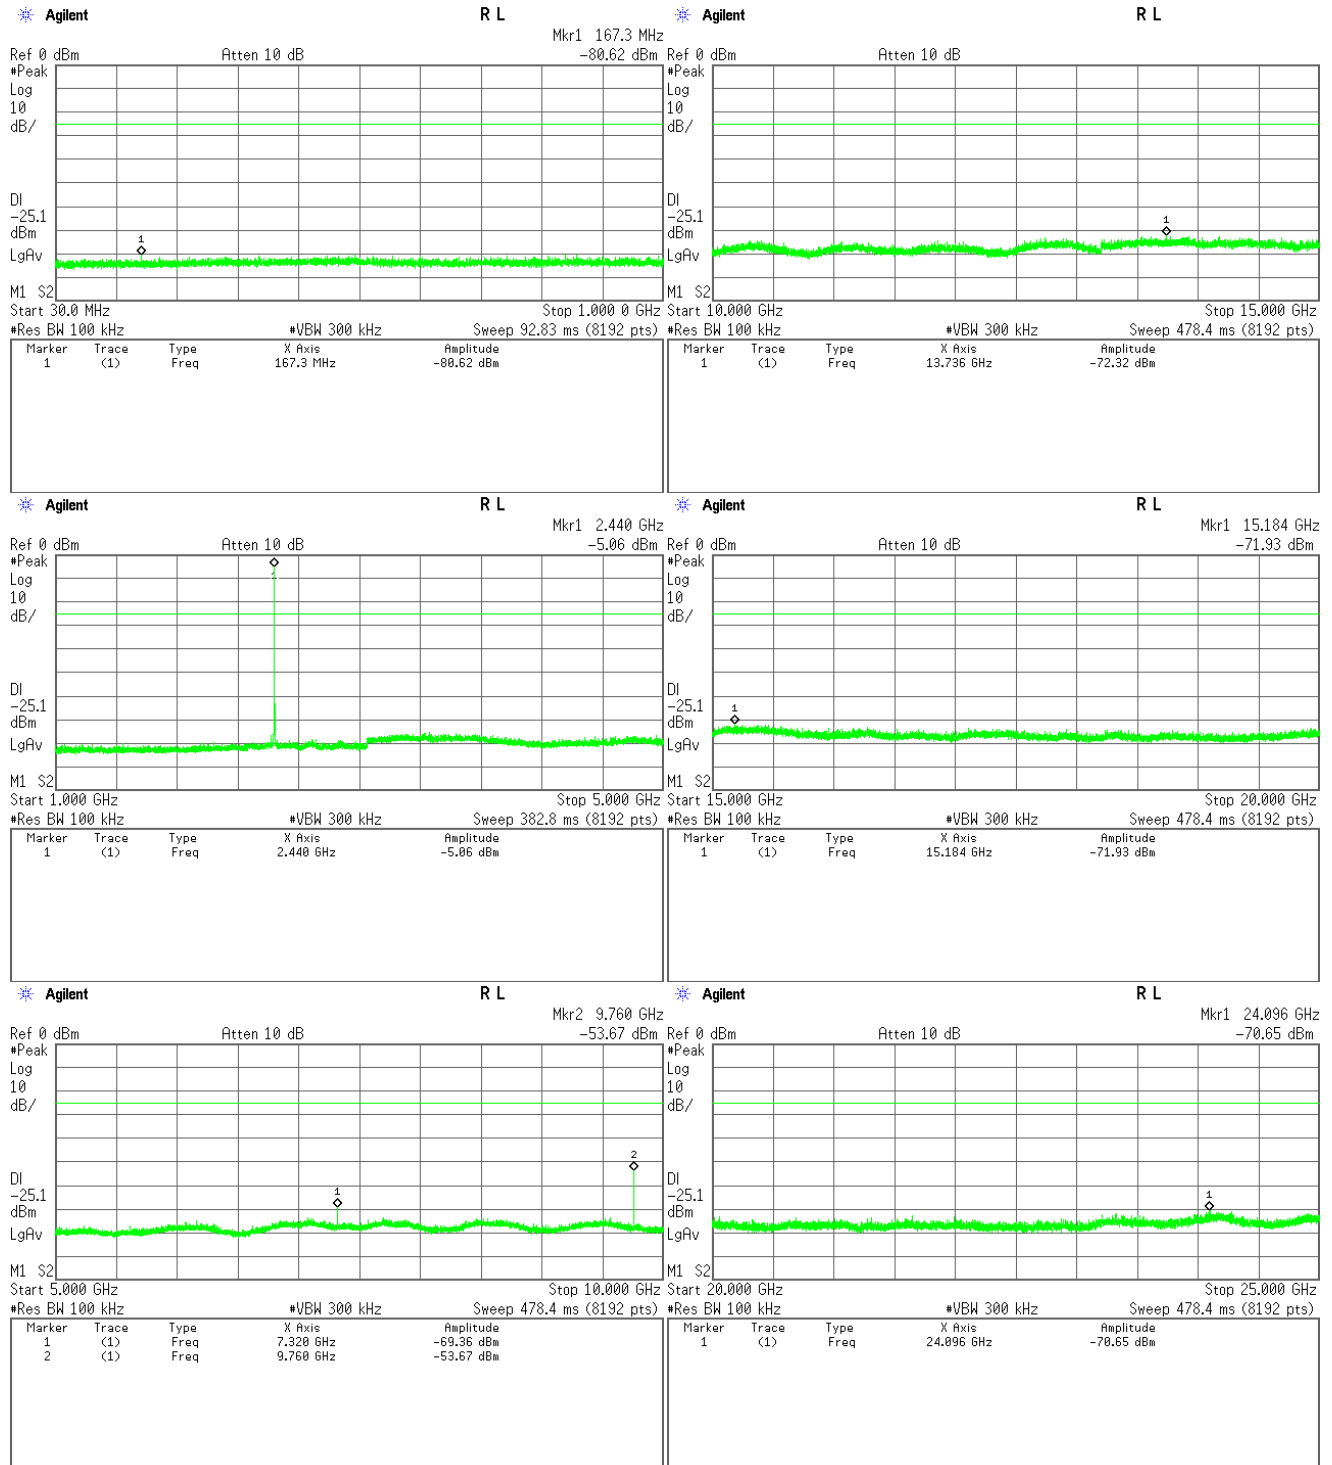


High Channel

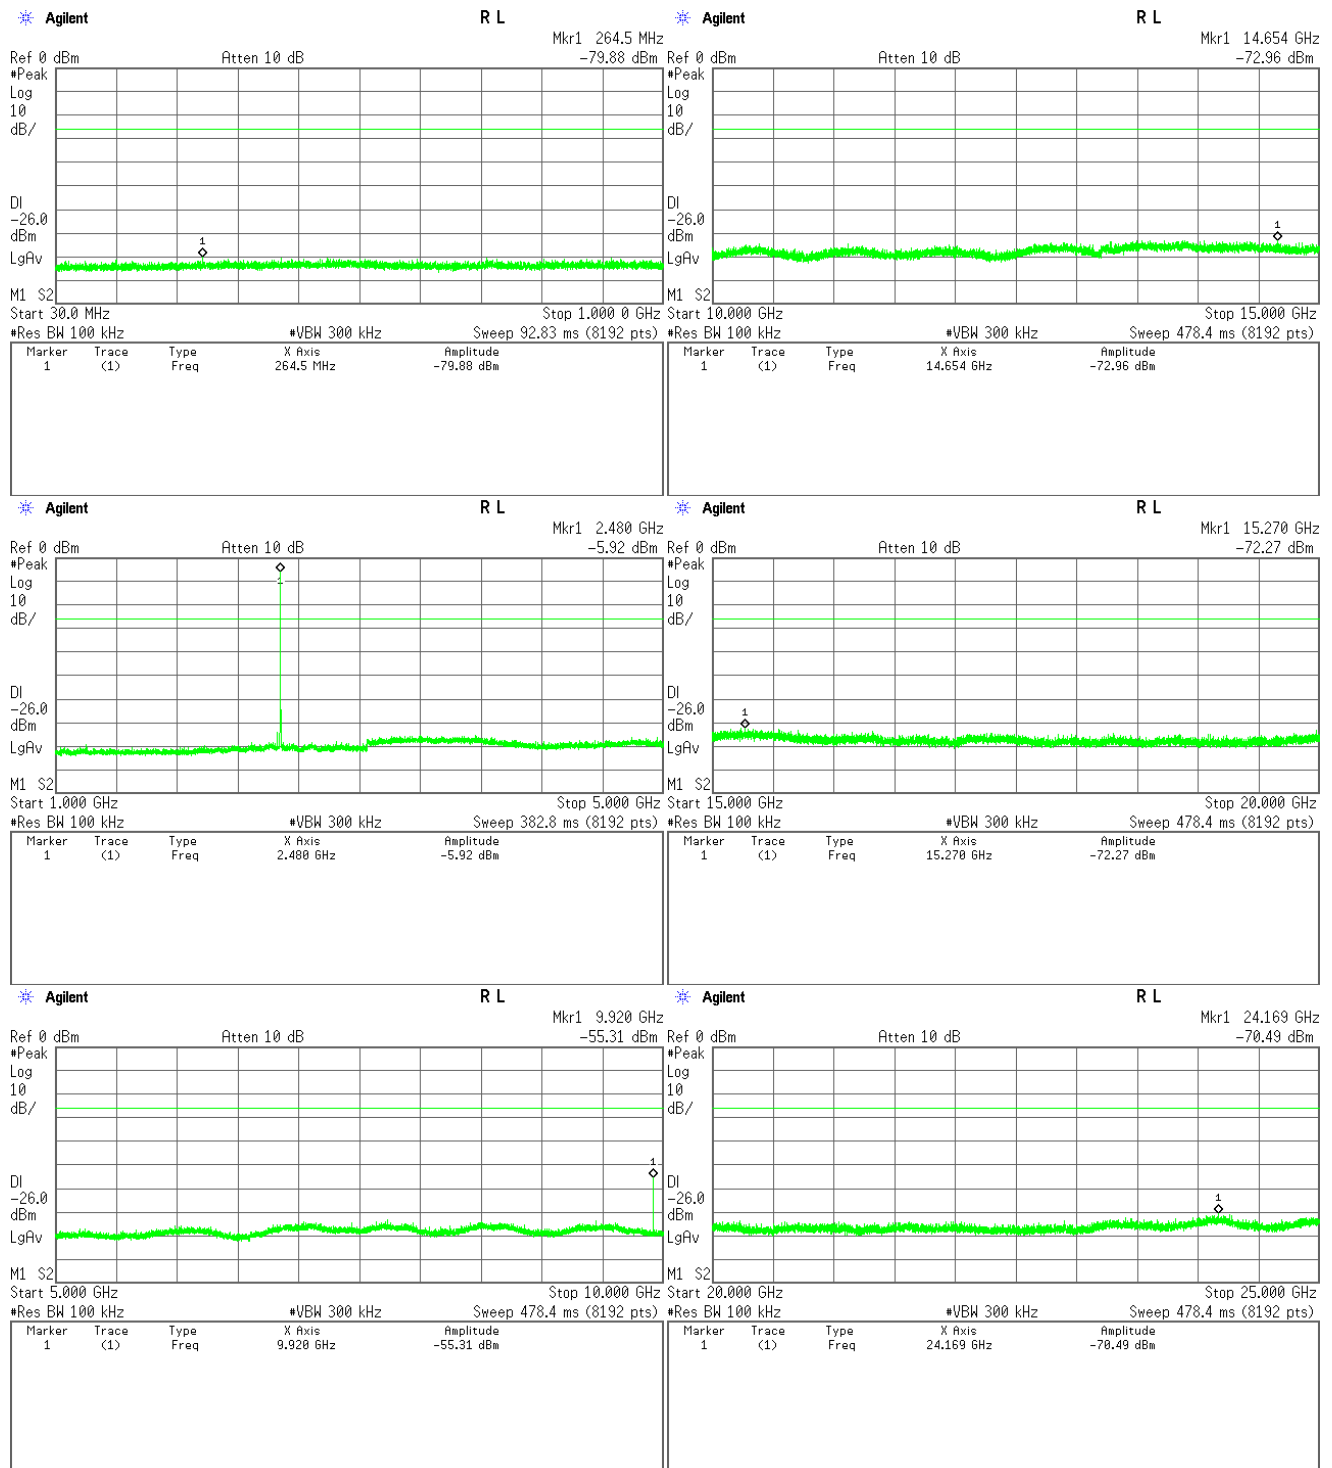


Band-Edge Emission

1) IEEE 802.11b

Low Channel

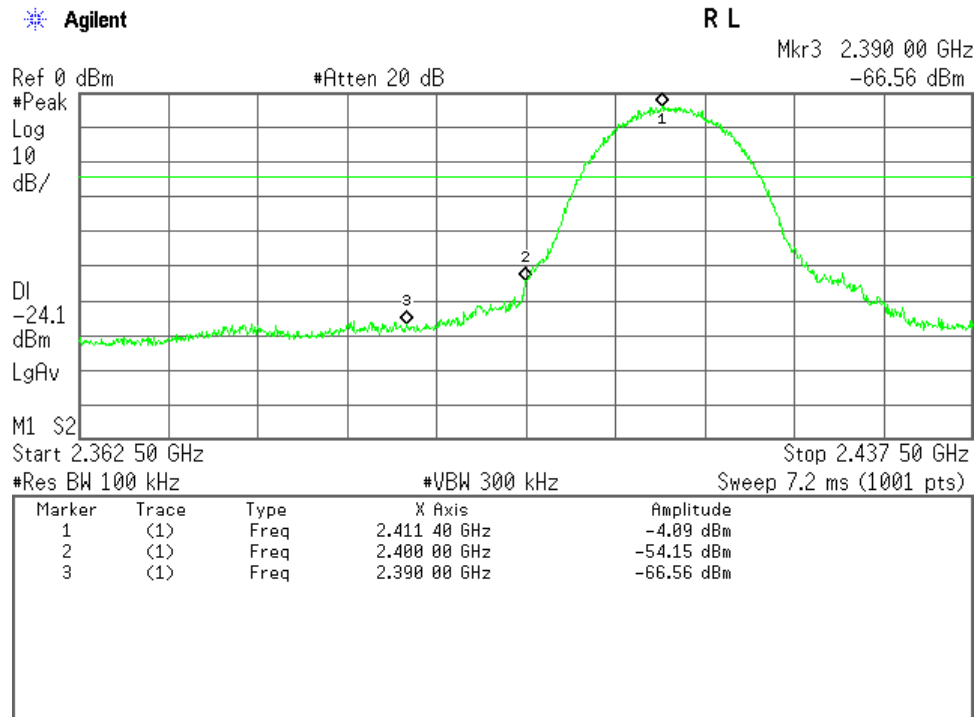


High Channel

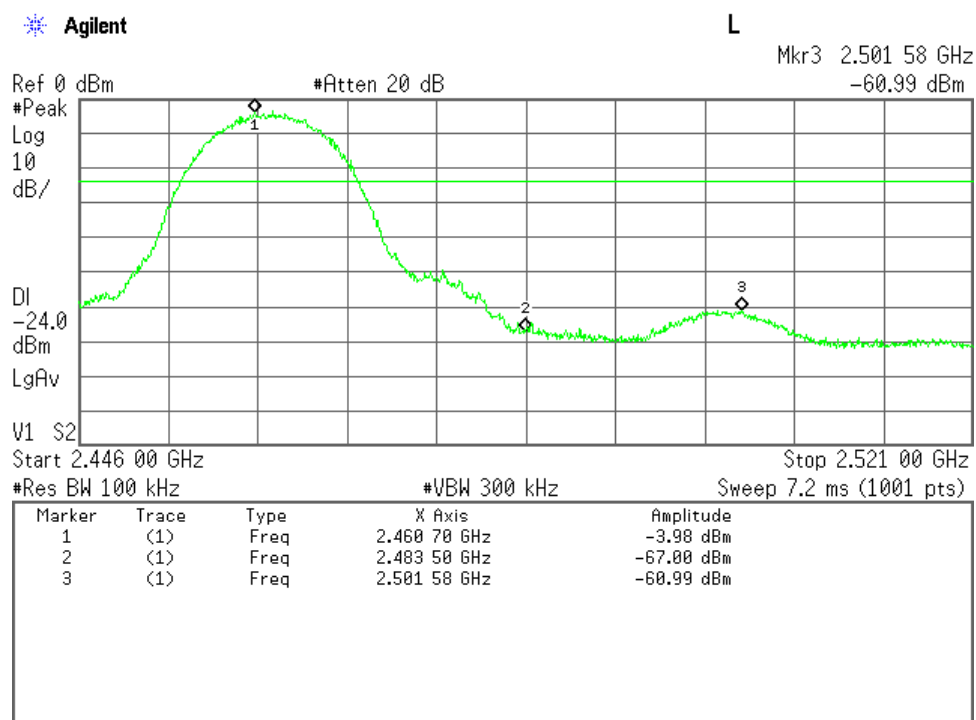


2) IEEE 802.11g

Low Channel

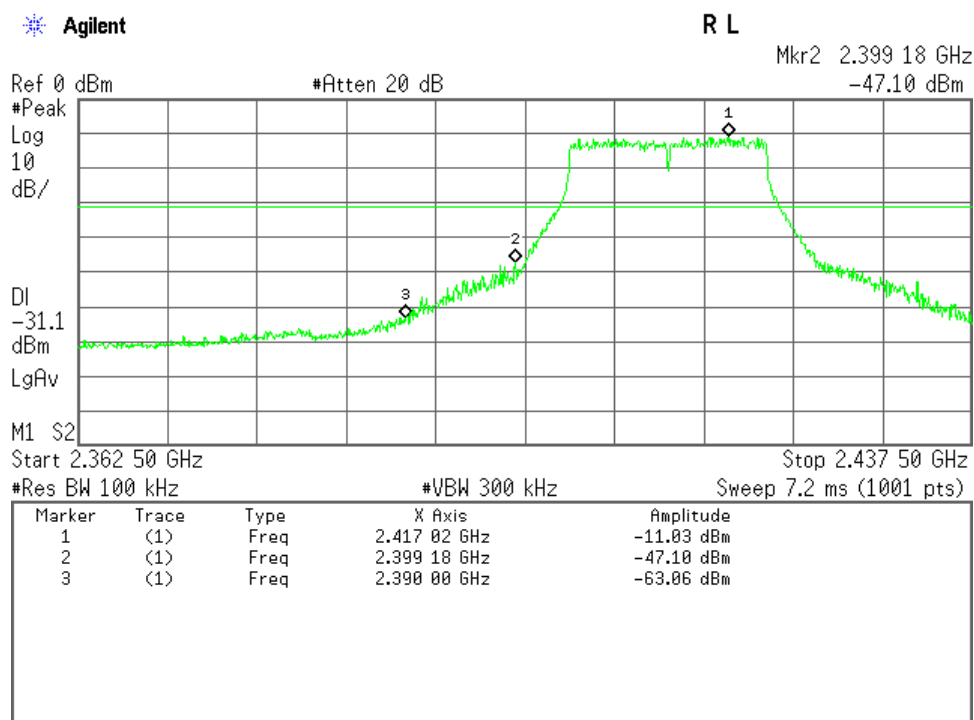


High Channel

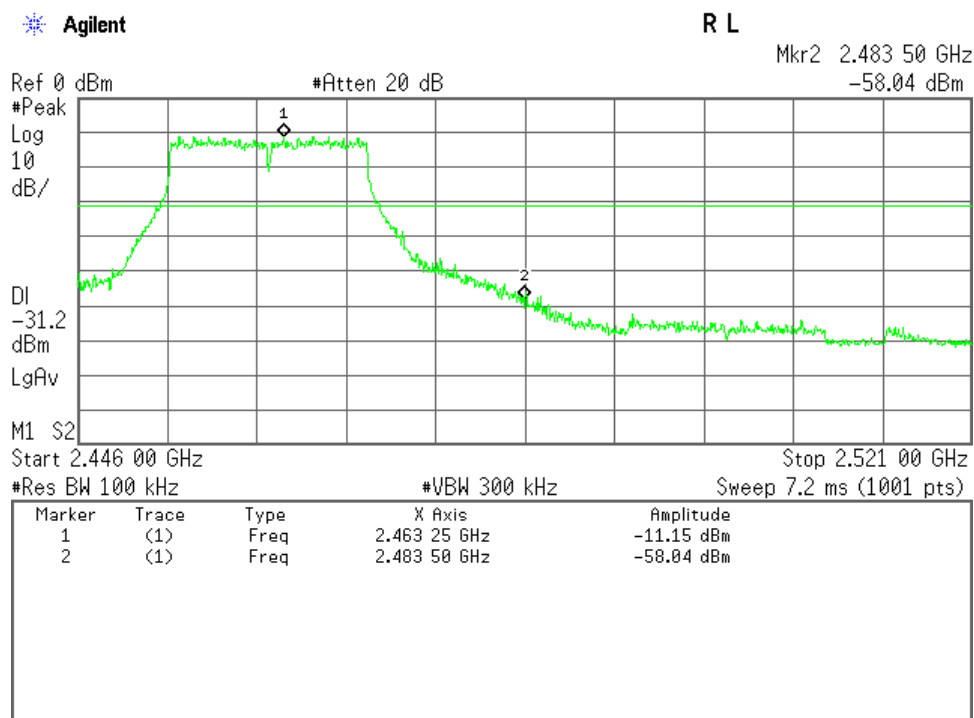


3) IEEE 802.11n

Low Channel

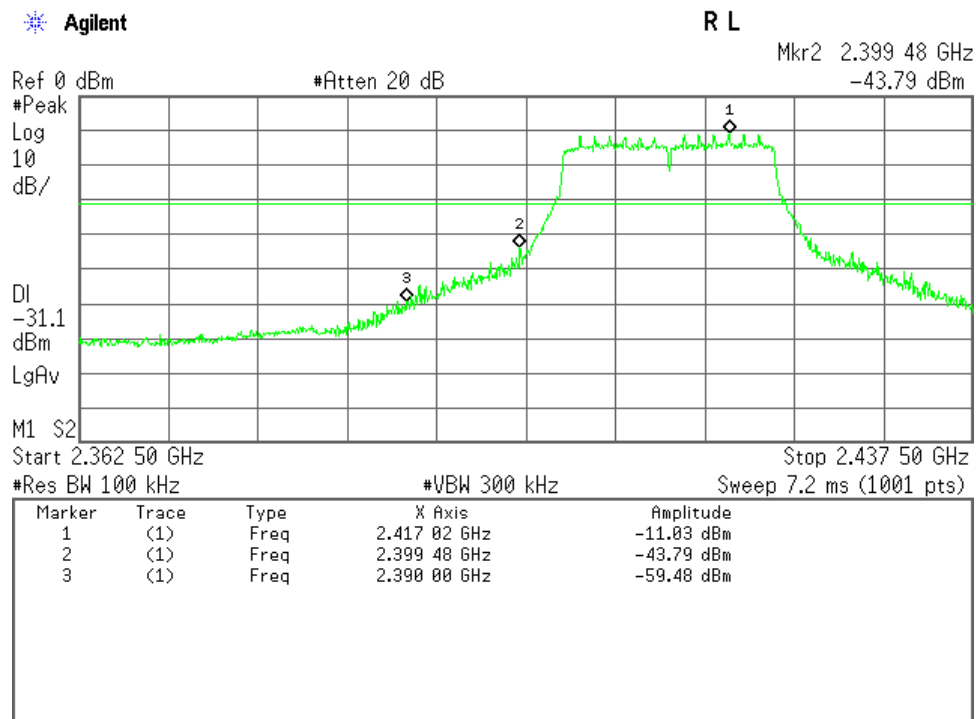


High Channel

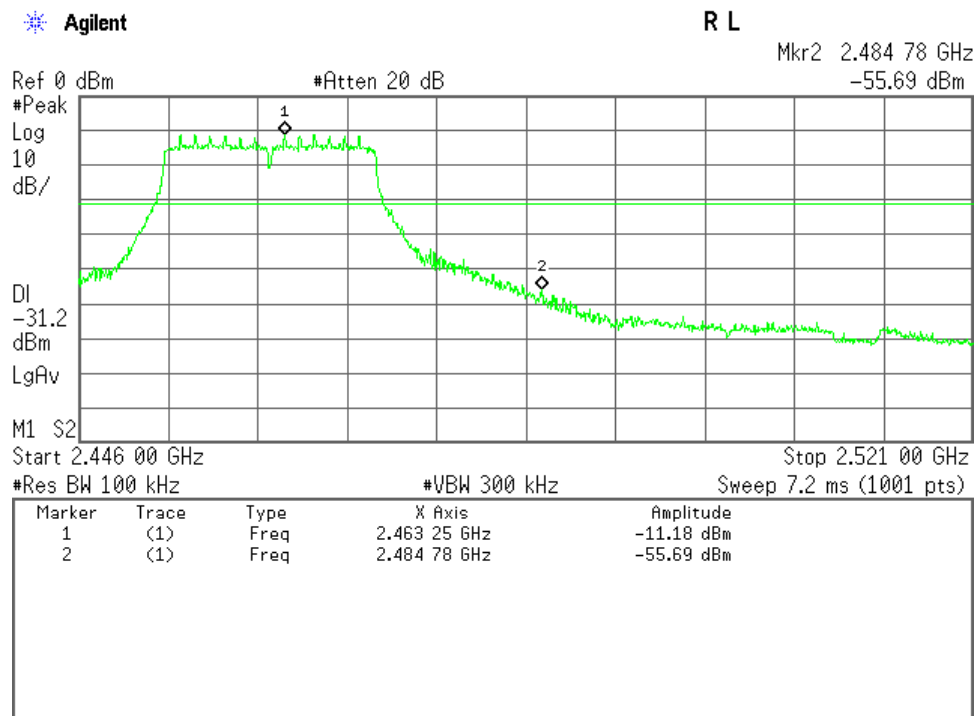


4) Bluetooth Low Energy

Low Channel

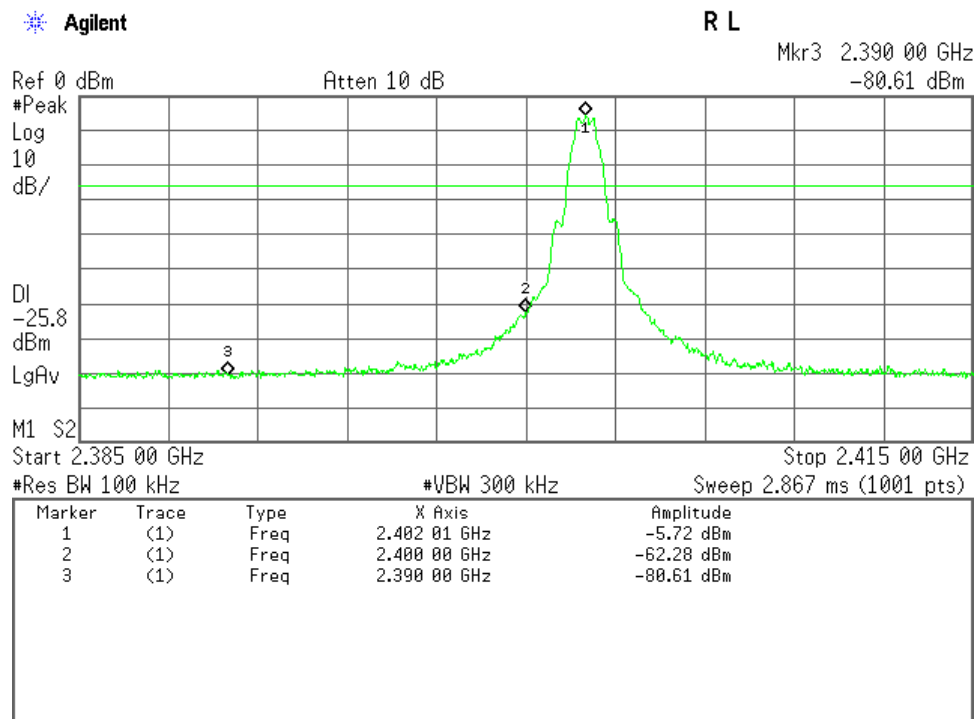

High Channel

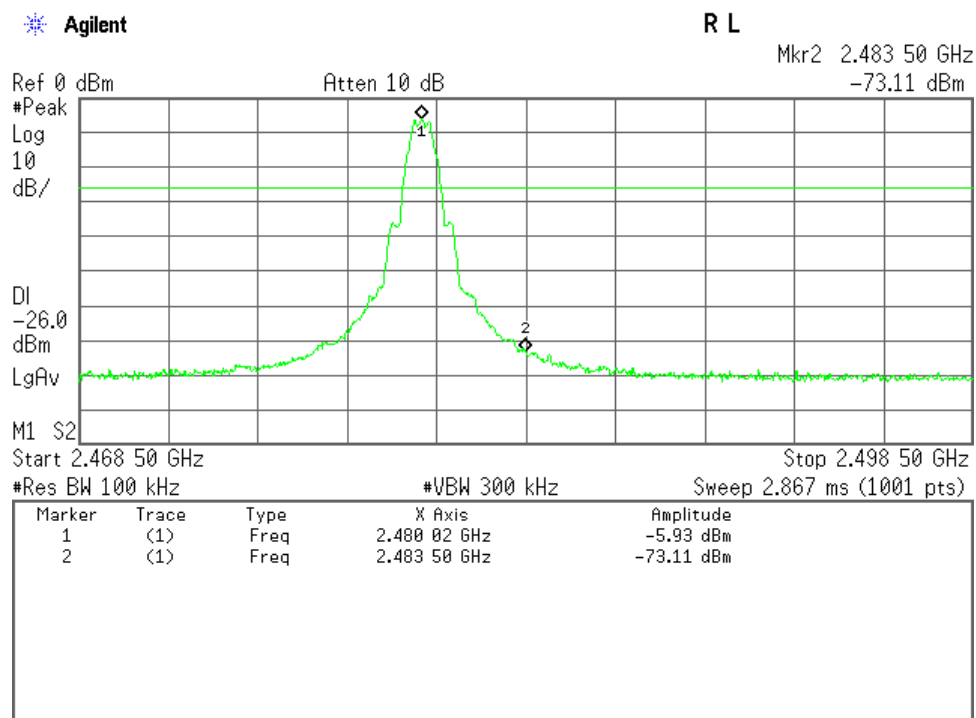

7.8 AC Powerline Conducted Emission

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.8.1 Worst Point and Measurement Uncertainty

Min. Limit Margin (Quasi-Peak) 11.1 dB at 1.40 MHz

Uncertainty of Measurement Results +/-2.7 dB(2 σ)

Remarks : WLAN mode

7.8.2 Test Site and Instruments**7.8.2.1 Test Site**

KITA-KANSAI Testing Center

Test site : SAITO ☐ - Anechoic chamber (A1) ☐ - Measurement room (M1)
☒ - Measurement room (M2) ☐ - Measurement room (M3)
☐ - Shielded room (S1) ☐ - Shielded room (S2)
☐ - Shielded room (S3) ☐ - Shielded room (S4)

7.8.2.2 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2014/5	1 Year
AMN (main)	KNW-407FR	Kyoritsu	D-103	2013/10	1 Year
RF Cable	RG223/U	SUHNER	H-35	2014/6	1 Year


7.8.3 Test Method and Test Setup (Diagrammatic illustration)

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

– Side View –

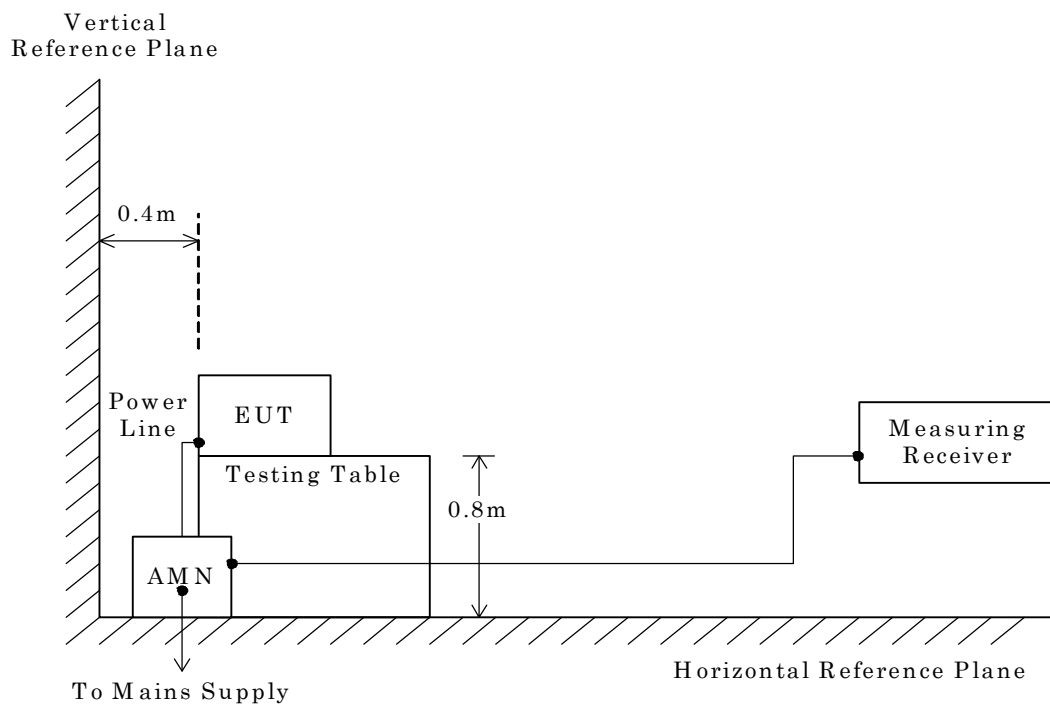

NOTE

AMN : Artificial Mains Network


7.8.4 Test Data

- 1) Mode of EUT : (WLAN) All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE 802.11b, IEEE 802.11g and IEEE 802.11n) has been listed.

Test Date: September 18, 2014

Temp.: 26 °C, Humi.: 40 %

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]	Remarks
		VA		VB		QP	AVE	QP	AVE		
0.21	10.3	33.2	--	32.7	--	63.2	53.2	43.5	--	+19.7	-
0.31	10.2	28.6	--	31.7	--	60.0	50.0	41.9	--	+18.1	-
0.63	10.2	26.4	--	31.9	--	56.0	46.0	42.1	--	+13.9	-
0.74	10.2	26.4	--	31.5	--	56.0	46.0	41.7	--	+14.3	-
1.40	10.3	34.6	16.6	32.2	--	56.0	46.0	44.9	26.9	+11.1	-
2.35	10.4	23.7	--	33.0	13.1	56.0	46.0	43.4	23.5	+12.6	-
4.03	10.4	19.8	--	30.6	--	56.0	46.0	41.0	--	+15.0	-
20.53	11.3	16.5	--	26.4	--	60.0	50.0	37.7	--	+22.3	-

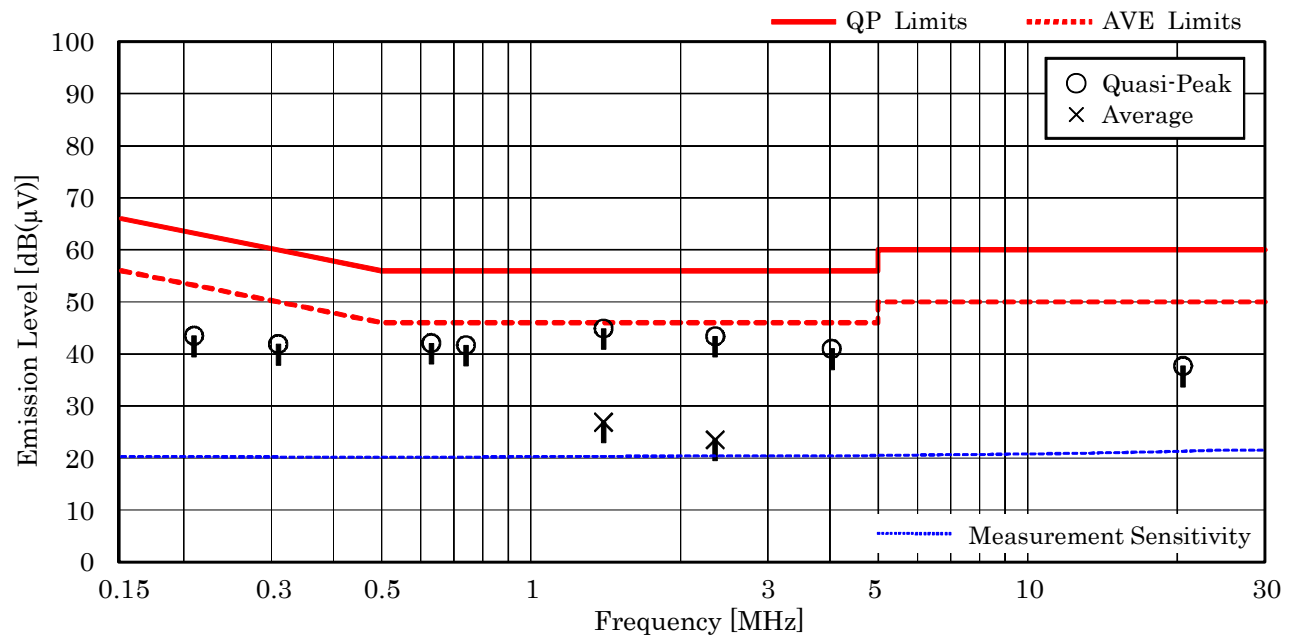

NOTES


- The spectrum was checked from 0.15 MHz to 30 MHz.
- The correction factor includes the AMN insertion loss and the cable loss.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- The symbol of "--" means "not applicable".
- Calculated result at 1.40 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading = 10.3 + 34.6 = 44.9 dB(μV)
- QP : Quasi-Peak Detector / AVE : Average Detector
- Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

2) Mode of EUT : Bluetooth Low Energy

Test Date: September 18, 2014

Temp.: 26 °C, Humi.: 40 %

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]	Remarks
		VA		VB		QP	AVE	QP	AVE		
		QP	AVE	QP	AVE	QP	AVE	QP	AVE		
0.21	10.3	33.2	--	32.7	--	63.2	53.2	43.5	--	+19.7	-
0.31	10.2	28.7	--	31.7	--	60.0	50.0	41.9	--	+18.1	-
0.63	10.2	26.5	--	31.8	--	56.0	46.0	42.0	--	+14.0	-
0.73	10.2	26.0	--	31.2	--	56.0	46.0	41.4	--	+14.6	-
1.40	10.3	34.5	16.8	31.8	--	56.0	46.0	44.8	27.1	+11.2	-
2.03	10.4	23.9	--	32.1	--	56.0	46.0	42.5	--	+13.5	-
4.09	10.4	19.7	--	30.4	--	56.0	46.0	40.8	--	+15.2	-
20.46	11.3	16.9	--	26.6	--	60.0	50.0	37.9	--	+22.1	-

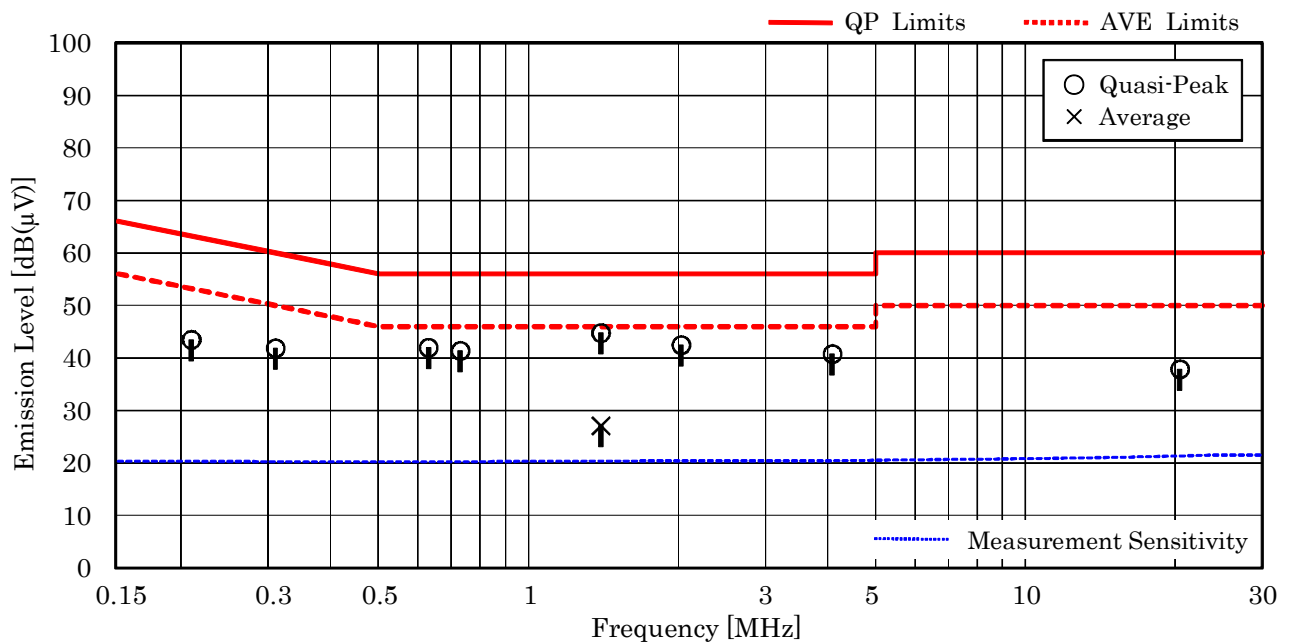

NOTES

- The spectrum was checked from 0.15 MHz to 30 MHz.
- The correction factor includes the AMN insertion loss and the cable loss.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- The symbol of "--" means "not applicable".
- Calculated result at 1.40 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading = 10.3 + 34.5 = 44.8 dB(μV)
- QP : Quasi-Peak Detector / AVE : Average Detector
- Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

7.9 Radiated Emission

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

7.9.1 Worst Point and Measurement Uncertainty

Min. Limit Margin (Average)	<u>6.2</u> dB	at	<u>2483.5</u> MHz
Uncertainty of Measurement Results	9 kHz – 30 MHz	<u>+/-1.9</u>	dB(2σ)
	30 MHz – 300 MHz	<u>+/-4.3</u>	dB(2σ)
	300 MHz – 1000 MHz	<u>+/-5.4</u>	dB(2σ)
	1 GHz – 6 GHz	<u>+/-4.6</u>	dB(2σ)
	6 GHz – 18 GHz	<u>+/-5.2</u>	dB(2σ)
	18 GHz – 40 GHz	<u>+/-5.4</u>	dB(2σ)

Remarks : IEEE802.11n mode, Z axis position.

7.9.2 Test Site and Instruments

7.9.2.1 Test Site

KITA-KANSAI Testing Center SAITO EMC Branch

☐ - Anechoic chamber A1

☒ - Anechoic chamber A2

7.9.2.2 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2014/5	1 Year
Loop Antenna	HFH2-Z2	Rohde & Schwarz	C-2	2014/8	1 Year
RF Cable	RG213/U	SUHNER	H-28	2014/8	1 Year
Biconical Antenna	VHA9103/BBA9106	Schwarzbeck	C-30	2014/5	1 Year
Log-periodic Antenna	UHALP9108-A1	Schwarzbeck	C-31	2014/5	1 Year
RF Cable	S 10162 B-11 etc.	SUHNER	H-4	2014/4	1 Year
Site Attenuation	--	----	H-15	2014/1	1 Year
Pre-Amplifier	TPA0118-36	TOYO	A-37	2014/5	1 Year
Pre-Amplifier	RP1826G-45H	EMCS	A-53	2014/3	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2014/7	1 Year
Horn Antenna	91889-2	EATON	C-41-2	2014/7	1 Year
Horn Antenna	3160-04	EMCO	C-55	2014/6	1 Year
Horn Antenna	3160-05	EMCO	C-56	2014/6	1 Year
Horn Antenna	3160-06	EMCO	C-57	2014/6	1 Year
Horn Antenna	3160-07	EMCO	C-58	2014/6	1 Year
Horn Antenna	3160-08	EMCO	C-59	2014/6	1 Year
Horn Antenna	3160-09	EMCO	C-48	2014/6	1 Year
Attenuator	54A-10	Weinschel	D-29	2013/10	1 Year
Attenuator	2-10	Weinschel	D-79	2013/11	1 Year
Band Rejection Filter	BRM50701	MICRO-TRONICS	D-93	2014/2	1 Year
RF Cable	SUCOFLEX102E	HUBER+SUHNER	C-75	2014/2	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-66	2014/1	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-67	2014/1	1 Year
RF Cable	SUCOFLEX102EA	SUHNER	C-69	2014/2	1 Year
SVSWR	--	----	H-19	2014/2	1 Year
Pre-Amplifier	310N	SONOMA	A-17	2014/4	1 Year

7.9.3 Test Method and Test Setup (Diagrammatic illustration)


7.9.3.1 Radiated Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

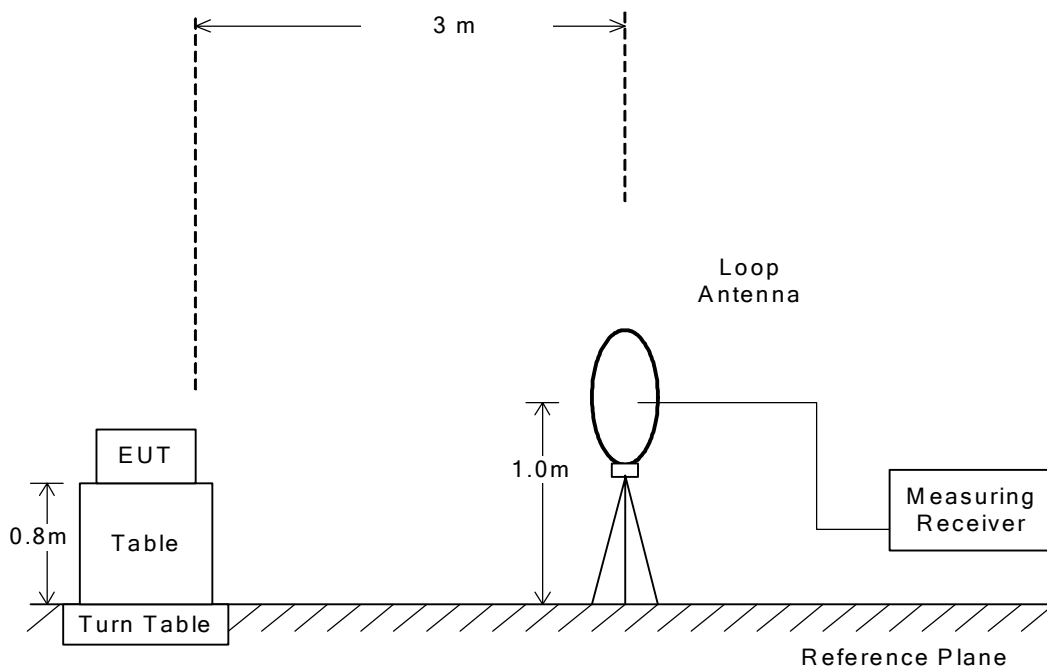


7.9.3.2 Radiated Emission 30 MHz – 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

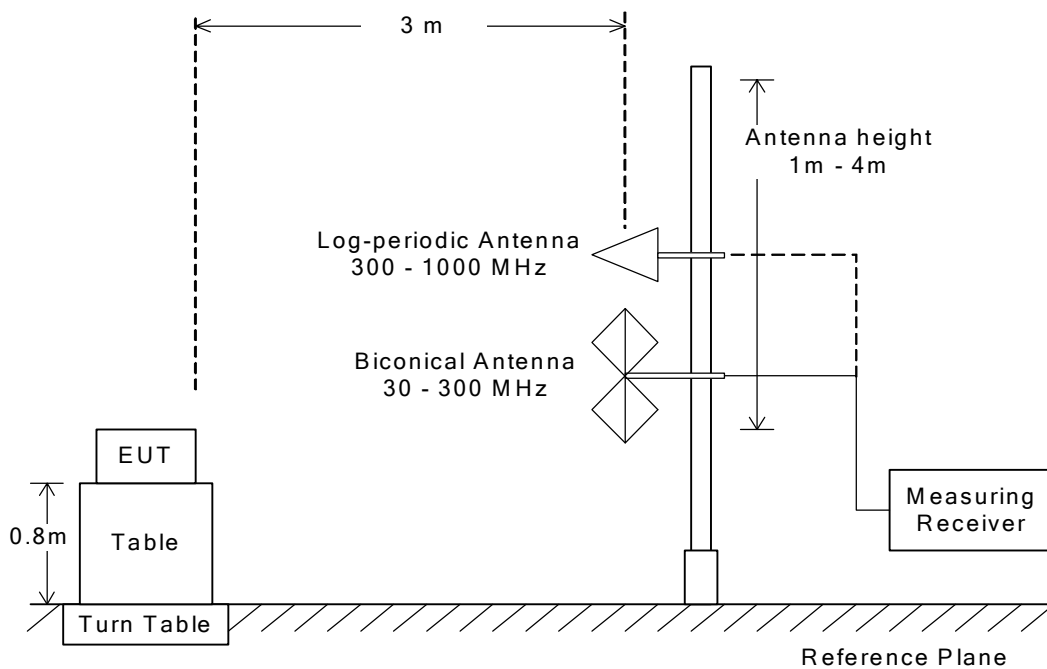

7.9.3.3 Radiated Emission above 1 GHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.


This configurations was used for the final tests.

The setting of the measuring instruments are shown as follows:

Type	Peak	Average
Detector Function	Peak	Peak
Res. Bandwidth	1 MHz	1 MHz
Video Bandwidth	3 MHz	$\geq 1/T * 1)$
Video Filtering	Linear Voltage	Linear Voltage
Sweep Time	AUTO	AUTO
Trace	Max Hold	Max Hold

Note: 1. T: Minimum transmission duration

– Side View –

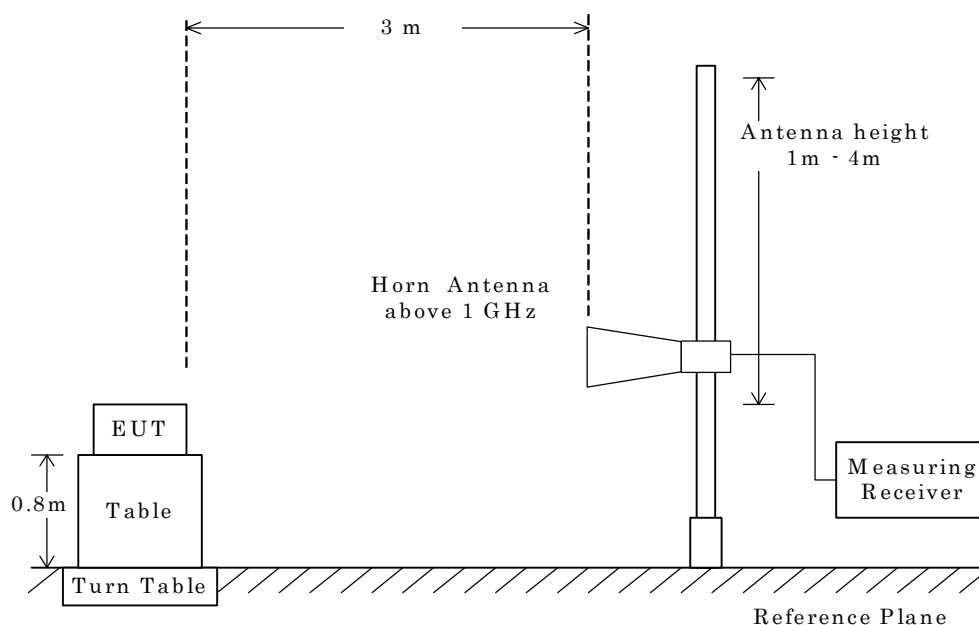

NOTE

The antenna height is scanned depending on the EUT's size and mounting height.

7.9.4 Test Data


7.9.4.1 Band-edge Compliance

Test Date : September 13, 2014

Temp.:26°C, Humi:52%

Mode of EUT : TX(1ch: 2412 MHz, (IEEE 802.11b))


Antenna Polarization : Horizontal

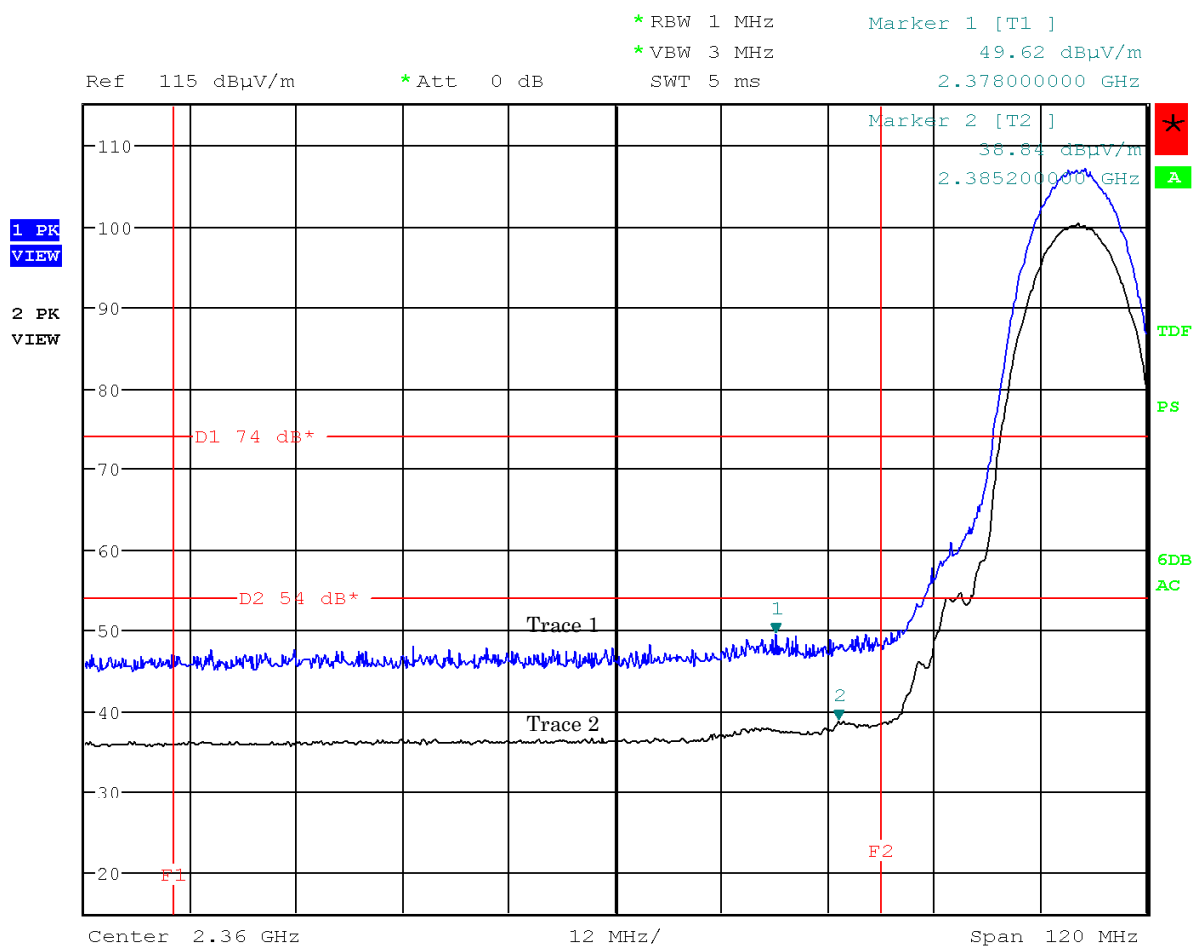

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX(1ch: 2412 MHz, (IEEE 802.11b))


Antenna Polarization : Vertical

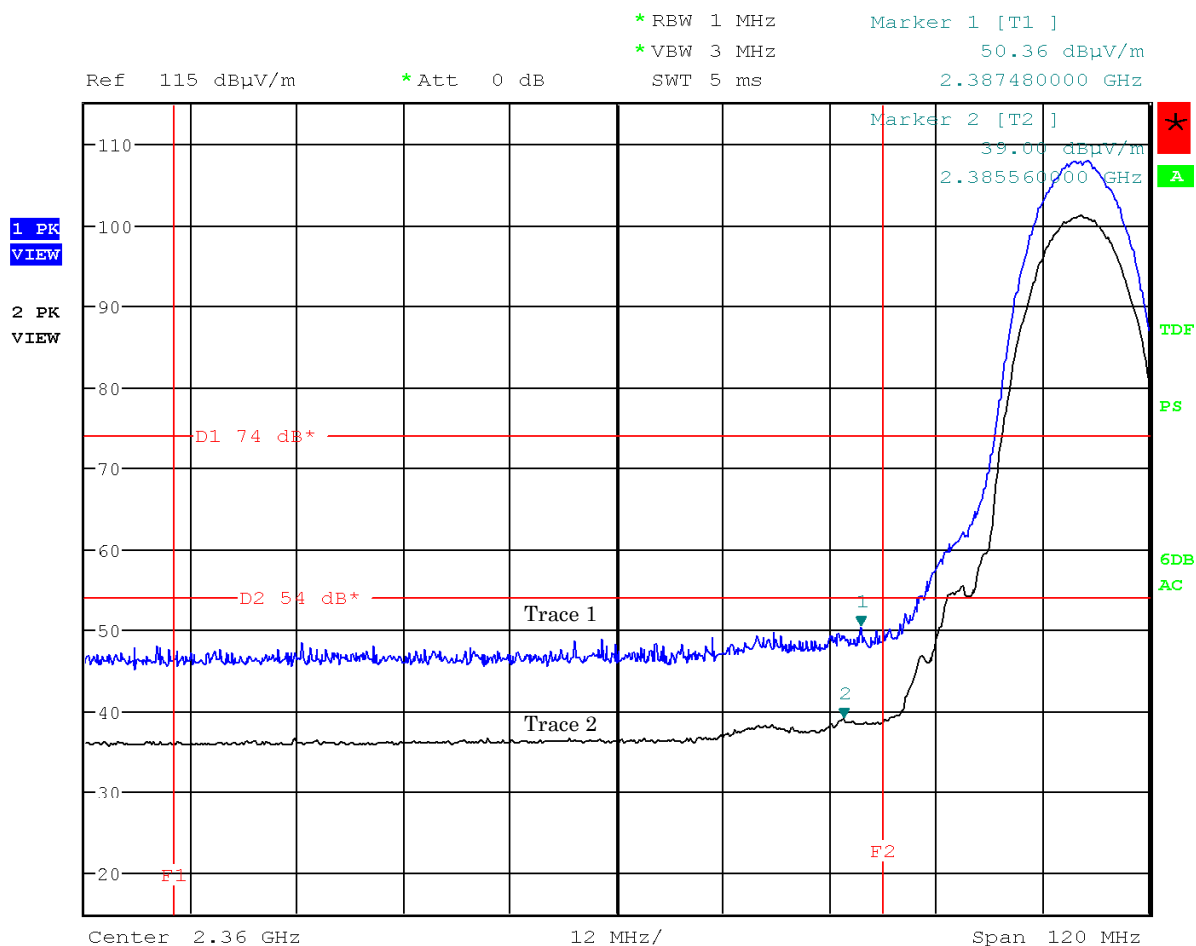

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX(11ch: 2462 MHz, (IEEE 802.11b))


Antenna Polarization : Horizontal

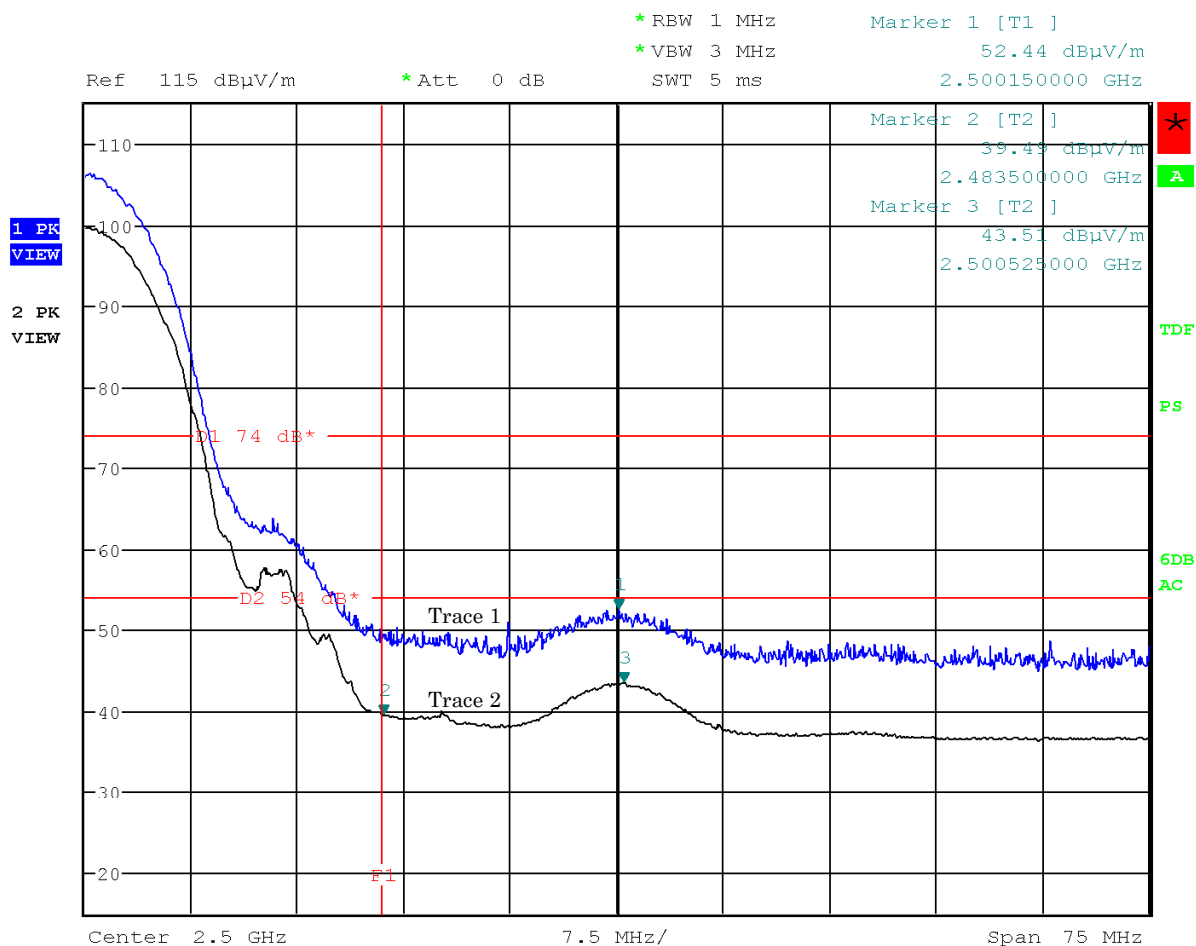

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX(11ch: 2462 MHz, (IEEE 802.11b))


Antenna Polarization : Vertical

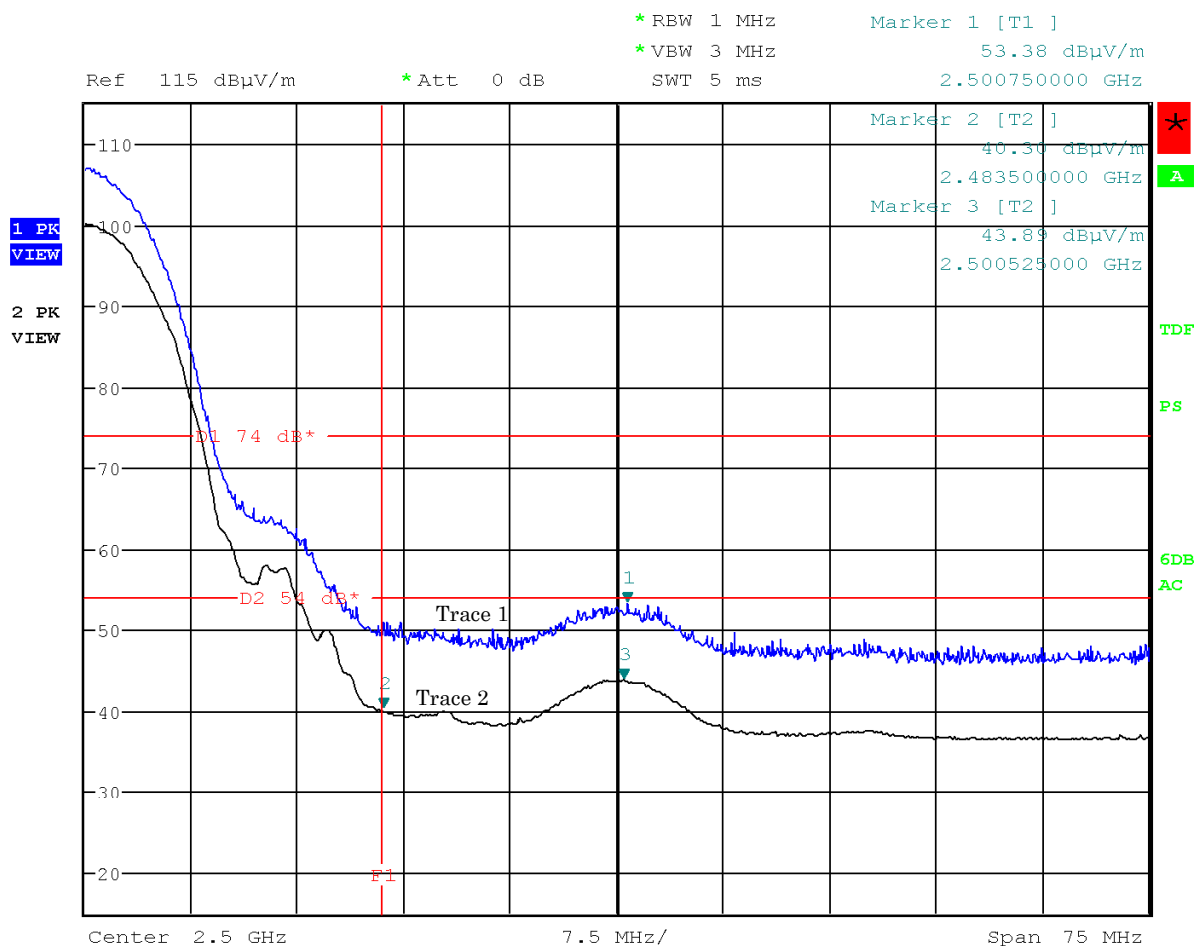

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX(1ch: 2412 MHz, (IEEE 802.11g))


Antenna Polarization : Horizontal

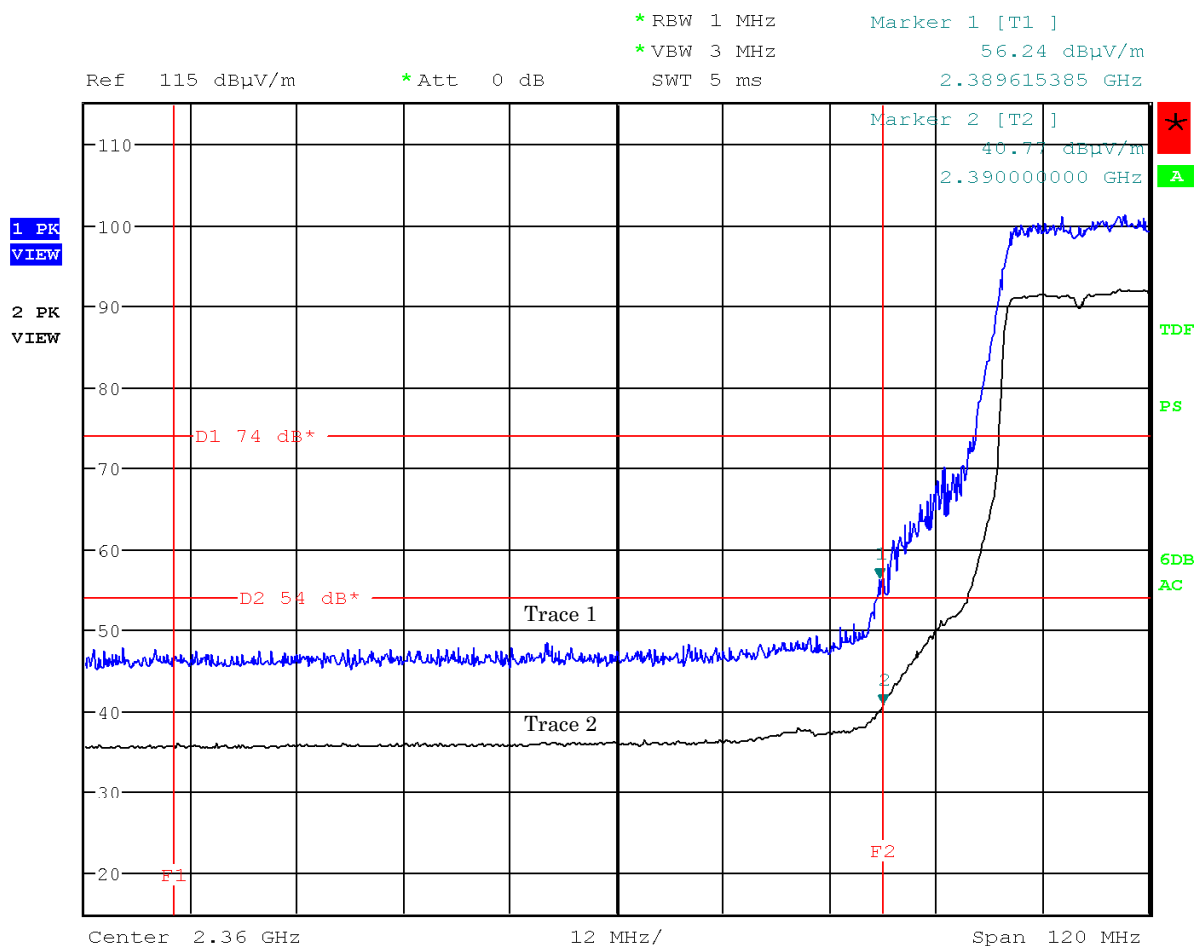

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX(1ch: 2412 MHz, (IEEE 802.11g))


Antenna Polarization : Vertical

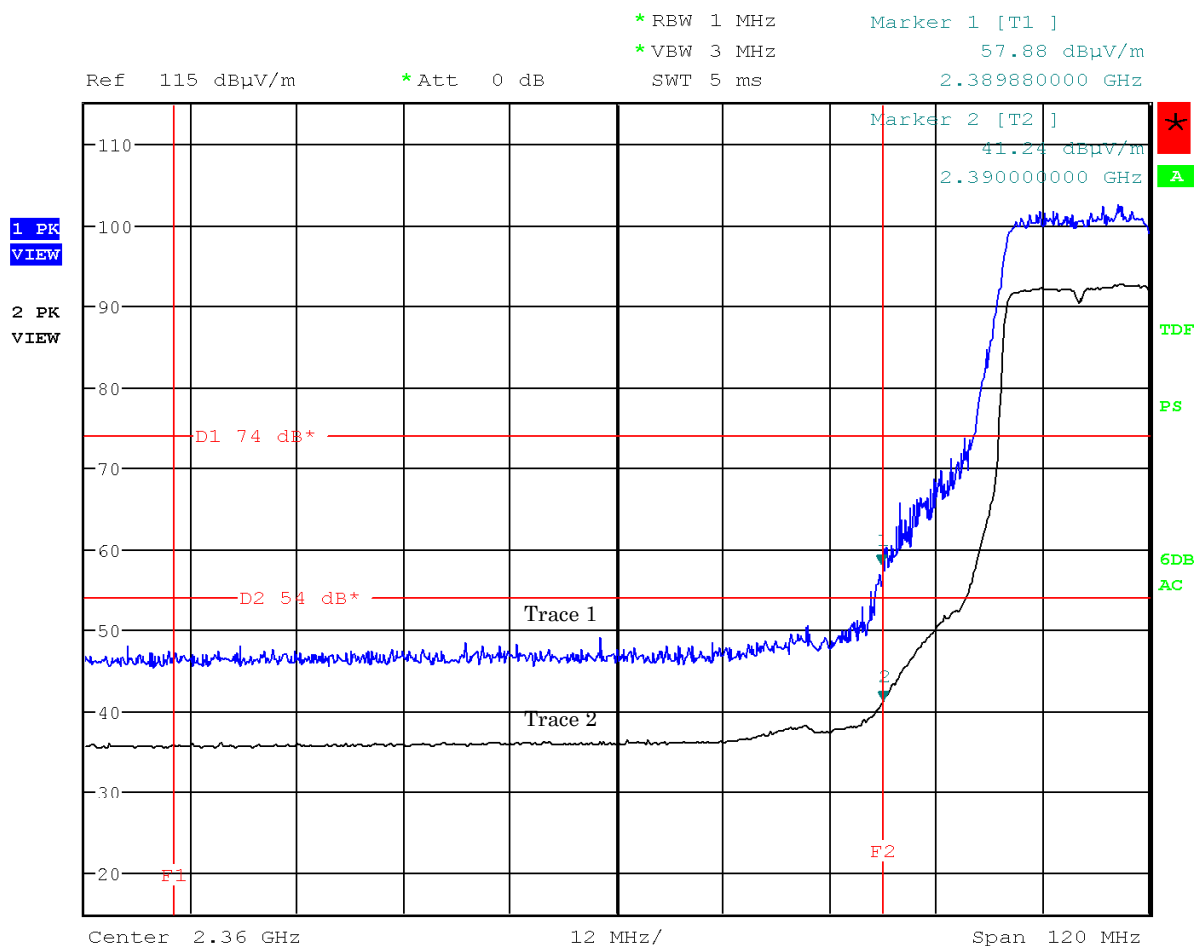

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX(11ch: 2462 MHz, (IEEE 802.11g))


Antenna Polarization : Horizontal

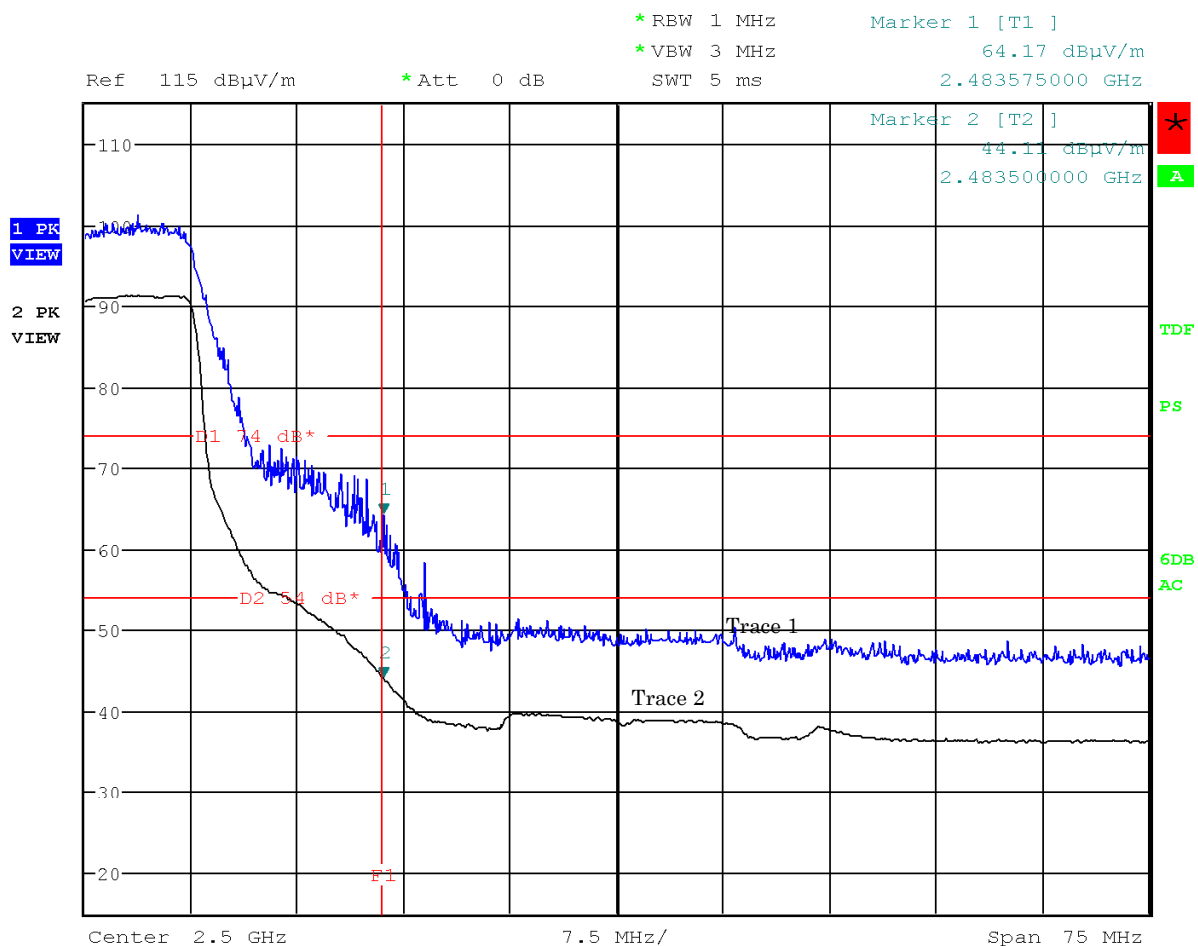

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX(11ch: 2462 MHz, (IEEE 802.11g))


Antenna Polarization : Vertical

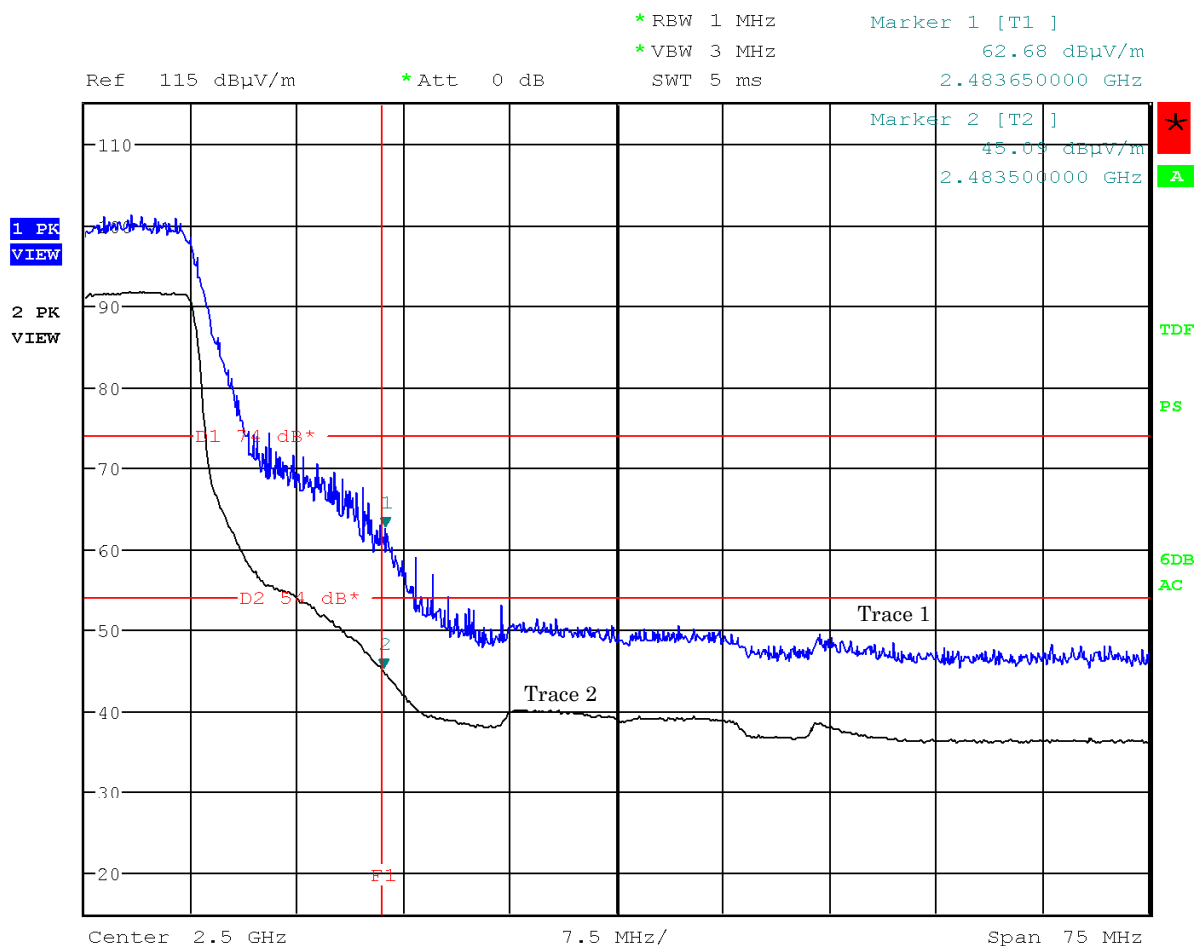

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX(1ch: 2412 MHz, (IEEE 802.11n))


Antenna Polarization : Horizontal

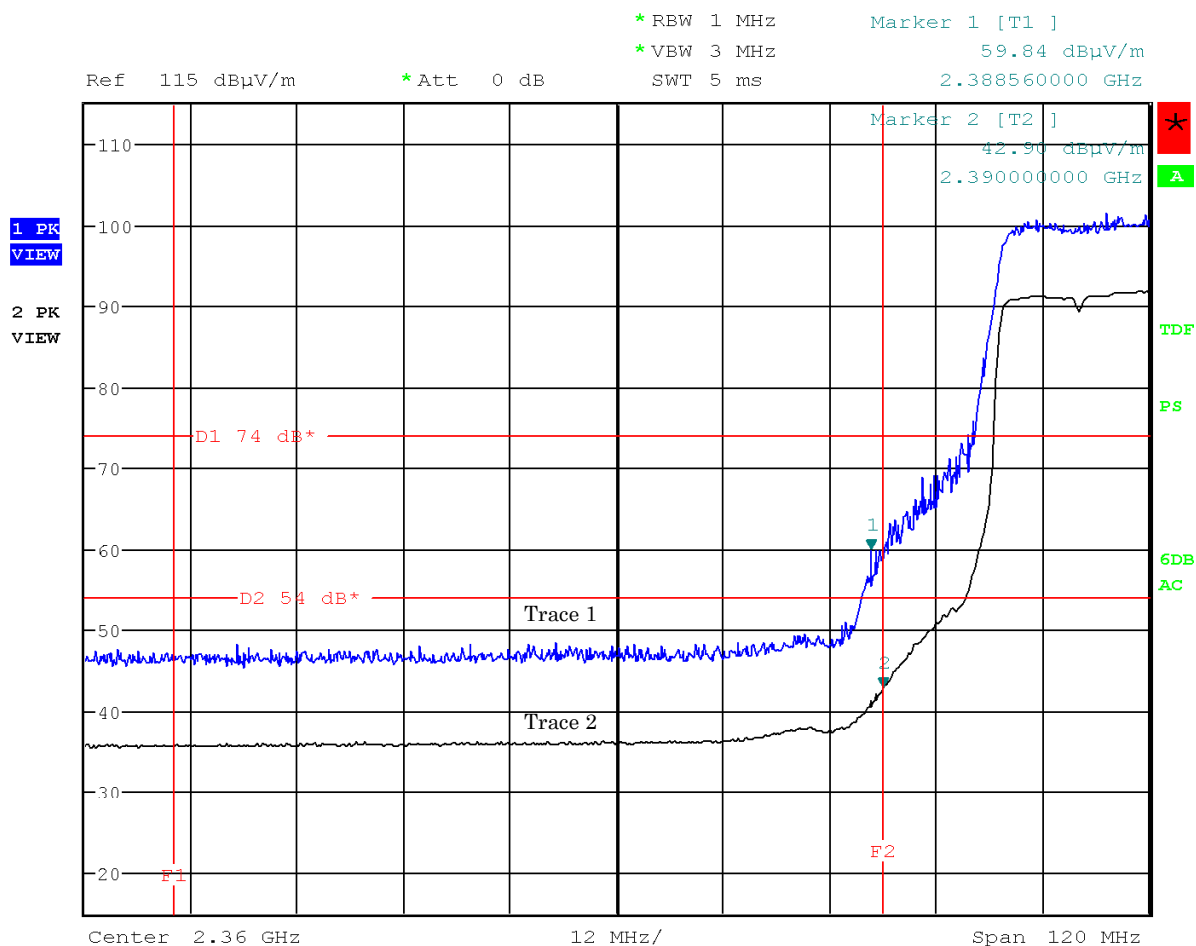

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX(1ch: 2412 MHz, (IEEE 802.11n))


Antenna Polarization : Vertical

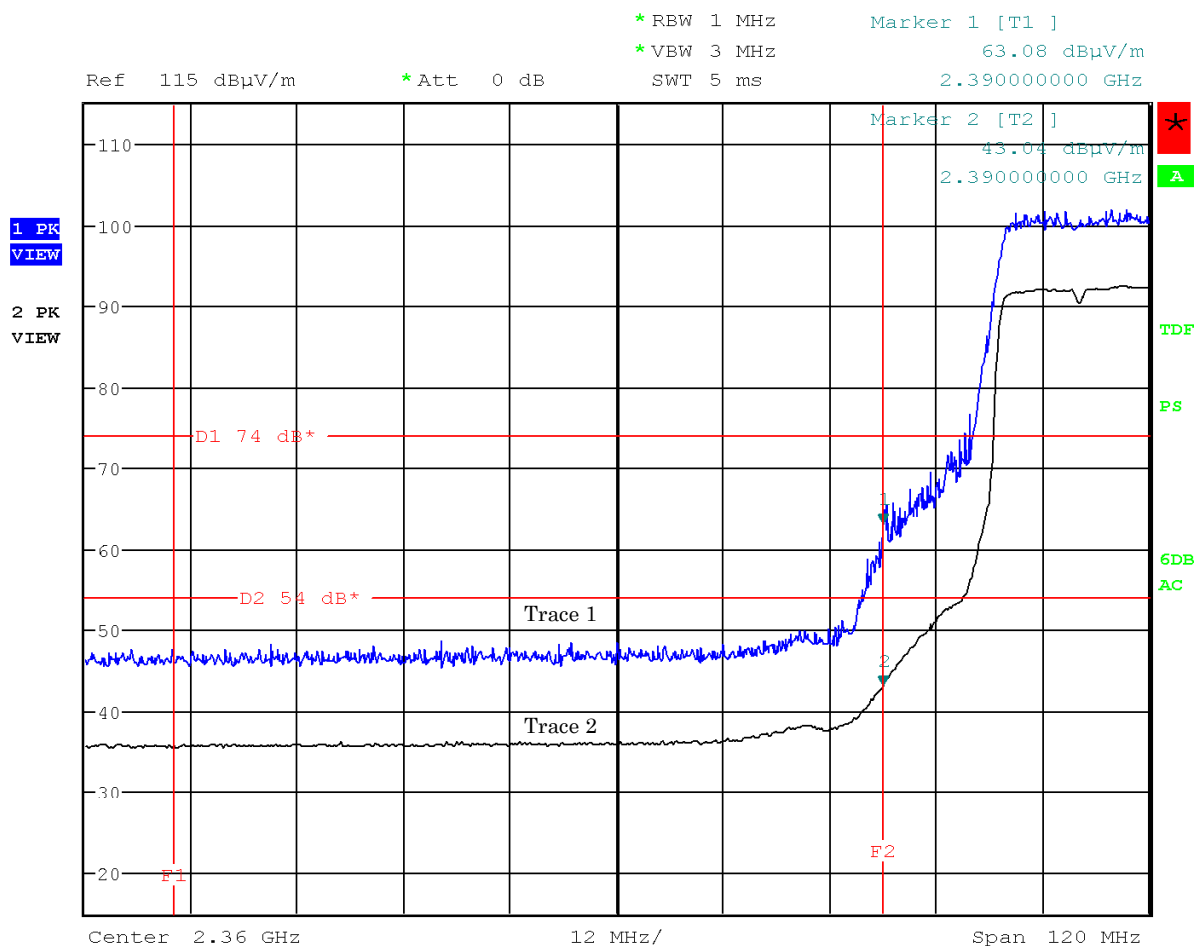

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX(11ch: 2462 MHz, (IEEE 802.11n))


Antenna Polarization : Horizontal

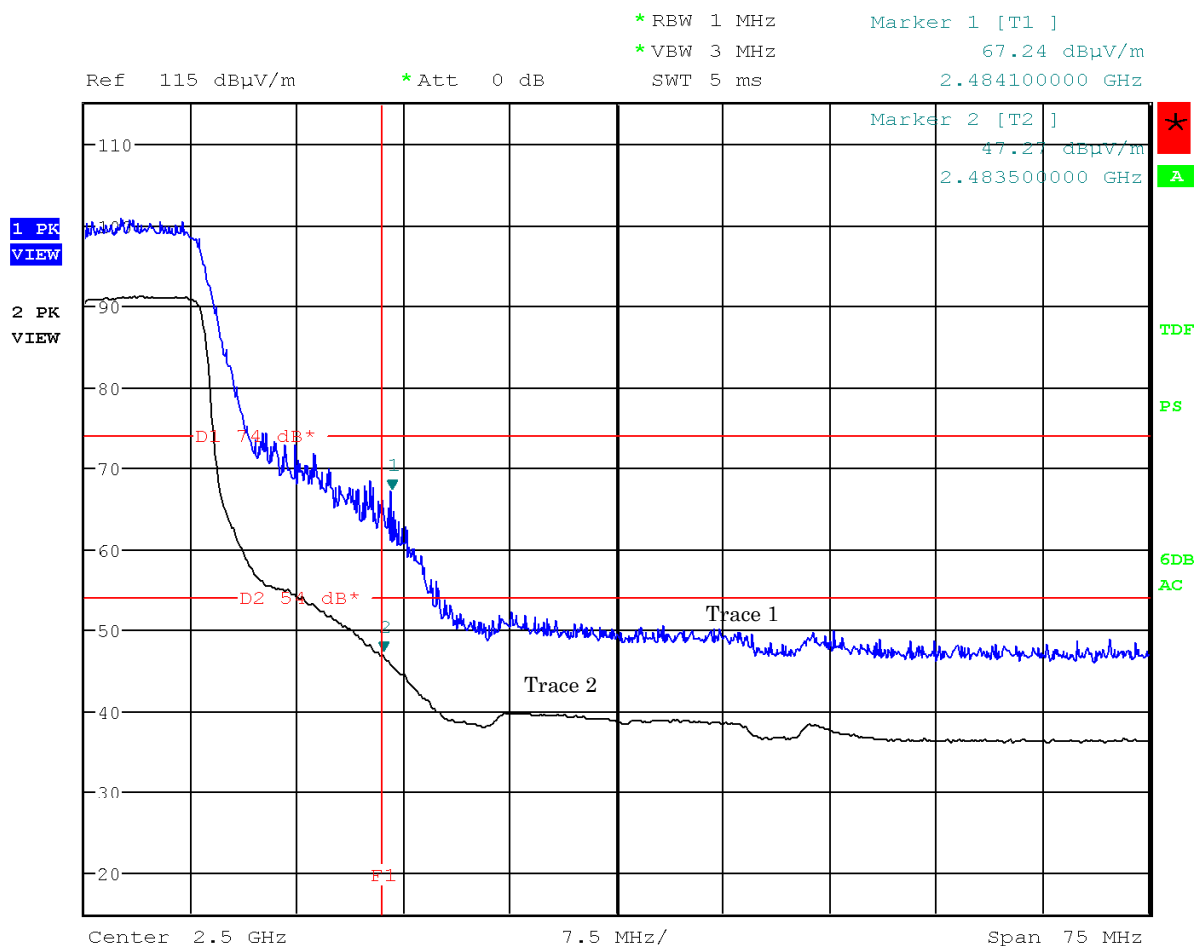

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : TX(11ch: 2462 MHz, (IEEE 802.11n))


Antenna Polarization : Vertical

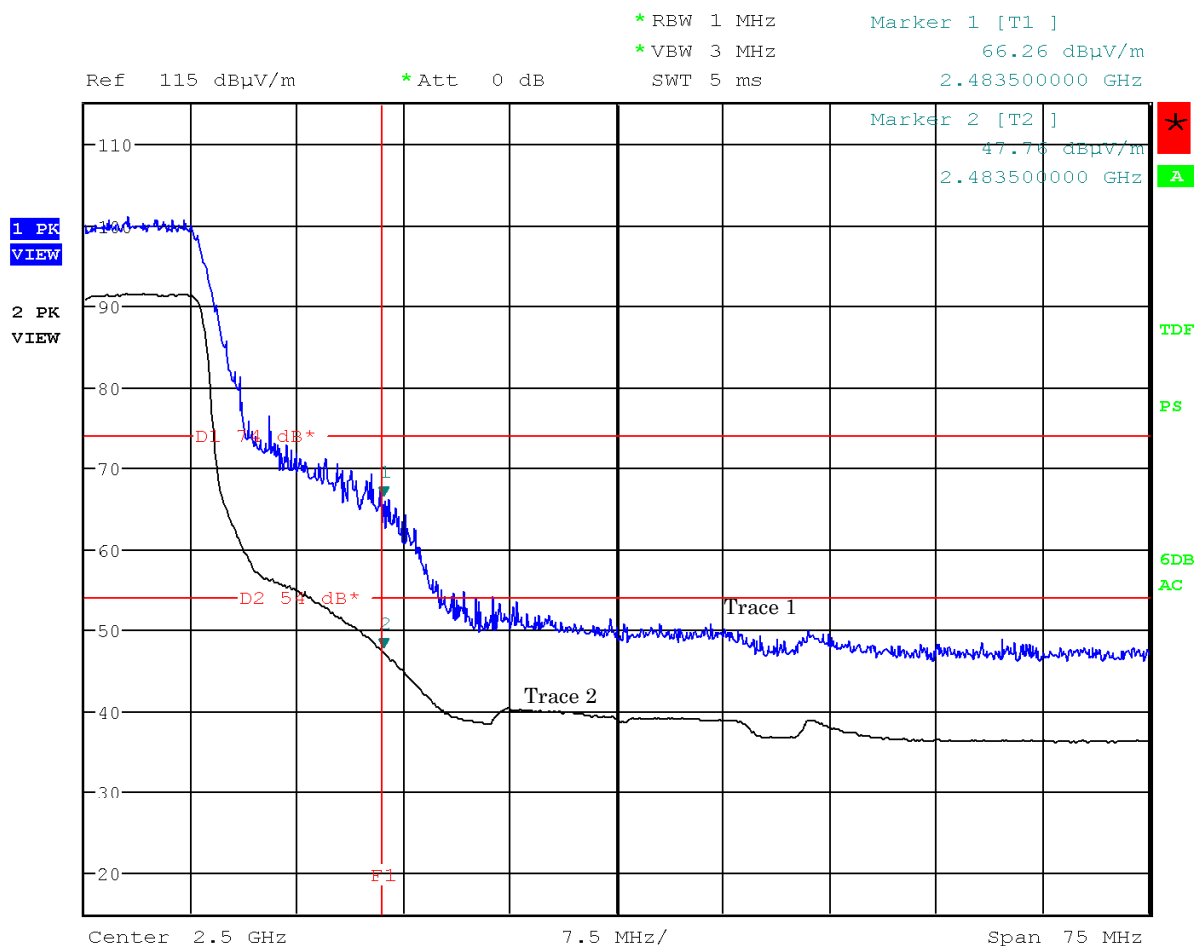

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (0ch: 2402 MHz)


Antenna Polarization : Horizontal

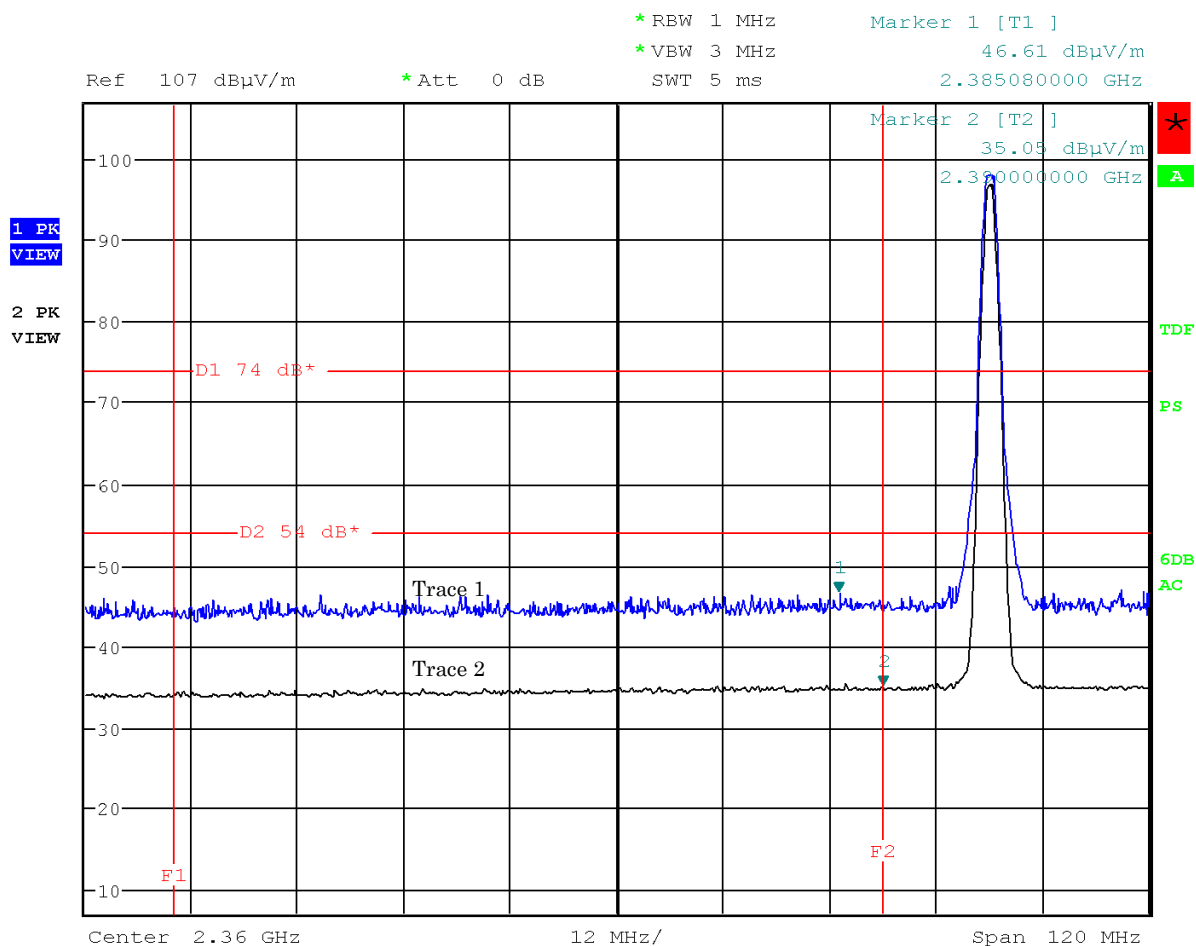

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (0ch: 2402 MHz)


Antenna Polarization : Vertical

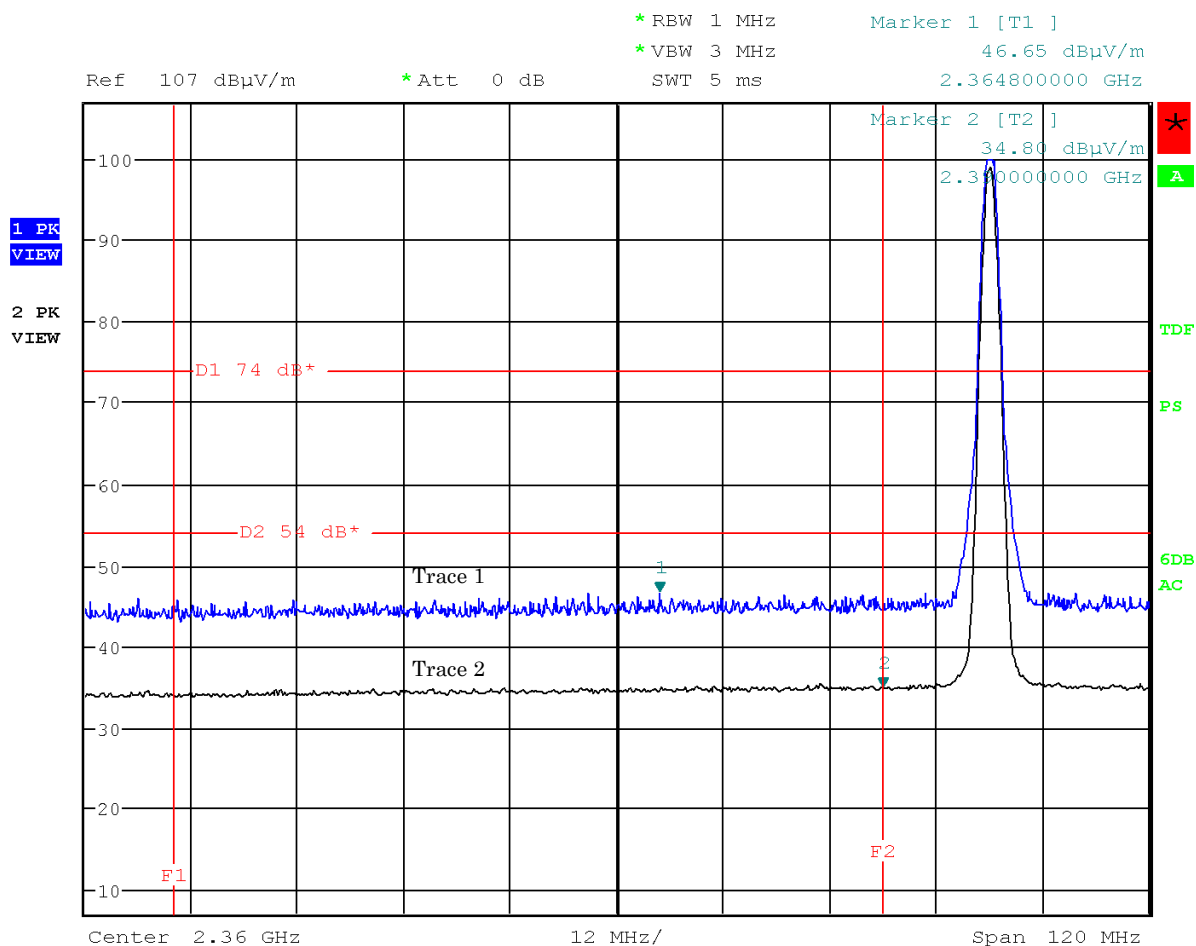

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (39ch: 2480 MHz)


Antenna Polarization : Horizontal

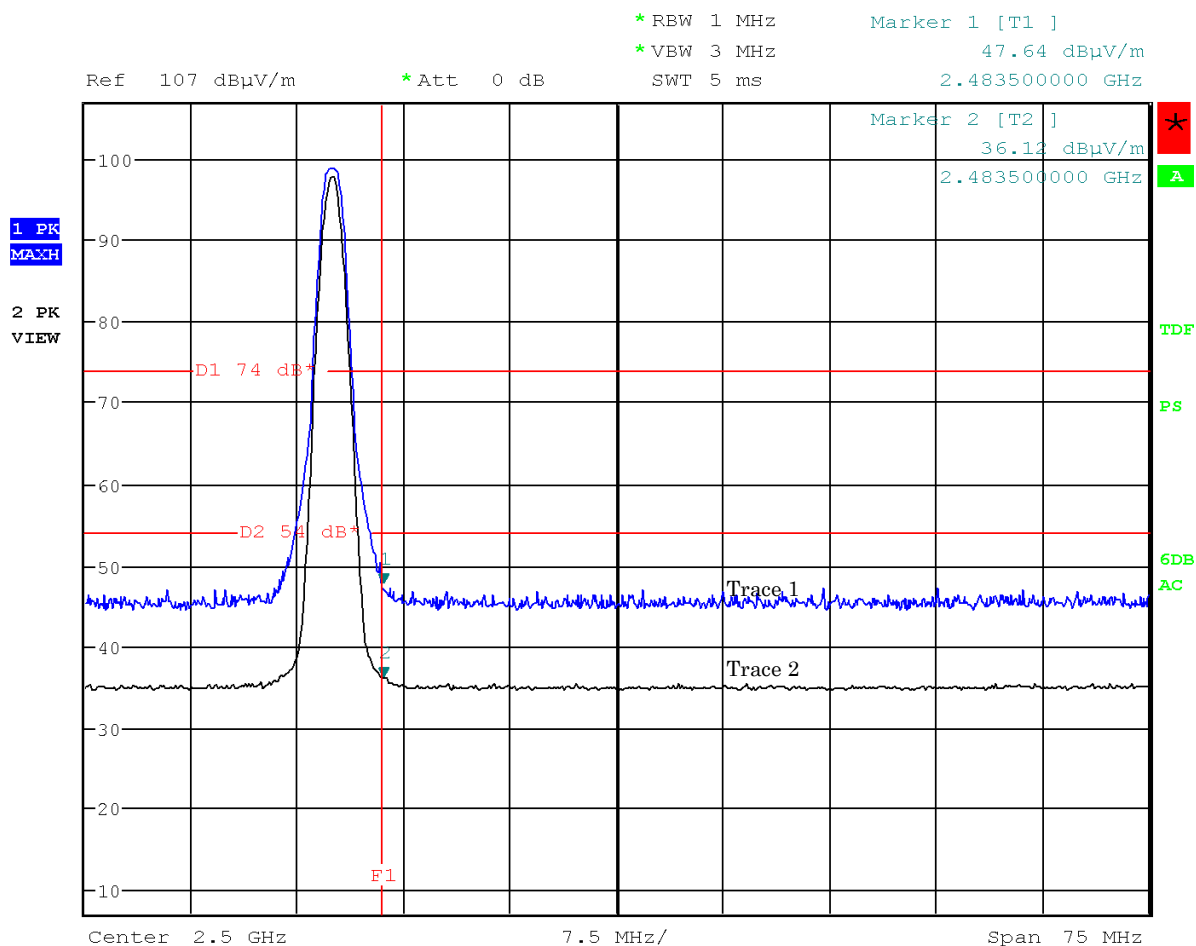

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (39ch: 2480 MHz)

Antenna Polarization : Vertical

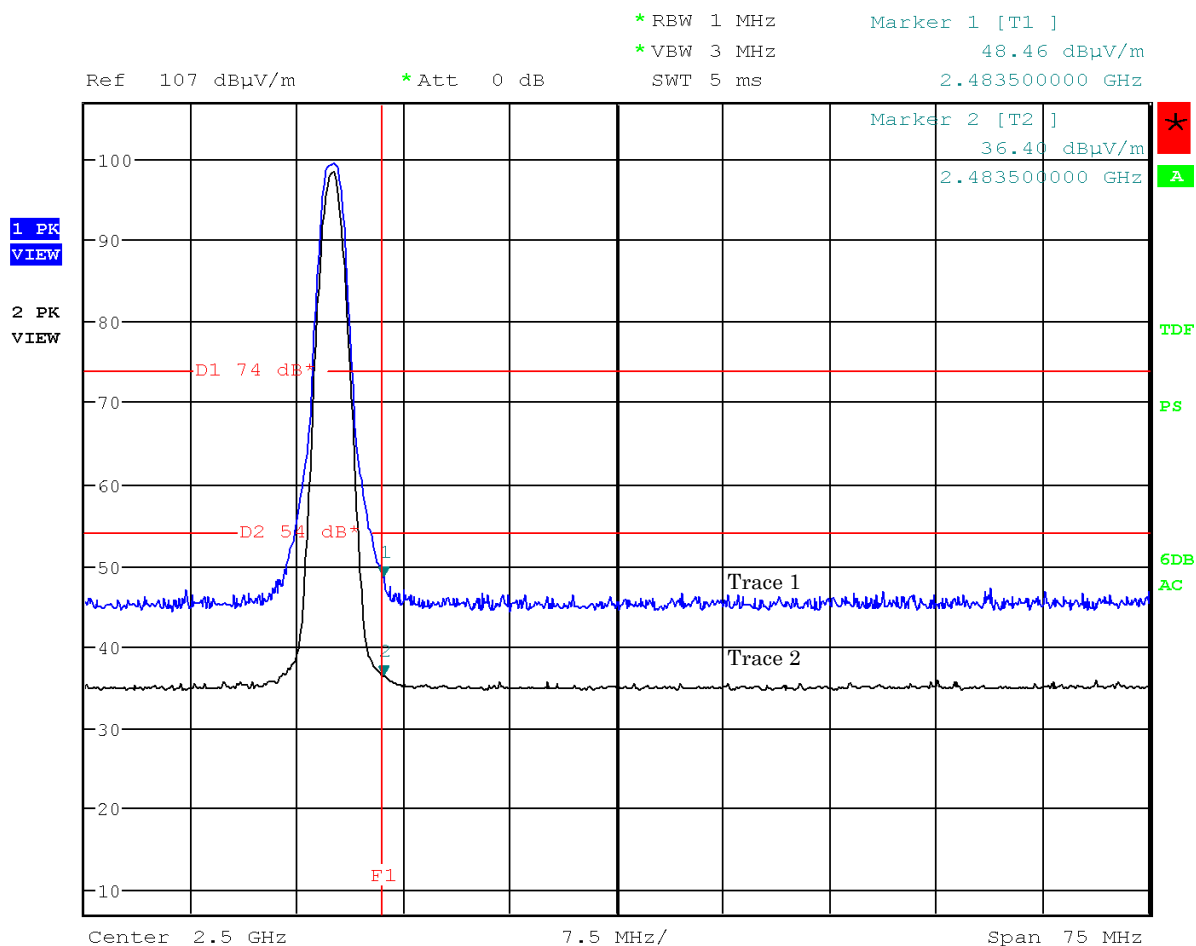

Note: The trace 1 is Peak . The trace 2 is Average.

7.9.4.2 Other Spurious Emission (9kHz – 30MHz)

Test Date : September 17, 2014

Temp.:26°C, Humi:51%

Mode of EUT : WLAN/Bluetooth LE

Results : No spurious emissions in the range 20dB below the limit.


7.9.4.3 Other Spurious Emission (30MHz – 1000MHz)

Mode of EUT : (WLAN) All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE802.11b, IEEE802.11g and IEEE802.11n) has been listed.

Test Date: September 17, 2014

Temp.: 26 °C, Humi: 51 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Cable Loss [dB]	Meter Readings [dB(μV)]		Limits [dB(μV/m)]	Results [dB(μV/m)]		Margin [dB]	Remarks
			Hori.	Vert.		Hori.	Vert.		
30.5	18.6	-27.8	< 25.0	32.0	40.0	< 15.8	22.8	+17.2	-
45.0	13.1	-27.6	< 25.0	34.5	40.0	< 10.5	20.0	+20.0	-
190.9	16.3	-26.1	41.2	37.6	43.5	31.4	27.8	+12.1	-

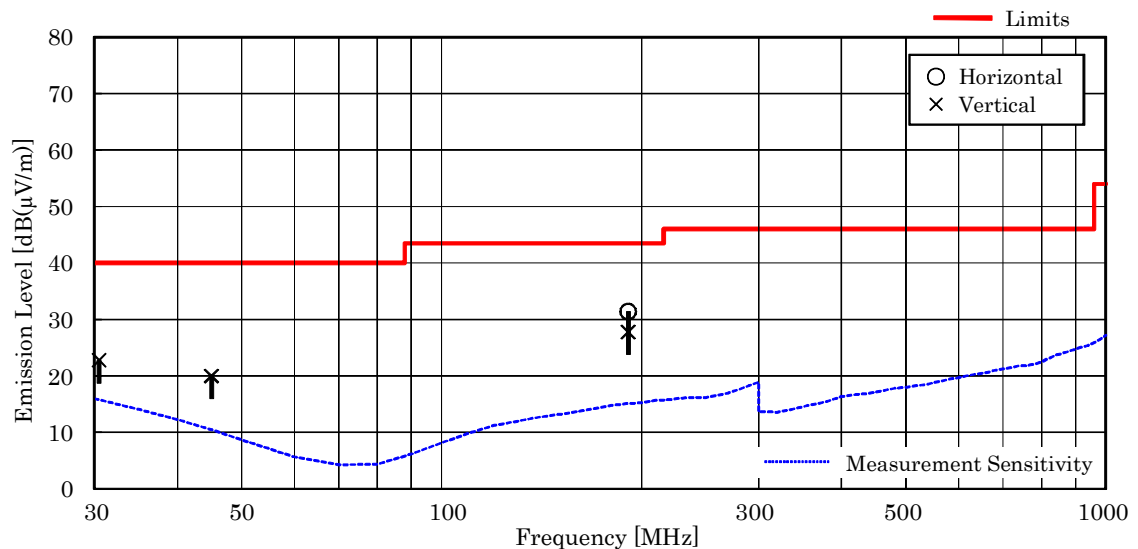

NOTES


1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. Calculated result at 190.9 MHz, as the worst point shown on underline:
Antenna Factor + Cable Loss + Meter Reading = 16.3 + -26.1 + 41.2 = 31.4 dB(μV/m)
6. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

Mode of EUT : Bluetooth Low Energy

Test Date: September 17, 2014

Temp.: 26 °C, Humi: 51 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Cable Loss [dB]	Meter Readings [dB(μV)]		Limits [dB(μV/m)]	Results [dB(μV/m)]		Margin [dB]	Remarks
			Hori.	Vert.		Hori.	Vert.		
33.0	17.6	-27.7	< 25.0	37.1	40.0	< 14.9	27.0	+13.0	-
190.9	16.3	-26.1	40.3	37.1	43.5	30.5	27.3	+13.0	-

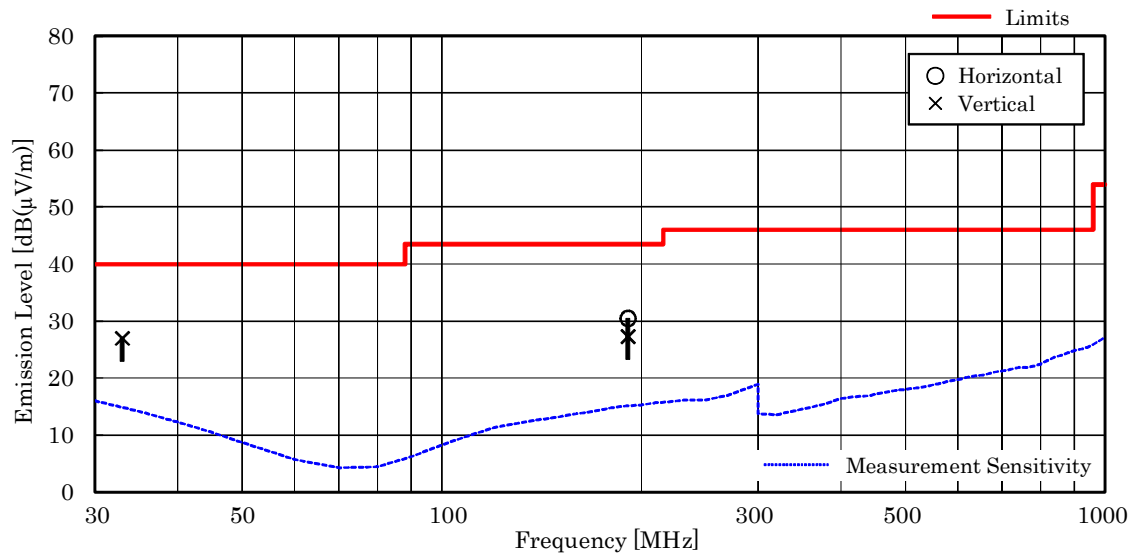

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. Calculated result at 33.0 MHz, as the worst point shown on underline:
Antenna Factor + Cable Loss + Meter Reading = 17.6 + -27.7 + 37.1 = 27.0 dB(μV/m)
6. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

7.9.4.4 Other Spurious Emission (Above 1000MHz)

7.9.4.4.1 Mode of TX

7.9.4.4.1.1 IEEE802.11b

Test Date: September 16, 2014

Temp.: 26 °C, Humi: 55 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx Low Ch												
4824.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
12060.0	33.6	-26.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.5	< 35.5	> +18.5	
19296.0	-6.1	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
Test condition : TXMiddle Ch												
4874.0	27.3	-16.1	< 38.0	28.4	< 38.0	29.4	74.0	54.0	< 49.2	40.6	+13.4	
7311.0	29.8	-16.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.0	< 41.0	> +13.0	
12185.0	33.5	-26.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.1	< 35.1	> +18.9	
19496.0	-6.1	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
Test condition : TXHigh Ch												
4924.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.9	< 40.9	> +13.1	
12310.0	33.4	-26.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 44.8	< 34.8	> +19.2	
19696.0	-6.1	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
22158.0	-6.7	3.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.8 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.0 dB(μV/m)

Minimum Margin: 54.0 - <41.0 = >13.0 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

7.9.4.4.1.2 IEEE802.11g

Test Date: September 16, 2014

Temp.: 26 °C, Humi: 55 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx Low Ch												
4824.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
12060.0	33.6	-26.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.5	< 35.5	> +18.5	
19296.0	-6.1	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
Test condition : TXMiddle Ch												
4874.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7311.0	29.8	-16.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.0	< 41.0	> +13.0	
12185.0	33.5	-26.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.1	< 35.1	> +18.9	
19496.0	-6.1	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
Test condition : TXHigh Ch												
4924.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.9	< 40.9	> +13.1	
12310.0	33.4	-26.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 44.8	< 34.8	> +19.2	
19696.0	-6.1	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
22158.0	-6.7	3.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.8 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.0 dB(μV/m)

Minimum Margin: 54.0 - <41.0 = >13.0 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

7.9.4.4.1.3 IEEE802.11n

Test Date: September 16, 2014

Temp.: 26 °C, Humi: 55 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin [dB]	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx Low Ch												
4824.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
12060.0	33.6	-26.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.5	< 35.5	> +18.5	
19296.0	-6.1	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
Test condition : TXMiddle Ch												
4874.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7311.0	29.8	-16.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.0	< 41.0	> +13.0	
12185.0	33.5	-26.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.1	< 35.1	> +18.9	
19496.0	-6.1	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
Test condition : TXHigh Ch												
4924.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.9	< 40.9	> +13.1	
12310.0	33.4	-26.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 44.8	< 34.8	> +19.2	
19696.0	-6.1	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
22158.0	-6.7	3.6	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 46.9	< 36.9	> +17.1	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.8 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.0 dB(μV/m)

Minimum Margin: 54.0 - <41.0 = >13.0 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

7.9.4.4.1.4 Bluetooth Low Energy

Test Date: September 16, 2014

Temp.: 26 °C, Humi: 55 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin [dB]	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
[MHz]	[dB(1/m)]	[dB]										
Test condition : Tx Low Ch												
4804.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
12010.0	33.7	-26.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.7	< 35.7	> +18.3	
19216.0	-6.1	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
Test condition : TX Middle Ch												
4880.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7320.0	29.8	-16.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.0	< 41.0	> +13.0	
12200.0	33.5	-26.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.0	< 35.0	> +19.0	
19520.0	-6.1	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
Test condition : TX High Ch												
4960.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7440.0	29.8	-17.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.8	< 40.8	> +13.2	
12400.0	33.5	-26.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 44.6	< 34.6	> +19.4	
19840.0	-6.3	3.5	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.2	< 37.2	> +16.8	
22320.0	-6.7	3.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.0	< 37.0	> +17.0	

Calculated result at 7320.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.8 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.0 dB(μV/m)

Minimum Margin: 54.0 - <41.0 =>13.0 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

7.9.4.4.2 Mode of RX (WLAN)

Test Date: September 16, 2014

Temp.: 26 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE						
Test condition : RX Middle Ch												
2437.0	21.4	-18.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 40.8	< 30.8	> +23.2	
4874.0	27.3	-16.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.9	< 38.9	> +15.1	
7311.0	29.8	-17.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.7	< 40.7	> +13.3	

Calculated result at 4874.0 MHz, as the worst point shown on underline:

Antenna Factor = 27.3 dB(1/m)

Corr. Factor = -16.4 dB

+) Meter Reading = <28.0 dB(μV)

Result = <38.9 dB(μV/m)

Minimum Margin: 54.0 - <38.9 =>15.1 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

7.9.4.4.3 Mode of RX (Bluetooth Low Energy)

Test Date: September 16, 2014

Temp.: 26 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical							
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : RX Middle Ch												
2440.0	21.4	-18.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 40.8	< 30.8	> +23.2	
4880.0	27.3	-16.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.0	< 39.0	> +15.0	
7320.0	29.8	-17.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.7	< 40.7	> +13.3	

Calculated result at 7320.0 MHz, as the worst point shown on underline:

Antenna Factor = 29.8 dB(1/m)

Corr. Factor = -17.1 dB

+) Meter Reading = <28.0 dB(μV)

Result = <40.7 dB(μV/m)

Minimum Margin: 54.0 - <40.7 =>13.3 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 7.5 GHz .
3. The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average