



FCC RF Test Report

FCC ID : UZ7ET45CA
EQUIPMENT : Tablet
BRAND NAME : Zebra
MODEL NAME : ET45CA
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
STANDARD : 47 CFR Part 2, 27(O)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : May 31, 2022 ~ Jul. 04, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Maximum EIRP and Emission Designator	7
1.5 Testing Location	8
1.6 Test Software.....	8
1.7 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example.....	10
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	12
3.1 Measuring Instruments	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test	12
3.4 Conducted Output Power and EIRP	13
3.5 Peak-to-Average Ratio	14
3.6 Occupied Bandwidth	15
3.7 Conducted Band Edge	16
3.8 Conducted Spurious Emission	17
3.9 Frequency Stability	18
4 RADIATED TEST ITEMS	19
4.1 Measuring Instruments	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test	20
4.4 Radiated Spurious Emission	21
5 LIST OF MEASURING EQUIPMENT	22
6 UNCERTAINTY OF EVALUATION	23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG230412F	Rev. 01	Initial issue of report	Aug. 16, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77, n78)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 23.16 dB at 7764.00 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet
Brand Name	Zebra
Model Name	ET45CA
FCC ID	UZ7ET45CA
HW Version	EV2-2
SW Version	ET45-userdebug 11 11-10-12.00-RG-U00-PRD-GSE MXJ release-keys
MFD	10MAY22
EUT Stage	Identical Prototype

Specification of Accessory				
Battery	Brand Name	Zebra	Model Number	BT-000455

Supported Unit Used in Test Configuration and System				
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Earphone 1	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-01
Earphone 2	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
USB Cable (Type C to Type A)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
SCS	30kHz
Bandwidth	n77: 20 / 30 / 40 / 60 / 80 / 100MHz n78: 20 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	Ant. 1: 5G NR n77: -1.0 dBi 5G NR n78: -1.0 dBi Ant. 3: 5G NR n77: 0.5 dBi 5G NR n78: 0.5 dBi Ant. 4: 5G NR n77: 0.4 dBi 5G NR n78: 0.4 dBi Ant. 5: 5G NR n77: 0.2 dBi 5G NR n78: 0.2 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP is shown in the report, 5G NR n77/n78 for Antenna 3.
2. The device supports n77/n78(1T4R) SRS resources on Ant.1/3/4/5, only the test data of worst Ant.3 is showed in the report according to the maximum power.
3. 5G NR n77/n78 support SA and NSA mode. The whole testing has assessed SA mode by referring to the higher conducted power for conducted test items.
4. 5G NR n77/n78 support HPUE mode.
5. The EN-DC combinations declared by the manufacturer are as follows: DC_7A_n77A, DC_2A_n78A, DC_5A_n78A, DC_7A_n78A, DC_38A_n78A.
6. For NSA mode of RSE testing, we only choose the combination of the maximum power among all NSA combinations to test.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Maximum EIRP and Emission Designator

5G NR n77		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3710.01 ~ 3969.99	0.4446	18M2G7D	0.4009	18M2W7D
30	3715.02 ~ 3964.98	0.4498	27M8G7D	0.3972	27M9W7D
40	3720.00 ~ 3960.00	0.4477	37M9G7D	0.3999	37M8W7D
60	3730.02 ~ 3949.98	0.4345	57M8G7D	0.3648	57M8W7D
80	3740.01 ~ 3939.99	0.4395	77M4G7D	0.3741	77M6W7D
100	3750.00 ~ 3930.00	0.4539	97M4G7D	0.3767	97M5W7D

5G NR n78		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3710.01 ~ 3789.99	0.4246	18M2G7D	0.3540	18M2W7D
30	3715.02 ~ 3784.98	0.4227	27M8G7D	0.3532	27M9W7D
40	3720.00 ~ 3780.00	0.4256	37M9G7D	0.3597	37M8W7D
50	3725.01 ~ 3774.99	0.3882	47M5G7D	0.3342	47M5W7D
60	3730.02 ~ 3769.98	0.3945	57M8G7D	0.3296	57M8W7D
70	3735.00 ~ 3765.00	0.3882	67M6G7D	0.3251	67M6W7D
80	3740.01 ~ 3759.99	0.3864	77M4G7D	0.3459	77M6W7D
90	3745.02 ~ 3754.98	0.3855	87M6G7D	0.3266	87M6W7D
100	3750.00 ~ 3750.00	0.4295	97M4G7D	0.3334	97M5W7D

Note:

- 5G NR Band n77 overlaps the entire frequency range of Band n78. Therefore, the conducted test results provided in this report covers Band n77 as well as Band n78, and 5G NR n78 supports BW 50/70/90MHz, it is tested in the report.
- All modulations have been tested, only the maximum bandwidth and the worst test results of PSK & QAM are shown in the report.

1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)									Modulation					RB #		Test Channel		
		20	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n77	v	v	v	-	v	-	v	-	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n77	v			-		-		-		v	v				v	v	v	v	v
26dB and 99% Bandwidth	n77	v	v	v	-	v	-	v	-	v	v	v	v	v	v		v		v	
	n78				v		v		v	v	v	v	v	v	v		v		v	
Conducted Band Edge	n77	v			-	v	-		-	v	v	v				v	v	v		v
	n78				v		v		v		v	v				v	v	v		v
Conducted Spurious Emission	n77	v			-	v	-		-	v	v	v				v		v	v	v
	n78				v		v		v		v	v				v		v	v	v
Frequency Stability	n77	v			-		-		-			v					v		v	
E.R.P / E.I.R.P	n77	v	v	v	-	v	-	v	-	v	v	v	v	v	v	v	v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n77	Worst Case																v	v	v
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Normal Voltage: 3.87Vdc, Extreme Voltage: 3.55Vdc ~4.45Vdc																			

2.2 Connection Diagram of Test System

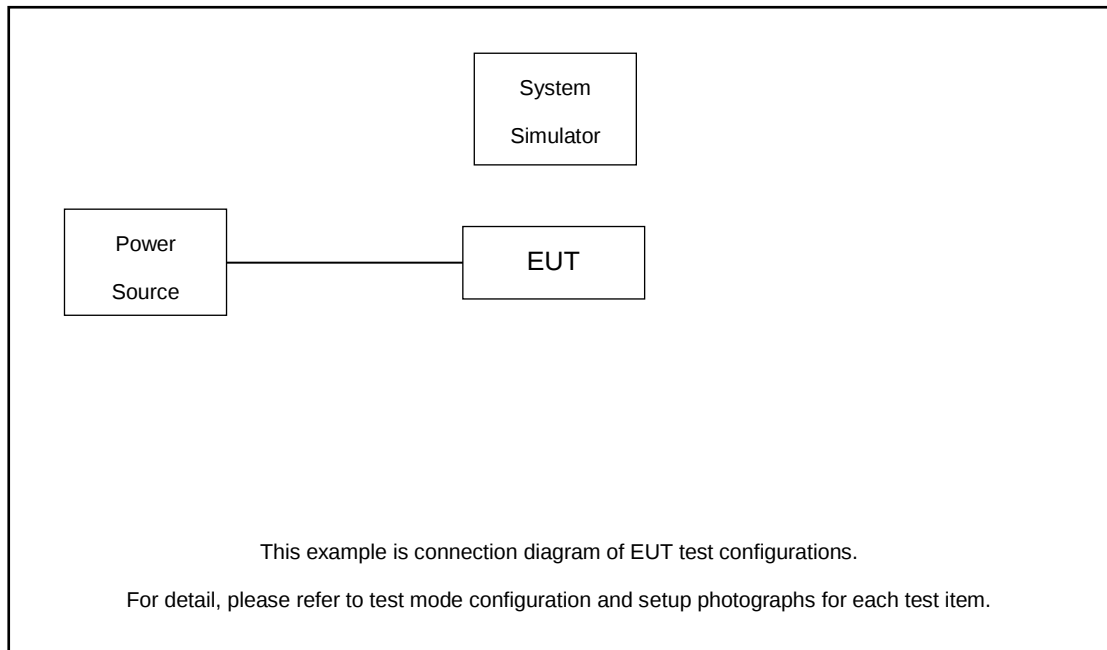

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.6 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 8.6 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99

5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	3750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

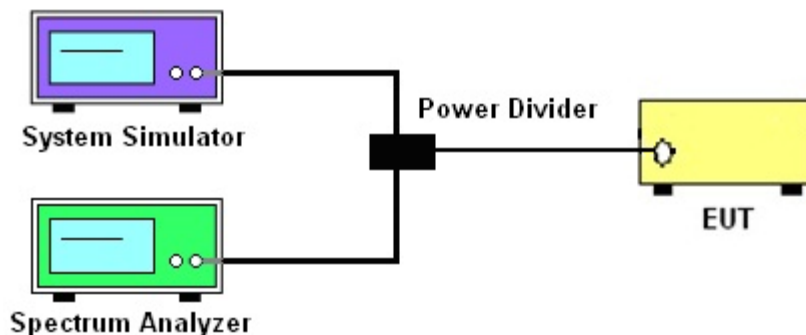

3.2.3 Frequency Stability

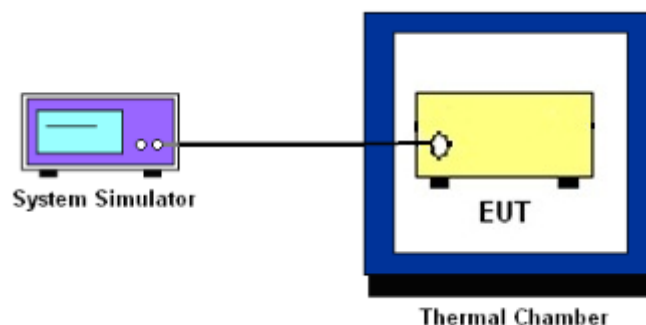

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

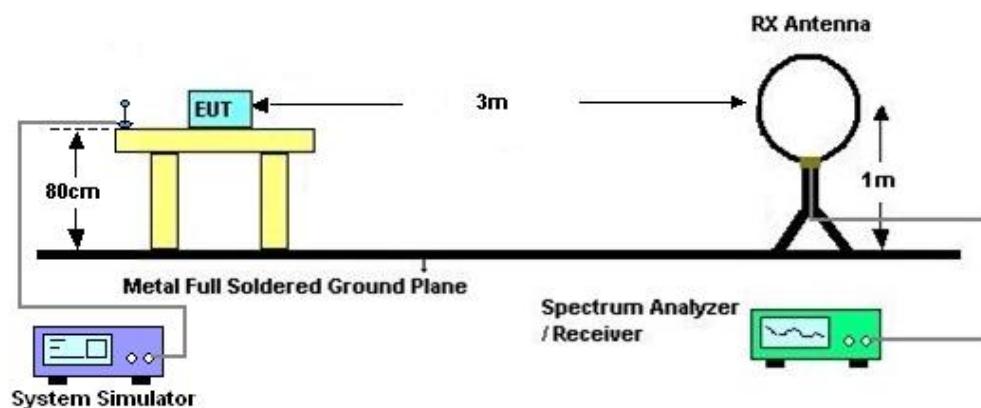

4.2.2 For radiated test from 30MHz to 1GHz

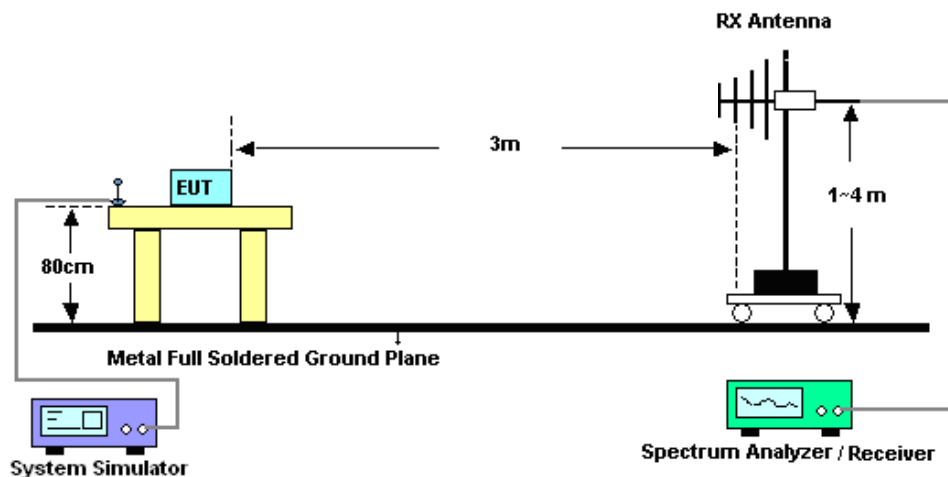

4.2.3 For radiated test above 1GHz

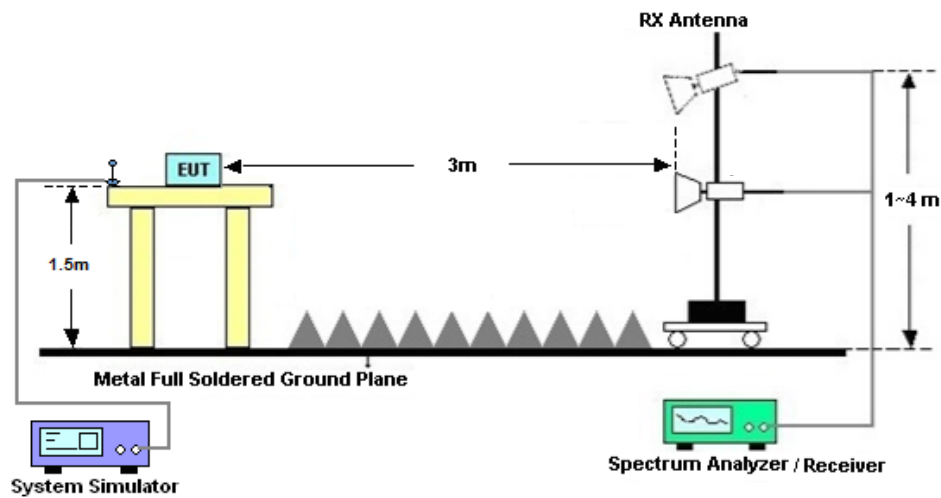

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2021	May 31, 2022~Jul. 04, 2022	Dec. 26, 2022	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04265	60.06.020.0077	0.4GHz~26.5GHz	Dec. 25, 2021	May 31, 2022~Jul. 04, 2022	Dec. 24, 2022	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 14, 2021	May 31, 2022~Jul. 04, 2022	Jul. 13, 2022	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010B	MY57541079	10Hz-44G,MAX 30dB	Oct. 14, 2022	Jun. 24, 2022	Oct. 13, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jun. 24, 2022	Oct. 29, 2022	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Jun. 24, 2022	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 05, 2022	Jun. 24, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jun. 24, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Jan. 05, 2022	Jun. 24, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2022	Jun. 24, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Jun. 24, 2022	Jul. 29, 2022	Radiation (03CH04-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Oct. 13, 2021	Jun. 24, 2022	Oct. 12, 2022	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 24, 2022	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 24, 2022	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 24, 2022	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Kuo	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N77(ANT3)

Conducted Output Power and EIRP (ANT gain=0.5dBi)

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	25.12	25.62	0.3648
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	24.78	25.28	0.3373
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@1	25.98	26.48	0.4446
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.53	26.03	0.4009
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@1	25.75	26.25	0.4217
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@1	25.06	25.56	0.3597
77	30	30	647668	3715.02	DFT-s-OFDM QPSK	1@1	25.65	26.15	0.4121
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	1@1	24.96	25.46	0.3516
77	30	30	656000	3840	DFT-s-OFDM QPSK	1@1	26.03	26.53	0.4498
77	30	30	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.49	25.99	0.3972
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	1@1	25.62	26.12	0.4093
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	1@1	24.91	25.41	0.3475
77	30	40	648000	3720	DFT-s-OFDM QPSK	1@1	25.76	26.26	0.4227
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@1	25.08	25.58	0.3614
77	30	40	656000	3840	DFT-s-OFDM QPSK	1@1	26.01	26.51	0.4477
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.52	26.02	0.3999
77	30	40	664000	3960	DFT-s-OFDM QPSK	1@1	25.66	26.16	0.4130
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	1@1	24.95	25.45	0.3508
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@1	25.42	25.92	0.3908
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	1@1	24.69	25.19	0.3304
77	30	60	656000	3840	DFT-s-OFDM QPSK	1@1	25.65	26.15	0.4121
77	30	60	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.98	25.48	0.3532
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@1	25.88	26.38	0.4345
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	1@1	25.12	25.62	0.3648
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	1@1	25.35	25.85	0.3846
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	1@1	24.47	24.97	0.3141
77	30	80	656000	3840	DFT-s-OFDM QPSK	1@1	25.34	25.84	0.3837
77	30	80	656000	3840	DFT-s-OFDM	1@1	24.63	25.13	0.3258

					16 QAM				
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	1@1	25.93	26.43	0.4395
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	1@1	25.23	25.73	0.3741
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	135@67	25.36	25.86	0.3855
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	25.27	25.77	0.3776
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@271	25.52	26.02	0.3999
77	30	100	650000	3750	DFT-s-OFDM QPSK	135@67	25.4	25.9	0.3890
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@1	25.37	25.87	0.3864
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@271	25.51	26.01	0.3990
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	135@67	24.31	24.81	0.3027
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@1	24.48	24.98	0.3148
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@271	24.77	25.27	0.3365
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	135@67	22.82	23.32	0.2148
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@1	22.7	23.2	0.2089
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@271	22.93	23.43	0.2203
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	135@67	20.61	21.11	0.1291
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@1	20.65	21.15	0.1303
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@271	20.91	21.41	0.1384
77	30	100	650000	3750	CP-OFDM QPSK	137@68	23.86	24.36	0.2729
77	30	100	650000	3750	CP-OFDM QPSK	1@1	23.77	24.27	0.2673
77	30	100	650000	3750	CP-OFDM QPSK	1@271	24	24.5	0.2818
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	135@67	26.07	26.57	0.4539
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.31	25.81	0.3811
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@271	25.86	26.36	0.4325
77	30	100	656000	3840	DFT-s-OFDM QPSK	135@67	25.97	26.47	0.4436
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@1	25.28	25.78	0.3784
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@271	25.77	26.27	0.4236
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	135@67	24.95	25.45	0.3508
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.51	25.01	0.3170
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@271	25.01	25.51	0.3556
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	135@67	23.46	23.96	0.2489
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@1	22.72	23.22	0.2099
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@271	22.87	23.37	0.2173
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	135@67	21.2	21.7	0.1479

77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@1	20.66	21.16	0.1306
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@271	20.77	21.27	0.1340
77	30	100	656000	3840	CP-OFDM QPSK	137@68	24.57	25.07	0.3214
77	30	100	656000	3840	CP-OFDM QPSK	1@1	23.87	24.37	0.2735
77	30	100	656000	3840	CP-OFDM QPSK	1@271	24.3	24.8	0.3020
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	135@67	25.87	26.37	0.4335
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@1	26.02	26.52	0.4487
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@271	25.95	26.45	0.4416
77	30	100	662000	3930	DFT-s-OFDM QPSK	135@67	25.86	26.36	0.4325
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@1	25.98	26.48	0.4446
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@271	25.81	26.31	0.4276
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	135@67	24.79	25.29	0.3381
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@1	25.26	25.76	0.3767
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@271	25.22	25.72	0.3733
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	135@67	23.45	23.95	0.2483
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@1	23.37	23.87	0.2438
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@271	23.06	23.56	0.2270
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	135@67	21.01	21.51	0.1416
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@1	21.2	21.7	0.1479
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@271	21.22	21.72	0.1486
77	30	100	662000	3930	CP-OFDM QPSK	137@68	24.27	24.77	0.2999
77	30	100	662000	3930	CP-OFDM QPSK	1@1	24.52	25.02	0.3177
77	30	100	662000	3930	CP-OFDM QPSK	1@271	24.22	24.72	0.2965


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00591	PASS	NV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00412	PASS	LV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00636	PASS	HV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00657	PASS	-30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00413	PASS	-20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00457	PASS	-10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00662	PASS	0°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00615	PASS	10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00123	PASS	20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00313	PASS	30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00435	PASS	40°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.00256	PASS	50°C


Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	50@0	6.96	13	PASS
77	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	1@0	8.11	13	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	50@0	7.94	13	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	7.96	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	6.71	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	1@0	7.33	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	7.56	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	8.38	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	50@0	6.87	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	1@0	7.65	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	50@0	7.61	13	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	7.86	13	PASS

N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

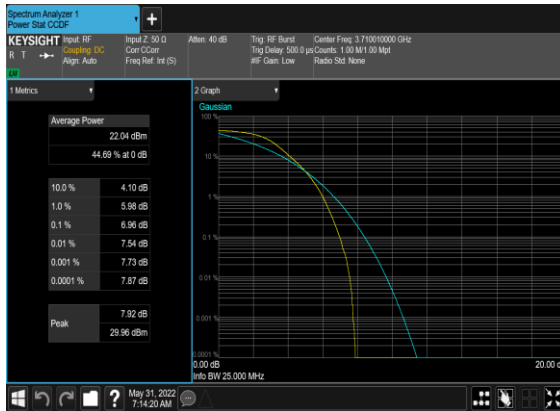


N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

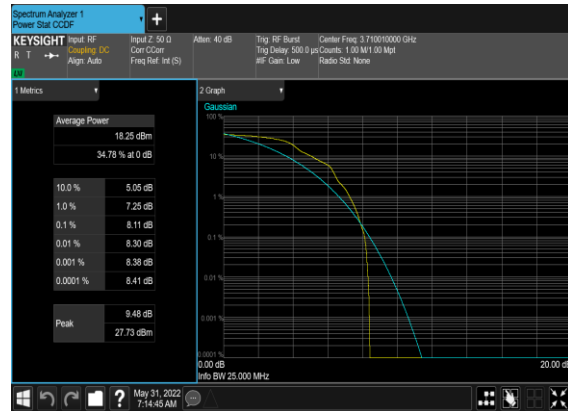


N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH




N77(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

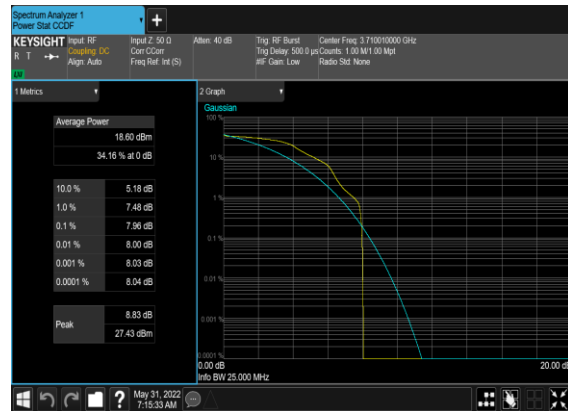


N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

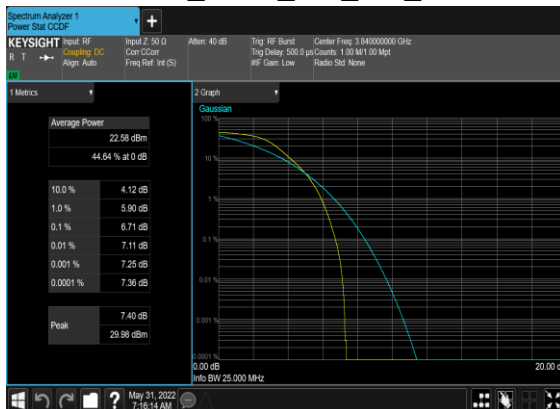


N77(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

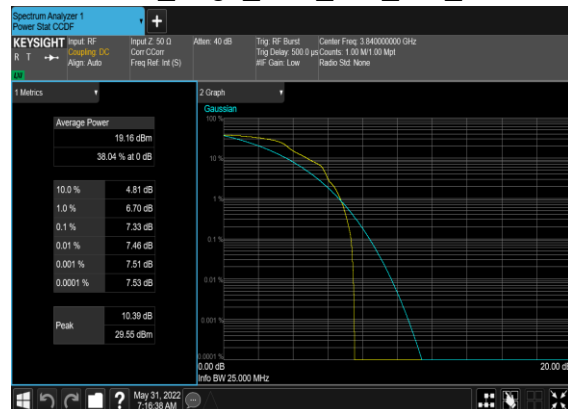


N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

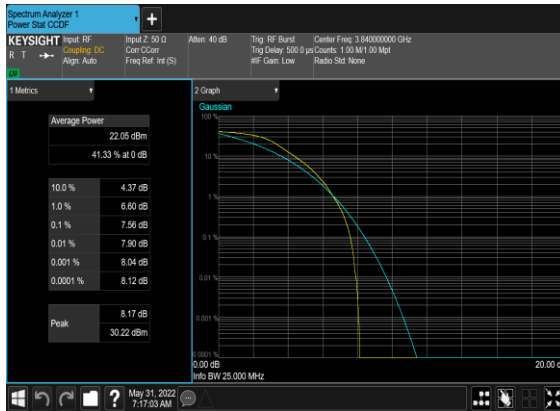


N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

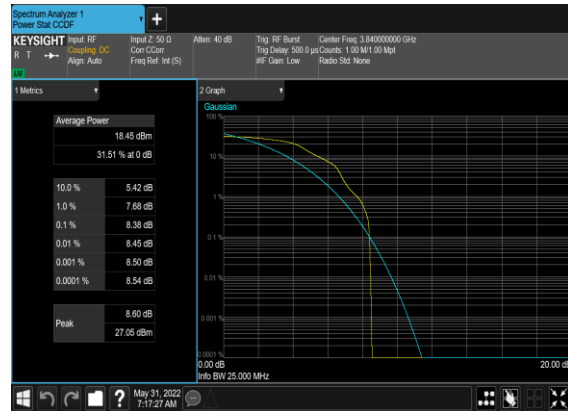


N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_High_CH

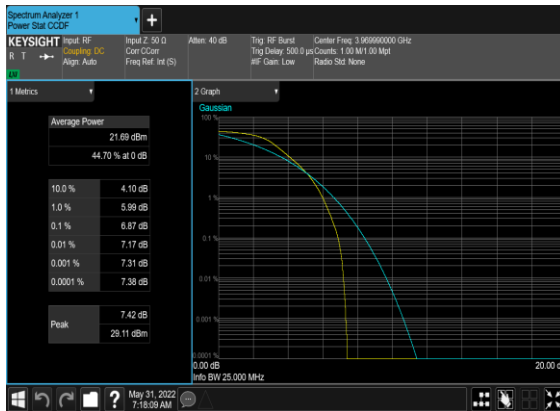


N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_High_CH

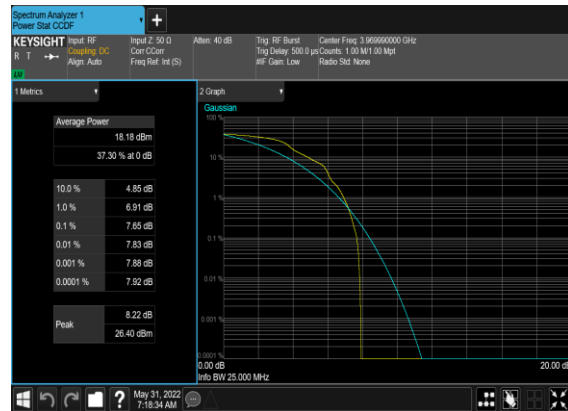

N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

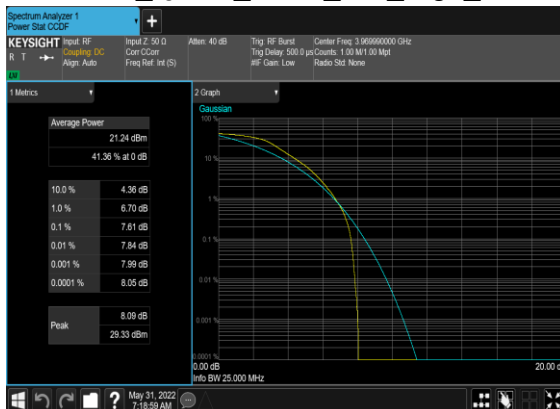

N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

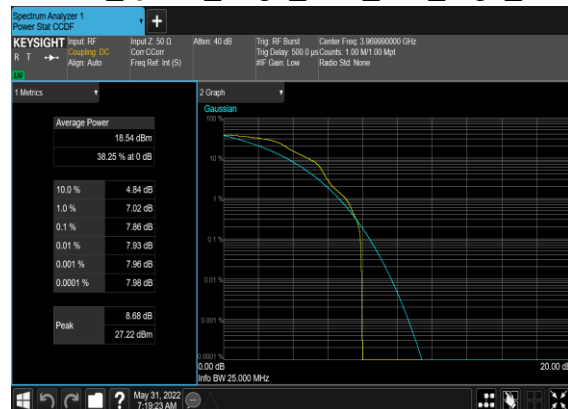


Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB OBW (MHz)
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	17.835	19.2
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	17.848	19.03
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	18.195	19.26
77	30	20	656000	3840.0	CP-OFDM 16 QAM	51@0	18.228	19.42
77	30	20	656000	3840.0	CP-OFDM 64 QAM	51@0	18.194	19.38
77	30	20	656000	3840.0	CP-OFDM 256 QAM	51@0	18.182	19.42
77	30	30	656000	3840.0	DFT-s-OFDM PI/2 BPSK	75@0	26.739	28.11
77	30	30	656000	3840.0	DFT-s-OFDM QPSK	75@0	26.771	28.22
77	30	30	656000	3840.0	CP-OFDM QPSK	78@0	27.83	29.17
77	30	30	656000	3840.0	CP-OFDM 16 QAM	78@0	27.808	29.13
77	30	30	656000	3840.0	CP-OFDM 64 QAM	78@0	27.875	29.21
77	30	30	656000	3840.0	CP-OFDM 256 QAM	78@0	27.842	29.16
77	30	40	656000	3840.0	DFT-s-OFDM PI/2 BPSK	100@0	35.717	37.31
77	30	40	656000	3840.0	DFT-s-OFDM QPSK	100@0	35.799	37.32
77	30	40	656000	3840.0	CP-OFDM QPSK	106@0	37.86	39.5
77	30	40	656000	3840.0	CP-OFDM 16 QAM	106@0	37.827	39.21
77	30	40	656000	3840.0	CP-OFDM 64 QAM	106@0	37.767	39.59
77	30	40	656000	3840.0	CP-OFDM 256 QAM	106@0	37.84	39.25
77	30	60	656000	3840.0	DFT-s-OFDM PI/2 BPSK	162@0	57.843	60.01
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	162@0	57.799	60.08
77	30	60	656000	3840.0	CP-OFDM QPSK	162@0	57.739	59.84
77	30	60	656000	3840.0	CP-OFDM 16 QAM	162@0	57.782	59.86
77	30	60	656000	3840.0	CP-OFDM 64 QAM	162@0	57.847	60.05
77	30	60	656000	3840.0	CP-OFDM 256 QAM	162@0	57.708	59.7
77	30	80	656000	3840.0	DFT-s-OFDM PI/2 BPSK	216@0	77.153	79.59

77	30	80	656000	3840.0	DFT-s-OFDM QPSK	216@0	77.139	79.54
77	30	80	656000	3840.0	CP-OFDM QPSK	217@0	77.39	80.01
77	30	80	656000	3840.0	CP-OFDM 16 QAM	217@0	77.599	80.05
77	30	80	656000	3840.0	CP-OFDM 64 QAM	217@0	77.456	80.06
77	30	80	656000	3840.0	CP-OFDM 256 QAM	217@0	77.383	79.94
77	30	100	656000	3840.0	DFT-s-OFDM PI/2 BPSK	270@0	96.519	99.49
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	270@0	96.292	99.53
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.412	100.5
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.379	100.6
77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.273	100.6
77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.479	100.6


N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

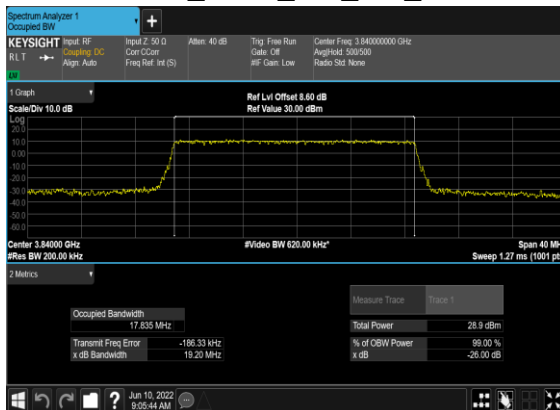


N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

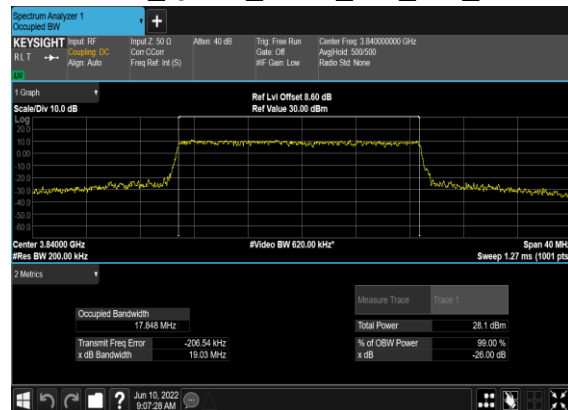


N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

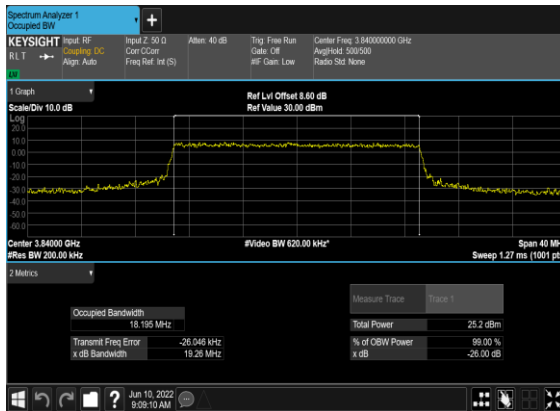


N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

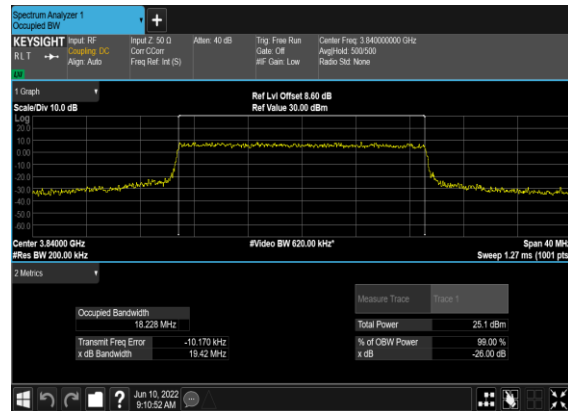


N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

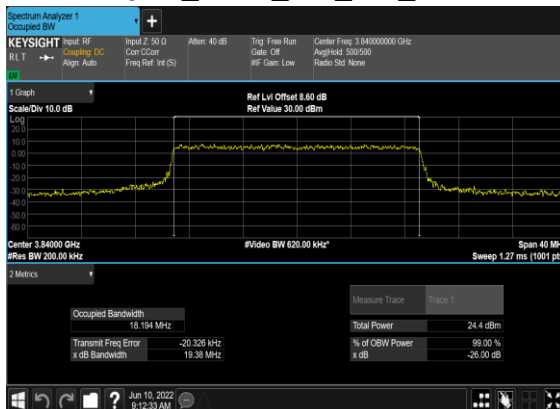


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

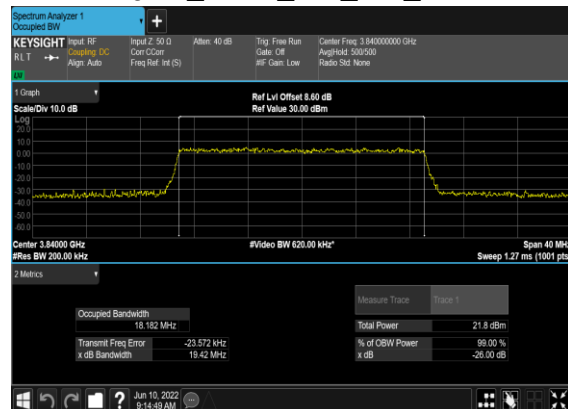


N77(30M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

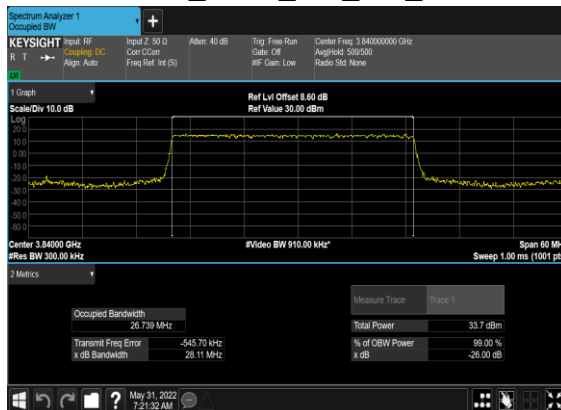


N77(30M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

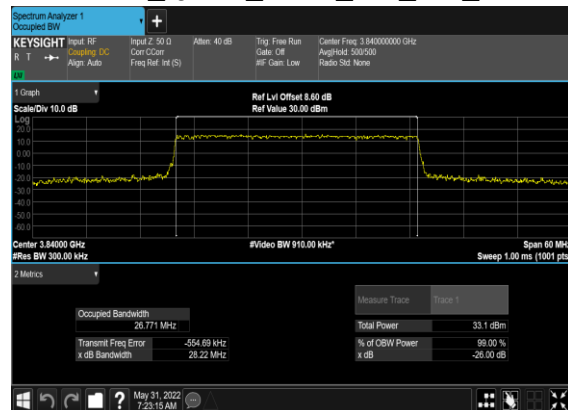


N77(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

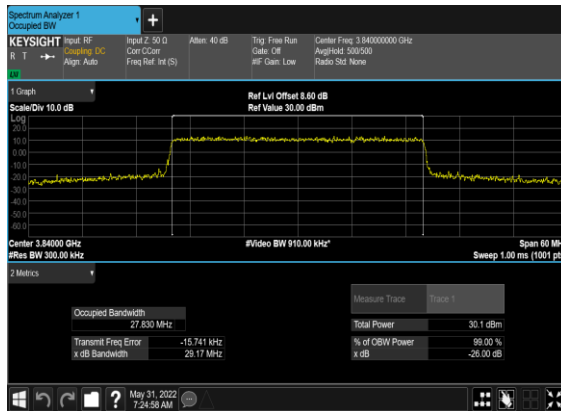


N77(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

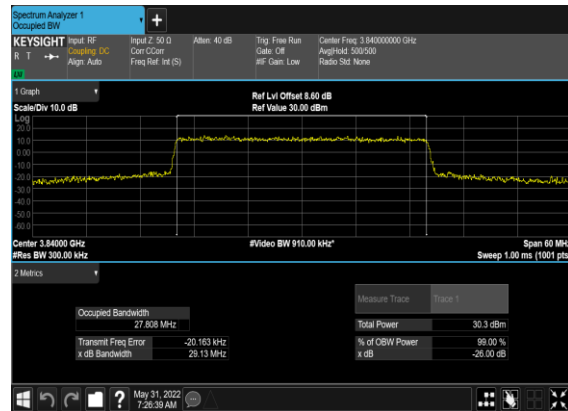


N77(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

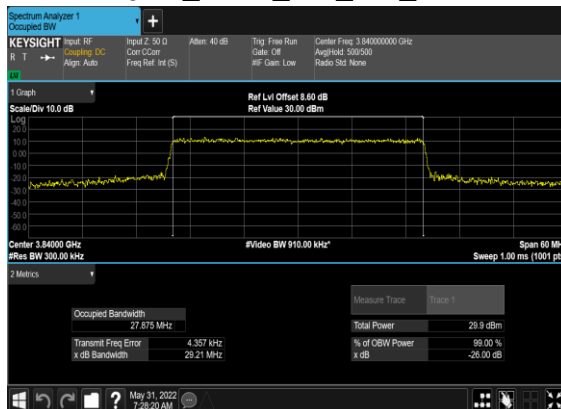


N77(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

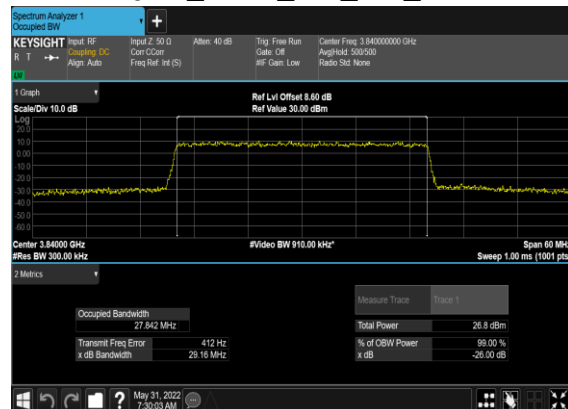


N77(40M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

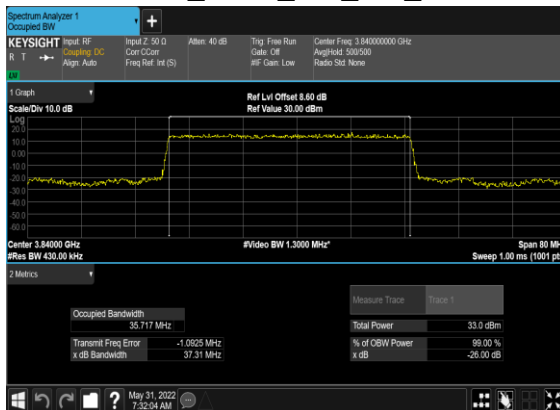


N77(40M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

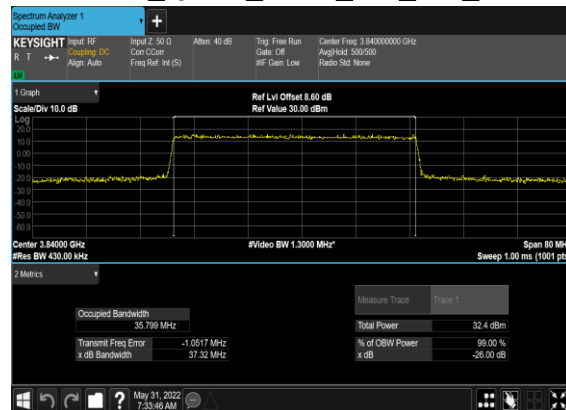


N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

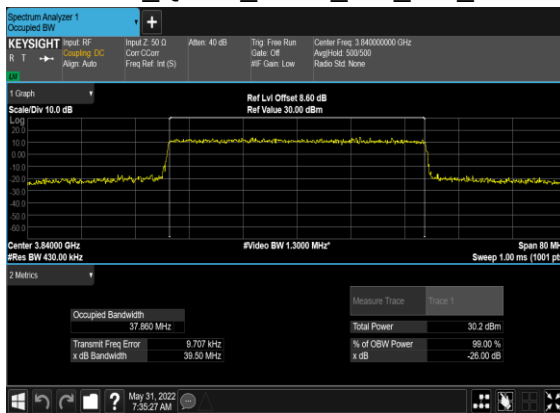


N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

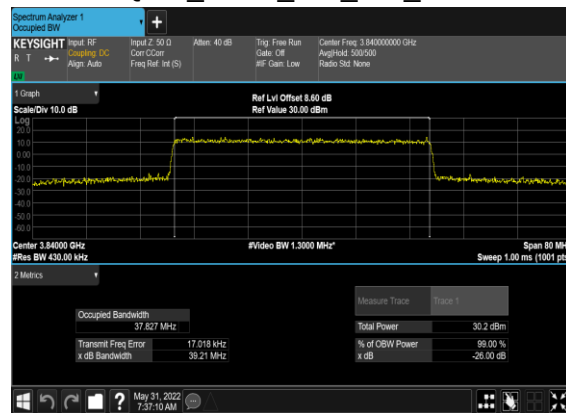


N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

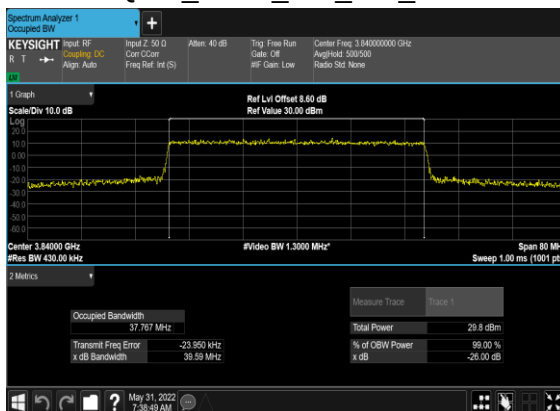


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

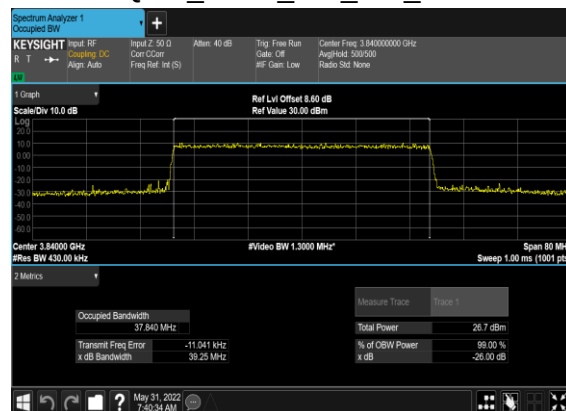


N77(60M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

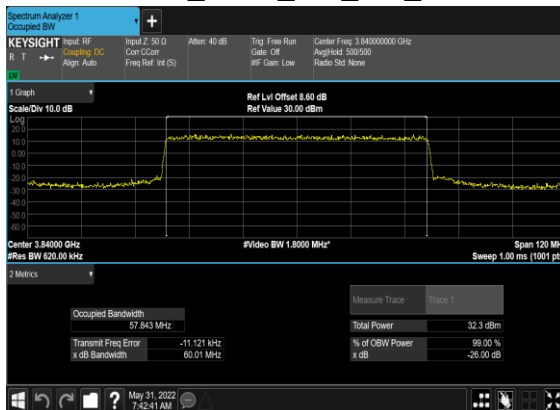


N77(60M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

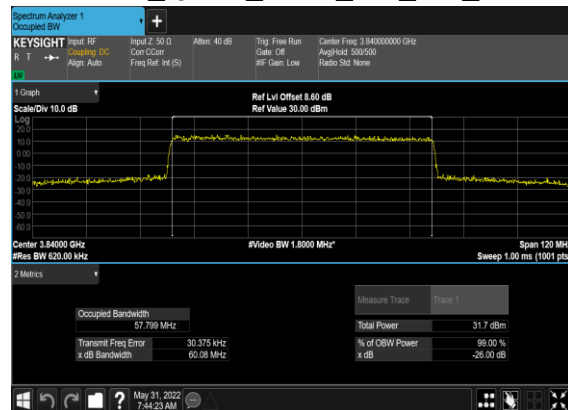


N77(60M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

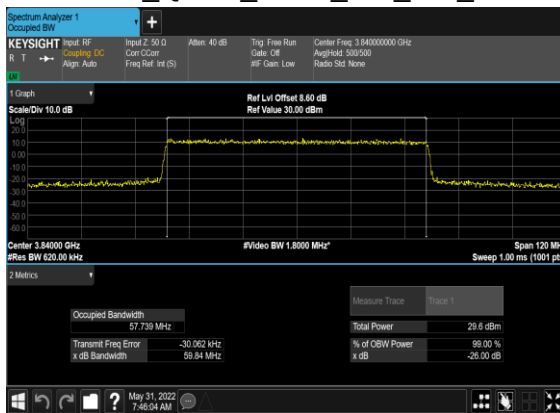


N77(60M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

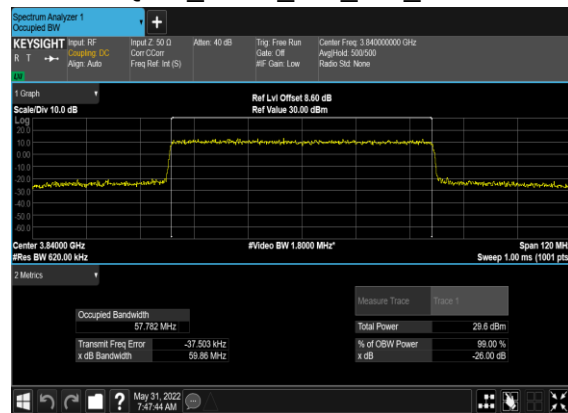


N77(60M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

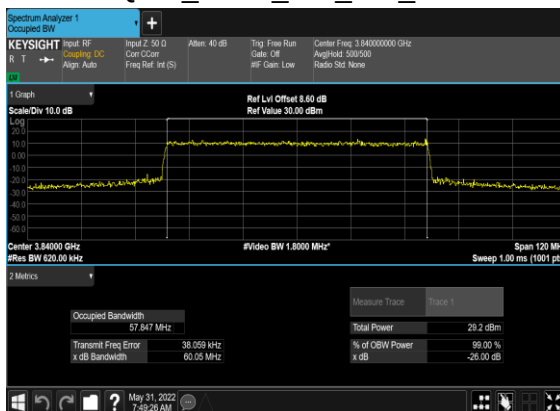


N77(60M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

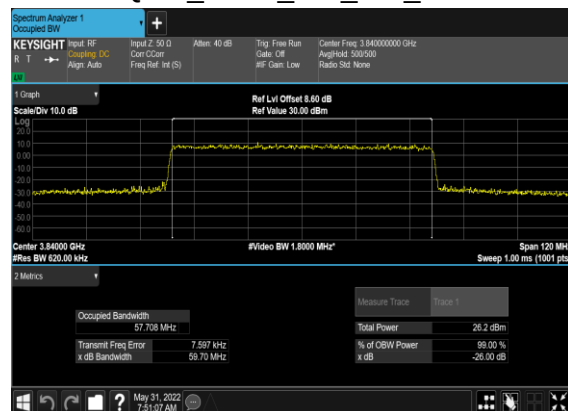


N77(80M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

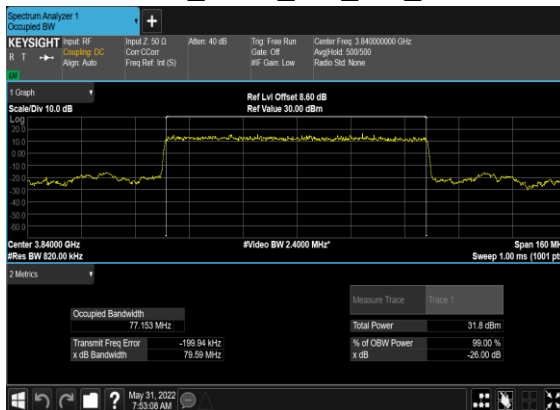


N77(80M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

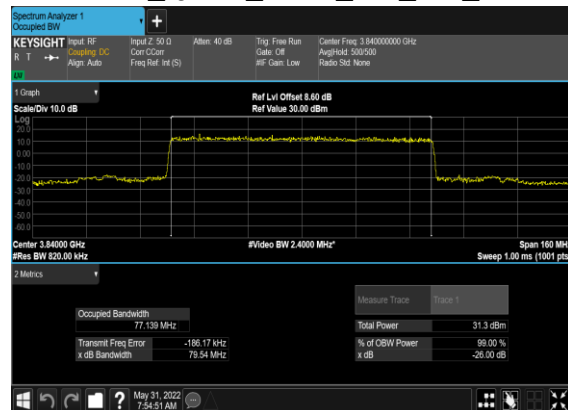


N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

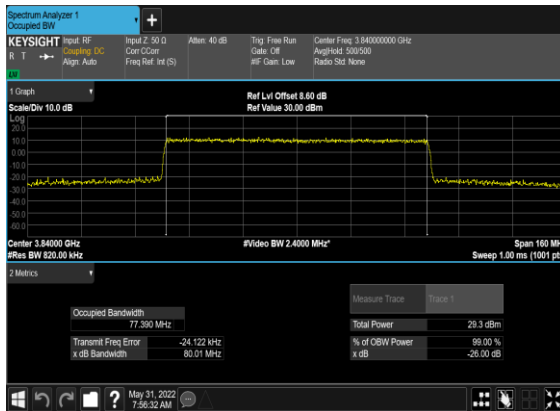


N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

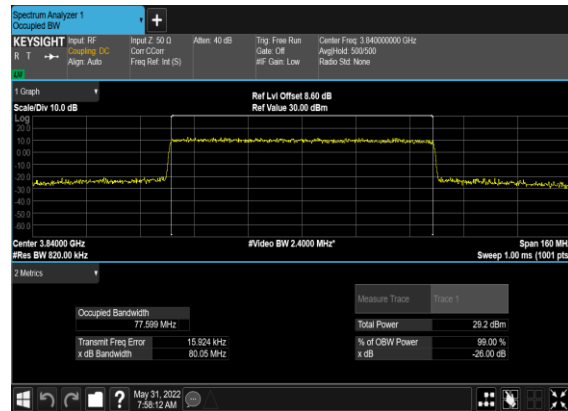


N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

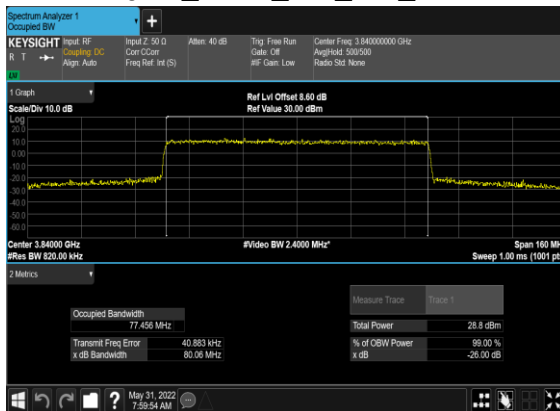


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

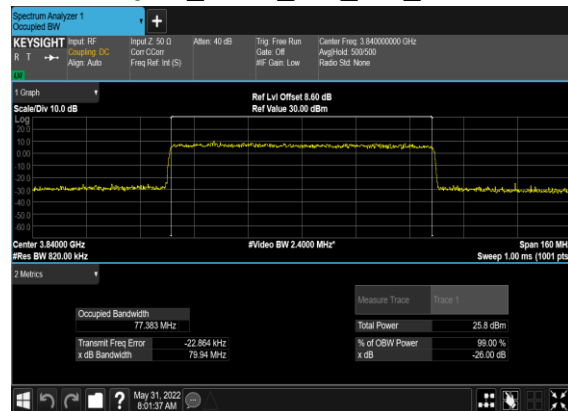


N77(100M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

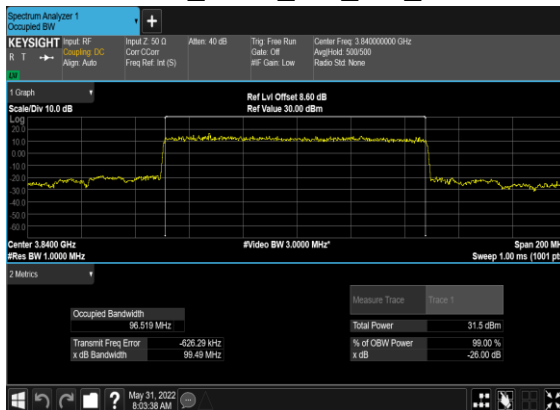


N77(100M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

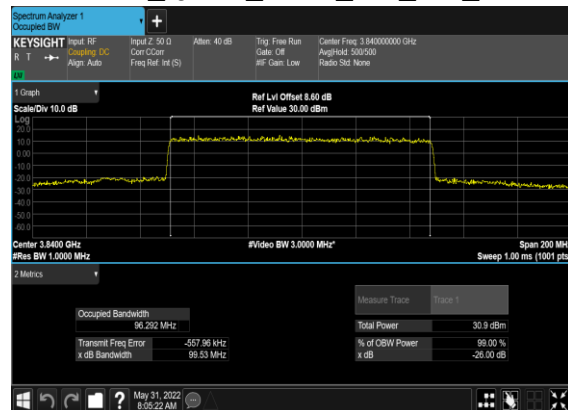


N77(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

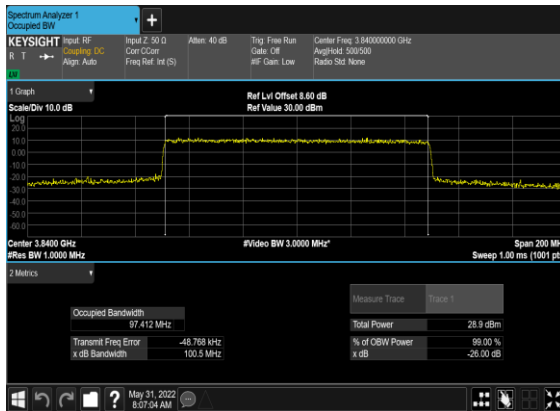


N77(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

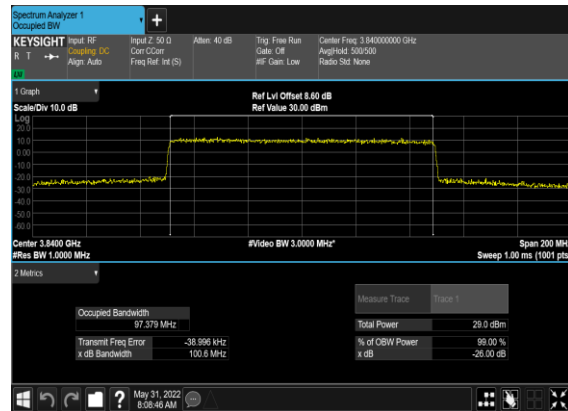

N77(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

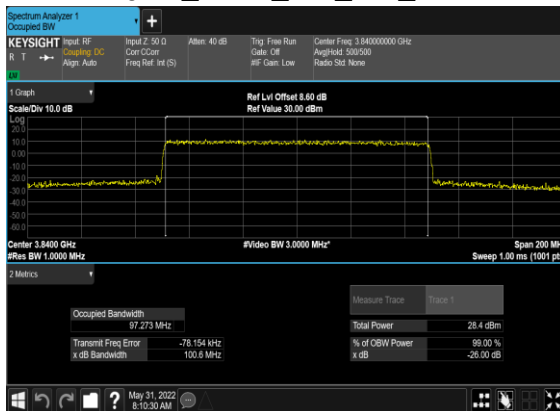

N77(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

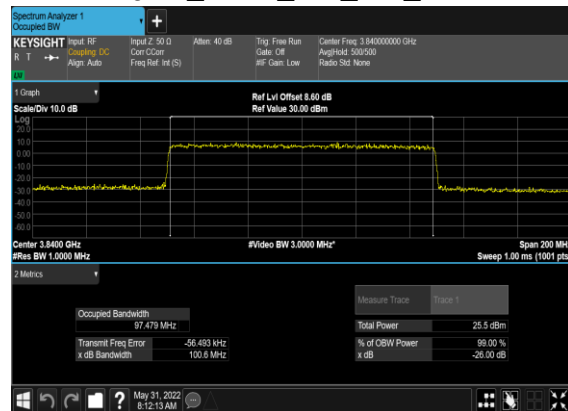


Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	---


77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---

77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

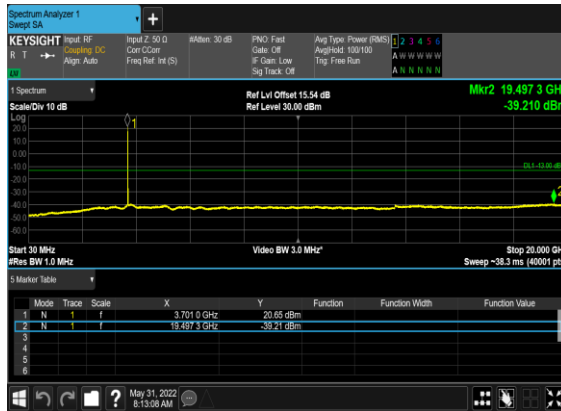


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

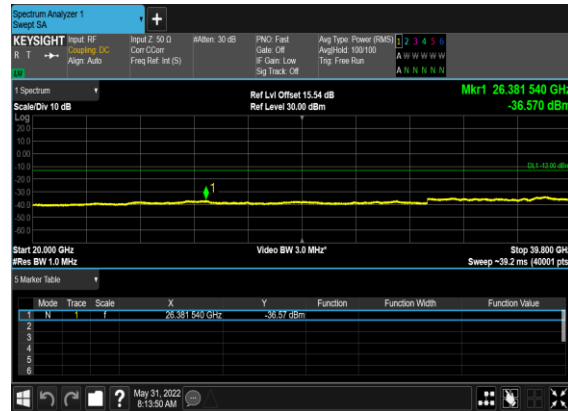

N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

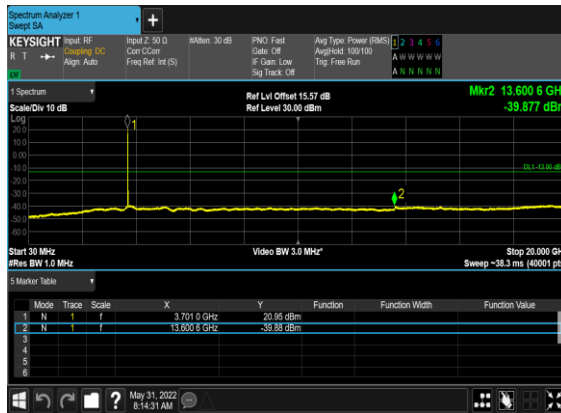


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

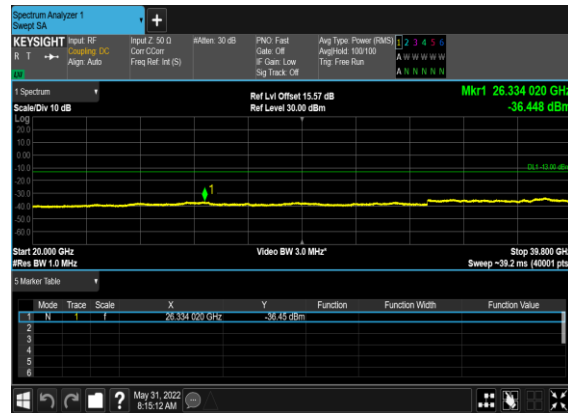


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH




N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

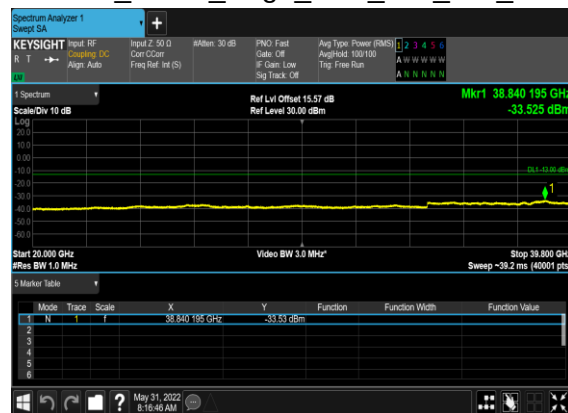


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

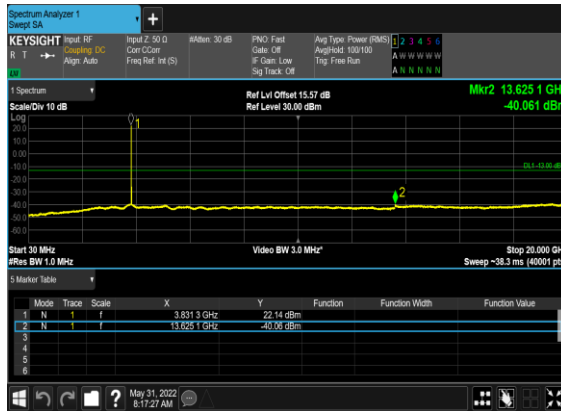


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

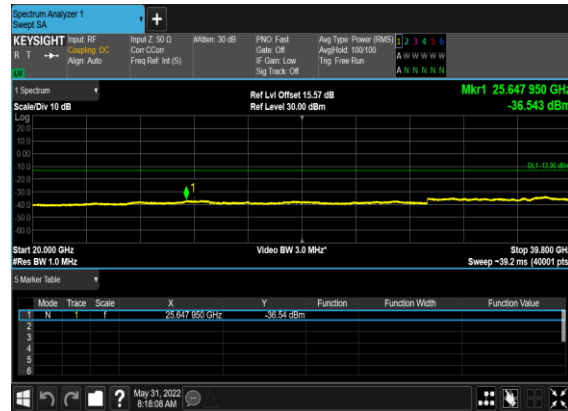


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

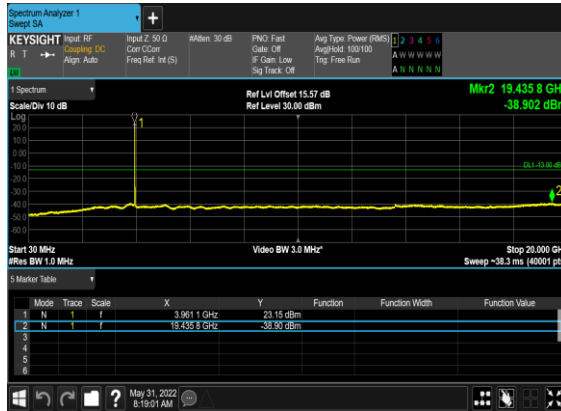


N77(20M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

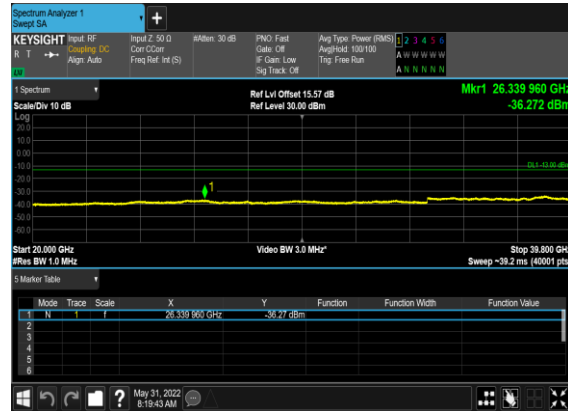


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

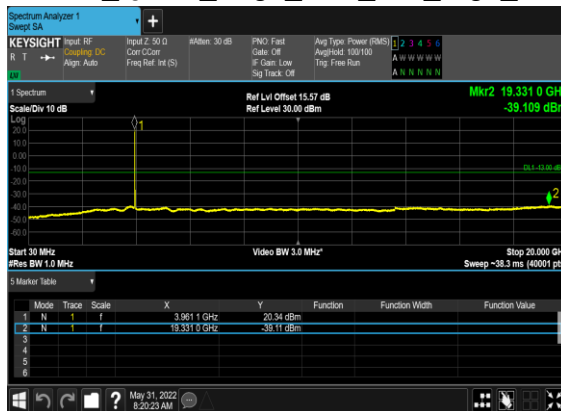


N77(20M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

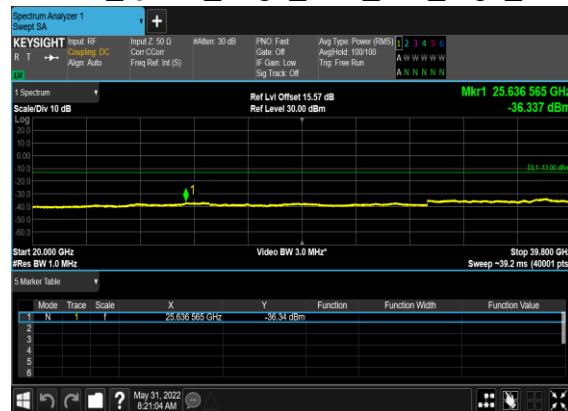


N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

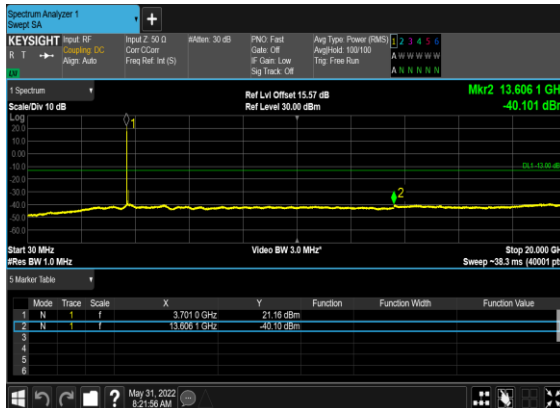


N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

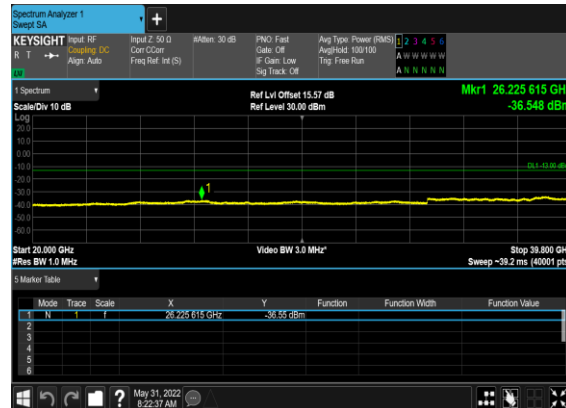

N77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

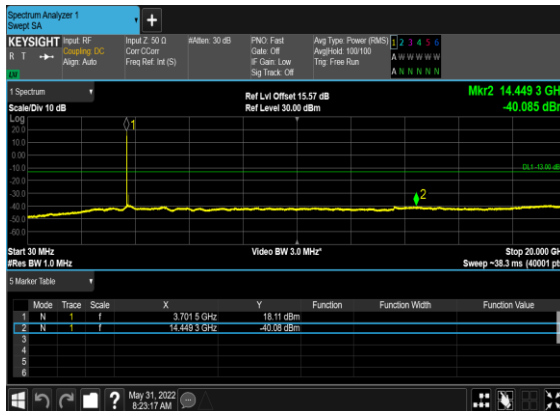


N77(60M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

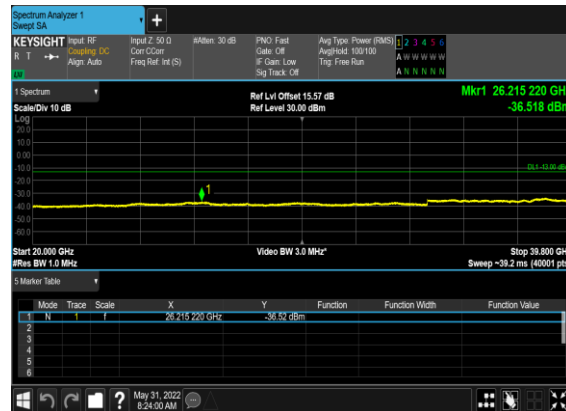


N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH




N77(60M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

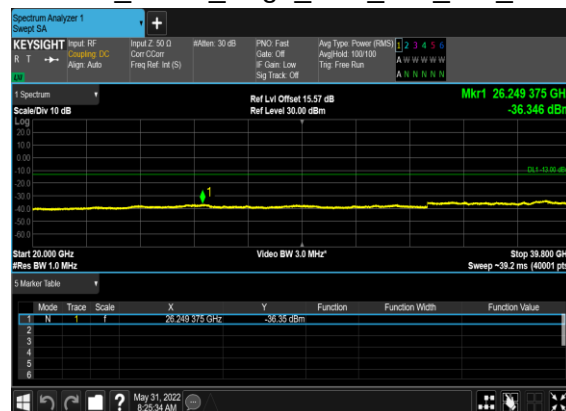


N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

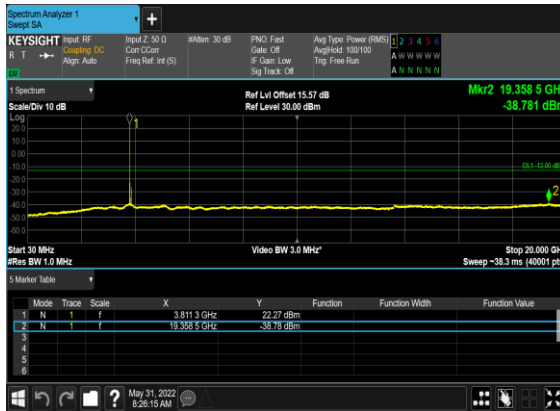


N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

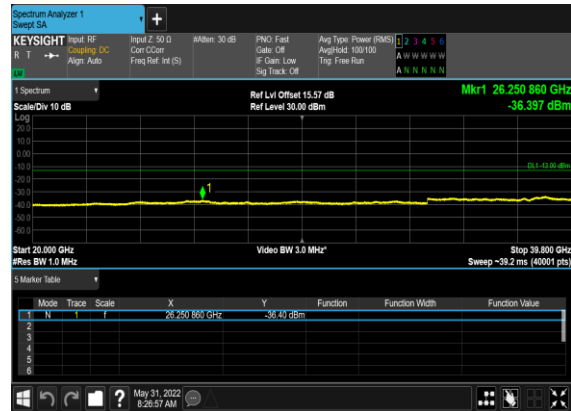


N77(60M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

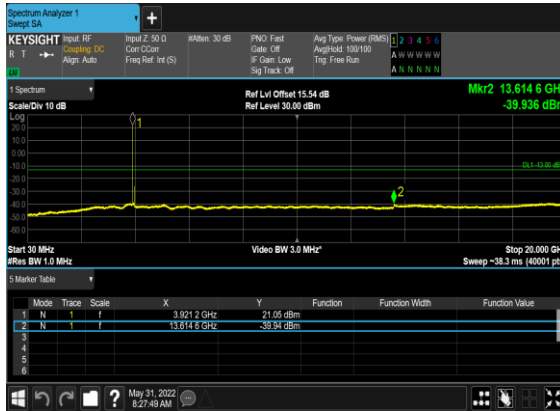


N77(60M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

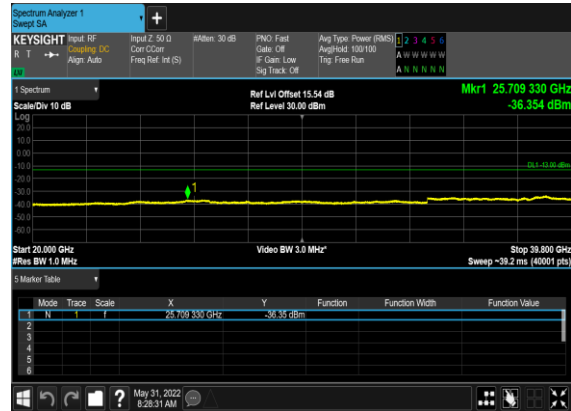


N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

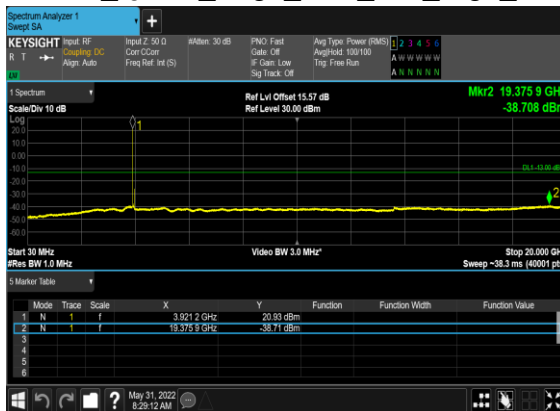


N77(60M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

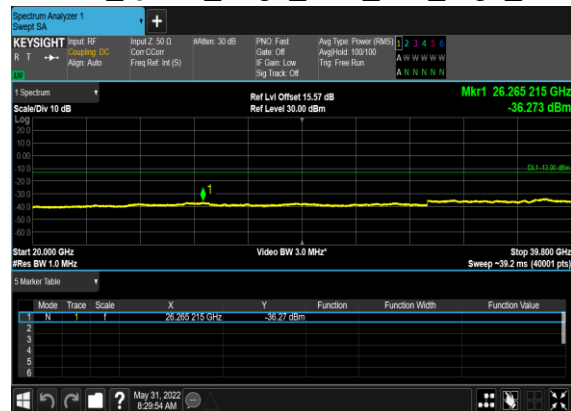


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

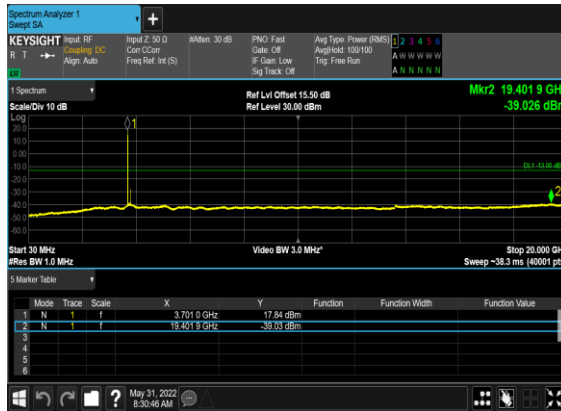


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

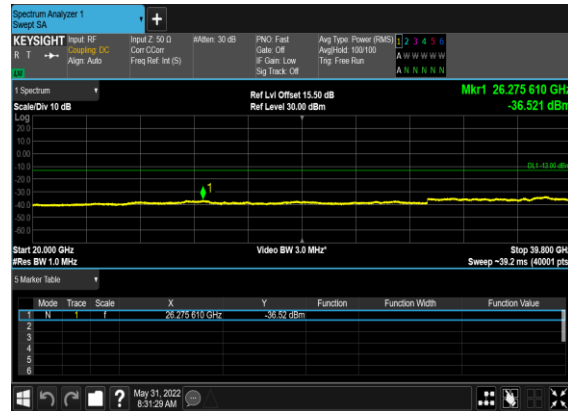


N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

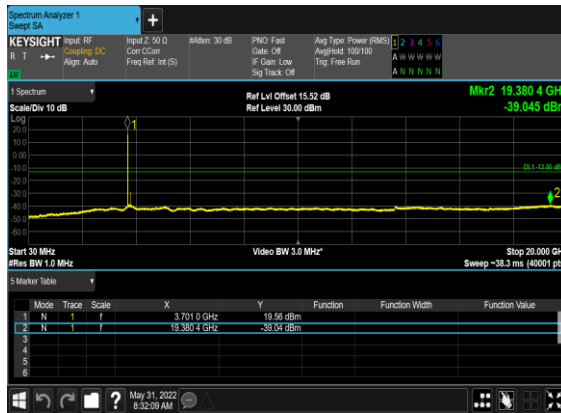


N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

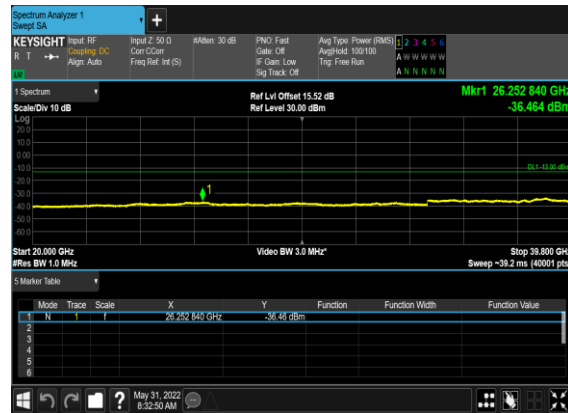


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

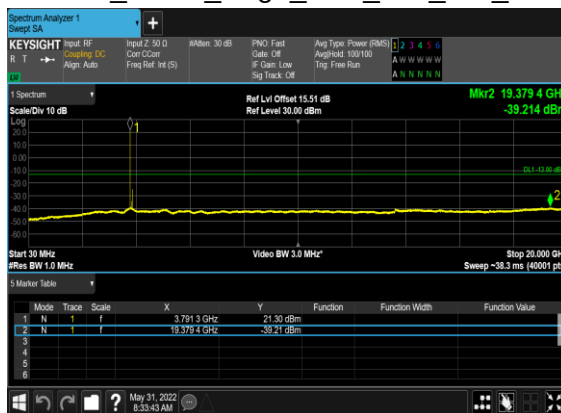


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

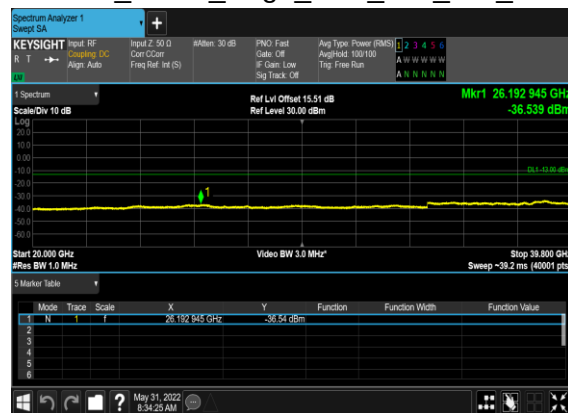


N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

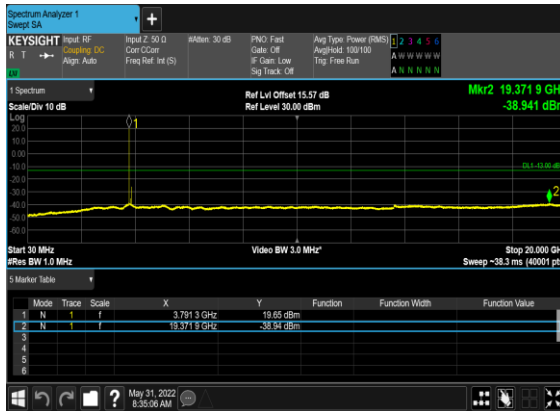


N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

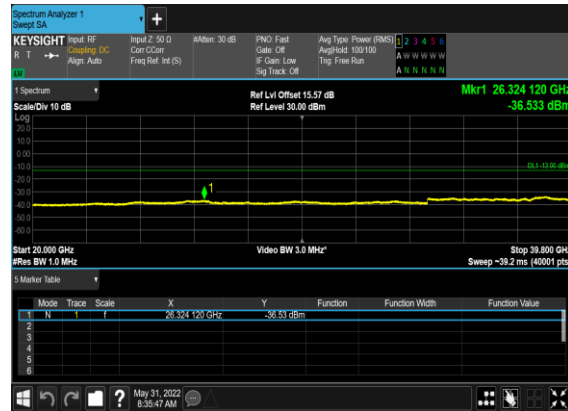


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

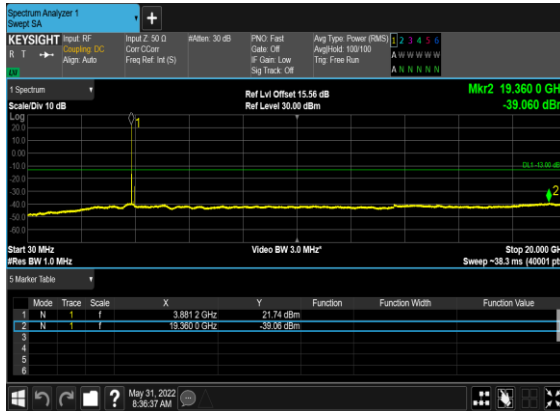


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

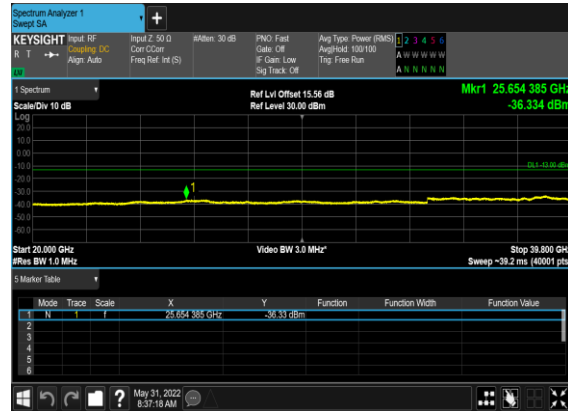

N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

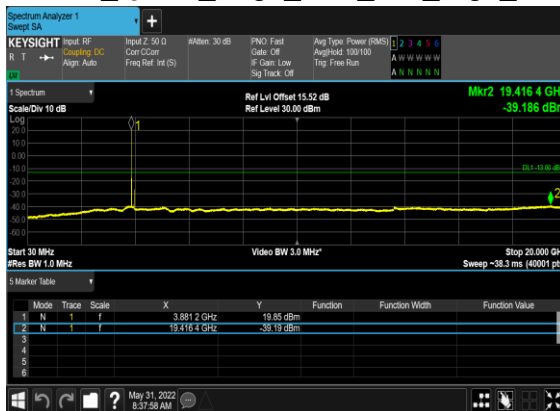


N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

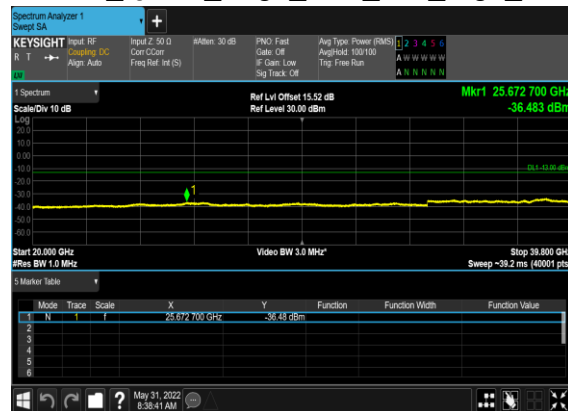


Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	1@50	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@50	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM BPSK	162@0	see graph	PASS
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	162@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	1@161	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@161	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM BPSK	162@0	see graph	PASS
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	162@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	270@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@272	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@272	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	270@0	see graph	PASS


N77(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

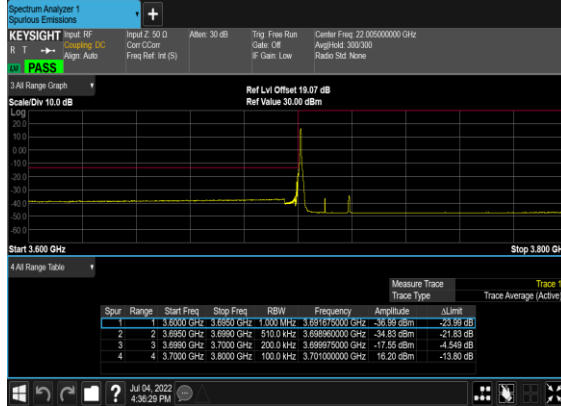

N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

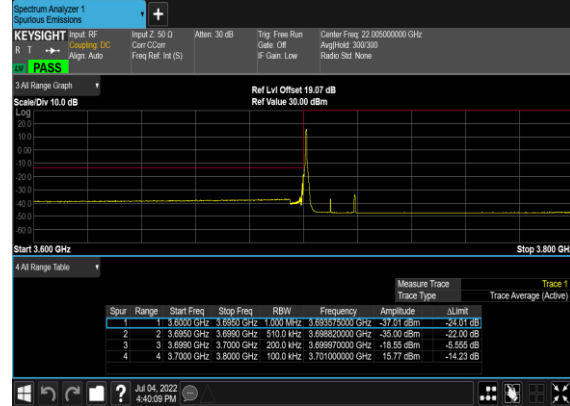


N77(20M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

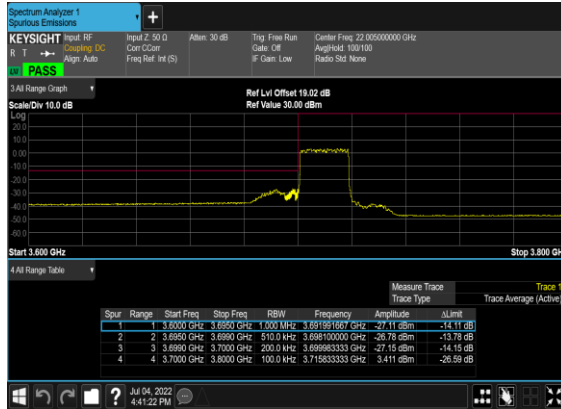

N77(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH



N77(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

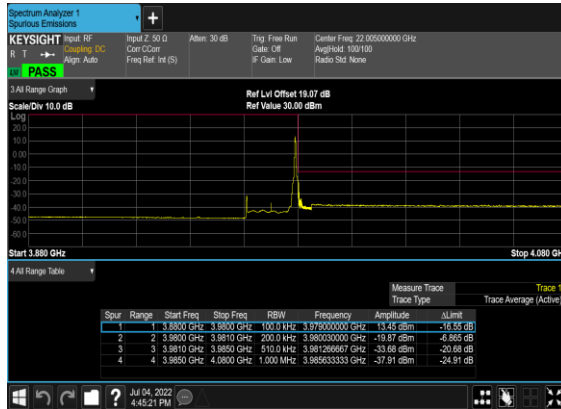

N77(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

