


Test Graphs

Band Edge NVNT a 5500MHz Low Ant1

Spectrum

Ref Level 20.00 dBm Offset 7.10 dB RBW 1 MHz
Att 30 dB SWT 1 ms VBW 3 MHz Mode Auto Sweep
SGL Count 100/100

IPk Max

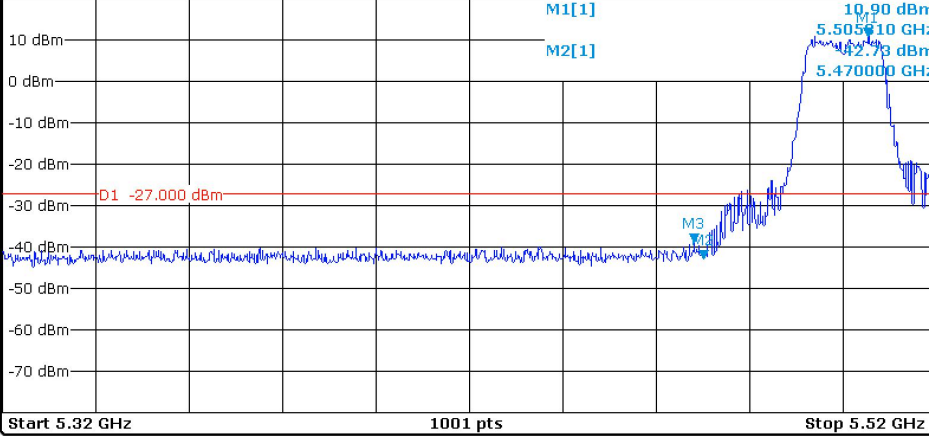

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	5.50531 GHz	10.90 dBm		
M2		1	5.47 GHz	-42.73 dBm		
M3		1	5.468 GHz	-38.85 dBm		

Band Edge NVNT a 5700MHz High Ant1

Spectrum

Ref Level 20.00 dBm Offset 7.24 dB RBW 1 MHz
Att 30 dB SWT 1 ms VBW 3 MHz Mode Auto Sweep
SGL Count 100/100


IPk Max

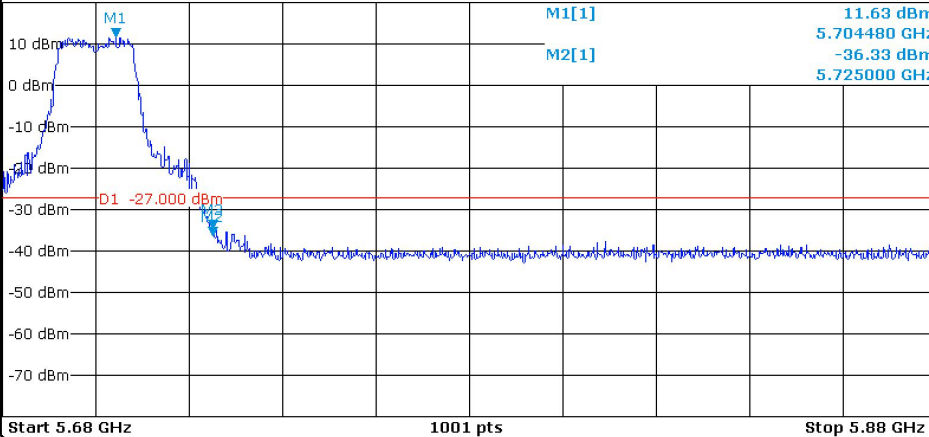


Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	5.70448 GHz	11.63 dBm		
M2		1	5.725 GHz	-36.33 dBm		
M3		1	5.7252 GHz	-34.55 dBm		


Band Edge NVNT n20 5500MHz Low Ant1

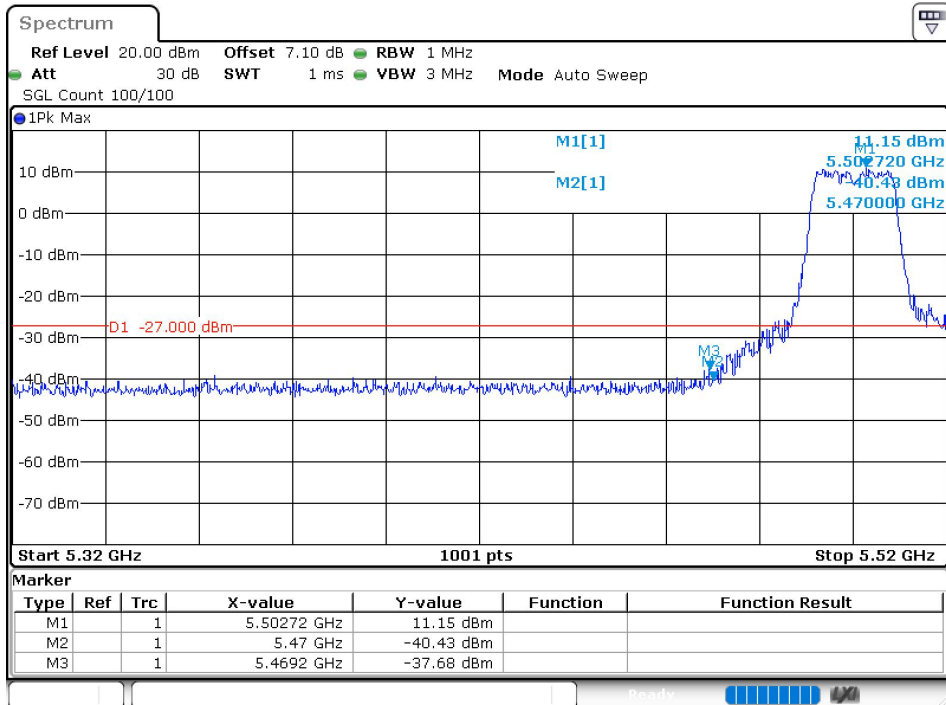


Band Edge NVNT n20 5700MHz High Ant1

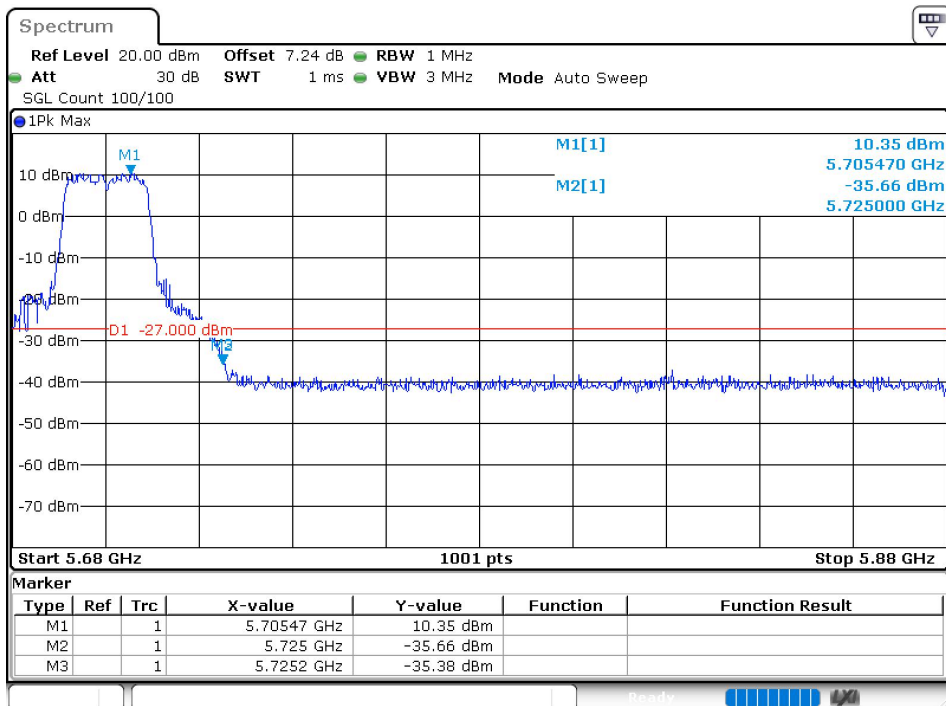

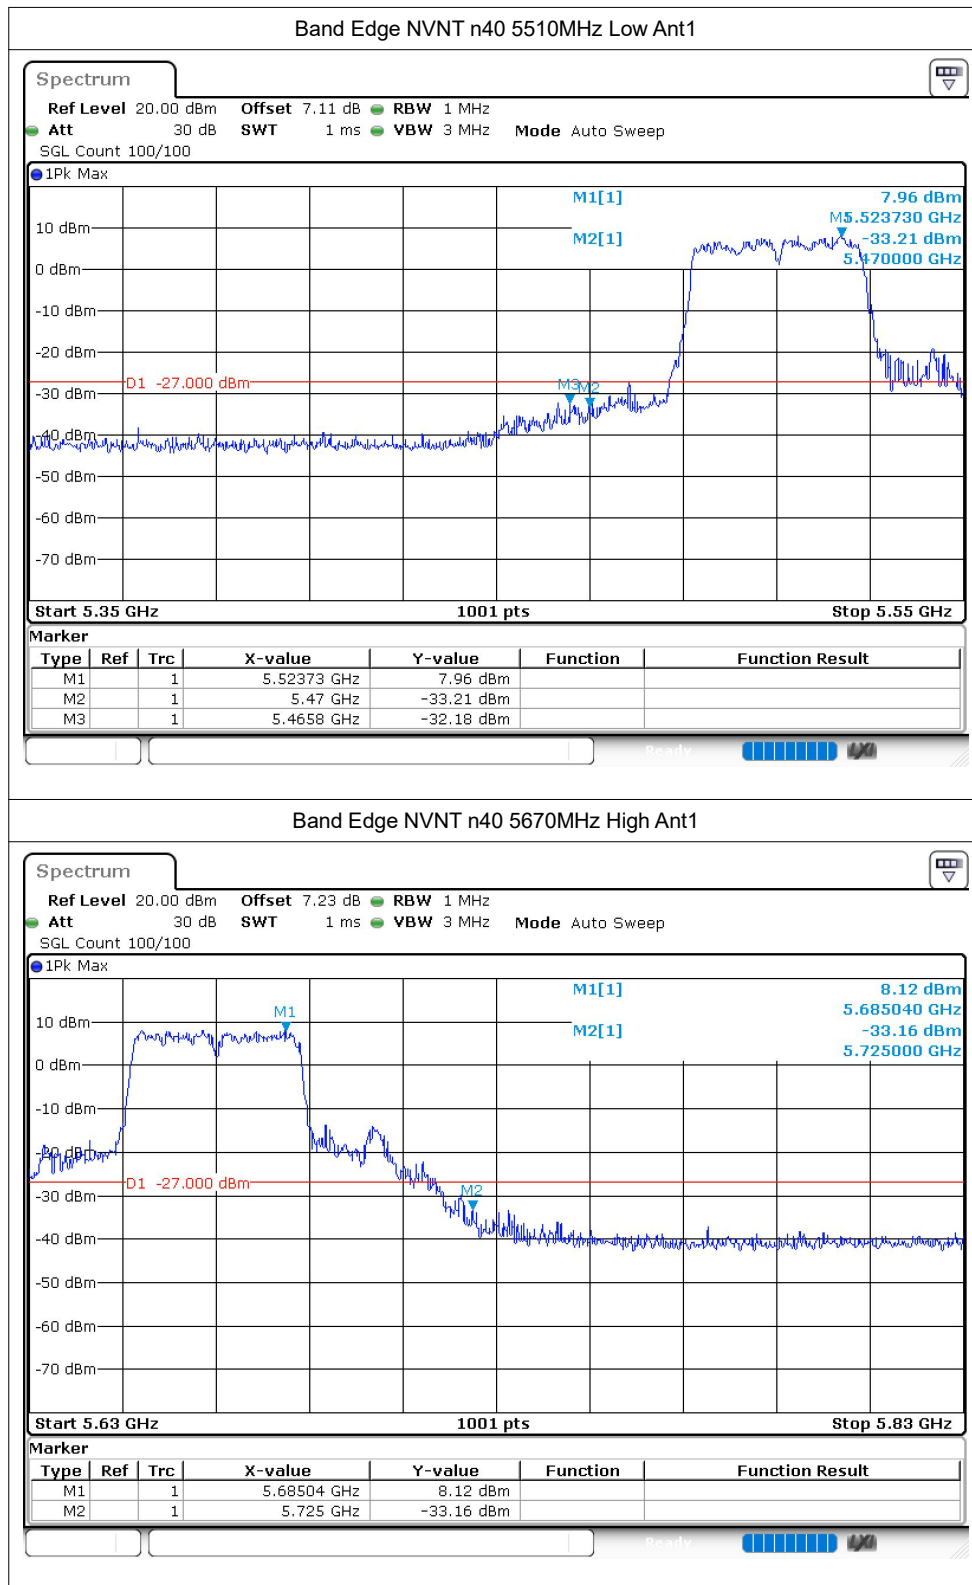

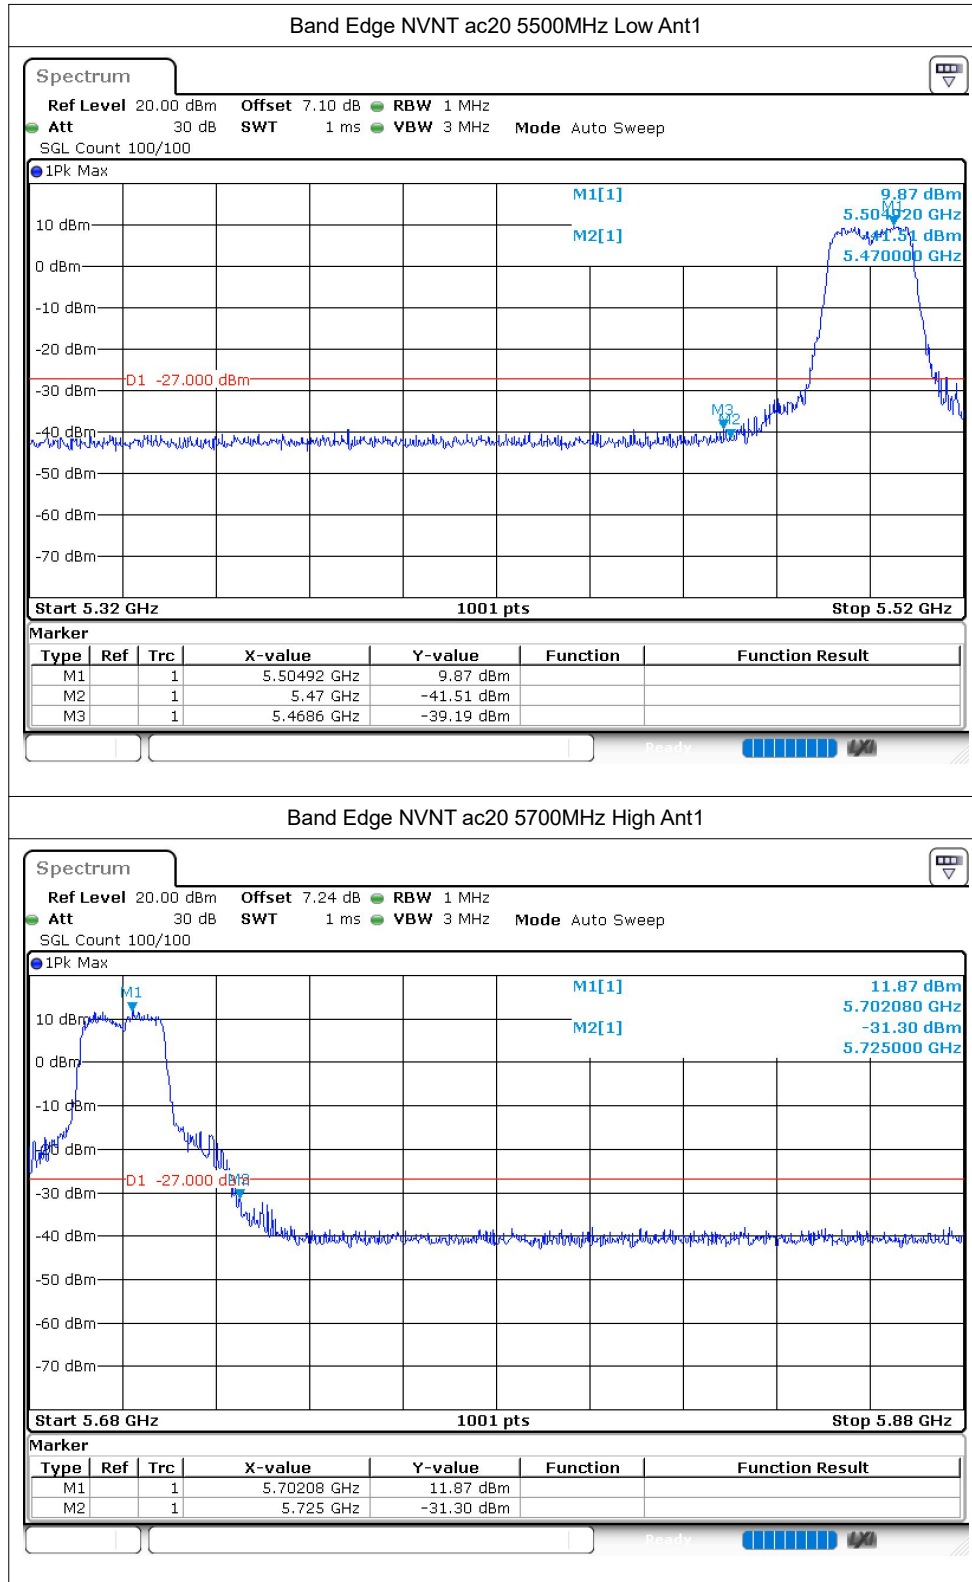

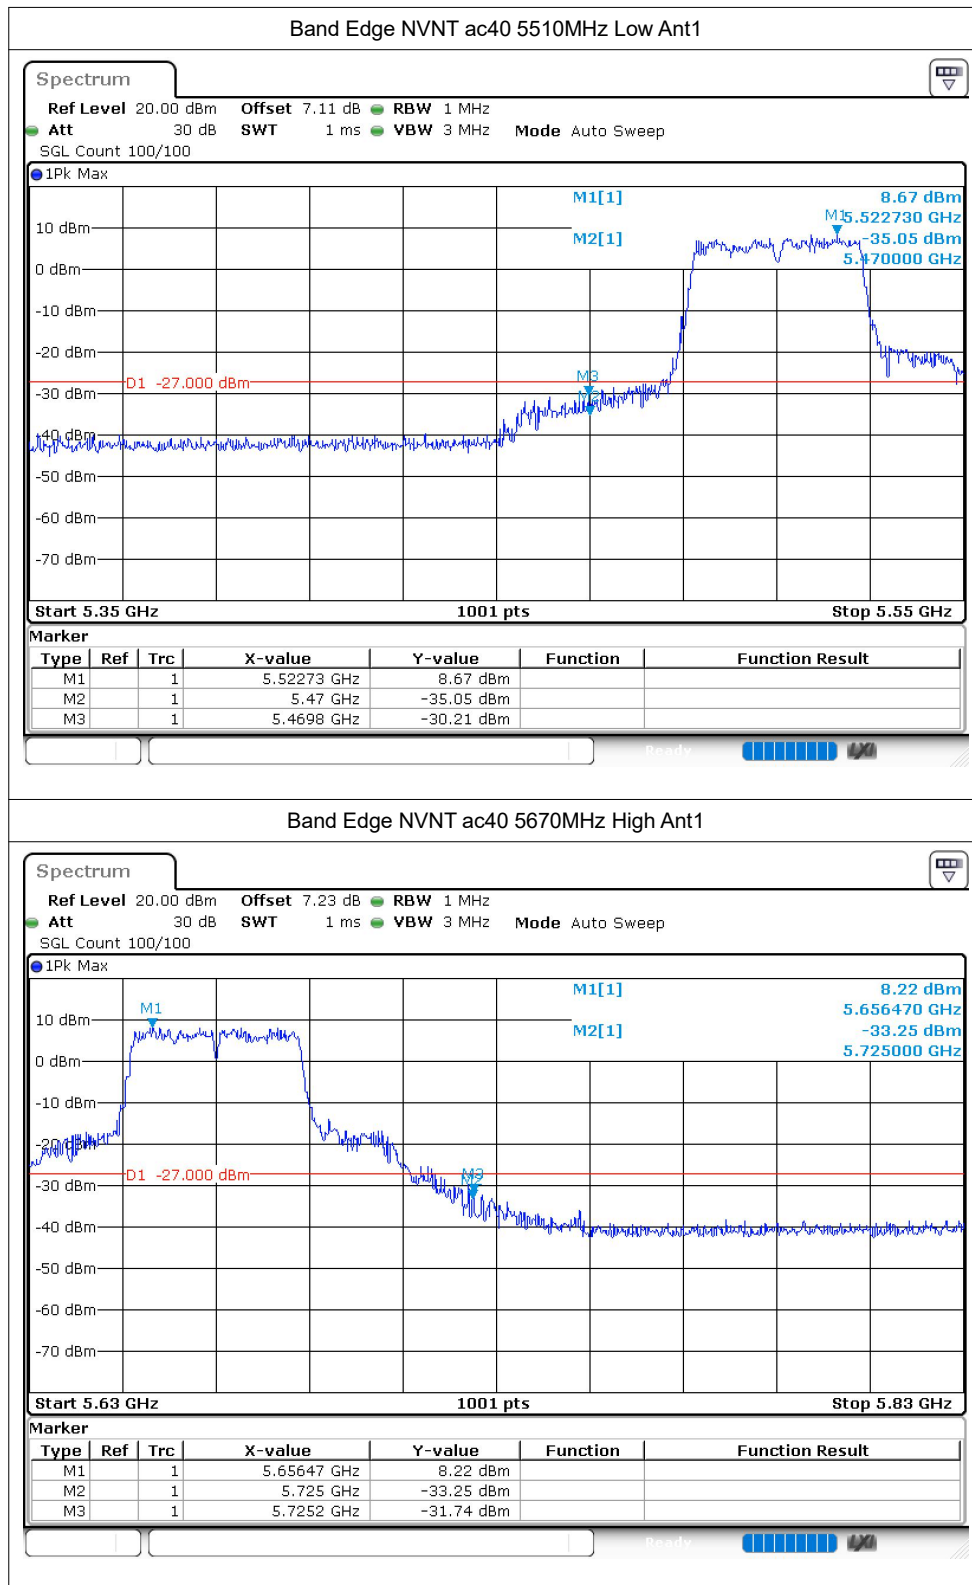


Band Edge NVNT ac80 5530MHz Low Ant1

Spectrum

Ref Level 20.00 dBm Offset 7.12 dB RBW 1 MHz
Att 30 dB SWT 1 ms VBW 3 MHz Mode Auto Sweep
SGL Count 100/100

1Pk Max

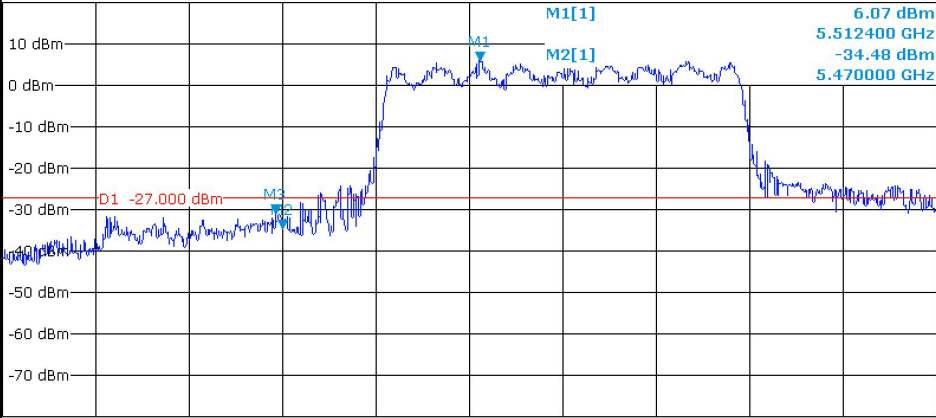

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	5.5124 GHz	6.07 dBm		
M2		1	5.47 GHz	-34.48 dBm		
M3		1	5.4686 GHz	-30.76 dBm		

Band Edge NVNT ac80 5610MHz High Ant1

Spectrum

Ref Level 20.00 dBm Offset 7.21 dB RBW 1 MHz
Att 30 dB SWT 1 ms VBW 3 MHz Mode Auto Sweep
SGL Count 100/100

1Pk Max

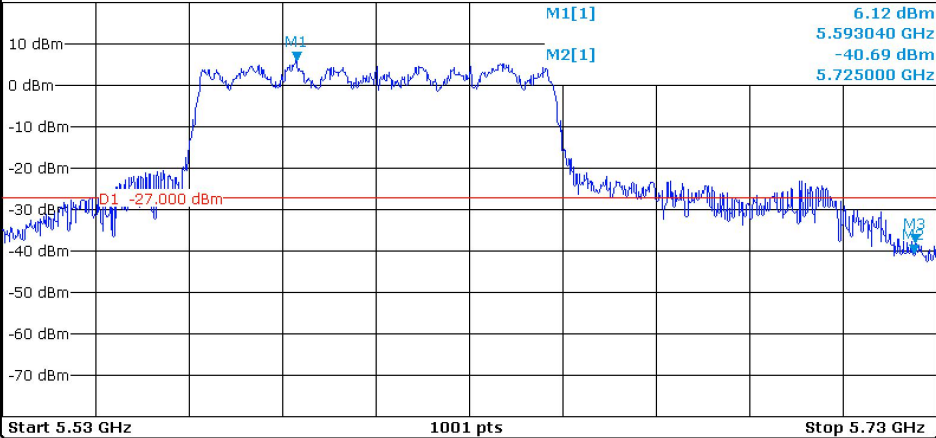

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	5.59304 GHz	6.12 dBm		
M2		1	5.725 GHz	-40.69 dBm		
M3		1	5.7254 GHz	-38.09 dBm		

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant1	-30.63	-27	Pass
NVNT	a	5600	Ant1	-31.14	-27	Pass
NVNT	a	5700	Ant1	-30.49	-27	Pass
NVNT	n20	5500	Ant1	-31.44	-27	Pass
NVNT	n20	5600	Ant1	-31.1	-27	Pass
NVNT	n20	5700	Ant1	-30.29	-27	Pass
NVNT	n40	5510	Ant1	-30.23	-27	Pass
NVNT	n40	5590	Ant1	-30.82	-27	Pass
NVNT	n40	5670	Ant1	-31.02	-27	Pass
NVNT	ac20	5500	Ant1	-30.4	-27	Pass
NVNT	ac20	5600	Ant1	-30.94	-27	Pass
NVNT	ac20	5700	Ant1	-30.96	-27	Pass
NVNT	ac40	5510	Ant1	-30.57	-27	Pass
NVNT	ac40	5590	Ant1	-29.91	-27	Pass
NVNT	ac40	5670	Ant1	-31.52	-27	Pass
NVNT	ac80	5530	Ant1	-31.79	-27	Pass
NVNT	ac80	5610	Ant1	-30.9	-27	Pass

Test Graphs

Tx. Spurious NVNT a 5500MHz Ant1 Emission

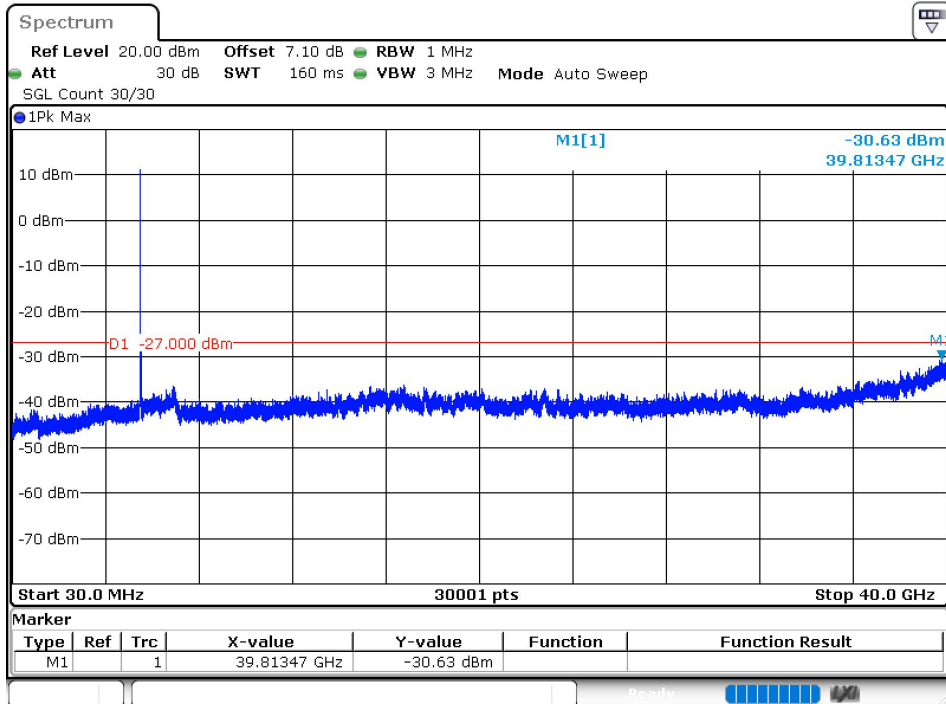

Tx. Spurious NVNT a 5600MHz Ant1 Emission

