


1. Bandwidth

1.1 OBW


1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.843	Pass
		2441	DH5	1	0.838	Pass
		2480	DH5	1	0.837	Pass
PI/4DQPSK	SISO	2402	2DH5	1	1.161	Pass
		2441	2DH5	1	1.162	Pass
		2480	2DH5	1	1.162	Pass
8DPSK	SISO	2402	3DH5	1	1.162	Pass
		2441	3DH5	1	1.162	Pass
		2480	3DH5	1	1.161	Pass


1.1.2 Test Graph

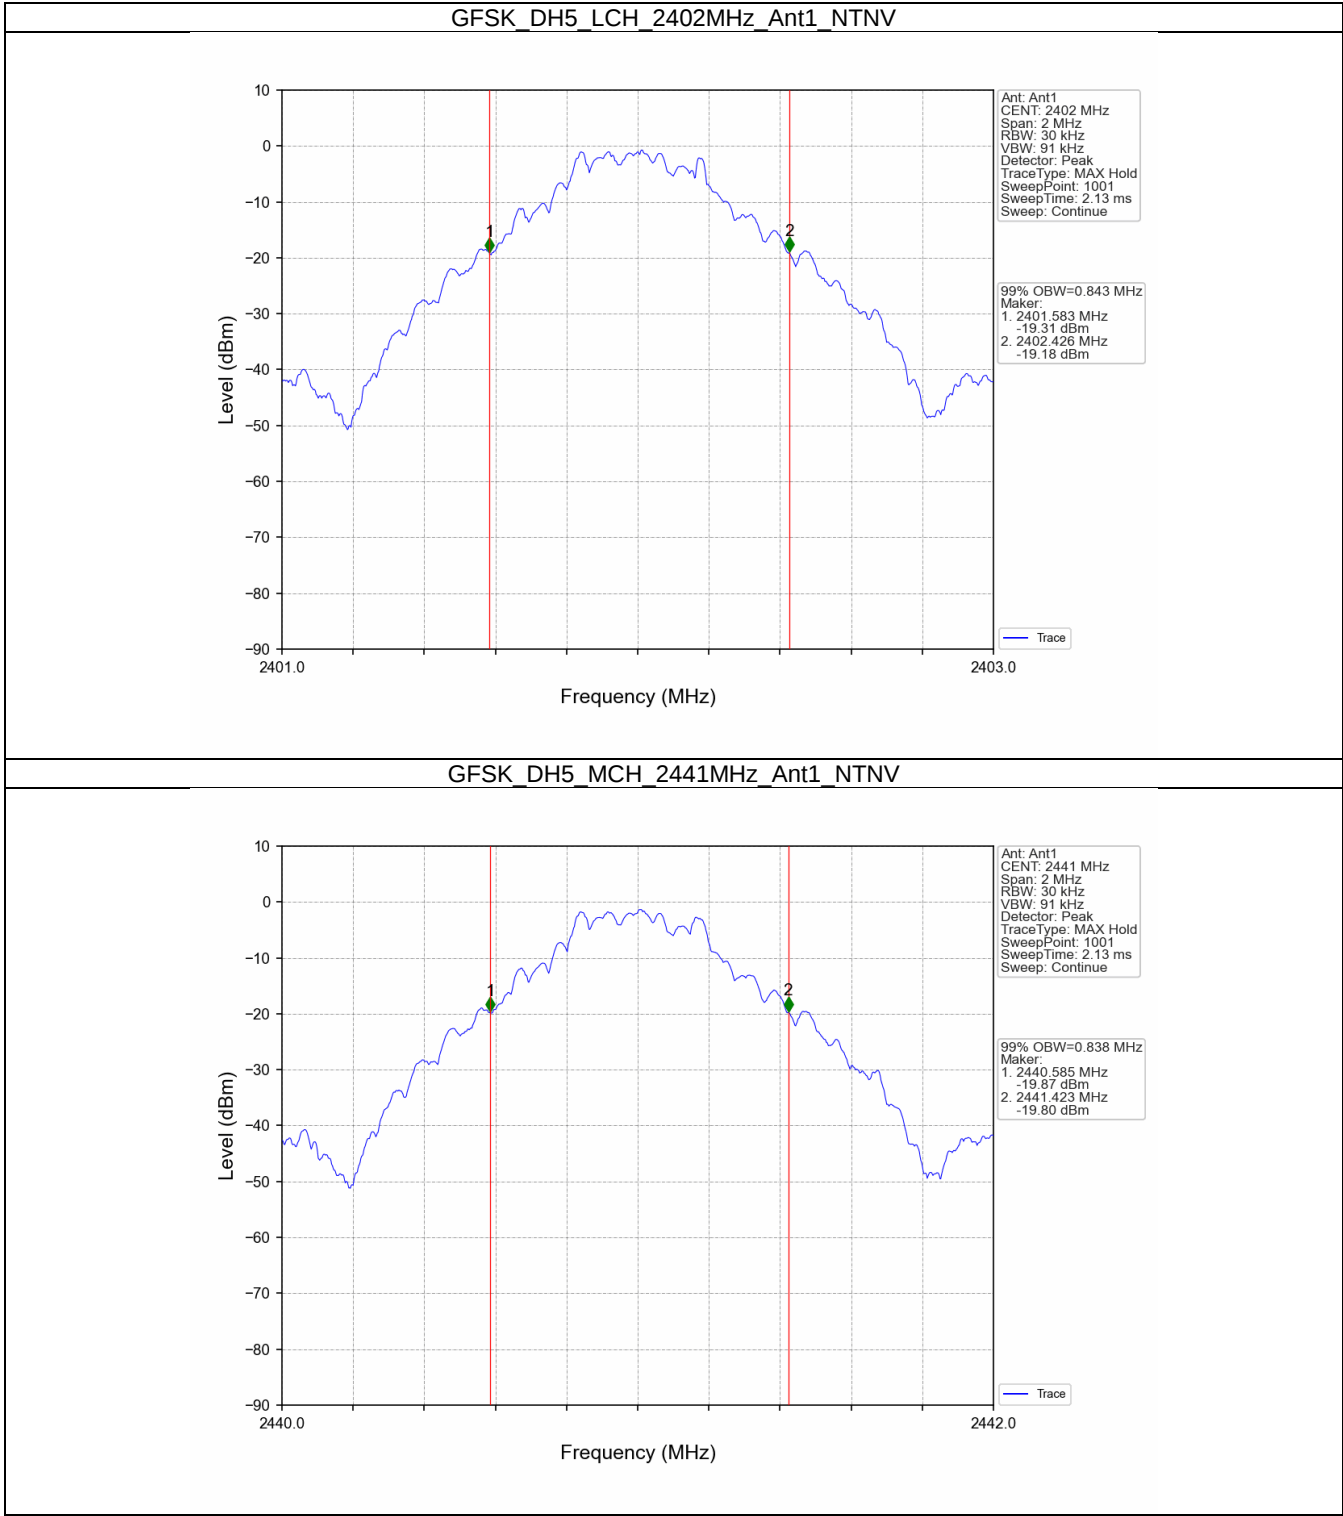


GFSK DH5 HCH 2480MHz Ant1 NTNV

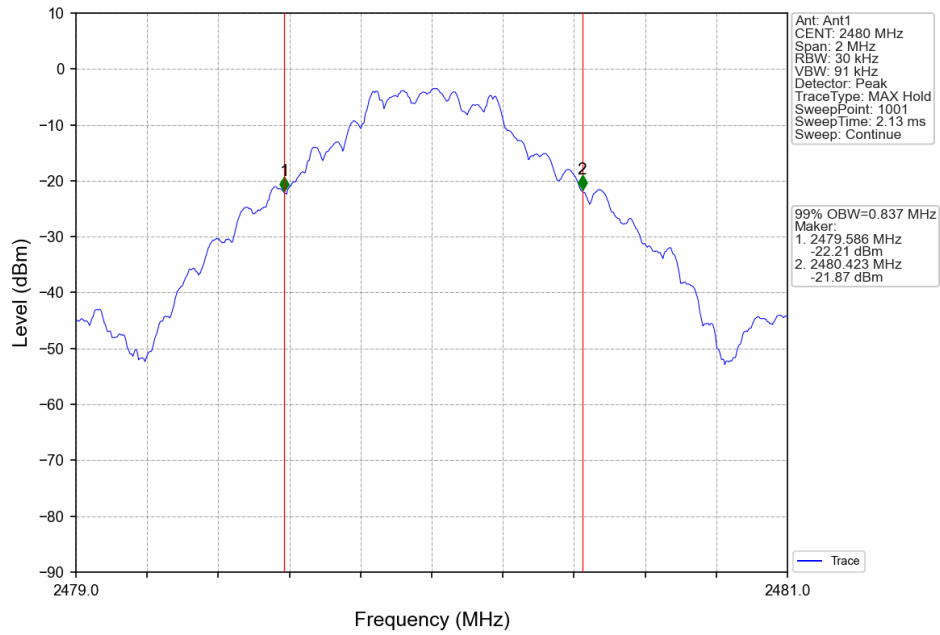


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTNV

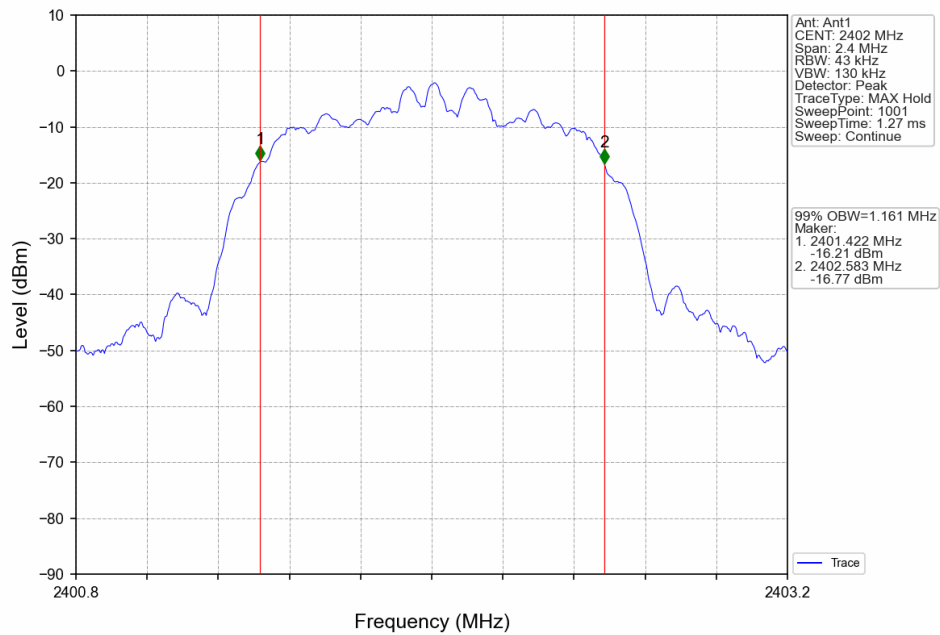


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTNV

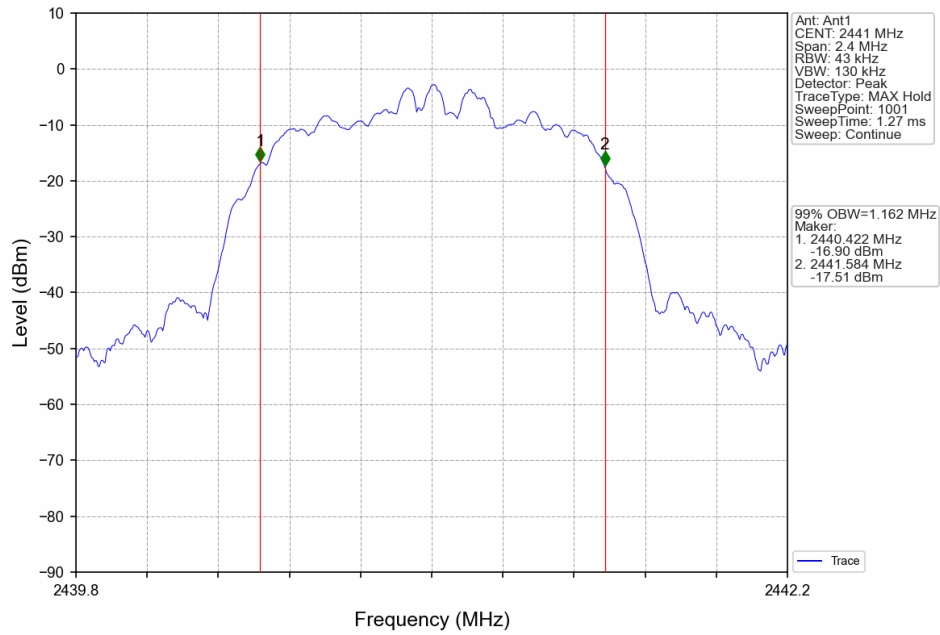


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTNV

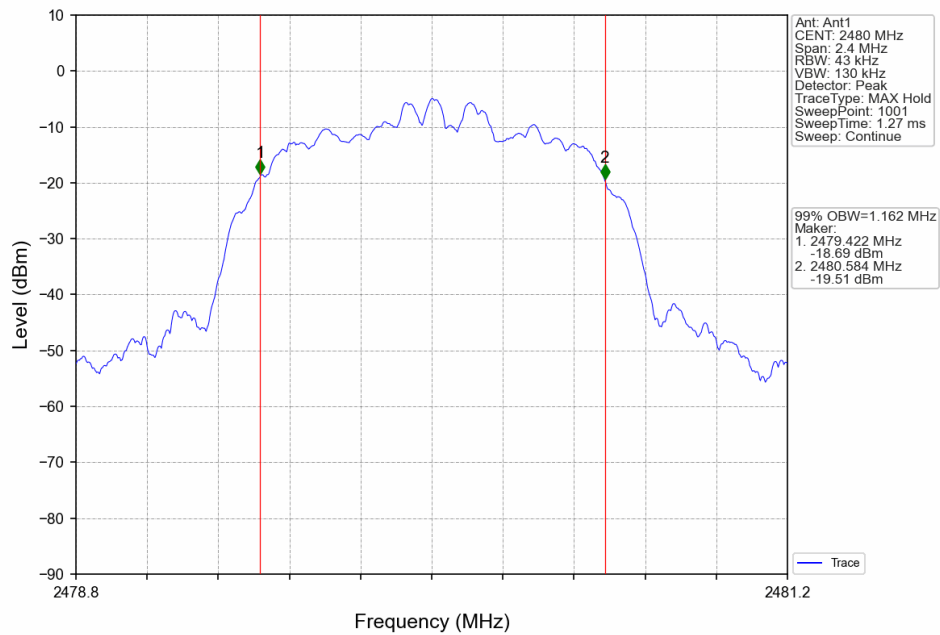


8DPSK 3DH5 LCH 2402MHz Ant1 NTV

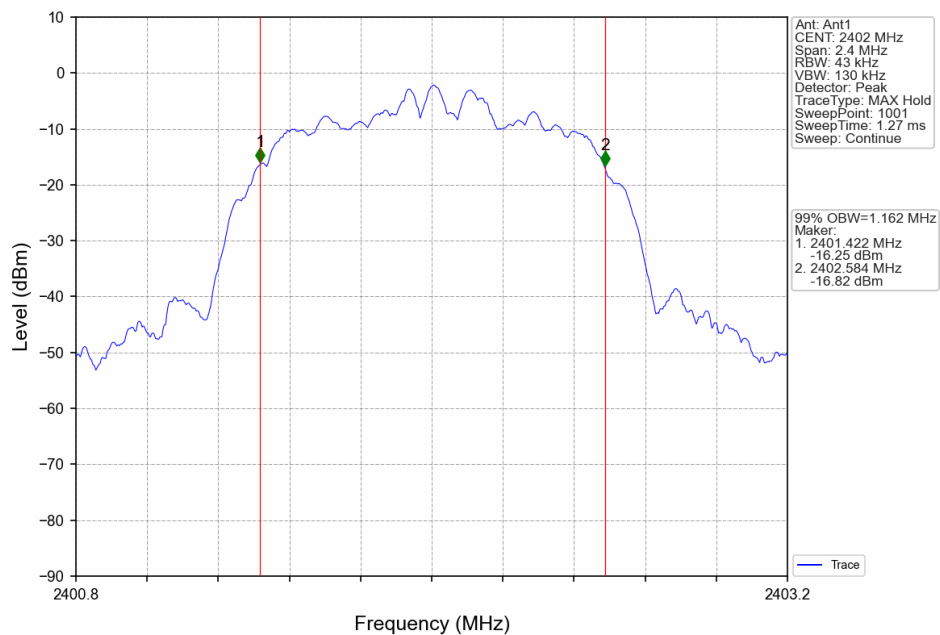

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

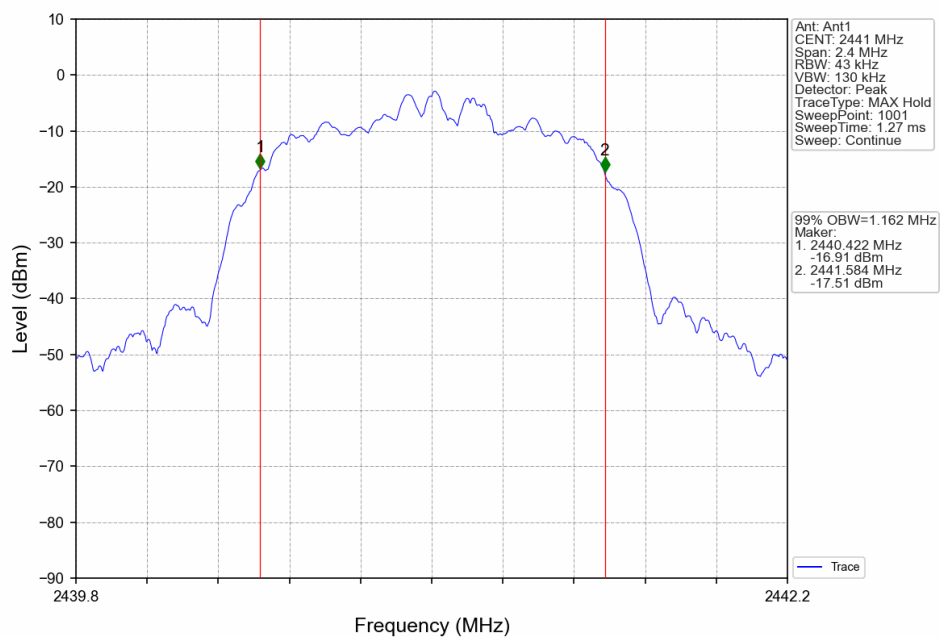

8DPSK 3DH5 HCH 2480MHz Ant1 NTN

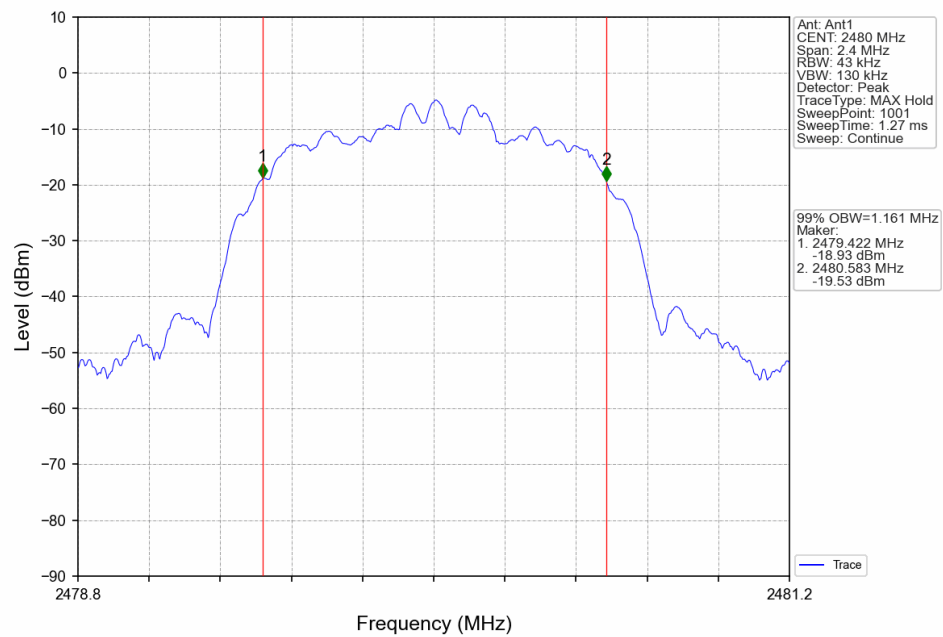


1.2 20dB BW


1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.953	Pass
		2441	DH5	1	0.953	Pass
		2480	DH5	1	0.952	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.292	Pass
		2441	2DH5	1	1.292	Pass
		2480	2DH5	1	1.292	Pass
8DPSK	SISO	2402	3DH5	1	1.291	Pass
		2441	3DH5	1	1.293	Pass
		2480	3DH5	1	1.299	Pass


1.2.2 Test Graph

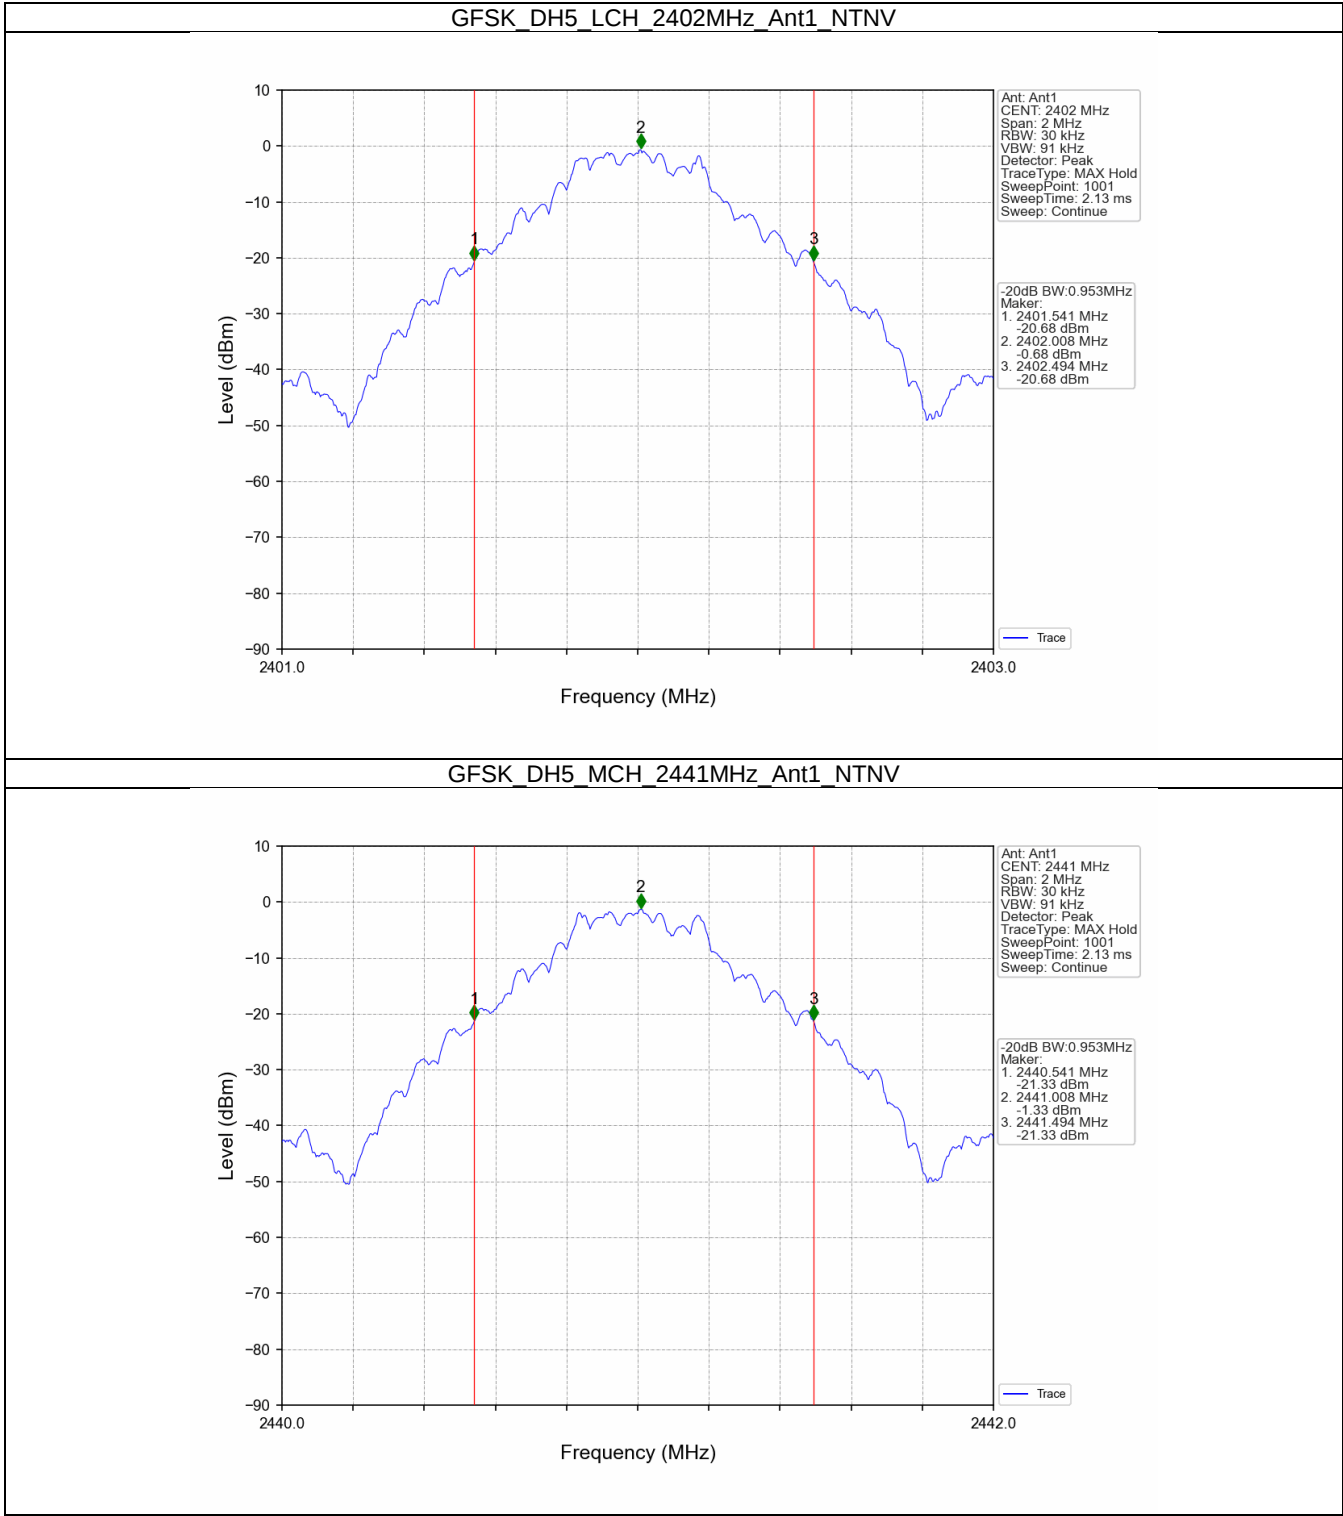


GFSK DH5 HCH 2480MHz Ant1 NTNV

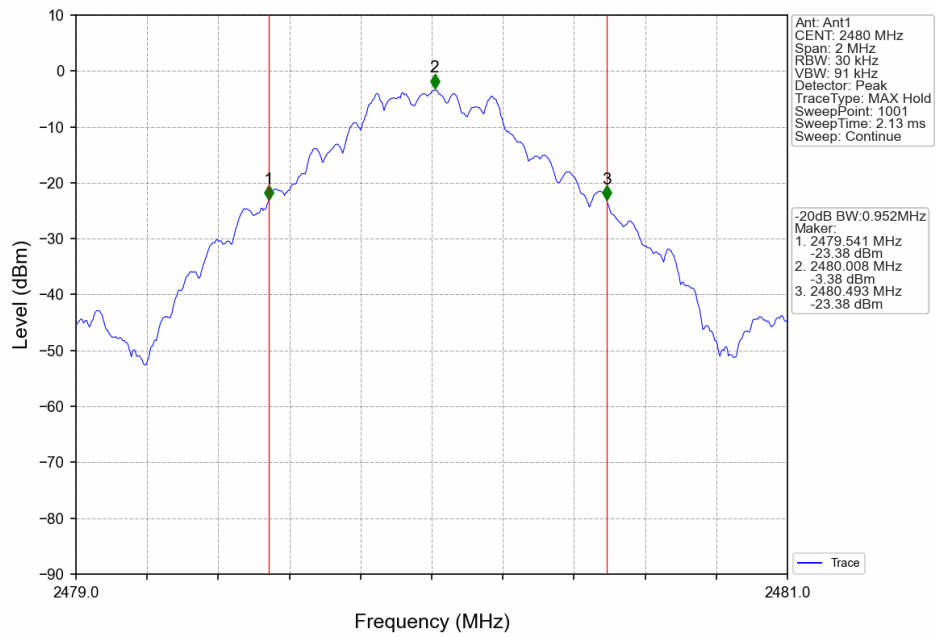


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTNV

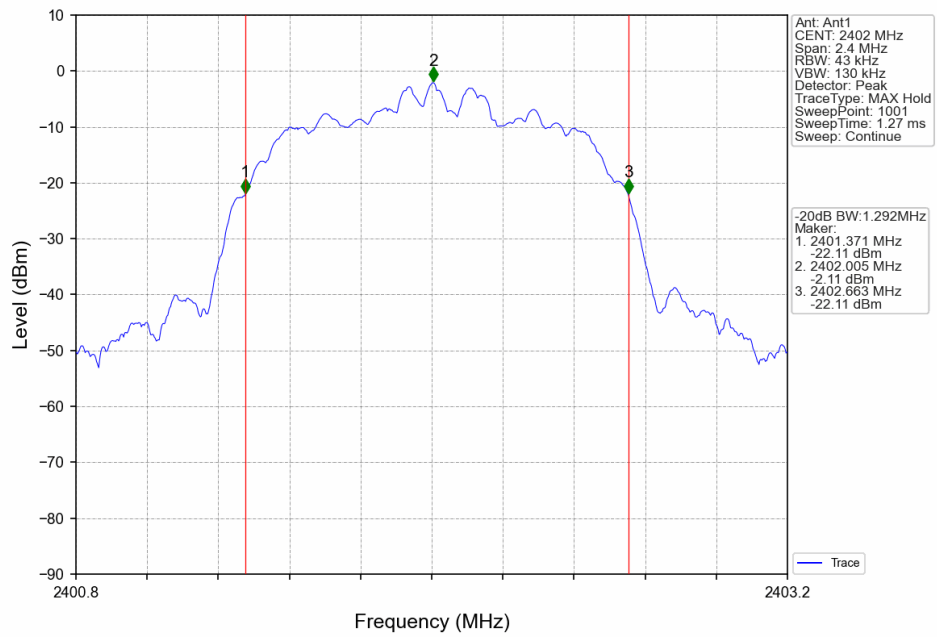


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTNV

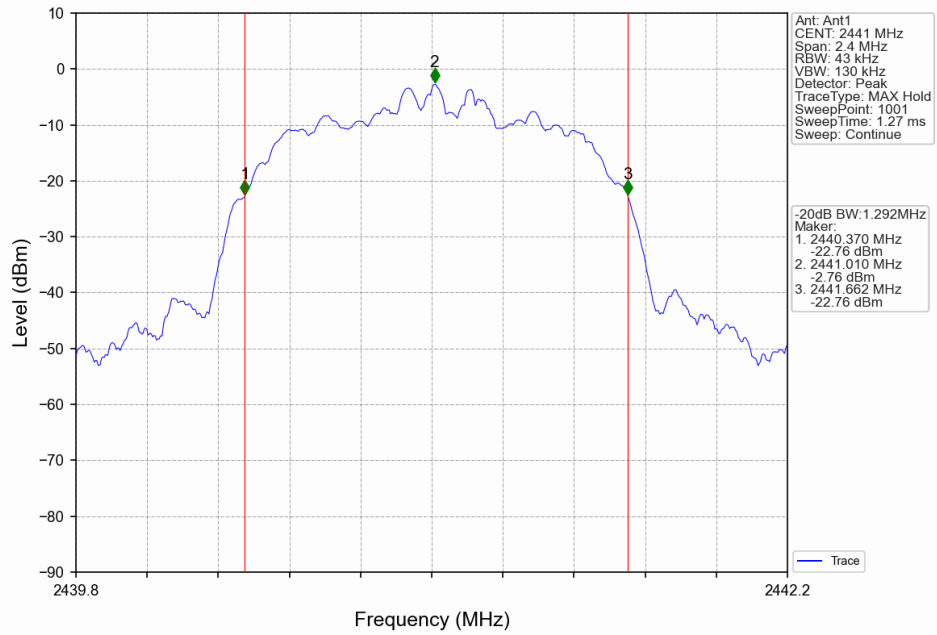


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTNV

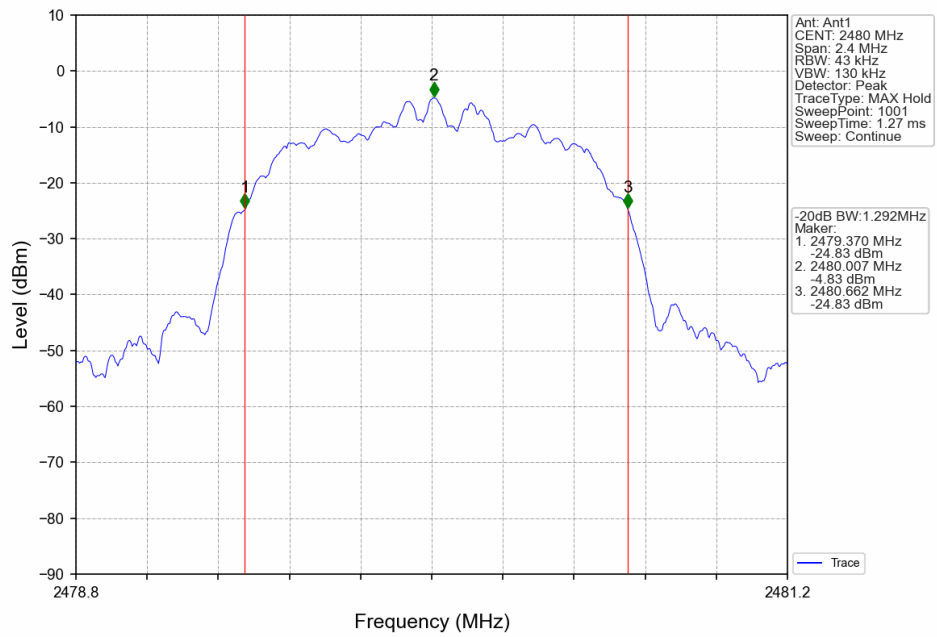


8DPSK 3DH5 LCH 2402MHz Ant1 NTV

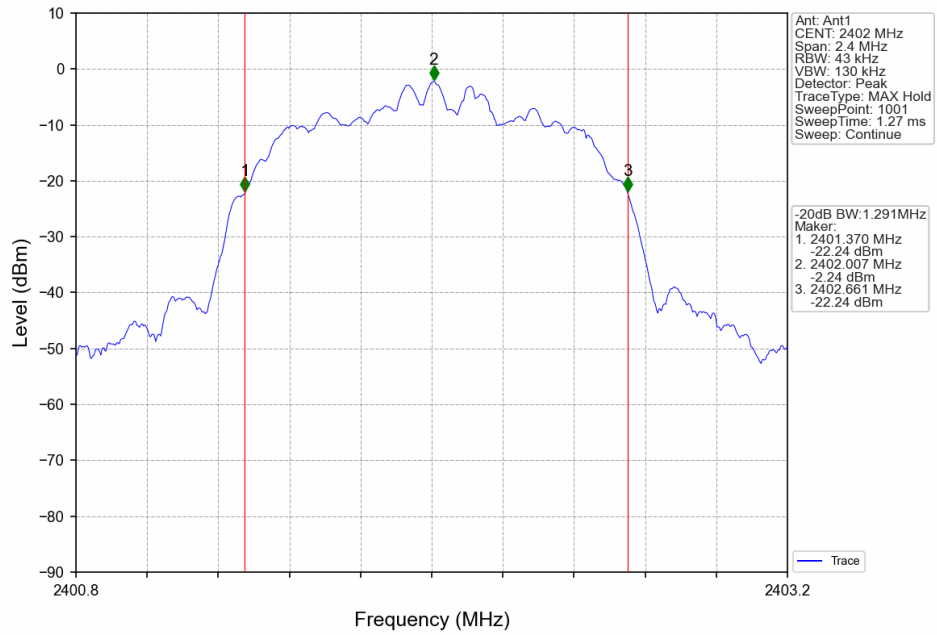

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

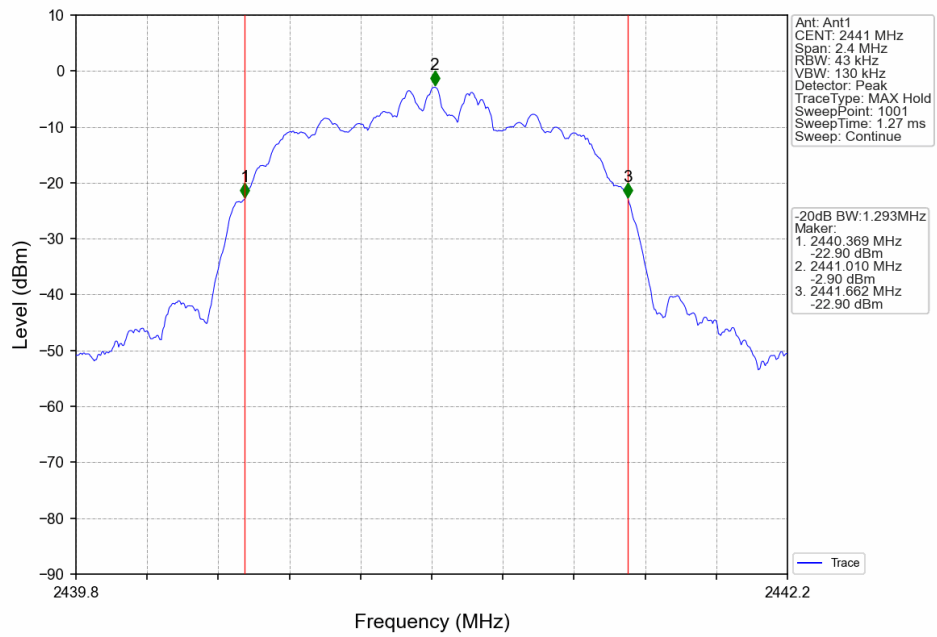

8DPSK 3DH5 HCH 2480MHz Ant1 NTNV

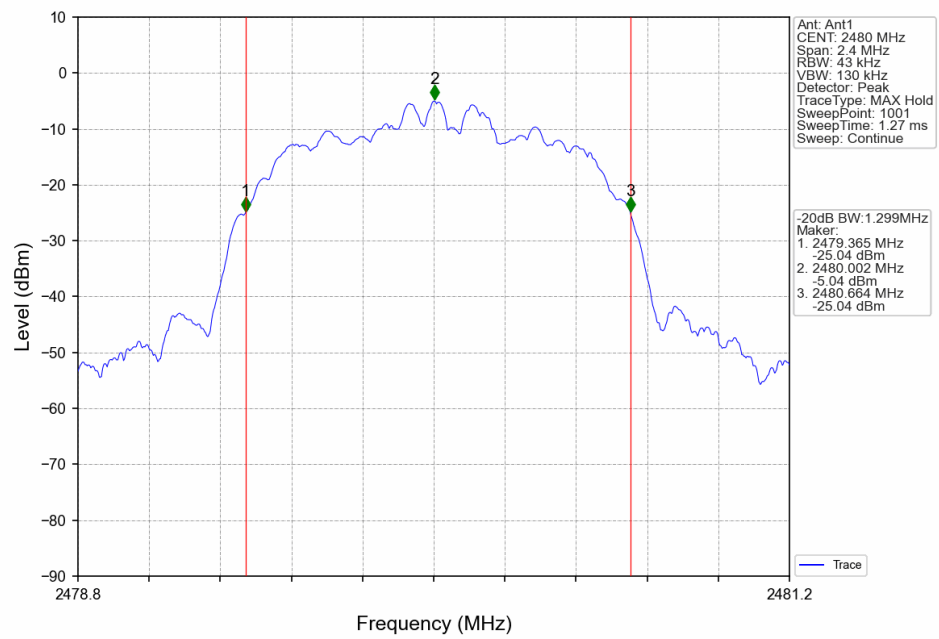

2. Maximum Conducted Output Power


2.1 Power

2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	1.50	<=30	Pass
		2441	DH5	0.85	<=30	Pass
		2480	DH5	-1.23	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	0.75	<=20.97	Pass
		2441	2DH5	0.05	<=20.97	Pass
		2480	2DH5	-1.96	<=20.97	Pass
8DPSK	SISO	2402	3DH5	0.62	<=20.97	Pass
		2441	3DH5	-0.05	<=20.97	Pass
		2480	3DH5	-1.96	<=20.97	Pass

Note1: Antenna Gain: Ant1: 2.50dBi;


2.1.2 Test Graph

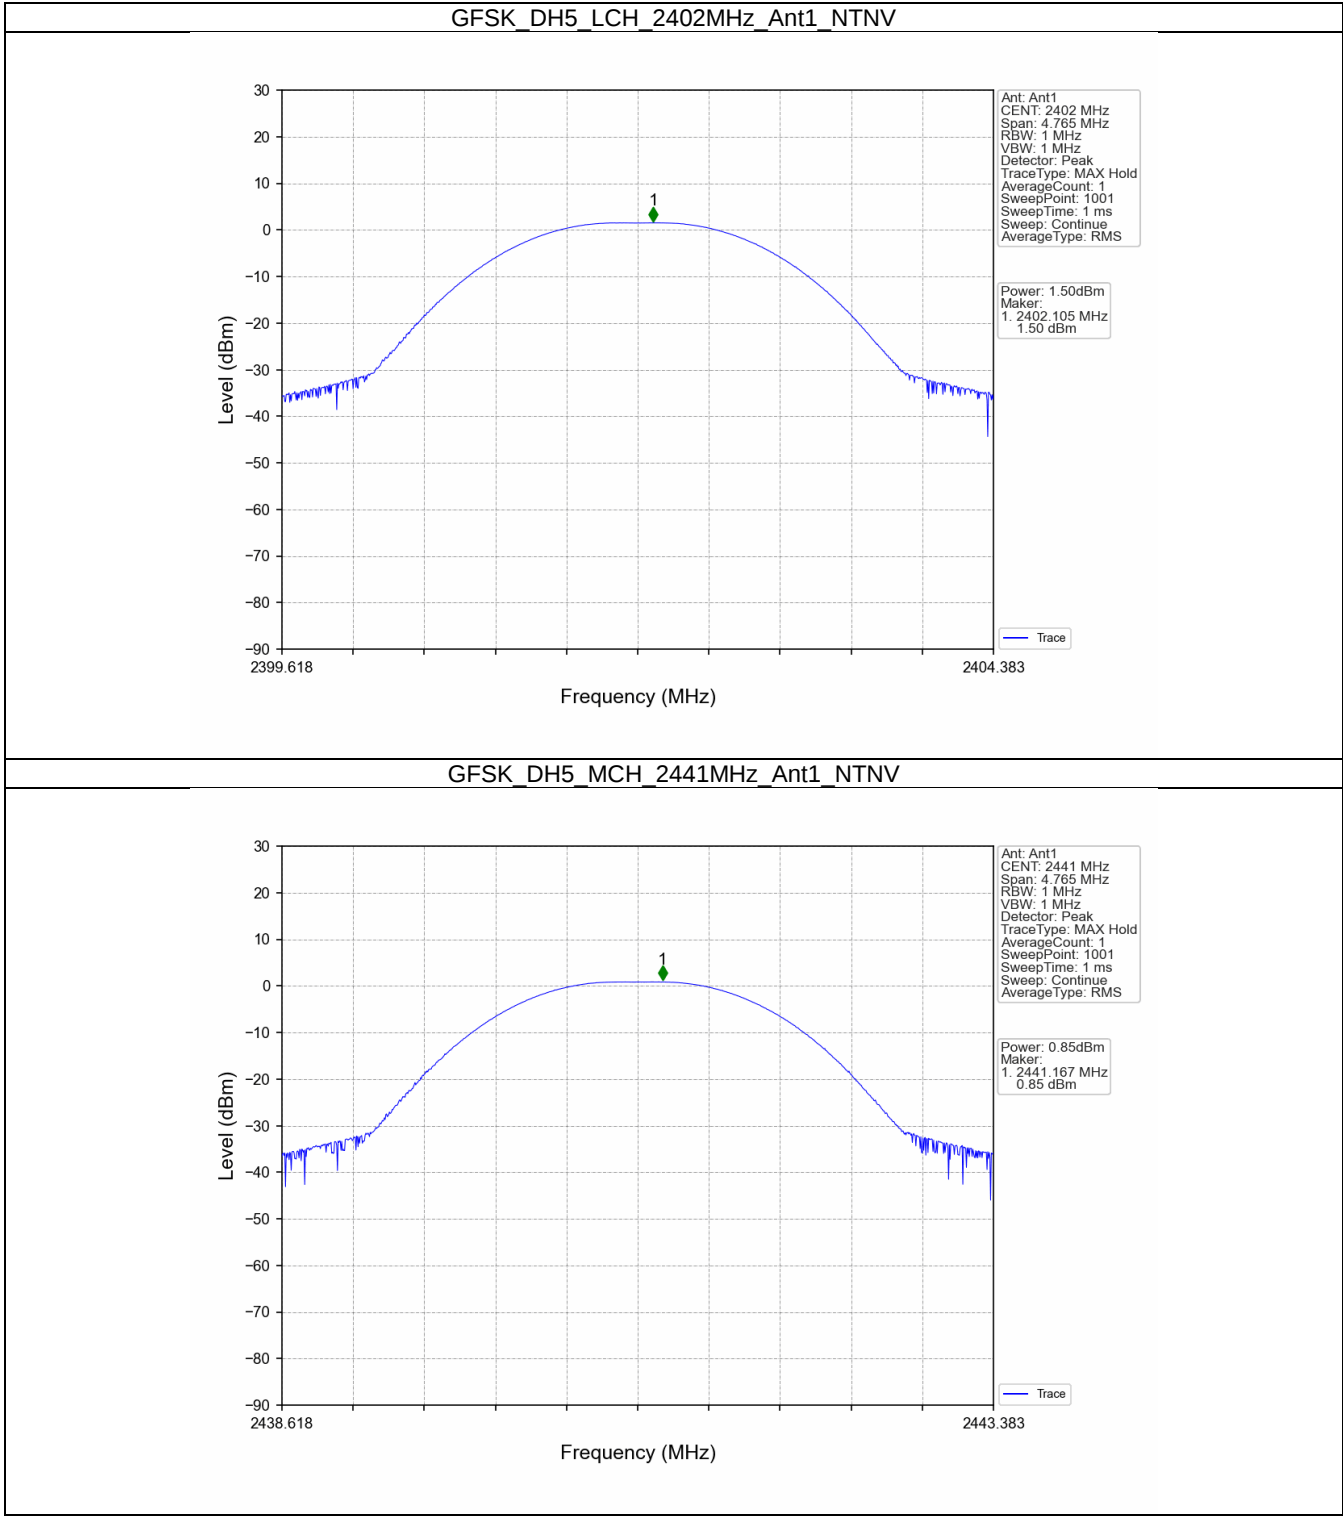


GFSK DH5 HCH 2480MHz Ant1 NTN

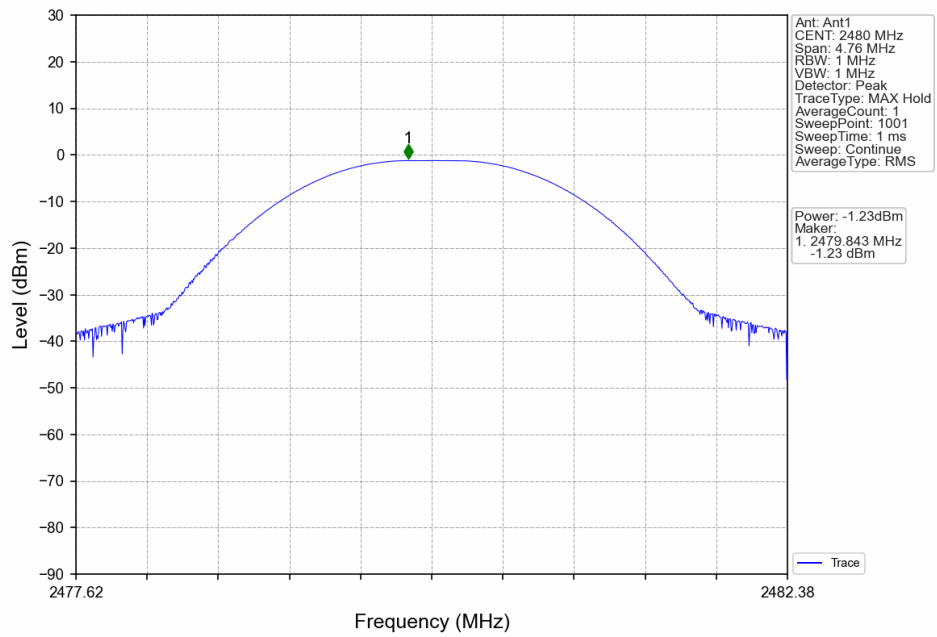


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

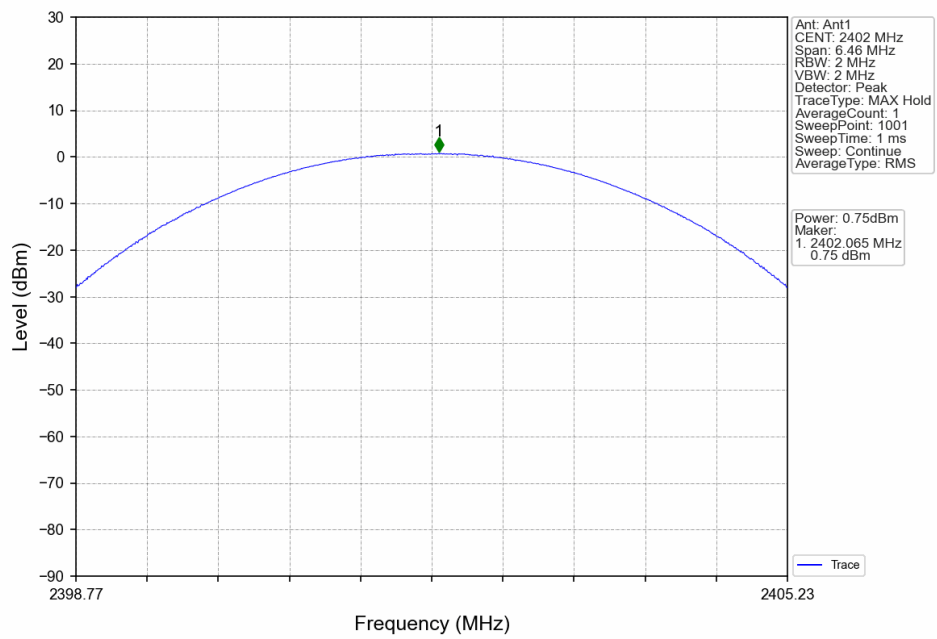


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTNV

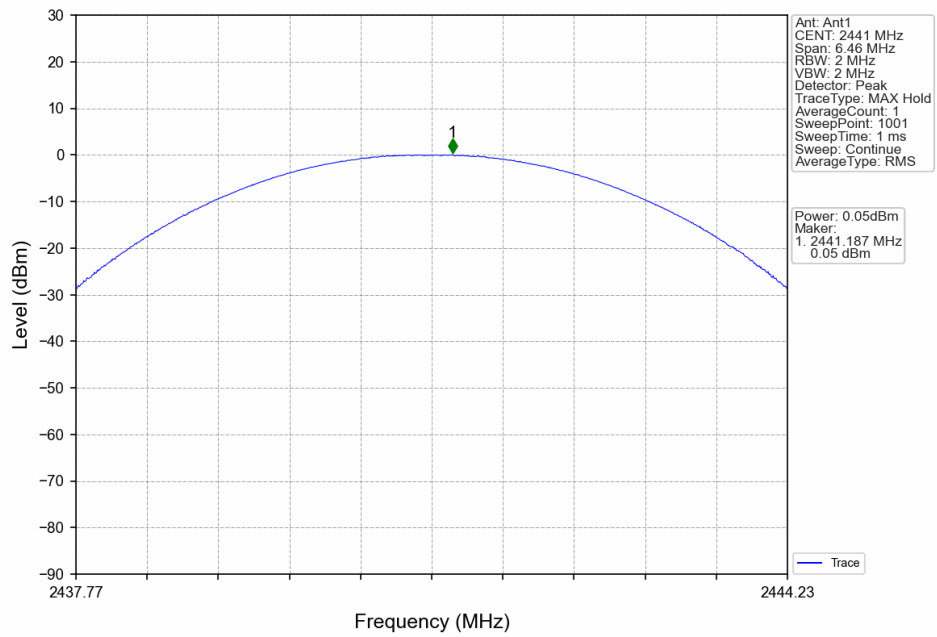


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTNV

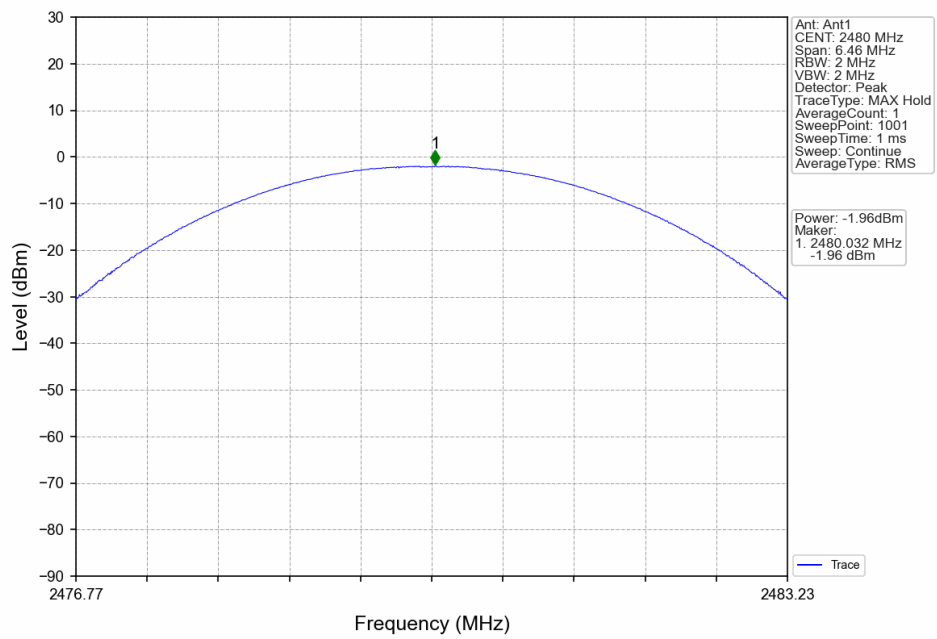


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

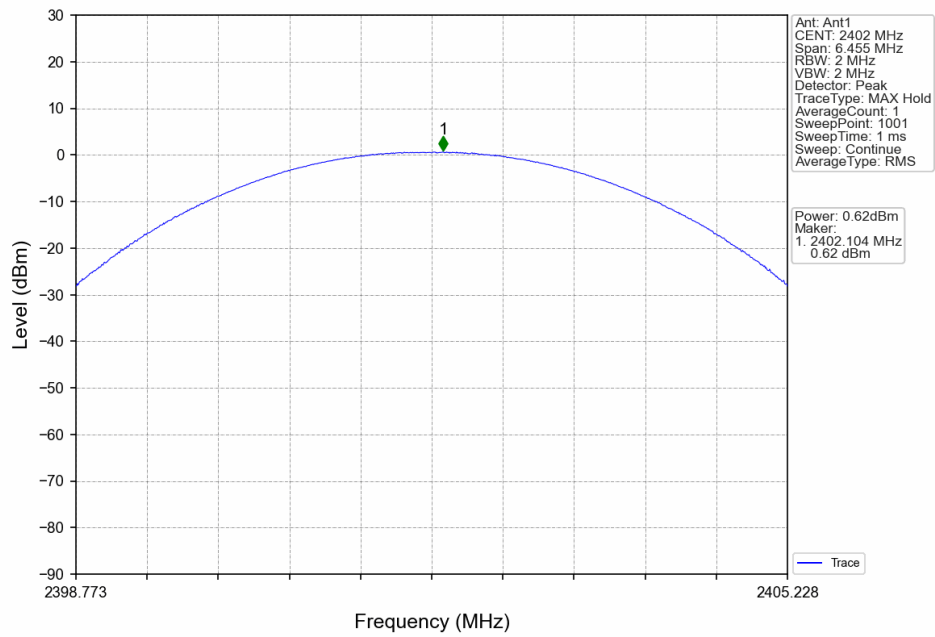

8DPSK 3DH5 MCH 2441MHz Ant1 NTN

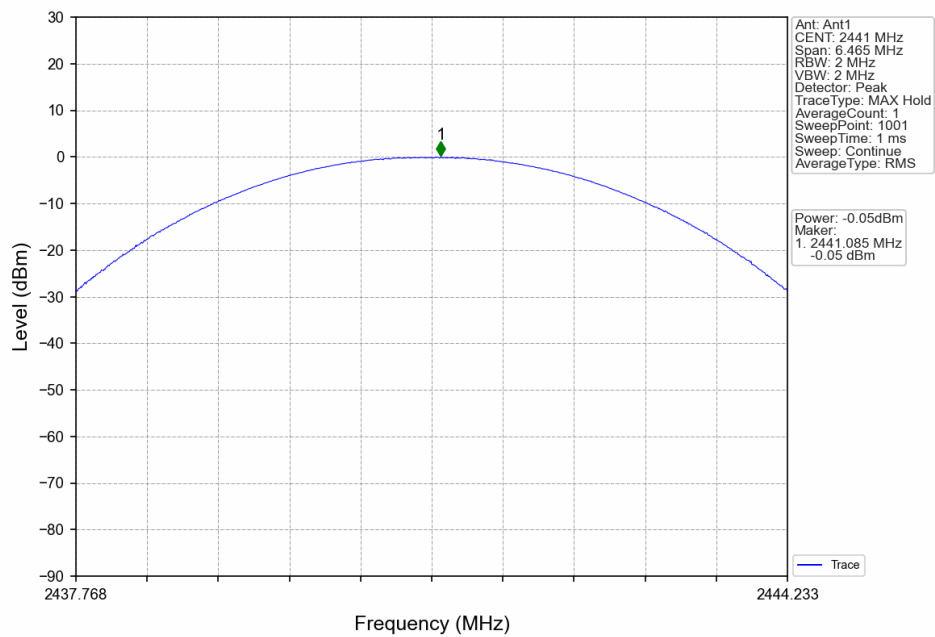

8DPSK 3DH5 HCH 2480MHz Ant1 NTN

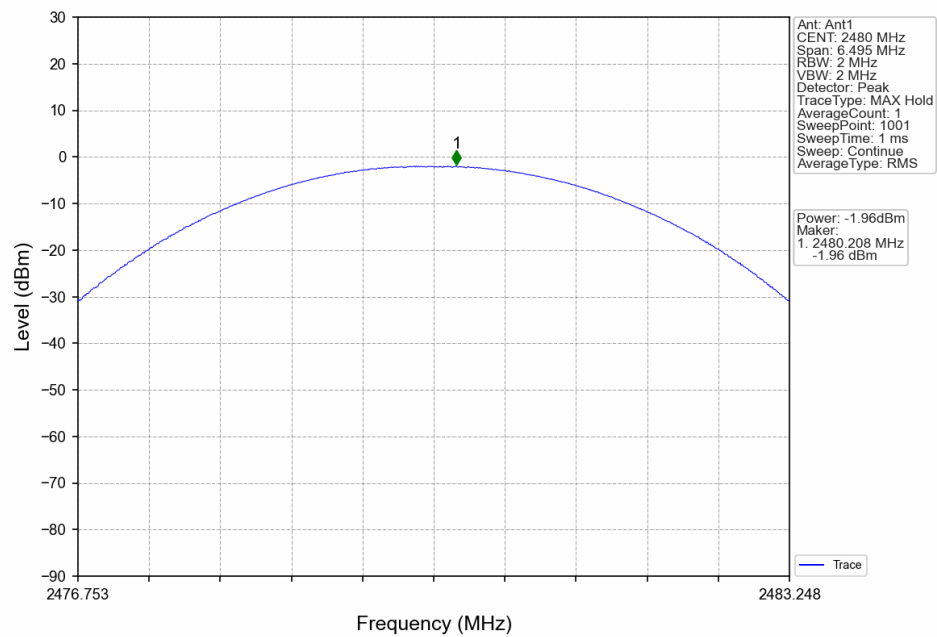


3. Carrier Frequency Separation

3.1 Ant1


3.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	0.953	≥ 0.953	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.015	1.292	≥ 0.861	Pass
8DPSK	SISO	HOPP	3DH5	0.991	1.299	≥ 0.866	Pass

3.1.2 Test Graph

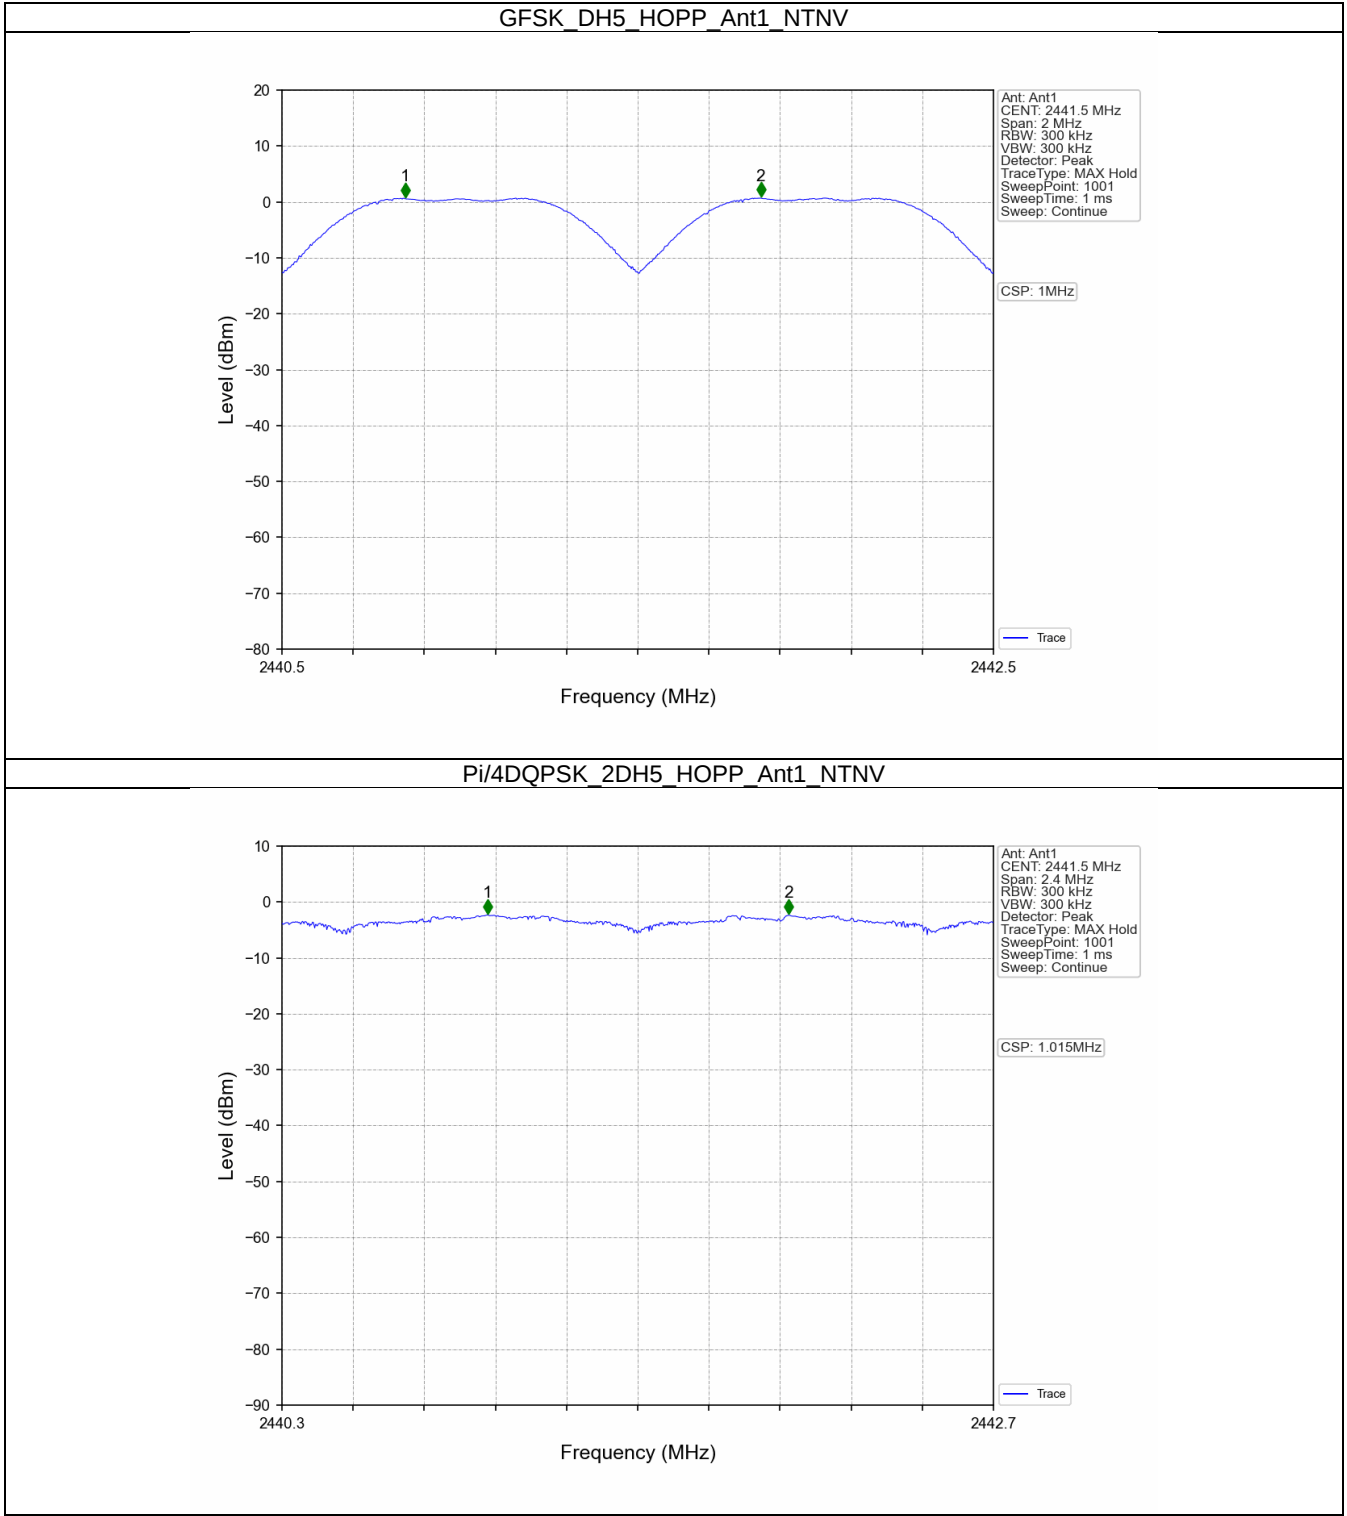

8DPSK 3DH5 HOPP Ant1 NTN

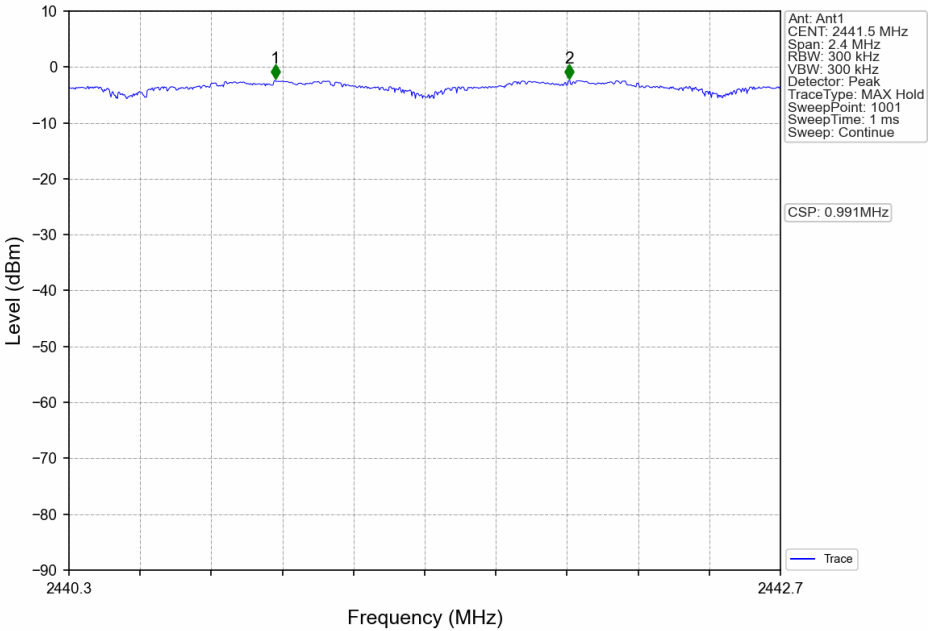


4. Number of Hopping Frequencies

4.1 HoppNum


4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

4.1.2 Test Graph

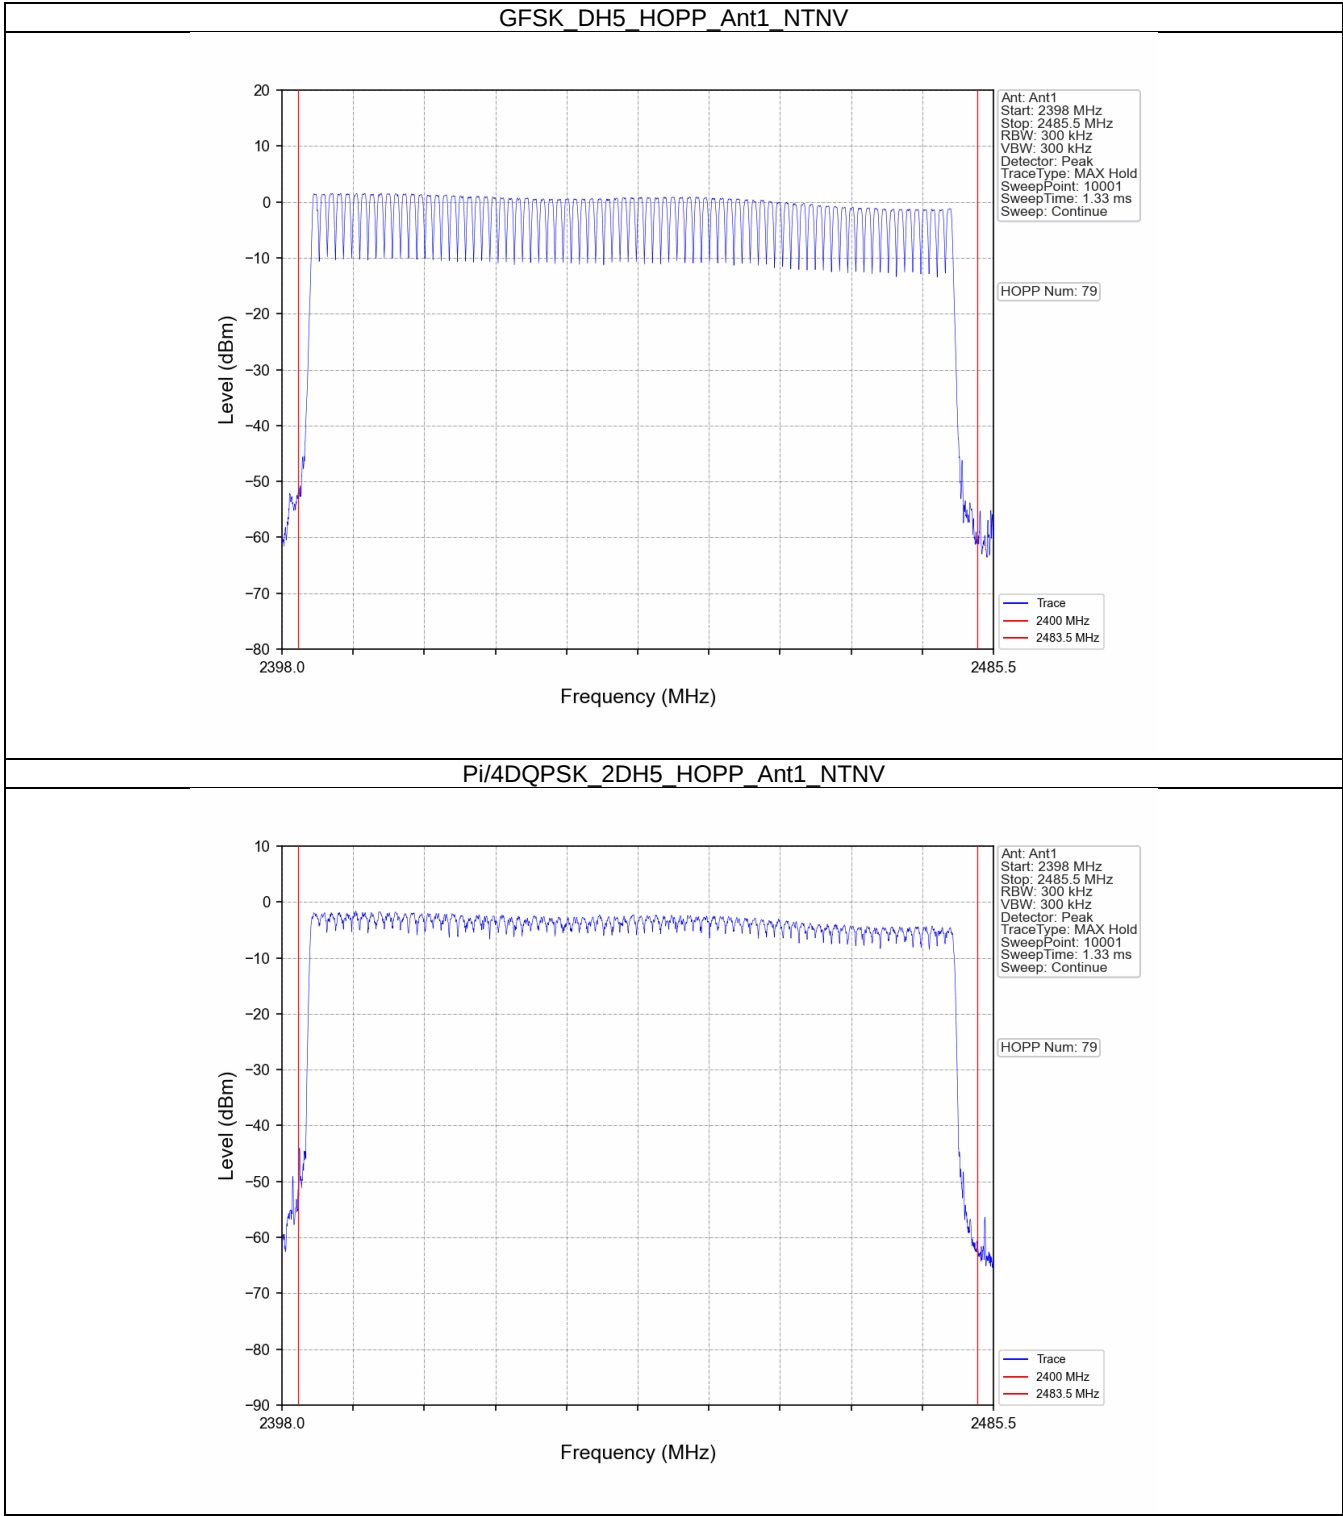

8DPSK 3DH5 HOPP Ant1 NTN

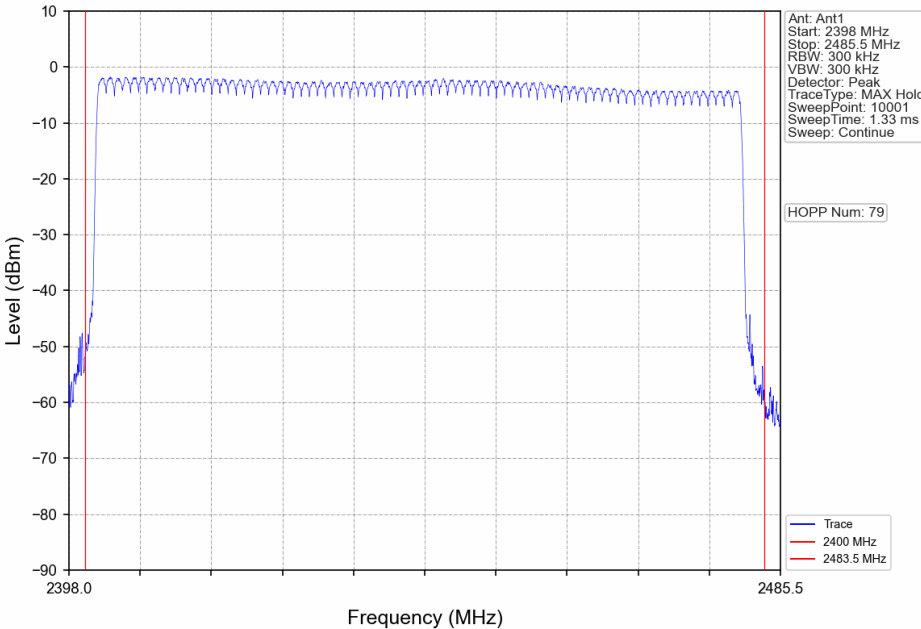


5. Time of Occupancy (Dwell Time)

5.1 Ant1


5.1.1 Test Result

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.408	31.600	318	129.744	<=400	Pass
			DH3	1.662	31.600	160	265.920	<=400	Pass
			DH5	2.914	31.600	103	300.142	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.416	31.600	320	133.120	<=400	Pass
			2DH3	1.668	31.600	157	261.876	<=400	Pass
			2DH5	2.920	31.600	104	303.680	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.416	31.600	320	133.120	<=400	Pass
			3DH3	1.670	31.600	167	278.890	<=400	Pass
			3DH5	2.916	31.600	110	320.760	<=400	Pass


5.1.2 Test Graph

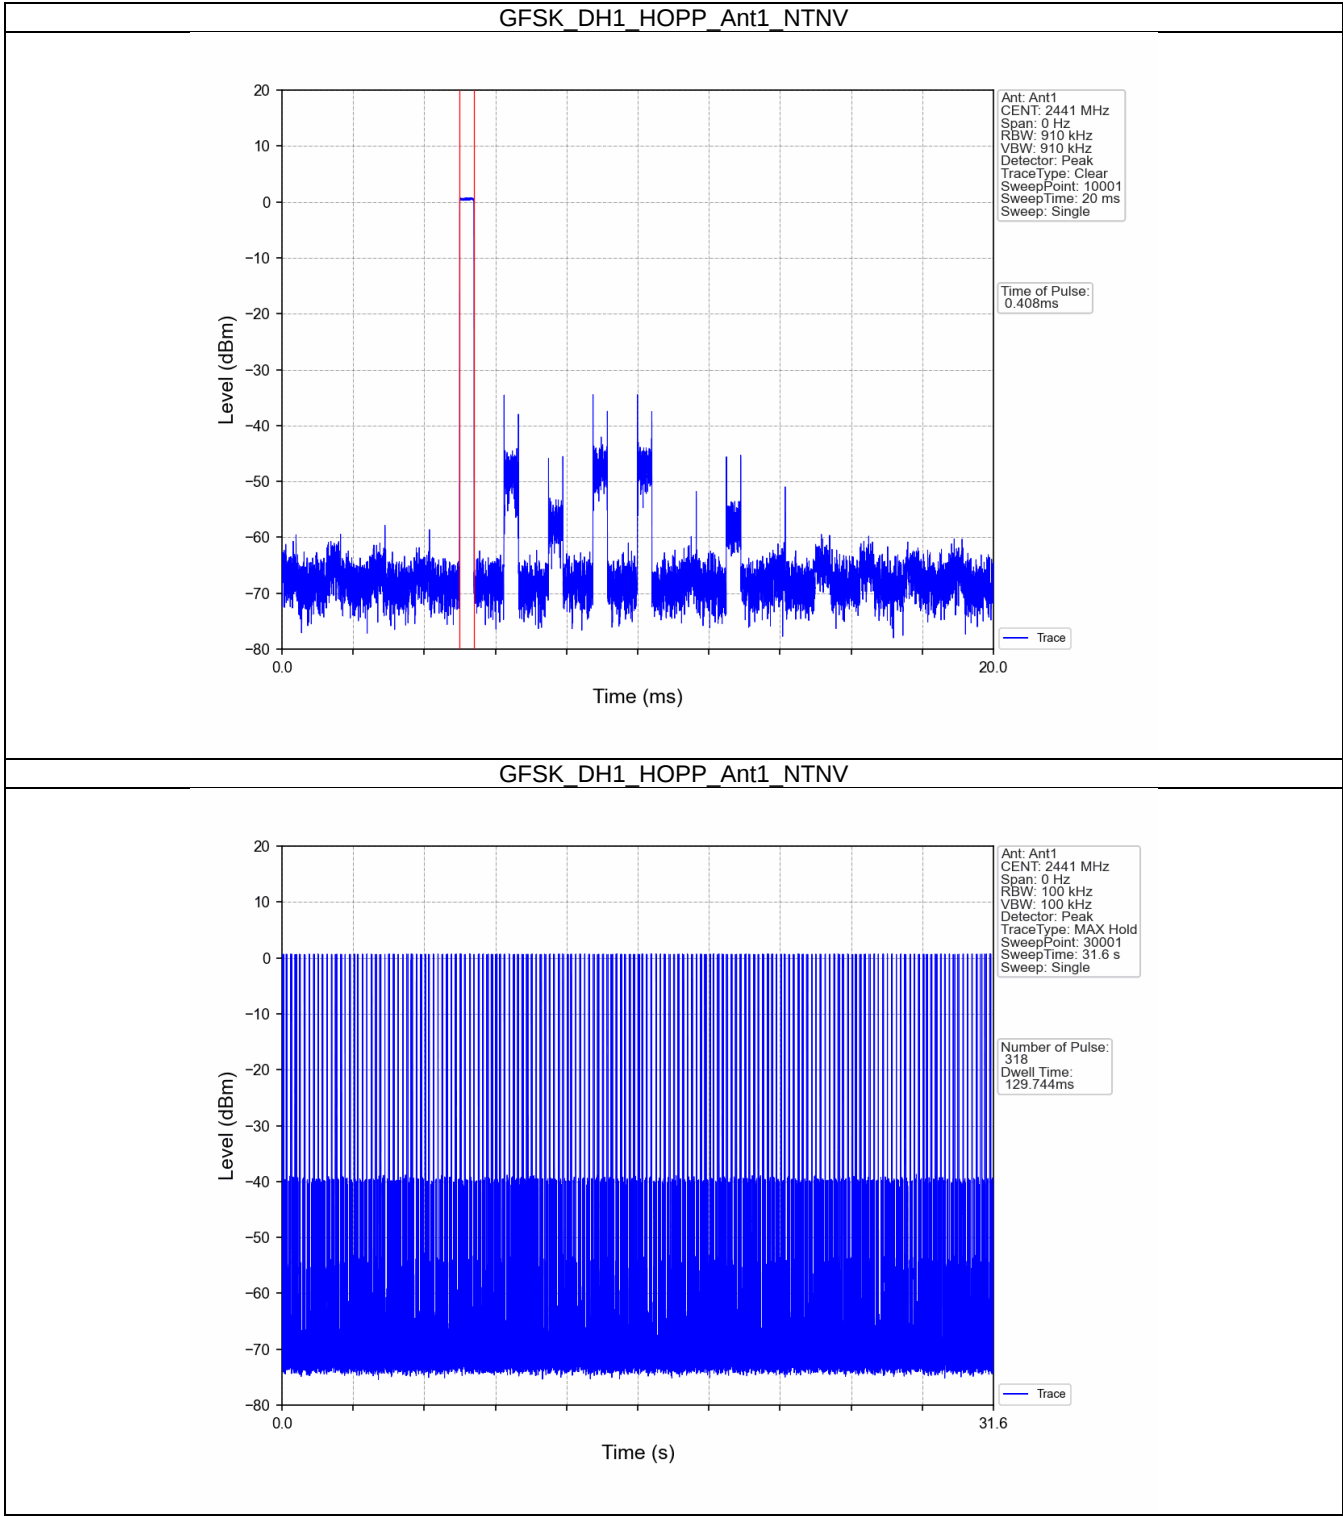


GFSK DH3 HOPP Ant1 NTN

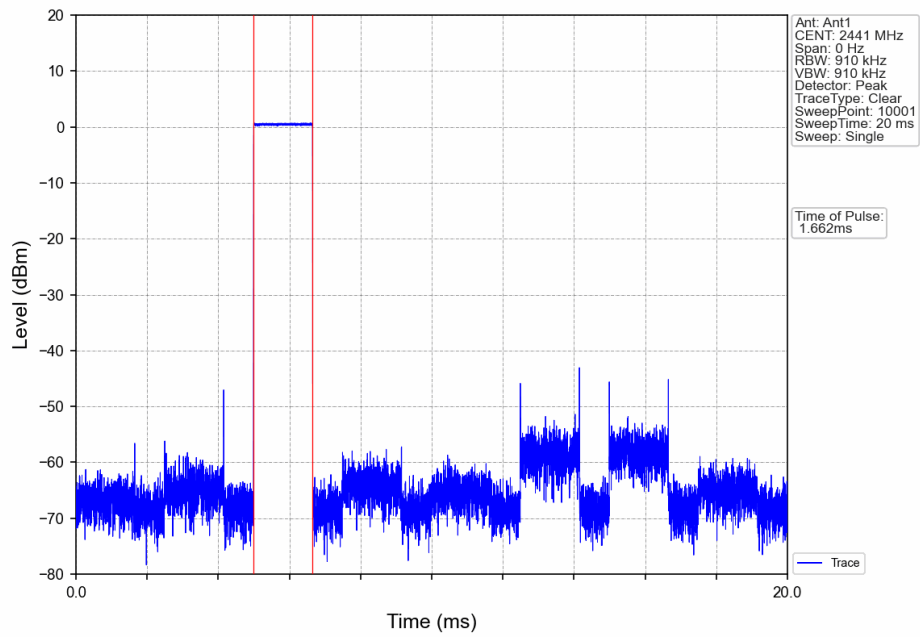


GFSK DH3 HOPP Ant1 NTN

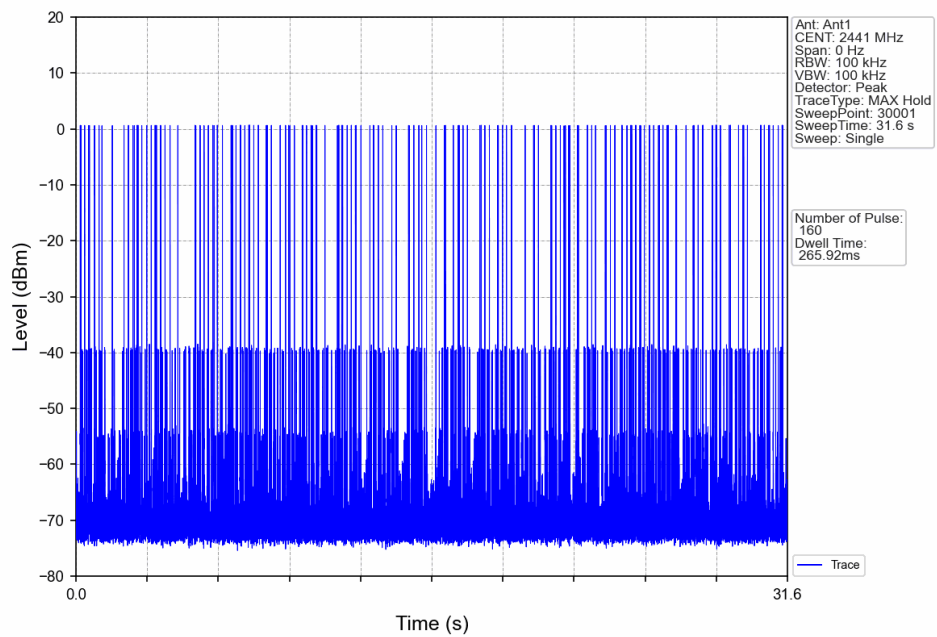


GFSK DH5 HOPP Ant1 NTN

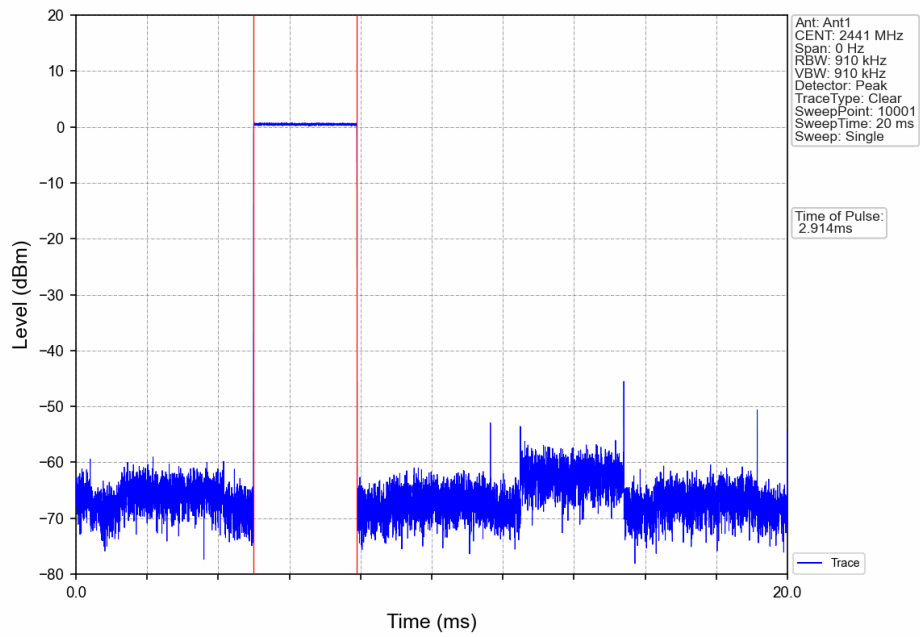


GFSK DH5 HOPP Ant1 NTN

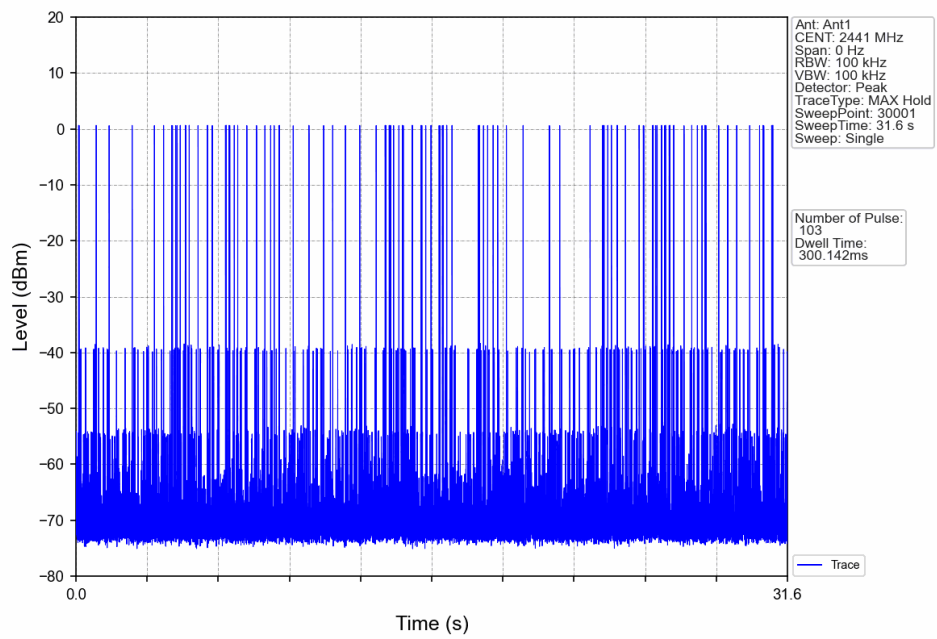


Pi/4DQPSK 2DH1 HOPP Ant1 NTN

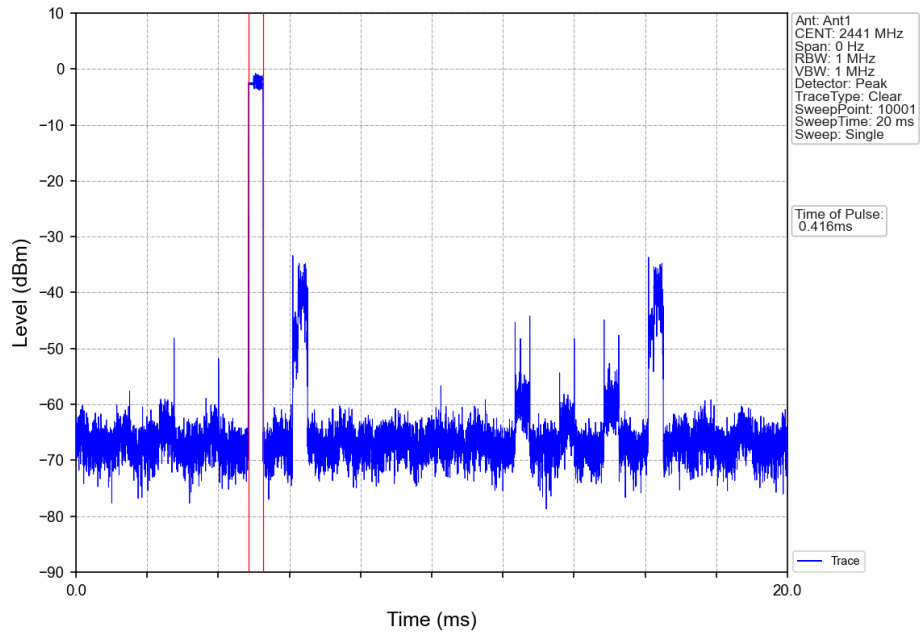


Pi/4DQPSK 2DH1 HOPP Ant1 NTN

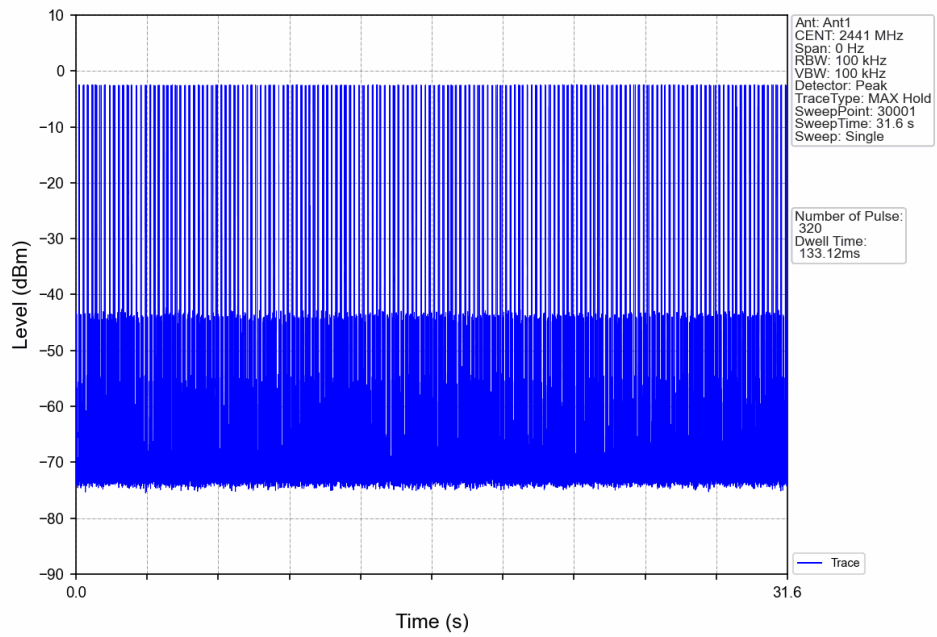


Pi/4DQPSK 2DH3 HOPP Ant1 NTN

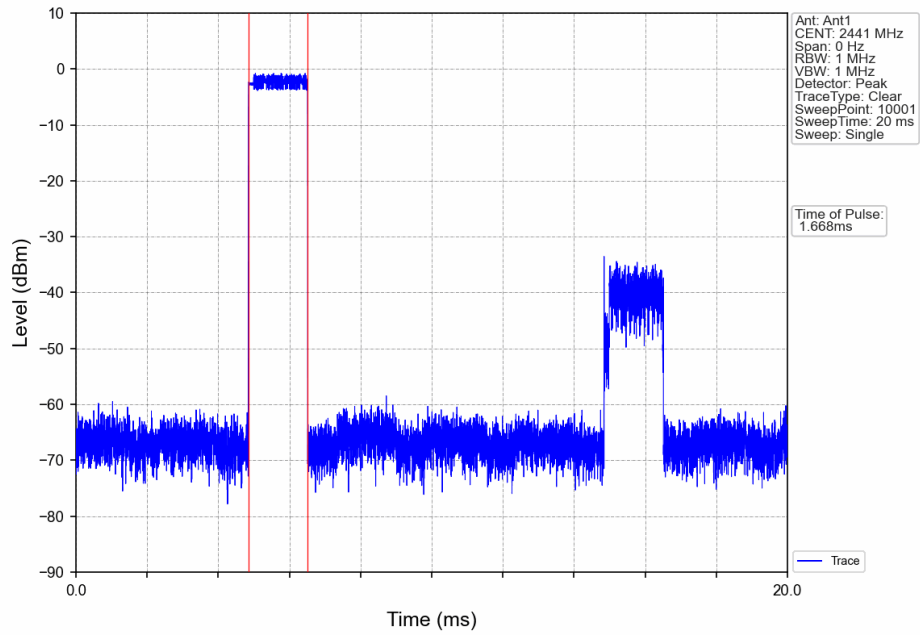


Pi/4DQPSK 2DH3 HOPP Ant1 NTN

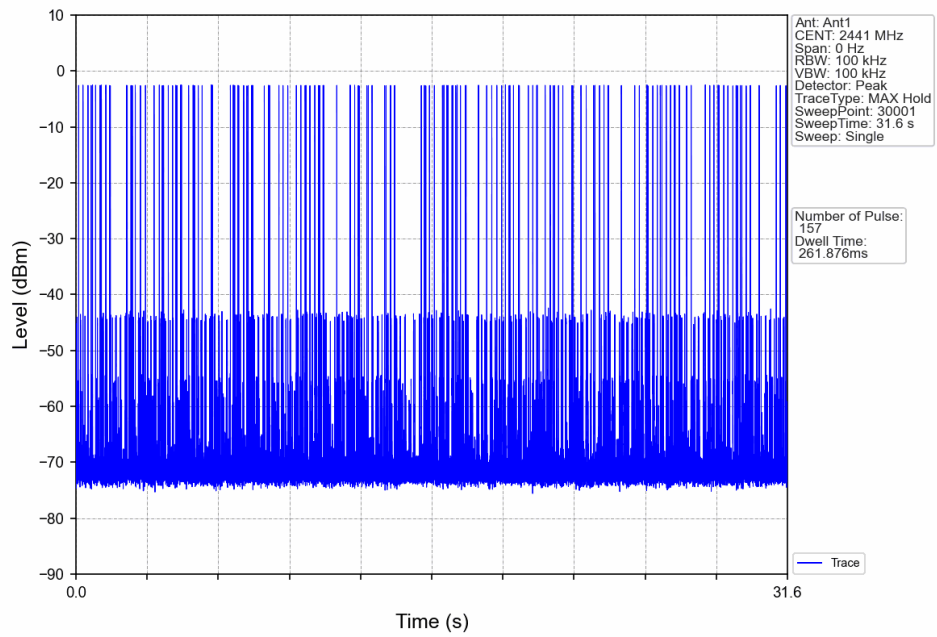


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

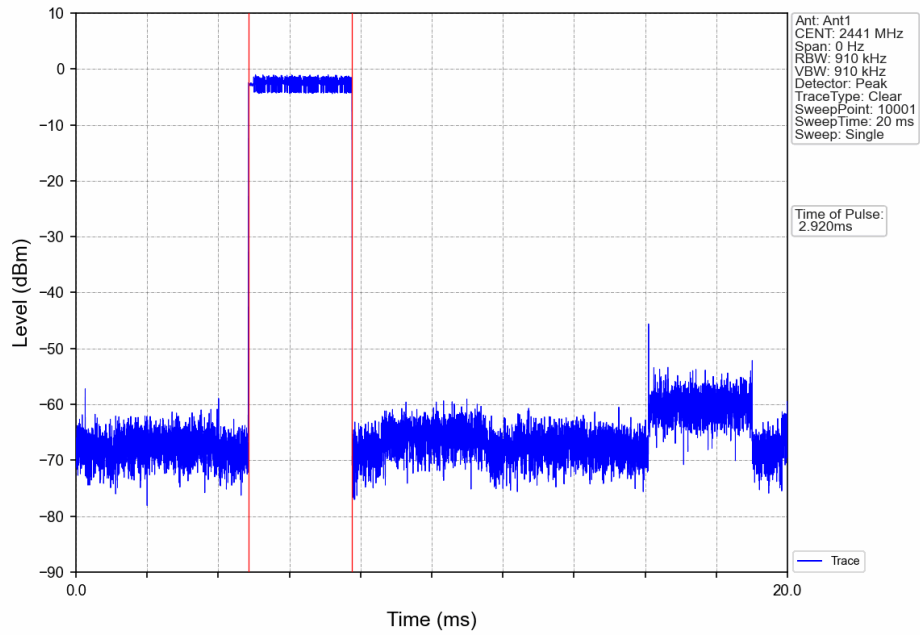


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

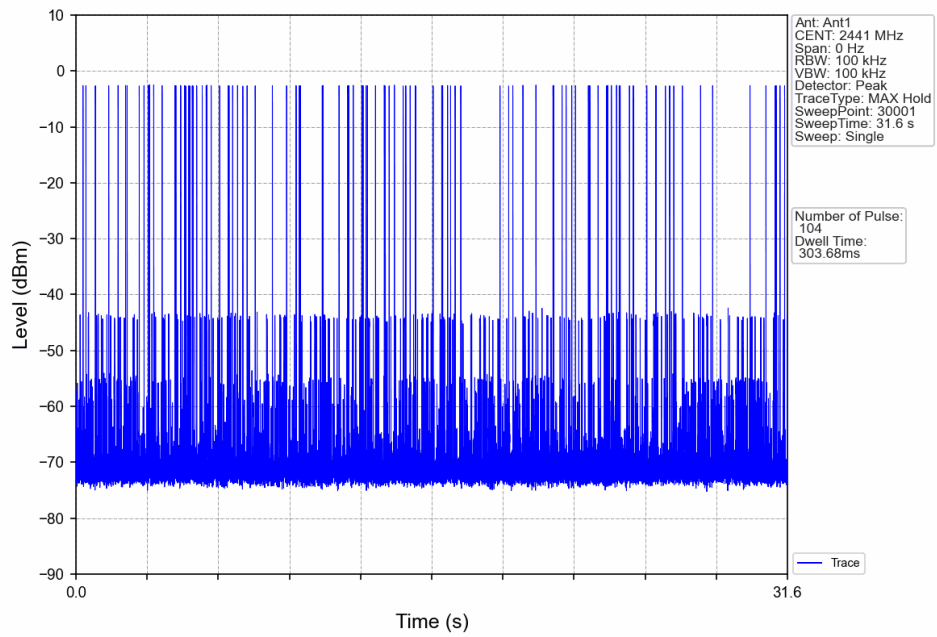


8DPSK 3DH1 HOPP Ant1 NTN

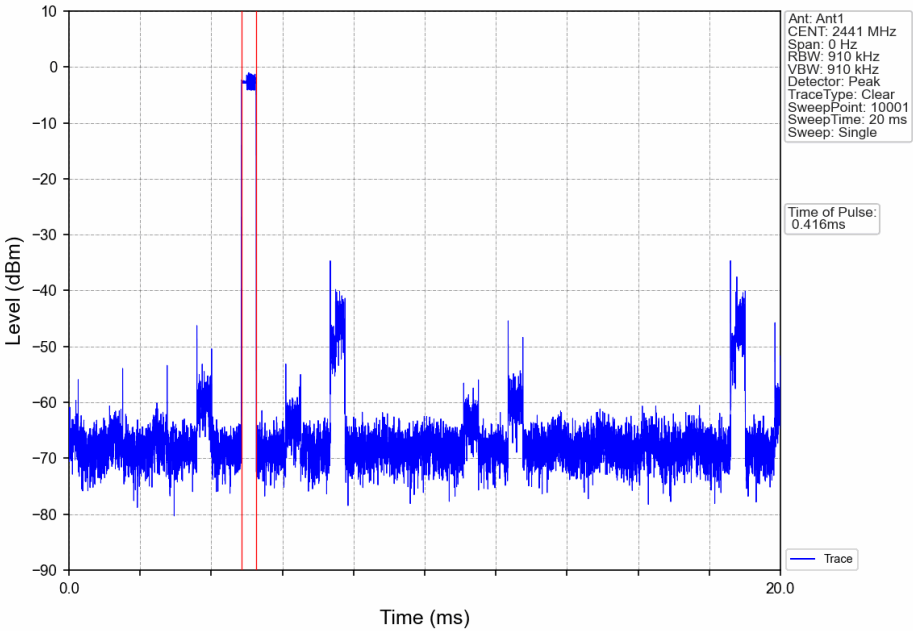


8DPSK 3DH1 HOPP Ant1 NTN

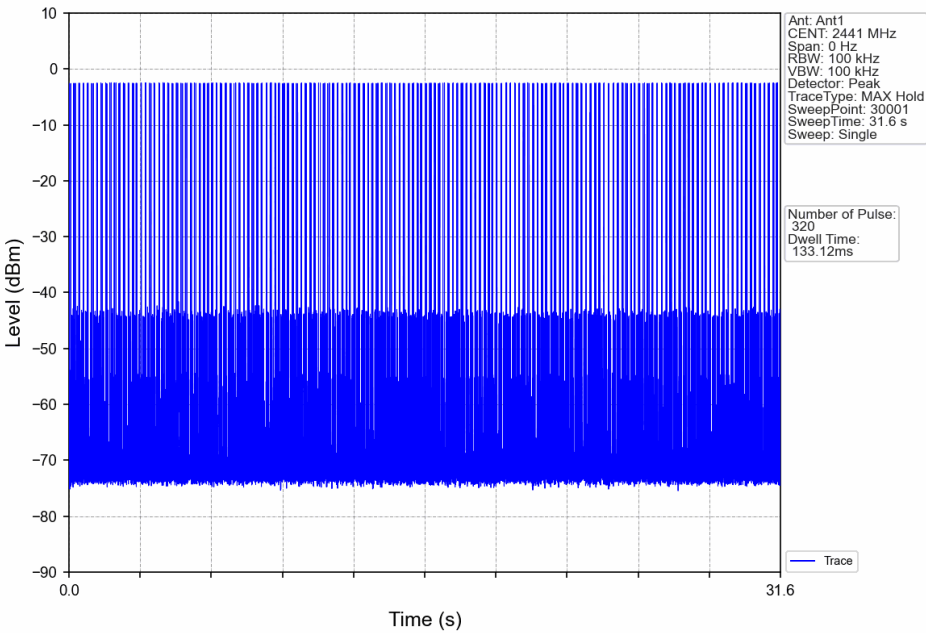


8DPSK 3DH3 HOPP Ant1 NTN

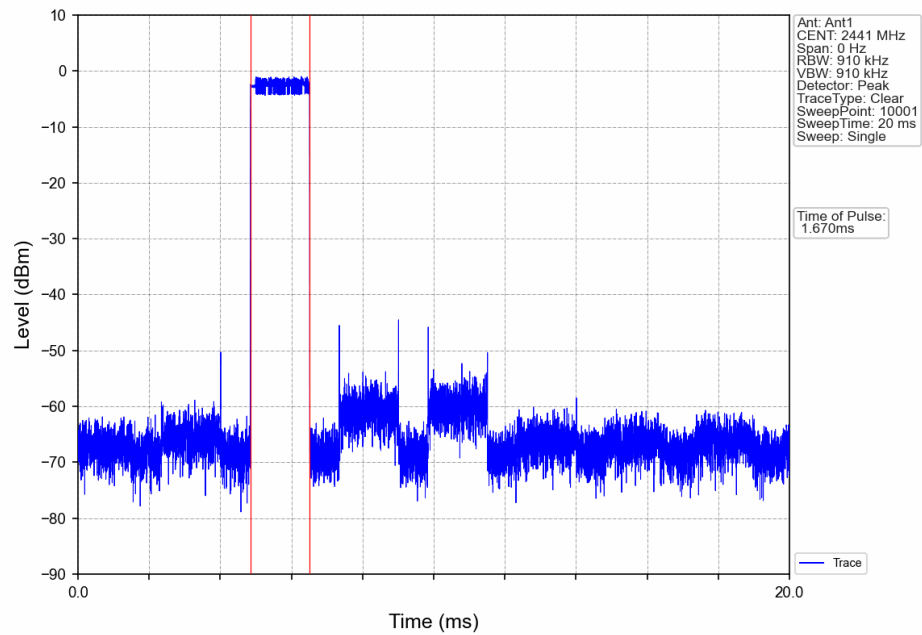


8DPSK 3DH3 HOPP Ant1 NTN

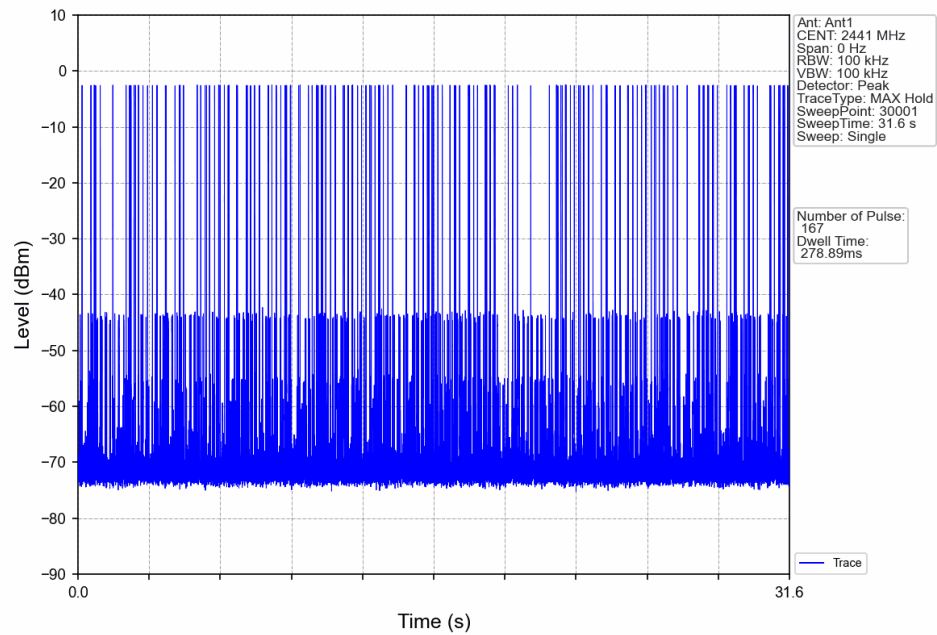

8DPSK 3DH5 HOPP Ant1 NTNV

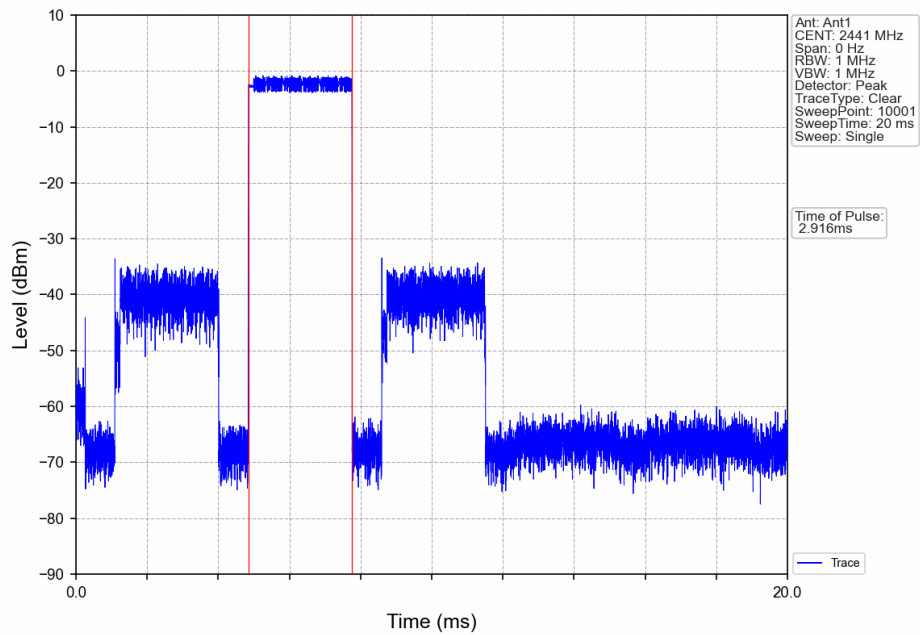

8DPSK 3DH5 HOPP Ant1 NTNV

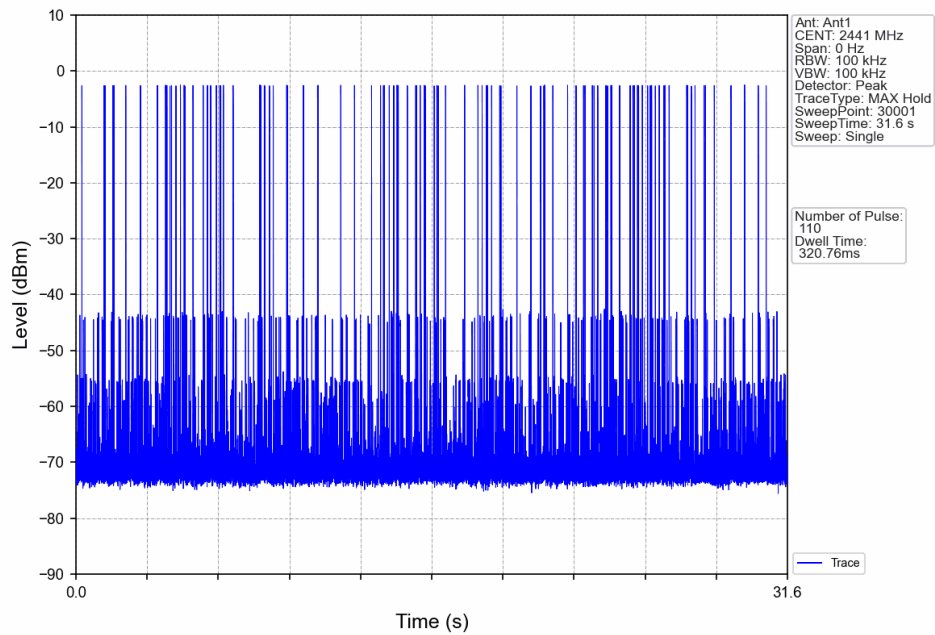

6. Unwanted Emissions In Non-restricted Frequency Bands


6.1 Ref

6.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	1.33
		2441	DH5	1	0.71
		2480	DH5	1	-1.35
Pi/4DQPSK	SISO	2402	2DH5	1	-1.93
		2441	2DH5	1	-2.48
		2480	2DH5	1	-4.48
8DPSK	SISO	2402	3DH5	1	-1.97
		2441	3DH5	1	-2.65
		2480	3DH5	1	-4.47

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


6.1.2 Test Graph

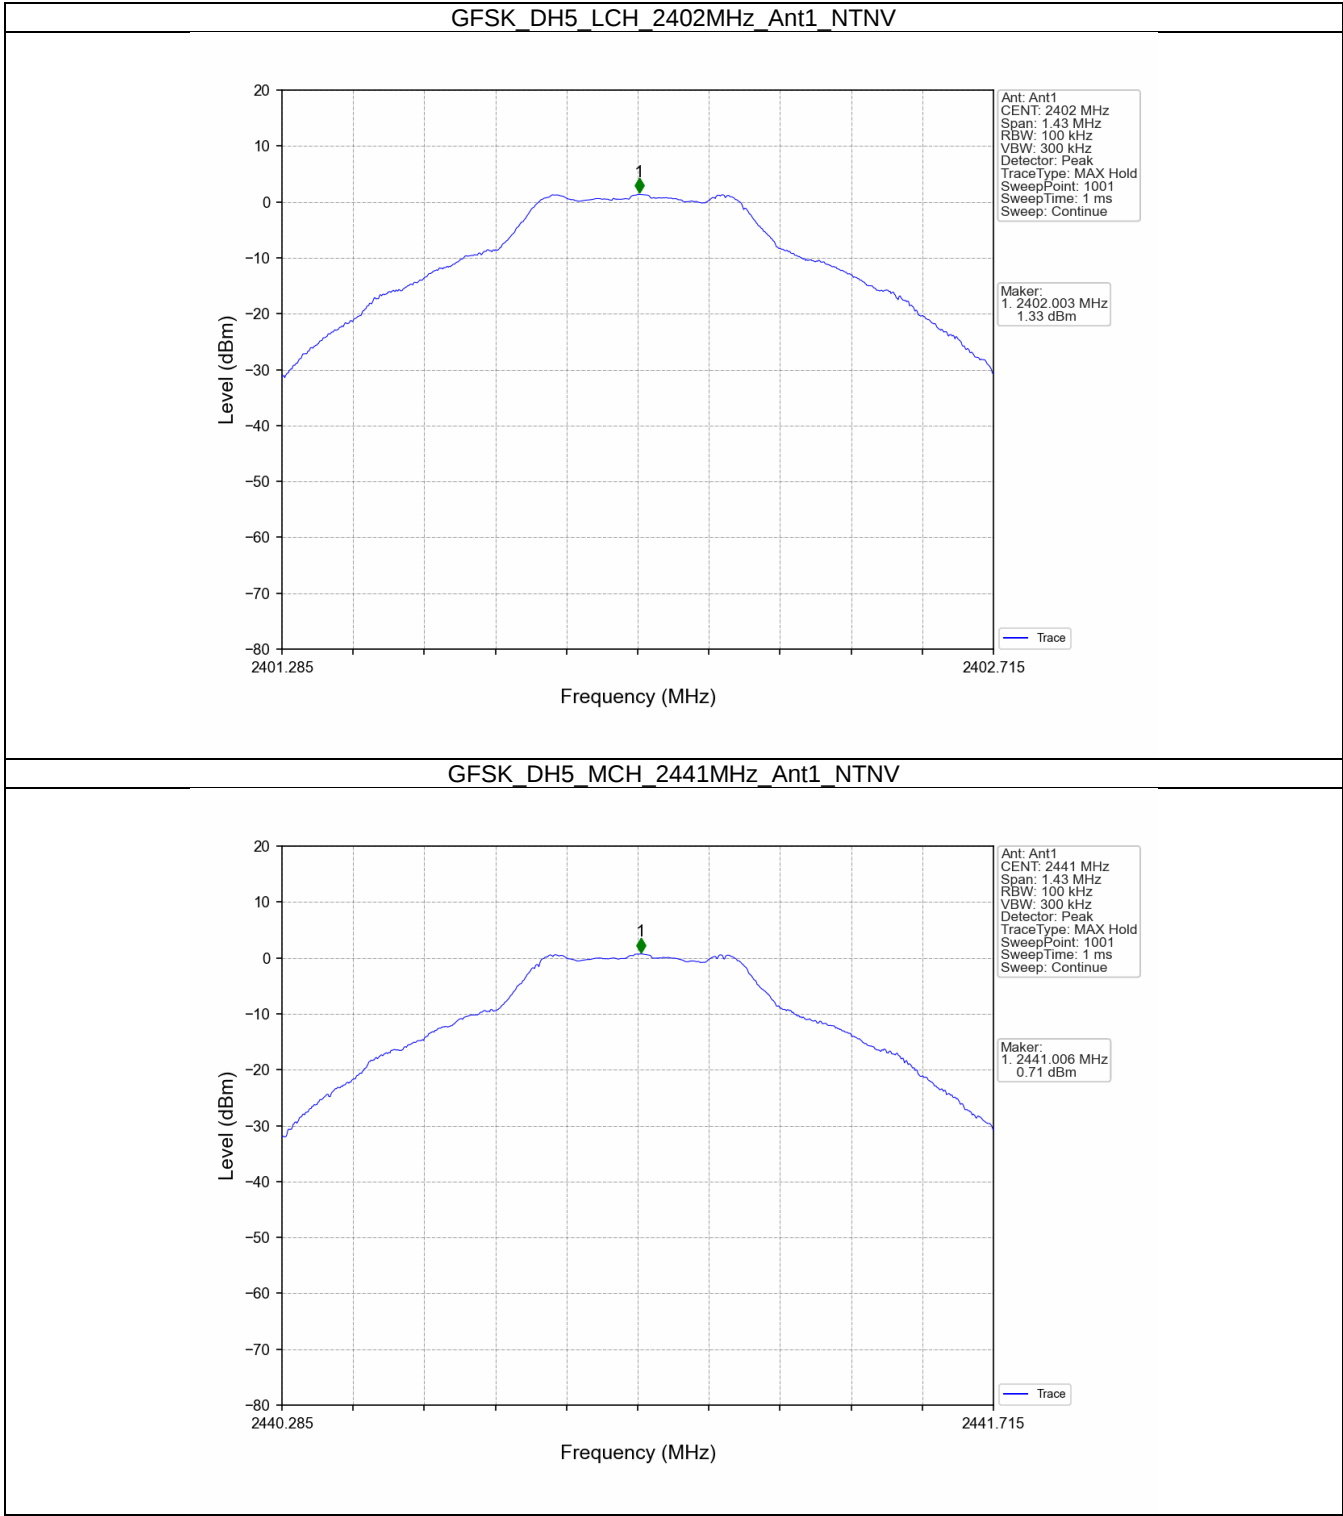


GFSK DH5 HCH 2480MHz Ant1 NTV

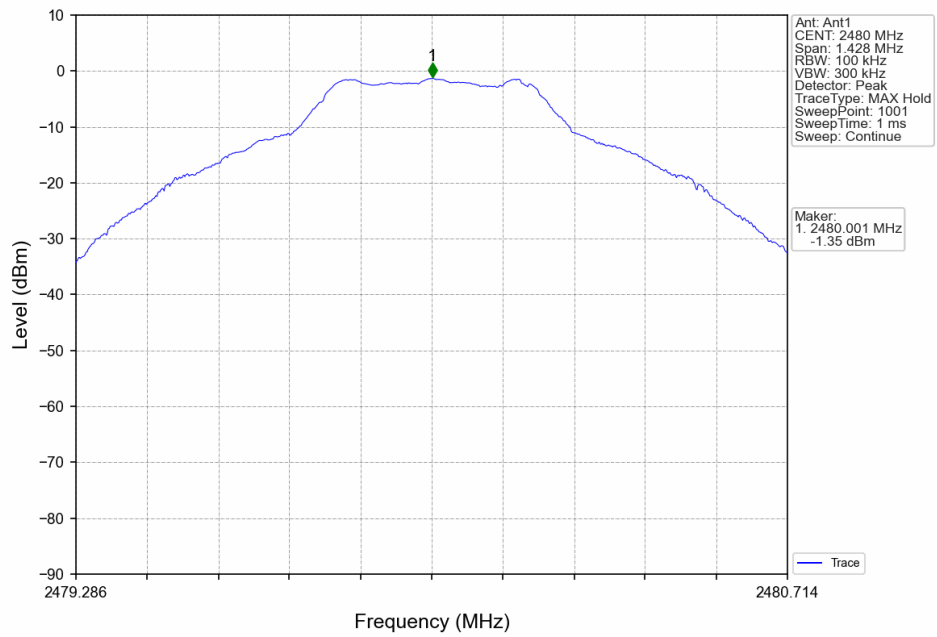


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTV

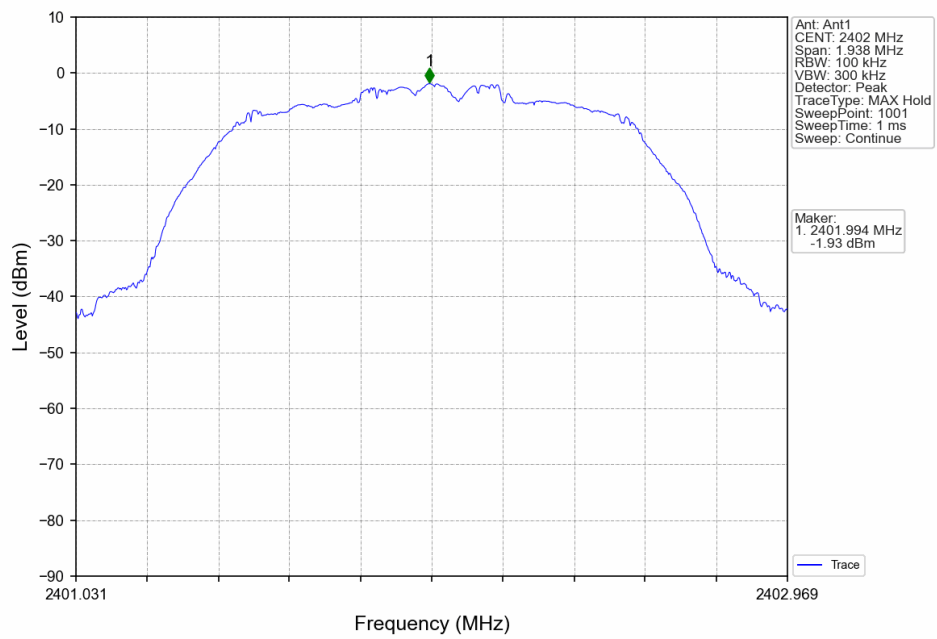


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTNV

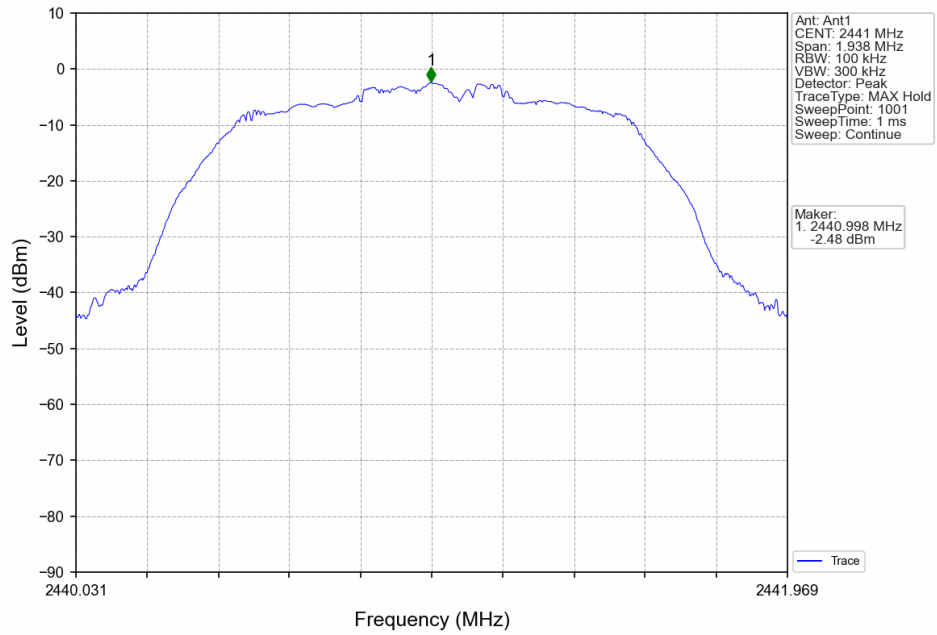


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTNV

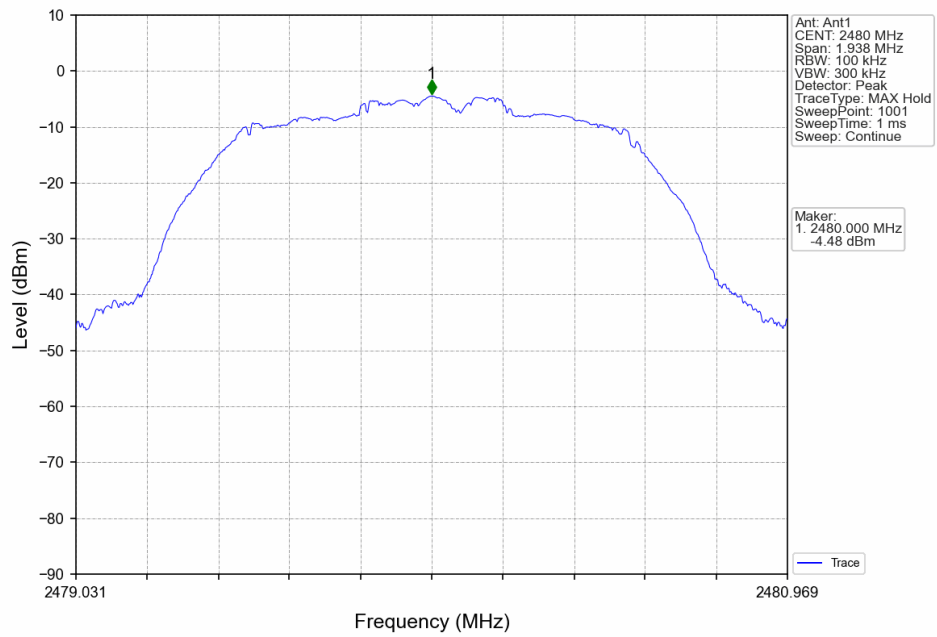


8DPSK 3DH5 LCH 2402MHz Ant1 NTV

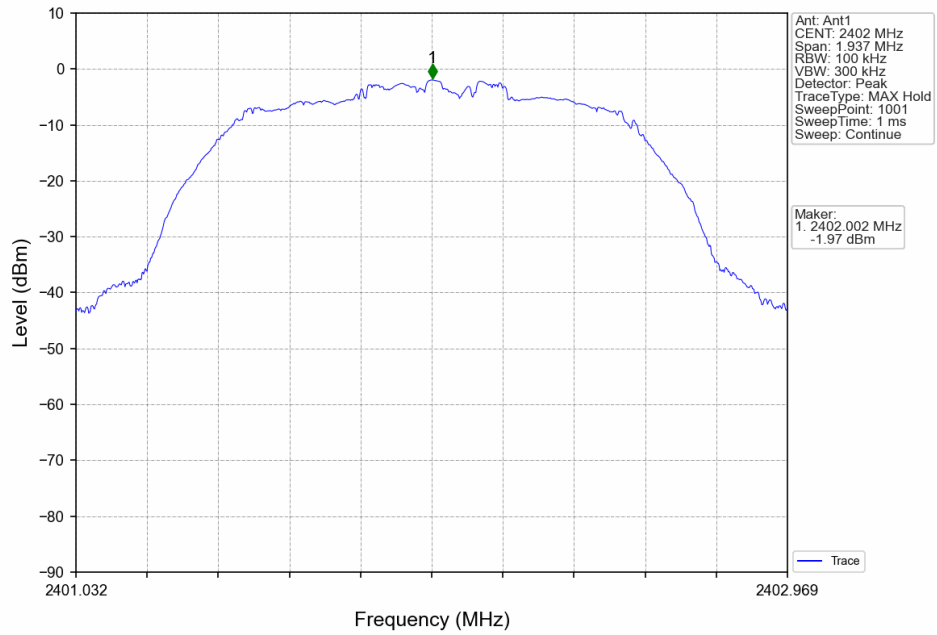

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

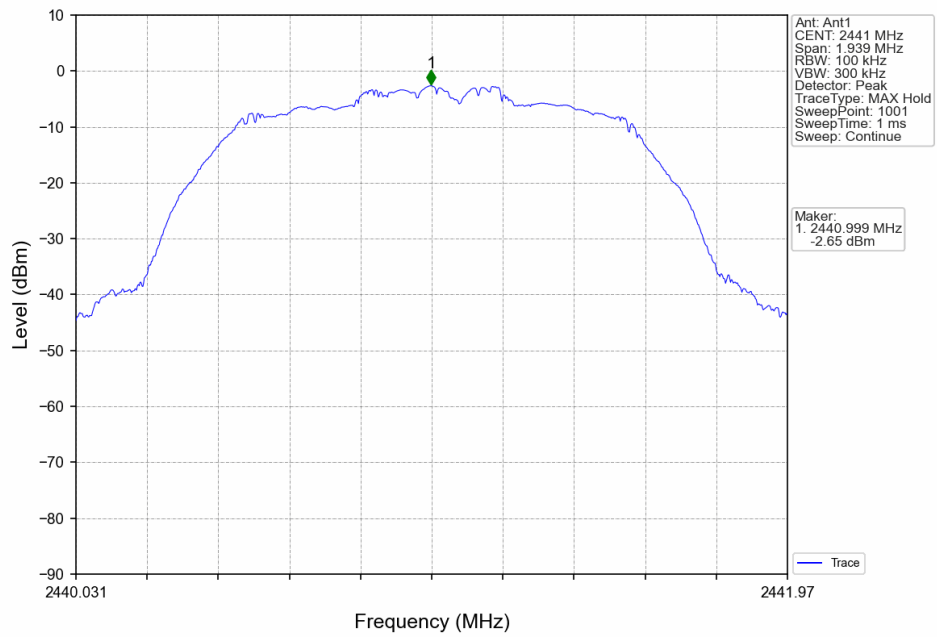

8DPSK 3DH5 HCH 2480MHz Ant1 NTNV

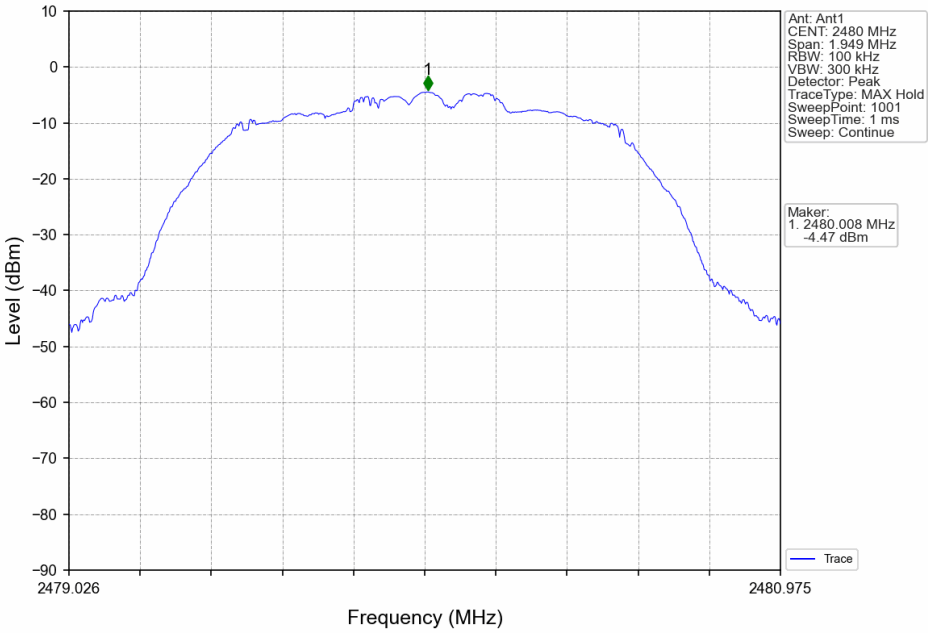


6.2 CSE


6.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	1.33	-18.67	Pass
		2441	DH5	1	1.33	-18.67	Pass
		2480	DH5	1	1.33	-18.67	Pass
		HOPP	DH5	1	1.33	-18.67	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	-1.93	-21.93	Pass
		2441	2DH5	1	-1.93	-21.93	Pass
		2480	2DH5	1	-1.93	-21.93	Pass
		HOPP	2DH5	1	-1.93	-21.93	Pass
8DPSK	SISO	2402	3DH5	1	-1.97	-21.97	Pass
		2441	3DH5	1	-1.97	-21.97	Pass
		2480	3DH5	1	-1.97	-21.97	Pass
		HOPP	3DH5	1	-1.97	-21.97	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.							


6.2.2 Test Graph

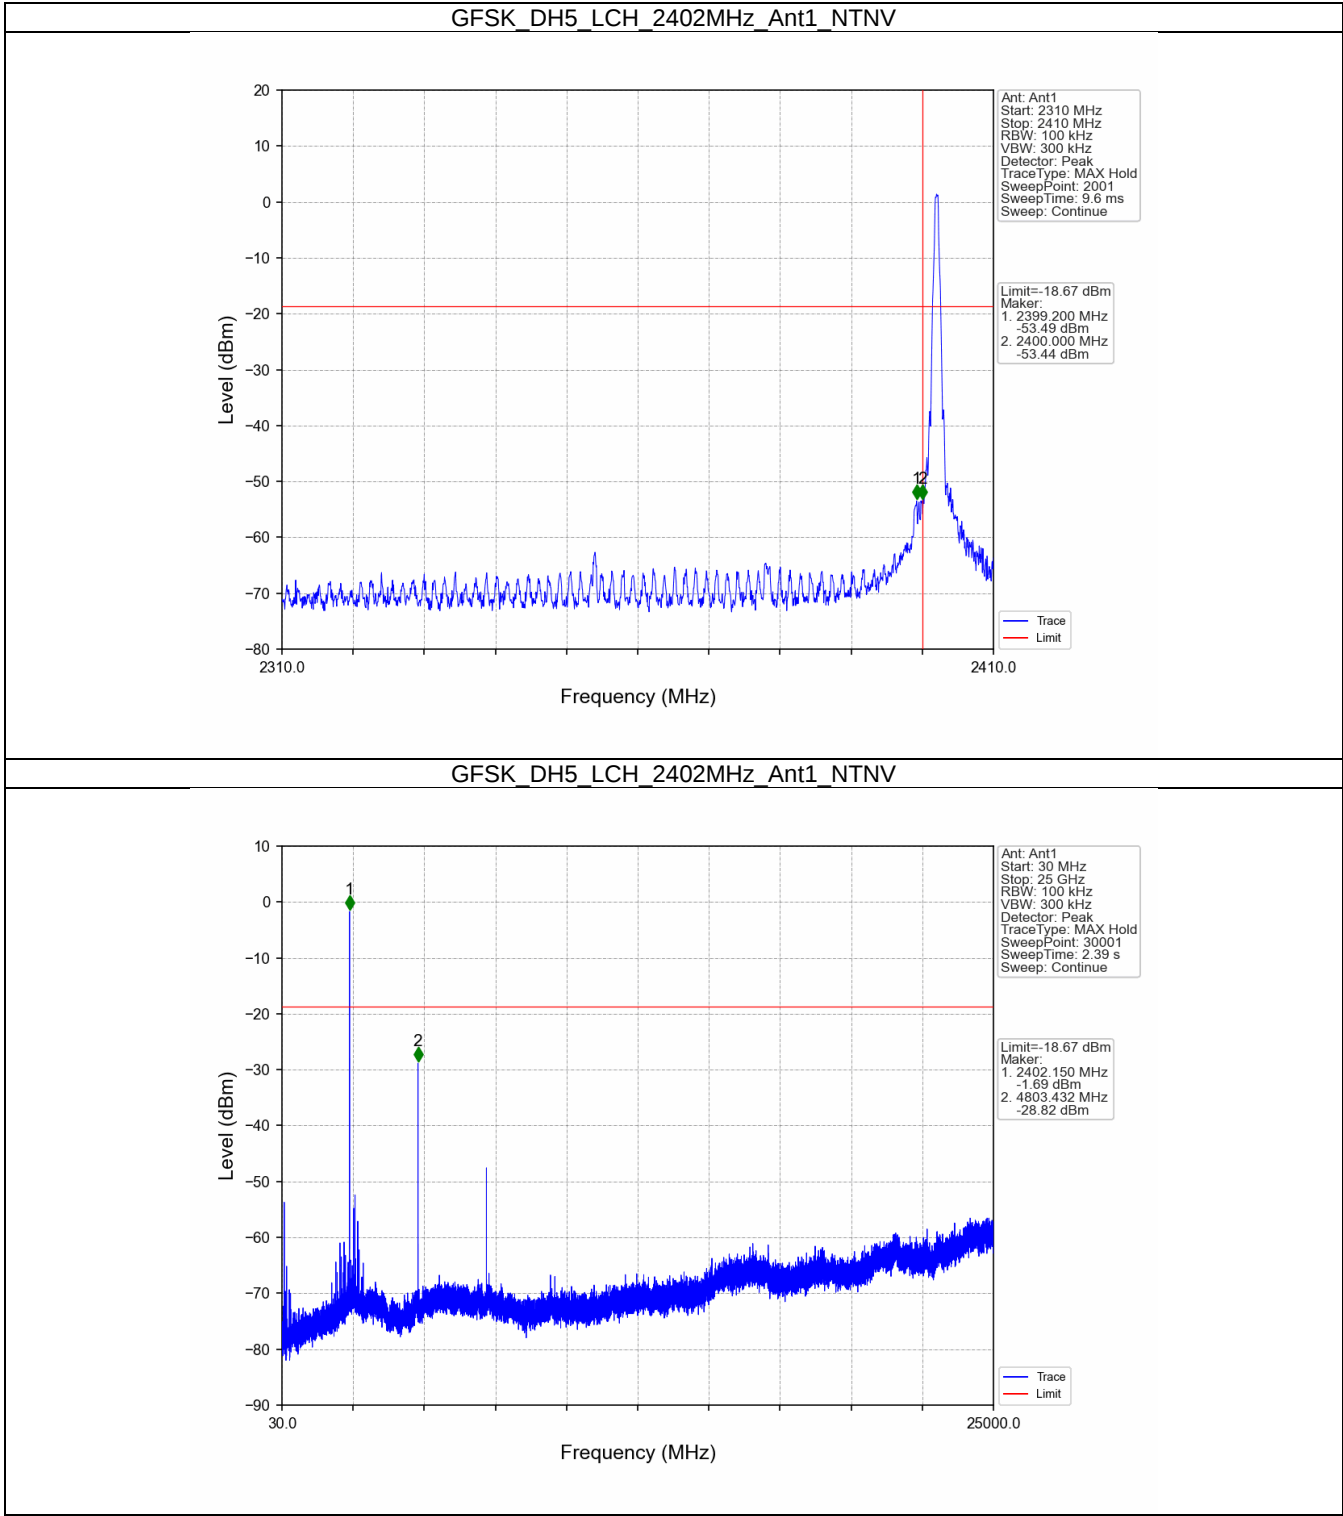


GFSK DH5 MCH 2441MHz Ant1 NTNV

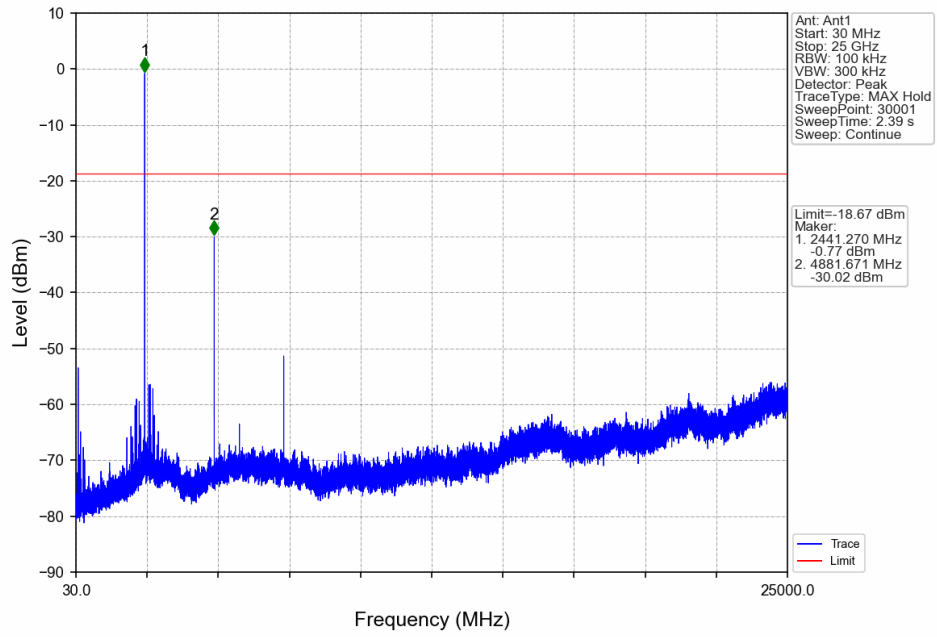


GFSK DH5 HCH 2480MHz Ant1 NTNV

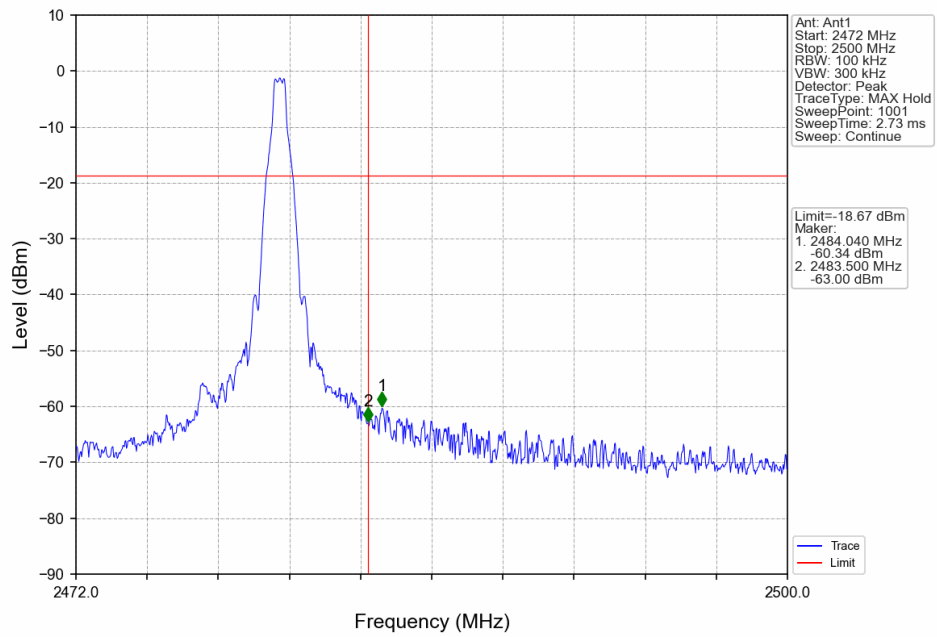


GFSK DH5 HCH 2480MHz Ant1 NTV

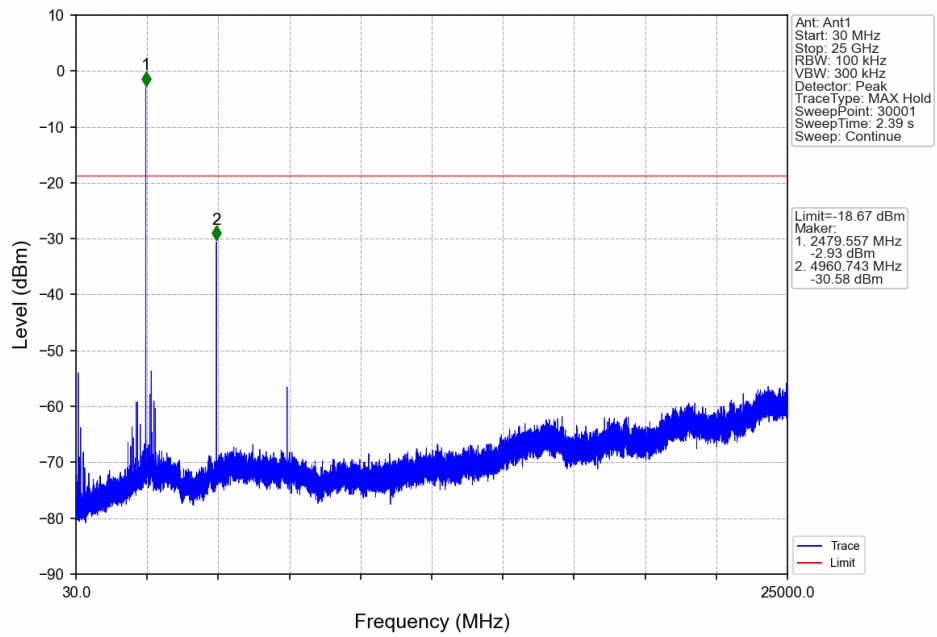


GFSK DH5 HOPP Ant1 NTV

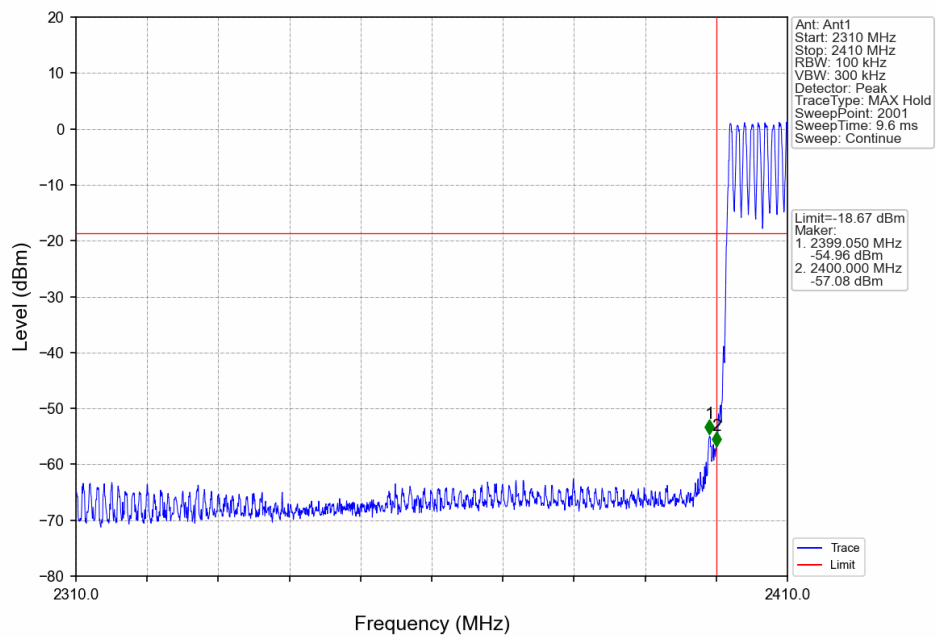


GFSK DH5 HOPP Ant1 NTN

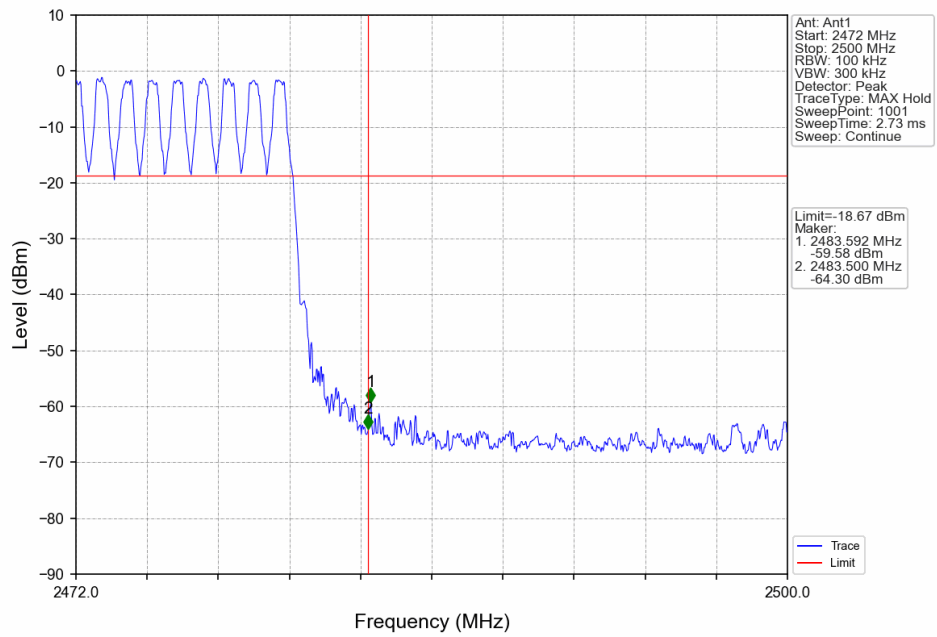


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

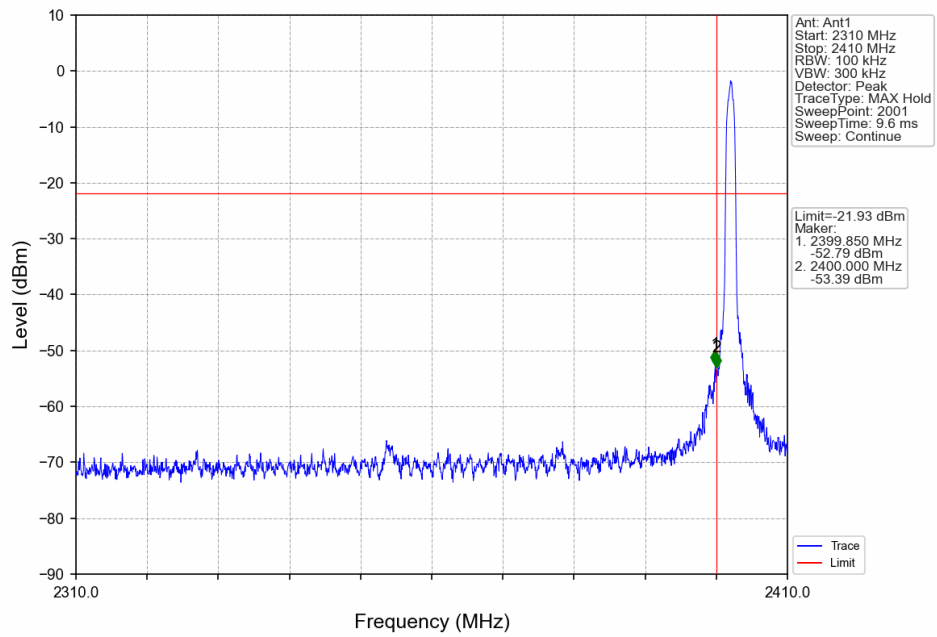


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

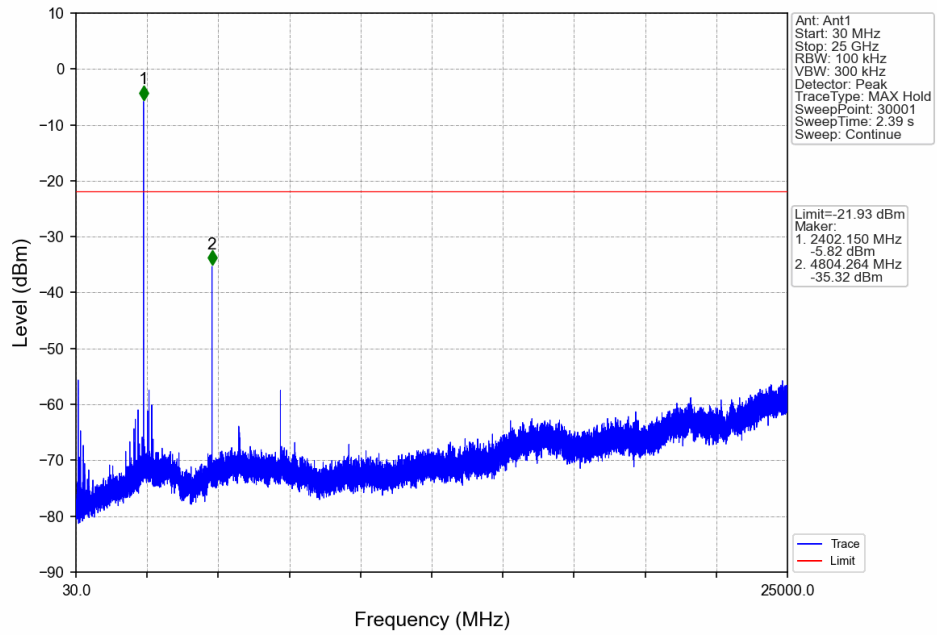


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

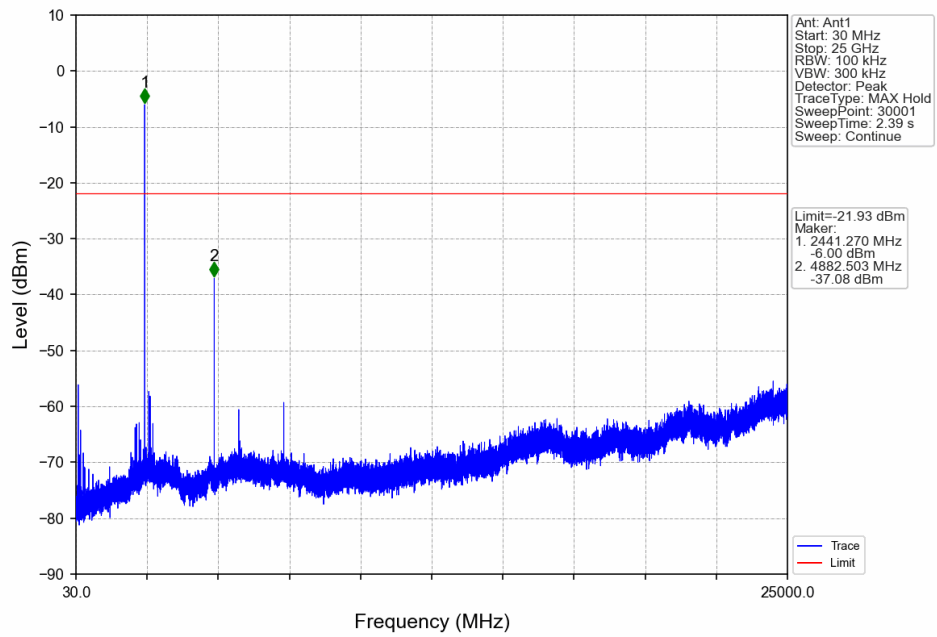


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

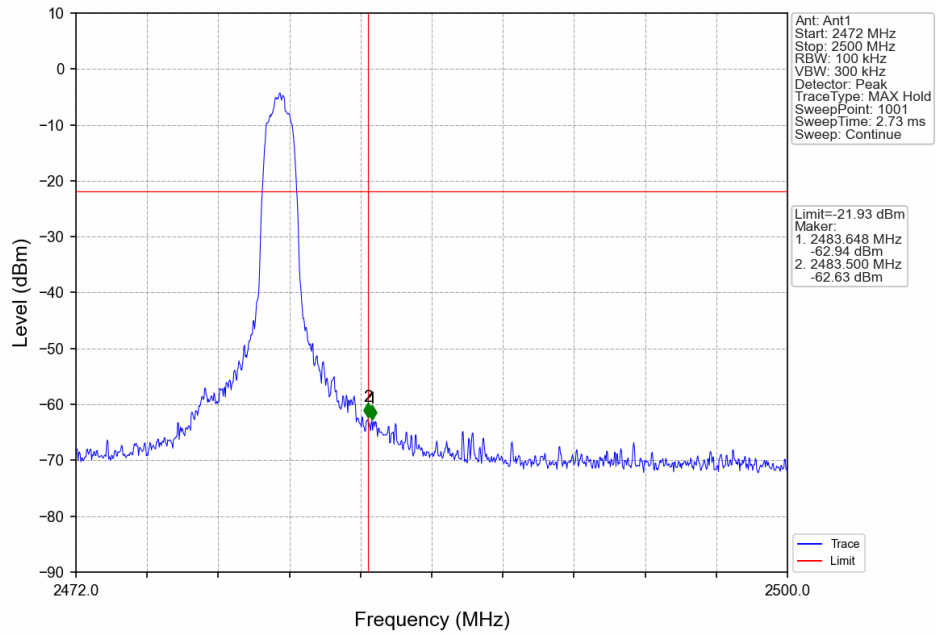


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

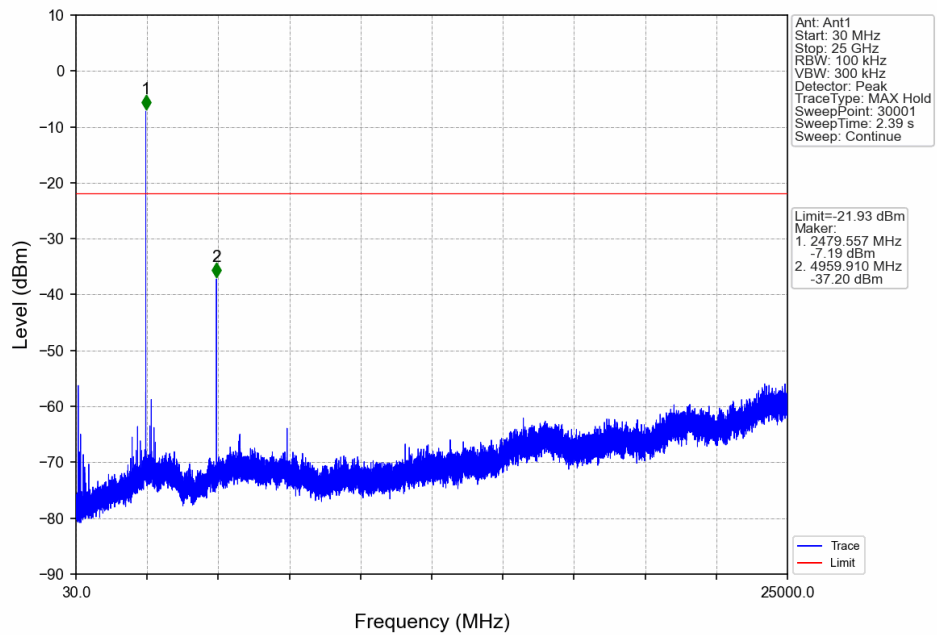


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

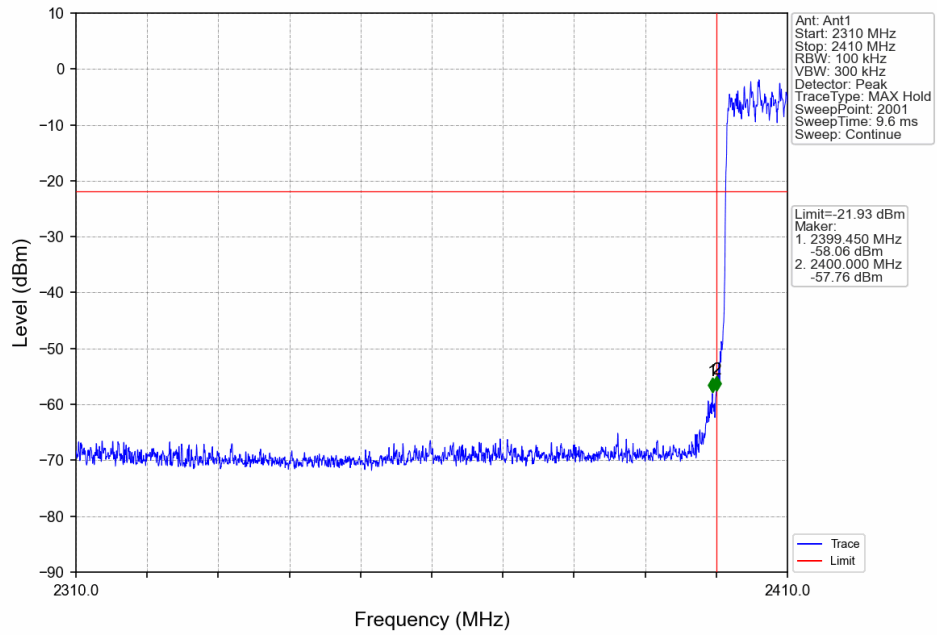


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

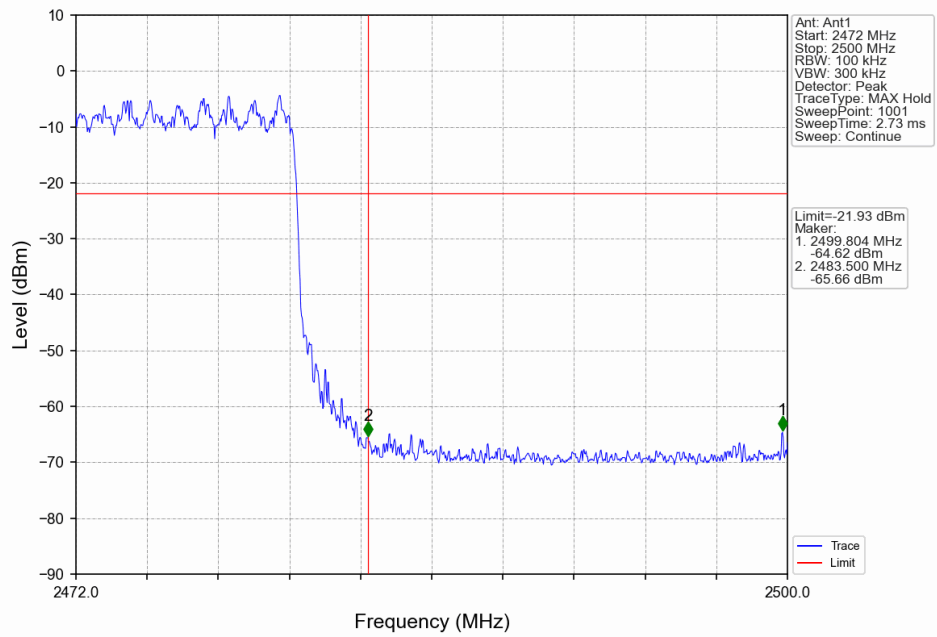


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

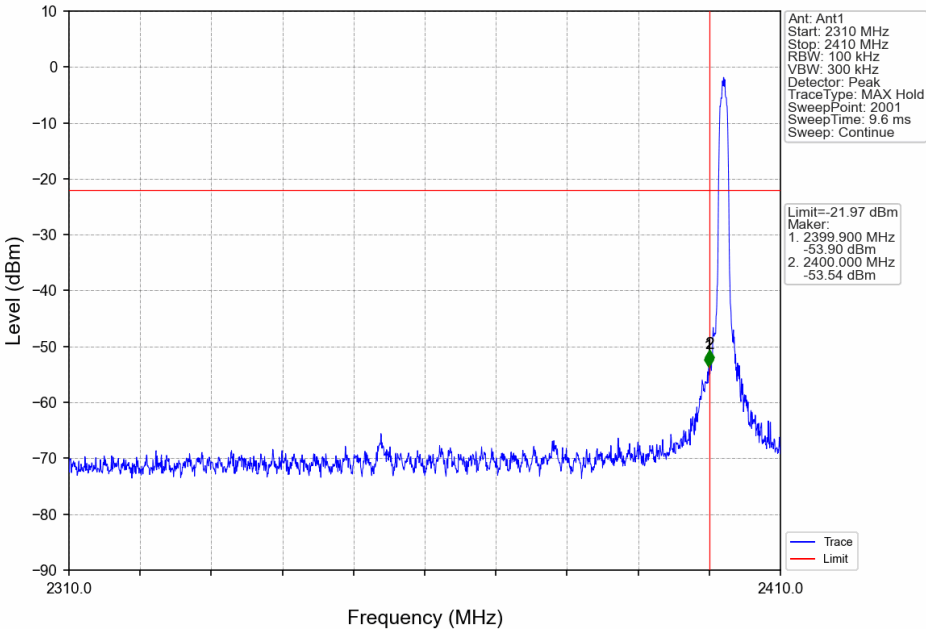


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

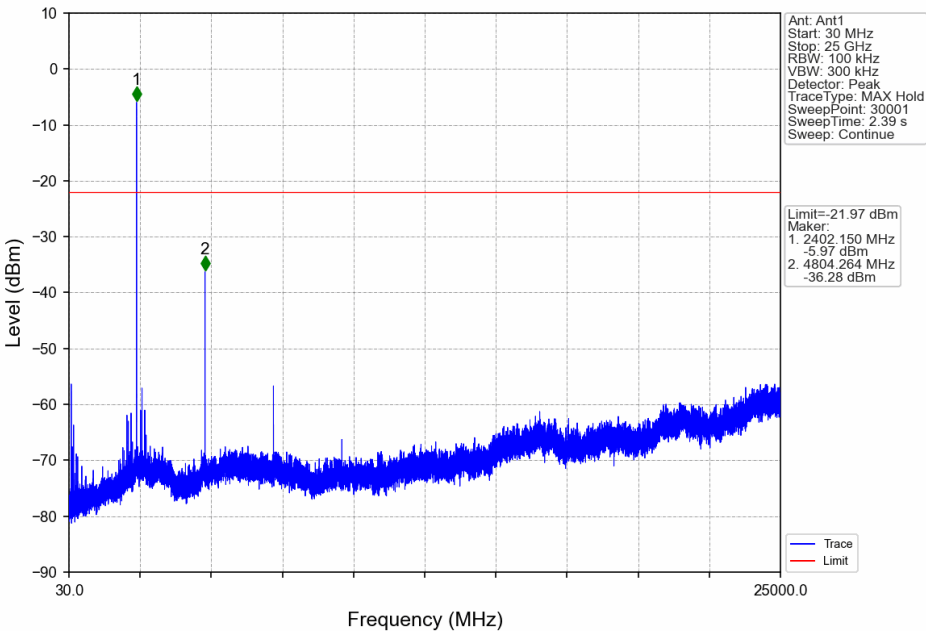


8DPSK 3DH5 MCH 2441MHz Ant1 NTN

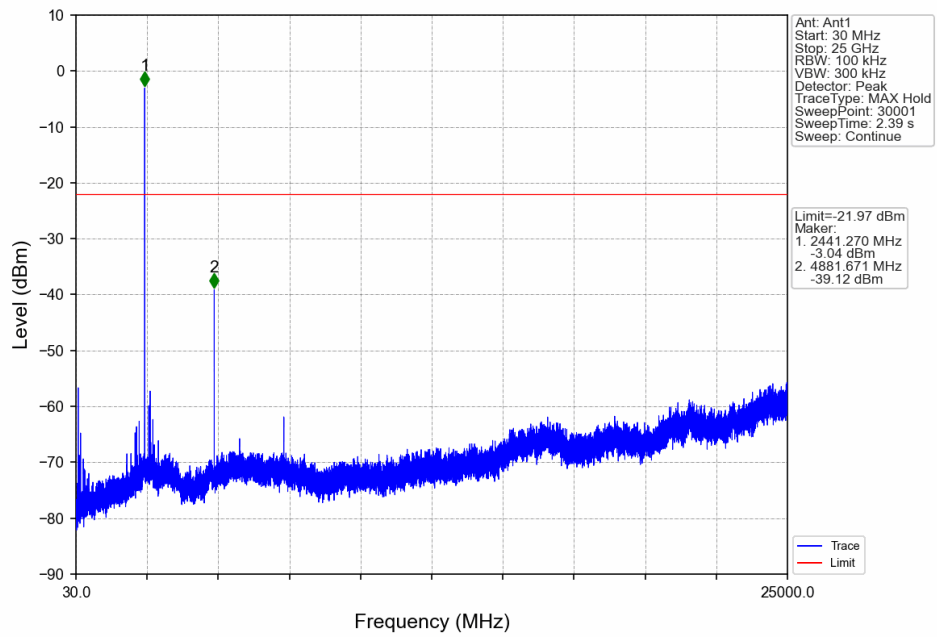


8DPSK 3DH5 HCH 2480MHz Ant1 NTN

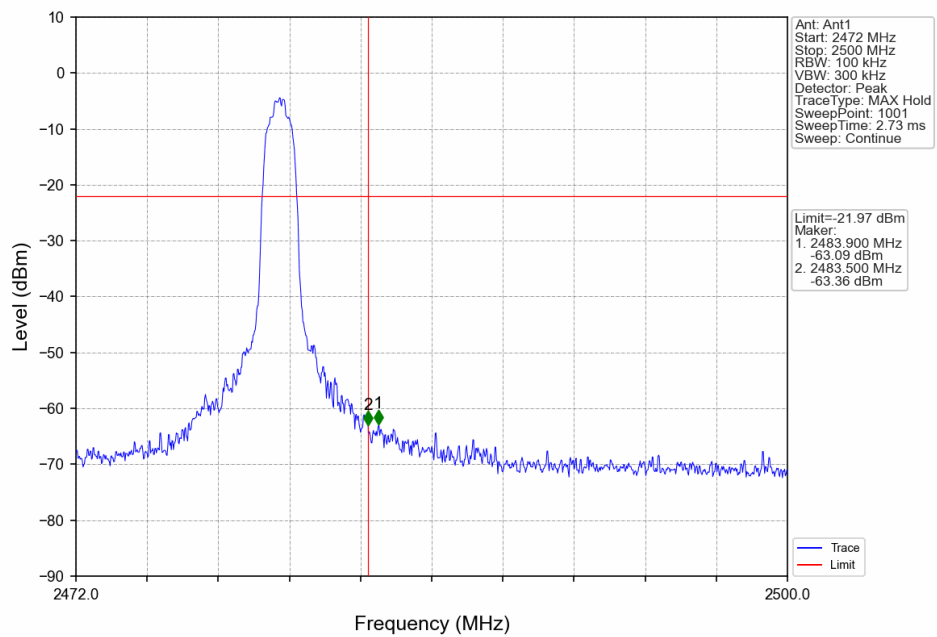

8DPSK 3DH5 HCH 2480MHz Ant1 NTNV

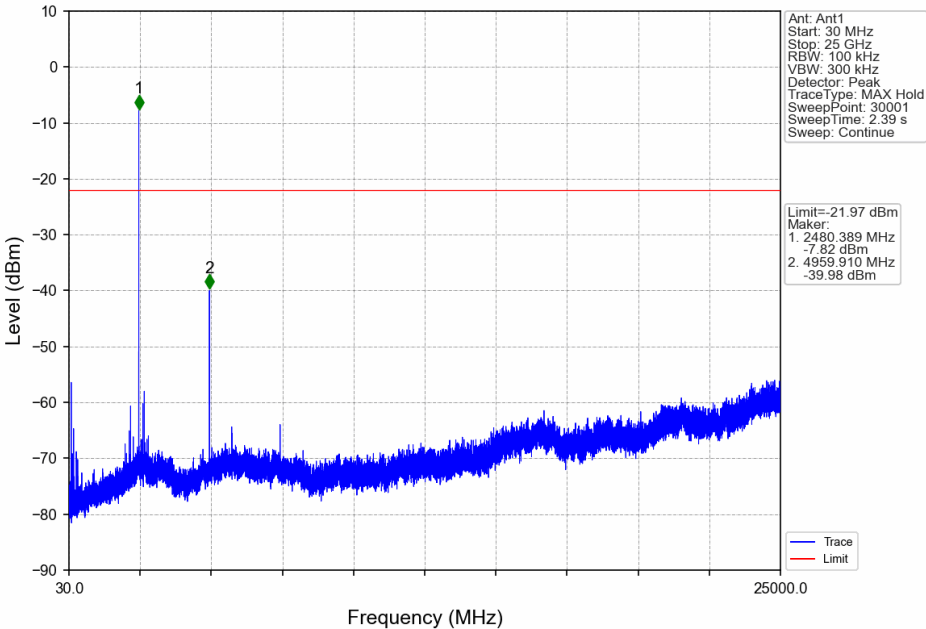

8DPSK 3DH5 HOPP Ant1 NTNV

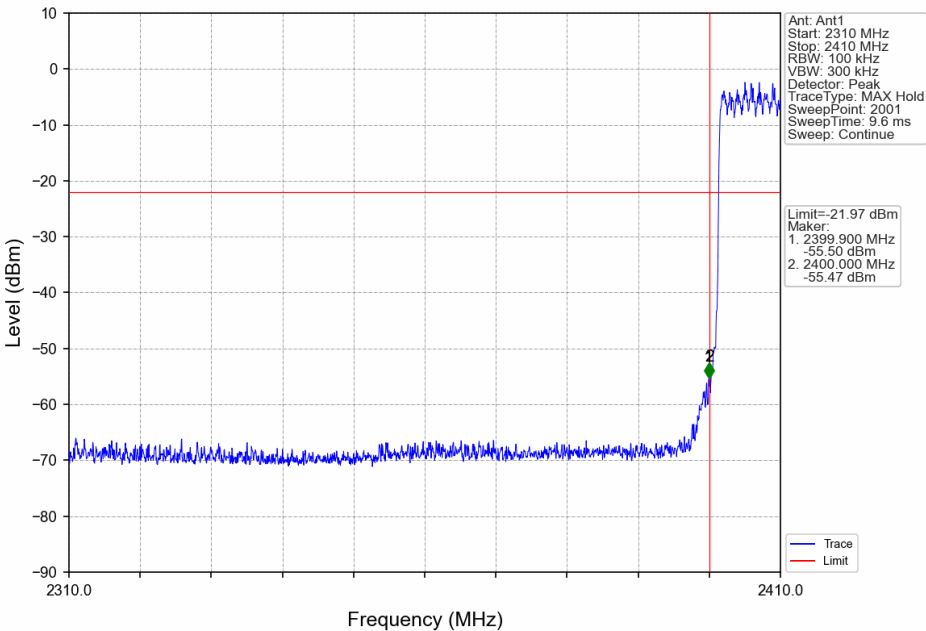

8DPSK 3DH5 HOPP Ant1 NTNV

