


120mm

155mm

hugolog

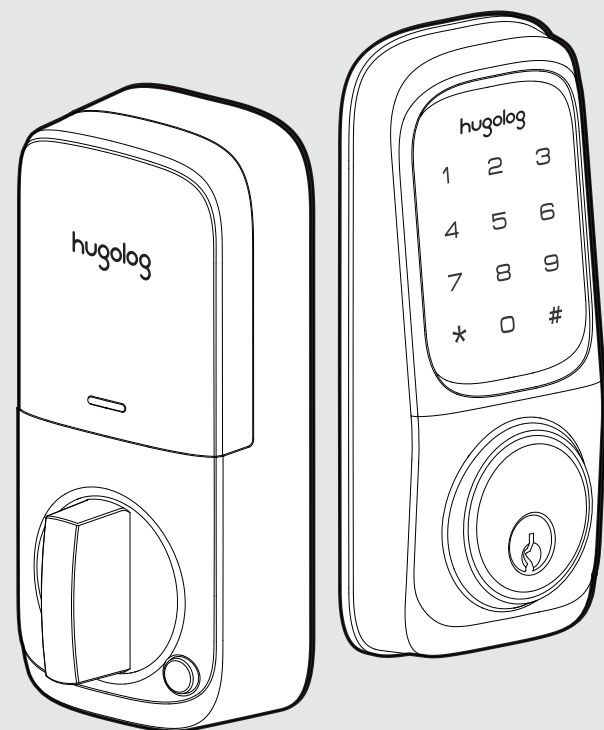

•HCD01 Programming Instructions

Information and Safety Warnings

- Failure to follow these instructions could result in damage to the product and void the factory warranty.
- The accuracy of the door preparation is critical for the proper functioning and security of this product. Misalignment can cause performance degradation and lessening of security.
- This lockset is designed to provide the highest standard of product quality and performance. Care should be taken to ensure a long-lasting finish. When cleaning is required, use a soft, damp cloth. Using lacquer thinner, caustic soaps, abrasive cleaners, or polishes could damage the coating and result in tarnishing.


(▲ NOTE: Do not load batteries until lock is completely installed.)

1. Master PIN Code (4~10 digits): The default master pin code is "12345678", It's required that you change it to a code of your own before programming.
2. User PIN Code (4~10 digits): A total of 20 user codes(and one temporary one-time user code) may be programmed.
3. Neither master nor user PIN codes support the following combination of numbers.

A.	1	2	3	4	5	6	7	8	9	×	Forward number sequence
B.	9	8	7	6	5	4	3	2	1	×	Backward number sequence
C.	2	2	2	2	2	2	2	2	2	×	Repeat number sequence
D.	5	6	8	3						✓	
	5	6	8	3	9	1				×	Contain existing code sequence
	9	1	5	6	8	3				×	

Parts Illustrations

ITEM	SPECIFICATIONS	REMARKS
Exterior Assembly	155.2mm(L)x70.5mm(W)x30.6mm(H)	
Interior Assembly	153.2mm(L)x68.3mm(W)x57.2mm(H)	
Battery	AA alkaline battery x4	Last up to six months (10 times open/close per day)

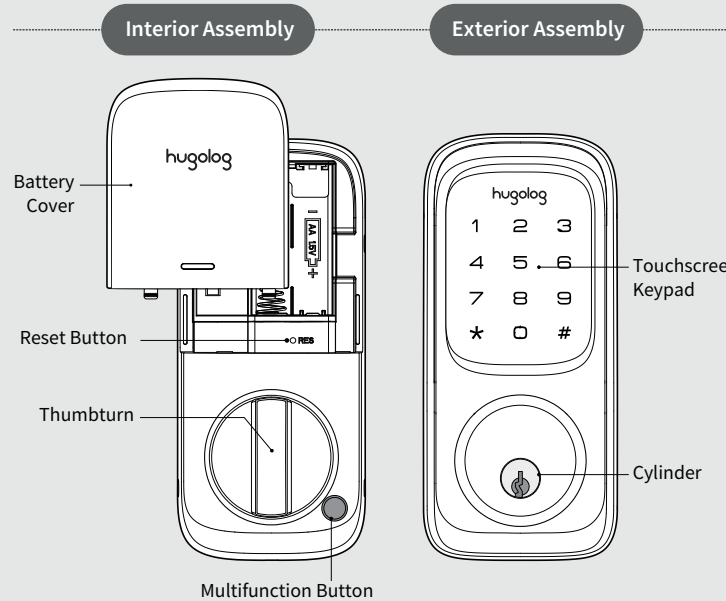

(▲ CAUTION: Master and User PIN code have 4~10 digits, the default master PIN code is 12345678. Please change it prior to programming of the lock)

Definitions

Master Code:
Required for programming and feature settings. Master code can be used to unlock the door under vacation mode. The default master code needs to be changed before programming. (Property owner/ manager should keep this information confidential.)

Auto Unlock:
Automatically locks the deadbolt 30 seconds after unlocking. This feature is disabled by default.

Wrong Entry Limit:
After 10 unsuccessful attempts at entering a valid PIN code, the unit will shut down for 3 minutes.

Silent Mode:
The beep sounds when pressing keypad can be muted. But you will still hear low battery and system alerts.

Vacation Mode:
This is a security feature for you when you are leaving your home for vacation or long trip. Enabling vacation mode will restrict all user codes until master code is entered on keypad. If the lock is unlocked by thumbturn or the key, the lock will sound an alarm.

Unlock with Fake Code:
User can prevent PIN code from exposure by entering random digits before or after PIN code.

Privacy Mode:
When the privacy mode is activated, the door cannot be opened from outside except with master PIN code.

背面

Factory Default Settings

SETTINGS	FACTORY DEFAULT
Master code	12345678
Auto lock	Disabled
Silent mode	Disabled
Wrong code entry limit	10 times
Shutdown time	3 minutes


Restore factory default settings

1. Keep your lock in "unlock" status, insert 4AA batteries in battery pack.
2. Use the provided reset pin to press and hold the reset button for more than 5 seconds until hearing beep sound.
3. If reset is successful, the bolt will extend on its own to learn the orientation of the door.

Troubleshooting

- **The lock can't be locked or unlocked by keypad?**
Make sure the codes are not disabled. If needed, restore the lock to default settings.
- **The keypad doesn't respond when touched (no lights and no beeps)?**
Make sure the power cable is properly connected. Change the batteries with 4 brand-new AA standard alkaline batteries. Do not mix old and new batteries.
- **The hugolog logo on top of the keypad keeps flashing red?**
It indicates the battery life is under 20% and please change the batteries as soon as possible.
- **Forgot the Master or user PIN codes**
Perform a reset to erase all passcodes. Once the reset is complete, all passcodes will be erased, and the master code will return to the default. (12345678).

How to use?

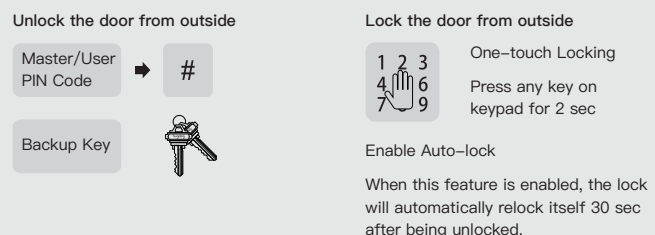

IC Warning

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:
(1) This device may not cause interference.
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.
Cet appareil est conforme aux CNR exemptes de licence d'industrie Canada.
Son fonctionnement est soumis aux deux conditions suivantes:
(1) Ce dispositif ne peut causer d'interférences ; et
(2) Ce dispositif doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement de l'appareil.
Ce matériel est complété par une exposition de rayonnements FCC pour un environnement naturel. Ce matériel doit être installé et se faire avec une distance minimale de 20cm entre les radiateurs et les autres/Your body shop.

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

FCC Caution


This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.
Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement
This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Lock Operation

! The default master code is 12345678. It's required that you change it to a code of your own before programming.

! When setting is unsuccessful, the indicator light will flash red.

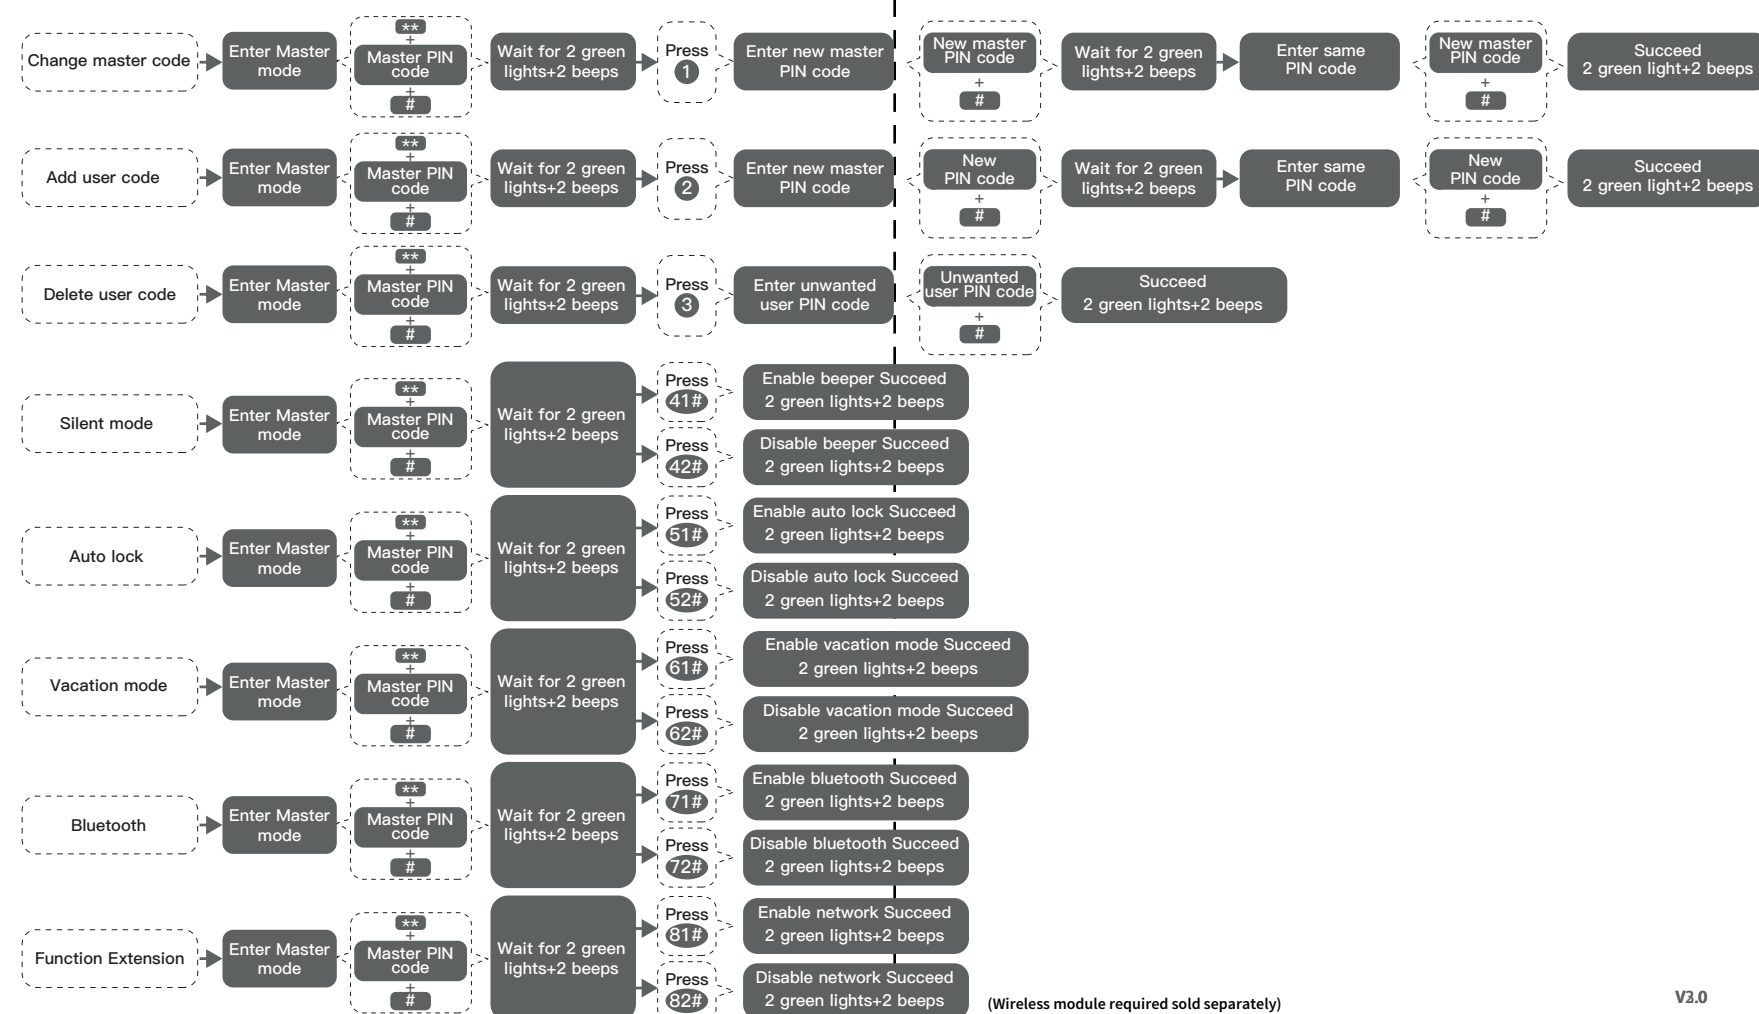

(Wireless module required sold separately)

V3.0

折后尺寸: 120x155mm

工艺: 折页

材质: 60g双胶纸

颜色: 单黑印刷

----- 折线

————— 切割线