

FCC/IC TEST REPORT

Test report No.: EMC- FCC- R0219
FCC ID: YZP-TWFBR101D
IC ID: 7414C-TWFBR101D
Type of equipment: Power over Ethernet
Basic Model Name: TWFB-R101D
Applicant: LG Innotek Co., Ltd.
Max.RF Output Power: 25.31 dBm
FCC Rule Part(s): FCC Part 15 Subpart C 15.247
IC Rule Part(s): RSS-210 Issue 8, December 2010
RSS-GEN Issue 4, November 2014
Frequency Range: 2 412 MHz ~ 2 462 MHz
2 422 MHz ~ 2 452 MHz
Test result: Complied

The above equipment was tested by EMC compliance Testing Laboratory for compliance with the requirements of FCC Rules and Regulations.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of receipt: 2015. 02. 10

Date of test: 2015. 02. 23 ~ 02. 27


Issued date: 2015. 03. 04

Tested by:



AHN, BYUNG WOO

Approved by:



SON, MIN GI

[Contents]

1. Client information	3
2. Laboratory information	4
3. Description of E.U.T.	5
3.1 Basic description	5
3.2 General description	5
3.3 Test frequency	6
3.4 Test Voltage	6
4. Summary of test results	7
4.1 Standards & results	7
5. Test results	8
5.1 Antenna Requirement	8
5.2 Maximum Peak Output Power	9
5.3 Peak Power Spectral Density	13
5.4 6 dB Bandwidth(DTS Channel Bandwidth)	37
5.5 Spurious Emission, Band Edge and Restricted bands	80
5.8 Conducted Emission	147
6. Test equipment used for test	149

1. Client information

Applicant: LG Innotek Co., Ltd.
Address: (Jangduk-dong) 26, Hanamsandan 5beon-ro, Gwangsan-gu,
Gwangju, 506-731, Korea
Telephone number: +82-62-950-0563
Contact person: Yoon DongHyeon / dhyoona@lginnotek.com

Manufacturer#1: PT.LG Innotek Indonesia
Address: Bekasi International Industrial Estate, Block C8 NO.12 &
12A,Lemahabang, Bekasi Timur, 17550, Jawa Barat, Indon
Manufacturer#2: LG INNOTEK CO., LTD.
Address: 978-1, JANGDUK-DONG, GWANGSAN-GU, GWANGJU, 506-
731, SOUTH KOREA

2. Laboratory information

Address

EMC compliance Ltd.

80-5, Sin-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea

Telephone Number: 82-70-5008-1021 Facsimile Number: 82-505-299-8311

Certificate

KOLAS No.: 231

FCC Site Designation No.: KR0040

FCC Site Registration No.: 687132

VCCI Site Registration No.: R-3327, G-198, C-3706, T-1849

IC Site Registration No.: 8035A-2

SITE MAP



EMC compliance Ltd.

80-5, Sin-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea

82-70-5008-1021 (Main) 82-505-299-8311 (Fax)

3. Description of E.U.T.

3.1 Basic description

Applicant	LG Innotek Co., Ltd.
Address of Applicant	(Jangduk-dong) 26, Hanamsandan 5beon-ro, Gwangsan-gu, Gwangju, 506-731, Korea
Manufacturer#1	PT.LG Innotek Indonesia.
Address of Manufacturer	Bekasi International Industrial Estate, Block C8 NO.12 & 12A, Lemahabang, Bekasi Timur, 17550, Jawa Barat, Indon
Manufacturer#2	LG INNOTEK CO., LTD.
Address of Manufacturer	978-1, JANGDUK-DONG, GWANGSAN-GU, GWANGJU, 506-731, SOUTH KOREA
Type of equipment	Power over Ethernet
Basic Model	TWFB-R101D
Serial number	N/A

3.2 General description

Frequency Range	2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20)_MIMO 2 422 MHz ~ 2 452 MHz (802.11n_HT40)_MIMO
Type of Modulation	CCK, OFDM
Number of Channels	11 ch (802.11b/g/n_HT20), 9 ch(802.11n_HT40)
Antenna Gain	ANT 1: 3.13 dBi ANT 2 :0.42 dBi
Transmit Power	25.31dBm
Power supply	AC 120 V*
Product SW/HW version	1.0
Radio SW/HW version	N/A
Test SW Version	MP TOOL-RTL819x 2.3
RF power setting in TEST SW	Path 41

* Declared by the applicant.

3.3 Test frequency

802.11b/g/n HT20

	Frequency
Low frequency	2 412 MHz
Middle frequency	2 437 MHz
High frequency	2 462 MHz

802.11n HT40

	Frequency
Low frequency	2 422 MHz
Middle frequency	2 437 MHz
High frequency	2 452 MHz

3.4 Test Voltage

Mode	Voltage
Norminal voltage	AC 120 V

4. Summary of test results

4.1 Standards & results

FCC Rule Reference	IC Rule Reference	Parameter	Report Section	Test Result
15.203, 15.247(b)(4)	-	Antenna Requirement	5.1	C
15.247(b)(3)	RSS-210, A8.4(2)	Maximum Peak Output Power	5.2	C
15.247(e)	RSS-210, A8.2(b)	Peak Power Spectral Density	5.3	C
15.247(a)(2)	RSS-210, A8.2(a)	6 dB Channel Bandwidth	5.4	C
-	RSS-GEN, 6.6	Occupied Bandwidth	5.4	C
15.247(d), 15.205(a), 15.209(a)	RSS-210, A8.5 RSS-GEN, 8.9, 8.10	Spurious Emission, Band Edge and Restricted bands	5.5	C
15.207(a)	RSS-GEN, 8.8	Conducted Emissions	5.6	C
Note: C = complies NC = Not complies NT = Not tested NA = Not Applicable				

* The general test methods used to test this device is ANSI C63.10:2013

4.2 Uncertainty

Measurement Item	Expanded Uncertainty $U = KU_c (K = 2)$	
Conducted RF power	± 1.36 dB	
Conducted Spurious Emissions	± 1.52 dB	
Radiated Spurious Emissions	30 MHz ~ 300 MHz:	+ 4.94 dB, - 5.06 dB
		+ 4.93 dB, - 5.05 dB
	300 MHz ~ 1 000 MHz:	+ 4.97 dB, - 5.08 dB
		+ 4.84 dB, - 4.96 dB
Conducted Emissions	1 GHz ~ 25 GHz:	+ 6.03 dB, - 6.05 dB
	9 kHz ~ 150 kHz:	± 3.75 dB
	150 kHz ~ 30 MHz:	± 3.36 dB

5. Test results

5.1 Antenna Requirement

5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.1.2 Result

-Complied

The transmitter has an integral PCB antenna.

The total directional peak gain of the antenna not exceeds 6.0 dBi

ANT 1 Gain	3.13 dBi
ANT 2 Gain	0.42 dBi

According to KDB 662911 D01 Multiple Transmitter Output v02r01

- Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

$$\text{Array Gain} = 10 \log(N_{ANT}/N_{SS}) \text{ dB.}$$

$$\text{Total gain} = 6.14 \text{ dBi (individual gain(3.13 dBi) + Array gain(3.01 dBi))}$$

For power measurements on IEEE 802.11 devices

$$\text{Array Gain} = 0 \text{ dB (i.e., no array gain) for } N_{ANT} \leq 2;$$

$$\text{Array Gain} = 0 \text{ dB (i.e., no array gain) for channel widths } \geq 40 \text{ MHz for any } N_{ANT};$$

$$\text{Array Gain} = 5 \log(N_{ANT}/N_{SS}) \text{ dB or } 3 \text{ dB, whichever is less, for } 20\text{-MHz channel widths with } N_{ANT} \geq 5.$$

For power measurements on all other devices:

$$\text{Array Gain} = 10 \log(N_{ANT}/N_{SS}) \text{ dB.}$$

$$\text{Total gain} = 3.13 \text{ dBi (individual gain(3.13 dBi) + Array gain(0 dBi))}$$

5.2 Maximum Peak Output Power

5.2.1 Regulation

According to §15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2.2 Measurement Procedure

These test measurement settings are specified in section 9.0 of 558074 D01 DTS Meas Guidance.

5.2.2.1 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

5.2.3 Test Result

- Complied

* 802.11b_ANT 1

Channel	Frequency (MHz)	Result (dBm)	Average Power (dBm)	Limit (dBm)	Margin (dB)
Low	2 412	19.18	16.75	30.00	10.82
Middle	2 437	18.88	16.40	30.00	11.12
High	2 462	18.58	16.02	30.00	11.43

* 802.11g_ANT 1

Channel	Frequency (MHz)	Result (dBm)	Average Power (dBm)	Limit (dBm)	Margin (dB)
Low	2 412	22.08	12.17	30.00	7.92
Middle	2 437	21.98	11.89	30.00	8.02
High	2 462	21.38	11.58	30.00	8.62

* 802.11n HT20_ANT 1

Channel	Frequency (MHz)	Result (dBm)	Average Power (dBm)	Limit (dBm)	Margin (dB)
Low	2 412	22.58	12.20	30.00	7.42
Middle	2 437	22.28	11.35	30.00	7.72
High	2 462	21.88	11.52	30.00	8.12

* 802.11n HT40_ANT 1

Channel	Frequency (MHz)	Result (dBm)	Average Power (dBm)	Limit (dBm)	Margin (dB)
Low	2 422	21.88	10.41	30.00	8.12
Middle	2 437	22.38	10.23	30.00	7.62
High	2 452	21.38	10.08	30.00	8.62

*** 802.11g_ANT 2**

Channel	Frequency (MHz)	Result (dBm)	Average Power (dBm)	Limit (dBm)	Margin (dB)
Low	2 412	23.89	14.58	30.00	6.11
Middle	2 437	23.88	13.82	30.00	6.12
High	2 462	23.39	13.95	30.00	6.62

*** 802.11n HT20_ANT 2**

Channel	Frequency (MHz)	Result (dBm)	Average Power (dBm)	Limit (dBm)	Margin (dB)
Low	2 412	24.19	14.43	30.00	5.81
Middle	2 437	23.99	14.26	30.00	6.01
High	2 462	23.59	13.92	30.00	6.42

*** 802.11n HT40_ANT 2**

Channel	Frequency (MHz)	Result (dBm)	Average Power (dBm)	Limit (dBm)	Margin (dB)
Low	2 422	19.34	17.16	30.00	10.66
Middle	2 437	19.18	17.03	30.00	10.82
High	2 452	18.98	16.86	30.00	11.02

*** 802.11g_MIMO (ANT 1+2)**

Channel	Frequency (MHz)	Result (dBm)	Average Power (dBm)	Limit (dBm)	Margin (dB)
Low	2 412	25.31	15.45	30.00	4.69
Middle	2 437	25.22	15.28	30.00	4.78
High	2 462	24.98	15.23	30.00	5.02

*** 802.11n HT20_MIMO (ANT 1+2)**

Channel	Frequency (MHz)	Result (dBm)	Average Power (dBm)	Limit (dBm)	Margin (dB)
Low	2 412	22.18	19.50	30.00	7.82
Middle	2 437	22.01	19.21	30.00	7.99
High	2 462	21.74	19.02	30.00	8.26

*** 802.11n HT40_MIMO (ANT 1+2)**

Channel	Frequency (MHz)	Result (dBm)	Average Power (dBm)	Limit (dBm)	Margin (dB)
Low	2 422	20.00	17.15	30.00	10.00
Middle	2 437	20.05	17.82	30.00	9.95
High	2 452	19.81	17.62	30.00	10.19

-NOTE:

1. Since the directional gain of the integral antenna declared by the manufacturer ($G_{ANT} = \text{ANT 1: } 3.13 \text{ dBi, ANT 2: } 0.42 \text{ dBi}$) does not exceed 6.0 dBi. Therefore, it doesn't need to reduce the output power.
2. We took the insertion loss of the cable loss into consideration within the measuring instrument.
3. Average power was used on RF Exposure.

5.3 Peak Power Spectral Density

5.3.1 Regulation

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.3.2 Measurement Procedure

These test measurement settings are specified in section 10.0 of 558074 D01 DTS Meas Guidance.

5.3.2.1 Method PKPSD (peak PSD)

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set the span to 1.5 times the DTS bandwidth.
- 3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- 4) Set the VBW $\geq 3 \times \text{RBW}$.
- 5) Detector = peak.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3.3 Test Result

- Complied

*** 802.11b_ANT 1**

Channel	Result [dBm]	Limit [dBm]	Margin [dBm]
Low	6.93	8.00	1.07
Middle	6.52	8.00	1.48
High	6.03	8.00	1.97

*** 802.11g_ANT 1**

Channel	Result [dBm]	Limit [dBm]	Margin [dBm]
Low	1.09	8.00	6.91
Middle	0.77	8.00	7.23
High	0.52	8.00	7.48

*** 802.11n HT20_ANT 1**

Channel	Result [dBm]	Limit [dBm]	Margin [dBm]
Low	2.51	8.00	5.49
Middle	0.53	8.00	7.47
High	0.19	8.00	7.81

*** 802.11n HT20_ANT 1**

Channel	Result [dBm]	Limit [dBm]	Margin [dBm]
Low	-3.12	8.00	11.12
Middle	-3.39	8.00	11.39
High	-3.66	8.00	11.66

*** 802.11g_ANT 2**

Channel	Result [dBm]	Limit [dBm]	Margin [dBm]
Low	2.87	8.00	5.13
Middle	2.75	8.00	5.25
High	2.64	8.00	5.36

*** 802.11n HT20_ANT 2**

Channel	Result [dBm]	Limit [dBm]	Margin [dBm]
Low	3.12	8.00	4.88
Middle	2.85	8.00	5.15
High	2.74	8.00	5.25

*** 802.11n HT40_ANT 2**

Channel	Result [dBm]	Limit [dBm]	Margin [dBm]
Low	-0.58	8.00	8.58
Middle	-0.68	8.00	8.68
High	-0.87	8.00	8.87

*** 802.11g_MIMO (ANT 1+2)**

Channel	Result [dBm]	Limit [dBm]	Margin [dBm]
Low	4.31	7.86	3.55
Middle	4.06	7.86	3.80
High	3.93	7.86	3.93

*** 802.11n HT20_MIMO (ANT 1+2)**

Channel	Result [dBm]	Limit [dBm]	Margin [dBm]
Low	4.20	7.86	3.66
Middle	4.10	7.86	3.76
High	3.64	7.86	4.22

*** 802.11n HT40_MIMO (ANT 1+2)**

Channel	Result [dBm]	Limit [dBm]	Margin [dBm]
Low	0.44	7.86	7.42
Middle	0.46	7.86	7.40
High	0.07	7.86	7.79

-NOTE:


1. Since the directional gain of the integral antenna declared by the manufacturer ($G_{ANT} = ANT\ 1 : 3.13\ dBi, ANT\ 2 : 0.42\ dBi$), does exceed 6.0 dBi, So there was need to reduce the output power Limit.
(Total gain = 6.14 dBi (individual gain(3.13 dBi) + Array gain(3.01 dBi)))
Therefore limit is 7.86 dBm (=8.00 dBm - 0.14 dB)
2. We took the insertion loss of the cable loss into consideration within the measuring instrument.

5.3.4 Test Plot


Figure 1. Plot of the Power Density

* 802.11b_ANT 1


Low Channel(2 412 MHz)

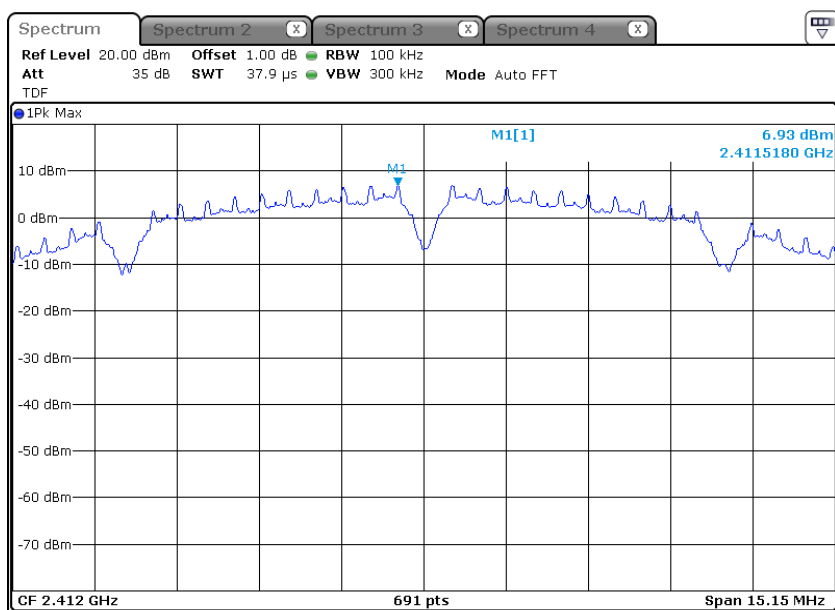

Middle Chnnel (2 437 MHz)

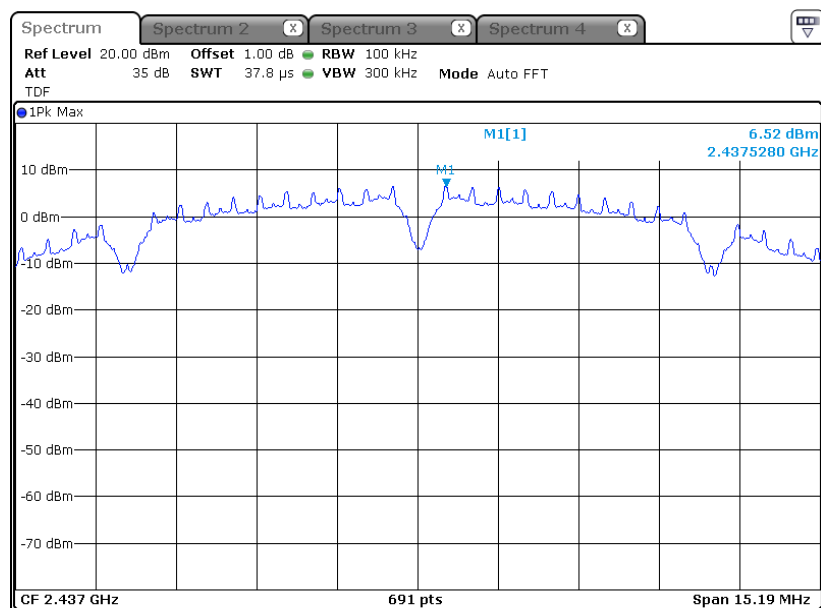


High Channel (2 462 MHz)

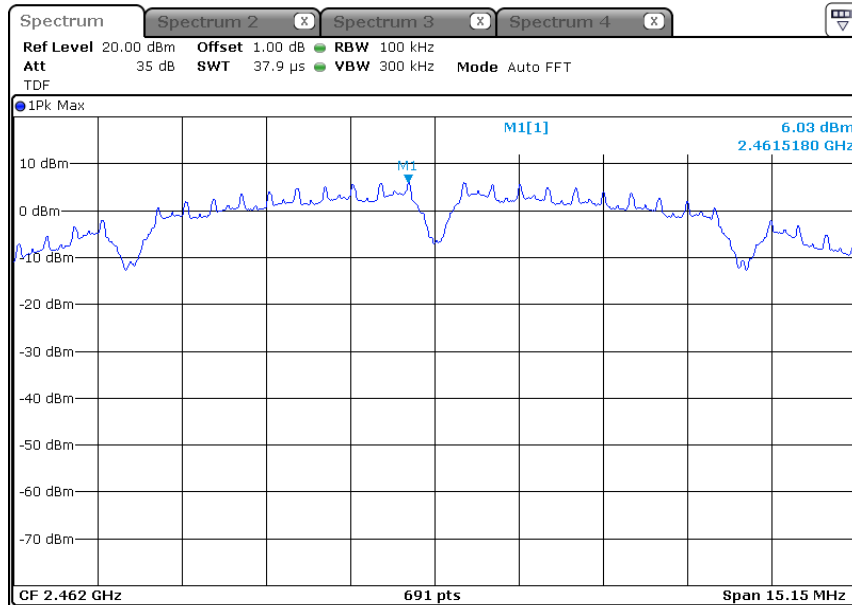


* 802.11g_ANT 1


Low Channel(2 412 MHz)

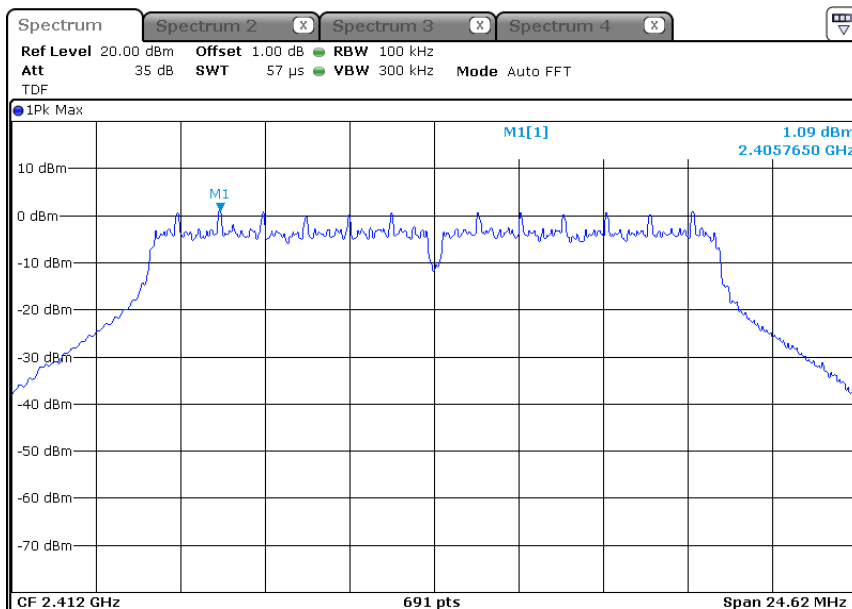

Middle Channel (2 437 MHz)

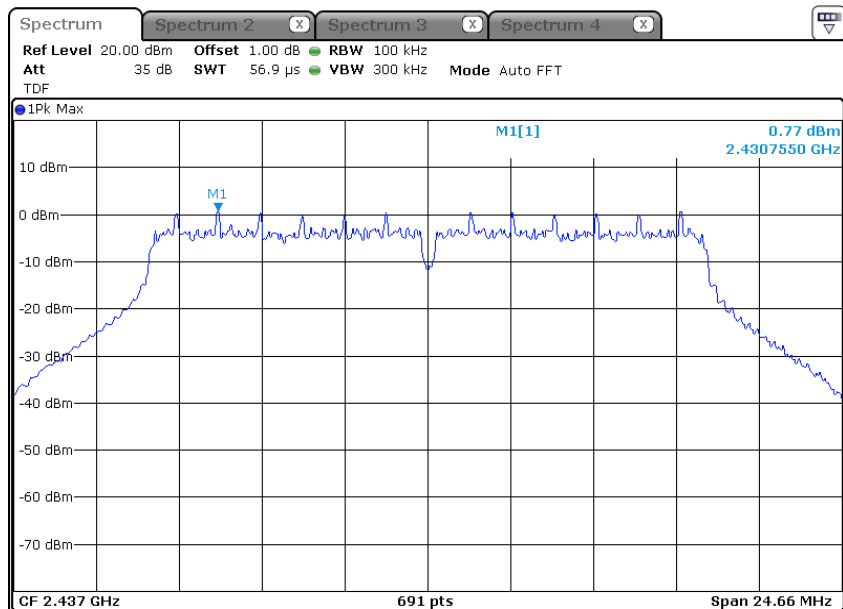


High Channel (2 462 MHz)

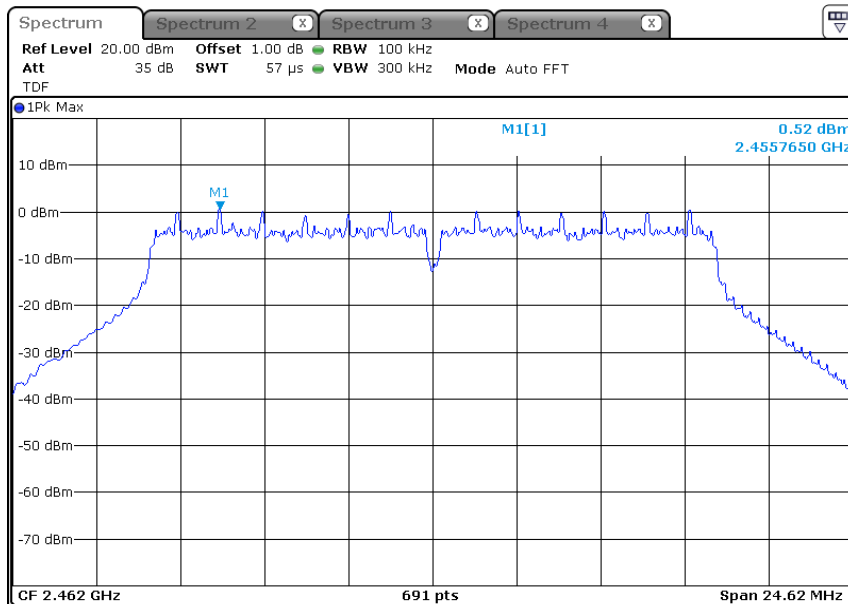


*** 802.11n HT20_ANT 1**


Low Channel(2 412 MHz)

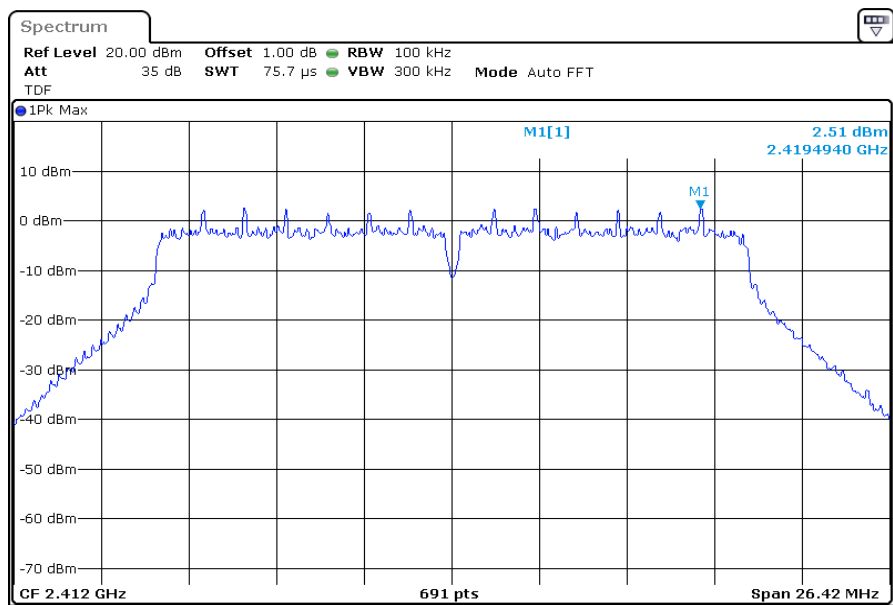

Middle Channel (2 437 MHz)

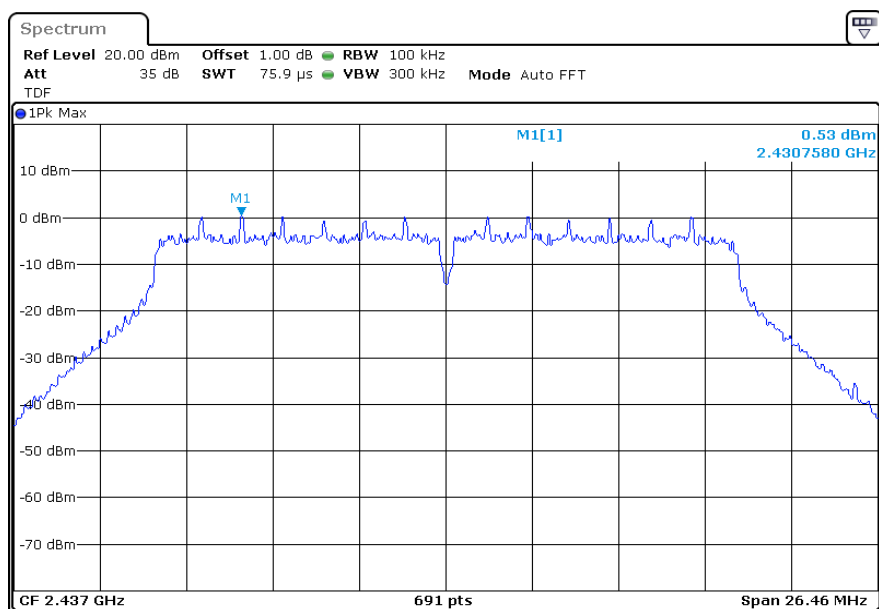


High Channel (2 462 MHz)

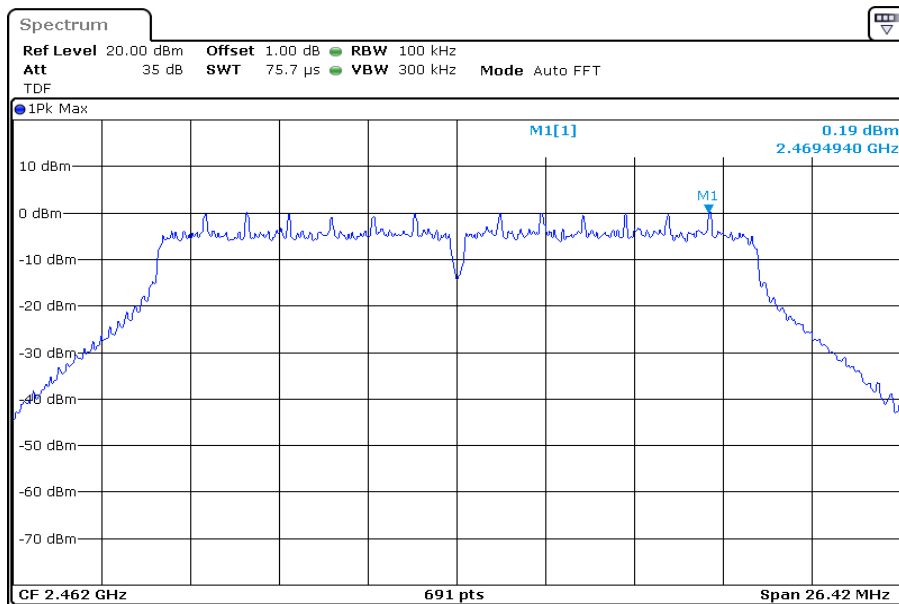


* 802.11n HT40_ANT 1


Low Channel(2 422 MHz)

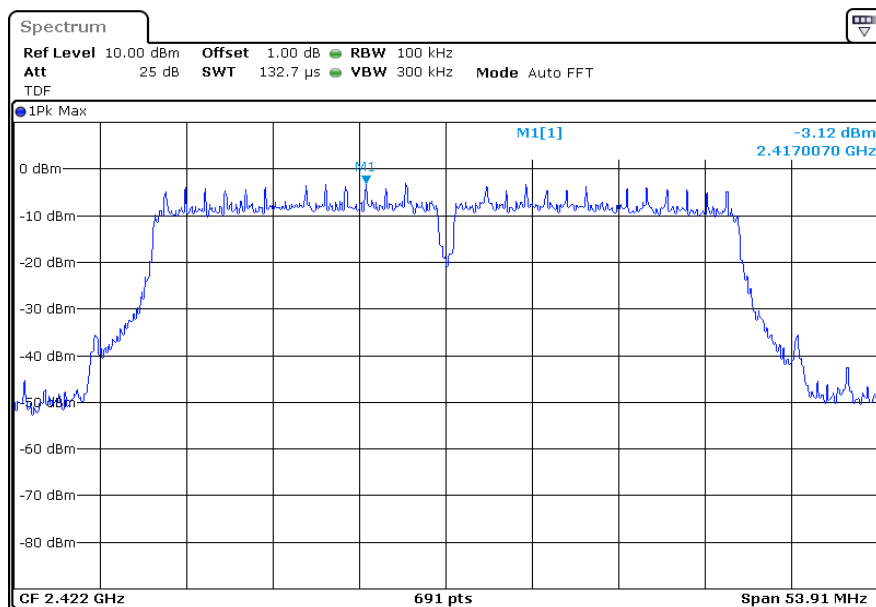

Middle Channel (2 437 MHz)

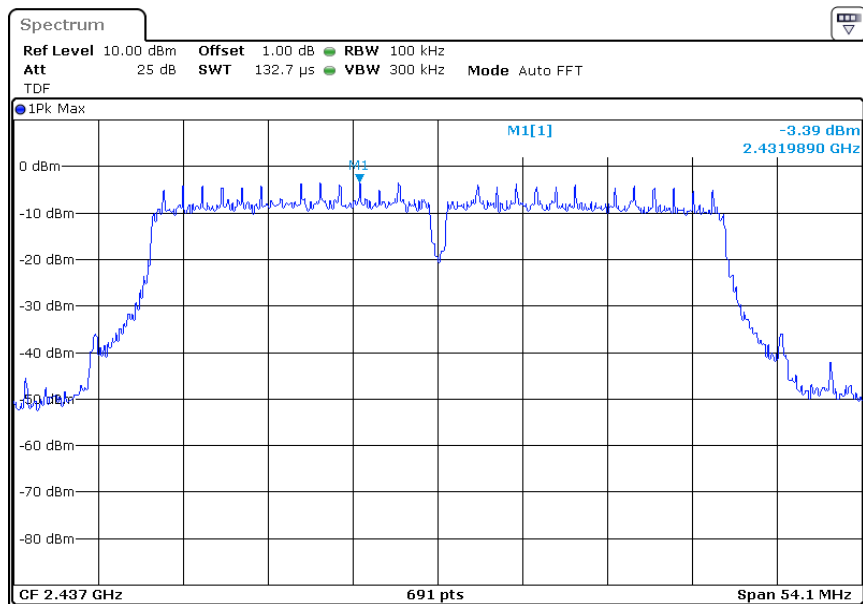


High Channel (2 452 MHz)

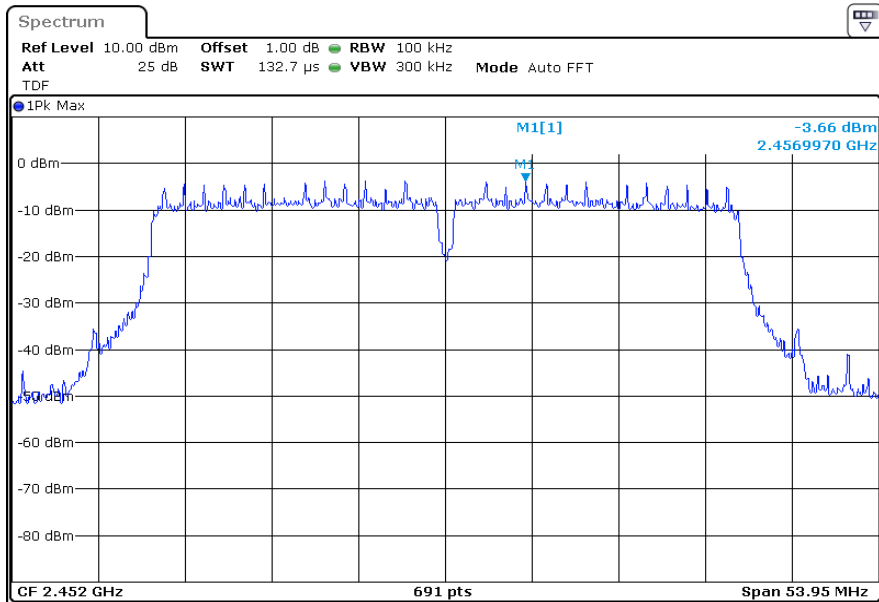


*** 802.11g_ANT 2**


Low Channel(2 412 MHz)

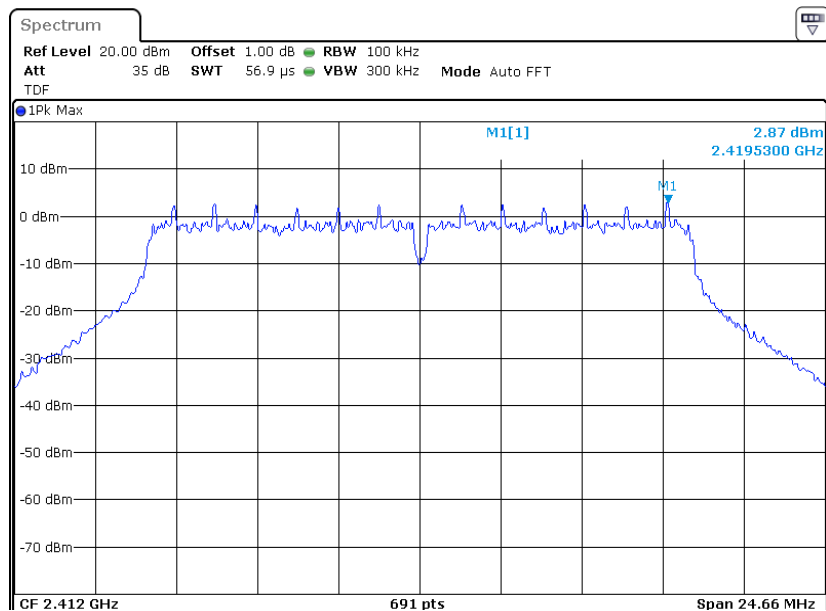

Middle Chnnel (2 437 MHz)

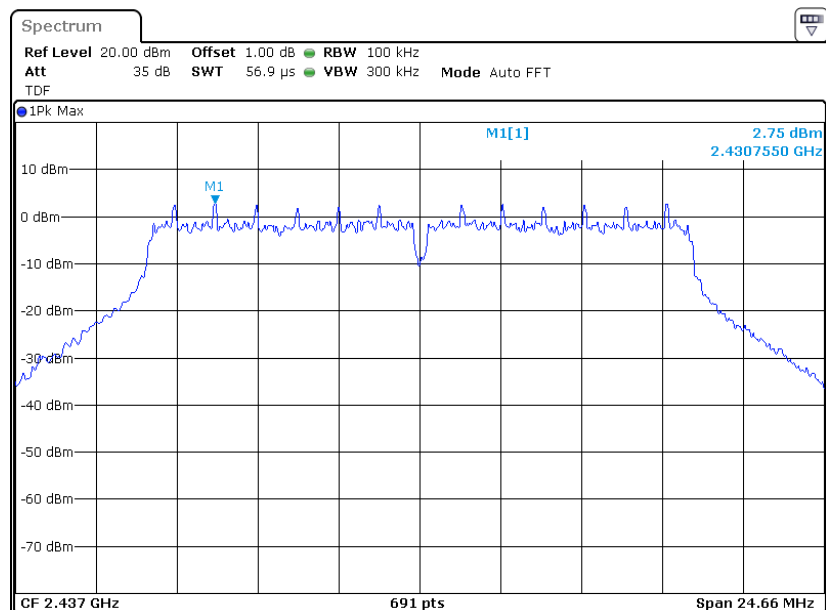


High Channel (2 462 MHz)

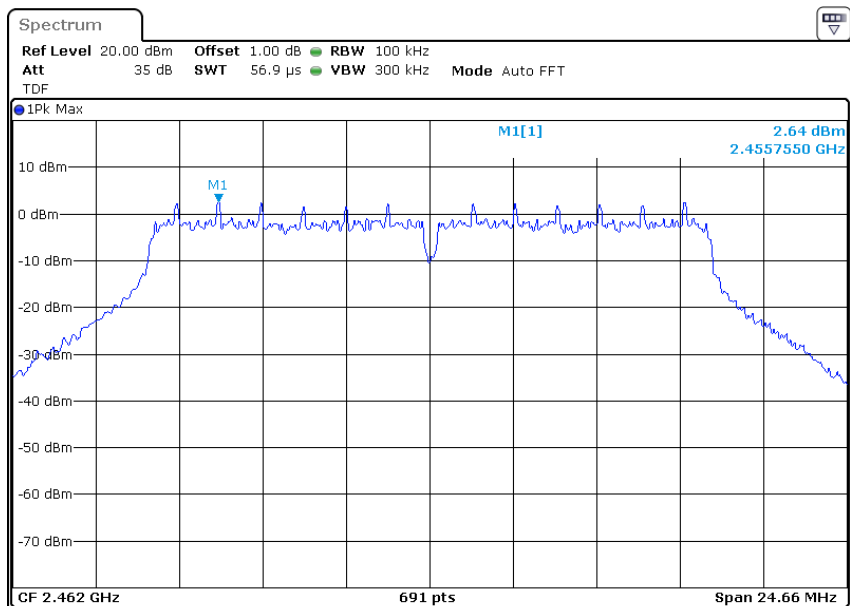


* 802.11 HT20_ANT 2


Low Channel(2 412 MHz)

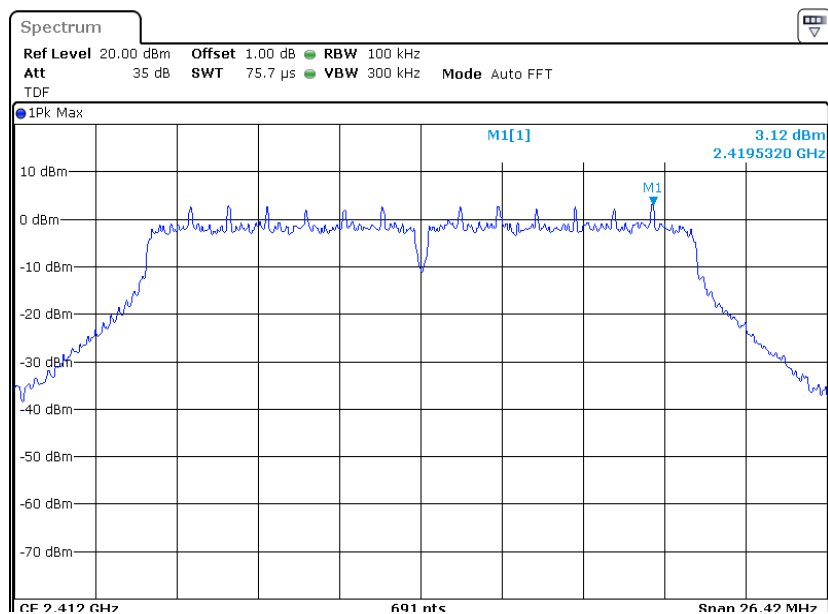

Middle Channel (2 437 MHz)

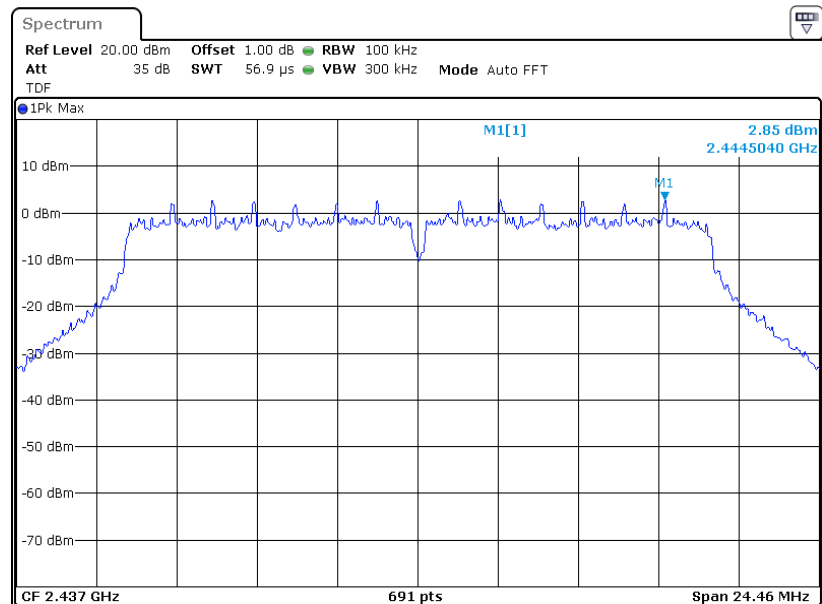


High Channel (2 462 MHz)

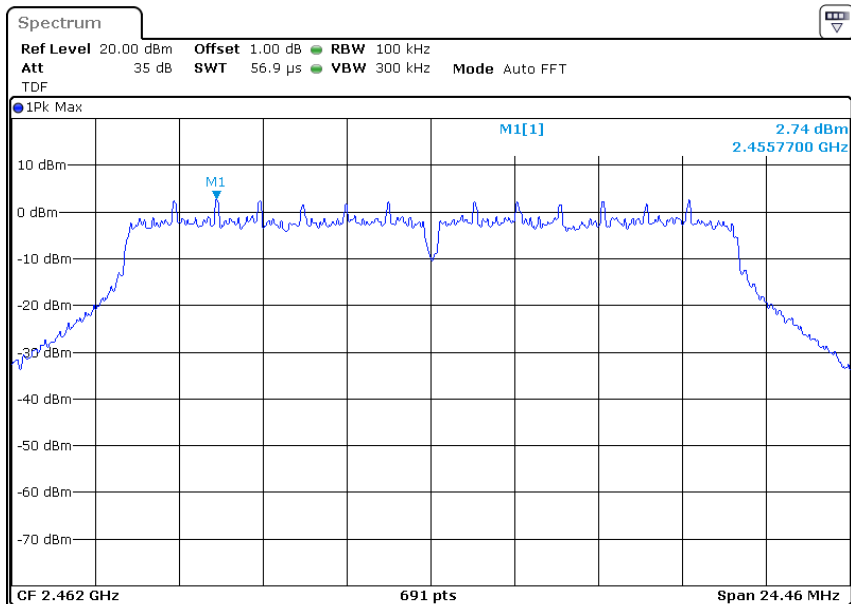


*** 802.11n HT40_ANT 2**


Low Channel(2 422 MHz)

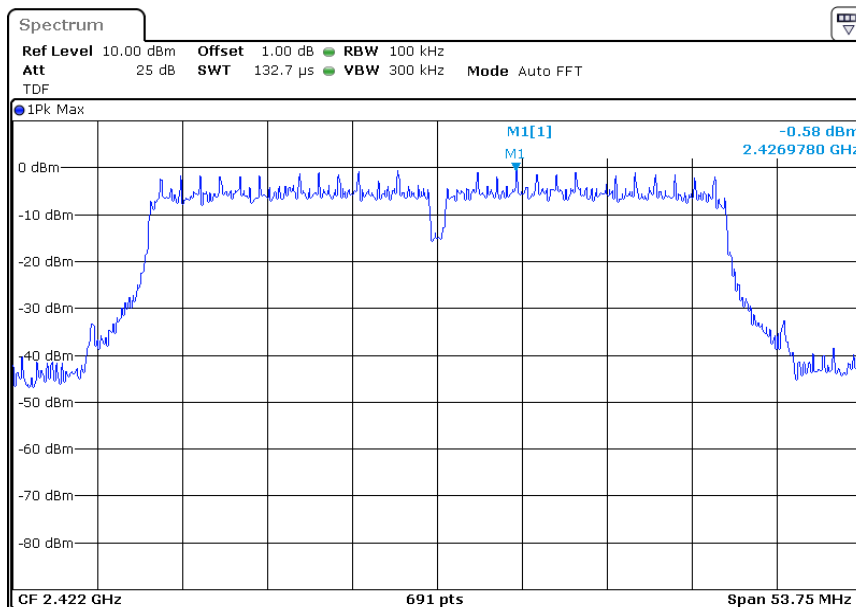

Middle Channel (2 437 MHz)

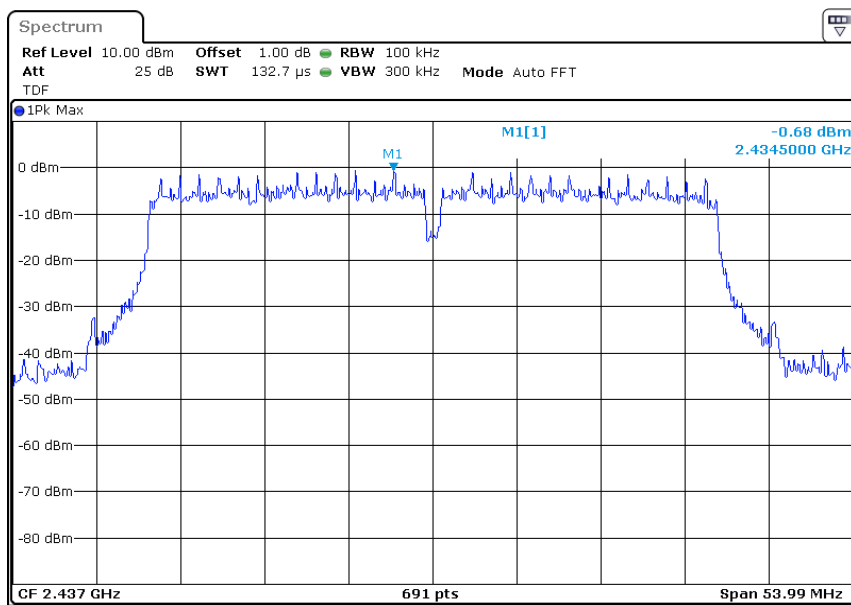


High Channel (2 452 MHz)

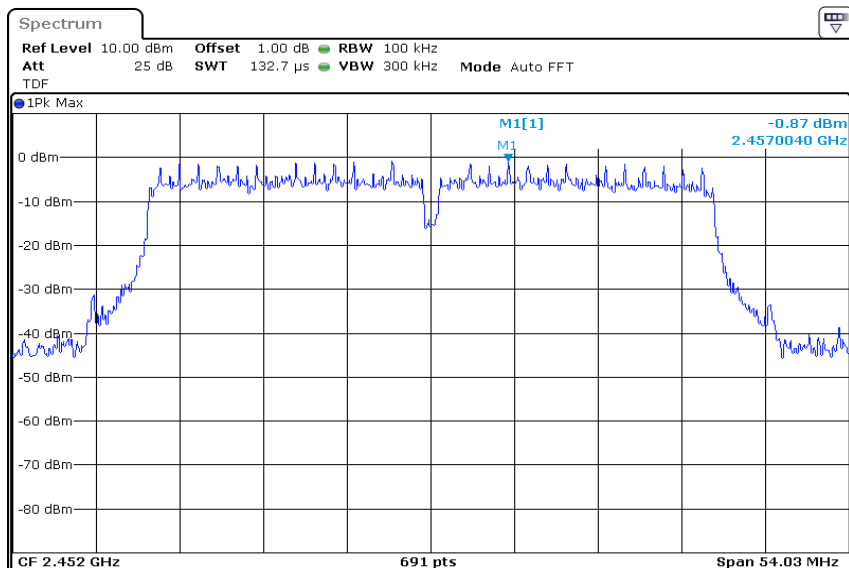


* 802.11b_MIMO (ANT 1)


Low Channel(2 412 MHz)

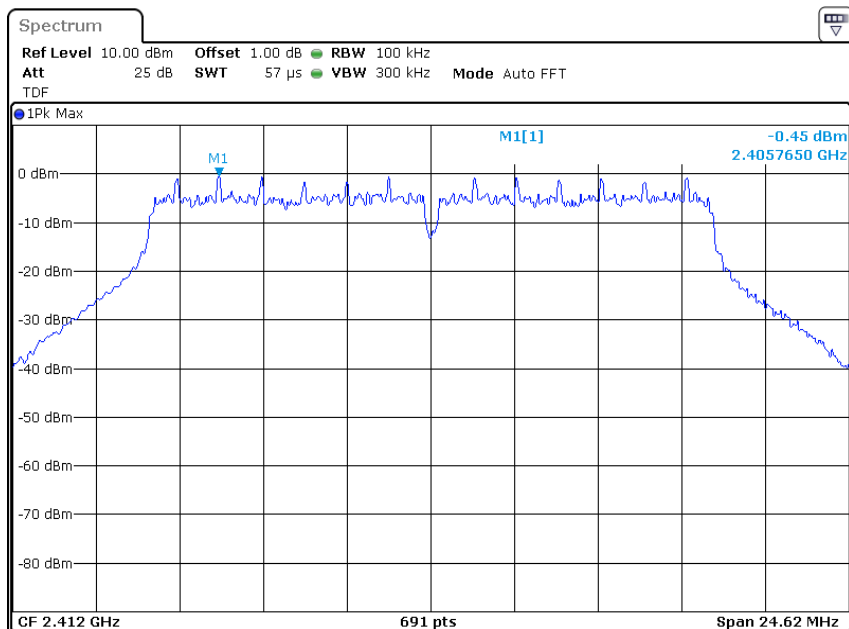

Middle Channel (2 437 MHz)

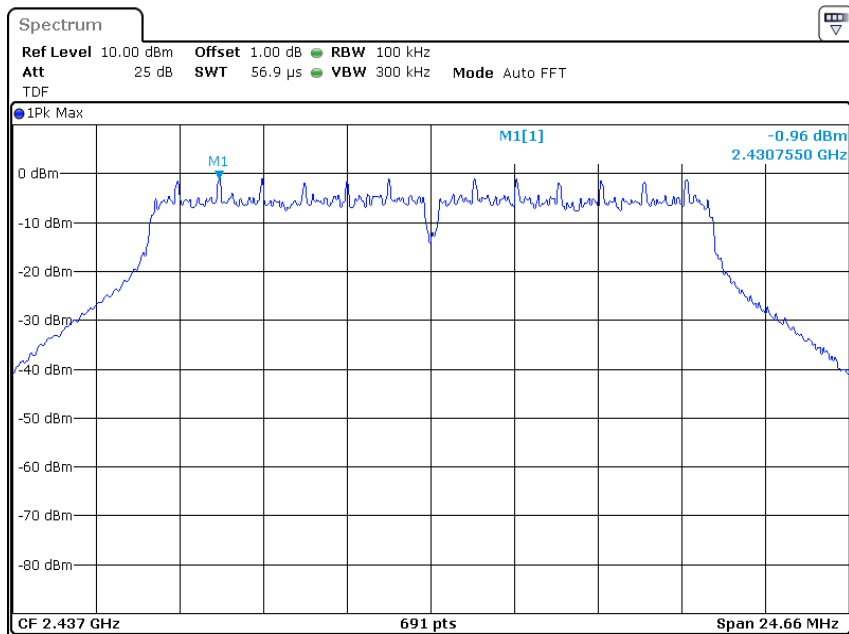


High Channel (2 462 MHz)

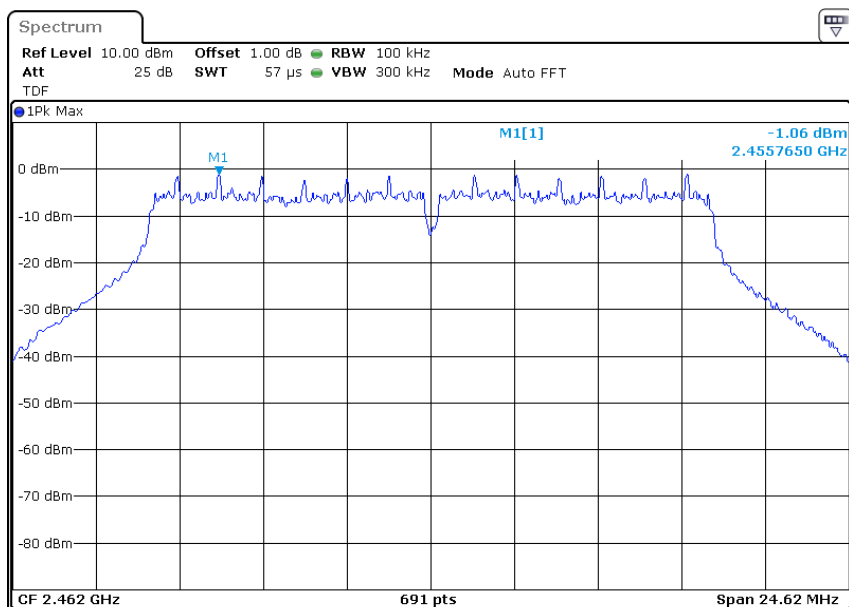


*** 802.11n HT20_MIMO (ANT 1)**


Low Channel(2 412 MHz)

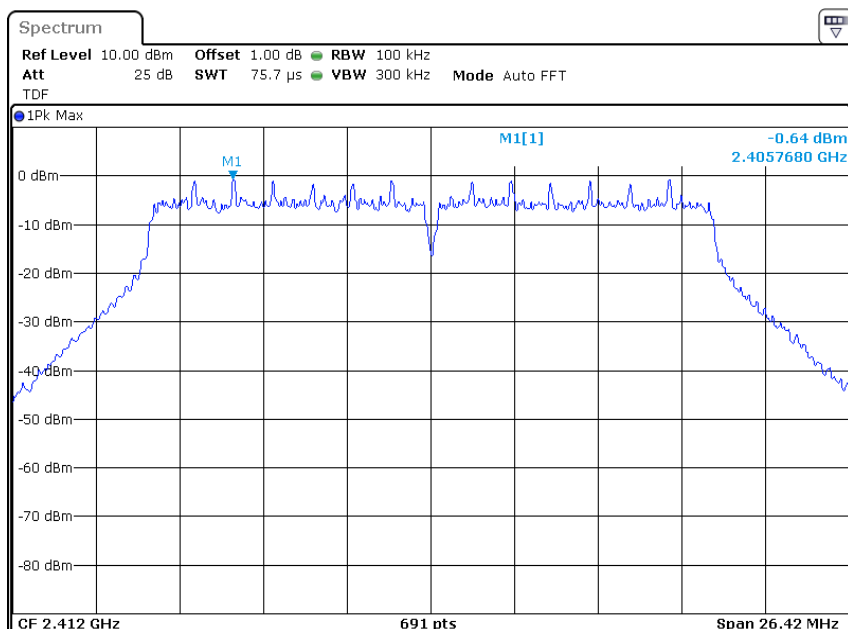

Middle Channel (2 437 MHz)

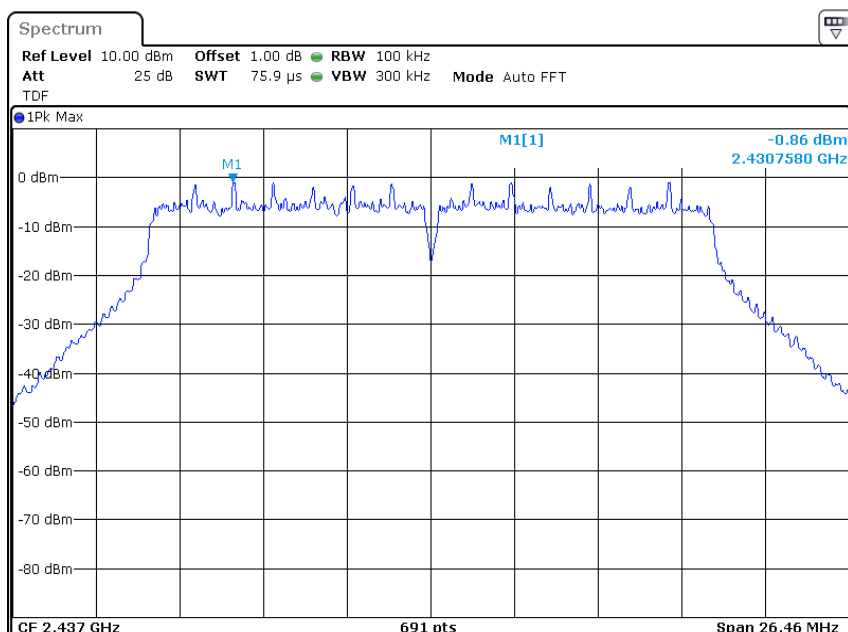


High Channel (2 462 MHz)

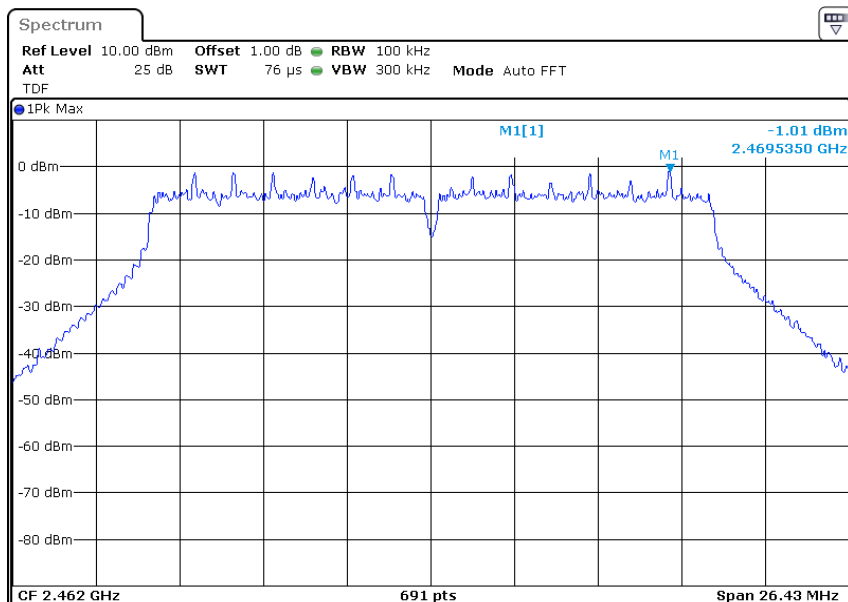


* 802.11n HT40_MIMO (ANT 1)


Low Channel(2 422 MHz)

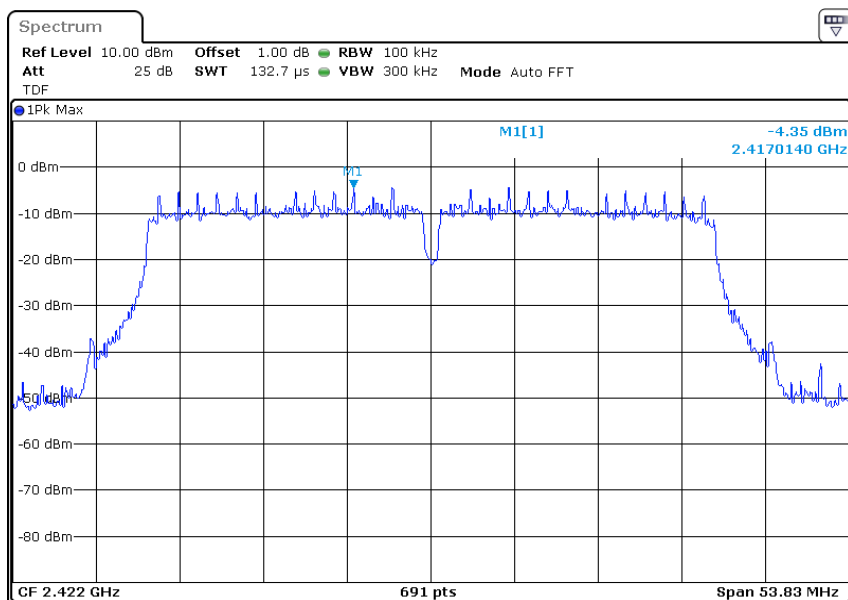

Middle Channel (2 437 MHz)

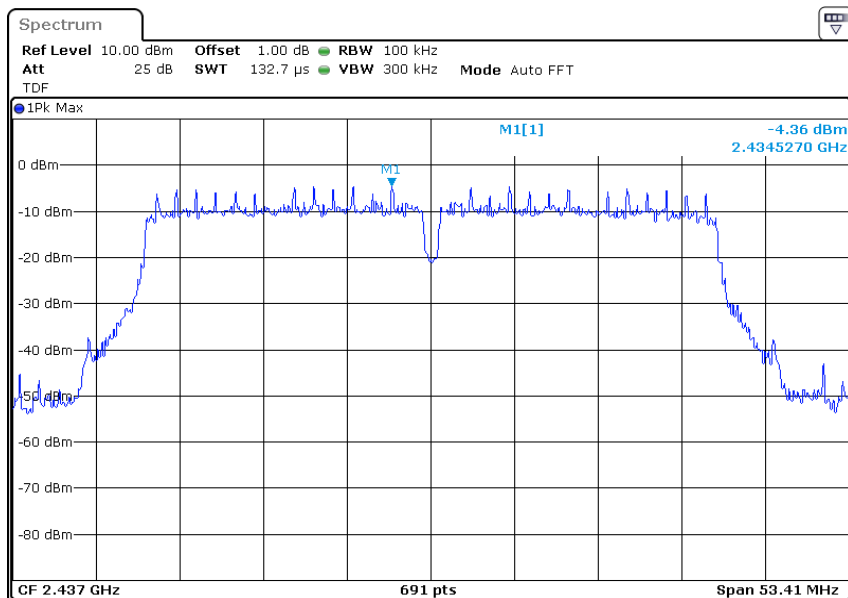


High Channel (2 452 MHz)

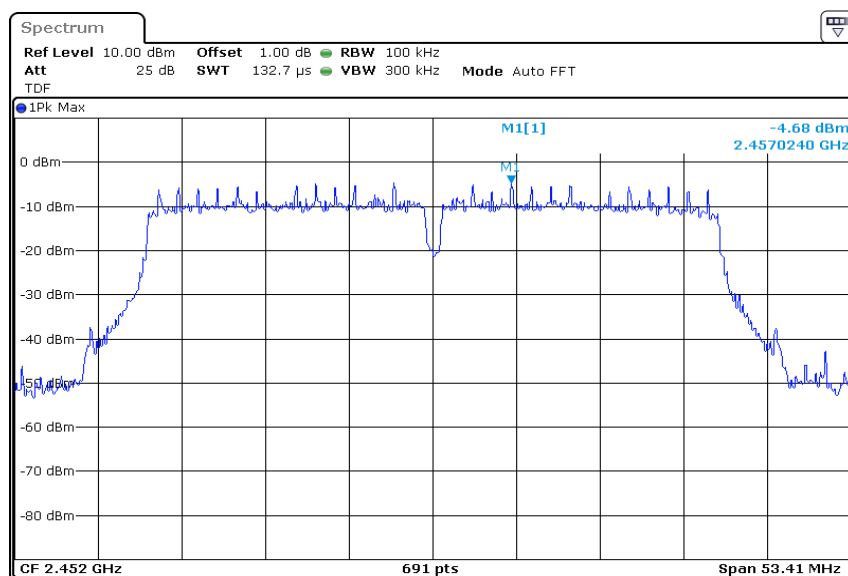


*** 802.11g_MIMO (ANT 2)**


Low Channel(2 412 MHz)

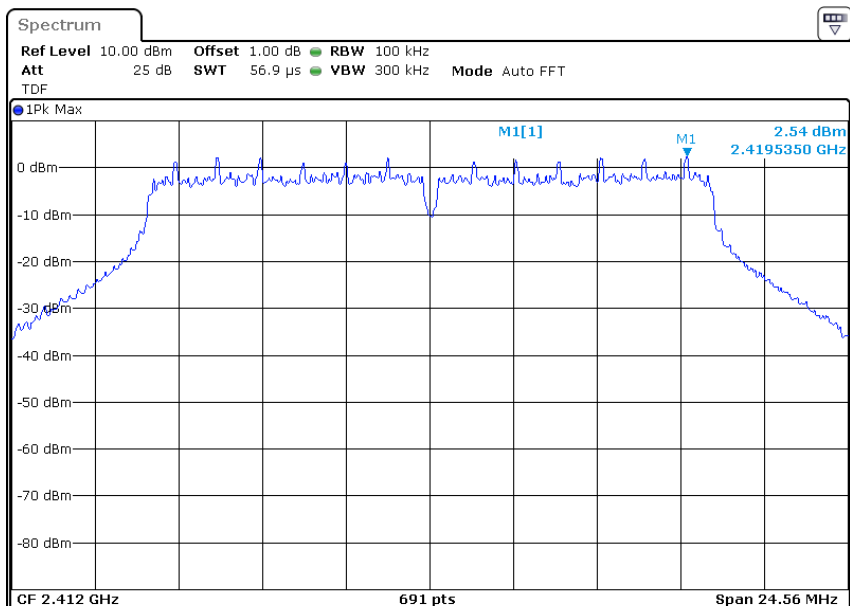

Middle Chnnel (2 437 MHz)

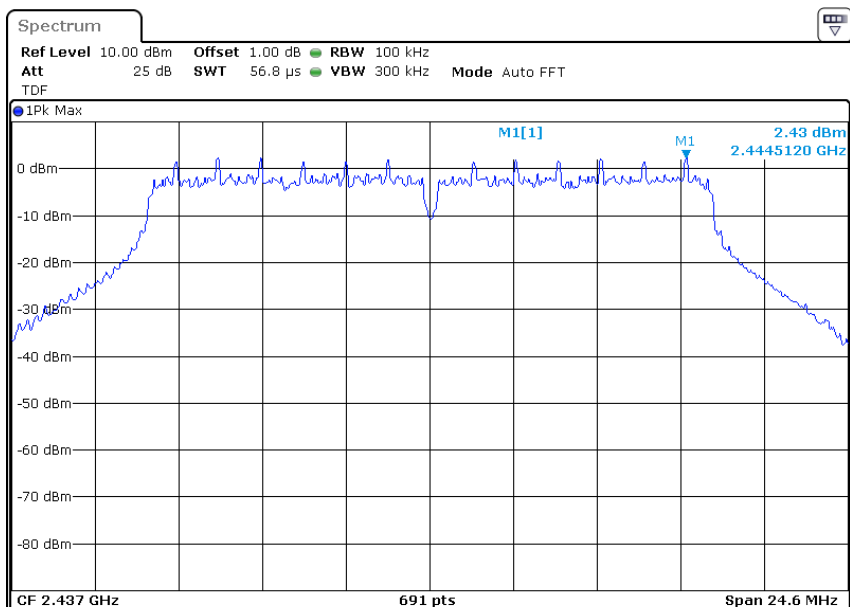


High Channel (2 462 MHz)

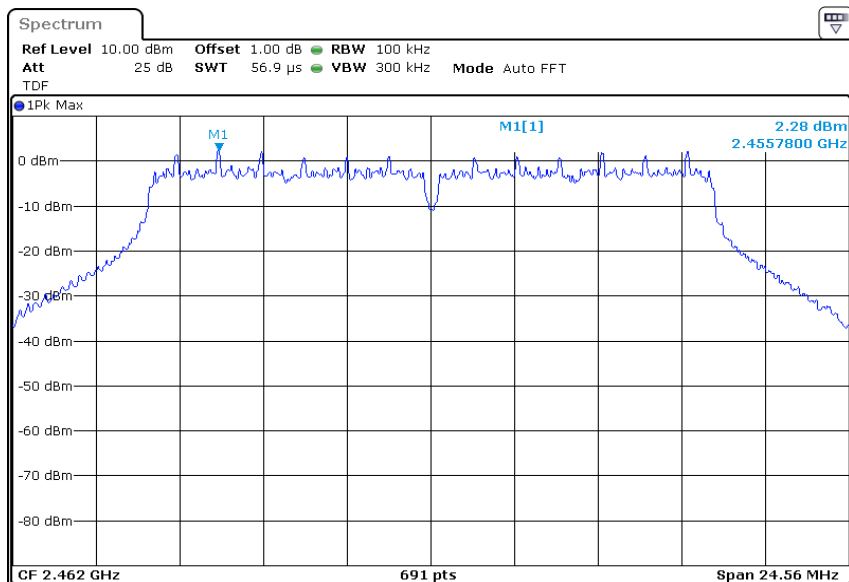


* 802.11 HT20_MIMO (ANT 2)


Low Channel(2 412 MHz)

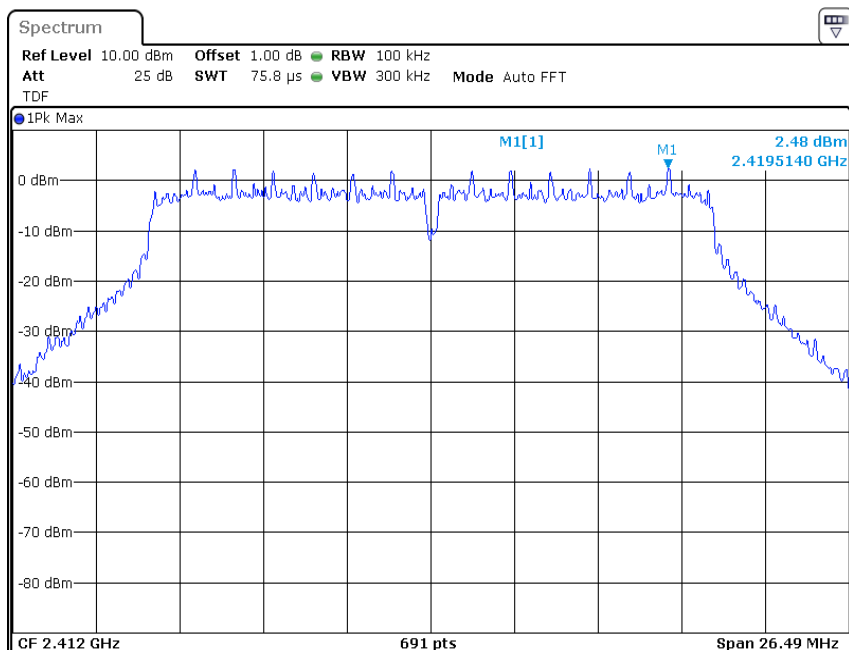

Middle Channel (2 437 MHz)

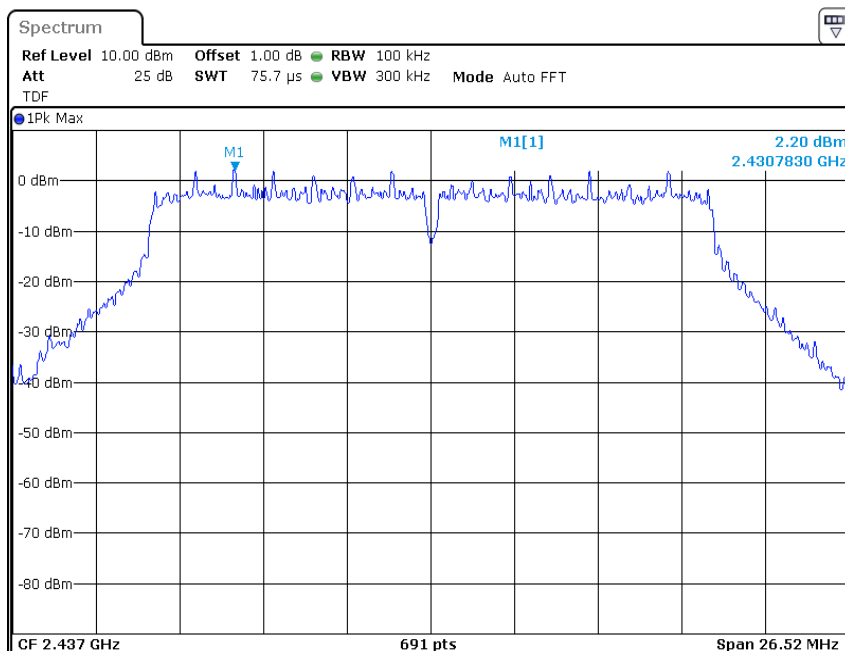


High Channel (2 462 MHz)

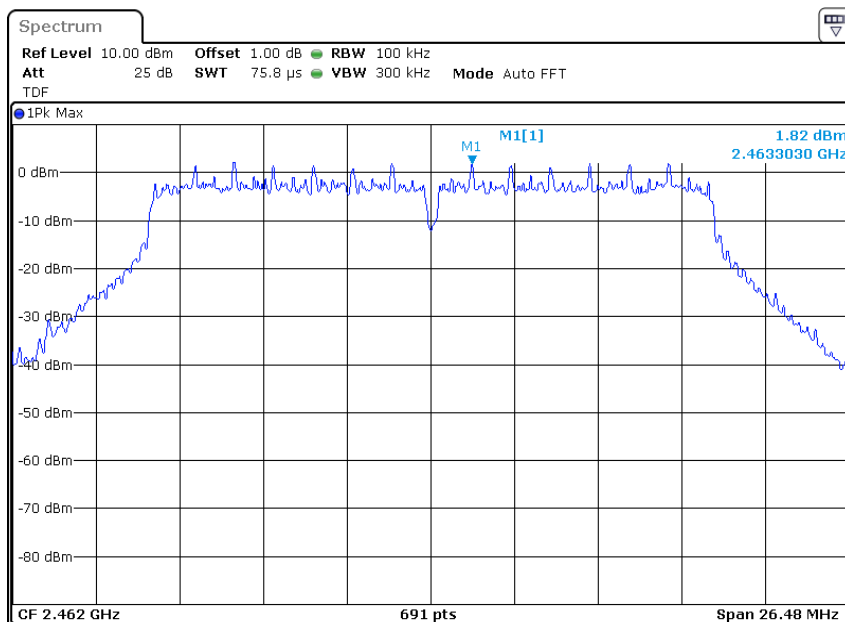


*** 802.11n HT40_ANT 2**


Low Channel(2 422 MHz)

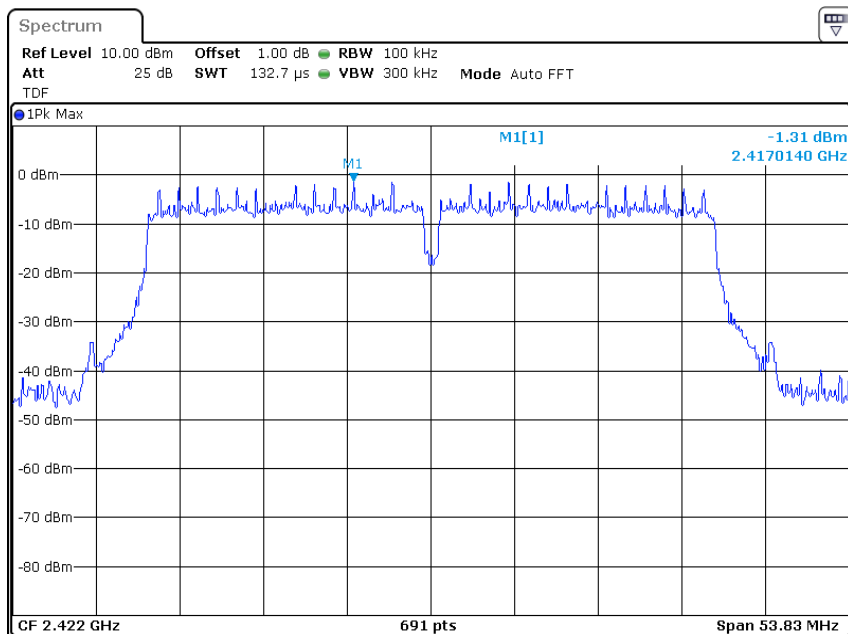

Middle Channel (2 437 MHz)

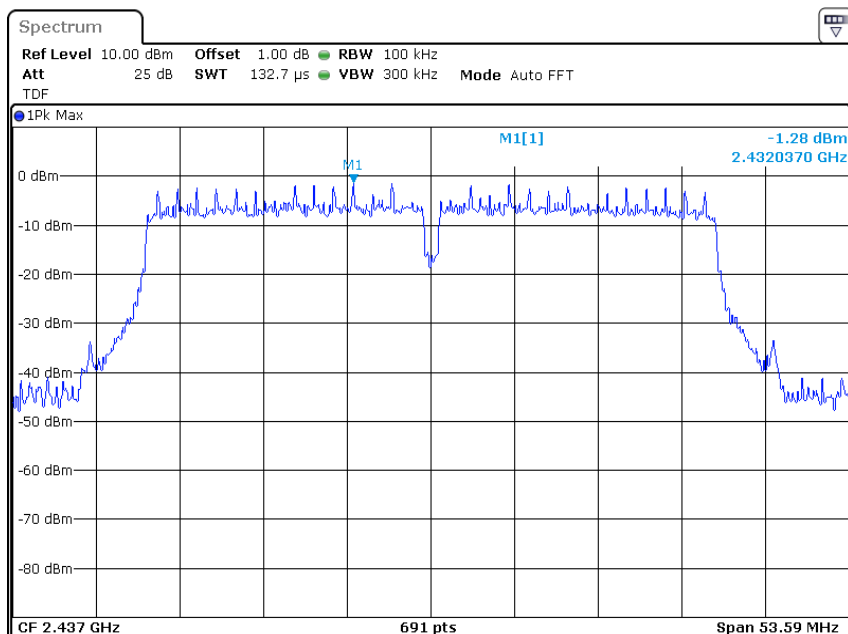

High Channel (2 452 MHz)

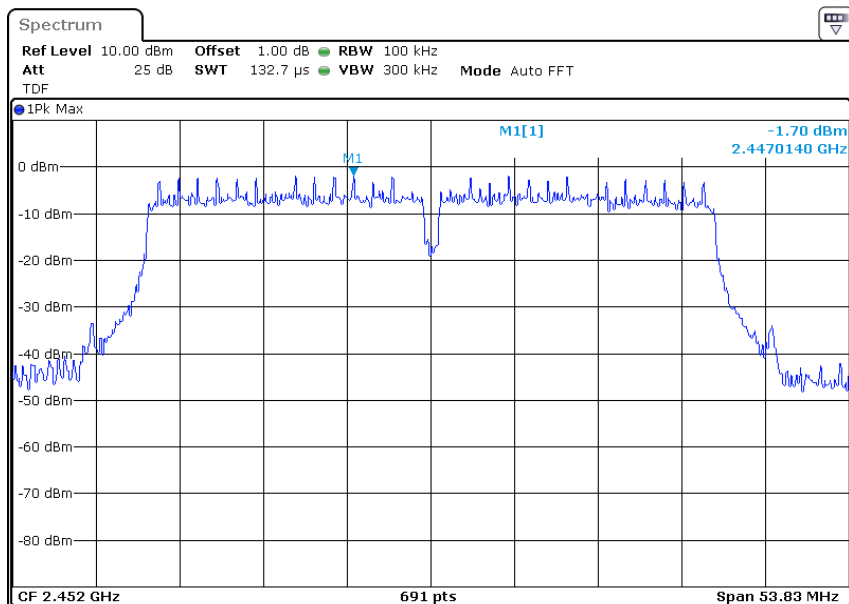

5.4 6 dB Bandwidth(DTS Channel Bandwidth)

5.4.1 Regulation

According to §15.247(a)(2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2 400–2 483.5 MHz, and 5 725–5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.4.2 Measurement Procedure

These test measurement settings are specified in section 8.0 of 558074 D01 DTS Meas Guidance.

5.4.2.1 DTS Channel Bandwidth-Option 1

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4.2.2 DTS Channel Bandwidth Measurement Procedure-Option 2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

5.4.3 Test Result

- Complied

*** 802.11b_ANT 1**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 412	10.10	0.50	15.05
Middle	2 437	10.13	0.50	15.05
High	2 462	10.10	0.50	15.05

*** 802.11g_ANT 1**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 412	16.41	0.50	16.44
Middle	2 437	16.44	0.50	16.44
High	2 462	16.41	0.50	16.50

*** 802.11n HT20_ANT 1**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 412	17.61	0.50	17.66
Middle	2 437	17.64	0.50	17.66
High	2 462	17.61	0.50	17.66

*** 802.11n HT40_ANT 1**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 422	35.94	0.50	35.89
Middle	2 437	36.07	0.50	35.89
High	2 452	35.96	0.50	35.89

*** 802.11g_ANT 2**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 412	16.41	0.50	16.50
Middle	2 437	16.44	0.50	16.44
High	2 462	16.41	0.50	16.44

*** 802.11n HT20_ANT 2**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 412	17.61	0.50	17.71
Middle	2 437	17.64	0.50	17.71
High	2 462	17.61	0.50	17.71

*** 802.11n HT40_ANT 2**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 422	35.83	0.50	36.01
Middle	2 437	35.99	0.50	36.01
High	2 452	36.02	0.50	36.01

*** 802.11g_MIMO (ANT 1)**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 412	16.41	0.50	16.50
Middle	2 437	16.44	0.50	16.44
High	2 462	16.41	0.50	16.44

*** 802.11n HT20_MIMO (ANT 1)**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 412	17.61	0.50	17.66
Middle	2 437	17.64	0.50	17.66
High	2 462	17.62	0.50	17.66

*** 802.11n HT40_MIMO (ANT 1)**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 422	35.88	0.50	35.89
Middle	2 437	35.61	0.50	35.89
High	2 452	35.61	0.50	36.01

*** 802.11g_MIMO (ANT 2)**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 412	16.37	0.50	16.50
Middle	2 437	16.40	0.50	16.50
High	2 462	16.37	0.50	16.50

*** 802.11n HT20_MIMO (ANT 2)**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 412	17.66	0.50	17.66
Middle	2 437	17.68	0.50	17.66
High	2 462	17.65	0.50	17.66

*** 802.11n HT40_MIMO (ANT 2)**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Min. Limit (MHz)	Occupied Bandwidth (99 % BW) (MHz)
Low	2 422	35.88	0.50	36.01
Middle	2 437	35.72	0.50	36.01
High	2 452	35.88	0.50	36.01

-NOTE:


1. We took the insertion loss of the cable loss into consideration within the measuring instrument.

5.4.4 Test Plot


Figure 2. Plot of the 6dB Bandwidth & Occupied Bandwidth

* 802.11b_ANT 1 (6 dB Bandwidth)


Low Channel (2 412 MHz)

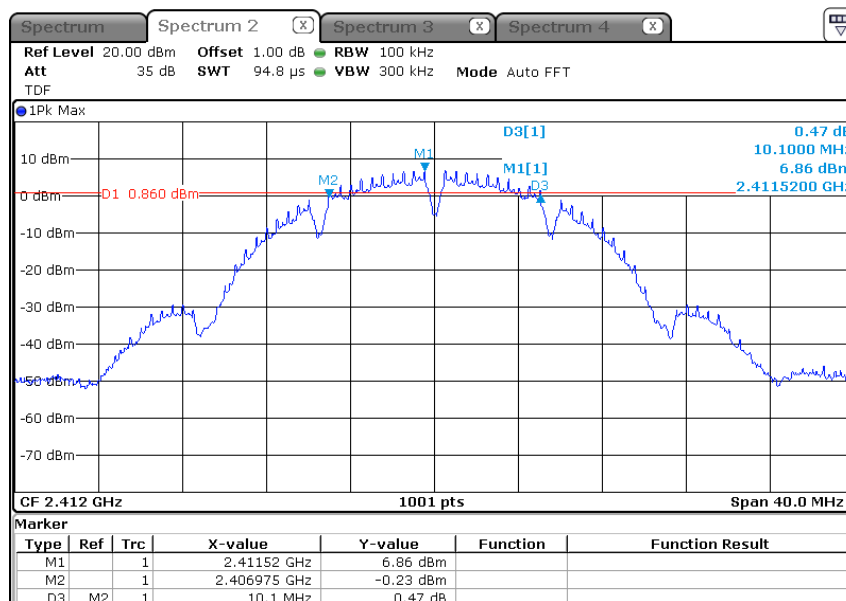

Middle Channel (2 437 MHz)

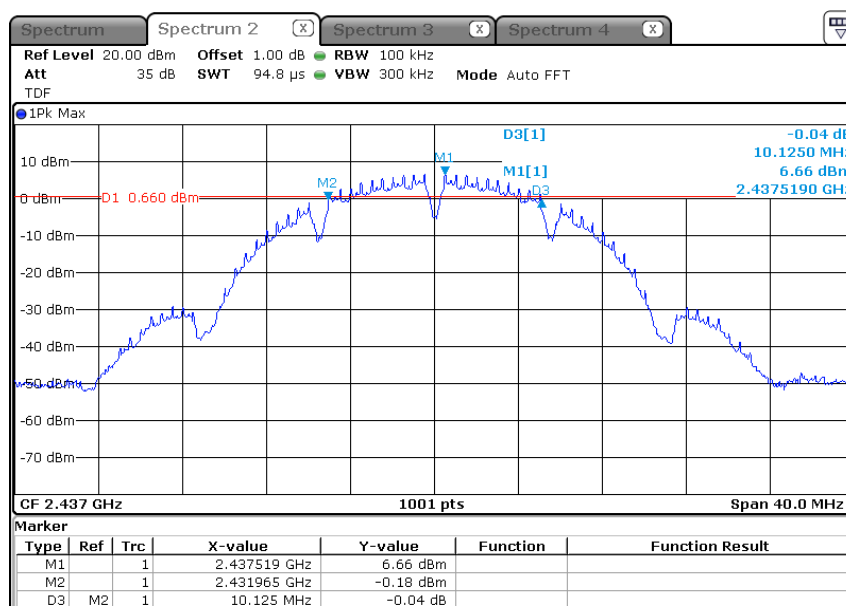


High Channel (2 462 MHz)

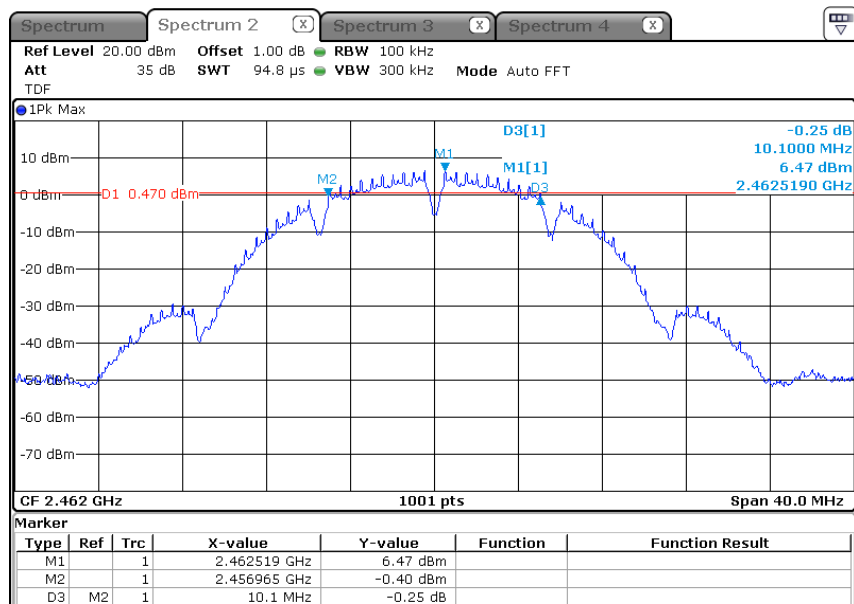


* 802.11g_ANT 1 (6 dB Bandwidth)


Low Channel (2 412 MHz)

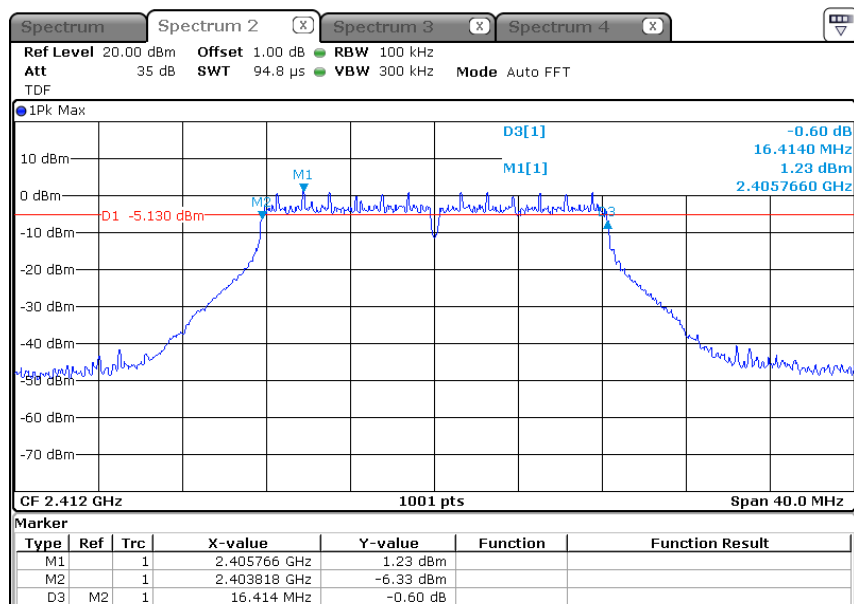

Middle Channel (2 437 MHz)

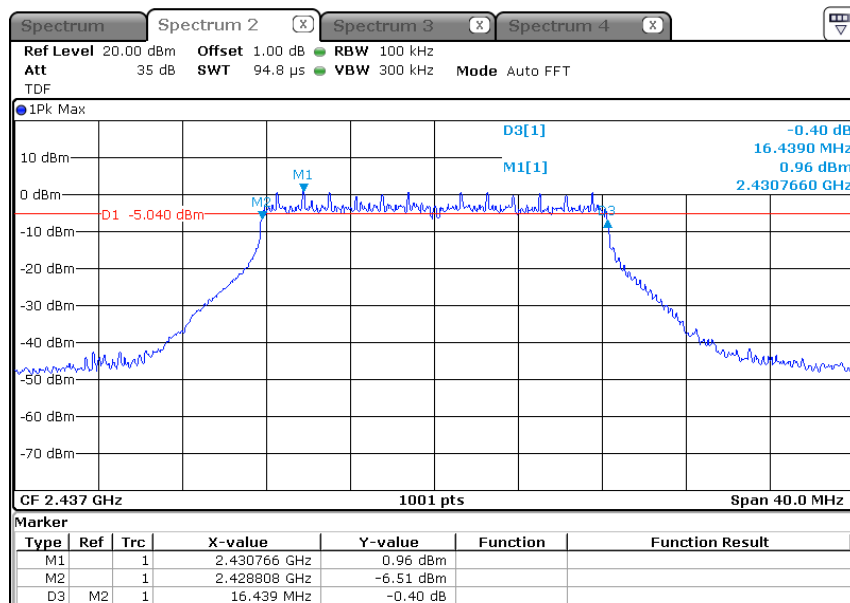


High Channel (2 462 MHz)

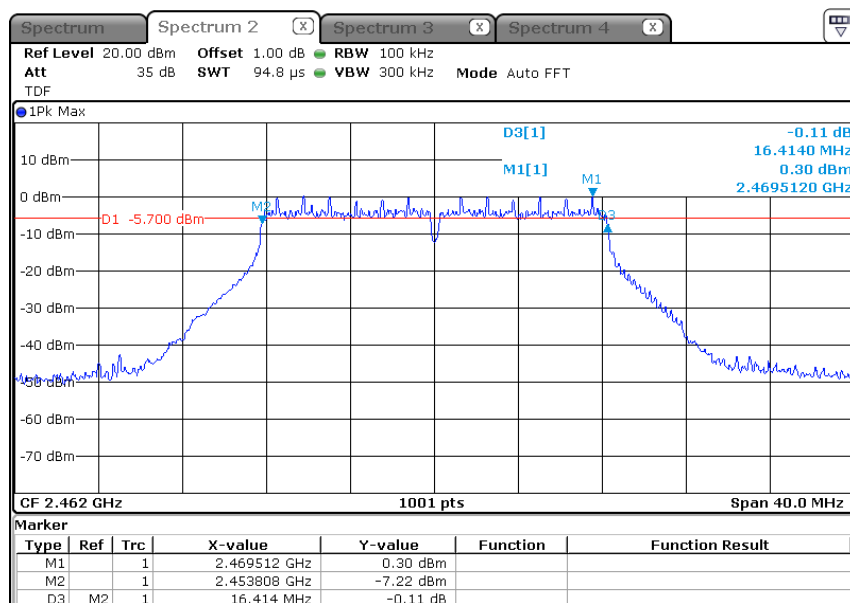


*** 802.11n HT20_ANT 1 (6 dB Bandwidth)**


Low Channel (2 412 MHz)

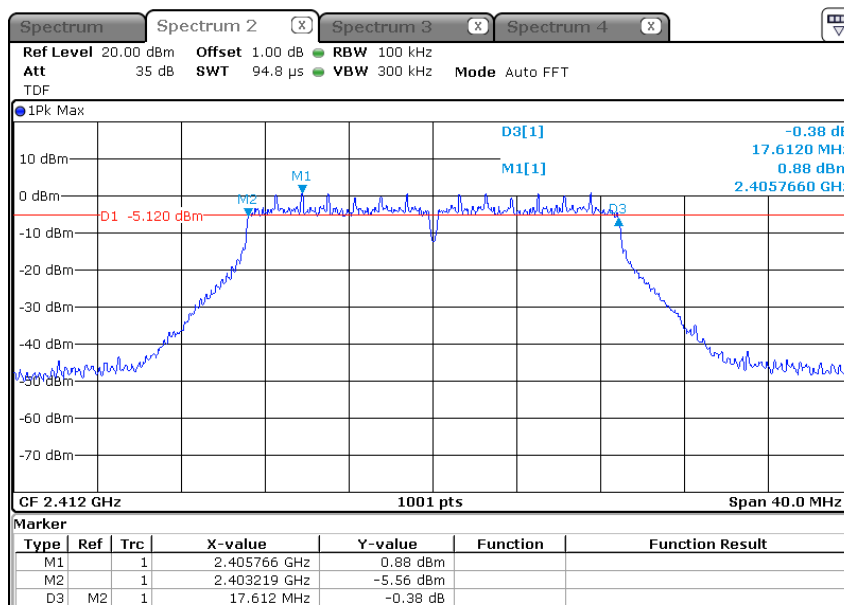

Middle Channel (2 437 MHz)

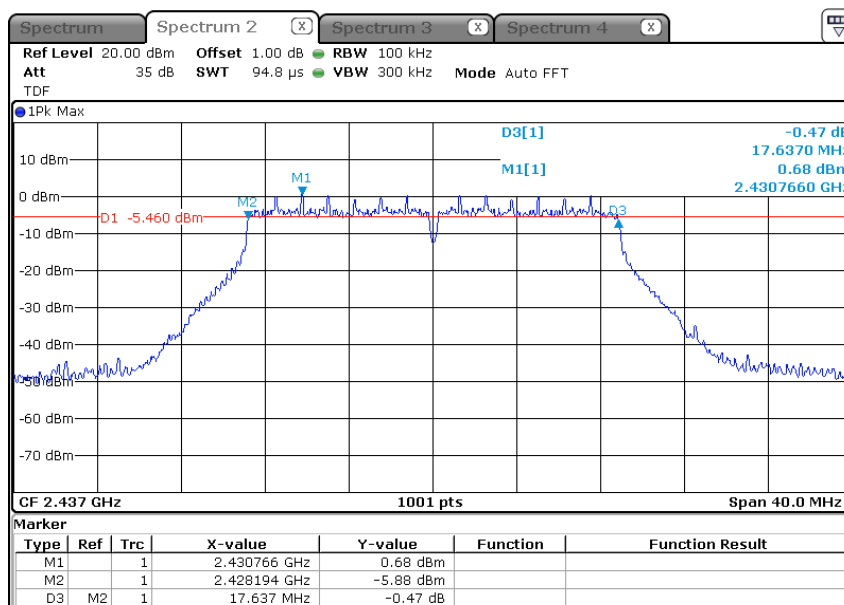


High Channel (2 462 MHz)

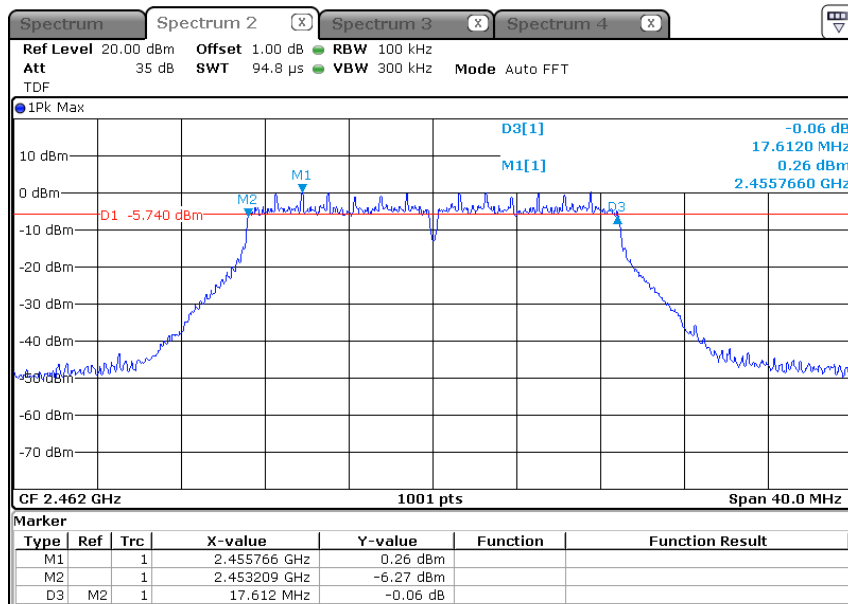


* 802.11n HT40_ANT 1 (6 dB Bandwidth)


Low Channel (2 422 MHz)

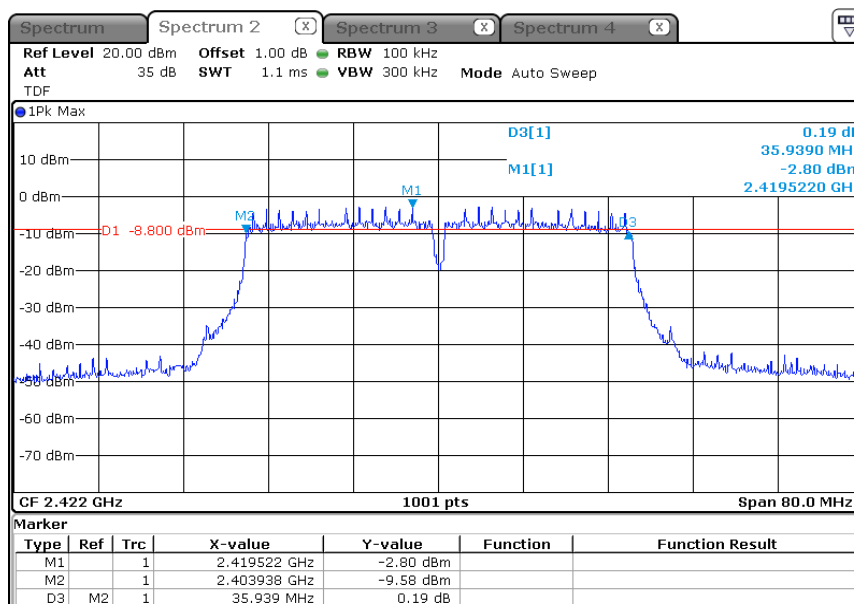

Middle Channel (2 437 MHz)

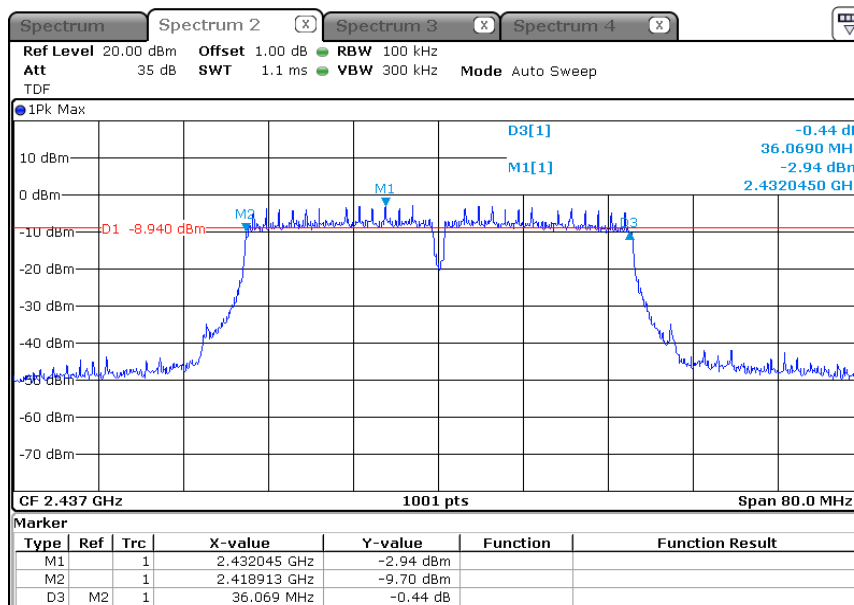


High Channel (2 452 MHz)

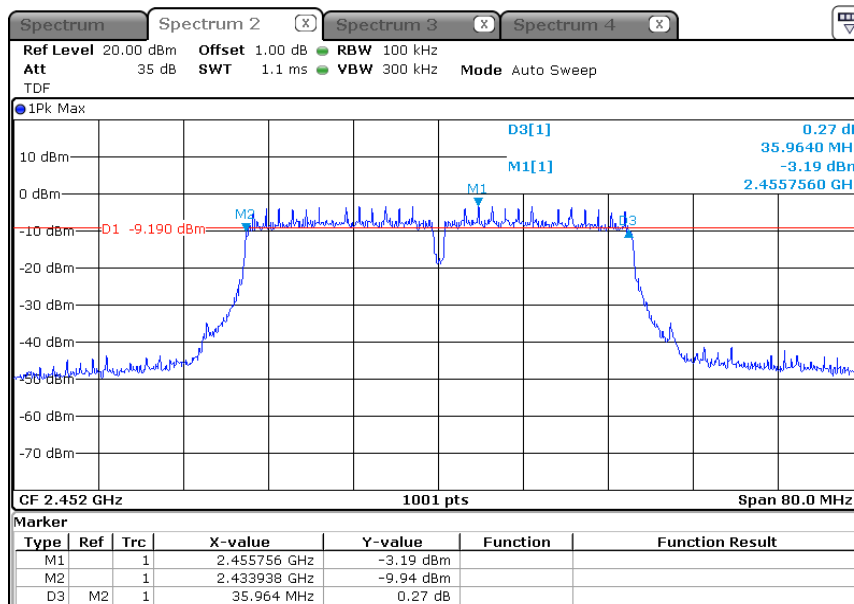


*** 802.11g_ANT 2(6 dB Bandwidth)**


Low Channel (2 412 MHz)

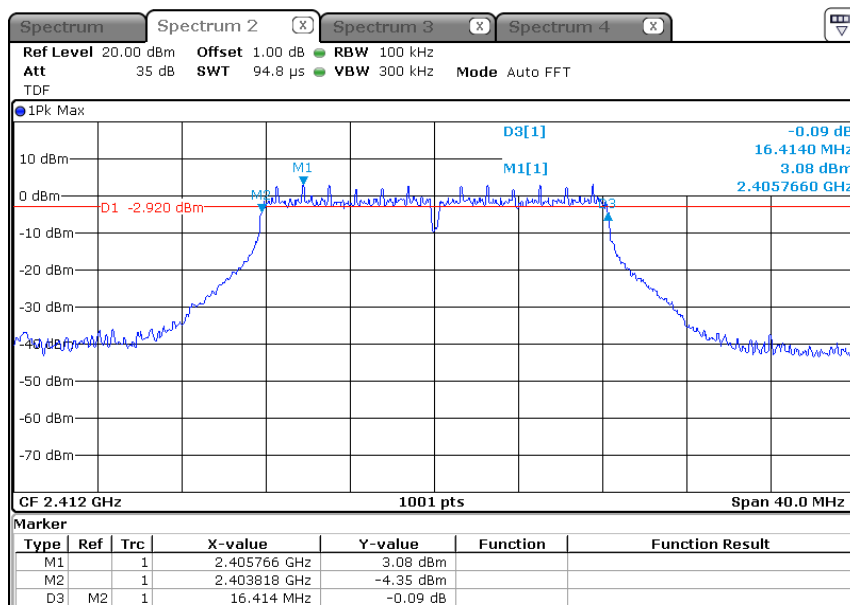

Middle Channel (2 437 MHz)

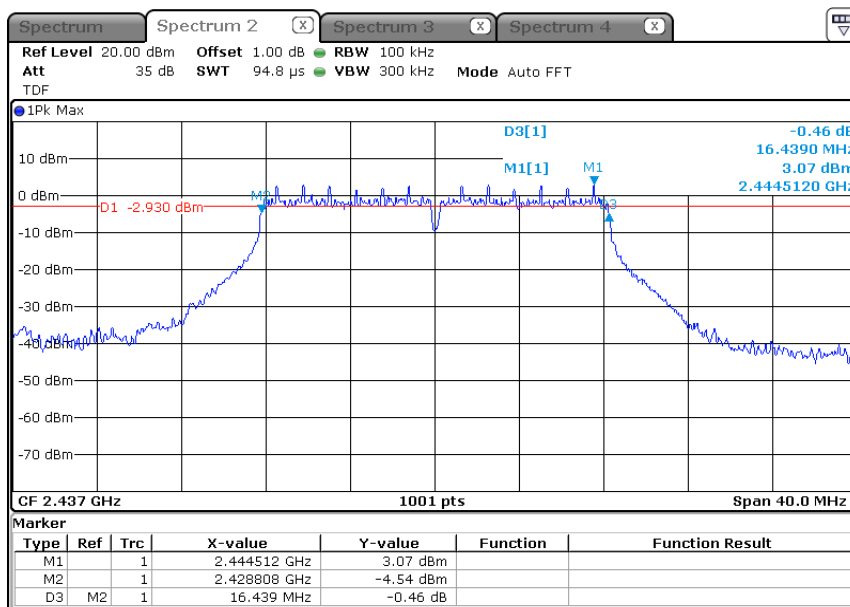


High Channel (2 462 MHz)

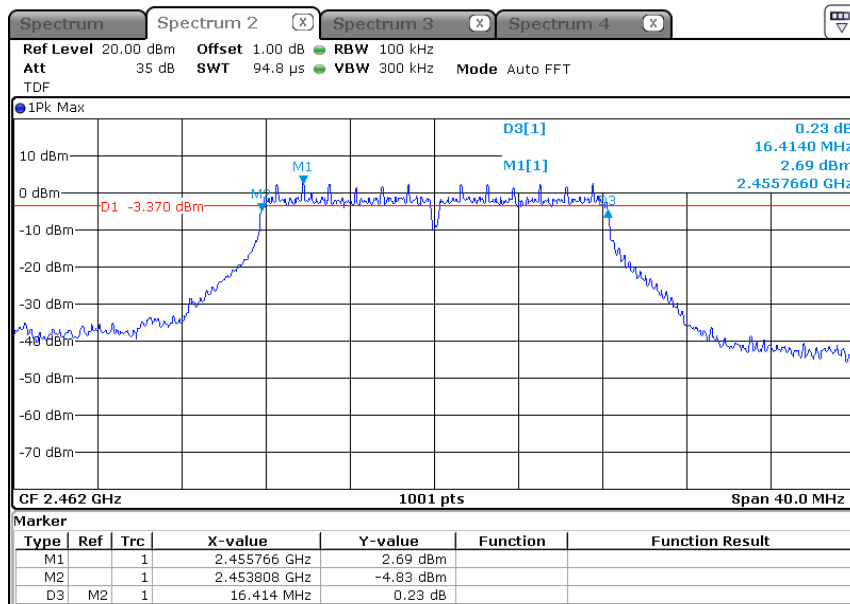


* 802.11 HT 20_ANT 2 (6 dB Bandwidth)


Low Channel (2 412 MHz)

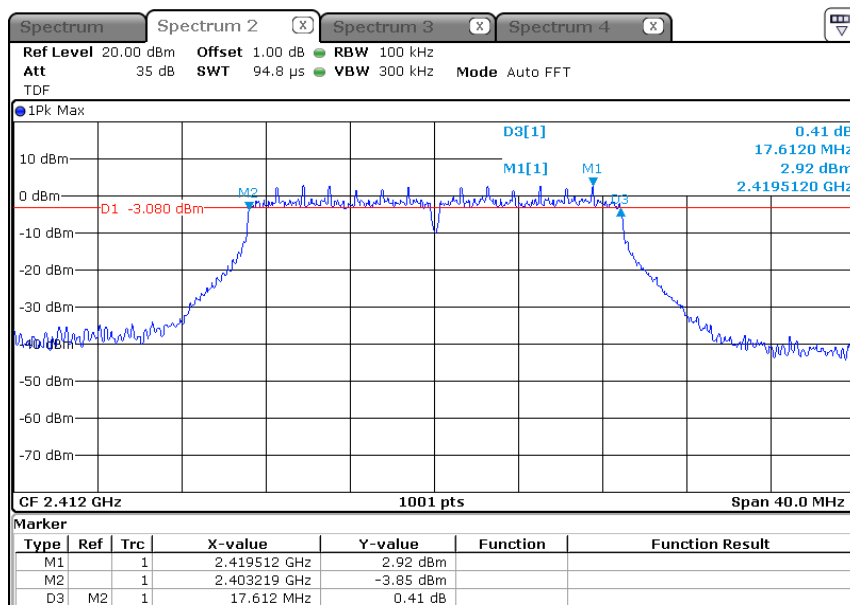

Middle Channel (2 437 MHz)

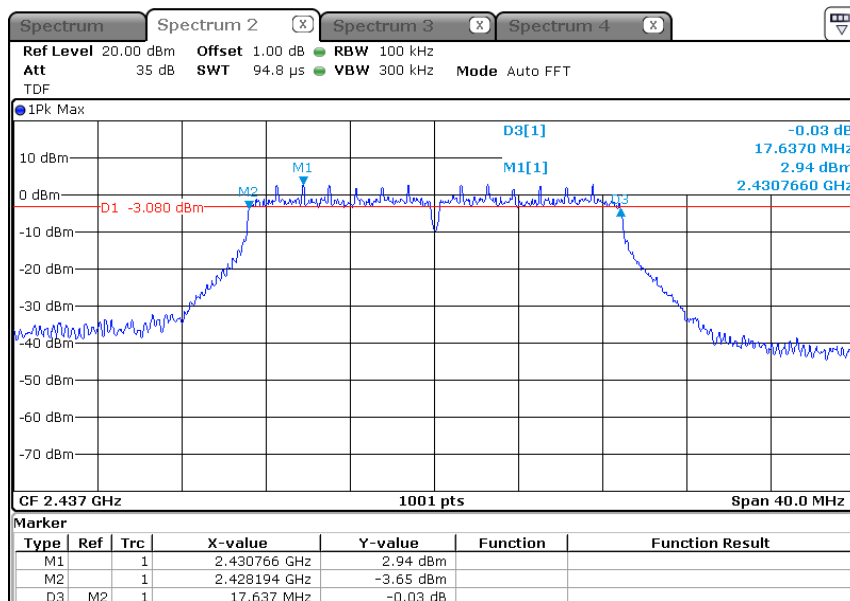


High Channel (2 462 MHz)

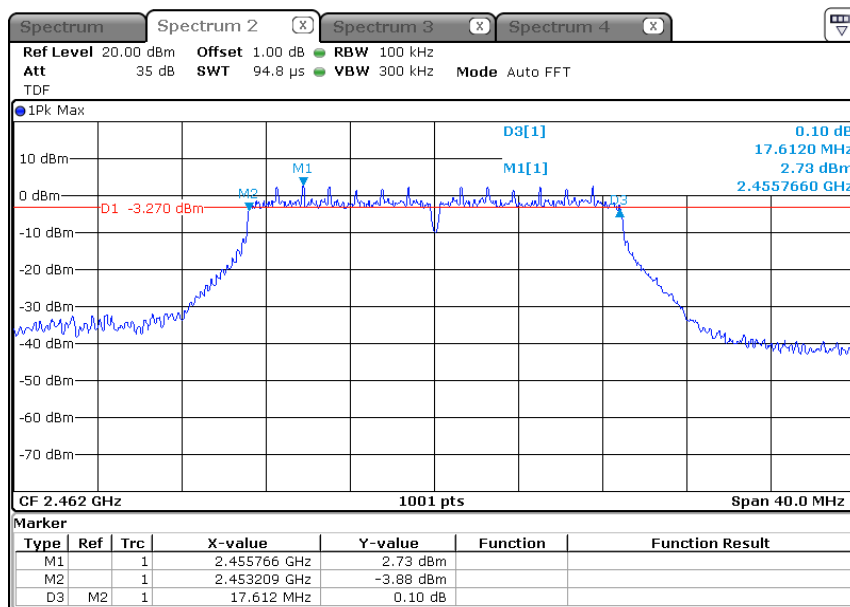


*** 802.11n HT40_ANT 2 (6 dB Bandwidth)**


Low Channel (2 422 MHz)

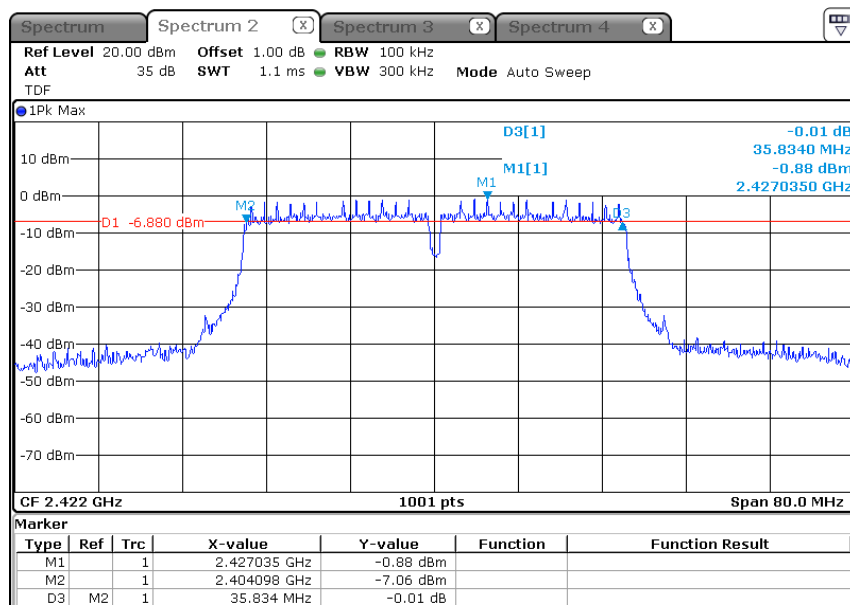

Middle Channel (2 437 MHz)

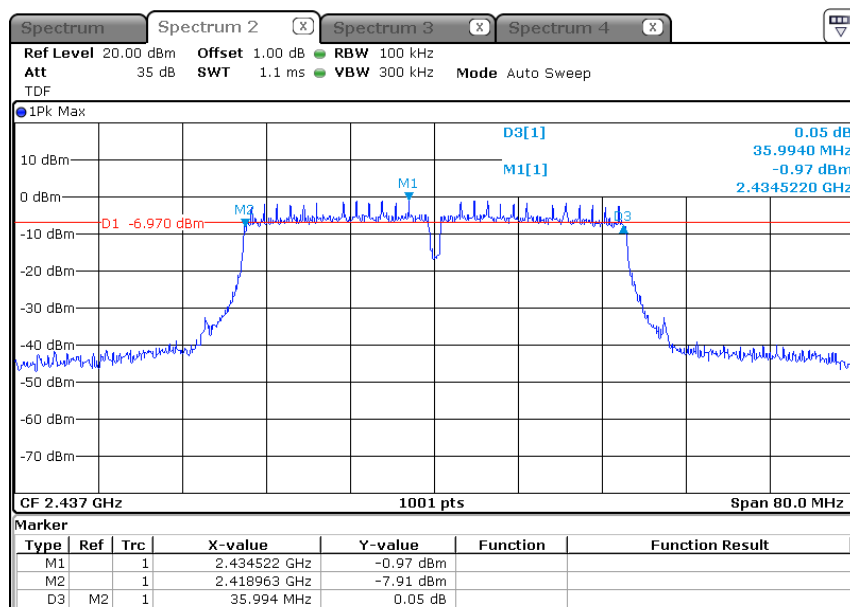


High Channel (2 452 MHz)

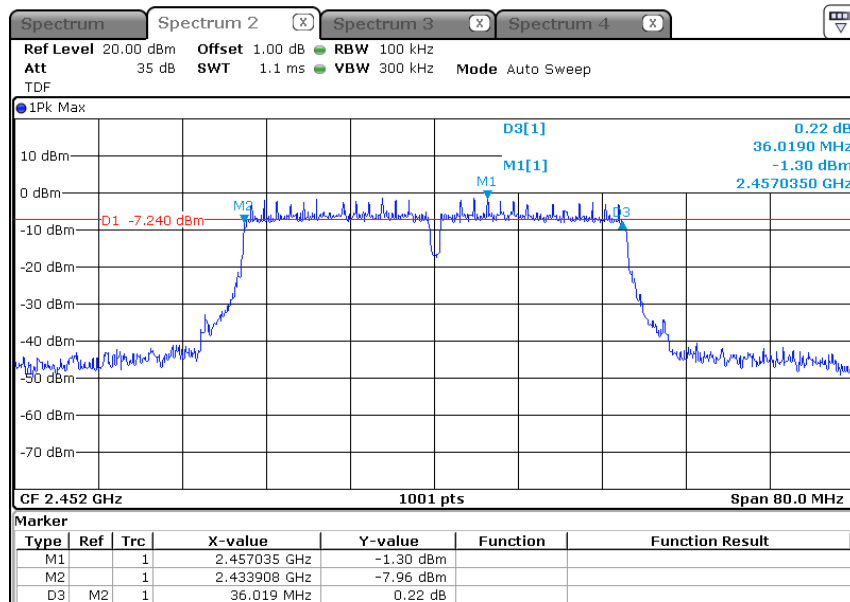


* 802.11n HTg_MIMO (ANT 1) (6 dB Bandwidth)


Low Channel (2 412 MHz)

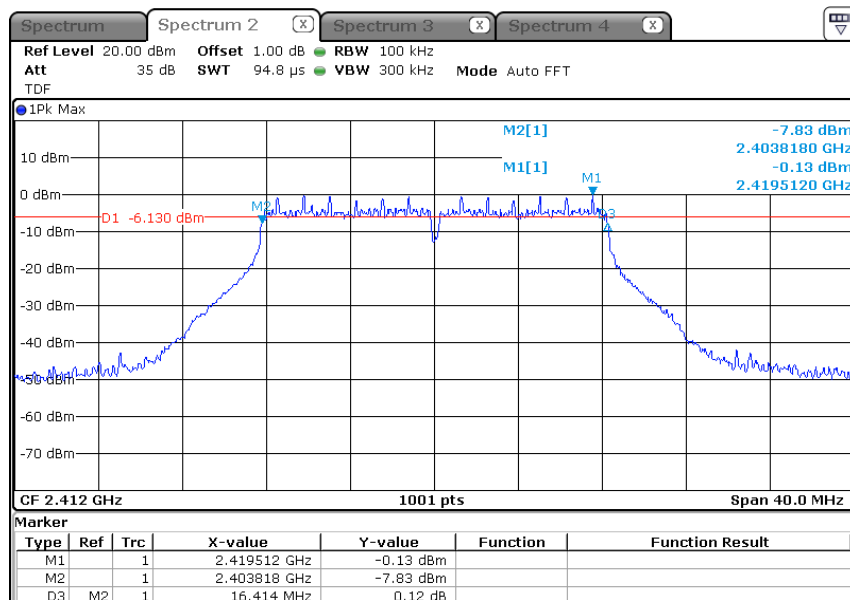

Middle Channel (2 437 MHz)

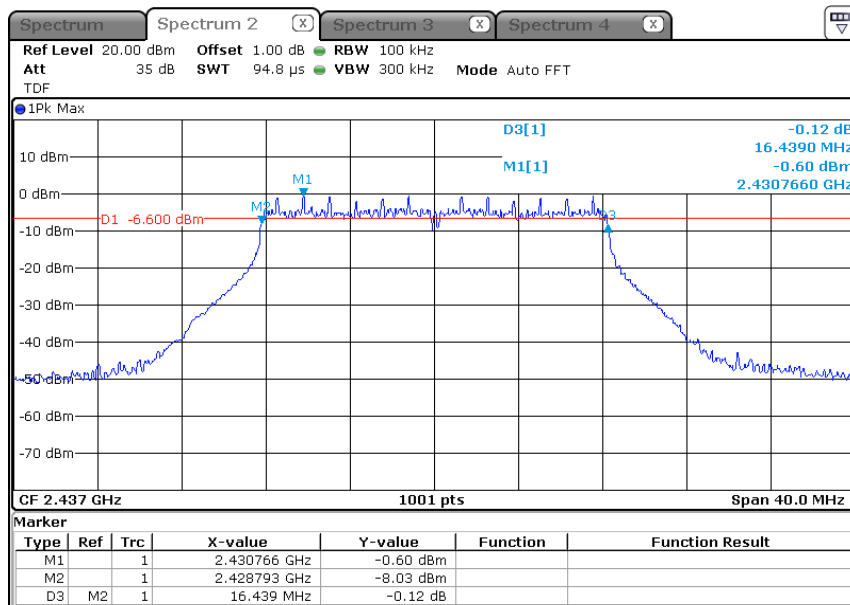


High Channel (2 462 MHz)

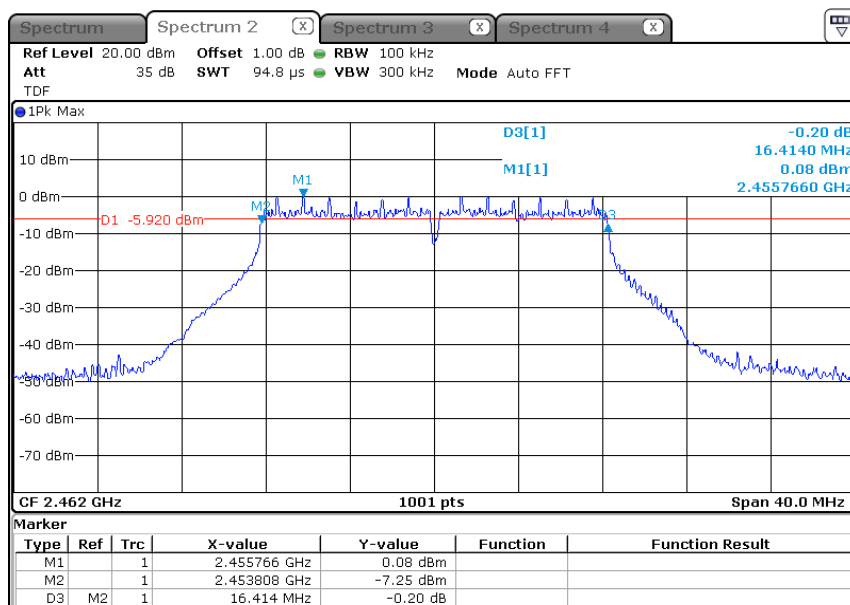


*** 802.11n HT20_MIMO (ANT 1) (6 dB Bandwidth)**


Low Channel (2 412 MHz)

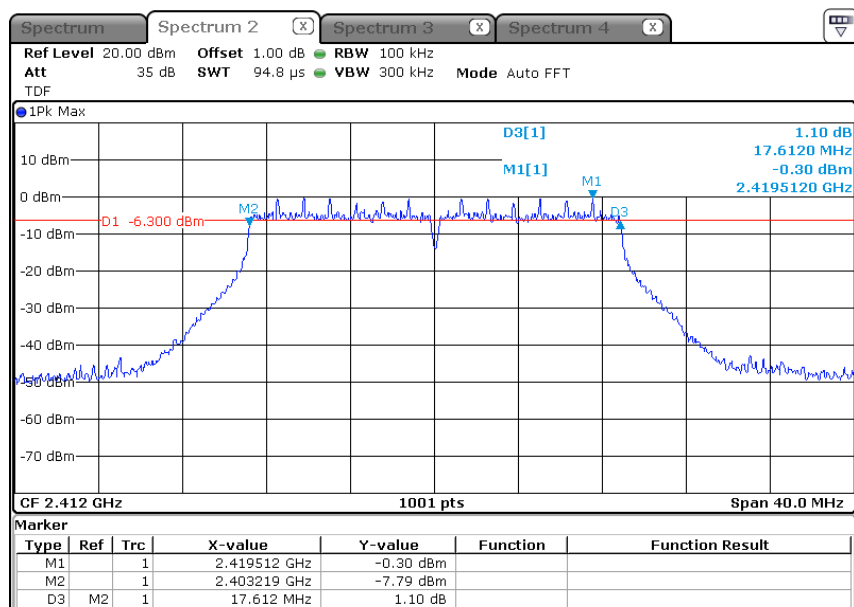

Middle Channel (2 437 MHz)

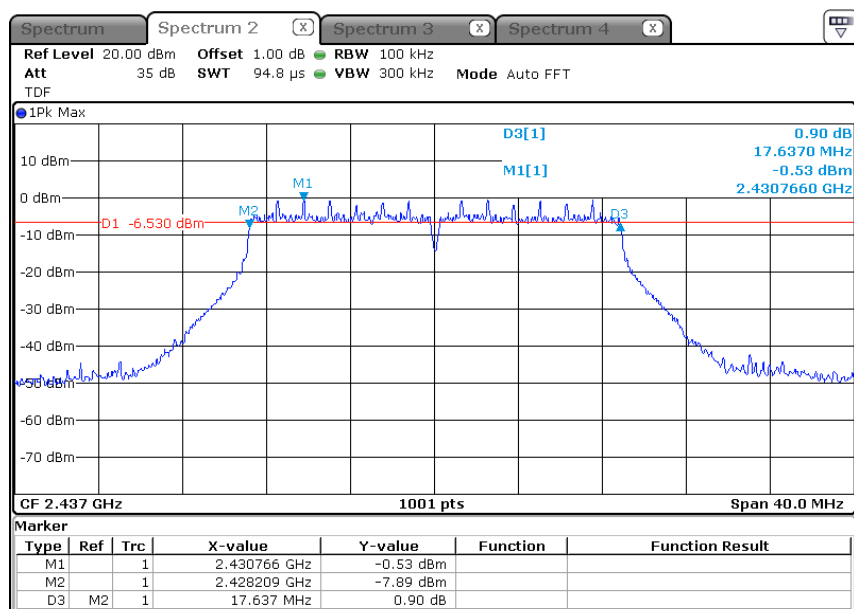


High Channel (2 462 MHz)

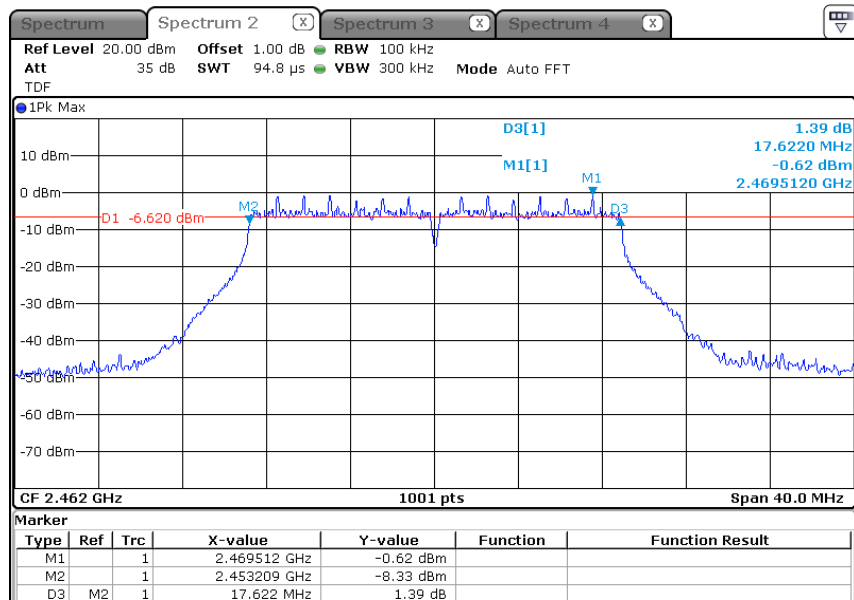


* 802.11n HT40_MIMO (ANT 1) (6 dB Bandwidth)


Low Channel (2 422 MHz)

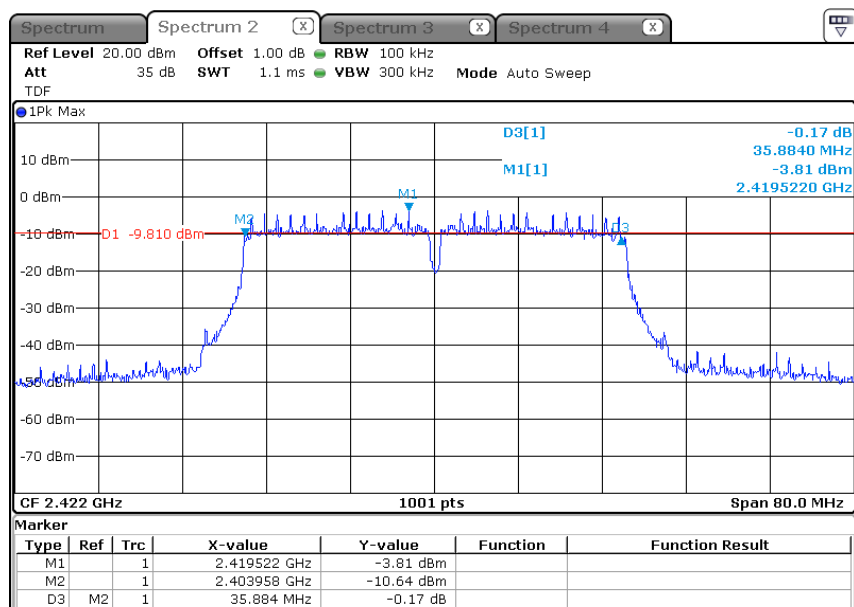

Middle Channel (2 437 MHz)

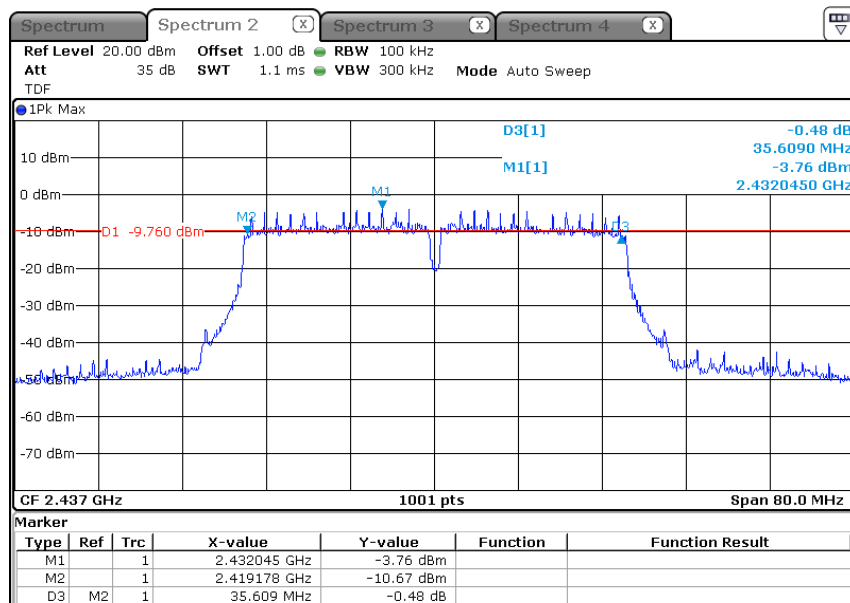


High Channel (2 452 MHz)

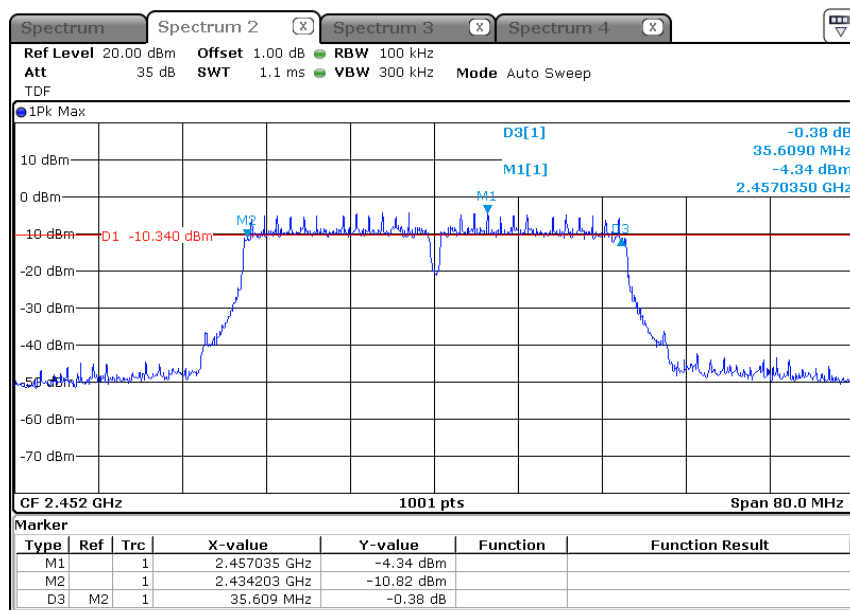


*** 802.11g_MIMO (ANT 2) (6 dB Bandwidth)**


Low Channel (2 412 MHz)

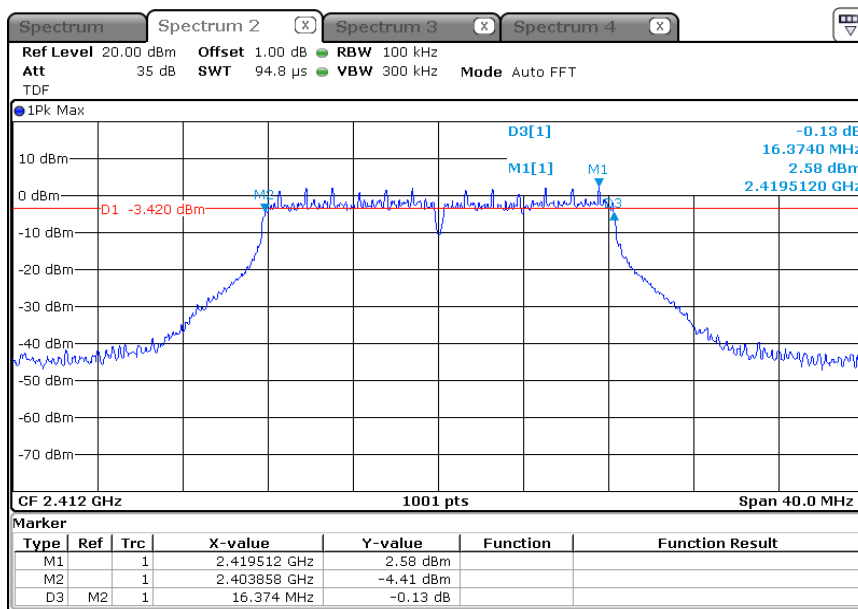

Middle Channel (2 437 MHz)

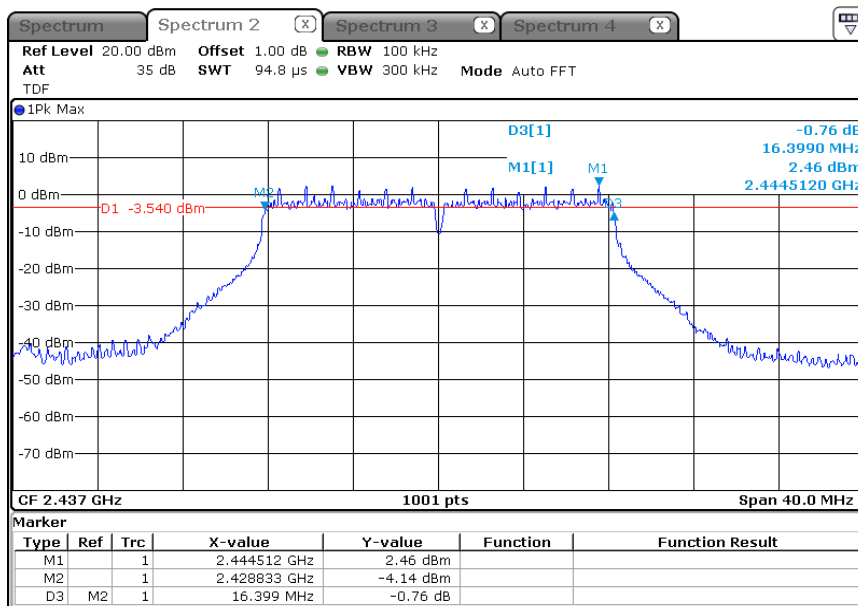


High Channel (2 462 MHz)

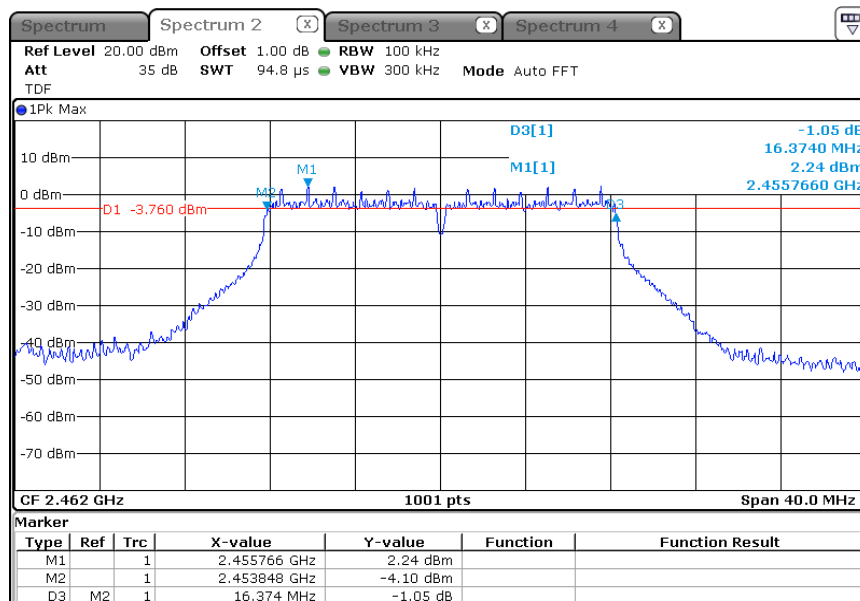


* 802.11n HT20_MIMO (ANT 2) (6 dB Bandwidth)_MIMO (ANT 2)


Low Channel (2 412 MHz)

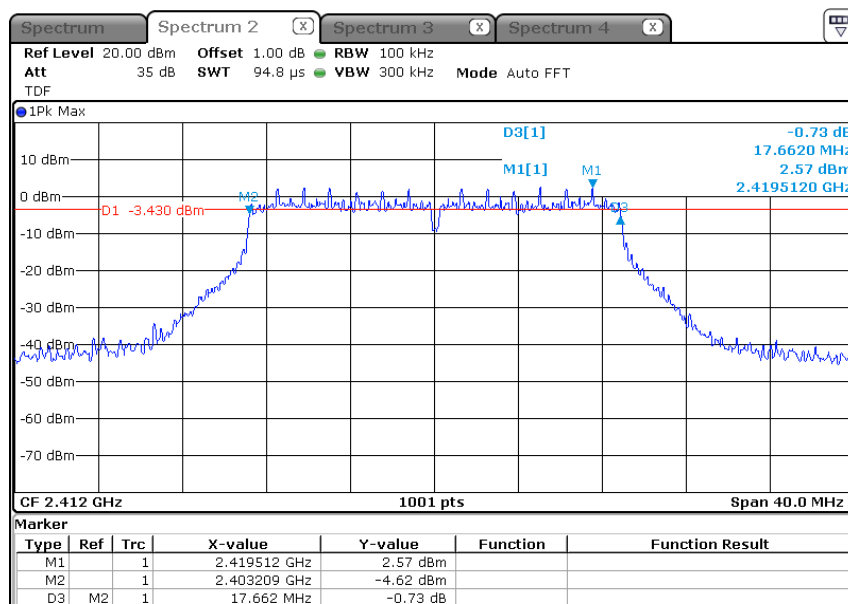

Middle Channel (2 437 MHz)

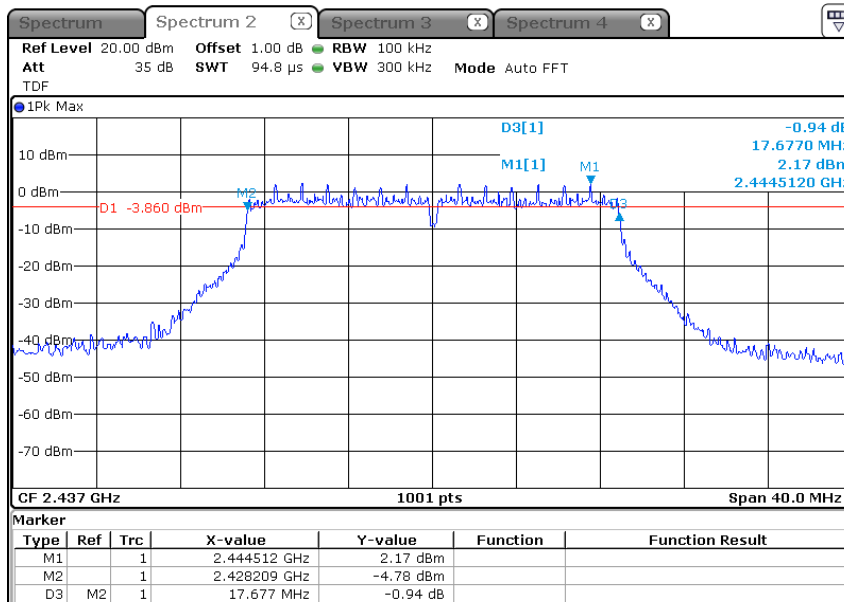


High Channel (2 462 MHz)

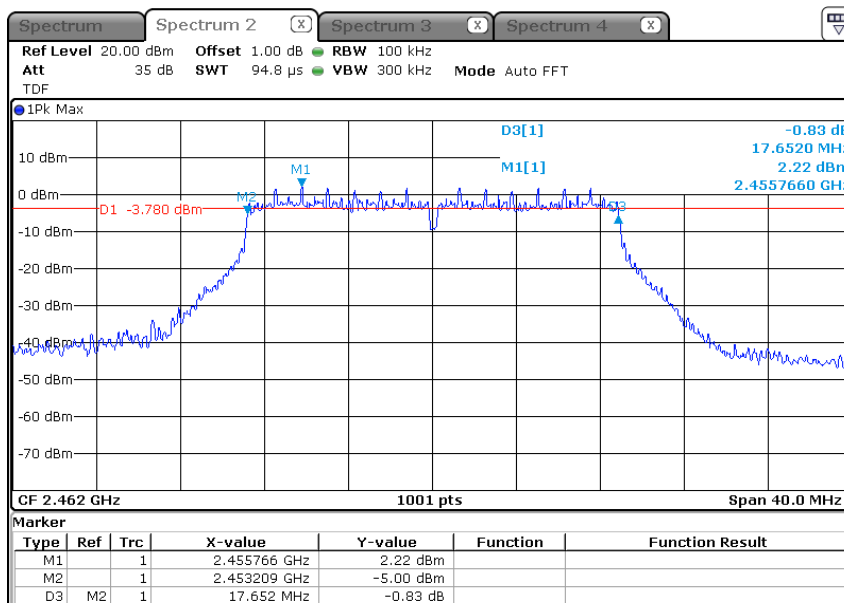


*** 802.11 HT40_MIMO (ANT 2) (6 dB Bandwidth)**


Low Channel (2 422 MHz)

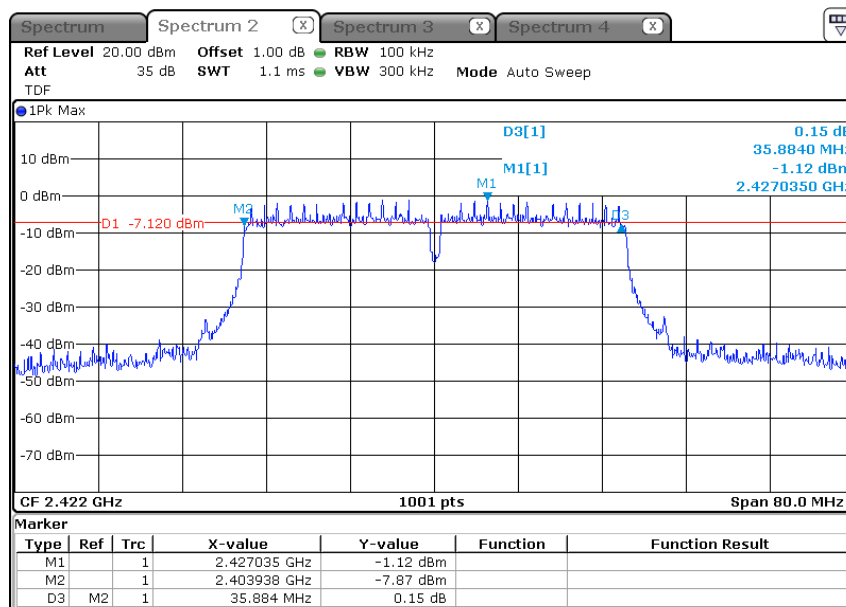

Middle Channel (2 437 MHz)

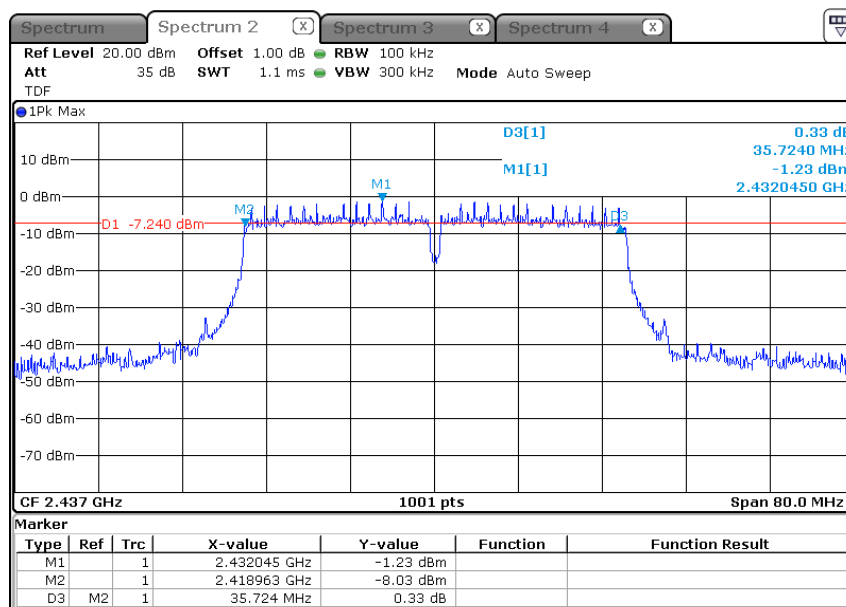


High Channel (2 452 MHz)

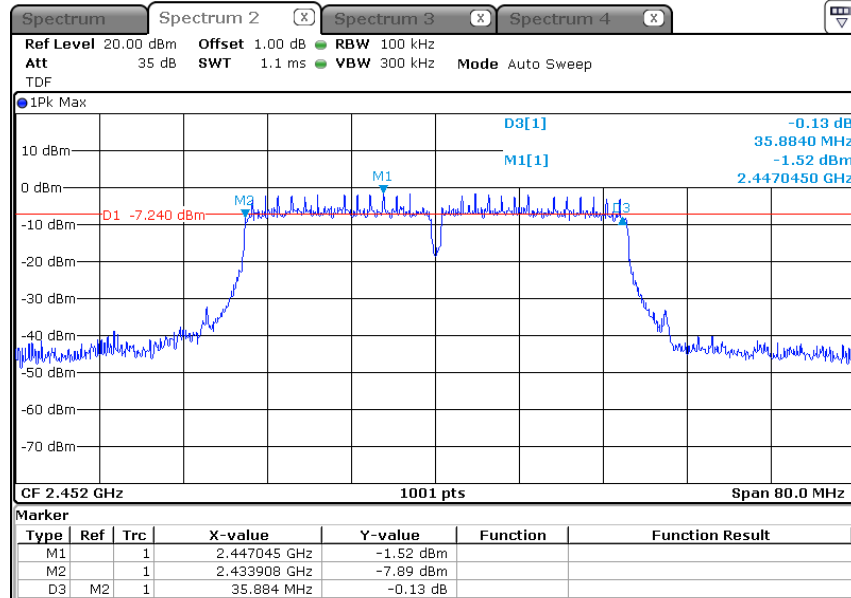


* 802.11b_ANT 1 (Occupied Bandwidth)


Low Channel (2 412 MHz)

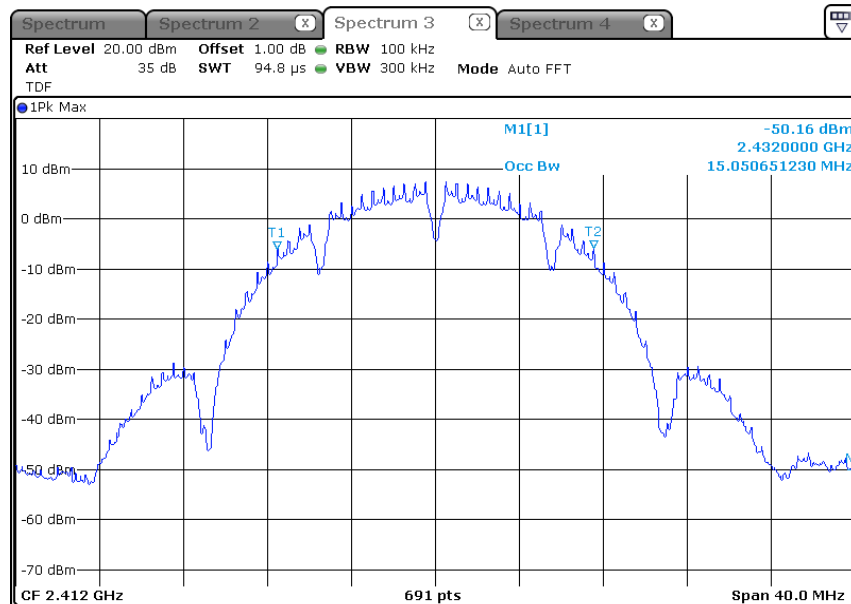

Middle Channel (2 437 MHz)

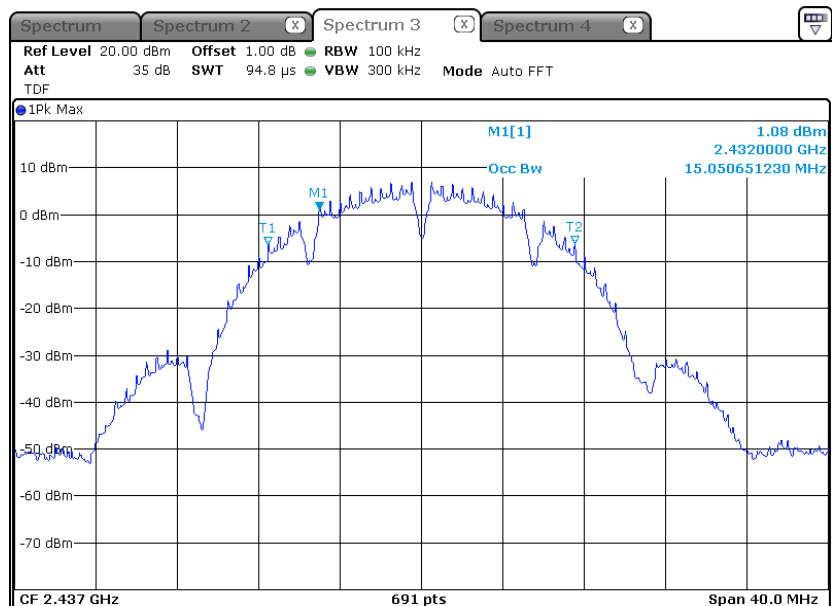


High Channel (2 462 MHz)

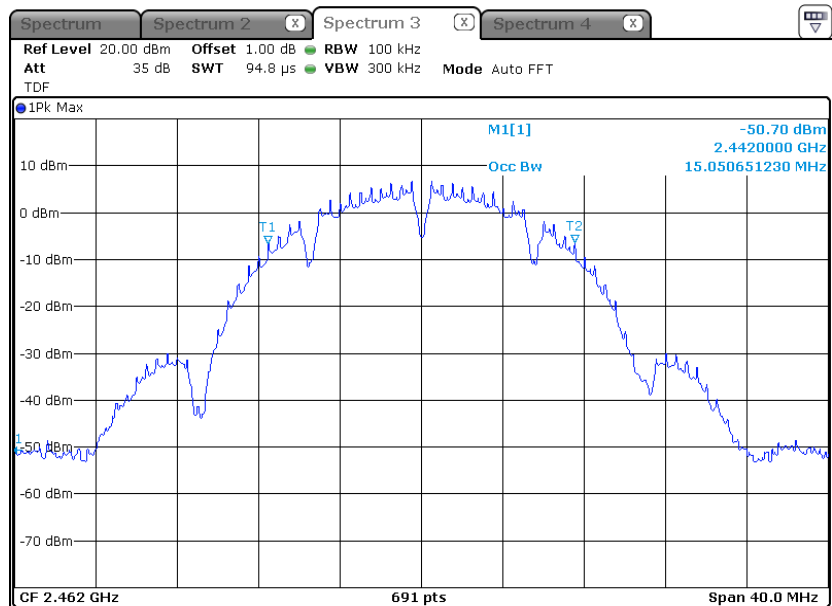


*** 802.11g_ANT 1 (Occupied Bandwidth)**


Low Channel (2 412 MHz)

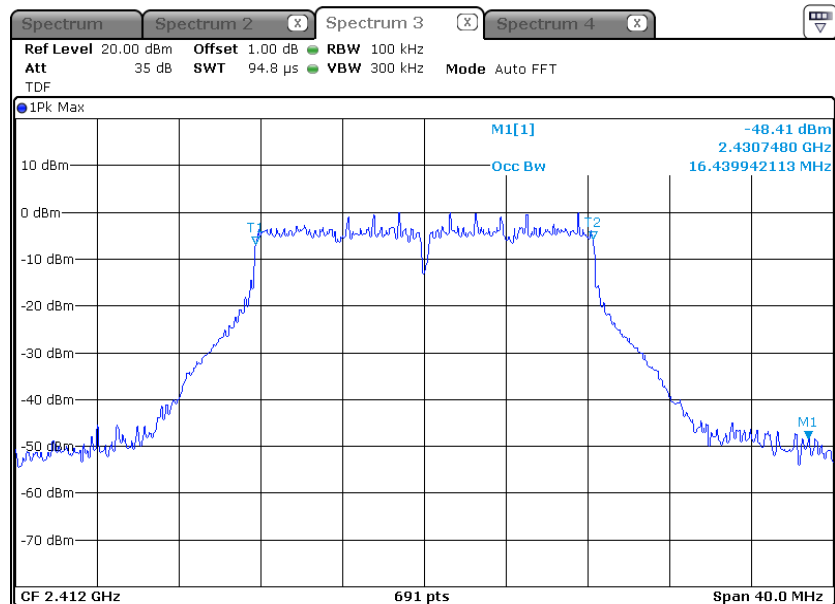

Middle Channel (2 437 MHz)

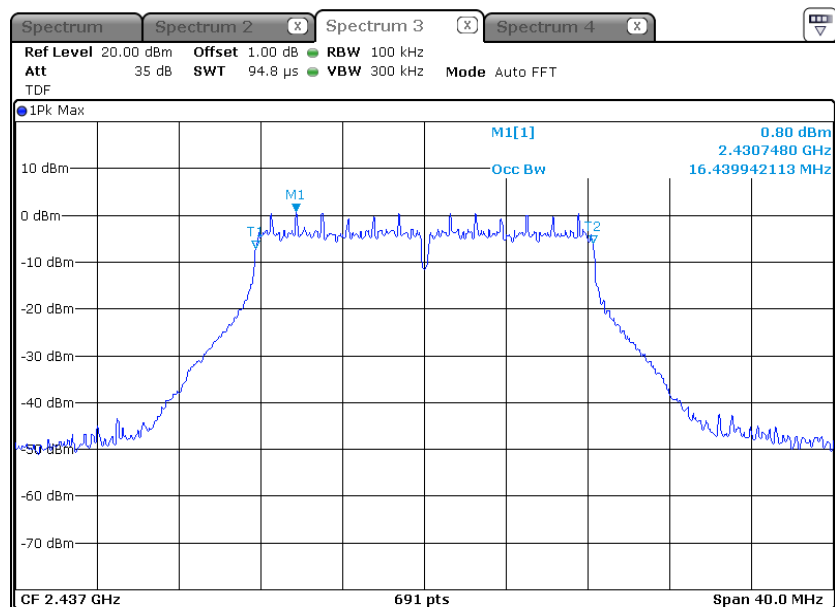


High Channel (2 462 MHz)

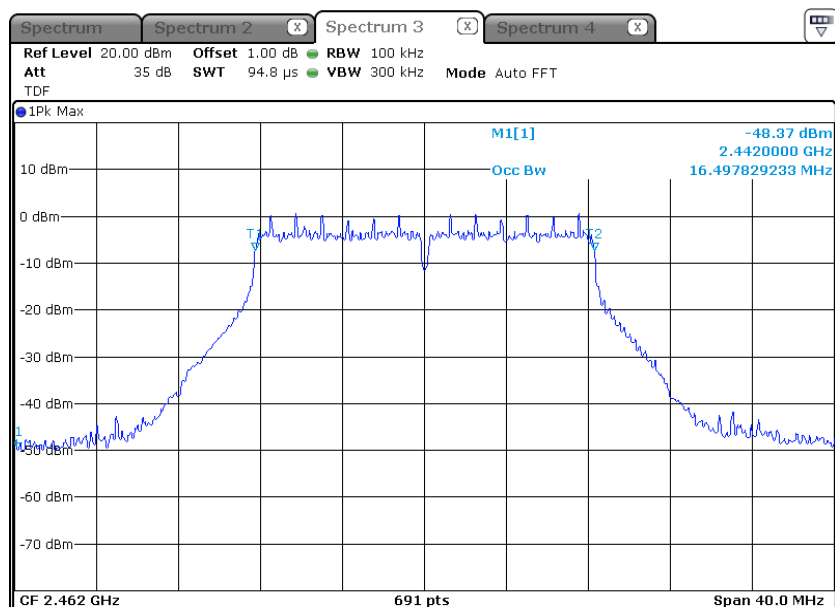


*** 802.11n HT20_ANT 1 (Occupied Bandwidth)**


Low Channel (2 412 MHz)

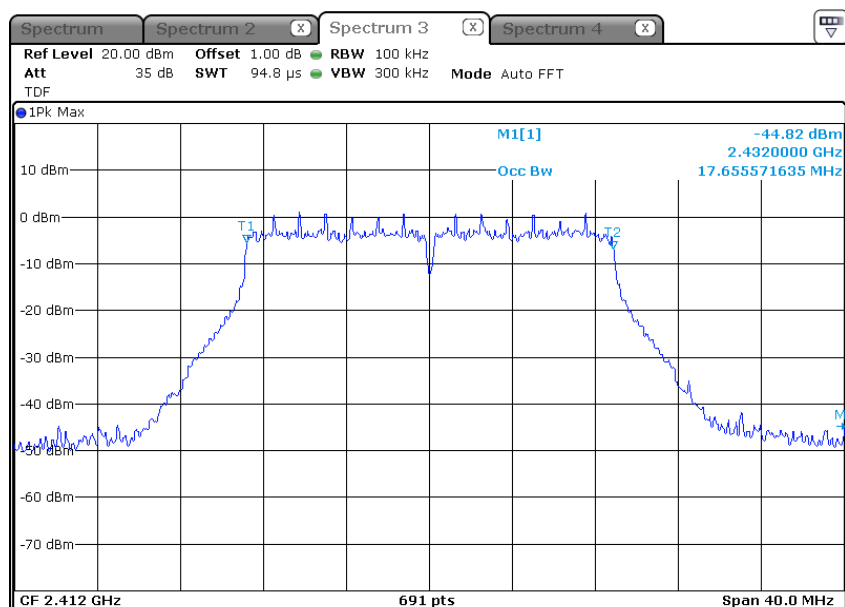

Middle Channel (2 437 MHz)

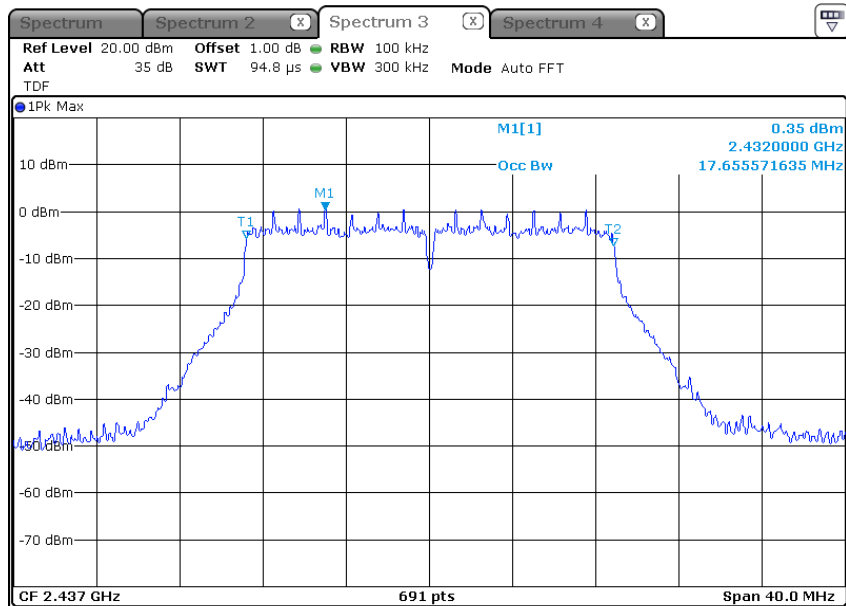


High Channel (2 462 MHz)

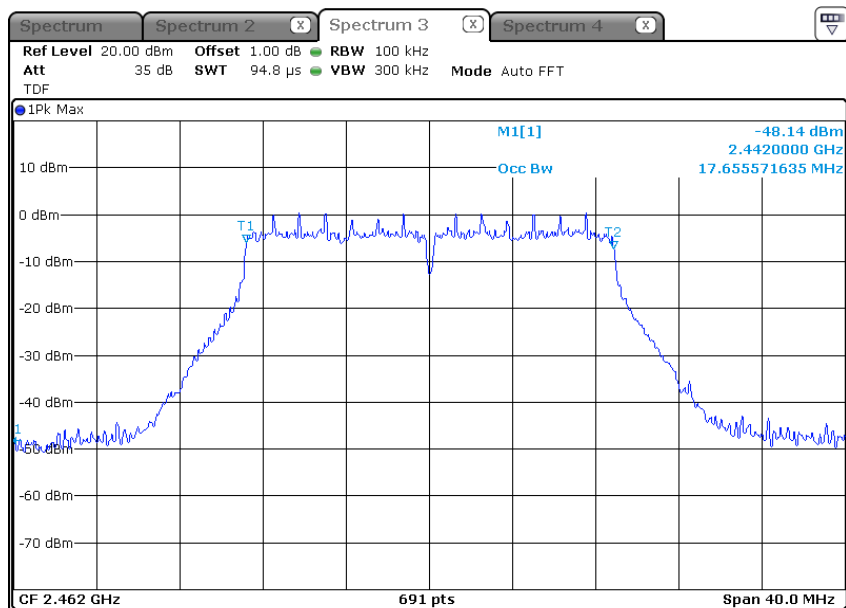


*** 802.11n HT40_ANT 1 (Occupied Bandwidth)**


Low Channel (2 412 MHz)

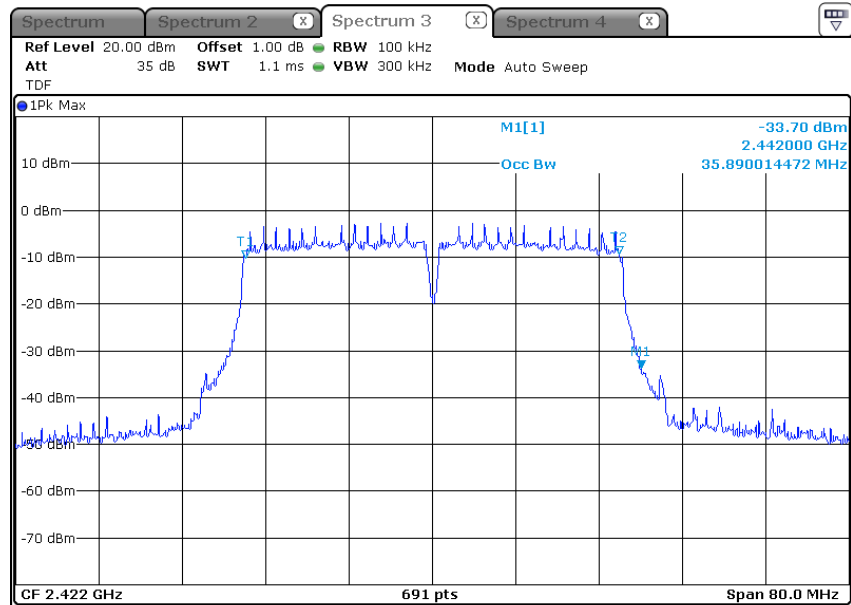

Middle Channel (2 437 MHz)

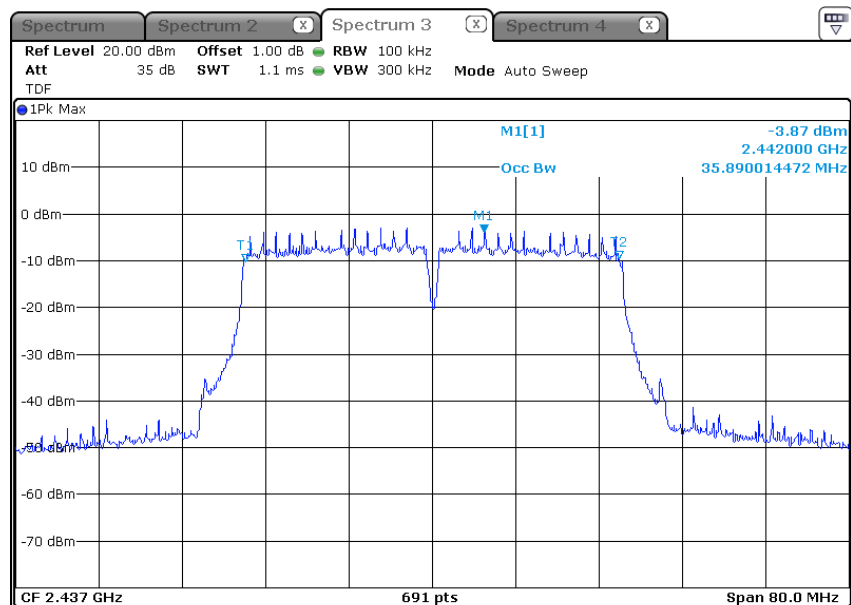


High Channel (2 462 MHz)

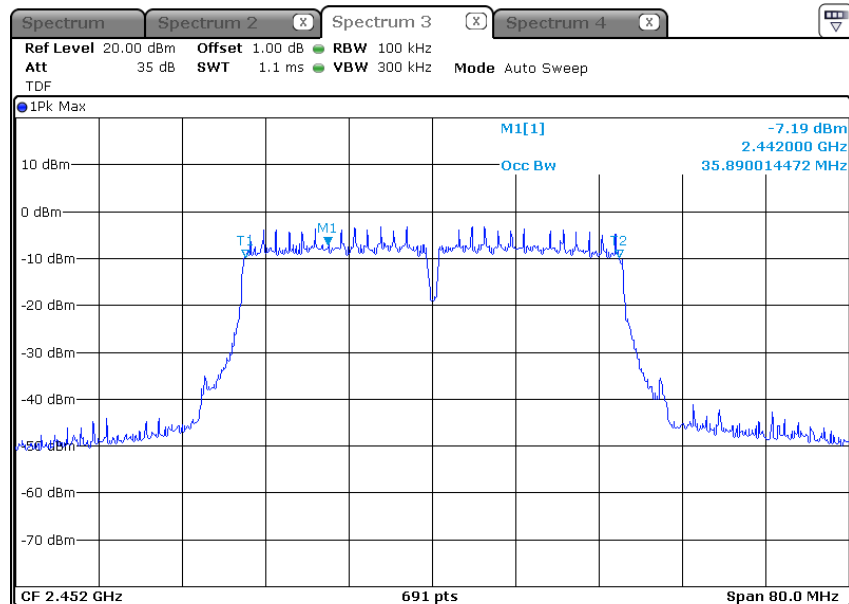


* 802.11g_ANT 2 (Occupied Bandwidth)


Low Channel (2 412 MHz)

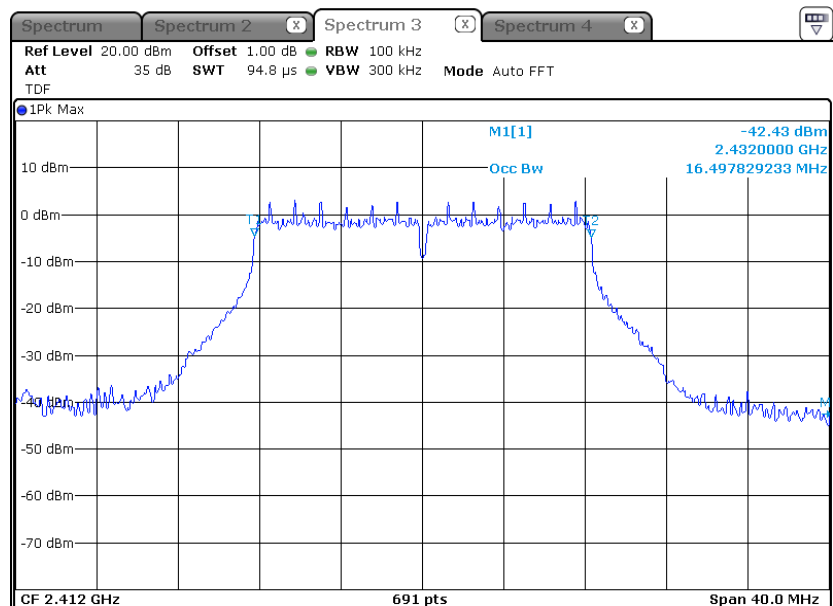

Middle Channel (2 437 MHz)

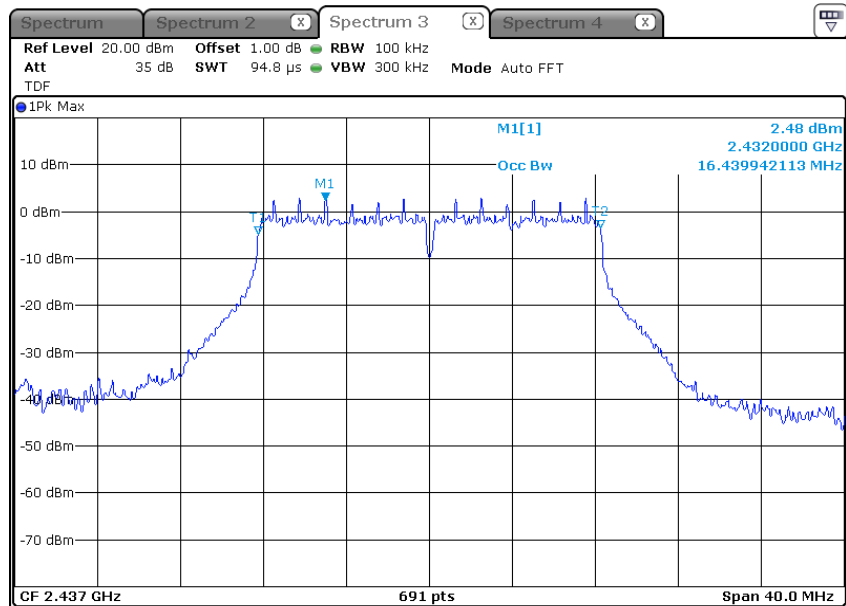


High Channel (2 462 MHz)

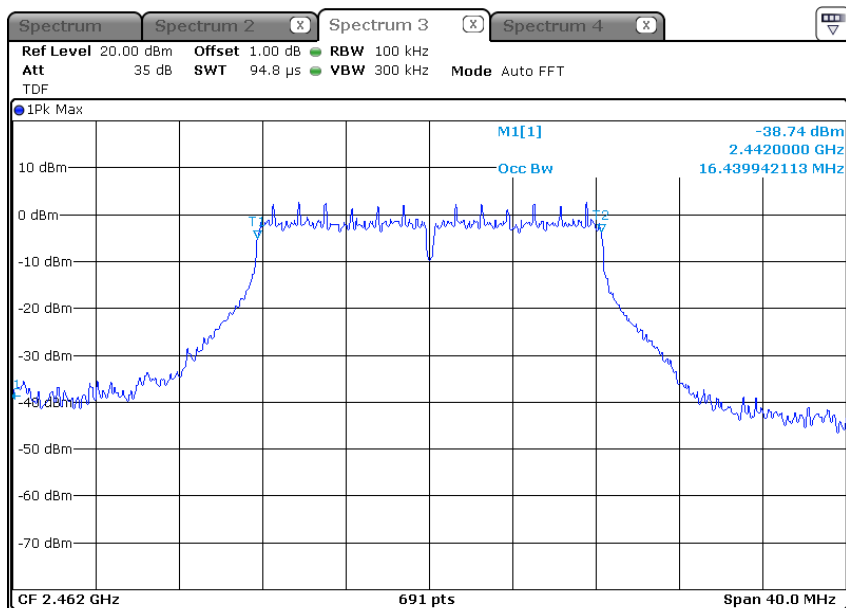


*** 802.11n HT20_ANT 2 (Occupied Bandwidth)**


Low Channel (2 412 MHz)

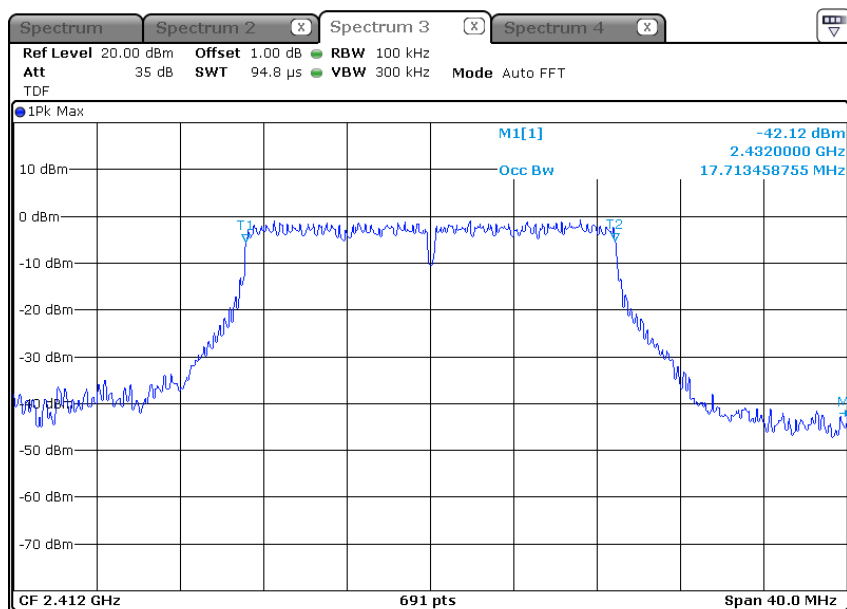

Middle Channel (2 437 MHz)

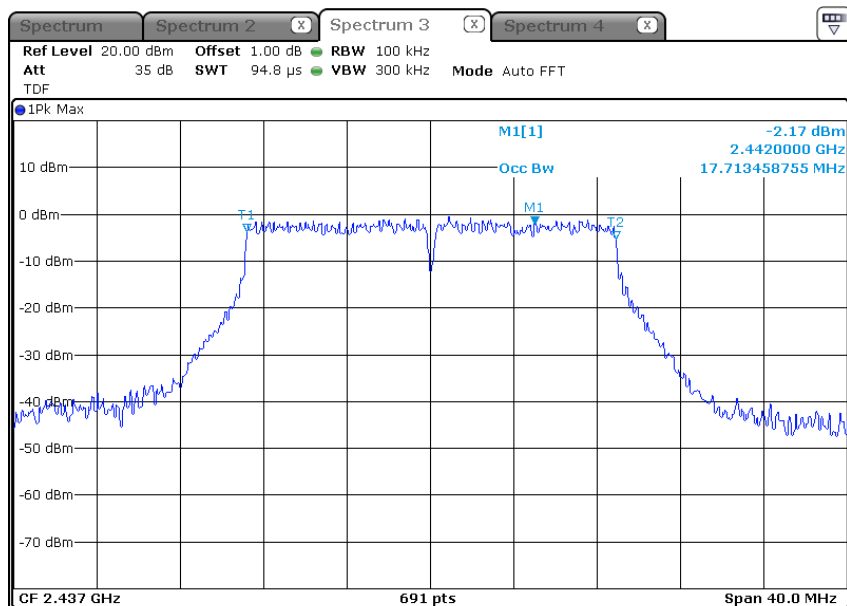


High Channel (2 462 MHz)

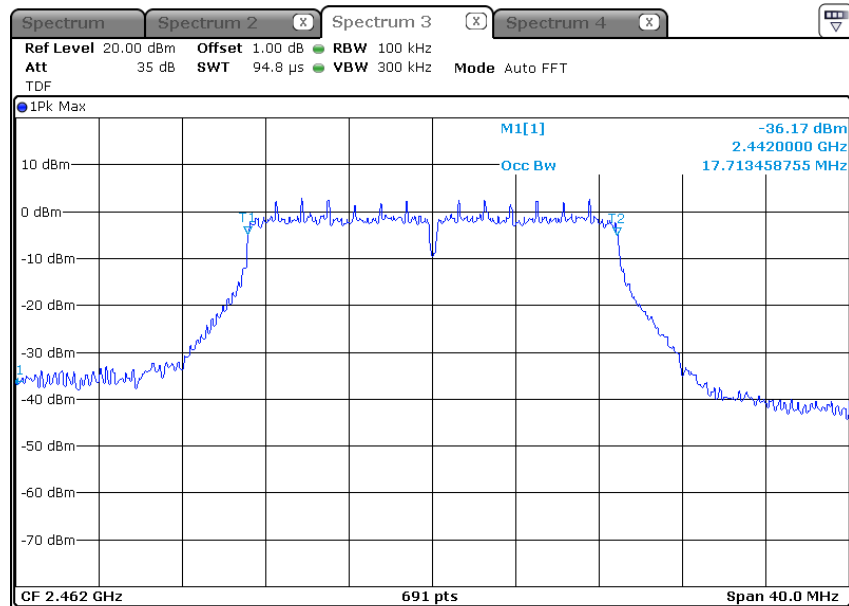


* 802.11n HT40_ANT 2 (Occupied Bandwidth)


Low Channel (2 422 MHz)

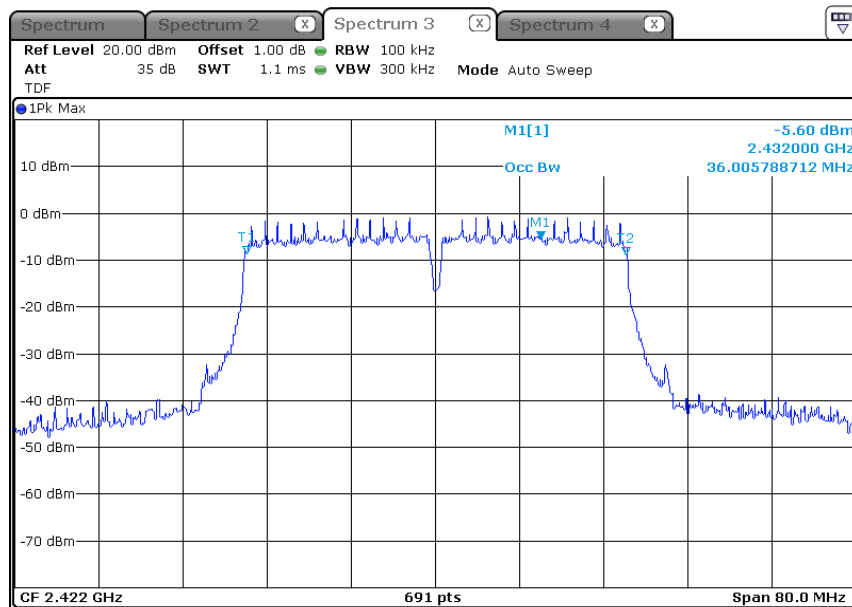

Middle Channel (2 437 MHz)

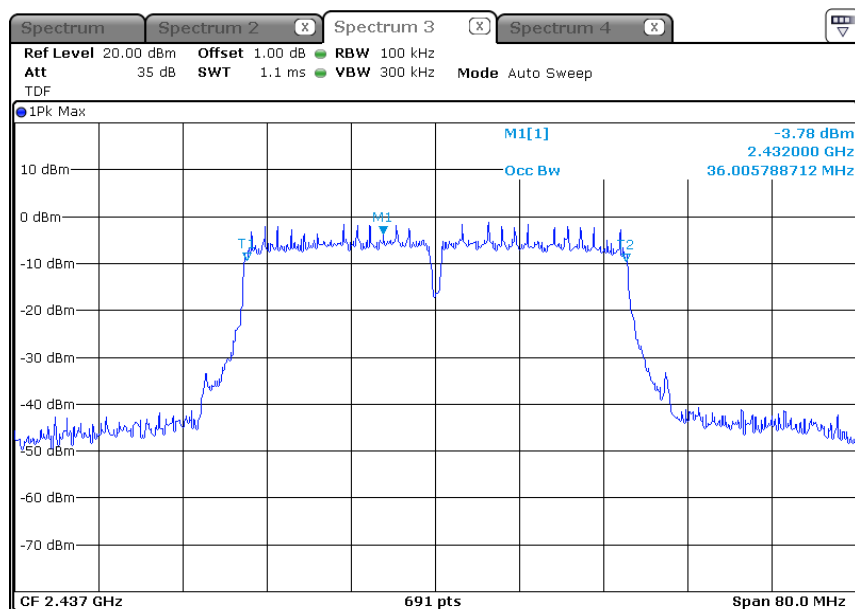


High Channel (2 452 MHz)

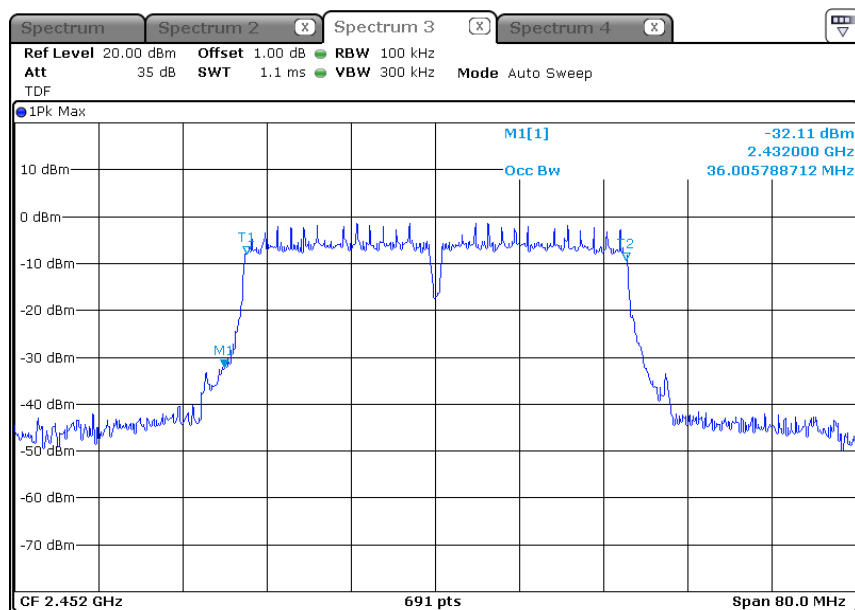


*** 802.11g_MIMO (ANT 1) (Occupied Bandwidth)**


Low Channel (2 412 MHz)

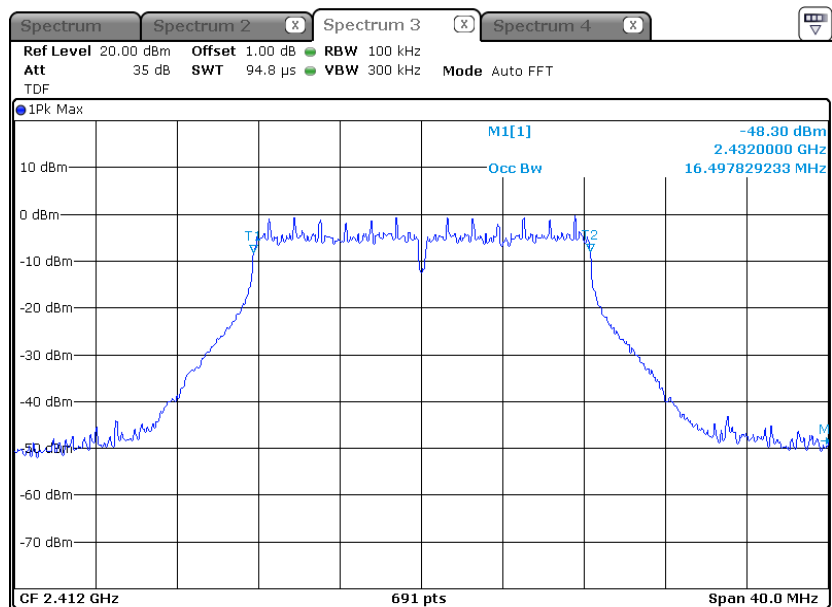

Middle Channel (2 437 MHz)

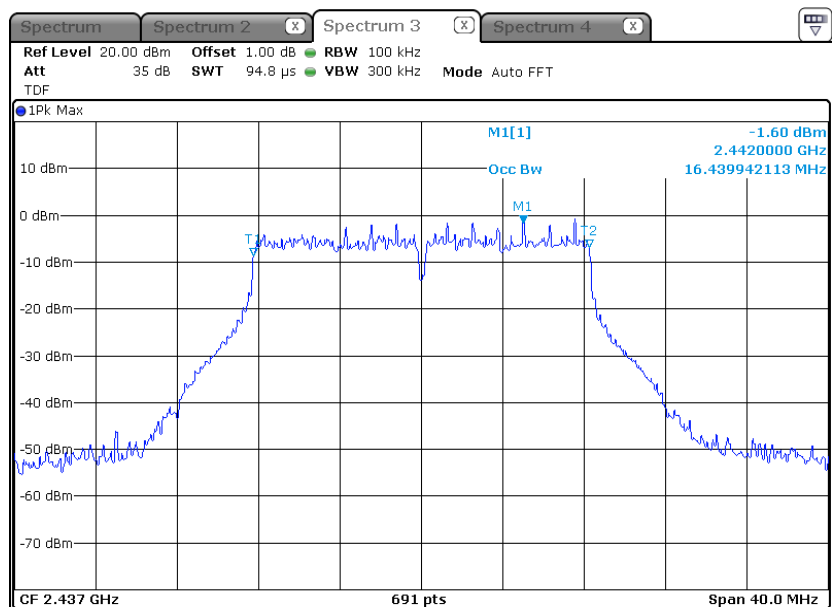


High Channel (2 462 MHz)

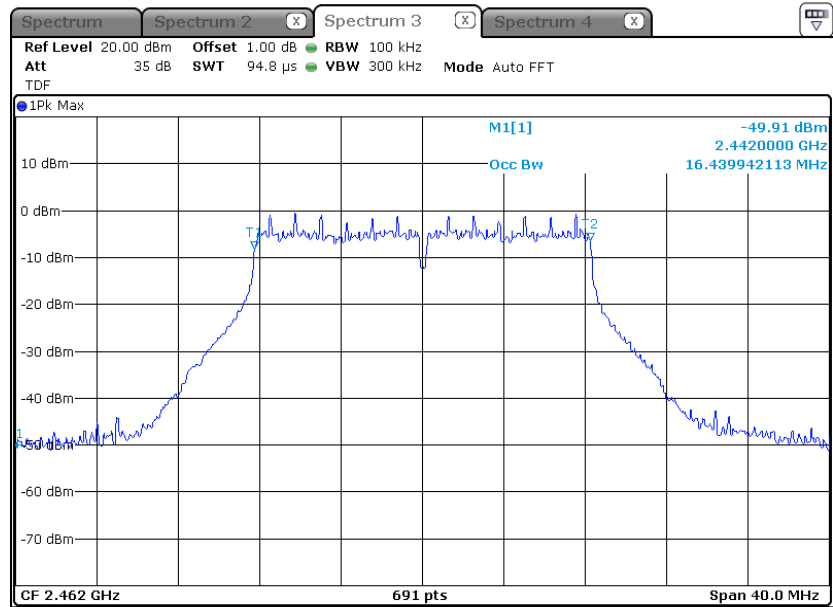


* 802.11n HT20_MIMO (ANT 1) (Occupied Bandwidth)


Low Channel (2 412 MHz)

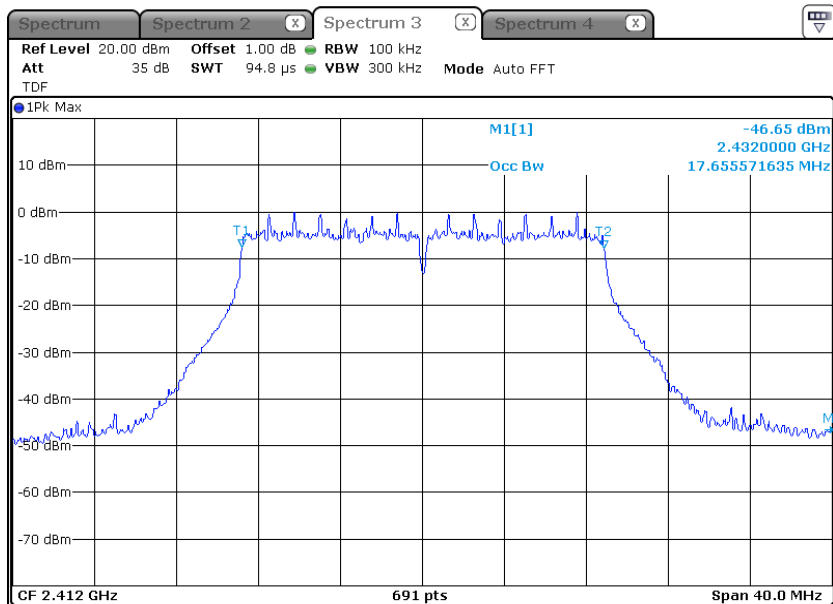

Middle Channel (2 437 MHz)

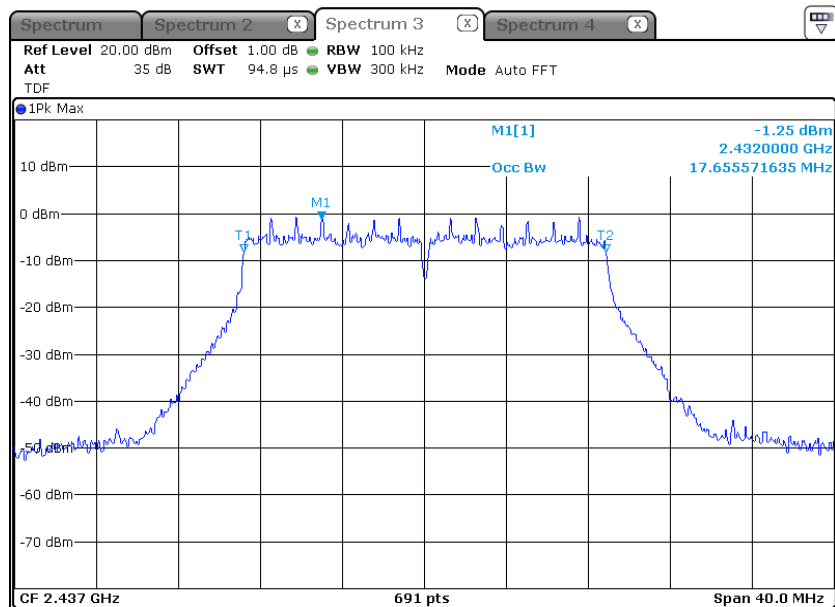


High Channel (2 462 MHz)

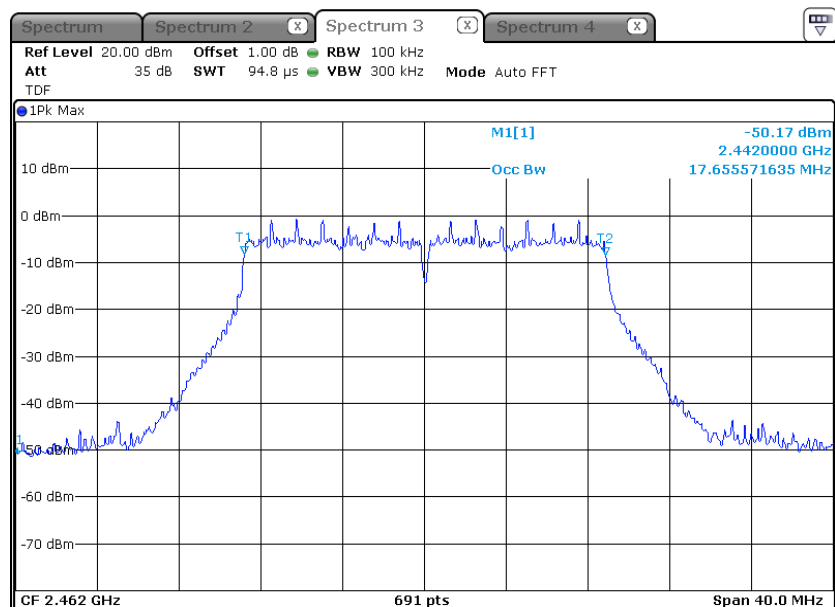


*** 802.11n HT40_MIMO (ANT 1) (Occupied Bandwidth)**


Low Channel (2 422 MHz)

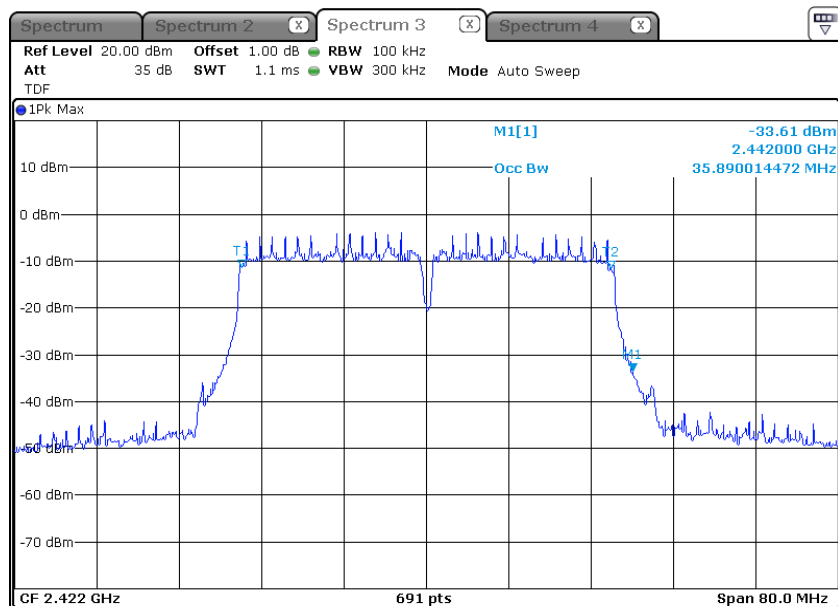

Middle Channel (2 437 MHz)

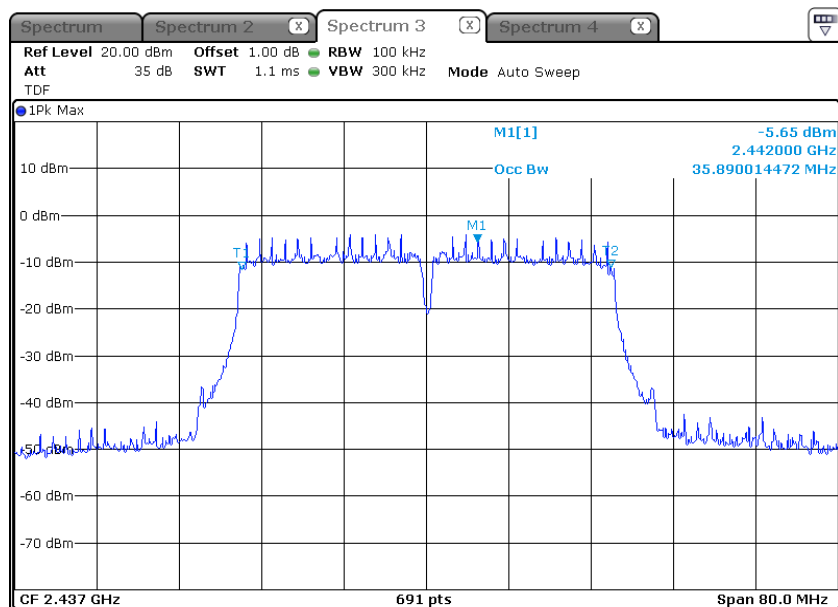


High Channel (2 452 MHz)

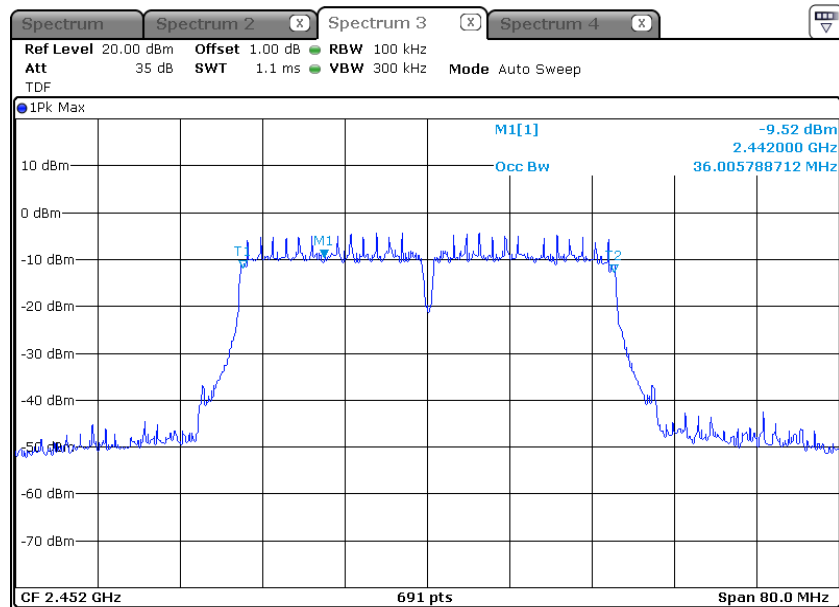


* 802.11g_MIMO (ANT 2) (Occupied Bandwidth)


Low Channel (2 412 MHz)

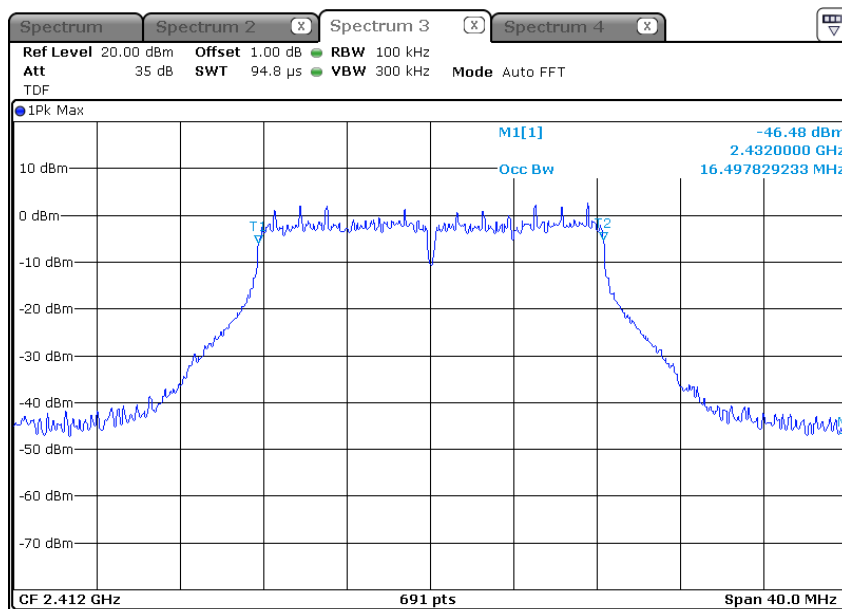

Middle Channel (2 437 MHz)

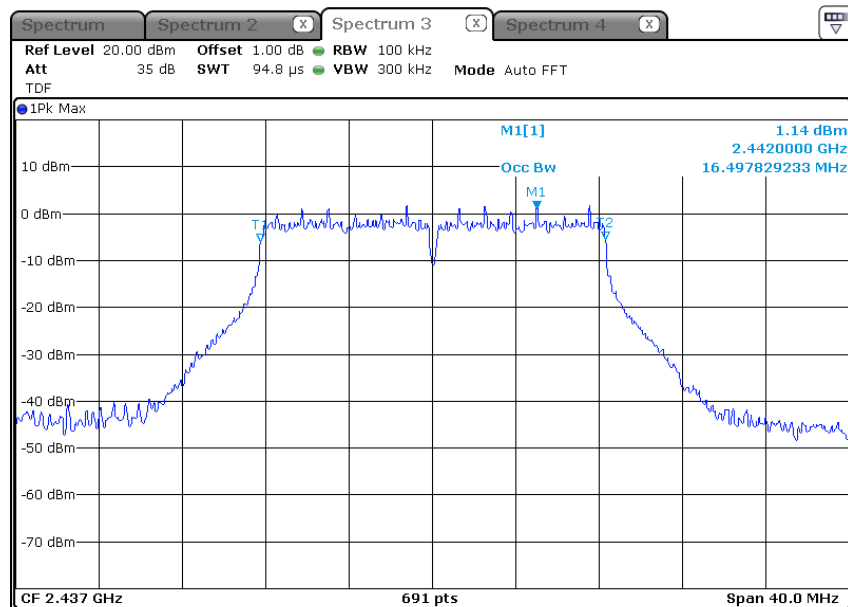


High Channel (2 462 MHz)

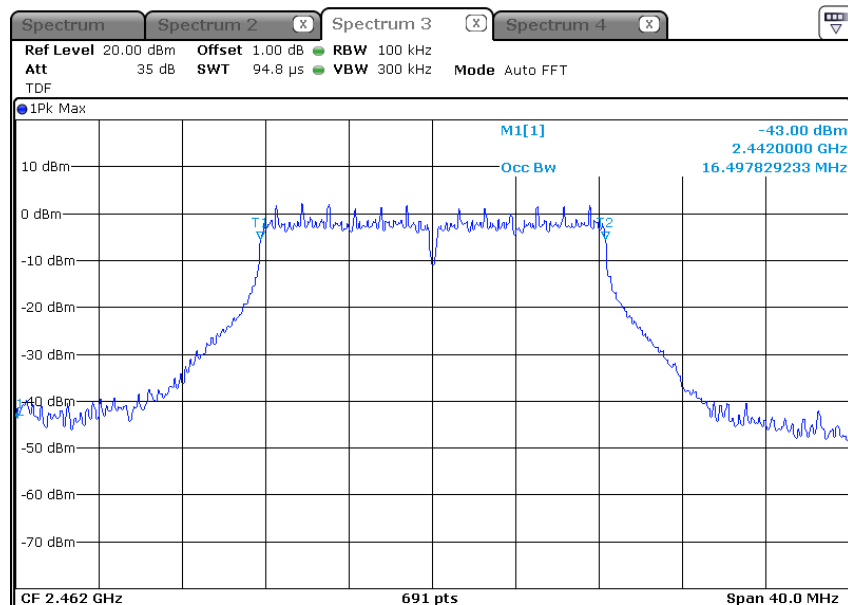


*** 802.11n HT20_MIMO (ANT 2) (Occupied Bandwidth)**


Low Channel (2 412 MHz)

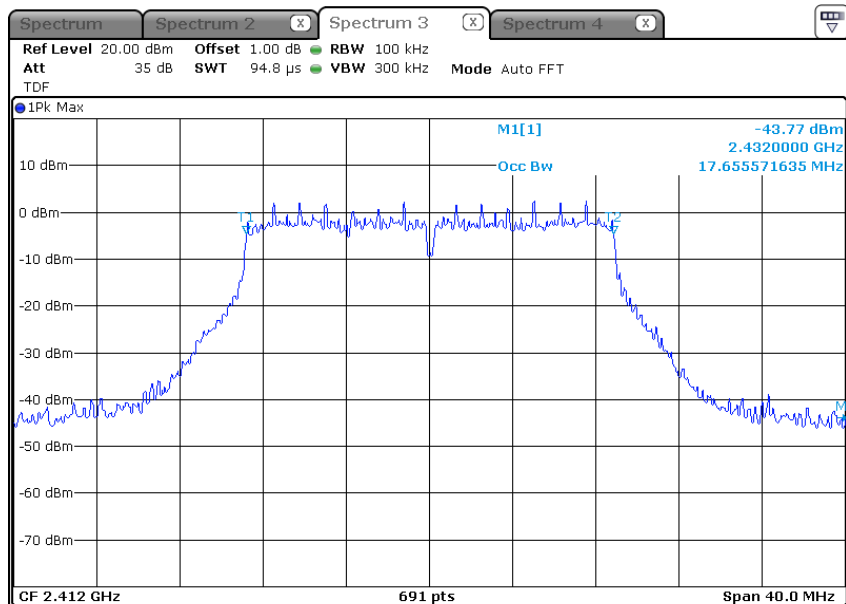

Middle Channel (2 437 MHz)

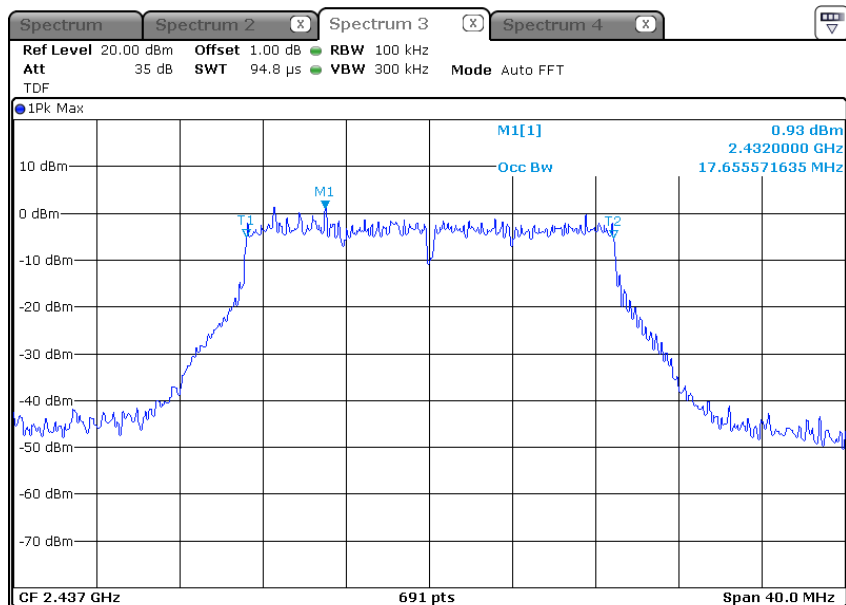


High Channel (2 462 MHz)

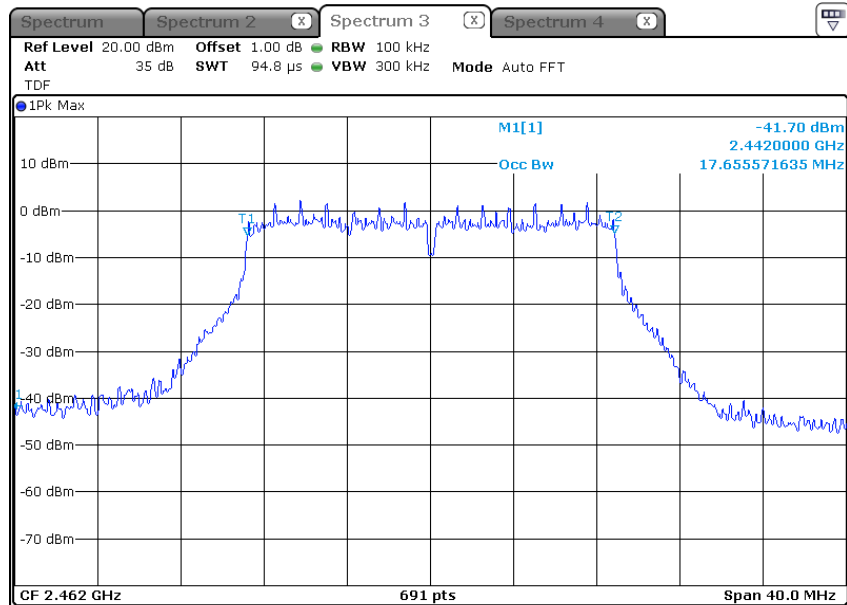


*** 802.11n HT40_MIMO (ANT 2) (Occupied Bandwidth)**


Low Channel (2 422 MHz)

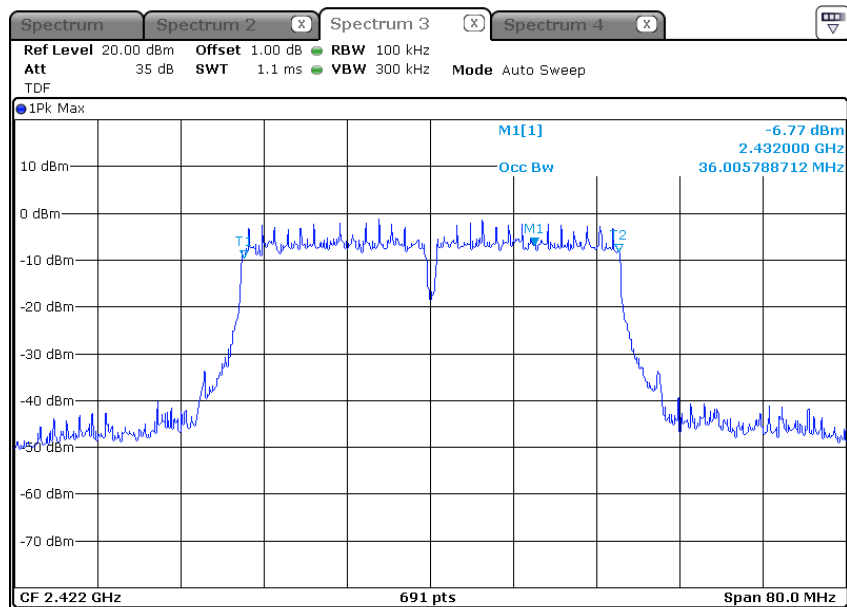

Middle Channel (2 437 MHz)

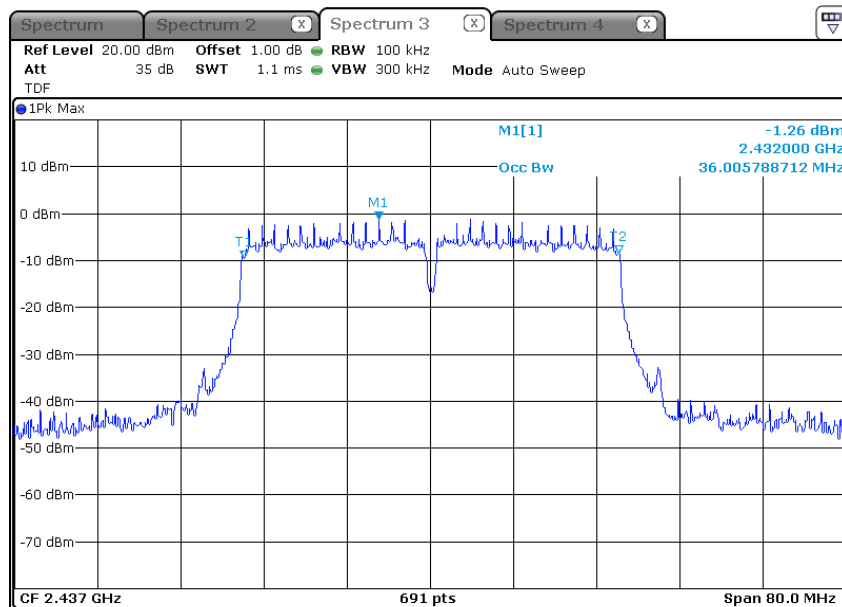

High Channel (2 452 MHz)

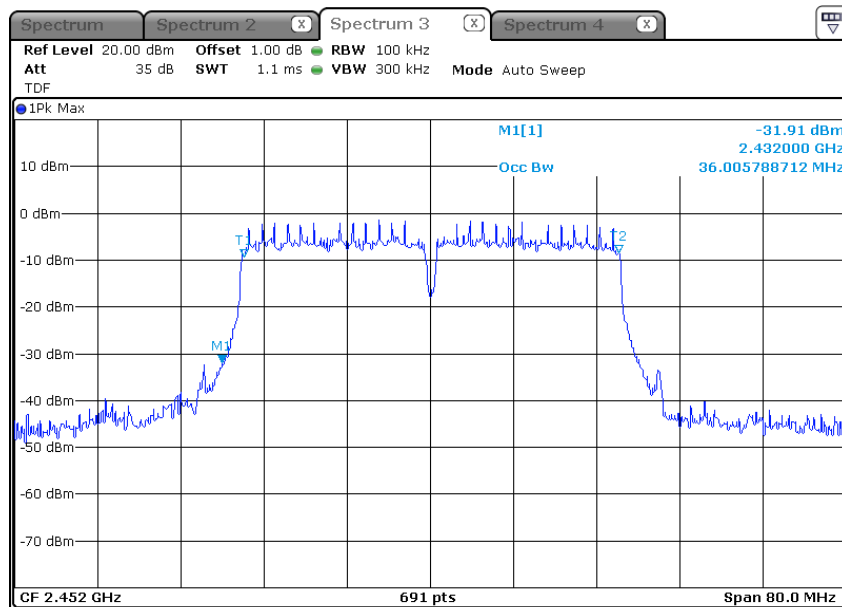

5.5 Spurious Emission, Band Edge and Restricted bands

5.5.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

According to § 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	Above 38.6
13.36 - 13.41			

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

5.5.2 Measurement Procedure

5.5.2.1 Band-edge Compliance of RF Conducted Emissions

5.5.2.1.1 Reference Level Measurement

Establish a reference level by using the following procedure:

- 1) Set instrument center frequency to DTS channel center frequency.
- 2) Set the span to ≥ 1.5 times the DTS bandwidth.
- 3) Set the RBW = 100 kHz.
- 4) Set the VBW $\geq 3 \times$ RBW.
- 5) Detector = peak.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum PSD level.

5.5.2.1.2 Emissions Level Measurement

- 1) Set the center frequency and span to encompass frequency range to be measured.
- 2) Set the RBW = 100 kHz.
- 3) Set the VBW $\geq 3 \times$ RBW.
- 4) Detector = peak.
- 5) Ensure that the number of measurement points $\geq \text{span/RBW}$
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b).
Report the three highest emissions relative to the limit.

5.5.2.2 Conducted Spurious Emissions

Set the spectrum analyzer as follows:

- 1) Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
Typically, several plots are required to cover this entire span.

2) RBW = 100 kHz

3) VBW \geq RBW

4) Sweep = auto

5) Detector function = peak

6) Trace = max hold

7) Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

8) Each frequency found during preliminary measurements was re-examined and investigated.

The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

5.5.2.3 Radiated Spurious Emissions

- 1) The preliminary and final radiated measurements were performed to determine the frequency producing the maximum emissions in a 10m anechoic chamber. The EUT was tested at a distance 3 meters.
- 2) The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
- 3) The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, and from 30 to 1 000 MHz using the TRILOG broadband antenna, and from 1 000 MHz to 26 500 MHz using the horn antenna.
- 4) Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
- 5) the 0.8m height is for below 1 G testing, and 1.5m is for above 1G testing.

Note

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz ($\geq 1/T$) for Average detection (AV) at frequency above 1 GHz. (where T = pulse width).

5.5.3 Test Result

- Complied

1. Band edge & Conducted Spurious Emissions was shown in figure 3.
Note: We took the insertion loss of the cable into consideration within the measuring instrument.
2. Measured value of the Field strength of spurious Emissions (Radiated)

* Below 1 GHz data

Worst-case : 802. 11n HT20_MMO (ANT 1+2)_Low Channel

Low channel (2 412 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Quasi-Peak DATA. Emissions below 30 MHz							
Below 30.00	Not Detected	-	-	-	-	-	-
Quasi-Peak DATA. Emissions below 1 GHz							
77.53	120	V	50.2	-19.2	31.0	40.0	9.0
Below 100.00	-	-	-	-	-	-	-

*** Above 1 GHz data**

802.11b_ANT 1_Low channel (2 412 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 386.50	1 000	H	55.7	1.9	57.6	74.0	16.4
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 386.50	1 000	H	48.6	1.9	50.5	54.0	3.5
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11b_ANT 1_Middle channel (2 437 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-

802.11b_ANT 1_High channel (2 462 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 388.00	1 000	H	59.2	1.9	61.1	74.0	12.9
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 388.00	1 000	H	45.3	1.9	47.2	54.0	6.8
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11g_ANT 1_Low channel (2 412 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 388.00	1 000	H	59.2	1.9	61.1	74.0	12.9
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 388.00	1 000	H	45.3	1.9	47.2	54.0	6.8
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11g_ANT 1_Middle channel (2 437 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-

802.11g_ANT 1_High channel (2 462 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 484.75	1 000	H	57.2	2.2	59.4	74.0	14.6
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 484.75	1 000	H	45.0	2.2	47.2	54.0	6.8
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT20_ANT 1_Low channel (2 412 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 390.00	1 000	H	60.3	1.9	62.2	74.0	11.8
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 390.00	1 000	H	46.7	1.9	48.6	54.0	5.4
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT20_ANT 1_Middle channel (2 437 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-

802.11n HT20_ANT 1_High channel (2 462 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 483.50	1 000	H	63.7	2.2	65.9	74.0	8.1
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 483.50	1 000	H	45.6	2.2	47.8	54.0	6.2
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT40_ANT 1_Low channel (2 422 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 388.25	1 000	H	63.8	1.9	65.7	74.0	8.3
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 388.25	1 000	H	42.4	1.9	44.3	54.0	9.7
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT40_ANT 1_Middle channel (2 437 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-

802.11n HT40_ANT 1_High channel (2 452 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 485.00	1 000	H	57.8	2.2	60.0	74.0	14.0
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 485.00	1 000	H	45.7	2.2	47.9	54.0	6.1
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11g_ANT 2_Low channel (2 412 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 390.00	1 000	H	61.8	1.9	63.7	74.0	10.3
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 390.00	1 000	H	46.1	1.9	48.0	54.0	6.0
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11g_ANT 2_Middle channel (2 437 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-

802.11g_ANT 2_High channel (2 462 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 484.25	1 000	H	61.3	2.2	63.5	74.0	10.5
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 484.25	1 000	H	46.9	2.2	49.1	54.0	4.9
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT20_ANT 2_Low channel (2 412 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 389.75	1 000	H	61.4	1.9	63.3	74.0	10.7
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 389.75	1 000	H	48.2	1.9	50.1	54.0	3.9
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT20_ANT 2_Middle channel (2 437 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-

802.11n HT20_ANT 2_High channel (2 462 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 484.50	1 000	H	58.7	2.2	60.9	74.0	13.1
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 484.50	1 000	H	46.8	2.2	49.0	54.0	5.0
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT40_ANT 2_Low channel (2 422 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 387.75	1 000	H	61.2	1.9	63.1	74.0	10.9
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 387.75	1 000	H	47.9	1.9	49.8	54.0	4.2
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT40_ANT 2_Middle channel (2 437 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-

802.11n HT40_ANT 2_High channel (2 452 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 483.50	1 000	H	56.6	2.2	58.8	74.0	15.2
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 483.50	1 000	H	46.8	2.2	49.0	54.0	5.0
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11g_MIMO (ANT 1+2)_Low channel (2 412 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 389.75	1 000	H	61.5	1.9	63.4	74.0	10.6
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 389.75	1 000	H	45.7	1.9	47.6	54.0	6.4
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11g_MIMO (ANT 1+2)_ Middle channel (2 437 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-

802.11g_MIMO (ANT 1+2)_High channel (2 462 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 483.75	1 000	H	60.2	2.2	62.4	74.0	11.6
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 483.75	1 000	H	44.8	2.2	47.0	54.0	7.0
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT20_MIMO (ANT 1+2)_Low channel (2 412 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 389.25	1 000	H	63.1	1.9	65.0	74.0	9.0
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 389.25	1 000	H	47.6	1.9	49.5	54.0	4.5
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT20_MIMO (ANT 1+2)_ Middle channel (2 437 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-

802.11n HT20_MIMO (ANT 1+2)_ High channel (2 462 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 483.50	1 000	H	66.4	2.2	68.6	74.0	5.4
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 483.50	1 000	H	47.4	2.2	49.6	54.0	4.4
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT40_MIMO (ANT 1+2)_Low channel (2 422 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 388.00	1 000	H	65.9	1.9	67.8	74.0	6.2
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 388.00	1 000	H	48.1	1.9	50.0	54.0	4.0
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.

802.11n HT40_MIMO (ANT 1+2)_ Middle channel (2 437 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
-	Not Detected	-	-	-	-	-	-

802.11n HT40_MIMO (ANT 1+2)_ High channel (2 452 MHz)

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Reading [dB(μV)]	Factor [dB]	Result [dB (μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Peak DATA. Emissions above 1 GHz							
*2 486.25	1 000	H	61.5	2.2	63.7	74.0	10.3
Above 3 000.00	Not Detected	-	-	-	-	-	-
Average DATA. Emissions above 1 GHz							
*2 486.25	1 000	H	47.5	2.2	49.7	54.0	4.3
Above 3 000.00	Not Detected	-	-	-	-	-	-

* This Asterisk means restricted band.


5.5.4 Test Plot

Figure 3. Plot of the Band-edge & Conducted Spurious Emissions


* 802.11b_ANT 1

Lowest Channel (2 412 MHz)


Reference

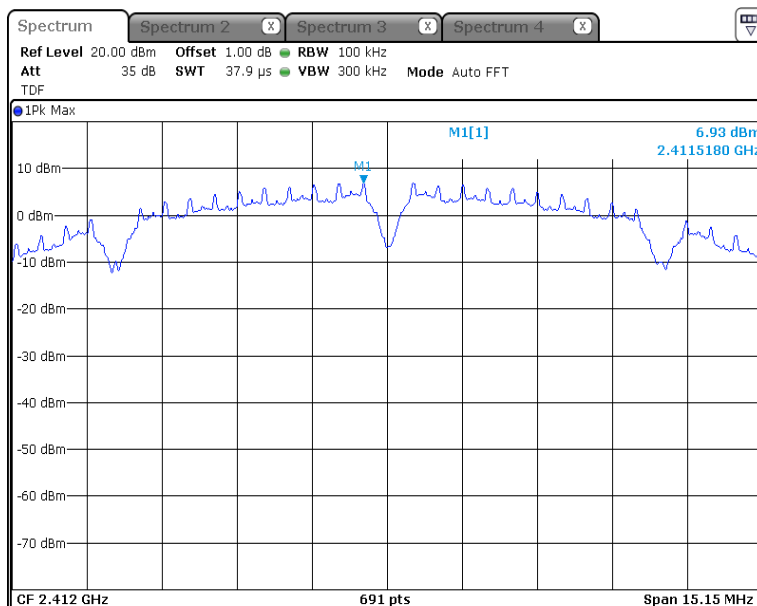

Band-edge

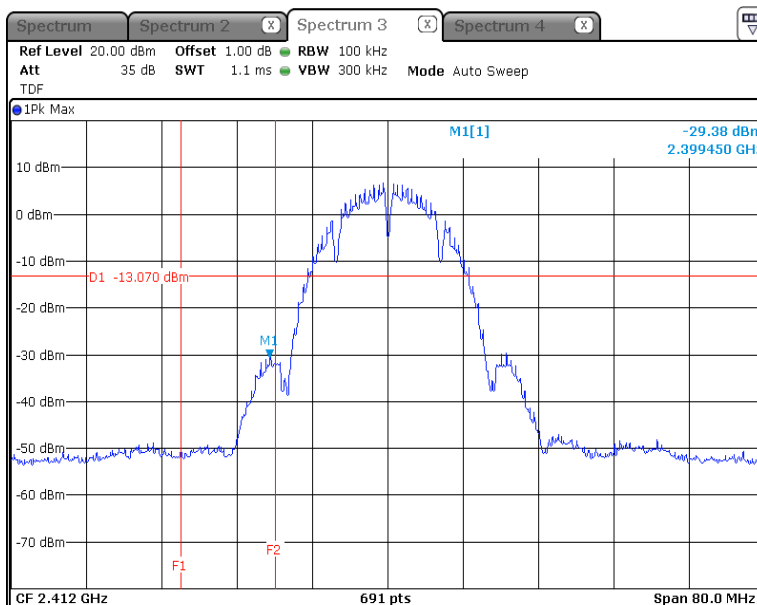


Conducted Spurious Emissions

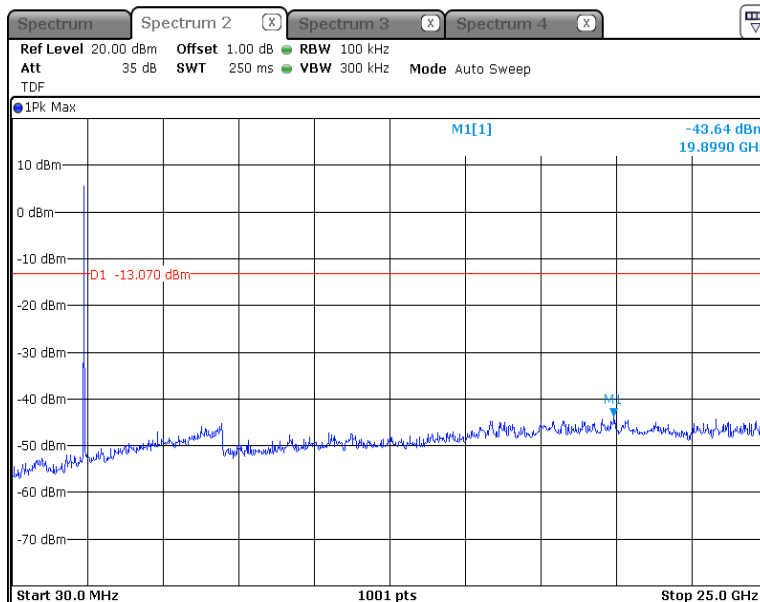


Middle Channel (2 437 MHz)

Reference

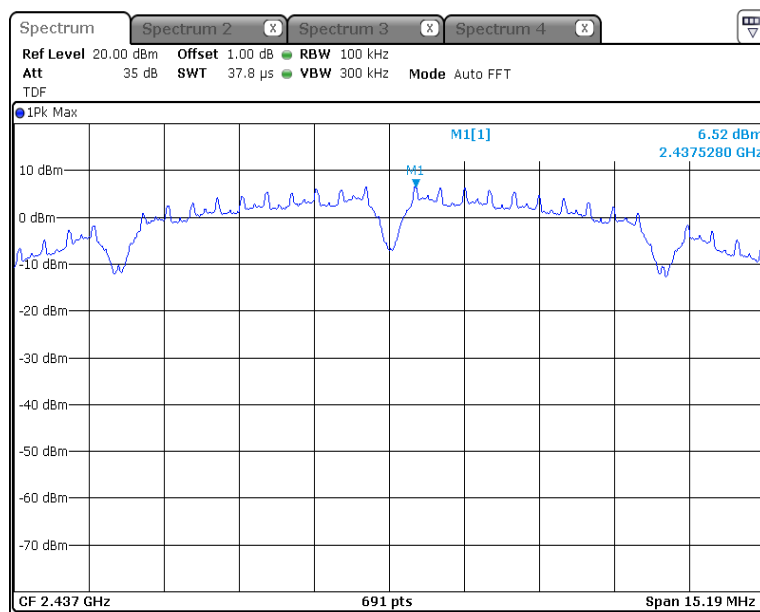


Conducted Spurious Emissions

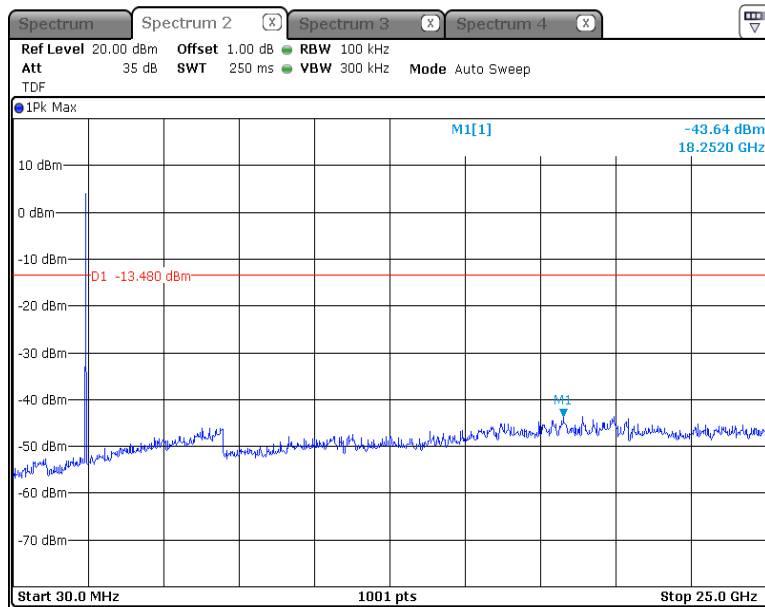


Highest Channel (2 462 MHz)


Reference

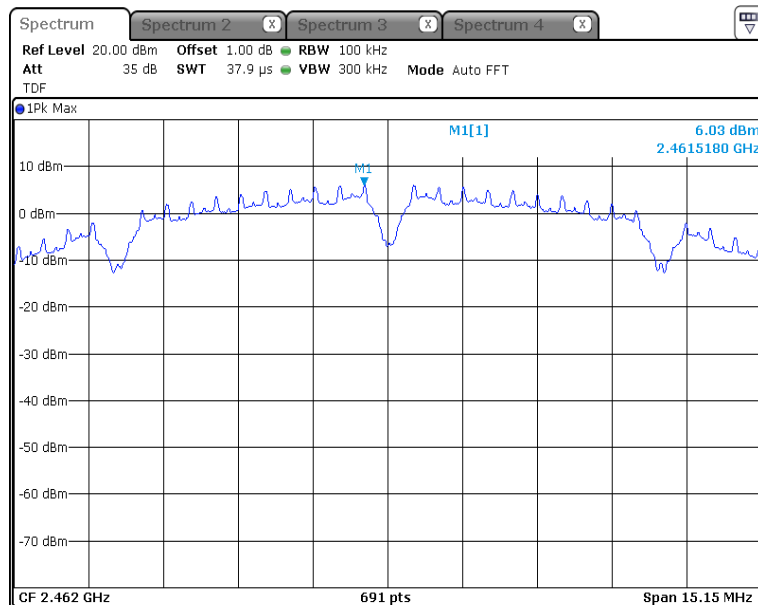

Band-edge

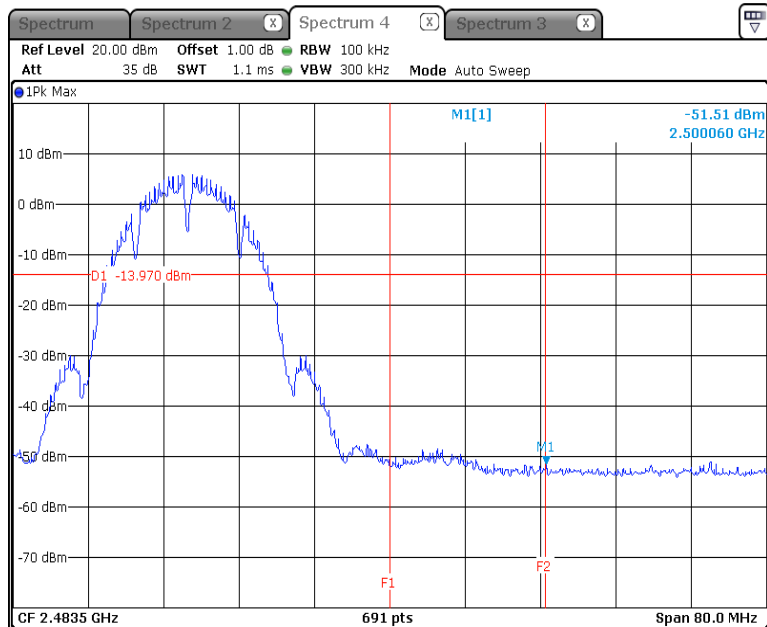


Conducted Spurious Emissions

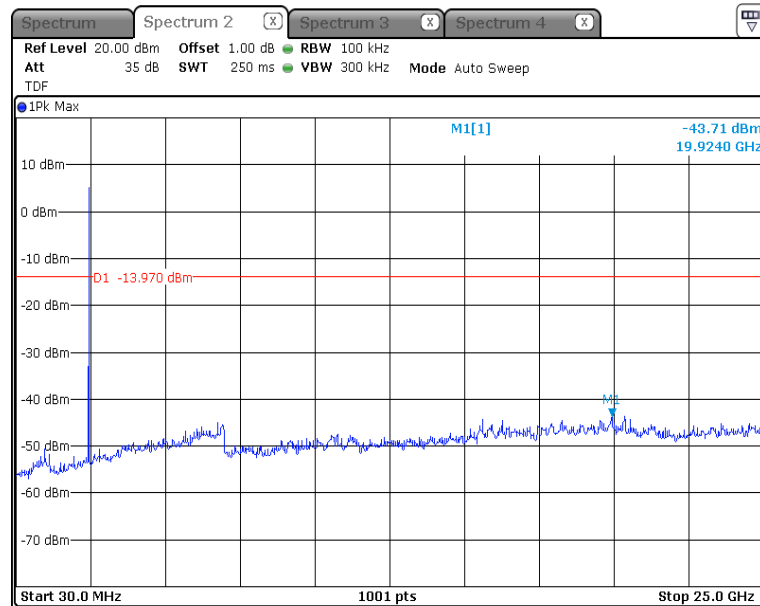


*** 802.11g_ANT 1**

Lowest Channel (2 412 MHz)


Reference

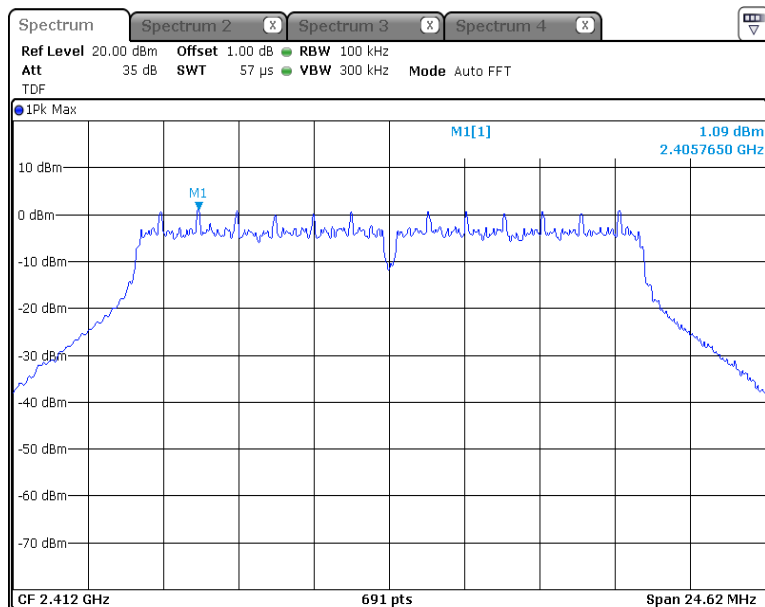

Band-edge

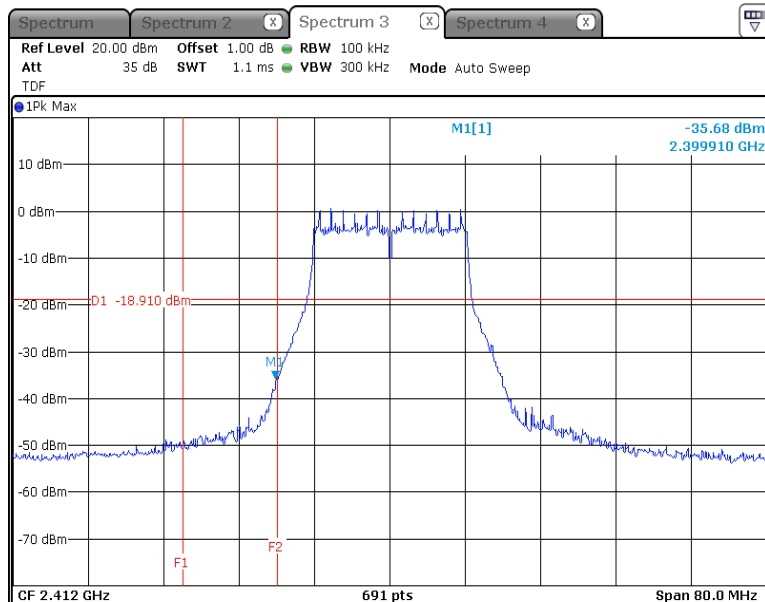


Conducted Spurious Emissions

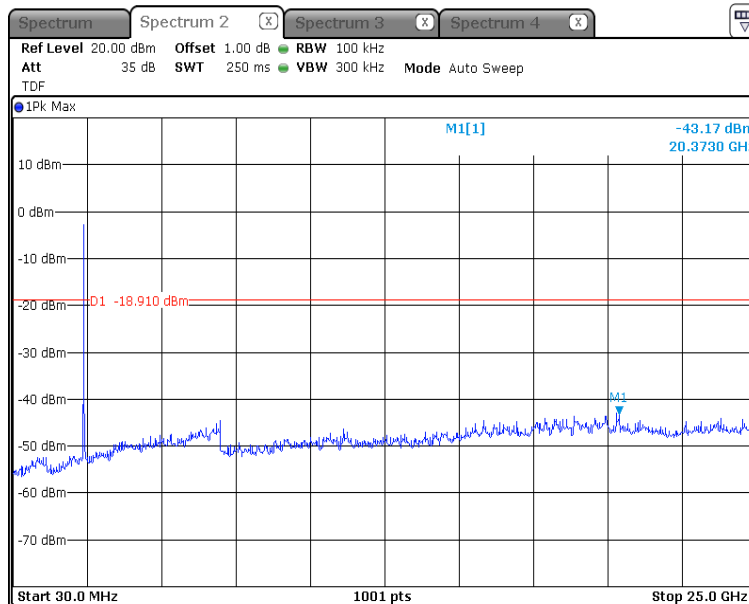


Middle Channel (2 437 MHz)

Reference

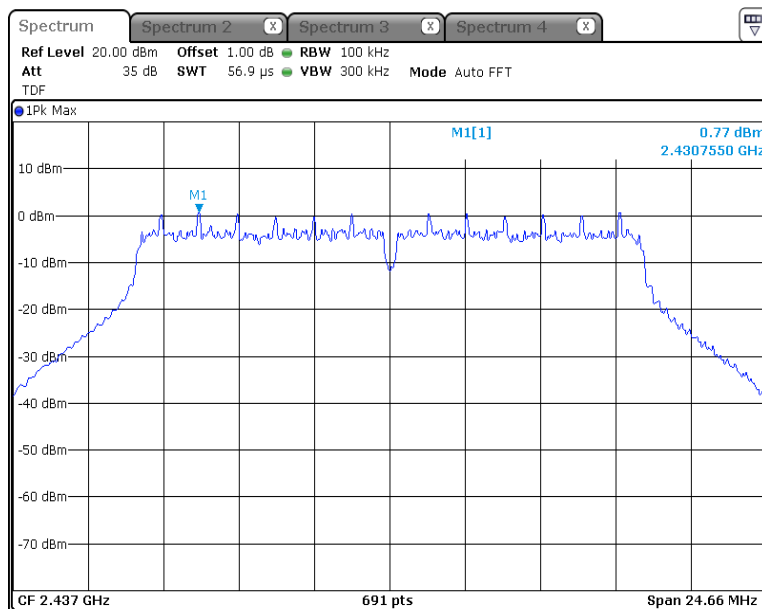


Conducted Spurious Emissions

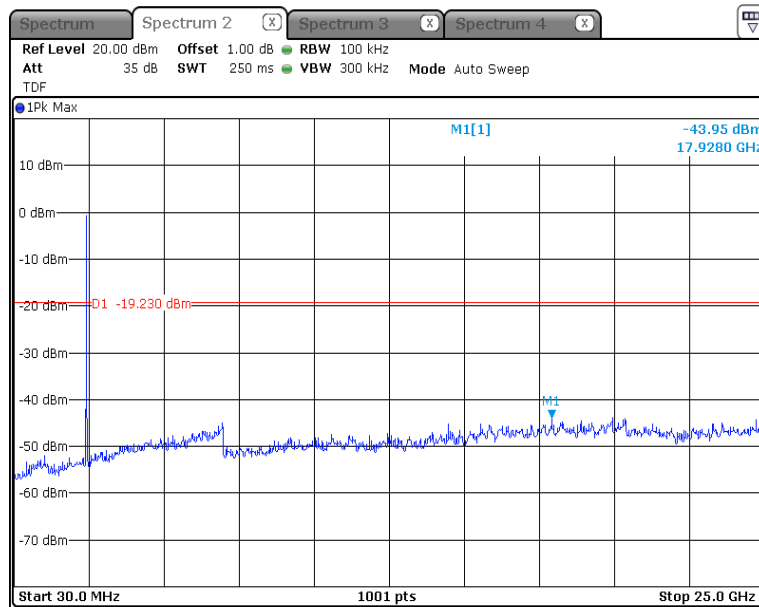


Highest Channel (2 462 MHz)


Reference

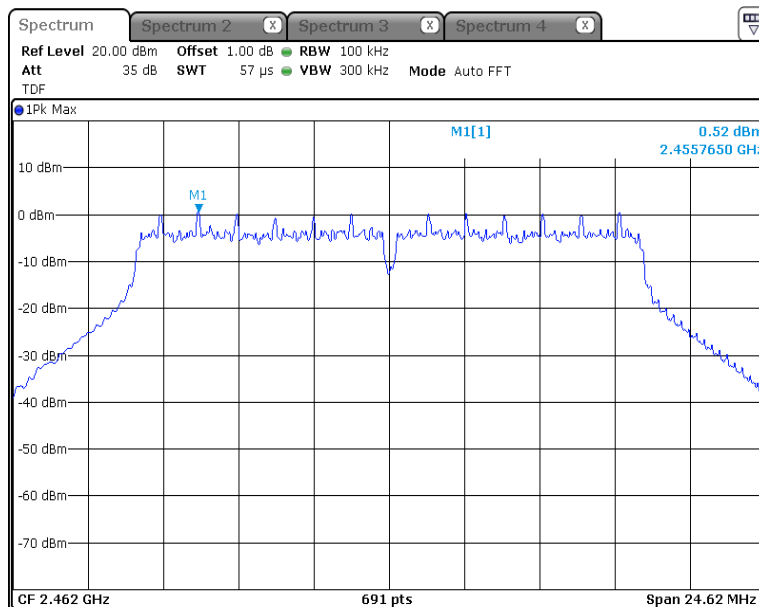

Band-edge

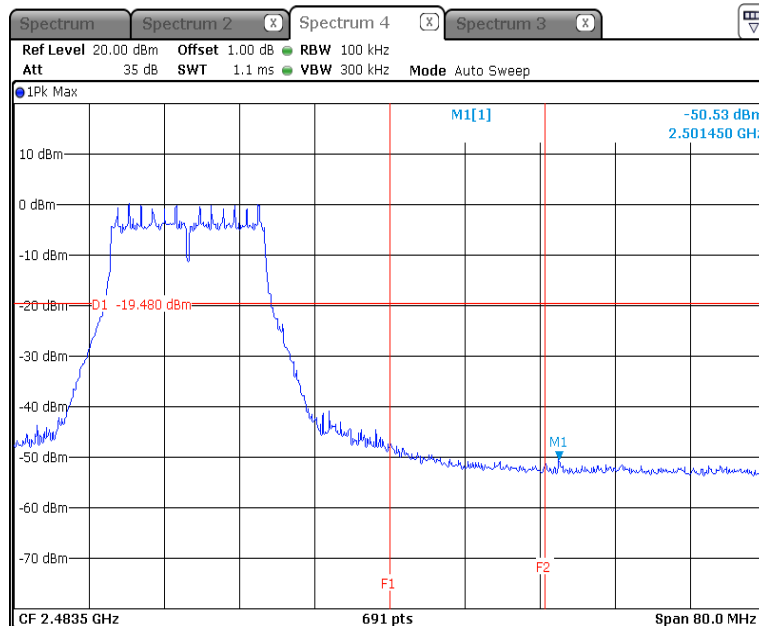


Conducted Spurious Emissions

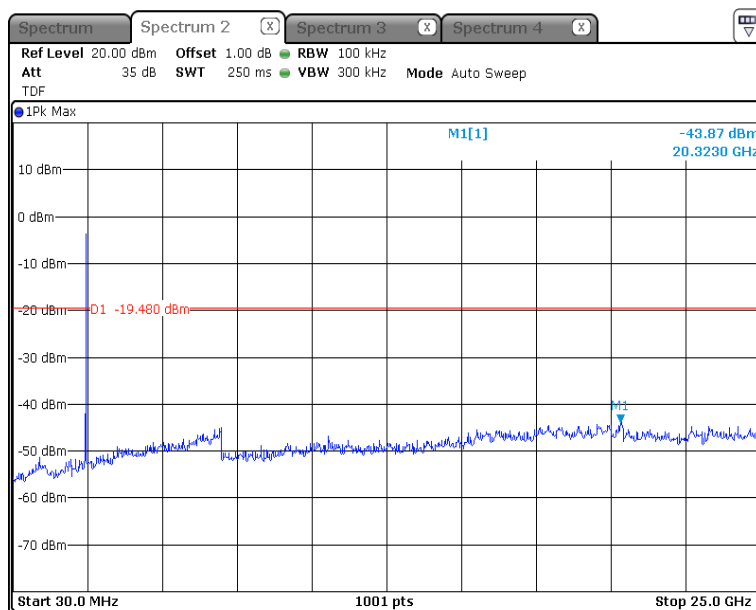


*** 802.11n HT20_ANT 1**

Lowest Channel (2 412 MHz)


Reference

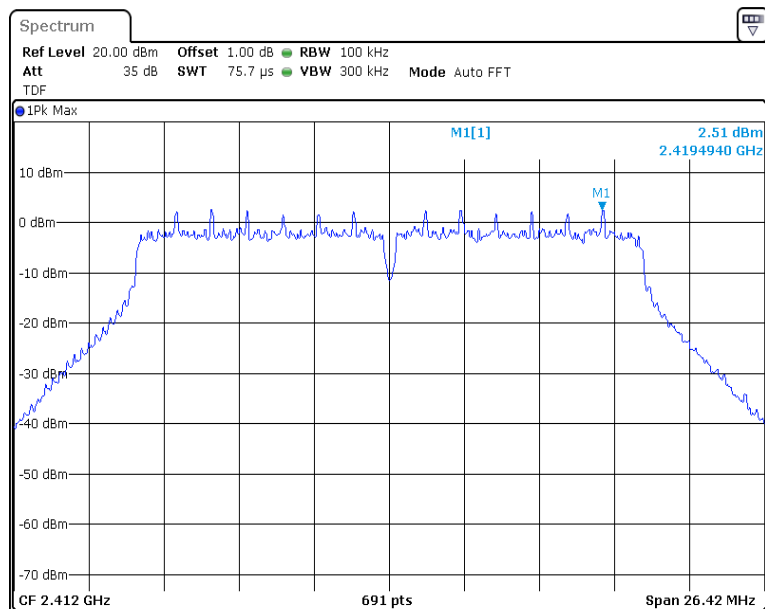

Band-edge

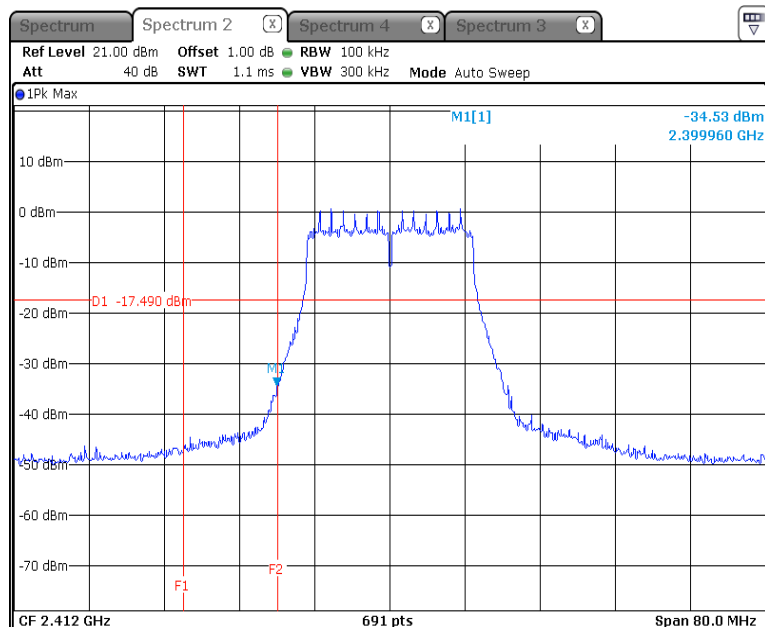


Conducted Spurious Emissions

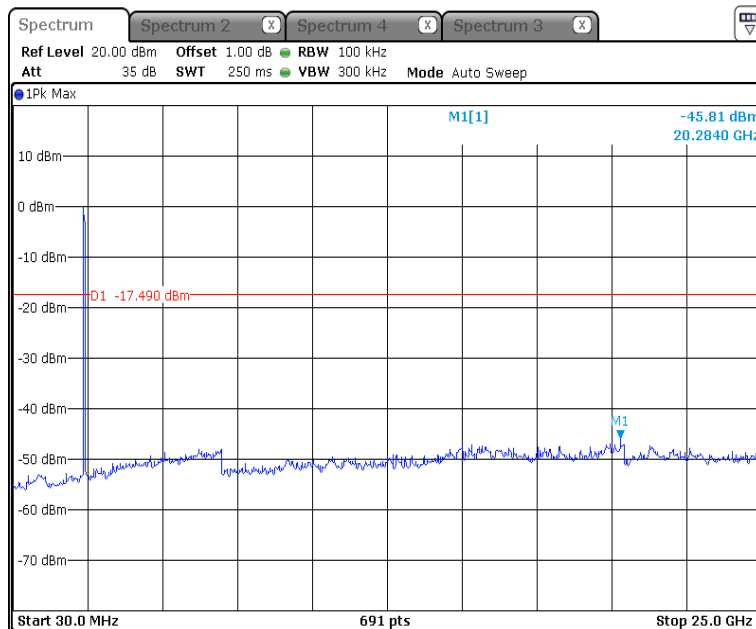


Middle Channel (2 437 MHz)

Reference

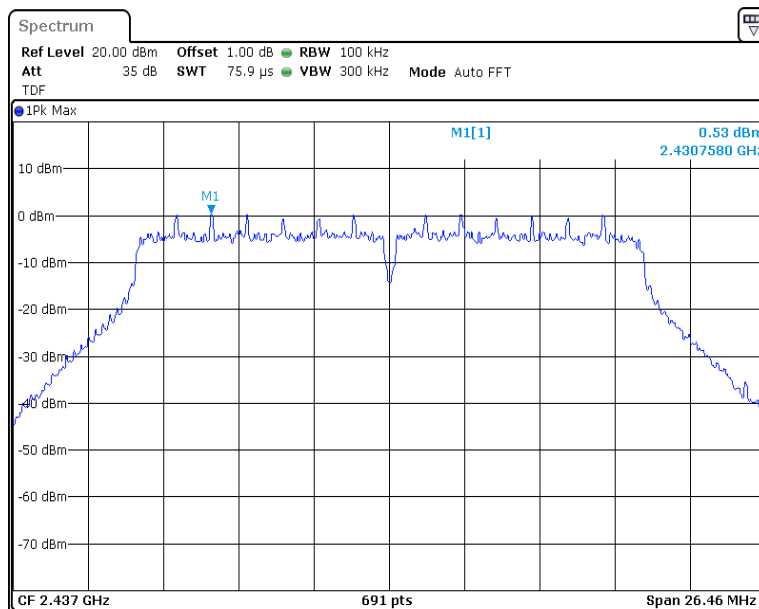


Conducted Spurious Emissions

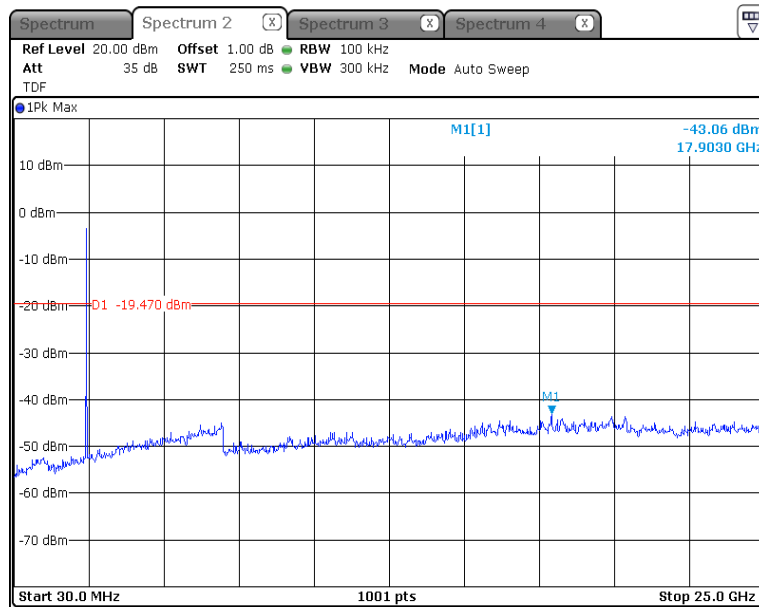


Highest Channel (2 462 MHz)


Reference

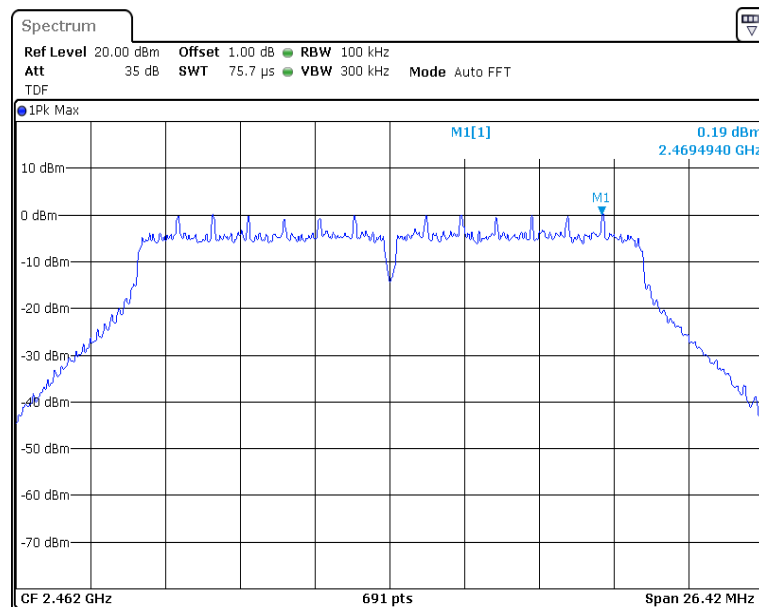

Band-edge

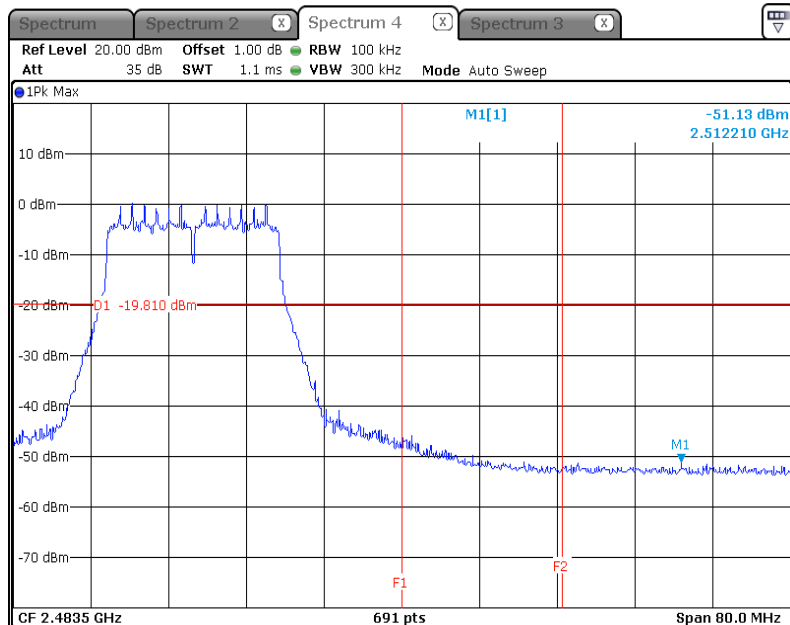


Conducted Spurious Emissions

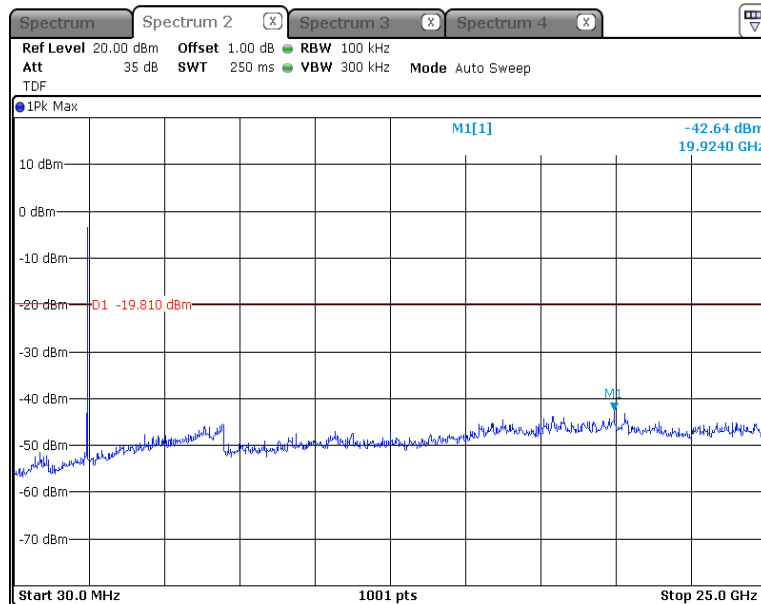


*** 802.11n HT40_ANT 1**

Lowest Channel (2 422 MHz)


Reference

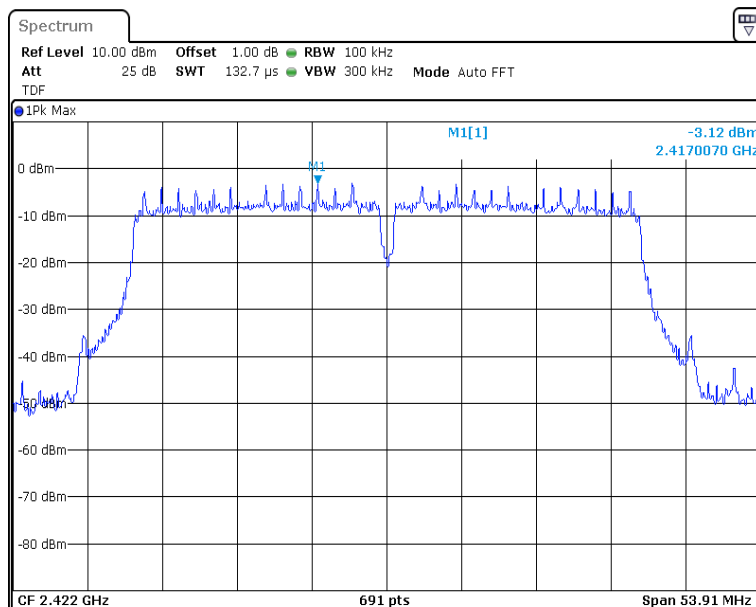

Band-edge

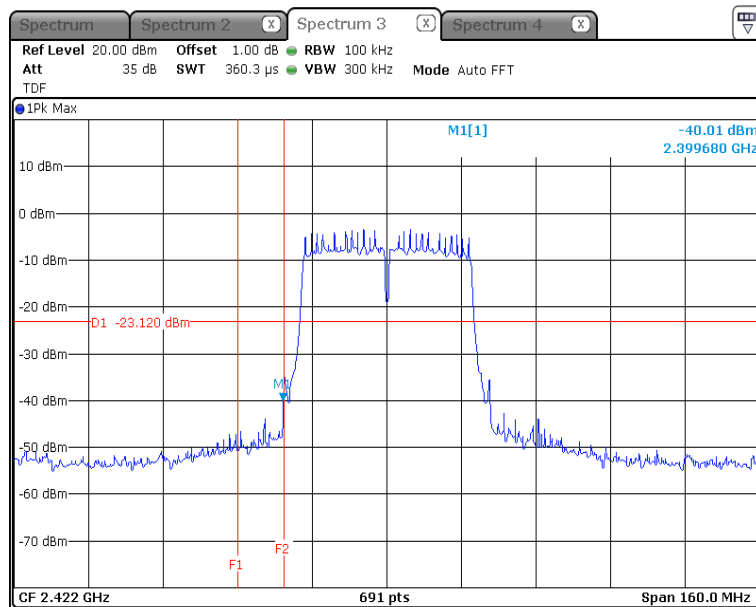


Conducted Spurious Emissions

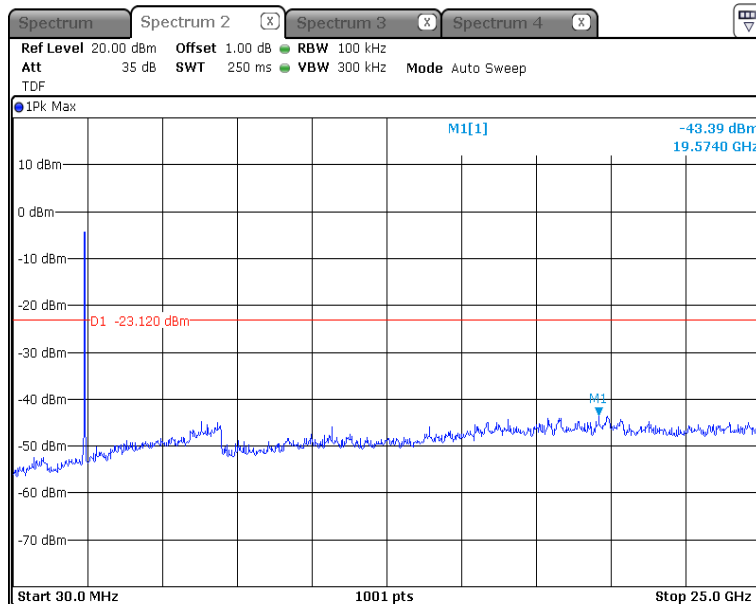


Middle Channel (2 437 MHz)

Reference

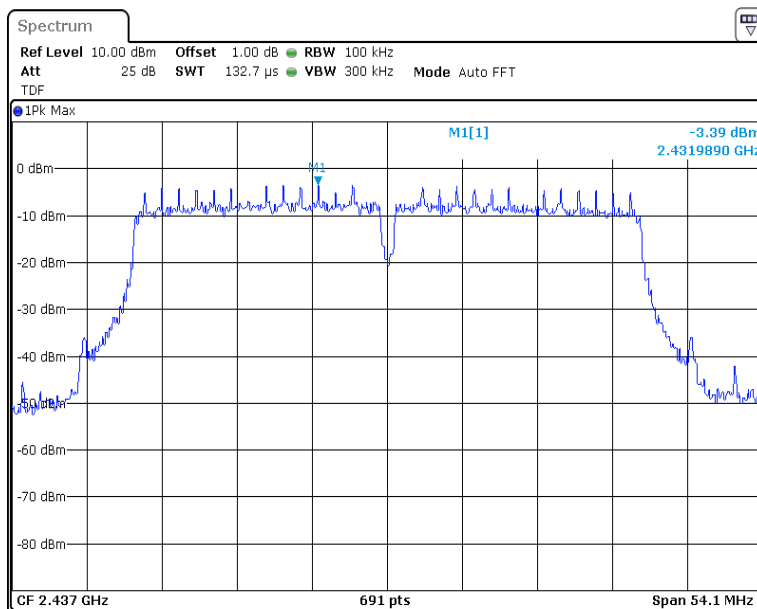


Conducted Spurious Emissions

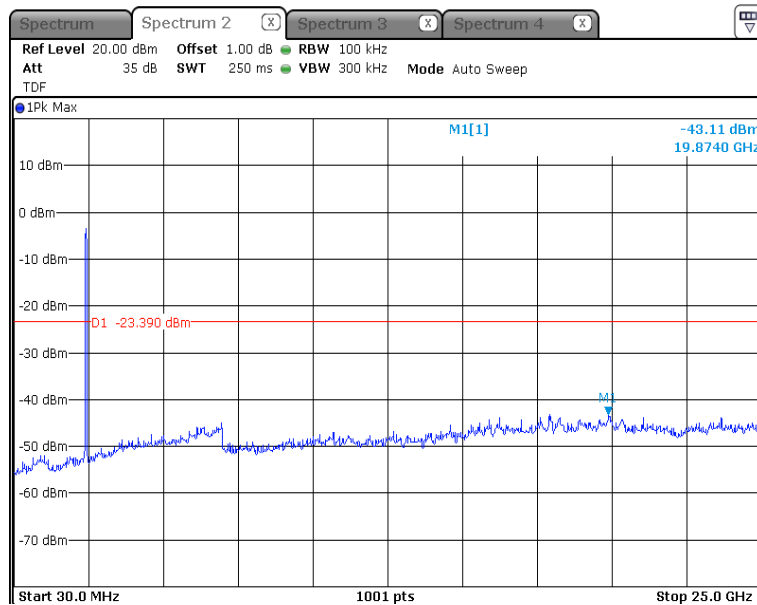


Highest Channel (2 452 MHz)


Reference

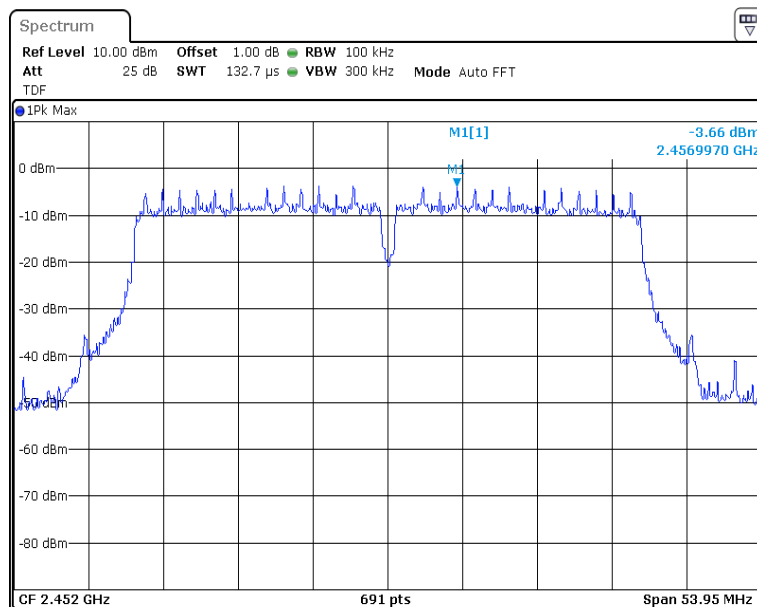

Band-edge

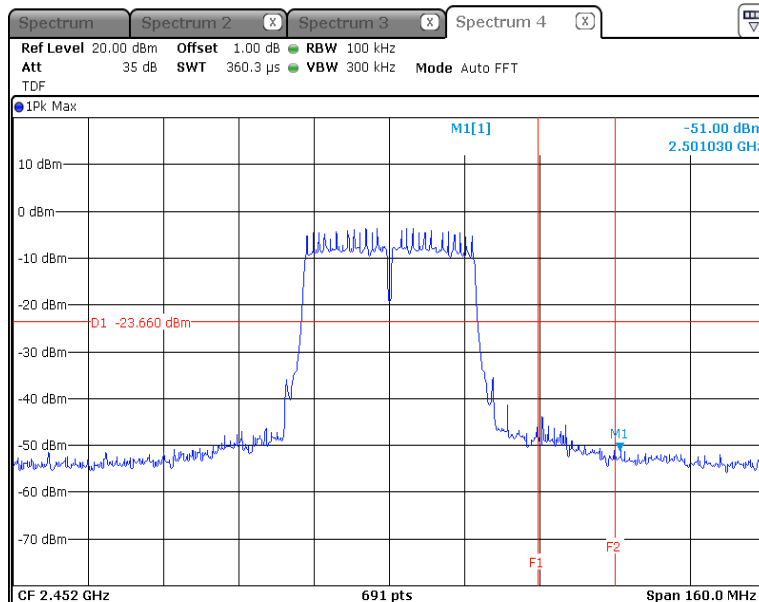


Conducted Spurious Emissions

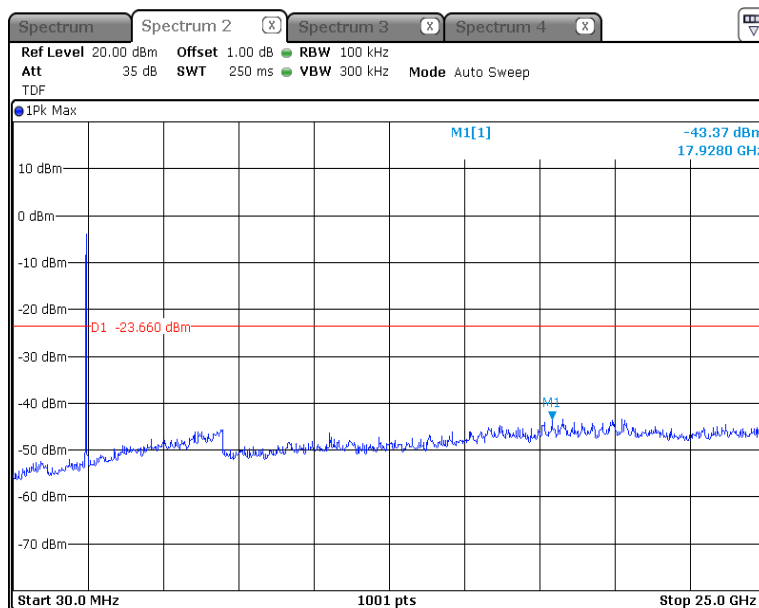


*** 802.11g_ANT 2**

Lowest Channel (2 412 MHz)


Reference

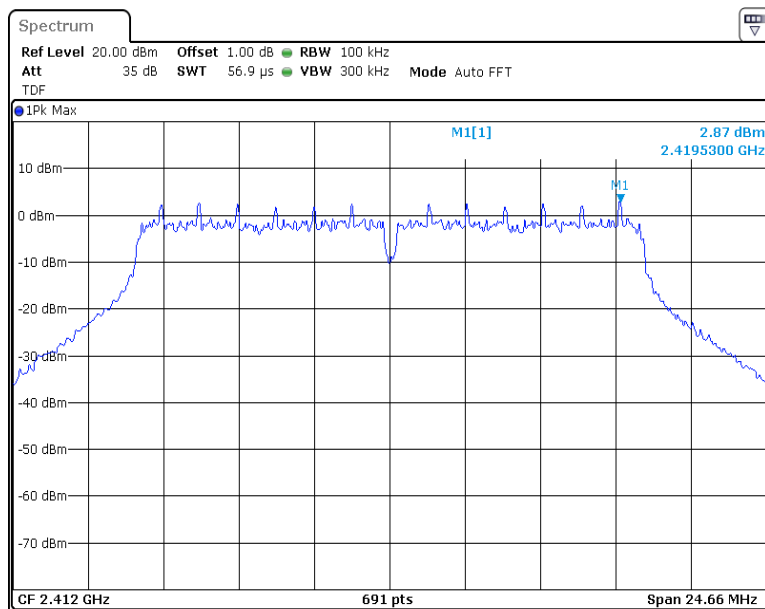

Band-edge

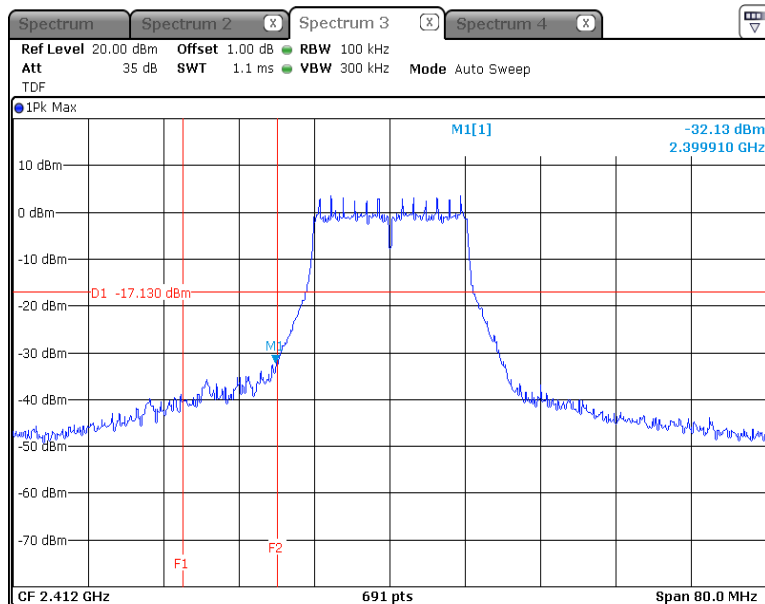


Conducted Spurious Emissions

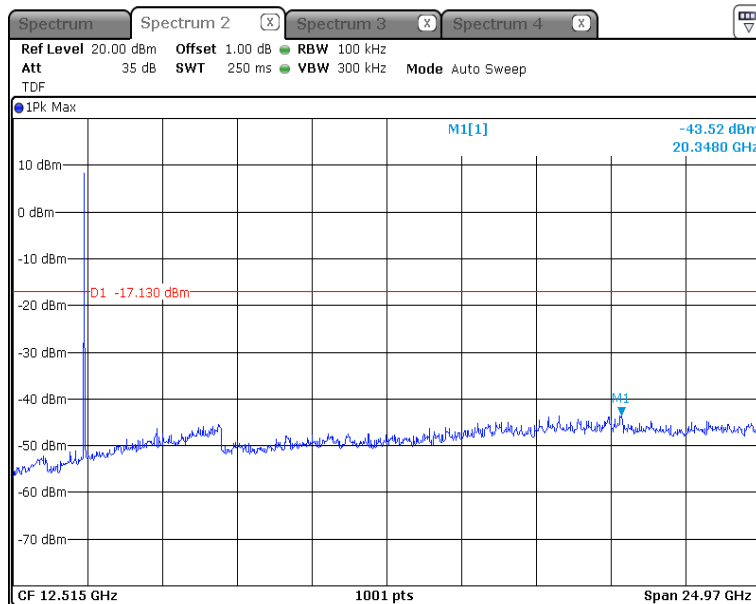


Middle Channel (2 437 MHz)

Reference

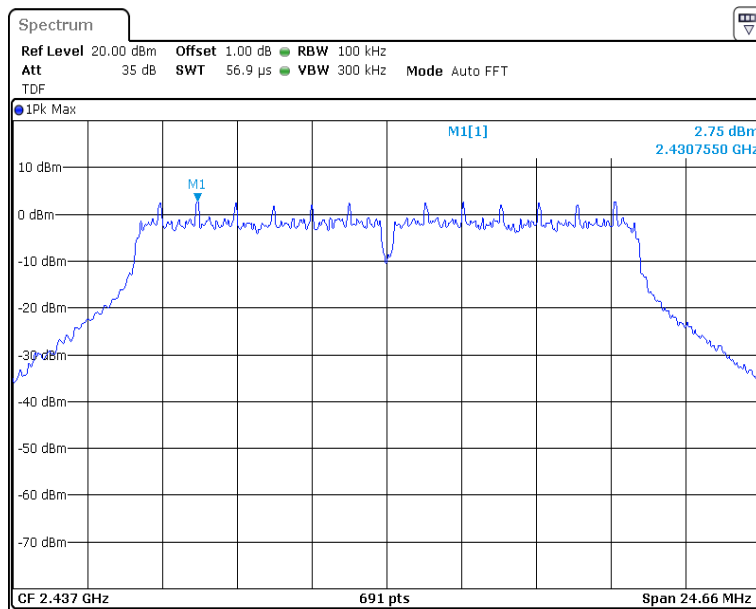


Conducted Spurious Emissions

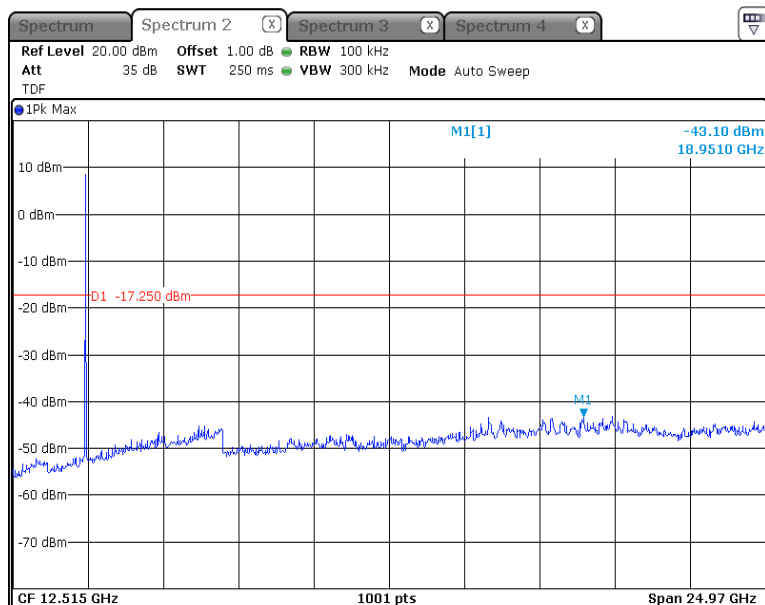


Highest Channel (2 462 MHz)


Reference

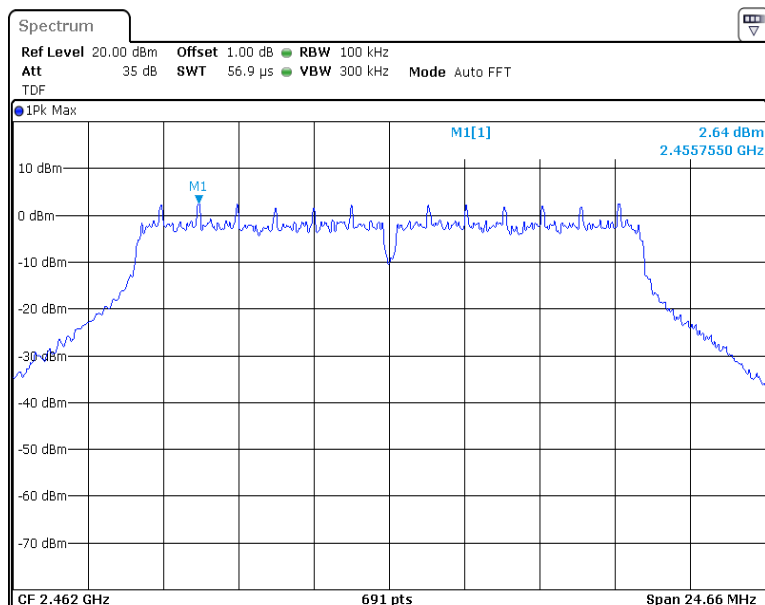

Band-edge

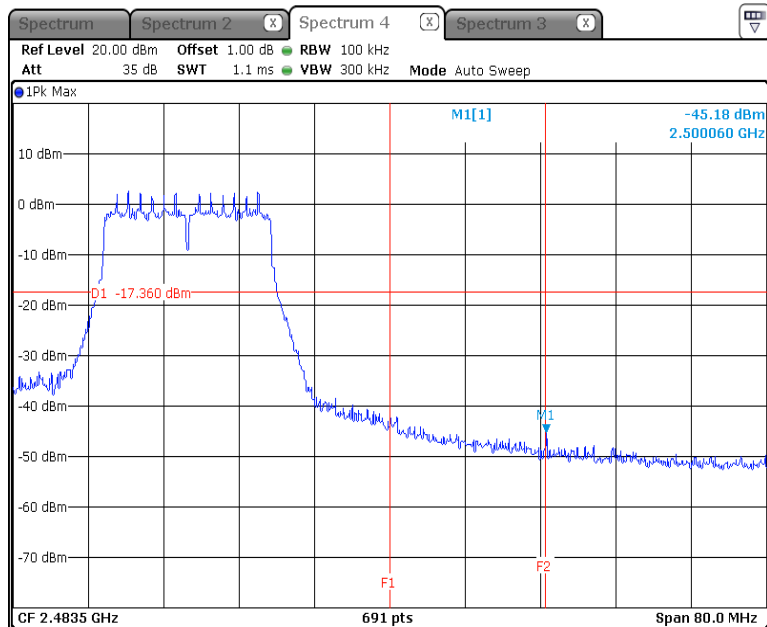


Conducted Spurious Emissions

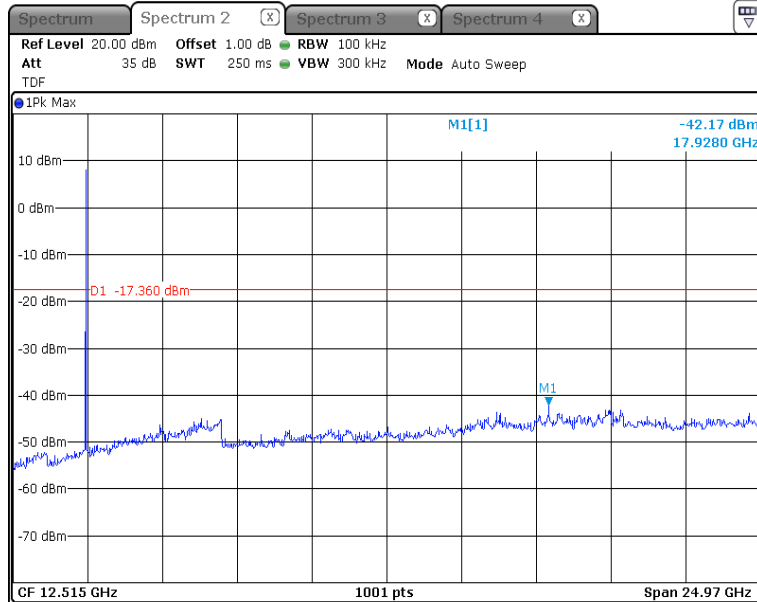


*** 802.11n HT20_ANT 2**

Lowest Channel (2 412 MHz)


Reference

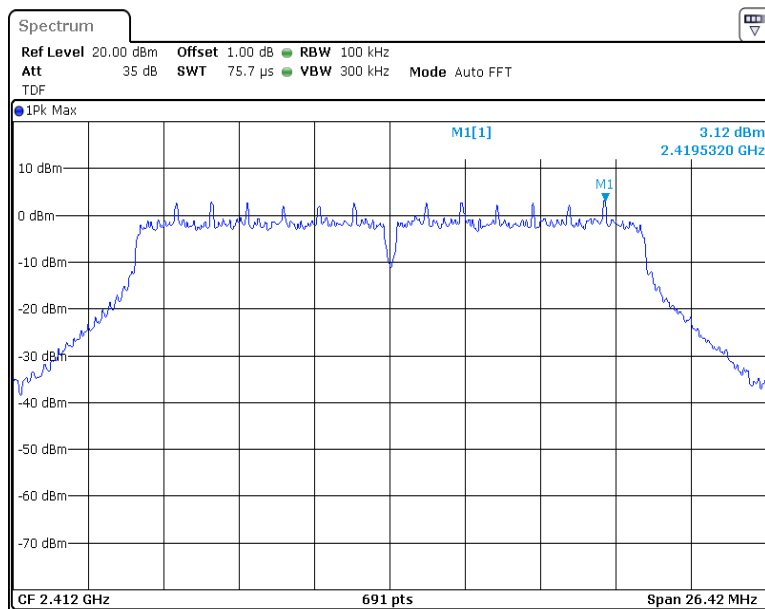

Band-edge

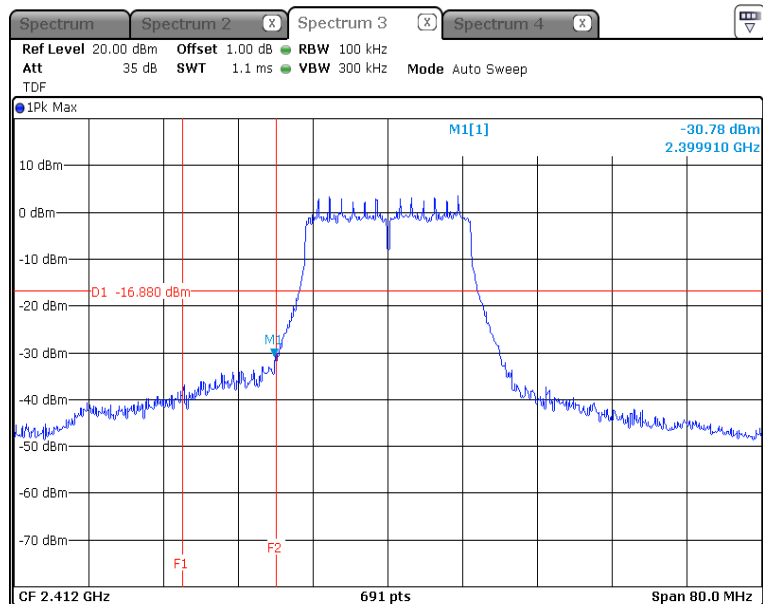


Conducted Spurious Emissions

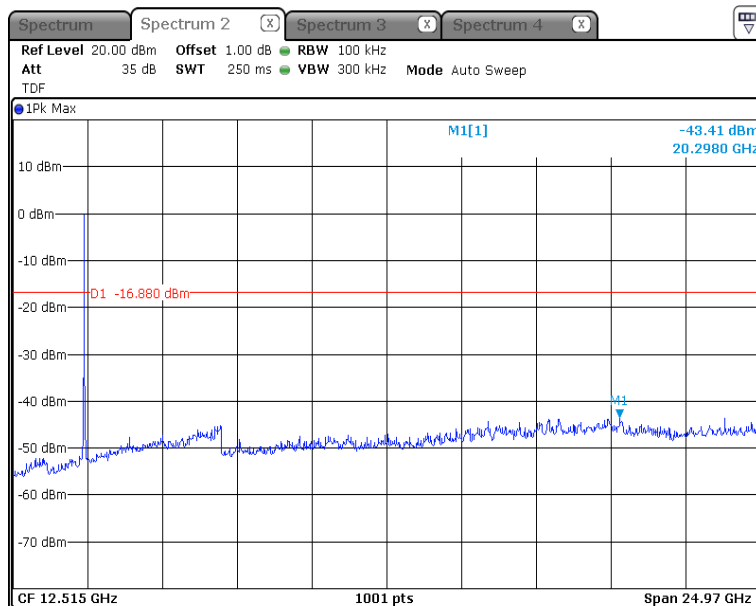


Middle Channel (2 437 MHz)

Reference

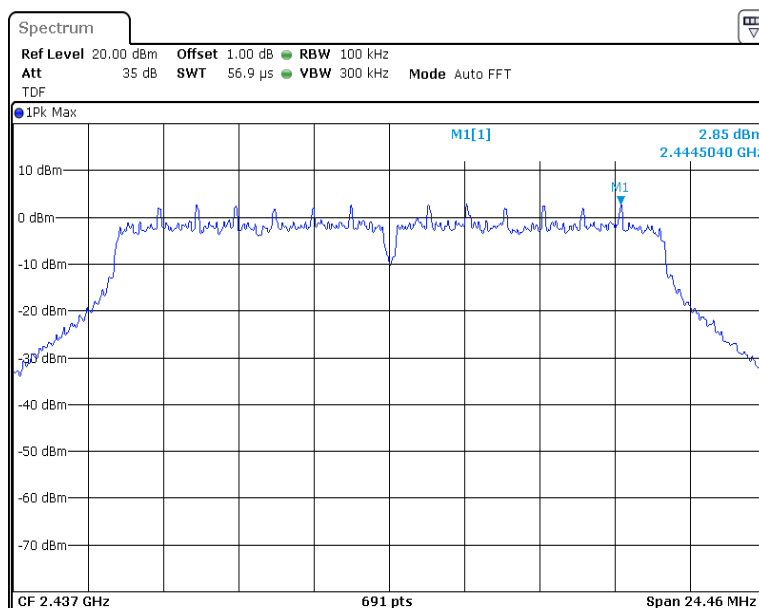


Conducted Spurious Emissions

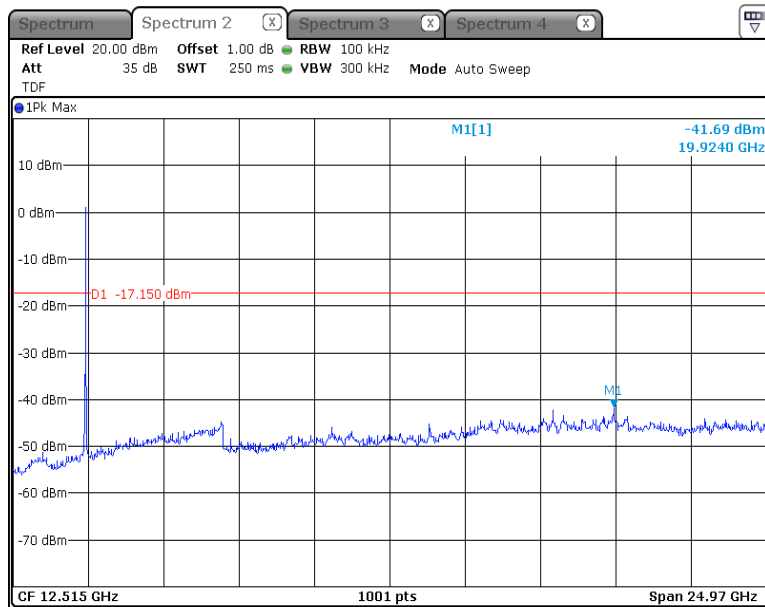


Highest Channel (2 462 MHz)


Reference

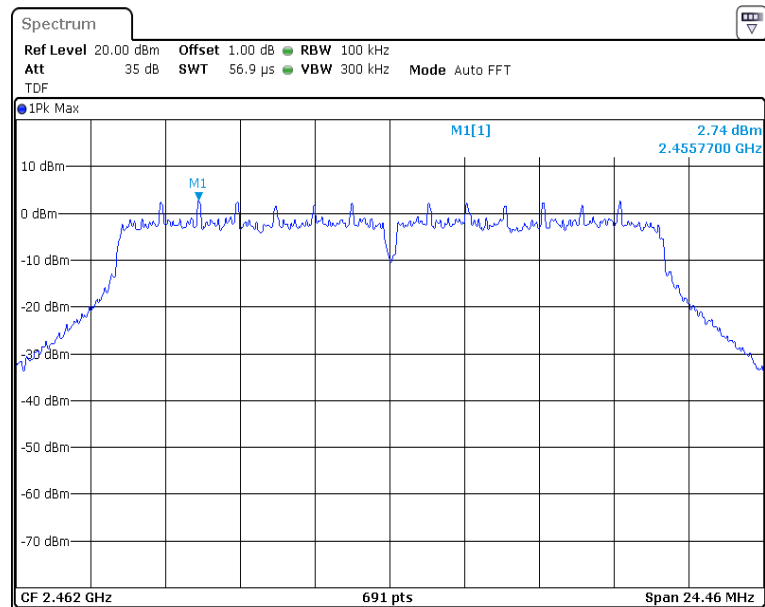

Band-edge

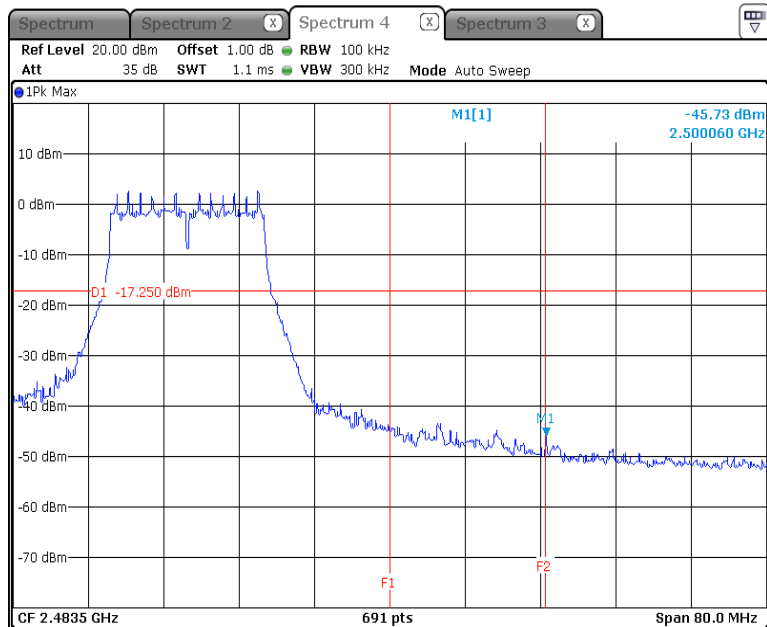


Conducted Spurious Emissions

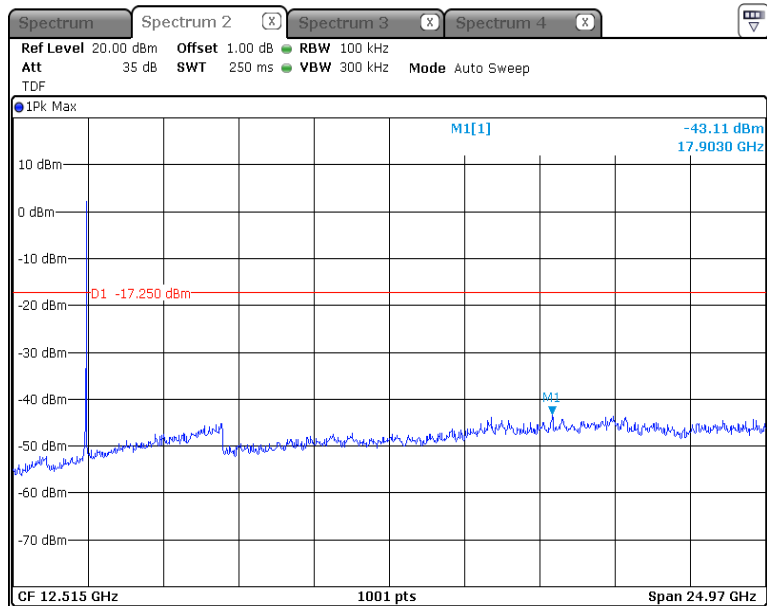


*** 802.11n HT40_ANT 2**

Lowest Channel (2 422 MHz)


Reference

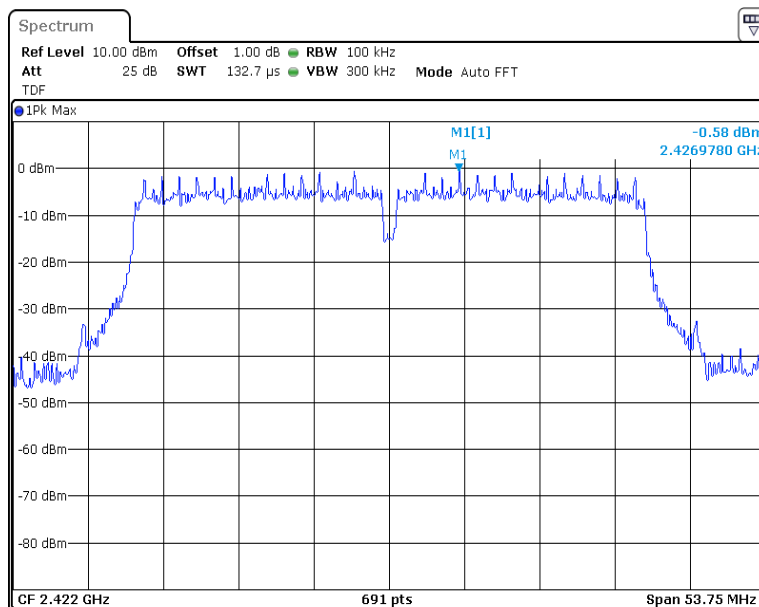

Band-edge

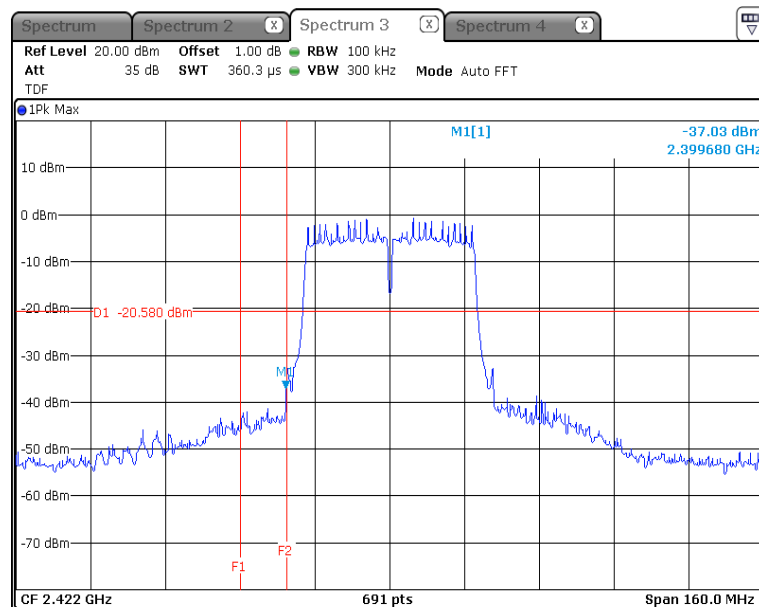


Conducted Spurious Emissions

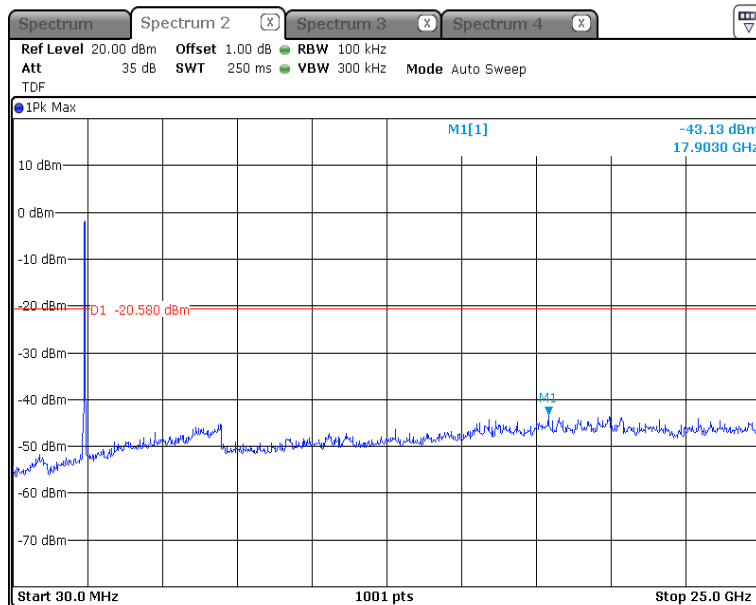


Middle Channel (2 437 MHz)

Reference

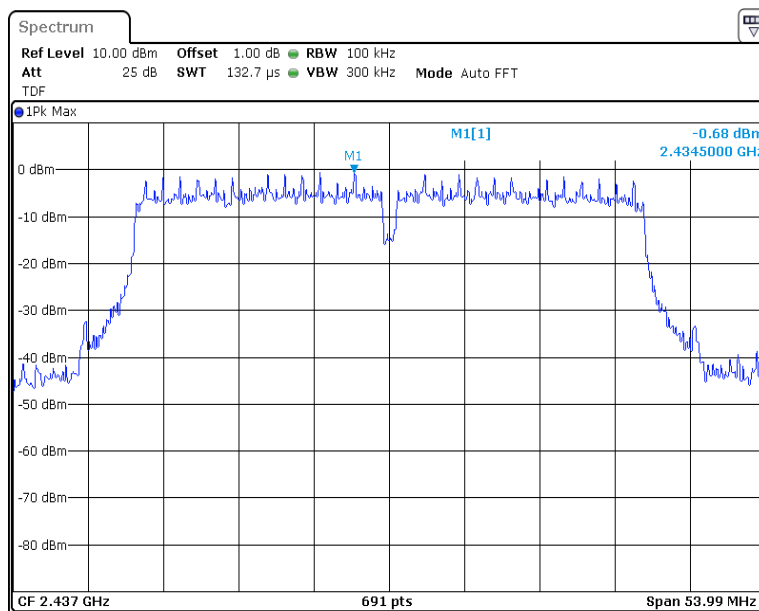


Conducted Spurious Emissions

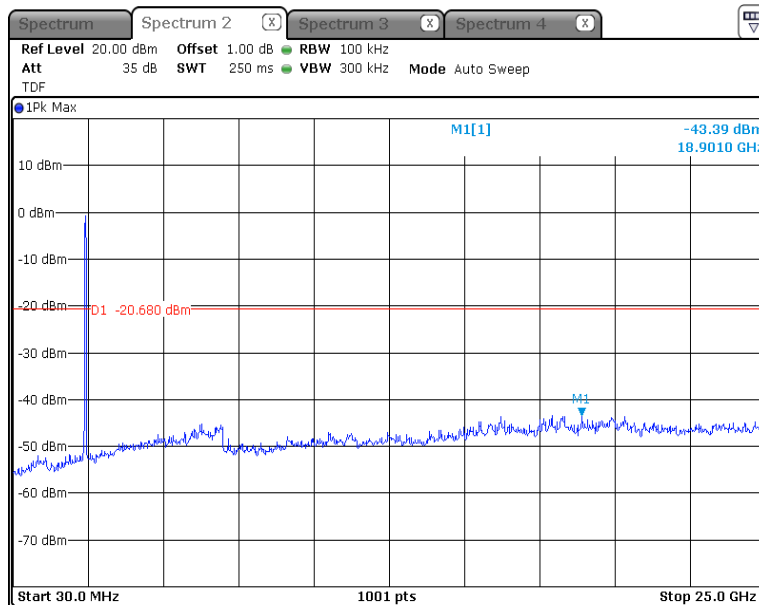


Highest Channel (2 452 MHz)


Reference

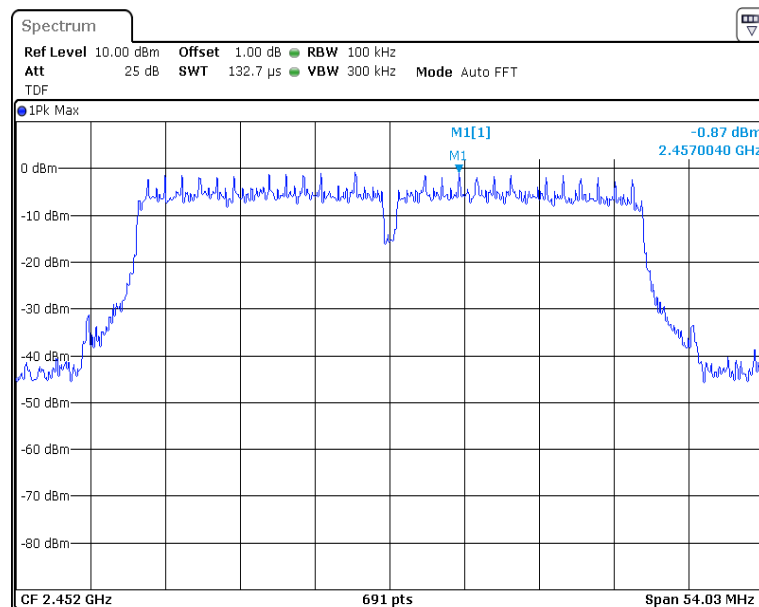

Band-edge

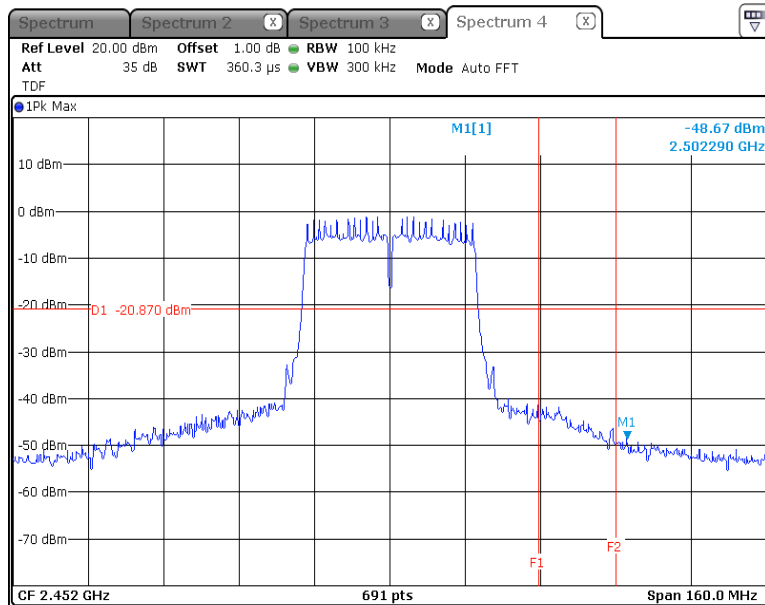


Conducted Spurious Emissions

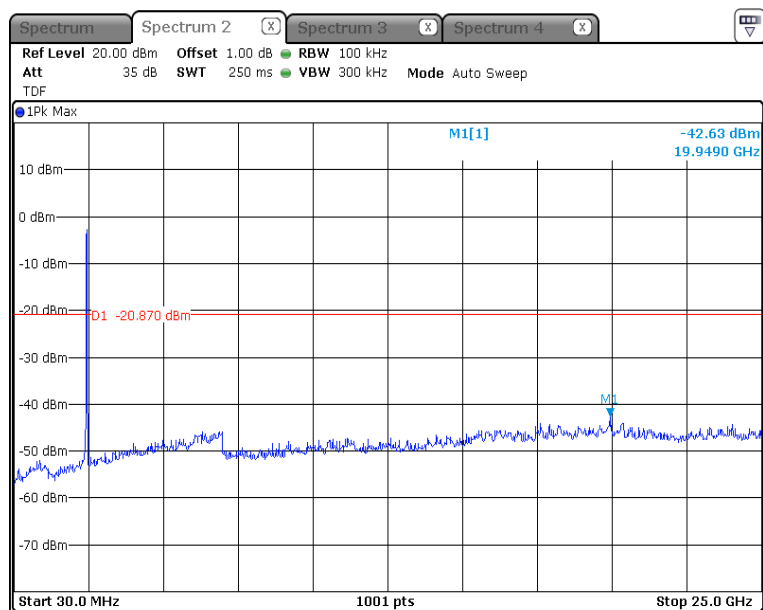


*** 802.11g_MIMO (ANT 1)**

Lowest Channel (2 412 MHz)


Reference

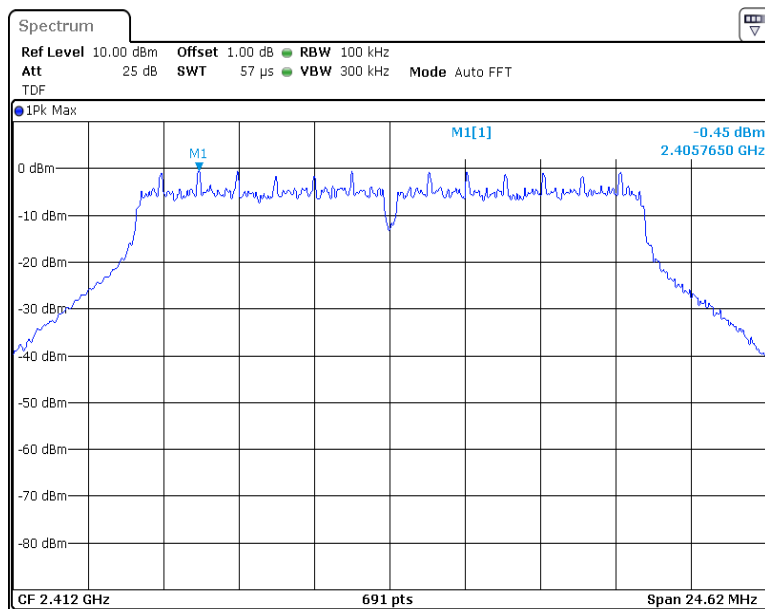

Band-edge

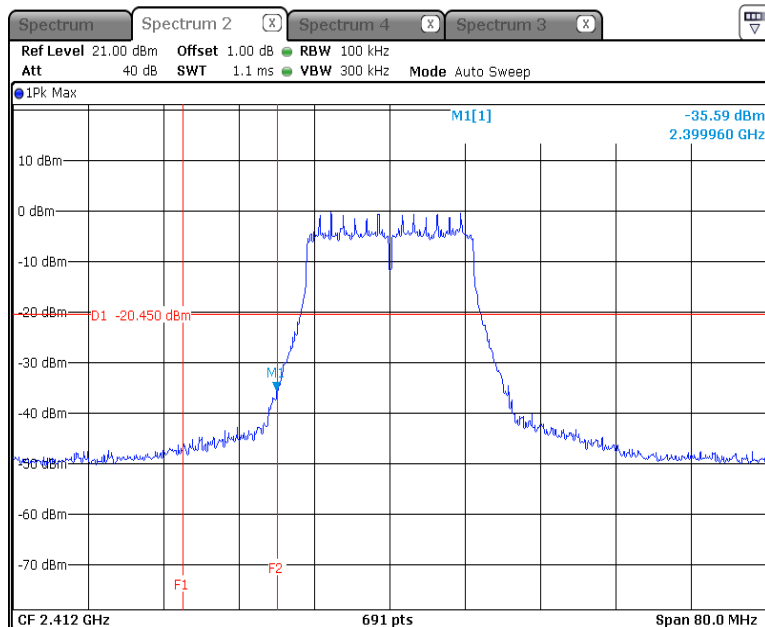


Conducted Spurious Emissions

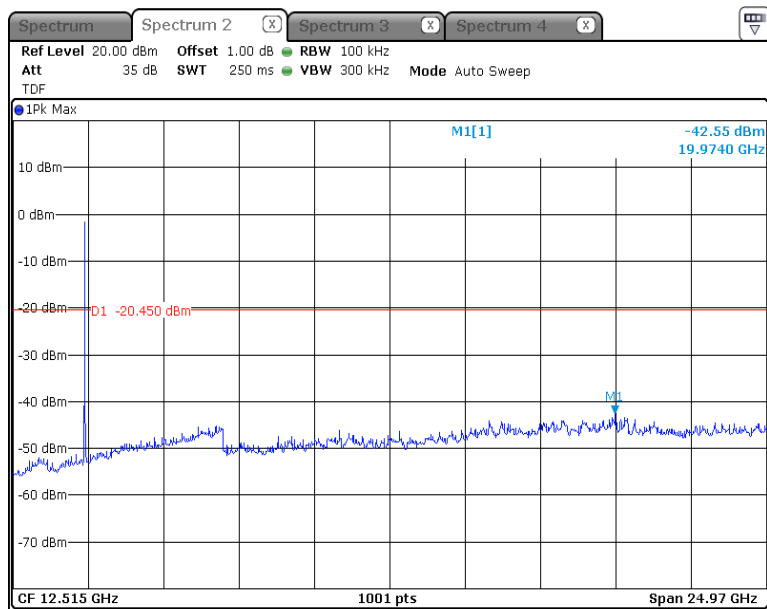


Middle Channel (2 437 MHz)

Reference

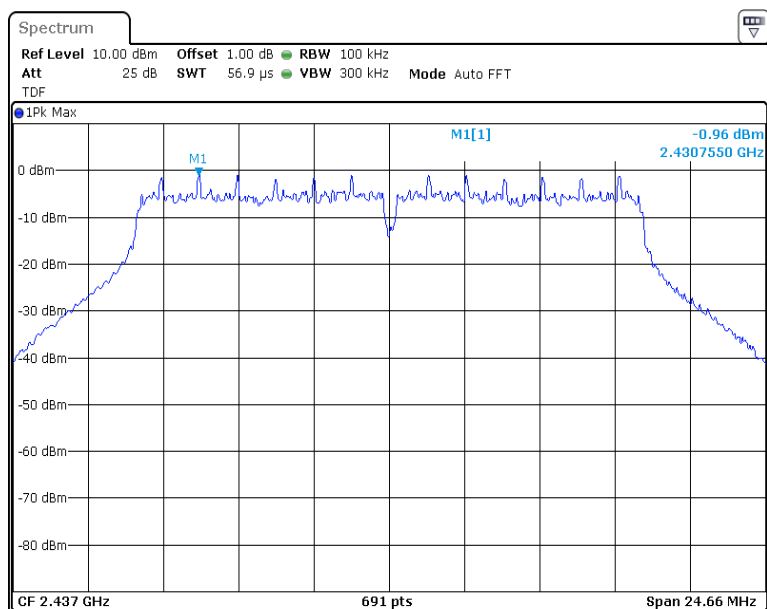


Conducted Spurious Emissions

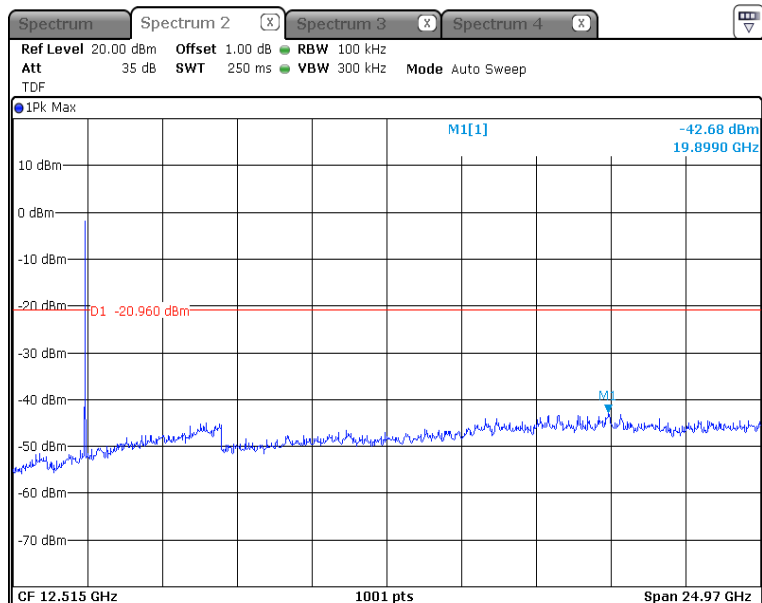


Highest Channel (2 462 MHz)


Reference

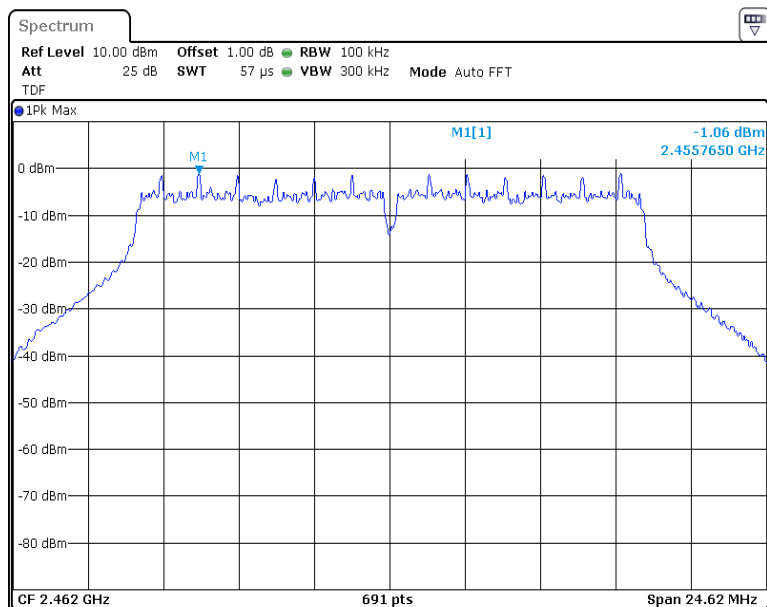

Band-edge

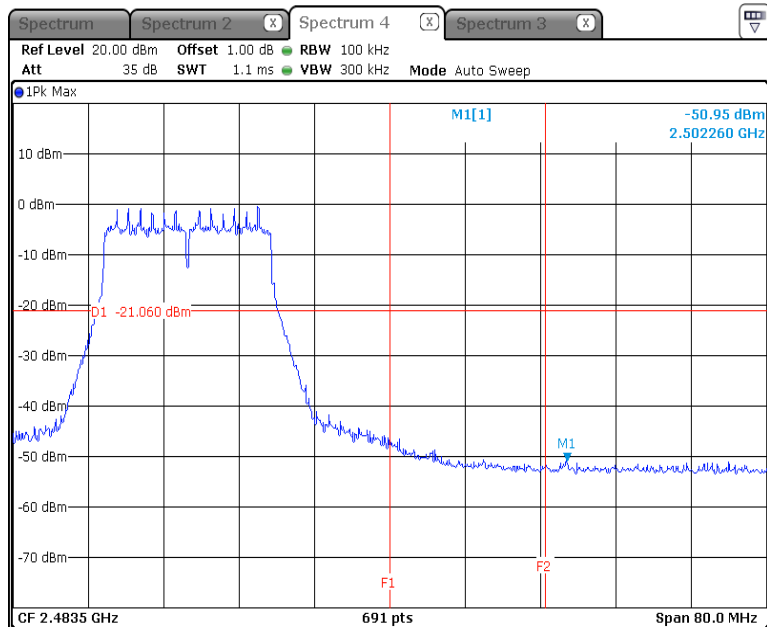


Conducted Spurious Emissions

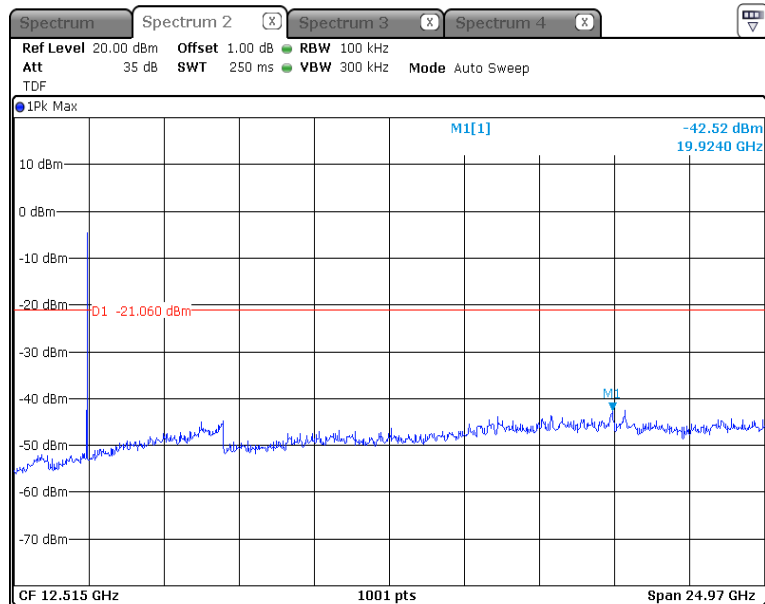


*** 802.11n HT20_MIMO (ANT 1)**

Lowest Channel (2 412 MHz)


Reference

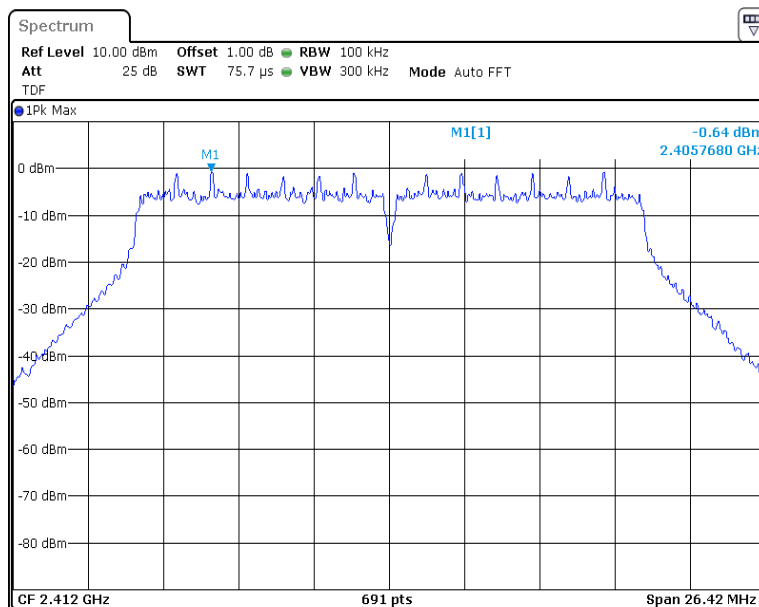

Band-edge

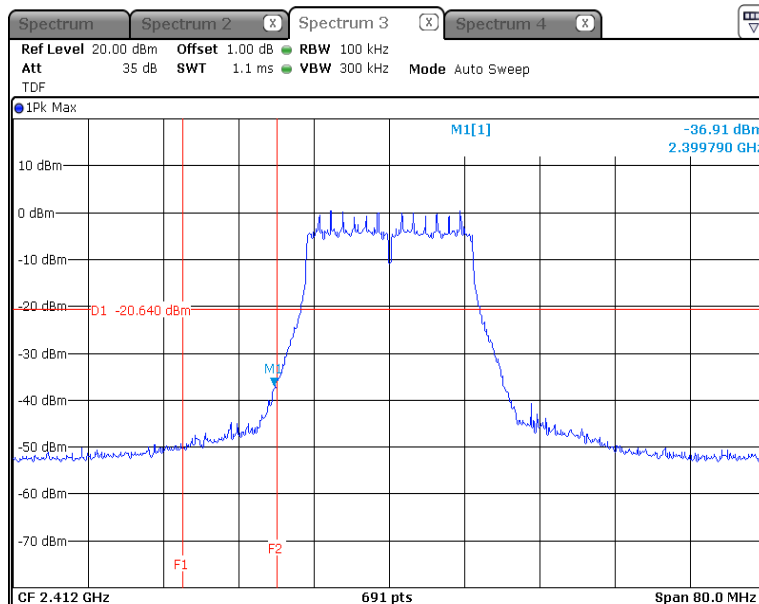


Conducted Spurious Emissions

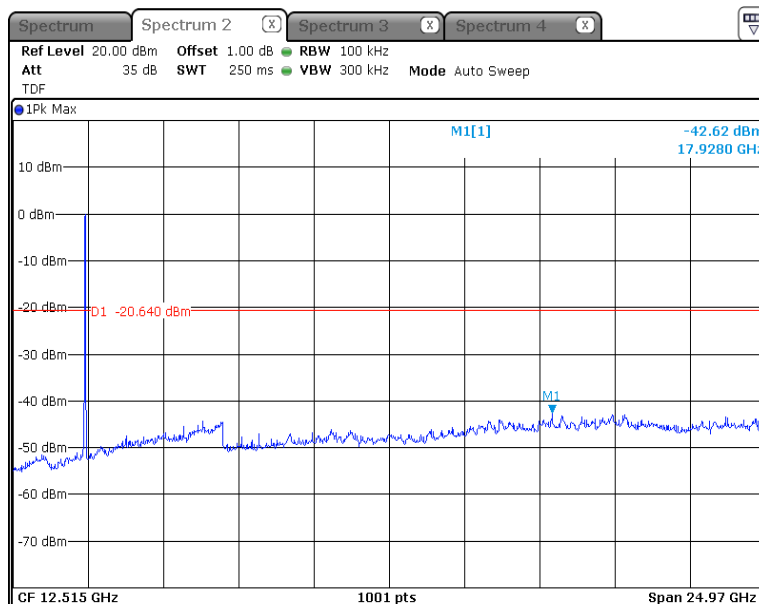


Middle Channel (2 437 MHz)

Reference

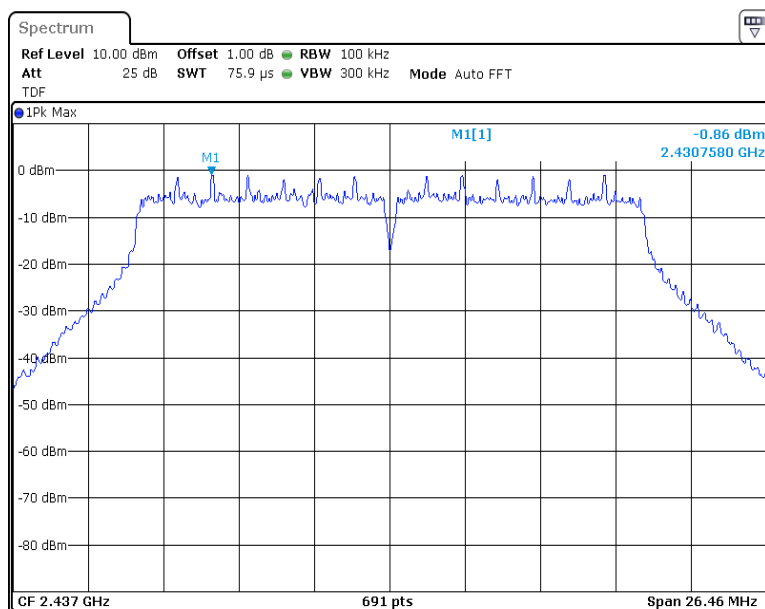


Conducted Spurious Emissions

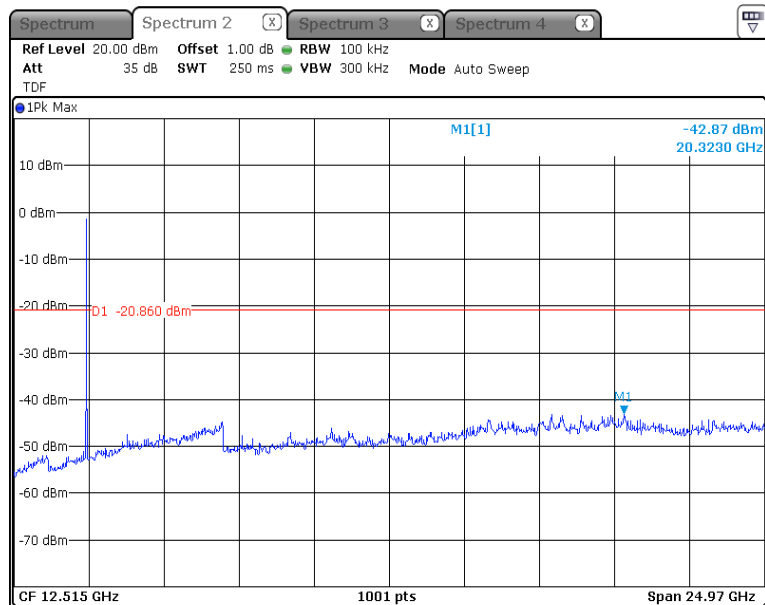


Highest Channel (2 462 MHz)


Reference

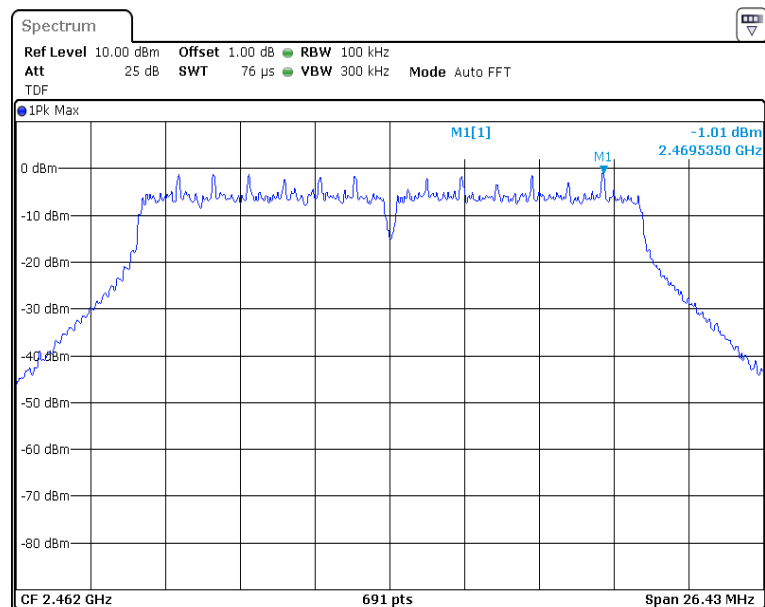

Band-edge

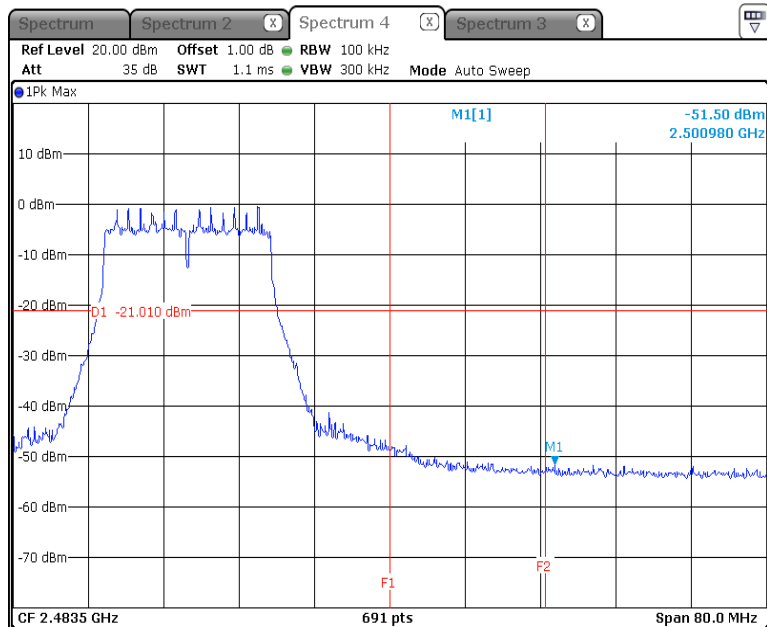


Conducted Spurious Emissions

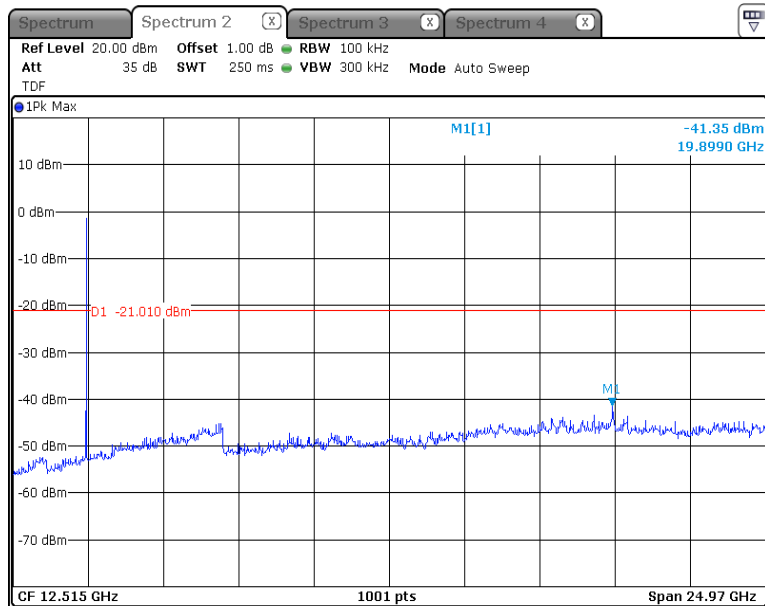


*** 802.11n HT40_MIMO (ANT 1)**

Lowest Channel (2 422 MHz)


Reference

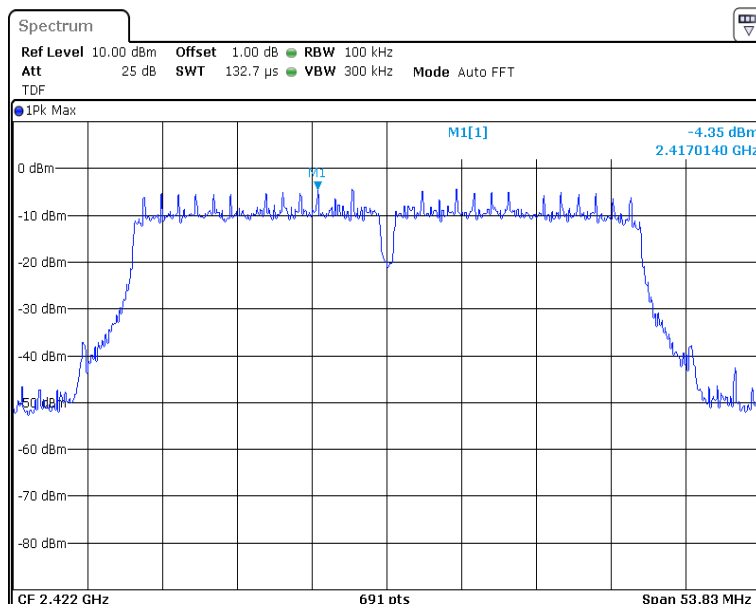

Band-edge

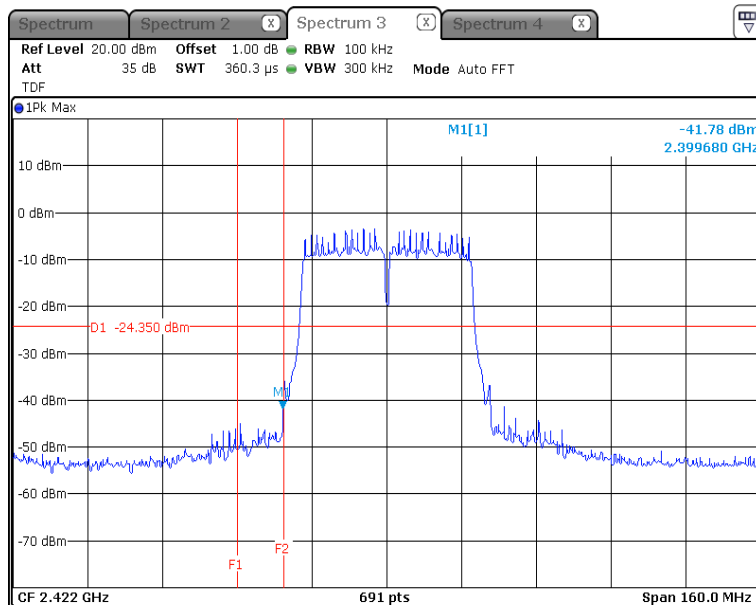


Conducted Spurious Emissions

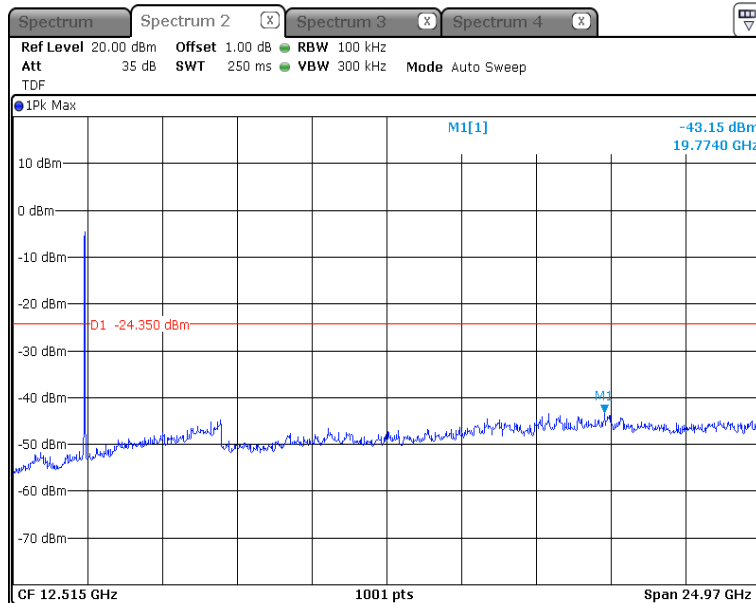


Middle Channel (2 437 MHz)

Reference

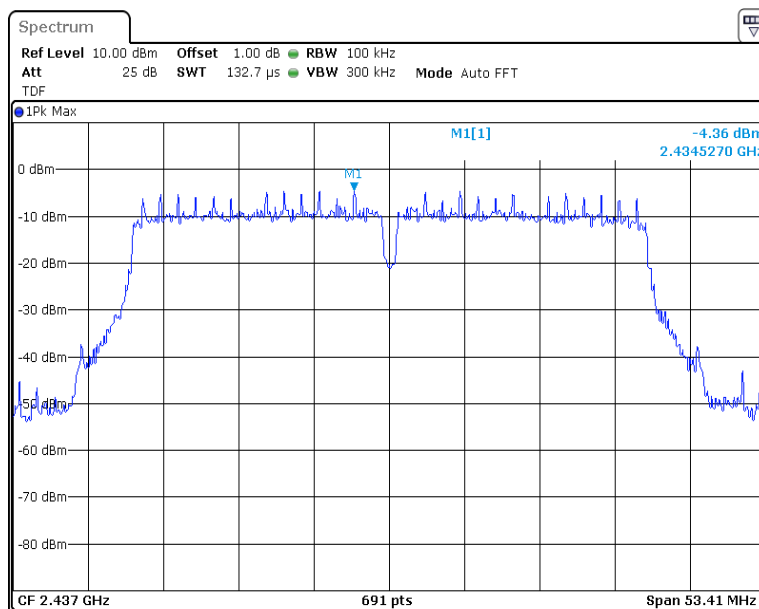


Conducted Spurious Emissions

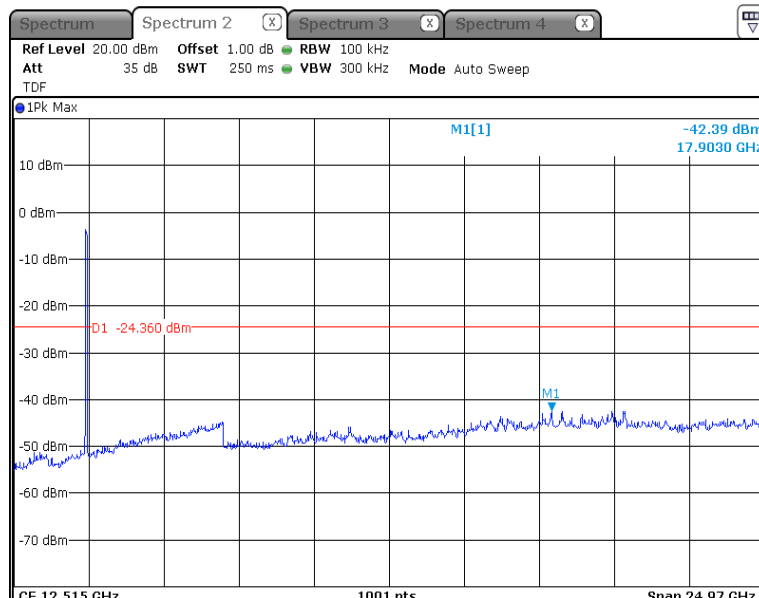


Highest Channel (2 452 MHz)


Reference

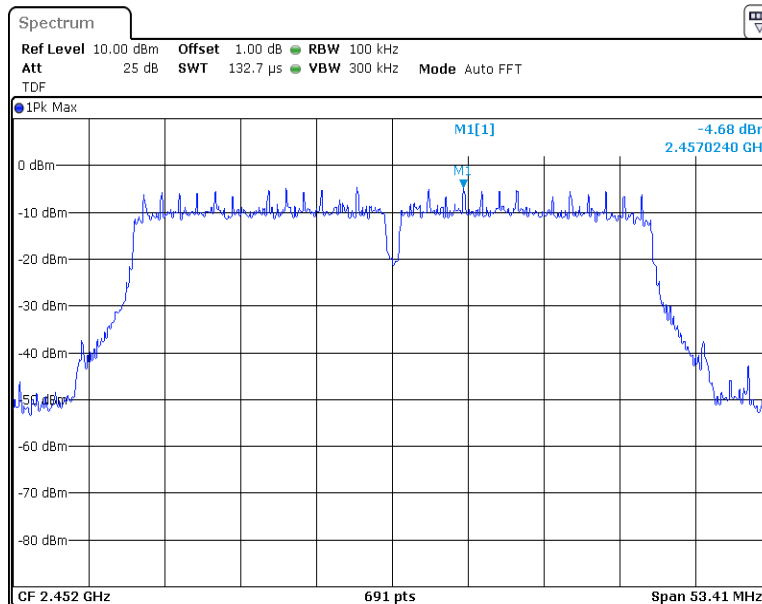

Band-edge

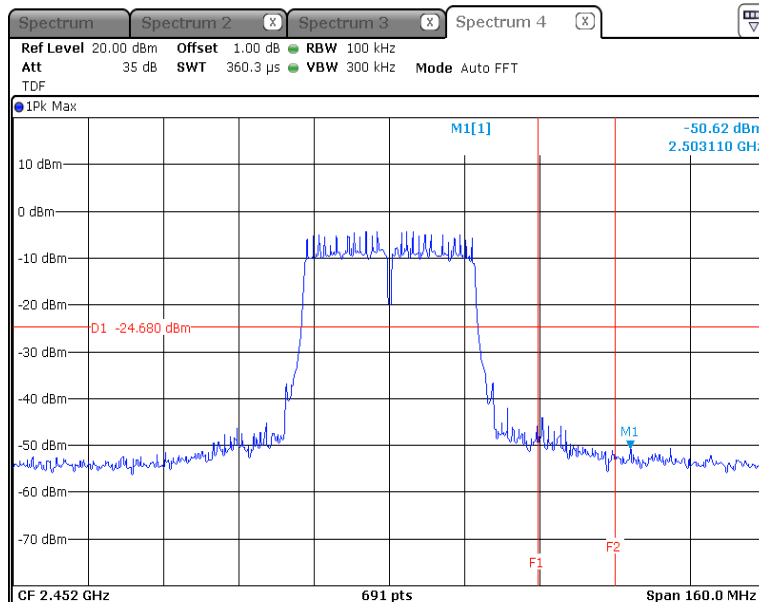


Conducted Spurious Emissions

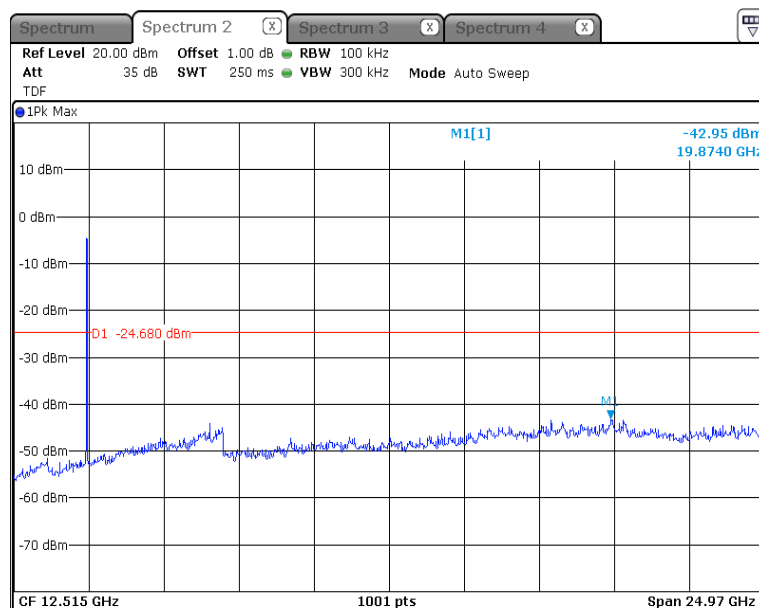


*** 802.11g_MIMO (ANT 2)**

Lowest Channel (2 412 MHz)


Reference

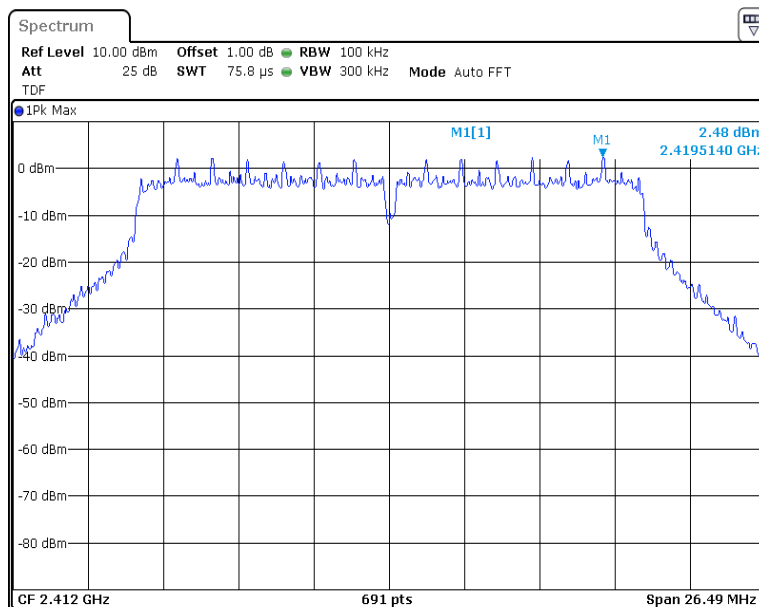

Band-edge

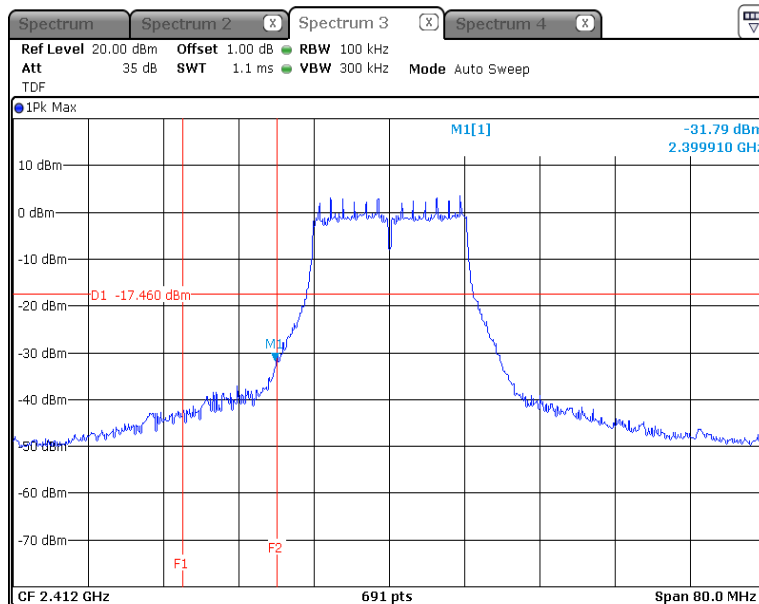


Conducted Spurious Emissions

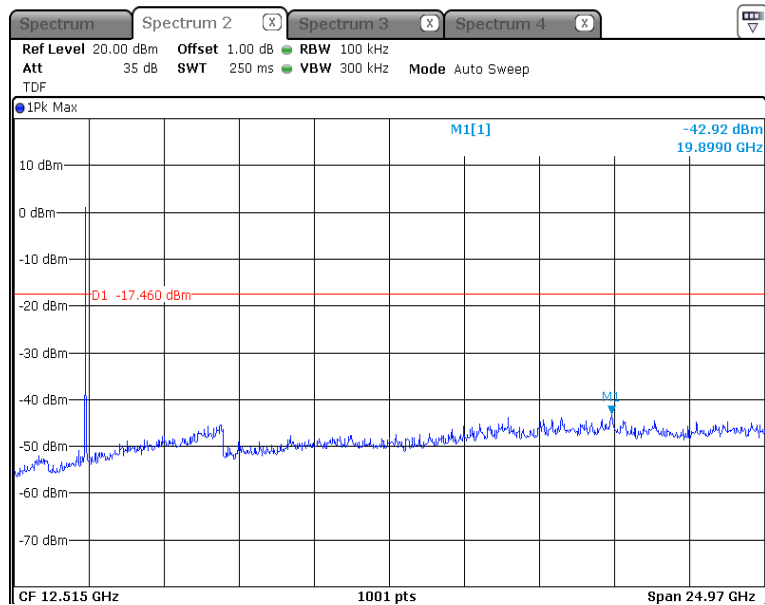


Middle Channel (2 437 MHz)

Reference

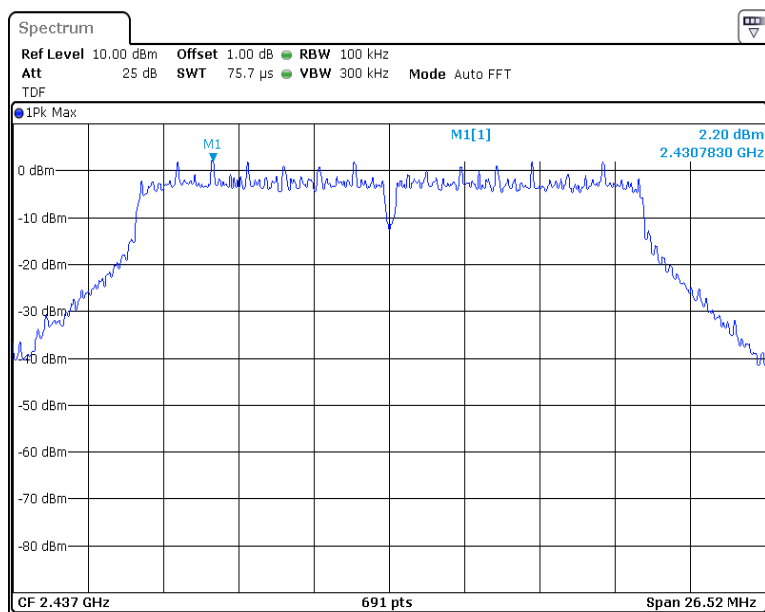


Conducted Spurious Emissions

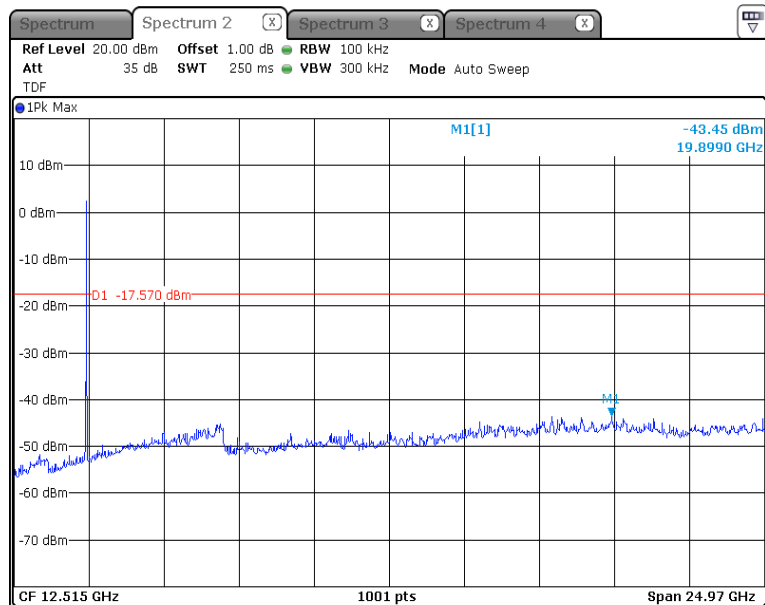


Highest Channel (2 462 MHz)


Reference

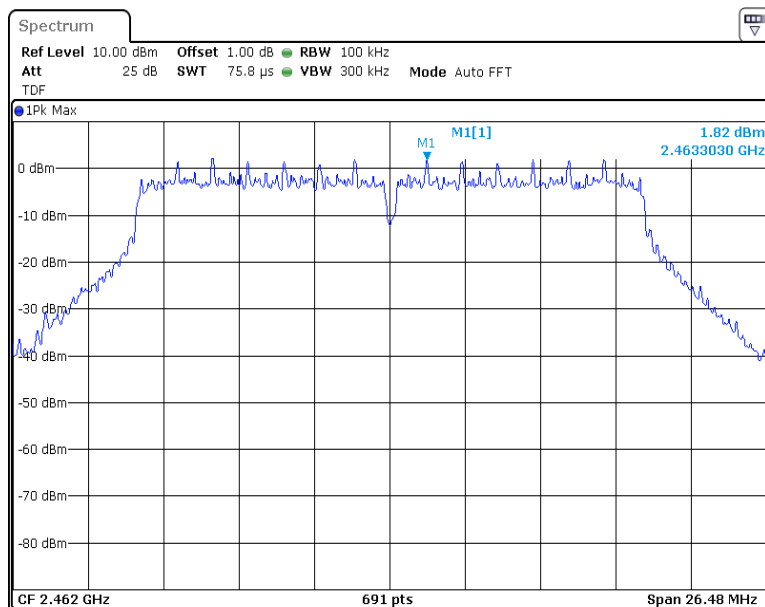

Band-edge

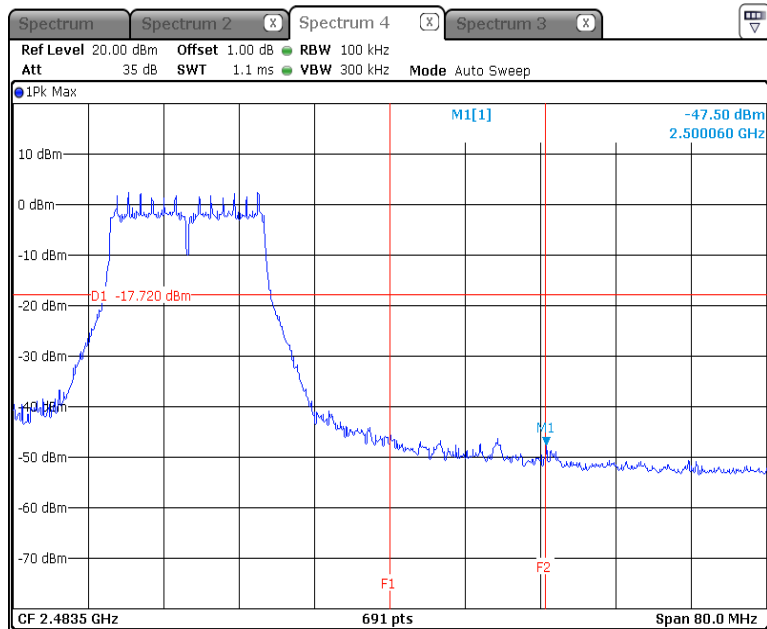


Conducted Spurious Emissions

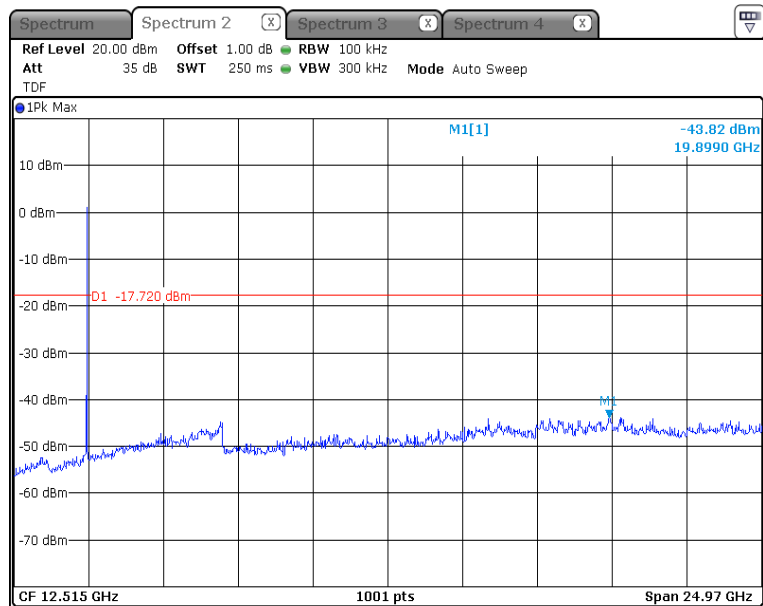


*** 802.11n HT20_MIMO (ANT 2)**

Lowest Channel (2 412 MHz)


Reference

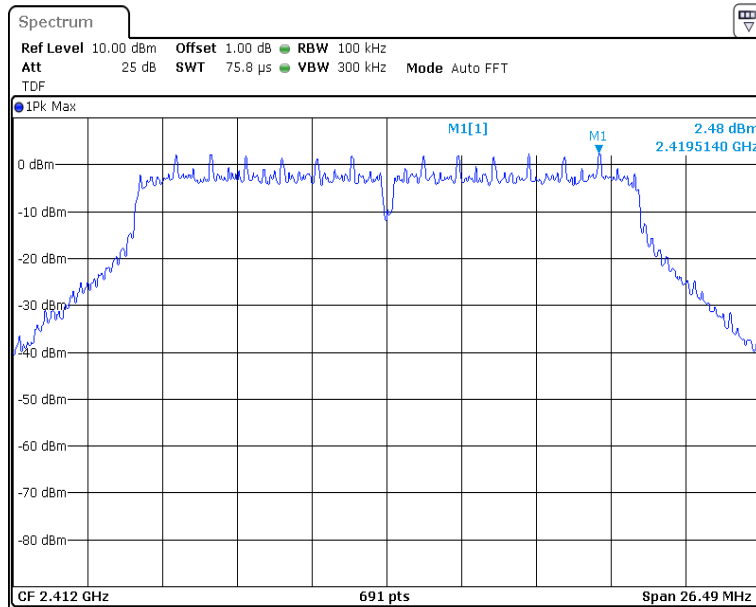

Band-edge

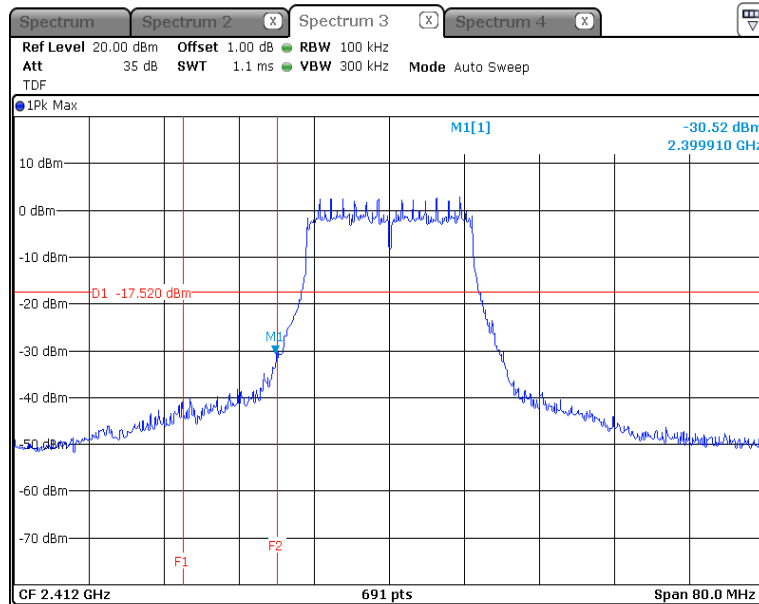


Conducted Spurious Emissions

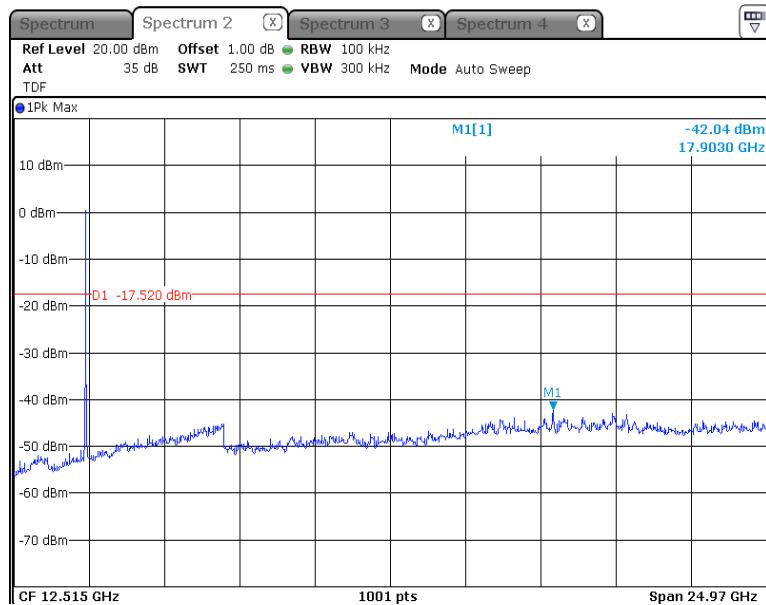


Middle Channel (2 437 MHz)

Reference

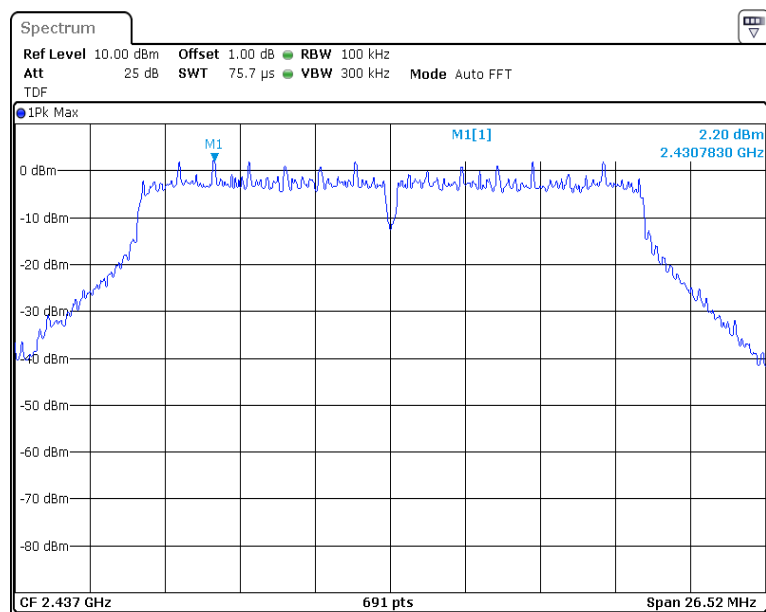


Conducted Spurious Emissions

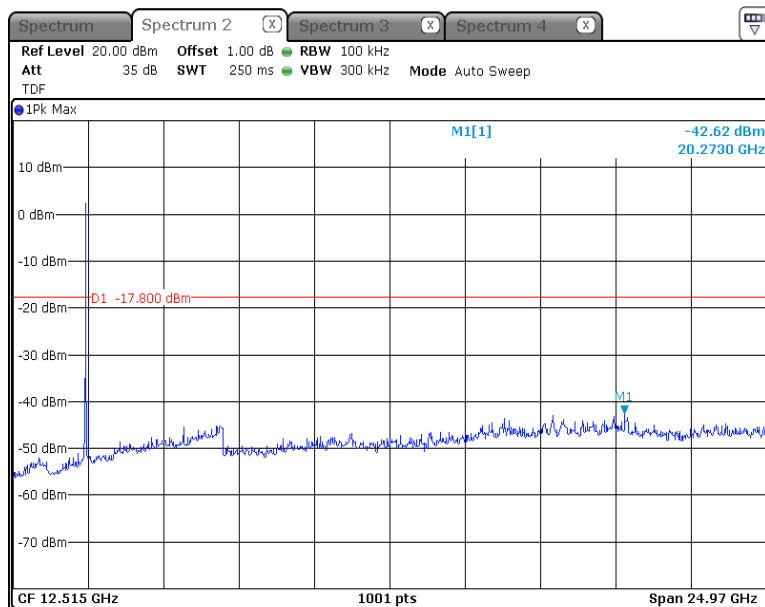


Highest Channel (2 462 MHz)


Reference

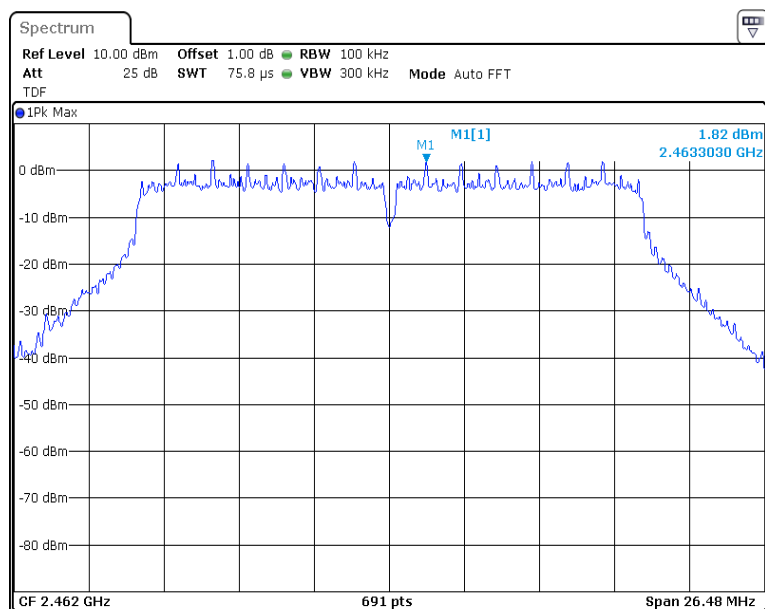

Band-edge

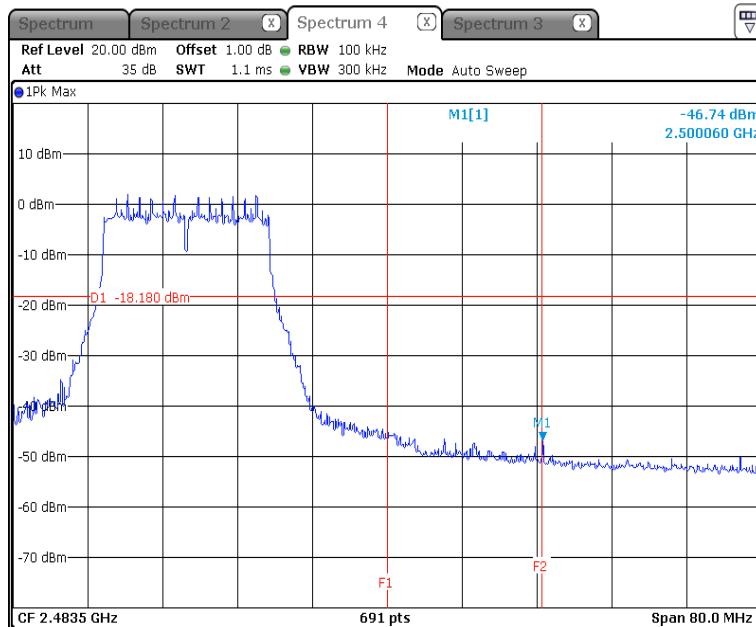


Conducted Spurious Emissions

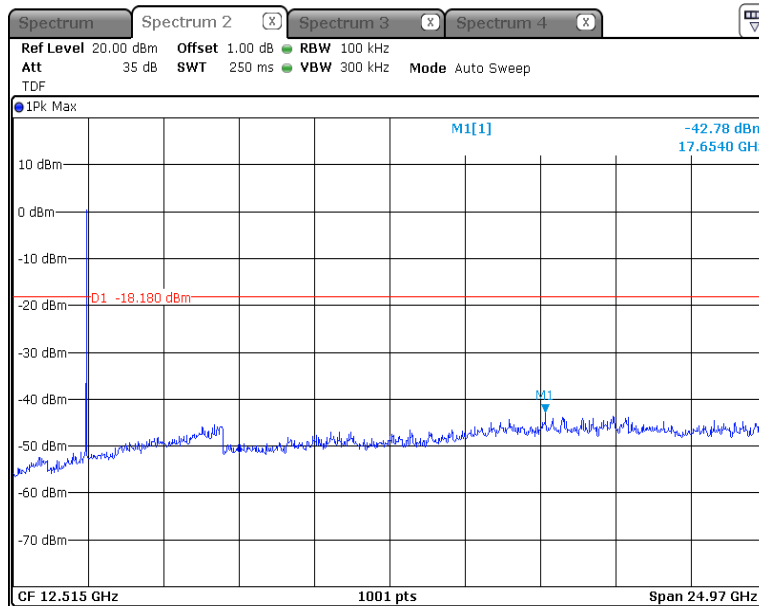


*** 802.11n HT40_MIMO (ANT 2)**

Lowest Channel (2 422 MHz)


Reference

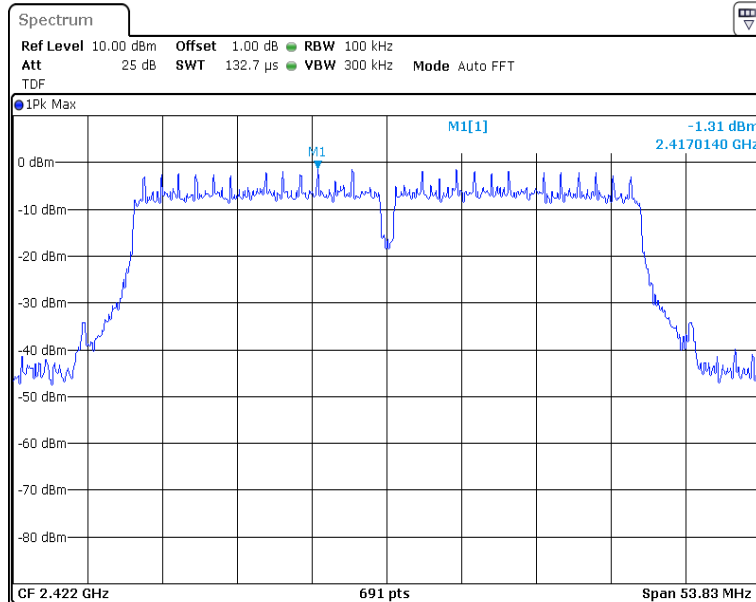

Band-edge

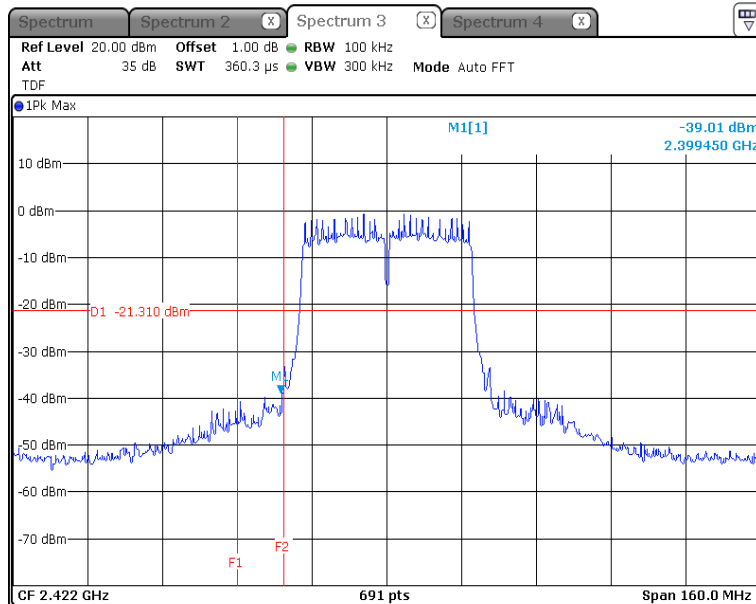


Conducted Spurious Emissions

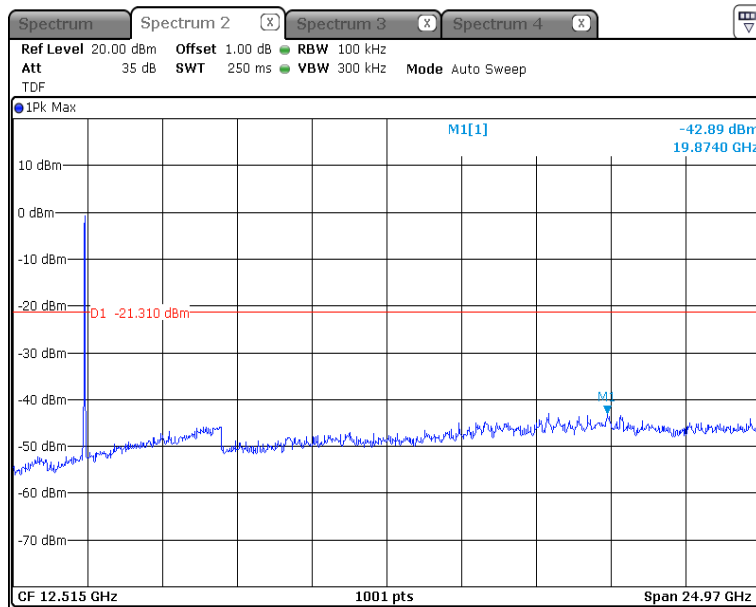


Middle Channel (2 437 MHz)

Reference

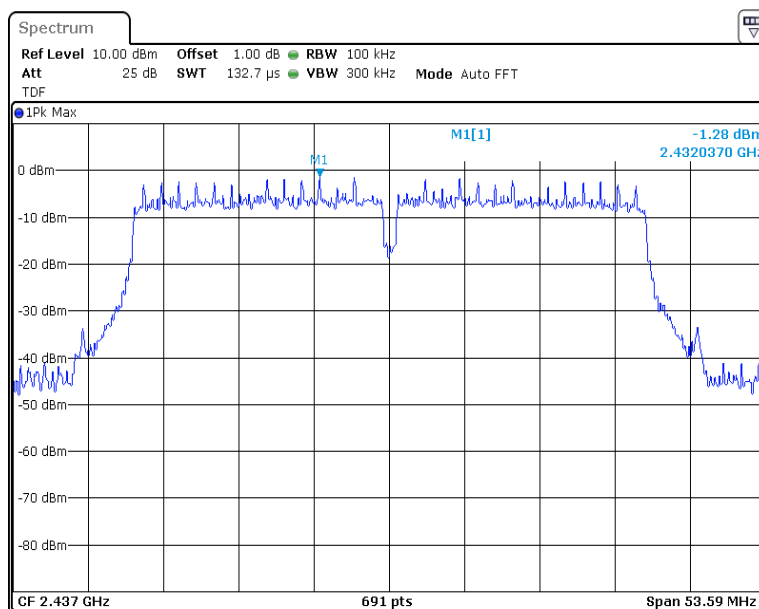


Conducted Spurious Emissions

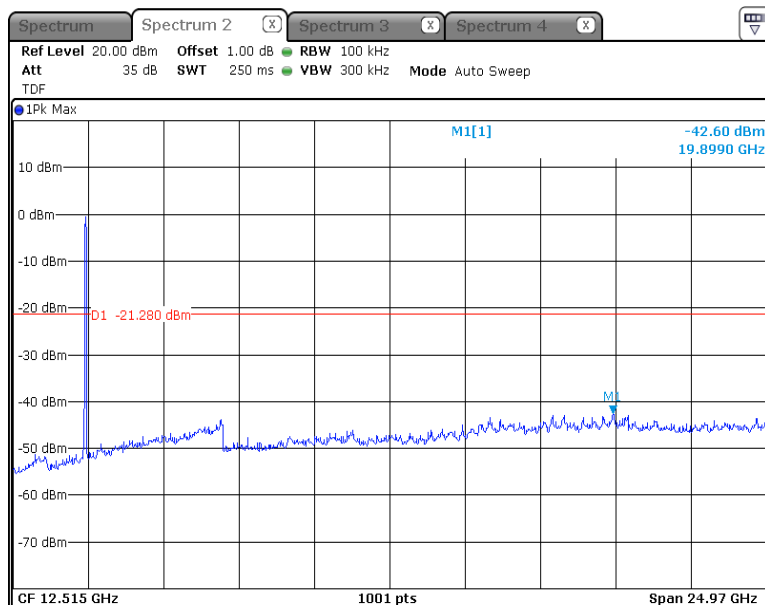


Highest Channel (2 452 MHz)


Reference

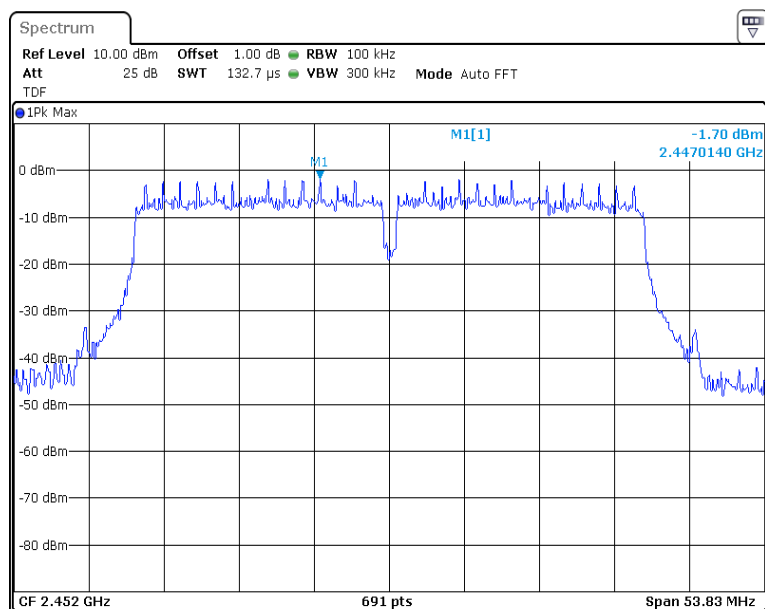

Band-edge

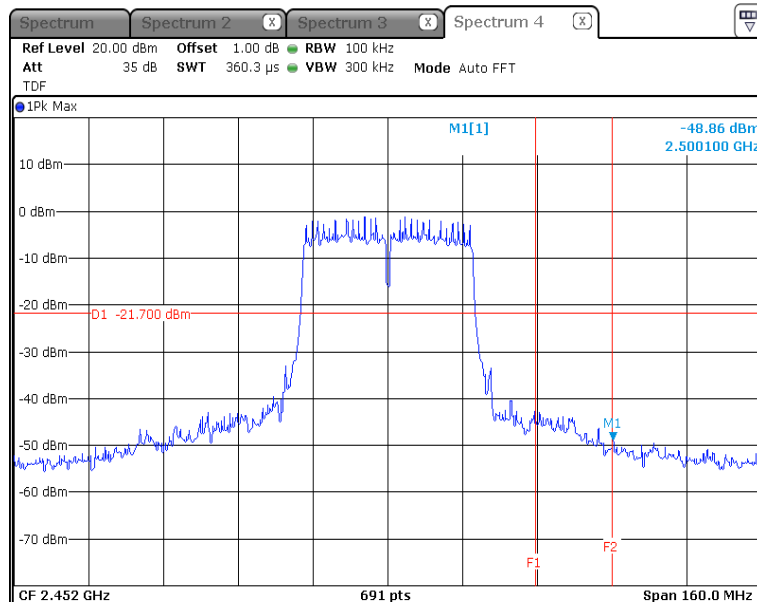

Conducted Spurious Emissions

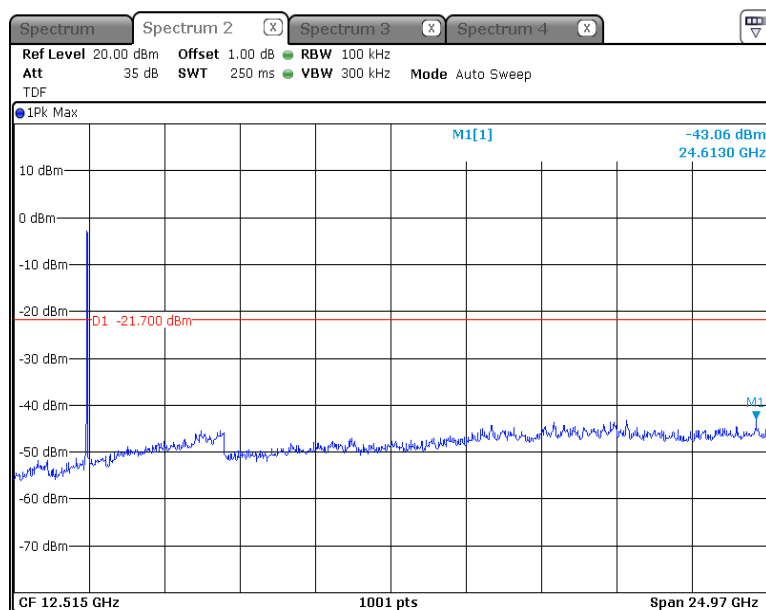

5.8 Conducted Emission

5.8.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

5.8.2 Measurement Procedure


- 1) The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
- 2) Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
- 3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
- 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
- 5) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

5.8.3 Test Result

- Complied

Figure 4. plot of Conducted Emission

*Conducted worst-case data : 802.11n HT20_MIMO (ANT 1+2)_Low Channel (2 412 MHz)

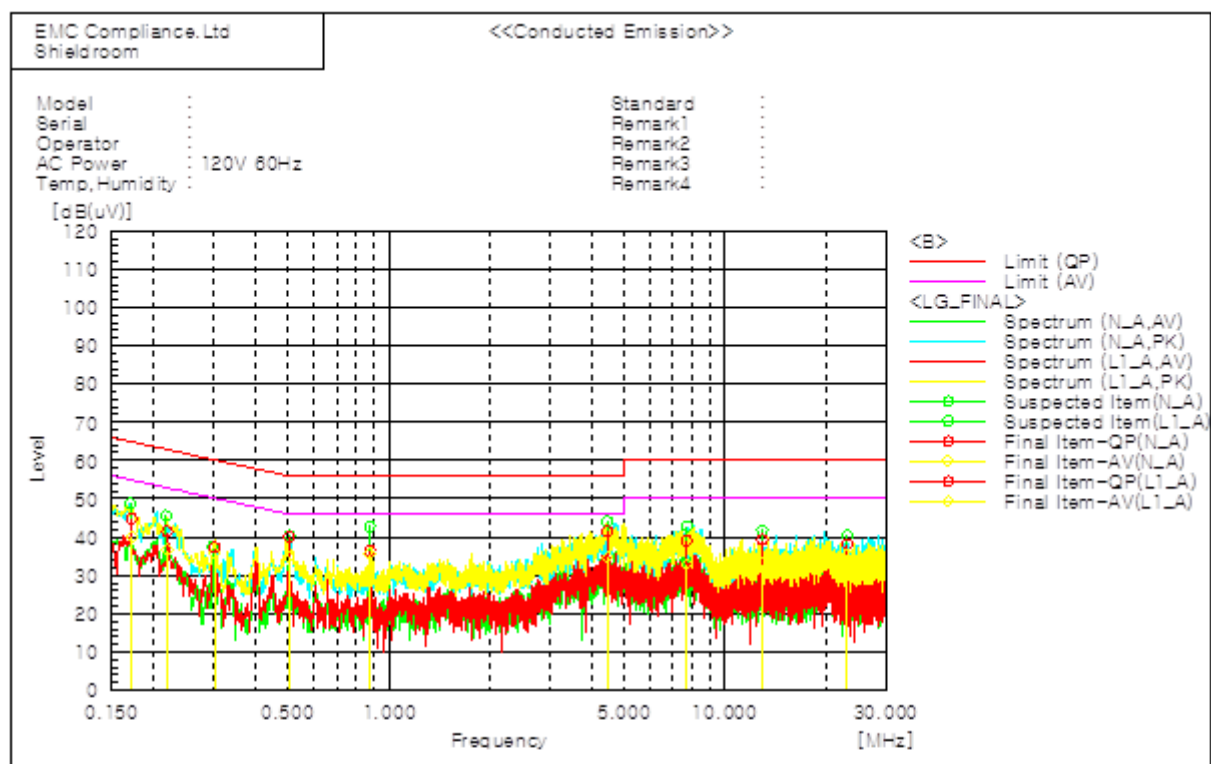

Final Result

--- N_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.17221	34.1	29.3	10.7	44.8	40.0	64.9	54.9	20.1	14.9
2	0.50511	29.0	23.7	11.1	40.1	34.8	56.0	46.0	15.9	11.2
3	4.45925	27.1	20.3	14.3	41.4	34.6	56.0	46.0	14.6	11.4

--- L1_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.21926	30.9	25.9	10.6	41.5	36.5	62.8	52.8	21.3	16.3
2	0.30301	26.6	25.2	10.7	37.3	35.9	60.2	50.2	22.9	14.3
3	0.87701	24.9	24.2	11.6	36.5	35.8	56.0	46.0	19.5	10.2
4	7.68734	24.1	18.0	14.9	39.0	32.9	60.0	50.0	21.0	17.1
5	12.87866	23.5	17.4	15.7	39.2	33.1	60.0	50.0	20.8	16.9
6	23.12798	20.9	18.3	17.3	38.2	35.6	60.0	50.0	21.8	14.4

6. Test equipment used for test

	Description	Manufacturer	Model No.	Serial No.	Next Cal Date.
■	Spectrum Analyzer	R&S	FSV40	100989	16.01.23
■	AC Power Supply	KIKUSUI	PCR2000W	GB001619	15.10.14
■	Signal Generator	R&S	SMR40	100007	15.06.10
■	EMI Test Receiver	R&S	ESCI	100710	15.10.13
■	Two-Line V-Network	ENV216	R&S	101352	15.10.13
■	Line Impedance Stabilization Network	NNLK8121	SCHWARZBECK	8121-472	15.06.24
■	LOOP Antenna	R&S	HFH2-Z2	100355	15.06.19
■	Bi-Log Antenna	Schwarzbeck	VULB9163	552	16.05.14
■	Horn Antenna	ETS-LINDGREN	3117	155787	16.02.05
■	Amplifier	AGILENT	8447D	2944A07626	16.01.20
■	Broadband Preamplifier	Schwarzbeck	BBV9718	9718-233	15.04.22
■	Attenuator	HP	8491A	16861	15.07.01
■	Highpass Filter	Wainwright Instruments GmbH	WHKX3.0/18G-12SS	44	16.02.02
■	EMI Test Receiver	R&S	ESR	101078	16.02.16
■	EMI Test Receiver	em test	ESCI	101428	15.10.23
■	Bilog Antenna	TESEQ	CBL61123D	37876	15.08.28
■	Amplifier	SONOMA	310N	293004	15.09.25
■	turn table	MATURO	CO2000-SOFT	-	-
■	Turn Table	Innco Systems	DT2000S-1t	79	-
■	Antenna Mast	Innco Systems	MA4000-EP	303	-
■	Antenna mast	Mature GmbH	AM4	079/3440509	-