


|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 123_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

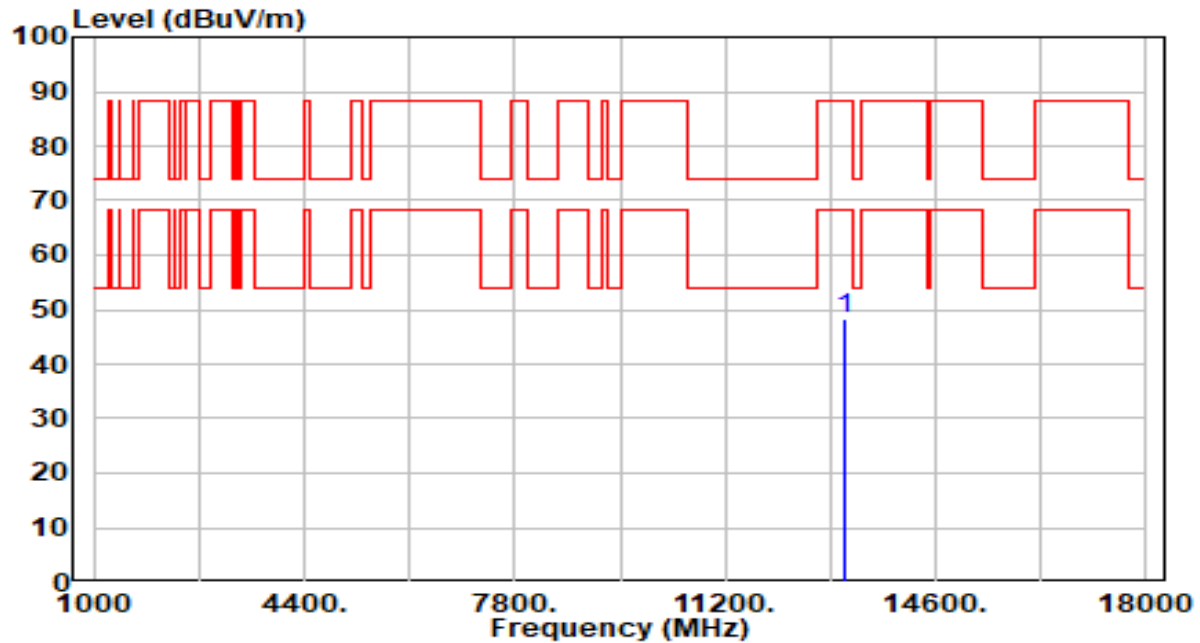


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13130.000     | 41.31          | 7.17       | 48.48                | -39.72      | 88.20          | 200         | 173         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 147_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

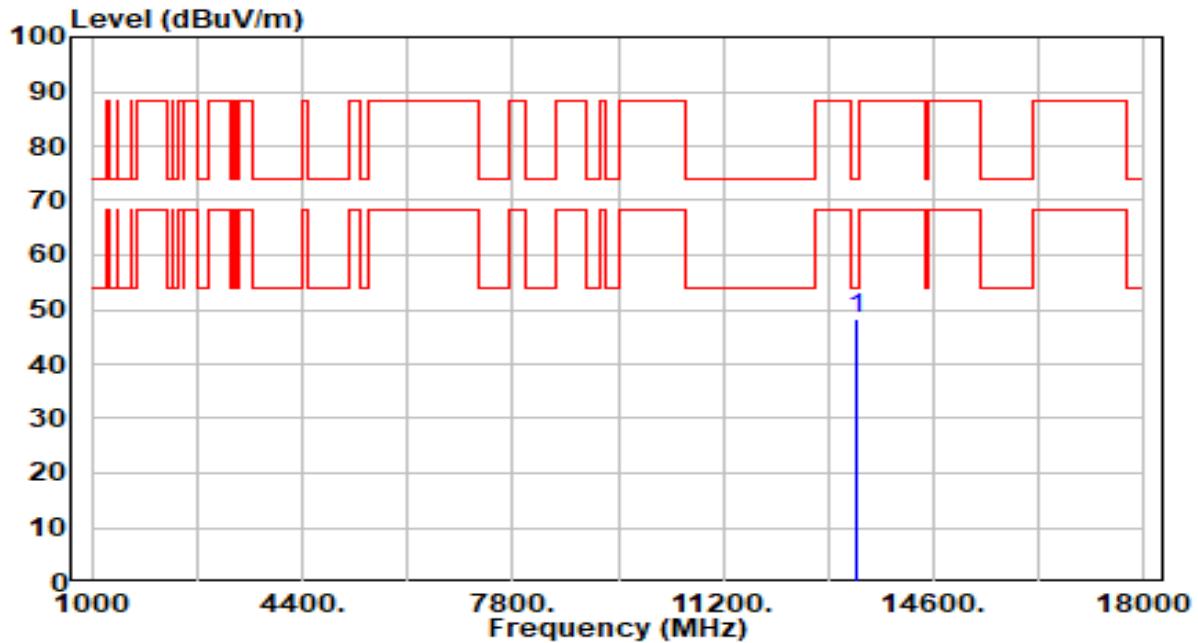


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13370.000     | 41.18          | 7.10       | 48.27                | -25.73      | 74.00          | 100         | 236         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 147_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

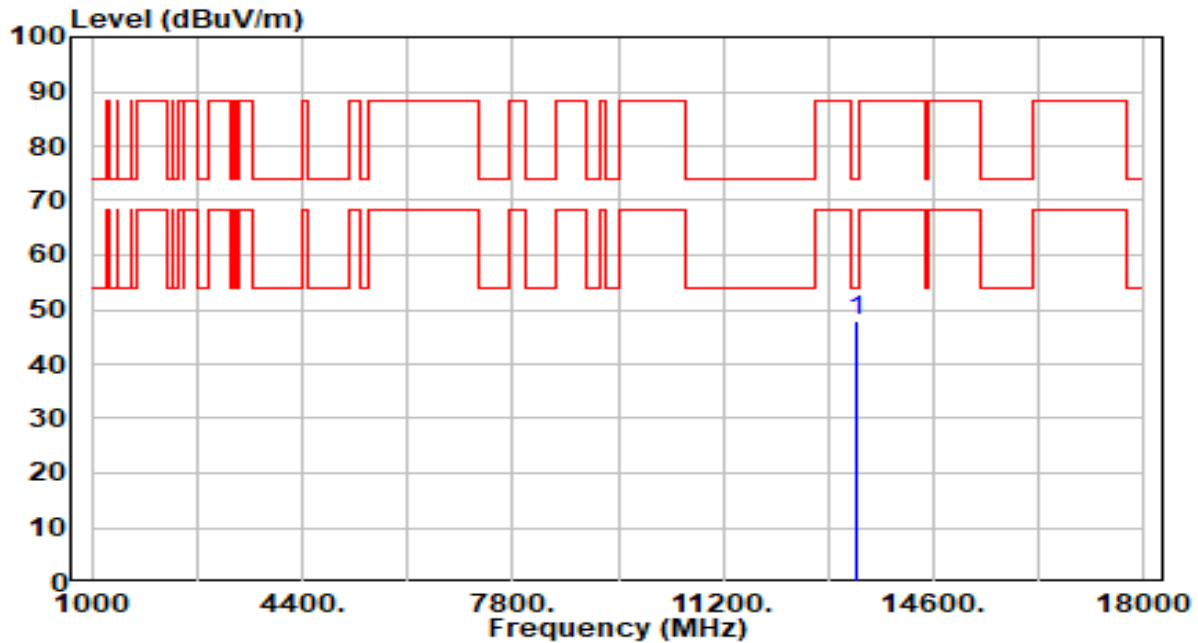


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13370.000     | 40.92          | 7.10       | 48.02                | -25.98      | 74.00          | 200         | 216         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 179_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

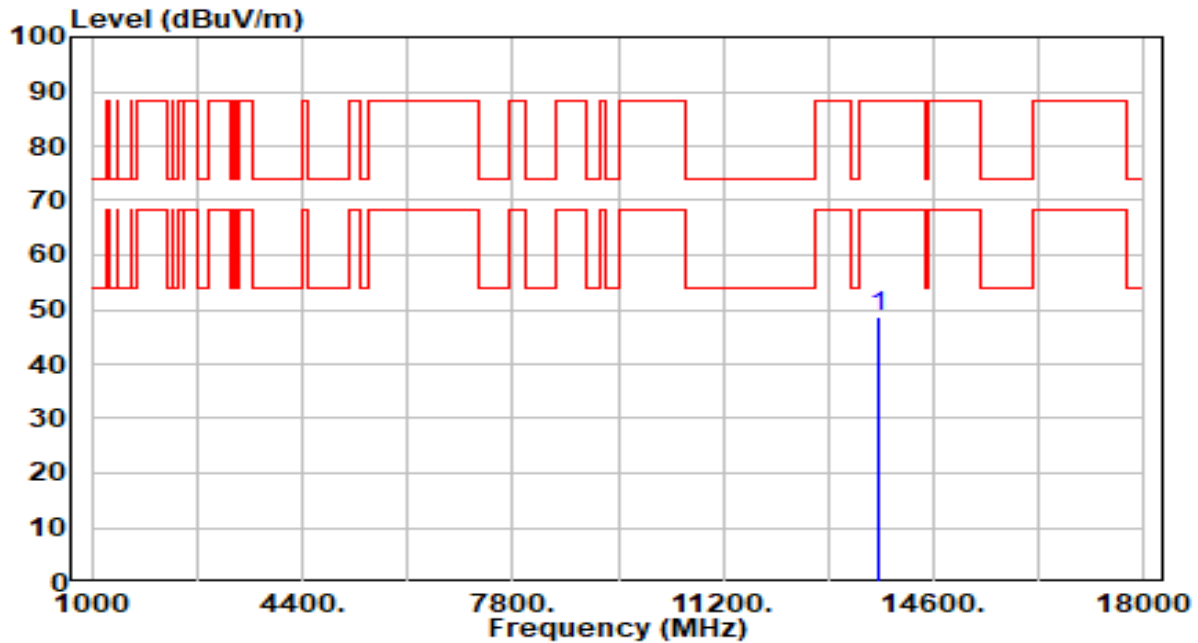


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13690.000     | 41.93          | 6.75       | 48.67                | -39.53      | 88.20          | 100         | 328         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 179_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

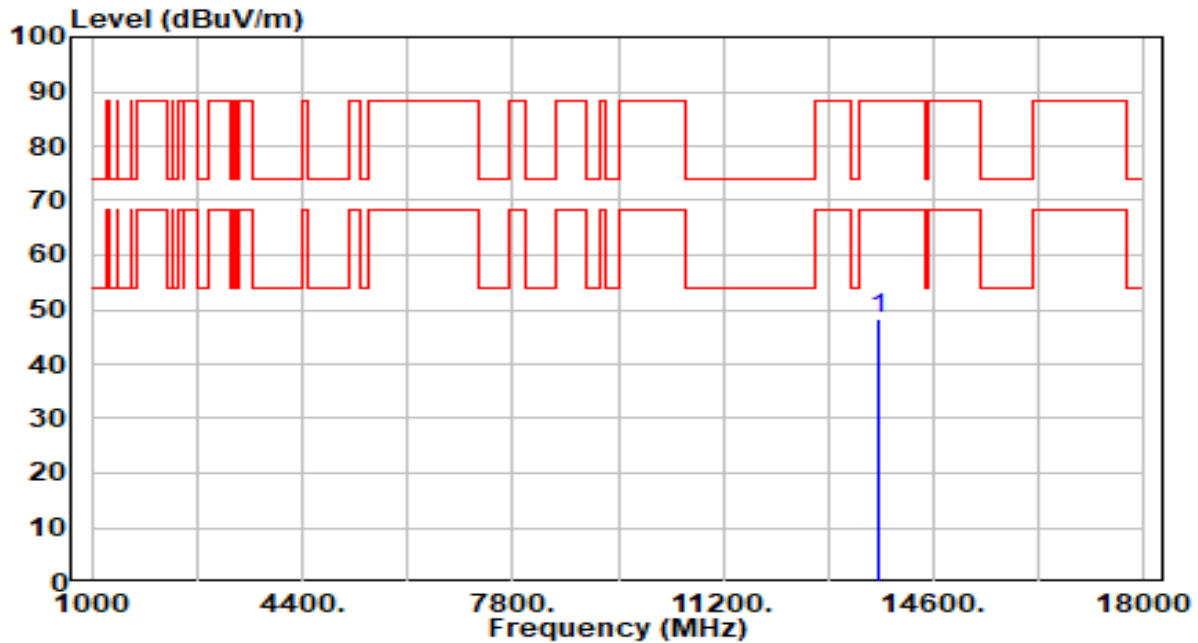


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13690.000     | 41.54          | 6.75       | 48.29                | -39.91      | 88.20          | 200         | 153         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 187_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

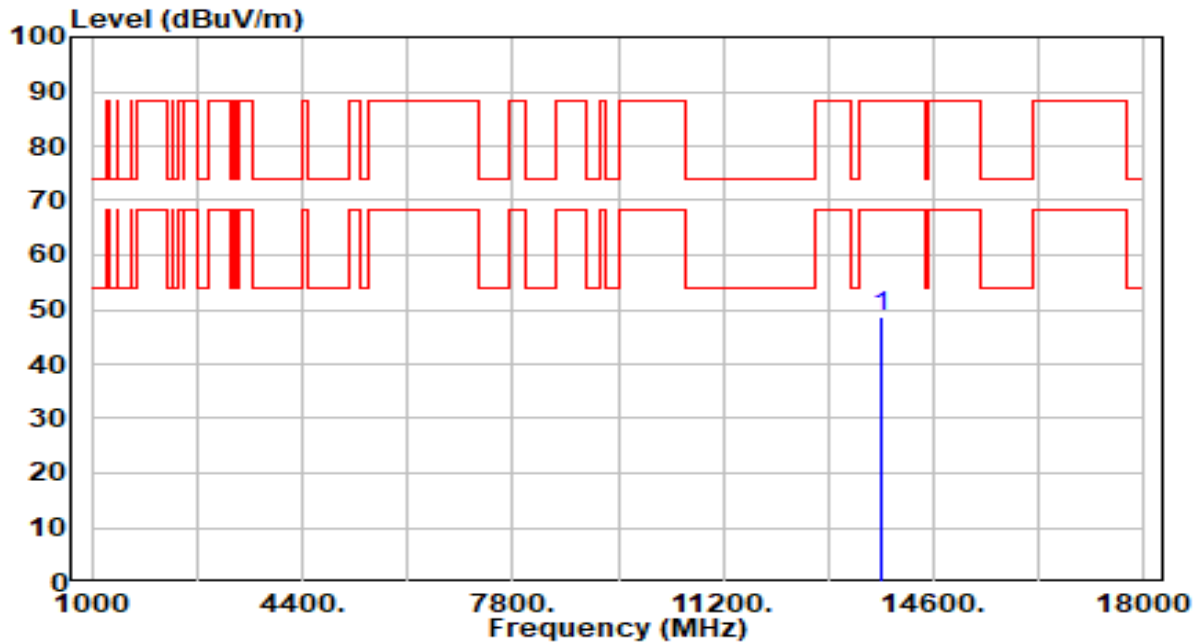


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13770.000     | 41.84          | 6.75       | 48.60                | -39.60      | 88.20          | 100         | 72          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 187_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

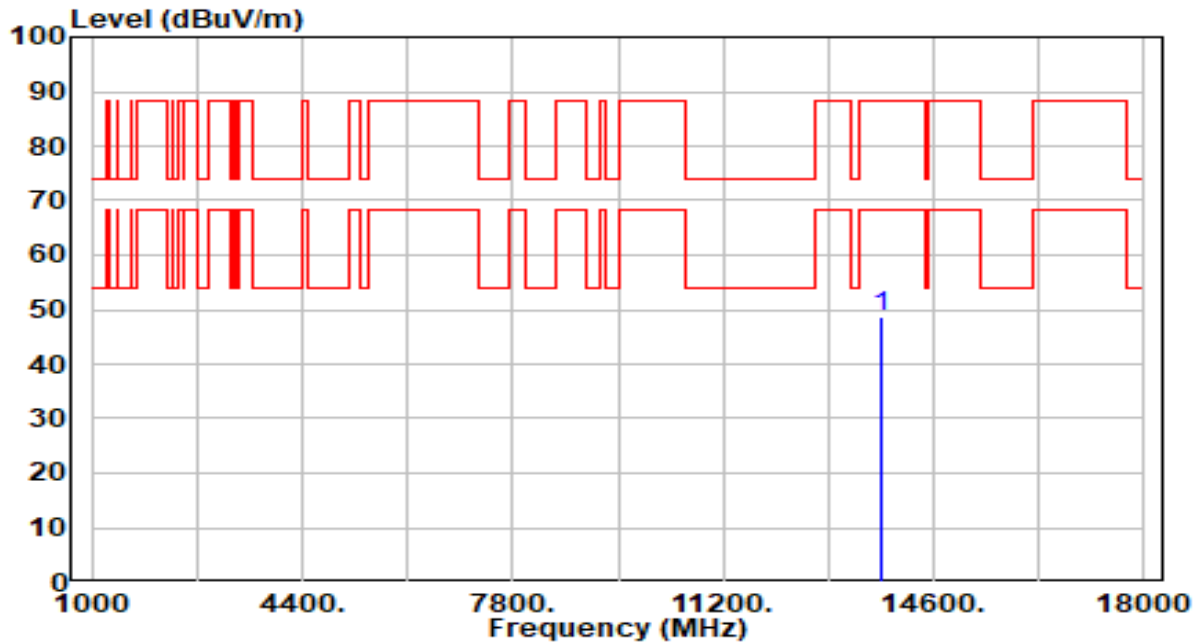


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13770.000     | 41.93          | 6.75       | 48.69                | -39.51      | 88.20          | 200         | 176         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 195_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

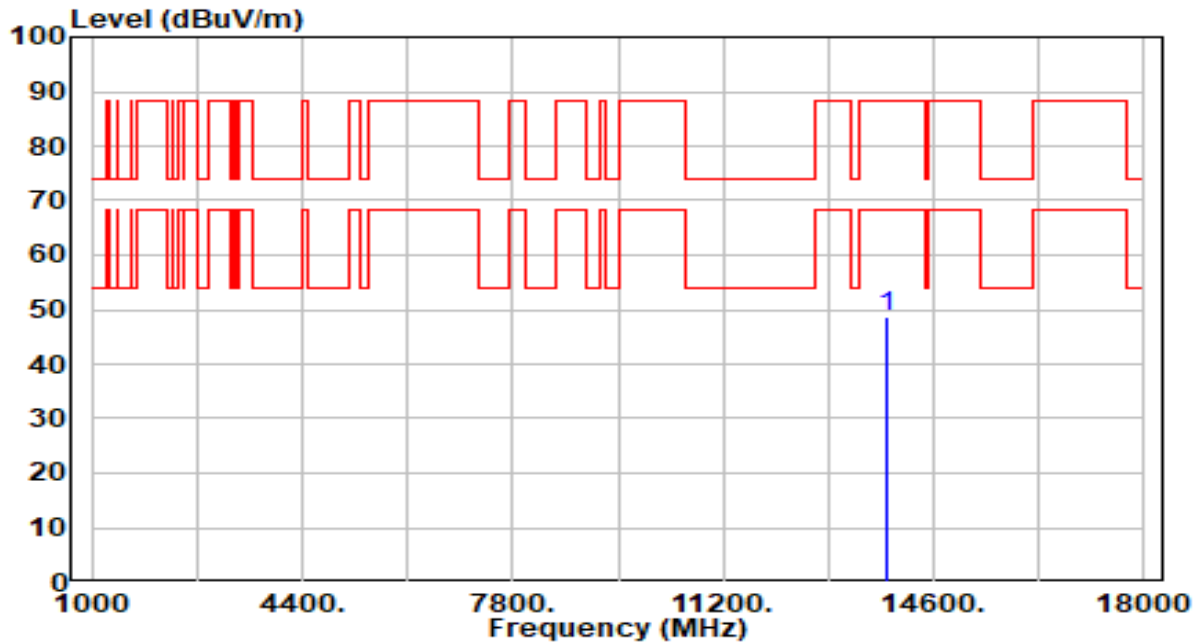


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13850.000     | 41.82          | 6.76       | 48.59                | -39.61      | 88.20          | 100         | 200         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 195_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

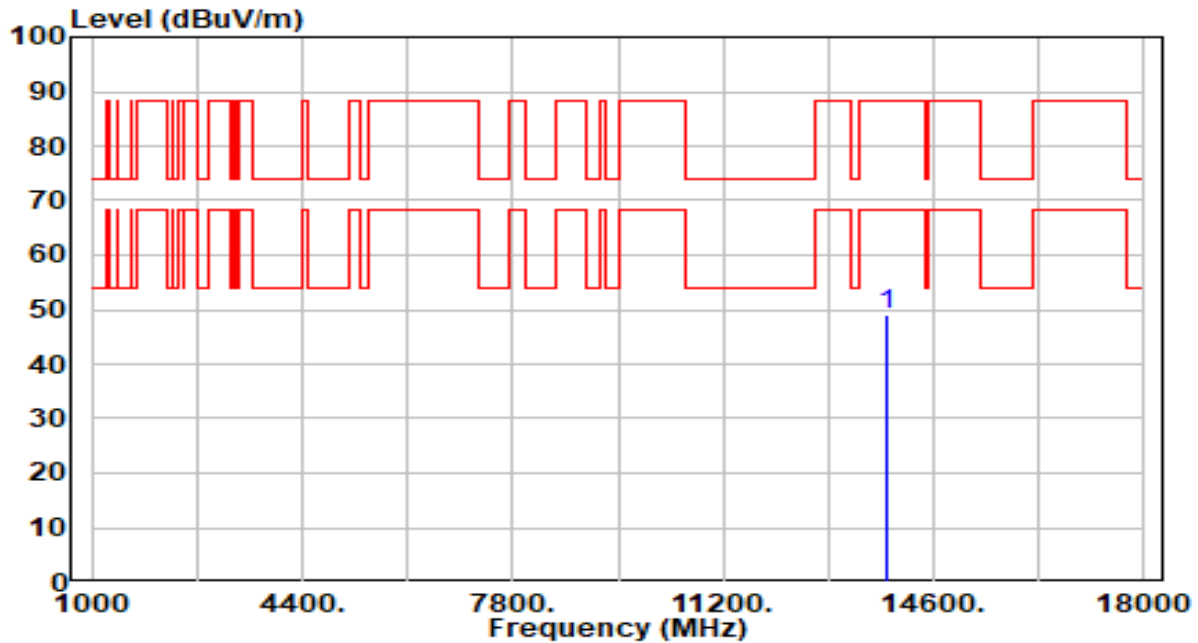


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13850.000     | 42.21          | 6.76       | 48.97                | -39.23      | 88.20          | 200         | 316         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 211_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

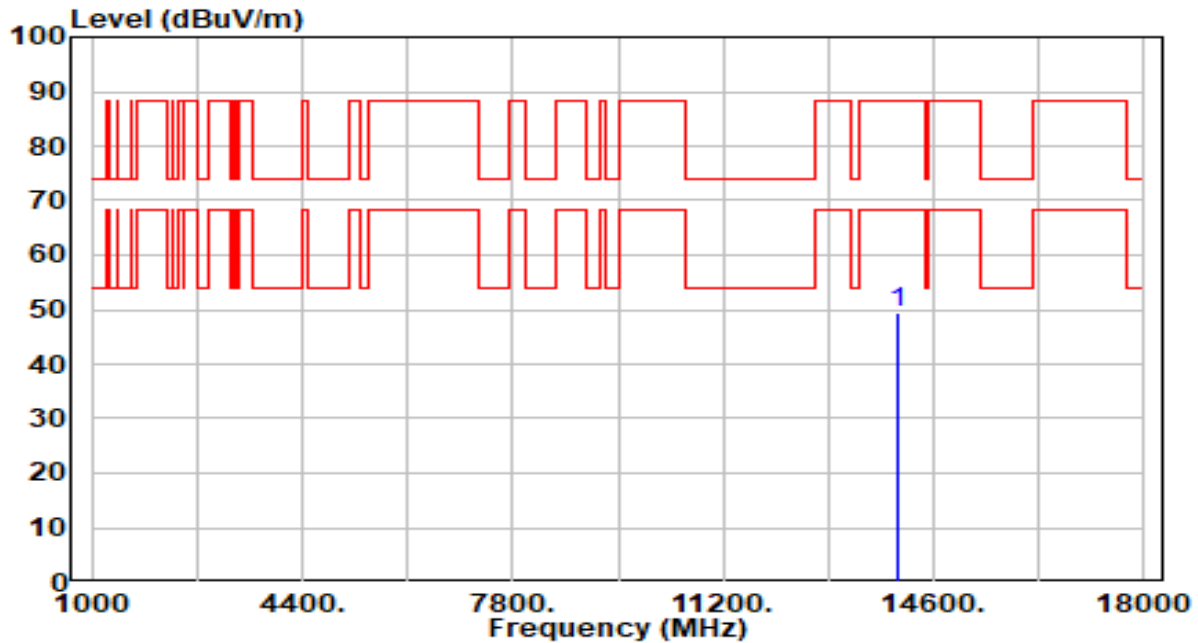


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14010.000     | 42.59          | 6.79       | 49.38                | -38.82      | 88.20          | 100         | 41          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 211_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

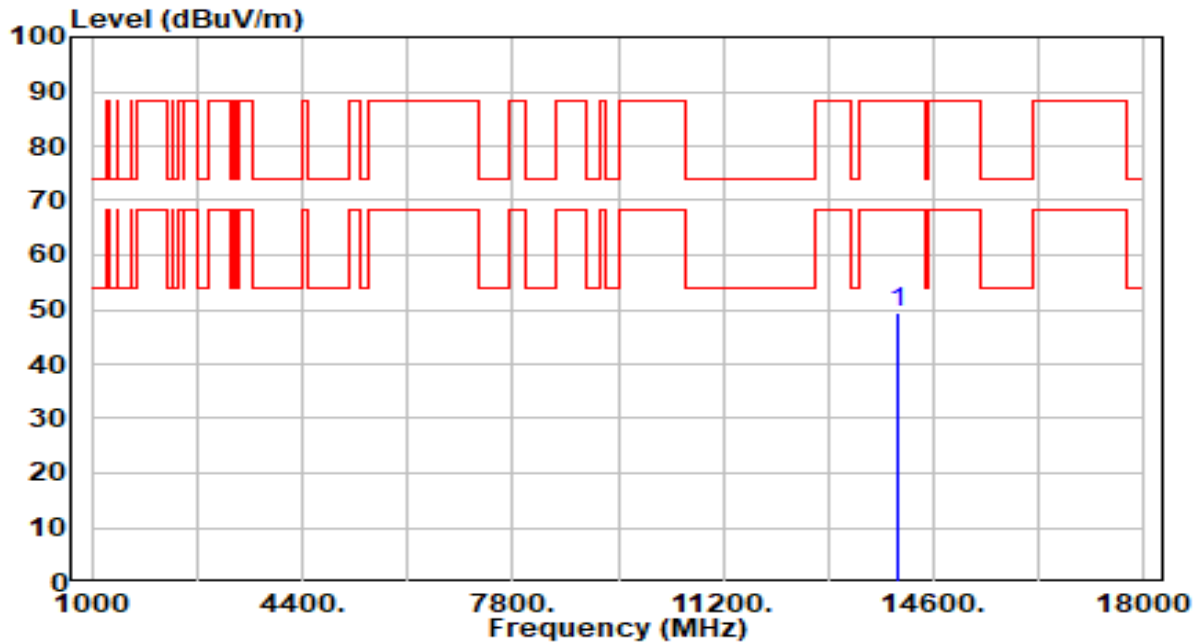


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14010.000     | 42.72          | 6.79       | 49.51                | -38.69      | 88.20          | 200         | 324         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

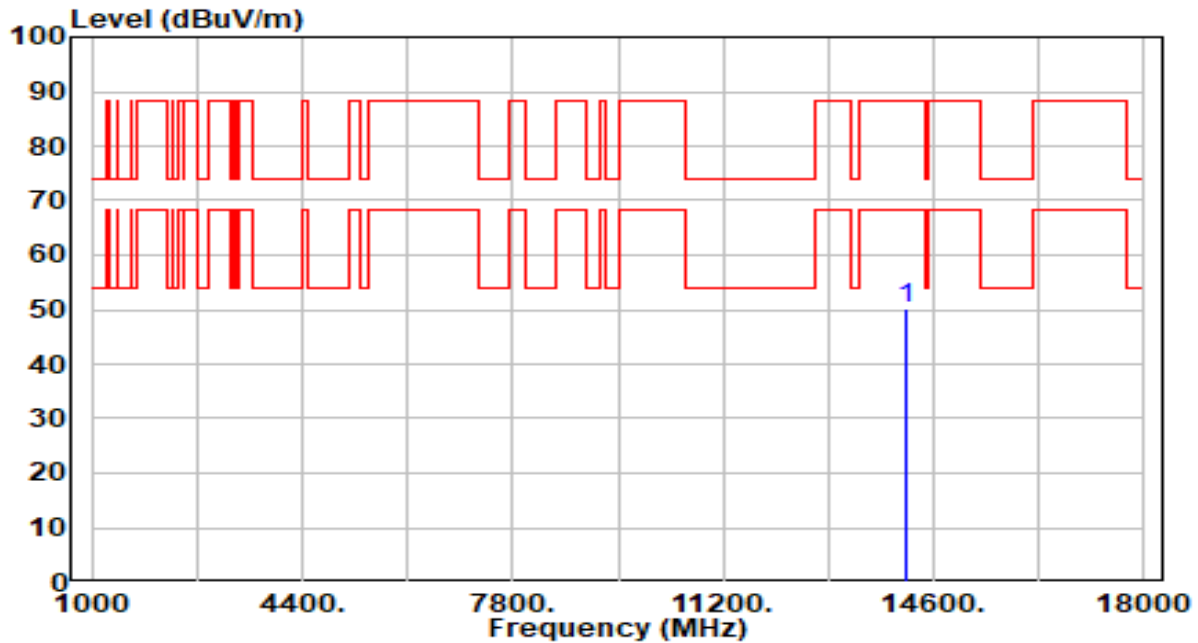


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14170.000     | 43.18          | 6.92       | 50.10                | -38.10      | 88.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

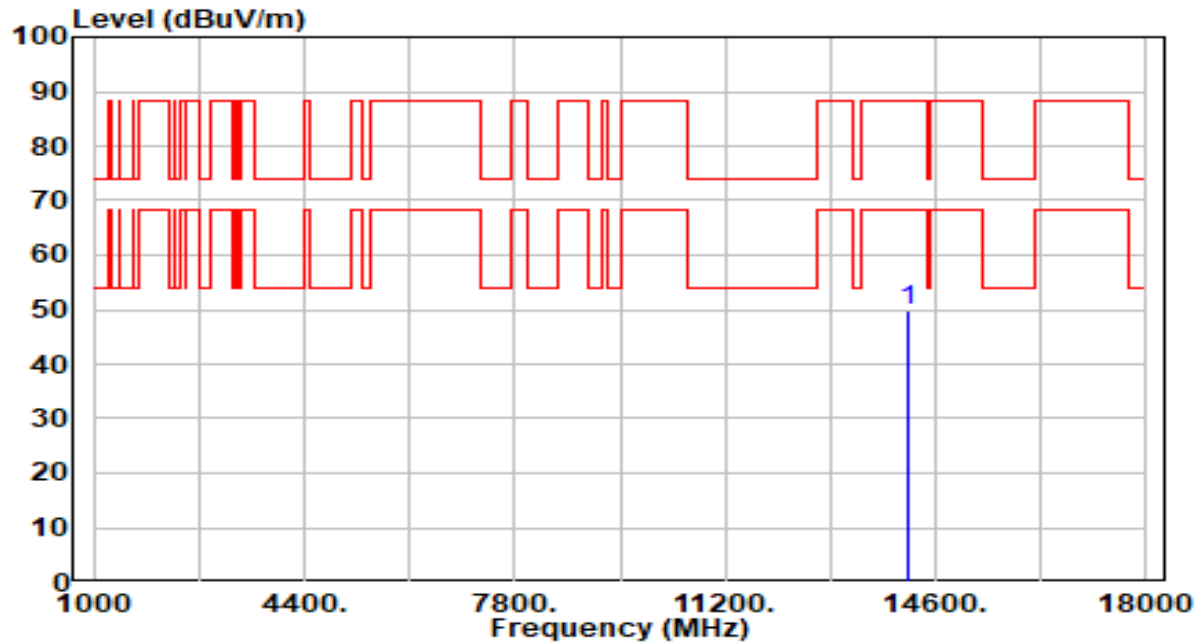


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14170.000     | 43.06          | 6.92       | 49.98                | -38.22      | 88.20          | 200         | 104         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

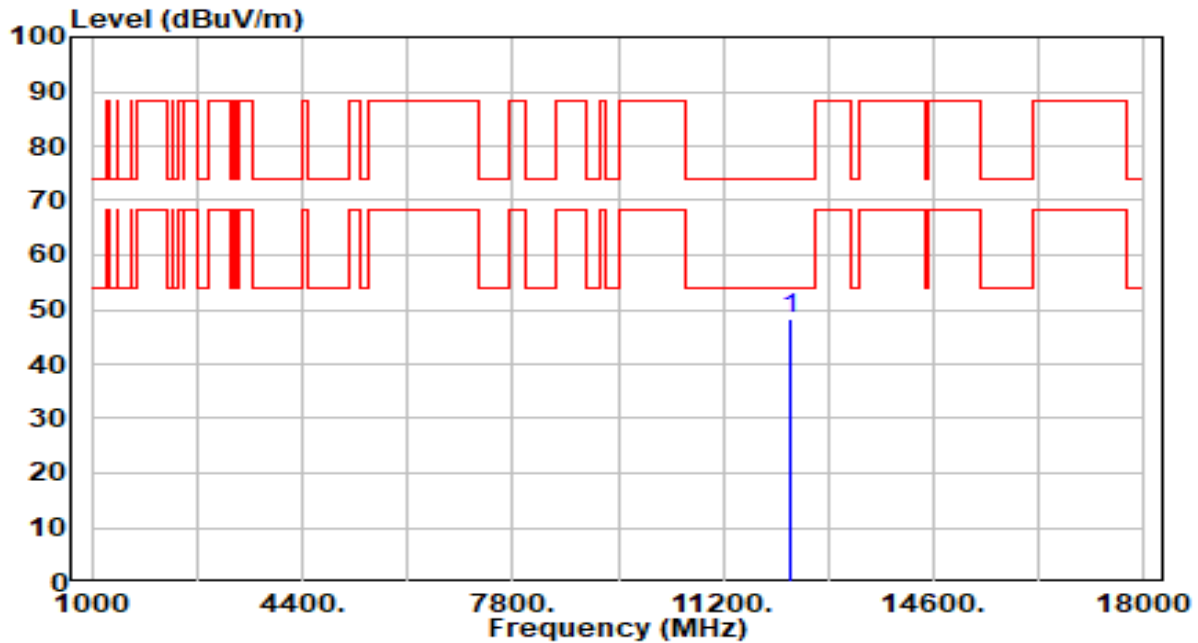


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12290.000     | 41.96          | 6.21       | 48.17                | -25.83      | 74.00          | 100         | 104         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

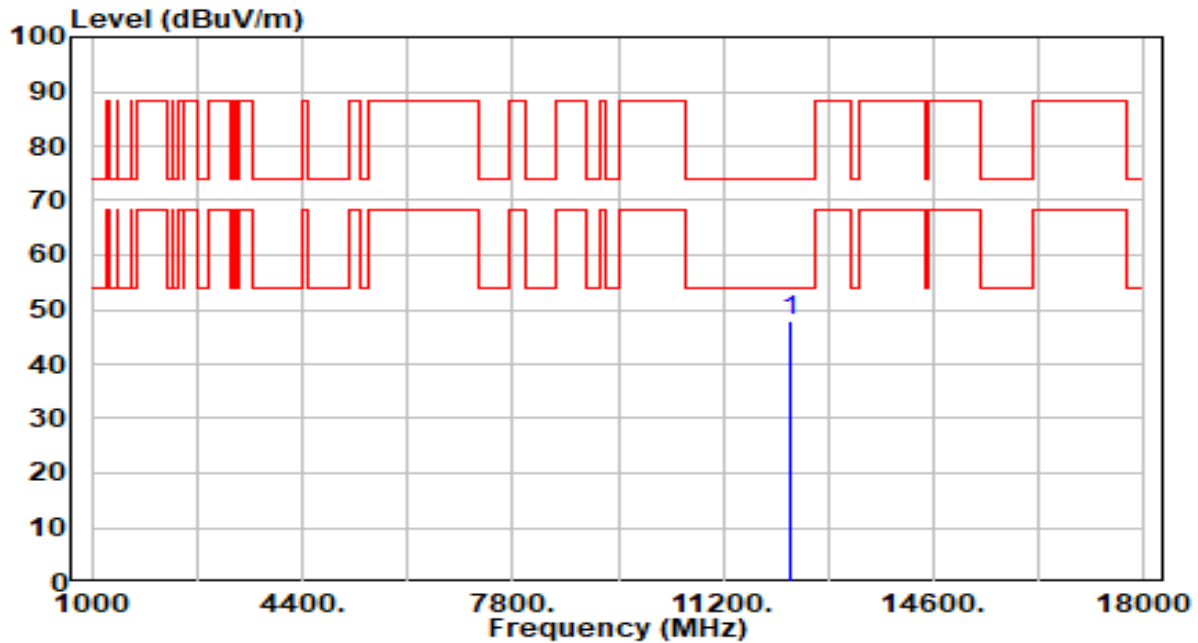


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12290.000     | 41.84          | 6.21       | 48.05                | -25.95      | 74.00          | 200         | 115         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 55_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

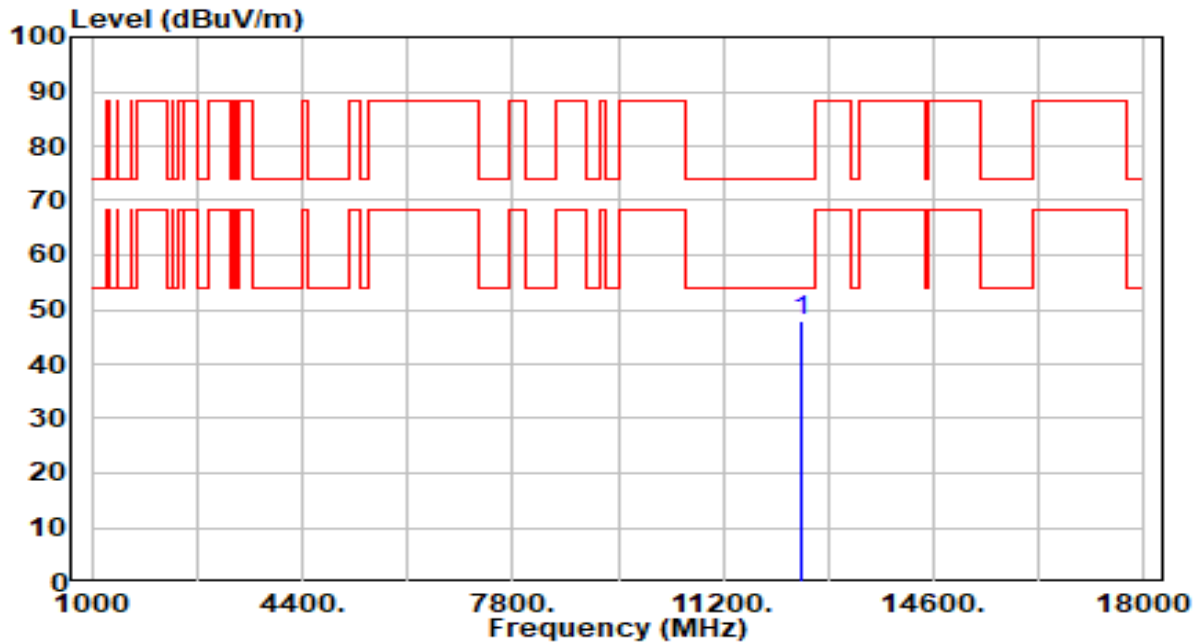


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12450.000     | 41.29          | 6.51       | 47.79                | -26.21      | 74.00          | 100         | 187         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 55_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

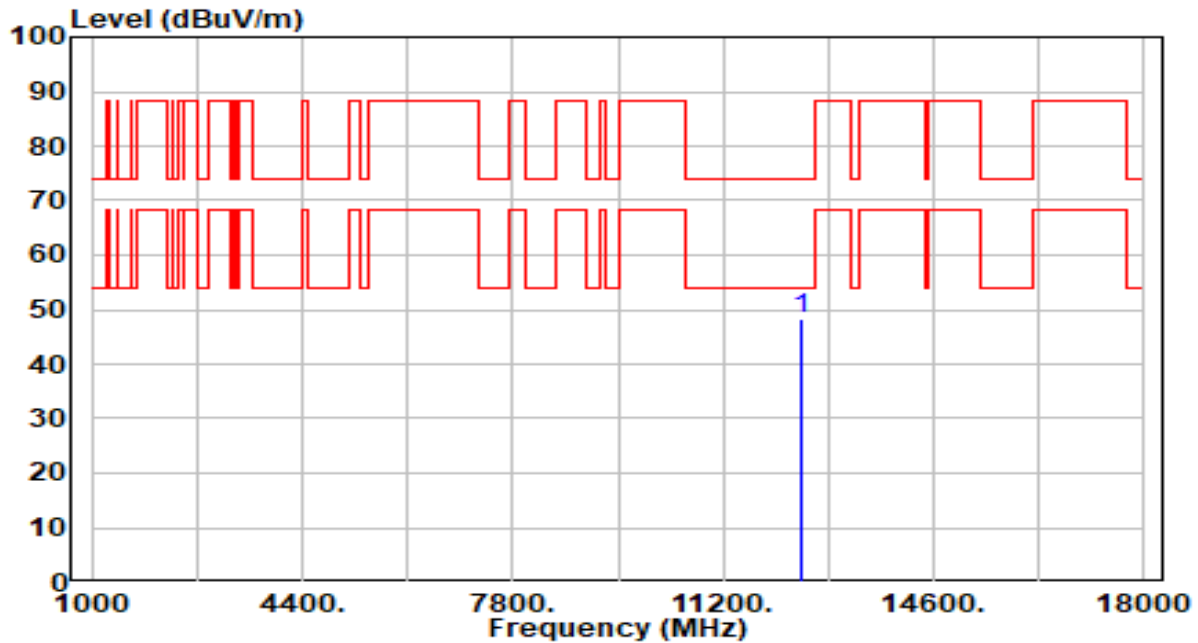


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12450.000     | 41.65          | 6.51       | 48.15                | -25.85      | 74.00          | 200         | 63          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 87_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

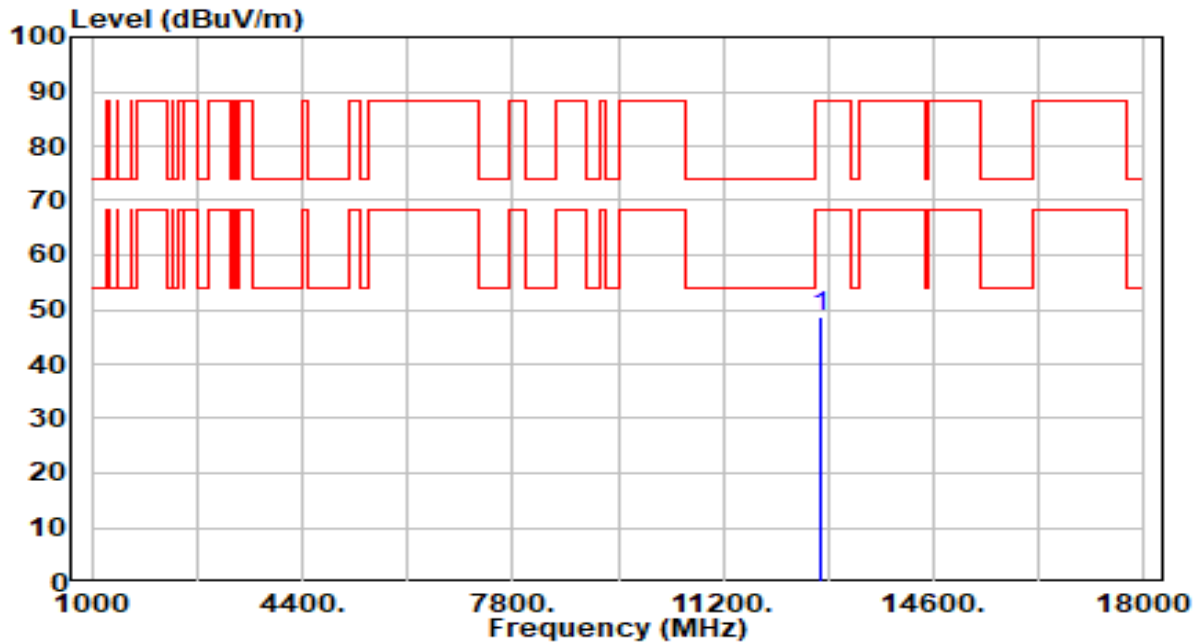


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12770.000     | 41.67          | 7.17       | 48.84                | -39.36      | 88.20          | 100         | 257         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 87_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

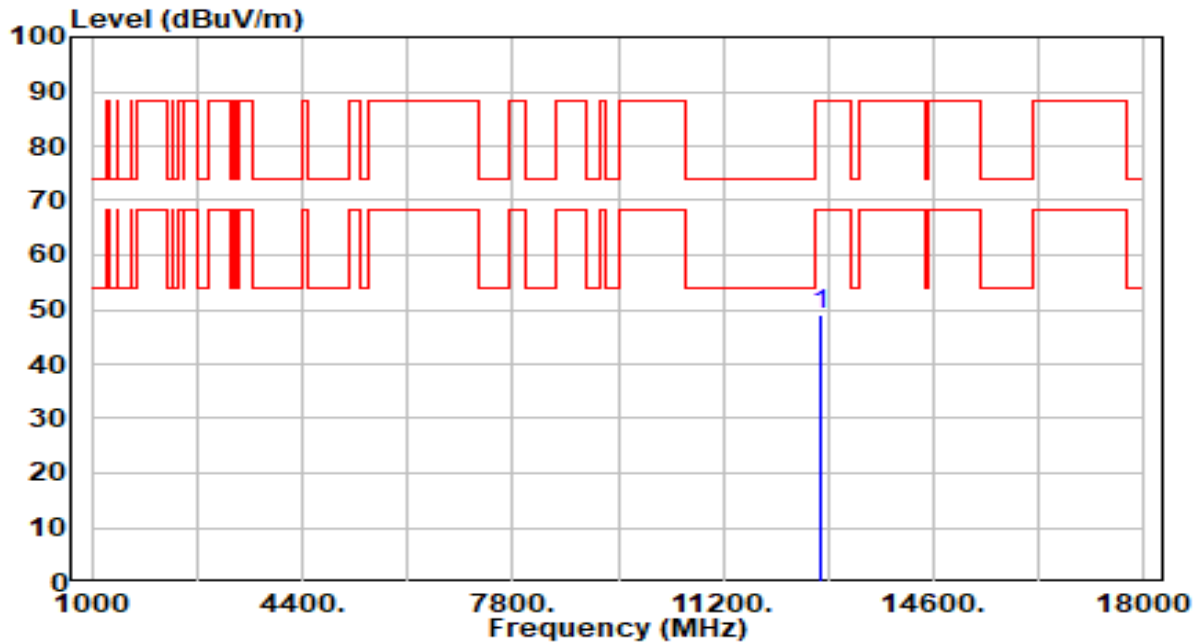


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12770.000     | 41.84          | 7.17       | 49.01                | -39.19      | 88.20          | 200         | 186         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band6_CH 103_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

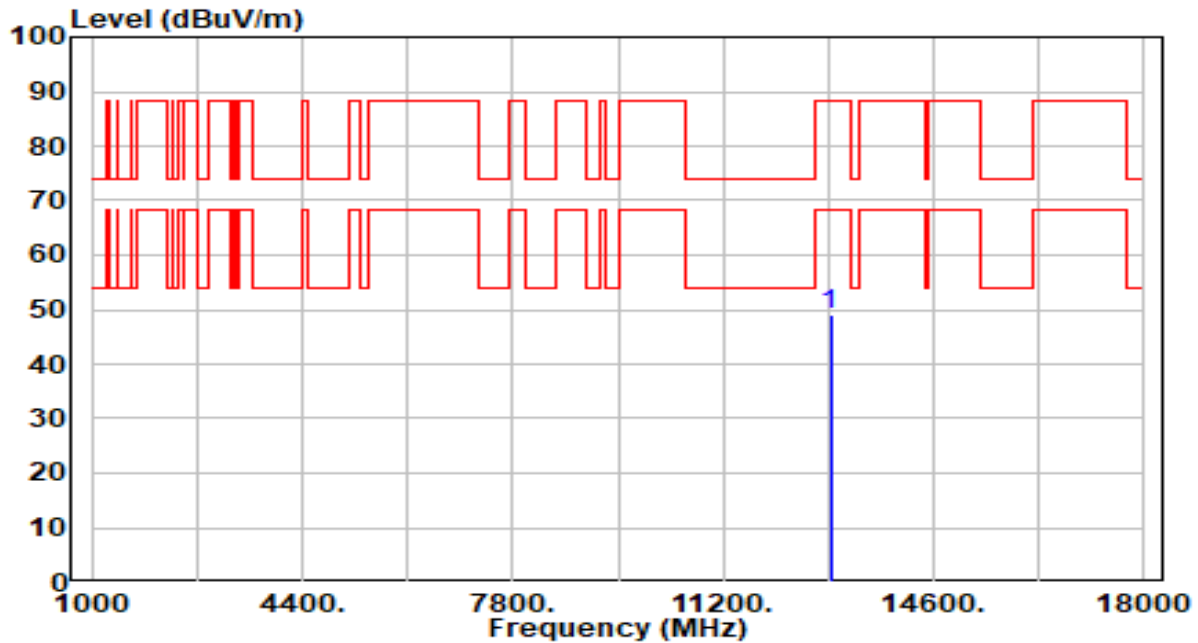


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12930.000     | 41.88          | 7.24       | 49.12                | -39.08      | 88.20          | 100         | 325         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band6_CH 103_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

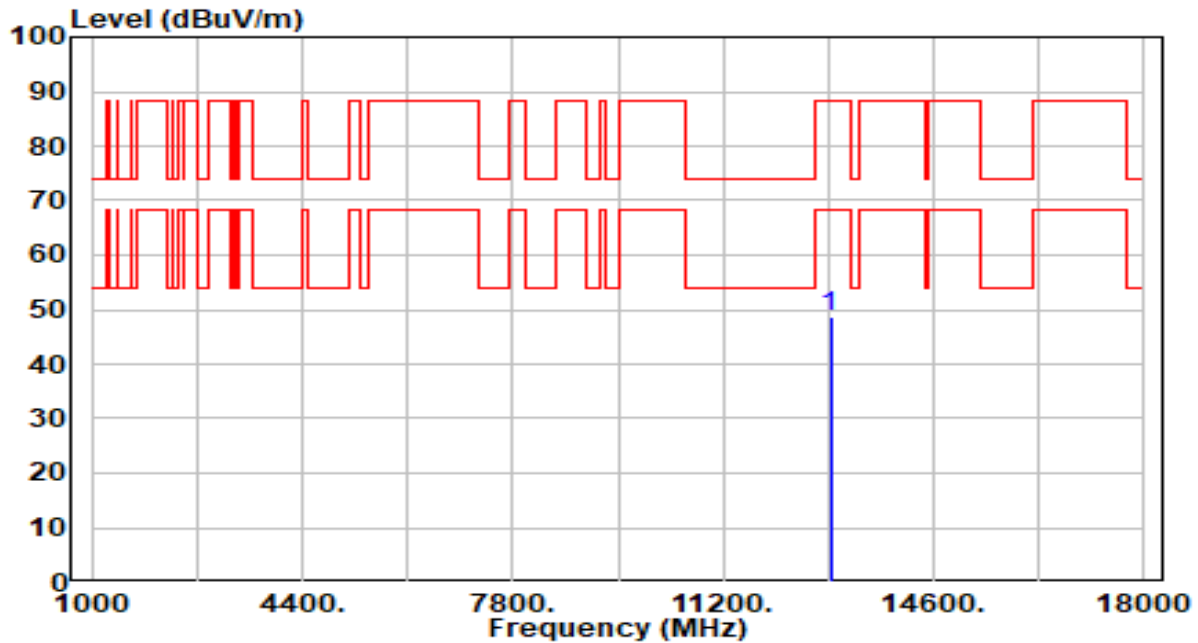


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12930.000     | 41.39          | 7.24       | 48.63                | -39.57      | 88.20          | 200         | 93          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 119_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

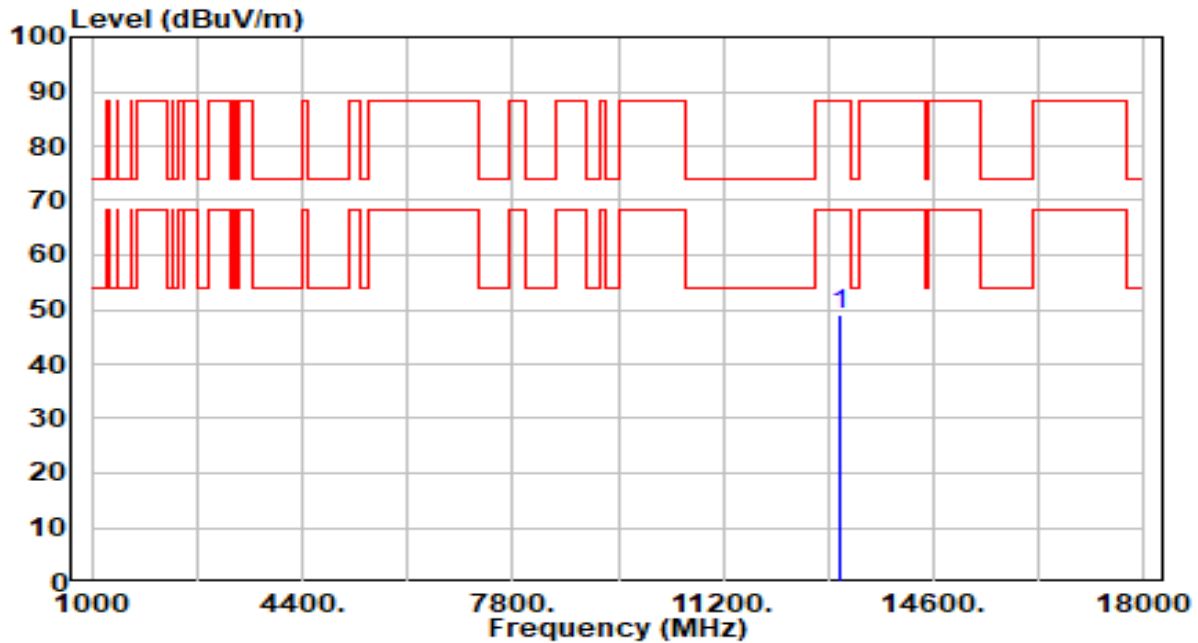


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13090.000     | 41.86          | 7.20       | 49.06                | -39.14      | 88.20          | 100         | 227         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 119_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

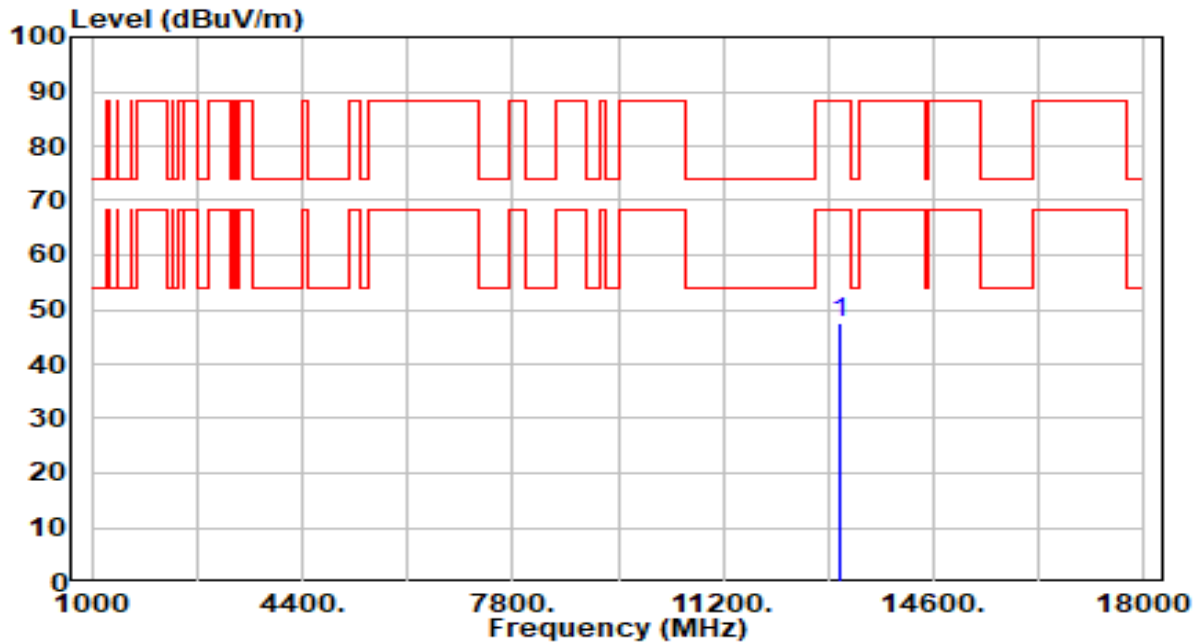


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13090.000     | 40.41          | 7.20       | 47.61                | -40.59      | 88.20          | 200         | 60          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 135_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

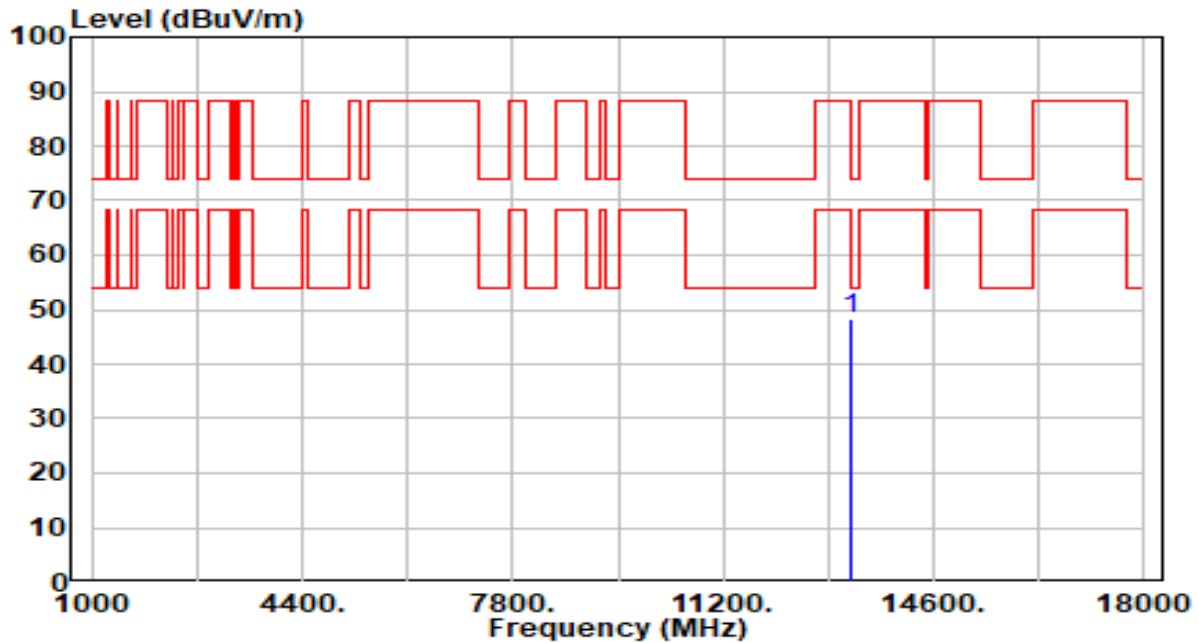


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13250.000     | 41.04          | 7.12       | 48.16                | -25.84      | 74.00          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 135_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

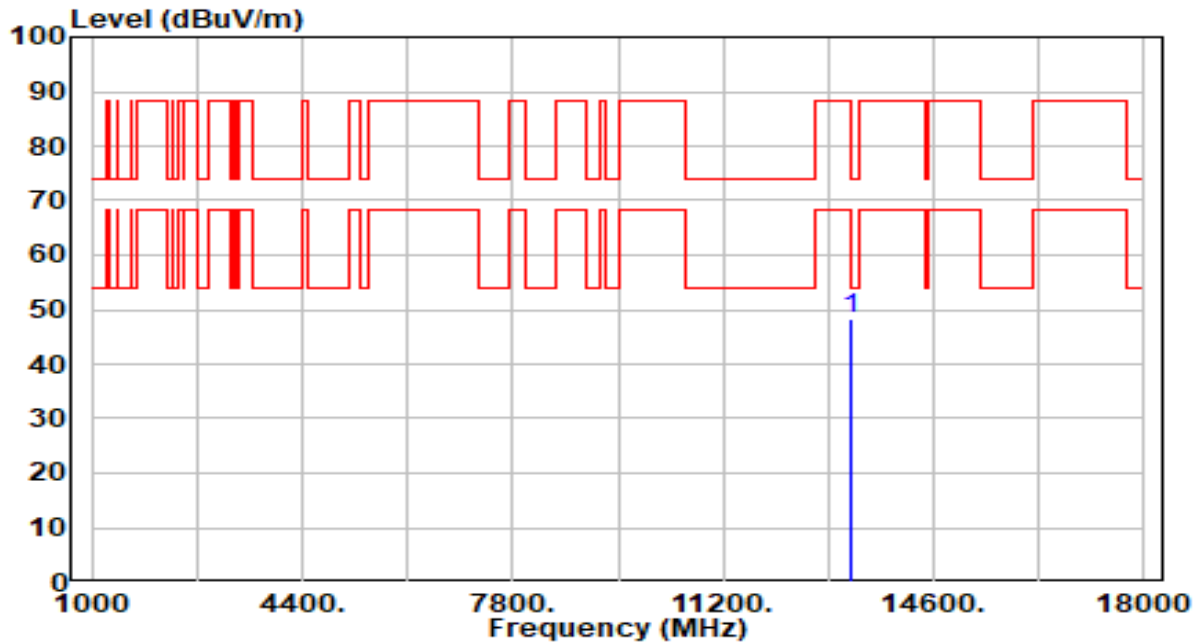


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13250.000     | 41.13          | 7.12       | 48.25                | -25.75      | 74.00          | 200         | 142         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 151_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

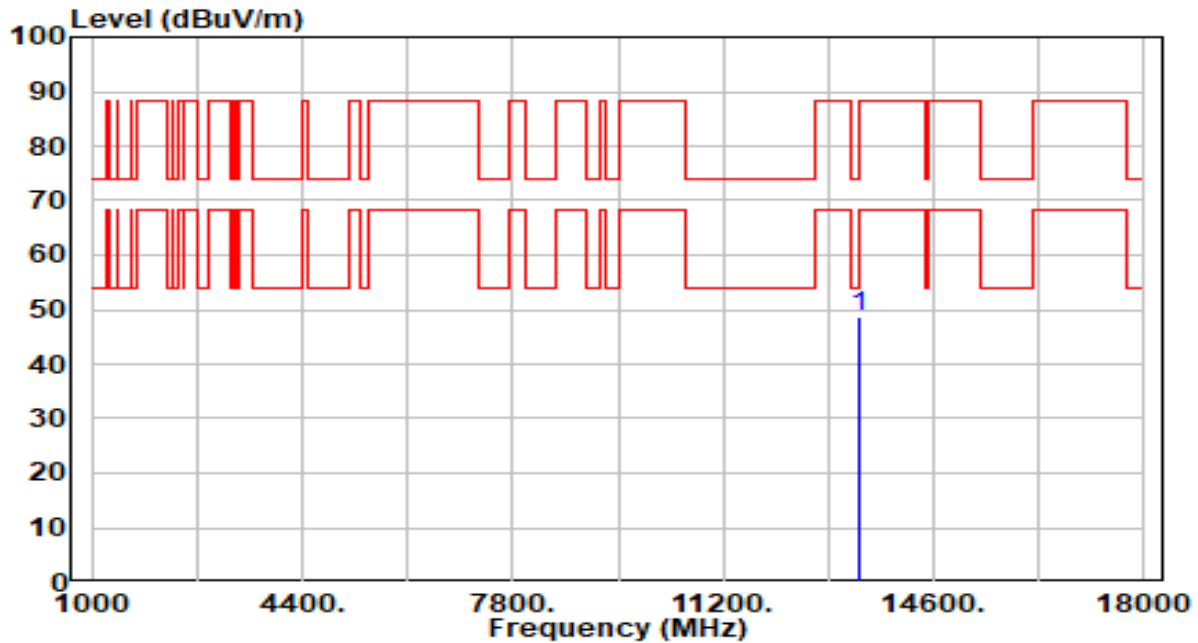


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13410.000     | 41.46          | 7.08       | 48.54                | -39.66      | 88.20          | 100         | 111         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 151_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

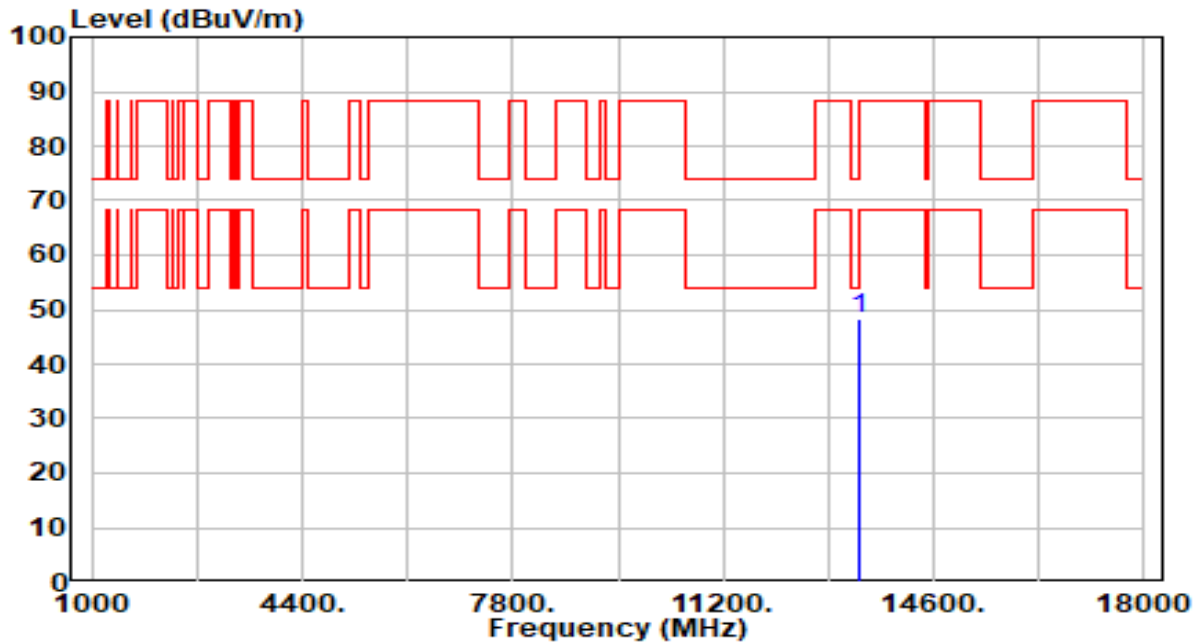


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13410.000     | 41.09          | 7.08       | 48.17                | -40.03      | 88.20          | 200         | 52          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 183_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

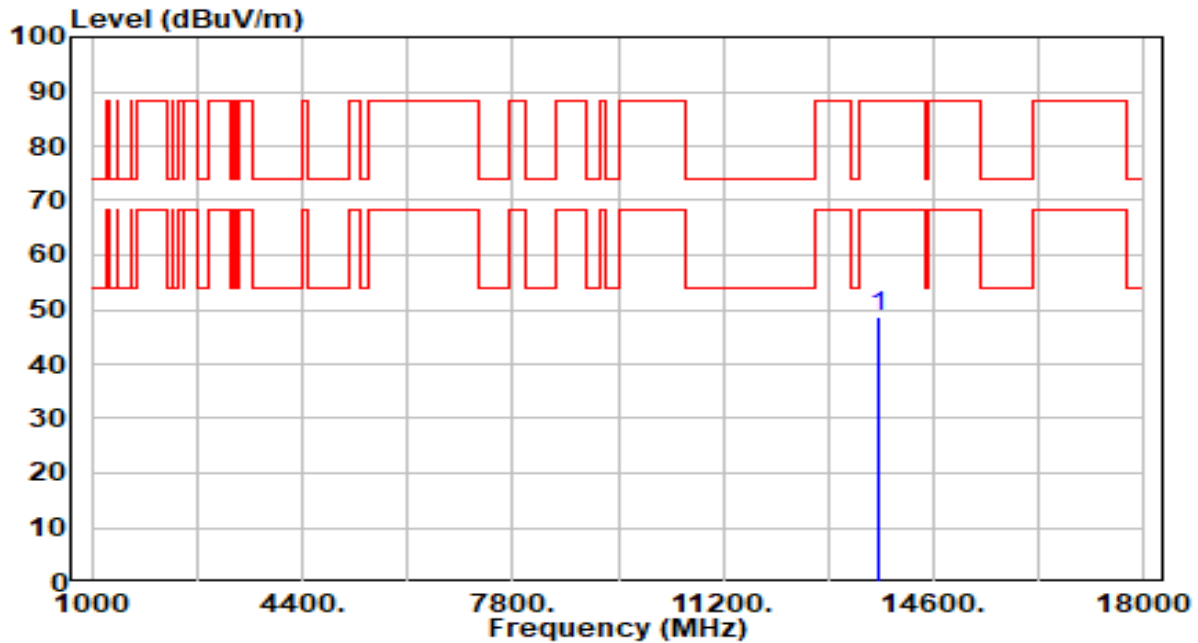


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13730.000     | 42.11          | 6.75       | 48.86                | -39.34      | 88.20          | 100         | 326         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 183_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

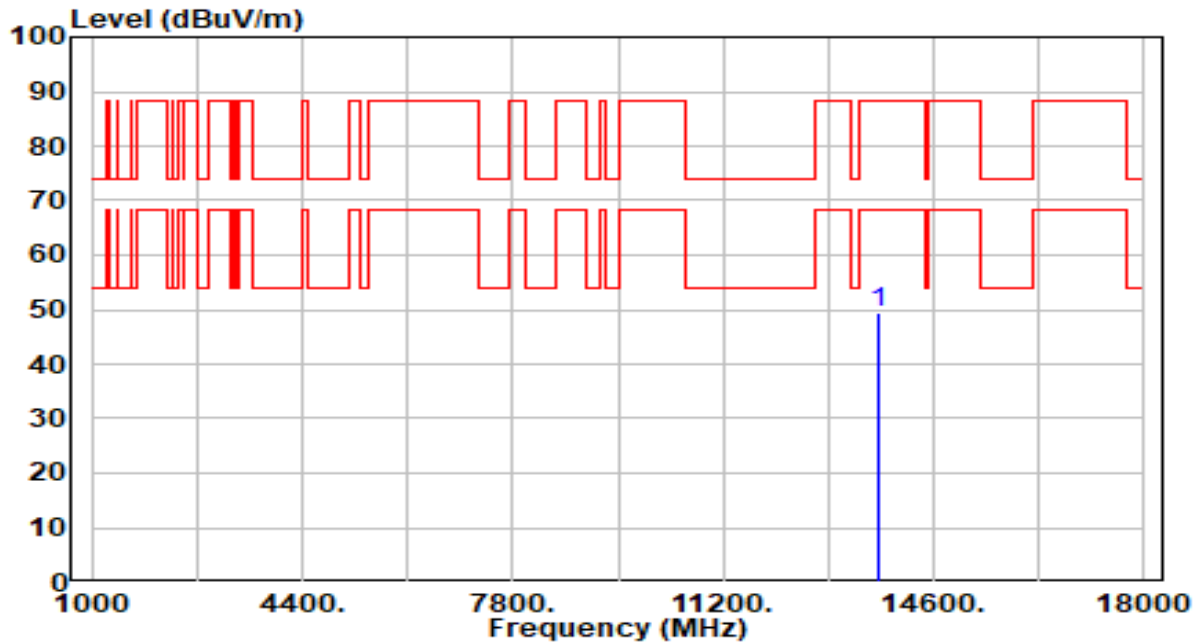


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13730.000     | 42.59          | 6.75       | 49.34                | -38.86      | 88.20          | 200         | 259         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 199_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

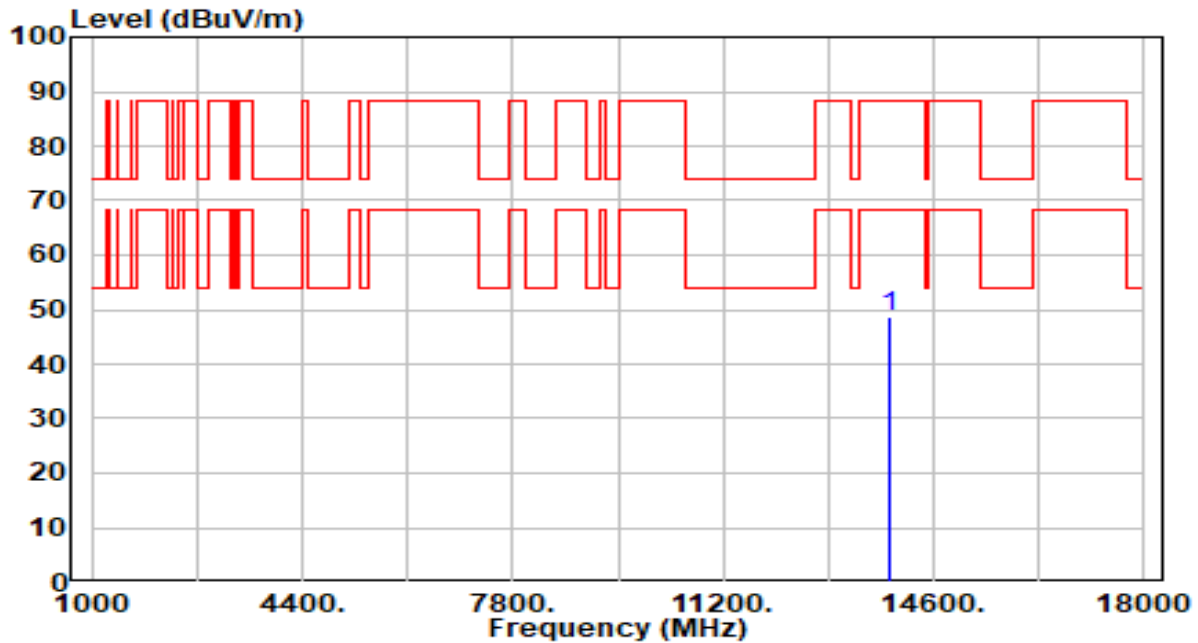


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13890.000     | 42.01          | 6.77       | 48.77                | -39.43      | 88.20          | 100         | 181         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 199_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

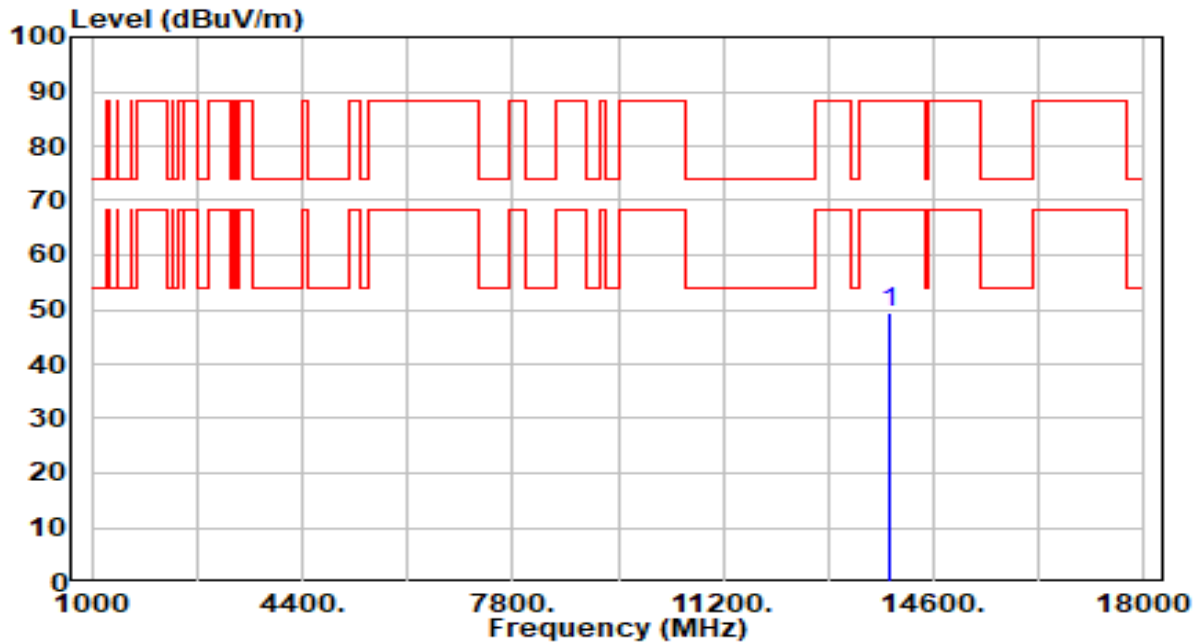


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13890.000     | 42.50          | 6.77       | 49.27                | -38.93      | 88.20          | 200         | 270         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

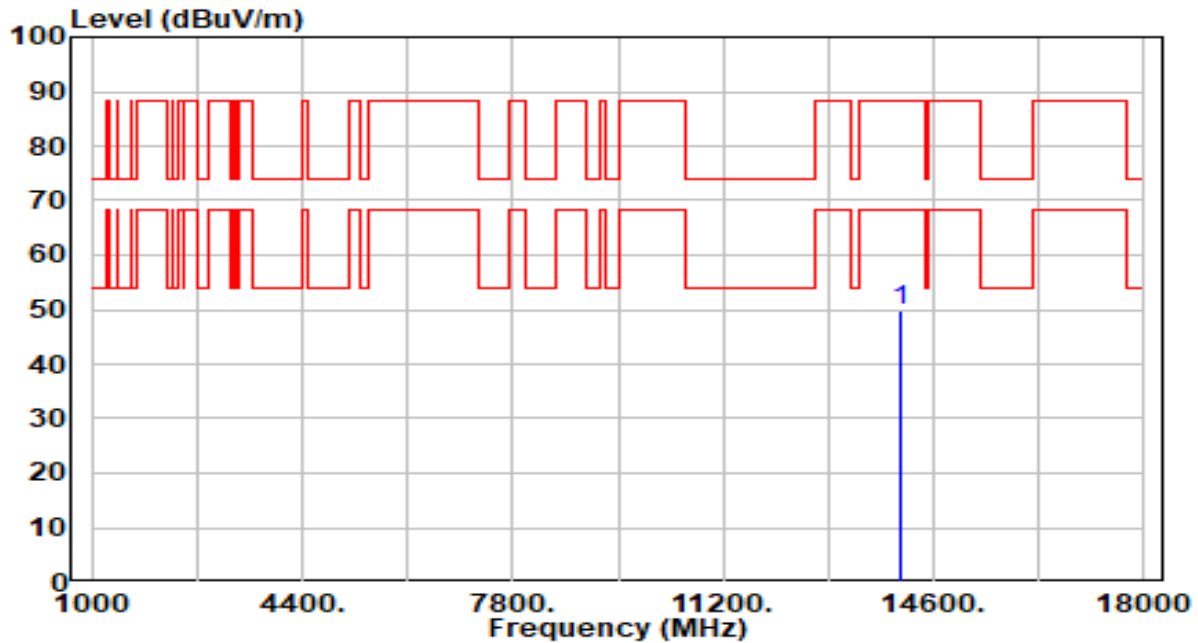


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14050.000     | 43.13          | 6.82       | 49.96                | -38.24      | 88.20          | 100         | 26          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

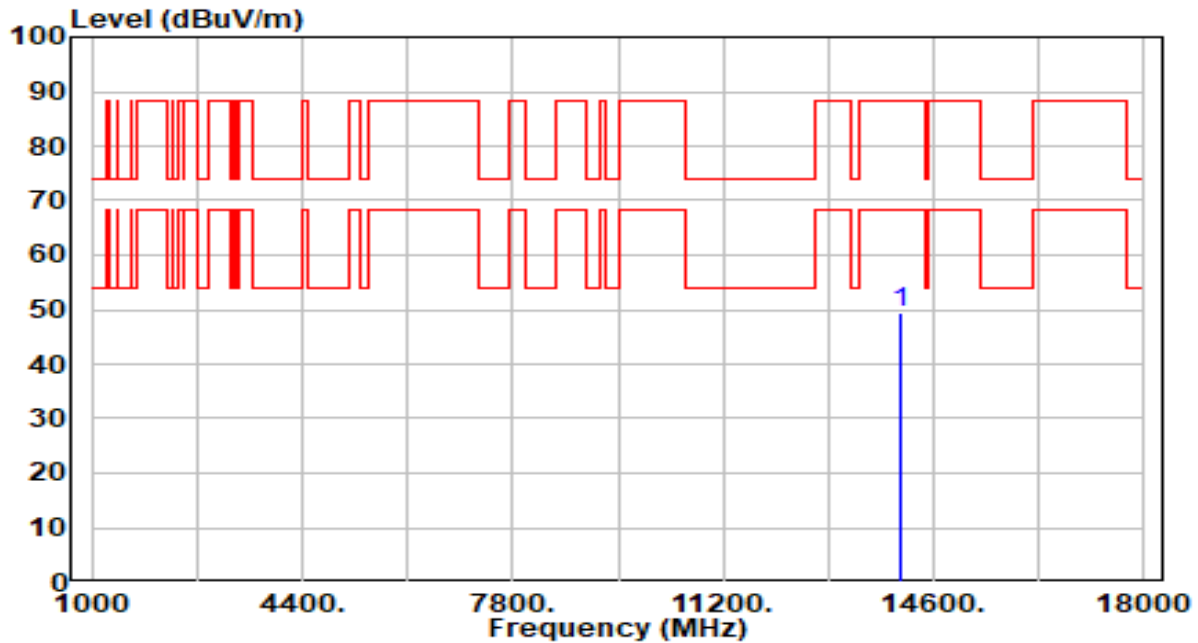


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14050.000     | 42.73          | 6.82       | 49.55                | -38.65      | 88.20          | 200         | 263         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

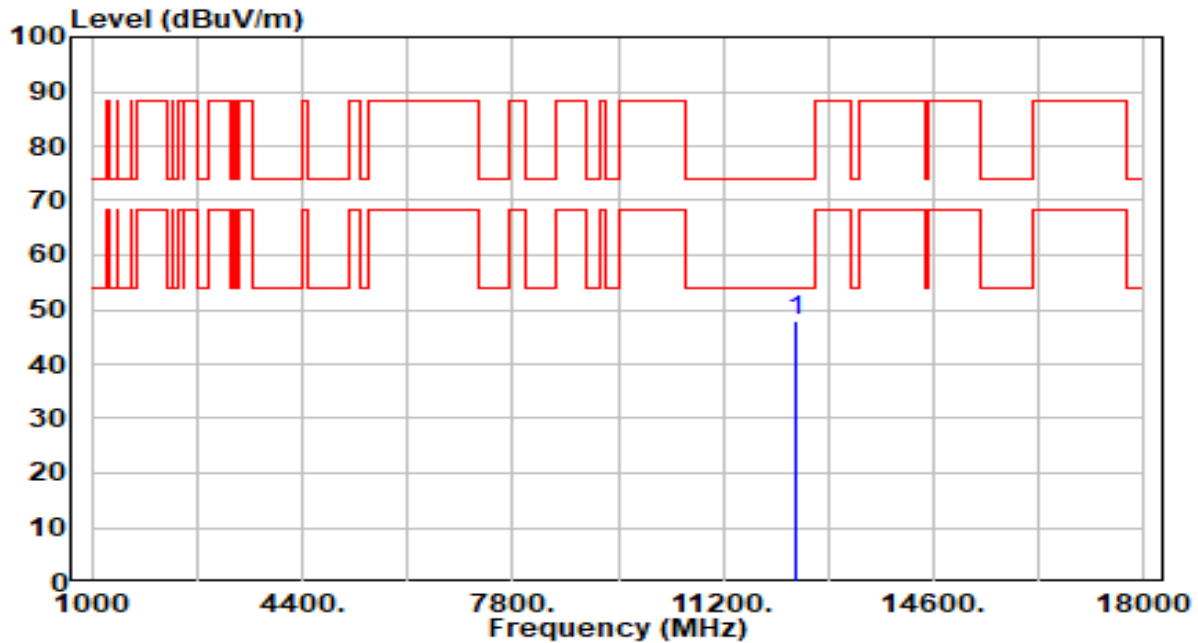


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12370.000     | 41.56          | 6.31       | 47.87                | -26.13      | 74.00          | 100         | 333         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

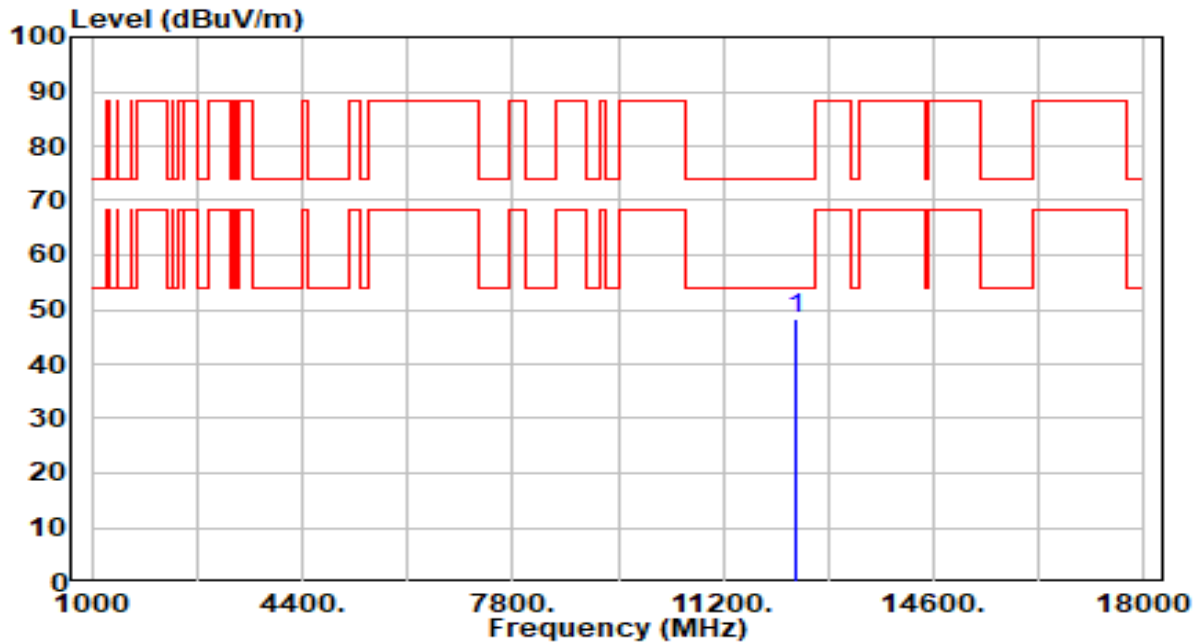


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12370.000     | 42.15          | 6.31       | 48.46                | -25.54      | 74.00          | 200         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 79_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

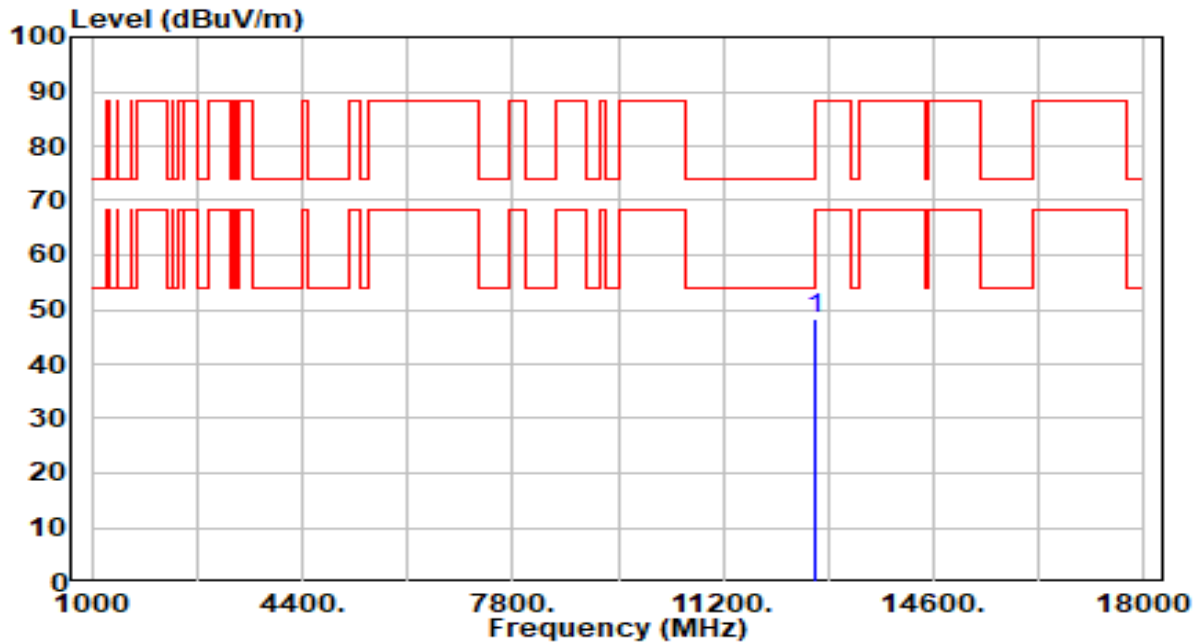


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12690.000     | 41.21          | 7.06       | 48.28                | -25.72      | 74.00          | 100         | 54          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 79_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

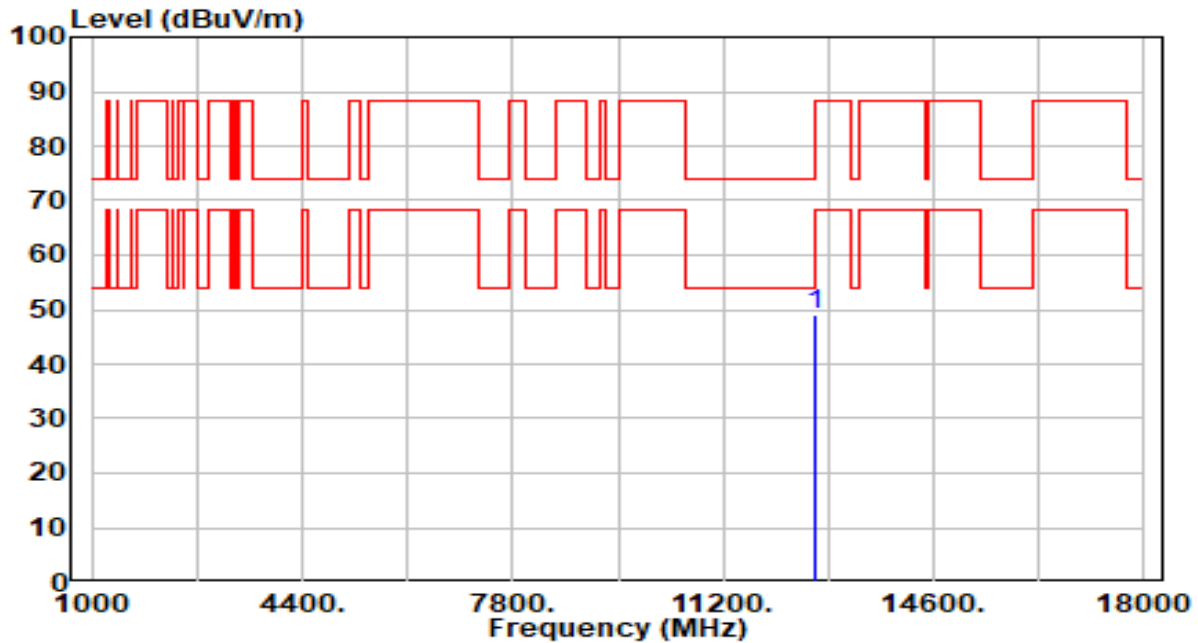


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12690.000     | 41.98          | 7.06       | 49.04                | -24.96      | 74.00          | 200         | 249         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band6_CH 111_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

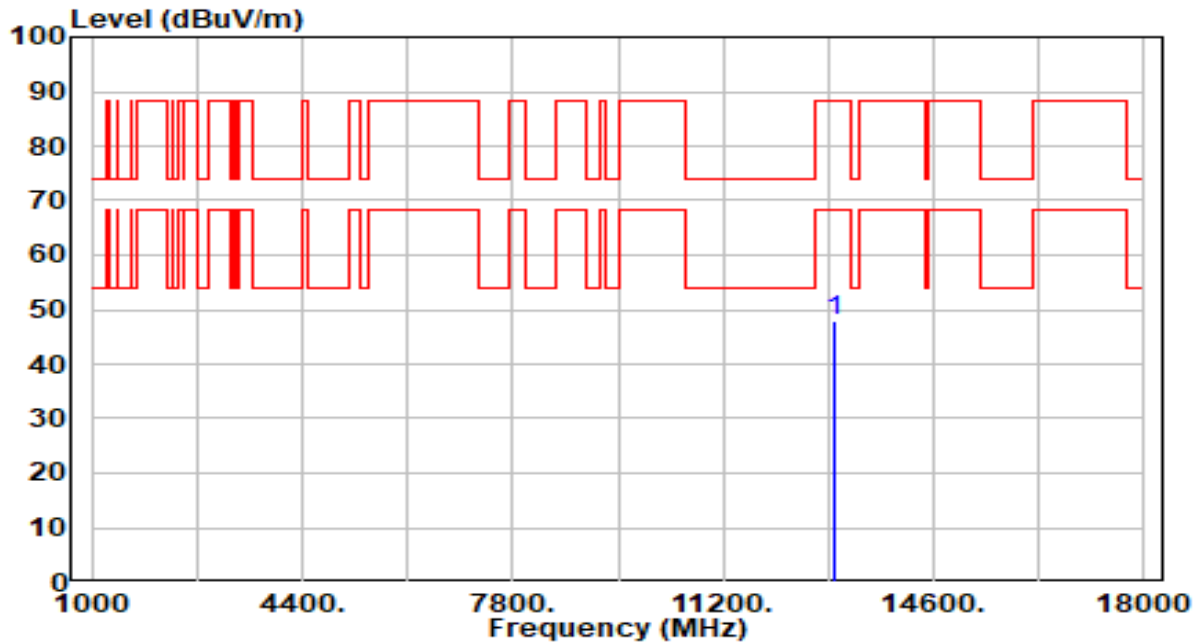


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13010.000     | 40.77          | 7.25       | 48.03                | -40.17      | 88.20          | 100         | 336         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band6_CH 111_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

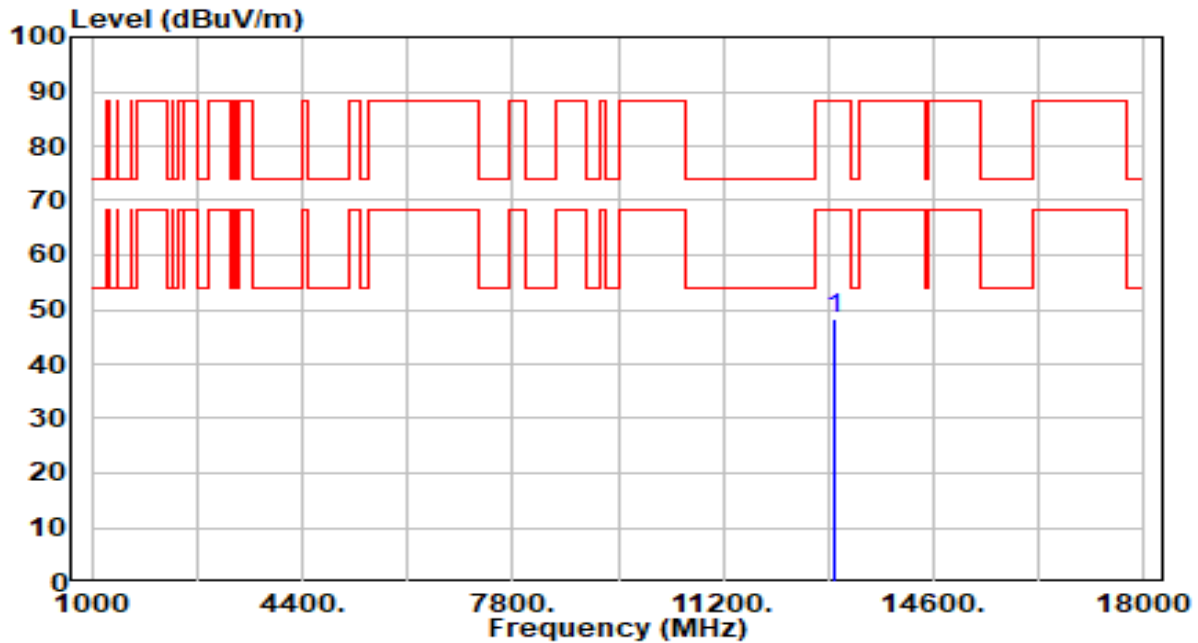


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13010.000     | 40.93          | 7.25       | 48.18                | -40.02      | 88.20          | 159         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 143_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

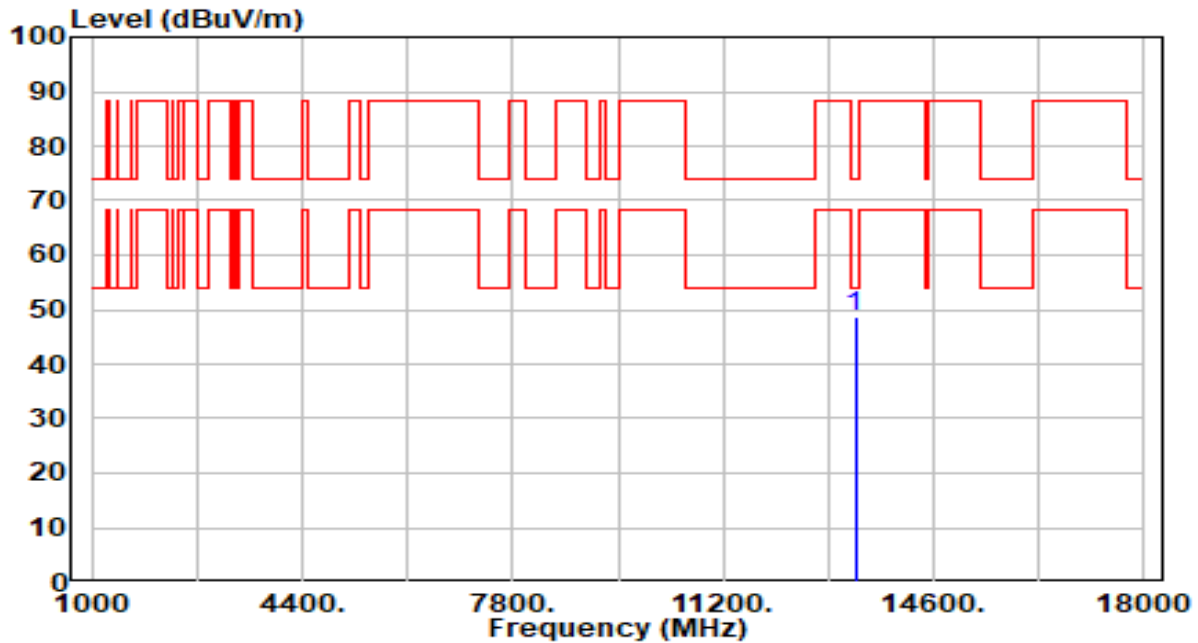


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13330.000     | 41.40          | 7.10       | 48.50                | -25.50      | 74.00          | 100         | 20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 143_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

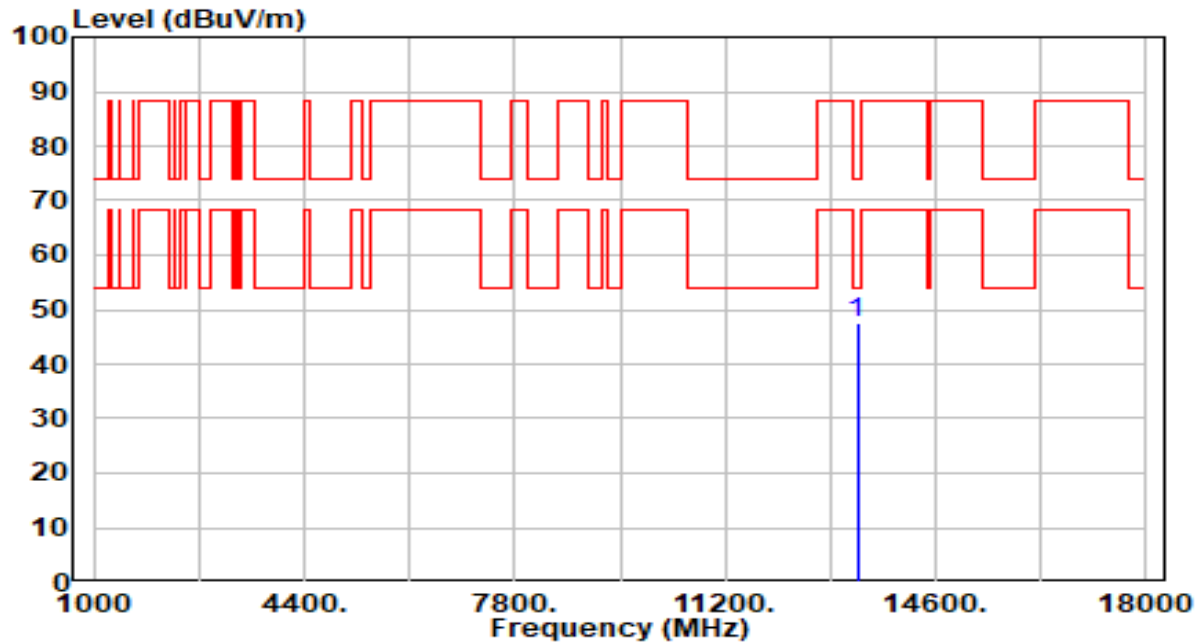


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13330.000     | 40.50          | 7.10       | 47.61                | -26.39      | 74.00          | 200         | 51          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 175_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

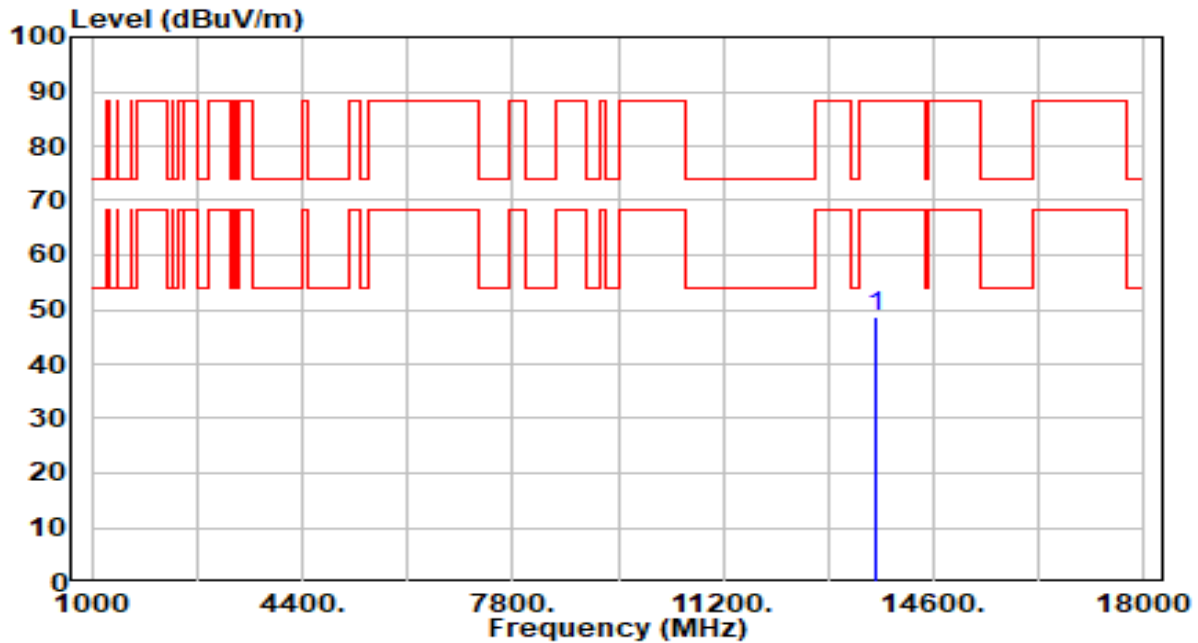


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13650.000     | 42.01          | 6.74       | 48.75                | -39.45      | 88.20          | 100         | 34          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 175_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

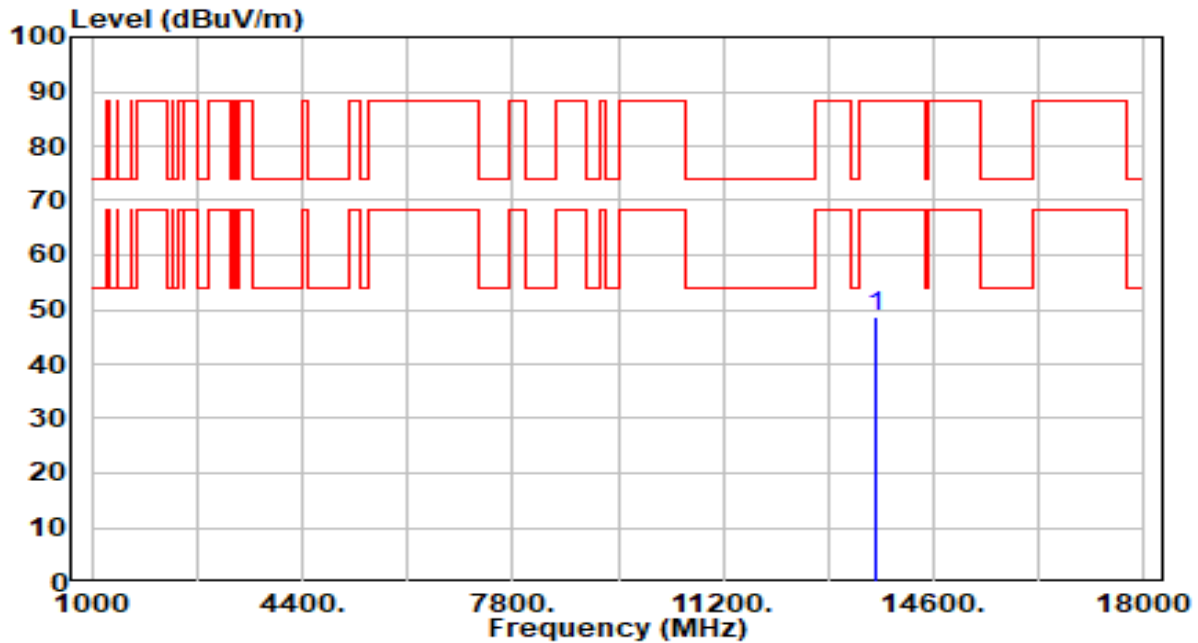


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13650.000     | 41.98          | 6.74       | 48.72                | -39.48      | 88.20          | 200         | 231         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

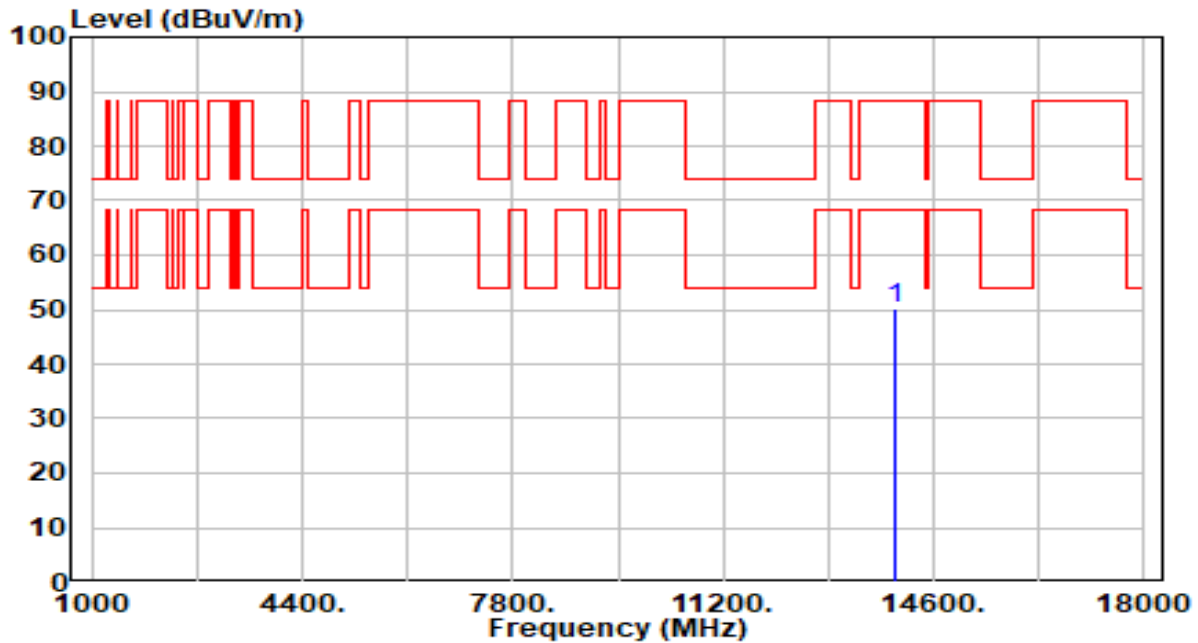


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13970.000     | 43.36          | 6.78       | 50.13                | -38.07      | 88.20          | 100         | 148         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

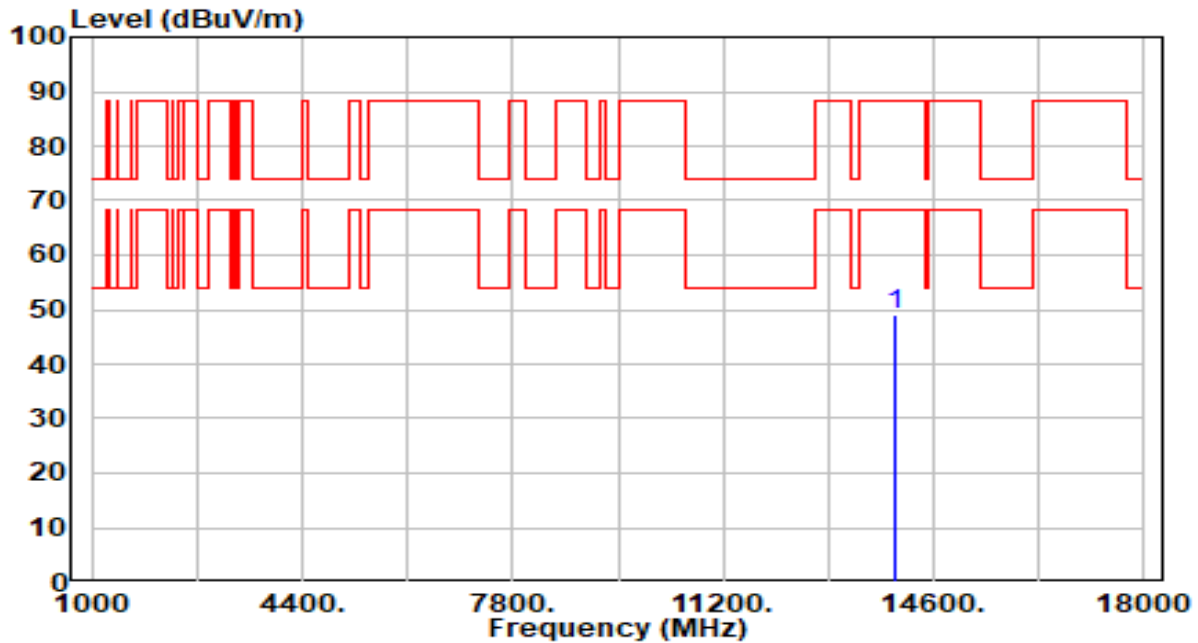


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13970.000     | 42.33          | 6.78       | 49.11                | -39.09      | 88.20          | 200         | 14          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

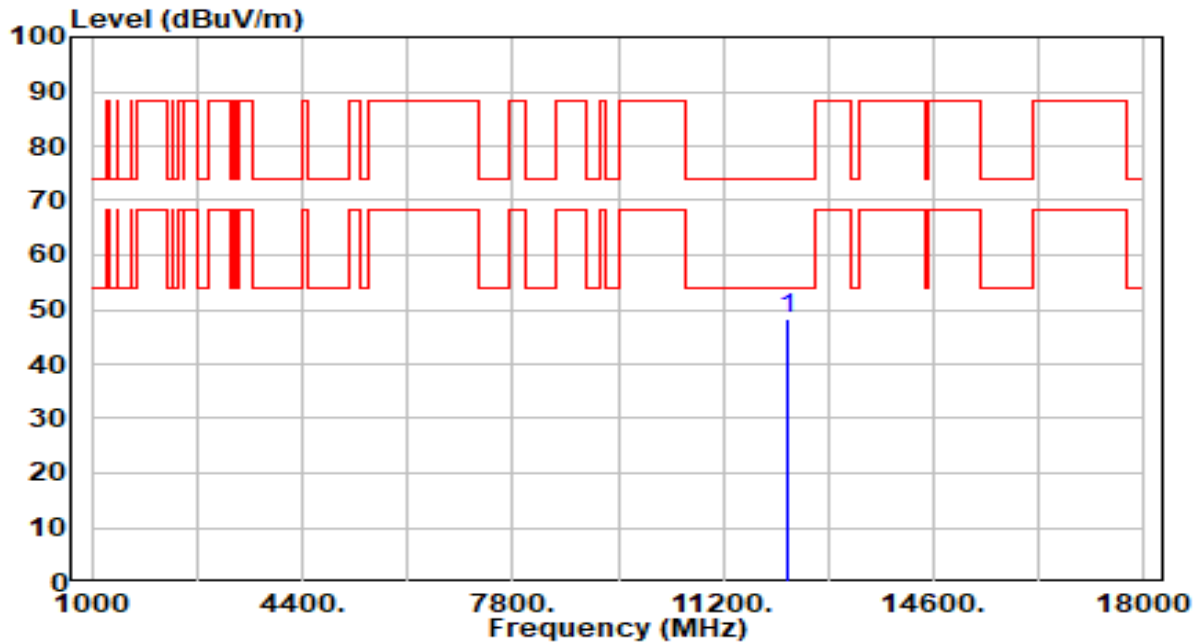


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 12230.000          | 44.04             | 4.43          | 48.47                   | -25.53         | 74.00             | 100            | 98             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

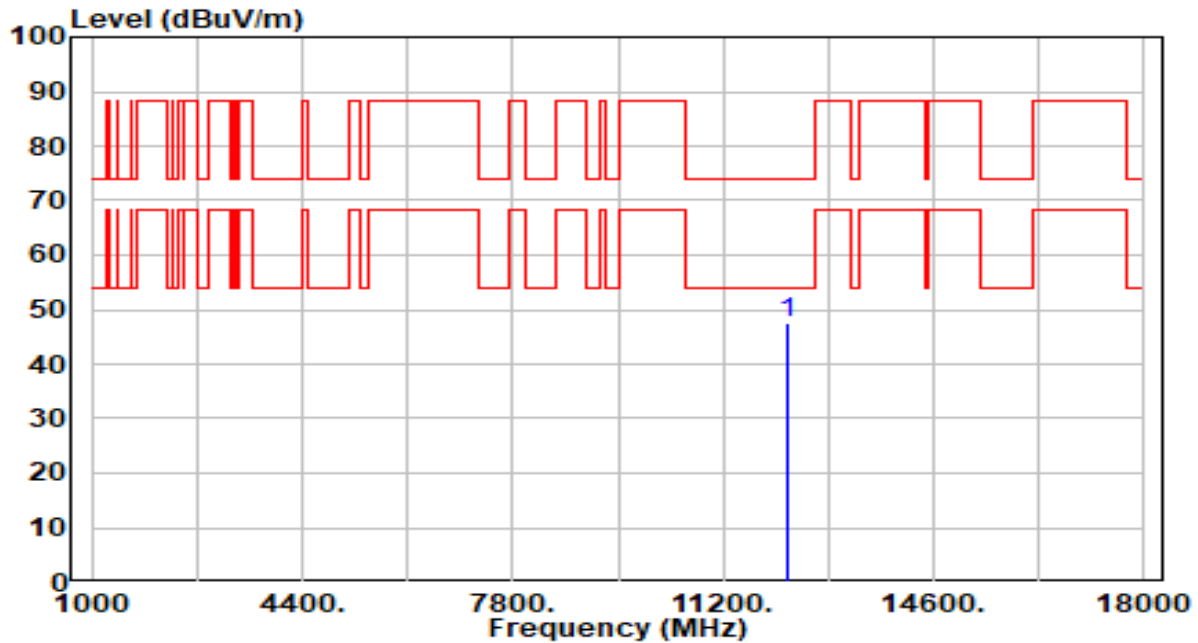


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 12230.000          | 43.23             | 4.43          | 47.66                   | -26.34         | 74.00             | 295            | 0              | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 61_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

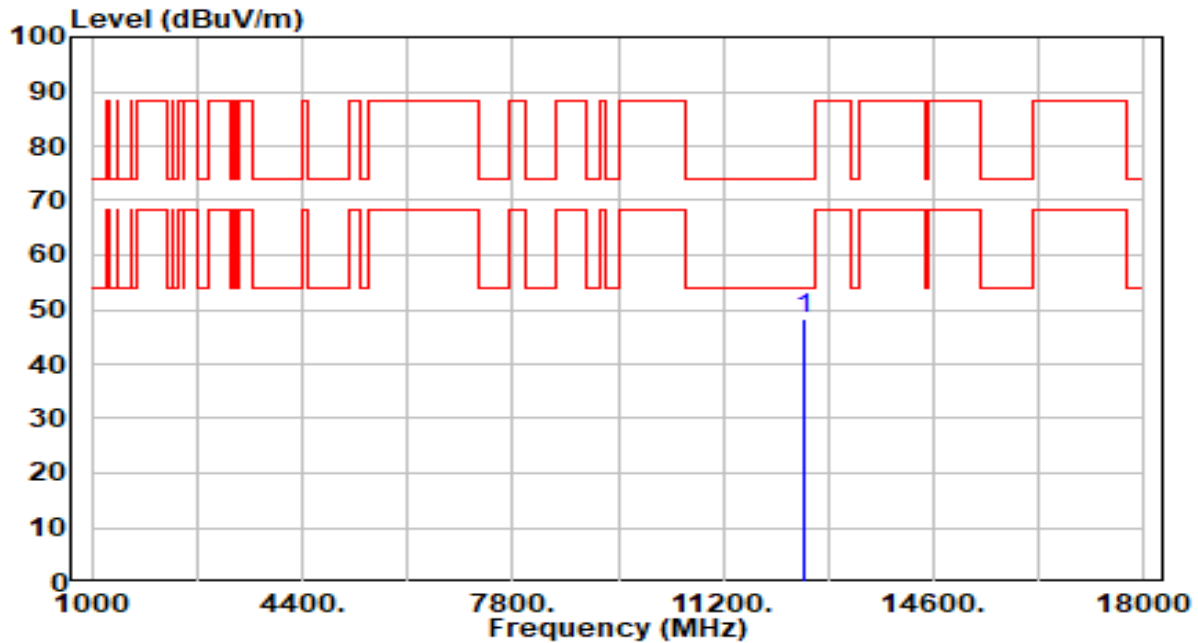


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12510.000     | 43.17          | 4.97       | 48.14                | -25.86      | 74.00          | 100         | 255         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 61_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

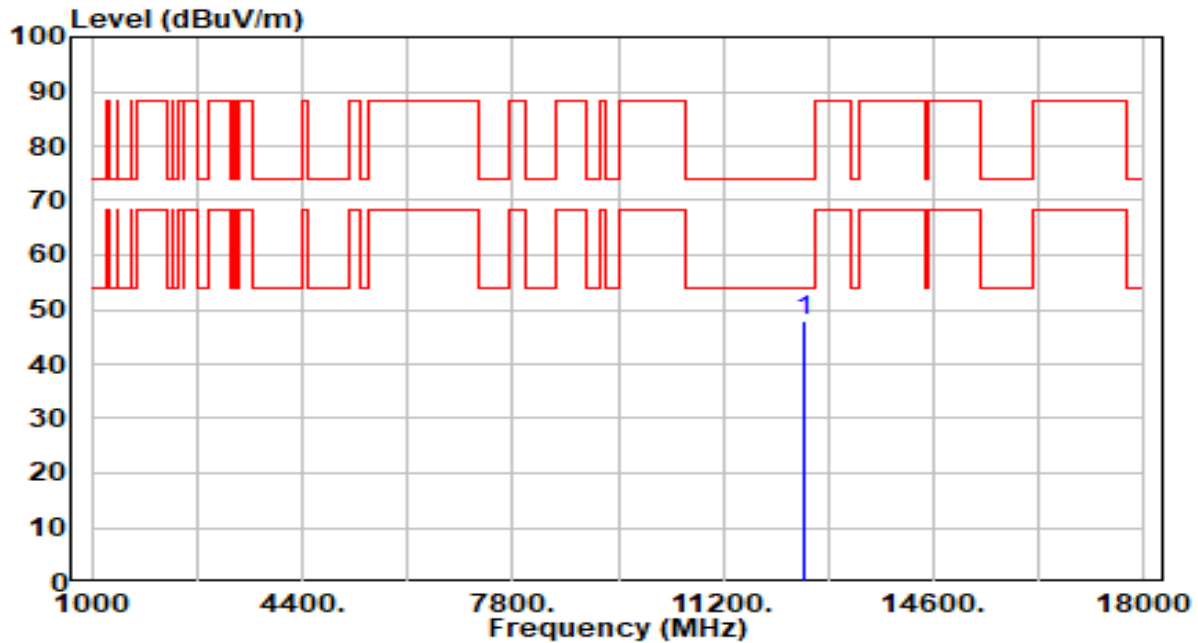


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12510.000     | 42.89          | 4.97       | 47.86                | -26.14      | 74.00          | 200         | 295         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 93_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

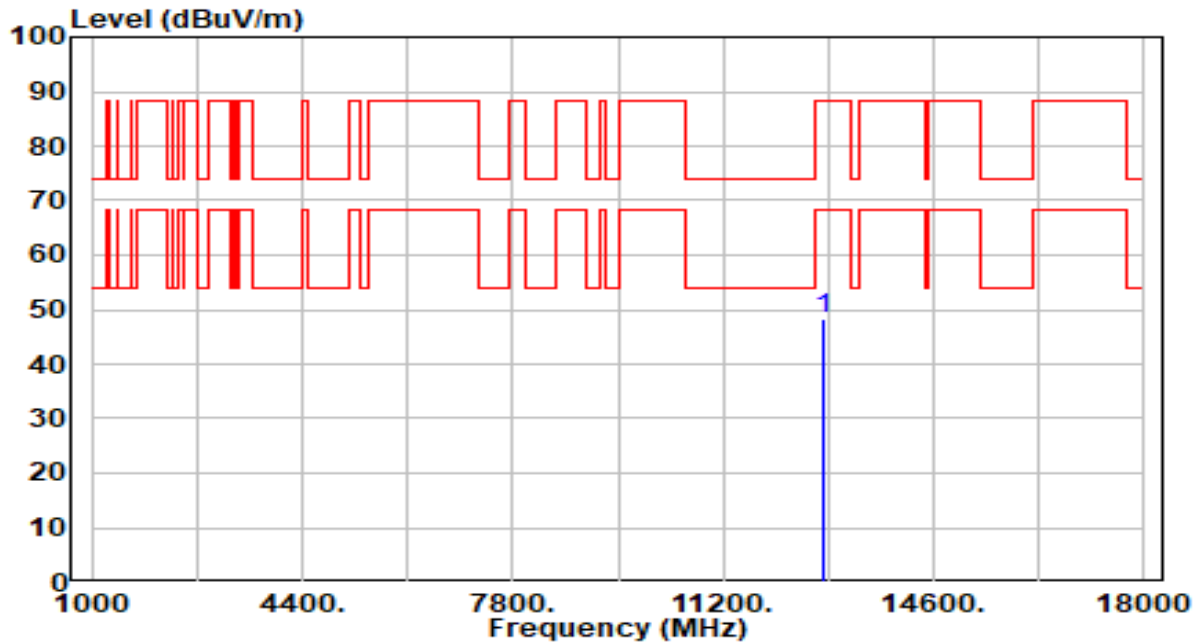


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12830.000     | 42.87          | 5.45       | 48.32                | -39.88      | 88.20          | 100         | 162         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 93_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

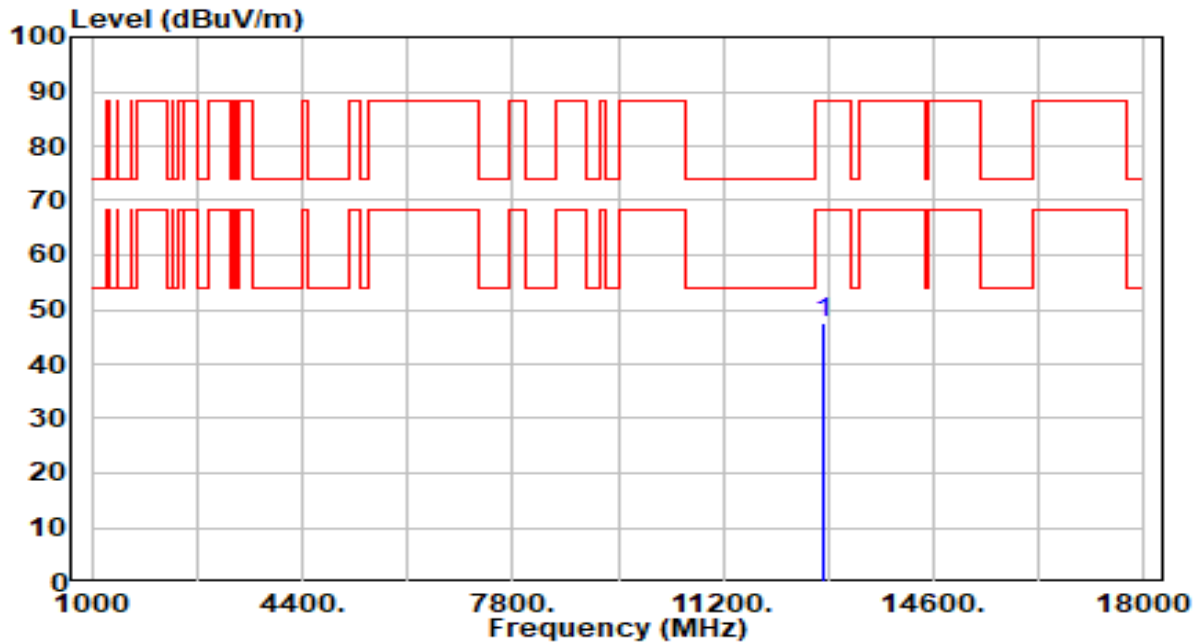


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12830.000     | 42.27          | 5.45       | 47.72                | -40.48      | 88.20          | 200         | 95          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 97_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

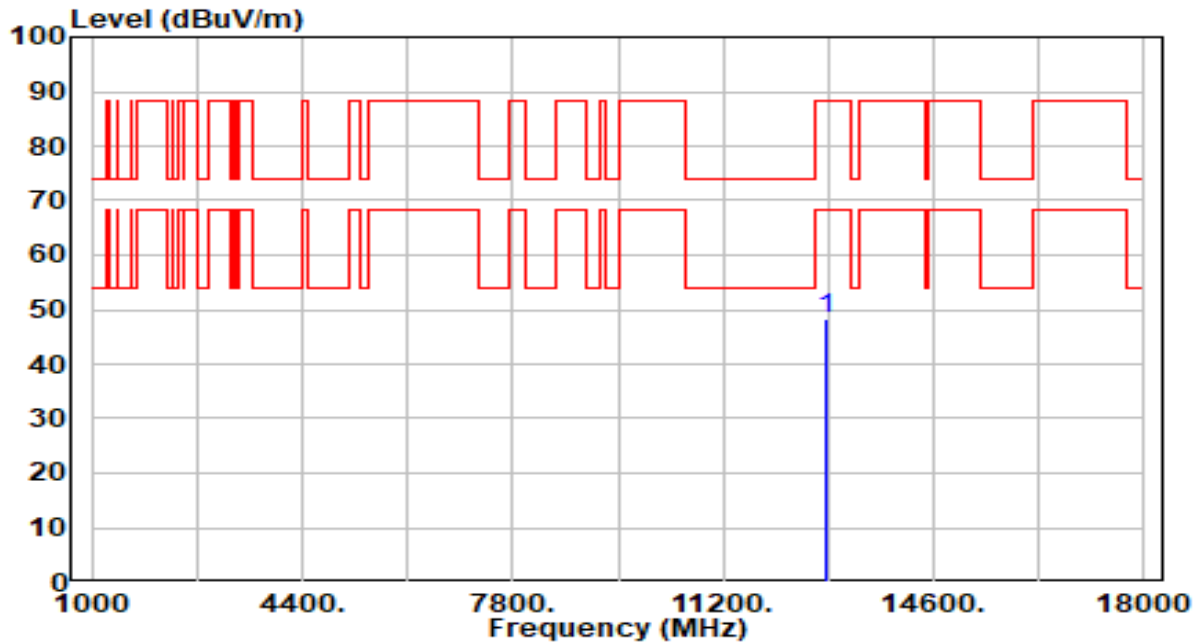


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12870.000     | 42.95          | 5.46       | 48.41                | -39.79      | 88.20          | 100         | 188         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 97_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

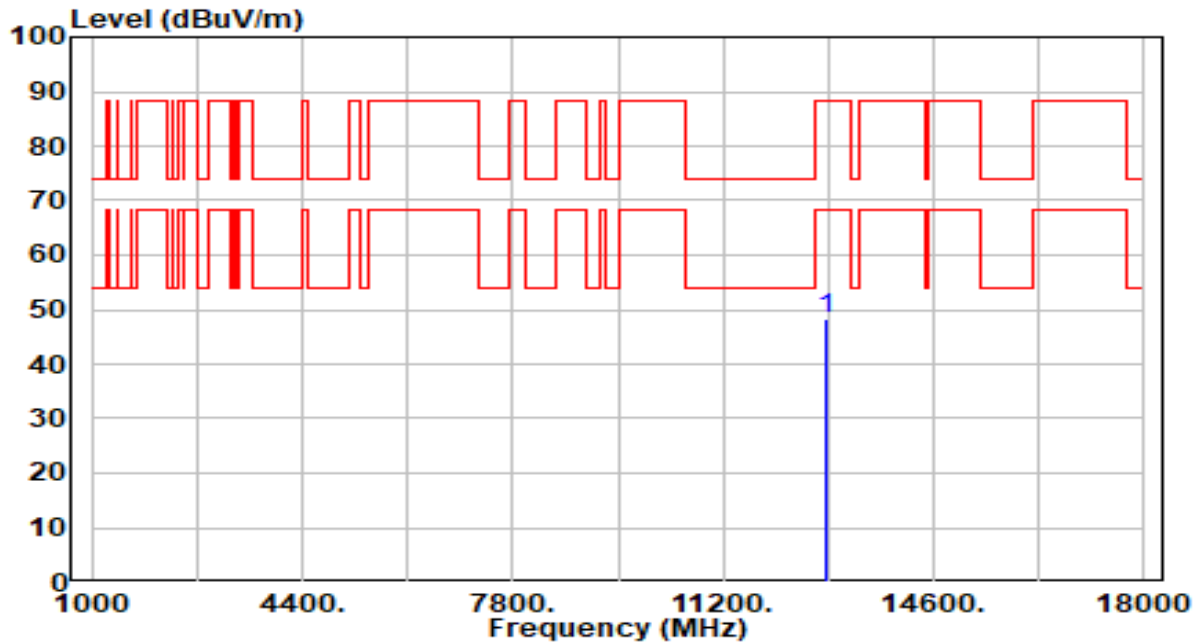


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 12870.000          | 42.71             | 5.46          | 48.17                   | -40.03         | 88.20             | 200            | 83             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 105_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

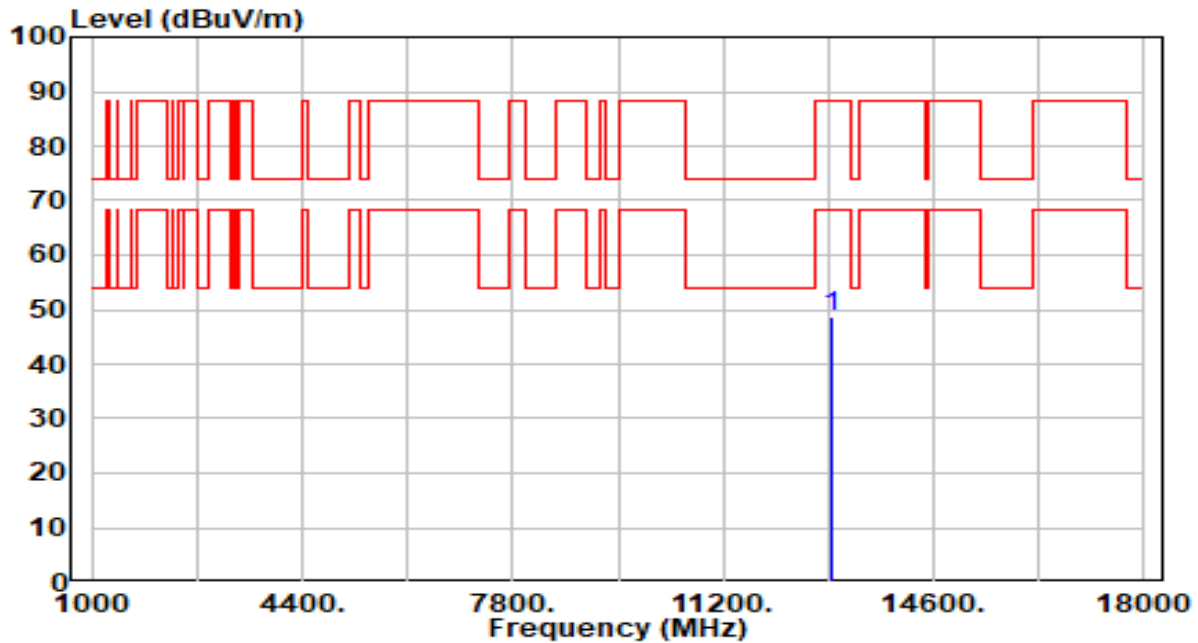


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12950.000     | 43.36          | 5.47       | 48.83                | -39.37      | 88.20          | 100         | 63          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 105_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

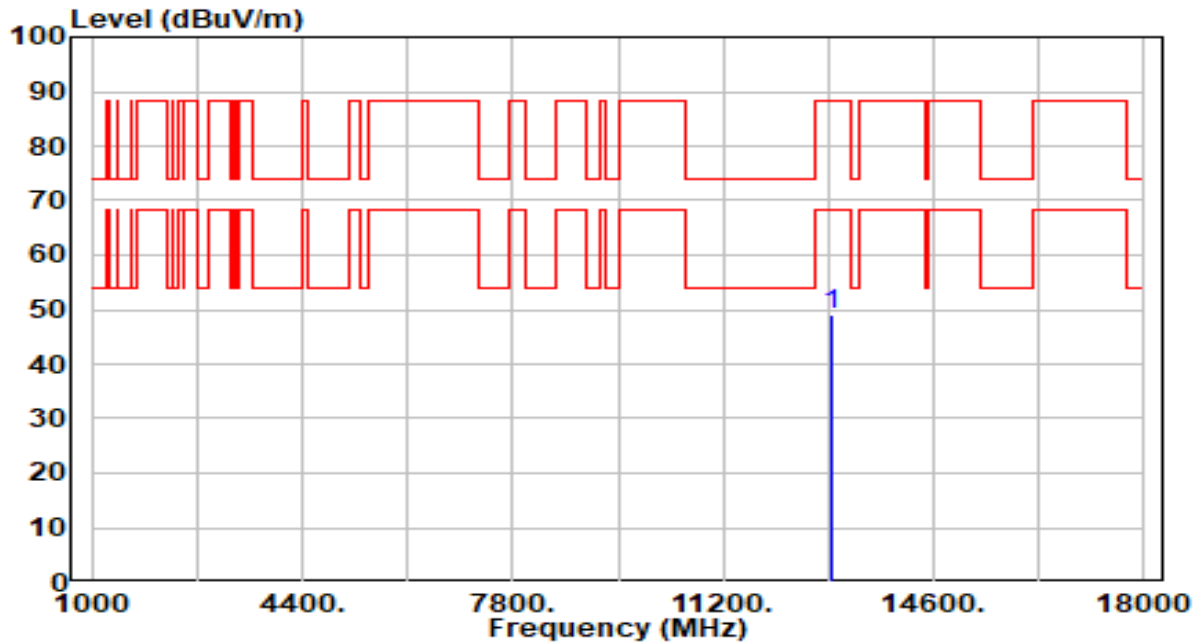


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 12950.000          | 43.43             | 5.47          | 48.90                   | -39.30         | 88.20             | 200            | 303            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 113_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

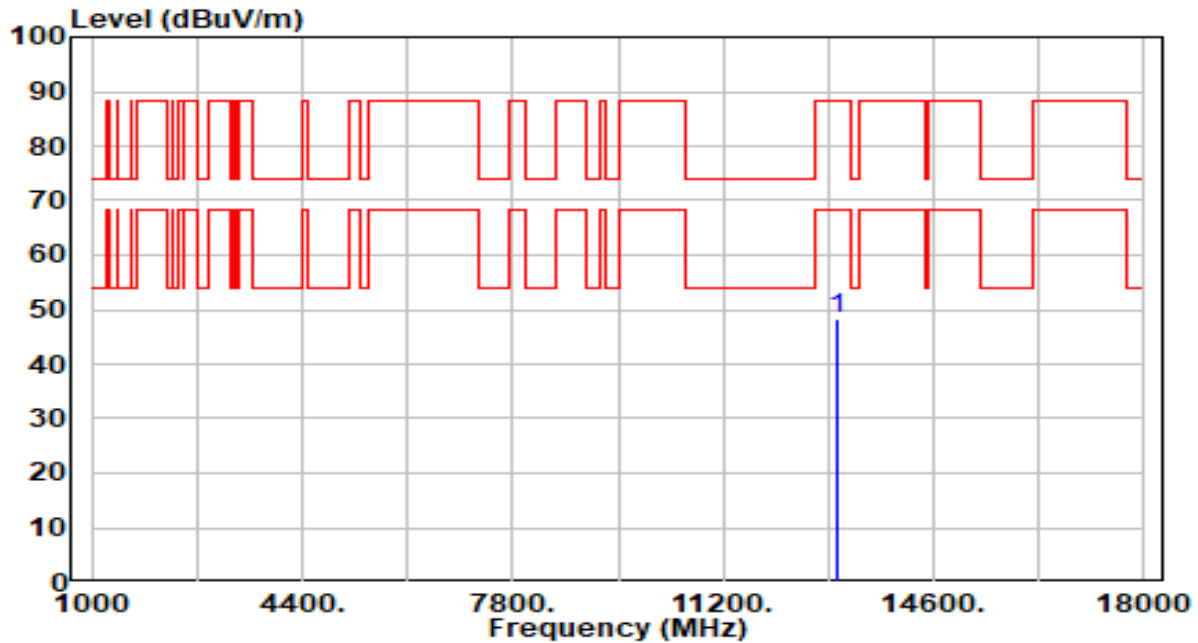


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13030.000     | 42.80          | 5.46       | 48.25                | -39.95      | 88.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band6_CH 113_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

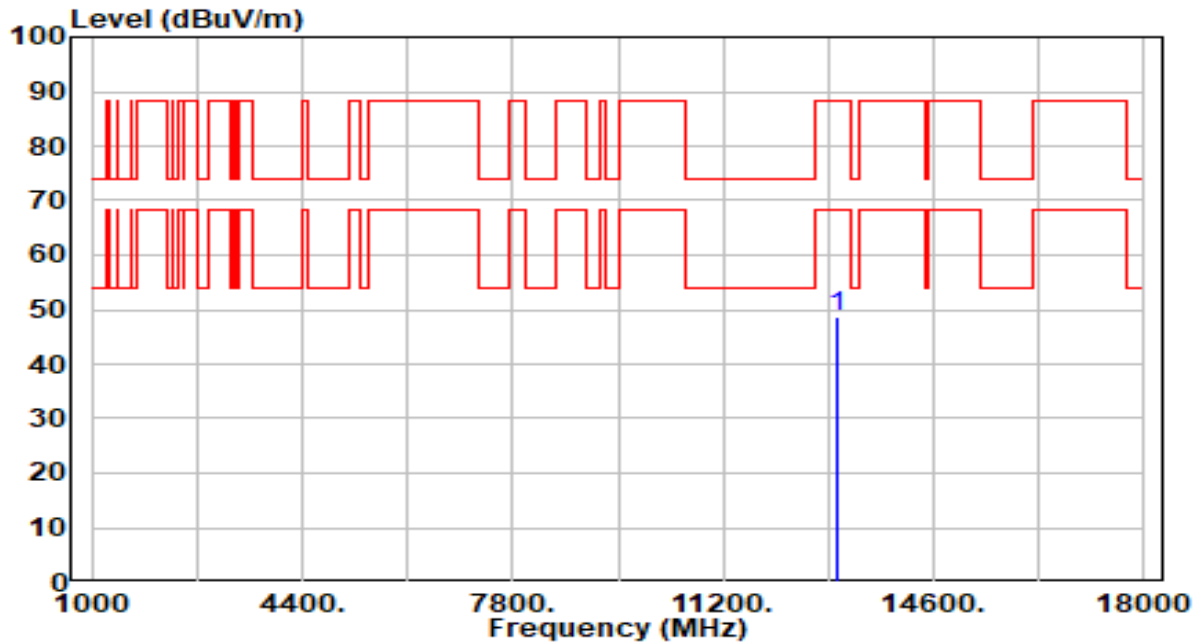


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13030.000     | 43.04          | 5.46       | 48.50                | -39.70      | 88.20          | 200         | 76          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 117_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

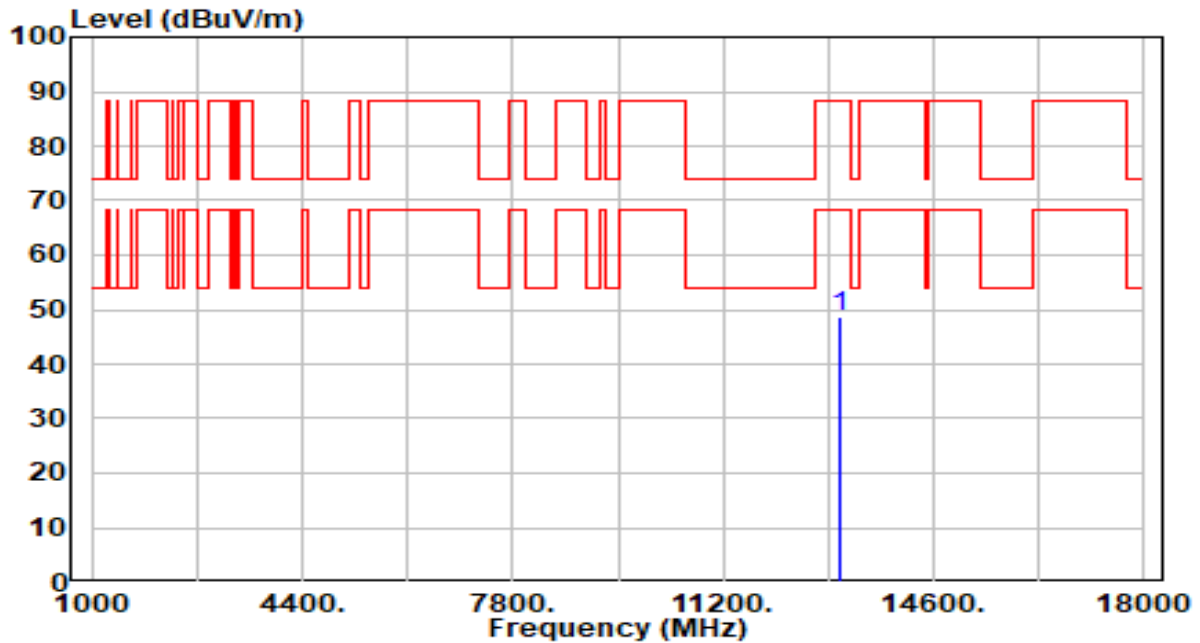


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13070.000     | 43.21          | 5.43       | 48.64                | -39.56      | 88.20          | 100         | -1          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 117_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

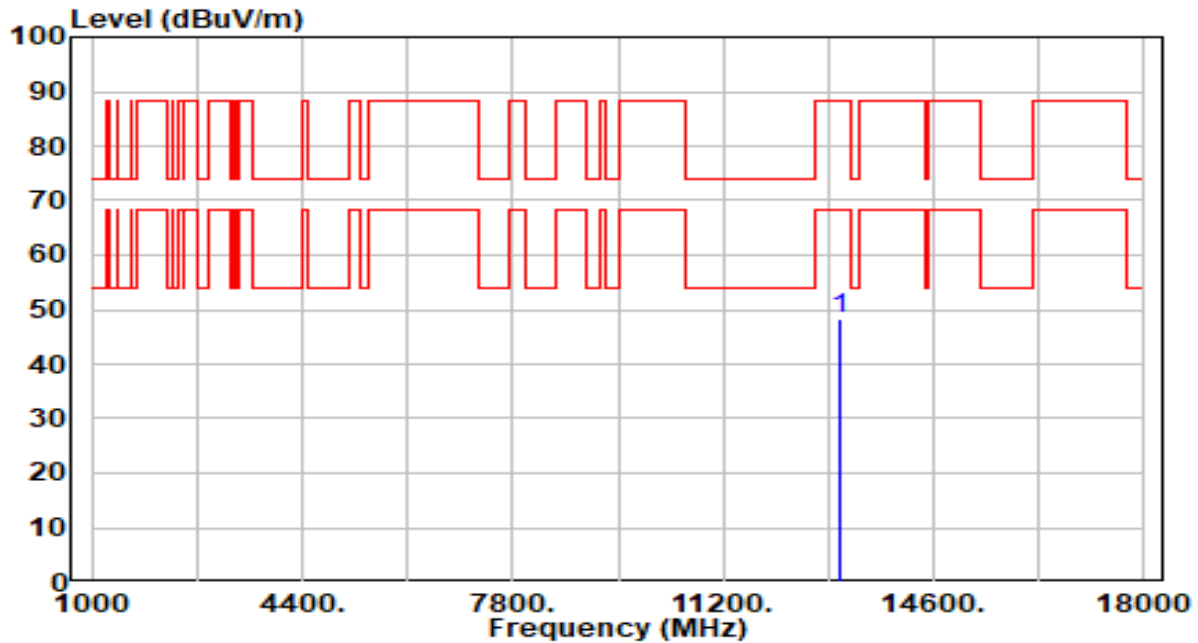


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13070.000     | 42.86          | 5.43       | 48.29                | -39.91      | 88.20          | 200         | 68          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 153_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

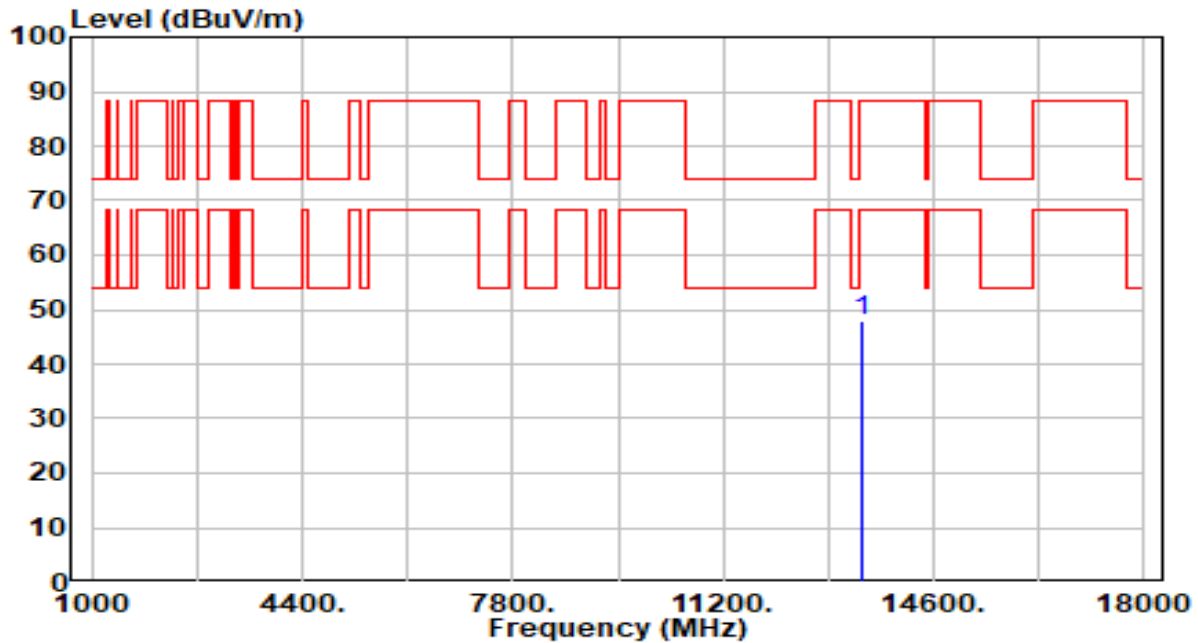


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13430.000     | 42.62          | 5.26       | 47.89                | -40.31      | 88.20          | 100         | 97          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 153_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

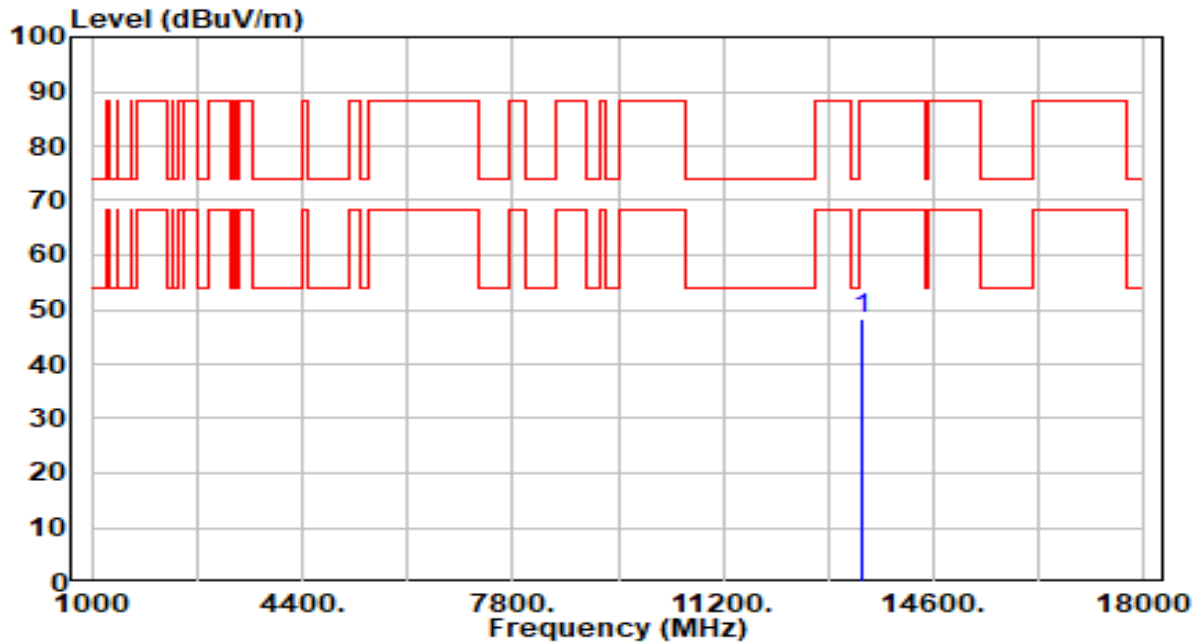


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13430.000     | 43.22          | 5.26       | 48.48                | -39.72      | 88.20          | 200         | 83          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 181_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

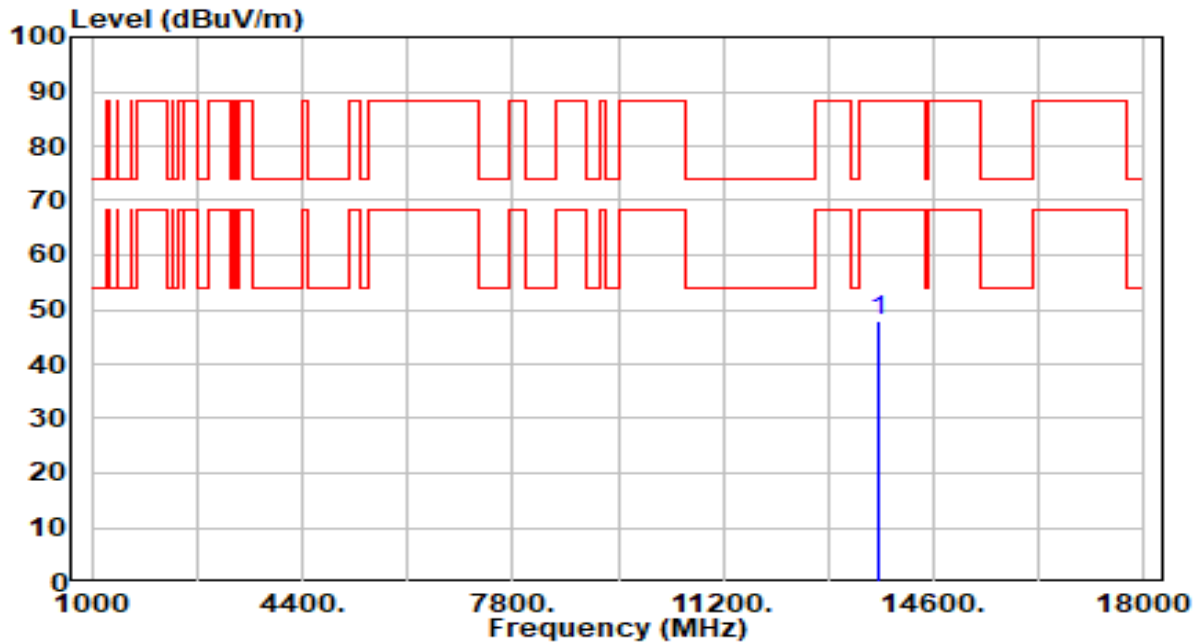


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13710.000     | 43.09          | 4.95       | 48.03                | -40.17      | 88.20          | 100         | 302         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 181_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

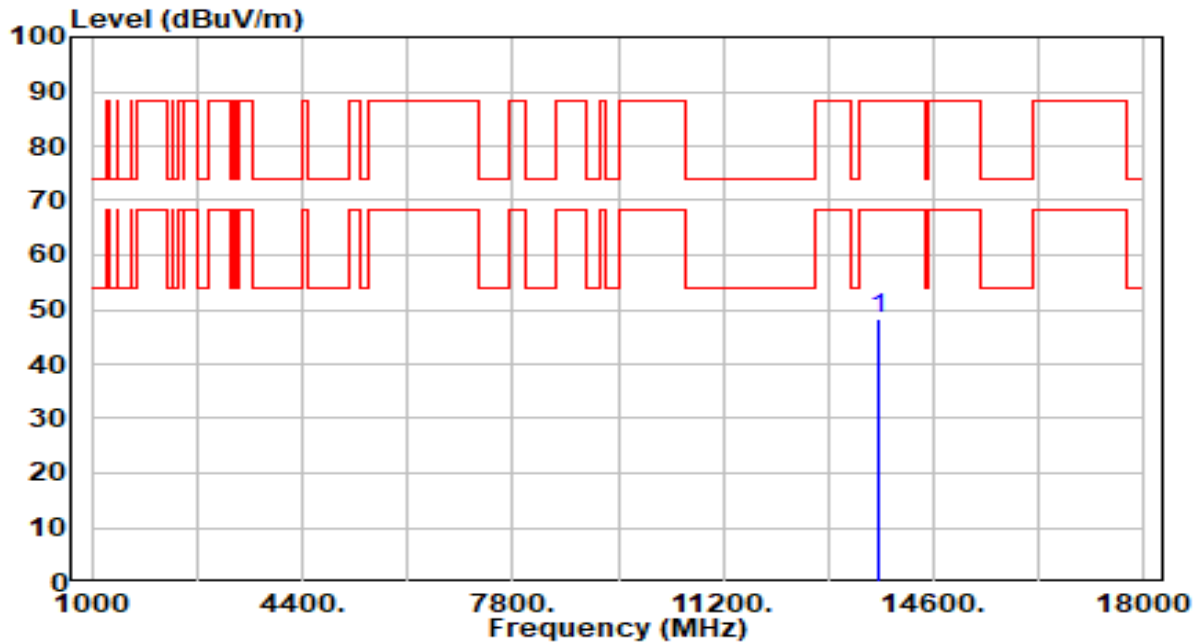


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13710.000     | 43.37          | 4.95       | 48.31                | -39.89      | 88.20          | 200         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 185_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

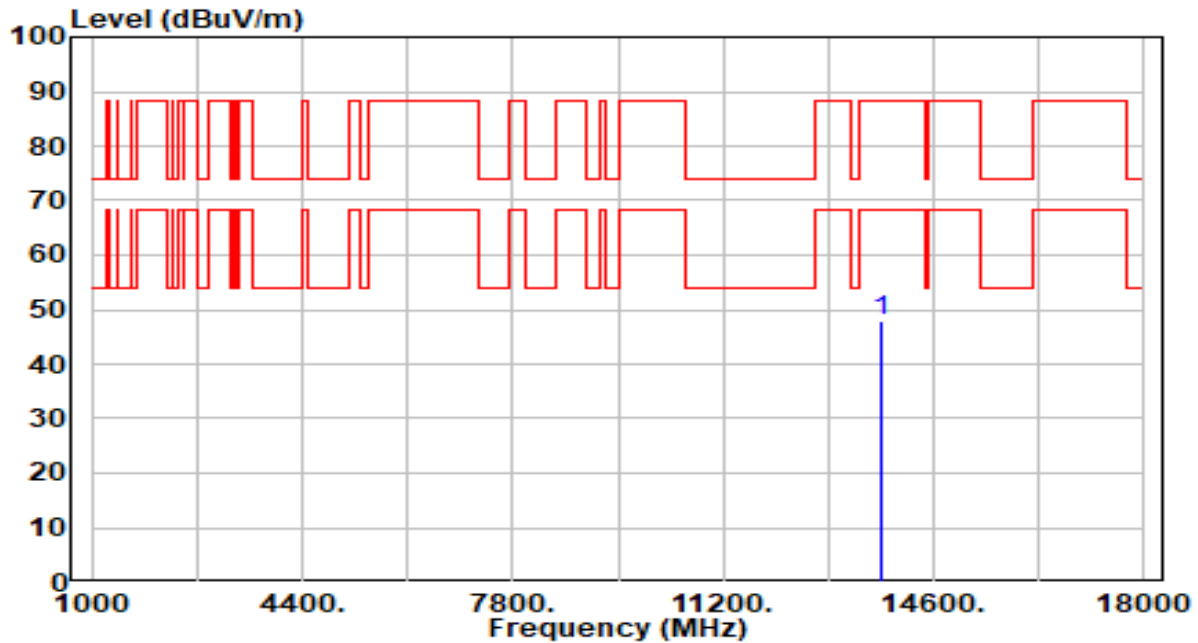


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13750.000     | 43.16          | 4.95       | 48.11                | -40.09      | 88.20          | 100         | 208         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band7_CH 185_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

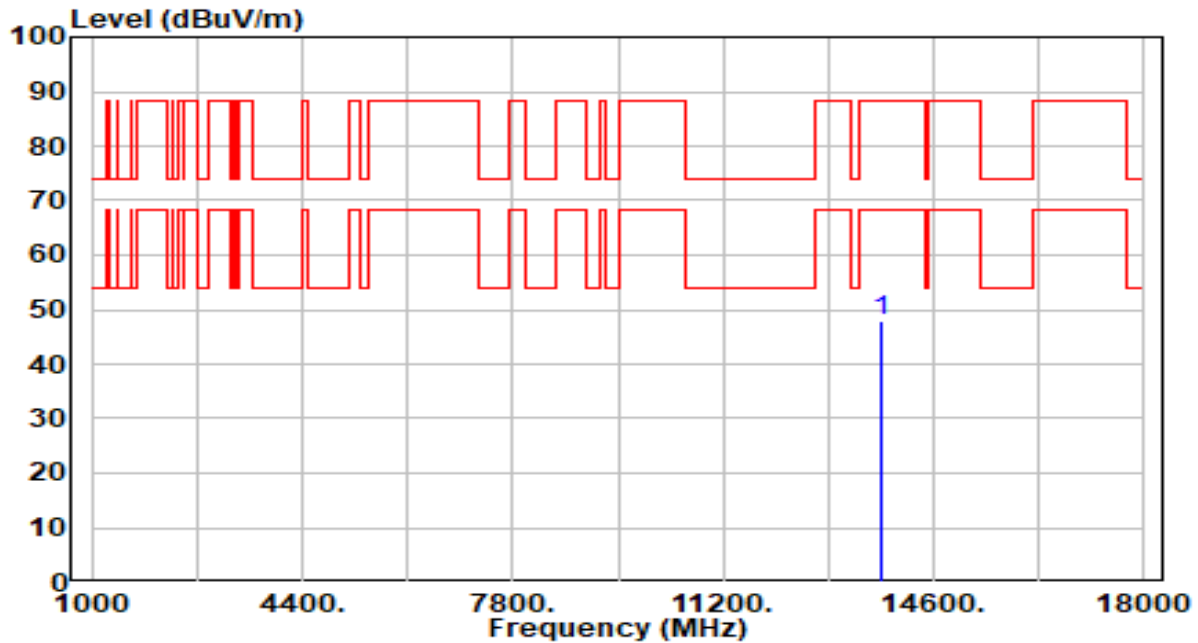


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13750.000     | 43.11          | 4.95       | 48.06                | -40.14      | 88.20          | 200         | 288         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 189_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

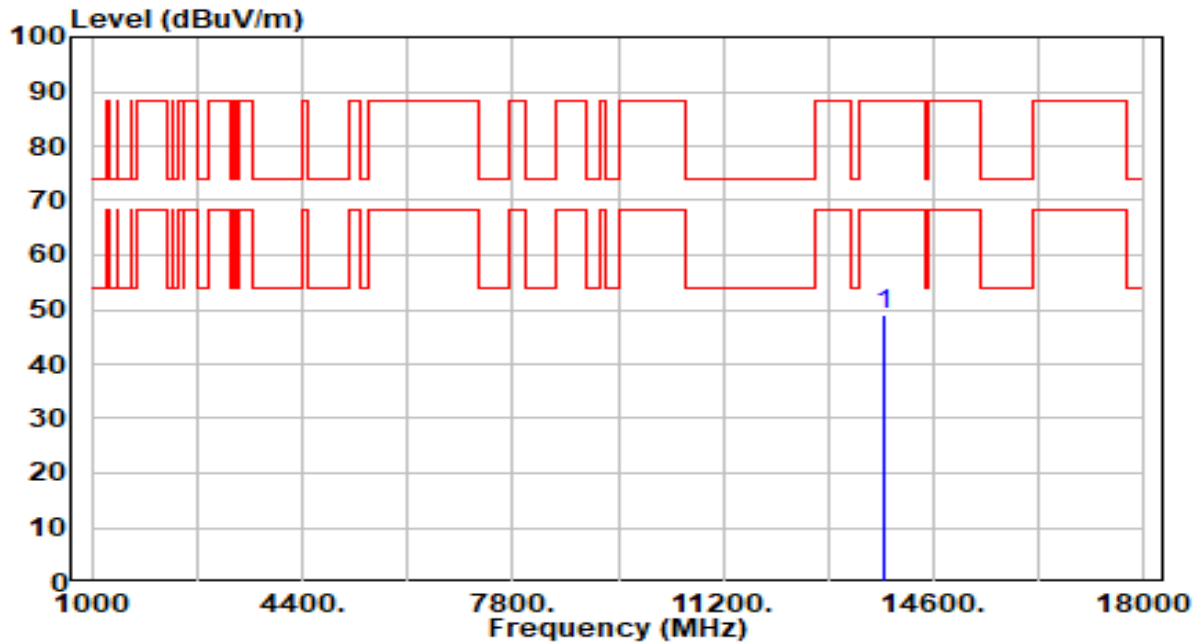


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 13790.000          | 44.13             | 4.95          | 49.08                   | -39.12         | 88.20             | 100            | 346            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 189_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

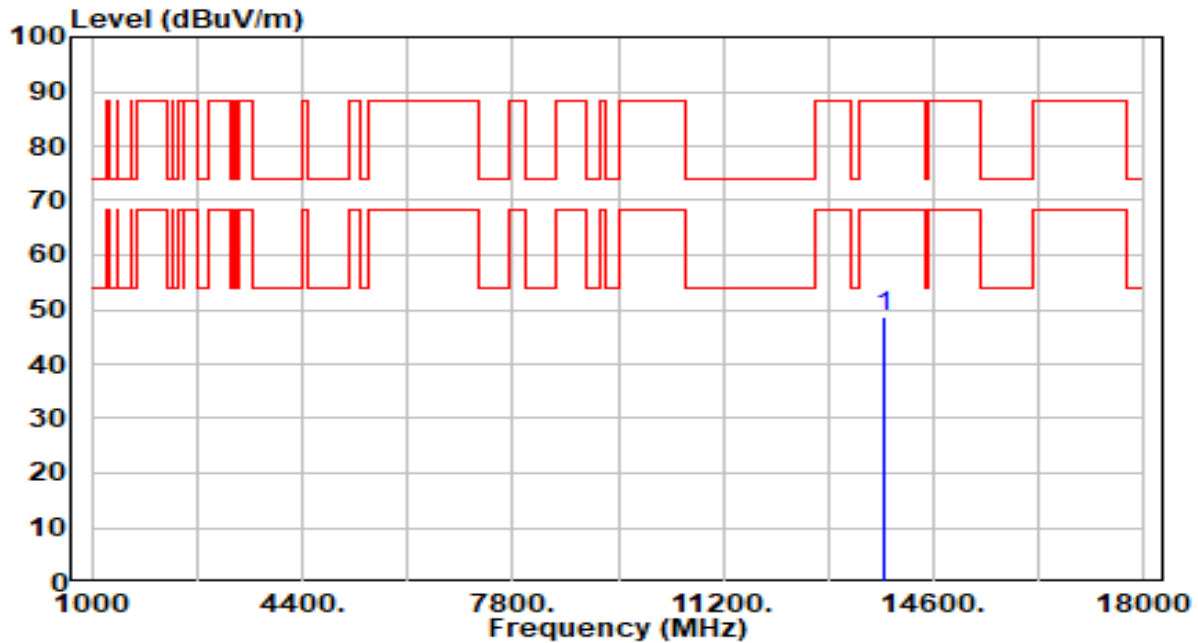


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13790.000     | 43.69          | 4.95       | 48.65                | -39.55      | 88.20          | 200         | 279         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 213_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

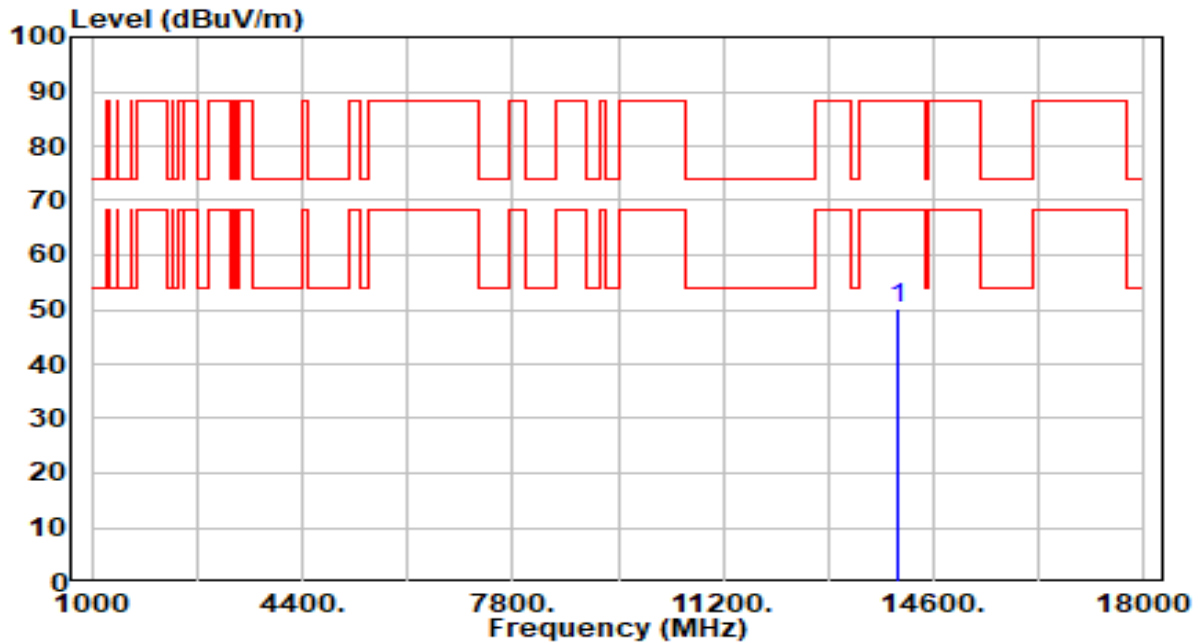


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14030.000     | 45.11          | 5.00       | 50.11                | -38.09      | 88.20          | 100         | 318         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 213_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

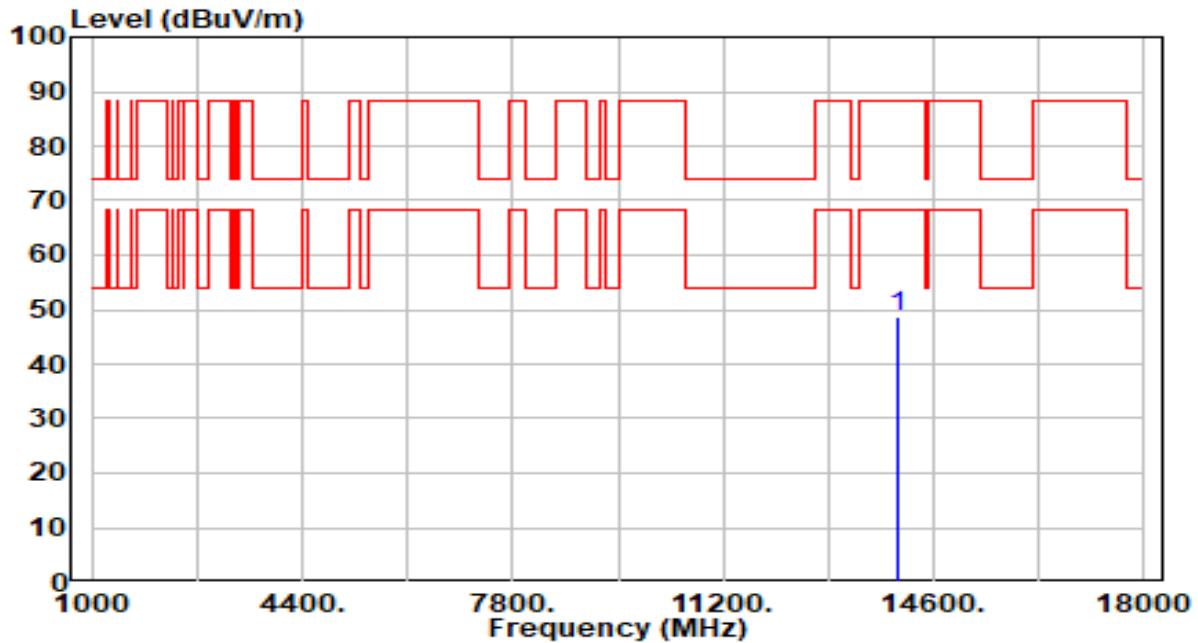


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 14030.000          | 43.61             | 5.00          | 48.61                   | -39.59         | 88.20             | 200            | 320            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

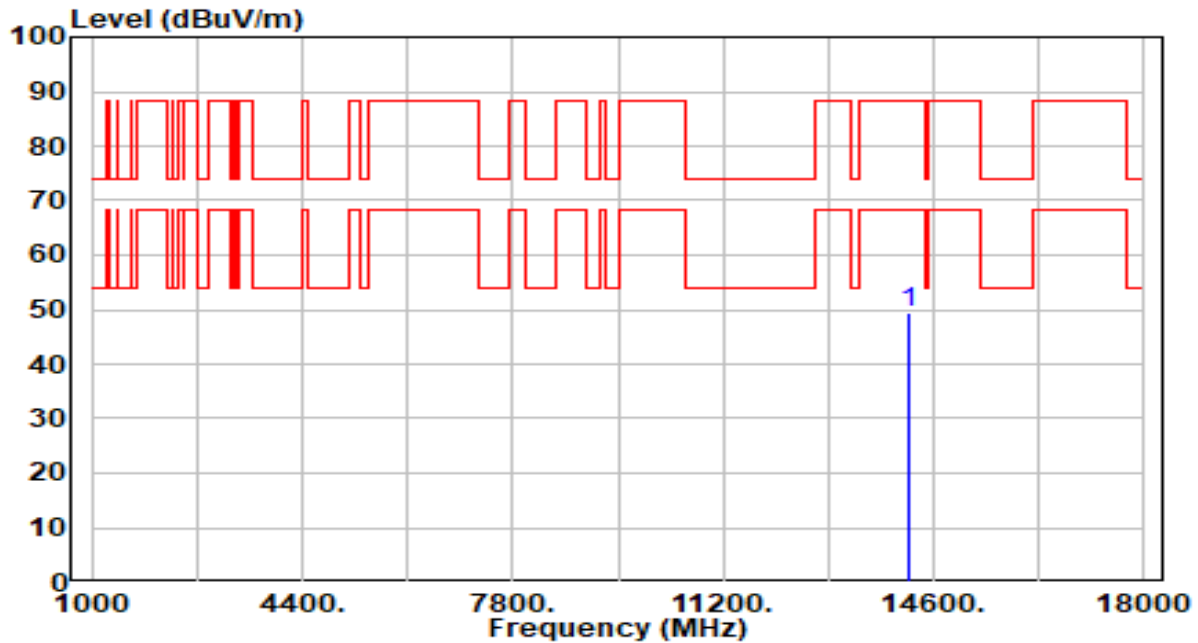


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14190.000     | 44.32          | 5.17       | 49.49                | -38.71      | 88.20          | 100         | 75          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

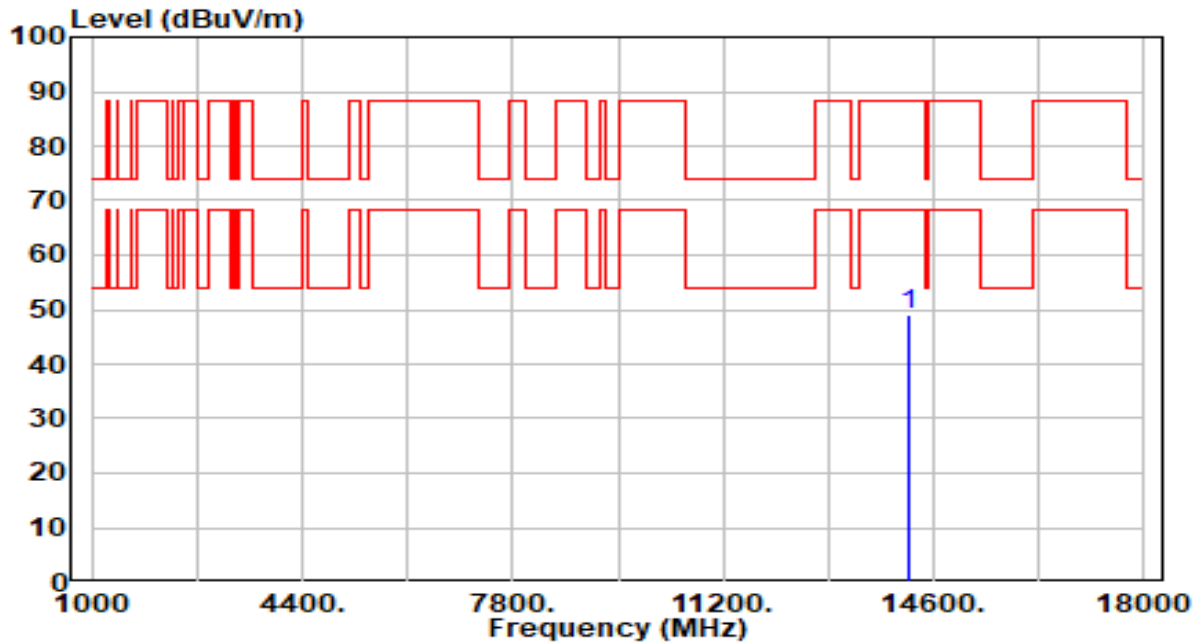


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14190.000     | 43.82          | 5.17       | 48.98                | -39.22      | 88.20          | 200         | 5           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 35_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

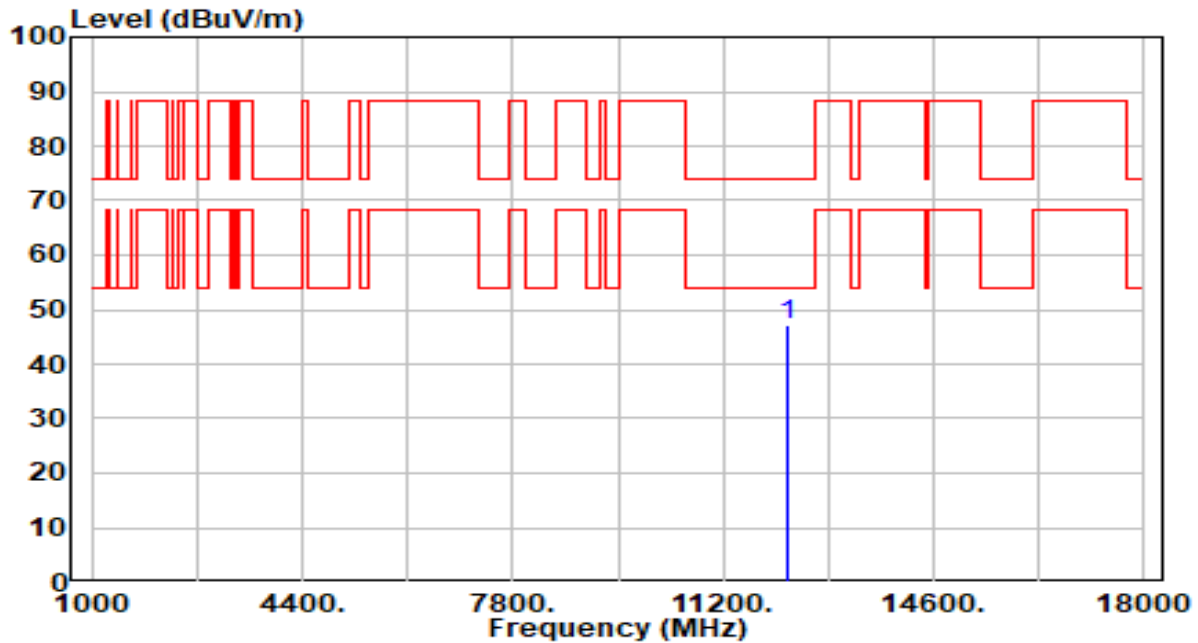


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12250.000     | 42.63          | 4.45       | 47.08                | -26.92      | 74.00          | 100         | 108         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 35_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

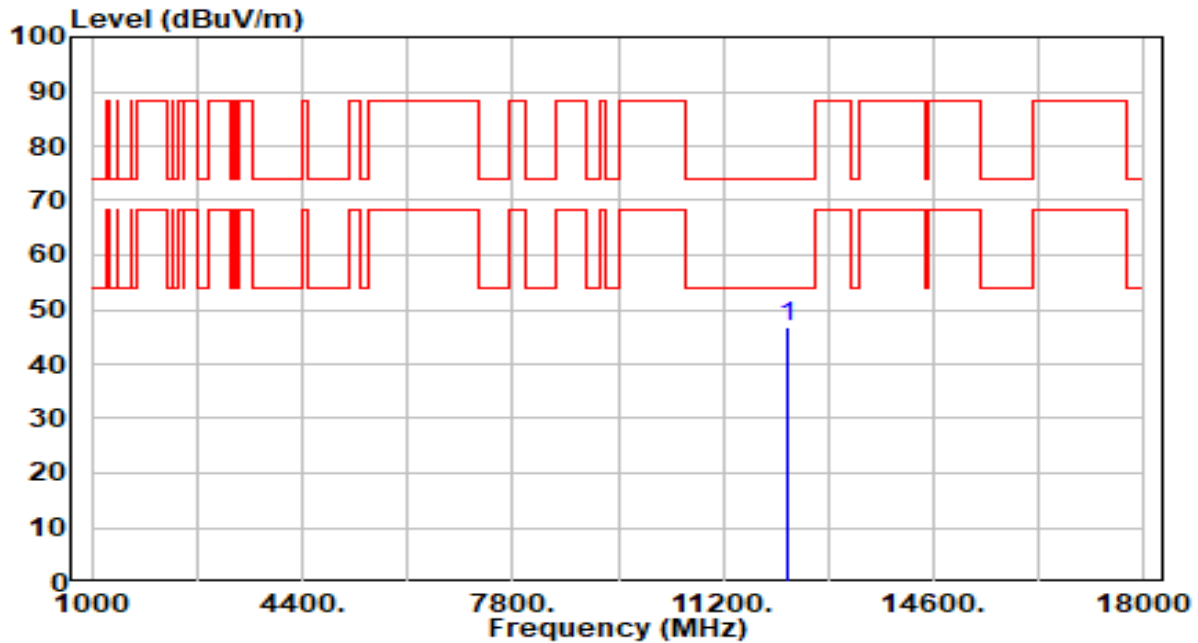


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12250.000     | 42.32          | 4.45       | 46.77                | -27.23      | 74.00          | 200         | 191         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 59_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

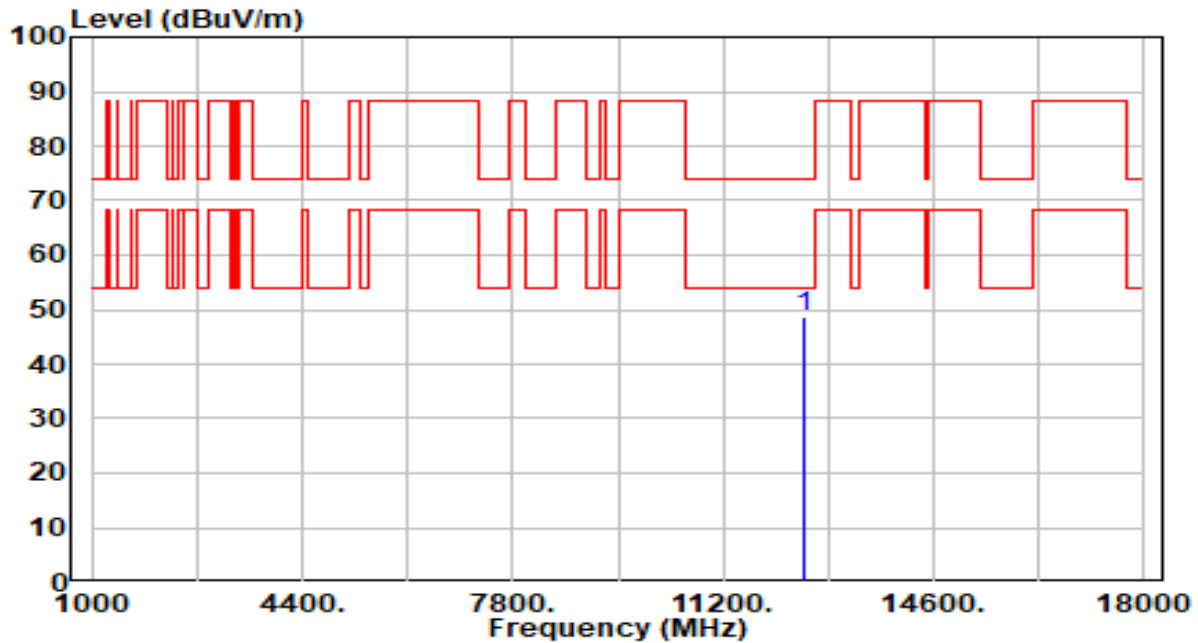


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12490.000     | 43.64          | 4.91       | 48.55                | -25.45      | 74.00          | 100         | 351         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 59_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

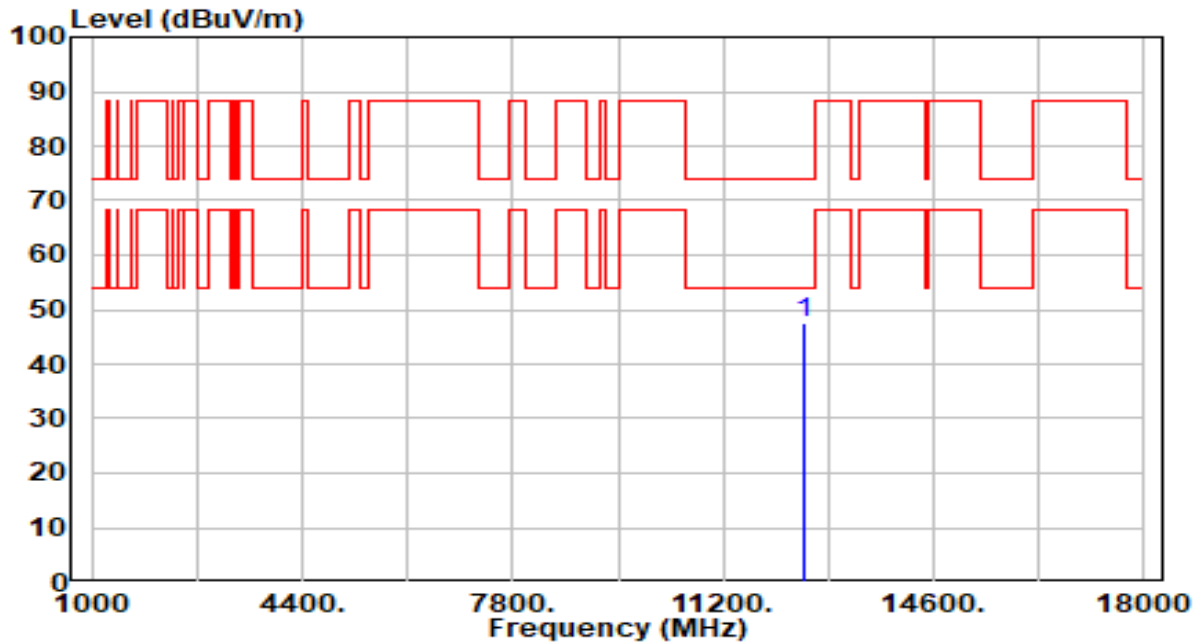


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12490.000     | 42.79          | 4.91       | 47.70                | -26.30      | 74.00          | 200         | 93          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 91_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

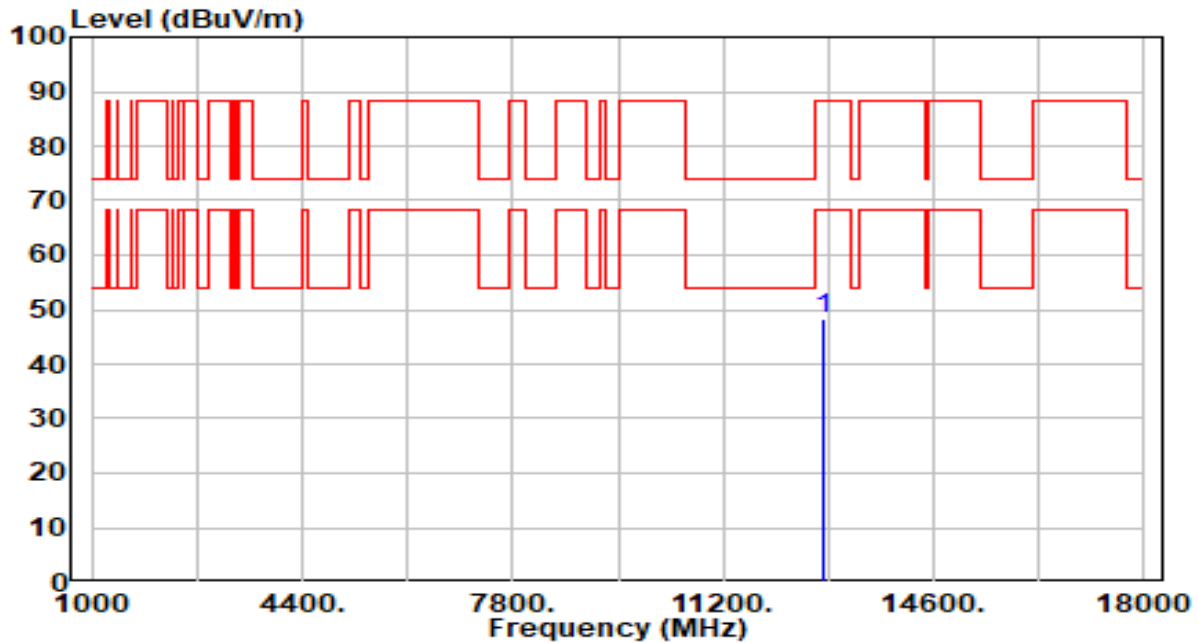


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12810.000     | 42.70          | 5.45       | 48.14                | -40.06      | 88.20          | 100         | 234         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 91_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

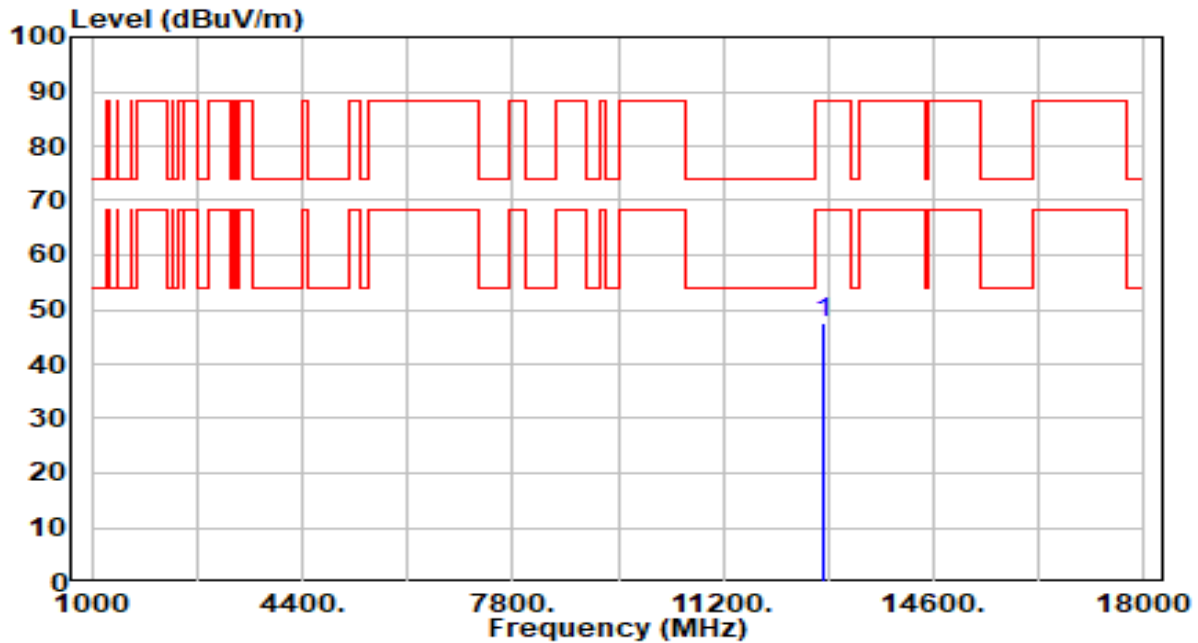


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12810.000     | 42.19          | 5.45       | 47.64                | -40.56      | 88.20          | 200         | 116         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 99_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

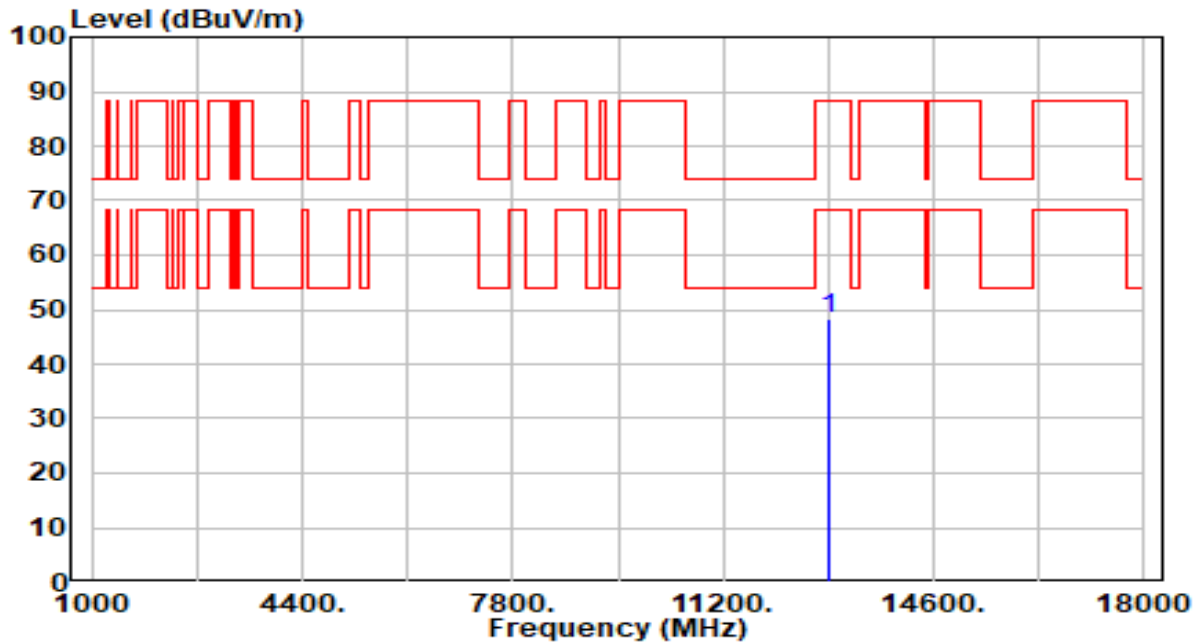


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12890.000     | 42.69          | 5.46       | 48.15                | -40.05      | 88.20          | 100         | 298         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 99_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

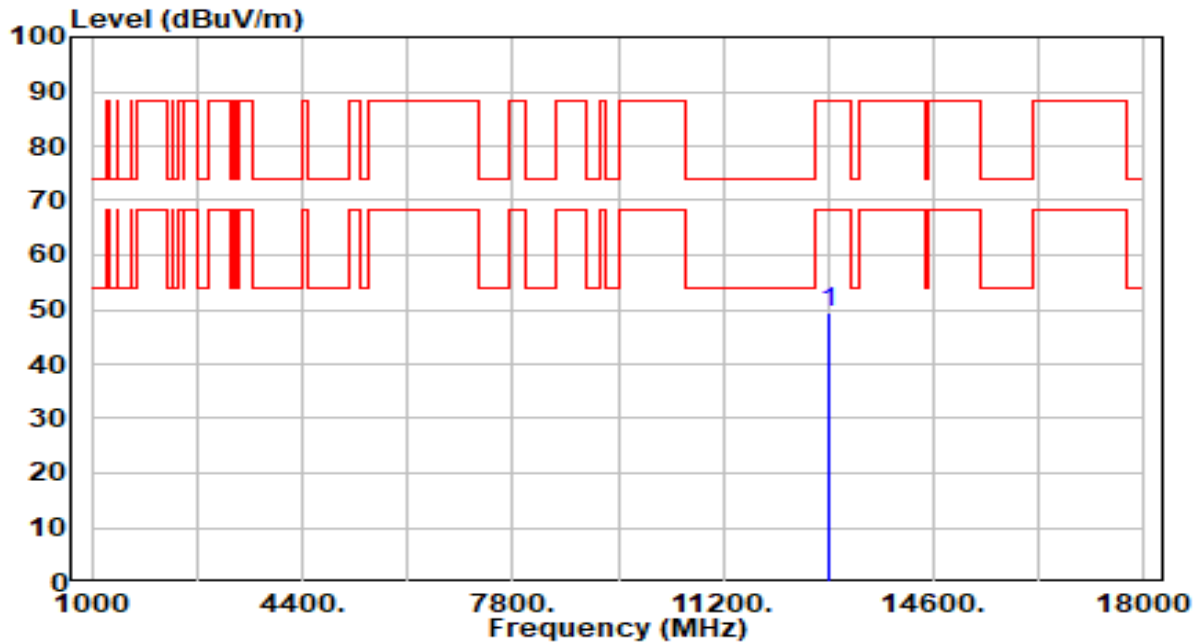


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12890.000     | 43.79          | 5.46       | 49.25                | -38.95      | 88.20          | 200         | 117         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 107_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

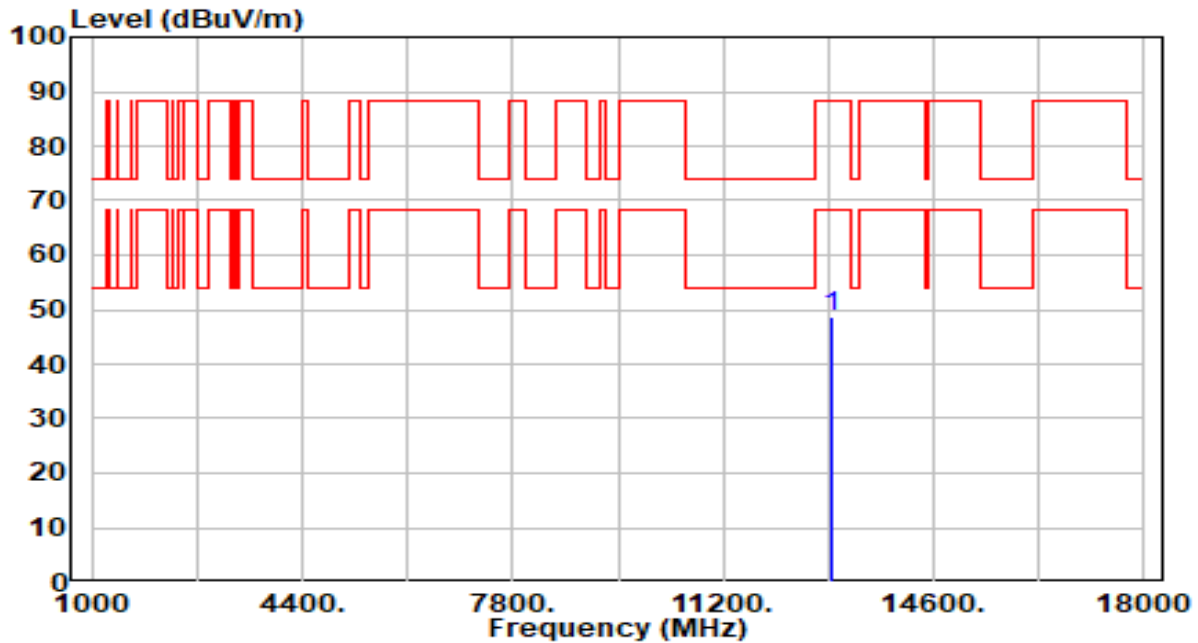


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12970.000     | 43.23          | 5.47       | 48.70                | -39.50      | 88.20          | 100         | 124         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 107_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

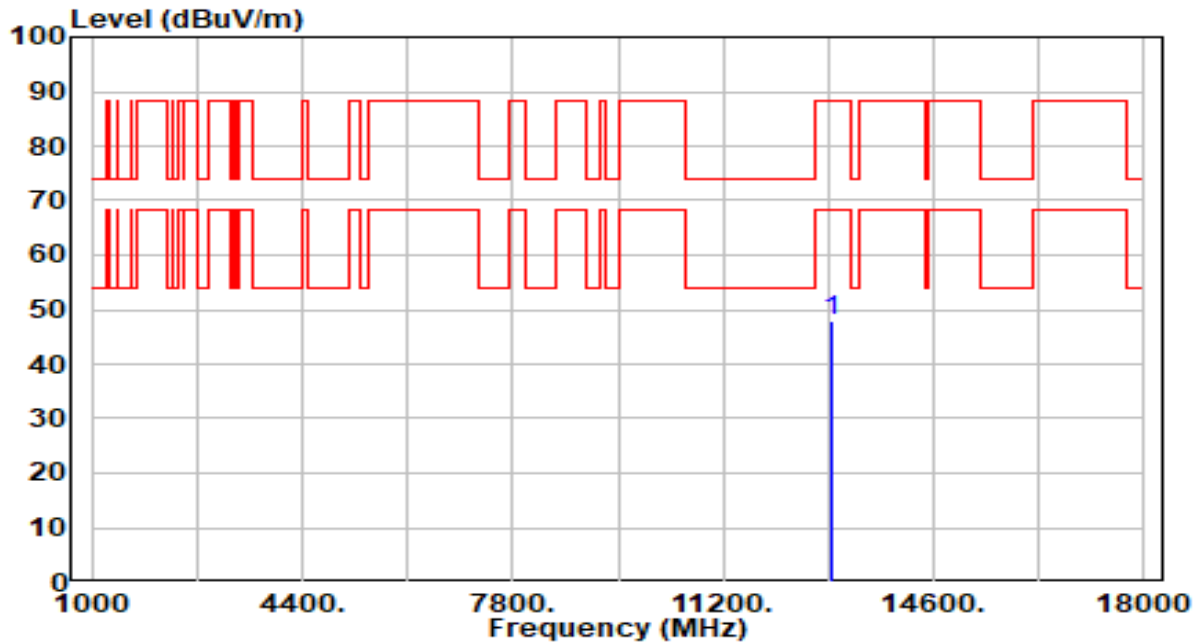


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12970.000     | 42.57          | 5.47       | 48.04                | -40.16      | 88.20          | 200         | 69          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 115_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

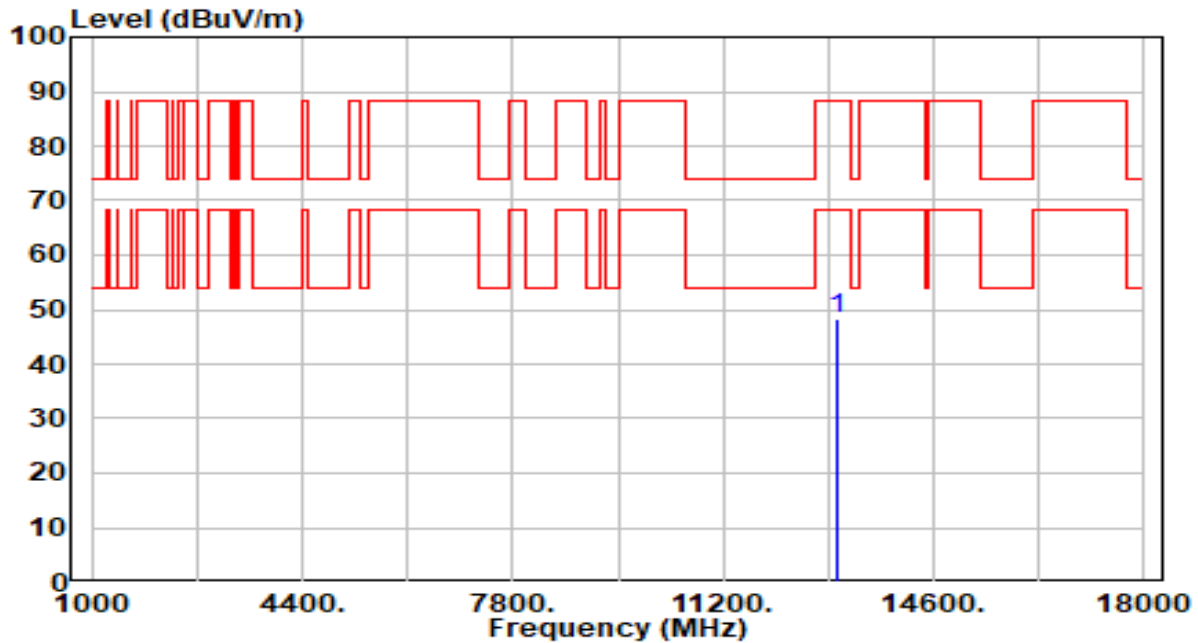


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13050.000     | 42.77          | 5.45       | 48.21                | -39.99      | 88.20          | 100         | 1           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band6_CH 115_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

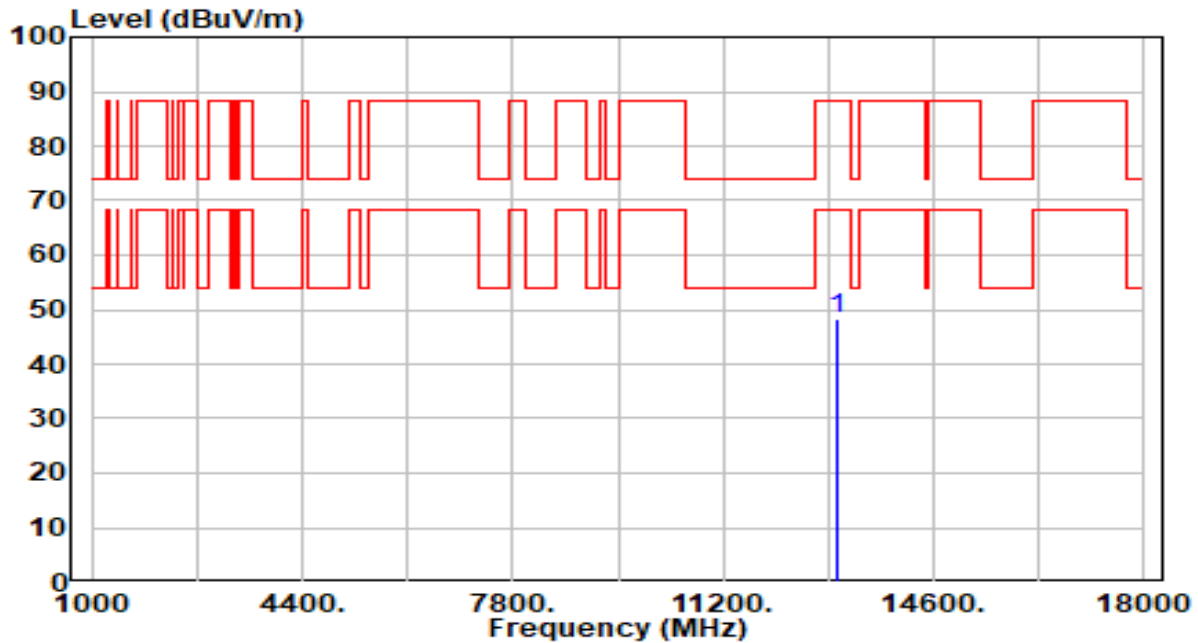


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 13050.000          | 42.85             | 5.45          | 48.30                   | -39.90         | 88.20             | 200            | 65             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 123_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

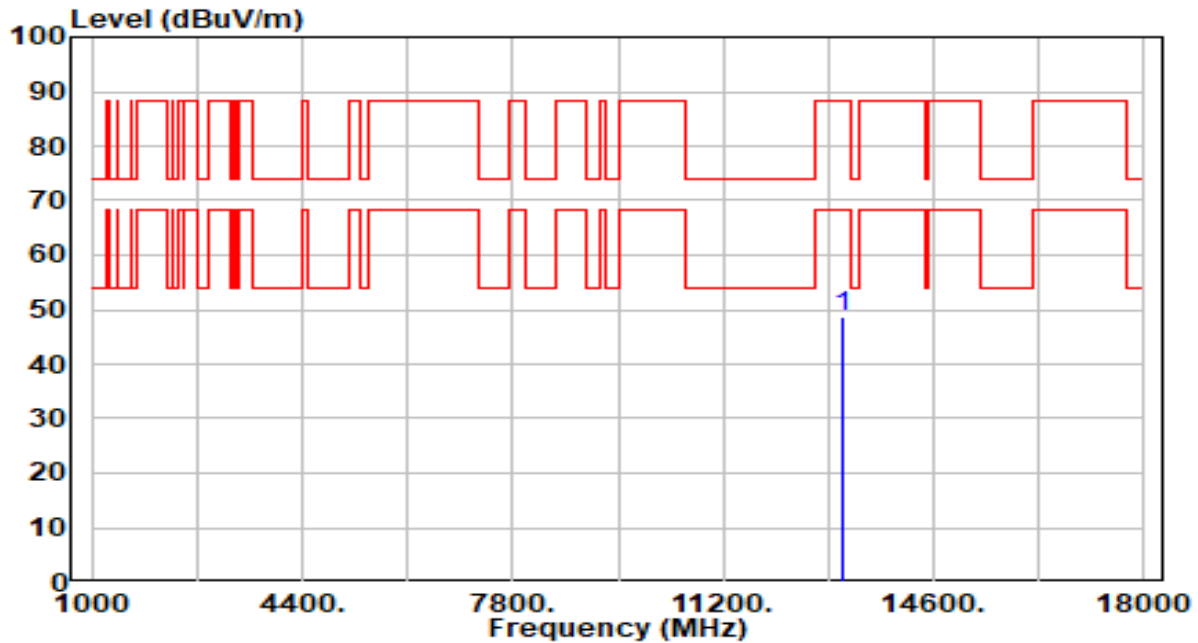


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 13130.000          | 43.28             | 5.39          | 48.67                   | -39.53         | 88.20             | 100            | 276            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 123_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

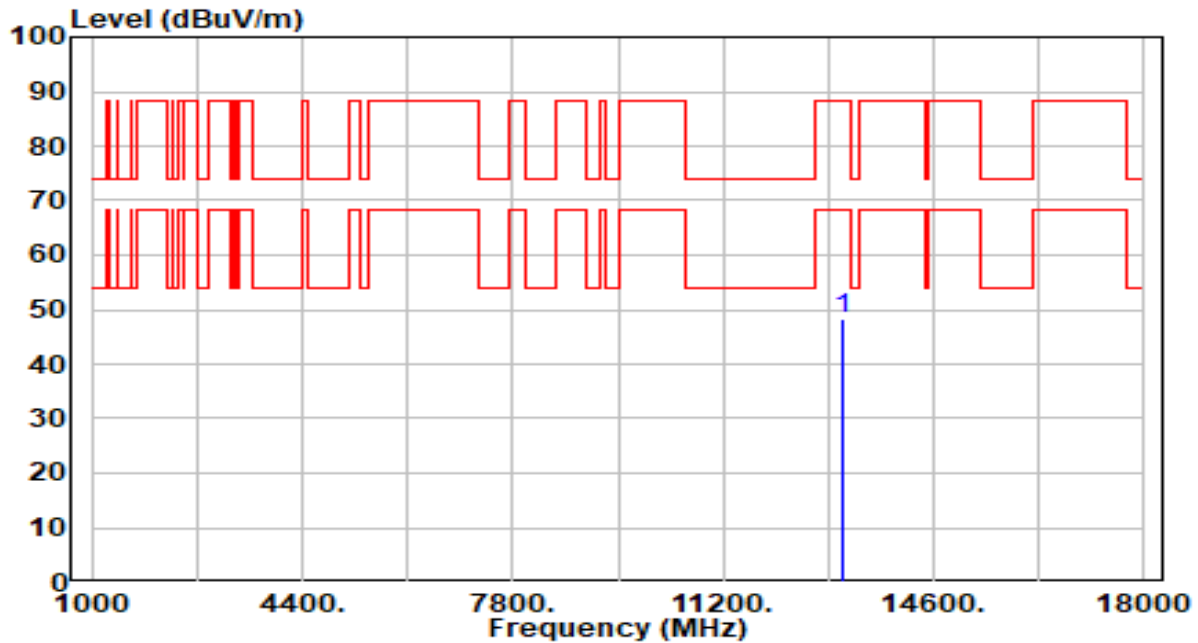


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13130.000     | 42.80          | 5.39       | 48.18                | -40.02      | 88.20          | 200         | 129         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 147_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

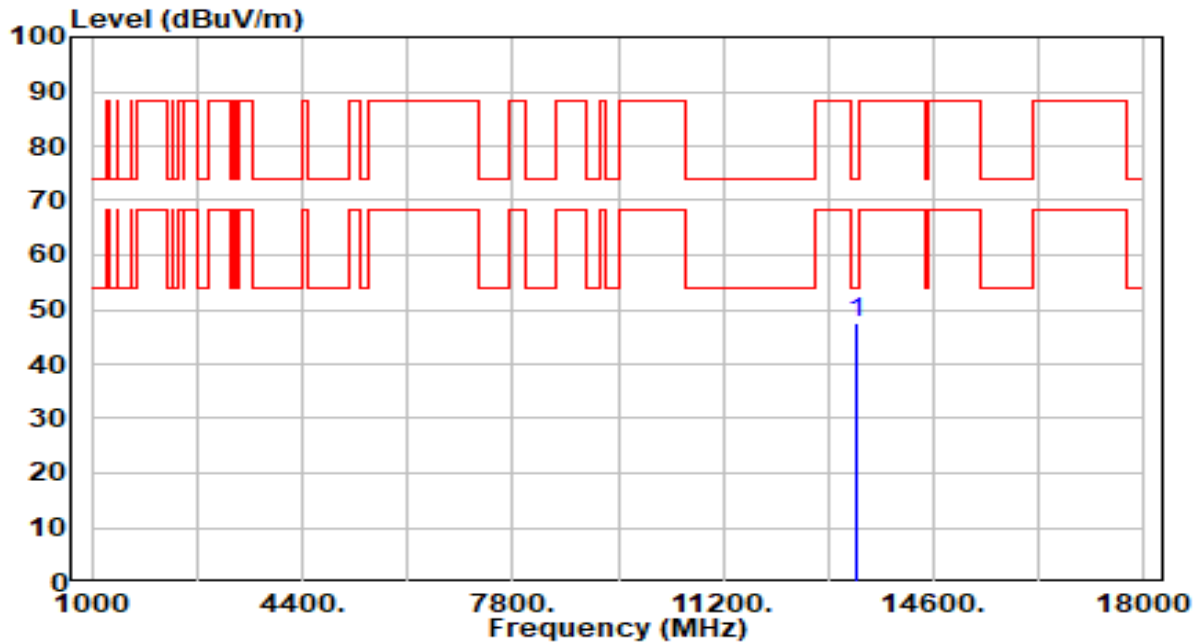


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13370.000     | 42.38          | 5.31       | 47.69                | -26.31      | 74.00          | 100         | 108         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 147_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

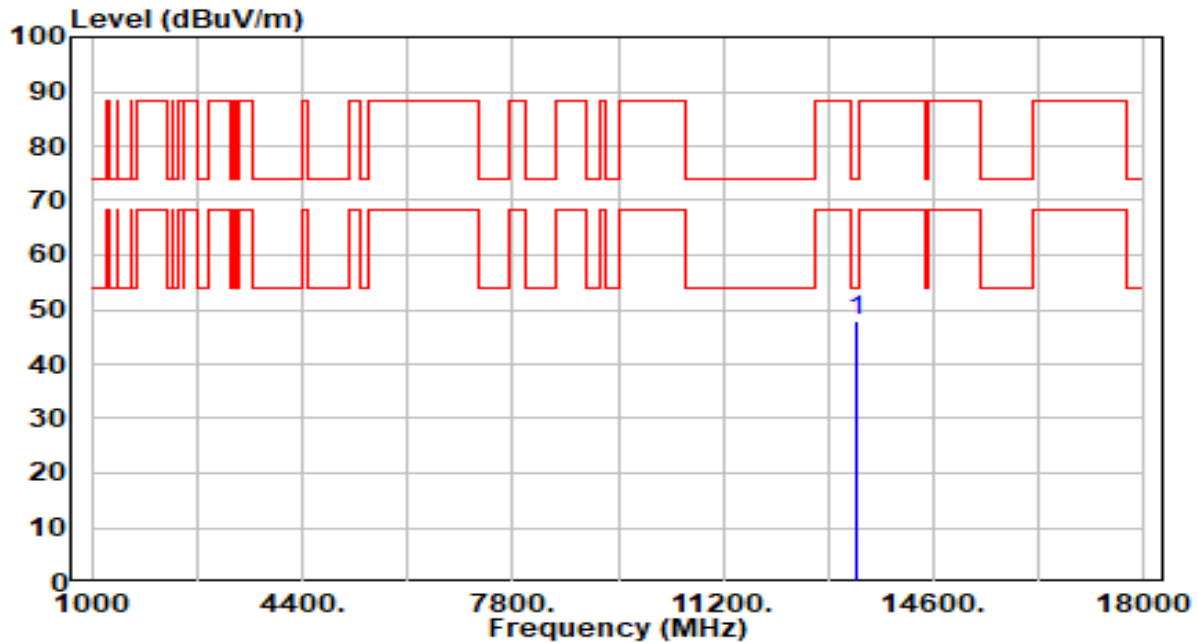


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13370.000     | 42.44          | 5.31       | 47.75                | -26.25      | 74.00          | 200         | 108         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 179_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

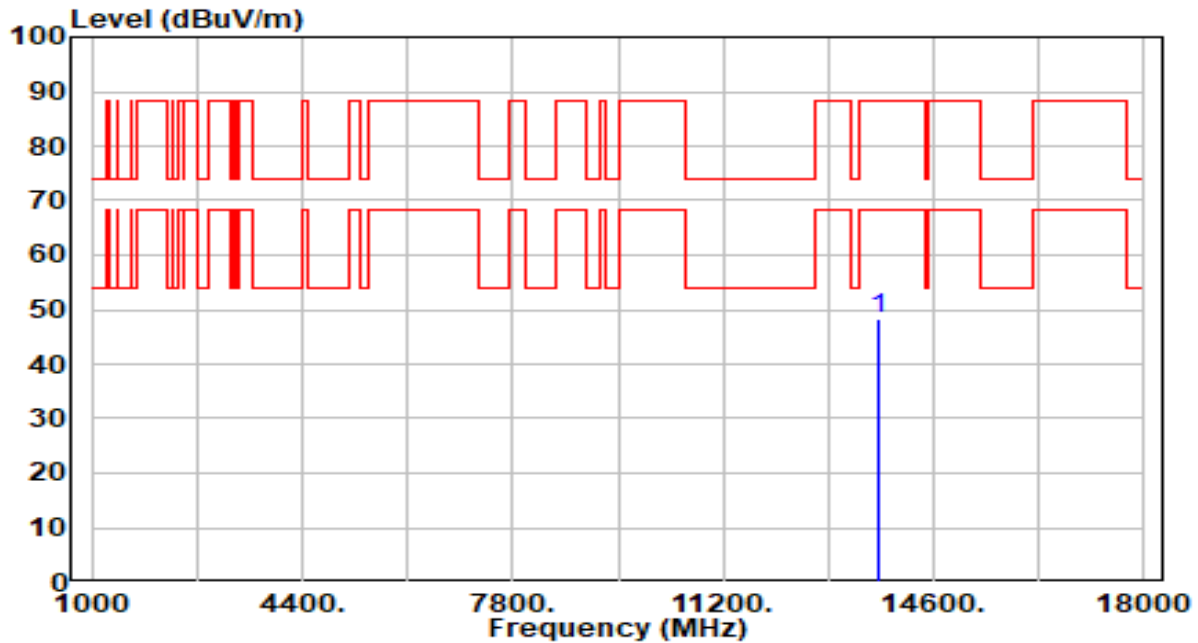


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13690.000     | 43.19          | 4.95       | 48.14                | -40.06      | 88.20          | 100         | 239         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band7_CH 179_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

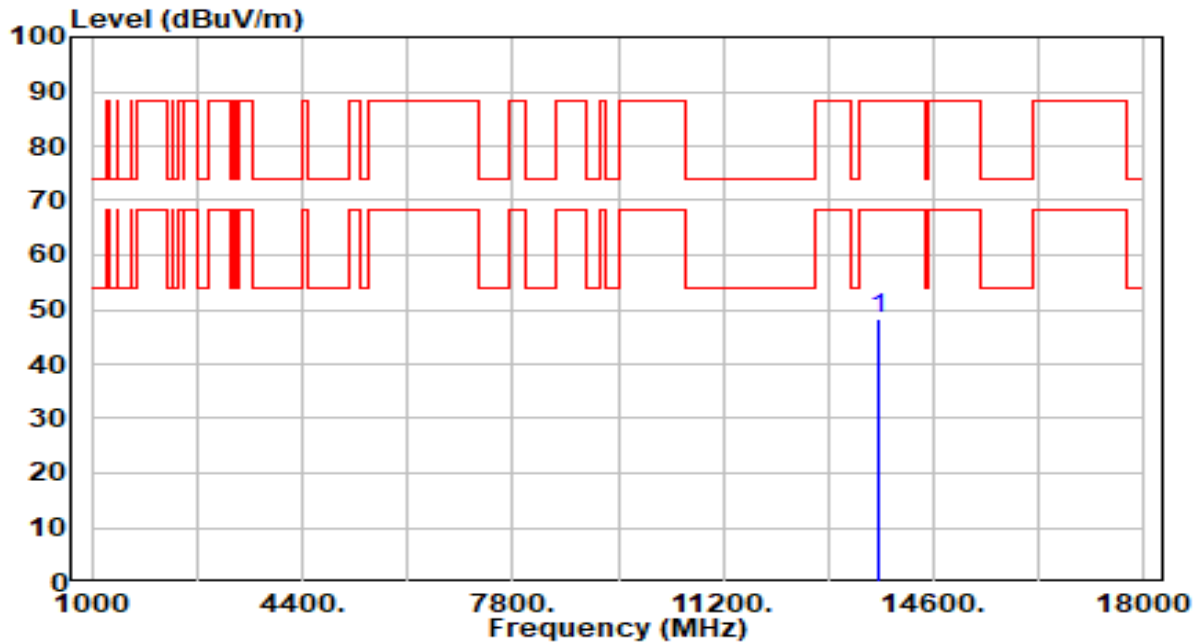


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13690.000     | 43.42          | 4.95       | 48.37                | -39.83      | 88.20          | 200         | 212         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 187_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

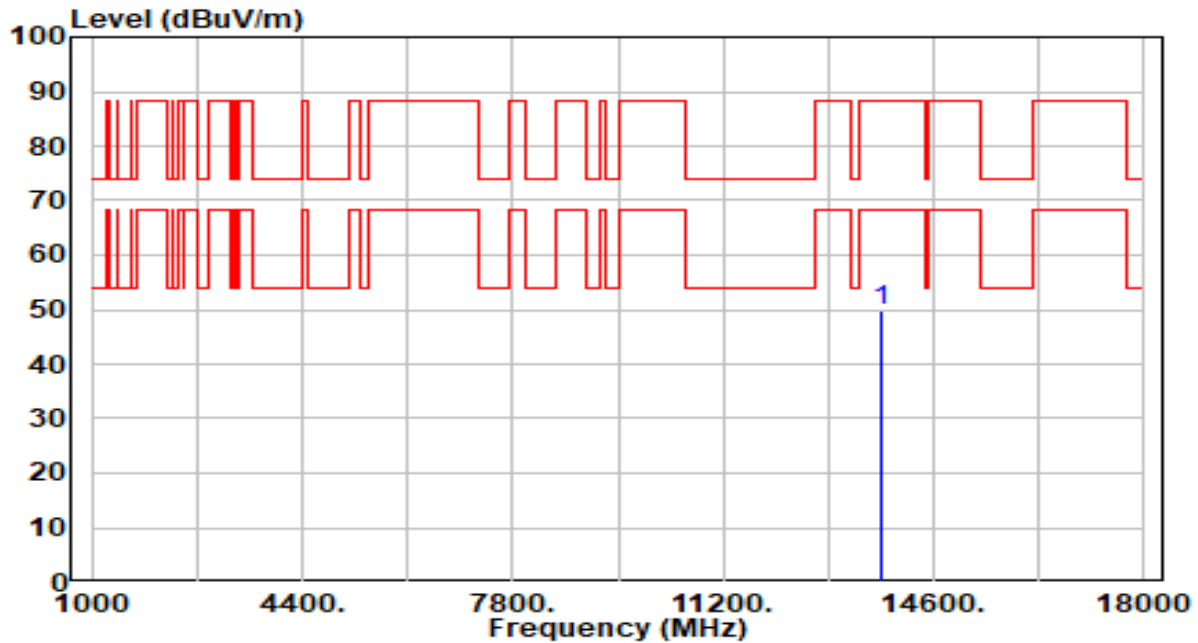


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13770.000     | 44.85          | 4.95       | 49.80                | -38.40      | 88.20          | 100         | 137         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 187_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

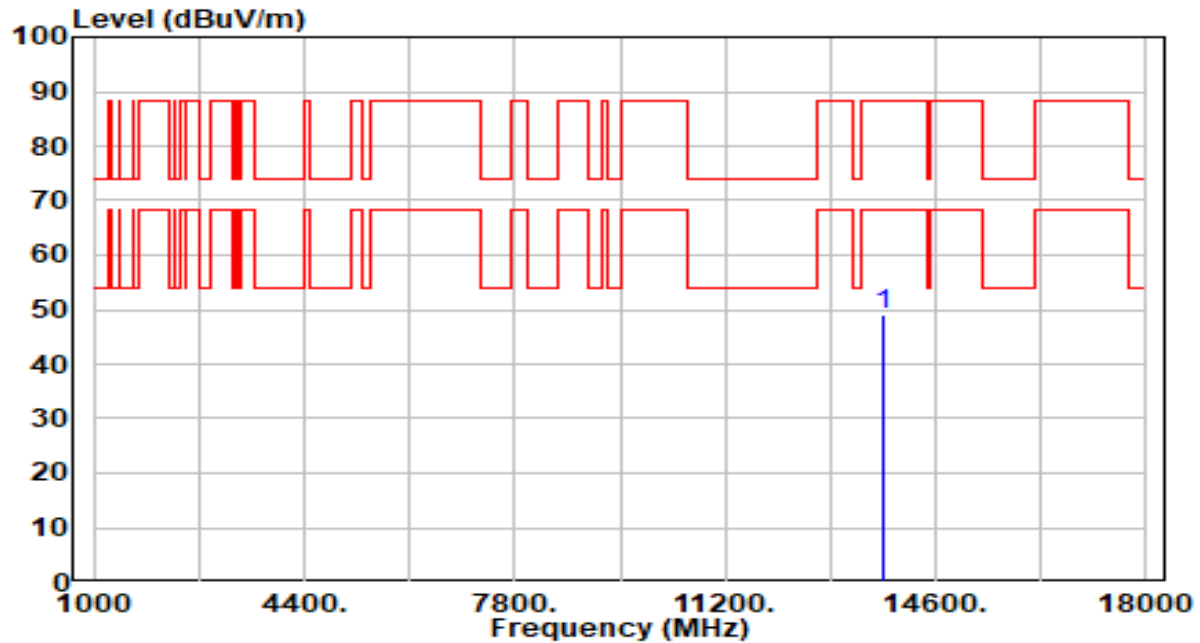


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13770.000     | 44.21          | 4.95       | 49.16                | -39.04      | 88.20          | 200         | 194         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 195_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

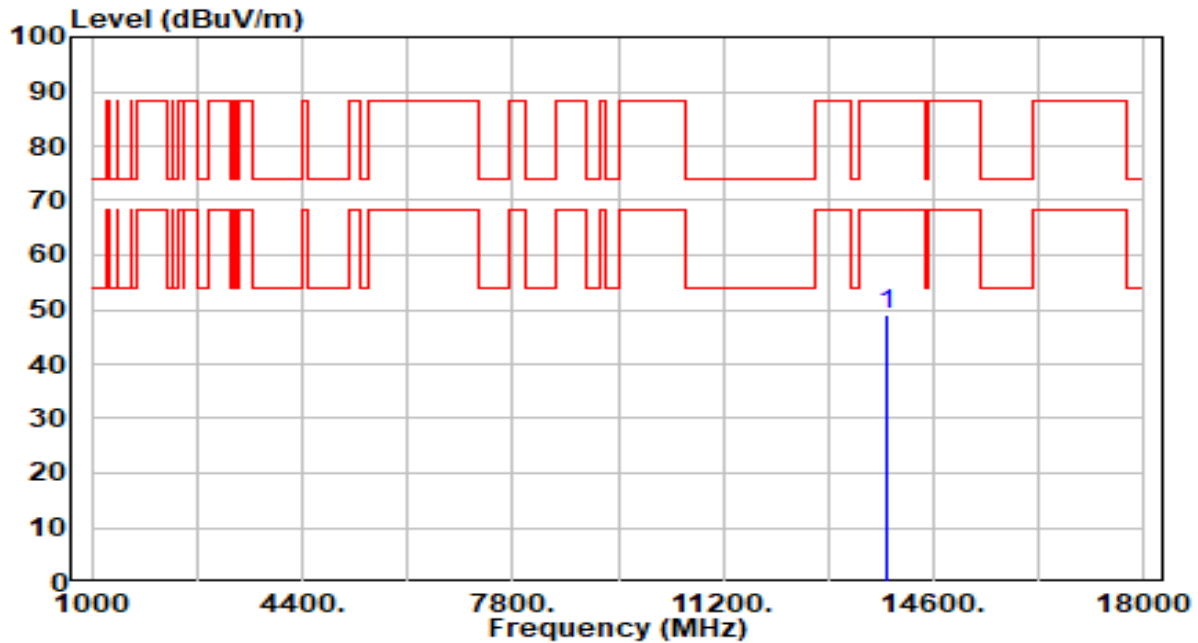


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 13850.000          | 44.21             | 4.96          | 49.17                   | -39.03         | 88.20             | 100            | 50             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 195_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

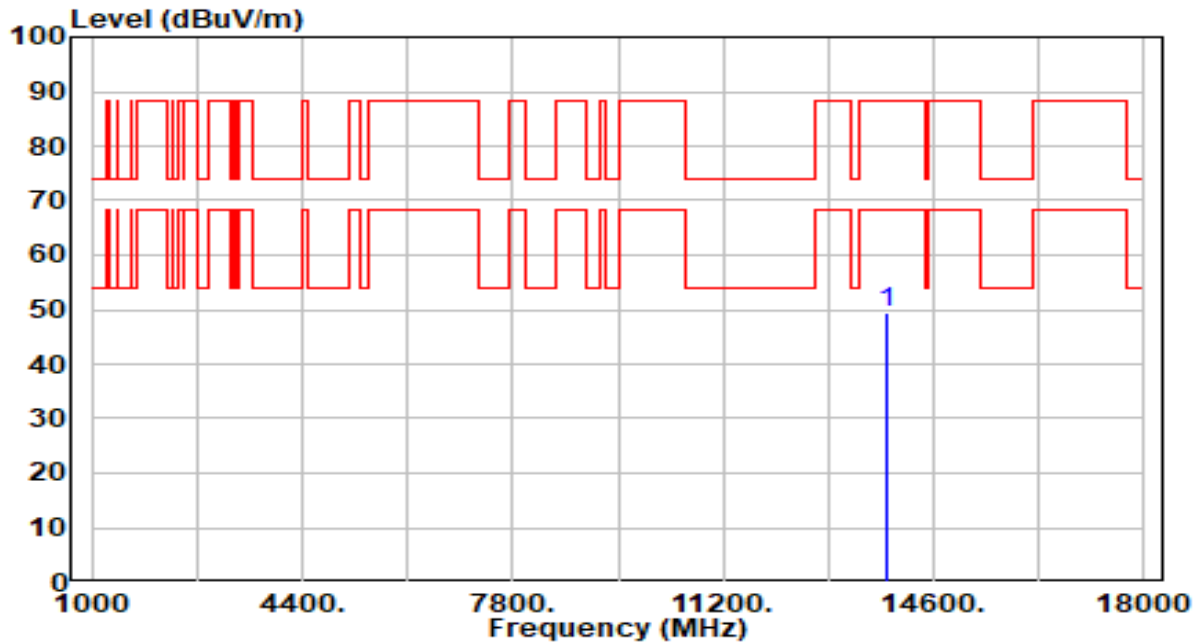


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13850.000     | 44.38          | 4.96       | 49.34                | -38.86      | 88.20          | 200         | 120         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 211_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

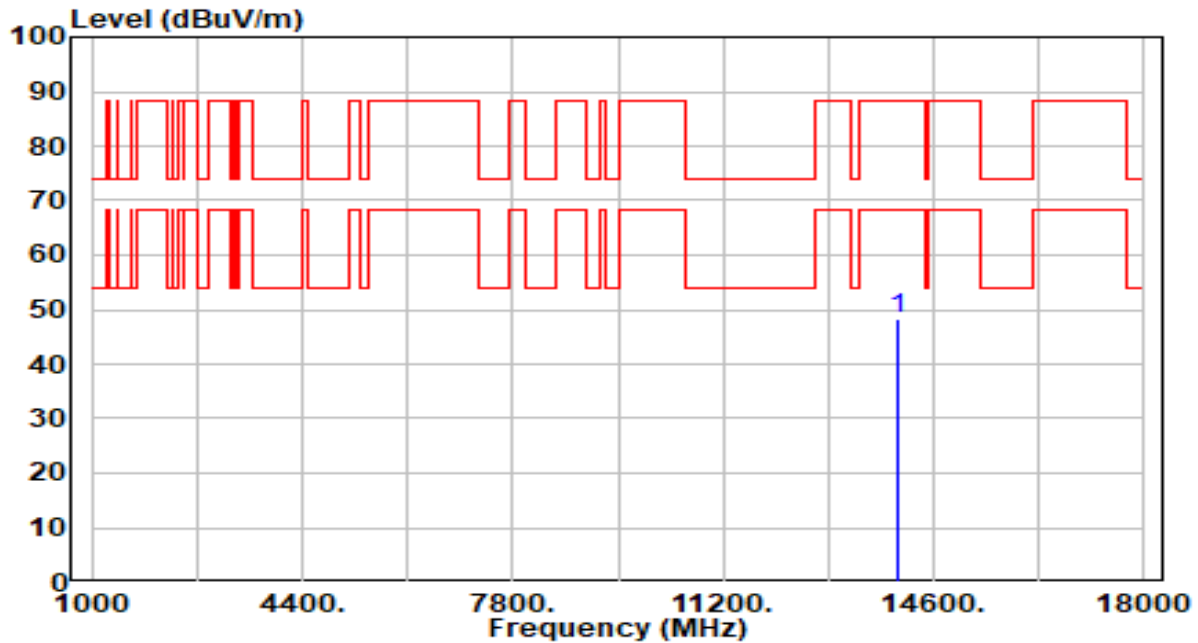


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14010.000     | 43.16          | 4.98       | 48.14                | -40.06      | 88.20          | 100         | 107         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 211_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

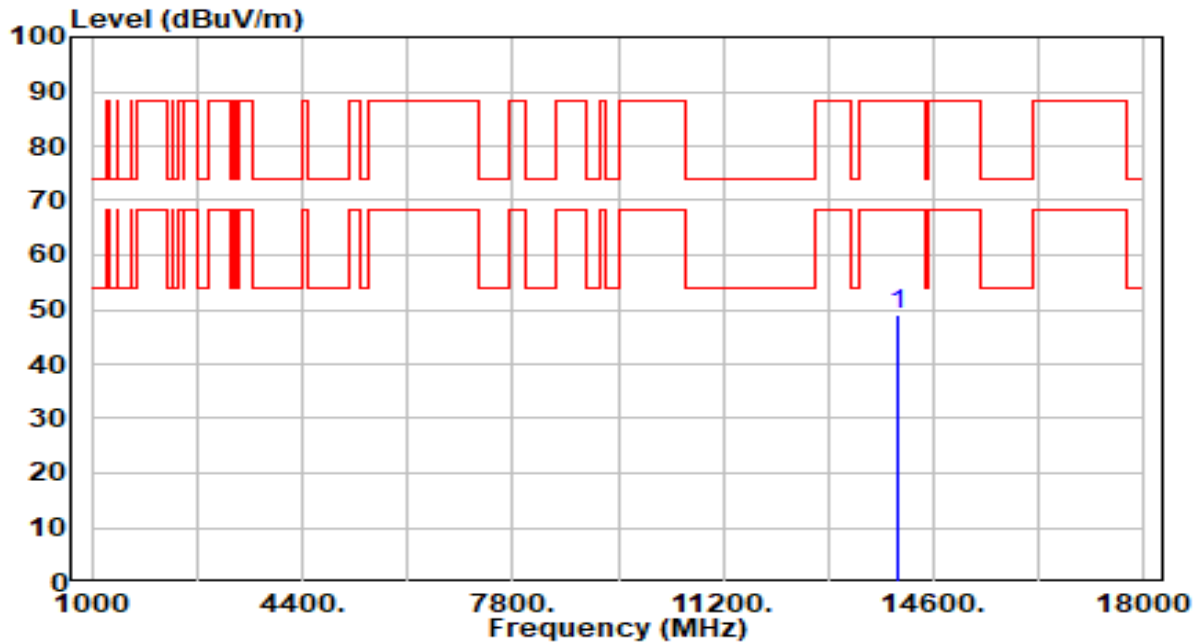


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 14010.000          | 44.01             | 4.98          | 48.99                   | -39.21         | 88.20             | 200            | 108            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

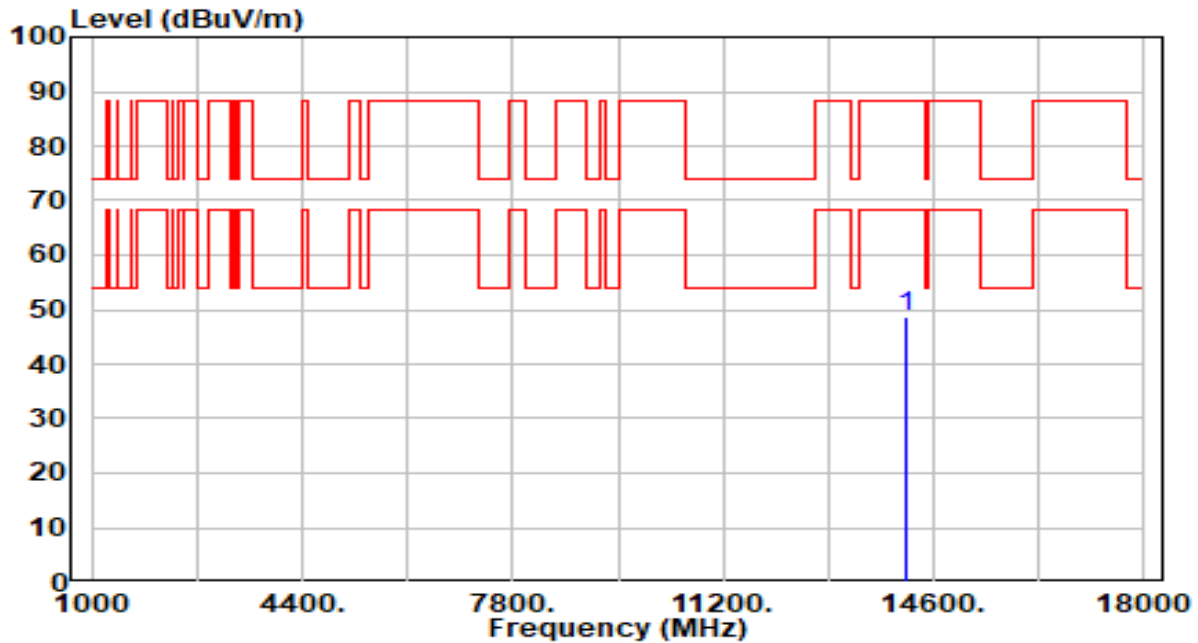


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14170.000     | 43.51          | 5.15       | 48.66                | -39.54      | 88.20          | 100         | 68          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

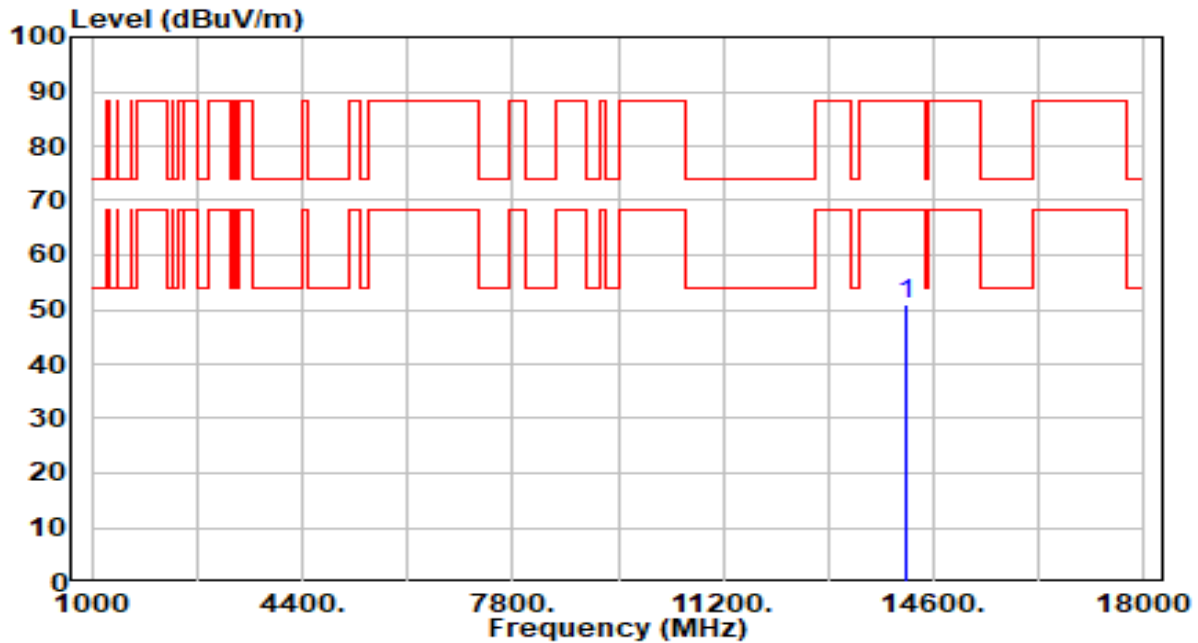


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14170.000     | 45.68          | 5.15       | 50.83                | -37.37      | 88.20          | 200         | 92          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

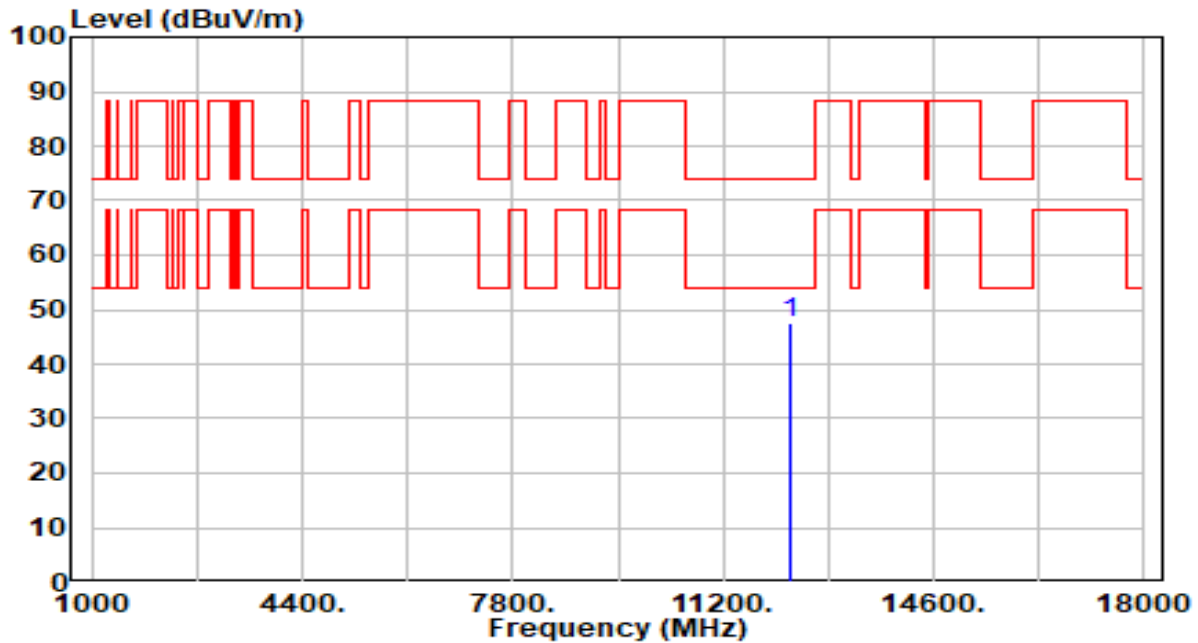


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12290.000     | 42.98          | 4.50       | 47.47                | -26.53      | 74.00          | 100         | 68          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

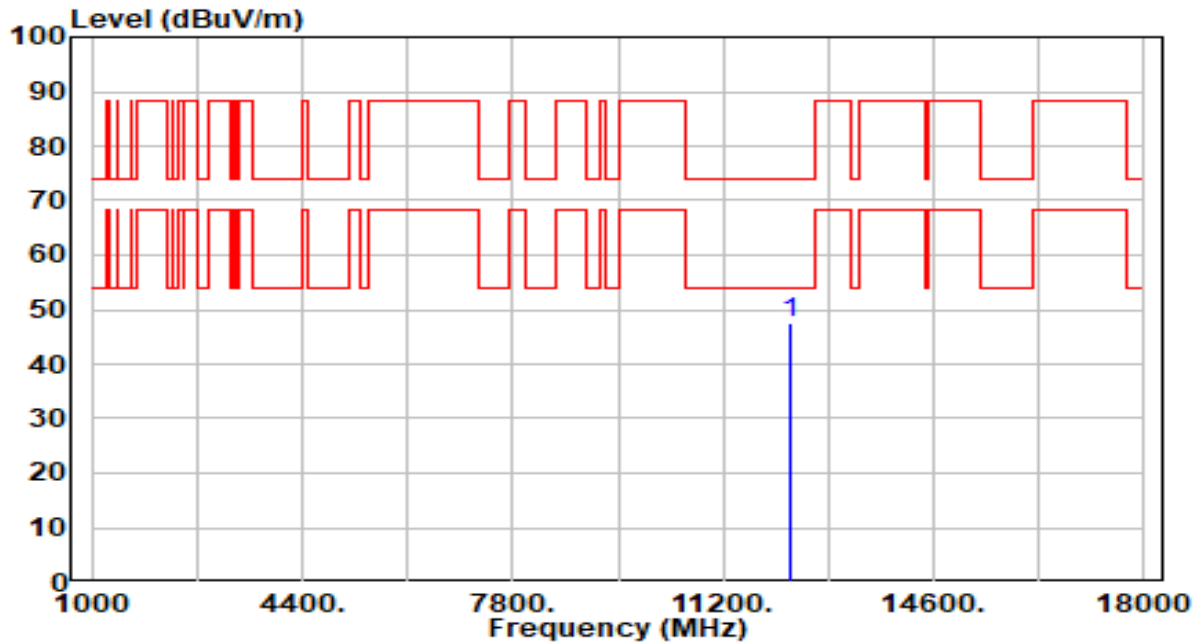


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12290.000     | 43.12          | 4.50       | 47.62                | -26.38      | 74.00          | 200         | 161         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 55_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

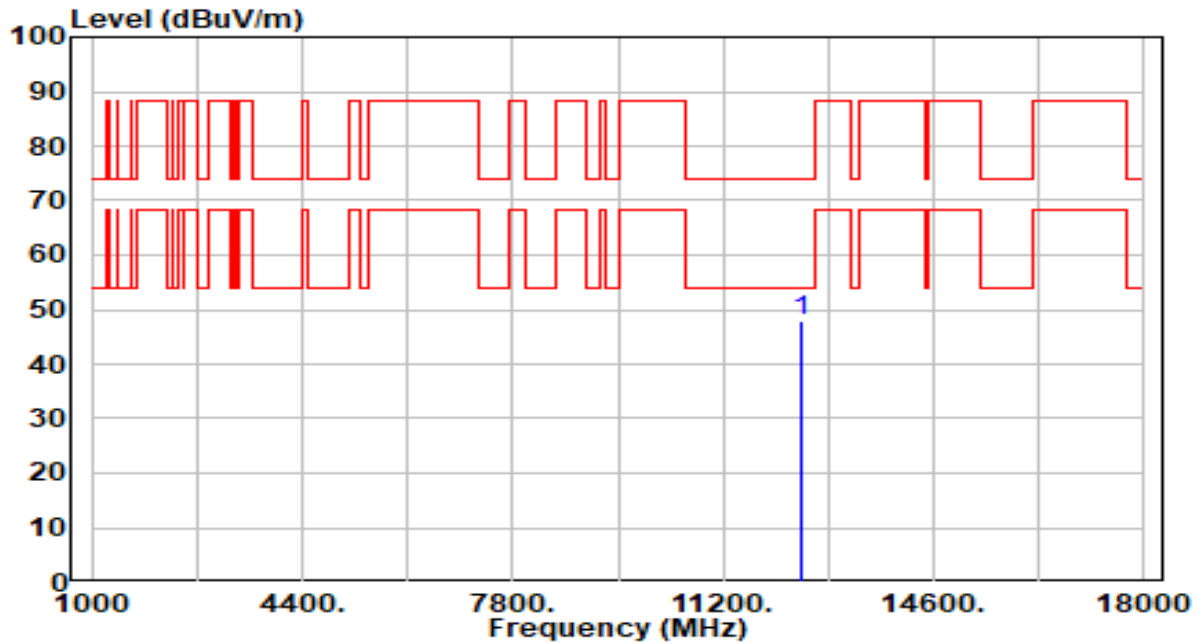


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 12450.000       | 43.07          | 4.78       | 47.85                | -26.15      | 74.00          | 100         | 300         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 55_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

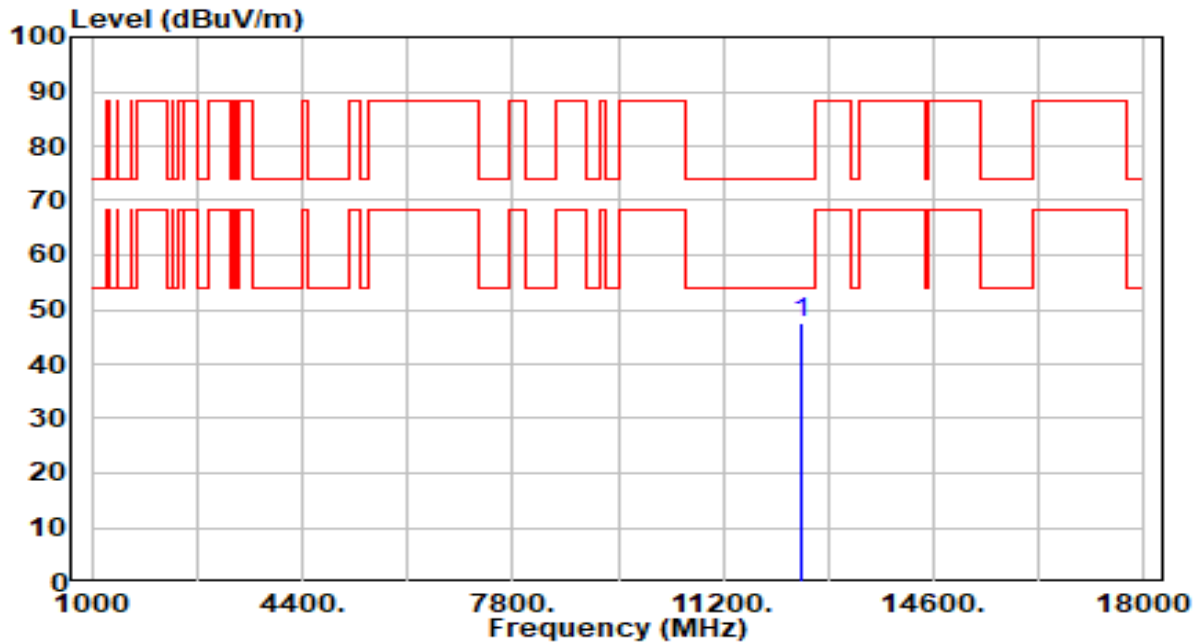


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12450.000     | 42.63          | 4.78       | 47.41                | -26.59      | 74.00          | 200         | 248         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 87_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

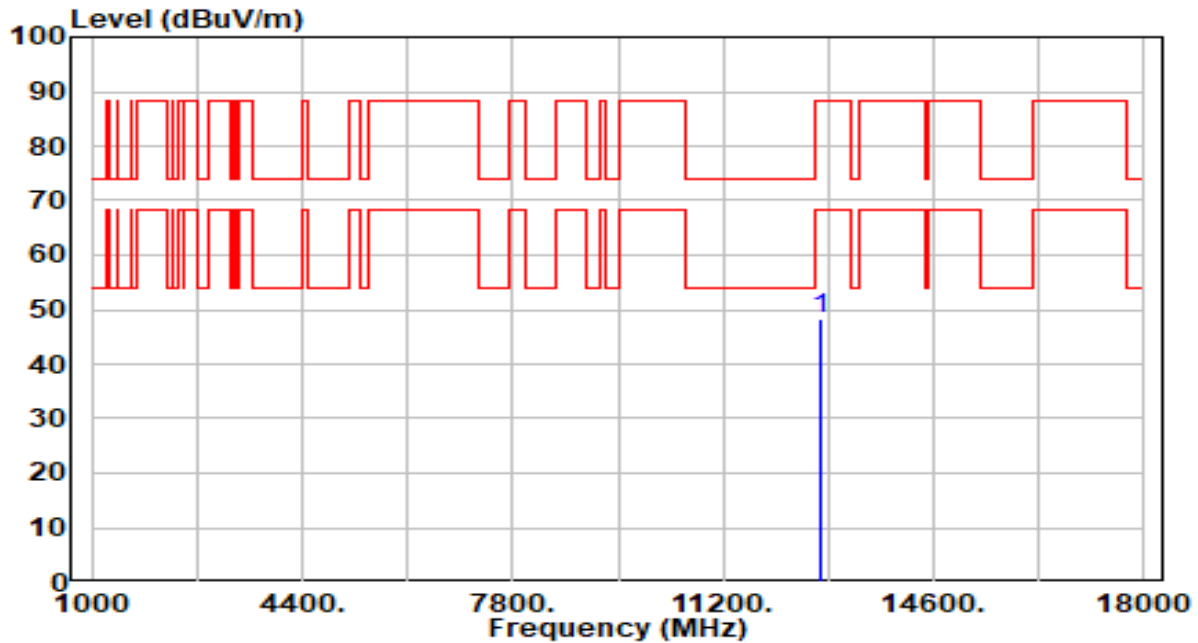


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12770.000     | 42.91          | 5.41       | 48.32                | -39.88      | 88.20          | 100         | 274         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 87_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

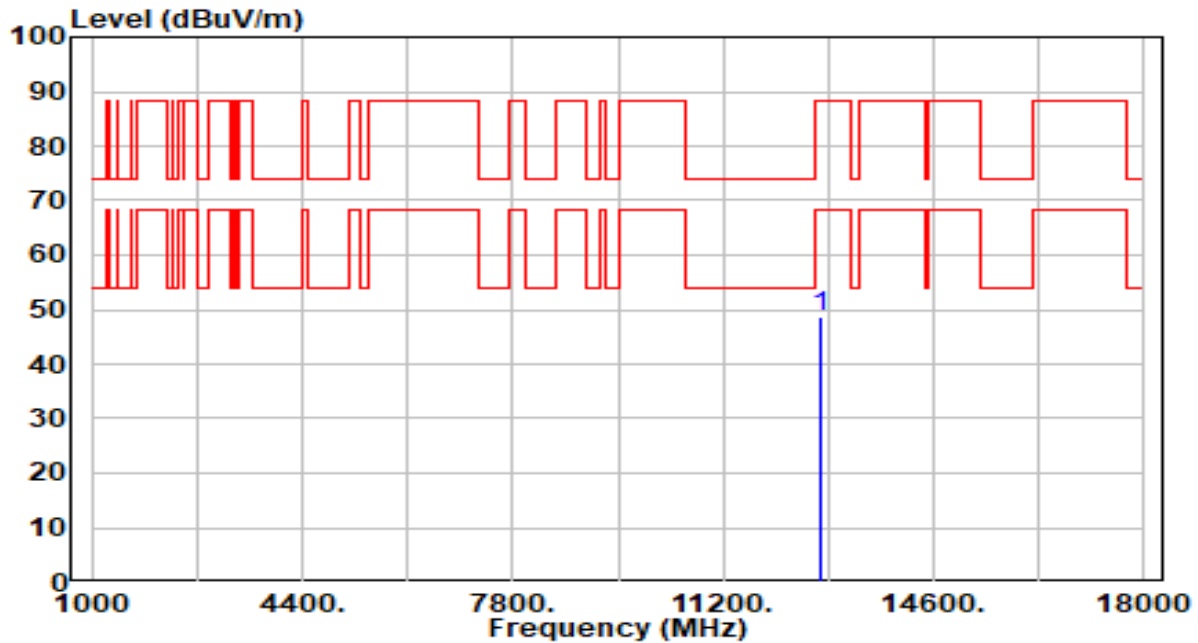


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12770.000     | 43.46          | 5.41       | 48.86                | -39.34      | 88.20          | 200         | 265         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band6_CH 103_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

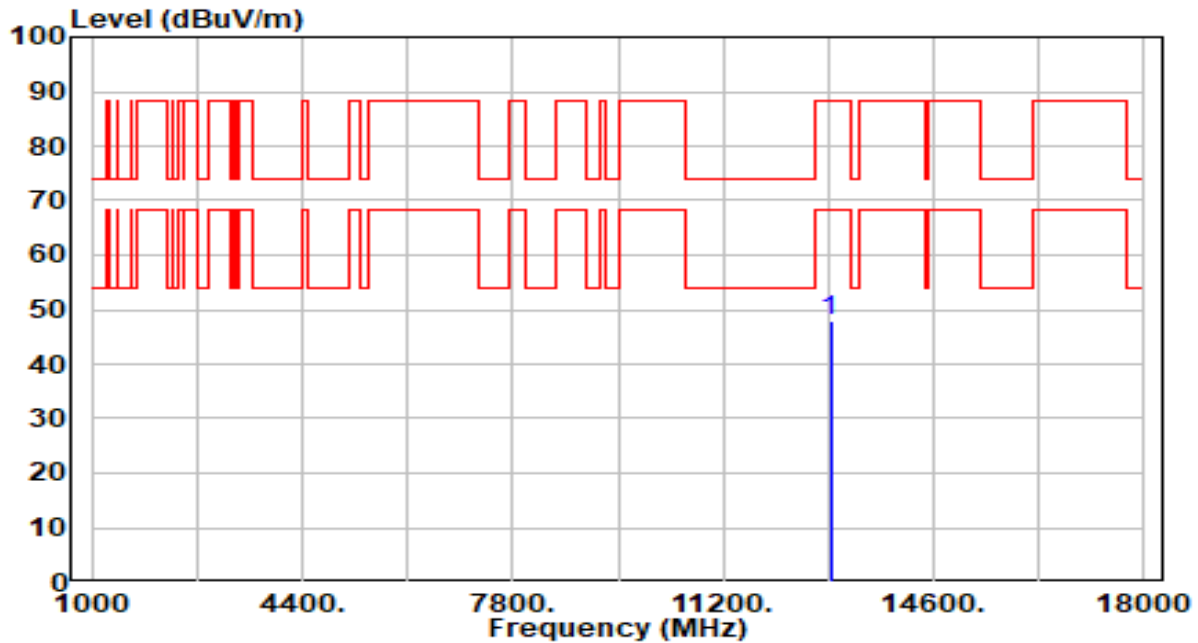


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12930.000     | 42.40          | 5.47       | 47.87                | -40.33      | 88.20          | 100         | 84          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band6_CH 103_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

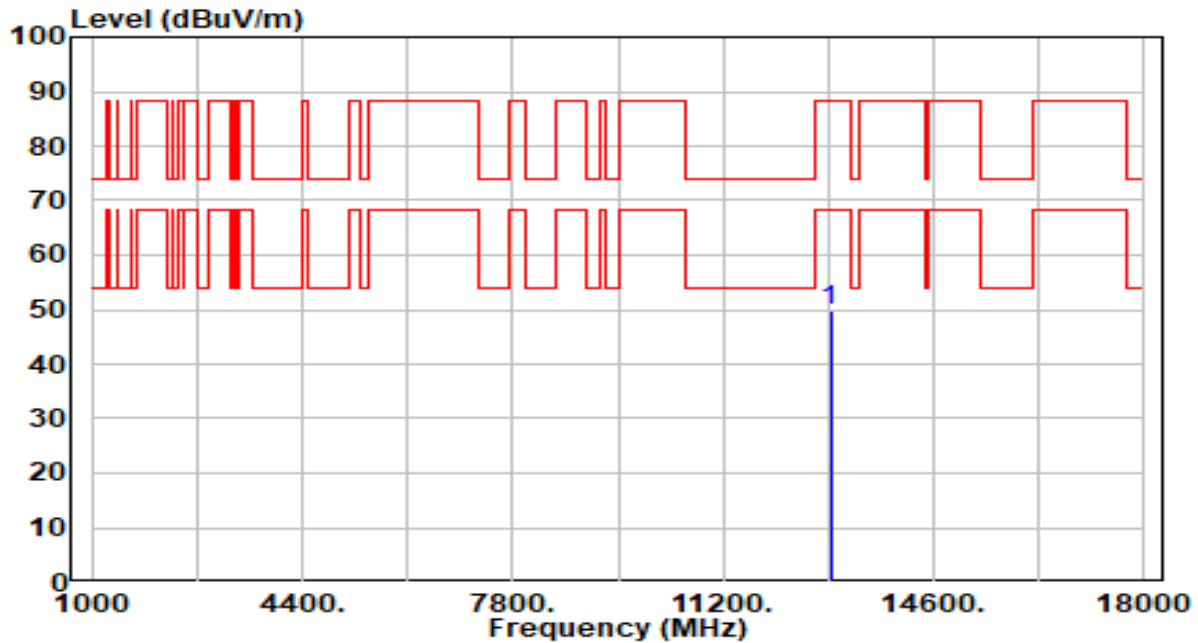


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12930.000     | 44.34          | 5.47       | 49.81                | -38.39      | 88.20          | 200         | 12          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 119_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

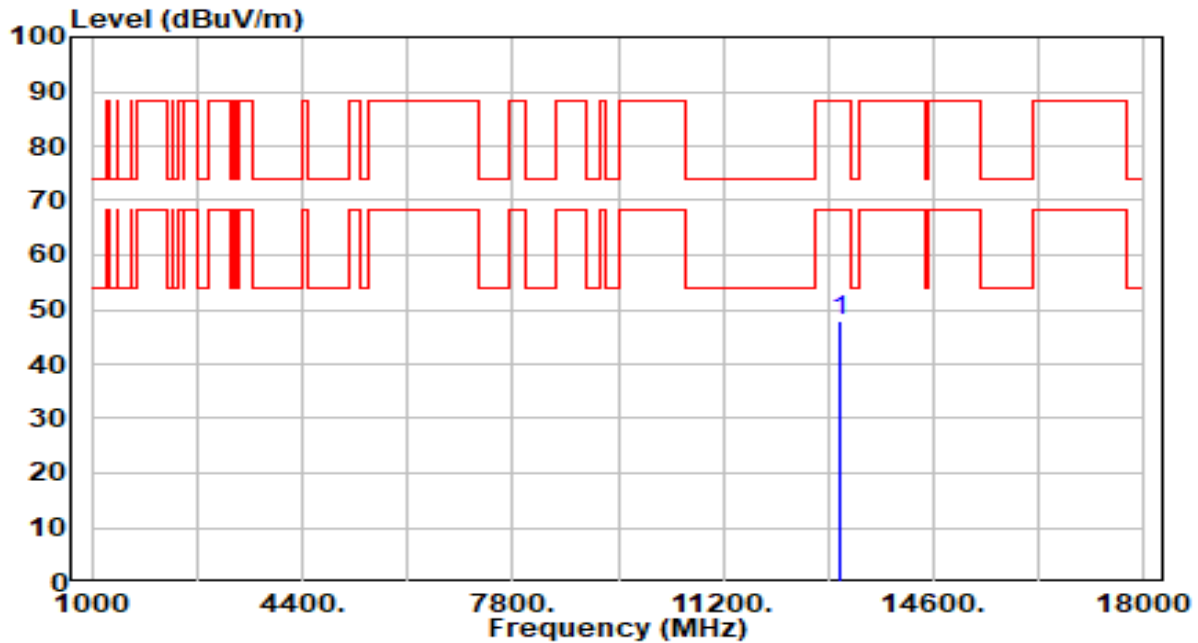


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13090.000     | 42.66          | 5.42       | 48.08                | -40.12      | 88.20          | 100         | 189         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 119_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

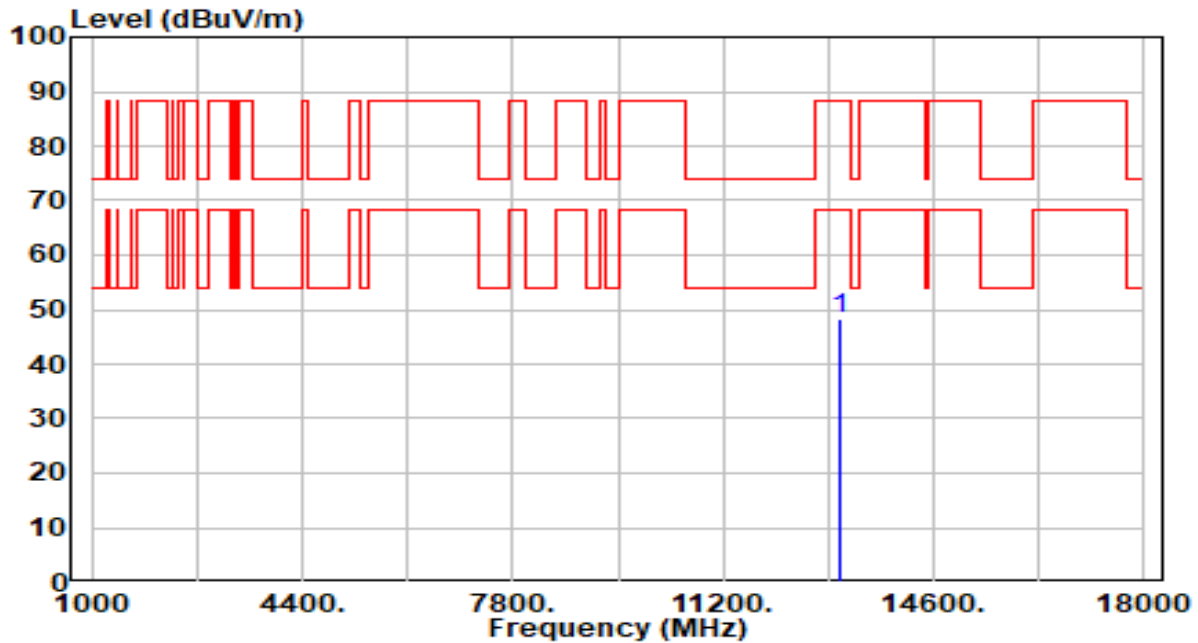


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13090.000     | 42.96          | 5.42       | 48.38                | -39.82      | 88.20          | 200         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 135_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

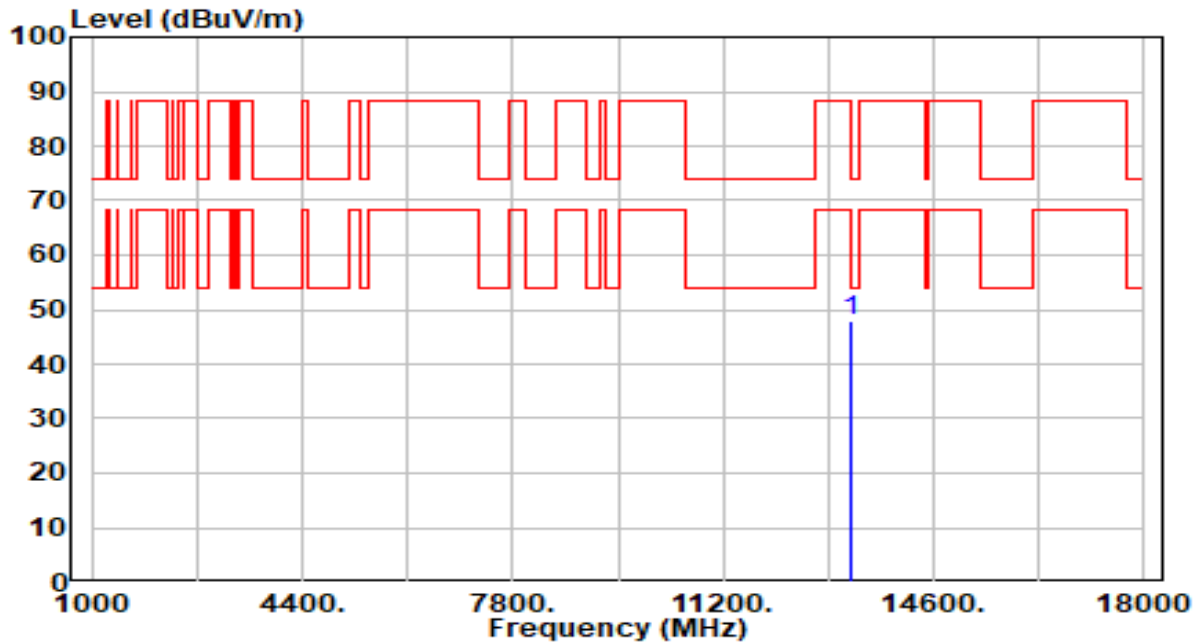


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13250.000     | 42.67          | 5.33       | 48.00                | -26.00      | 74.00          | 100         | 316         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 135_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

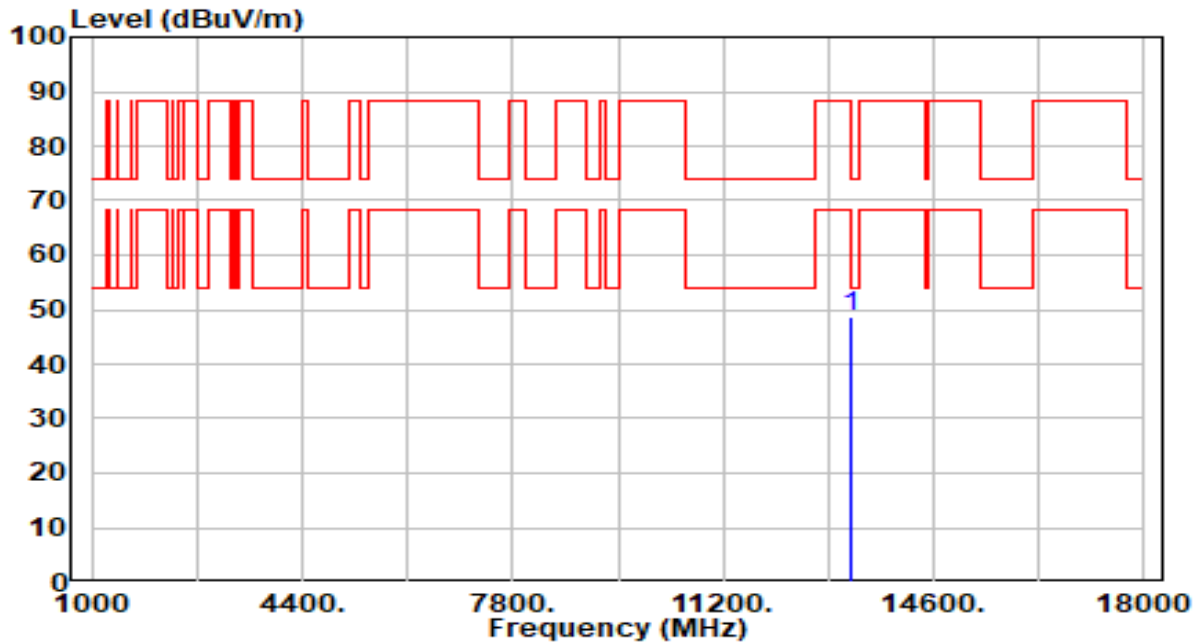


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13250.000     | 43.43          | 5.33       | 48.76                | -25.24      | 74.00          | 200         | 256         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 151_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

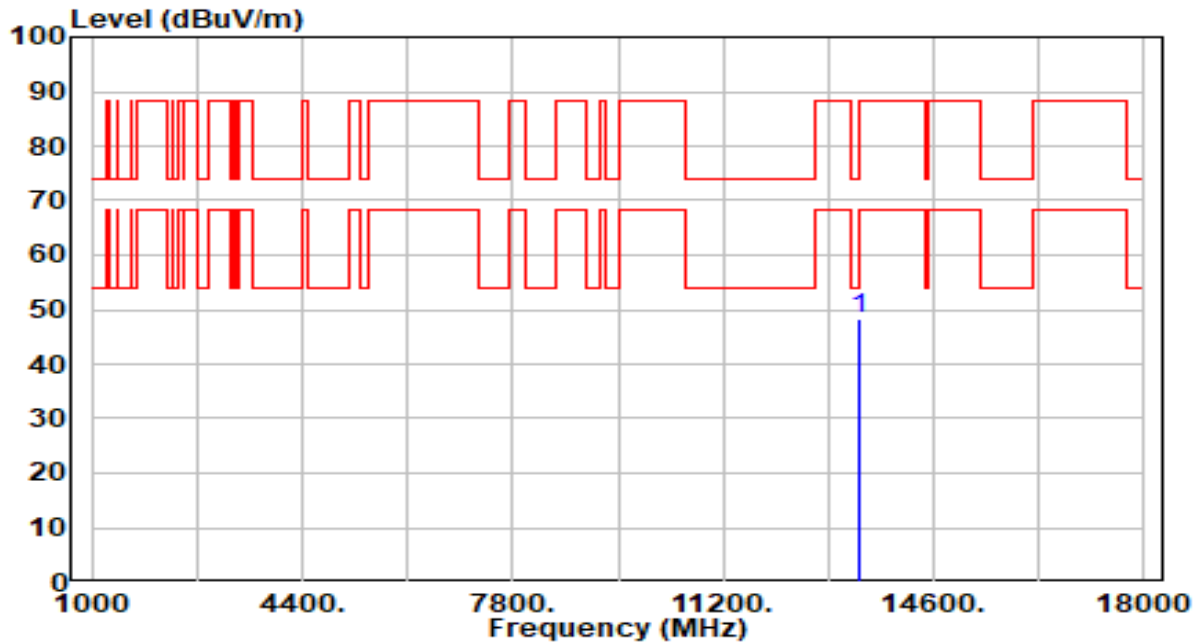


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13410.000     | 42.89          | 5.29       | 48.18                | -40.02      | 88.20          | 100         | 154         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 151_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

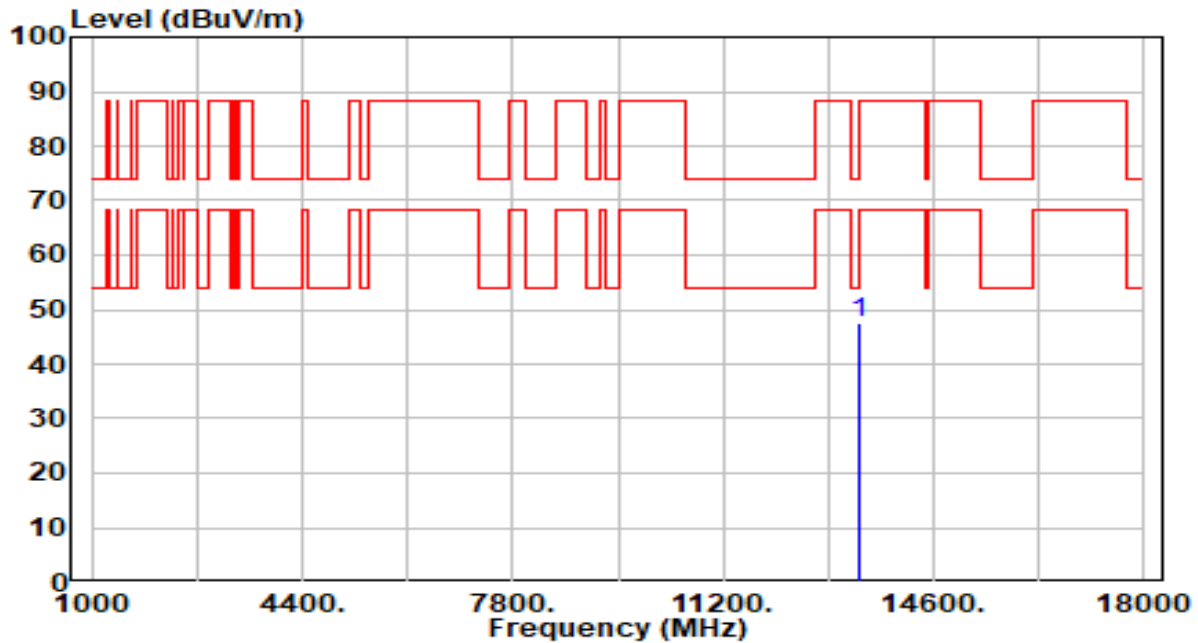


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13410.000     | 42.31          | 5.29       | 47.60                | -40.60      | 88.20          | 200         | 154         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 183_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

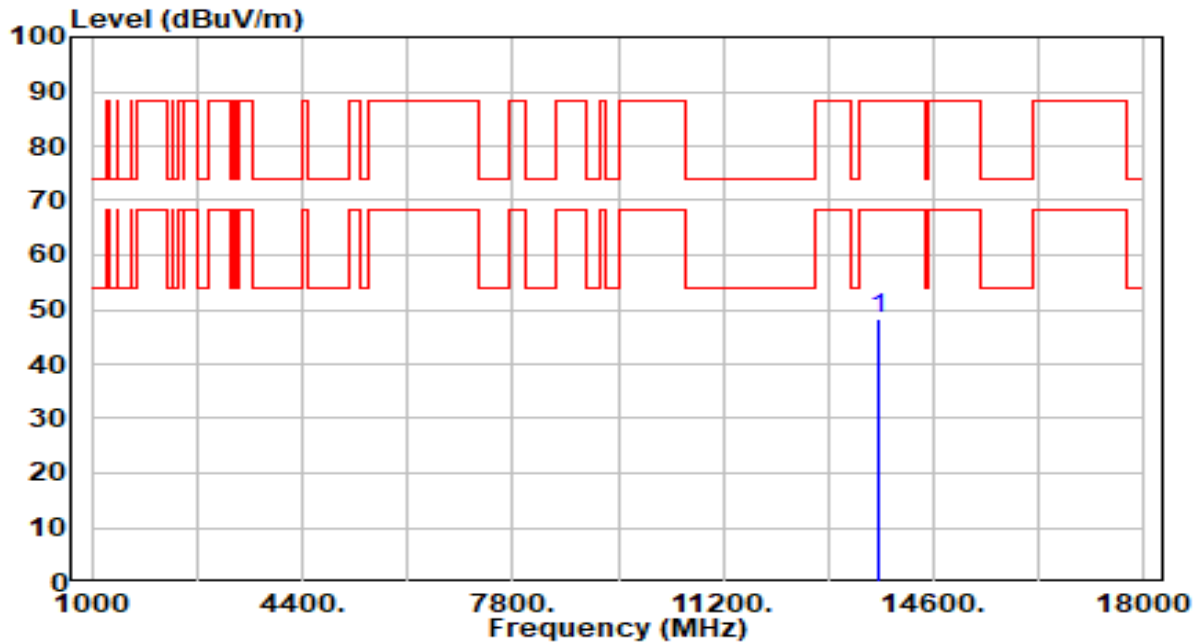


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 13730.000          | 43.32             | 4.95          | 48.27                   | -39.93         | 88.20             | 100            | 249            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band7_CH 183_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

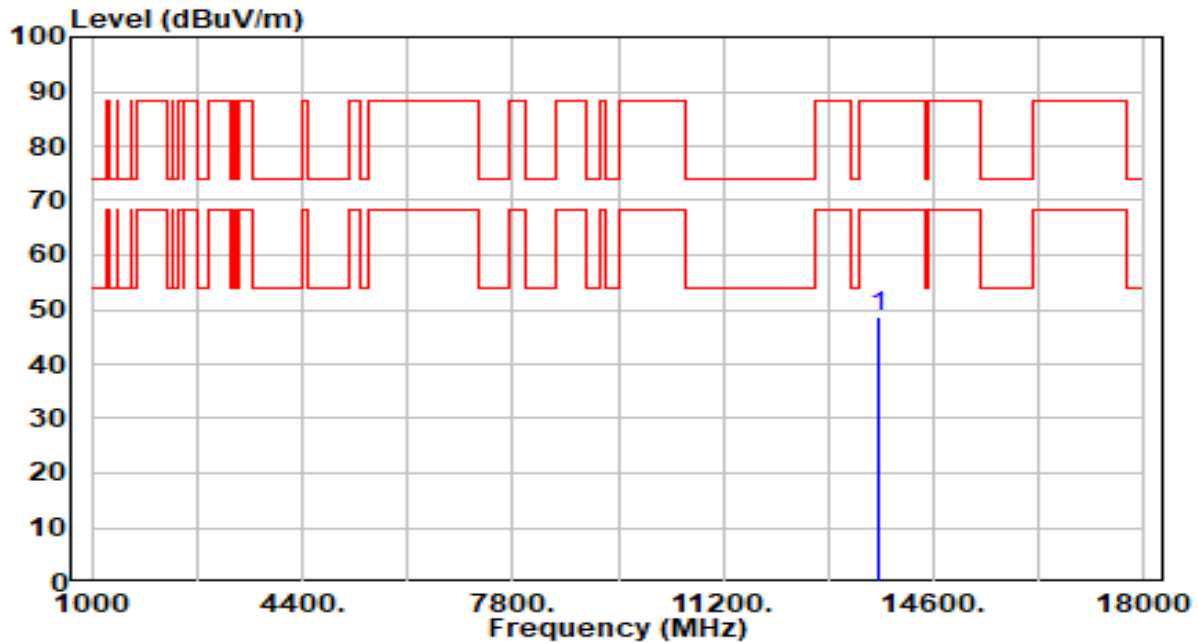


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 13730.000          | 43.56             | 4.95          | 48.51                   | -39.69         | 88.20             | 200            | 69             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 199_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

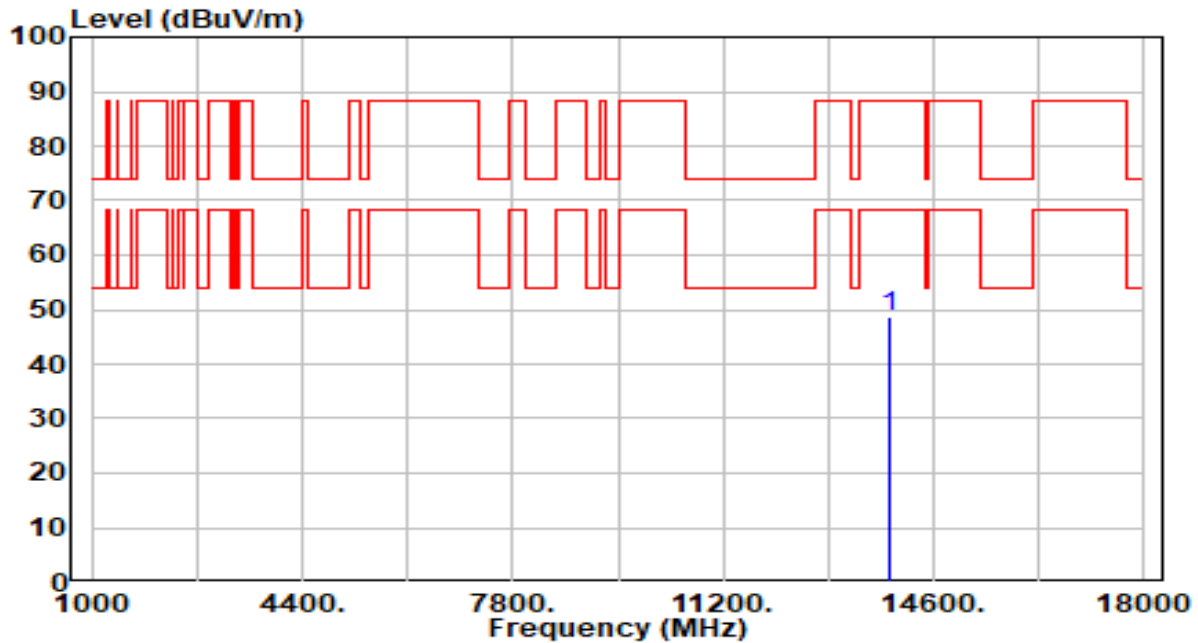


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13890.000     | 43.65          | 4.96       | 48.61                | -39.59      | 88.20          | 100         | 330         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 199_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

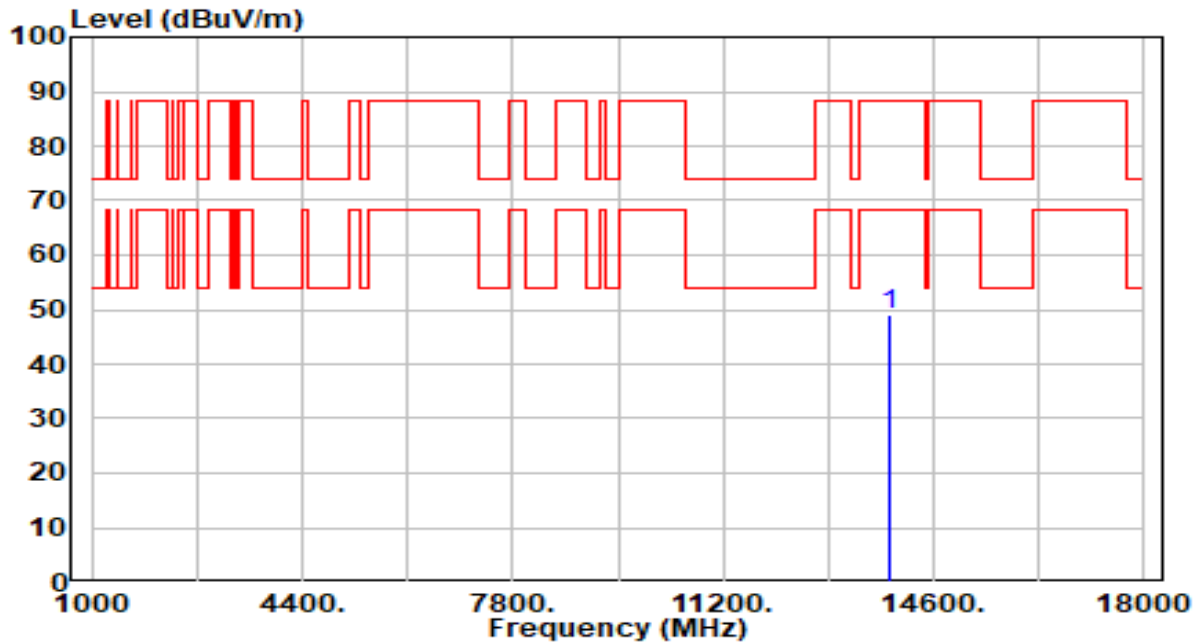


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13890.000     | 44.01          | 4.96       | 48.97                | -39.23      | 88.20          | 200         | 35          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

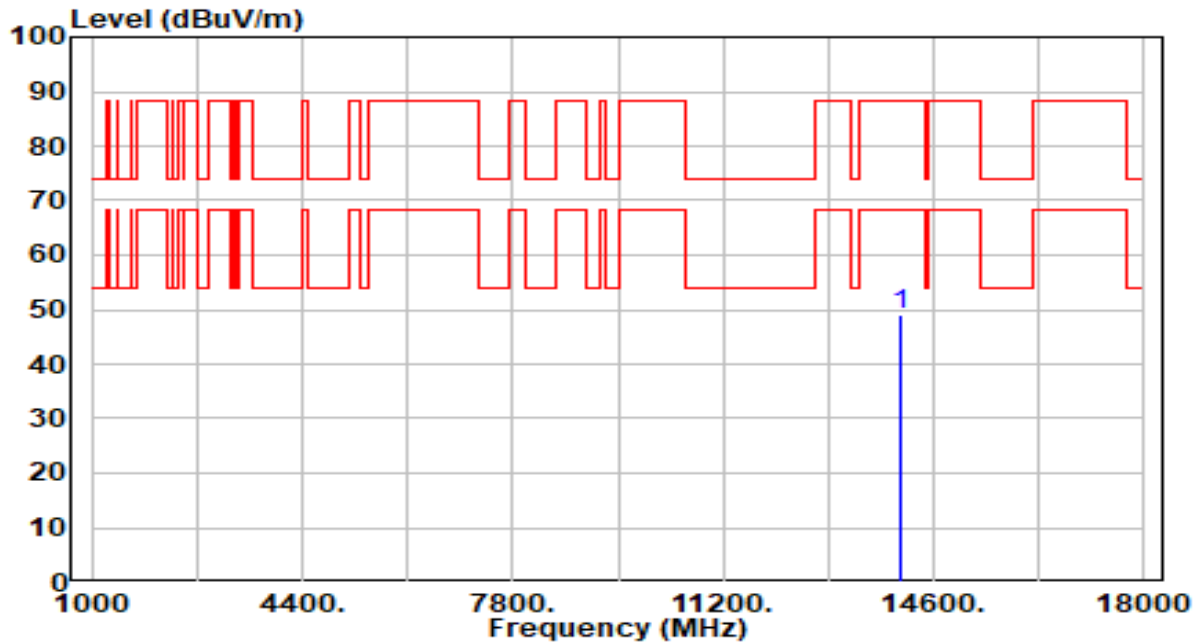


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14050.000     | 43.94          | 5.02       | 48.97                | -39.23      | 88.20          | 100         | 325         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

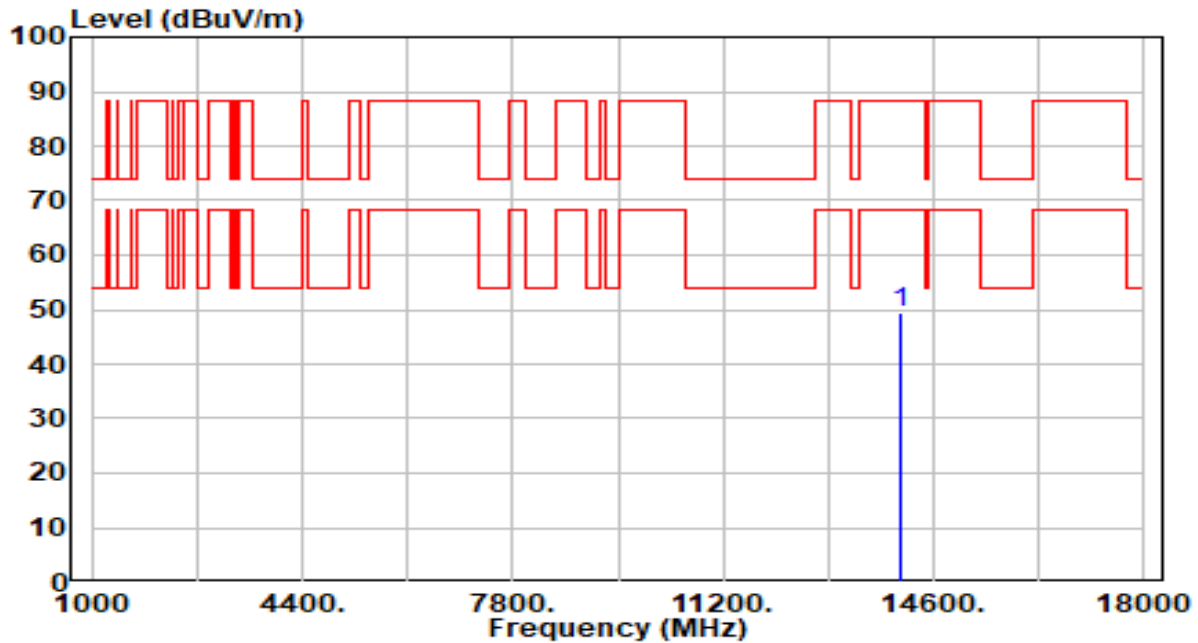


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 14050.000     | 44.42          | 5.02       | 49.44                | -38.76      | 88.20          | 200         | 91          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

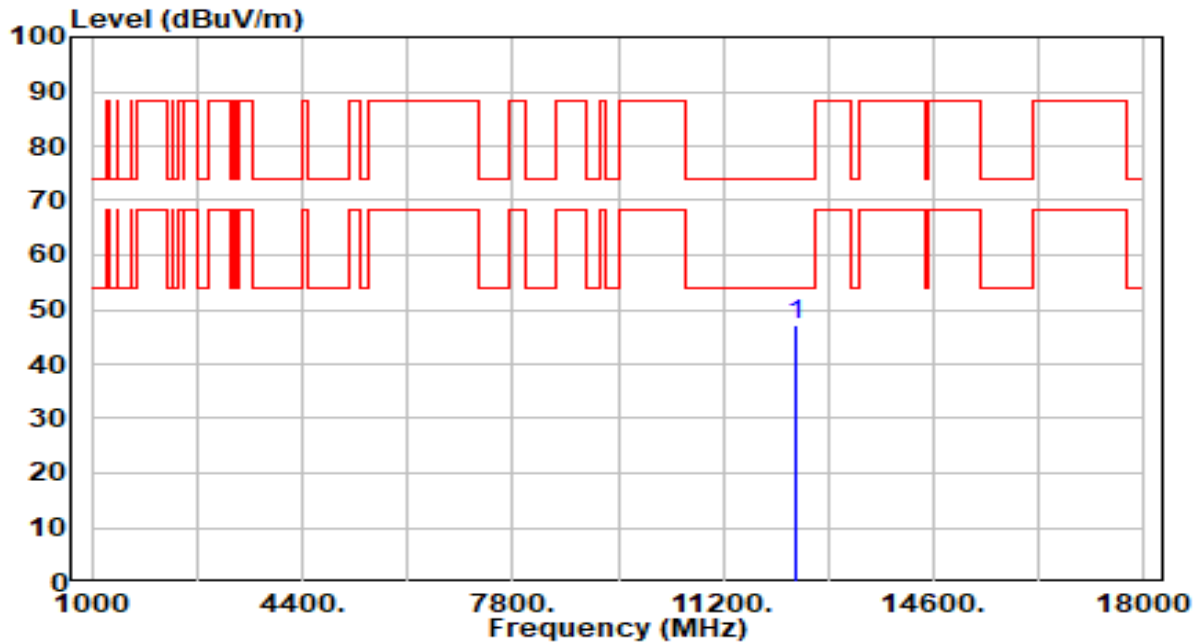


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12370.000     | 42.48          | 4.59       | 47.07                | -26.93      | 74.00          | 100         | 1           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

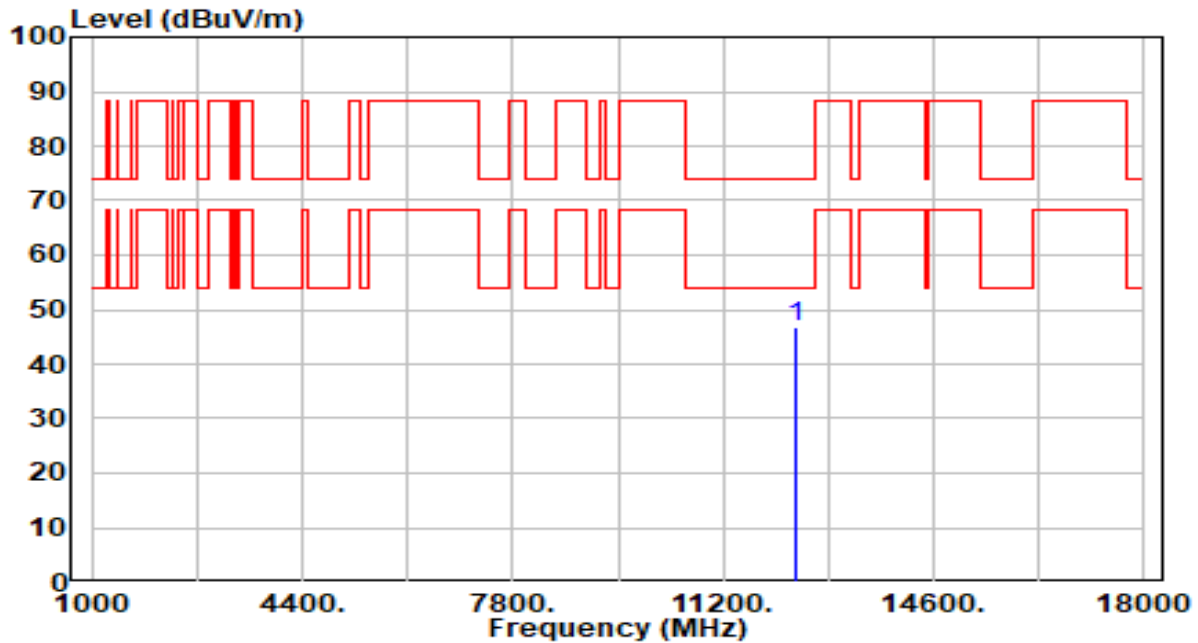


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 12370.000          | 42.07             | 4.59          | 46.66                   | -27.34         | 74.00             | 200            | 334            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 79_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

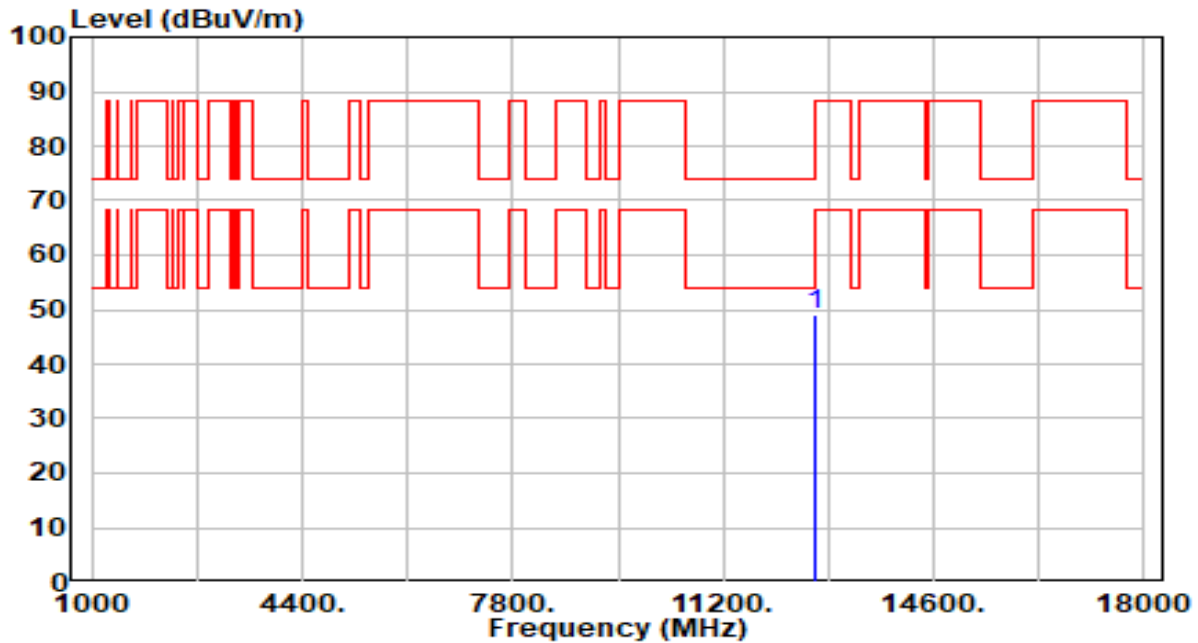


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12690.000     | 43.83          | 5.31       | 49.14                | -24.86      | 74.00          | 100         | 283         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 79_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

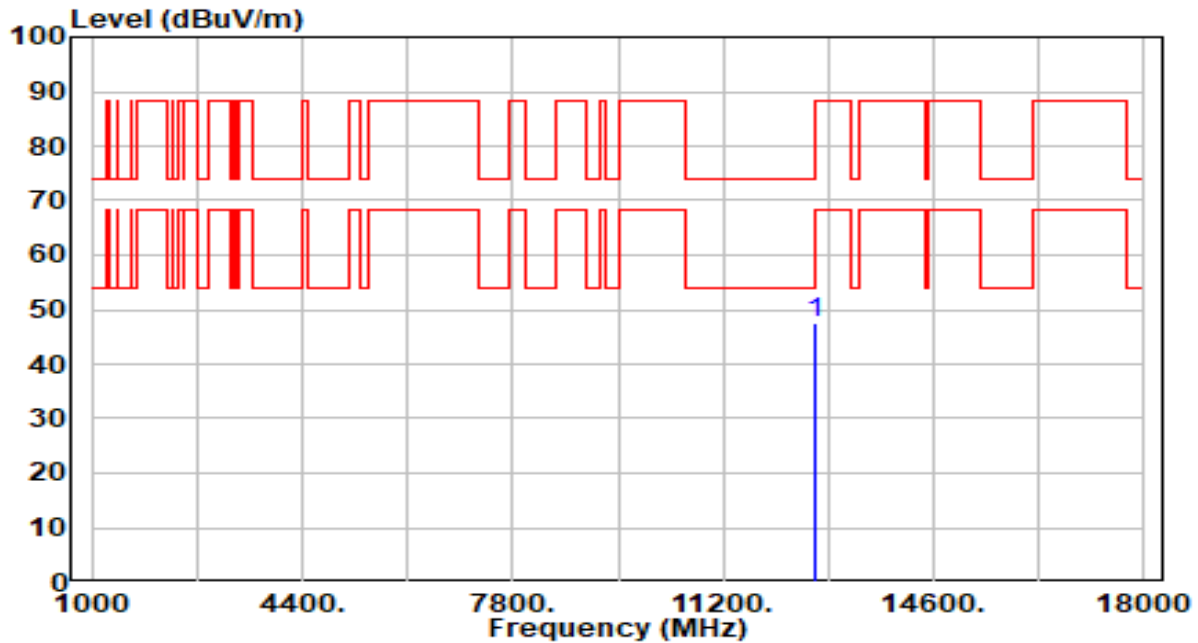


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 12690.000     | 42.42          | 5.31       | 47.74                | -26.26      | 74.00          | 200         | 338         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band6_CH 111_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

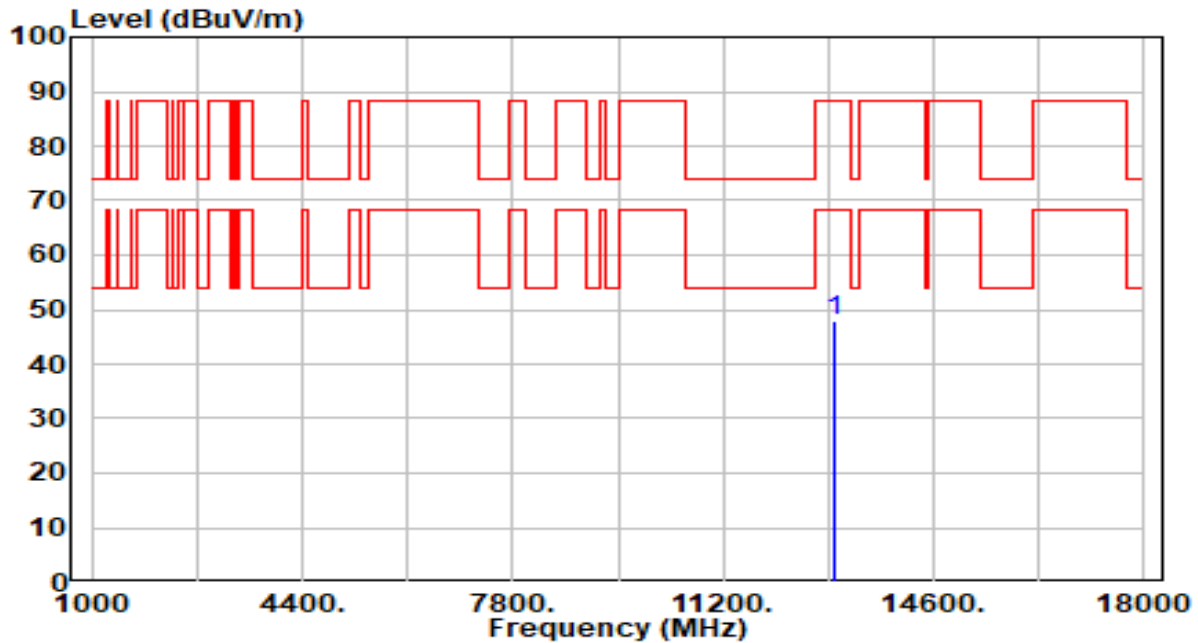


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13010.000     | 42.32          | 5.47       | 47.80                | -40.40      | 88.20          | 100         | 266         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band6_CH 111_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

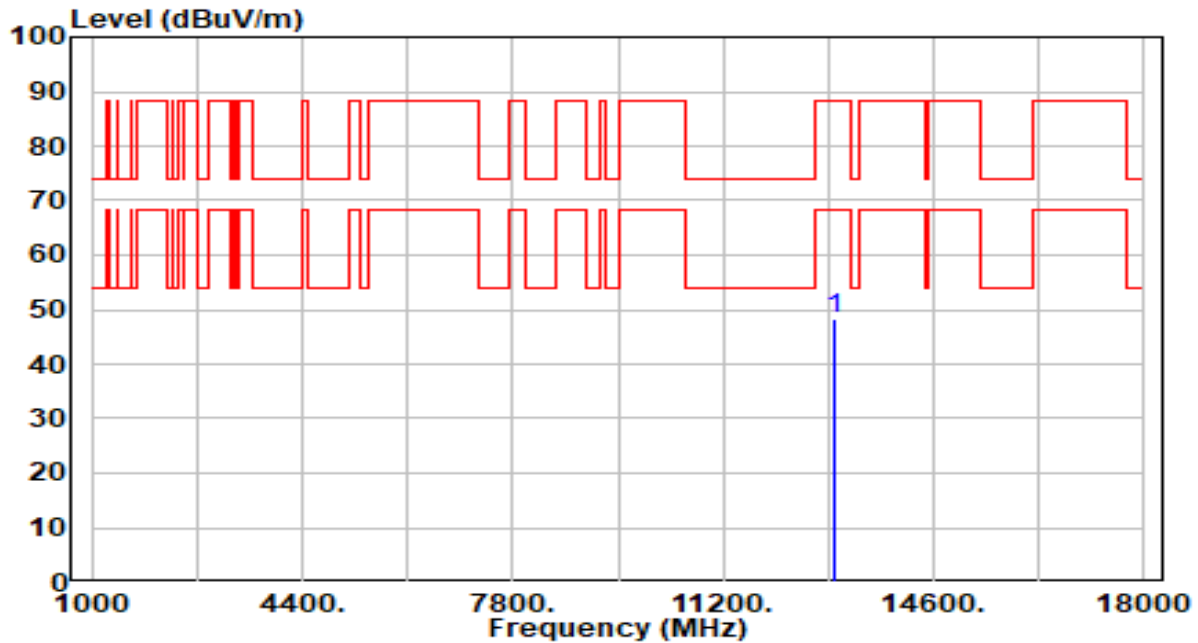


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13010.000     | 42.70          | 5.47       | 48.17                | -40.03      | 88.20          | 200         | 206         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 143_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

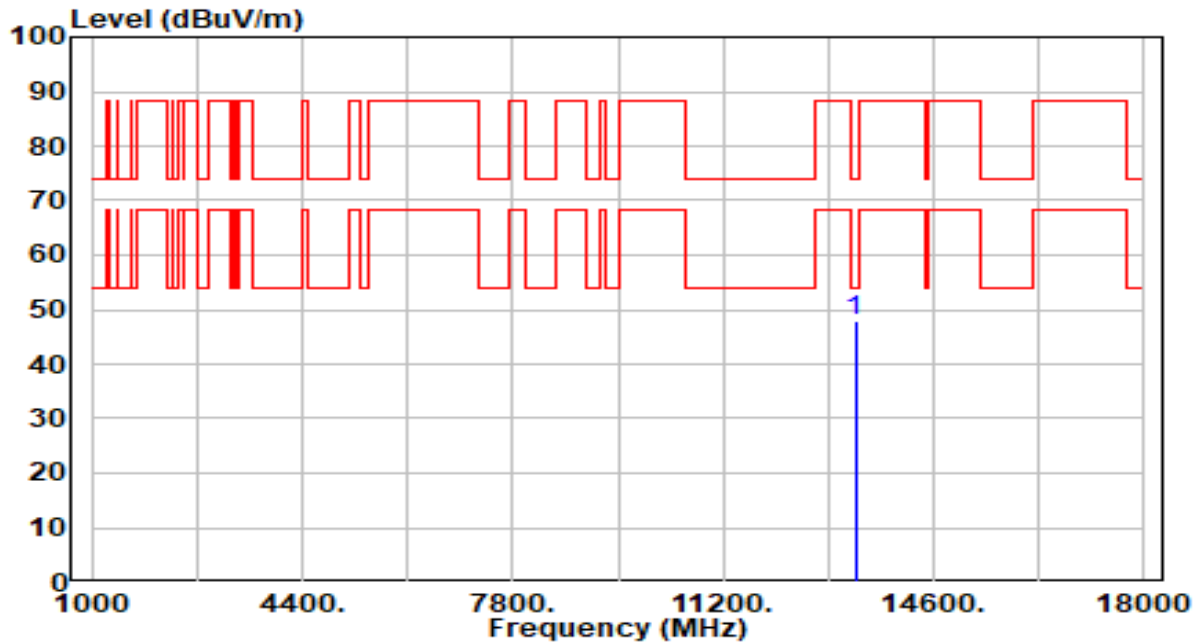


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13330.000     | 42.60          | 5.31       | 47.92                | -26.08      | 74.00          | 100         | 204         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 143_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

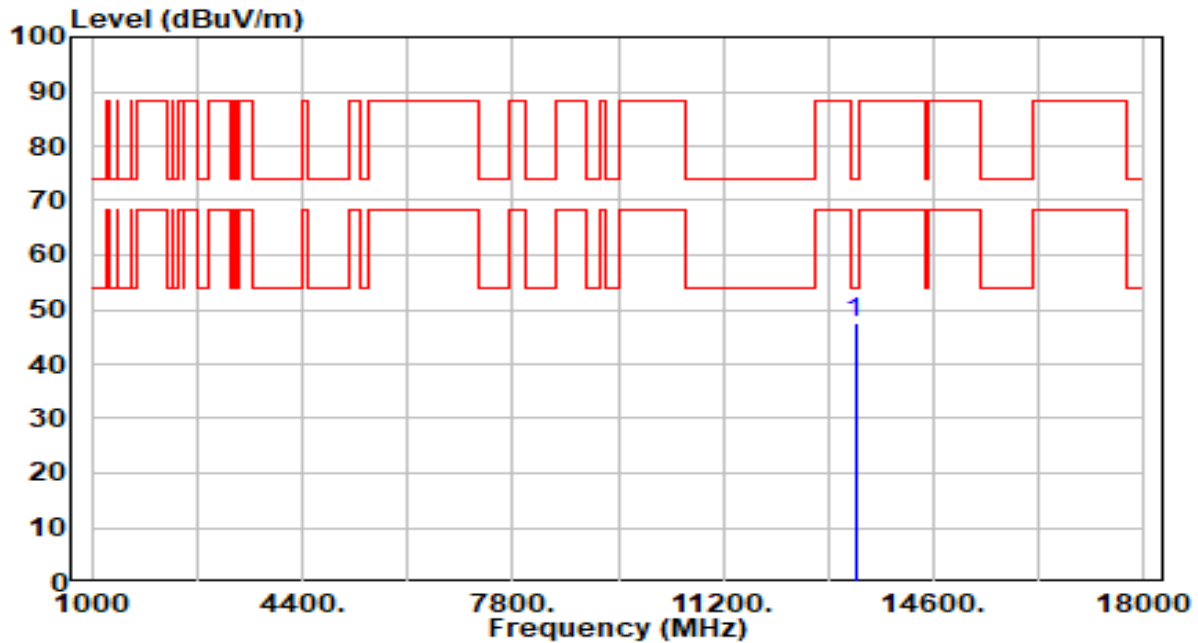


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13330.000     | 42.13          | 5.31       | 47.45                | -26.55      | 74.00          | 200         | 83          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 175_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

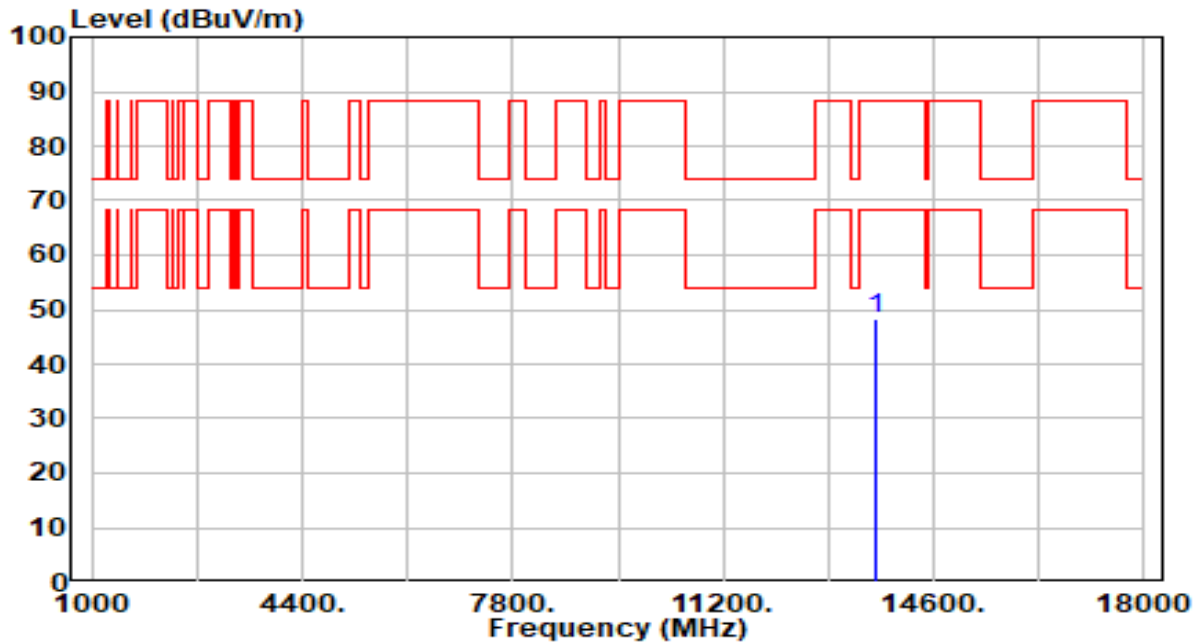


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13650.000     | 43.18          | 4.94       | 48.12                | -40.08      | 88.20          | 100         | 139         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band7_CH 175_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

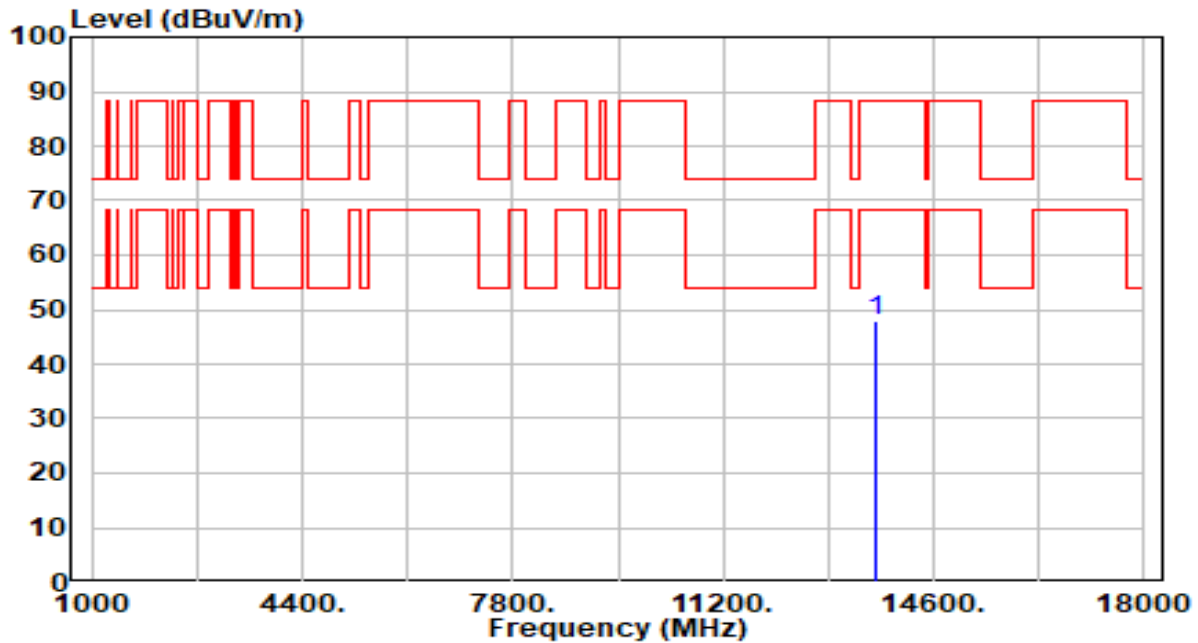


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13650.000     | 43.05          | 4.94       | 47.99                | -40.21      | 88.20          | 200         | 344         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

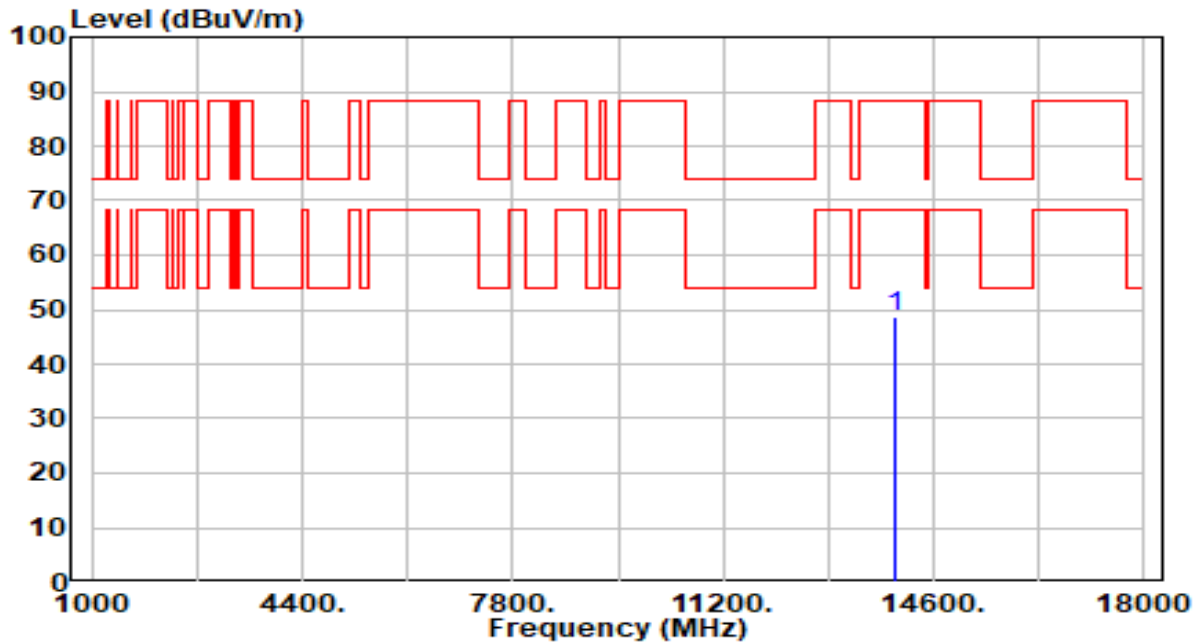


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13970.000     | 43.56          | 4.97       | 48.52                | -39.68      | 88.20          | 100         | 138         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

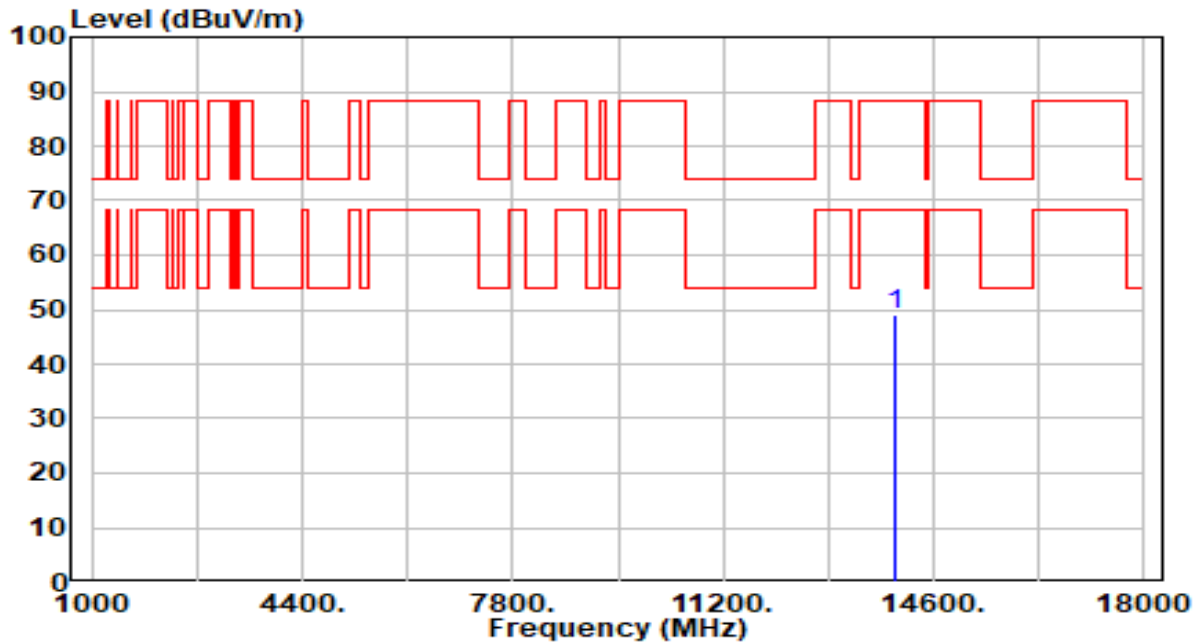


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 13970.000     | 43.92          | 4.97       | 48.88                | -39.32      | 88.20          | 200         | 156         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |              |
|-----------|--------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                          | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                       | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_RX_Band5_CH 1_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

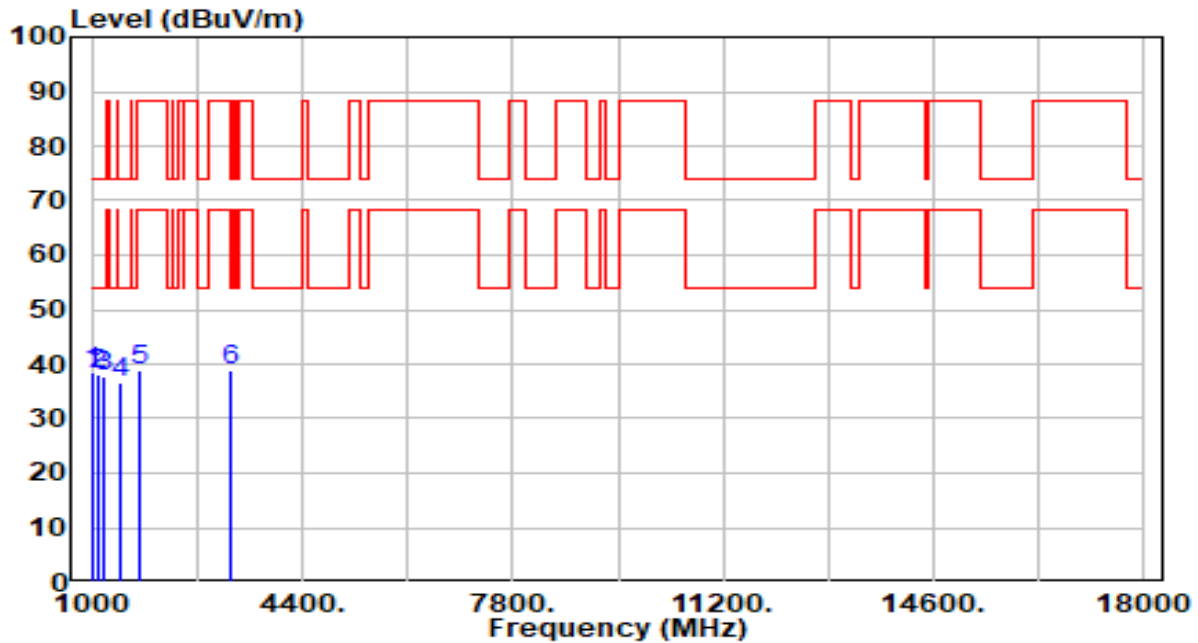


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 1037.000        | 46.12          | -7.78      | 38.34                | -35.66      | 74.00          | 100         | 262         | Peak              |
| 2  |   | 1118.000        | 45.91          | -7.85      | 38.05                | -35.95      | 74.00          | 100         | 265         | Peak              |
| 3  |   | 1200.000        | 45.53          | -7.93      | 37.60                | -36.40      | 74.00          | 200         | 248         | Peak              |
| 4  |   | 1480.000        | 43.93          | -7.44      | 36.49                | -37.51      | 74.00          | 300         | 238         | Peak              |
| 5  |   | 1791.000        | 46.39          | -7.46      | 38.93                | -49.27      | 88.20          | 100         | 11          | Peak              |
| 6  |   | 3249.000        | 42.62          | -3.62      | 39.01                | -49.19      | 88.20          | 100         | 288         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |              |
|-----------|--------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                          | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_RX_Band5_CH 1_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

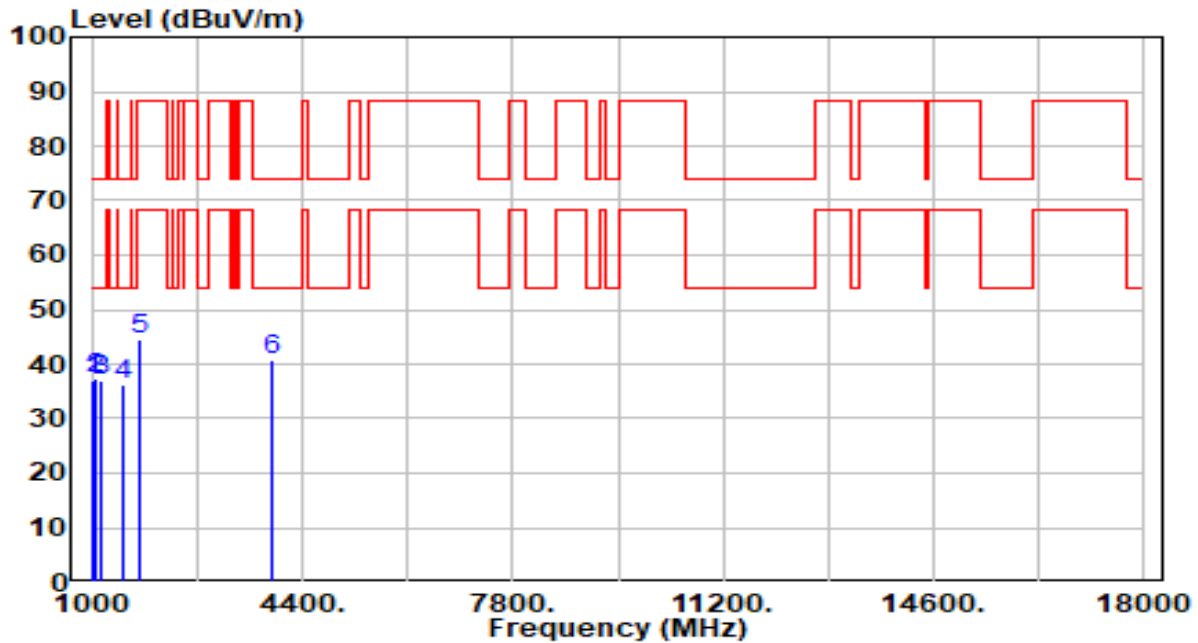

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 1009.000        | 44.66          | -7.75      | 36.91                | -37.09      | 74.00          | 300         | 115         | Peak              |
| 2  | 1072.000        | 45.19          | -7.81      | 37.38                | -36.62      | 74.00          | 300         | 357         | Peak              |
| 3  | 1131.000        | 44.77          | -7.87      | 36.90                | -37.10      | 74.00          | 300         | 58          | Peak              |
| 4  | 1489.000        | 43.59          | -7.45      | 36.14                | -37.86      | 74.00          | 126         | 360         | Peak              |
| 5  | 1786.000        | 51.87          | -7.47      | 44.41                | -43.79      | 88.20          | 126         | 360         | Peak              |
| 6  | * 3891.000      | 42.93          | -2.22      | 40.72                | -33.28      | 74.00          | 300         | 336         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 6.9. Radiated Restricted Band Edge

### 6.9.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)    | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|-----------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                    | --                 | --                 |

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v01 clause G - Unwanted Emission Measurement

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 6.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section II) G

### 6.9.3. Test Setting

#### Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

#### Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10Hz
4. If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration
5. Detector = Peak


6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

#### 6.9.4. Test Setup

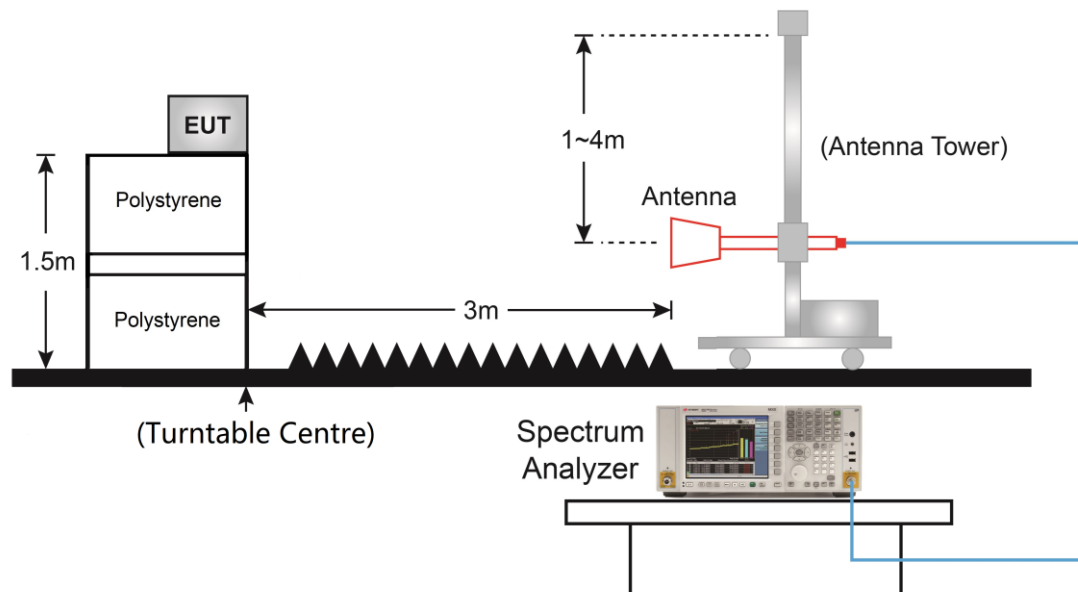

### 6.9.5. Test Result

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

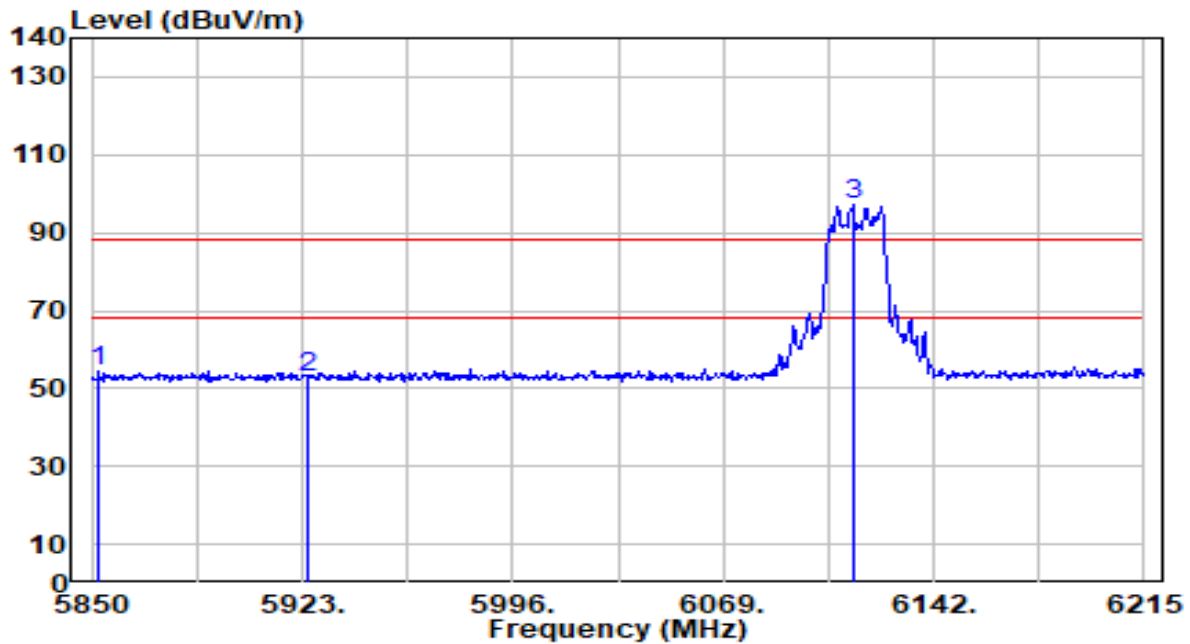


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5852.190           | 51.92             | 2.27          | 54.20                   | -34.00         | 88.20             | 218            | 87             | Peak                 |
| 2  |   | 5925.000           | 50.38             | 2.38          | 52.76                   | -35.44         | 88.20             | 218            | 87             | Peak                 |
| 3  |   | 6113.895           | 94.42             | 2.86          | 97.27                   | N/A            | N/A               | 218            | 87             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

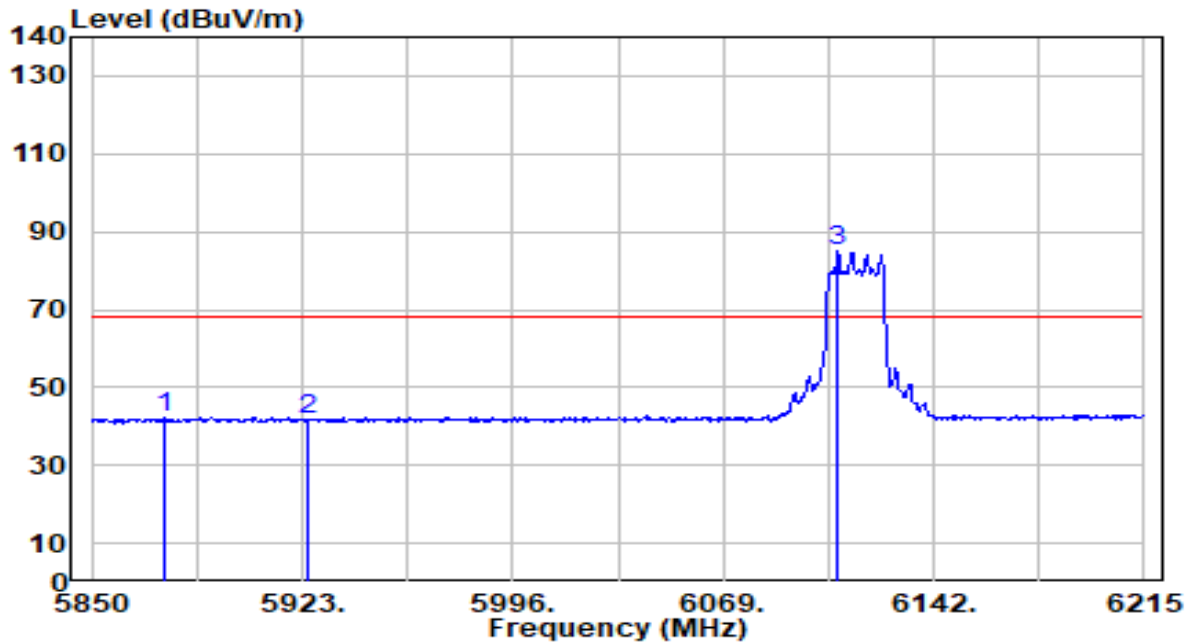


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5874.820        | 39.79          | 2.31       | 42.10                | -26.10      | 68.20          | 218         | 87          | Average           |
| 2  |   | 5925.000        | 39.22          | 2.38       | 41.61                | -26.59      | 68.20          | 218         | 87          | Average           |
| 3  |   | 6108.785        | 82.33          | 2.84       | 85.17                | N/A         | N/A            | 218         | 87          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

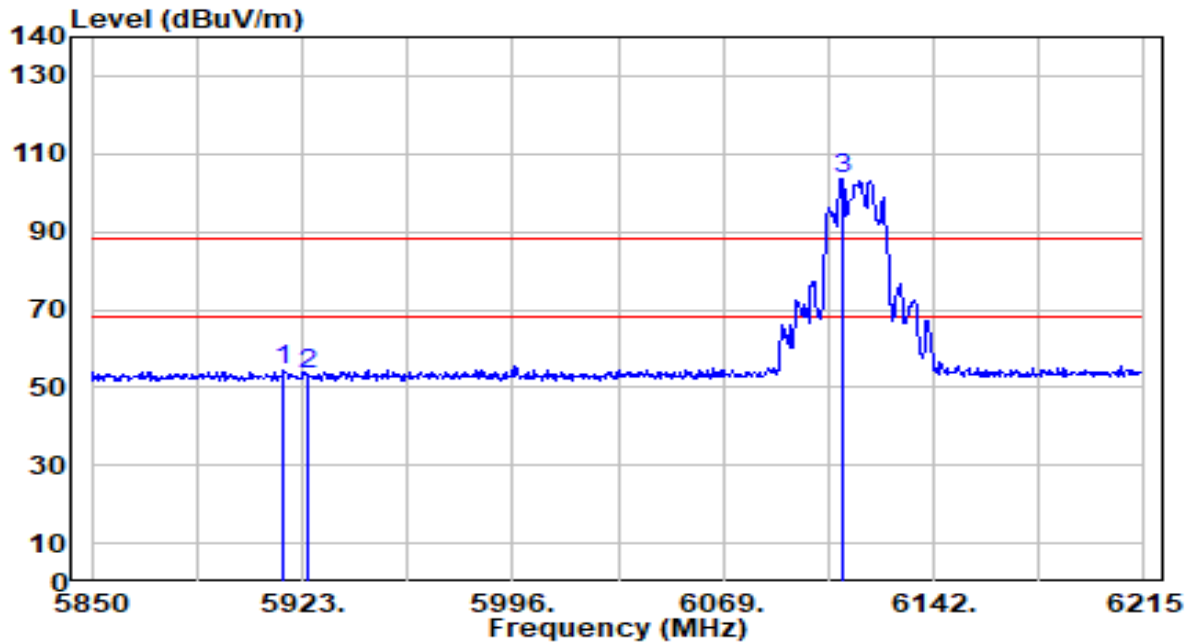


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5916.795        | 52.06          | 2.37       | 54.44                | -33.76      | 88.20          | 172         | 241         | Peak              |
| 2  |   | 5925.000        | 50.97          | 2.38       | 53.35                | -34.85      | 88.20          | 172         | 241         | Peak              |
| 3  |   | 6110.245        | 100.51         | 2.85       | 103.35               | N/A         | N/A            | 172         | 241         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

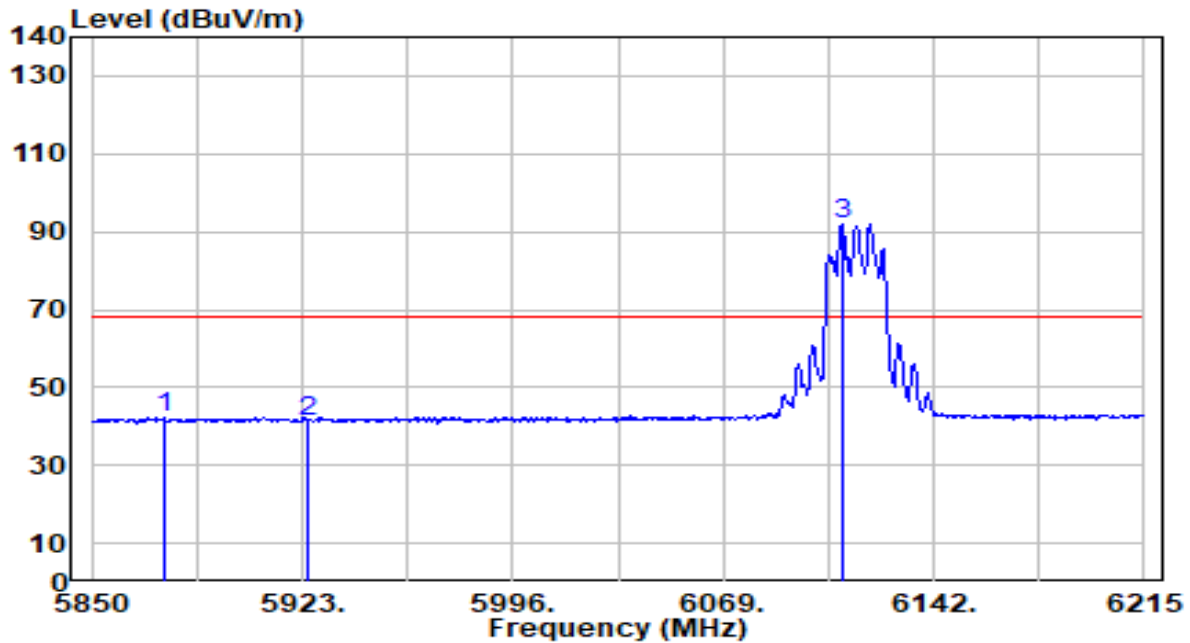


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5875.185        | 39.91          | 2.31       | 42.22                | -25.98      | 68.20          | 172         | 241         | Average           |
| 2  |   | 5925.000        | 39.07          | 2.38       | 41.46                | -26.74      | 68.20          | 172         | 241         | Average           |
| 3  |   | 6110.245        | 89.13          | 2.85       | 91.97                | N/A         | N/A            | 172         | 241         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

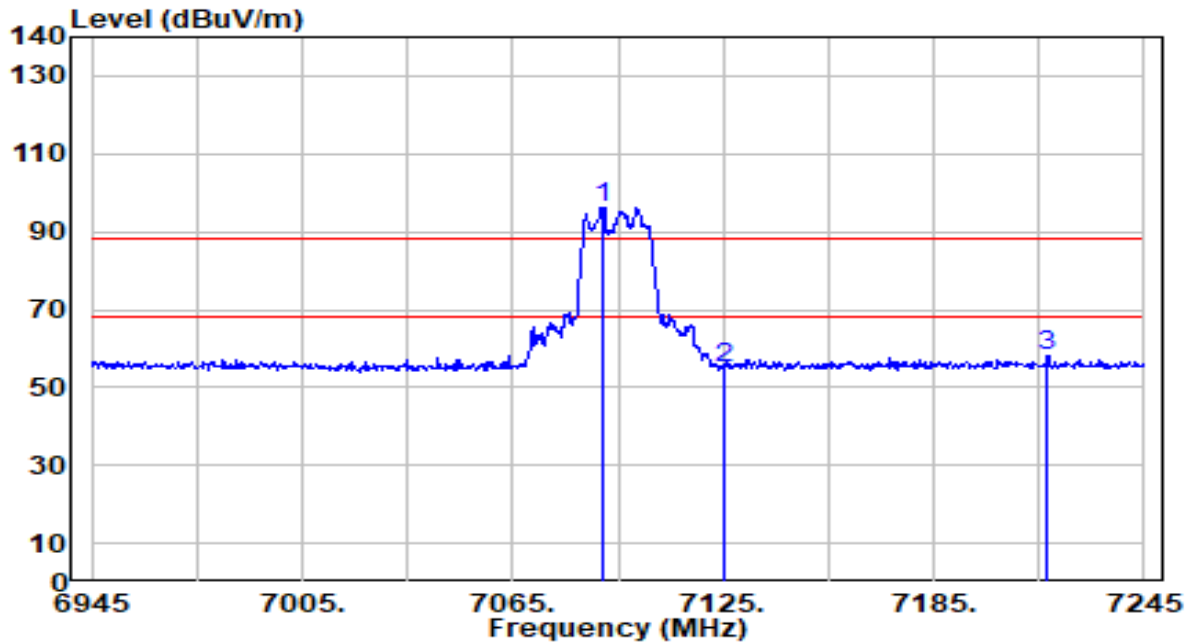


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7090.800        | 90.72          | 5.69       | 96.41                | N/A         | N/A            | 209         | 177         | Peak              |
| 2  | 7125.000        | 49.46          | 5.73       | 55.19                | -33.01      | 88.20          | 209         | 177         | Peak              |
| 3  | * 7217.400      | 52.18          | 5.82       | 58.00                | -30.20      | 88.20          | 209         | 177         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

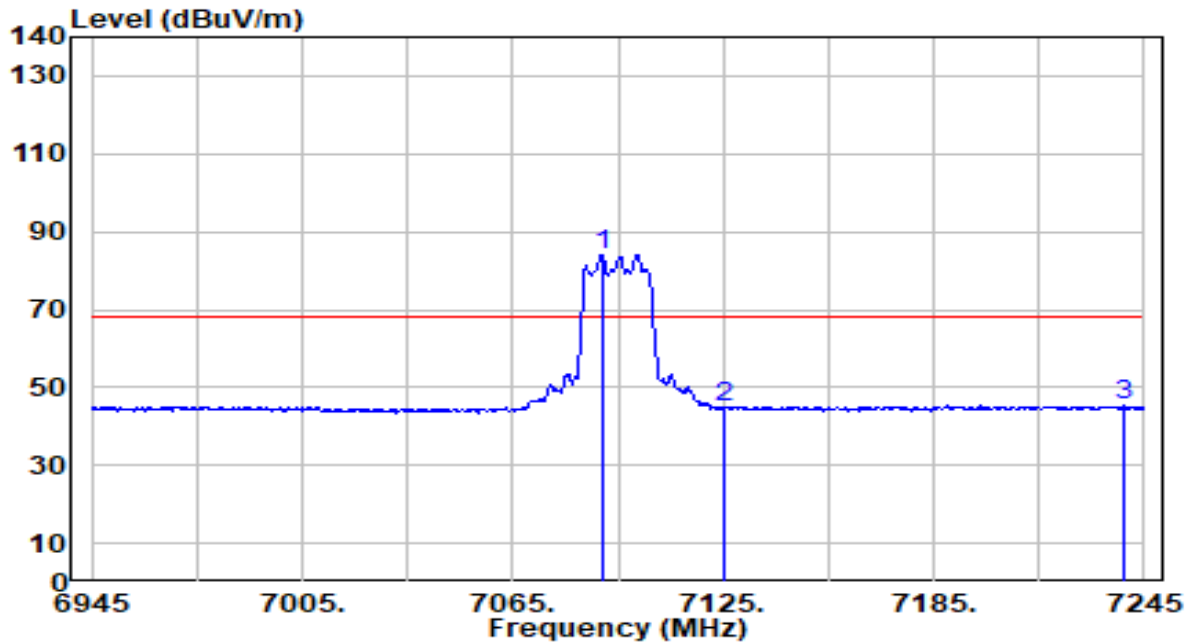


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7090.500        | 78.56          | 5.69       | 84.25                | N/A         | N/A            | 209         | 177         | Average           |
| 2  | 7125.000        | 39.14          | 5.73       | 44.87                | -23.33      | 68.20          | 209         | 177         | Average           |
| 3  | * 7239.600      | 39.55          | 5.81       | 45.36                | -22.84      | 68.20          | 209         | 177         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

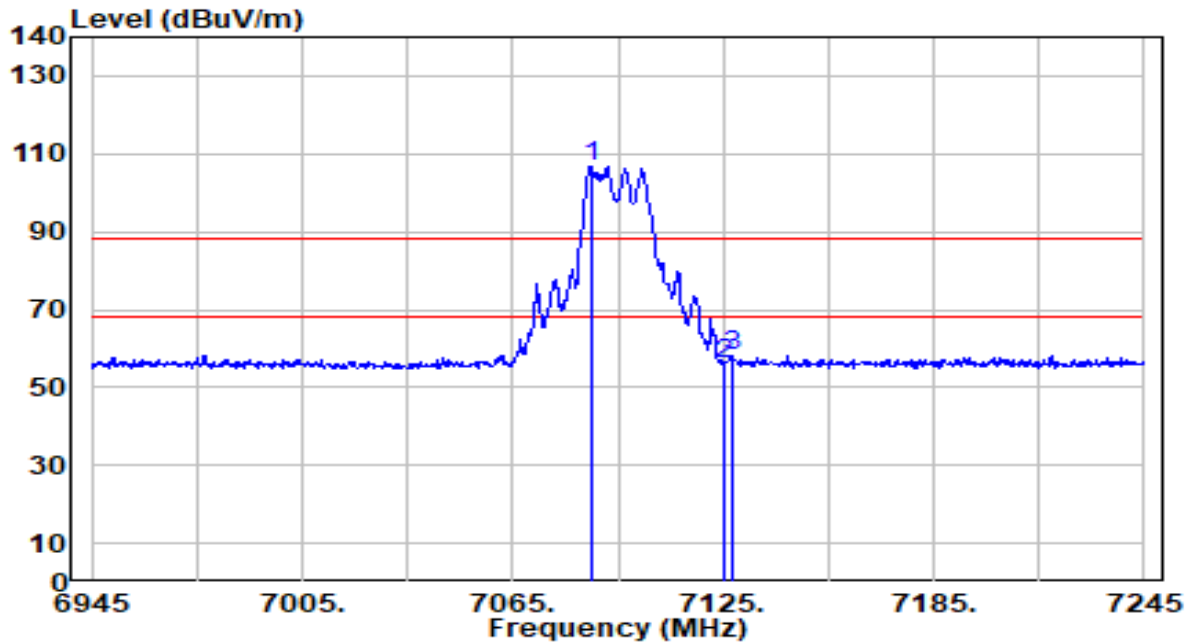


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7087.200        | 101.16         | 5.69       | 106.84               | N/A         | N/A            | 215         | 51          | Peak              |
| 2  | 7125.000        | 50.20          | 5.73       | 55.93                | -32.27      | 88.20          | 215         | 51          | Peak              |
| 3  | * 7127.400      | 52.55          | 5.74       | 58.29                | -29.91      | 88.20          | 215         | 51          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

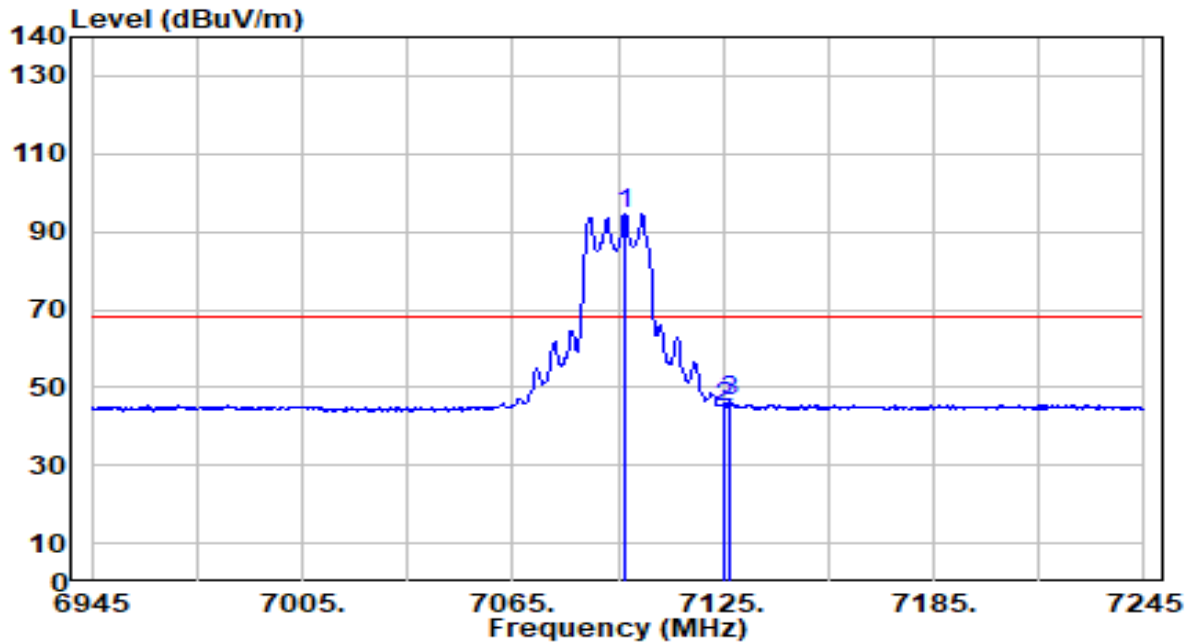


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7097.100        | 88.83          | 5.70       | 94.52                | N/A         | N/A            | 215         | 51          | Average           |
| 2  | 7125.000        | 39.02          | 5.73       | 44.75                | -23.45      | 68.20          | 215         | 51          | Average           |
| 3  | * 7126.800      | 40.80          | 5.73       | 46.53                | -21.67      | 68.20          | 215         | 51          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 35_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

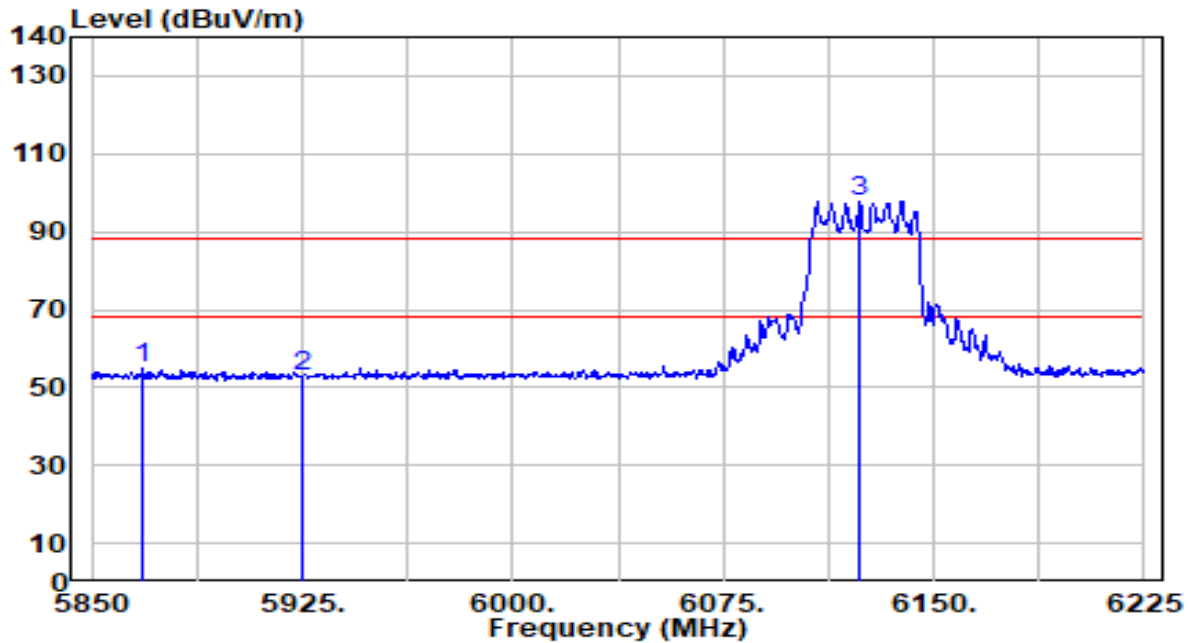


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5868.000        | 52.52          | 2.30       | 54.81                | -33.39      | 88.20          | 214         | 87          | Peak              |
| 2  |   | 5925.000        | 50.43          | 2.38       | 52.82                | -35.38      | 88.20          | 214         | 87          | Peak              |
| 3  |   | 6123.750        | 94.95          | 2.89       | 97.83                | N/A         | N/A            | 214         | 87          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 35_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

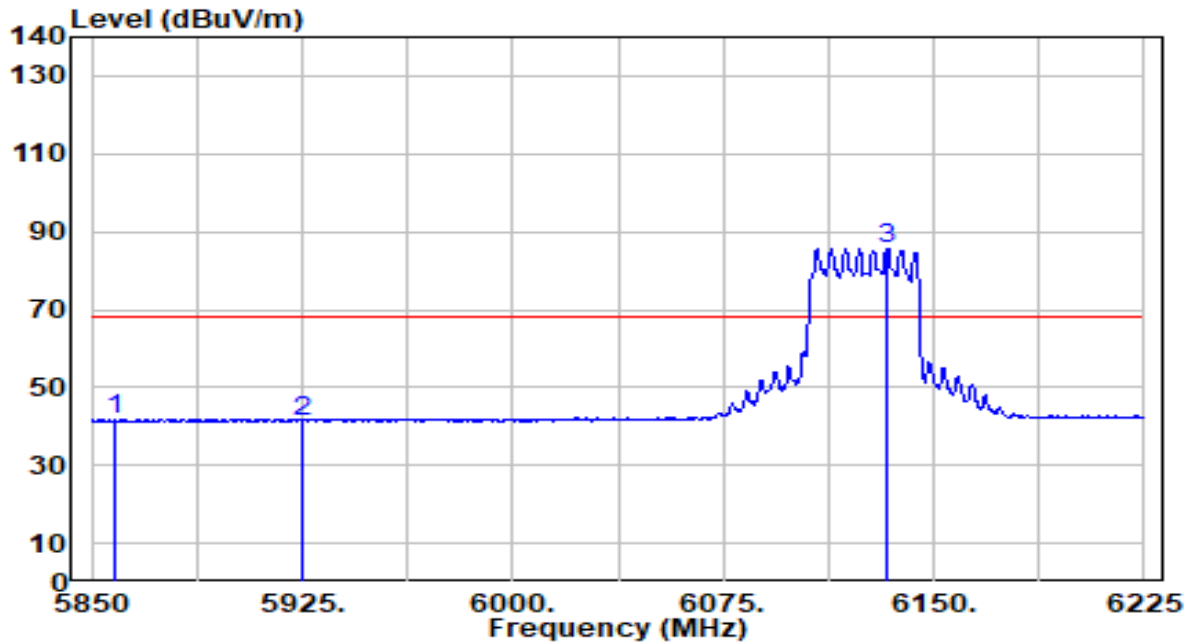


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5858.625        | 39.65          | 2.28       | 41.94                | -26.26      | 68.20          | 214         | 87          | Average           |
| 2  |   | 5925.000        | 39.05          | 2.38       | 41.44                | -26.76      | 68.20          | 214         | 87          | Average           |
| 3  |   | 6133.500        | 82.89          | 2.92       | 85.81                | N/A         | N/A            | 214         | 87          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 35_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

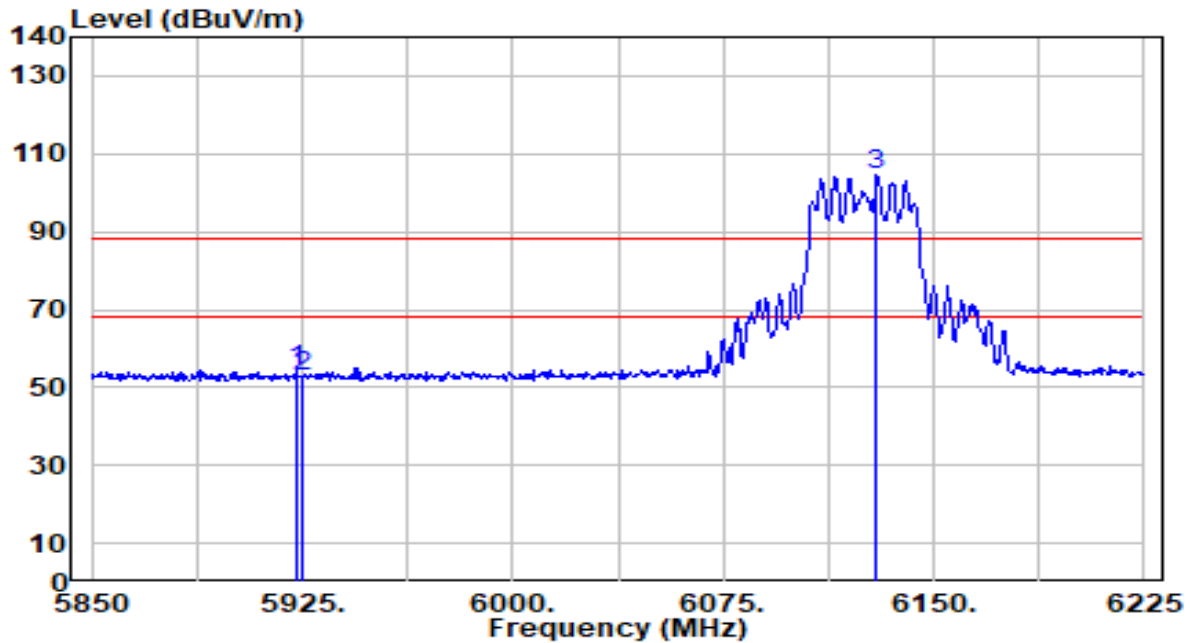


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5922.750           | 52.06             | 2.38          | 54.44                   | -33.76         | 88.20             | 162            | 241            | Peak                 |
| 2  |   | 5925.000           | 50.44             | 2.38          | 52.83                   | -35.37         | 88.20             | 162            | 241            | Peak                 |
| 3  |   | 6129.750           | 101.58            | 2.91          | 104.49                  | N/A            | N/A               | 162            | 241            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 35_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

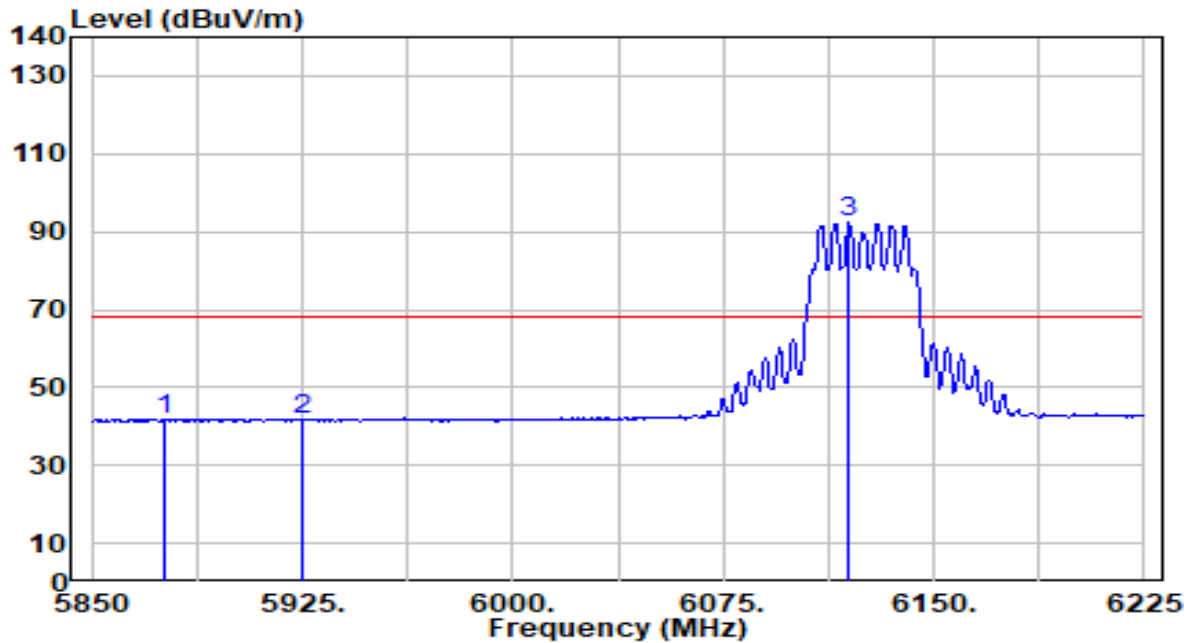


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5876.250        | 39.66          | 2.31       | 41.97                | -26.23      | 68.20          | 162         | 241         | Average           |
| 2  |   | 5925.000        | 39.23          | 2.38       | 41.61                | -26.59      | 68.20          | 162         | 241         | Average           |
| 3  |   | 6120.000        | 89.47          | 2.88       | 92.34                | N/A         | N/A            | 162         | 241         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

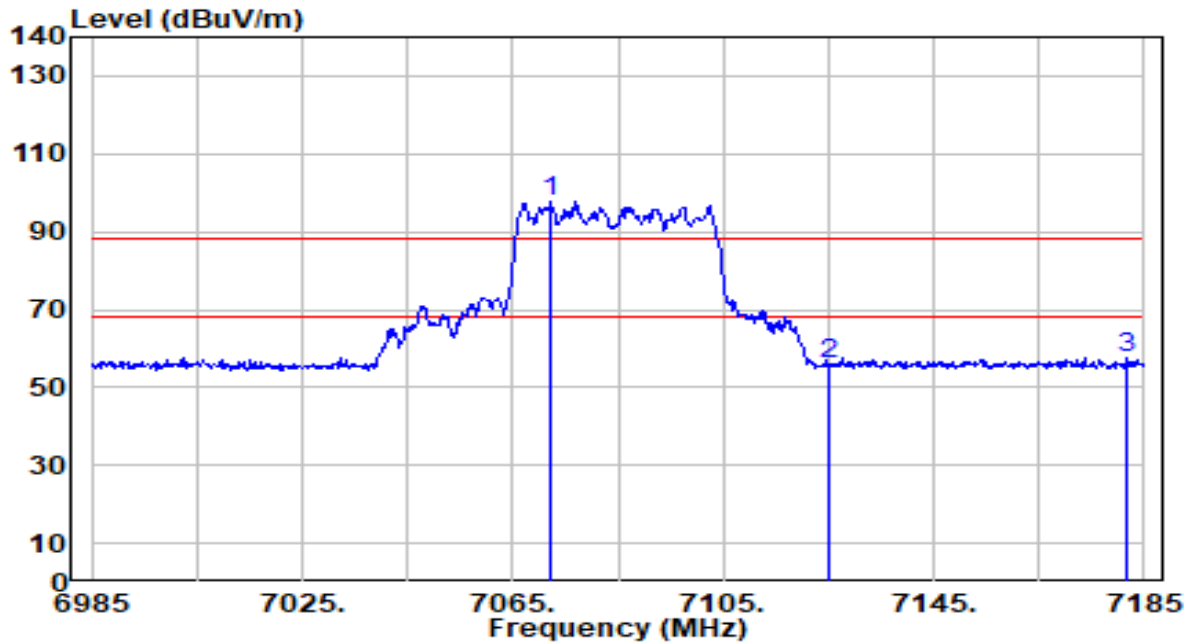


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7072.200        | 92.17          | 5.67       | 97.84                | N/A         | N/A            | 207         | 175         | Peak              |
| 2  | 7125.000        | 50.24          | 5.73       | 55.97                | -32.23      | 88.20          | 207         | 175         | Peak              |
| 3  | * 7181.800      | 51.92          | 5.80       | 57.73                | -30.47      | 88.20          | 207         | 175         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

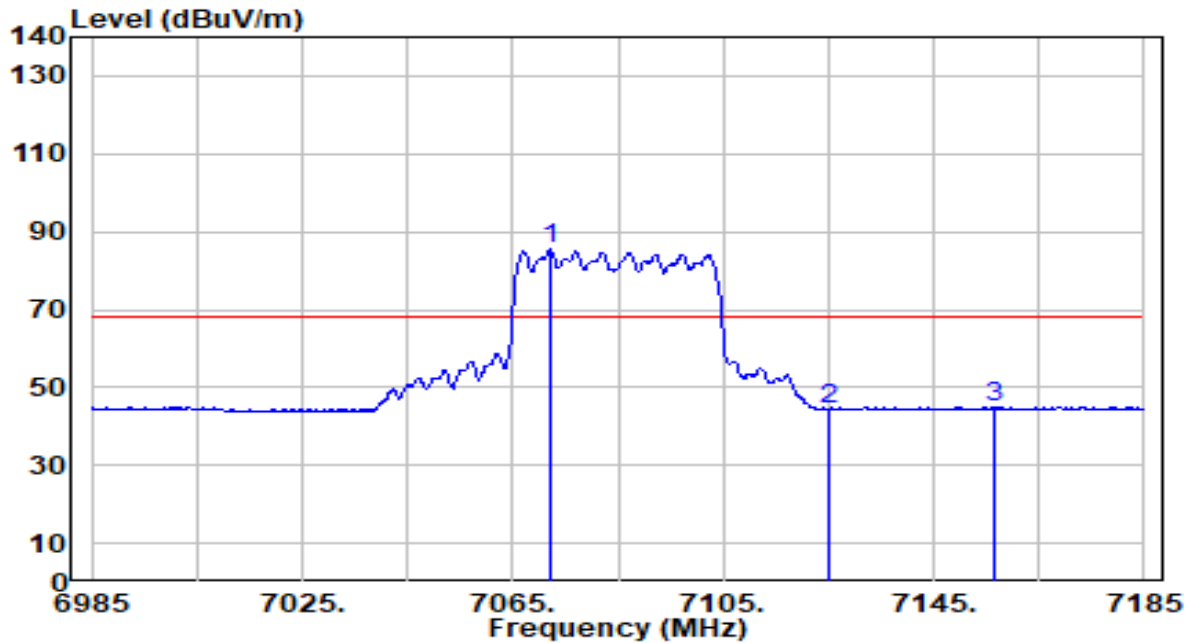


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7072.400        | 79.65          | 5.67       | 85.32                | N/A         | N/A            | 207         | 175         | Average           |
| 2  | 7125.000        | 38.60          | 5.73       | 44.33                | -23.87      | 68.20          | 207         | 175         | Average           |
| 3  | * 7156.400      | 39.26          | 5.77       | 45.03                | -23.17      | 68.20          | 207         | 175         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

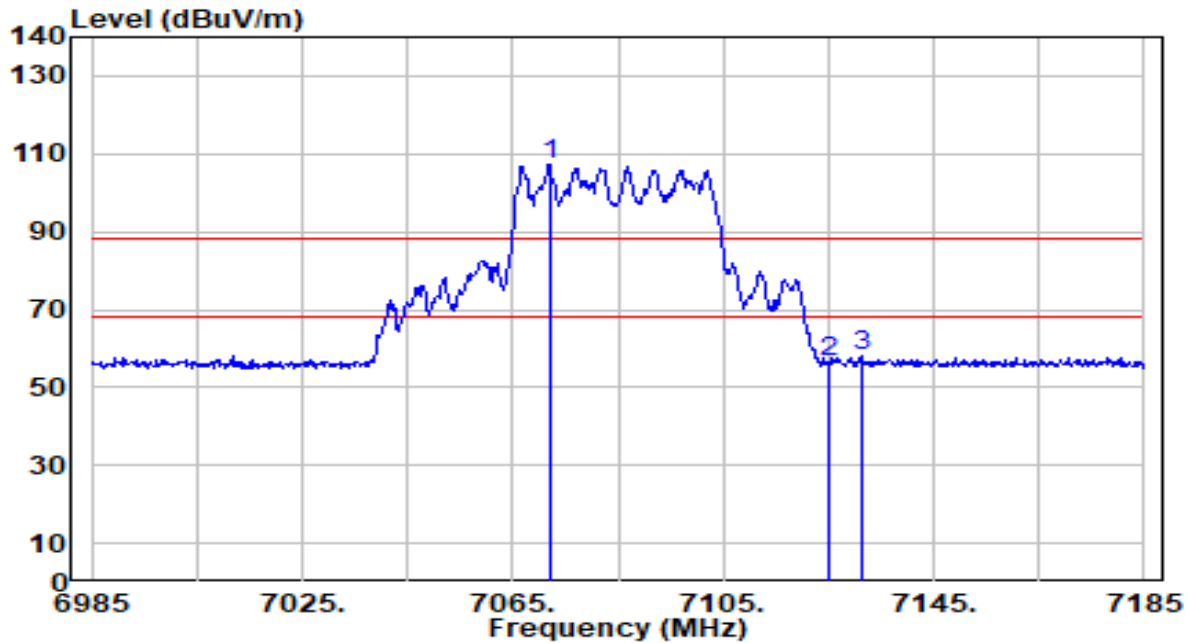


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7072.000        | 101.64         | 5.67       | 107.30               | N/A         | N/A            | 216         | 51          | Peak              |
| 2  | 7125.000        | 50.62          | 5.73       | 56.35                | -31.85      | 88.20          | 216         | 51          | Peak              |
| 3  | * 7131.400      | 52.17          | 5.74       | 57.91                | -30.29      | 88.20          | 216         | 51          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

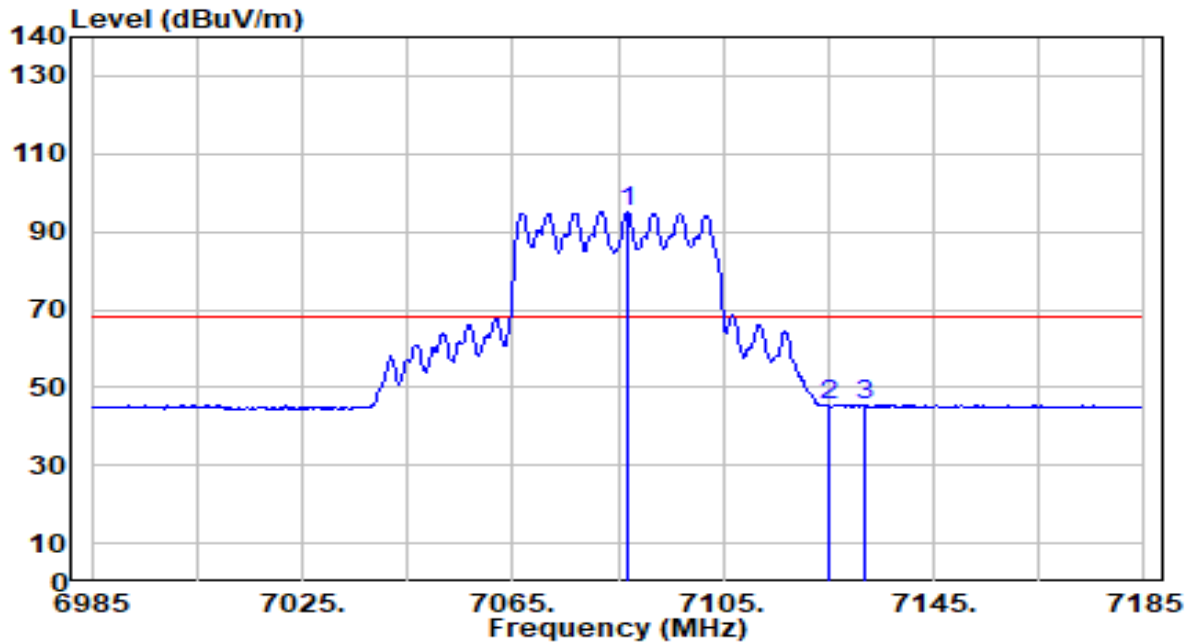


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7086.800        | 89.55          | 5.69       | 95.24                | N/A         | N/A            | 216         | 51          | Average           |
| 2  | 7125.000        | 39.73          | 5.73       | 45.46                | -22.74      | 68.20          | 216         | 51          | Average           |
| 3  | * 7132.000      | 39.79          | 5.74       | 45.53                | -22.67      | 68.20          | 216         | 51          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

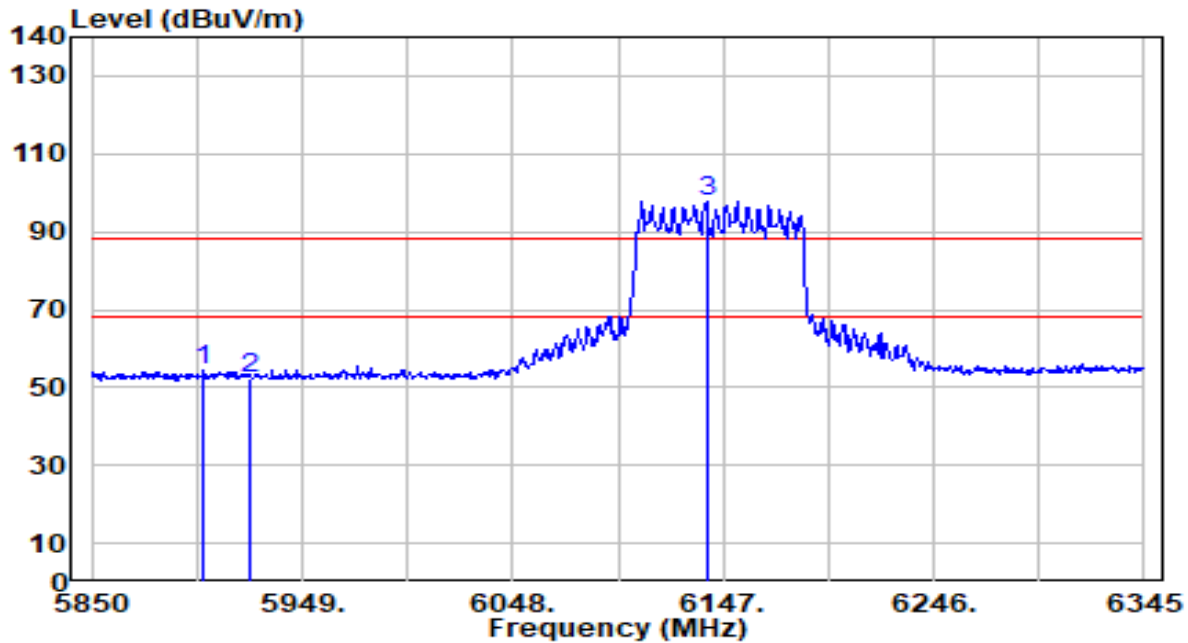


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5902.965        | 51.96          | 2.35       | 54.31                | -33.89      | 88.20          | 217         | 87          | Peak              |
| 2  |   | 5925.000        | 50.02          | 2.38       | 52.40                | -35.80      | 88.20          | 217         | 87          | Peak              |
| 3  |   | 6139.080        | 94.95          | 2.94       | 97.89                | N/A         | N/A            | 217         | 87          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

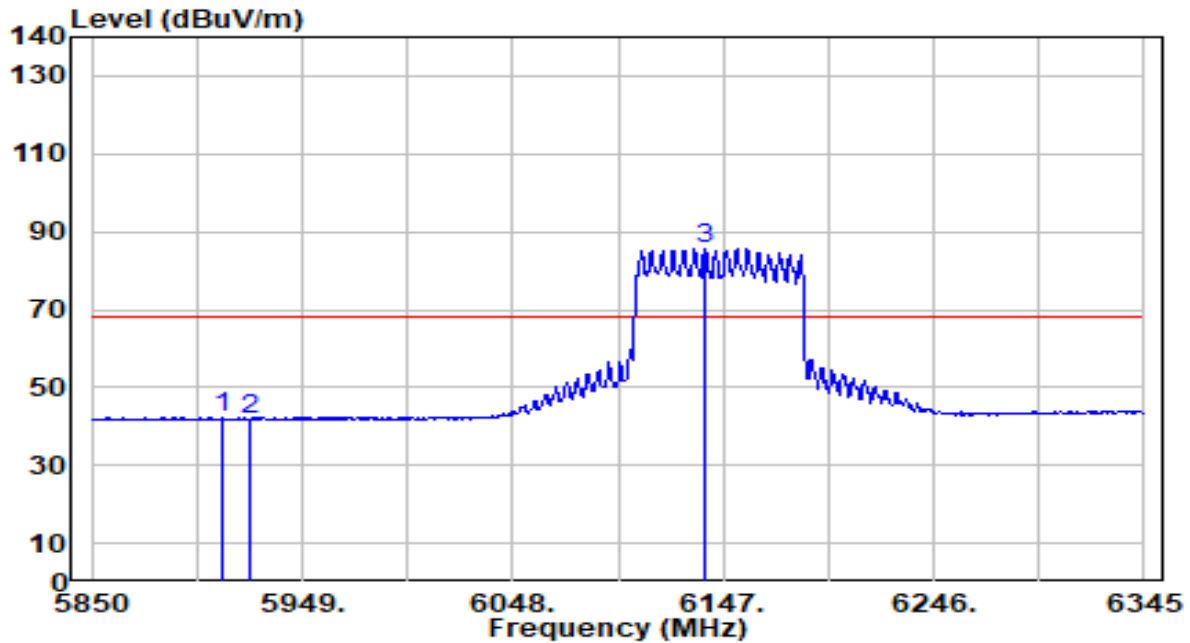


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5911.380        | 39.90          | 2.36       | 42.26                | -25.94      | 68.20          | 217         | 87          | Average           |
| 2  |   | 5925.000        | 39.56          | 2.38       | 41.95                | -26.25      | 68.20          | 217         | 87          | Average           |
| 3  |   | 6138.585        | 82.68          | 2.94       | 85.61                | N/A         | N/A            | 217         | 87          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

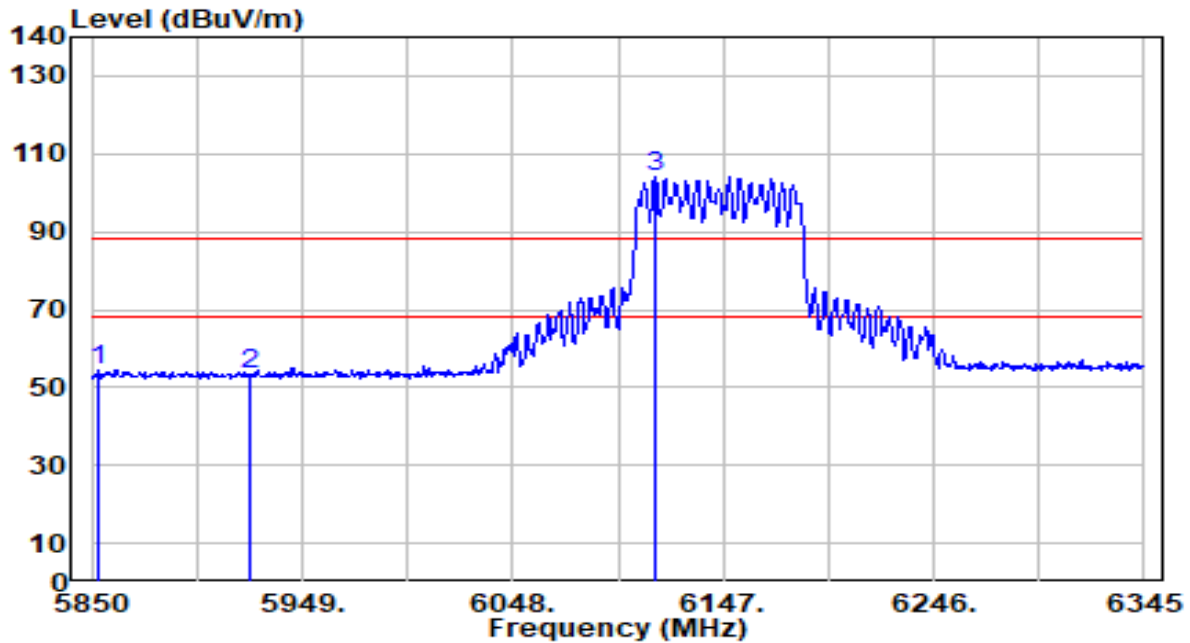


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5852.970        | 52.30          | 2.27       | 54.58                | -33.62      | 88.20          | 192         | 241         | Peak              |
| 2  |   | 5925.000        | 50.85          | 2.38       | 53.24                | -34.96      | 88.20          | 192         | 241         | Peak              |
| 3  |   | 6115.320        | 101.37         | 2.86       | 104.24               | N/A         | N/A            | 192         | 241         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

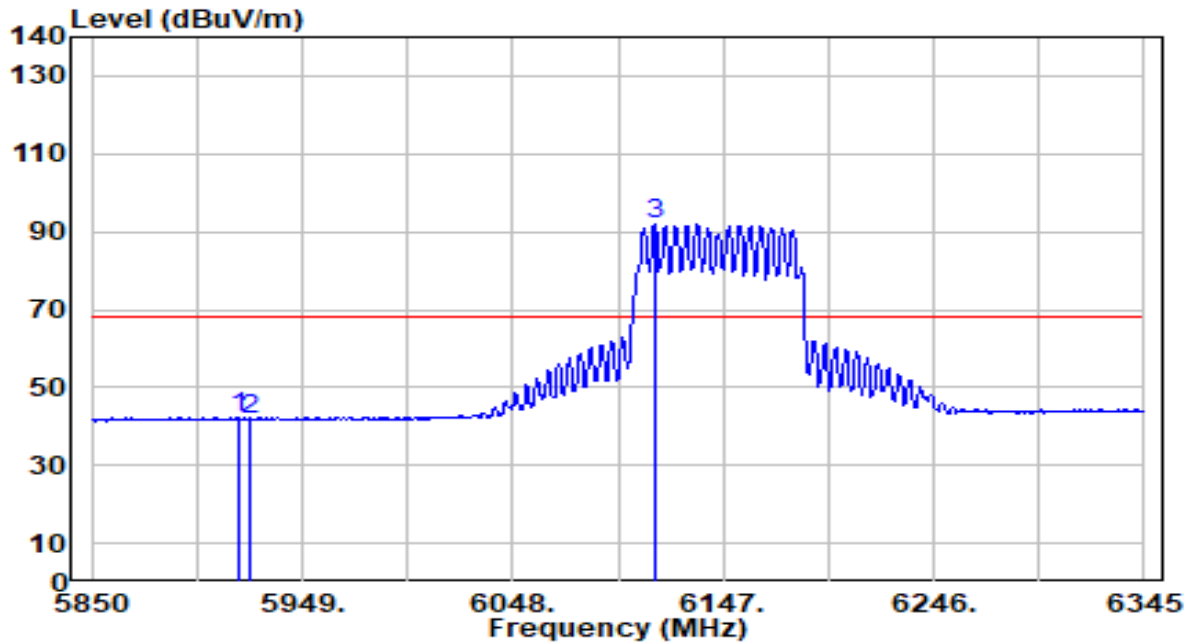


| No |   | Frequency<br>(MHz) | Reading<br>(dBUV) | C.F<br>(dB/m) | Measurement<br>(dBUV/m) | Margin<br>(dB) | Limit<br>(dBUV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5919.300           | 39.97             | 2.38          | 42.35                   | -25.85         | 68.20             | 192            | 241            | Average              |
| 2  |   | 5925.000           | 39.54             | 2.38          | 41.93                   | -26.27         | 68.20             | 192            | 241            | Average              |
| 3  |   | 6114.825           | 88.88             | 2.86          | 91.74                   | N/A            | N/A               | 192            | 241            | Average              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

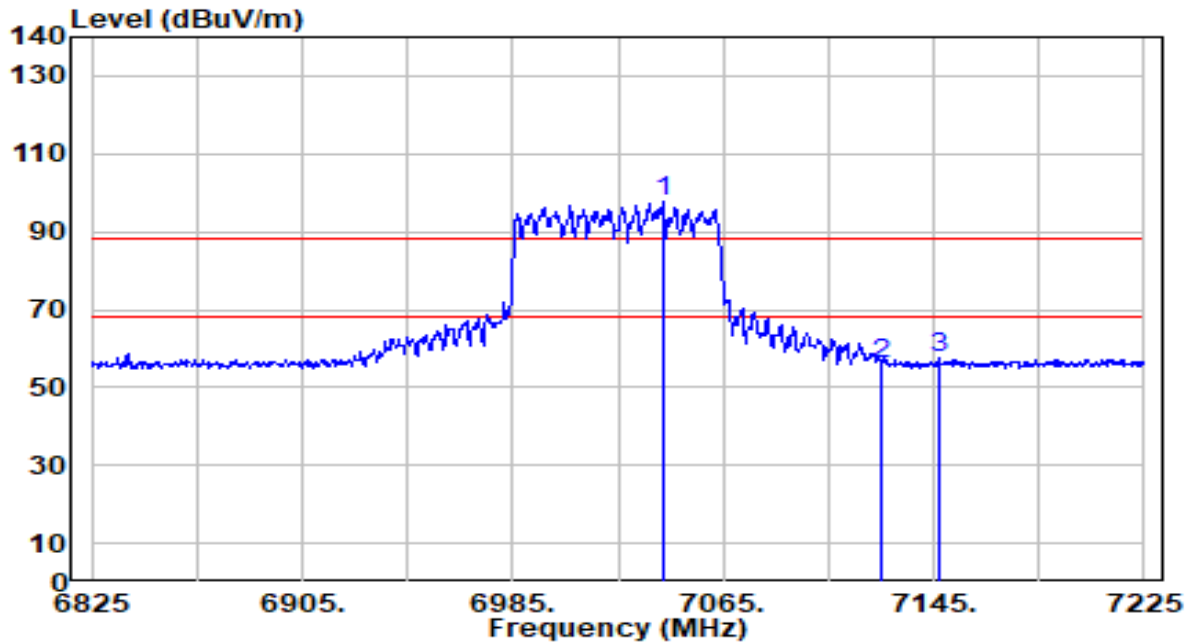


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7042.200        | 91.97          | 5.63       | 97.60                | N/A         | N/A            | 200         | 185         | Peak              |
| 2  | 7125.000        | 50.17          | 5.73       | 55.90                | -32.30      | 88.20          | 200         | 185         | Peak              |
| 3  | * 7146.600      | 51.92          | 5.76       | 57.68                | -30.52      | 88.20          | 200         | 185         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

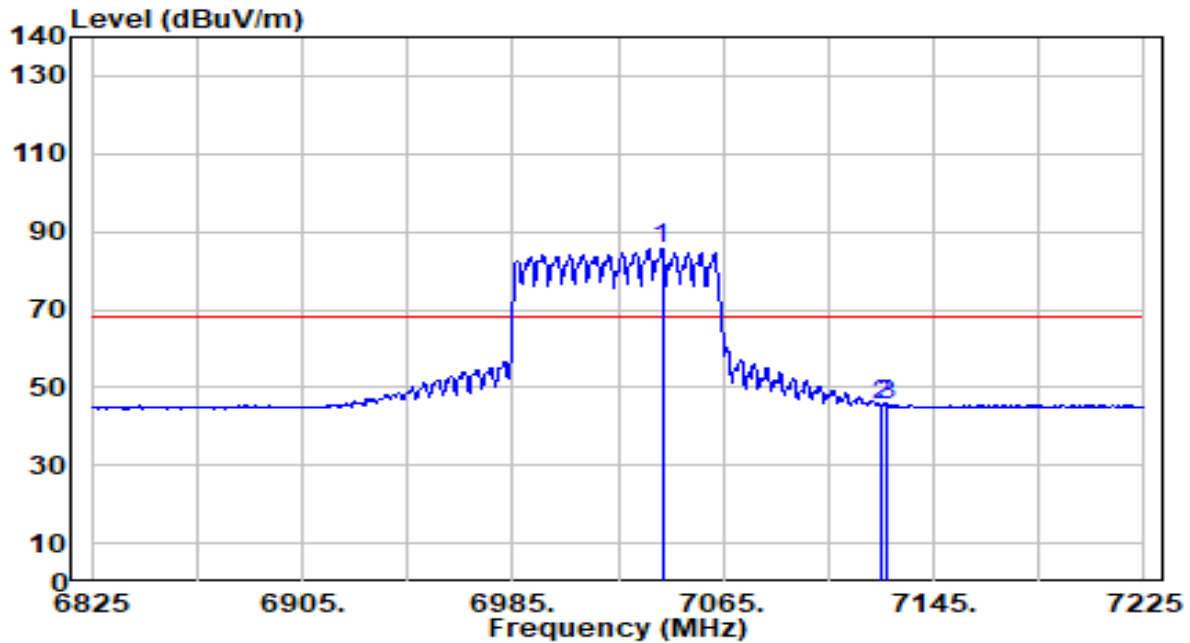


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7041.800        | 79.95          | 5.63       | 85.58                | N/A         | N/A            | 200         | 185         | Average           |
| 2  | 7125.000        | 39.68          | 5.73       | 45.41                | -22.79      | 68.20          | 200         | 185         | Average           |
| 3  | * 7127.400      | 39.83          | 5.74       | 45.57                | -22.63      | 68.20          | 200         | 185         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

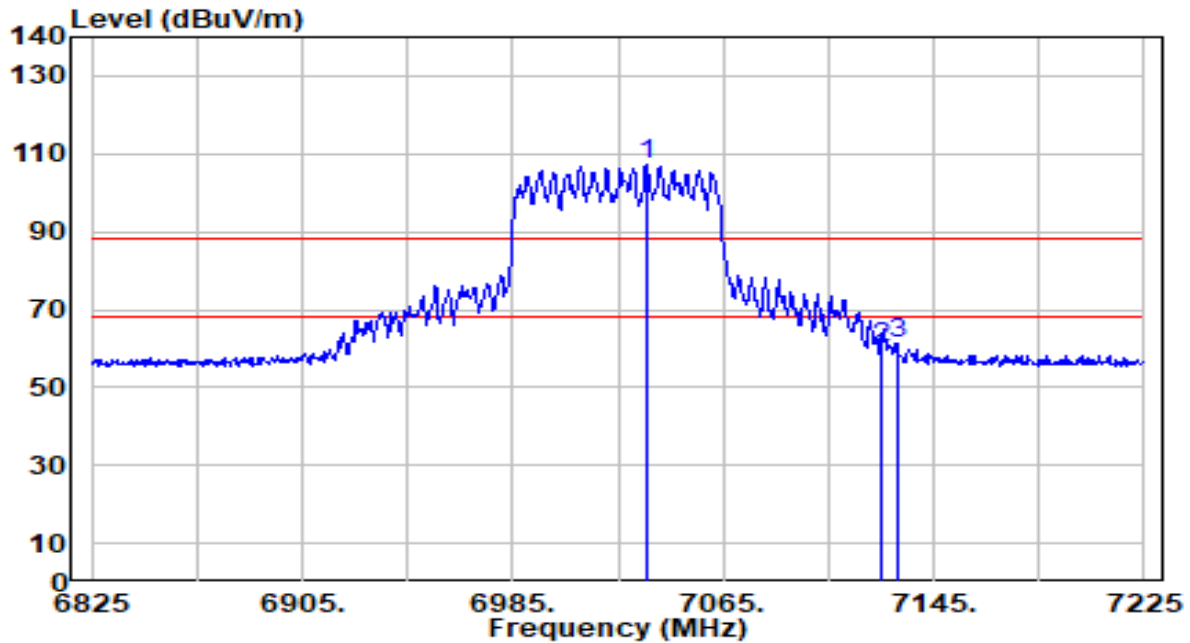


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7035.800        | 101.40         | 5.62       | 107.02               | N/A         | N/A            | 217         | 45          | Peak              |
| 2  | 7125.000        | 54.51          | 5.73       | 60.24                | -27.96      | 88.20          | 217         | 45          | Peak              |
| 3  | * 7131.000      | 55.39          | 5.74       | 61.12                | -27.08      | 88.20          | 217         | 45          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

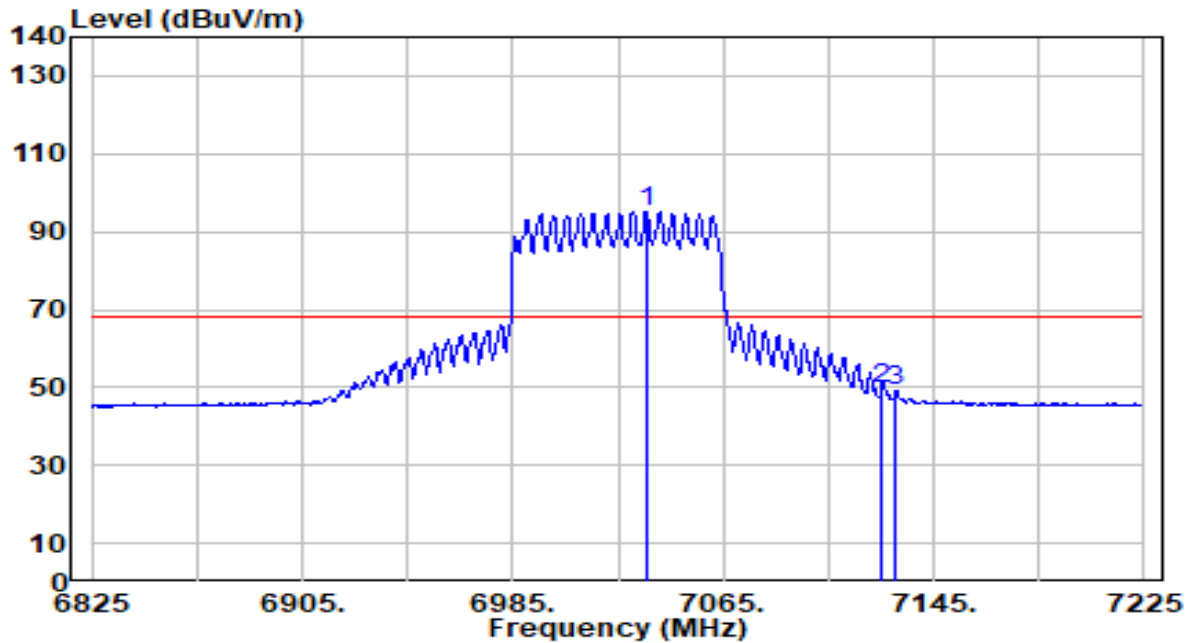


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7035.800        | 89.33          | 5.62       | 94.95                | N/A         | N/A            | 217         | 45          | Average           |
| 2  | * 7125.000      | 43.87          | 5.73       | 49.60                | -18.60      | 68.20          | 217         | 45          | Average           |
| 3  | 7130.600        | 43.37          | 5.74       | 49.11                | -19.09      | 68.20          | 217         | 45          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

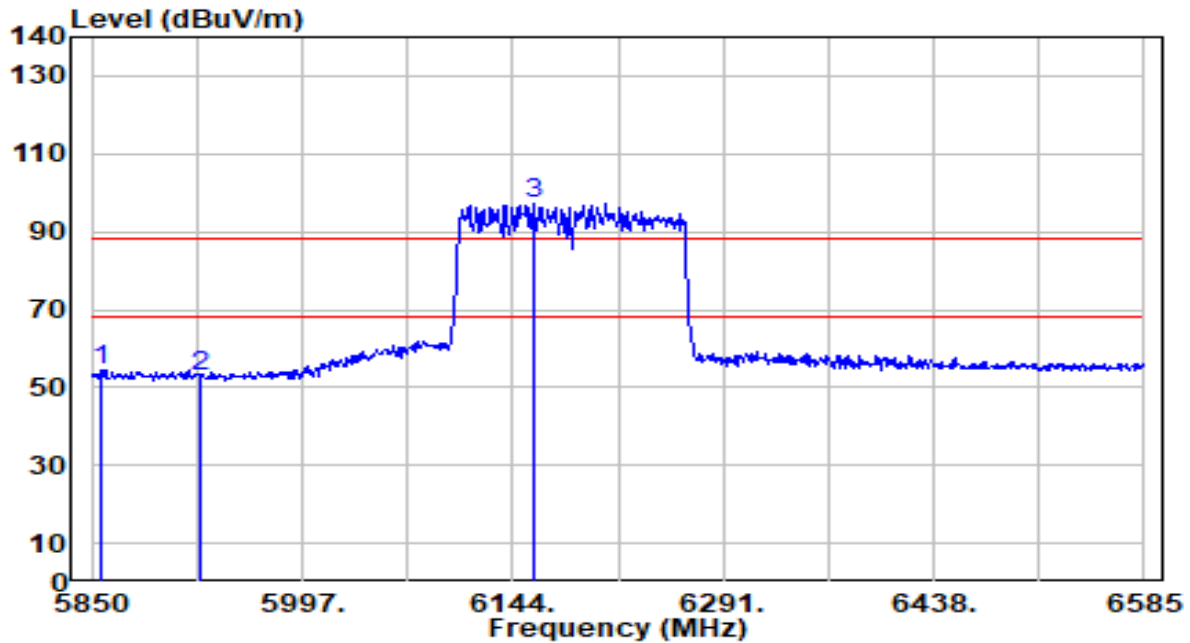


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5857.350           | 52.22             | 2.28          | 54.50                   | -33.70         | 88.20             | 200            | 87             | Peak                 |
| 2  |   | 5925.000           | 50.42             | 2.38          | 52.81                   | -35.39         | 88.20             | 200            | 87             | Peak                 |
| 3  |   | 6158.700           | 94.17             | 3.00          | 97.17                   | N/A            | N/A               | 200            | 87             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

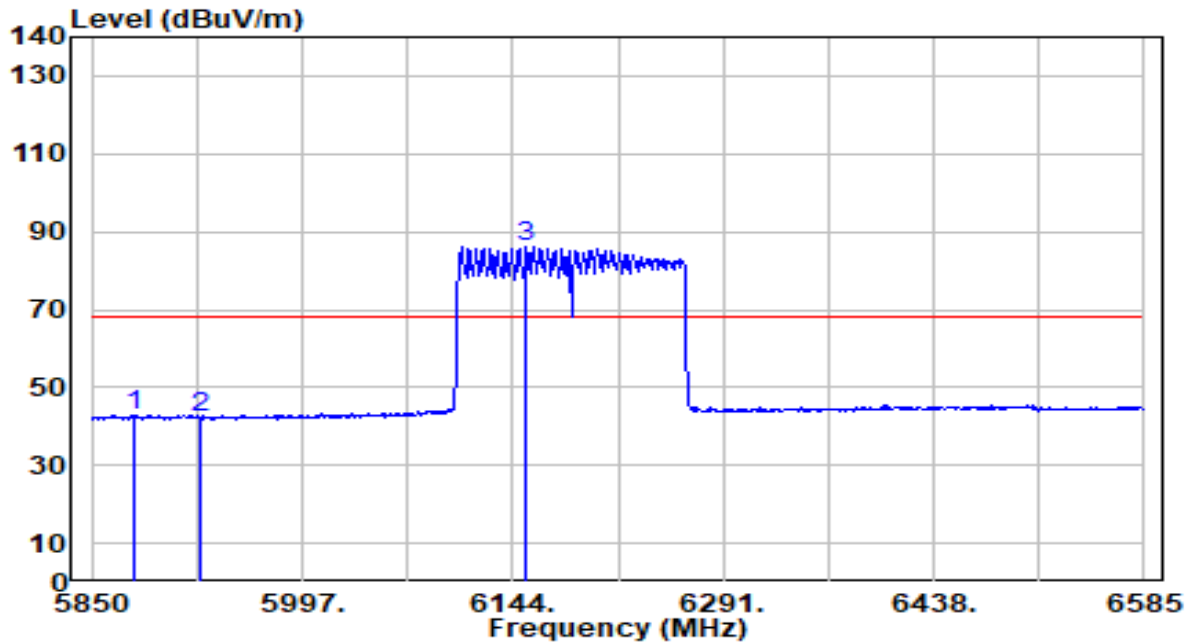


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5880.135        | 40.54          | 2.32       | 42.85                | -25.35      | 68.20          | 200         | 87          | Average           |
| 2  |   | 5925.000        | 39.88          | 2.38       | 42.27                | -25.93      | 68.20          | 200         | 87          | Average           |
| 3  |   | 6153.555        | 83.38          | 2.98       | 86.36                | N/A         | N/A            | 200         | 87          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

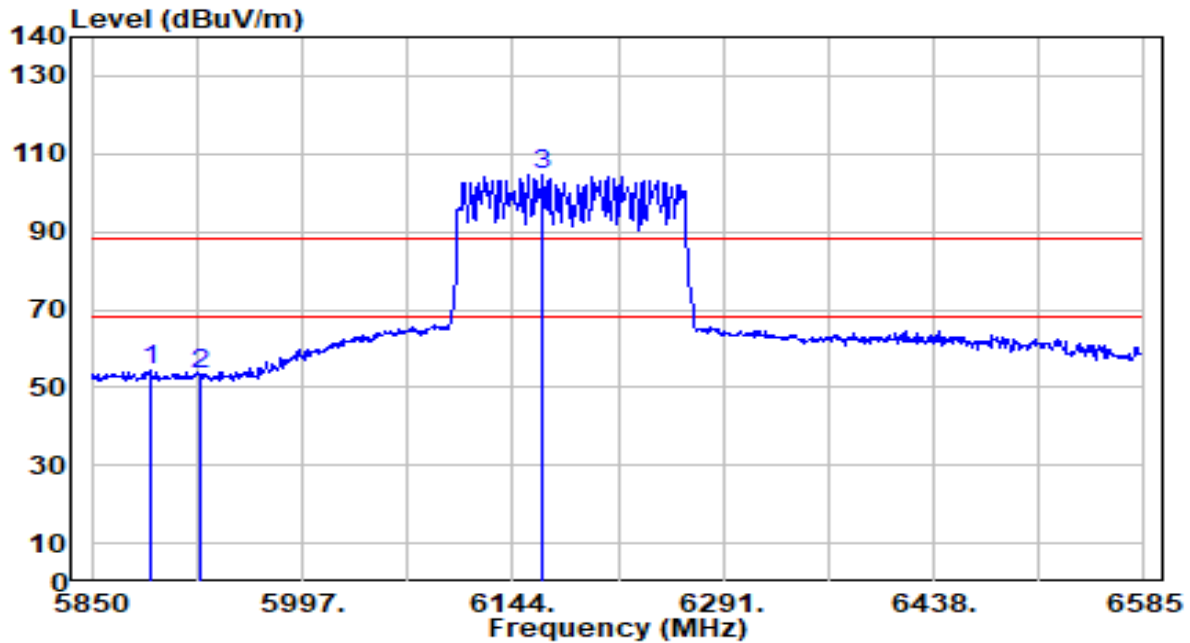


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5890.425           | 51.94             | 2.33          | 54.27                   | -33.93         | 88.20             | 172            | 241            | Peak                 |
| 2  |   | 5925.000           | 50.85             | 2.38          | 53.23                   | -34.97         | 88.20             | 172            | 241            | Peak                 |
| 3  |   | 6165.315           | 101.55            | 3.02          | 104.57                  | N/A            | N/A               | 172            | 241            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

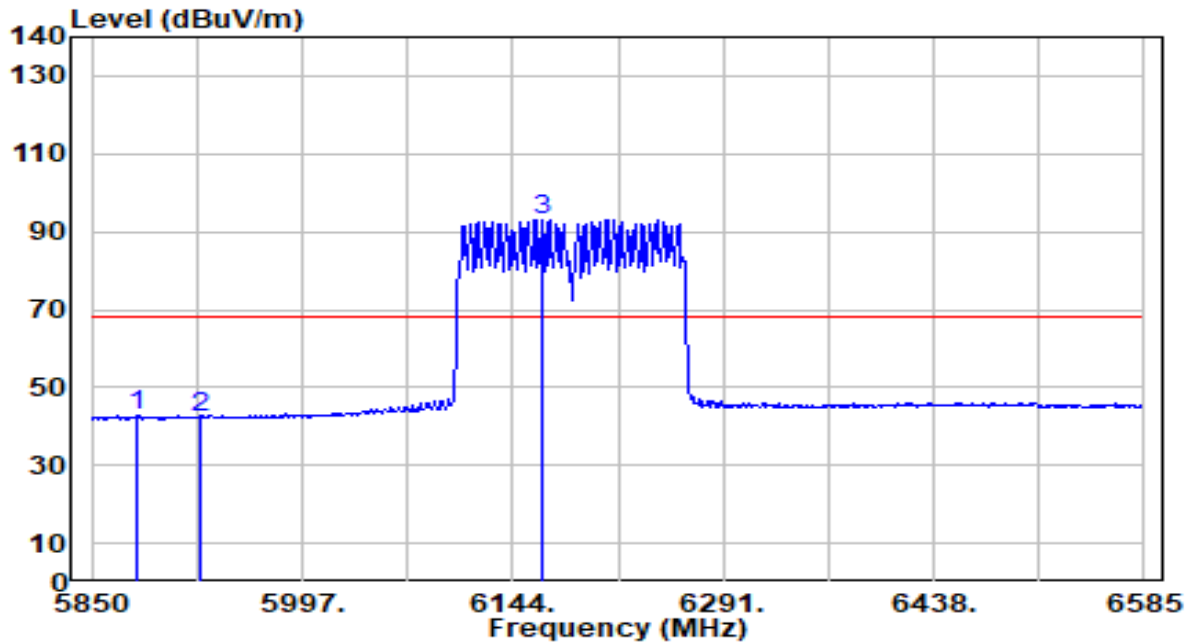


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5882.340        | 40.48          | 2.32       | 42.79                | -25.41      | 68.20          | 172         | 241         | Average           |
| 2  |   | 5925.000        | 40.03          | 2.38       | 42.42                | -25.78      | 68.20          | 172         | 241         | Average           |
| 3  |   | 6164.580        | 90.02          | 3.02       | 93.03                | N/A         | N/A            | 172         | 241         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

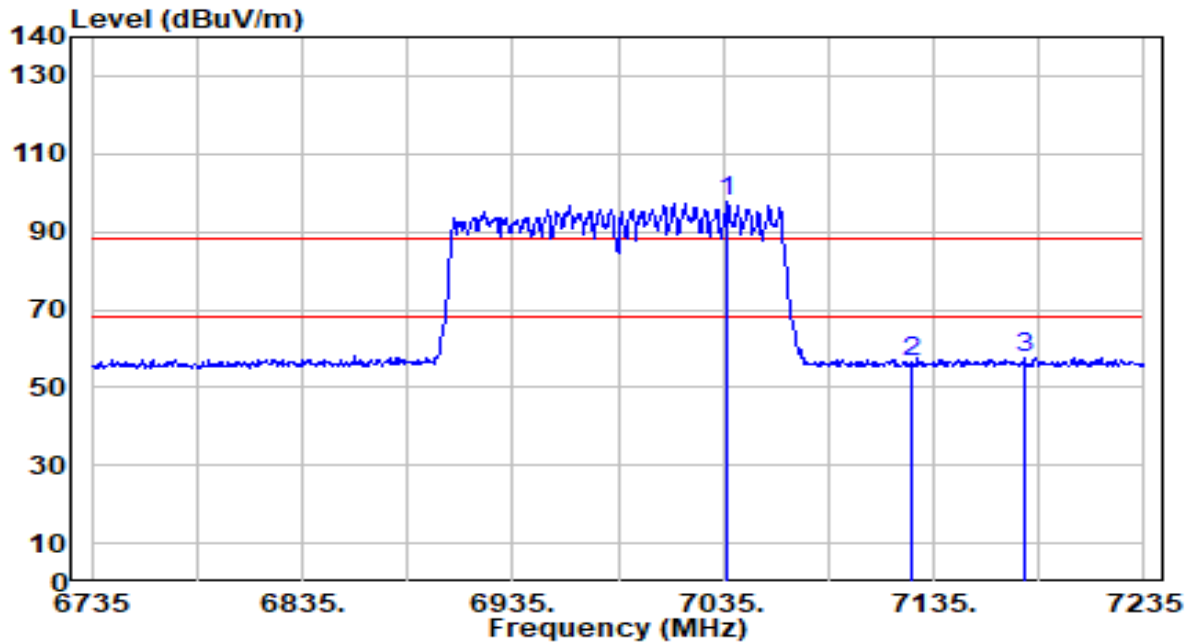


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7037.000        | 91.97          | 5.63       | 97.60                | N/A         | N/A            | 208         | 185         | Peak              |
| 2  | 7125.000        | 50.80          | 5.73       | 56.53                | -31.67      | 88.20          | 208         | 185         | Peak              |
| 3  | * 7178.000      | 51.90          | 5.80       | 57.69                | -30.51      | 88.20          | 208         | 185         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

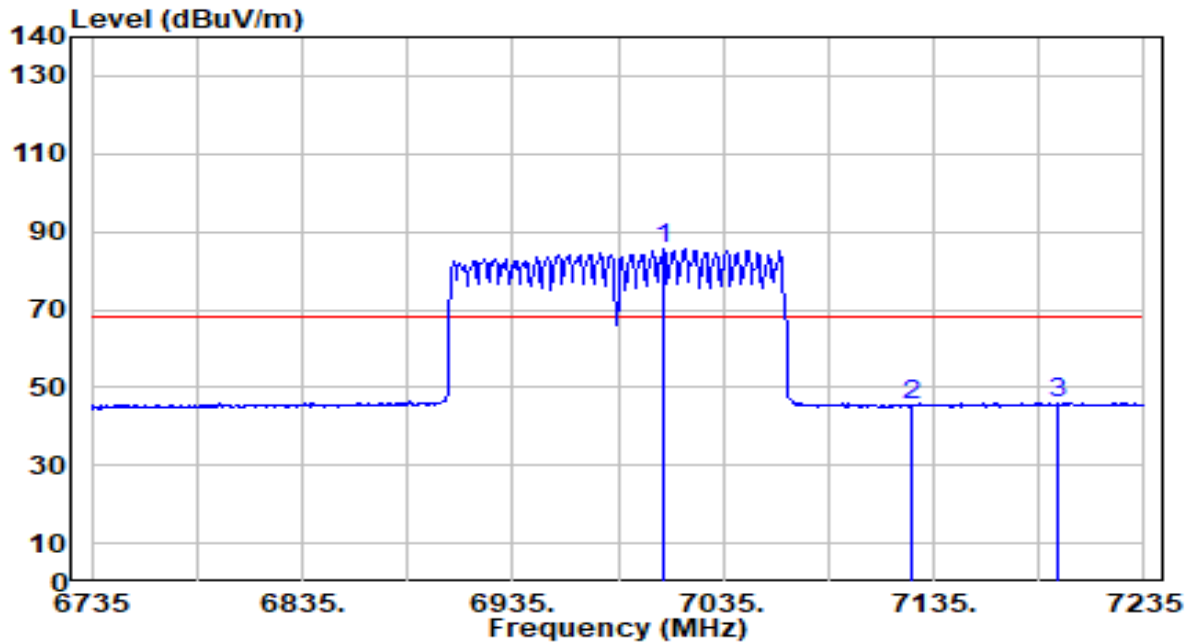


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7007.000        | 80.16          | 5.59       | 85.75                | N/A         | N/A            | 208         | 185         | Average           |
| 2  | 7125.000        | 39.51          | 5.73       | 45.24                | -22.96      | 68.20          | 208         | 185         | Average           |
| 3  | * 7193.500      | 40.31          | 5.82       | 46.12                | -22.08      | 68.20          | 208         | 185         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

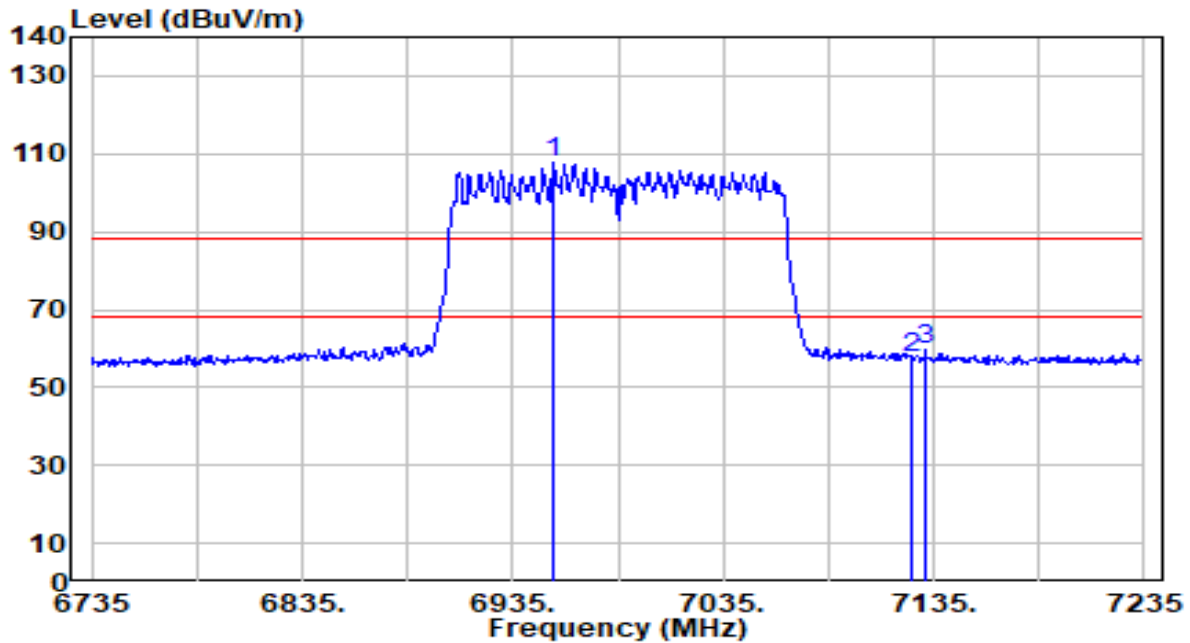


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6954.500        | 101.99         | 5.62       | 107.61               | N/A         | N/A            | 203         | 40          | Peak              |
| 2  | 7125.000        | 51.60          | 5.73       | 57.33                | -30.87      | 88.20          | 203         | 40          | Peak              |
| 3  | * 7131.000      | 54.08          | 5.74       | 59.82                | -28.38      | 88.20          | 203         | 40          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2022-12-26   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS1 | Test Voltage         | AC 120V/60Hz |

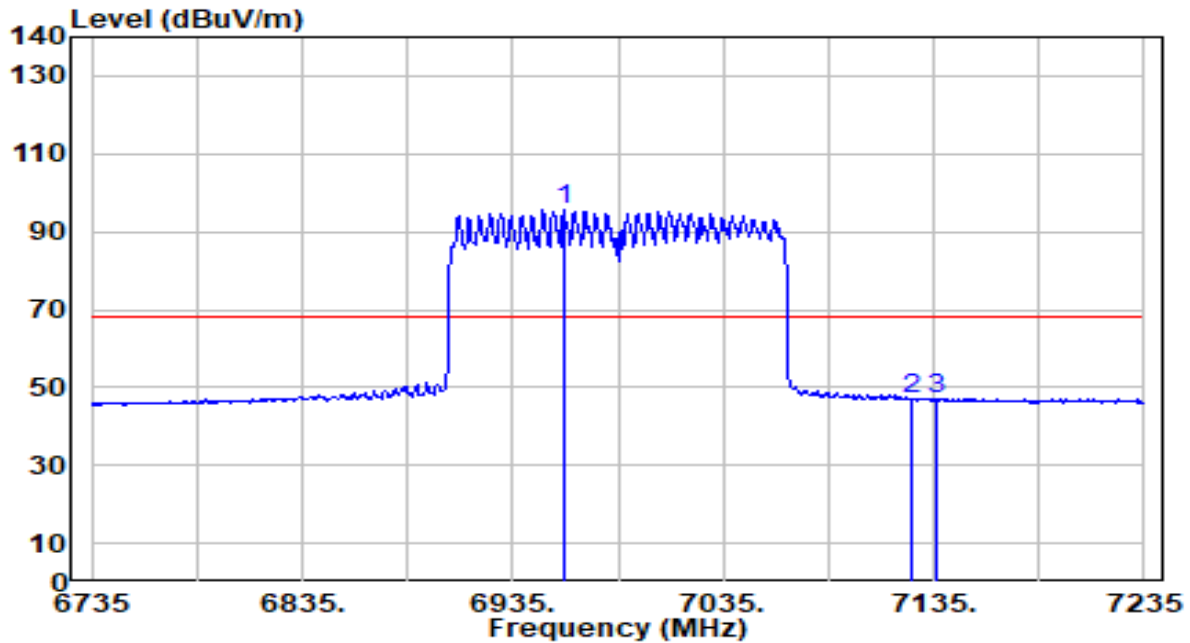


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 6959.500        | 89.78          | 5.61       | 95.39                | N/A         | N/A            | 203         | 40          | Average           |
| 2  | 7125.000        | 41.31          | 5.73       | 47.04                | -21.16      | 68.20          | 203         | 40          | Average           |
| 3  | * 7136.500      | 41.44          | 5.75       | 47.19                | -21.01      | 68.20          | 203         | 40          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

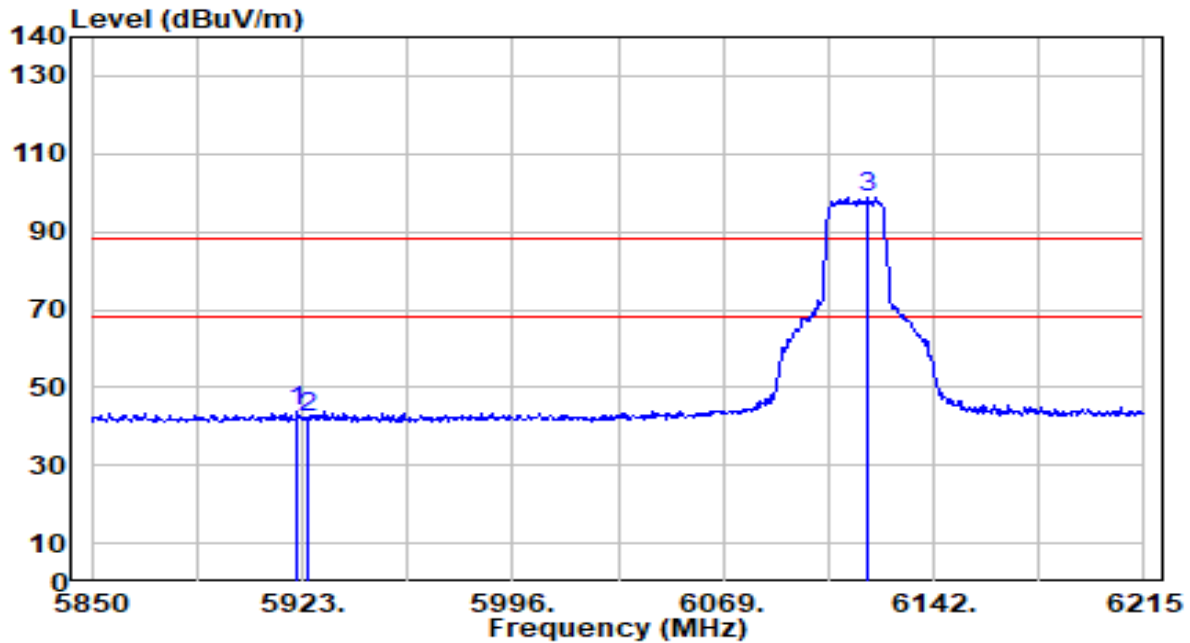


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5921.175           | 42.95             | 0.64          | 43.59                   | -44.61         | 88.20             | 232            | 84             | Peak                 |
| 2  |   | 5925.000           | 41.41             | 0.65          | 42.05                   | -46.15         | 88.20             | 232            | 84             | Peak                 |
| 3  |   | 6118.640           | 97.66             | 1.13          | 98.78                   | N/A            | N/A               | 232            | 84             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

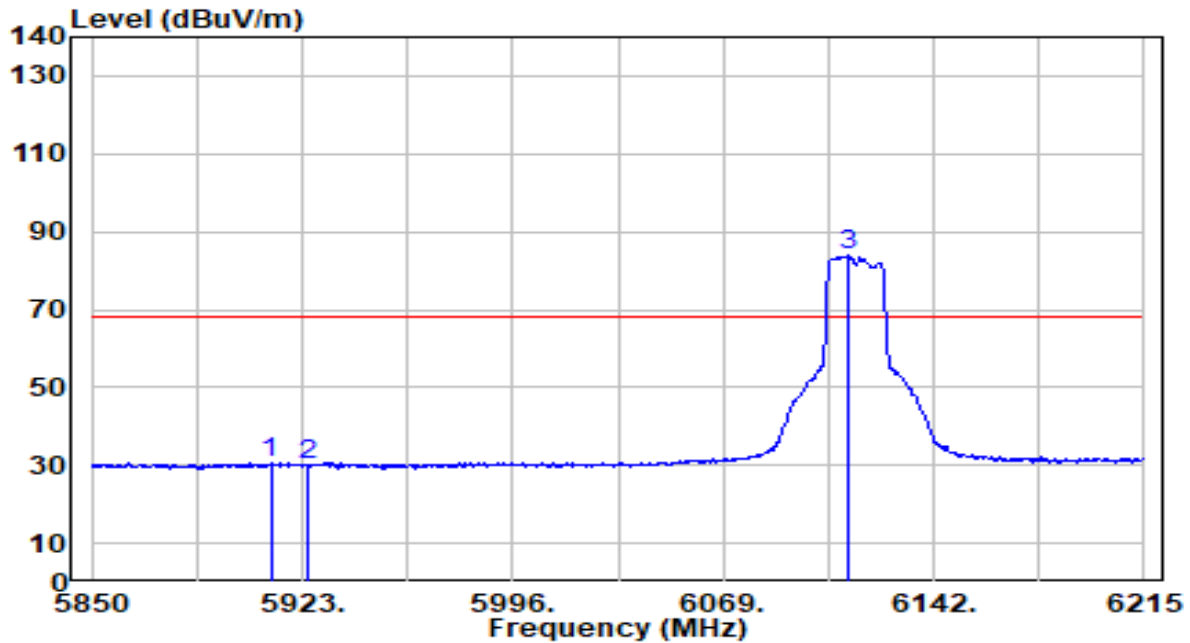


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5912.050           | 29.86             | 0.63          | 30.48                   | -37.72         | 68.20             | 232            | 84             | Average              |
| 2  |   | 5925.000           | 29.66             | 0.65          | 30.30                   | -37.90         | 68.20             | 232            | 84             | Average              |
| 3  |   | 6112.070           | 82.77             | 1.10          | 83.87                   | N/A            | N/A               | 232            | 84             | Average              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

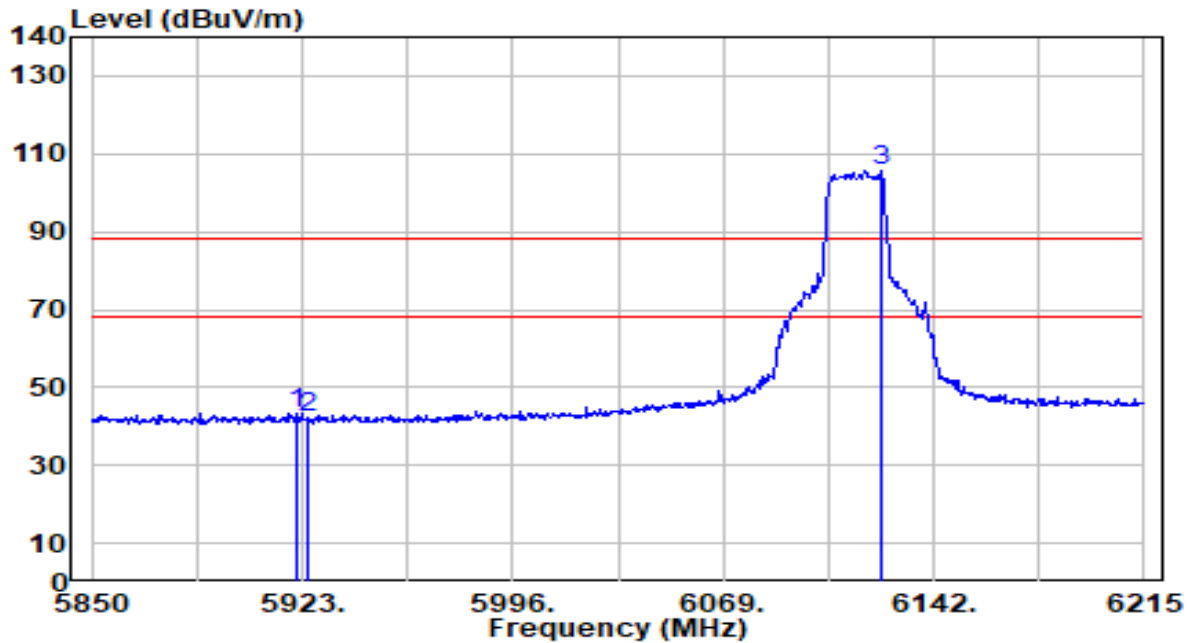


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5921.540        | 42.90          | 0.64       | 43.54                | -44.66      | 88.20          | 172         | 241         | Peak              |
| 2  |   | 5925.000        | 41.37          | 0.65       | 42.01                | -46.19      | 88.20          | 172         | 241         | Peak              |
| 3  |   | 6123.750        | 104.69         | 1.14       | 105.83               | N/A         | N/A            | 172         | 241         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

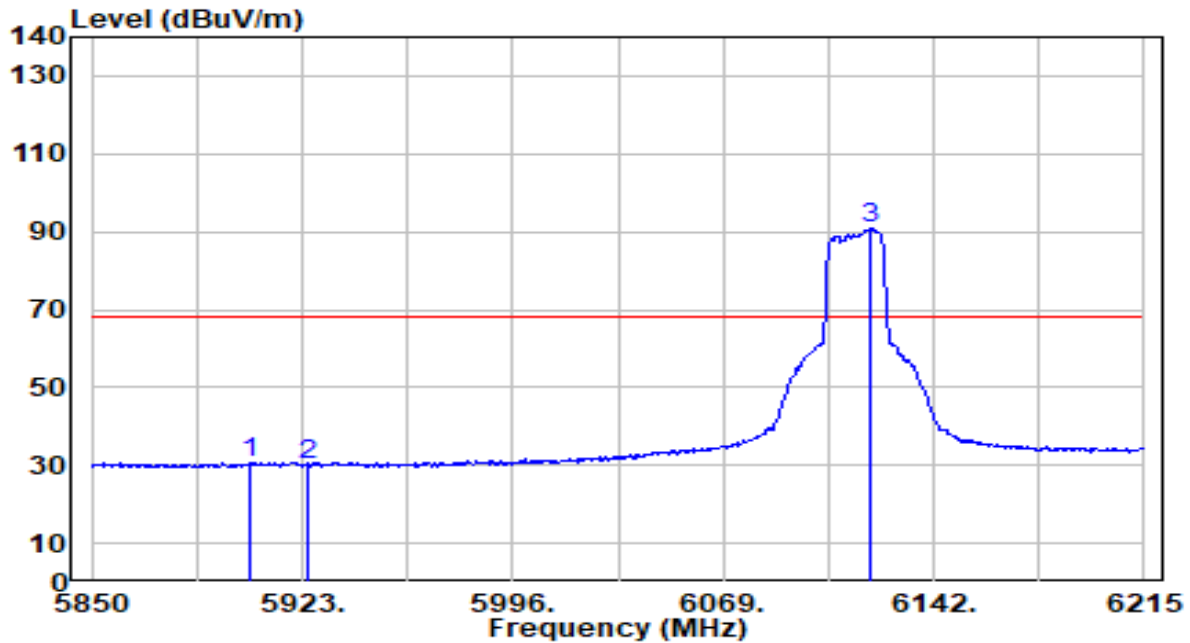


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5904.750        | 30.00          | 0.62       | 30.62                | -37.58      | 68.20          | 172         | 241         | Average           |
| 2  | 5925.000        | 29.43          | 0.65       | 30.08                | -38.12      | 68.20          | 172         | 241         | Average           |
| 3  | * 6120.465      | 89.86          | 1.13       | 90.99                | N/A         | N/A            | 172         | 241         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

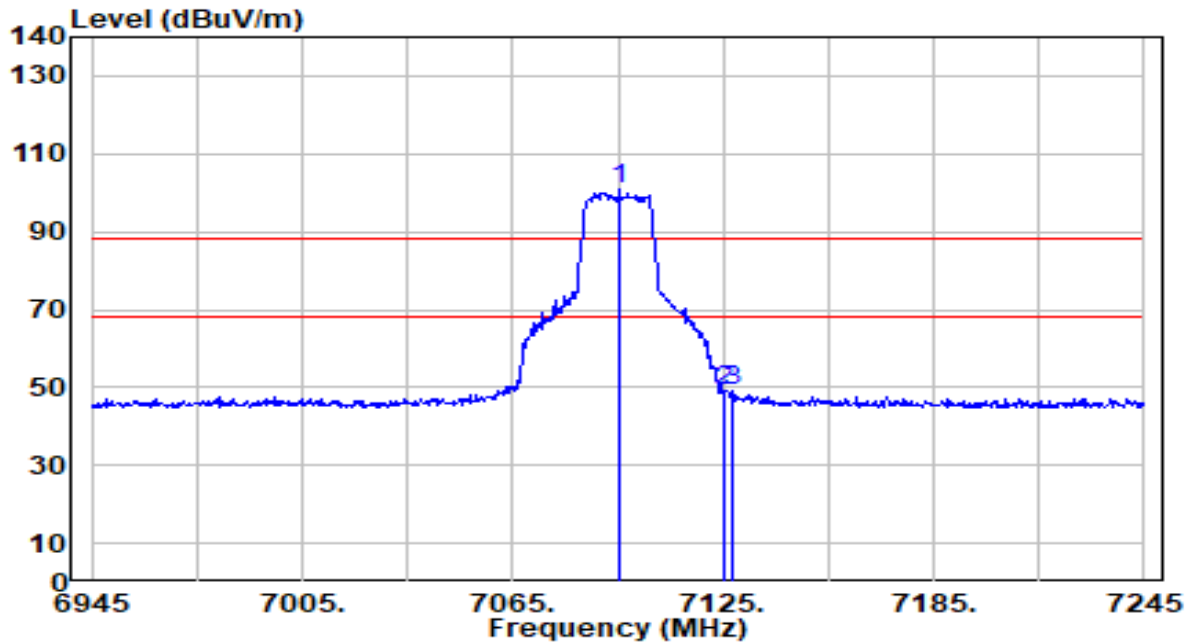


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7095.300        | 96.62          | 4.04       | 100.66               | N/A         | N/A            | 200         | 85          | Peak              |
| 2  | * 7125.000      | 45.12          | 4.08       | 49.20                | -39.00      | 88.20          | 200         | 85          | Peak              |
| 3  | 7127.700        | 44.93          | 4.08       | 49.01                | -39.19      | 88.20          | 200         | 85          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

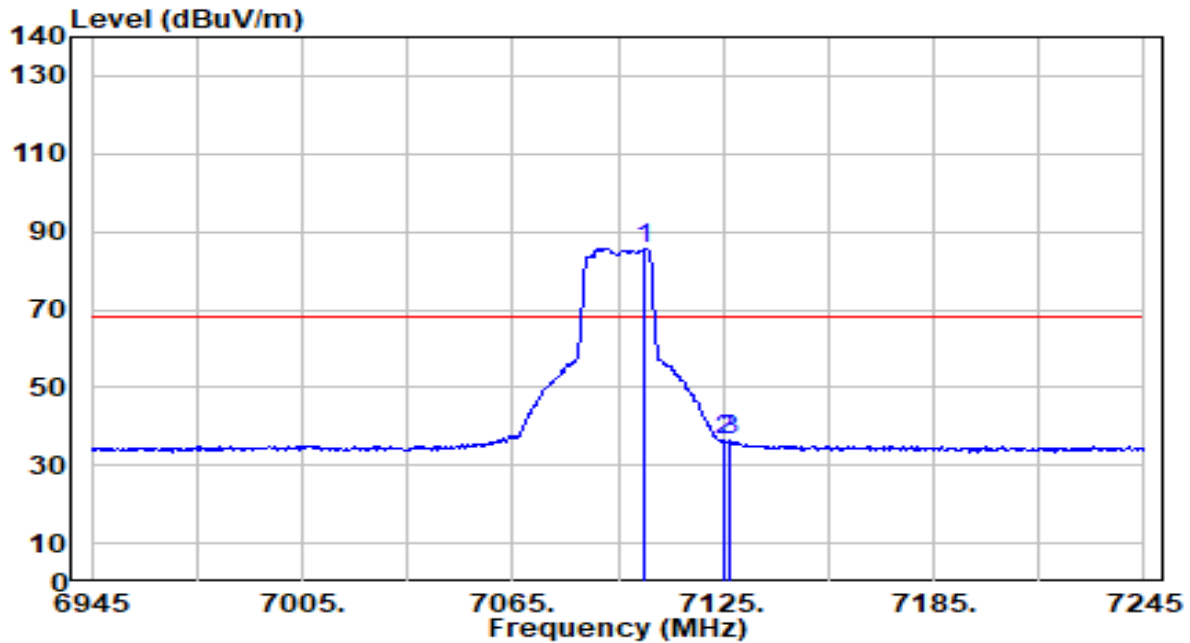


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7102.800        | 81.75          | 4.05       | 85.81                | N/A         | N/A            | 200         | 85          | Average           |
| 2  | * 7125.000      | 32.33          | 4.08       | 36.41                | -31.79      | 68.20          | 200         | 85          | Average           |
| 3  | 7126.800        | 32.32          | 4.08       | 36.40                | -31.80      | 68.20          | 200         | 85          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

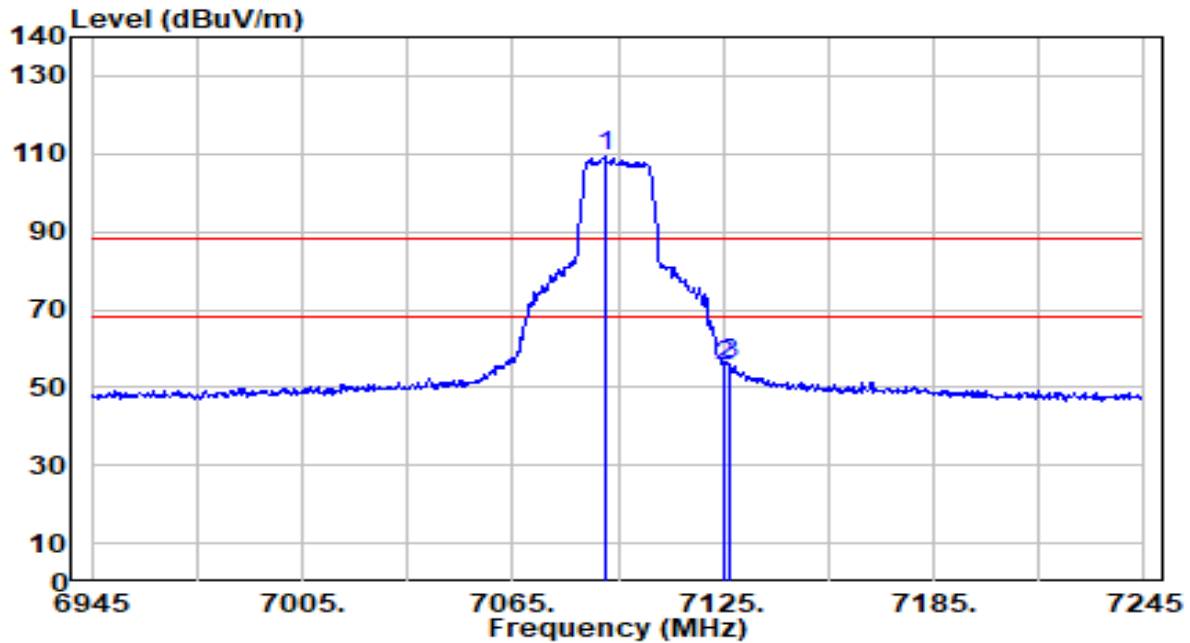


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7091.400        | 105.18         | 4.04       | 109.22               | N/A         | N/A            | 221         | 44          | Peak              |
| 2  | 7125.000        | 51.63          | 4.08       | 55.71                | -32.49      | 88.20          | 221         | 44          | Peak              |
| 3  | * 7126.800      | 51.67          | 4.08       | 55.76                | -32.44      | 88.20          | 221         | 44          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-20MHz_TX_Band8_CH 229_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

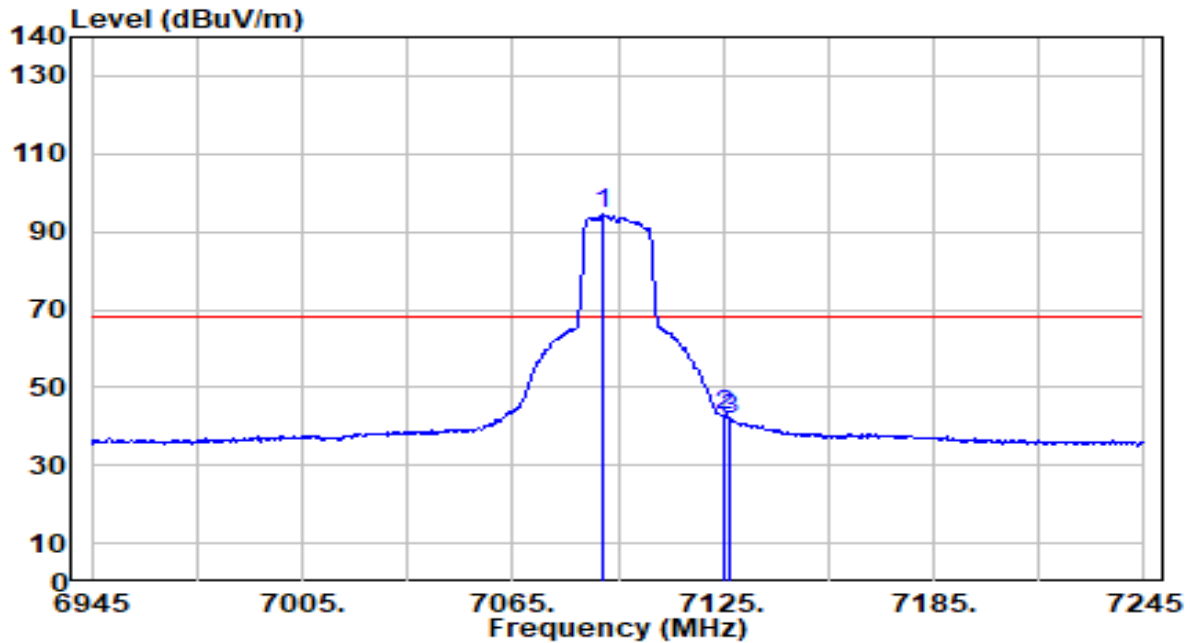


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7090.800        | 90.33          | 4.04       | 94.37                | N/A         | N/A            | 221         | 44          | Average           |
| 2  | * 7125.000      | 38.86          | 4.08       | 42.94                | -25.26      | 68.20          | 221         | 44          | Average           |
| 3  | 7127.100        | 37.79          | 4.08       | 41.87                | -26.33      | 68.20          | 221         | 44          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 35_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

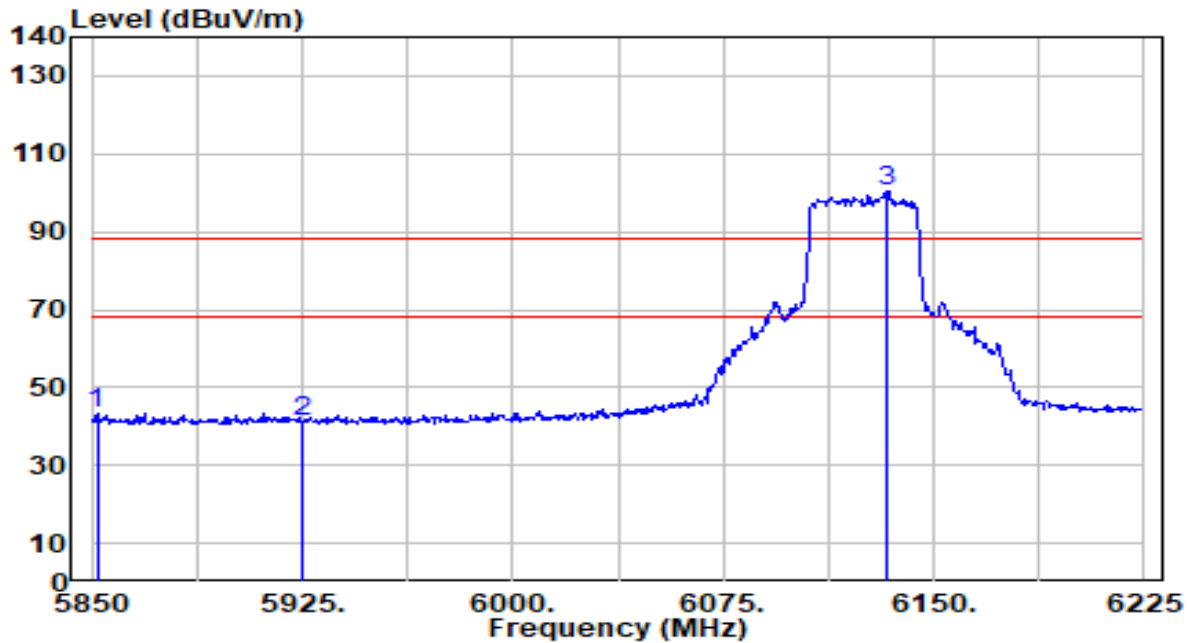


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5851.875        | 42.89          | 0.55       | 43.44                | -44.76      | 88.20          | 234         | 85          | Peak              |
| 2  |   | 5925.000        | 40.56          | 0.65       | 41.21                | -46.99      | 88.20          | 234         | 85          | Peak              |
| 3  |   | 6133.500        | 99.36          | 1.17       | 100.53               | N/A         | N/A            | 234         | 85          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 35_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

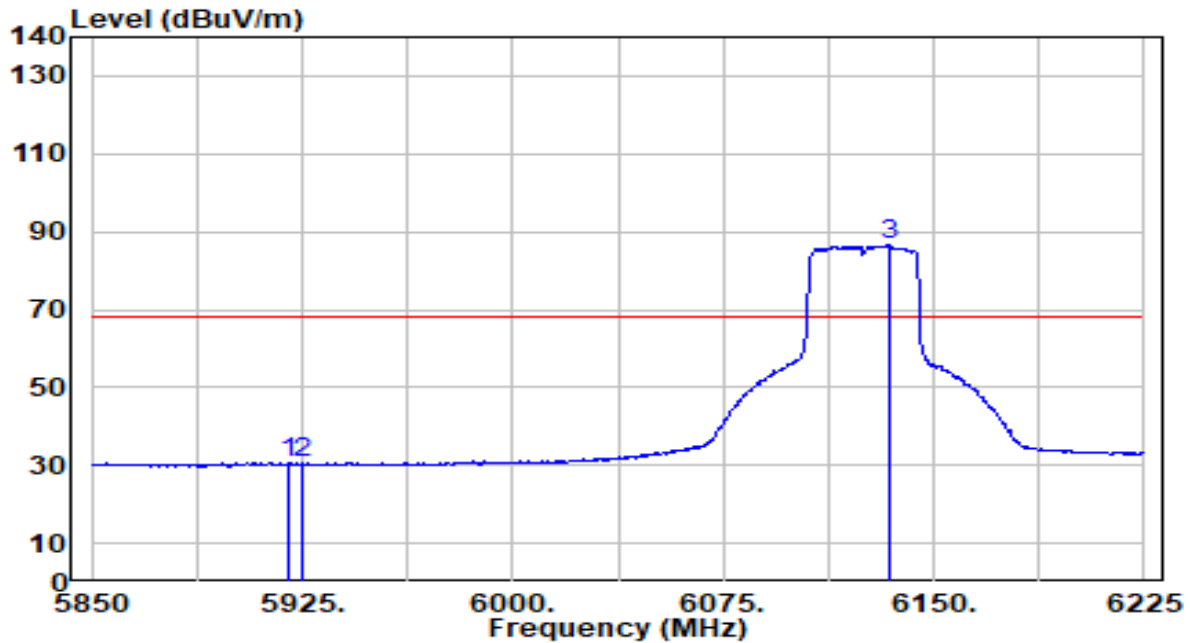


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5920.125        | 29.93          | 0.64       | 30.57                | -37.63      | 68.20          | 234         | 85          | Average           |
| 2  |   | 5925.000        | 29.82          | 0.65       | 30.47                | -37.73      | 68.20          | 234         | 85          | Average           |
| 3  |   | 6133.875        | 85.34          | 1.18       | 86.52                | N/A         | N/A            | 234         | 85          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 35_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

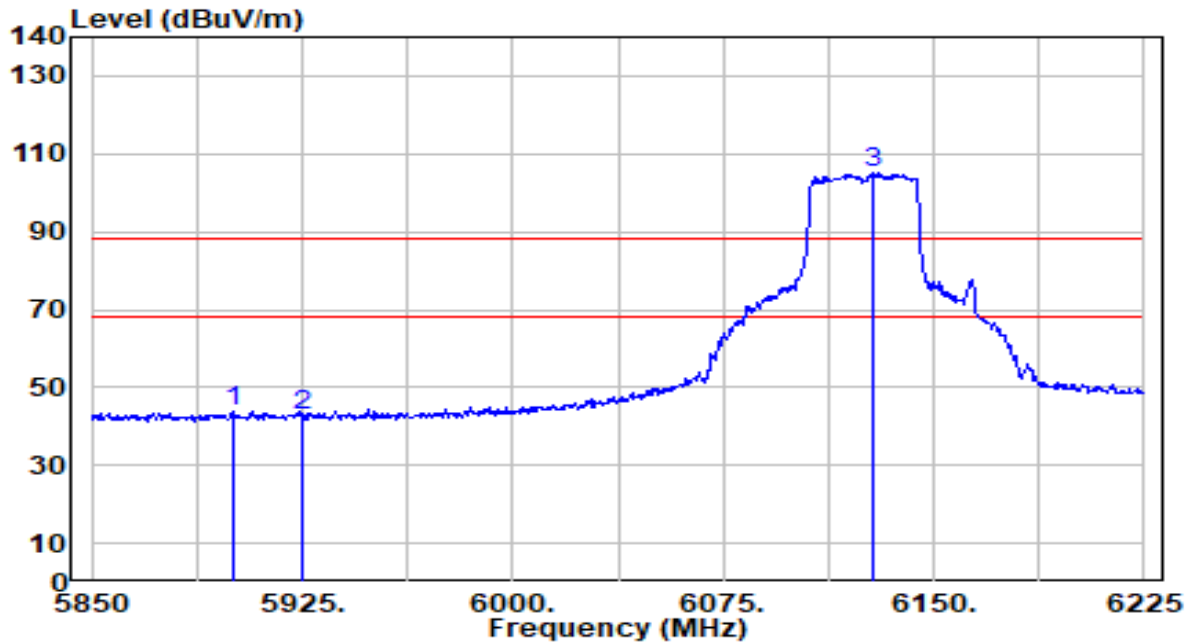


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5900.250        | 43.33          | 0.61       | 43.94                | -44.26      | 88.20          | 169         | 240         | Peak              |
| 2  |   | 5925.000        | 41.94          | 0.65       | 42.59                | -45.61      | 88.20          | 169         | 240         | Peak              |
| 3  |   | 6128.625        | 104.23         | 1.16       | 105.39               | N/A         | N/A            | 169         | 240         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band5_CH 35_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

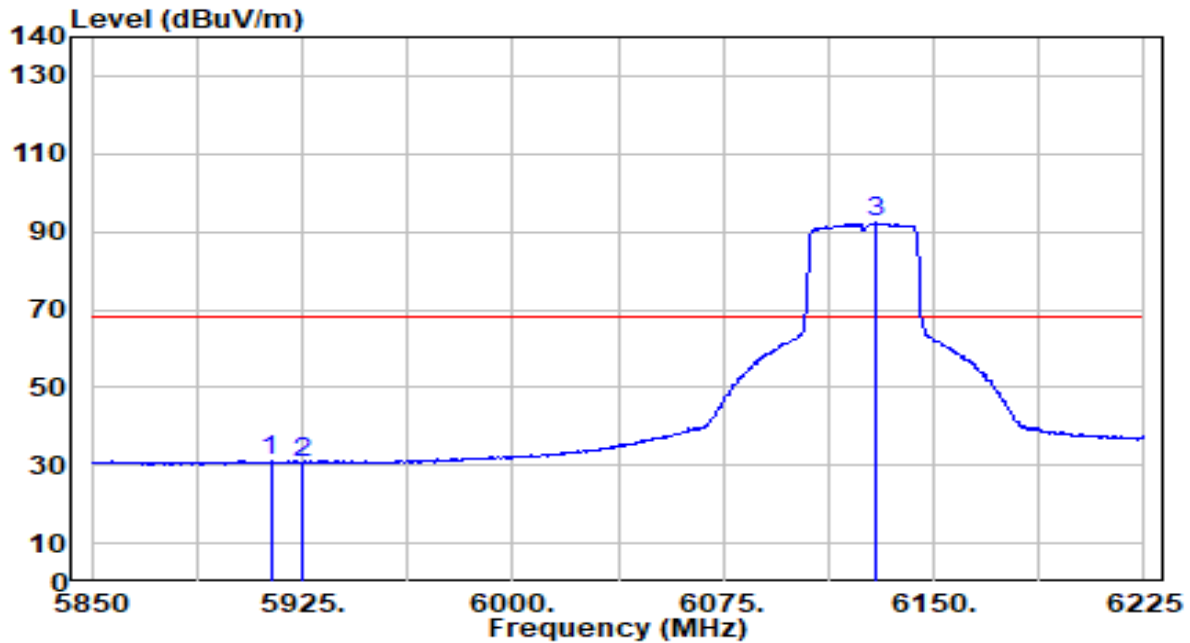


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5913.750        | 30.45          | 0.63       | 31.08                | -37.12      | 68.20          | 169         | 240         | Average           |
| 2  |   | 5925.000        | 30.06          | 0.65       | 30.71                | -37.49      | 68.20          | 169         | 240         | Average           |
| 3  |   | 6129.375        | 91.06          | 1.16       | 92.22                | N/A         | N/A            | 169         | 240         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

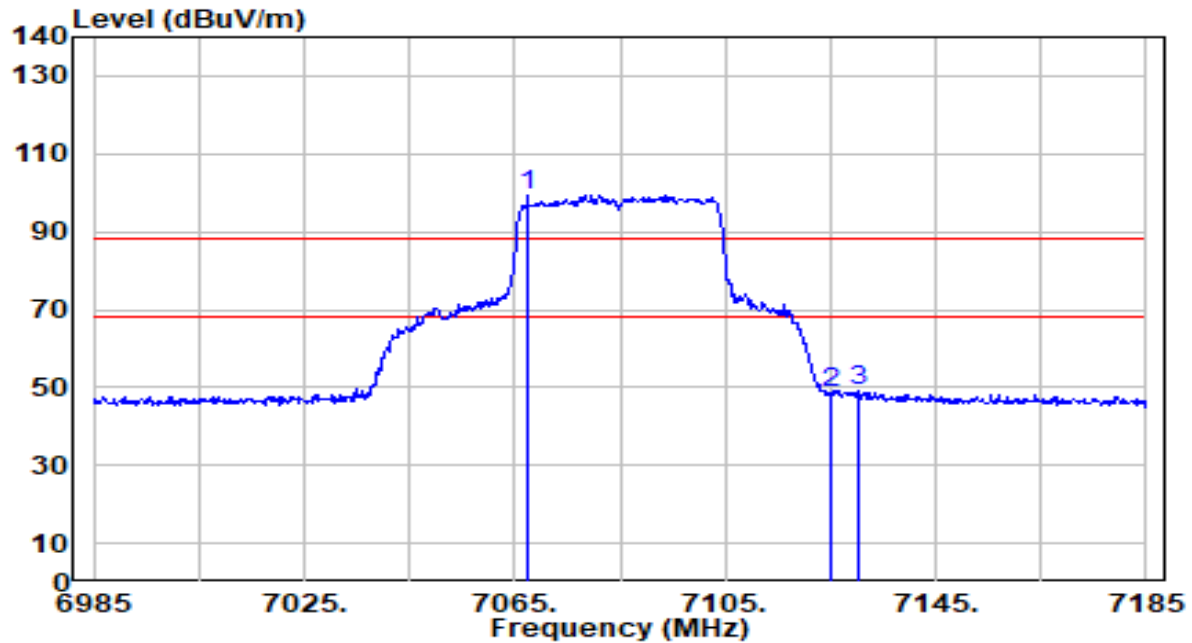


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7067.400        | 95.54          | 4.01       | 99.55                | N/A         | N/A            | 230         | 139         | Peak              |
| 2  | 7125.000        | 44.64          | 4.08       | 48.72                | -39.48      | 88.20          | 230         | 139         | Peak              |
| 3  | * 7130.200      | 44.87          | 4.09       | 48.96                | -39.24      | 88.20          | 230         | 139         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

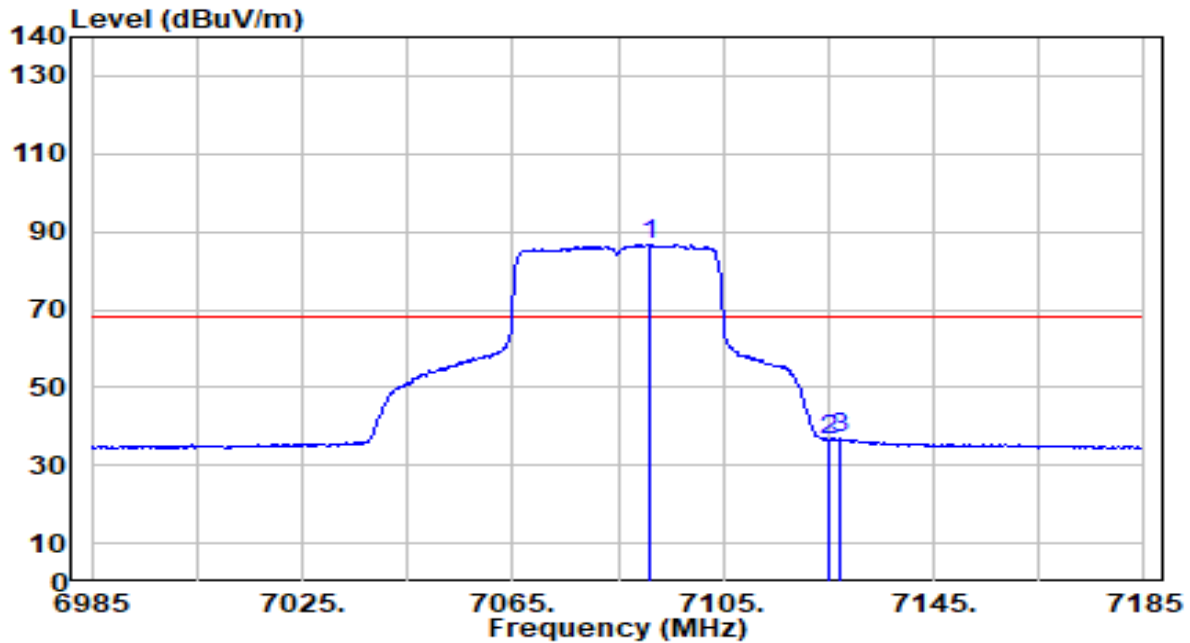


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7091.000        | 82.83          | 4.04       | 86.87                | N/A         | N/A            | 230         | 139         | Average           |
| 2  | 7125.000        | 32.47          | 4.08       | 36.55                | -31.65      | 68.20          | 230         | 139         | Average           |
| 3  | * 7127.400      | 32.69          | 4.08       | 36.78                | -31.42      | 68.20          | 230         | 139         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

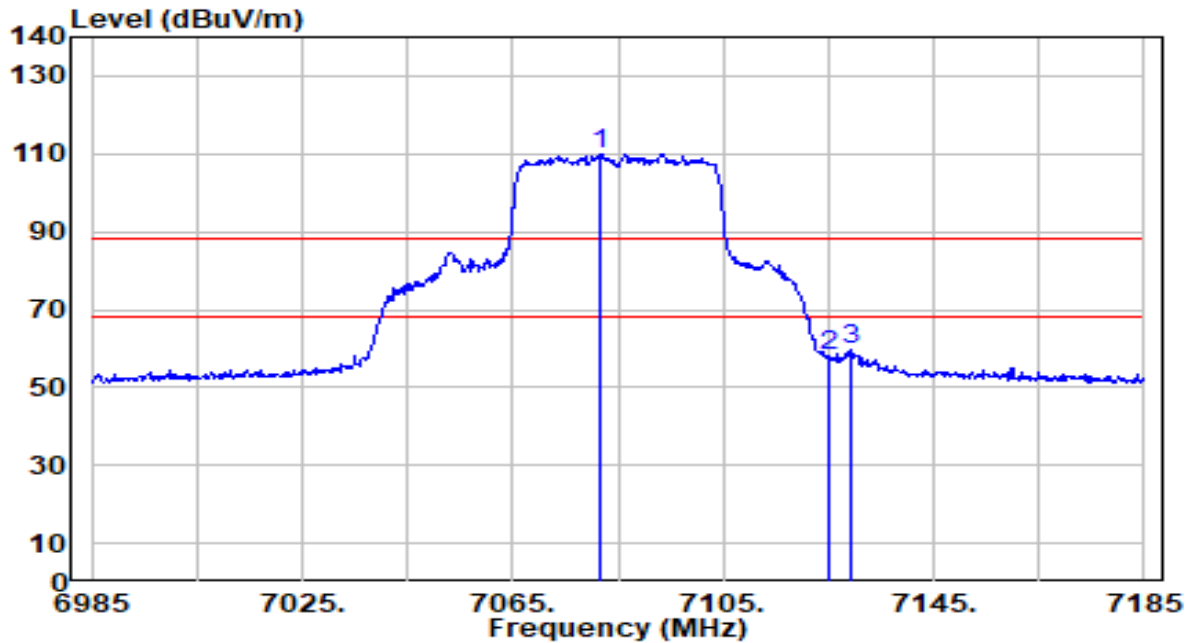


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7081.800        | 105.92         | 4.03       | 109.95               | N/A         | N/A            | 225         | 62          | Peak              |
| 2  | 7125.000        | 54.03          | 4.08       | 58.11                | -30.09      | 88.20          | 225         | 62          | Peak              |
| 3  | * 7129.200      | 55.53          | 4.09       | 59.61                | -28.59      | 88.20          | 225         | 62          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-40MHz_TX_Band8_CH 227_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

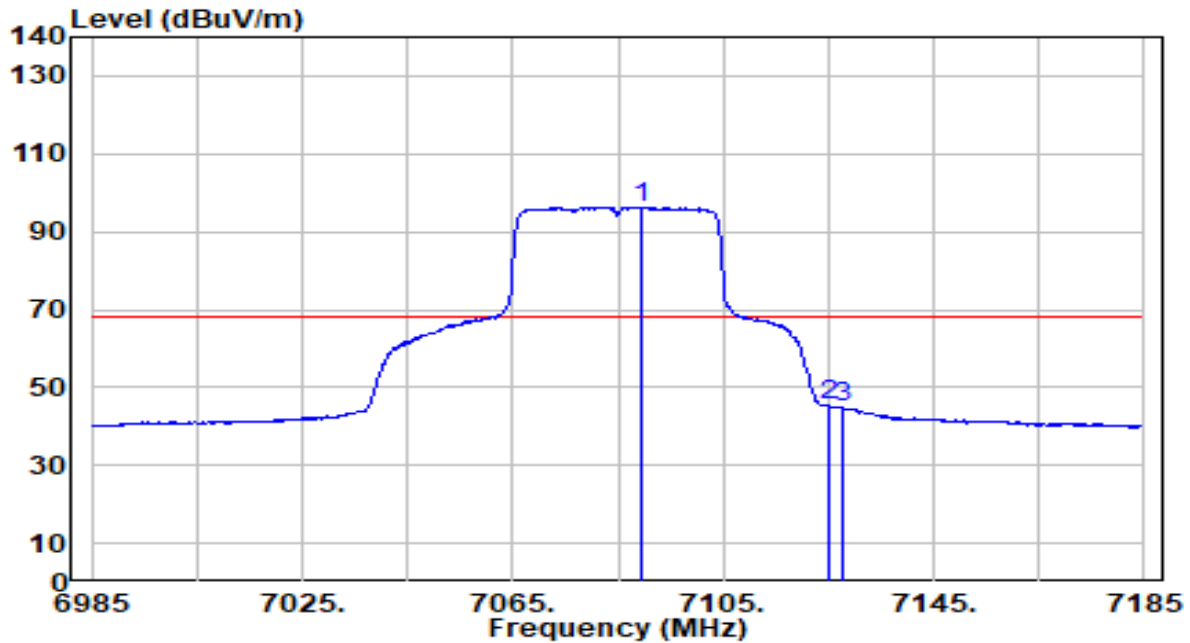


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7089.400        | 92.31          | 4.04       | 96.35                | N/A         | N/A            | 225         | 62          | Average           |
| 2  | * 7125.000      | 41.29          | 4.08       | 45.37                | -22.83      | 68.20          | 225         | 62          | Average           |
| 3  | 7127.800        | 40.94          | 4.08       | 45.02                | -23.18      | 68.20          | 225         | 62          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

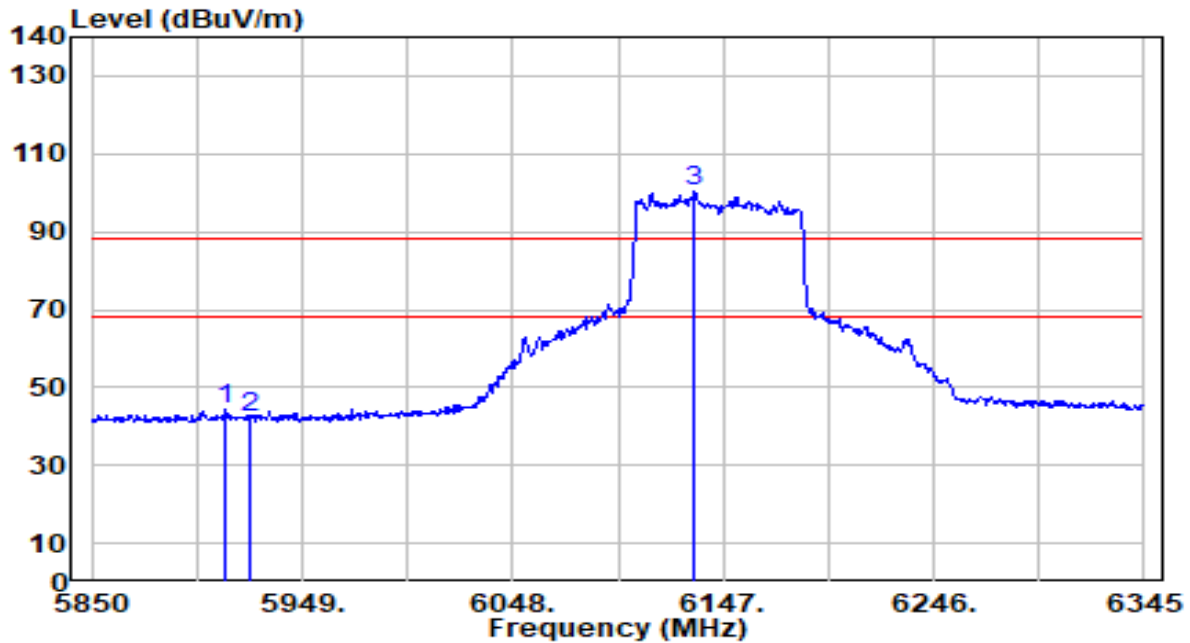


| No |   | Frequency<br>(MHz) | Reading<br>(dBUV) | C.F<br>(dB/m) | Measurement<br>(dBUV/m) | Margin<br>(dB) | Limit<br>(dBUV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5913.360           | 43.68             | 0.63          | 44.31                   | -43.89         | 88.20             | 233            | 85             | Peak                 |
| 2  |   | 5925.000           | 41.50             | 0.65          | 42.14                   | -46.06         | 88.20             | 233            | 85             | Peak                 |
| 3  |   | 6133.140           | 99.46             | 1.17          | 100.63                  | N/A            | N/A               | 233            | 85             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                        | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

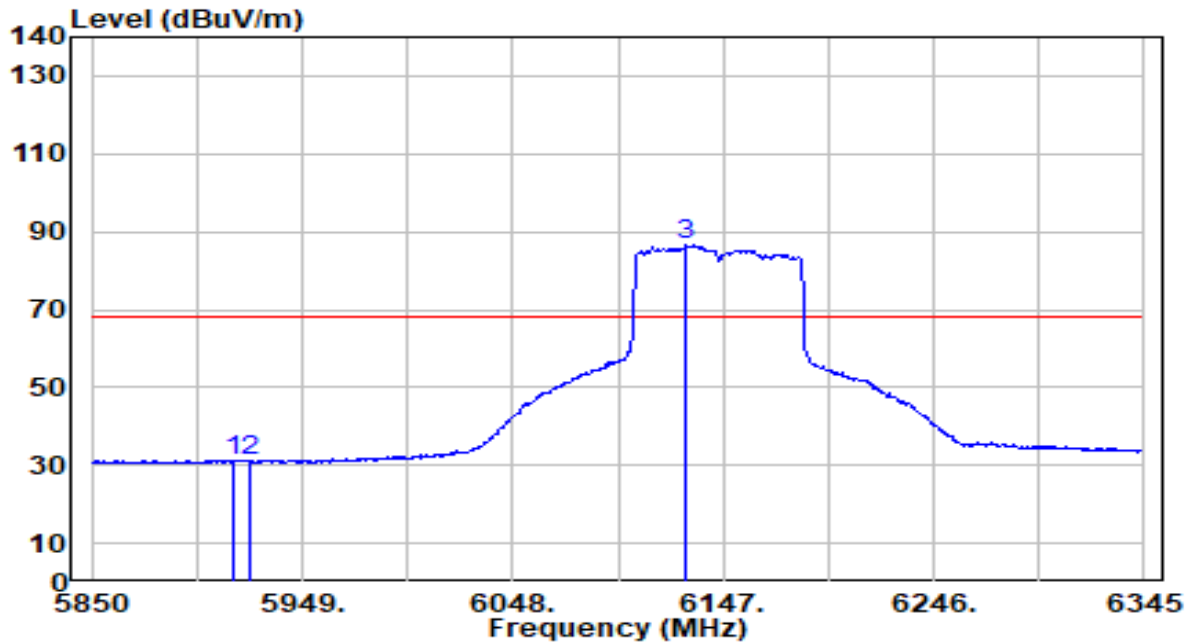


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5916.825           | 30.71             | 0.64          | 31.35                   | -36.85         | 68.20             | 233            | 85             | Average              |
| 2  |   | 5925.000           | 30.42             | 0.65          | 31.06                   | -37.14         | 68.20             | 233            | 85             | Average              |
| 3  |   | 6129.675           | 85.26             | 1.16          | 86.43                   | N/A            | N/A               | 233            | 85             | Average              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

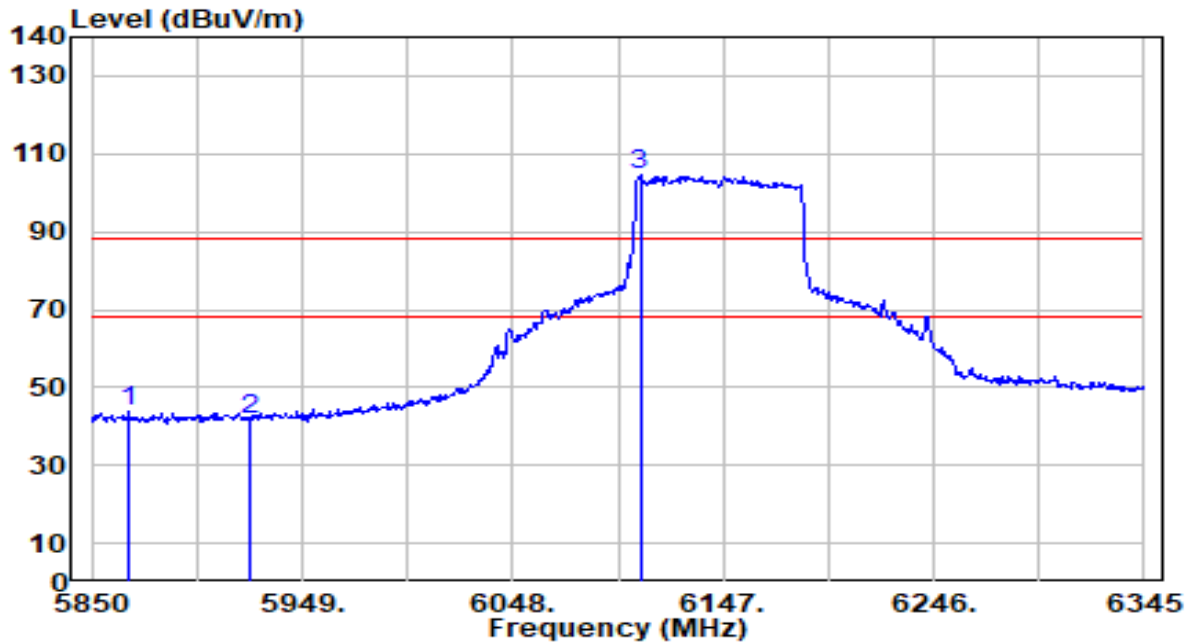


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5867.820           | 43.27             | 0.57          | 43.85                   | -44.35         | 88.20             | 180            | 240            | Peak                 |
| 2  |   | 5925.000           | 41.00             | 0.65          | 41.64                   | -46.56         | 88.20             | 180            | 240            | Peak                 |
| 3  |   | 6107.895           | 103.47            | 1.09          | 104.56                  | N/A            | N/A               | 180            | 240            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                   |                      |              |
|-----------|---------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                 | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                           | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band5_CH 39_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

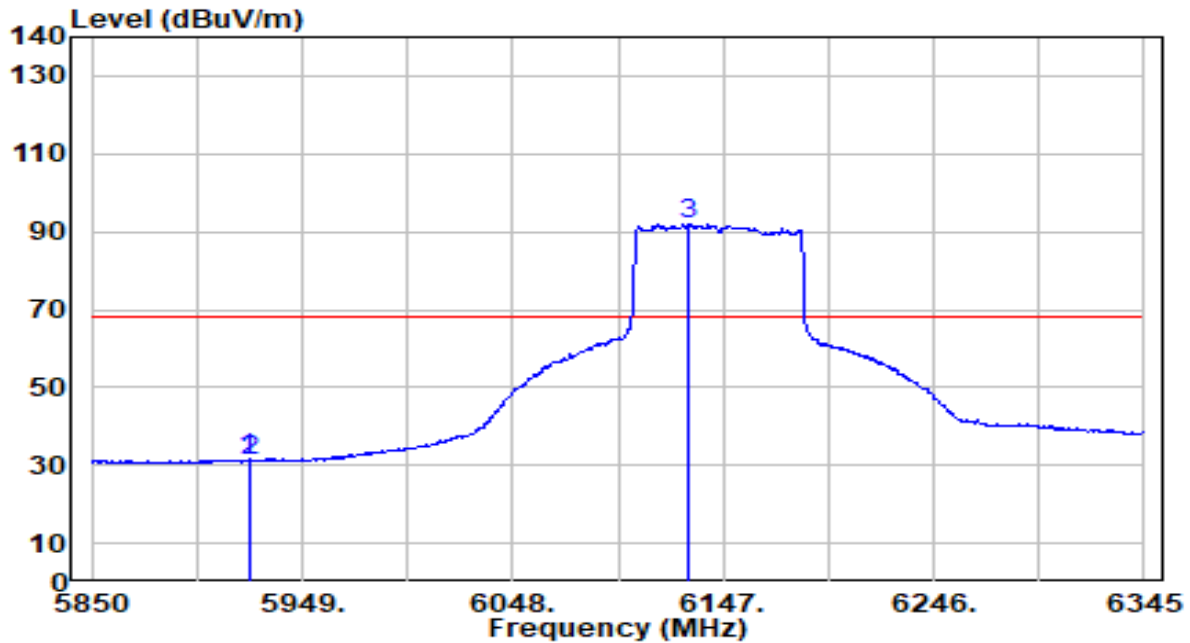


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 5923.755           | 30.79             | 0.64          | 31.44                   | -36.76         | 68.20             | 180            | 240            | Average              |
| 2  |   | 5925.000           | 30.42             | 0.65          | 31.06                   | -37.14         | 68.20             | 180            | 240            | Average              |
| 3  |   | 6130.170           | 90.84             | 1.16          | 92.00                   | N/A            | N/A               | 180            | 240            | Average              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

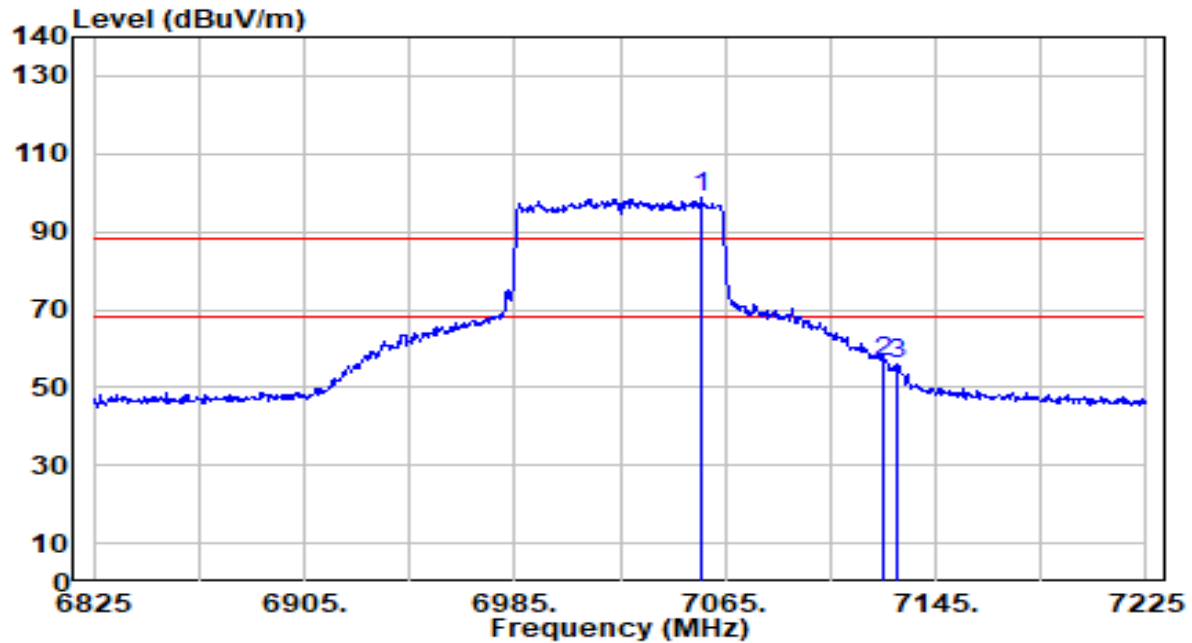


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7055.800        | 94.72          | 4.00       | 98.72                | N/A         | N/A            | 230         | 138         | Peak              |
| 2  | * 7125.000      | 52.66          | 4.08       | 56.74                | -31.46      | 88.20          | 230         | 138         | Peak              |
| 3  | 7130.600        | 51.79          | 4.09       | 55.88                | -32.32      | 88.20          | 230         | 138         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

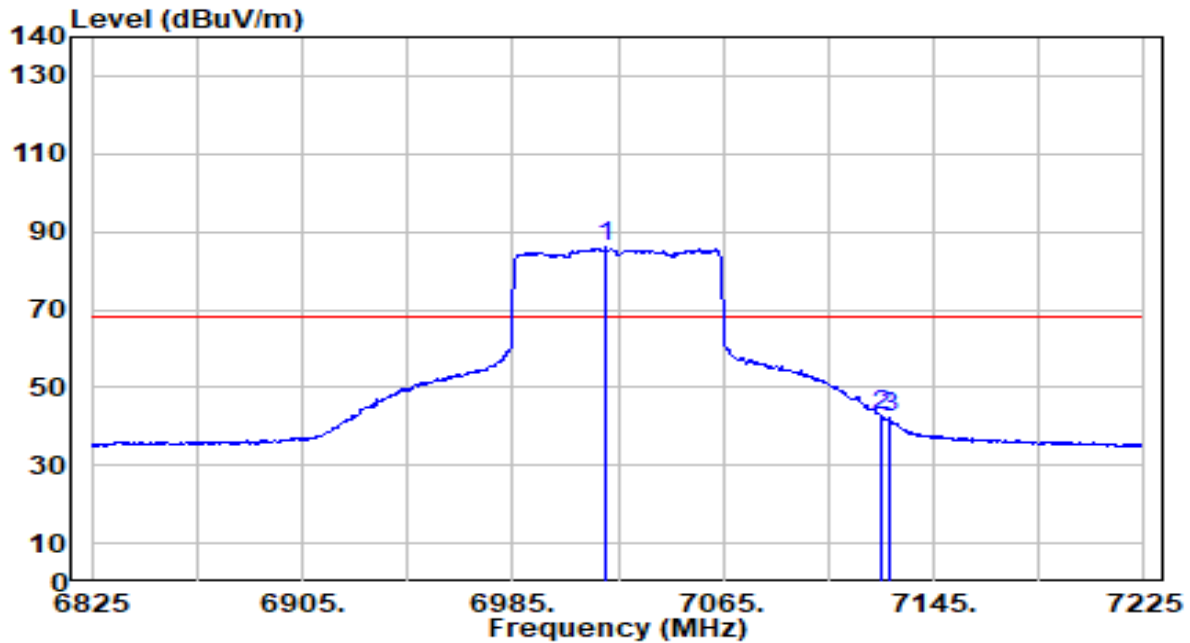


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7020.200        | 81.93          | 3.95       | 85.89                | N/A         | N/A            | 230         | 138         | Average           |
| 2  | * 7125.000      | 38.59          | 4.08       | 42.67                | -25.53      | 68.20          | 230         | 138         | Average           |
| 3  | 7128.200        | 38.06          | 4.08       | 42.14                | -26.06      | 68.20          | 230         | 138         | Average           |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

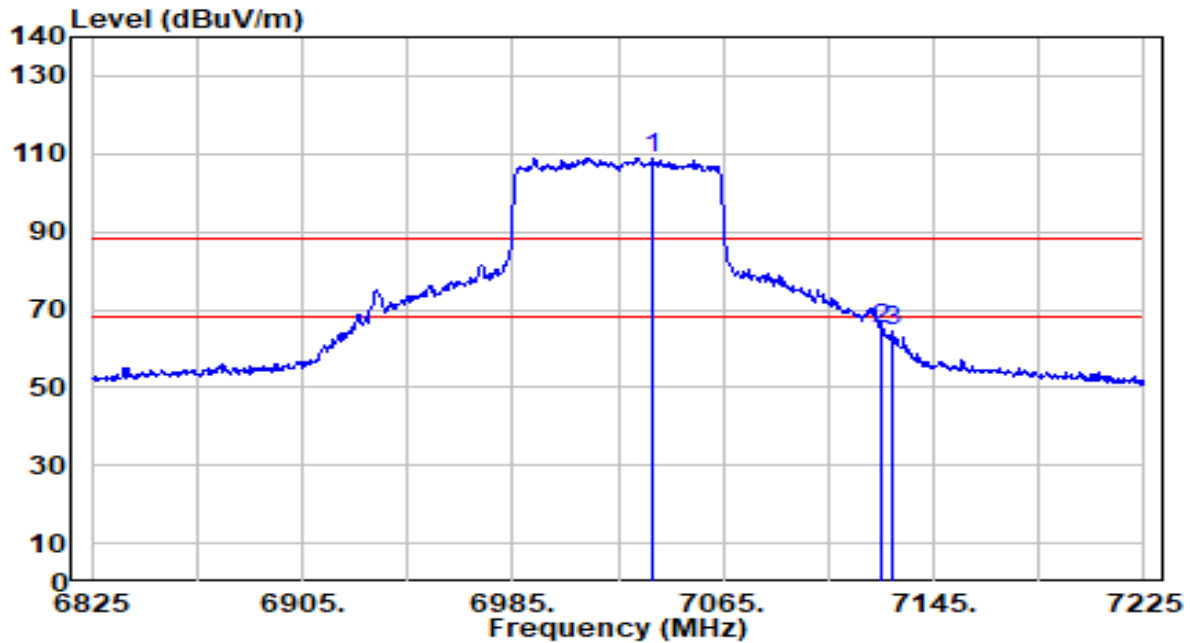


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7038.600        | 105.01         | 3.98       | 108.99               | N/A         | N/A            | 221         | 48          | Peak              |
| 2  | * 7125.000      | 60.83          | 4.08       | 64.91                | -23.29      | 88.20          | 221         | 48          | Peak              |
| 3  | 7129.400        | 60.41          | 4.09       | 64.49                | -23.71      | 88.20          | 221         | 48          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-80MHz_TX_Band8_CH 215_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

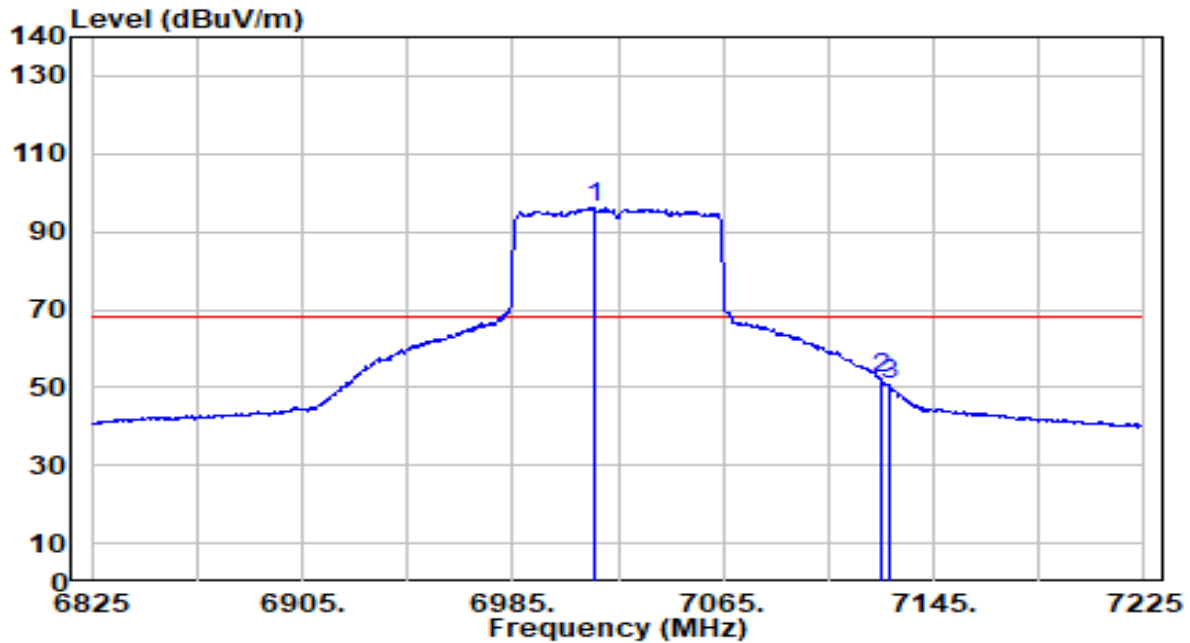


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7015.800        | 92.10          | 3.95       | 96.05                | N/A         | N/A            | 221         | 48          | Average           |
| 2  | * 7125.000      | 48.31          | 4.08       | 52.39                | -15.81      | 68.20          | 221         | 48          | Average           |
| 3  | 7127.800        | 46.53          | 4.08       | 50.61                | -17.59      | 68.20          | 221         | 48          | Average           |

Note:

1. " \* ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

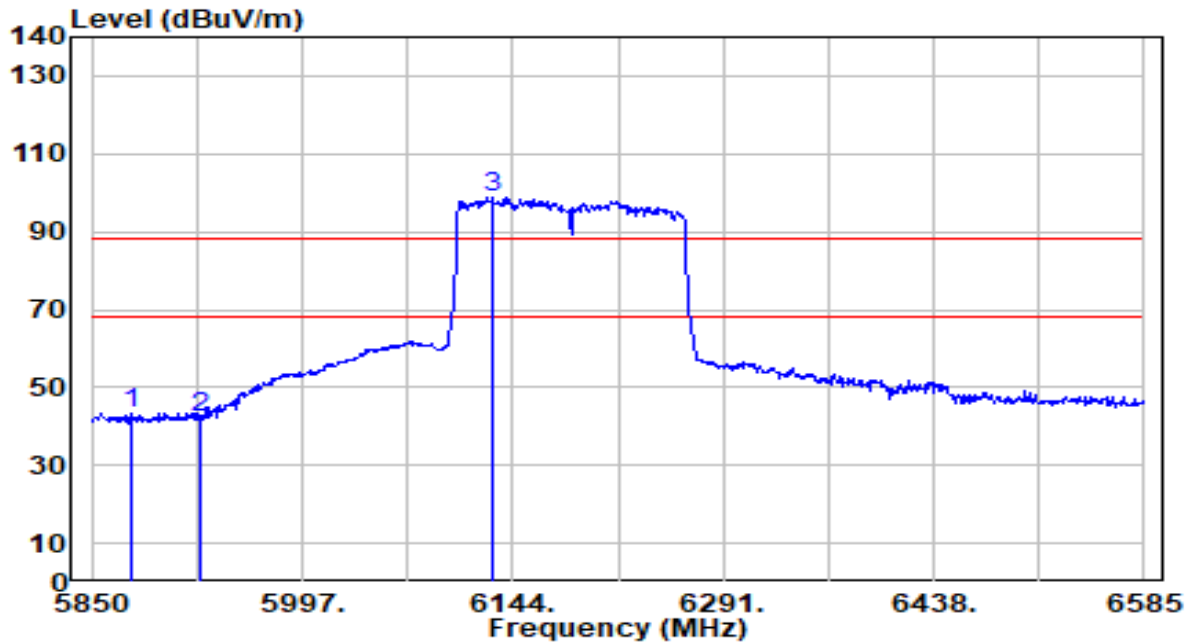


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5877.930        | 42.83          | 0.59       | 43.42                | -44.78      | 88.20          | 229         | 85          | Peak              |
| 2  |   | 5925.000        | 41.77          | 0.65       | 42.41                | -45.79      | 88.20          | 229         | 85          | Peak              |
| 3  |   | 6130.035        | 97.51          | 1.16       | 98.67                | N/A         | N/A            | 229         | 85          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                         | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

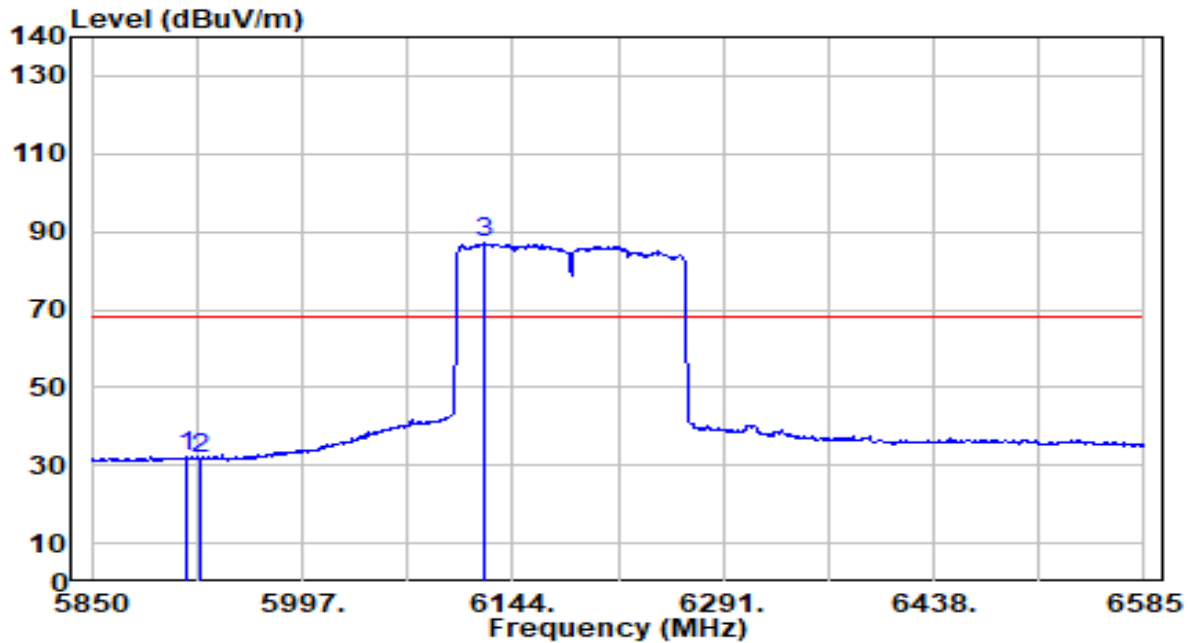


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5915.415        | 31.42          | 0.63       | 32.05                | -36.15      | 68.20          | 229         | 85          | Average           |
| 2  |   | 5925.000        | 31.05          | 0.65       | 31.70                | -36.50      | 68.20          | 229         | 85          | Average           |
| 3  |   | 6124.155        | 86.06          | 1.14       | 87.20                | N/A         | N/A            | 229         | 85          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

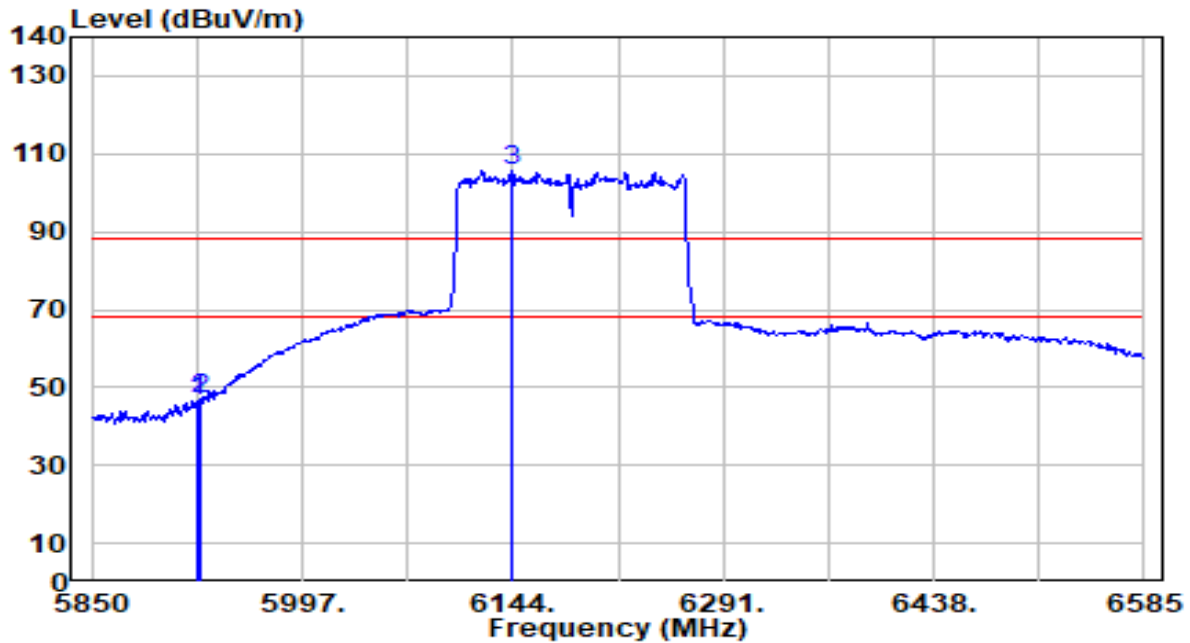


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5923.500        | 45.83          | 0.64       | 46.47                | -41.73      | 88.20          | 184         | 240         | Peak              |
| 2  | * 5925.000      | 46.24          | 0.65       | 46.88                | -41.32      | 88.20          | 184         | 240         | Peak              |
| 3  | 6143.265        | 104.48         | 1.21       | 105.69               | N/A         | N/A            | 184         | 240         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                    |                      |              |
|-----------|----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                  | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                            | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                           | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band5_CH 47_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

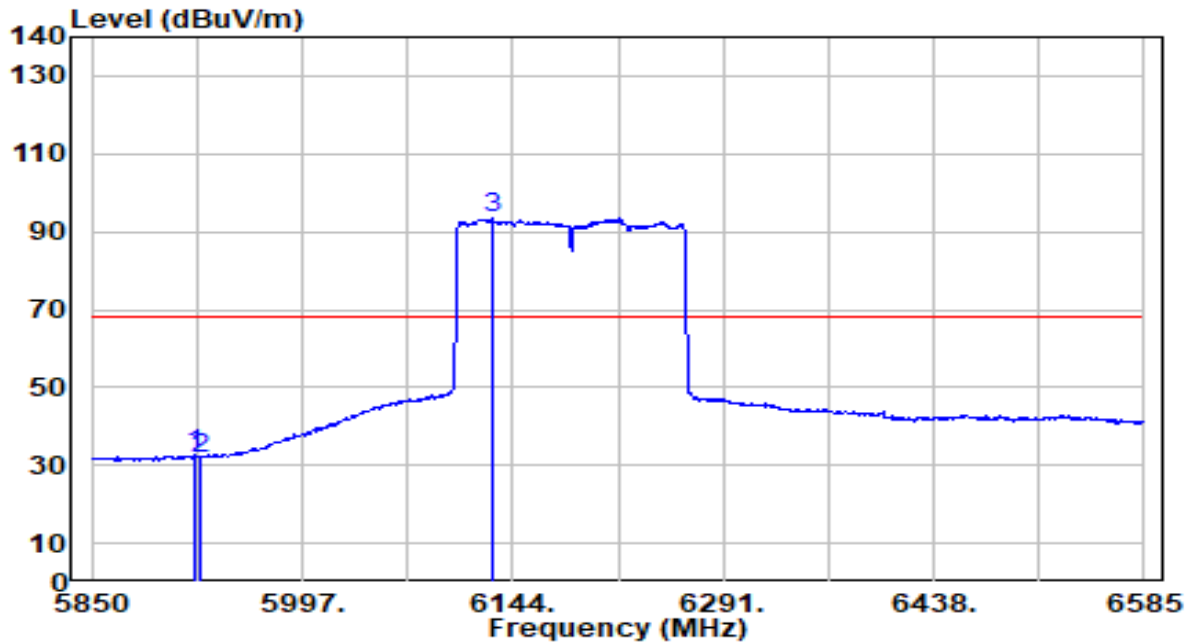


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5922.030        | 32.01          | 0.64       | 32.65                | -35.55      | 68.20          | 184         | 240         | Average           |
| 2  |   | 5925.000        | 31.28          | 0.65       | 31.92                | -36.28      | 68.20          | 184         | 240         | Average           |
| 3  |   | 6130.035        | 92.48          | 1.16       | 93.64                | N/A         | N/A            | 184         | 240         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

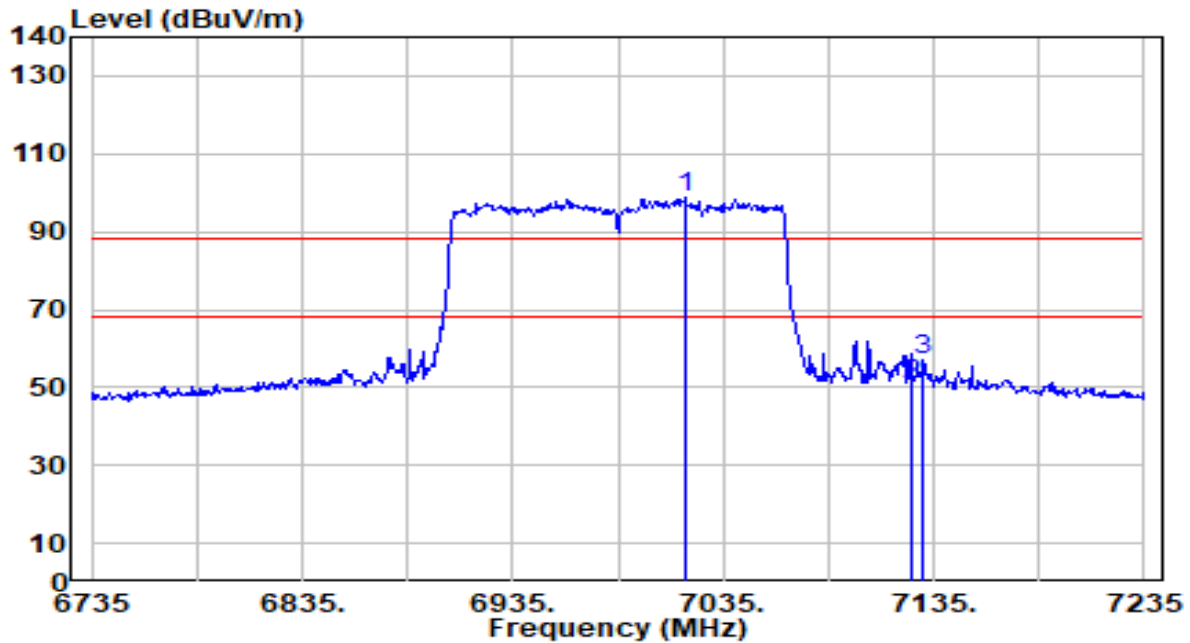


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7017.000        | 94.84          | 3.95       | 98.79                | N/A         | N/A            | 223         | 139         | Peak              |
| 2  | 7125.000        | 46.78          | 4.08       | 50.86                | -37.34      | 88.20          | 223         | 139         | Peak              |
| 3  | * 7130.000      | 53.14          | 4.09       | 57.23                | -30.97      | 88.20          | 223         | 139         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Horizontal                                          | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

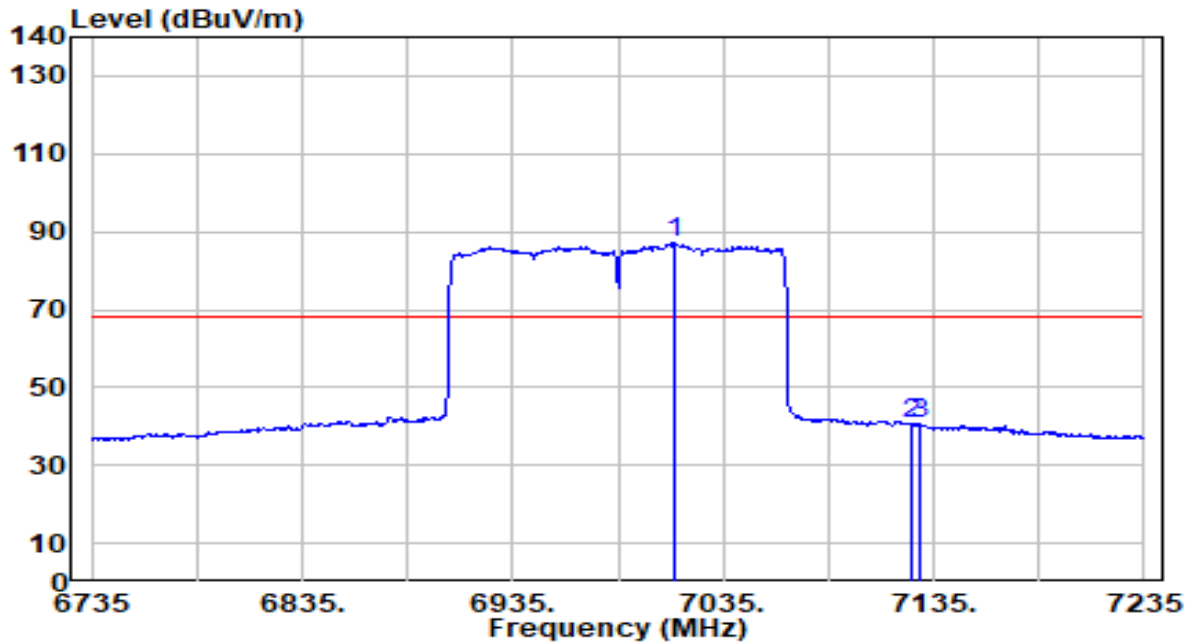


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7012.500        | 83.19          | 3.95       | 87.14                | N/A         | N/A            | 223         | 139         | Average           |
| 2  | 7125.000        | 36.38          | 4.08       | 40.46                | -27.74      | 68.20          | 223         | 139         | Average           |
| 3  | * 7129.000      | 36.73          | 4.08       | 40.82                | -27.38      | 68.20          | 223         | 139         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

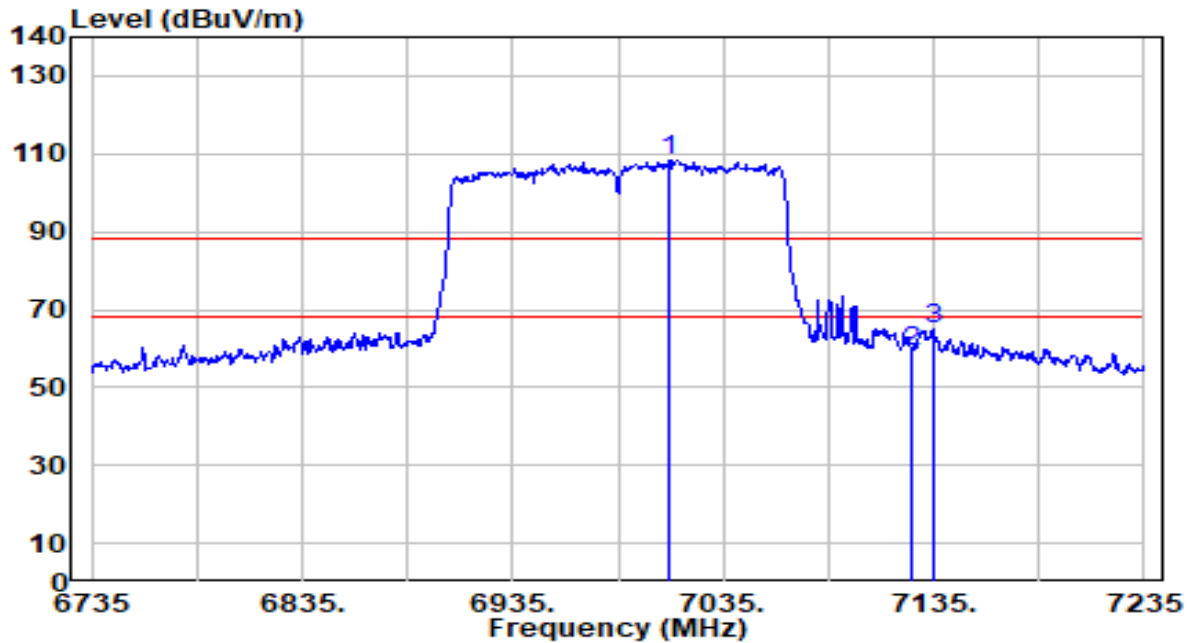


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7009.500        | 104.50         | 3.94       | 108.44               | N/A         | N/A            | 238         | 62          | Peak              |
| 2  | 7125.000        | 55.32          | 4.08       | 59.40                | -28.80      | 88.20          | 238         | 62          | Peak              |
| 3  | * 7134.500      | 60.76          | 4.09       | 64.85                | -23.35      | 88.20          | 238         | 62          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                     |                      |              |
|-----------|-----------------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router                   | Date of Test         | 2023-02-02   |
| Factor    | DRH18-E                                             | Temp. / Humidity     | 25°C /65%    |
| Polarity  | Vertical                                            | Site / Test Engineer | AC2 / Xuan   |
| Test Mode | 802.11ax-160MHz_TX_Band8_CH 207_ANT<br>0+1+2+3_NSS4 | Test Voltage         | AC 120V/60Hz |

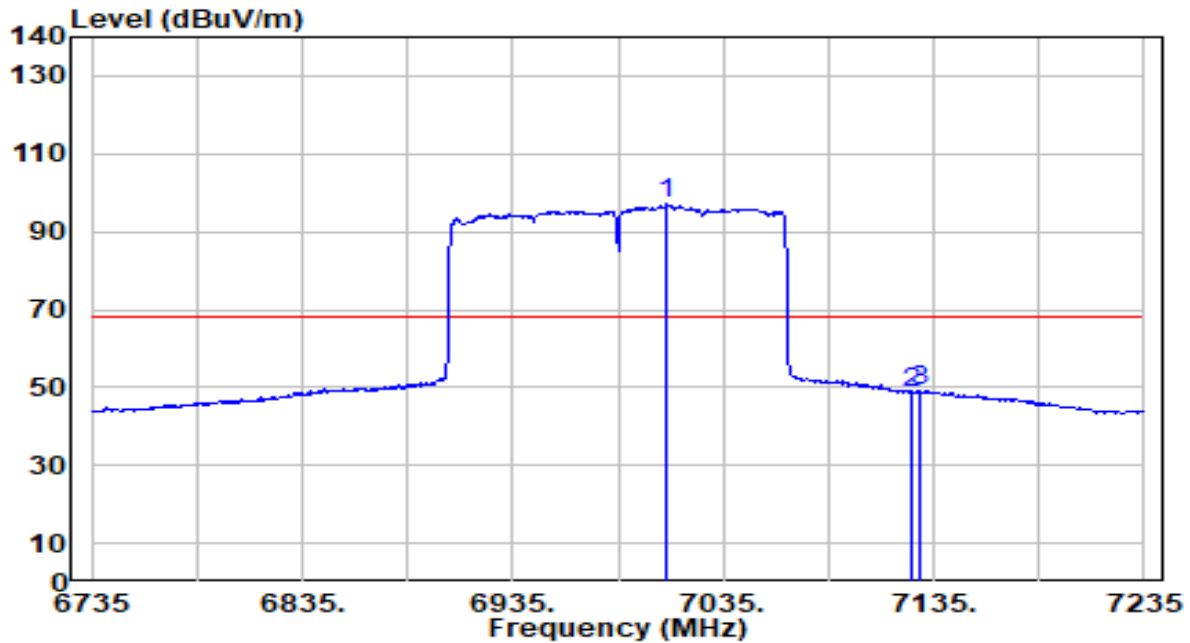

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 7008.500        | 93.44          | 3.94       | 97.38                | N/A         | N/A            | 238         | 62          | Average           |
| 2  | 7125.000        | 44.71          | 4.08       | 48.79                | -19.41      | 68.20          | 238         | 62          | Average           |
| 3  | * 7129.000      | 45.04          | 4.08       | 49.12                | -19.08      | 68.20          | 238         | 62          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 6.10. AC Conducted Emissions


### 6.10.1. Test Limit

| FCC Part 15.207 Limits |           |           |
|------------------------|-----------|-----------|
| Frequency (MHz)        | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50            | 66 - 56   | 56 - 46   |
| 0.50 - 5.0             | 56        | 46        |
| 5.0 - 30               | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.10.2. Test Setup

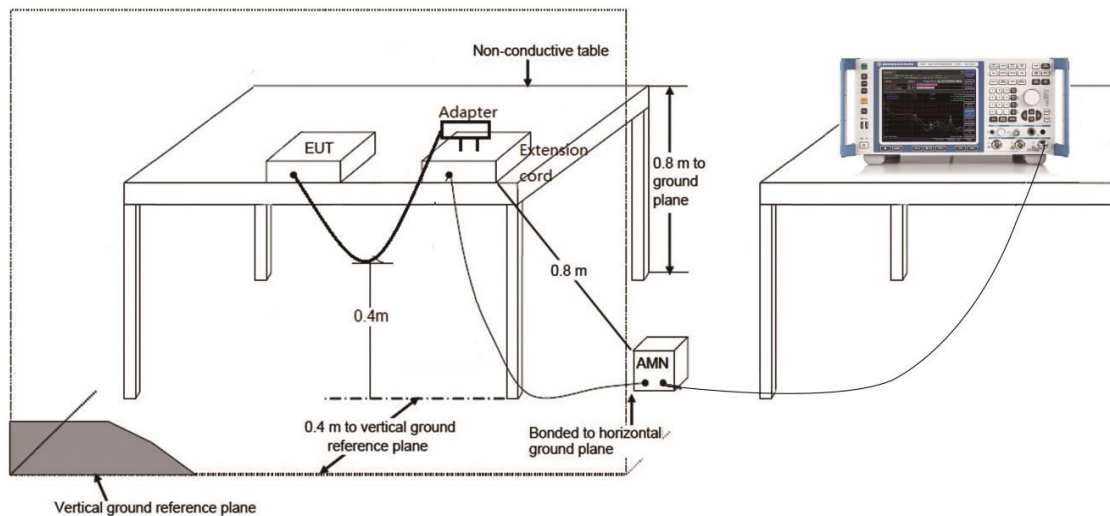

### 6.10.3. Test Result

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router            | Date of Test         | 2022-12-29   |
| Factor    | CE_ENV216-L1 (Filter ON)                     | Temp. / Humidity     | 22.2°C /62%  |
| Polarity  | Line1                                        | Site / Test Engineer | SR2 / Amber  |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

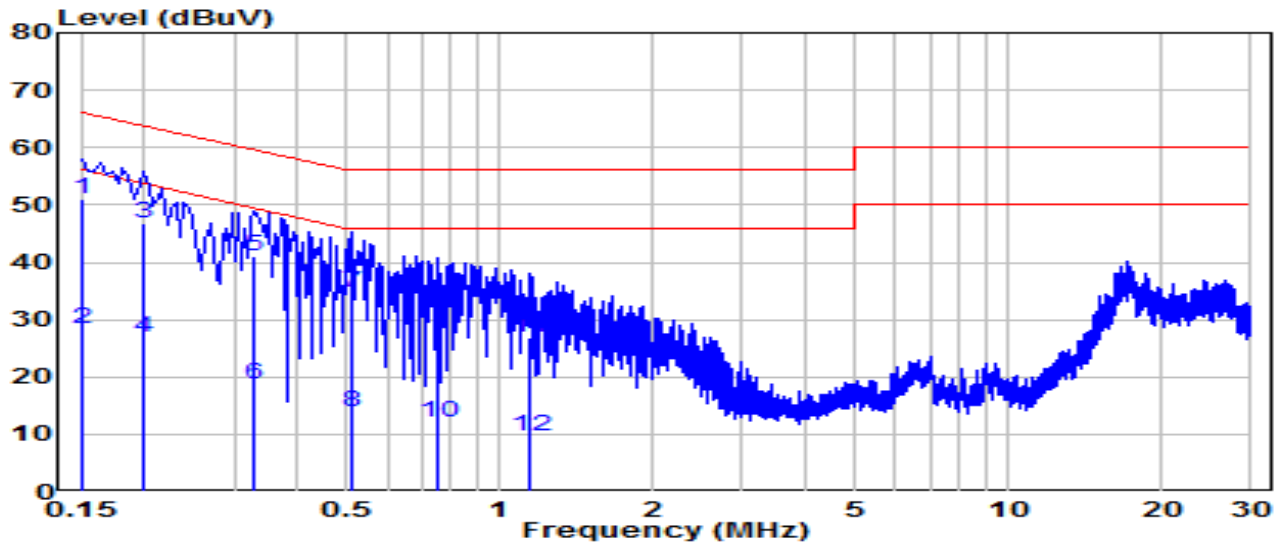


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | * | 0.150           | 41.28          | 9.62     | 50.90              | -15.10      | 66.00        | QP                |
| 2  | * | 0.150           | 18.69          | 9.62     | 28.31              | -27.69      | 56.00        | Average           |
| 3  |   | 0.199           | 37.30          | 9.62     | 46.93              | -16.70      | 63.63        | QP                |
| 4  |   | 0.199           | 17.13          | 9.62     | 26.75              | -26.88      | 53.63        | Average           |
| 5  |   | 0.330           | 31.33          | 9.63     | 40.96              | -18.49      | 59.45        | QP                |
| 6  |   | 0.330           | 9.00           | 9.63     | 18.63              | -30.82      | 49.45        | Average           |
| 7  |   | 0.510           | 25.19          | 9.64     | 34.83              | -21.17      | 56.00        | QP                |
| 8  |   | 0.510           | 4.12           | 9.64     | 13.76              | -32.24      | 46.00        | Average           |
| 9  |   | 0.753           | 22.52          | 9.66     | 32.18              | -23.82      | 56.00        | QP                |
| 10 |   | 0.753           | 2.50           | 9.66     | 12.16              | -33.84      | 46.00        | Average           |
| 11 |   | 1.144           | 17.09          | 9.67     | 26.77              | -29.23      | 56.00        | QP                |
| 12 |   | 1.144           | -0.05          | 9.67     | 9.62               | -36.38      | 46.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router            | Date of Test         | 2022-12-29   |
| Factor    | CE_ENV216-N (Filter ON)                      | Temp. / Humidity     | 22.2°C /62%  |
| Polarity  | Neutral                                      | Site / Test Engineer | SR2 / Amber  |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3 | Test Voltage         | AC 120V/60Hz |

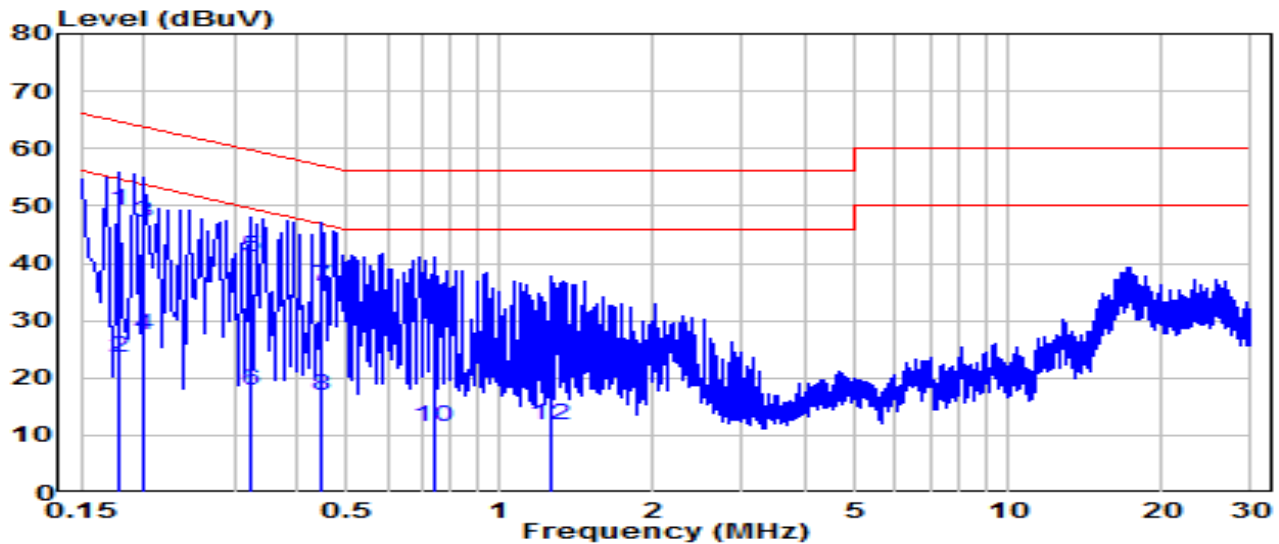


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | * | 0.177           | 39.52          | 9.62     | 49.14              | -15.49      | 64.63        | QP                |
| 2  | * | 0.177           | 13.81          | 9.62     | 23.43              | -31.19      | 54.63        | Average           |
| 3  |   | 0.199           | 37.55          | 9.62     | 47.18              | -16.45      | 63.63        | QP                |
| 4  |   | 0.199           | 17.80          | 9.62     | 27.42              | -26.21      | 53.63        | Average           |
| 5  |   | 0.325           | 31.33          | 9.63     | 40.96              | -18.61      | 59.57        | QP                |
| 6  |   | 0.325           | 8.24           | 9.63     | 17.87              | -31.70      | 49.57        | Average           |
| 7  |   | 0.447           | 26.35          | 9.64     | 35.99              | -20.94      | 56.93        | QP                |
| 8  |   | 0.447           | 7.30           | 9.64     | 16.94              | -29.99      | 46.93        | Average           |
| 9  |   | 0.739           | 21.77          | 9.66     | 31.42              | -24.58      | 56.00        | QP                |
| 10 |   | 0.739           | 1.77           | 9.66     | 11.42              | -34.58      | 46.00        | Average           |
| 11 |   | 1.252           | 16.57          | 9.68     | 26.24              | -29.76      | 56.00        | QP                |
| 12 |   | 1.252           | 2.25           | 9.68     | 11.92              | -34.08      | 46.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router            | Date of Test         | 2022-12-29   |
| Factor    | CE_ENV216-L1 (Filter ON)                     | Temp. / Humidity     | 22.2°C /62%  |
| Polarity  | Line1                                        | Site / Test Engineer | SR2 / Amber  |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3 | Test Voltage         | AC 240V/60Hz |

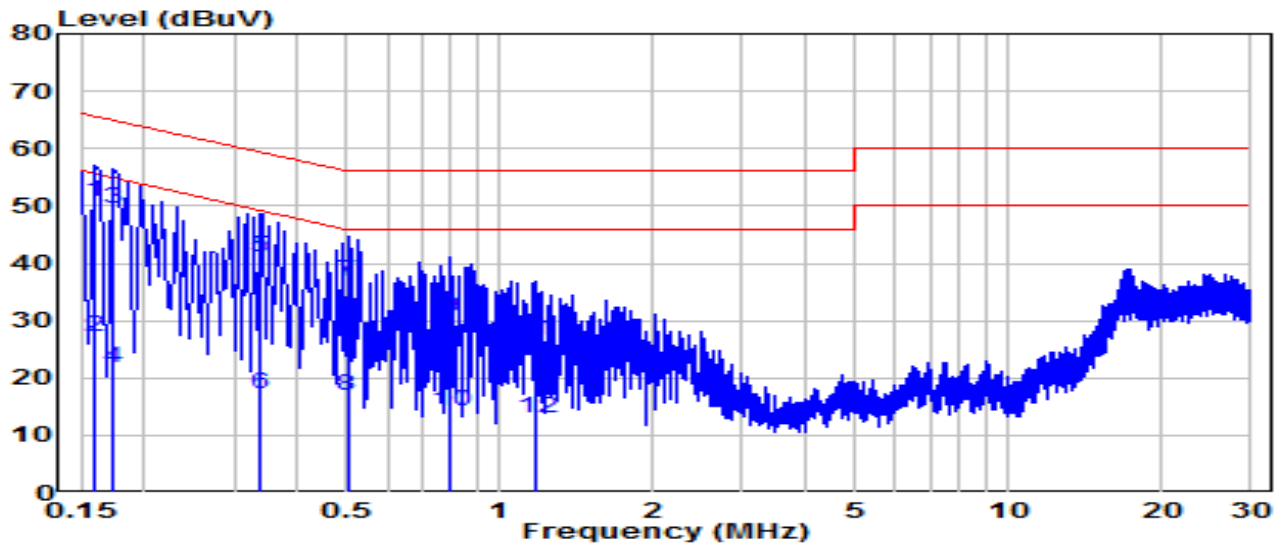


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | * | 0.159           | 41.12          | 9.62     | 50.74              | -14.77      | 65.52        | QP                |
| 2  | * | 0.159           | 17.65          | 9.62     | 27.27              | -28.24      | 55.52        | Average           |
| 3  |   | 0.172           | 39.82          | 9.62     | 49.44              | -15.40      | 64.84        | QP                |
| 4  |   | 0.172           | 12.04          | 9.62     | 21.66              | -33.18      | 54.84        | Average           |
| 5  |   | 0.339           | 31.52          | 9.63     | 41.15              | -18.08      | 59.23        | QP                |
| 6  |   | 0.339           | 7.64           | 9.63     | 17.27              | -31.96      | 49.23        | Average           |
| 7  |   | 0.501           | 27.32          | 9.64     | 36.96              | -19.04      | 56.00        | QP                |
| 8  |   | 0.501           | 7.28           | 9.64     | 16.92              | -29.08      | 46.00        | Average           |
| 9  |   | 0.798           | 20.76          | 9.66     | 30.42              | -25.58      | 56.00        | QP                |
| 10 |   | 0.798           | 4.60           | 9.66     | 14.26              | -31.74      | 46.00        | Average           |
| 11 |   | 1.176           | 16.85          | 9.67     | 26.53              | -29.47      | 56.00        | QP                |
| 12 |   | 1.176           | 3.31           | 9.67     | 12.98              | -33.02      | 46.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AXE11000 Tri-Band Wi-Fi 6E Router            | Date of Test         | 2022-12-29   |
| Factor    | CE_ENV216-N (Filter ON)                      | Temp. / Humidity     | 22.2°C /62%  |
| Polarity  | Neutral                                      | Site / Test Engineer | SR2 / Amber  |
| Test Mode | 802.11ax-20MHz_TX_Band5_CH 33_ANT<br>0+1+2+3 | Test Voltage         | AC 240V/60Hz |

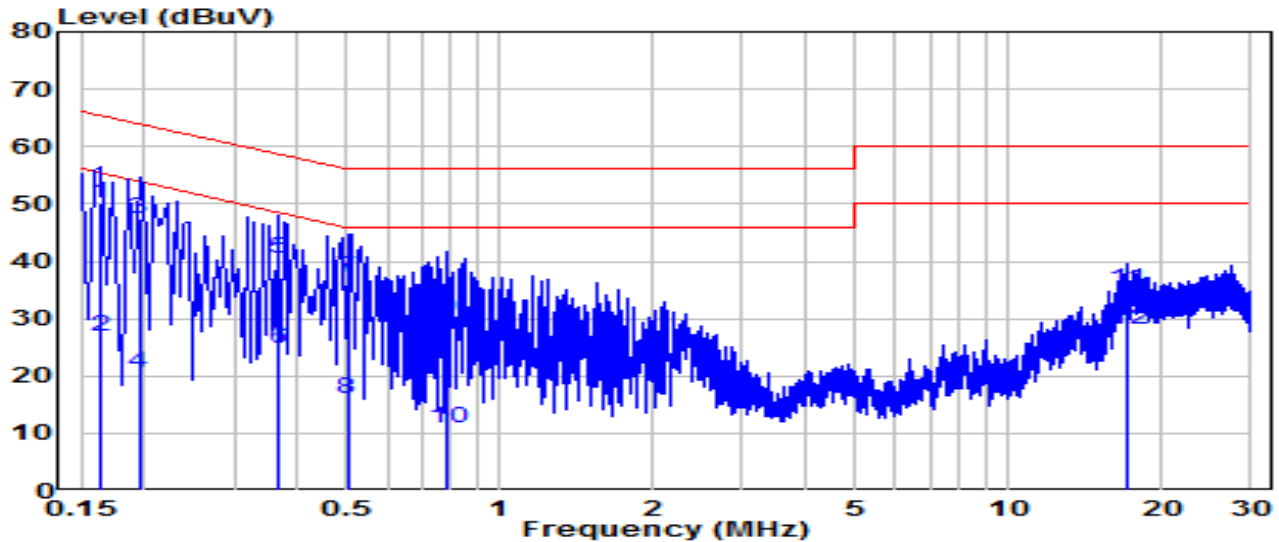

| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | * | 0.163           | 40.64          | 9.62     | 50.26              | -15.02      | 65.28        | QP                |
| 2  | * | 0.163           | 17.14          | 9.62     | 26.76              | -28.53      | 55.28        | Average           |
| 3  |   | 0.195           | 37.78          | 9.62     | 47.40              | -16.42      | 63.82        | QP                |
| 4  |   | 0.195           | 10.82          | 9.62     | 20.44              | -33.38      | 53.82        | Average           |
| 5  |   | 0.366           | 30.72          | 9.63     | 40.35              | -18.24      | 58.59        | QP                |
| 6  |   | 0.366           | 15.10          | 9.63     | 24.74              | -23.86      | 48.59        | Average           |
| 7  |   | 0.501           | 27.47          | 9.64     | 37.11              | -18.89      | 56.00        | QP                |
| 8  |   | 0.501           | 6.48           | 9.64     | 16.12              | -29.88      | 46.00        | Average           |
| 9  |   | 0.789           | 20.20          | 9.66     | 29.86              | -26.14      | 56.00        | QP                |
| 10 |   | 0.789           | 1.29           | 9.66     | 10.94              | -35.06      | 46.00        | Average           |
| 11 |   | 17.154          | 25.18          | 9.96     | 35.14              | -24.86      | 60.00        | QP                |
| 12 |   | 17.154          | 18.17          | 9.96     | 28.13              | -21.87      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

## 7. Conclusion

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules.

## **Appendix A : Test Setup Photograph**

Refer to "2212TW0117\_Setup Photo" file.

## **Appendix B : External Photograph**

Refer to "2212TW0117\_External Photo" file.

## **Appendix C : Internal Photograph**

Refer to "2212TW0117\_Internal Photo" file.

---

The End

---