

FCC TEST REPORT

REPORT NO.: RF920904R01

MODEL NO.: SMC2336W-AG

OEM MODEL NO.: 3CRWE154A72

RECEIVED: Sept. 4, 2003

TESTED: Oct. 10 ~ Oct. 22, 2003

APPLICANT: Arcadyan Technology Corporation

ADDRESS: 4F, No. 9, Park Avenue II, Science-based
Industrial Park, Hsinchu 330, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 186 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0

Table of Contents

1.	CERTIFICATION	6
2.	SUMMARY OF TEST RESULTS.....	7
3.	GENERAL INFORMATION	10
3.1	GENERAL DESCRIPTION OF EUT.....	10
3.2	DESCRIPTION OF TEST MODES.....	11
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	12
3.4	DESCRIPTION OF SUPPORT UNITS.....	13
4.	TEST TYPES AND RESULTS (FOR PART 802.11b & 802.11g)	14
4.1	CONDUCTED EMISSION MEASUREMENT.....	14
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	14
4.1.2	TEST INSTRUMENTS	14
4.1.3	TEST PROCEDURES.....	15
4.1.4	DEVIATION FROM TEST STANDARD	15
4.1.5	TEST SETUP	16
4.1.6	EUT OPERATING CONDITIONS.....	16
4.1.7	TEST RESULTS	17
4.2	RADIATED EMISSION MEASUREMENT.....	23
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	23
4.2.2	TEST INSTRUMENTS	24
4.2.3	TEST PROCEDURES.....	25
4.2.4	DEVIATION FROM TEST STANDARD	25
4.2.5	TEST SETUP	26
4.2.6	EUT OPERATING CONDITIONS.....	26
4.2.7	TEST RESULTS	27
4.2.8	TEST RESULTS (A)	29
4.2.9	TEST RESULTS (B)	32
4.2.10	TEST RESULTS (C).....	35
4.3	6dB BANDWIDTH MEASUREMENT	36
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	36
4.3.2	TEST INSTRUMENTS	36
4.3.3	TEST PROCEDURE	37
4.3.4	DEVIATION FROM TEST STANDARD	37
4.3.5	TEST SETUP	37
4.3.6	EUT OPERATING CONDITIONS.....	37
4.3.7	TEST RESULTS (A)	38
4.3.8	TEST RESULTS (B)	42
4.3.9	TEST RESULTS (C)	46
4.4	MAXIMUM PEAK OUTPUT POWER.....	48
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	48



4.4.2	INSTRUMENTS.....	48
4.4.1	TEST PROCEDURES.....	49
4.4.2	DEVIATION FROM TEST STANDARD.....	49
4.4.3	TEST SETUP.....	49
4.4.4	EUT OPERATING CONDITIONS.....	49
4.4.3	TEST RESULTS (A).....	50
4.4.4	TEST RESULTS (B).....	51
4.4.5	TEST RESULTS (C).....	52
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	53
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	53
4.5.2	TEST INSTRUMENTS.....	53
4.5.3	TEST PROCEDURE.....	54
4.5.4	DEVIATION FROM TEST STANDARD.....	54
4.5.5	TEST SETUP.....	54
4.5.6	EUT OPERATING CONDITION.....	54
4.5.7	TEST RESULTS (A).....	55
4.5.8	TEST RESULTS (B).....	59
4.5.9	TEST RESULTS (C).....	63
4.6	BAND EDGES MEASUREMENT.....	65
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	65
4.6.2	TEST INSTRUMENTS.....	65
4.6.3	TEST PROCEDURE.....	65
4.6.4	DEVIATION FROM TEST STANDARD.....	65
4.6.5	EUT OPERATING CONDITION.....	66
4.6.6	TEST RESULTS (A).....	66
4.6.7	TEST RESULTS (B).....	69
4.6.8	TEST RESULTS (C).....	72
4.7	ANTENNA REQUIREMENT.....	75
4.7.1	STANDARD APPLICABLE.....	75
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	75
5.	TEST TYPES AND RESULTS (FOR PART 802.11a).....	76
5.1	CONDUCTED EMISSION MEASUREMENT.....	76
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	76
5.1.2	TEST INSTRUMENTS.....	76
5.1.3	TEST PROCEDURES.....	77
5.1.4	DEVIATION FROM TEST STANDARD.....	77
5.1.5	TEST SETUP.....	78
5.1.6	EUT OPERATING CONDITIONS.....	78
5.1.7	TEST RESULTS.....	79
5.2	RADIATED EMISSION MEASUREMENT.....	81
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	81
5.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	81
5.2.3	TEST INSTRUMENTS.....	82

5.2.4	TEST PROCEDURES	83
5.2.5	DEVIATION FROM TEST STANDARD	83
5.2.6	TEST SETUP	84
5.2.7	EUT OPERATING CONDITIONS.....	84
5.2.8	TEST RESULTS	85
	FOR FREQUENCY 5.15~5.35GHZ.....	99
5.3	PEAK TRANSMIT POWER MEASUREMENT	99
5.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	99
5.3.2	TEST INSTRUMENTS	99
5.3.3	TEST PROCEDURE	100
5.3.4	DEVIATION FROM TEST STANDARD	100
5.3.5	TEST SETUP	100
5.3.6	EUT OPERATING CONDITIONS.....	100
5.3.7	TEST RESULTS	101
5.4	PEAK POWER EXCURSION MEASUREMENT	117
5.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	117
5.4.2	TEST INSTRUMENTS	117
5.4.3	TEST PROCEDURE	118
5.4.4	DEVIATION FROM TEST STANDARD	118
5.4.5	TEST SETUP	118
5.4.6	EUT OPERATING CONDITIONS.....	118
5.4.7	TEST RESULTS	119
5.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	128
5.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	128
5.5.2	TEST INSTRUMENTS	128
5.5.3	TEST PROCEDURES	129
5.5.4	DEVIATION FROM TEST STANDARD	129
5.5.5	TEST SETUP	129
5.5.6	EUT OPERATING CONDITIONS.....	129
5.5.7	TEST RESULTS	130
5.6	FREQUENCY STABILITY	139
5.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	139
5.6.2	TEST INSTRUMENTS	139
5.6.3	TEST PROCEDURE	139
5.6.4	DEVIATION FROM TEST STANDARD	140
5.6.5	TEST SETUP	140
5.6.6	EUT OPERATING CONDITION	140
5.6.7	TEST RESULTS	141
5.7	BAND EDGES MEASUREMENT	142
5.7.1	TEST INSTRUMENTS	142
5.7.2	TEST PROCEDURE	142
5.7.3	EUT OPERATING CONDITION	142
5.7.4	TEST RESULTS	142
5.8	ANTENNA REQUIREMENT	151

5.8.1	STANDARD APPLICABLE	151
5.8.2	ANTENNA CONNECTED CONSTRUCTION	151
	FOR FREQUENCY 5.725~5.850GHZ.....	152
5.9	6dB BANDWIDTH MEASUREMENT	152
5.9.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	152
5.9.2	TEST INSTRUMENTS	152
5.9.3	TEST PROCEDURE	153
5.9.4	DEVIATION FROM TEST STANDARD	153
5.9.5	TEST SETUP	153
5.9.6	EUT OPERATING CONDITIONS.....	153
5.9.7	TEST RESULTS	154
5.10	MAXIMUM PEAK OUTPUT POWER.....	161
5.10.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	161
5.10.2	INSTRUMENTS.....	161
5.10.3	TEST PROCEDURES	162
5.10.4	DEVIATION FROM TEST STANDARD	162
5.10.5	TEST SETUP	162
5.10.6	EUT OPERATING CONDITIONS.....	162
5.10.7	TEST RESULTS	163
5.11	POWER SPECTRAL DENSITY MEASUREMENT	164
5.11.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	164
5.11.2	TEST INSTRUMENTS	164
5.11.3	TEST PROCEDURE	165
5.11.4	DEVIATION FROM TEST STANDARD	165
5.11.5	TEST SETUP	165
5.11.6	EUT OPERATING CONDITION	165
5.11.7	TEST RESULTS	166
5.12	BAND EDGES MEASUREMENT.....	173
5.12.1	LIMITS OF BAND EDGES MEASUREMENT	173
5.12.2	TEST INSTRUMENTS	173
5.12.3	TEST PROCEDURE	173
5.12.4	DEVIATION FROM TEST STANDARD	173
5.12.5	EUT OPERATING CONDITION	174
5.12.6	TEST RESULTS	174
5.13	ANTENNA REQUIREMENT.....	183
5.13.1	STANDARD APPLICABLE	183
5.13.2	ANTENNA CONNECTED CONSTRUCTION	183
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION	184
7.	INFORMATION ON THE TESTING LABORATORIES.....	186



1. CERTIFICATION

PRODUCT : EZ-Stream Universal 2.4GHz/5GHz Wireless
Cardbus Adapter
BRAND NAME : SMC
MODEL NO. : SMC2336W-AG
OEM BRAND NAME : 3Com
OEM MODEL NO. : 3CRWE154A72
TEST ITEM: Engineering Sample
APPLICANT : Arcadyan Technology Corporation
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
Subpart E (Section 15.407), ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Oct. 10 ~ Oct. 22, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Rennie Wang, **DATE:** October 23, 2003
APPROVED BY: Ellis Wu, **DATE:** October 23, 2003
Rennie Wang
Ellis Wu, Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -15.94dB at 0.17MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -6.37dB at 2390.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.

For freq. 5.15 ~ 5.35GHz :

APPLIED STANDARD: 47 CFR Part 15, Subpart E			
Standard Section	Test Type	Result	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -16.94dB at 0.17MHz
15.407(b/1/2/3)(b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit Minimum passing margin is -0.14dB at 15960.00MHz
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.

For freq. 5.725 ~ 5.850GHz :

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -16.94dB at 0.17MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.02dB at 11518.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter
MODEL NO.	SMC2336W-AG
OEM MODEL NO.	3CRWE154A72
POWER SUPPLY	3.3VDC from host equipment
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	up to 54Mbps *(Turbo mode : up to 108Mbps)
FREQUENCY RANGE	802.11b and 802.11g: 2412~2462MHz 802.11a: 5.15~5.35GHz and 5.725~5.850GHz
NUMBER OF CHANNEL	802.11b and 802.11g: 11 for Normal mode / 1 for Turbo mode 802.11a: 13 for Normal mode / 5 for Turbo mode
CHANNEL SPACING	802.11b and 802.11g: 5MHz 802.11a: 20MHz for Normal mode / 40MHz for Turbo mode
OUTPUT POWER	802.11b and 802.11g: 19.45dBm 802.11a: 19.82dBm
DATA CABLE	NA
ANTENNA TYPE	Patch antenna
ANTENNA GAIN	2412~2462MHz: 0.06dBi 5.15~5.35GHz: 1.05dBi 5.725~5.850GHz: 2.26dBi
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
2. This EUT is capable of providing data rates of up to 108Mbps in Turbo Mode depending upon reception quality.
3. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

For 802.11b and 802.11g: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Data rate 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.
4. One turbo mode was presented at frequency 2437MHz.
5. Test result A is for CCK technique, test result B is for OFDM technique and test result C is for OFDM technique in Turbo mode which presented in Section 4.

For 802.11a: Twelve channels are provided to this EUT for Normal mode.

Channel	Frequency	Channel	Frequency
1	5180 MHz	8	5320 MHz
2	5200 MHz	9	5745 MHz
3	5220 MHz	10	5765 MHz
4	5240 MHz	11	5785 MHz
5	5260 MHz	12	5805 MHz
6	5280 MHz	13	5825 MHz
7	5300 MHz		

Five channels are provided to this EUT for Turbo Mode.

Channel	Frequency	Channel	Frequency
1	5210 MHz	4	5760 MHz
2	5250 MHz	5	5800 MHz
3	5290 MHz		

NOTE:

1. The EUT was tested in both normal mode (channel bandwidth of approximately 30MHz) and turbo mode (channel bandwidth of approximately 60MHz).
2. "Normal Mode" allows data rates of up to 54Mbps. The device was, therefore, tested in Normal mode at the data rate that produced the highest output power for normal mode (6Mbps).
3. "Turbo Mode" allows data rates of up to 108Mbps. At data rates higher than 12Mbps the PA gain is reduced to improve signal fidelity. The device was, therefore, tested in turbo mode at the data rate that produced the highest output power for turbo mode (12Mbps).
4. Channel 1, 4, 5, 8, 9, 11 and 13 are the closest frequencies to the band edge, were chosen for final test of Normal Mode.
5. Channel 1 ~ 5 were chosen for final test of turbo mode.



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 15, Subpart C. (15.247),
Subpart E (15.407). ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	Dell	PP01L	TW-09C748-12800-16M-5064	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY017057	FCC DoC Approved
3	MODEM	ACEEX	1414	980020514	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS (FOR PART 802.11b & 802.11g)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 20, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 18, 2003
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 29 2003
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29 2003
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May 01, 2004
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 10.
 4. The VCCI Site Registration No. is C-1312.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

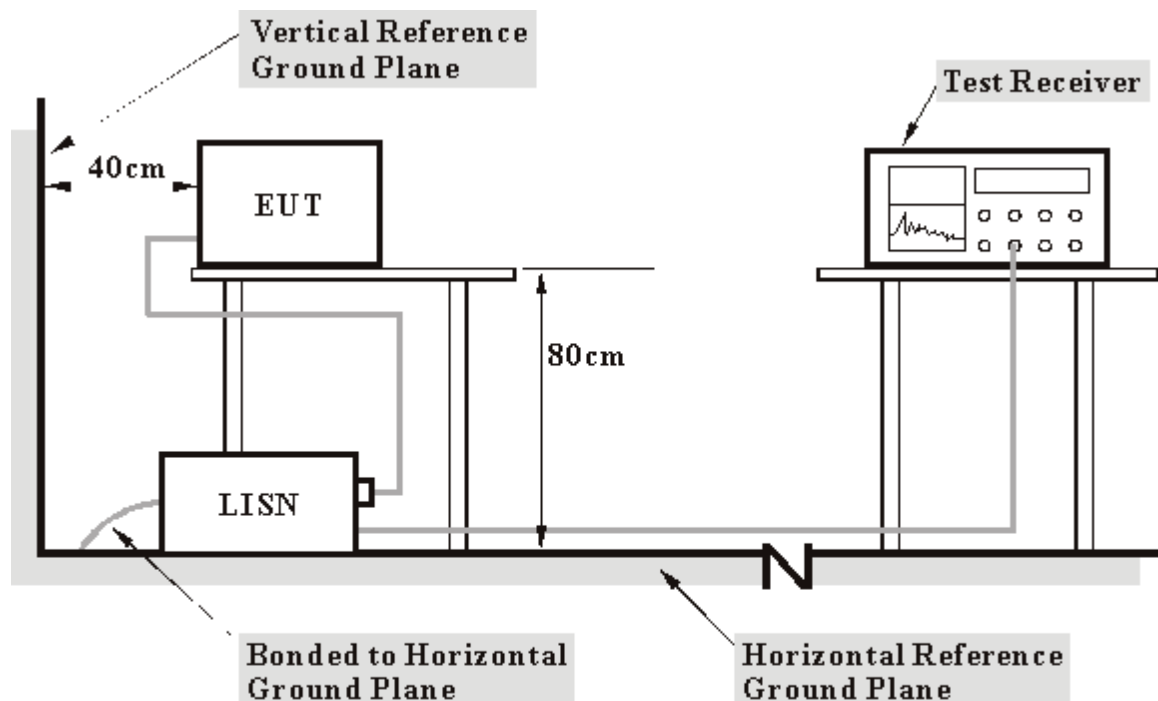

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- a. Plug the EUT into the computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.

4.1.7 TEST RESULTS

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.06	48.29	-	48.35	-	64.79	54.79	-16.45	-
2	0.232	0.06	38.85	-	38.91	-	62.38	52.38	-23.47	-
3	0.285	0.06	36.26	-	36.32	-	60.67	50.67	-24.35	-
4	3.828	0.22	28.17	-	28.39	-	56.00	46.00	-27.61	-
5	17.055	0.59	26.72	-	27.31	-	60.00	50.00	-32.69	-
6	23.109	0.80	26.58	-	27.38	-	60.00	50.00	-32.62	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

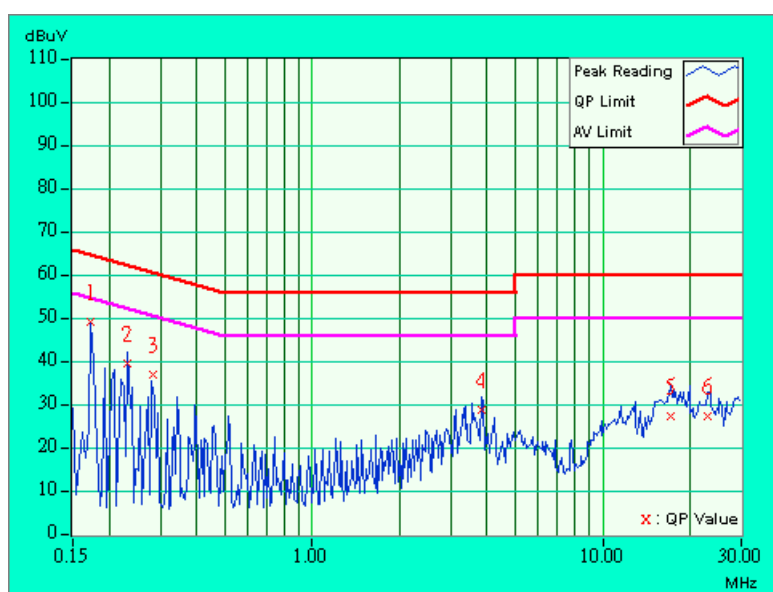

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.172	0.05	48.87	-	48.92	-	64.86	54.86	-15.94	-
2	0.228	0.05	40.54	-	40.59	-	62.52	52.52	-21.93	-
3	0.287	0.05	34.85	-	34.90	-	60.62	50.62	-25.72	-
4	3.602	0.20	29.53	-	29.73	-	56.00	46.00	-26.27	-
5	17.348	0.50	26.87	-	27.37	-	60.00	50.00	-32.63	-
6	20.105	0.51	22.99	-	23.50	-	60.00	50.00	-36.50	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

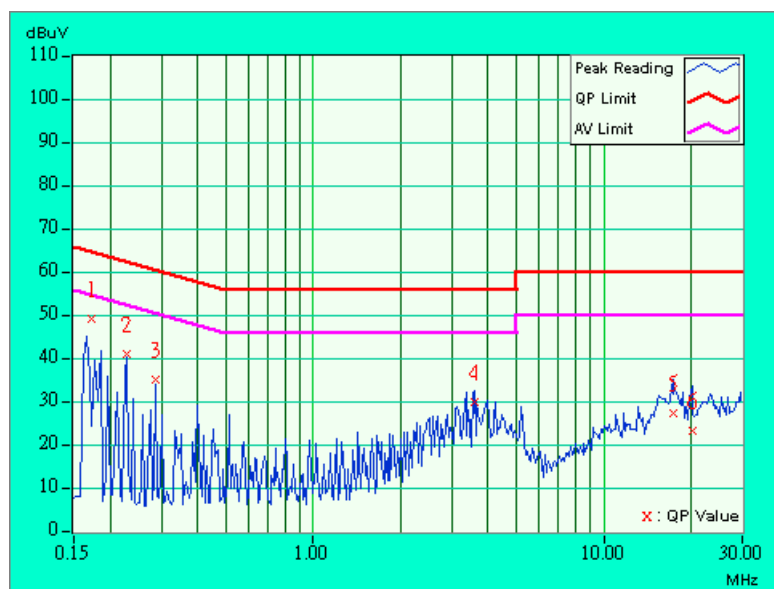

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.06	48.37	-	48.43	-	64.98	54.98	-16.56	-
2	0.228	0.06	41.07	-	41.13	-	62.52	52.52	-21.39	-
3	0.287	0.06	35.98	-	36.04	-	60.62	50.62	-24.58	-
4	0.341	0.06	30.74	-	30.80	-	59.17	49.17	-28.37	-
5	3.484	0.21	27.58	-	27.79	-	56.00	46.00	-28.21	-
6	17.707	0.60	27.34	-	27.94	-	60.00	50.00	-32.06	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

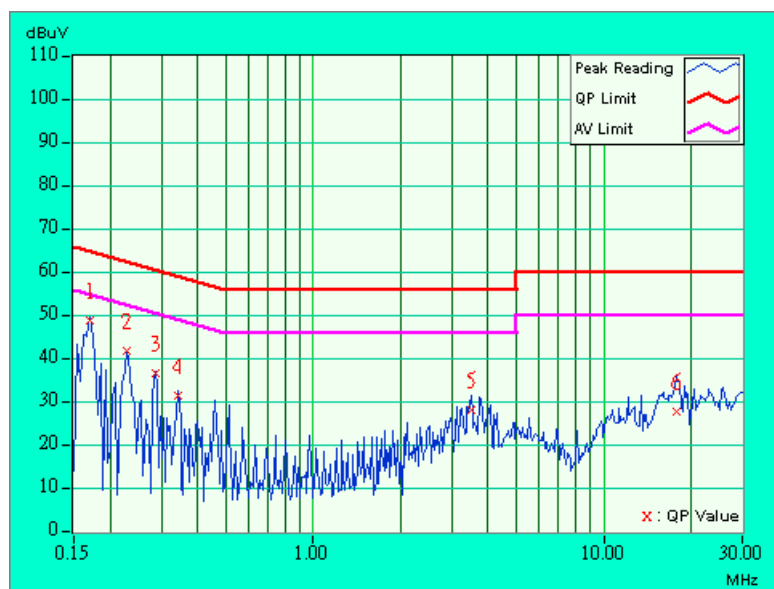

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.05	47.87	-	47.92	-	64.79	54.79	-16.87	-
2	0.228	0.05	40.09	-	40.14	-	62.52	52.52	-22.38	-
3	0.287	0.05	34.77	-	34.82	-	60.62	50.62	-25.80	-
4	0.341	0.05	30.88	-	30.93	-	59.17	49.17	-28.24	-
5	3.773	0.20	31.84	-	32.04	-	56.00	46.00	-23.96	-
6	19.754	0.51	23.94	-	24.45	-	60.00	50.00	-35.55	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

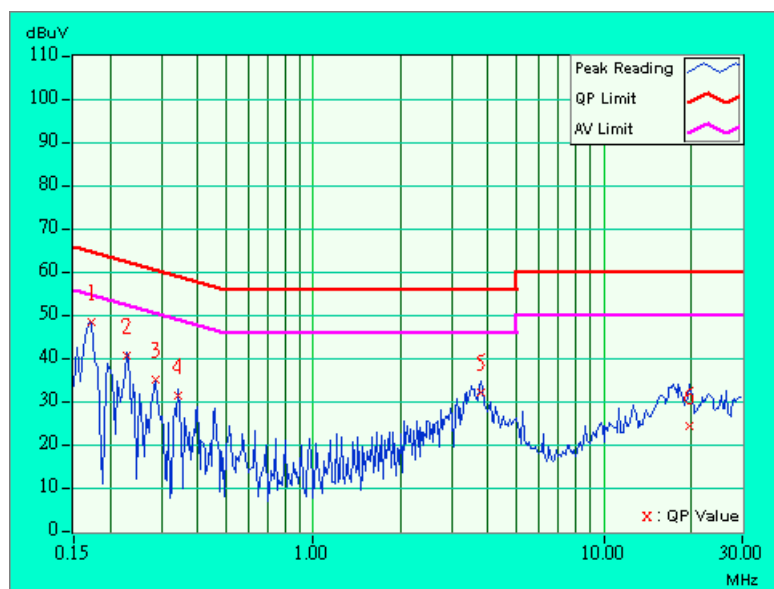

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.06	48.03	-	48.09	-	64.79	54.79	-16.71	-
2	0.227	0.06	41.35	-	41.41	-	62.55	52.55	-21.14	-
3	0.287	0.06	35.96	-	36.02	-	60.62	50.62	-24.60	-
4	0.342	0.06	31.20	-	31.26	-	59.15	49.15	-27.89	-
5	3.773	0.22	30.30	-	30.52	-	56.00	46.00	-25.48	-
6	19.578	0.63	23.30	-	23.93	-	60.00	50.00	-36.07	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

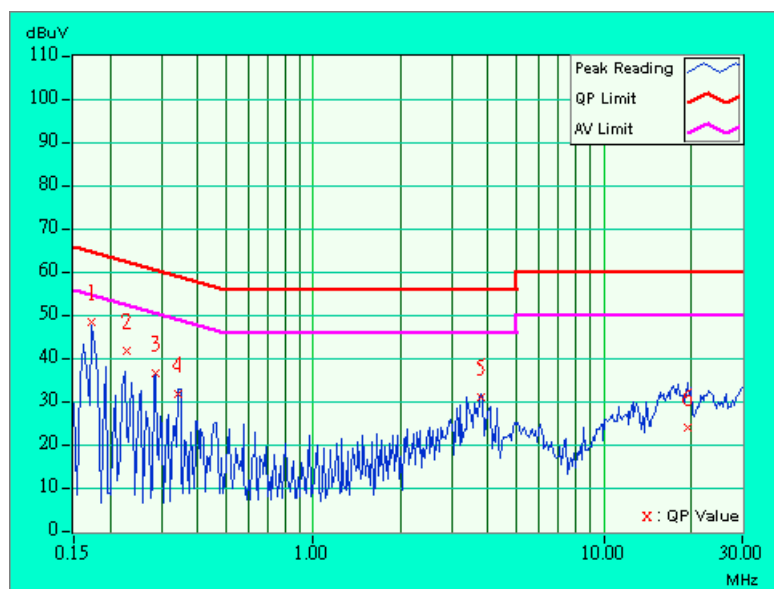

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.05	47.75	-	47.80	-	64.79	54.79	-16.99	-
2	0.228	0.05	40.11	-	40.16	-	62.52	52.52	-22.36	-
3	0.289	0.05	32.58	-	32.63	-	60.55	50.55	-27.92	-
4	0.345	0.05	30.13	-	30.18	-	59.07	49.07	-28.89	-
5	3.715	0.20	29.49	-	29.69	-	56.00	46.00	-26.31	-
6	17.777	0.50	26.89	-	27.39	-	60.00	50.00	-32.61	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

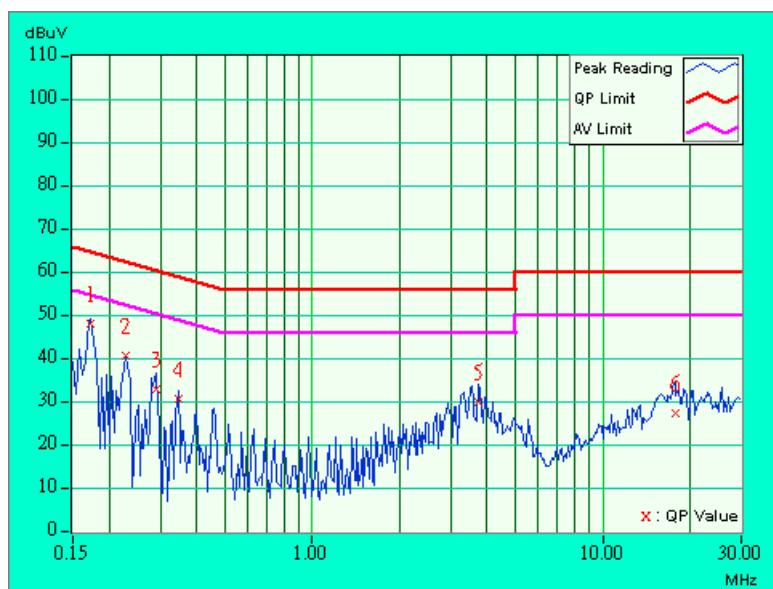

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Preamplifier	8447D	2432A03504	June 10, 2004
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 11, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
Schwarzbeck Antenna	VULB9168	137	Apr. 03, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	June 30, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23, 2004
ADT. Turn Table	TT100	0306	NA
ADT. Tower	AT100	0306	NA
Software	ADT_Radiated_V5.14	NA	NA
TIMES RF cable	LL142	CABLE-CH6-01	Apr. 30, 2004

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Chamber No. 6.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

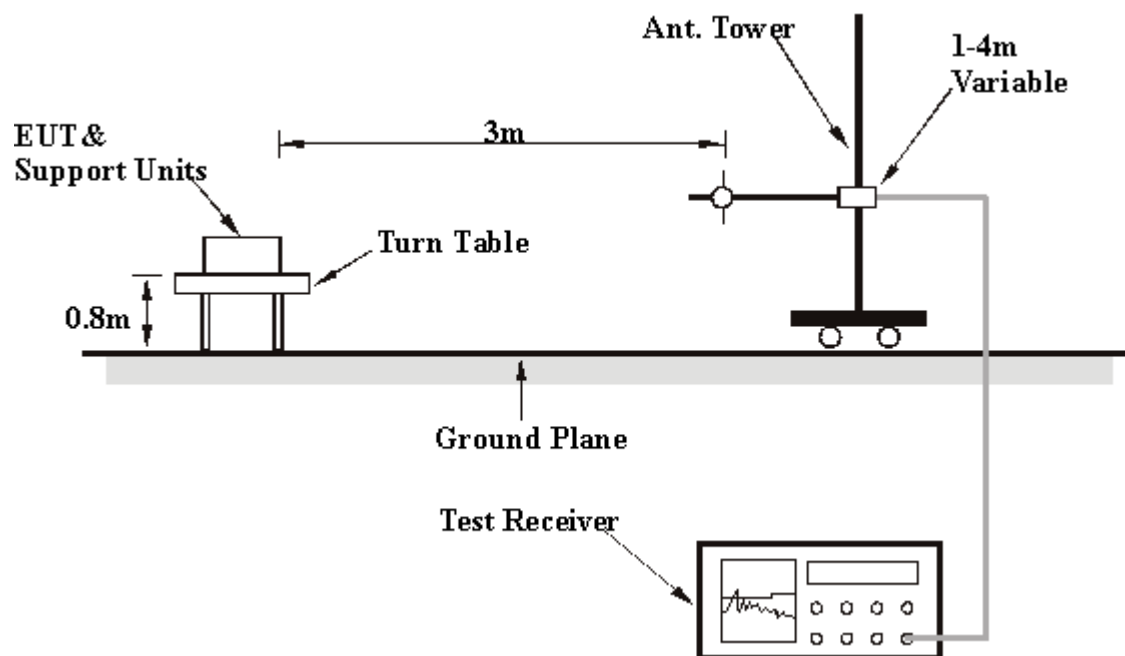

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 55%RH, 991hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	131.08	28.89 QP	43.50	-14.61	3.00 H	94	15.77	13.12
2	243.83	35.21 QP	46.00	-10.79	1.25 H	130	21.96	13.25
3	300.20	35.92 QP	46.00	-10.08	1.25 H	277	20.82	15.10
4	331.30	31.02 QP	46.00	-14.98	1.00 H	178	15.10	15.92
5	393.51	34.58 QP	46.00	-11.42	1.00 H	349	17.03	17.54
6	459.60	35.43 QP	46.00	-10.57	2.00 H	121	15.99	19.44
7	527.64	34.70 QP	46.00	-11.30	1.75 H	208	14.08	20.62
8	566.51	31.04 QP	46.00	-14.96	1.50 H	154	9.43	21.61
9	601.50	34.42 QP	46.00	-11.58	1.25 H	259	11.80	22.62
10	634.55	30.09 QP	46.00	-15.91	1.25 H	151	7.05	23.05
11	704.53	34.33 QP	46.00	-11.67	1.25 H	226	10.23	24.10
12	735.63	34.41 QP	46.00	-11.59	1.00 H	205	9.45	24.96

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 55%RH, 991hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	78.60	29.31 QP	40.00	-10.69	1.00 V	166	19.66	9.64
2	140.80	33.58 QP	43.50	-9.92	1.25 V	79	19.79	13.79
3	201.06	33.79 QP	43.50	-9.71	2.00 V	91	22.55	11.24
4	255.49	33.36 QP	46.00	-12.64	1.75 V	16	19.85	13.51
5	300.20	35.61 QP	46.00	-10.39	1.50 V	166	20.51	15.10
6	360.46	34.37 QP	46.00	-11.63	1.25 V	310	17.68	16.69
7	420.72	35.34 QP	46.00	-10.66	1.00 V	151	16.98	18.37
8	459.60	38.66 QP	46.00	-7.34	1.00 V	190	19.22	19.44
9	490.70	31.00 QP	46.00	-15.00	1.00 V	142	11.13	19.88
10	523.75	33.41 QP	46.00	-12.59	1.25 V	172	12.87	20.54
11	566.51	30.48 QP	46.00	-15.52	1.00 V	172	8.87	21.61
12	735.63	31.59 QP	46.00	-14.41	1.00 V	46	6.63	24.96

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.8 TEST RESULTS (A)

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa	TESTED BY:	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.98 PK	74.00	-22.02	1.32 H	274	22.39	29.59
1	2390.00	44.39 AV	54.00	-9.61	1.32 H	274	14.80	29.59
2	*2412.00	111.30 PK			1.32 H	274	81.64	29.66
2	*2412.00	103.71 AV			1.32 H	274	74.05	29.66
3	4824.00	50.96 PK	74.00	-23.04	1.09 H	313	15.71	35.25
3	4824.00	36.50 AV	54.00	-17.50	1.09 H	313	1.25	35.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	43.24 PK	74.00	-30.76	1.57 V	268	13.65	29.59
1	2390.00	35.96 AV	54.00	-18.04	1.57 V	268	6.37	29.59
2	*2412.00	102.56 PK			1.57 V	268	72.90	29.66
2	*2412.00	95.28 AV			1.57 V	268	65.62	29.66
3	4824.00	55.41 PK	74.00	-18.59	1.57 V	268	20.16	35.25
3	4824.00	41.15 AV	54.00	-12.85	1.57 V	268	5.90	35.25

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	111.53 PK			1.21 H	268	81.79	29.74
1	*2437.00	103.26 AV			1.21 H	268	73.52	29.74
2	4874.00	53.58 PK	74.00	-20.42	1.23 H	135	18.11	35.46
2	4874.00	39.48 AV	54.00	-14.52	1.23 H	135	4.01	35.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.88 PK			1.82 V	271	71.14	29.74
1	*2437.00	93.76 AV			1.82 V	271	64.02	29.74
2	4874.00	55.87 PK	74.00	-18.13	1.82 V	271	20.40	35.46
2	4874.00	41.18 AV	54.00	-12.82	1.82 V	271	5.71	35.46

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.07 PK			1.28 H	274	80.24	29.83
1	*2462.00	102.03 AV			1.28 H	274	72.20	29.83
2	2483.50	49.66 PK	74.00	-24.34	1.28 H	274	19.76	29.90
2	2483.50	41.62 AV	54.00	-12.38	1.28 H	274	11.72	29.90
3	4924.00	52.95 PK	74.00	-21.05	1.59 H	143	17.28	35.67
3	4924.00	39.27 AV	54.00	-14.73	1.59 H	143	3.60	35.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.69 PK			1.25 V	54	71.86	29.83
1	*2462.00	93.78 AV			1.25 V	54	63.95	29.83
2	2483.50	41.28 PK	74.00	-32.72	1.25 V	54	11.38	29.90
2	2483.50	33.37 AV	54.00	-20.63	1.25 V	54	3.47	29.90
3	4924.00	57.32 PK	74.00	-16.68	1.72 V	238	21.65	35.67
3	4924.00	42.56 AV	54.00	-11.44	1.72 V	238	6.89	35.67

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.2.9 TEST RESULTS (B)

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 50%RH, 991hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.74 PK	74.00	-8.26	1.01 H	59	34.26	31.48
1	2390.00	46.90 AV	54.00	-7.10	1.01 H	59	15.42	31.48
2	*2412.00	104.41 PK			1.01 H	59	72.90	31.51
2	*2412.00	93.91 AV			1.01 H	59	62.40	31.51
3	4824.00	55.23 PK	74.00	-18.77	1.00 H	25	17.37	37.86
3	4824.00	41.25 AV	54.00	-12.75	1.00 H	25	3.39	37.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.09 PK	74.00	-12.91	1.04 V	290	29.61	31.48
1	2390.00	42.58 AV	54.00	-11.42	1.04 V	290	11.10	31.48
2	*2412.00	99.76 PK			1.04 V	290	68.25	31.51
2	*2412.00	89.58 AV			1.04 V	290	58.07	31.51
3	4824.00	62.35 PK	74.00	-11.65	1.08 V	122	24.49	37.86
3	4824.00	44.38 AV	54.00	-9.62	1.08 V	122	6.52	37.86

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 50%RH, 991hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.54 PK			1.04 H	54	72.00	31.54
1	*2437.00	93.86 AV			1.04 H	54	62.32	31.54
2	4874.00	55.10 PK	74.00	-18.90	1.00 H	14	17.16	37.94
2	4874.00	41.63 AV	54.00	-12.37	1.00 H	14	3.69	37.94

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	98.27 PK			1.04 V	292	66.73	31.54
1	*2437.00	87.62 AV			1.04 V	292	56.08	31.54
2	4874.00	56.32 PK	74.00	-17.68	1.14 V	241	18.38	37.94
2	4874.00	41.32 AV	54.00	-12.68	1.14 V	241	3.38	37.94

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 50%RH, 991hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.64 PK			1.21 H	53	70.07	31.57
1	*2462.00	91.53 AV			1.21 H	53	59.96	31.57
2	2483.50	54.89 PK	74.00	-19.11	1.21 H	53	23.29	31.60
2	2483.50	44.78 AV	54.00	-9.22	1.21 H	53	13.18	31.60
3	4924.00	56.36 PK	74.00	-17.64	1.24 H	273	18.34	38.02
3	4924.00	43.00 AV	54.00	-11.00	1.24 H	273	4.98	38.02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	97.44 PK			1.00 V	189	65.87	31.57
1	*2462.00	86.93 AV			1.00 V	189	55.36	31.57
2	2483.50	50.69 PK	74.00	-23.31	1.00 V	189	19.09	31.60
3	4924.00	60.10 PK	74.00	-13.90	1.42 V	273	22.08	38.02
3	4924.00	42.69 AV	54.00	-11.31	1.42 V	273	4.67	38.02

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.2.10 TEST RESULTS (C)

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 60%RH, 991hPa	TESTED BY:	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.03 PK	74.00	-16.97	1.26 H	273	24.23	32.80
1	2390.00	47.63 AV	54.00	-6.37	1.26 H	273	14.83	32.80
2	*2437.00	105.20 PK			1.26 H	273	72.13	33.07
2	*2437.00	95.63 AV			1.26 H	273	62.56	33.07
3	2483.50	55.20 PK	74.00	-18.80	1.26 H	273	21.89	33.31
3	2483.50	45.62 AV	54.00	-8.38	1.26 H	273	12.31	33.31
4	4874.00	55.63 PK	74.00	-18.37	1.38 H	220	16.49	39.14
4	4874.00	35.63 AV	54.00	-18.37	1.38 H	220	-3.51	39.14

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.32 PK	74.00	-21.68	1.63 V	20	19.52	32.80
1	2390.00	41.32 AV	54.00	-12.68	1.63 V	20	8.52	32.80
2	*2437.00	97.52 PK			1.63 V	20	64.45	33.07
2	*2437.00	91.32 AV			1.63 V	20	58.25	33.07
3	2483.50	49.96 PK	74.00	-24.04	1.63 V	20	16.65	33.31
4	4874.00	50.24 PK	74.00	-23.76	1.10 V	52	11.10	39.14

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS (A)


EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 55%RH, 991hPa
TESTED BY: Martin Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.36	0.5	PASS
6	2437	11.64	0.5	PASS
11	2462	12.64	0.5	PASS


CH1

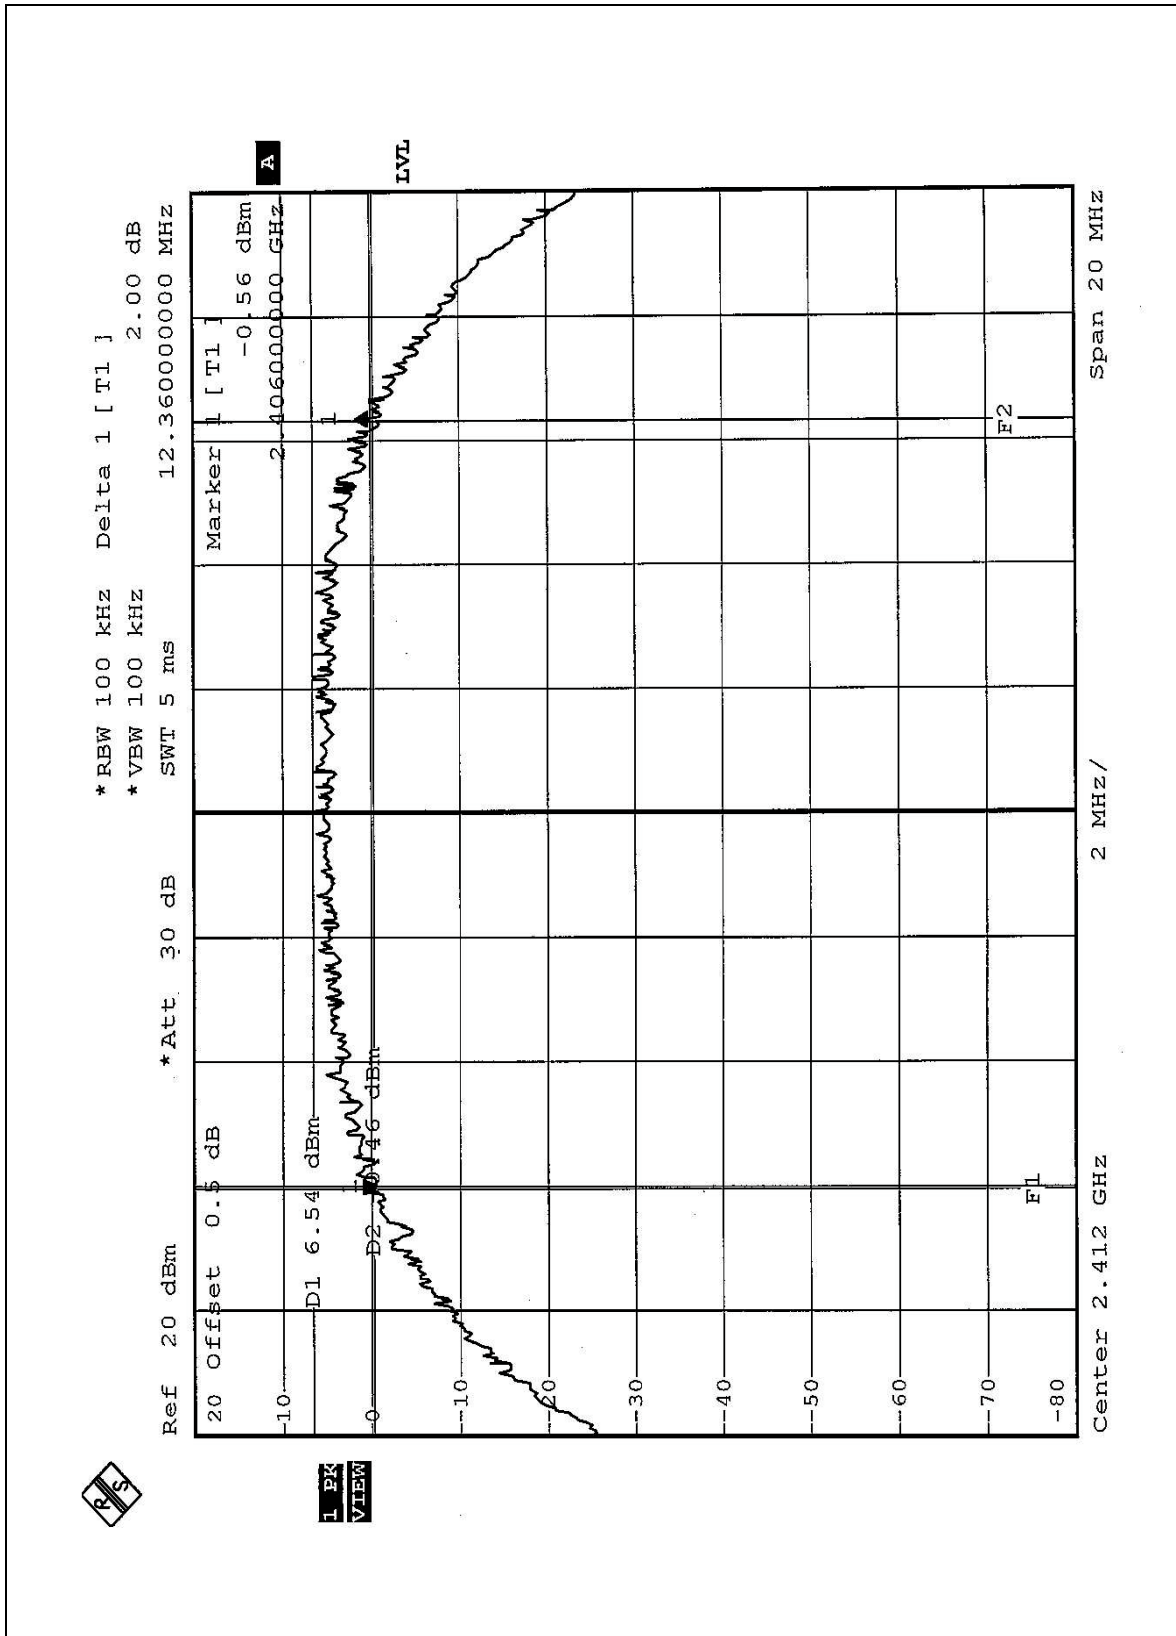

CH6

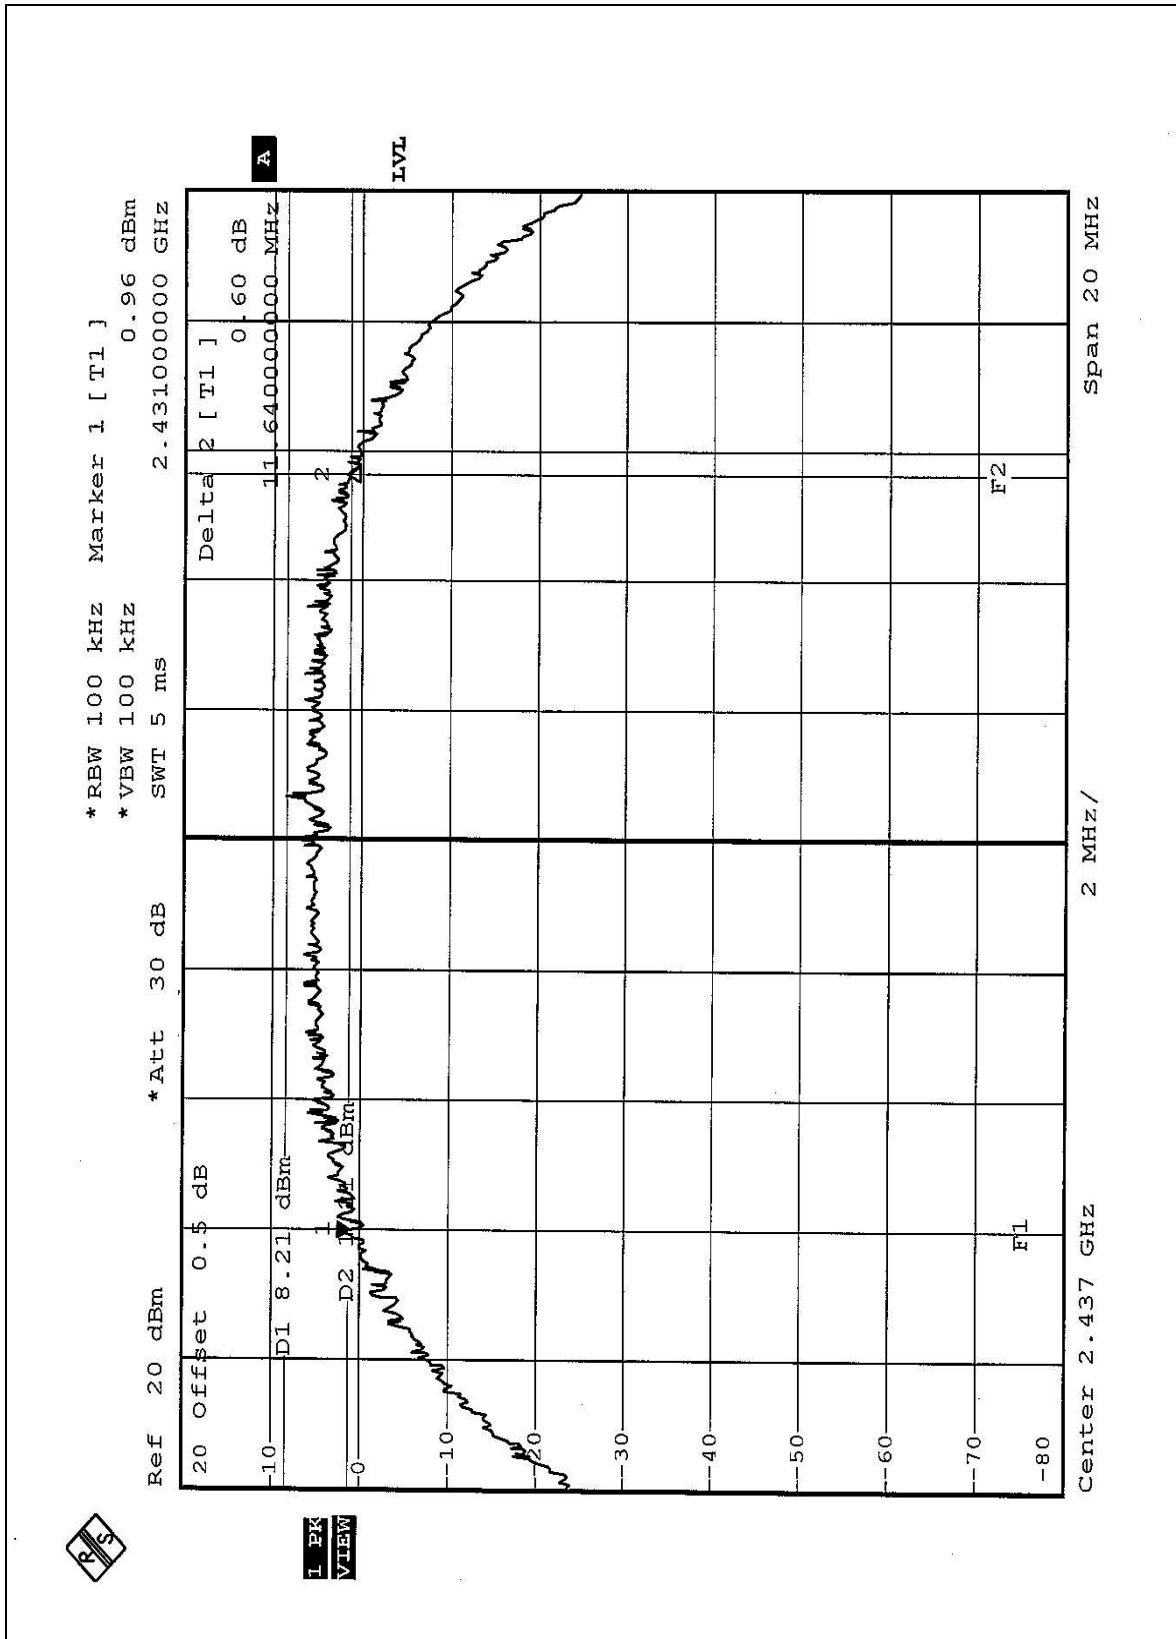

CH11

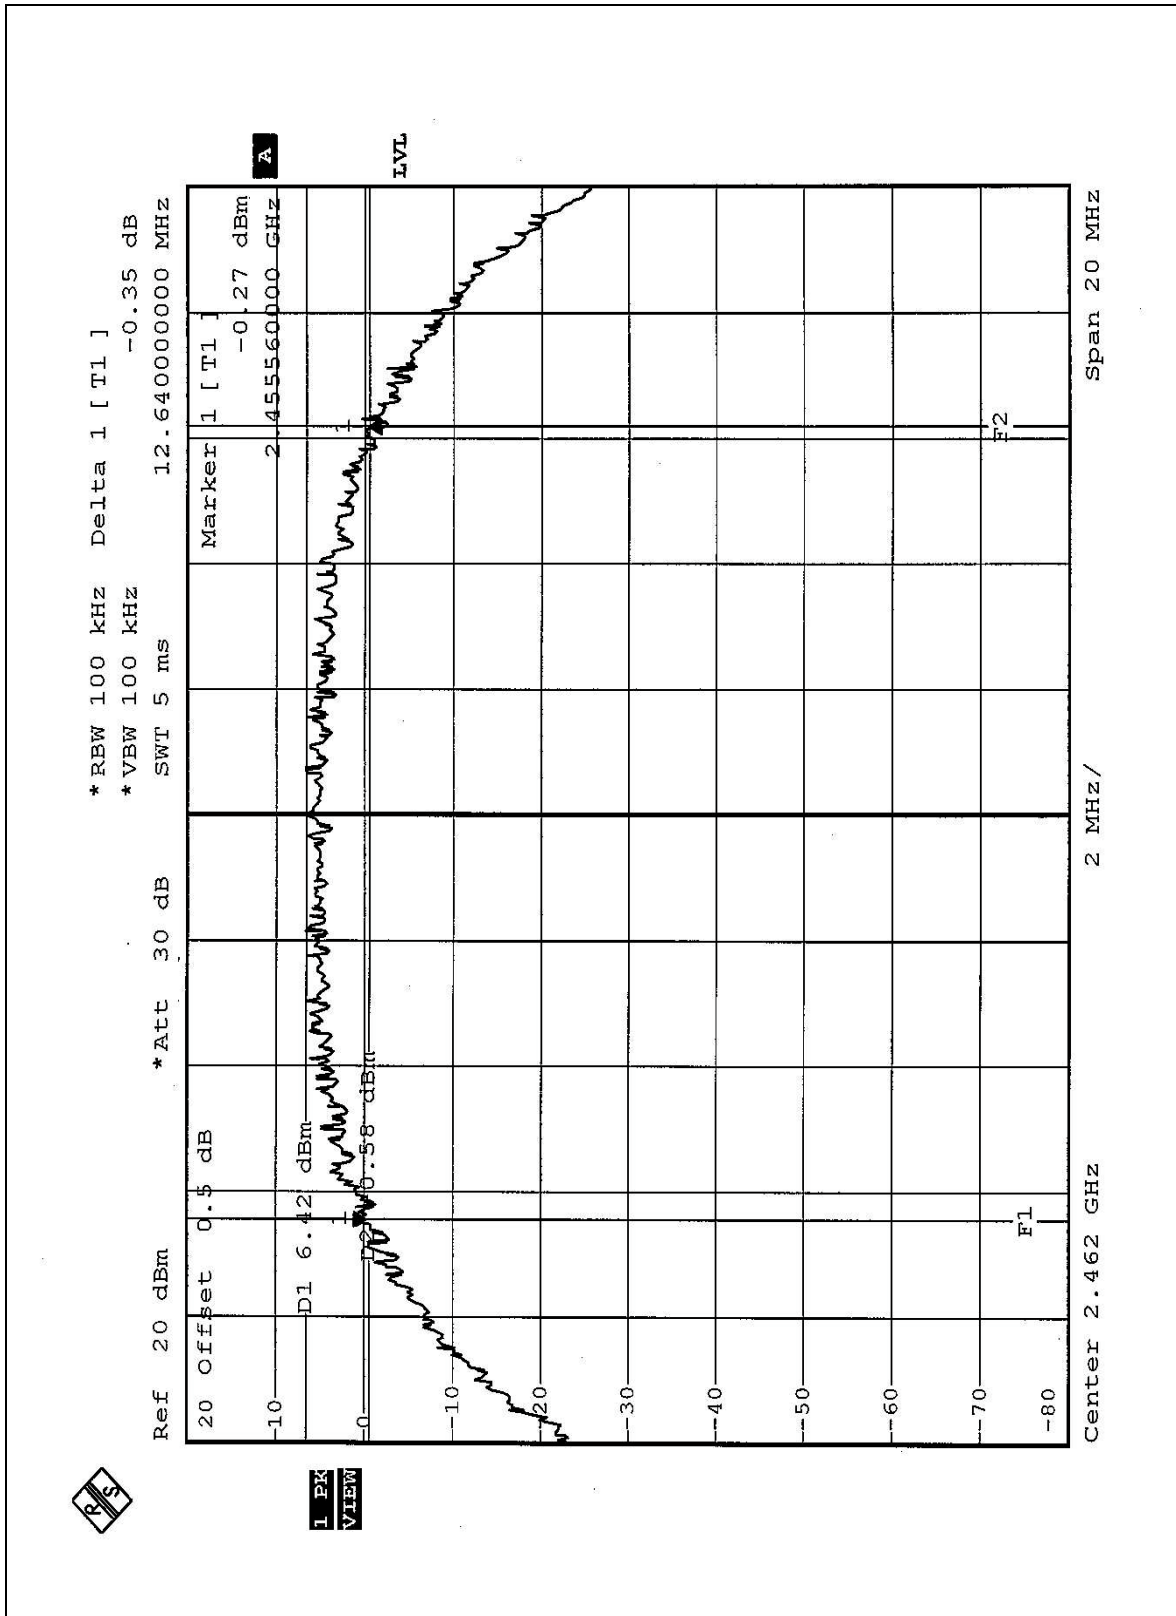




4.3.8 TEST RESULTS (B)


EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 55%RH, 991hPa
TESTED BY: Martin Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.28	0.5	PASS
6	2437	16.32	0.5	PASS
11	2462	16.40	0.5	PASS


CH1

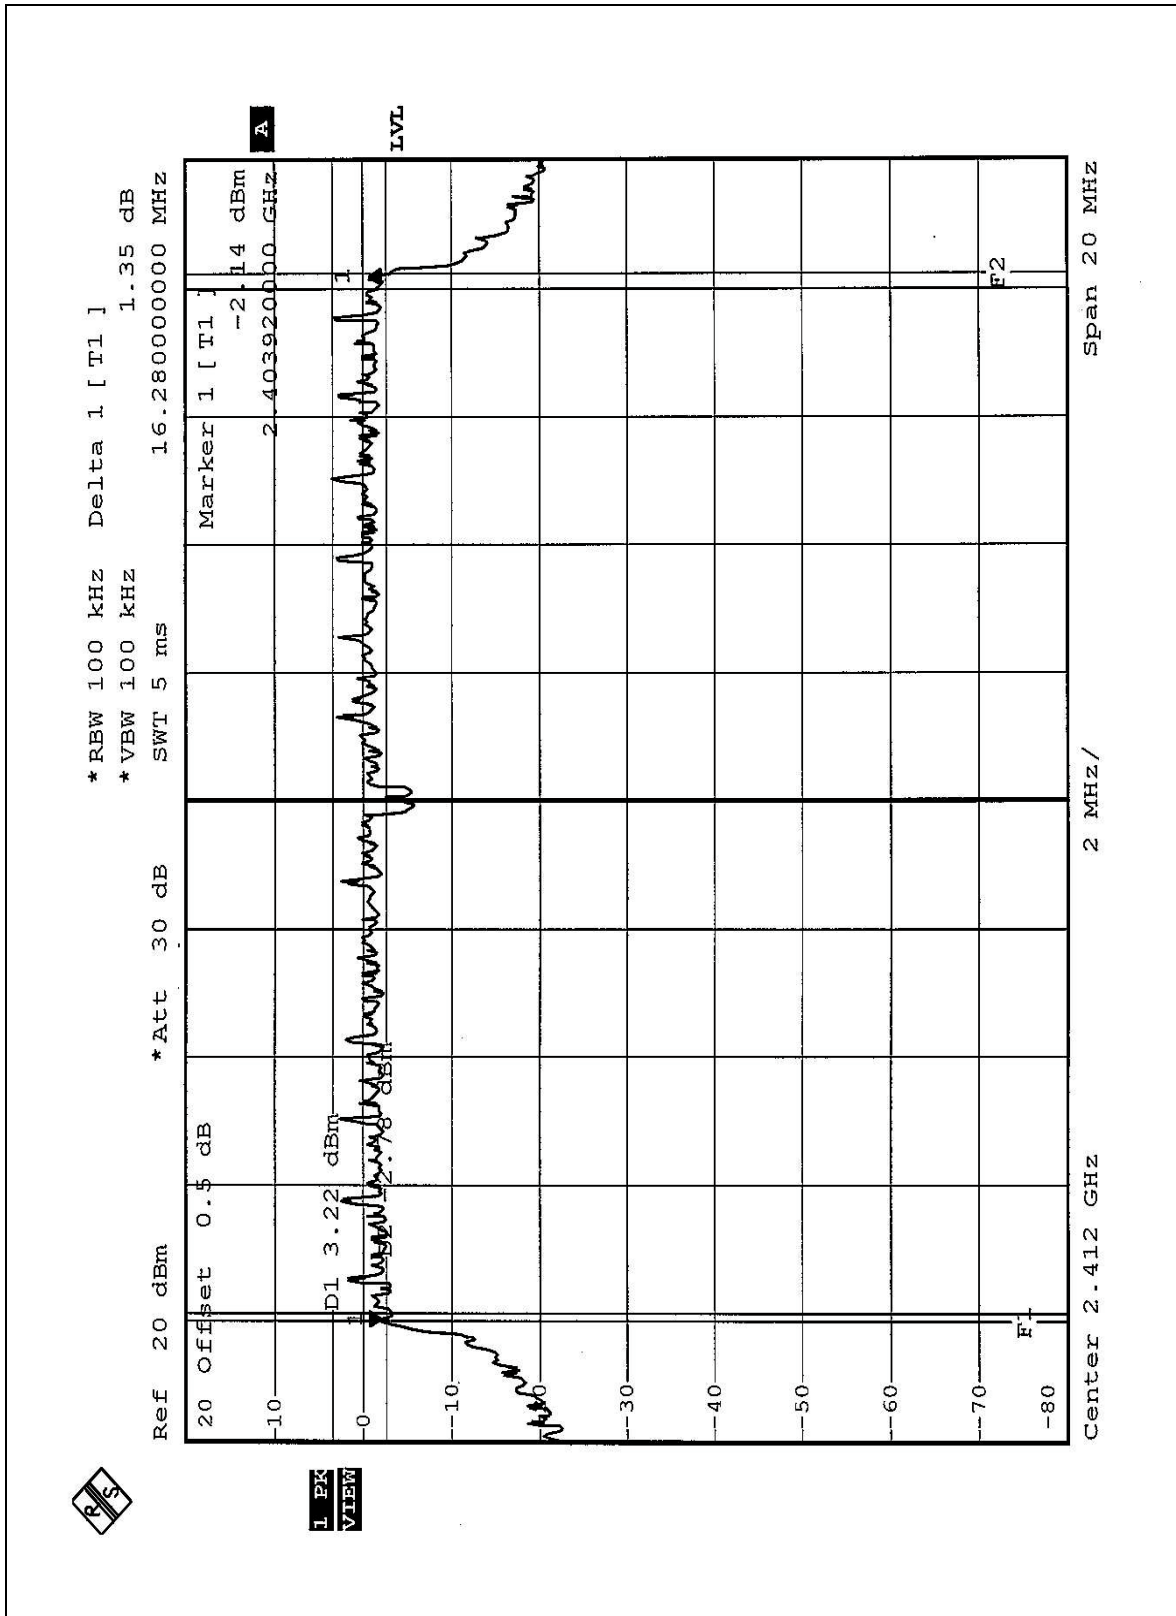

CH6

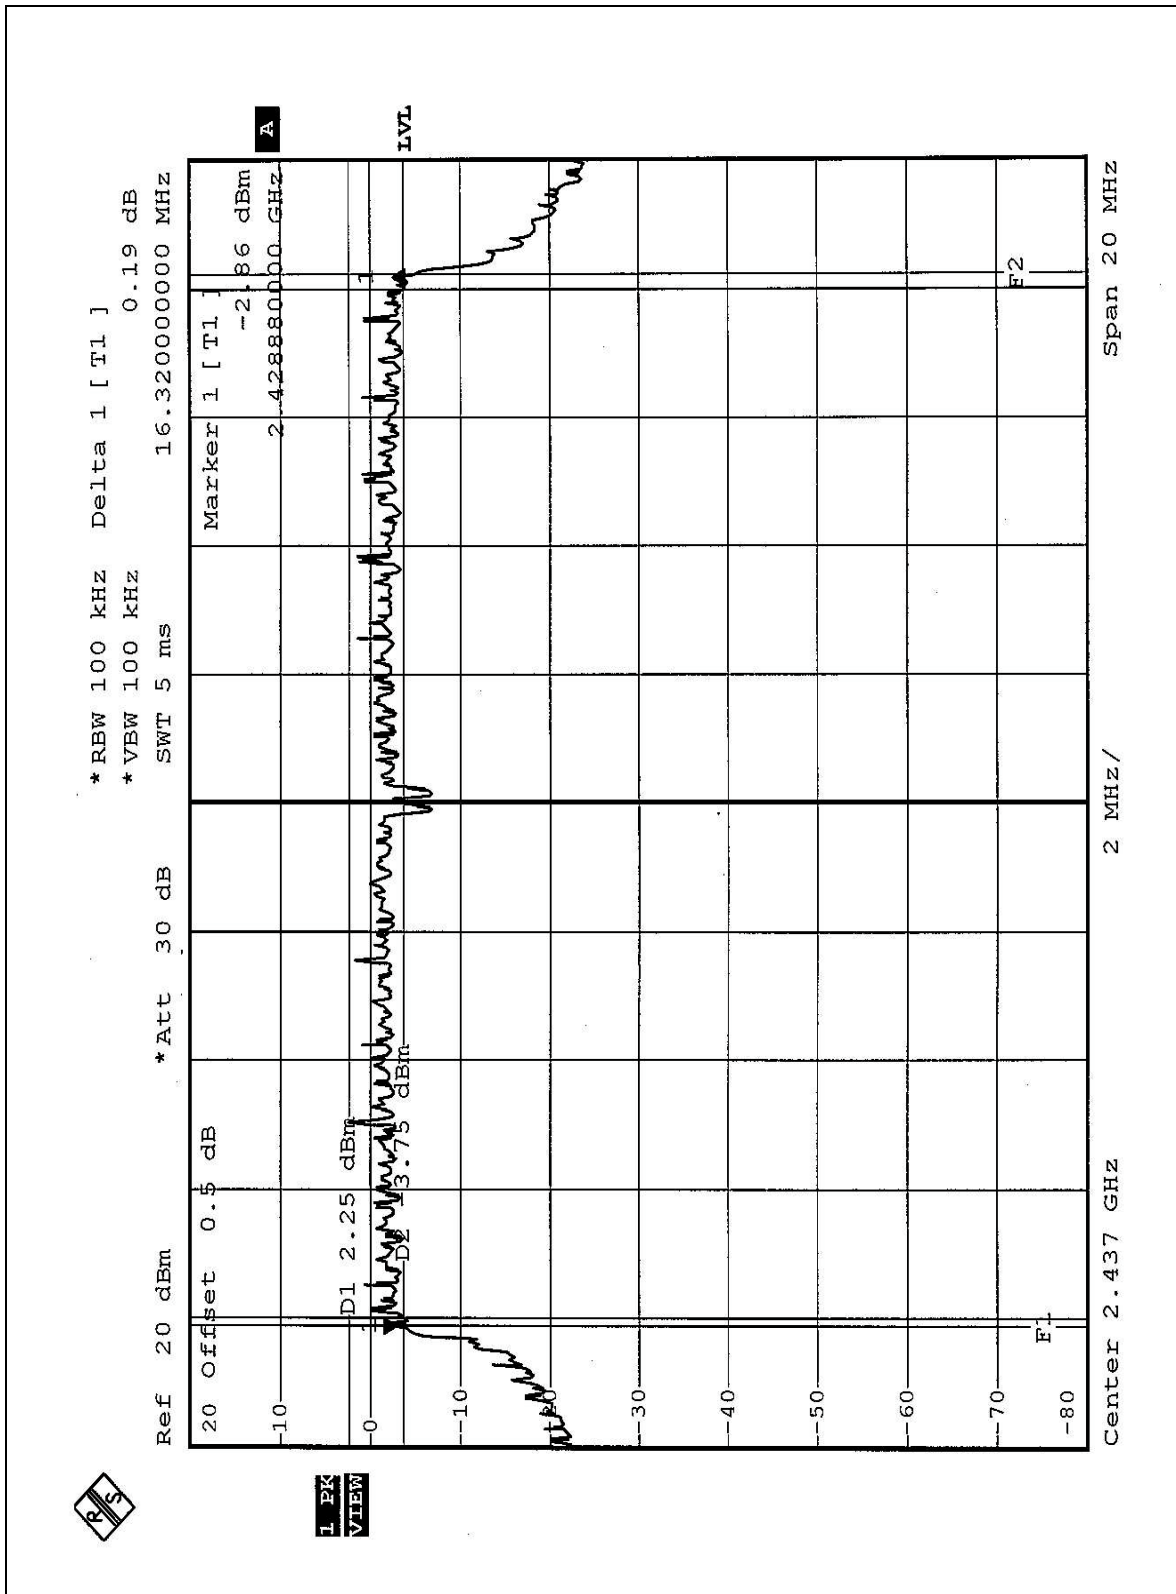

CH11

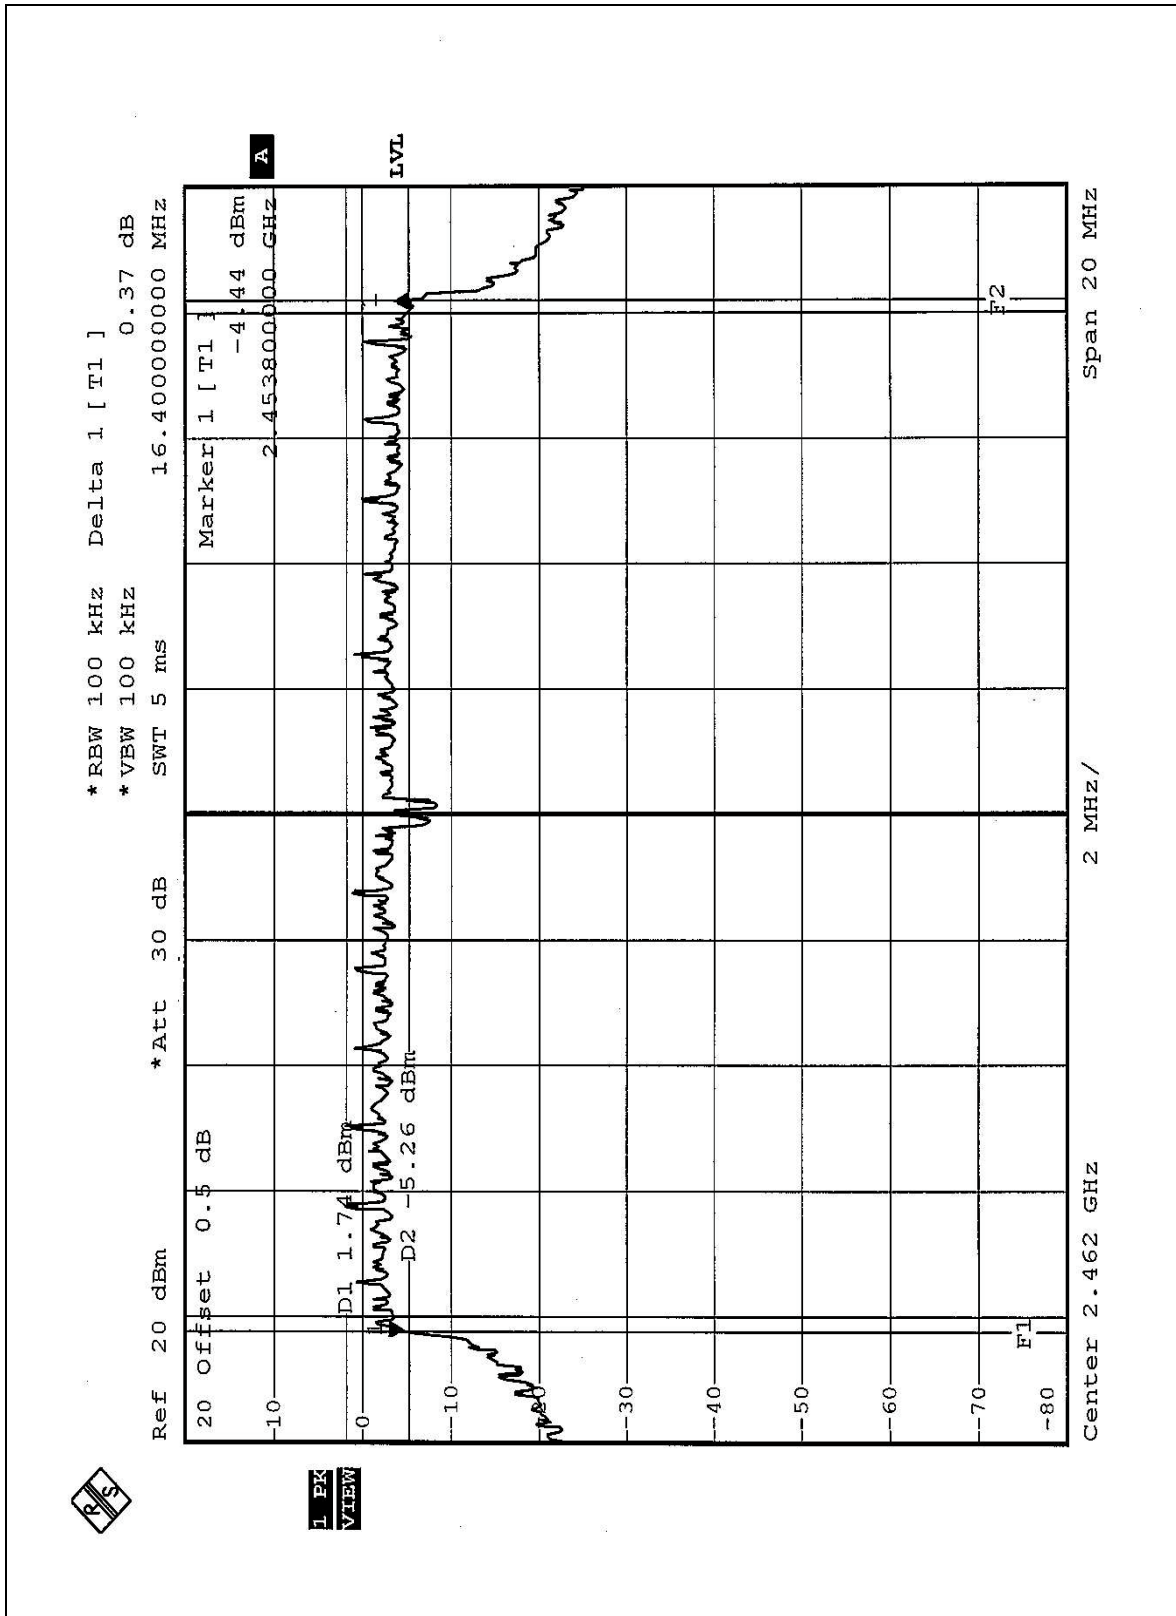




4.3.9 TEST RESULTS (C)

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	32.72	0.5	PASS

CH6

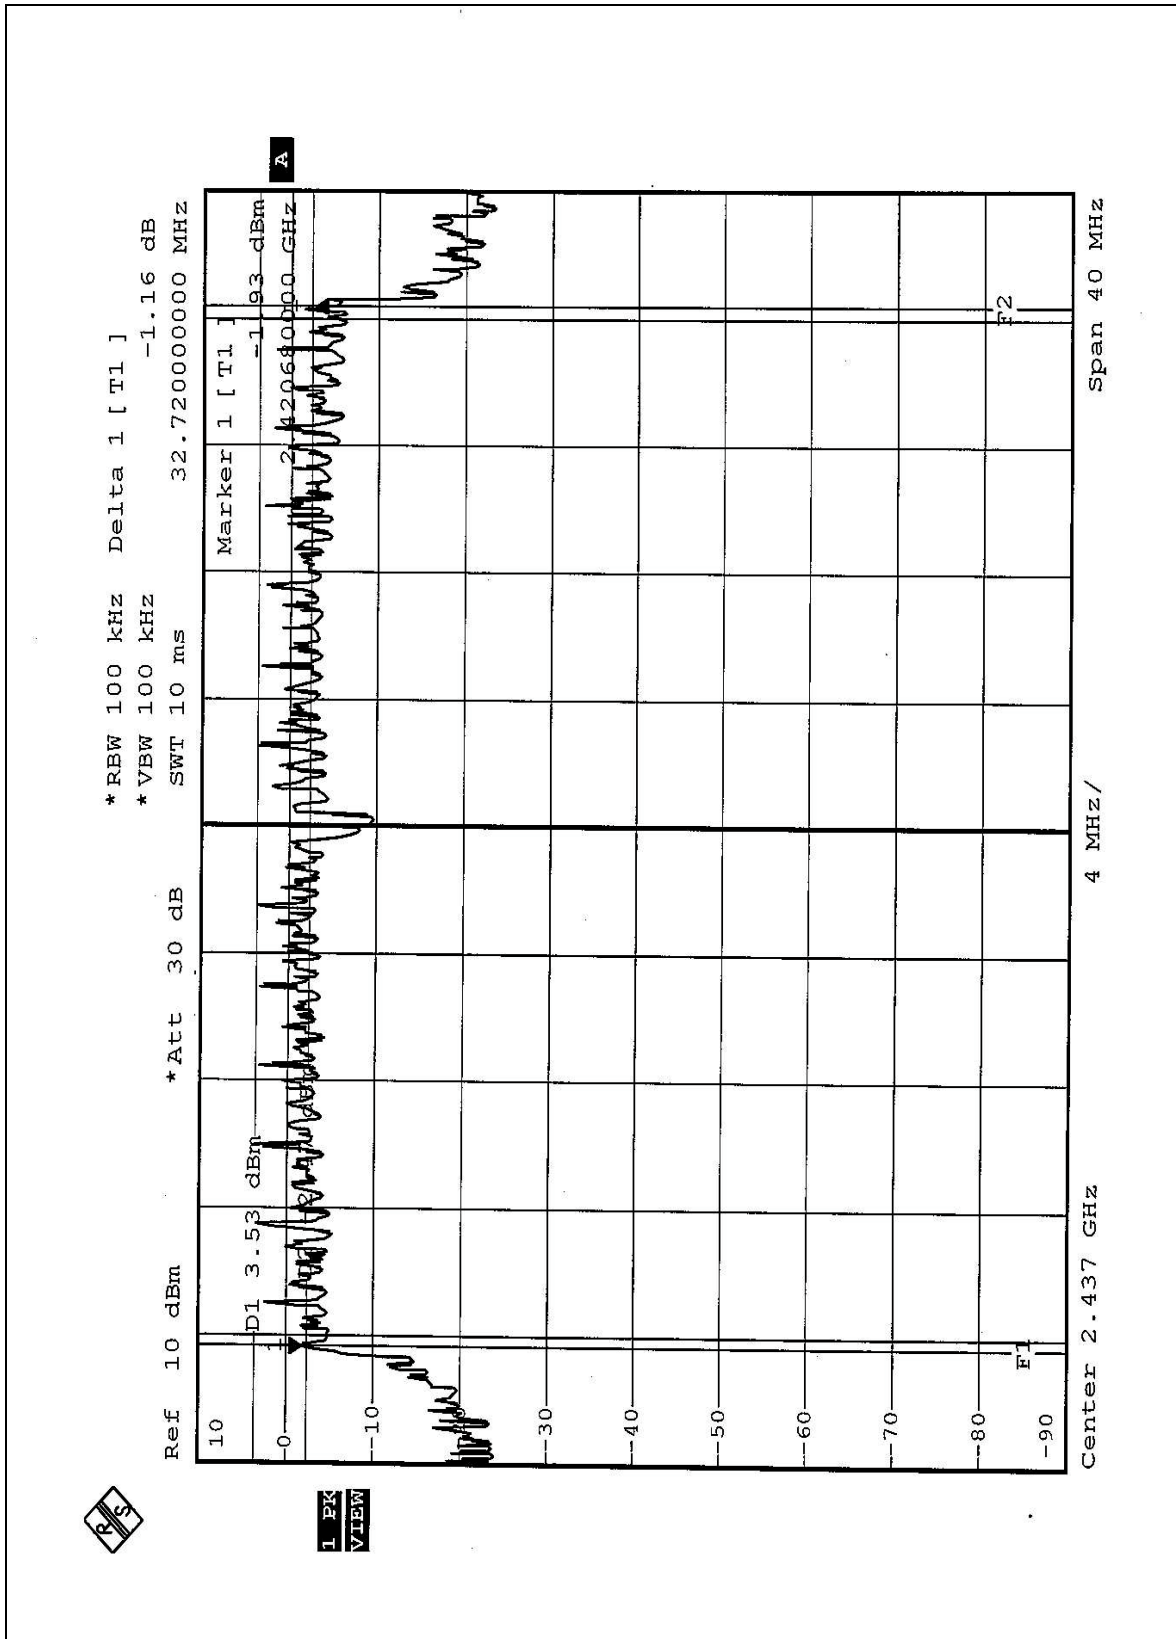

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..

.

4.4.1 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.2 DEVIATION FROM TEST STANDARD

No deviation

4.4.3 TEST SETUP



4.4.4 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.3 TEST RESULTS (A)

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 55%RH, 991hPa
TESTED BY: Martin Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	18.45	30	PASS
6	2437	19.27	30	PASS
11	2462	19.45	30	PASS



4.4.4 TEST RESULTS (B)

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 55%RH, 991hPa
TESTED BY: Martin Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	19.11	30	PASS
6	2437	19.04	30	PASS
11	2462	18.96	30	PASS



4.4.5 TEST RESULTS (C)

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 55%RH, 991hPa
TESTED BY: Martin Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	19.10	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION


Same as Item 4.3.6

4.5.7 TEST RESULTS (A)


EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 55%RH, 991hPa
TESTED BY: Martin Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-3.83	8	PASS
6	2437	-4.97	8	PASS
11	2462	-4.83	8	PASS


CH1

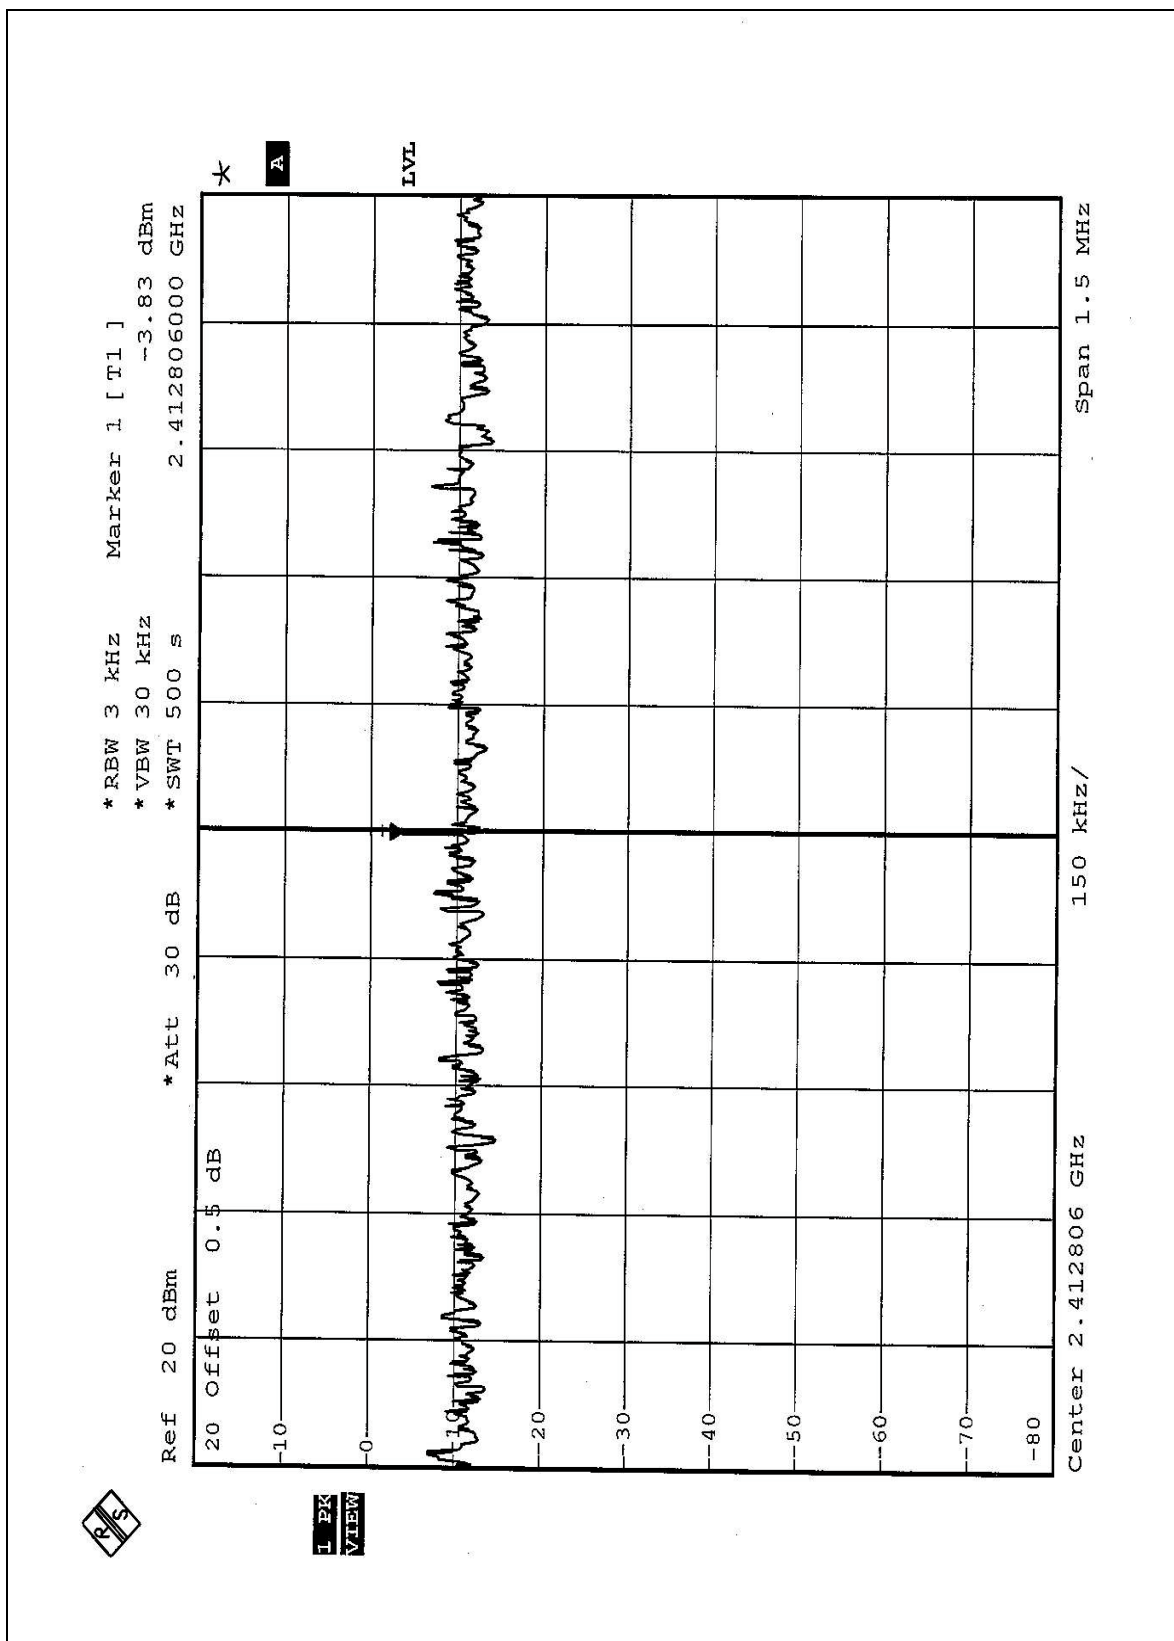

CH6

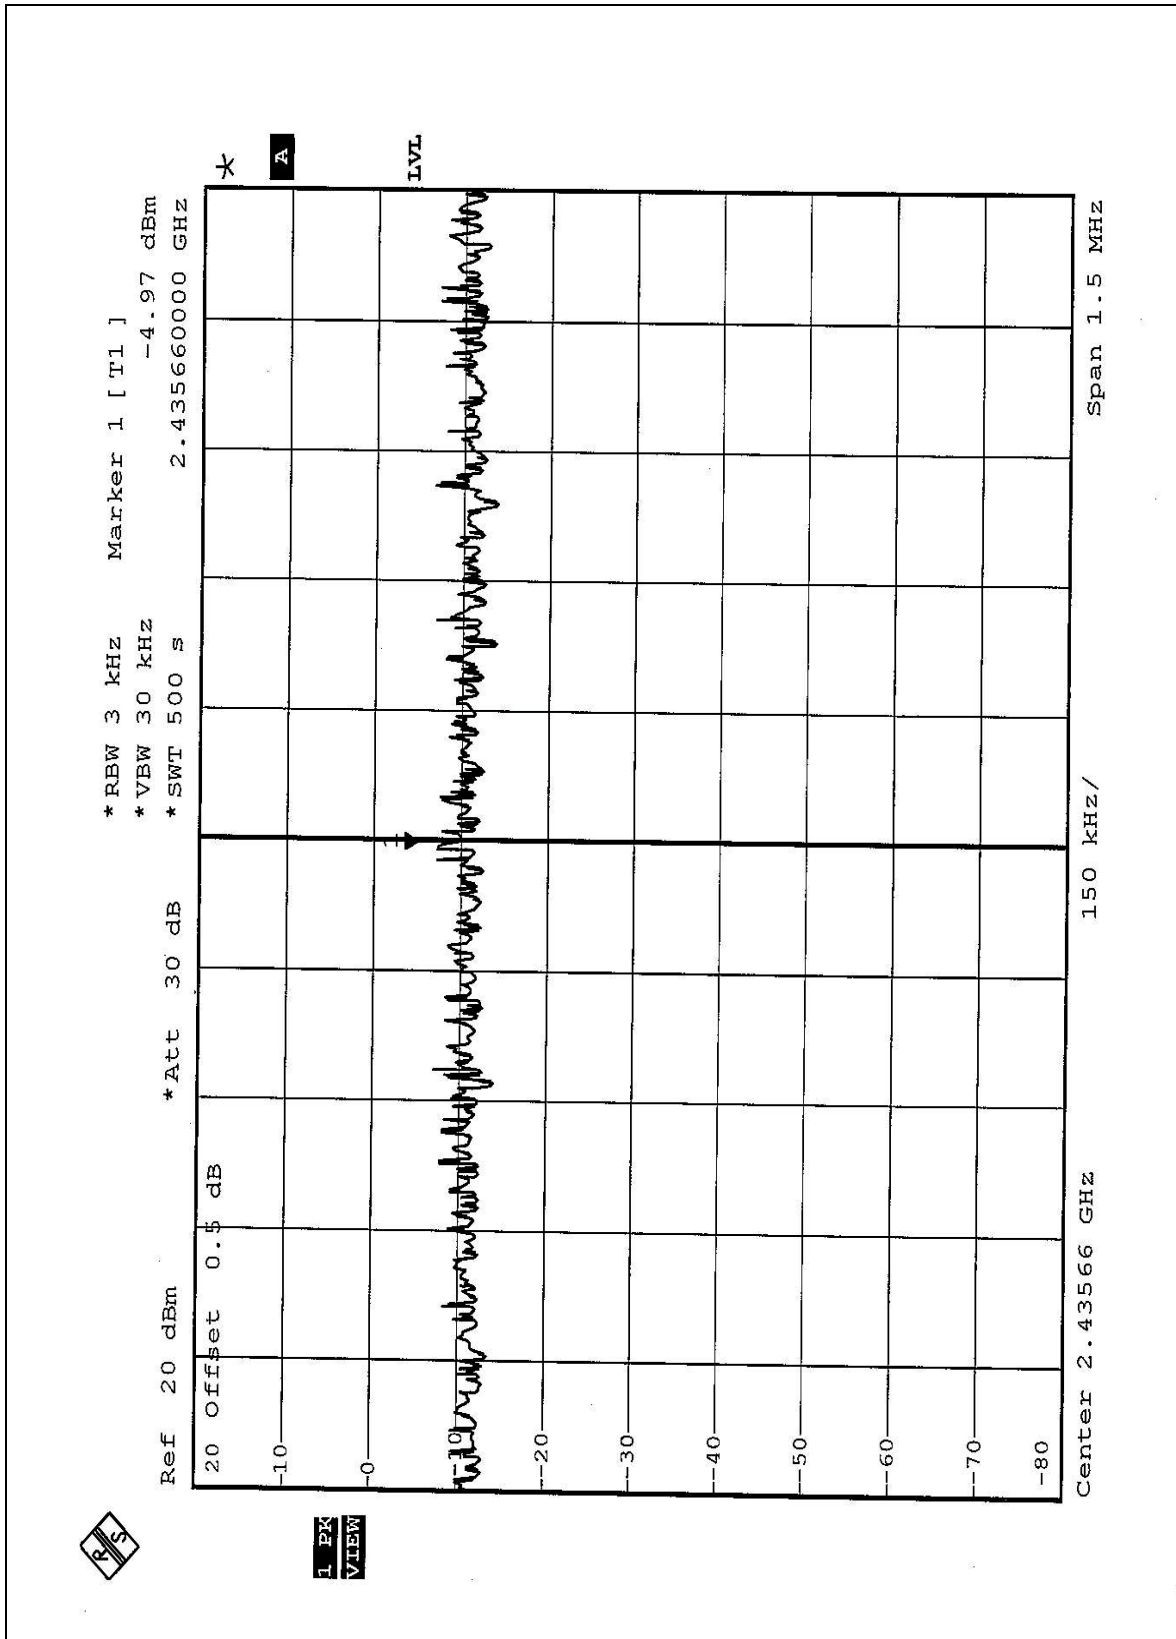

CH11

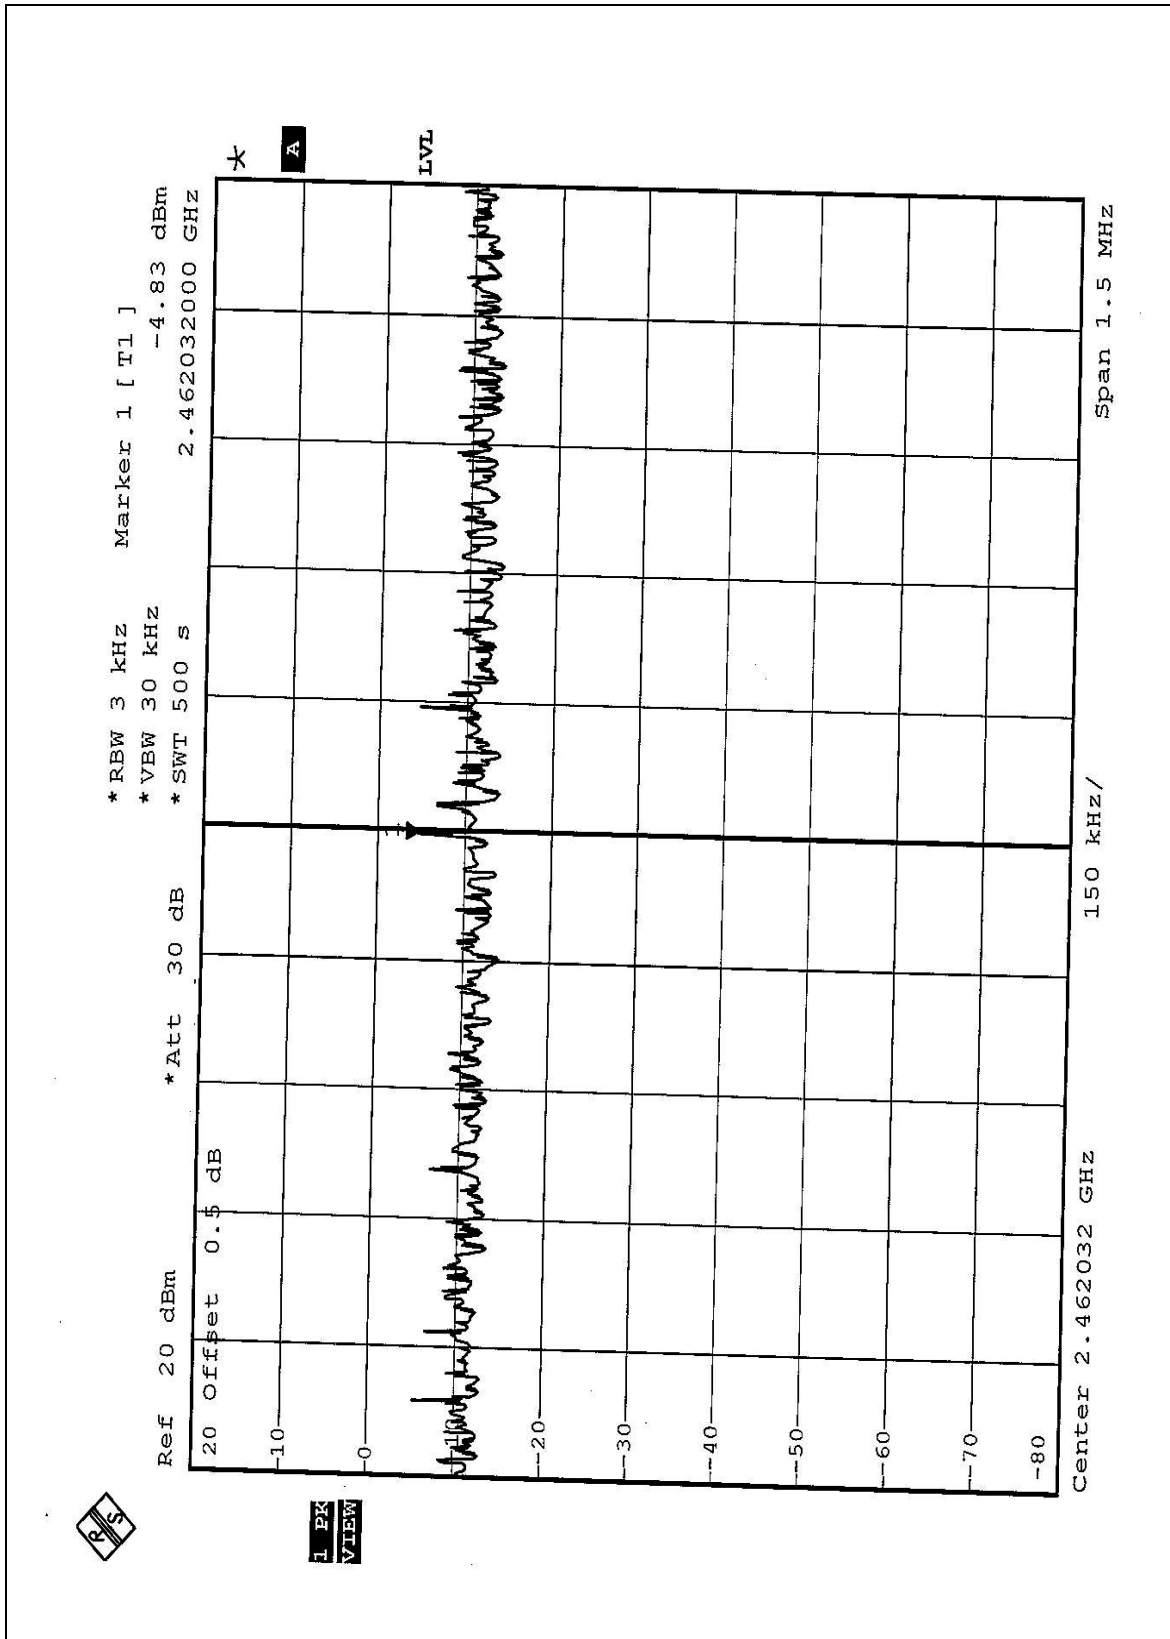




4.5.8 TEST RESULTS (B)


EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	27deg. C, 55%RH, 991hPa
TESTED BY: Martin Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-3.90	8	PASS
6	2437	-6.52	8	PASS
11	2462	-6.77	8	PASS


CH1

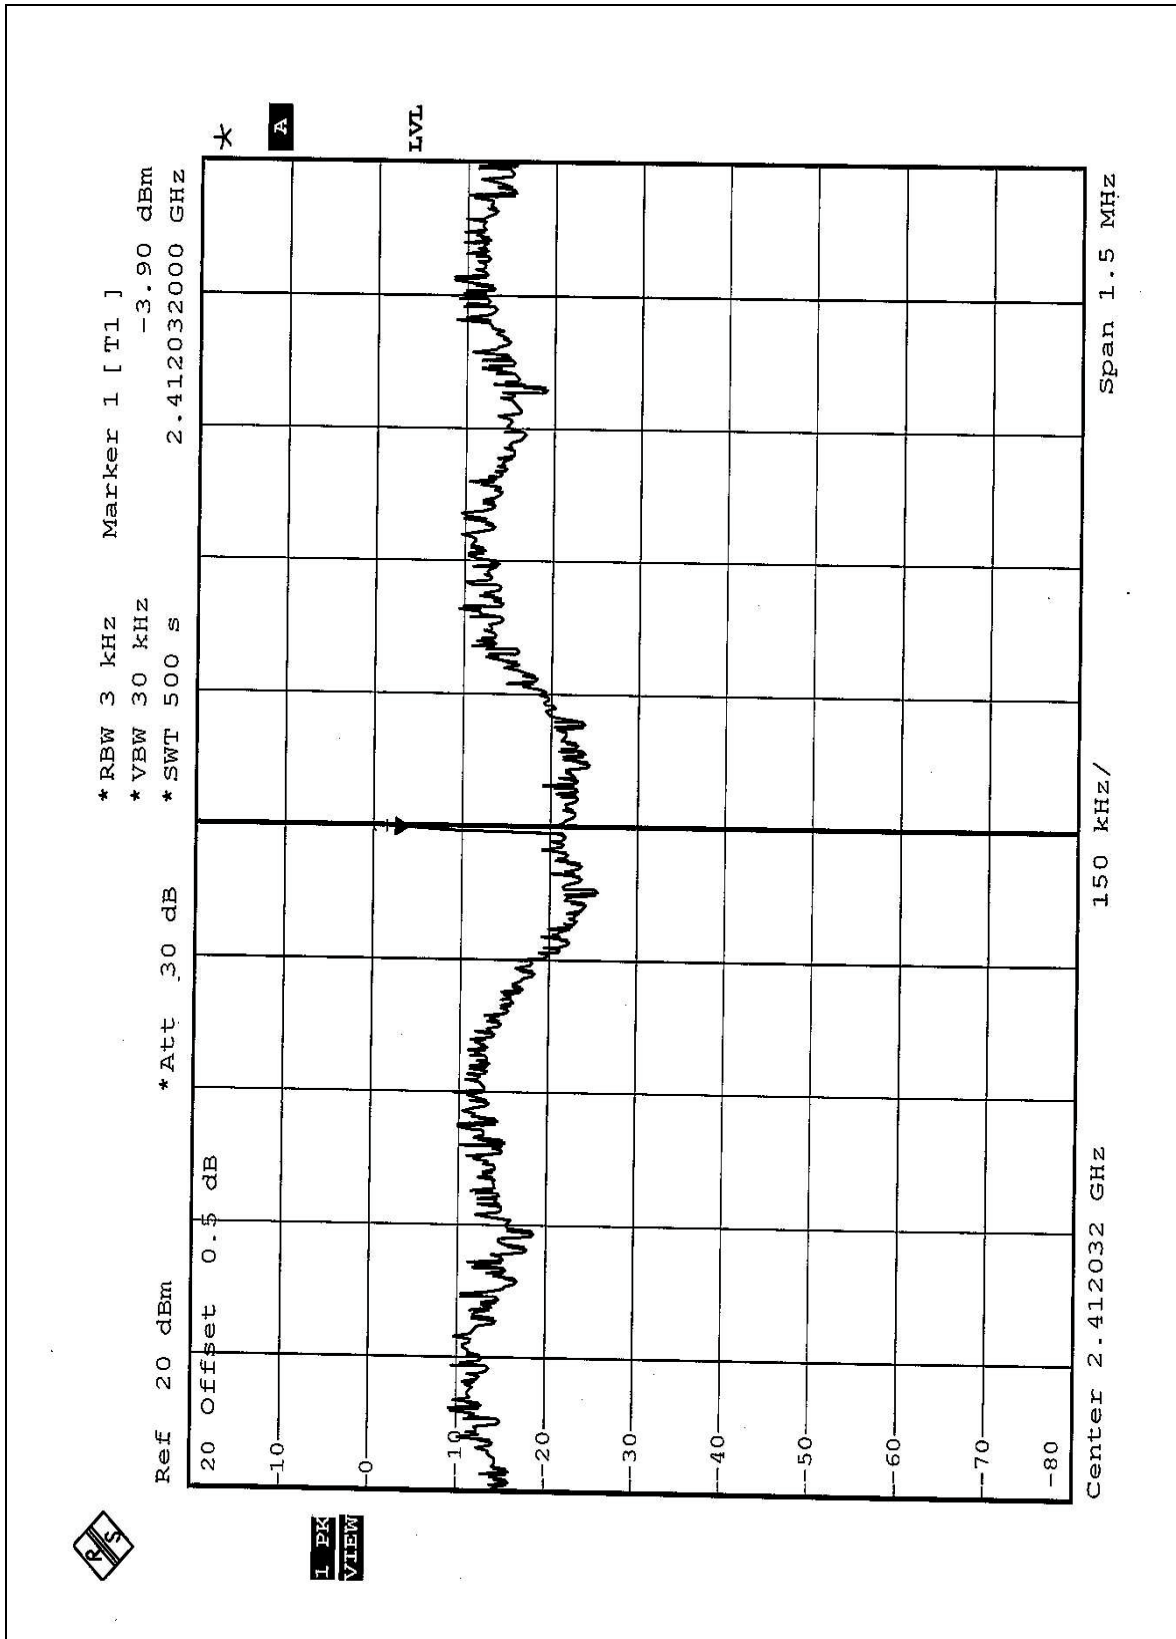

CH6

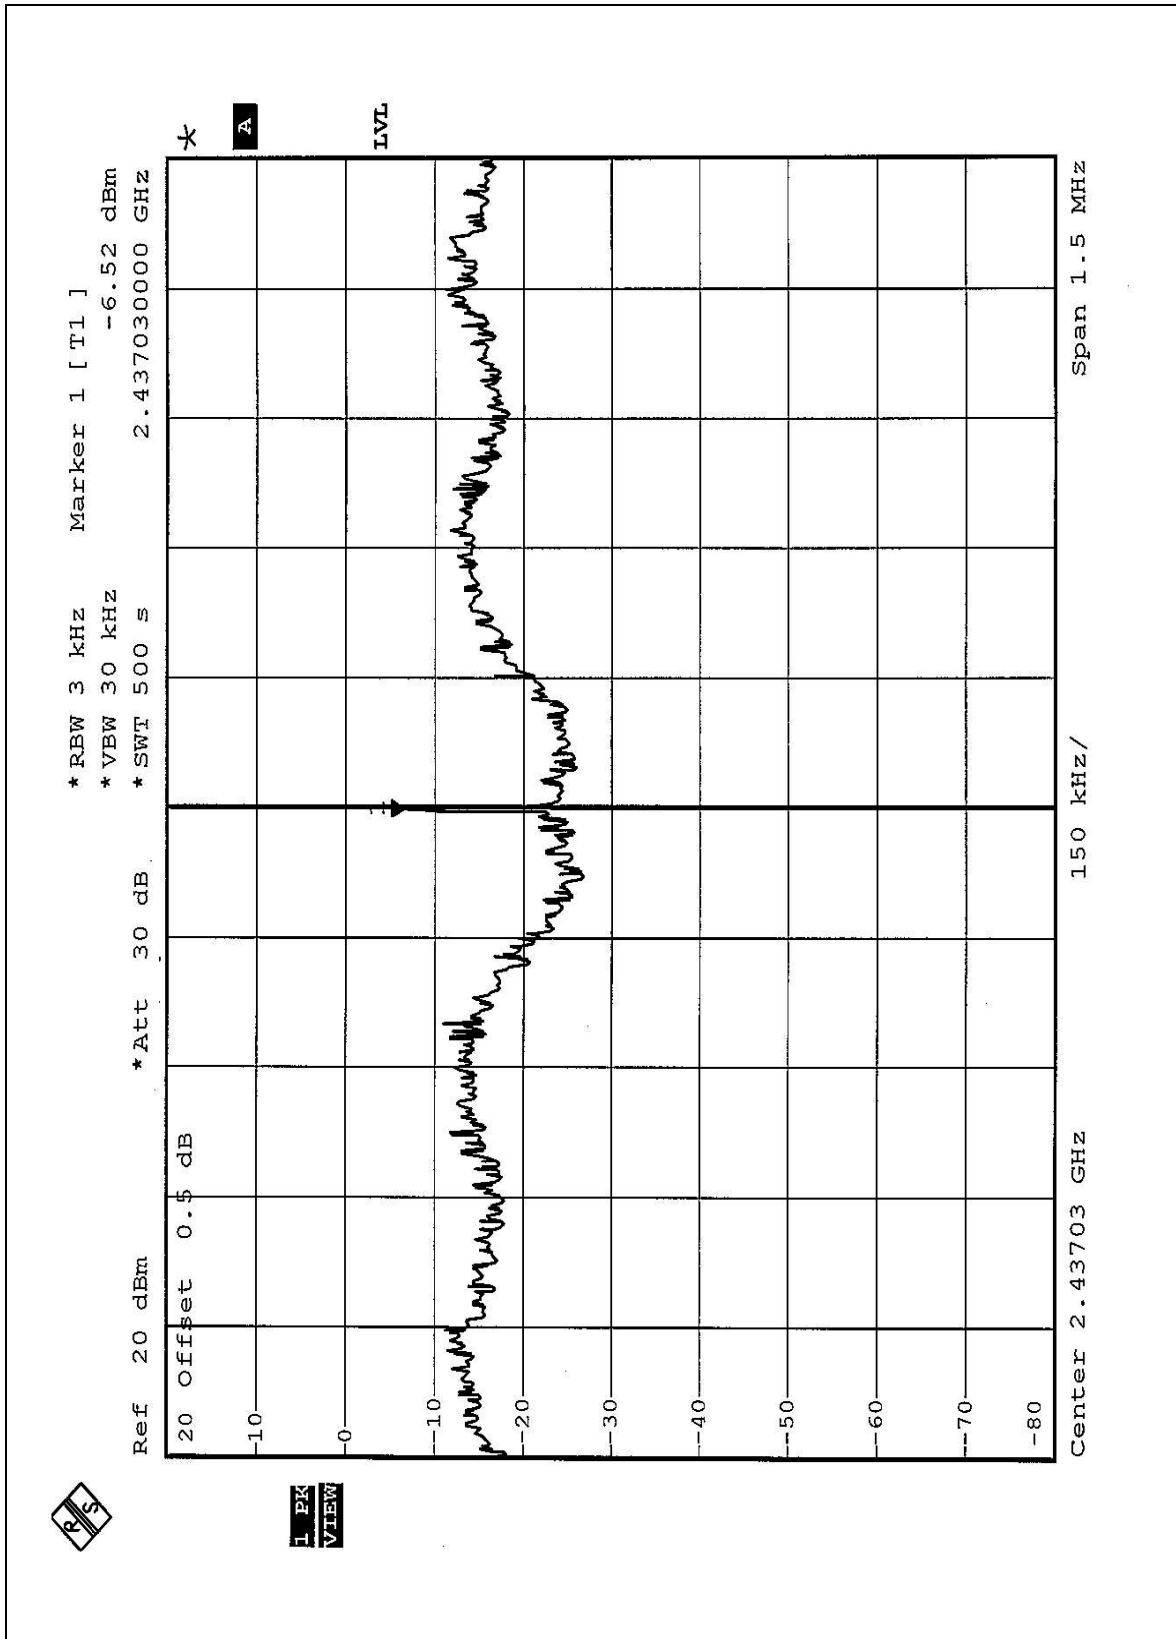

CH11

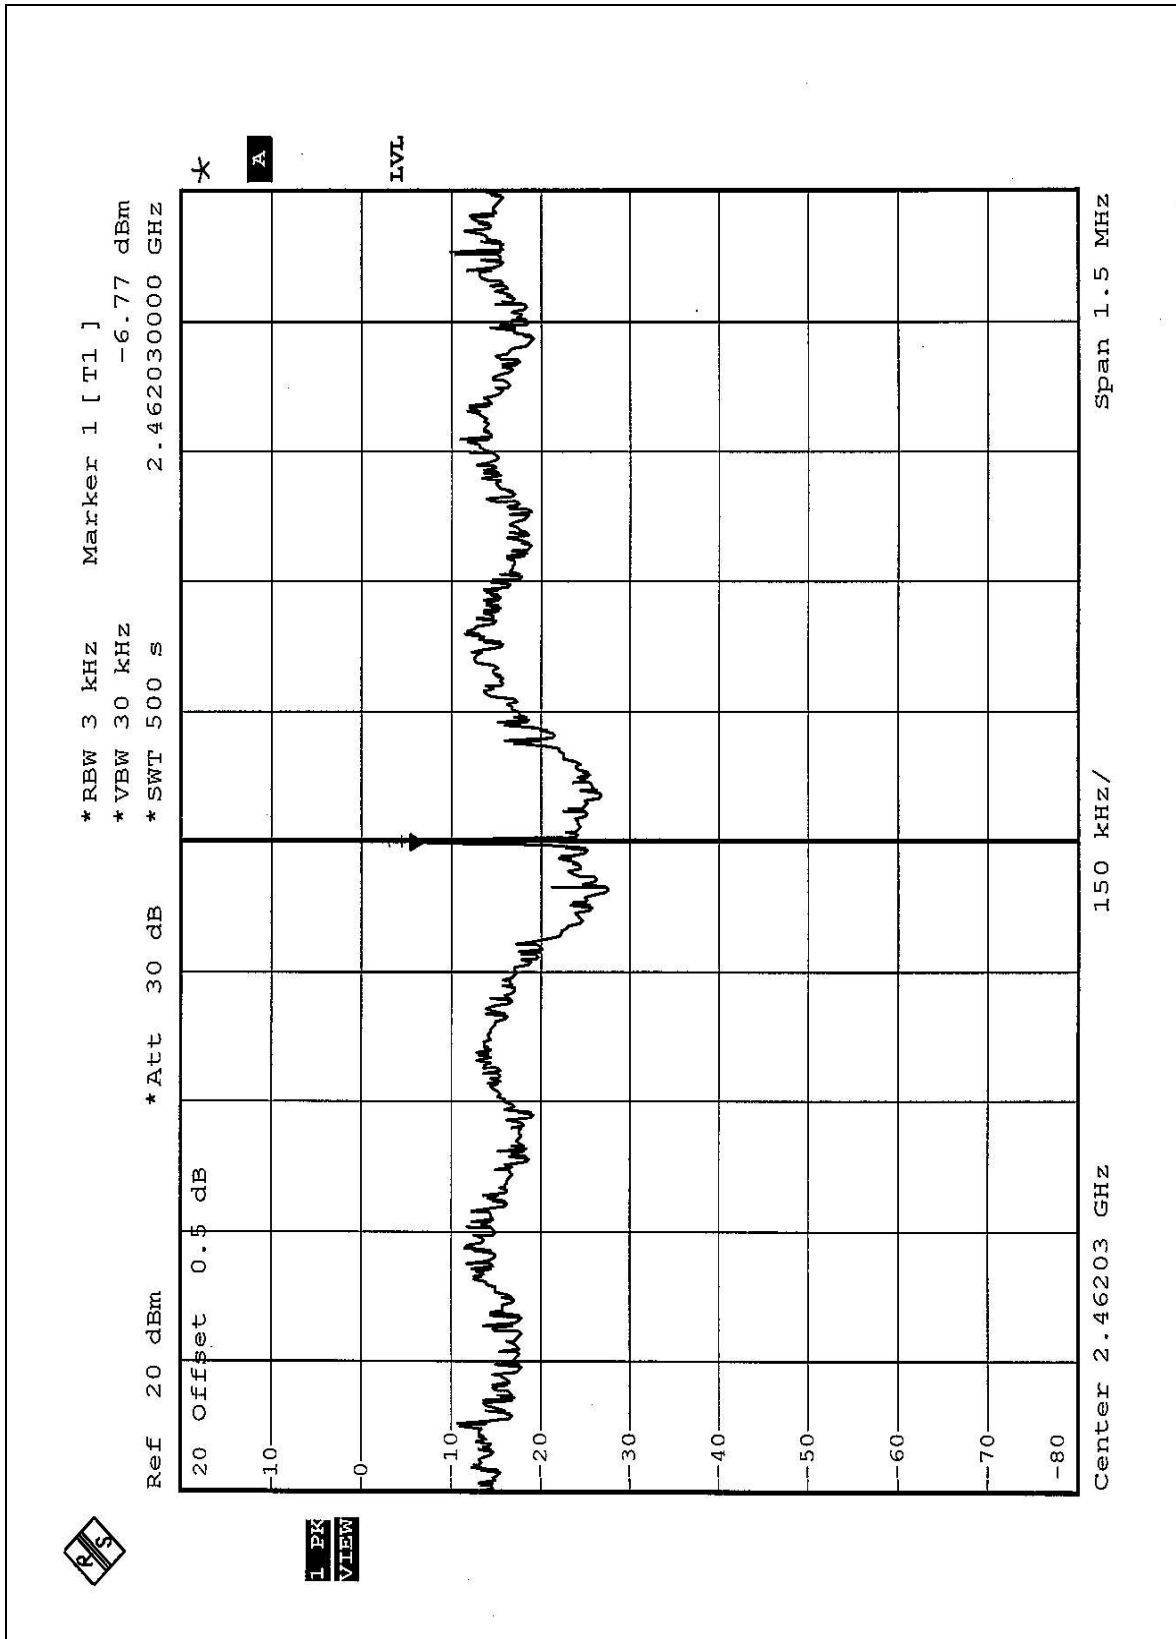




4.5.9 TEST RESULTS (C)

EUT	EZ-Stream Universal 2.4GHz/5GHz Wireless Cardbus Adapter	MODEL	SMC2336W-AG
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 65%RH, 991hPa
TESTED BY: Steven Lu			

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-6.07	8	PASS

CH6

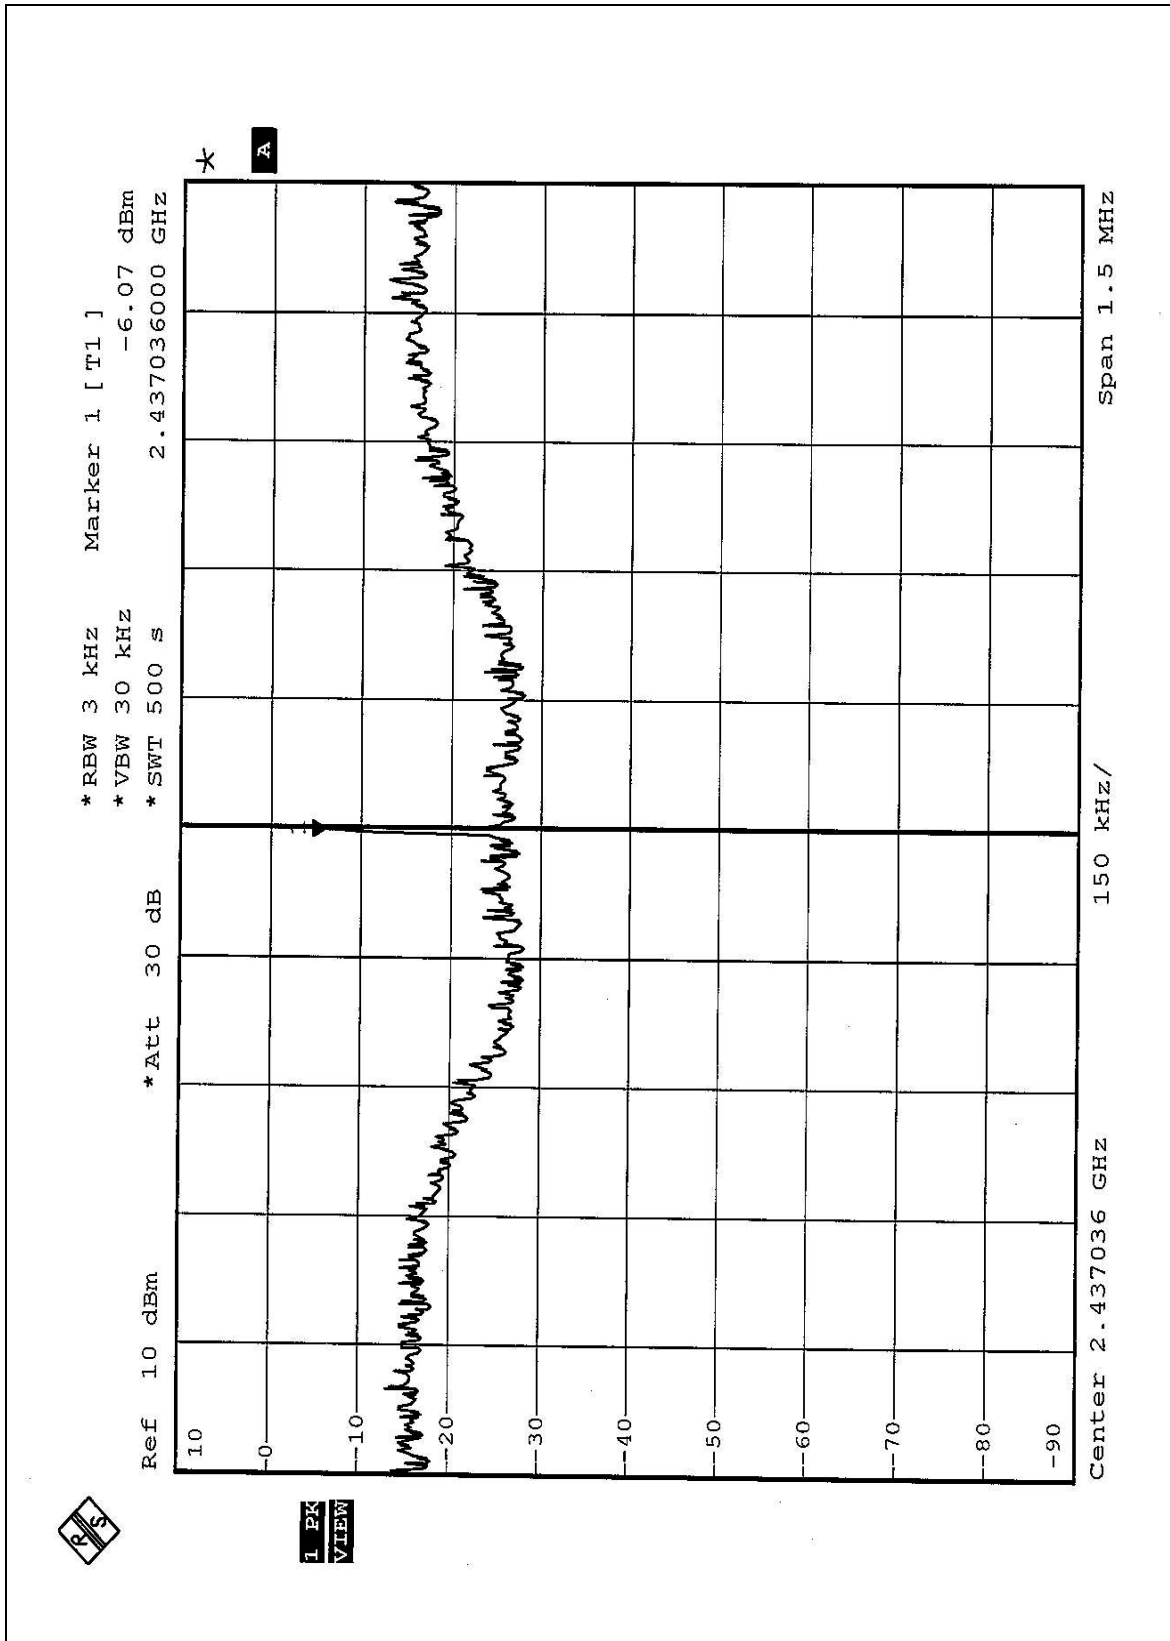

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6

4.6.6 TEST RESULTS (A)

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE 1: The band edge emission plot of CCK technique on the following first page shows 54.02dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 103.71dBuV/m, so the maximum field strength in restrict band is $103.71 - 54.02 = 49.69$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of CCK technique on the following second page shows 55.92dB delta between carrier maximum power and local maximum emission in restrict band (2.4866GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 102.03dBuV/m, so the maximum field strength in restrict band is $102.03 - 55.92 = 46.11$ dBuV/m which is under 54dBuV/m limit.

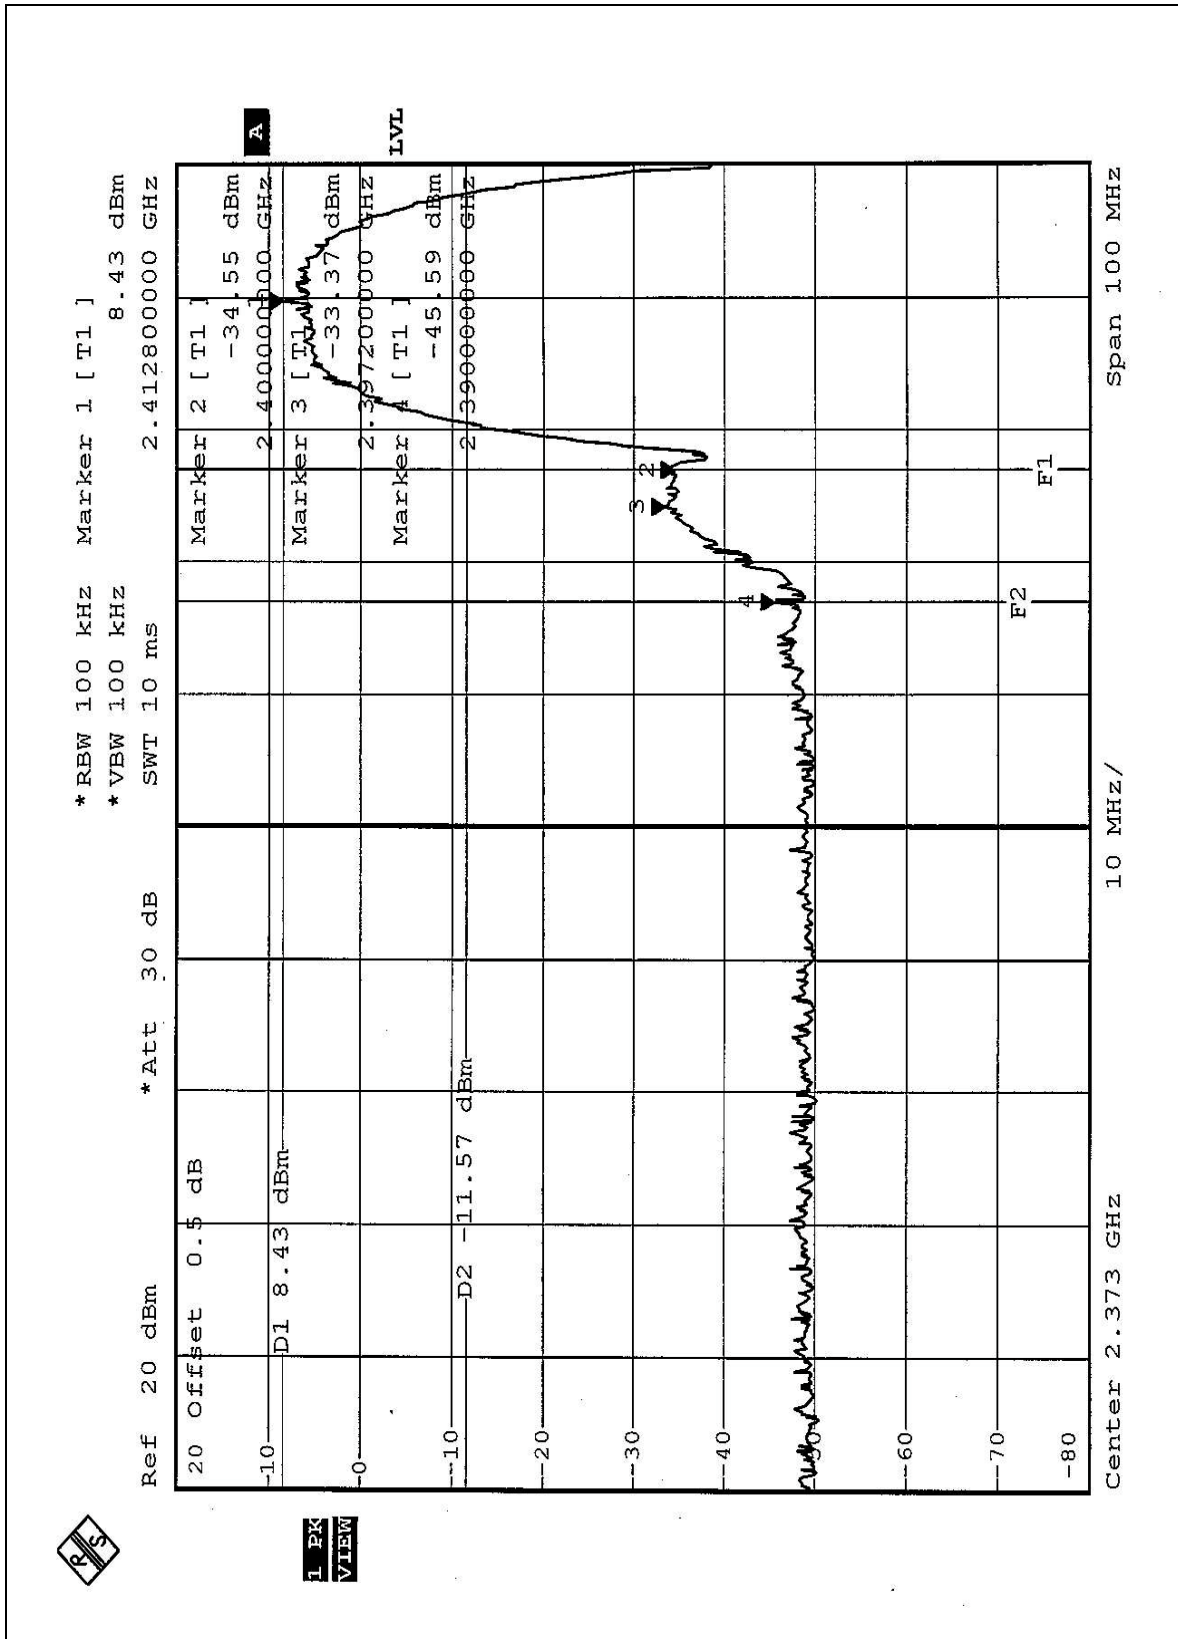







4.6.7 TEST RESULTS (B)

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE 1: The band edge emission plot of OFDM technique on the following first page shows 46.39dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 93.91dBuV/m, so the maximum field strength in restrict band is $93.91 - 46.39 = 47.52$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of OFDM technique on the following second page shows 45.28dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 91.53dBuV/m, so the maximum field strength in restrict band is $91.53 - 45.28 = 46.25$ dBuV/m which is under 54dBuV/m limit.

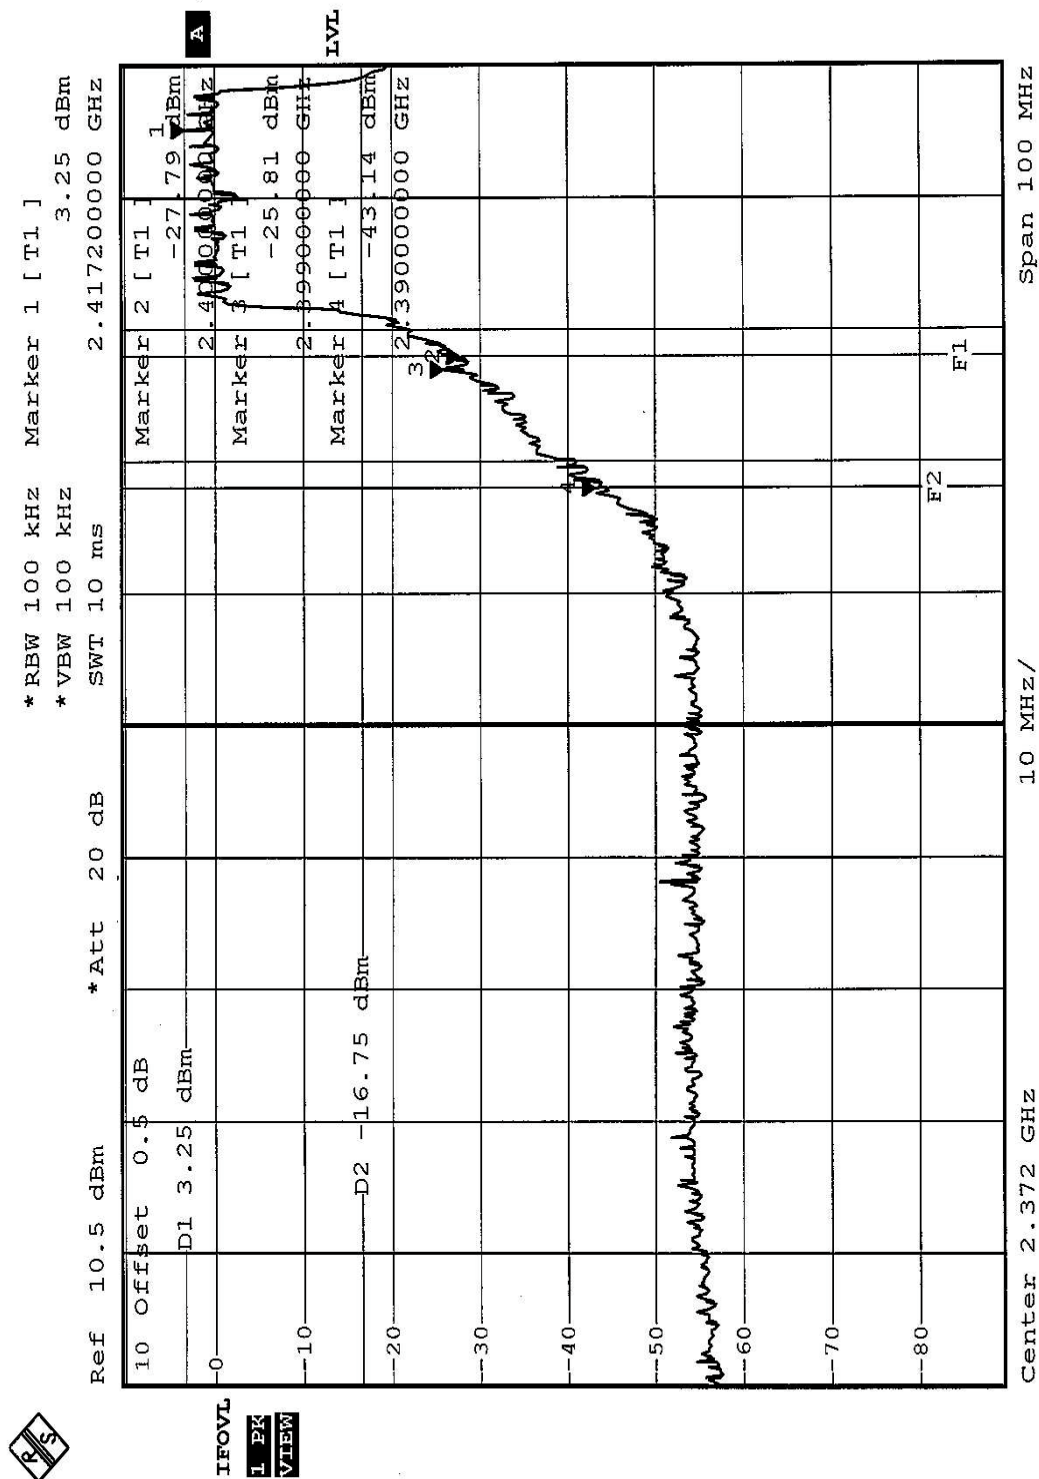

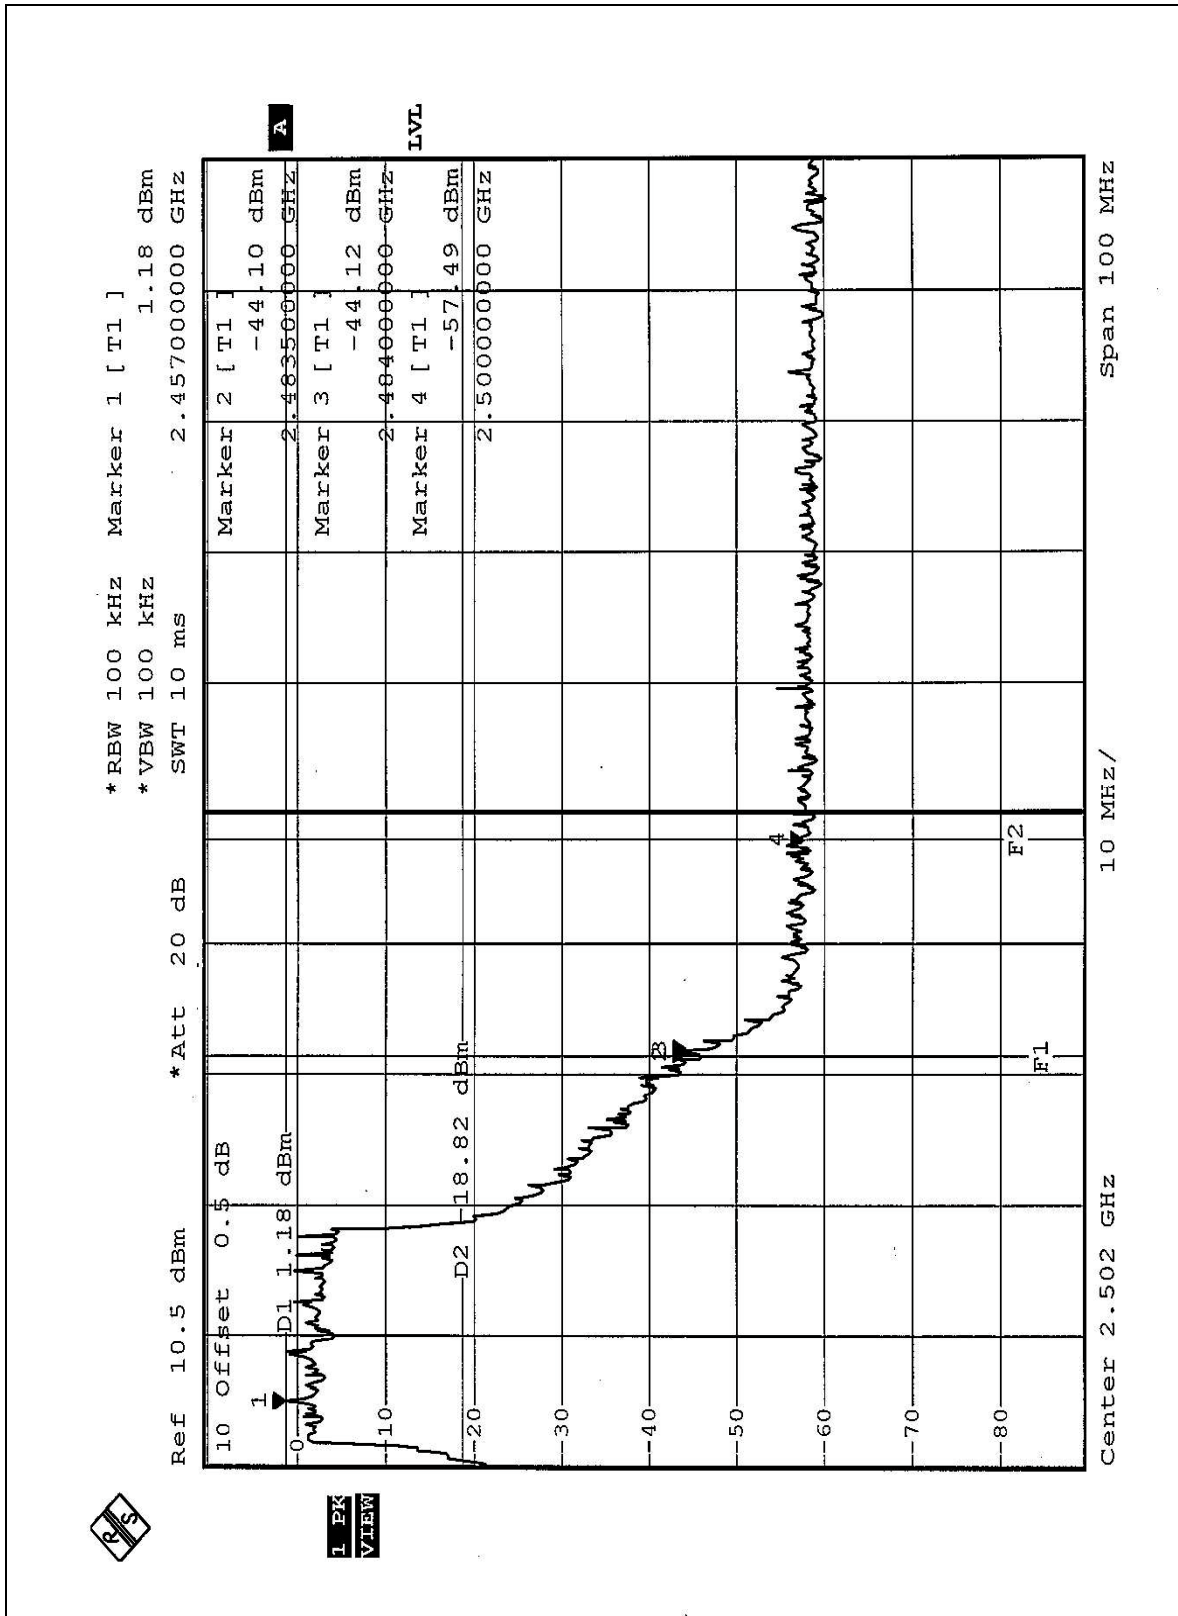





4.6.8 TEST RESULTS (C)

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE 1: The band edge emission plot of OFDM technique with Turbo mode on the following first page shows 53.82dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.10 is 95.63dBuV/m, so the maximum field strength in restrict band is $95.63 - 53.82 = 41.81$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of OFDM technique with Turbo mode on the following second page shows 51.24dB delta between carrier maximum power and local maximum emission in restrict band (2.4845GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.10 is 95.63 dBuV/m, so the maximum field strength in restrict band is $95.63 - 51.24 = 44.39$ dBuV/m which is under 54dBuV/m limit.

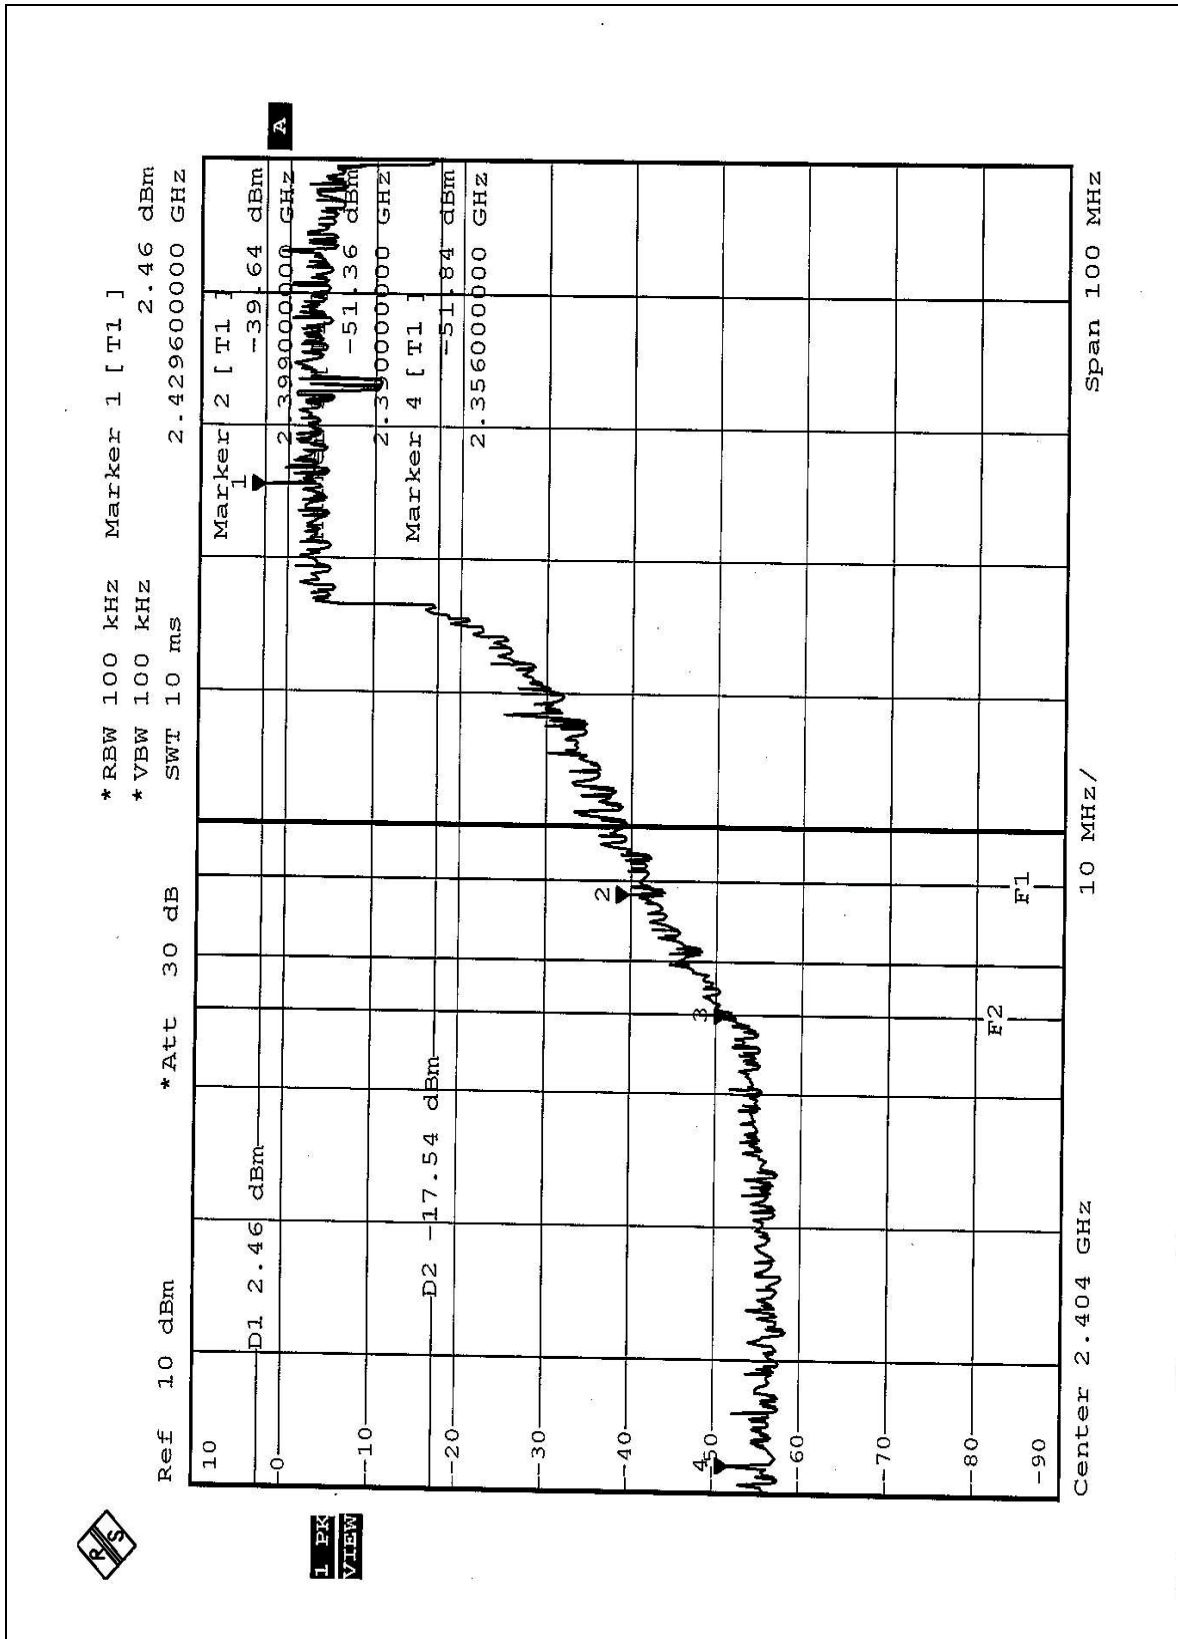

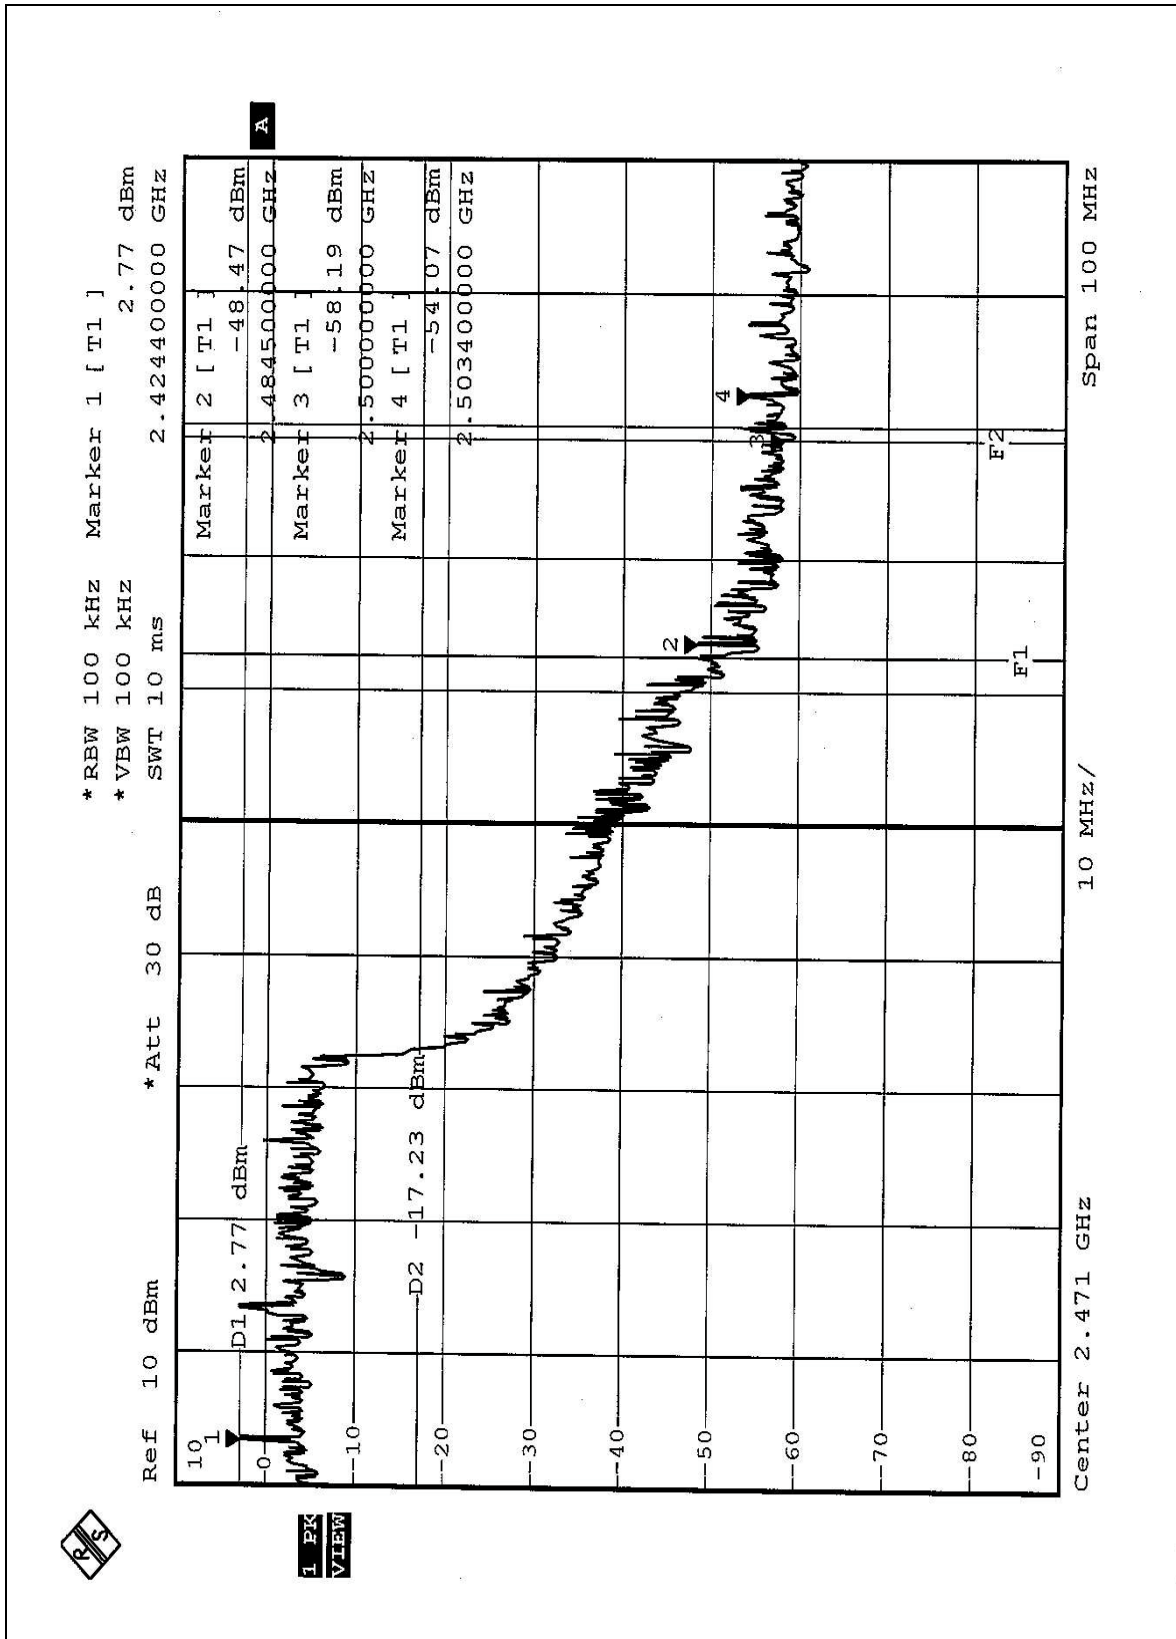



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Patch antenna without antenna connector. The maximum Gain of the antenna is 0.06dBi.