

EMC TEST REPORT



Report No.: 15050015-FCC-E

Supersede Report No.: N/A

Applicant	Micron Electronics LLC.	
Product Name	WCDMA Tracker	
Model No.	Prime one	
Serial No.	N/A	
Test Standard	FCC Part 15 Subpart B Class B:2014, ANSI C63.4: 2014	
Test Date	May 07 to May 28, 2015	
Issue Date	May 28, 2015	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		
<i>Lucifer He</i>	<i>Chris You</i>	
Lucifer He Test Engineer	Chris You Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	15050015-FCC-E
Page	3 of 27

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 AC POWER LINE CONDUCTED EMISSIONS	9
6.2 RADIATED EMISSIONS	13
ANNEX A. TEST INSTRUMENT	17
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	18
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	23
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	26
ANNEX E. DECLARATION OF SIMILARITY	27

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15050015-FCC-E	NONE	Original	May 28, 2015

2. Customer information

Applicant Name	Micron Electronics LLC.
Applicant Add	1001 Yamato Road, Suite 400, Boca Raton, FL 33431, USA
Manufacturer	Micron Electronics LLC.
Manufacturer Add	1001 Yamato Road, Suite 400, Boca Raton, FL 33431, USA

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Description of EUT:	WCDMA Tracker
Main Model:	Prime one
Serial Model:	N/A
Date EUT received:	May 06, 2015
Test Date(s):	May 07 to May 28, 2015
Equipment Category :	JBP
Antenna Gain:	GSM850:0 dBi PCS1900: 1.8 dBi UMTS-FDD Band V: 0dBi UMTS-FDD Band II: 1.8dBi Bluetooth: -1dBi WIFI:-1dBi
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK, 8PSK UMTS-FDD: QPSK, 16QAM 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz WIFI:802.11b/g/n(20M): 2412-2472 MHz WIFI:802.11n(40M): 2422-2462 MHz Bluetooth: 2402-2480 MHz
Number of Channels:	GSM 850: 124CH

Test Report	15050015-FCC-E
Page	7 of 27

PCS1900: 299CH

UMTS-FDD Band V : 102CH

UMTS-FDD Band II : 277CH

WIFI :802.11b/g/n(20M): 13CH

WIFI :802.11n(40M): 9CH

Bluetooth: 79CH

Port: USB Port

Battery:

Input Power: Spec: 3.7V 850mAh
Charger Max Voltage:4.35V
Input DC5V(USB Port)

Trade Name : Prime

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: ZKQ-ONE

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	22°C
Relative Humidity	57%
Atmospheric Pressure	1029mbar
Test date :	May 29, 2015
Tested By :	Lucifer He

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.															
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>	Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	
Frequency ranges (MHz)	Limit (dBµV)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

Test Setup	 <p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>
------------	---

Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.
-----------	---


Test Report	15050015-FCC-E
Page	10 of 27

	<p>3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</p> <p>4. All other supporting equipment were powered separately from another main supply.</p> <p>5. The EUT was switched on and allowed to warm up to its normal operating condition.</p> <p>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</p> <p>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</p> <p>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode 1: USB Mode

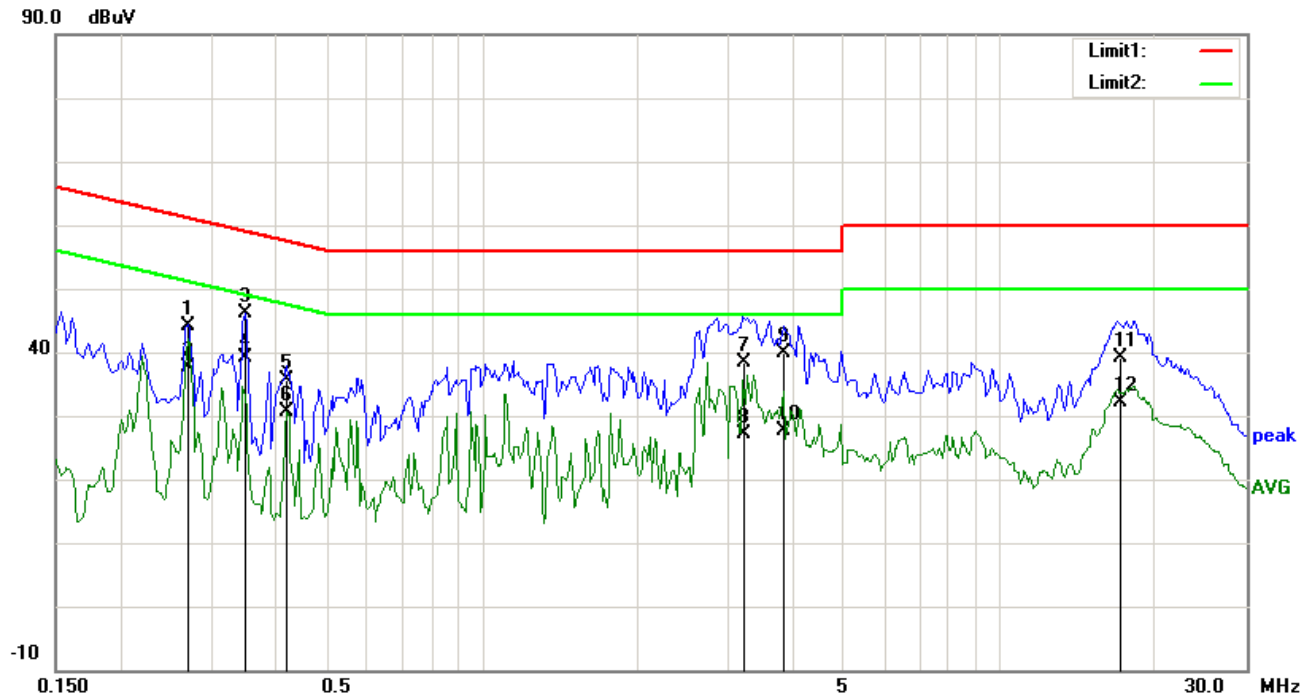


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Comment
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)	
1	L1	0.2711	31.41	QP	12.75	44.16	61.08	-16.92	
2	L1	0.2711	24.78	AVG	12.75	37.53	51.08	-13.55	
3	L1	0.3492	33.78	QP	12.46	46.24	58.98	-12.74	
4	L1	0.3492	26.73	AVG	12.46	39.19	48.98	-9.79	
5	L1	0.4195	23.36	QP	12.20	35.56	57.46	-21.90	
6	L1	0.4195	18.54	AVG	12.20	30.74	47.46	-16.72	
7	L1	3.2069	26.91	QP	11.40	38.31	56.00	-17.69	
8	L1	3.2069	15.80	AVG	11.40	27.20	46.00	-18.80	
9	L1	3.8398	28.58	QP	11.40	39.98	56.00	-16.02	
10	L1	3.8398	16.35	AVG	11.40	27.75	46.00	-18.25	
11	L1	17.1085	24.60	QP	14.55	39.15	60.00	-20.85	
12	L1	17.1085	17.56	AVG	14.55	32.11	50.00	-17.89	

Test Mode 1: USB Mode

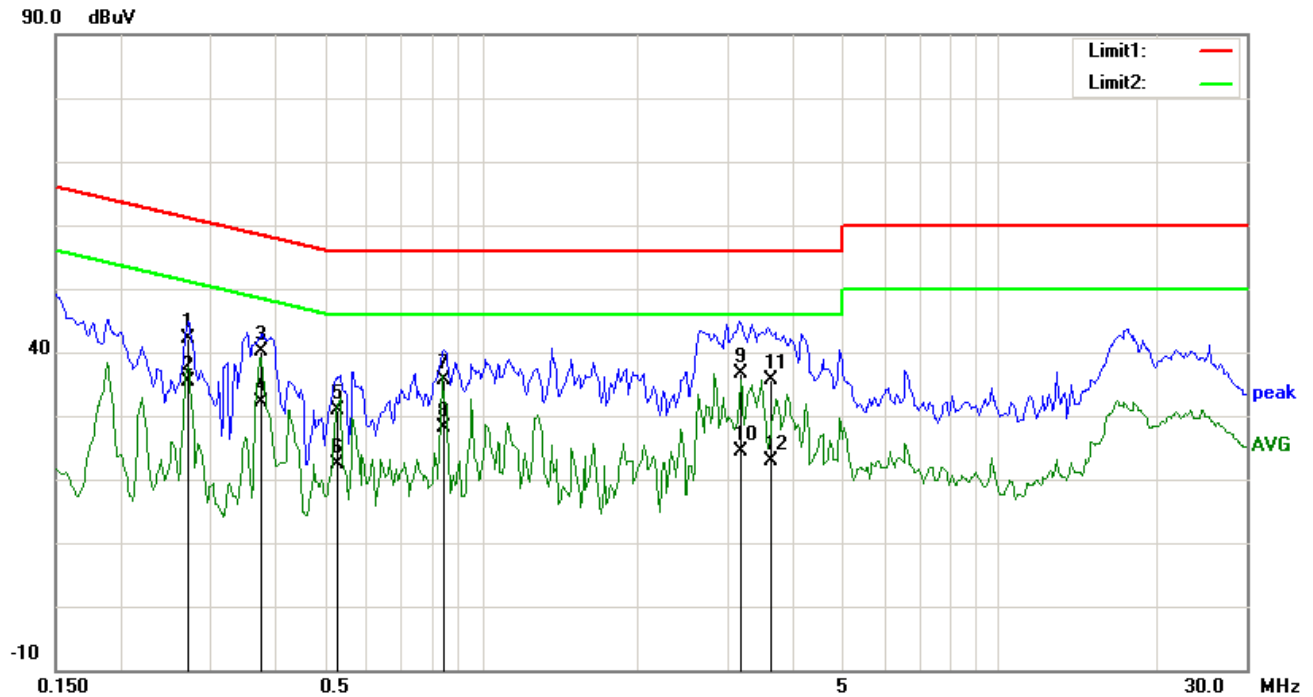

Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Comment
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)	
1	N	0.2711	29.38	QP	12.75	42.13	61.08	-18.95	
2	N	0.2711	22.66	AVG	12.75	35.41	51.08	-15.67	
3	N	0.3727	27.77	QP	12.37	40.14	58.44	-18.30	
4	N	0.3727	19.83	AVG	12.37	32.20	48.44	-16.24	
5	N	0.5265	18.90	QP	11.87	30.77	56.00	-25.23	
6	N	0.5265	10.62	AVG	11.87	22.49	46.00	-23.51	
7	N	0.8453	24.03	QP	11.55	35.58	56.00	-20.42	
8	N	0.8453	16.59	AVG	11.55	28.14	46.00	-17.86	
9	N	3.1641	25.02	QP	11.67	36.69	56.00	-19.31	
10	N	3.1641	12.60	AVG	11.67	24.27	46.00	-21.73	
11	N	3.6225	23.88	QP	11.73	35.61	56.00	-20.39	
12	N	3.6225	11.22	AVG	11.73	22.95	46.00	-23.05	

6.2 Radiated Emissions

Temperature	22°C
Relative Humidity	57%
Atmospheric Pressure	1029mbar
Test date :	May 29, 2015
Tested By :	Lucifer He

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15. 107(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<div><input checked="" type="checkbox"/></div>	
		Frequency range (MHz)		Field Strength (µV/m)
		30 – 88		100
		88 – 216		150
		216 960		200
		Above 960		500

Test Setup	
------------	--

Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarization (whichever gave the higher emission level
-----------	--

Test Report	15050015-FCC-E
Page	14 of 27


	<p>over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>■ 1 kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%)</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode: USB Mode

Below 1GHz

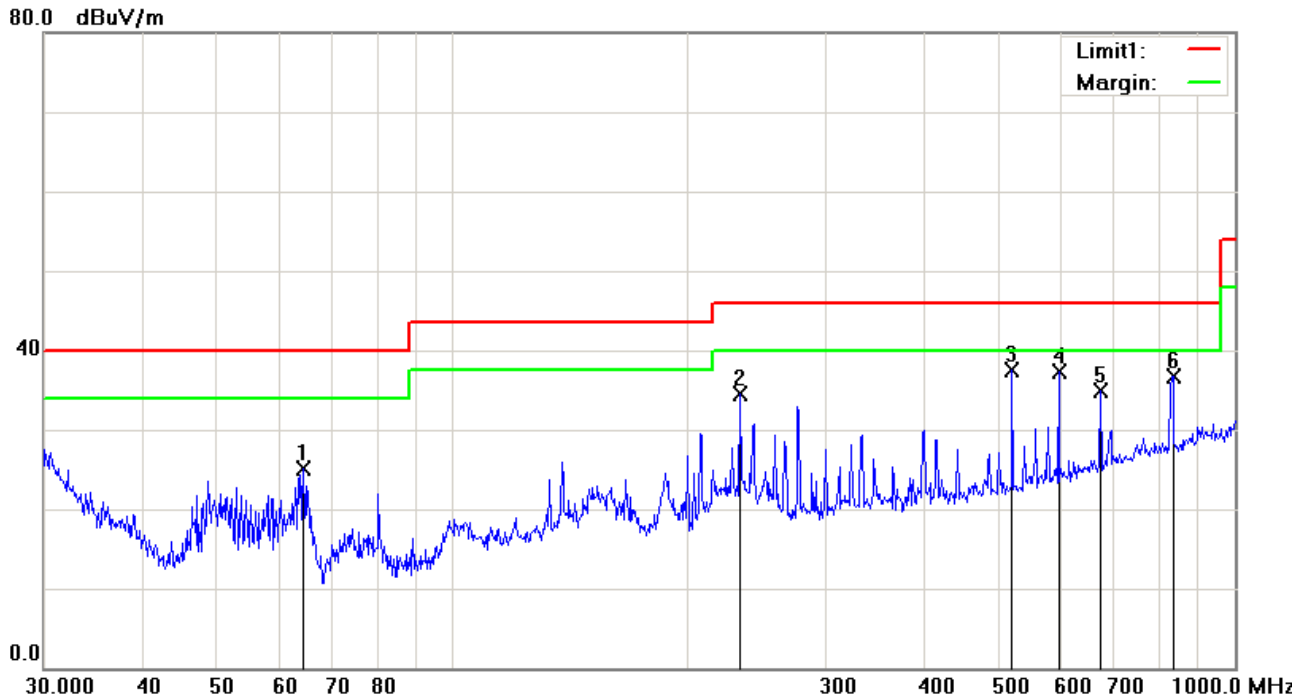

Test Data


Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree	Comment
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()	
1	H	64.4331	39.18	peak	-14.01	25.17	40.00	-14.83	100	359	
2	H	232.5318	43.49	peak	-9.04	34.45	46.00	-11.55	100	115	
3	H	519.0649	38.95	peak	-1.36	37.59	46.00	-8.41	100	285	
4	H	595.1329	37.32	peak	-0.07	37.25	46.00	-8.75	100	274	
5	H	672.8445	33.90	peak	1.07	34.97	46.00	-11.03	100	285	
6	H	833.3171	33.13	peak	3.61	36.74	46.00	-9.26	100	44	

Above 1GHz

Note: The frequency that above 1GHz is mainly from the environment noise.

Below 1GHz

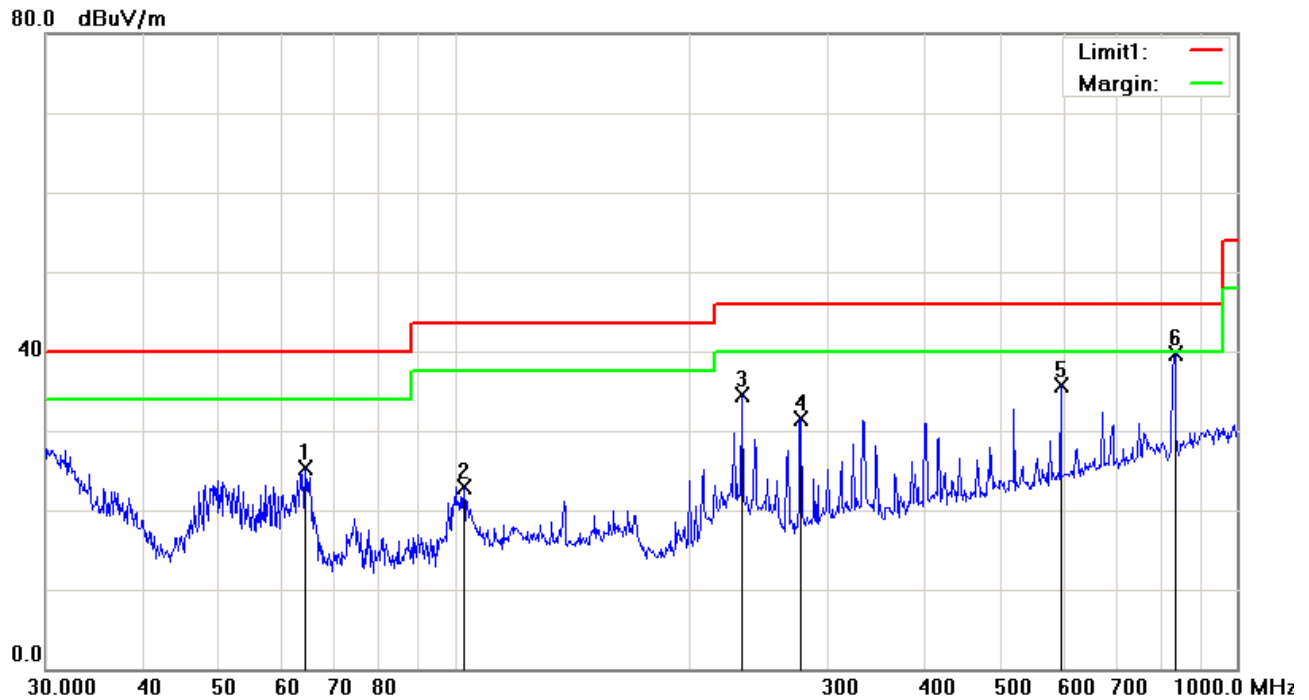

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree	Comment
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()	
1	V	64.4331	39.26	peak	-14.01	25.25	40.00	-14.75	100	25	
2	V	102.7192	33.21	peak	-10.32	22.89	43.50	-20.61	100	188	
3	V	233.3487	43.60	peak	-9.04	34.56	46.00	-11.44	100	218	
4	V	277.0935	39.36	peak	-7.95	31.41	46.00	-14.59	100	195	
5	V	595.1329	35.82	peak	-0.07	35.75	46.00	-10.25	100	139	
6	V	833.3171	36.19	peak	3.61	39.80	46.00	-6.20	100	44	

Above 1GHz

Note: The frequency that above 1GHz is mainly from the environment noise.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191106	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191107	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna	AH-118	71259	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>


Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo






EUT - Top View

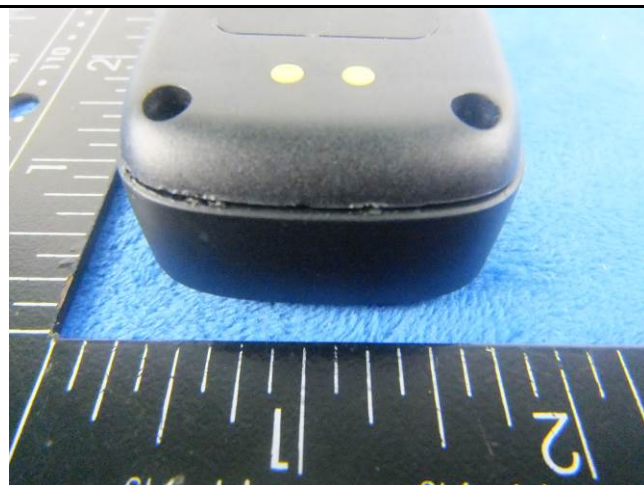

EUT - Bottom View



EUT - Left View

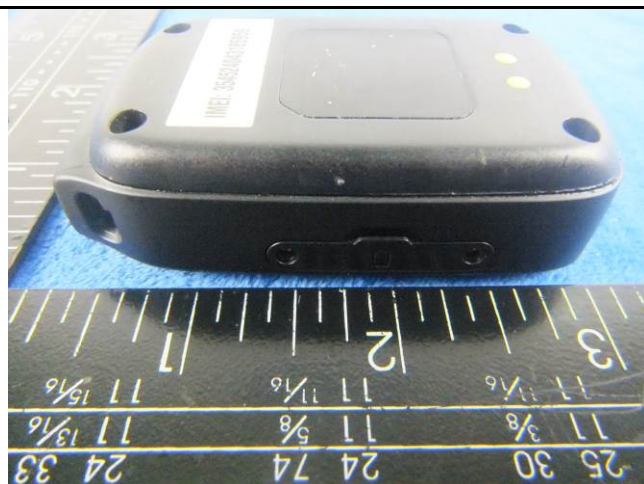


EUT - Right View


Annex B.ii. Photograph: EUT Internal Photo




Cover Off - Top View 1

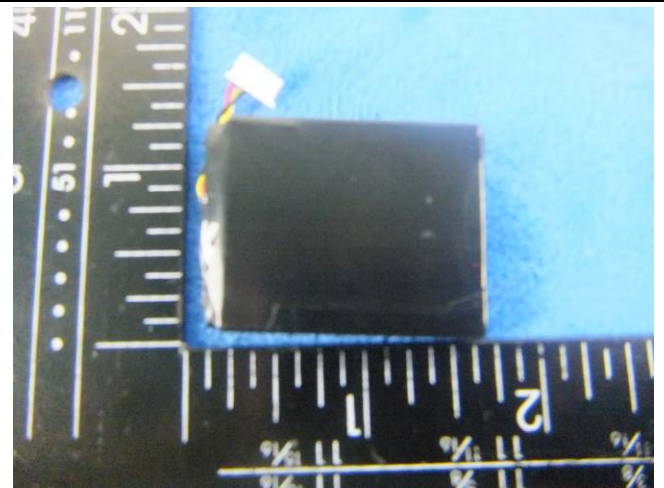


Battery - Top View

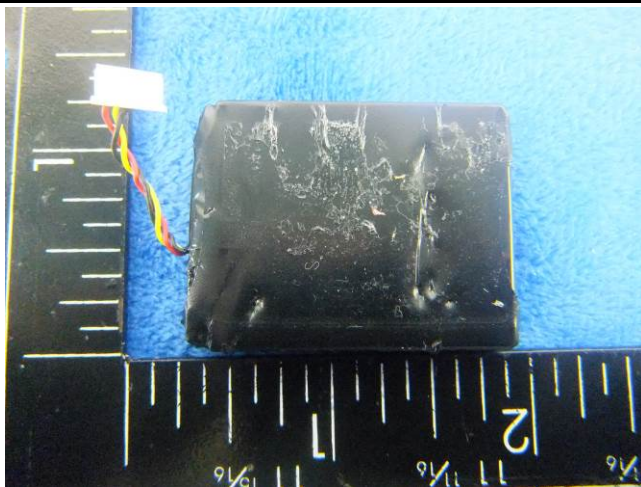

Battery - Bottom View

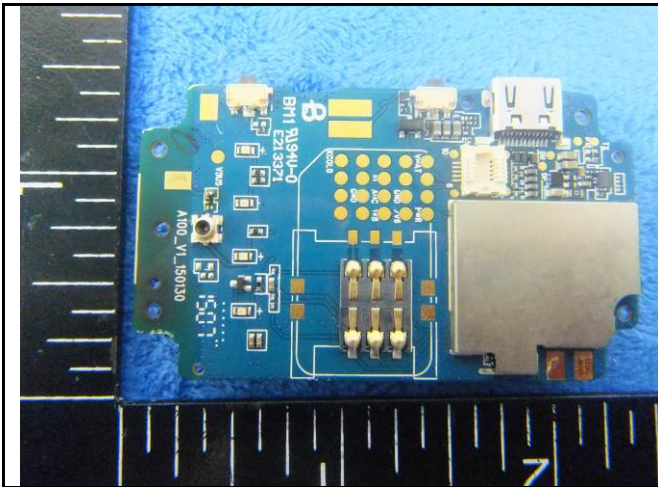


Mainboard With Shielding - Front View

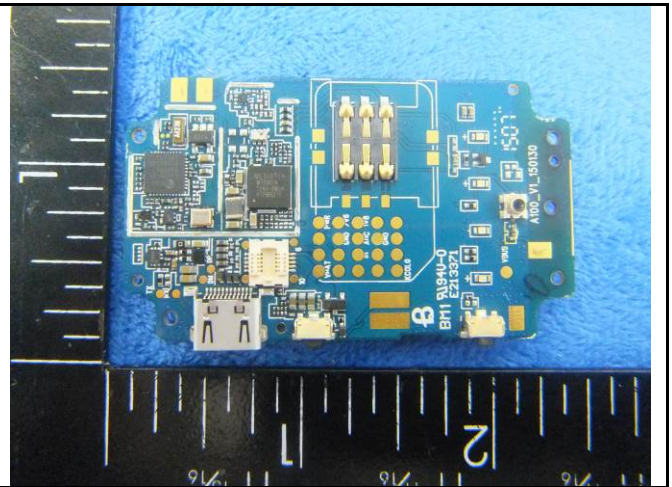

Mainboard Without Shielding - Front View




Mainboard With Shielding - rear View

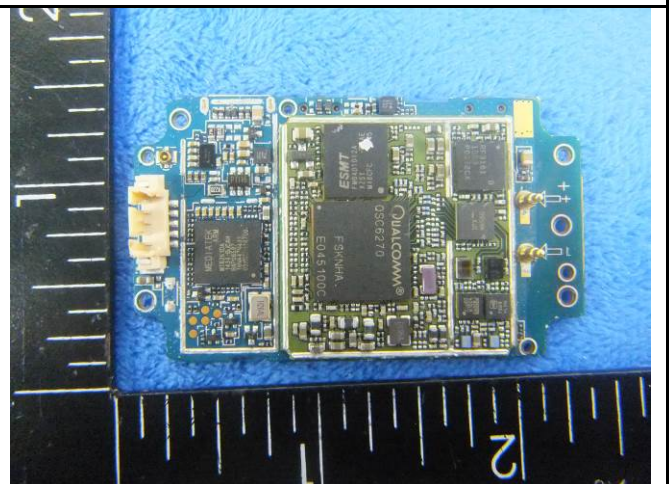

Mainboard Without Shielding - rear View



WIFI/BT/BLE - Antenna View

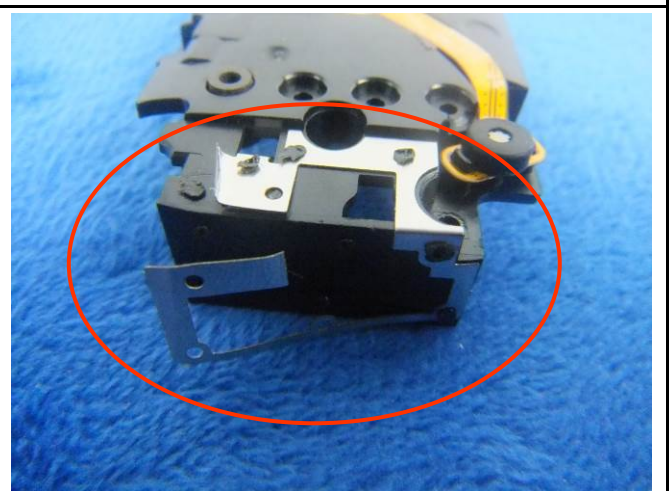


GSM/PCS/UMTS-FDD Antenna View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup – Front View

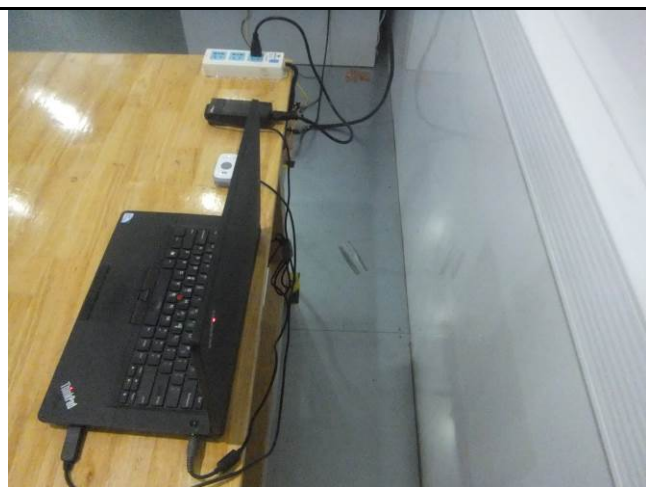

Conducted Emissions Test Setup – Side View

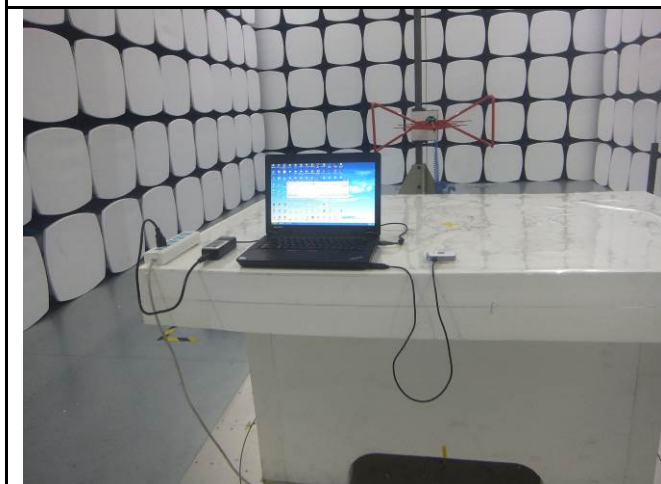


Radiated Spurious Emissions Test Setup Below 1GHz

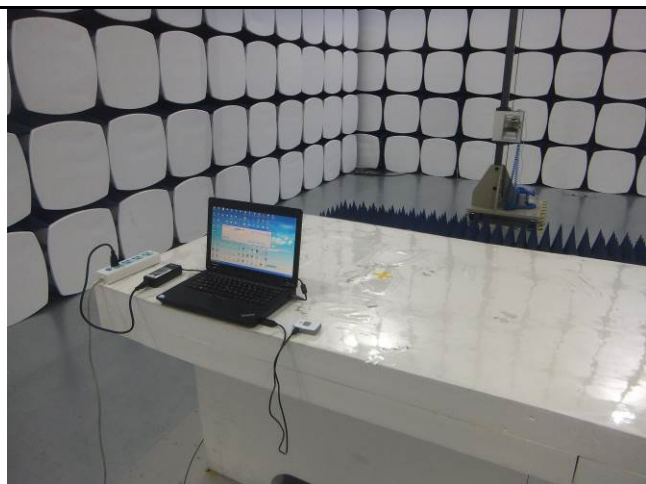


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Block Configuration Diagram for Conducted Emissions

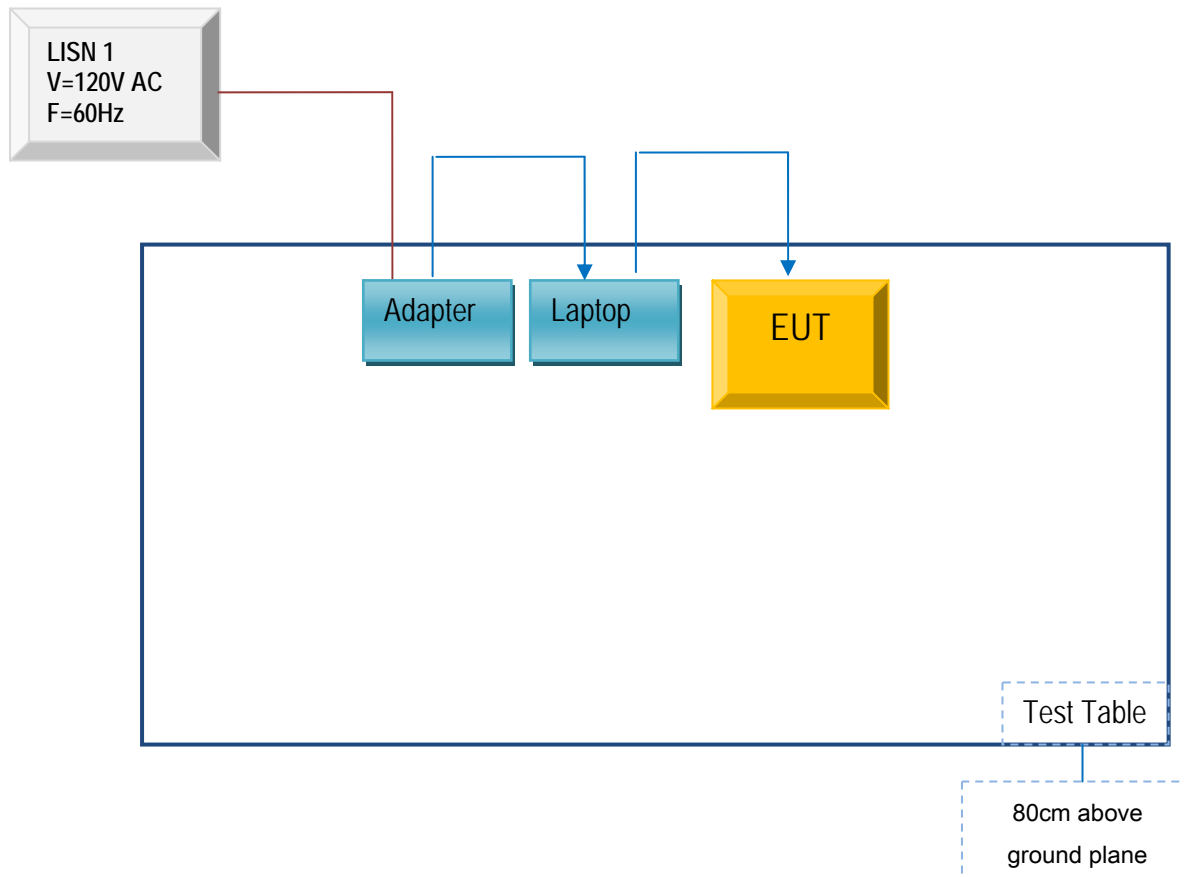

Block Configuration Diagram for Radiated Emissions

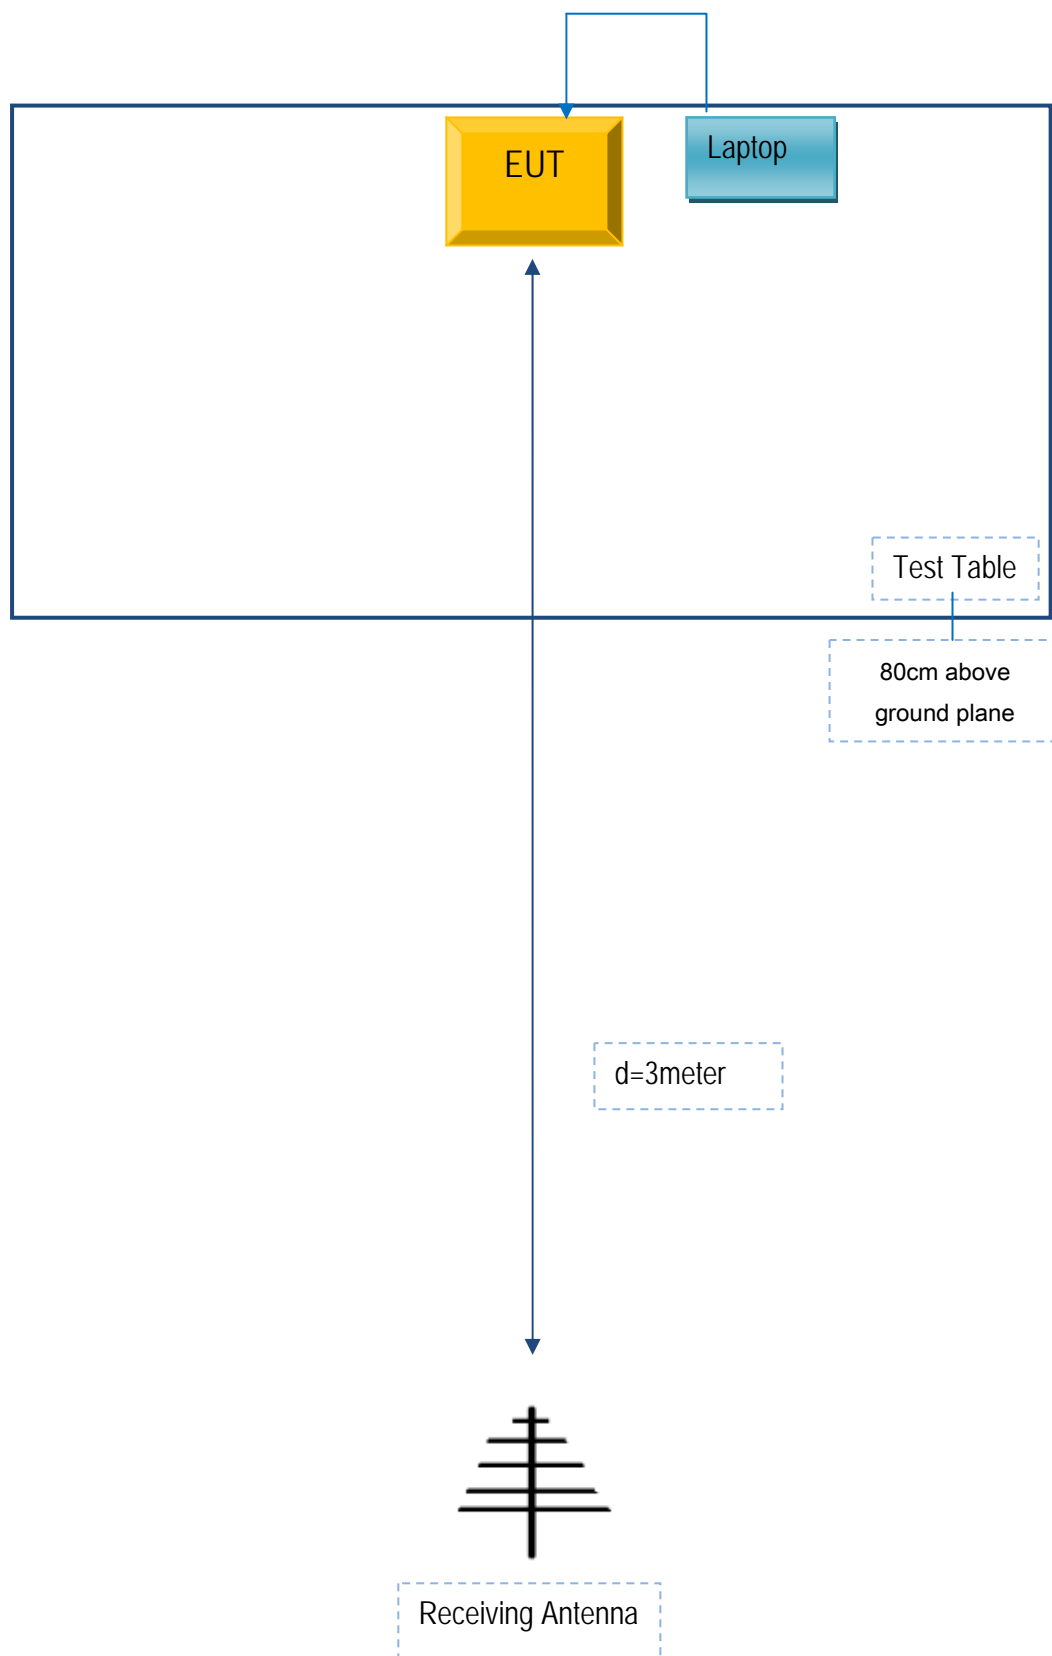

Test Report	15050015-FCC-E
Page	25 of 27

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
Lenovo	Lenovo Laptop	E40& 0579A52	N/A	N/A

Test Report	15050015-FCC-E
Page	26 of 27

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see Attachment

Test Report	15050015-FCC-E
Page	27 of 27

Annex E. DECLARATION OF SIMILARITY

N/A