

#### Function:

1. Wireless Charging area for Phone
2. Wireless Charging area for TWS.
3. Smart Watch Charging area
4. Time display
5. Warm yellow Smart night light
6. Smart night light switch
7. Clock display on/off button
8. Mode
9. Down
10. UP
11. Phone Wireless Charging indicator LED ON/OFF(touch button)
12. Wireless Charging indicator ( circle of colorful lights at the base )
13. Type-C Input Port
14. USB - A Output Port

#### What include:

- 1 x Wireless charger
- 1 x Type-C to Type-C Charging Cable
- 1 x Instruction Manual

#### Specifications:

Type-C Input: 9V/3A ,12V/2.5A

Wireless Output for phone: 5W/7.5W/10W/15W

Wireless Output for TWS: 5W

Wireless Output for Smart watch :3W

## Instructions:

Connect the provided Type-C USB to USB-A cable to the Type-C USB input port (13), then connect the USB end of the cable to a USB power adapter.

USB adapter must also support 9V/3A ,12V/2.5A.

**Note:** When using the wireless charger to charge 3 devices simultaneously, it is advisable to use a plug-in adapter above QC/ PD 30W to work at its best.

## Wireless Charging functions :

- When powered on, the indicator light (12) will flash and then turn off, indicating that the product is on standby.
- Place the wireless charging supported mobile phone on the wireless charging surface (1), put wireless charging supported TWS on the surface (2 ), put wireless charging supported watch on the surface (3) and it is not compatible with all smart watches.
- Phone and TWS and Smart watch will begin to charge automatically.
- Once fully charged remove the device.

## Time Setting:

1. In time mode: Press and hold the [MODE] key for 2 seconds to enter the time setting state. The "hour" flashes. Press the [▲] key to adjust the "hour", press the [▼] key to adjust the "hour", again press the [MODE] key to set the "minute", press the [▲] key to adjust the "minute", and press the [▼] key to adjust the "minute"; Long press and hold the ▲ / ▼ key

You can quickly adjust the time division and then press the [MODE] key again to complete the time setting. If there is no operation for 10 seconds, it will automatically return to the time mode and maintain the settings before returning.

### 12/24 Hour Conversion:

1. In time mode: Press and hold the [▼] key to switch to the 12/24 hour system.
2. The "AM/PM" icon is displayed on the morning/afternoon of the 12 hour system.

## Alarm Settings:

1. In time mode, short press the [Mode] key to switch to alarm mode. At this point, the 'AL' icon will be displayed.

Press and hold the [Mode] key for 2 seconds to enter your desired time setting state. The "hour" flashes, press the [▲] key to adjust it up (hour), and press the [▼] key to adjust it down.

Short press the [Mode] key to set the "minute",

press the [▲] key to adjust the "minute" upwards,


press the [▼] key to adjust the "minute" downwards, and long press the ▲ / ▼ key to quickly adjust the time division setting and activate the alarm clock.

Then press the [Mode] key again to complete the alarm, and the "■" icon will light up.

2. In alarm mode, short press the [▲] key to turn the "■" alarm on/off. After turning on the alarm clock, the "■" icon will appear on any interface.

3. If there is no operation within 10 seconds, it will automatically return to time mode and keep the settings and alarm clock on or off before returning.



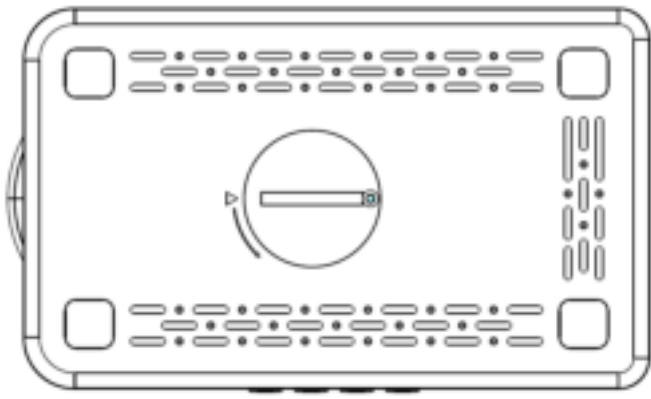

The product contains a CR2032 battery for time memory and only the time will remain active while the wireless charger is not plugged in..

The cell battery is only used to remember the clock, and the time will not be displayed if the power cable is not be plugged in.

Please remove the battery isolator before use.

**Battery replace:**

Please use the corresponding screwdriver to open and install a new CR2032 battery as standard in the product.

**FCC WARNING**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.