

SAR Test Report
On
Dual-Band Tri-mode AMPS/CDMA Cellular Phone

FCC Part 22 & 24 Certification	
FCC ID:	OVFKWC-KX1
Model:	KX1
Original Grant Dates:	

STATEMENT OF COMPLIANCE	
Kyocera Wireless Corp declares under its sole responsibility that the product, FCC ID: OVFKWC-KX444 to which this declaration relates, is in conformity with the appropriate General Population/Uncontrolled RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices.	
Any deviations from these standards, guidelines and recommended practices are noted: NONE.	
Date of Test:	May 20 - June 15, 2004
Test performed by:	Kyocera Wireless Corp 10300 Campus Point Drive CA 92121
Report Prepared by:	Lin Lu, Regulatory Engineer, Principal

Table of Contents

1	INTRODUCTION.....	3
2	EQUIPMENT UNDER TEST (EUT).....	3
3	SAR TEST RESULT SUMMARY	5
3.1	MAXIMUM RESULTS FOUND DURING SAR EVALUATION.....	6
3.2	HEAD CONFIGURATION.....	6
3.3	BODY WORN CONFIGURATION (WITH KWC BODY WORN ACCESSORIES)	6
3.4	MEASUREMENT UNCERTAINTY	6
4	TEST CONDITIONS.....	7
4.1	AMBIENT CONDITIONS	7
4.2	RF CHARACTERISTICS OF THE TEST SITE	7
4.3	TEST SIGNAL, FREQUENCIES AND OUTPUT POWER	7
4.4	DEVICE TEST CONDITIONS	7
5	DESCRIPTION OF THE TEST EQUIPMENT	8
5.1	DOSIMETRIC SYSTEM	8
5.2	ADDITIONAL EQUIPMENT NEEDED IN VALIDATION	8
5.3	TISSUE STIMULANTS	8
5.4	PHANTOMS DESCRIPTION.....	9
5.5	ISOTROPIC E-FIELD PROBE.....	9
6	SYSTEM VALIDATION	10
7	DESCRIPTION OF THE TEST PROCEDURE.....	11
7.1	TEST POSITIONS	11
7.1.1	<i>Initial Ear Position.....</i>	<i>11</i>
7.1.2	<i>Cheek Position.....</i>	<i>12</i>
7.1.3	<i>Tilt Position.....</i>	<i>12</i>
7.1.4	<i>Body Worn Configuration.....</i>	<i>13</i>
7.2	SCAN PROCEDURES	13
7.3	SAR AVERAGING METHODS.....	13
8	MEASUREMENT UNCERTAINTY	14
9	TEST DATA	15
9.1	HEAD SAR TEST RESULTS.....	15
9.2	BODY WORN SAR TEST RESULT	18
10	TEST SETUP PHOTOS	24
	APPENDIX A: VALIDATION TEST PRINTOUT.....	28
	APPENDIX B: SAR DISTRIBUTION PRINTOUT.....	28
	APPENDIX C: PROBE CALIBRATION PARAMETERS.....	28

1 INTRODUCTION

This test report describes an environmental evaluation measurement of specific absorption rate (SAR) distribution in simulated human head tissues exposed to radio frequency (RF) radiation from a wireless portable device manufactured by Kyocera Wireless Corp. (KWC). These measurements were performed for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC). The testing was performed in accordance with FCC OET Bulletin 65 Supplement C (01/01) and IEEE P1528/D1.2 issued on April 21, 2003.

2 EQUIPMENT UNDER TEST (EUT)

The wireless device is described as follows:

FCC ID:	OVFKWC-KX1		
Product:	Tri-mode Dual-Band Analog/Digital Phone		
Trade Name:	Kyocera Wireless Corp		
Model Number:	KX1		
EUT S/N:	6W-X---0VX41S		
Type:	<input type="checkbox"/> Identical Prototype, <input checked="" type="checkbox"/> Pre-production		
Device Category:	Portable		
RF Exposure Environment:	General Population / Uncontrolled		
Antenna Type:	Fixed Stubby	Antenna Location:	Right/Rear
Detachable Antenna:	Yes	Antenna Dimensions:	22.5mm(L) x 10.3mm(W)
External Input:	Audio/Digital Data		
Quantity:	Quantity production is planned		
FCC Rule Parts:	§22H	§22H	§22.901(d) §24H
Modes:	800 AMPS	800 CDMA	800 CDMA1X 1900 CDMA
Multiple Access Scheme:	FDMA	CDMA	CDMA CDMA
Duty Cycle:	1:1	1:1	1:1 1:1
TX Frequency (MHz):	824 – 849	824 – 849	824 – 849 1850 - 1910
Emission Designators:	40K0F1D	40K0F8W	1M25F9W 1M25F9W
Max. Output Power (mW)	0.341 ERP	0.318 ERP 0.418 EIRP	

Note –

This product is a clam shell phone. There are two industry designs on the top half, named KX1 ID1 and KX1 ID2 (See pictures below).

The KX1 ID1 has removable housings, i.e., ‘Feng’ and ‘Shui’. Those two housings are made from the same material, kept the same dimensions, just have different patterns on the surface. Therefore, there is no any difference on all of electrical performance between those two housings. All of SAR measurements have been only conducted on KX1 ID 1 ‘Feng’ and the results are included in the report.

The only difference between KX1 ID1 and ID2 is the oritation of the sub-LCD shown on the picture below. The schematic and main board layout are identical. SAR in worst cases has been evaluated for ID2 to insure a compliance with FCC requirement. The results are reported in the following section.

KX1 model:

KX1 <ul style="list-style-type: none"> ▪ ID1 'Feng' ▪ ID2 ▪ ID1 'Shui'

<div style="display: flex; justify-content: space-around;"> ID1 'Feng' ID2 ID1 'Shui' </div>

Accessories:

KWC Battery Model <ul style="list-style-type: none"> ▪ Extended (high capacity battery): TXBAT10039 (3.7V, 1300mA_hr) ▪ Standard: TXBAT10042 (3.7V, 900mA_hr) ▪ Thin: TXBAT10050 (3.7V, 780mA_hr)
<p>All measurements were done with standard production batteries. The worst cases were re-evaluated with prototype thin and production extended batteries.</p>

<p style="text-align: center;">Thin, Standard and Extended Batteries</p>

KWC Leather Case Model: CA90-L8181-01

KWC Holster Model: CV90-L8180-01


3 SAR TEST RESULT SUMMARY

This device has been tested for localised specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1 ~ 1992 and has been tested in accordance with the measurement procedures specified in IEEE P1528_D1.2. Normal antenna operating positions were incorporated, with the device transmitting at frequencies consistent with normal usage of the device. The device has been shown to be capable of compliance for localised specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE std. C95.1-1992

3.1 Maximum Results Found during SAR Evaluation

The equipment is deemed to fulfil the requirements if the measured values are less than or equal to the limit.

3.2 Head Configuration

Mode	Ch/f(MHz)	Conducte d Power (dBm)	Device Position	Measured (mW/g)	Result
AMPS	991 (824.00)	25.07	Right Cheek	0.990	PASSED
CDMA-800	1013 (824.70)	25.08	Right Cheek	0.998	PASSED
CDMA-1900	1175 (1908.75)	23.05	Right Cheek	0.758	PASSED

3.3 Body Worn Configuration (with KWC body worn accessories)

Mode/	Ch/f(MHz)	Conducte d Power (dBm)	Device Position	Measured (mW/g)	Result
AMPS	383 (836.5)	25.05	Waist level	0.681	PASSED
CDMA-800	383 (836.5)	25.05	Waist level	0.652	PASSED
CDMA-1900	600 (1880.0)	23.09	Waist level	0.547	PASSED

3.4 Measurement Uncertainty

Combined Uncertainty (Assessment & Source)	± 10.46
Extended Uncertainty (k=2)	± 21.22

4 TEST CONDITIONS

4.1 Ambient Conditions

All tests were performed under the following environmental conditions:

Ambient Temperature:	22 ± 1 Degrees C
Tissue simulating liquid temperature:	22 ± 1 Degrees C
Humidity:	38 %
Pressure:	1015 mB

4.2 RF characteristics of the test site

All SAR measurements were performed inside a shielded room that provide isolation from external EM fields.

The E-field probes of the DASY 4 system are capable of detecting signals as low as 5 μ W/g in the liquid dielectric, and so external fields are minimised by the shielded room, leaving the phone as the dominate radiation source. 2 two-foot square ferrite panels are placed on the floor of the room beneath the phantom area of the DASY system to minimise reflected energy that would otherwise re-enter the phantom and combine constructively or destructively with the desired fields. These ferrite panels provide roughly 12 to 13 dB of attenuation in the frequency range of 900 MHz, and 7 to 8 dB of attenuation in the frequency range of 1.9 GHz.

4.3 Test Signal, Frequencies and Output Power

The device was controlled by using Kyocera Wireless Phone Support Toolkit, Test Code Controller.

In all operating bands, the measurements were performed on low, mid and high channels.

The phone was set to nominal maximum power level during all tests and at the beginning of the each test.

DASY4 system measures power drift during SAR testing by comparing E-field in the same location at the beginning and at the end of measurement. These records were used to monitor stability of power output.

4.4 Device Test Conditions

The EUT was tested with a fully charged battery as supplied with the handset. Conducted RF power measurements were performed before and after each SAR measurements to confirm the output power.

5 DESCRIPTION OF THE TEST EQUIPMENT

5.1 Dosimetric System

The measurements were performed with an automated near-field scanning system, DASY4, manufactured by Schmid & Partner Engineering AG (SPEAG) of Zurich, Switzerland. The system is comprised of high precision robot, robot controller, computer, near-field probe, probe alignment sensor and the SAM phantom containing brain or muscle equivalent material. The overall RSS uncertainty of the measurement system is $\pm 10.46\%$ with an expanded uncertainty of $\pm 21.22\%$ ($K=2$). The measurement uncertainty budget is given in section 6. Below is a list of the calibrated equipment used for the measurements:

Test Equipment	Serial Number	Cal. Due Date
DASY4 DAE3 V1	603	10-03-04
E-field Probe ET3DV6	1714	10-10-04
Dipole Validation kit, D835V2	495	10-03-05
Dipole Validation kit, D1900V2	5D037	10-06-05

The calibration records of E-field probe are attached in Appendix C.

5.2 Additional equipment needed in validation

Test Equipment	Serial Number	Cal. Due Date
Signal Generator, HP ESG-D3000A	US3844034	05-22-05
Power meter, Giga-tronics 8541C	1832754	07-11-04
Power Sensor, Giga-tronics 80601A	1831867	09-15-04
Vector Network Analyzer, Agilent 8753C	3410A05046	08-06-04
Dielectric Probe Kit, HP 85070B	3033A03145	09-30-04
Thermometer	--	--

5.3 Tissue Stimulants

All dielectric parameters of tissue stimulants were measured within 24 hours of SAR measurements. The depth of the tissue stimulant in the ear reference point and flat reference point of the phantom were at least 15cm during all the tests.

The list of ingredients and the percent composition used for the Head and Muscle tissue simulates are listed in the table below:

Ingredient	835 MHz		1900 MHz	
	HEAD	MUSCLE	HEAD	MUSCLE
Water	51.07%	65.45%	54%	69.91%
Cellulose	0.23%	--	--	--
Glycol monobutyl	--	--	44.91%	29.96%
Sugar	47.31%	34.31%	--	--
Preventol	0.24%	0.1%	--	--
Salt	1.15%	0.62%	0.21%	0.13%


The ingredients above are adopted from Application Note: Recipes for Head/Muscle Tissue Simulating Liquid by SPEAG.

5.4 Phantoms Description

SAM v4.0 phantom, manufactured by SPEAG, was used during the measurement. It has fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined in IEEE 1528/D1.2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. Reference markings on the phantom allow the complete set-up of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

The thickness of phantom shell is 2mm except for the ear, where an integrated ear spacer provides 6mm spacing from the tissue boundary. Manufacturer reports tolerance in shell thickness to be ± 0.1 mm.

5.5 Isotropic E-Field Probe

Model	<ul style="list-style-type: none"> ET3DV6 
Construction	<ul style="list-style-type: none"> Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycol)
Calibration	<ul style="list-style-type: none"> Calibration certificate in Appendix C
Frequency	<ul style="list-style-type: none"> 10MHz to 3GHz (dosimetry); Linearity: ± 0.2dB (30MHz to 3GHz)
Optical Surface	<ul style="list-style-type: none"> ± 0.2mm repeatability in air and clear liquid over diffuse reflecting
Detection	<ul style="list-style-type: none"> Surface
Directivity	<ul style="list-style-type: none"> ± 0.2dB in HSL (rotation around probe axis) ± 0.4dB in HSL (rotation normal to probe axis)
Dynamic Range	<ul style="list-style-type: none"> 5 μW/g to > 100 mW/g; Linearity: ± 0.2dB
Dimensions	<ul style="list-style-type: none"> Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	<ul style="list-style-type: none"> General dosimetry up to 3GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms.

6 SYSTEM VALIDATION

The probes are calibrated annually by the manufacturer. Dielectric parameters of the stimulating liquids are measured with an automated Hewlett Packard 85070B dielectric probe in conjunction with an Agilent 8753C-network analyser.

The SAR measurements of the device were done within 24 hours of system accuracy verification, which was done using the dipole validation kit. Power level of 20dBm was supplied to a dipole antenna placed under the flat section of SAM phantom. The validation results are in the table below and printouts of the validation test are attached in Appendix A. All the measured parameters were within the specification.

Note since the validation reference in muscle liquid is not available, the system validation with head tissues was done for the device testing in muscle. Based on OET 65 Supplement C EAB Part 22/24 SAR review Reminder Sheet 01/2002, this is a valid test.

Tissue	Freq. (MHz)	Description	Validation SAR (mW/g), 1g	Dielectric Parameters		Temp. (°C)	Test date	Comments Validation testing -
				ϵ_r	σ (S/m)			
Head	835	Measured	0.936	40.5	0.922	22±1	05-25-04	For device testing in head liquid
		Measured	1.04	41.4	0.923	22±1	05-27-04	For device testing in head liquid
		Measured	1.03	41.0	0.911	22±1	05-28-04	For device testing in muscle
		SPEAG Reference	0.944	43.0	0.90	--	10-03-03	
		FCC Reference*	--	41.5	0.90	20-26	--	
	1900	Measured	4.09	40.0	1.44	22±1	05-26-04	for device testing in head liquid
		Measured	3.91	39.6	1.47	22±1	06-01-04	for device testing in head liquid & muscle liquid
		SPEAG Reference	4.00	40.5	1.46	--	10-06-03	
		FCC Reference*	--	40.0	1.40	20-26	--	
Muscle	835	Measured	--	55.0	0.968	22±1	05-28-04	for device testing in muscle
		FCC Reference*	--	55.2	0.97	--	--	
	1900	Measured	--	54.6	1.57	22±1	06-01-04	for device testing in muscle
		FCC Reference*	--	53.3	1.52	20-26	--	

FCC reference values are adopted from OET Bulletin 65 (97-01) Supplement C (01-01).

7 DESCRIPTION OF THE TEST PROCEDURE

Measurements were made on both left-hand side and right hand side of the phantom.

The device was position against phantom according to OET Bulletin 65 (97-01) Supplement C (01-01). Definitions of terms used in aligning the device to a head phantom are available in IEEE Standard P1528/D1.2 "Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"

7.1 Test Positions

The device was placed in the holder. The bottom of the device aligns with the bottom of the holder clamp to provide a standard positioning and ensure enough free space for antenna.

Device holder was provided by SPEAG together with DASY4.

7.1.1 Initial Ear Position

The device was initially positioned with the earpiece region pressed against the ear spacer of a head phantom parallel to the "Neck-Front" (N-F) line defined along the base of the ear spacer that contains the "Ear Reference Point" (ERP). The "test device reference point" (point A) is aligned to the ERP on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane".

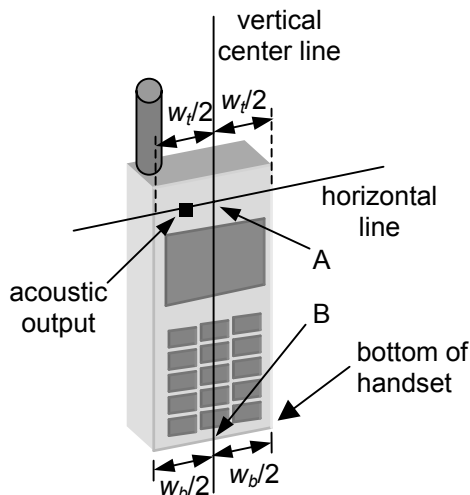


Figure 7-1 – Handset vertical and horizontal reference lines.

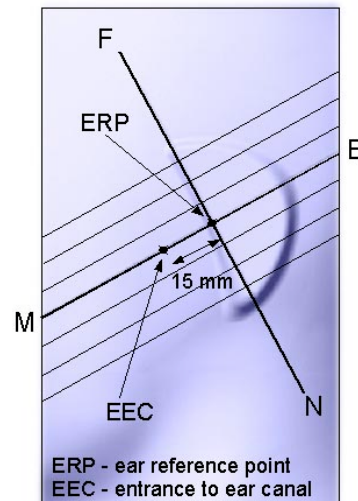


Figure 7-2 - Close up side view of phantom showing the ear region.

7.1.2 Cheek Position

“Initial ear position” alignments are maintained and the device is brought toward the mouth of the head phantom by pivoting along the “Neck-Front” line until any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom or when any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

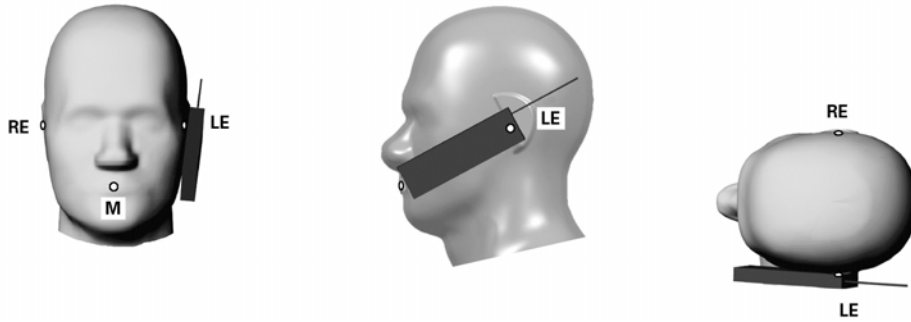


Figure 7.3 - Phone position 1, “cheek” or “touch” position.

7.1.3 Tilt Position

In the “cheek position”, if the earpiece of the device is not in full contact with the phantom’s ear spacer and the peak SAR location for the “cheek position” is located at the ear spacer region or corresponds to the earpiece region of the handset, the device is returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer. Otherwise, the device is moved away from the cheek perpendicular to the line passes through both “ear reference points” for approximate 2-3cm. While it is in this position, the device is tilted away from the mouth with respect to the “test device reference point” by 15°. After the tilt, it is then moved back toward the head perpendicular to the line passes through both “ear reference point” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process is repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously.

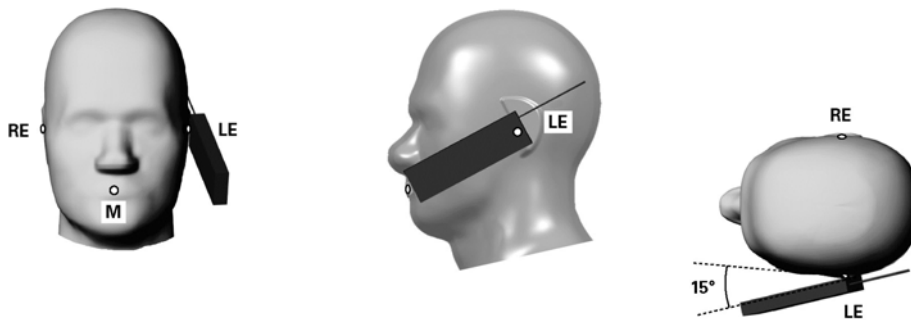


Figure 7.3 - Phone position 2, “tilted” position.

7.1.4 Body Worn Configuration

KWC body worn accessories were tested for the FCC RF exposure compliance. The device was positioned into the carrying case and placed below the flat phantom. Hands-free headset was connected during measurements.

The SAR levels were also measured with 25.0mm air space for the hands-free application, which allow user to use other body-worn holster that contains no metal and provides at least 25.0mm separation from the closest point of the handset to the body.

7.2 Scan Procedures

First coarse scans are used for quick determination of the field distribution. when an area scan measured all reachable points, it computed all of the field maxima found in the scan area, within a range of 2dB specified in IEEE P1528. For the cases that multiple maximums were detected, the number of zoom scan could be increased accordingly.

Next a cube scans, 7x7x7 points; spacing between each point 5x5x5mm, is performed around the highest E-field value to determine the averaged SAR-distribution over 1g. If two peaks were within 2dB of the highest one, two zoom scans could perform to provide the evaluations with a fine resolution volume scan to determine the one-gram average SAR for both peaks.

7.3 SAR Averaging Methods

The maximum SAR value is average over its volume using interpolation and extrapolation.

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the “Not a knot” –condition [W. Gander, Computermathematik, p. 141-150] (x, y and z – directions) [numerical Recipes in C, Second Edition, p 123].

The extrapolation is based on least square algorithm [W. Gander, Computermathematik, p. 168-180]. Through the points in the first 30mm in all z-axis, polynomials of order four are calculated. This polynomial is then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1mm from one another.

8 MEASUREMENT UNCERTAINTY

Description of individual measurement uncertainty

Uncertainty Description	Uncert. Value (± %)	Prob. Dist.	Div	C_i^1 1g	Stand. Uncert (1g) (±%)	V_i^2 or V_{eff}
Measurement system						
Probe calibration	4.8	N	1	1	4.8	∞
Axial isotropy	4.7	R	$\sqrt{3}$	0.7	1.9	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0.7	3.9	∞
Boundary effects	1.0	R	$\sqrt{3}$	1	0.6	∞
Linearity	4.7	R	$\sqrt{3}$	1	1.0	∞
System Detection limit	1.0	R	$\sqrt{3}$	1	0.5	∞
Readout Electronics	1.0	N	1	1	1.0	∞
Response Time	0.8	R	$\sqrt{3}$	1	0.5	∞
Integration Time	2.6	R	$\sqrt{3}$	1	1.5	∞
RF ambient conditions	3.0	R	$\sqrt{3}$	1	1.7	∞
Mech. Constrains of robot	0.4	R	$\sqrt{3}$	1	0.2	∞
Probe positioning	2.9	R	$\sqrt{3}$	1	1.7	∞
Extrapolation, integration and Integration Algorithms for Max. SAR Evaluation	1.0	R	$\sqrt{3}$	1	0.6	∞
Test Sample Related						
Device positioning	3.0	N	1	1	3.0	∞
Device Holder	3.0	N	1	1	3.0	∞
Power drift	7.0	N	$\sqrt{3}$	1	4.0	∞
Phantom and setup						
Phantom uncertainty	4.0	R	$\sqrt{3}$	1	2.3	∞
Liquid conductivity (target)	5.0	R	$\sqrt{3}$	0.6	1.7	∞
Liquid conductivity (meas.)	5.0	N	1	0.6	3.0	∞
Liquid permittivity (target)	5.0	R	$\sqrt{3}$	0.6	1.7	∞
Liquid permittivity (meas.)	5.0	N	1	0.6	1.5	∞
Combined Standard Uncertainty:					10.46	
Extended Standard Uncertainty (k=2):					21.22	

N: Normal

R: Rectangular

9 TEST DATA

9.1 Head SAR Test Results

The following tables list the SAR results in each configuration and operating mode. For each mode, corresponding SAR distribution printouts of maximum results (indicated in bold blue color in the following table) in every device position (Cheek or Tilt) are shown in Appendix B. Some of z-axis plots, marked as an asterisk, are also provided to show the depth of the liquid was deep enough. The rest of SAR distributions are substantially similar or equivalent to the plots submitted, regardless of used channel or battery configurations.

AMPS 800 HEAD ID1 'Feng'		Channel:	991	383	799
		Frequency (MHz):	824.04	836.49	848.97
		Power before Test (dBm):	25.10	25.07	25.12
		Power after Test (dBm):	25.04	25.04	25.00
Configuration	Test Position	Antenna Position	SAR, 1g (W/kg)		
w/ standard battery	Left Cheek/Touch	Fixed	0.883	0.805	0.910
	Left Ear/Tilt	Fixed	0.223	0.227	0.238
	Right Cheek/Touch	Fixed	0.990	0.850	0.986
	Right Ear/Tilt	Fixed	0.250	0.211	0.246
w/ extended battery	Left Cheek/Touch	Fixed			0.889
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.983		
	Right Ear/Tilt	Fixed			
w/ thin battery	Left Cheek/Touch	Fixed			0.824
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.939		
	Right Ear/Tilt	Fixed			

AMPS 800 HEAD ID2		Channel:	991	383	799
		Frequency (MHz):	824.04	836.49	848.97
		Power before Test (dBm):	25.10	25.10	25.09
		Power after Test (dBm):	25.02	25.00	25.02
Configuration	Test Position	Antenna Position	SAR, 1g (W/kg)		
w/ standard battery	Left Cheek/Touch	Fixed			0.95
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.86		
	Right Ear/Tilt	Fixed			
w/ extended battery	Left Cheek/Touch	Fixed			0.97
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.87		
	Right Ear/Tilt	Fixed			
w/ thin battery	Left Cheek/Touch	Fixed			0.94
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.87		
	Right Ear/Tilt	Fixed			

CDMA 800 HEAD ID1 'Feng'		Channel:	1013	383	777
		Frequency (MHz):	824.70	836.49	848.31
		Power before Test (dBm):	25.09	25.08	25.06
		Power after Test (dBm):	25.08	25.03	25.00
Configuration	Test Position	Antenna Position	SAR, 1g (W/kg)		
w/ standard battery	Left Cheek/Touch	Fixed	0.923	0.809	0.939
	Left Ear/Tilt	Fixed	0.247	0.242	0.220
	Right Cheek/Touch	Fixed	0.998*	0.831	0.934
	Right Ear/Tilt	Fixed	0.255	0.207	0.226
w/ extended battery	Left Cheek/Touch	Fixed			0.899
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.987		
	Right Ear/Tilt	Fixed			
w/ thin battery	Left Cheek/Touch	Fixed			0.794
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.879		
	Right Ear/Tilt	Fixed			

CDMA 800 HEAD ID2		Channel:	1013	383	777
		Frequency (MHz):	824.70	836.49	848.31
		Power before Test (dBm):	25.04	25.00	25.10
		Power after Test (dBm):	25.00	24.97	25.03
Configuration	Test Position	Antenna Position	SAR, 1g (W/kg)		
w/ standard battery	Left Cheek/Touch	Fixed			0.91
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.91		
	Right Ear/Tilt	Fixed			
w/ extended battery	Left Cheek/Touch	Fixed			0.96
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.92		
	Right Ear/Tilt	Fixed			
w/ thin battery	Left Cheek/Touch	Fixed			0.91
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.92		
	Right Ear/Tilt	Fixed			

CDMA 1900 HEAD ID1 'Feng'		Channel:	25	600	1175
		Frequency (MHz):	1851.25	1880	1908.75
		Power before Test (dBm):	23.10	23.15	23.13
		Power after Test (dBm):	23.01	23.04	23.07
Configuration	Test Position	Antenna Position	SAR, 1g (W/kg)		
w/ standard battery	Left Cheek/Touch	Fixed	0.339	0.393	0.562
	Left Ear/Tilt	Fixed	0.143	0.216	0.254
	Right Cheek/Touch	Fixed	0.753*	0.605	0.597
	Right Ear/Tilt	Fixed	0.287	0.249	0.237
w/ extended battery	Left Cheek/Touch	Fixed			0.563
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.500		
	Right Ear/Tilt	Fixed			
w/ thin battery	Left Cheek/Touch	Fixed			0.758
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.638		
	Right Ear/Tilt	Fixed			

CDMA 1900 HEAD ID2		Channel:	25	600	1175
		Frequency (MHz):	1851.25	1880	1908.75
		Power before Test (dBm):	23.08	23.03	23.10
		Power after Test (dBm):	23.02	23.00	23.00
Configuration	Test Position	Antenna Position	SAR, 1g (W/kg)		
w/ standard battery	Left Cheek/Touch	Fixed			0.35
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.62		
	Right Ear/Tilt	Fixed			
w/ extended battery	Left Cheek/Touch	Fixed			0.32
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.42		
	Right Ear/Tilt	Fixed			
w/ thin battery	Left Cheek/Touch	Fixed			0.39
	Left Ear/Tilt	Fixed			
	Right Cheek/Touch	Fixed	0.57		
	Right Ear/Tilt	Fixed			

9.2 Body Worn SAR Test Result

The device was tested with a 25mm air gap or with KWC body-worn accessories. For each configuration, SAR tests were performed only at mid channel due to very low SAR levels. All plots of the SAR distribution, tested with the ID1 'Feng' and standard batteries, are provided in Appendix B. The rest of SAR distributions are substantially similar or equivalent to the plots submitted, regardless of used accessory or battery or ID.

Waist Level SAR with KWC Body Worn Accessories

AMPS 800 BODY ID1 ‘Feng’		Channel:	991	383	799
		Frequency (MHz):	824.04	836.49	848.97
		Power before Test (dBm):		25.07	
		Power after Test (dBm):		25.04	
Configuration	Test Position	Phone Configuration	SAR, 1g (W/kg)		
With Standard Battery					
Air Gap - 25mm	Flat	Face Down		0.372	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.450	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.569*	
With Extended Battery					
Air Gap - 25mm	Flat	Face Down		0.334	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.373	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.589	
With Thin Battery					
Air Gap - 25mm	Flat	Face Down		0.424	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.448	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.579	

AMPS 800 BODY ID2		Channel:	991	383	799
		Frequency (MHz):	824.04	836.49	848.97
		Power before Test (dBm):		25.10	
		Power after Test (dBm):		25.00	
Configuration	Test Position	Phone Configuration	SAR, 1g (W/kg)		
With Standard Battery					
Air Gap - 25mm	Flat	Face Down		0.482	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.432	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.578	
With Extended Battery					
Air Gap - 25mm	Flat	Face Down		0.382	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.332	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.681	
With Thin Battery					
Air Gap - 25mm	Flat	Face Down		0.437	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.453	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.675	

CDMA 800 BODY ID1 ‘Feng’		Channel:	1013	383	777
		Frequency (MHz):	824.70	836.49	848.31
		Power before Test (dBm):		25.08	
		Power after Test (dBm):		25.03	
Configuration	Test Position	Phone Configuration	SAR, 1g (W/kg)		
With Standard Battery					
Air Gap - 25mm	Flat	Face Down		0.422	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.459	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.550	
With Extended Battery					
Air Gap - 25mm	Flat	Face Down		0.339	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.422	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.615	
With Thin Battery					
Air Gap - 25mm	Flat	Face Down		0.444	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.455	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.590	

CDMA 800 BODY ID2		Channel:	1013	383	777
		Frequency (MHz):	824.70	836.49	848.31
		Power before Test (dBm):		25.00	
		Power after Test (dBm):		24.97	
Configuration	Test Position	Phone Configuration	SAR, 1g (W/kg)		
With Standard Battery					
Air Gap - 25mm	Flat	Face Down		0.477	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.418	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.575	
With Extended Battery					
Air Gap - 25mm	Flat	Face Down		0.384	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.355	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.652	
With Thin Battery					
Air Gap - 25mm	Flat	Face Down		0.480	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.400	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.582	

CDMA 1900 BODY ID1 ‘Feng’		Channel:	25	600	1175
		Frequency (MHz):	1851.25	1880	1908.75
		Power before Test (dBm):		23.15	
		Power after Test (dBm):		23.04	
Configuration	Test Position	Phone Configuration	SAR, 1g (W/kg)		
With Standard Battery					
Air Gap - 25mm	Flat	Face Down		0.276	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.240	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.429	
With Extended Battery					
Air Gap - 25mm	Flat	Face Down		0.217	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.226	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.547	
With Thin Battery					
Air Gap - 25mm	Flat	Face Down		0.247	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.128	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.443	

CDMA 1900 BODY ID2		Channel:	25	600	1175
		Frequency (MHz):	1851.25	1880	1908.75
		Power before Test (dBm):		23.03	
		Power after Test (dBm):		23.00	
Configuration	Test Position	Phone Configuration	SAR, 1g (W/kg)		
With Standard Battery					
Air Gap - 25mm	Flat	Face Down		0.233	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.237	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.350	
With Extended Battery					
Air Gap - 25mm	Flat	Face Down		0.185	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.192	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.435	
With Thin Battery					
Air Gap - 25mm	Flat	Face Down		0.225	
Leather Case: (CA90-L8181-01)	Flat	Face Down		0.222	
Kyocera Holster: (CV90-L8180-01)	Flat	Face Down		0.345	

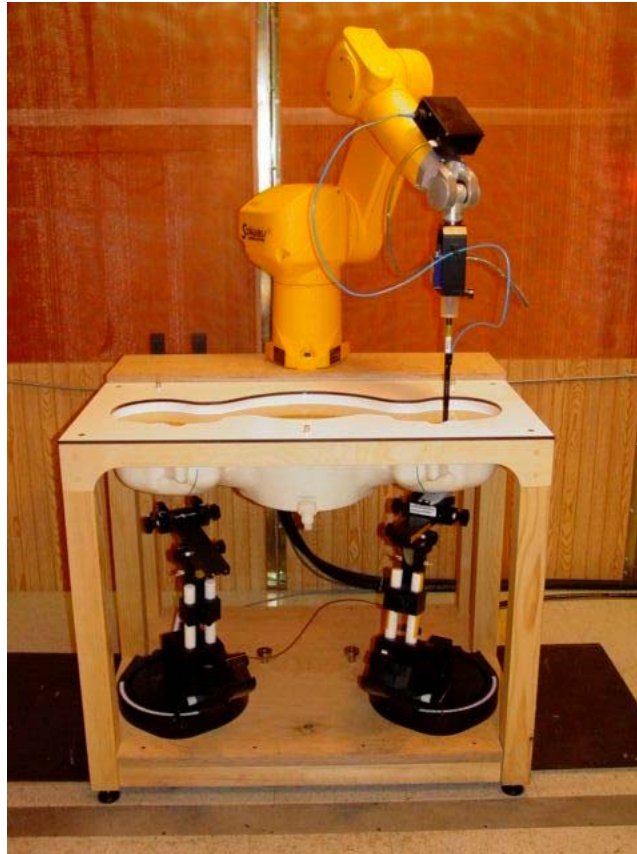
10 TEST SETUP PHOTOS

Figure 10.1 DASY 4 System



Figure 10.2 phone against the head (left cheek position)



Figure 10.3 phone against the head (left tilt position)



Figure 10.4 body SAR setup (with holster)



Figure 10.5 body SAR setup (with leather case)



Figure 10.6 body SAR setup (with 25mm air separation)

Appendix A: Validation test printout

Please see separate attachment

Appendix B: SAR distribution printout

Please see separate attachment

Appendix C: probe calibration parameters

Please see separate attachment