

FCC RF Test Report

(Bluetooth)

Report No.: JYTSZ-R12-2401350
Applicant: LG Electronics USA, Inc.
Address of Applicant: 111 Sylvan Avenue North Building, Englewood Cliffs, New Jersey, United States 07632


Equipment Under Test (EUT)

Product Name: Bluetooth Module
Model No.: MB2710
Trade Mark:



FCC ID: BEJ-MB2710
Applicable Standards: FCC CFR Title 47 Part 15C (§15.247)
Date of Sample Receipt: 07 Nov., 2024
Date of Test: 08 Nov., to 19 Nov., 2024
Date of Report Issued: 20 Nov., 2024
Test Result: PASS

Project by:	<u> </u> <i>vieta zhang</i>	Date:	<u> </u> <i>20 Nov., 2024</i>
Reviewed by:	<u> </u> <i>W. Peng</i>	Date:	<u> </u> <i>20 Nov., 2024</i>
Approved by:	<u> </u> <i>James Wei</i>	Date:	<u> </u> <i>20 Nov., 2024</i>
	Manager		



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	20 Nov., 2024	Original

2 Contents

Page

Cover Page	1
1 Version	2
2 Contents	3
3 General Information	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode and Test Environment	5
3.4 Description of Test Auxiliary Equipment	5
3.5 Measurement Uncertainty	5
3.6 Additions to, Deviations, or Exclusions From the Method	5
3.7 Laboratory Facility	6
3.8 Laboratory Location	6
3.9 Test Instruments List	6
4 Measurement Setup and Procedure	8
4.1 Test Channel	8
4.2 Test Setup	8
4.3 Test Procedure	10
5 Test Results	11
5.1 Summary	11
5.1.1 Clause and data summary	11
5.1.2 Test Limit	12
5.2 Antenna Requirement	13
5.3 AC Power Line Conducted Emission	14
5.4 Emissions in Restricted Frequency Bands	16
5.5 Emissions in Non-restricted Frequency Bands	28
Appendix – BT	31

3 General Information

3.1 Client Information

Applicant:	LG Electronics USA, Inc.
Address:	111 Sylvan Avenue North Building, Englewood Cliffs, New Jersey, United States 07632
Manufacturer:	LG Electronics USA, Inc.
Address:	111 Sylvan Avenue North Building, Englewood Cliffs, New Jersey, United States 07632
Factory:	Shenzhen Jingxun Technology Co., Ltd
Address:	3/F, A5 Building Zhiyuan Community No.1001, Xueyuan Road Nanshan District, Shenzhen City

3.2 General Description of E.U.T.

Product Name:	Bluetooth Module
Model No.:	MB2710
Operation Frequency:	2402 MHz - 2480 MHz
Transfer Rate:	1/2/3 Mbits/s
Number of Channel:	79
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology:	FHSS
Antenna Type:	Internal Antenna
Antenna Gain:	1.73 dBi (declare by applicant)
Antenna transmit mode:	SISO (1TX, 1RX)
Power Supply:	DC 3.3~4.2V
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

3.3 Test Mode and Test Environment

Test Modes:	
Non-hopping mode:	Keep the EUT in continuous transmitting mode.
Hopping mode:	Keep the EUT in hopping mode.
Remark: 1. For AC power line conducted emission and radiated spurious emission, pre-scan GFSK, $\pi/4$ -DQPSK, 8DPSK modulation mode, found GFSK modulation was worse case mode. The report only reflects the test data of worst mode. 2. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report.	
Operating Environment:	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	DC 3.3~4.2V
Test Engineer:	Logan Li (Conducted measurement) Real Chen (Radiated measurement)

3.4 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.

3.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	3.57 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	3.14 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m FAR)	4.95 dB
Radiated Emission (6GHz ~ 18GHz) (3m FAR)	5.23 dB
Radiated Emission (18GHz ~ 40GHz) (3m FAR)	5.32 dB
Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.	

3.6 Additions to, Deviations, or Exclusions From the Method

No

3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.9 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	01-05-2024	01-04-2025
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	01-09-2024	01-08-2025
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	01-05-2024	01-04-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-28-2023	12-27-2024
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-27-2023	12-26-2024
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-27-2023	12-26-2024
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-28-2023	12-27-2024
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-27-2023	12-26-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-27-2023	12-26-2024
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ004-2	09-09-2024	09-08-2025
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-17-2024	01-16-2025
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-17-2024	01-16-2025
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG001-7	01-17-2024	01-16-2025
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Radiated Emission(3m FAR):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m FAR	YUNYI	9m*6m*6m	WXJ097	06-15-2023	06-14-2028
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ097-2	07-01-2024	06-30-2025
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	07-01-2024	06-30-2027
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ097-3	06-16-2024	06-15-2025
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	12-28-2023	12-27-2024
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-28-2023	12-27-2024
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-6	12-28-2023	12-27-2024
Pre-amplifier (30MHz ~ 1GHz)	YUNYI	PAM-310N	WXJ097-5	04-24-2024	04-23-2025
Pre-amplifier (1GHz ~ 18GHz)	YUNYI	PAM-118N	WXJ097-6	04-24-2024	04-23-2025
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-28-2023	12-27-2024
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	12-27-2023	12-26-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-27-2023	12-26-2024
Spectrum Analyzer	KEYSIGHT	N9020B	WXJ081-1	06-11-2024	06-10-2025
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-13M	WXG097-1	07-30-2024	07-29-2025
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG097-2	07-30-2024	07-29-2025
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG097-3	07-30-2024	07-29-2025
High Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Low Band Reject Filter Group	Tonscend	JS0806-F	WXJ097-4	N/A	
Test Software	Tonscend	TS+	Version: 5.0.0		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	06-11-2024	06-10-2025
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	12-27-2023	12-26-2024
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	12-27-2023	12-26-2024
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	01-17-2024	01-16-2025
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

Conducted Method:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9010B	WXJ004-3	09-10-2024	09-09-2025
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	01-09-2023	01-08-2025
Power Detector Box	MWRFTTEST	MW100-PSB	WXJ007-4	09-10-2024	09-09-2025
DC Power Supply	Keysight	E3642A	WXJ025-2	N/A	
RF Control Unit	MWRFTTEST	MW100-RFCB	WXG006	N/A	
Test Software	MWRFTTEST	MTS 8310	Version: 2.0.0.0		

4 Measurement Setup and Procedure


4.1 Test Channel

According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	39	2441	78	2480

4.2 Test Setup


1) Conducted emission measurement:

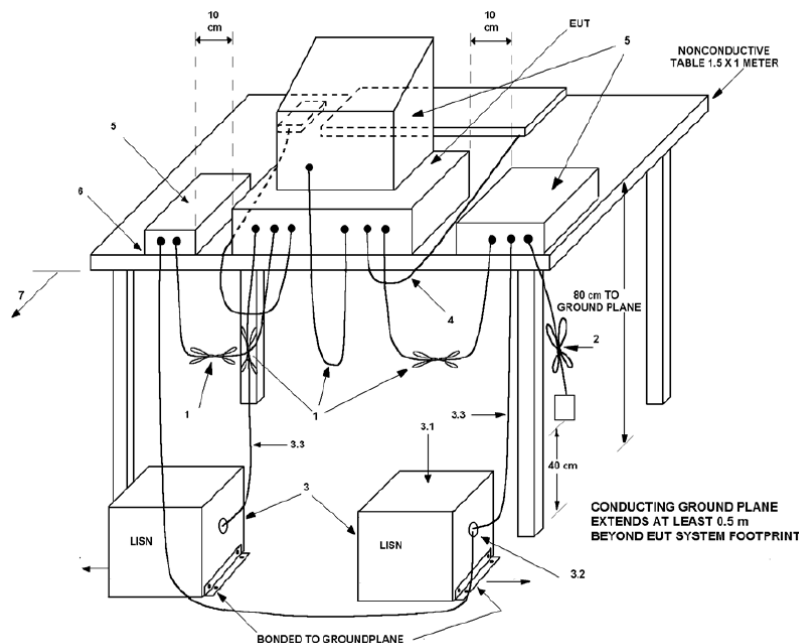


Note: The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

2) Radiated emission measurement:


Below 1GHz (3m SAC)

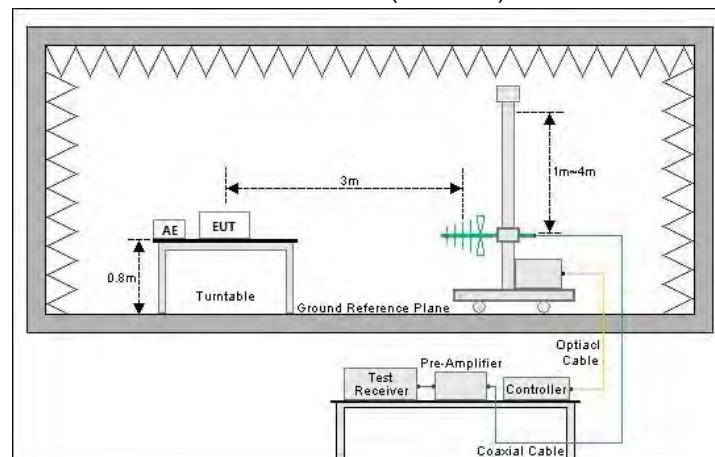

Above 1GHz (3m FAR)

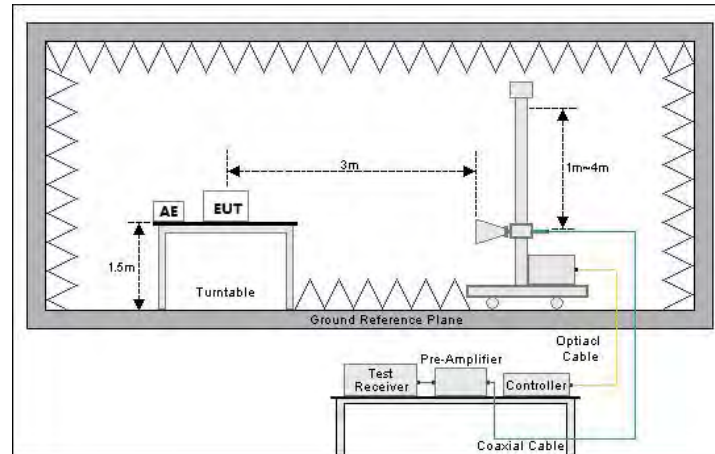

3) Conducted test method

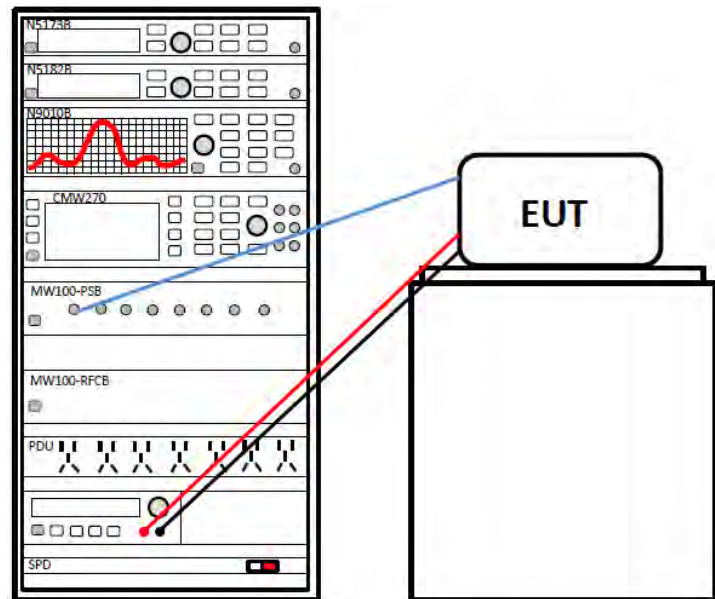

4.3 Test Procedure

Test method	Test step
Conducted emission	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Radiated emission	For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	1. The Bluetooth antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

5 Test Results

5.1 Summary

5.1.1 Clause and data summary

Test items	Standard clause	Test data	Result
Antenna Requirement	15.203 15.247 (b)(4)	See Section 5.2	Pass
AC Power Line Conducted Emission	15.207	See Section 5.3	Pass
Conducted Output Power	15.247 (b)(1)	Appendix – BT	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Appendix – BT	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Appendix – BT	Pass
Hopping Channel Number	15.247 (a)(1)(iii)	Appendix – BT	Pass
Dwell Time	15.247 (a)(1)(iii)	Appendix – BT	Pass
Band-edge Emission Conduction Spurious Emission	15.247 (d)	Appendix – BT	Pass
Emissions in Restricted Frequency Bands	15.205 15.247 (d)	See Section 5.4	Pass
Emissions in Non-restricted Frequency Bands	15.209 15.247(d)	See Section 5.5	Pass
Remark: 1. <i>Pass: The EUT complies with the essential requirements in the standard.</i> 2. <i>N/A: Not Applicable.</i> 3. <i>The cable insertion loss used by “RF Output Power” and other conduction measurement items is 0.5dB (provided by the customer).</i>			
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02		

5.1.2 Test Limit


Test items	Limit																																								
AC Power Line Conducted Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-Peak</th><th>Average</th></tr><tr><td>0.15 – 0.5</td><td>66 to 56 Note 1</td><td>56 to 46 Note 1</td></tr><tr><td>0.5 – 5</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>60</td><td>50</td></tr><tr><td colspan="3">Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.</td></tr></table>	Frequency (MHz)	Limit (dBμV)		Quasi-Peak	Average	0.15 – 0.5	66 to 56 Note 1	56 to 46 Note 1	0.5 – 5	56	46	5 – 30	60	50	Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.																									
Frequency (MHz)	Limit (dBμV)																																								
	Quasi-Peak	Average																																							
0.15 – 0.5	66 to 56 Note 1	56 to 46 Note 1																																							
0.5 – 5	56	46																																							
5 – 30	60	50																																							
Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.																																									
Conducted Output Power	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.																																								
20dB Occupied Bandwidth	Within authorization band																																								
Carrier Frequencies Separation	a) 0.025MHz or the 20dB bandwidth (whichever is greater). b) 0.025MHz or two-thirds of the 20dB bandwidth (whichever is greater).																																								
Hopping Channel Number	At least 15 channels.																																								
Dwell Time	Not be greater than 0.4 seconds.																																								
Band-edge Emission Conduction Spurious Emission	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																																								
Emissions in Restricted Frequency Bands Emissions in Non-restricted Frequency Bands	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBμV/m)</th><th rowspan="2">Detector</th></tr><tr><th>@ 3m</th><th>@ 10m</th></tr><tr><td>30 – 88</td><td>40.0</td><td>30.0</td><td>Quasi-peak</td></tr><tr><td>88 – 216</td><td>43.5</td><td>33.5</td><td>Quasi-peak</td></tr><tr><td>216 – 960</td><td>46.0</td><td>36.0</td><td>Quasi-peak</td></tr><tr><td>960 – 1000</td><td>54.0</td><td>44.0</td><td>Quasi-peak</td></tr><tr><td colspan="4">Note: The more stringent limit applies at transition frequencies.</td></tr><tr><th rowspan="2">Frequency</th><th colspan="2">Limit (dBμV/m) @ 3m</th><th rowspan="2">Peake</th></tr><tr><th colspan="2">Average</th></tr><tr><td>Above 1 GHz</td><td colspan="2">54.0</td><td>74.0</td></tr><tr><td colspan="4">Note: The measurement bandwidth shall be 1 MHz or greater.</td></tr></table>	Frequency (MHz)	Limit (dBμV/m)		Detector	@ 3m	@ 10m	30 – 88	40.0	30.0	Quasi-peak	88 – 216	43.5	33.5	Quasi-peak	216 – 960	46.0	36.0	Quasi-peak	960 – 1000	54.0	44.0	Quasi-peak	Note: The more stringent limit applies at transition frequencies.				Frequency	Limit (dBμV/m) @ 3m		Peake	Average		Above 1 GHz	54.0		74.0	Note: The measurement bandwidth shall be 1 MHz or greater.			
Frequency (MHz)	Limit (dBμV/m)		Detector																																						
	@ 3m	@ 10m																																							
30 – 88	40.0	30.0	Quasi-peak																																						
88 – 216	43.5	33.5	Quasi-peak																																						
216 – 960	46.0	36.0	Quasi-peak																																						
960 – 1000	54.0	44.0	Quasi-peak																																						
Note: The more stringent limit applies at transition frequencies.																																									
Frequency	Limit (dBμV/m) @ 3m		Peake																																						
	Average																																								
Above 1 GHz	54.0		74.0																																						
Note: The measurement bandwidth shall be 1 MHz or greater.																																									

5.2 Antenna Requirement

Standard requirement:	FCC Part 15 C Section 15.203 & 247(b)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
E.U.T Antenna:	
The Bluetooth antenna is an Internal antenna which permanently attached, and the best case gain of the antenna is 1.73 dBi. See product internal photos for details.	

5.3 AC Power Line Conducted Emission

Product name:	Bluetooth Module	Product model:	MB2710
Test by:	Kiran Zeng	Test mode:	BT Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	DC 5V		

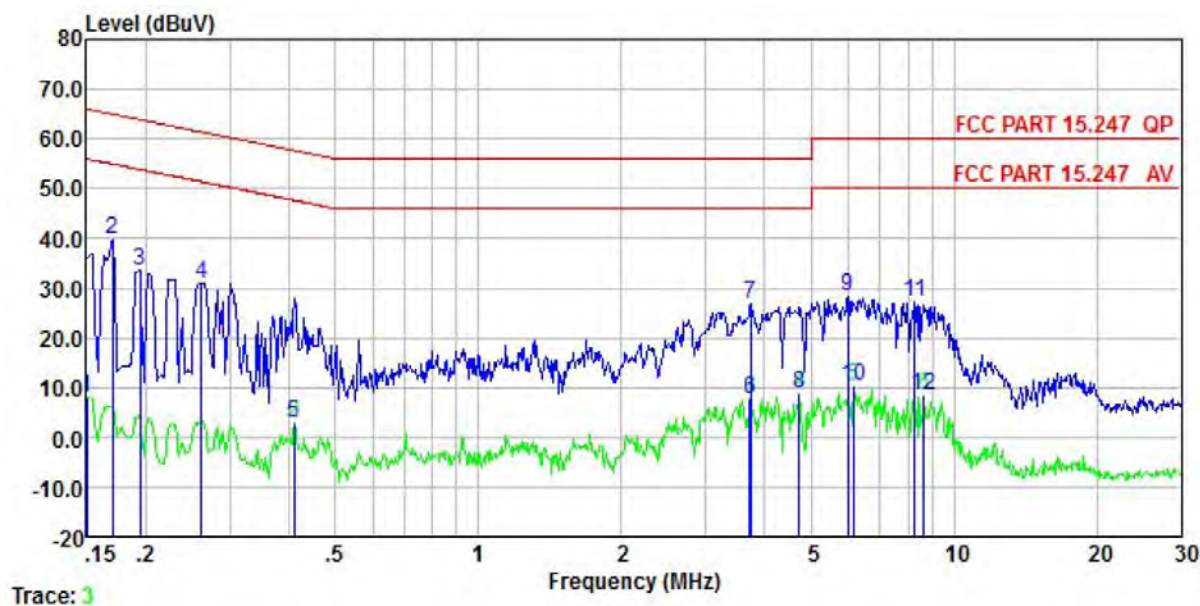


	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.150	-1.87	0.20	0.00	9.88	0.01	8.22	56.00	-47.78	Average
2	0.170	29.68	0.20	0.00	9.88	0.01	39.77	64.94	-25.17	QP
3	0.194	23.55	0.20	0.00	9.88	0.03	33.66	63.84	-30.18	QP
4	0.262	20.97	0.20	0.00	9.88	0.01	31.06	61.38	-30.32	QP
5	0.410	-7.38	0.20	0.00	9.88	0.04	2.74	47.64	-44.90	Average
6	3.720	-2.66	0.20	0.00	9.89	0.08	7.51	46.00	-38.49	Average
7	3.740	16.68	0.20	0.00	9.89	0.08	26.85	56.00	-29.15	QP
8	4.721	-1.55	0.20	0.00	9.89	0.09	8.63	46.00	-37.37	Average
9	5.993	18.10	0.20	0.00	9.90	0.09	28.29	60.00	-31.71	QP
10	6.153	0.23	0.20	0.00	9.90	0.09	10.42	50.00	-39.58	Average
11	8.279	17.17	0.20	0.00	9.90	0.10	27.37	60.00	-32.63	QP
12	8.637	-1.89	0.20	0.00	9.91	0.11	8.33	50.00	-41.67	Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Bluetooth Module	Product model:	MB2710
Test by:	Kiran Zeng	Test mode:	BT Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	DC 5V		

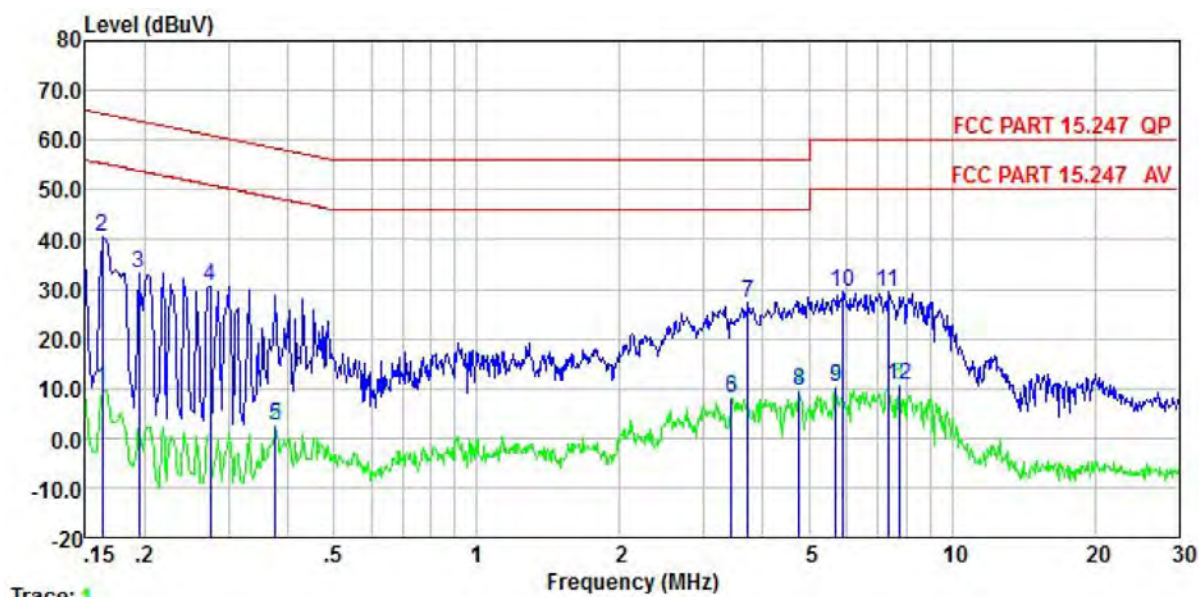


	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	-0.34	0.20	0.00	9.88	0.01	9.75	55.34	-45.59	Average
2	0.162	30.33	0.20	0.00	9.88	0.01	40.42	65.34	-24.92	QP
3	0.194	23.05	0.20	0.00	9.88	0.03	33.16	63.84	-30.68	QP
4	0.274	20.57	0.20	0.00	9.88	0.02	30.67	60.98	-30.31	QP
5	0.377	-7.61	0.20	0.00	9.88	0.03	2.50	48.34	-45.84	Average
6	3.436	-2.18	0.30	0.00	9.89	0.07	8.08	46.00	-37.92	Average
7	3.720	17.05	0.30	0.00	9.89	0.08	27.32	56.00	-28.68	QP
8	4.772	-0.71	0.30	0.00	9.89	0.09	9.57	46.00	-36.43	Average
9	5.683	-0.10	0.30	0.00	9.90	0.09	10.19	50.00	-39.81	Average
10	5.898	19.10	0.30	0.00	9.90	0.09	29.39	60.00	-30.61	QP
11	7.329	19.04	0.31	0.00	9.90	0.10	29.35	60.00	-30.65	QP
12	7.728	0.35	0.33	0.00	9.90	0.10	10.68	50.00	-39.32	Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

5.4 Emissions in Restricted Frequency Bands

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 5V		

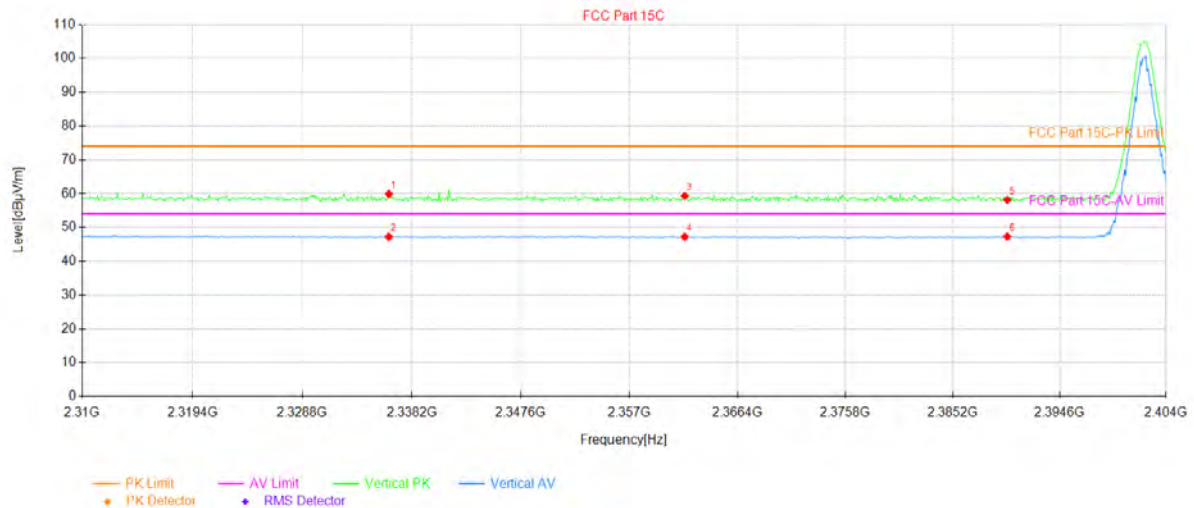

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2336.23	23.72	36.17	59.89	74.00	14.11	337	PK	PASS	Vertical
2	2336.23	11.05	36.17	47.22	54.00	6.78	119	AV	PASS	Vertical
3	2361.79	22.97	36.33	59.30	74.00	14.70	156	PK	PASS	Vertical
4	2361.79	10.90	36.33	47.23	54.00	6.77	171	AV	PASS	Vertical
5	2390.00	21.65	36.47	58.12	74.00	15.88	337	PK	PASS	Vertical
6	2390.00	10.83	36.47	47.30	54.00	6.70	119	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 5V		




Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2328.61	23.21	36.12	59.33	74.00	14.67	286	PK	PASS	Horizontal
2	2328.61	11.12	36.12	47.24	54.00	6.76	123	AV	PASS	Horizontal
3	2356.34	10.77	36.30	47.07	54.00	6.93	15	AV	PASS	Horizontal
4	2356.34	23.11	36.30	59.41	74.00	14.59	67	PK	PASS	Horizontal
5	2390.00	22.60	36.47	59.07	74.00	14.93	178	PK	PASS	Horizontal
6	2390.00	10.65	36.47	47.12	54.00	6.88	264	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 5V		

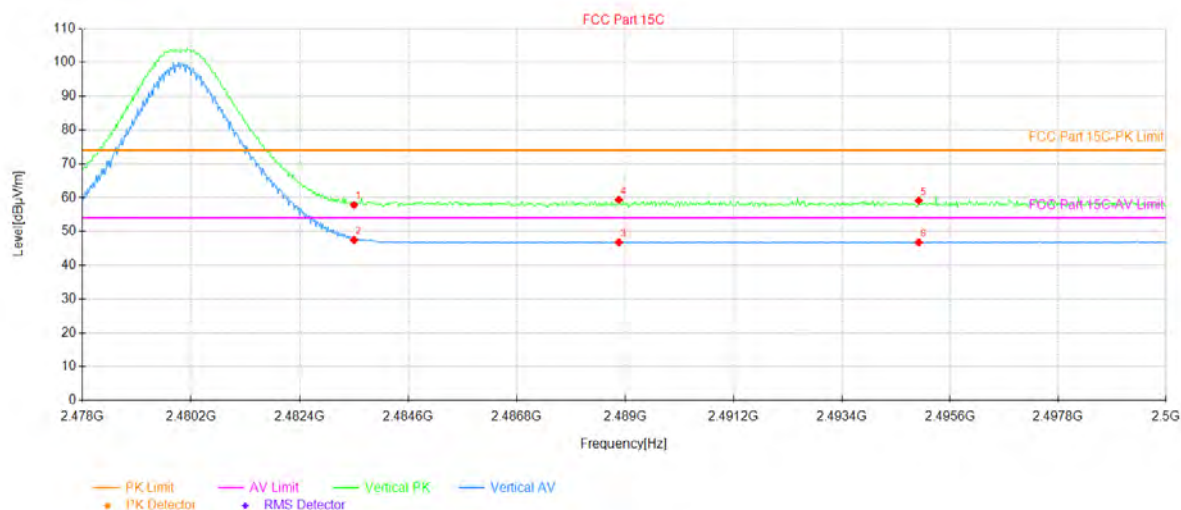


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.69	36.11	57.80	74.00	16.20	5	PK	PASS	Vertical
2	2483.50	11.37	36.11	47.48	54.00	6.52	189	AV	PASS	Vertical
3	2488.87	10.67	36.13	46.80	54.00	7.20	297	AV	PASS	Vertical
4	2488.87	23.23	36.13	59.36	74.00	14.64	117	PK	PASS	Vertical
5	2494.96	22.93	36.16	59.09	74.00	14.91	290	PK	PASS	Vertical
6	2494.96	10.63	36.16	46.79	54.00	7.21	42	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 5V		

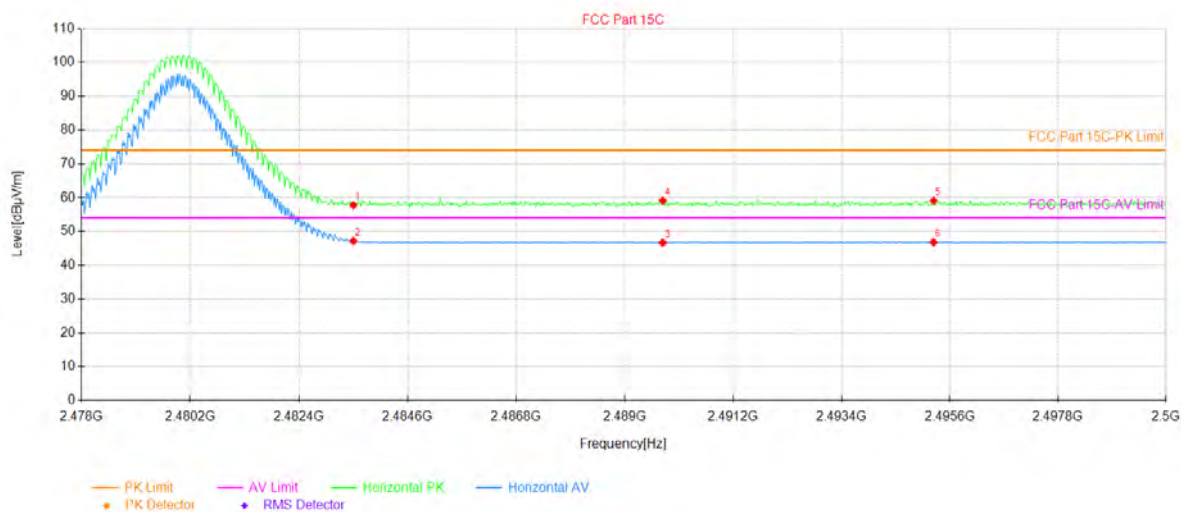

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.61	36.11	57.72	74.00	16.28	345	PK	PASS	Horizontal
2	2483.50	11.07	36.11	47.18	54.00	6.82	152	AV	PASS	Horizontal
3	2489.77	10.56	36.13	46.69	54.00	7.31	64	AV	PASS	Horizontal
4	2489.77	22.96	36.13	59.09	74.00	14.91	358	PK	PASS	Horizontal
5	2495.27	22.91	36.16	59.07	74.00	14.93	101	PK	PASS	Horizontal
6	2495.27	10.66	36.16	46.82	54.00	7.18	227	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

π/4-DQPSK mode

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 5V		

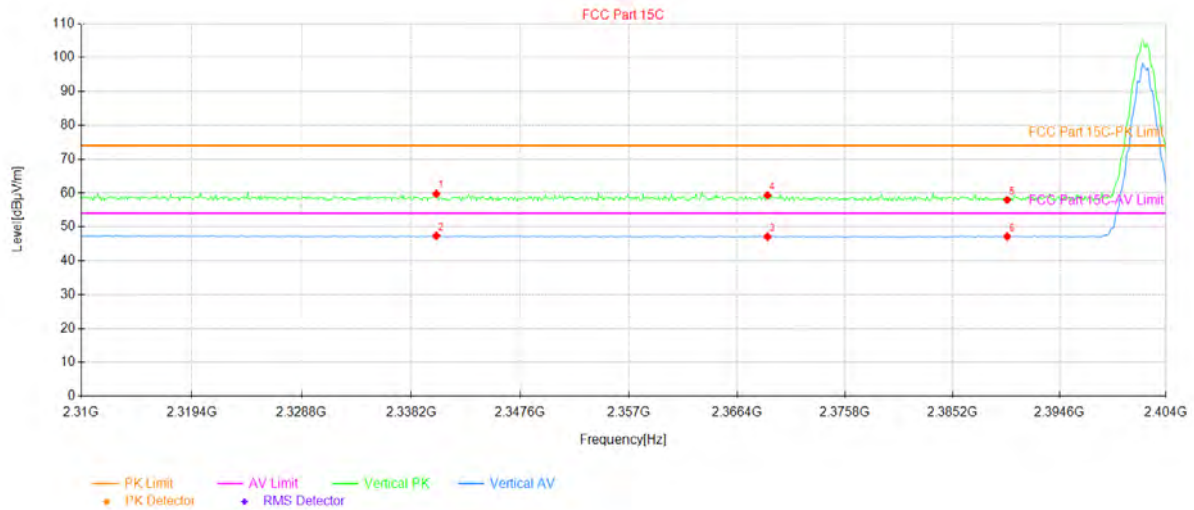


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2340.36	23.56	36.20	59.76	74.00	14.24	19	PK	PASS	Vertical
2	2340.36	11.16	36.20	47.36	54.00	6.64	104	AV	PASS	Vertical
3	2369.03	10.76	36.37	47.13	54.00	6.87	130	AV	PASS	Vertical
4	2369.03	22.94	36.37	59.31	74.00	14.69	107	PK	PASS	Vertical
5	2390.00	21.47	36.47	57.94	74.00	16.06	215	PK	PASS	Vertical
6	2390.00	10.72	36.47	47.19	54.00	6.81	334	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 5V		

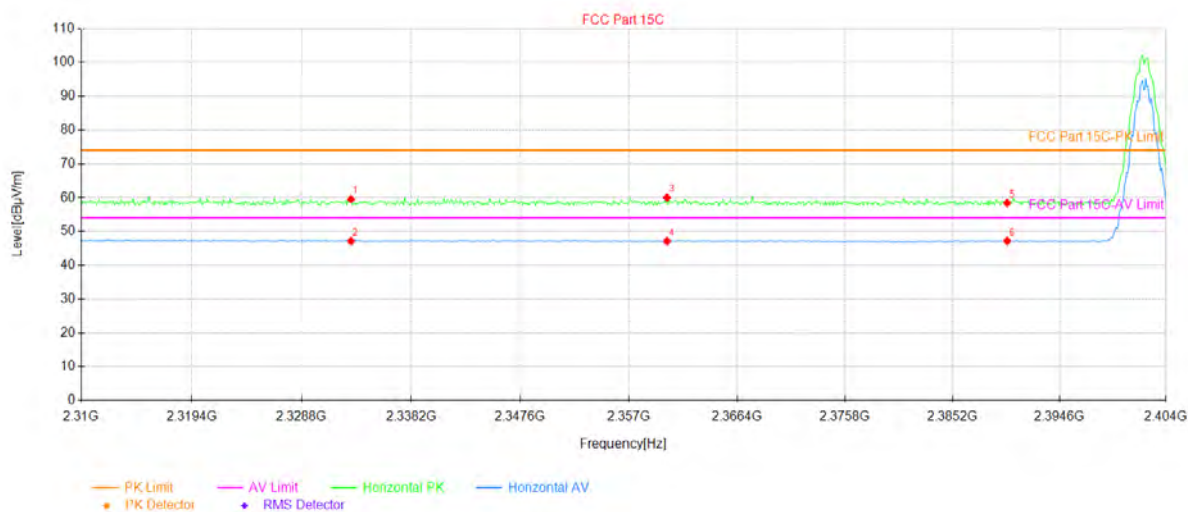


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2333.03	23.37	36.15	59.52	74.00	14.48	294	PK	PASS	Horizontal
2	2333.03	11.00	36.15	47.15	54.00	6.85	235	AV	PASS	Horizontal
3	2360.29	23.68	36.32	60.00	74.00	14.00	56	PK	PASS	Horizontal
4	2360.29	10.82	36.32	47.14	54.00	6.86	41	AV	PASS	Horizontal
5	2390.00	21.94	36.47	58.41	74.00	15.59	104	PK	PASS	Horizontal
6	2390.00	10.73	36.47	47.20	54.00	6.80	272	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 5V		

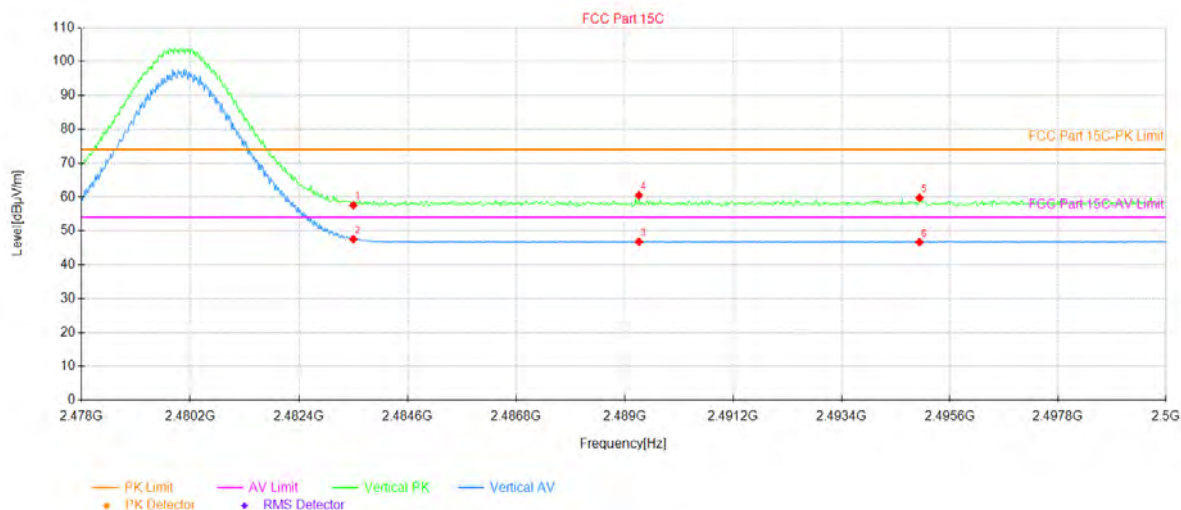


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.44	36.11	57.55	74.00	16.45	163	PK	PASS	Vertical
2	2483.50	11.49	36.11	47.60	54.00	6.40	7	AV	PASS	Vertical
3	2489.29	10.69	36.13	46.82	54.00	7.18	193	AV	PASS	Vertical
4	2489.29	24.35	36.13	60.48	74.00	13.52	63	PK	PASS	Vertical
5	2494.98	23.60	36.16	59.76	74.00	14.24	96	PK	PASS	Vertical
6	2494.98	10.53	36.16	46.69	54.00	7.31	19	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 5V		

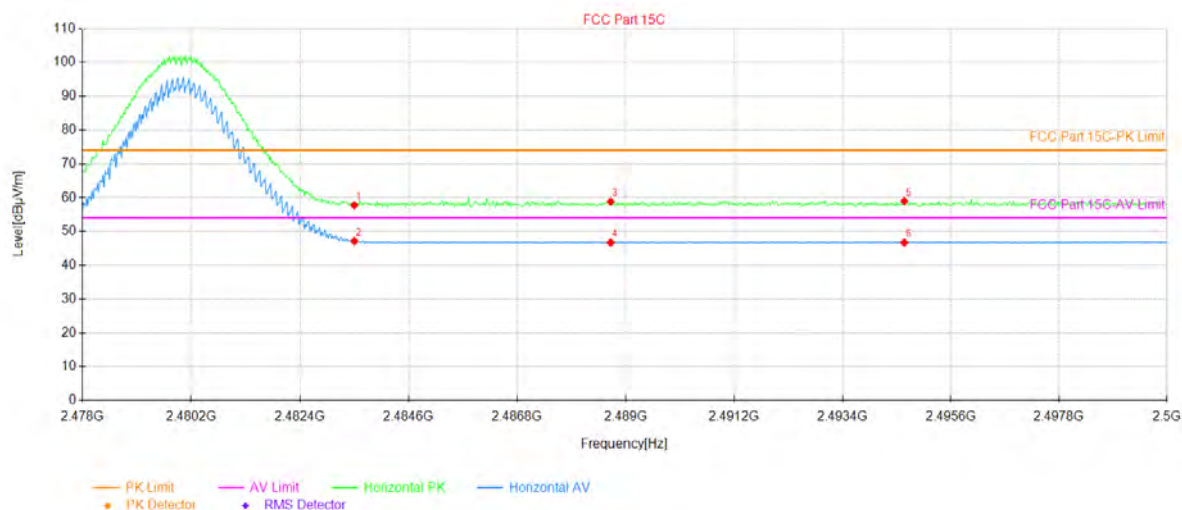

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.62	36.11	57.73	74.00	16.27	82	PK	PASS	Horizontal
2	2483.50	11.05	36.11	47.16	54.00	6.84	145	AV	PASS	Horizontal
3	2488.69	22.65	36.13	58.78	74.00	15.22	115	PK	PASS	Horizontal
4	2488.69	10.60	36.13	46.73	54.00	7.27	122	AV	PASS	Horizontal
5	2494.65	22.77	36.16	58.93	74.00	15.07	130	PK	PASS	Horizontal
6	2494.65	10.57	36.16	46.73	54.00	7.27	104	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

8DPSK mode

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 5V		

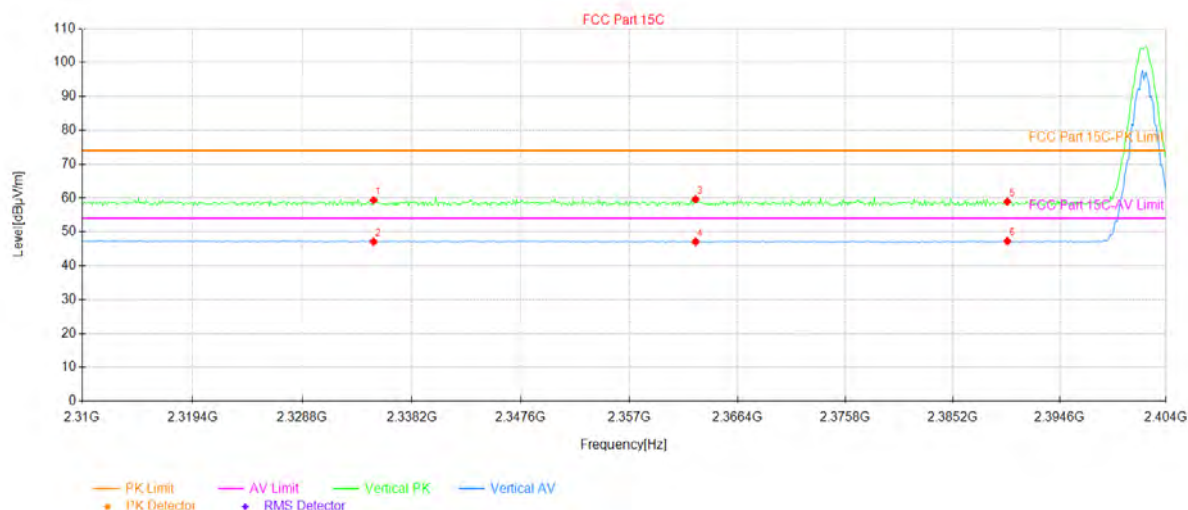


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2334.91	23.19	36.16	59.35	74.00	14.65	7	PK	PASS	Vertical
2	2334.91	10.96	36.16	47.12	54.00	6.88	1	AV	PASS	Vertical
3	2362.73	23.28	36.34	59.62	74.00	14.38	204	PK	PASS	Vertical
4	2362.73	10.77	36.34	47.11	54.00	6.89	81	AV	PASS	Vertical
5	2390.00	22.44	36.47	58.91	74.00	15.09	166	PK	PASS	Vertical
6	2390.00	10.80	36.47	47.27	54.00	6.73	1	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 5V		

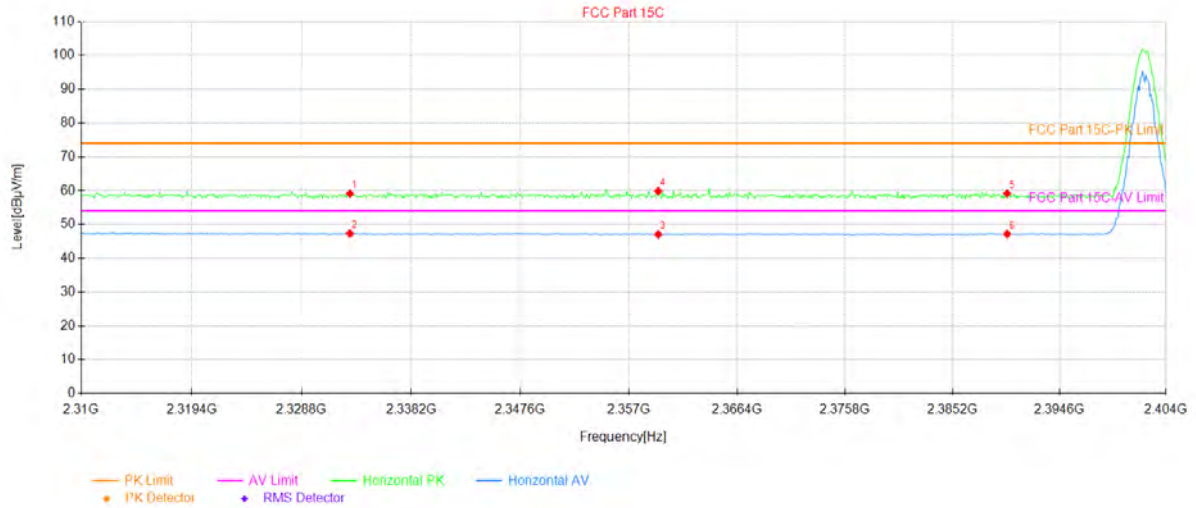


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2332.94	22.94	36.15	59.09	74.00	14.91	45	PK	PASS	Horizontal
2	2332.94	11.16	36.15	47.31	54.00	6.69	45	AV	PASS	Horizontal
3	2359.54	10.75	36.32	47.07	54.00	6.93	229	AV	PASS	Horizontal
4	2359.54	23.52	36.32	59.84	74.00	14.16	266	PK	PASS	Horizontal
5	2390.00	22.67	36.47	59.14	74.00	14.86	98	PK	PASS	Horizontal
6	2390.00	10.71	36.47	47.18	54.00	6.82	113	AV	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 5V		

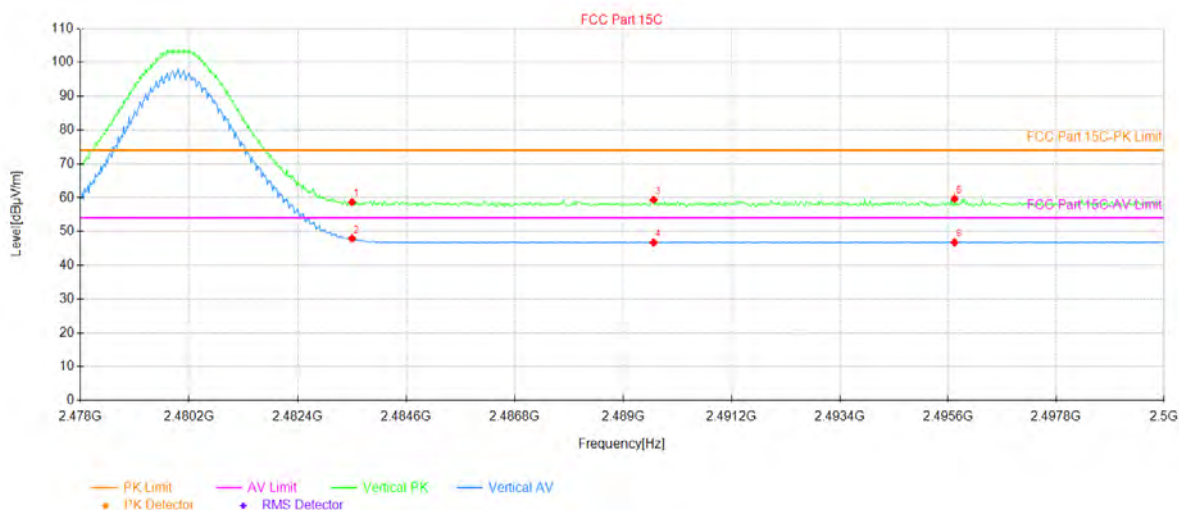


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.55	36.11	58.66	74.00	15.34	341	PK	PASS	Vertical
2	2483.50	11.81	36.11	47.92	54.00	6.08	178	AV	PASS	Vertical
3	2489.62	23.20	36.13	59.33	74.00	14.67	207	PK	PASS	Vertical
4	2489.62	10.60	36.13	46.73	54.00	7.27	349	AV	PASS	Vertical
5	2495.73	23.48	36.16	59.64	74.00	14.36	322	PK	PASS	Vertical
6	2495.73	10.63	36.16	46.79	54.00	7.21	358	AV	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Real Chen	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 5V		

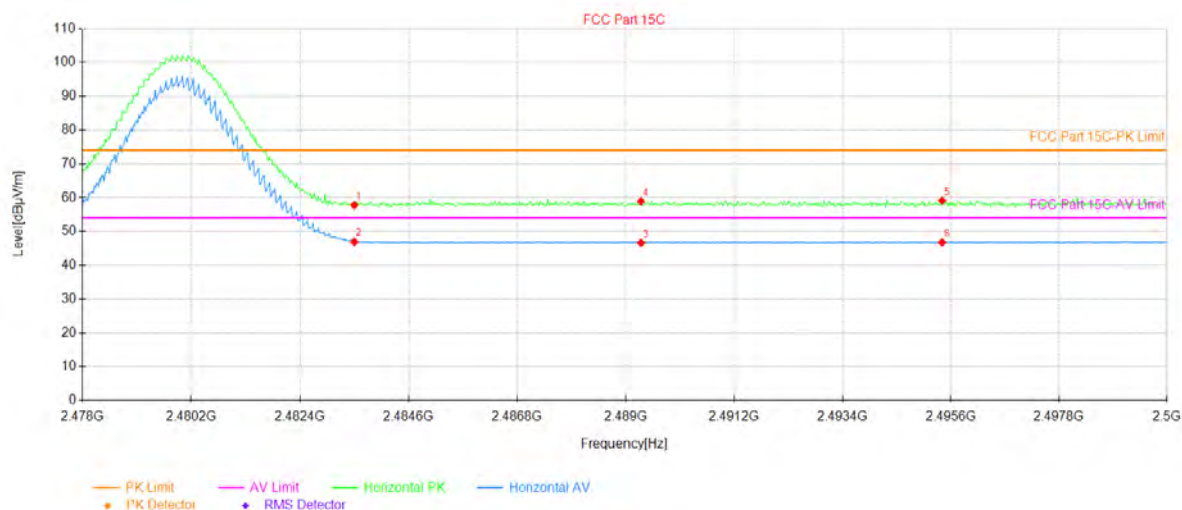

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	21.63	36.11	57.74	74.00	16.26	237	PK	PASS	Horizontal
2	2483.50	10.85	36.11	46.96	54.00	7.04	137	AV	PASS	Horizontal
3	2489.31	10.52	36.13	46.65	54.00	7.35	344	AV	PASS	Horizontal
4	2489.31	22.76	36.13	58.89	74.00	15.11	97	PK	PASS	Horizontal
5	2495.42	22.94	36.16	59.10	74.00	14.90	8	PK	PASS	Horizontal
6	2495.42	10.63	36.16	46.79	54.00	7.21	78	AV	PASS	Horizontal


Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

5.5 Emissions in Non-restricted Frequency Bands

Below 1GHz:

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Alan Chen	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 5V		

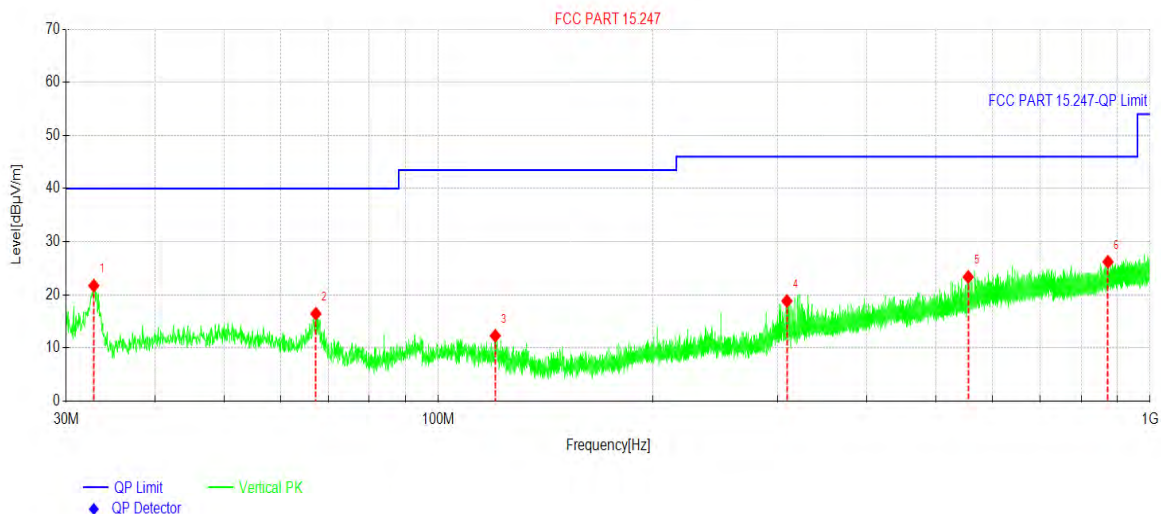


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	32.8131	37.57	-15.85	21.72	40.00	18.28	PK	Vertical
2	67.2984	32.20	-15.75	16.45	40.00	23.55	PK	Vertical
3	120.2630	28.87	-16.57	12.30	43.50	31.20	PK	Vertical
4	308.9374	31.73	-12.90	18.83	46.00	27.17	PK	Vertical
5	555.3783	31.38	-8.01	23.37	46.00	22.63	PK	Vertical
6	872.9236	29.26	-3.05	26.21	46.00	19.79	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Bluetooth Module	Product Model:	MB2710
Test By:	Alan Chen	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 5V		

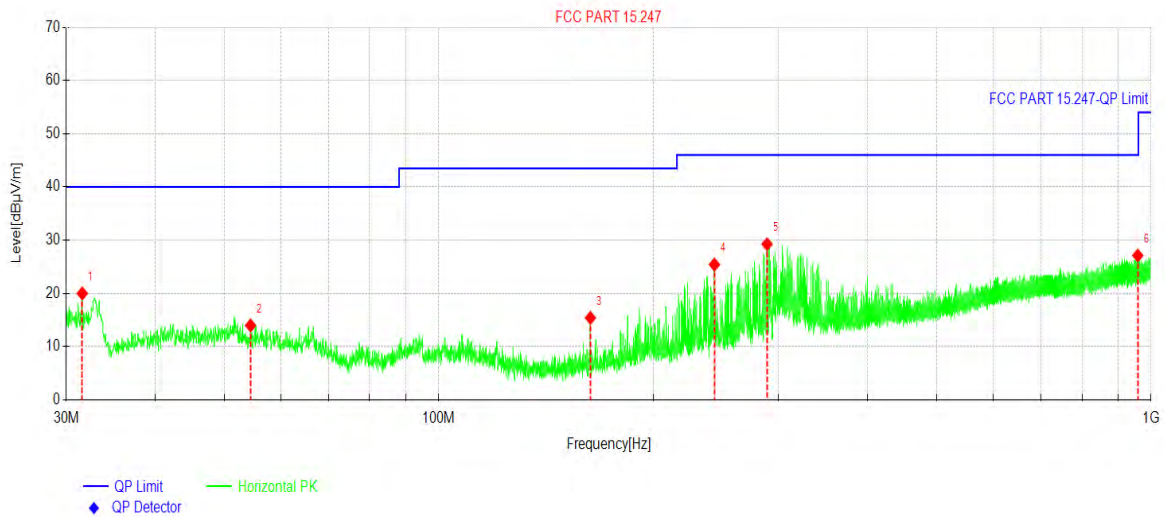

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	31.6006	35.89	-15.90	19.99	40.00	20.01	PK	Horizontal
2	54.4452	27.07	-13.10	13.97	40.00	26.03	PK	Horizontal
3	163.3332	33.12	-17.71	15.41	43.50	28.09	PK	Horizontal
4	243.8957	39.46	-14.05	25.41	46.00	20.59	PK	Horizontal
5	289.1000	42.49	-13.23	29.26	46.00	16.74	PK	Horizontal
6	958.1424	29.26	-2.15	27.11	46.00	18.89	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization
4804.00	48.77	-8.00	40.77	74.00	33.23	Vertical
4804.00	49.19	-8.00	41.19	74.00	32.81	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization
4804.00	39.44	-8.00	31.44	54.00	22.56	Vertical
4804.00	40.60	-8.00	32.60	54.00	21.40	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization
4882.00	48.38	-7.47	40.91	74.00	33.09	Vertical
4882.00	49.09	-7.47	41.62	74.00	32.38	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization
4882.00	38.21	-7.47	30.74	54.00	23.26	Vertical
4882.00	40.60	-7.47	33.13	54.00	20.87	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization
4960.00	47.54	-7.08	40.46	74.00	33.54	Vertical
4960.00	48.39	-7.08	41.31	74.00	32.69	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarization
4960.00	38.23	-7.08	31.15	54.00	22.85	Vertical
4960.00	39.72	-7.08	32.64	54.00	21.36	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Appendix – BT

Test Data

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	6.862	30	Pass
NVNT	1-DH1	2441	Ant1	6.964	48	Pass
NVNT	1-DH1	2480	Ant1	7.093	30	Pass
NVNT	2-DH1	2402	Ant1	6.941	21	Pass
NVNT	2-DH1	2441	Ant1	7.024	21	Pass
NVNT	2-DH1	2480	Ant1	7.151	21	Pass
NVNT	3-DH1	2402	Ant1	6.949	21	Pass
NVNT	3-DH1	2441	Ant1	7.053	21	Pass
NVNT	3-DH1	2480	Ant1	7.149	21	Pass

Test Graphs

Power NVNT 1-DH1 2402MHz Ant1




Power NVNT 1-DH1 2441MHz Ant1

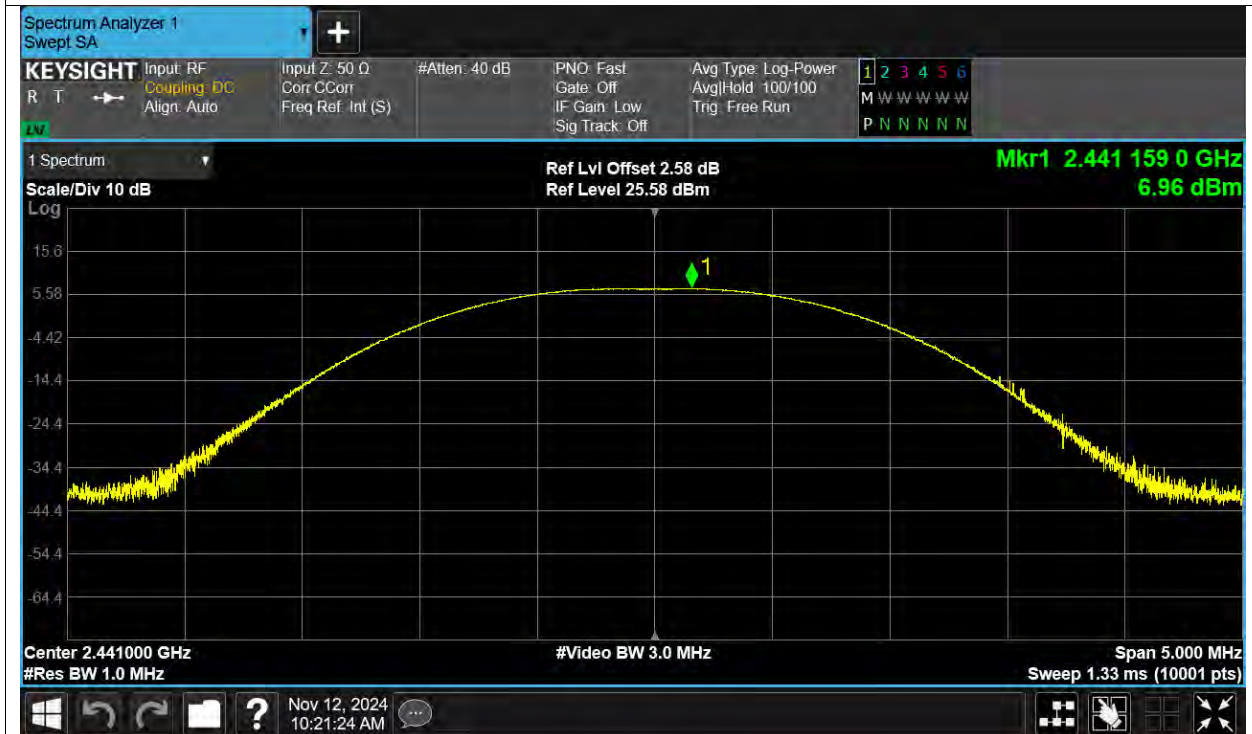

Power NVNT 1-DH1 2480MHz Ant1




Power NVNT 2-DH1 2402MHz Ant1

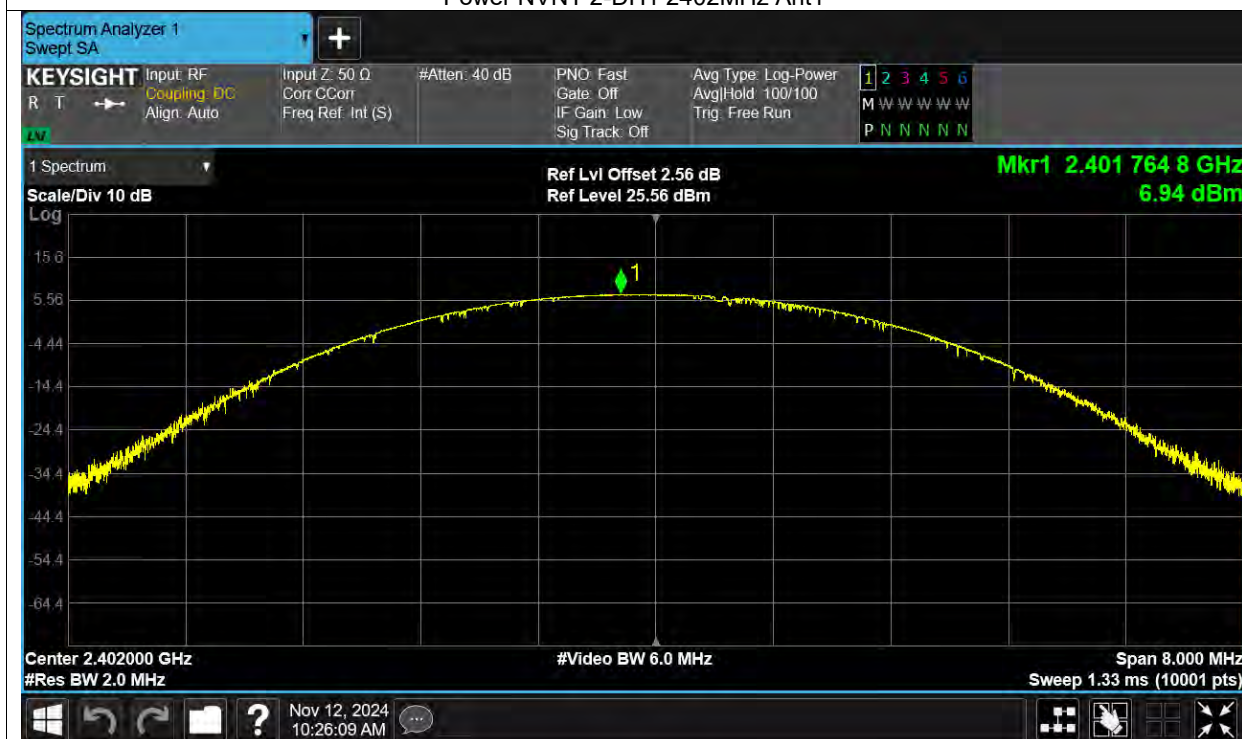

Power NVNT 2-DH1 2441MHz Ant1



Power NVNT 2-DH1 2480MHz Ant1

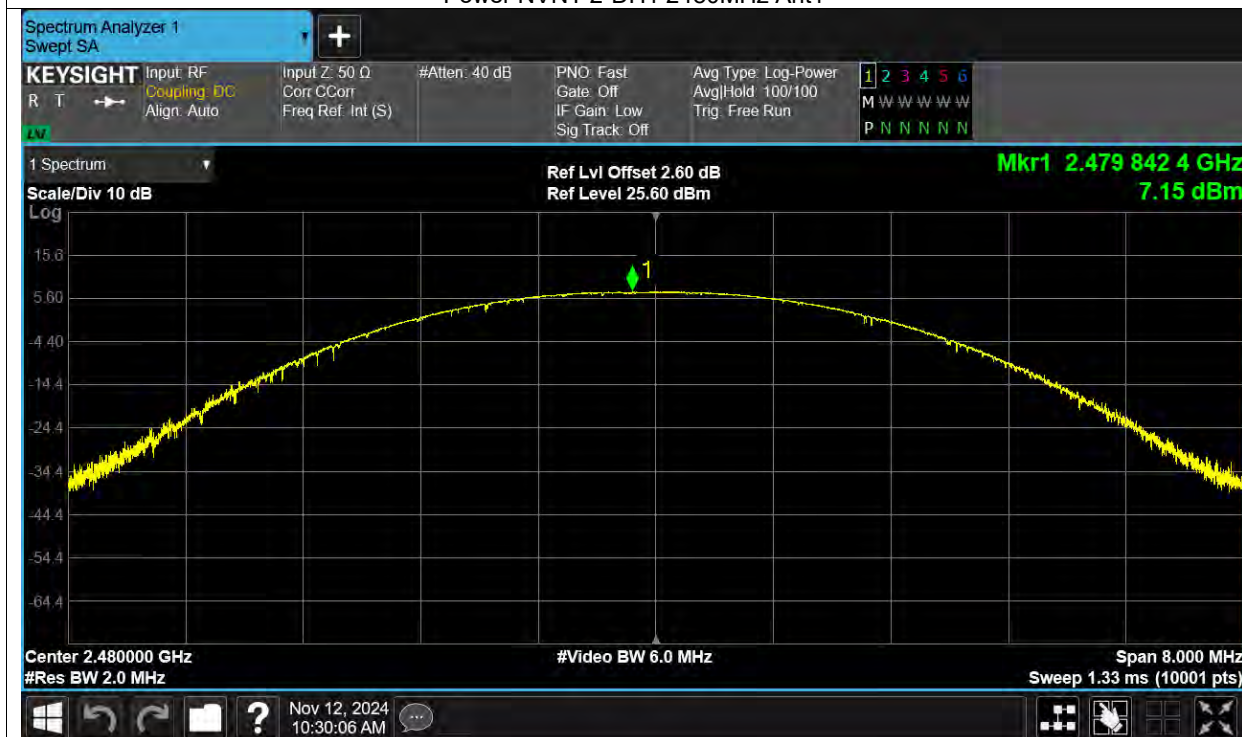

Power NVNT 3-DH1 2402MHz Ant1



Power NVNT 3-DH1 2441MHz Ant1



Power NVNT 3-DH1 2480MHz Ant1



-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH1	2402	Ant1	1.005
NVNT	1-DH1	2441	Ant1	1.006
NVNT	1-DH1	2480	Ant1	1.011
NVNT	2-DH1	2402	Ant1	1.167
NVNT	2-DH1	2441	Ant1	1.146
NVNT	2-DH1	2480	Ant1	1.105
NVNT	3-DH1	2402	Ant1	1.185
NVNT	3-DH1	2441	Ant1	1.189
NVNT	3-DH1	2480	Ant1	1.105

Test Graphs

-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1




-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1



-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1



-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

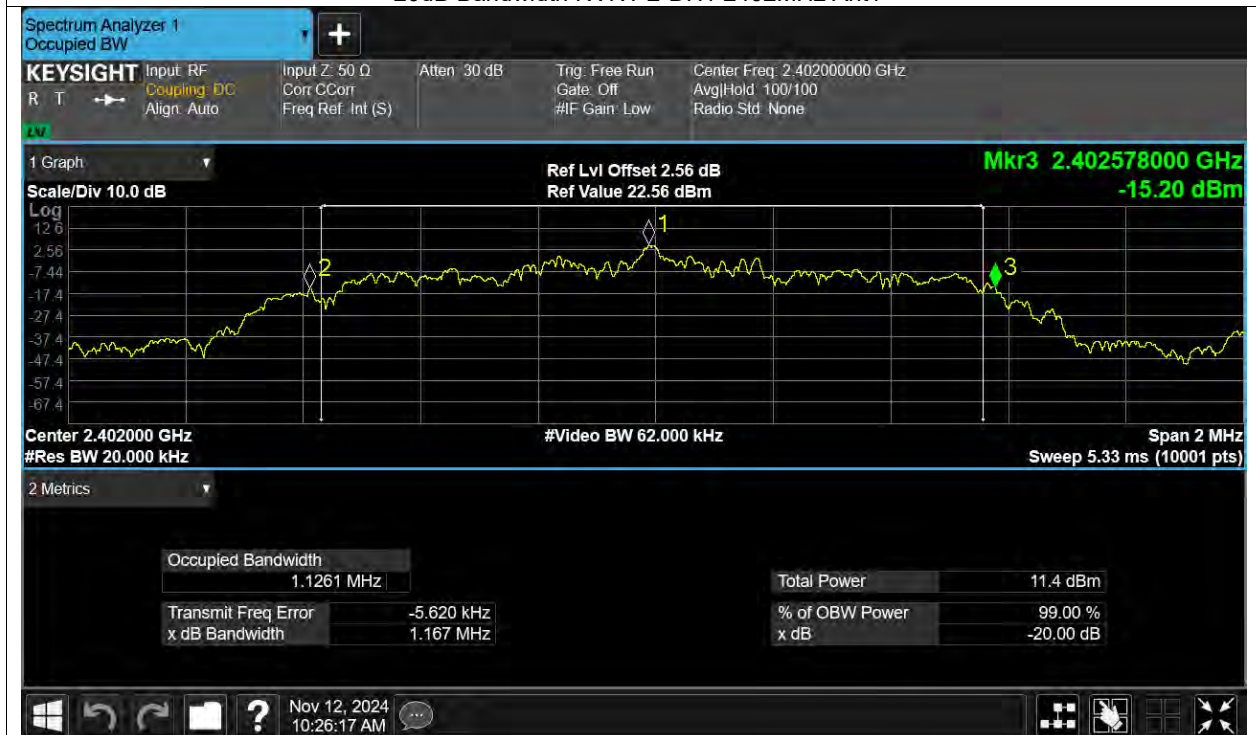

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1



-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1



-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1



-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1



-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1



Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2401.84	2403.146	1.306	0.025	Pass
NVNT	1-DH1	Ant1	2441.15	2442.156	1.006	1.006	Pass
NVNT	1-DH1	Ant1	2478.832	2480.168	1.336	0.025	Pass
NVNT	2-DH1	Ant1	2401.832	2402.83	0.998	0.025	Pass
NVNT	2-DH1	Ant1	2440.848	2441.842	0.994	0.795	Pass
NVNT	2-DH1	Ant1	2478.832	2479.828	0.996	0.025	Pass
NVNT	3-DH1	Ant1	2401.83	2402.836	1.006	0.79	Pass
NVNT	3-DH1	Ant1	2440.836	2441.844	1.008	0.793	Pass
NVNT	3-DH1	Ant1	2478.836	2479.83	0.994	0.737	Pass

Test Graphs


CFS NVNT 1-DH1 2402MHz Ant1




CFS NVNT 1-DH1 2441MHz Ant1




CFS NVNT 1-DH1 2480MHz Ant1

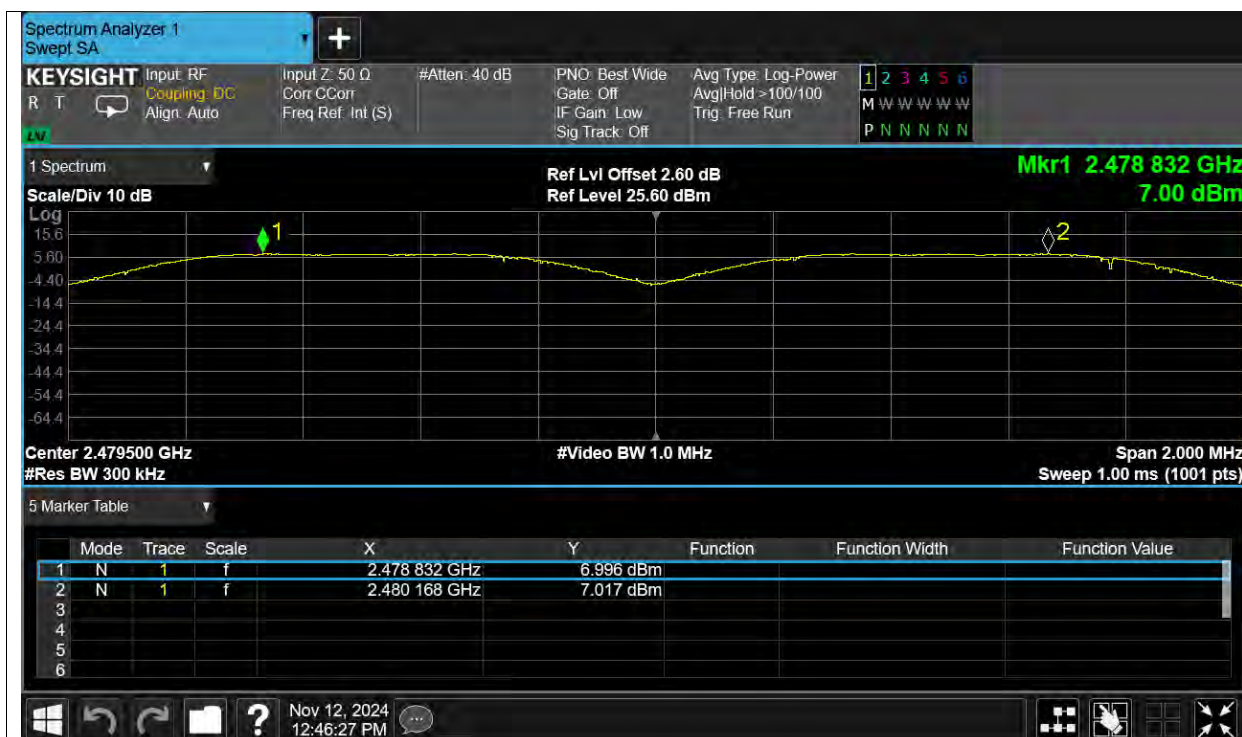


CFS NVNT 2-DH1 2402MHz Ant1

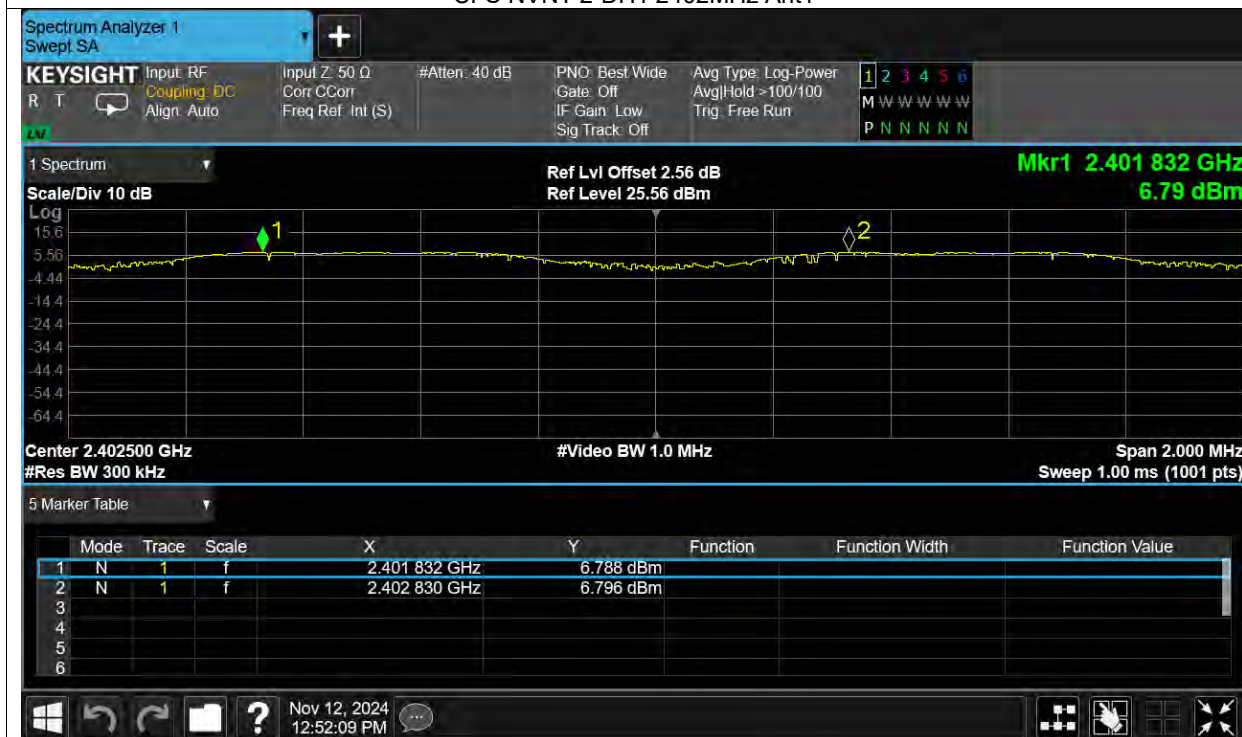


CFS NVNT 2-DH1 2441MHz Ant1

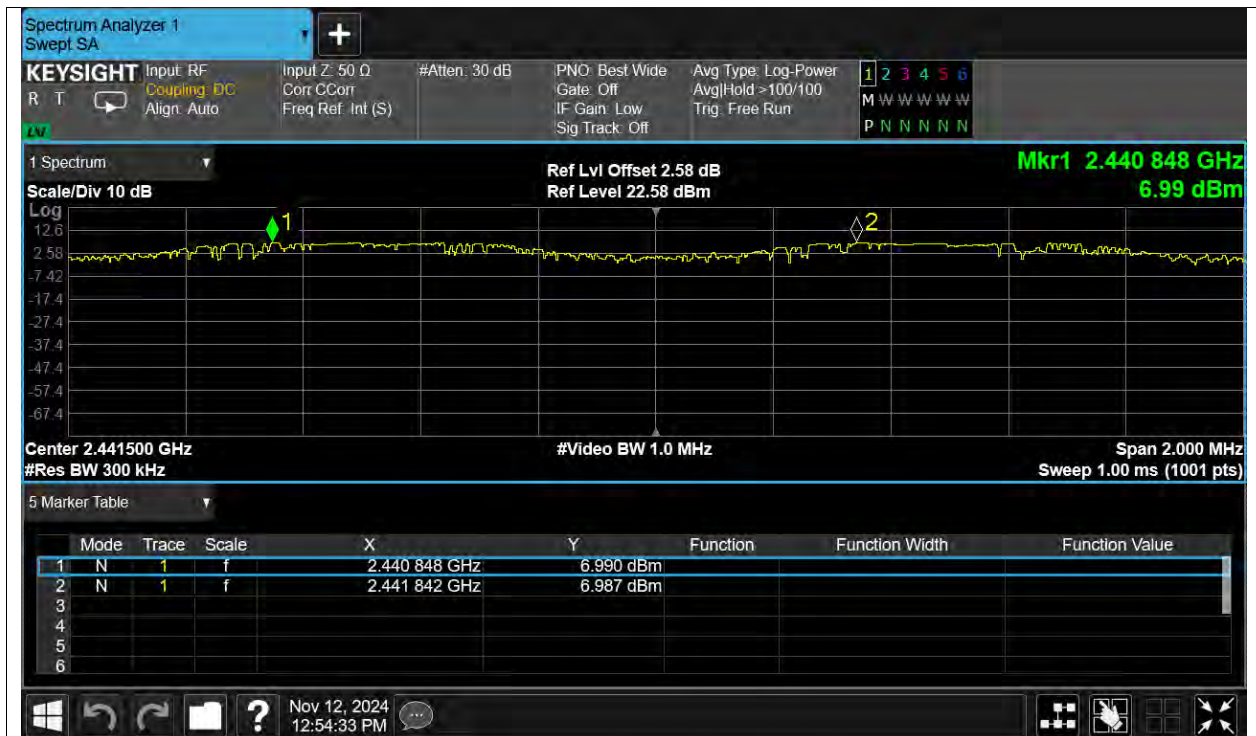

CFS NVNT 2-DH1 2480MHz Ant1

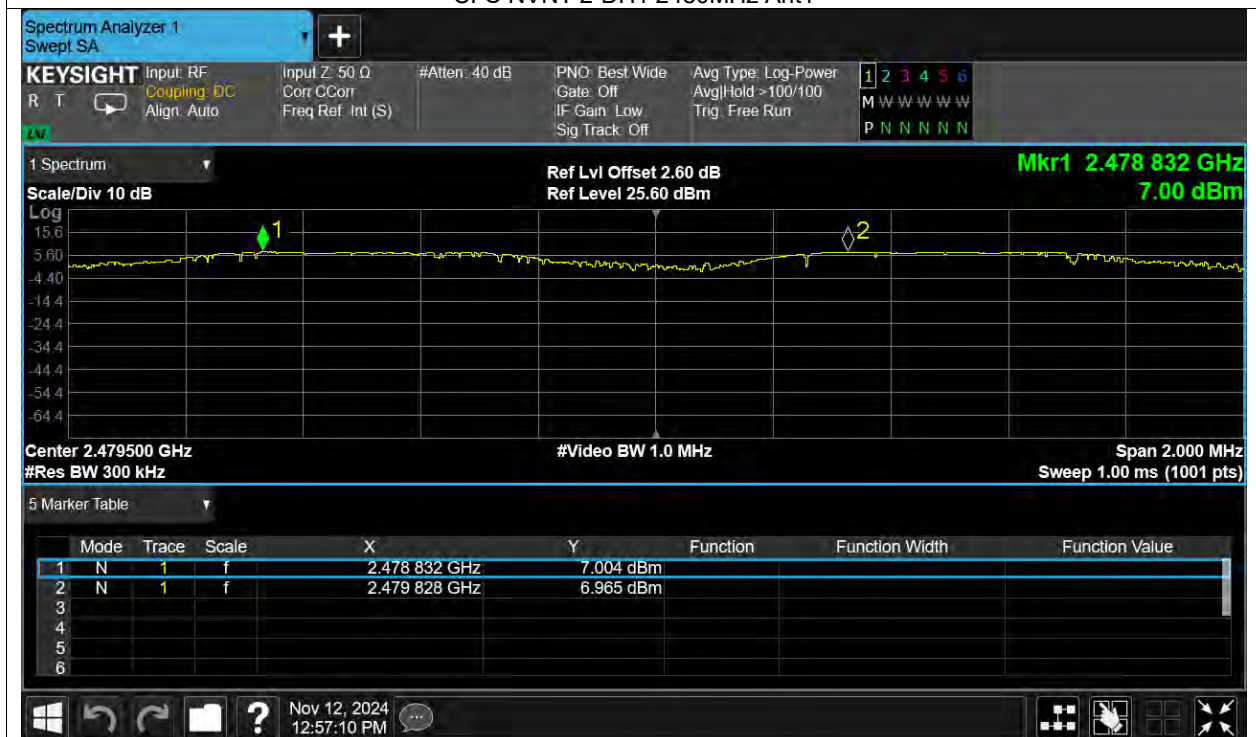


CFS NVNT 3-DH1 2402MHz Ant1

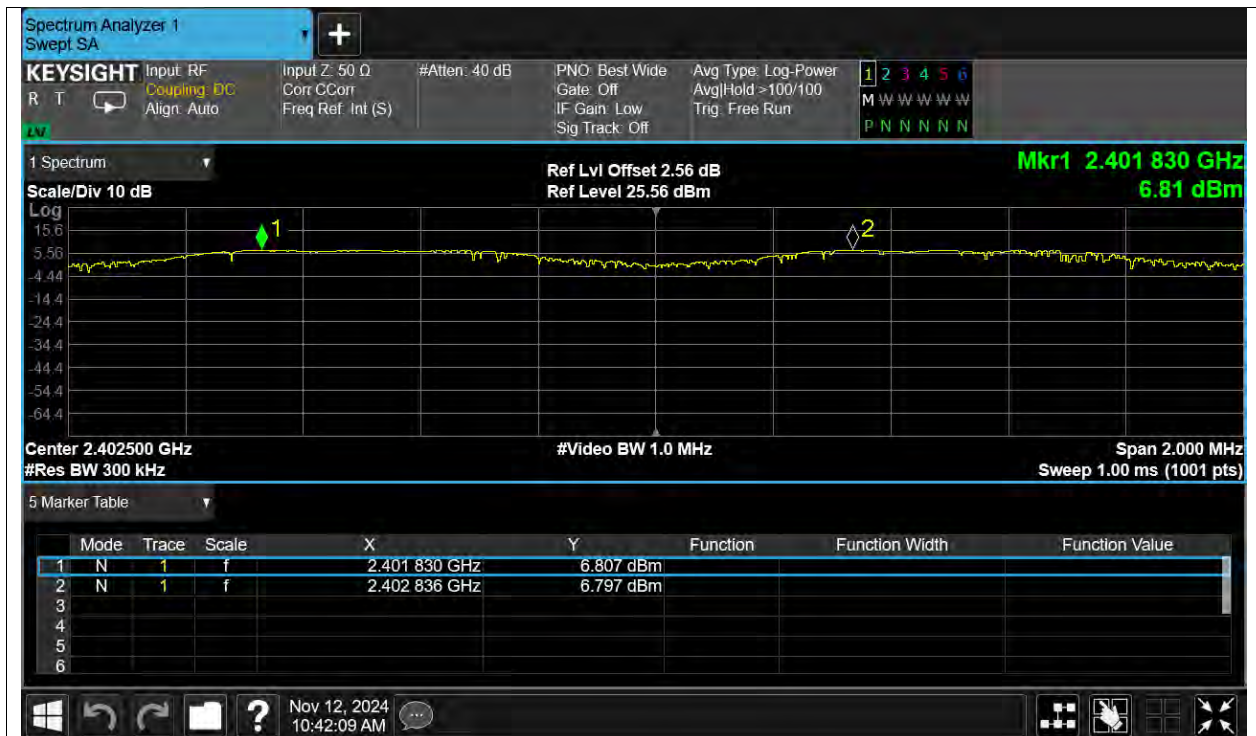

CFS NVNT 3-DH1 2441MHz Ant1



CFS NVNT 3-DH1 2480MHz Ant1

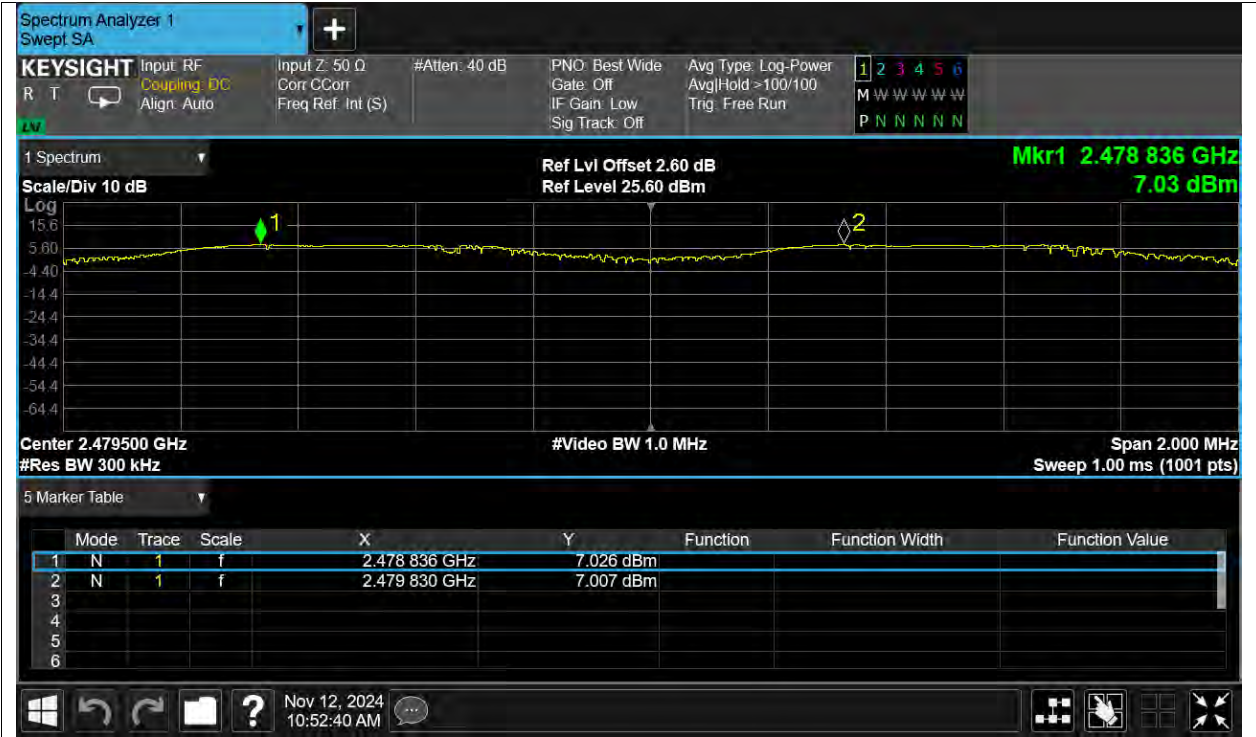


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-51.8	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-61.64	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-54.09	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-63.37	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-53.75	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-62.81	-20	Pass

Test Graphs

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref

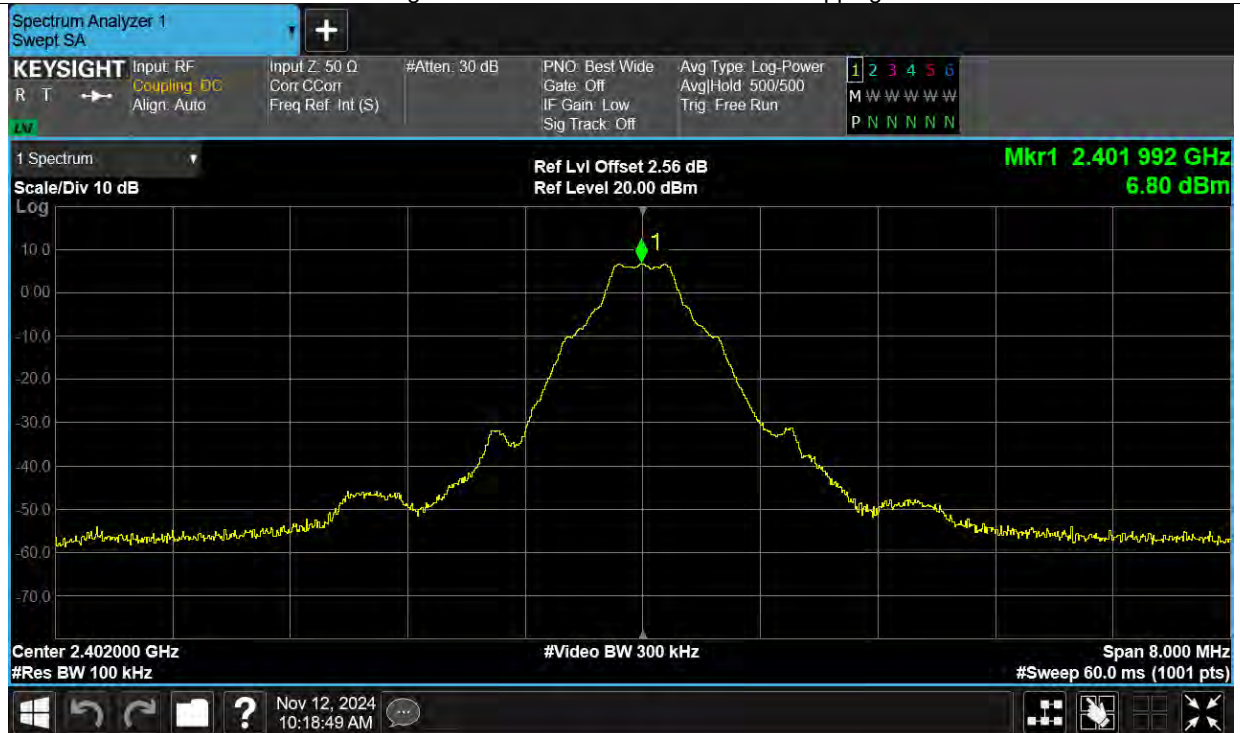


Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

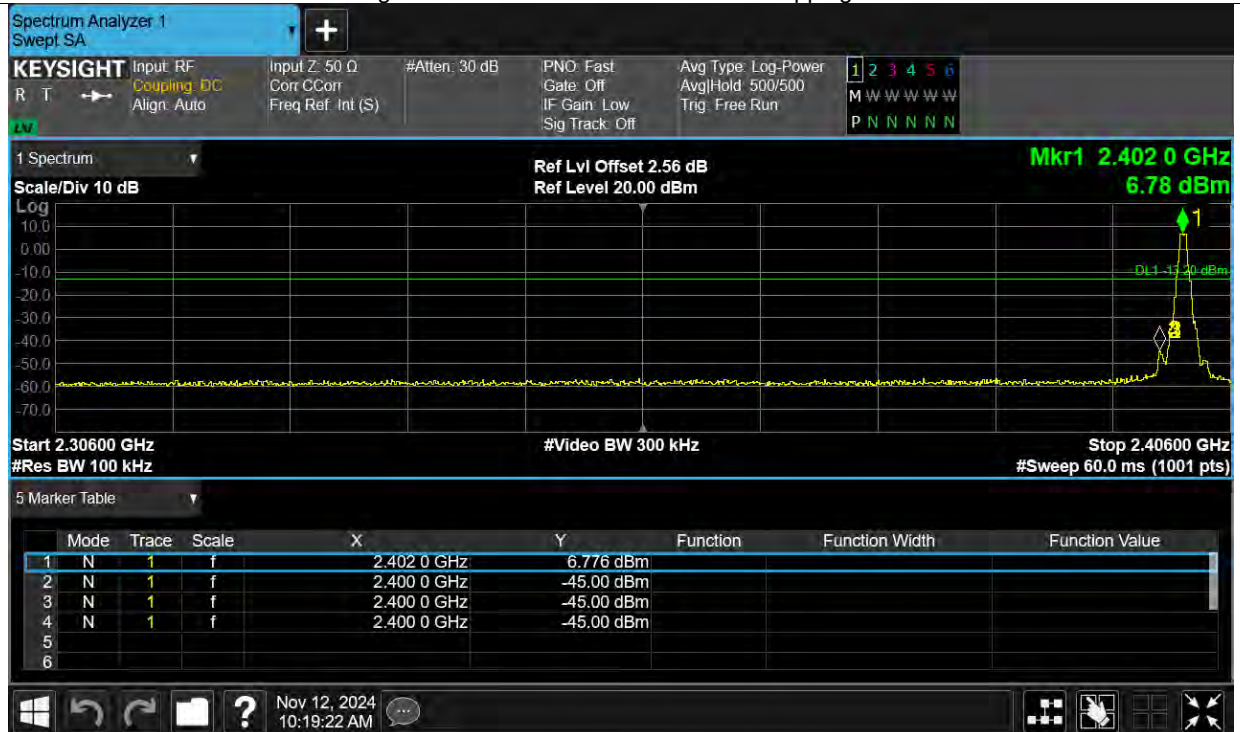

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

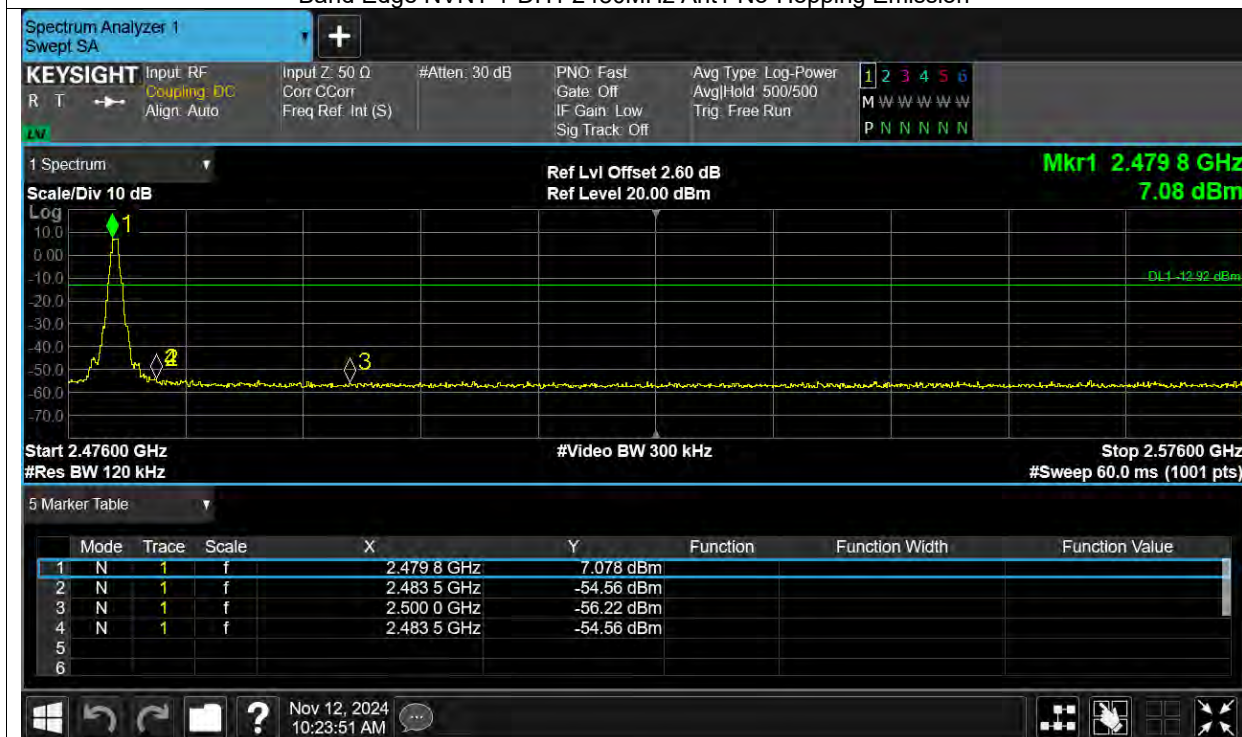

Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

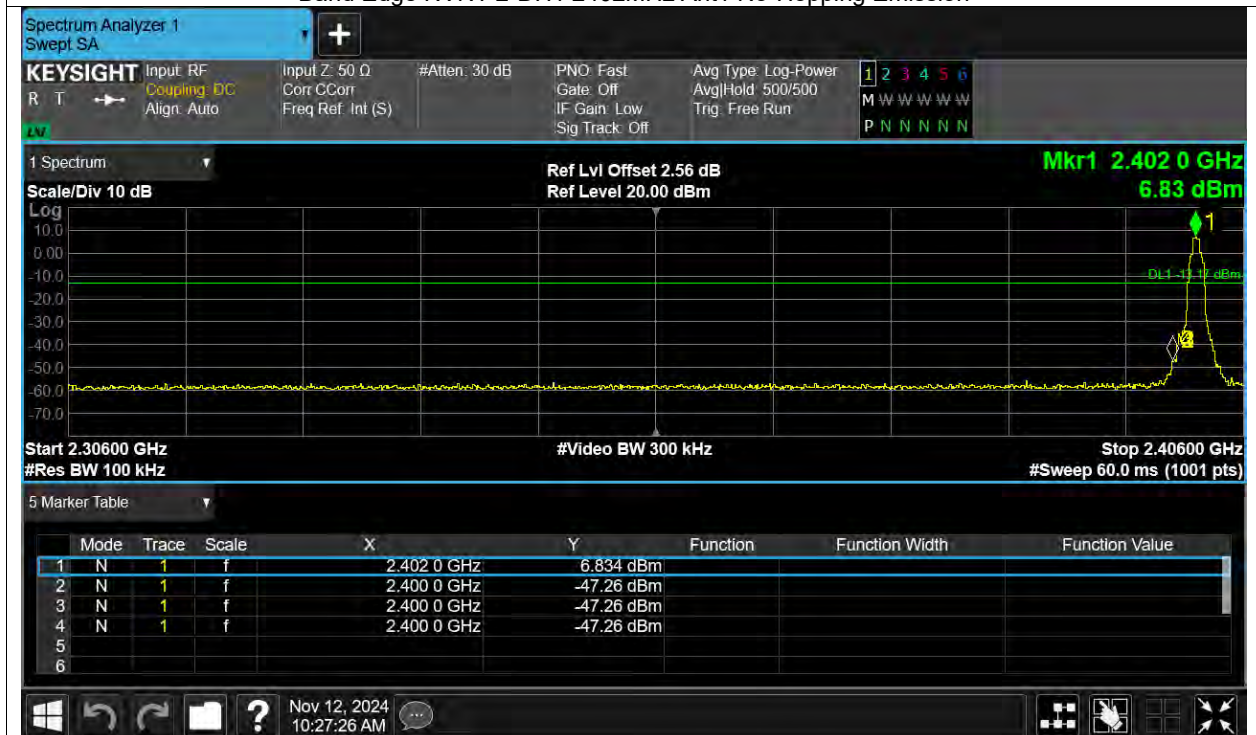

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref




Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

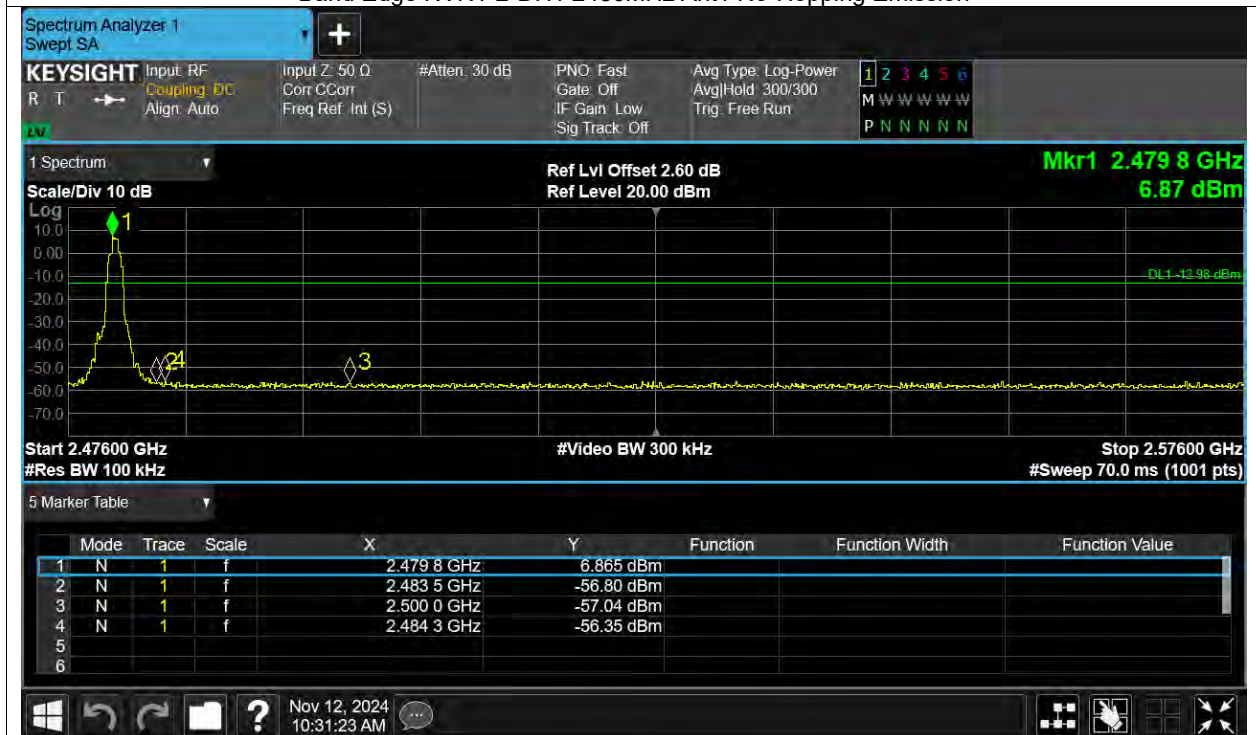

Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Emission

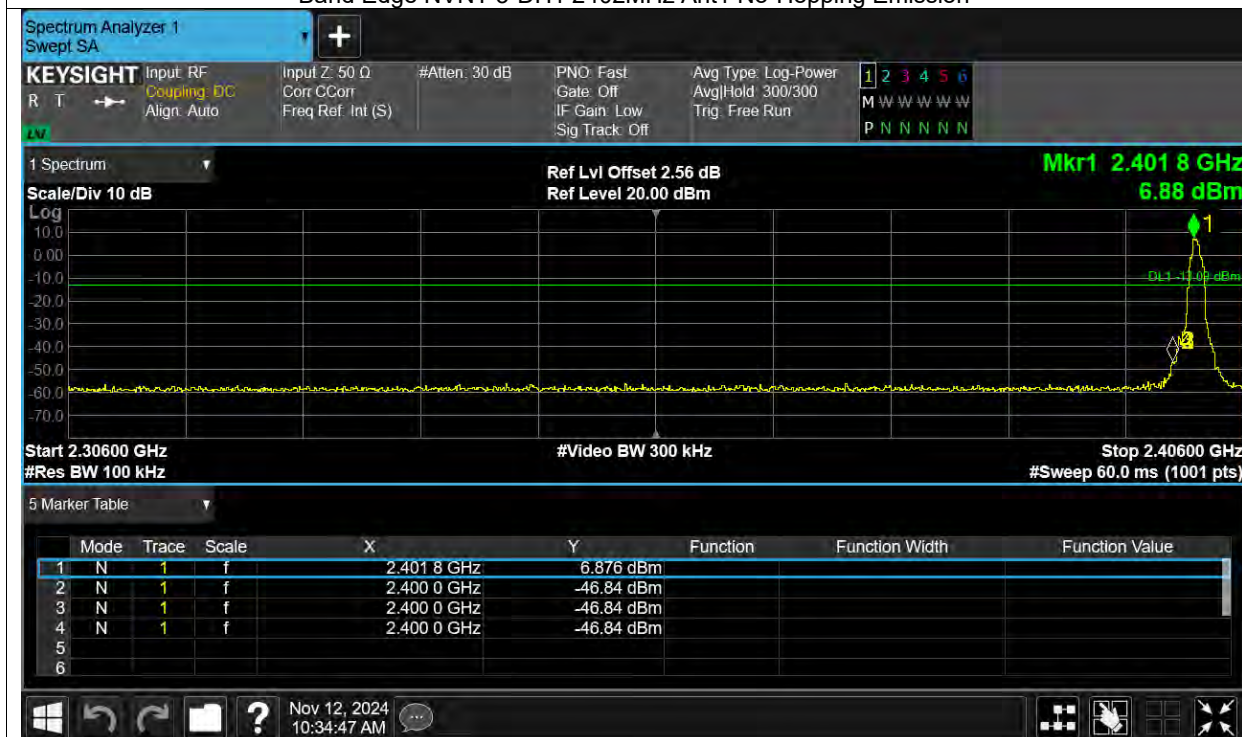

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Ref



Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Emission

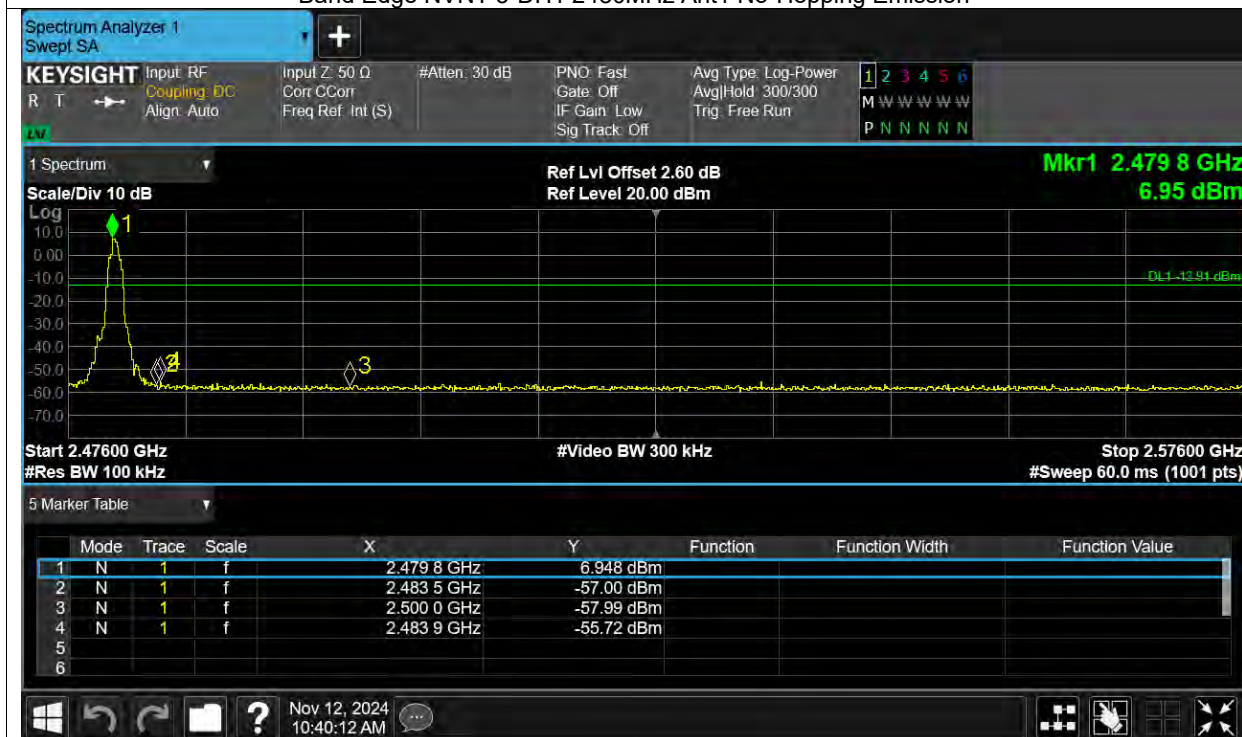

Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-62.92	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-63.19	-20	Pass
NVNT	2-DH1	2402	Ant1	Hopping	-62.81	-20	Pass
NVNT	2-DH1	2480	Ant1	Hopping	-62.87	-20	Pass
NVNT	3-DH1	2402	Ant1	Hopping	-62.89	-20	Pass
NVNT	3-DH1	2480	Ant1	Hopping	-62.53	-20	Pass

Test Graphs

Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission

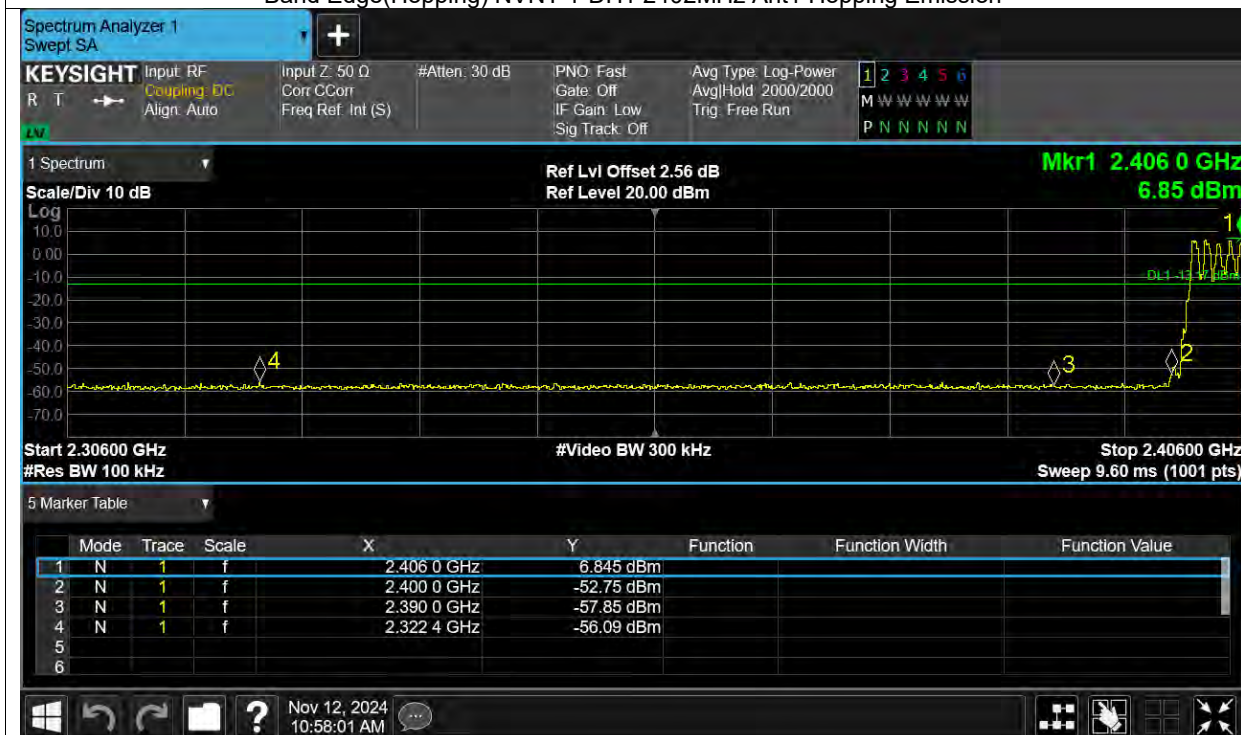

Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Emission

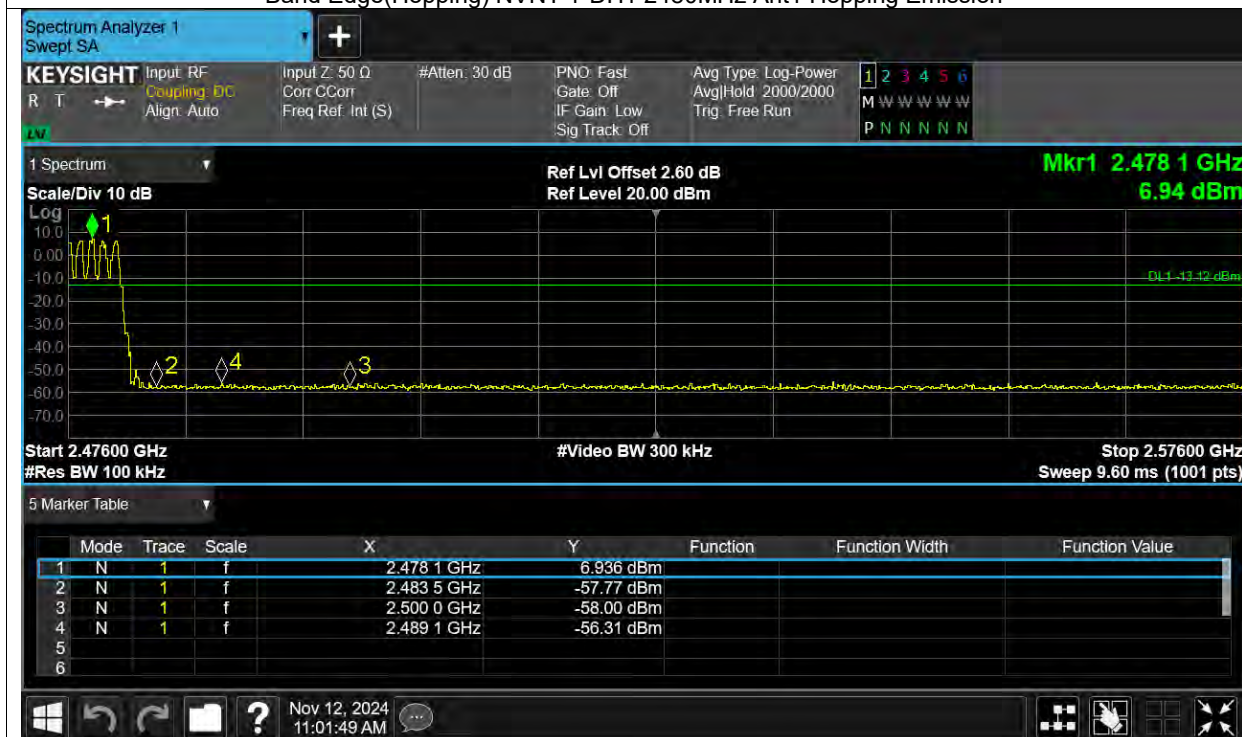

Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Emission

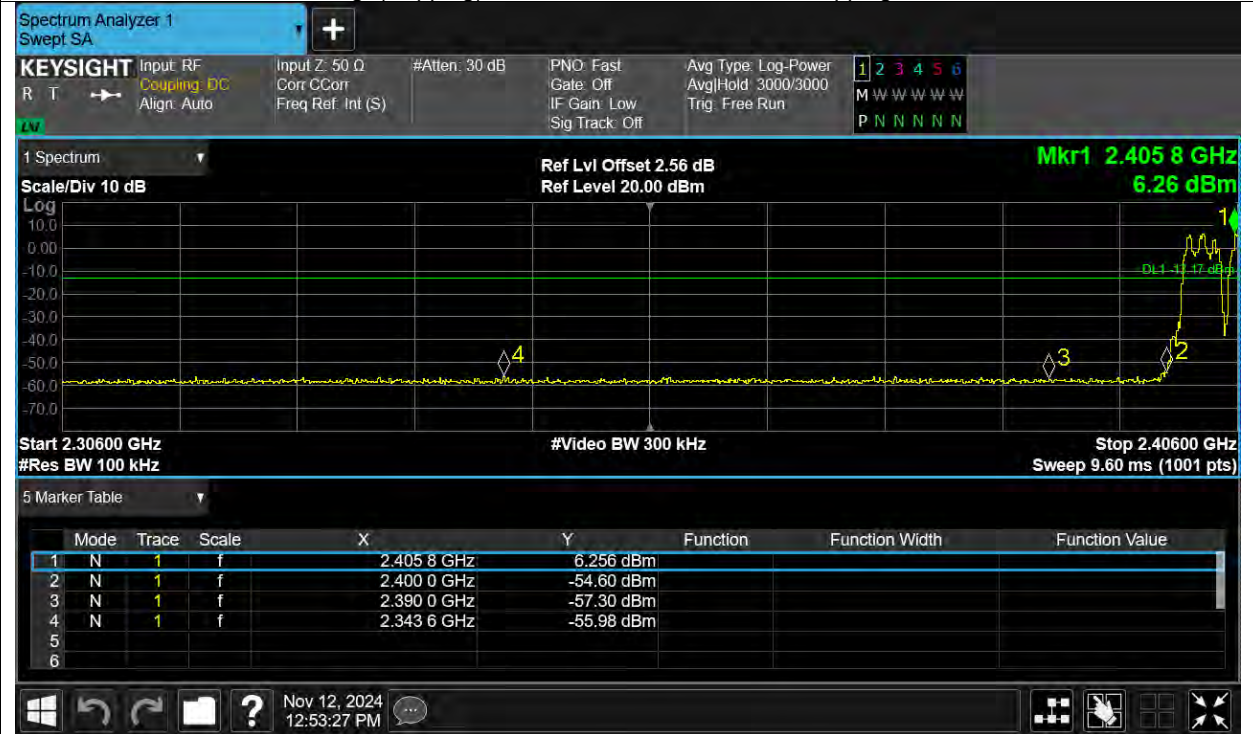

Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Emission

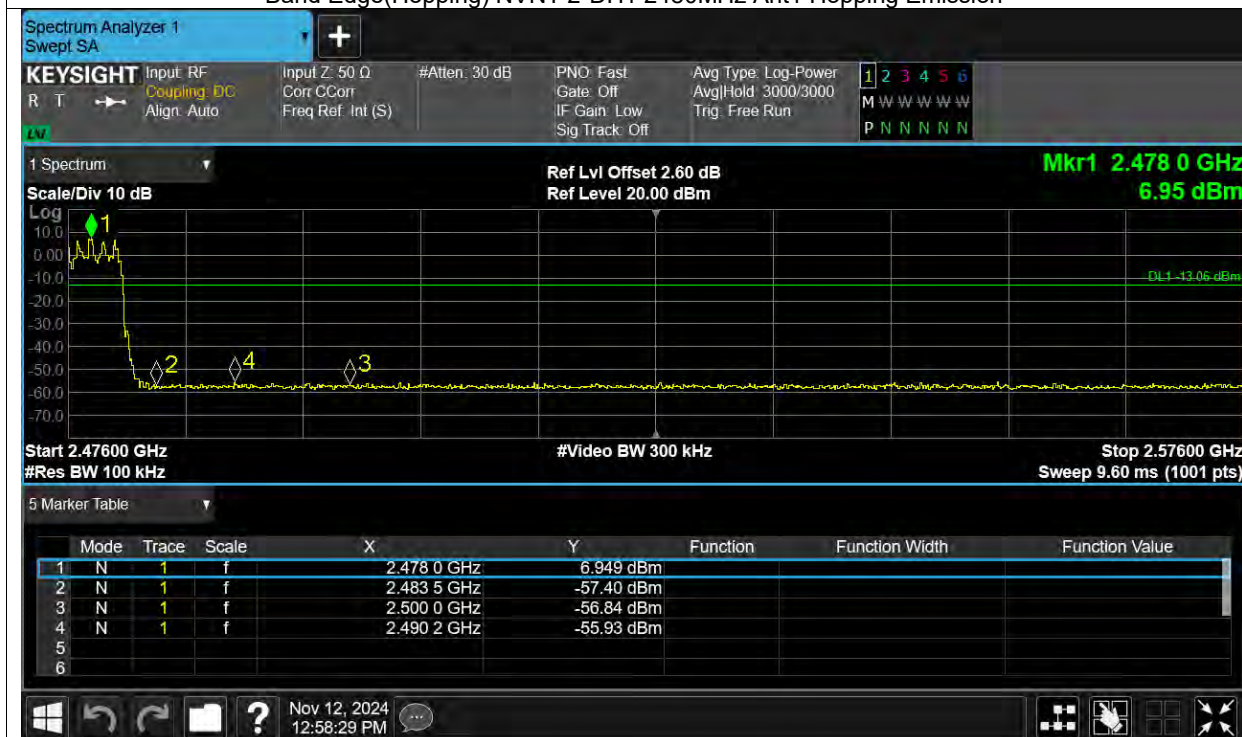

Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Emission

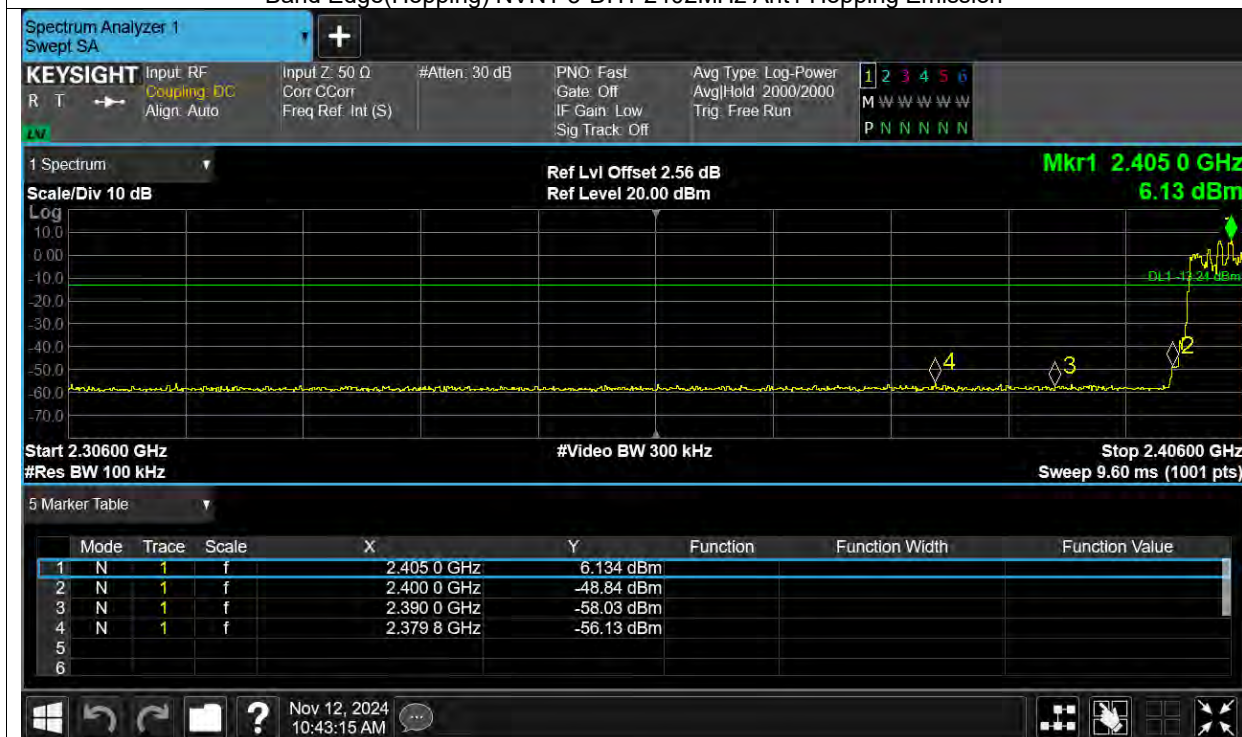

Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Emission

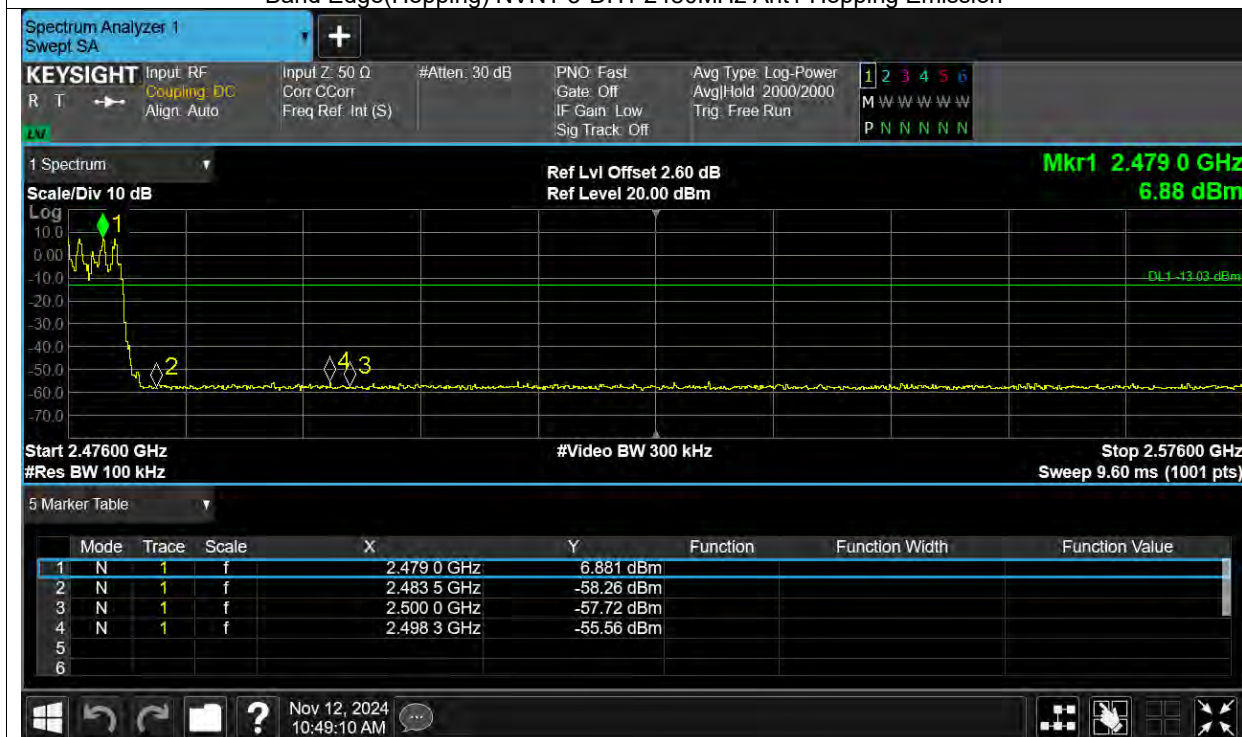

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	-56.01	-20	Pass
NVNT	1-DH1	2441	Ant1	-51.32	-20	Pass
NVNT	1-DH1	2480	Ant1	-55.69	-20	Pass
NVNT	2-DH1	2402	Ant1	-56.52	-20	Pass
NVNT	2-DH1	2441	Ant1	-56.55	-20	Pass
NVNT	2-DH1	2480	Ant1	-56.4	-20	Pass
NVNT	3-DH1	2402	Ant1	-55.65	-20	Pass
NVNT	3-DH1	2441	Ant1	-52.15	-20	Pass
NVNT	3-DH1	2480	Ant1	-56.49	-20	Pass

Test Graphs

Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref




Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission



Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref



Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

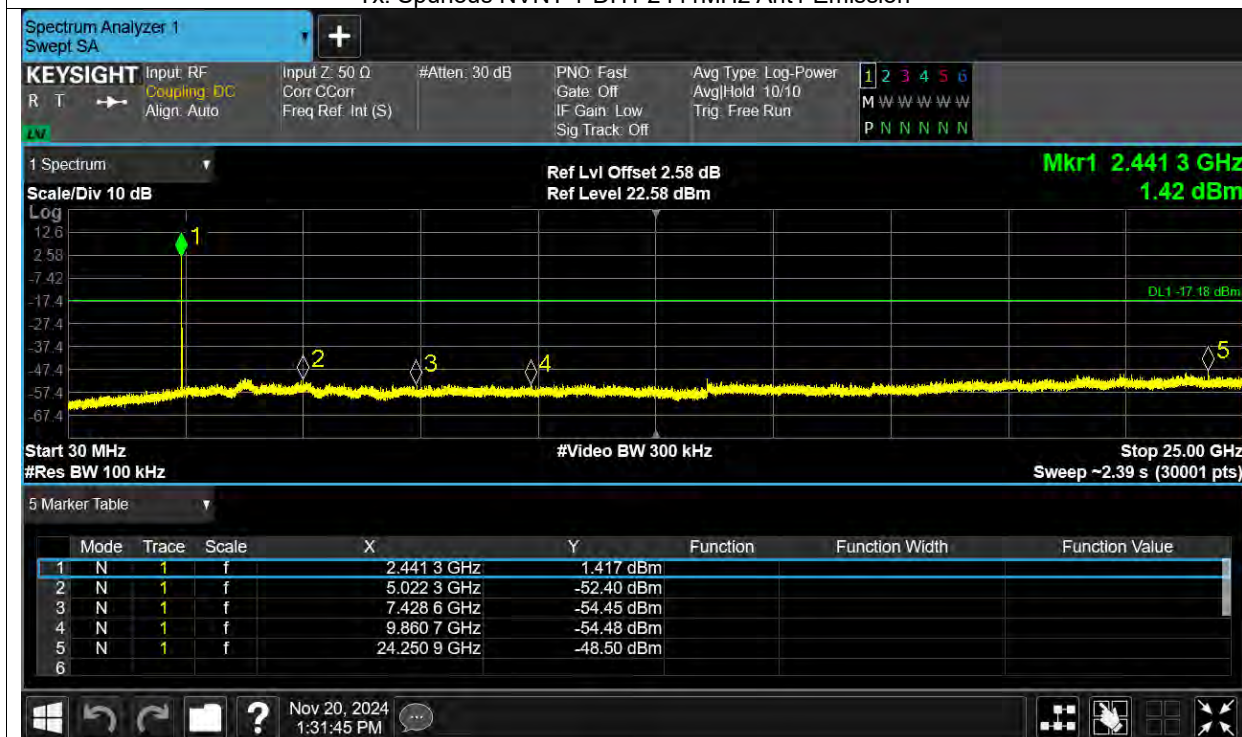

Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Ref



Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission




Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Ref




Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission



Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Ref

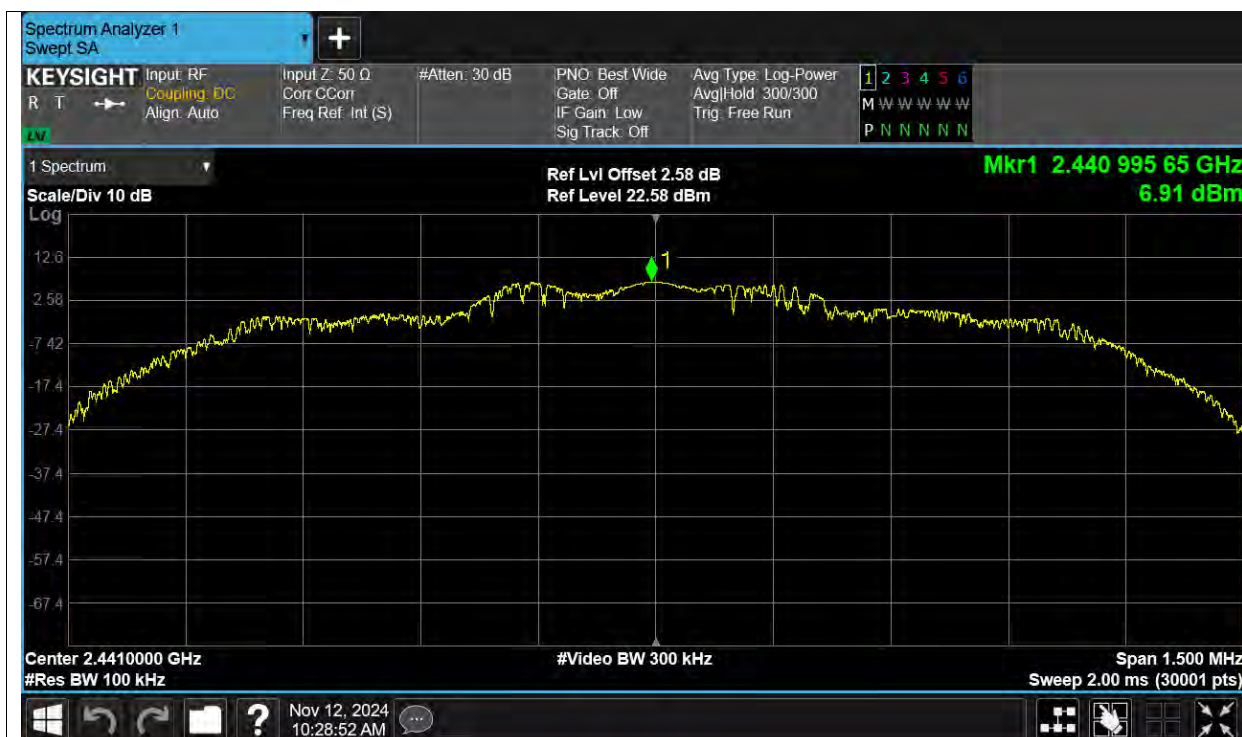

Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

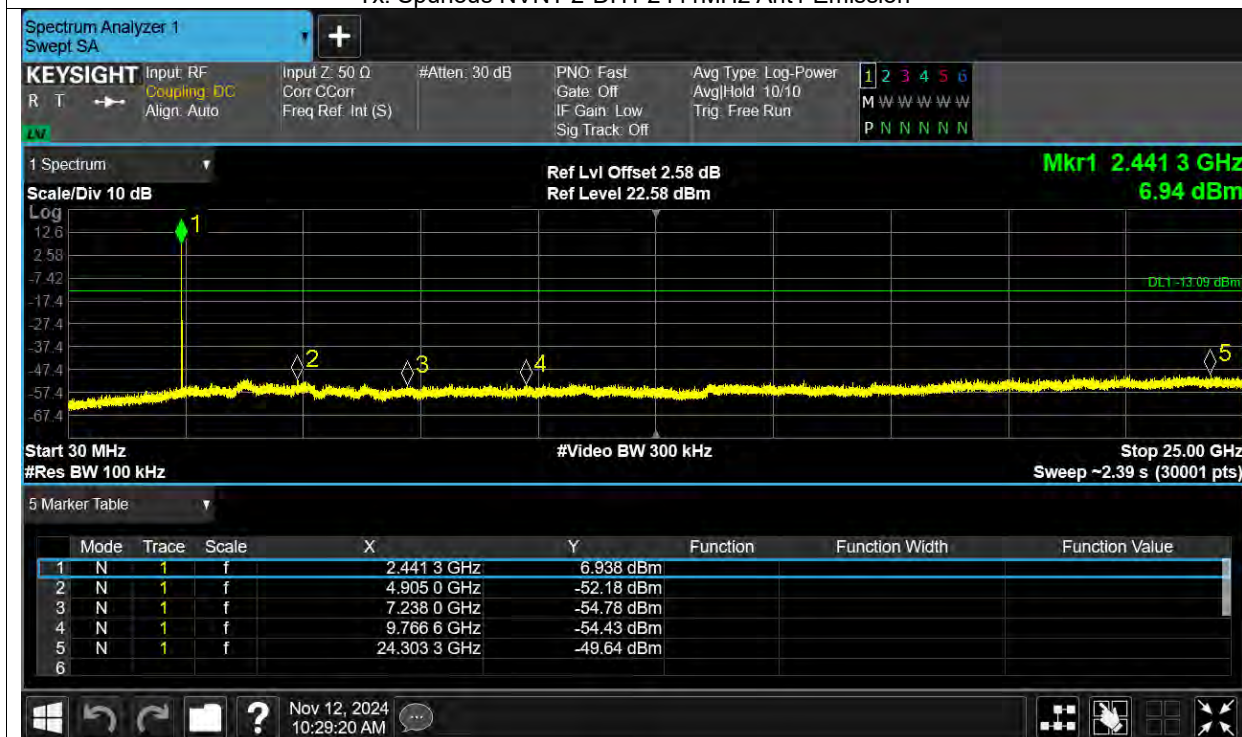

Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Ref



Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission



Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Ref



Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Emission



Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Ref



Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Emission



Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Ref



Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission




Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH1	Ant1	79	15	Pass
NVNT	2-DH1	Ant1	79	15	Pass
NVNT	3-DH1	Ant1	79	15	Pass

Test Graphs


Hopping No. NVNT 1-DH1 2441MHz Ant1

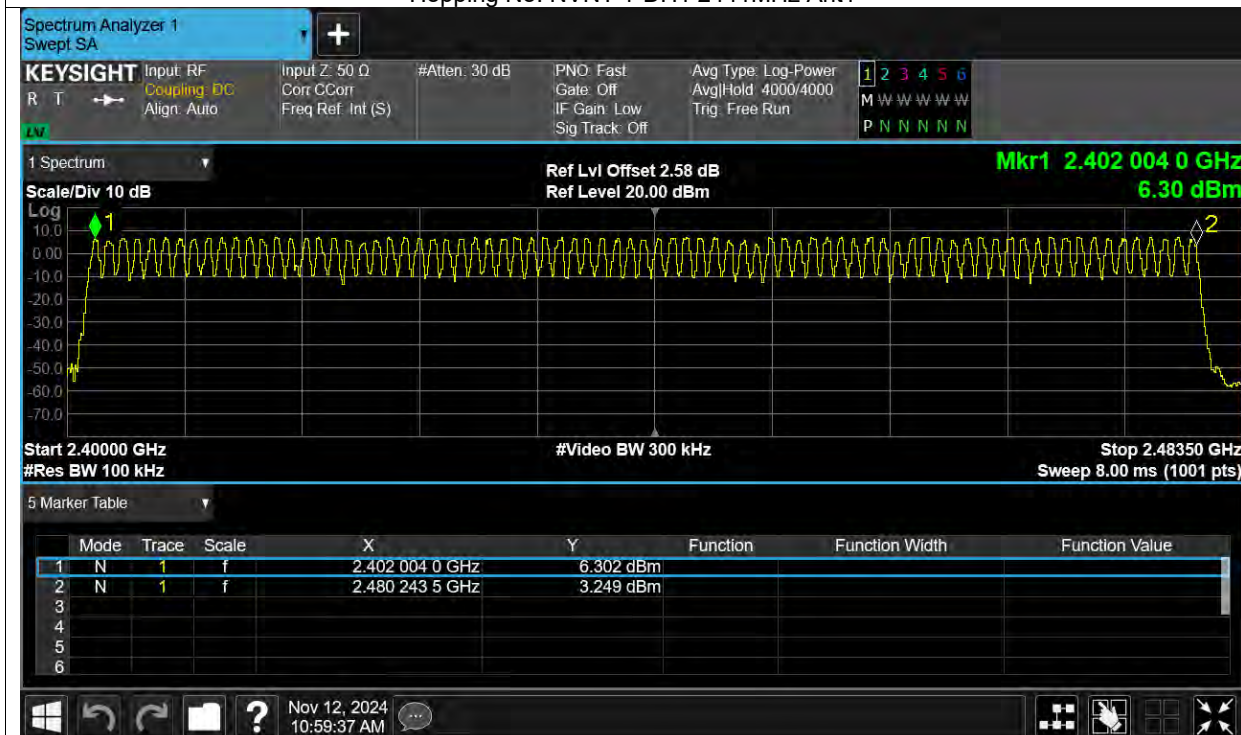

Hopping No. NVNT 2-DH1 2441MHz Ant1

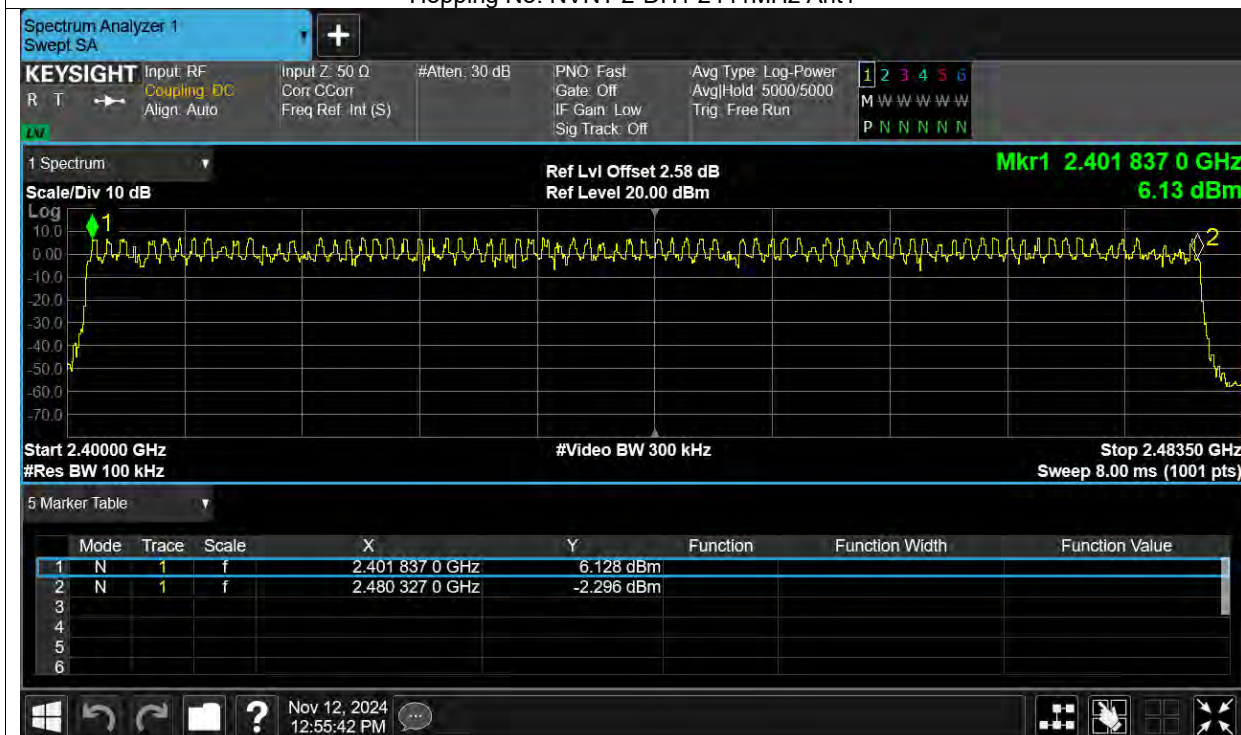

Hopping No. NVNT 3-DH1 2441MHz Ant1

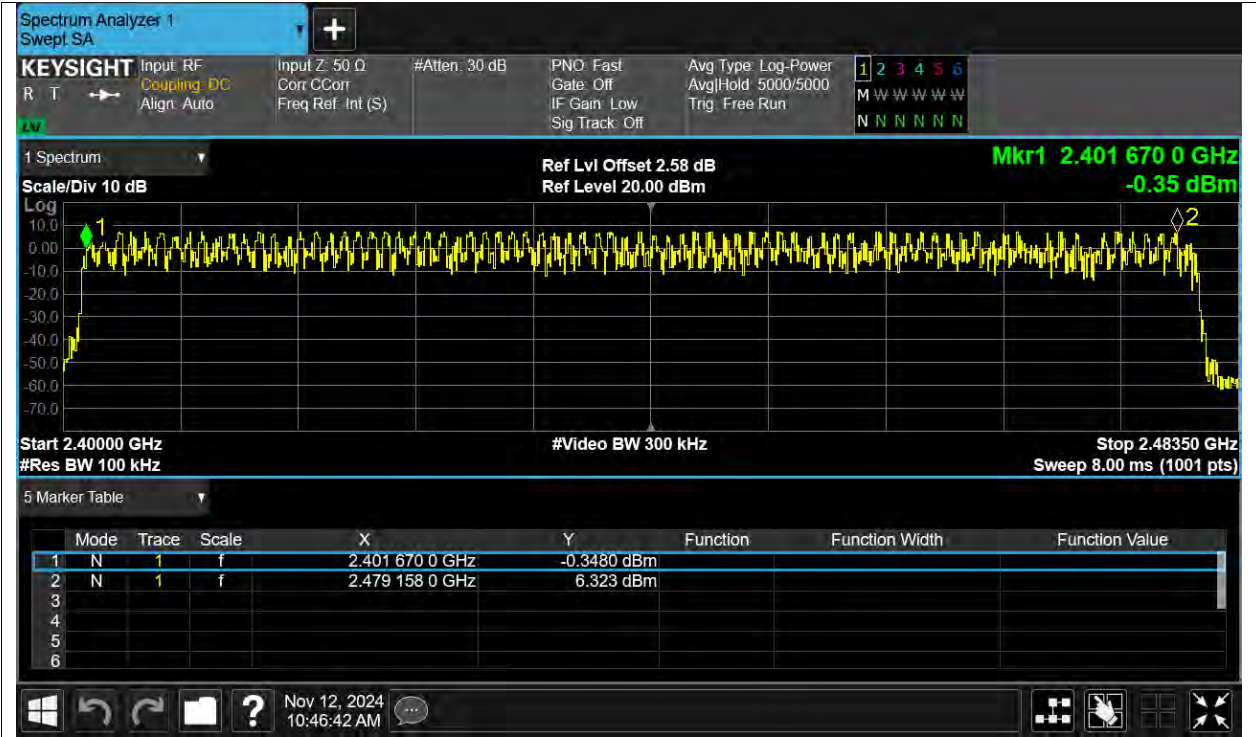

Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.377	120.64	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.633	261.28	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.88	307.2	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.386	123.52	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.638	262.08	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.886	307.84	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.386	123.52	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.636	261.76	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.886	307.84	31600	400	Pass

Test Graphs


Dwell NVNT 1-DH1 2441MHz Ant1



Dwell NVNT 1-DH3 2441MHz Ant1



Dwell NVNT 1-DH5 2441MHz Ant1

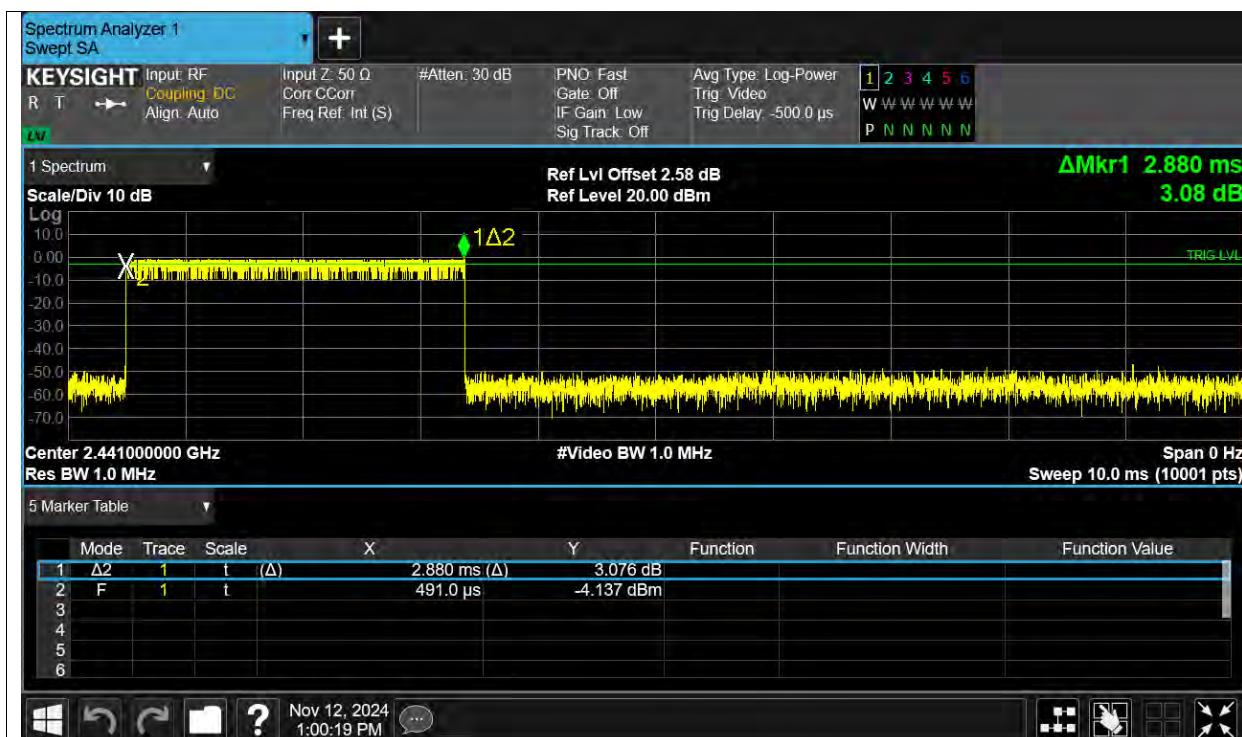


Dwell NVNT 2-DH1 2441MHz Ant1




Dwell NVNT 2-DH3 2441MHz Ant1




Dwell NVNT 2-DH5 2441MHz Ant1

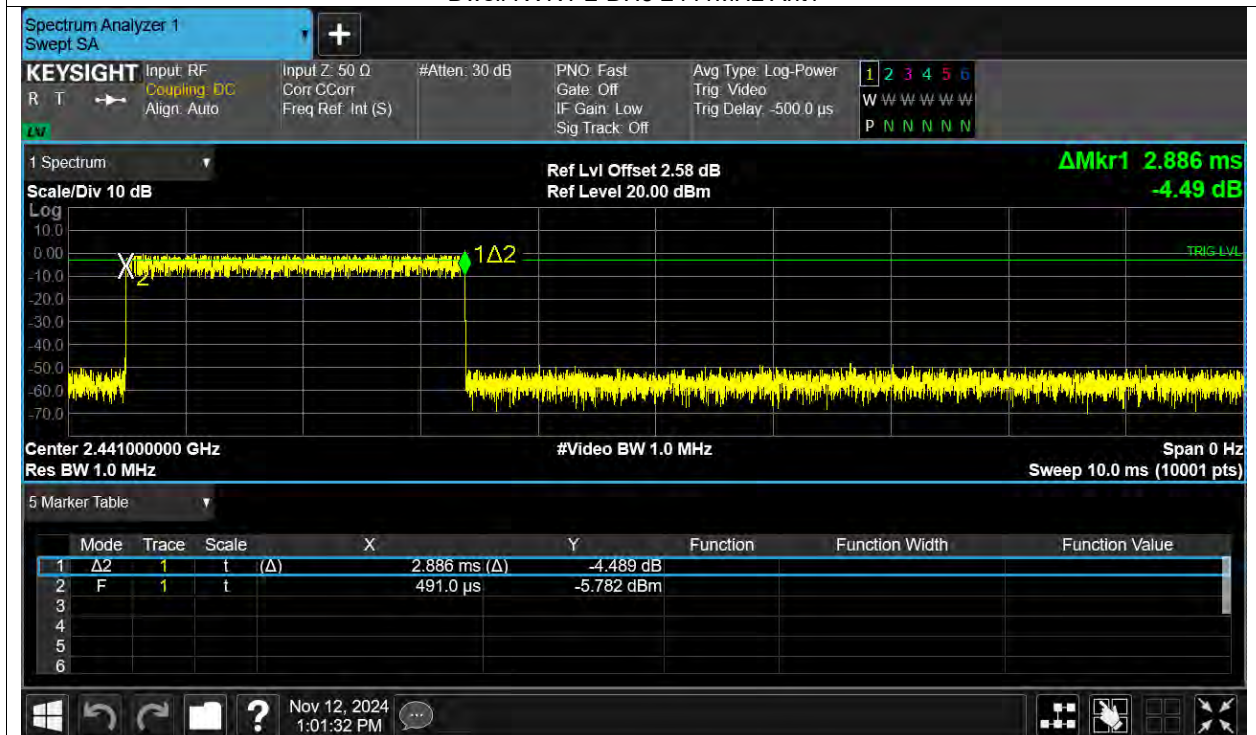


Dwell NVNT 3-DH1 2441MHz Ant1

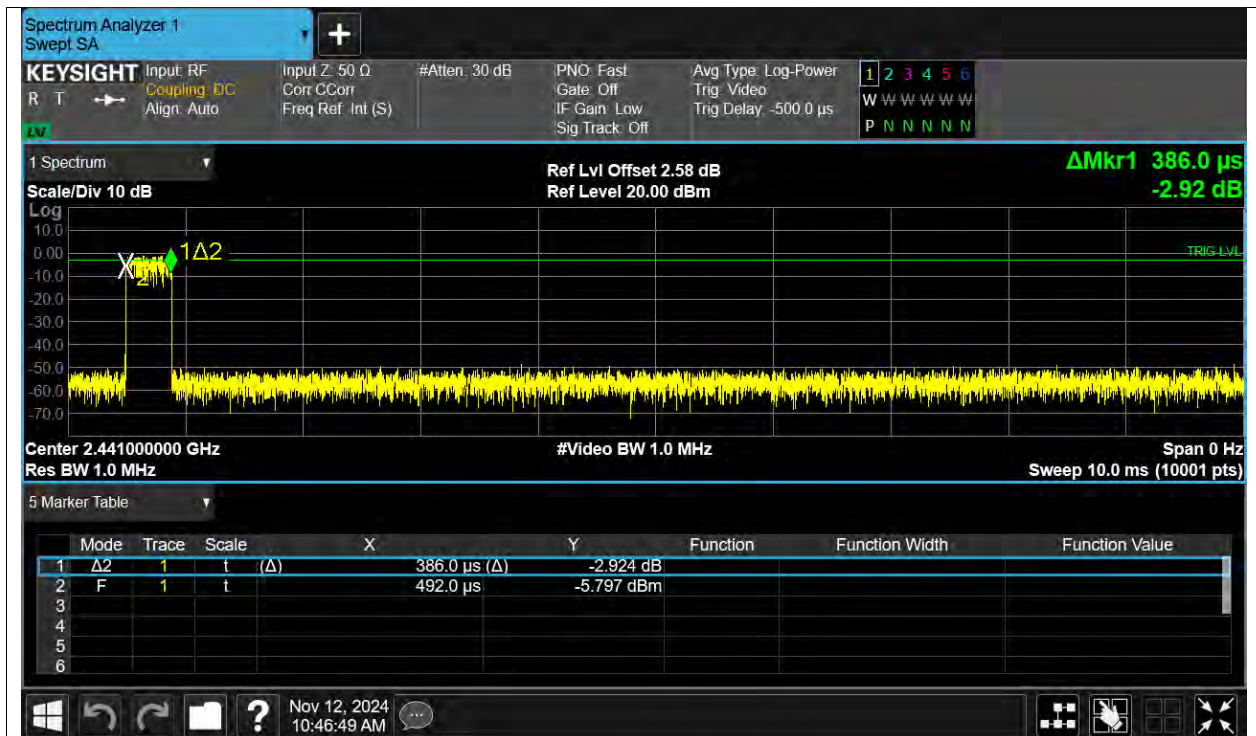

Dwell NVNT 3-DH3 2441MHz Ant1

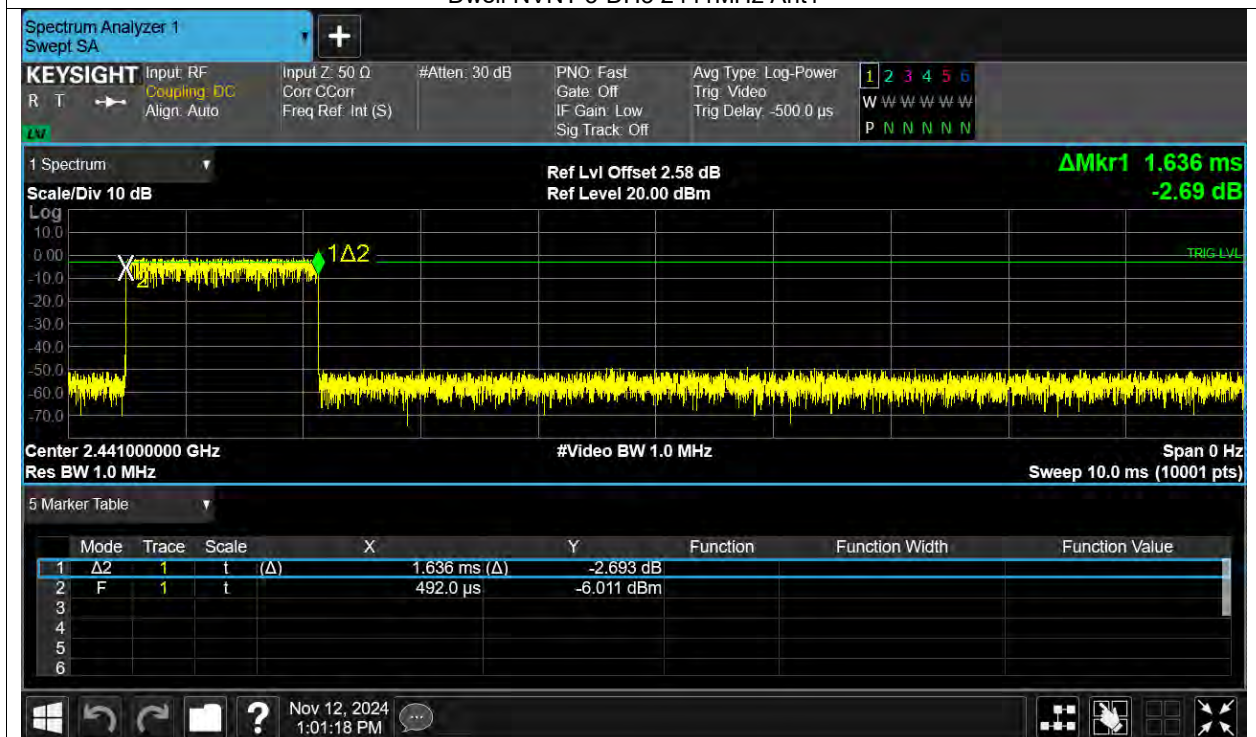

Dwell NVNT 3-DH5 2441MHz Ant1

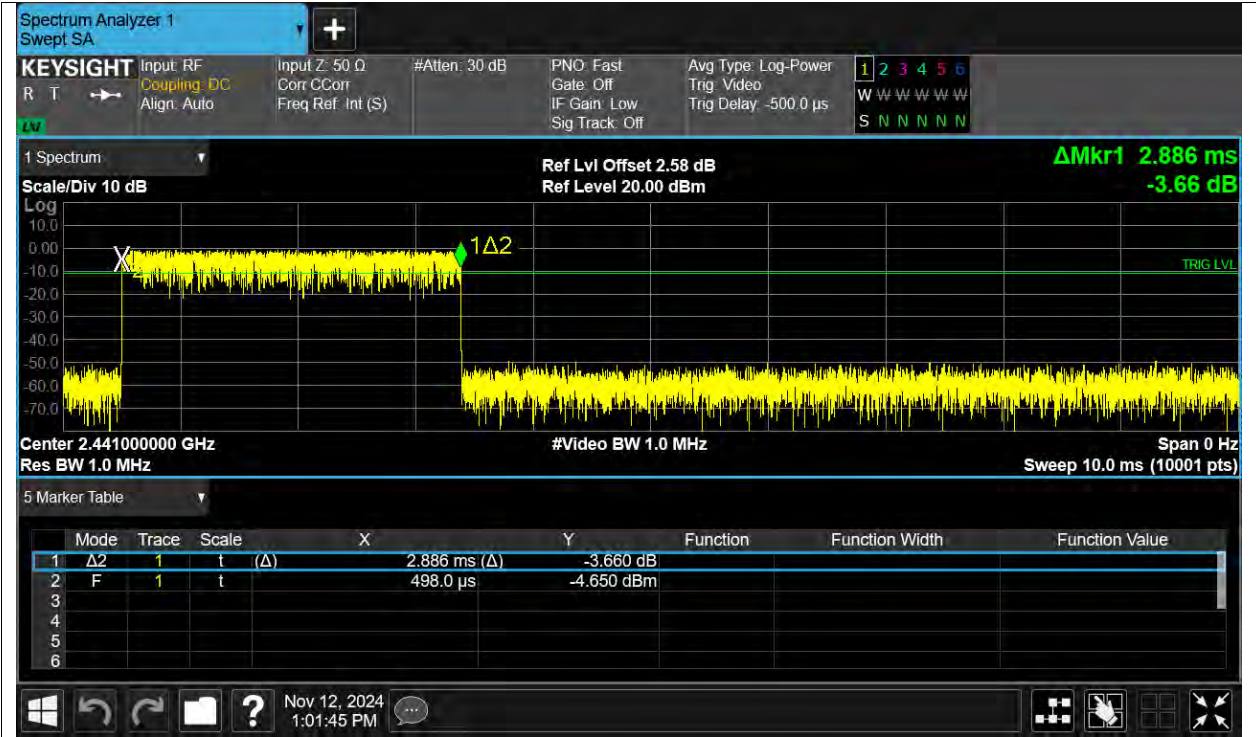

-----End of report-----