



SAR TEST REPORT

For

Xwireless LLC

Smartphone

Test Model: CG65

Prepared for : Xwireless LLC
Address : 11565 Old Georgetown Road Rockville, Maryland 20852
United States

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel : (86)755-82591330
Fax : (86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : October 08, 2023
Number of tested samples : 1
Sample number : A062823156-1
Serial number : Prototype
Date of Test : October 08, 2023 ~ November 3, 2023
Date of Report : November 6, 2023



**SAR TEST REPORT**

Report Reference No.....: LCSA09073120EB

Date Of Issue.....: November 6, 2023

Testing Laboratory Name.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Address.....: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Testing Location/ Procedure.....: Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name.....: Xwireless LLC**

Address.....: 11565 Old Georgetown Road Rockville, Maryland 20852 United States

Test Specification:

Standard.....: FCC 47CFR §2.1093, ANSI/IEEE C95.1-1992, IEEE 1528-2020, KDB 941225/248227/648474/447498/865664/690783

Test Report Form No.....: LCSEMC-1.0

TRF Originator.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF.....: Dated 2014-09

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description.....: Smartphone

Trade Mark.....: Vortex

Model/Type Reference.....: CG65

Operation Frequency.....: GSM850/1900,WCDMABand V/IV/II, WIFI2.4G, WIFI5.2G, WIFI5.8G,BT
and LTE 2,4,5,12,13,17,25,26,41,66,71

Ratings.....: Please Refer to Page 10

Result: Positive**Compiled by:**

Jay Zhan

Jay Zhan/ File administrators

Supervised by:

Cary Luo

Cary Luo / Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager





SAR -- TEST REPORT

Test Report No. :	LCSA09073120EB	<u>November 6, 2023</u> Date of issue
EUT..... : Smartphone		
Type/Model : CG65		
Applicant..... : Xwireless LLC Address..... : 11565 Old Georgetown Road Rockville, Maryland 20852 United States Telephone..... : / Fax..... : /		
Manufacturer..... : BOPEL MOBILE TECHNOLOGY CO., LIMITED Address..... : RM603, 6/F, HANG PONT COMM BLDG, 31 TONKIN ST, CHEUNG SHA WAN, KOWLOON, HONG KONG Telephone..... : / Fax..... : /		
Factory..... : BOPEL MOBILE TECHNOLOGY CO., LIMITED Address..... : RM603, 6/F, HANG PONT COMM BLDG, 31 TONKIN ST, CHEUNG SHA WAN, KOWLOON, HONG KONG Telephone..... : / Fax..... : /		

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

Revision	Issue Date	Revision Content	Revised By
000	November 6, 2023	Initial Issue	---





TABLE OF CONTENTS

1. TEST STANDARDS AND TEST DESCRIPTION	6
1.1. STATEMENT OF COMPLIANCE	6
1.2. TEST LOCATION	7
1.3. TEST FACILITY	8
1.4. TEST LABORATORY ENVIRONMENT	9
1.5. PRODUCT DESCRIPTION	10
1.6. DUT ANTENNA LOCATIONS(FRONT VIEW)	13
1.7. TEST SPECIFICATION	15
1.8. RF EXPOSURE LIMITS	16
1.9. EQUIPMENT LIST	17
2. SAR MEASUREMENTS SYSTEM CONFIGURATION	18
2.1. SAR MEASUREMENT SYSTEM	18
2.2. ISOTROPIC E-FIELD PROBE EX3DV4	20
2.3. DATA ACQUISITION ELECTRONICS (DAE)	21
2.4. SAM TWIN PHANTOM	21
2.5. ELI PHANTOM	22
2.6. DEVICE HOLDER FOR TRANSMITTERS	23
2.7. MEASUREMENT PROCEDURE	24
3. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	28
3.1. SAR MEASUREMENT VARIABILITY	28
3.2. SAR MEASUREMENT UNCERTAINTY	28
4. DESCRIPTION OF TEST POSITION	29
4.1. HEAD EXPOSURE CONDITION	29
4.2. BODY EXPOSURE CONDITION	32
4.3. EXTREMITY EXPOSURE CONDITIONS	33
5. SAR SYSTEM VERIFICATION PROCEDURE	34
5.1. TISSUE SIMULATE LIQUID	34
5.2. SAR SYSTEM CHECK	36
6. SAR MEASUREMENT PROCEDURE	38
6.1. CONDUCTED POWER MEASUREMENT	38
6.2. GSM TEST CONFIGURATION	38
6.3. UMTS TEST CONFIGURATION	38
6.4. LTE TEST CONFIGURATION	40
6.5. WIFI TEST CONFIGURATION	40
6.6. POWER REDUCTION	43
6.7. POWER DRIFT	43
7. TEST CONDITIONS AND RESULTS	44
7.1. CONDUCTED POWER RESULTS	44
7.2. STAND-ALONE SAR TEST EVALUATION	91
7.3. SAR MEASUREMENT RESULTS	92
7.4. MULTIPLE TRANSMITTER EVALUATION	112





1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Statement of Compliance

The maximum of results of SAR found during testing for Hyline Pro are follows:

<Highest Reported standalone SAR Summary>

Classment Class	Frequency Band	Head (Report SAR1-g (W/kg))	Body (Report SAR1-g (W/kg))
			(Separation Distance 10mm)
PCE	GSM 850	0.224	0.376
	GSM1900	0.151	0.509
	WCDMA Band II	0.172	0.741
	WCDMA Band IV	0.150	0.431
	WCDMA Band V	0.292	0.433
	LTE Band 2	0.153	0.632
	LTE Band 4	0.134	0.618
	LTE Band 5	0.234	0.390
	LTE Band 12	0.127	0.266
	LTE Band 13	0.121	0.257
	LTE Band 17	0.164	0.290
	LTE Band 25	0.151	0.644
	LTE Band 26	0.267	0.412
	LTE Band 41	0.260	0.268
	LTE Band 66	0.134	0.571
	LTE Band 71	0.152	0.358
DTS	WIFI2.4G	0.492	0.259
NII	WIFI5.2G	0.349	0.521
	WIFI5.8G	0.403	0.488

Note

- 1) This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2020.
- 2) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode;
- 3) Body worn only Front side,Rear side

<Highest Reported simultaneous SAR Summary>

Exposure Position	Classment Class	Head (Report SAR1-g (W/kg))	Highest Reported Simultaneous Transmission SAR1-g (W/kg)
Body	PCE	0.741	1.262
	NII	0.521	





1.2. Test Location

Company: Shenzhen LCS Compliance Testing Laboratory Ltd.
Address: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Telephone: (86)755-82591330
Fax: (86)755-82591330
Web: www.LCS-cert.com
E-mail: webmaster@LCS-cert.com



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



1.3. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Site Description
SAR Lab.

: NVLAP Accreditation Code is 600167-0.
FCC Designation Number is CN5024.
CAB identifier is CN0071.
CNAS Registration Number is L4595.
Test Firm Registration Number: 254912.





1.4. Test Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5
Atmospheric pressure:	950-1050mbar
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	





1.5. Product Description

The **Xwireless LLC**'s Model: CG65 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

General Description	
Product Name:	Smartphone
Test Model:	CG65
Power supply:	Input: 5.0V $\pm$ 2.0A Adapter Model: GYS-A5020S1 For AC Adapter Input: 100-240V~, 50/60Hz, 0.35A Adapter Output: 5.0V $\pm$ 2.0A, 10W Adapter Model: WZX-C05200A1 For AC Adapter Input: 100-240V~, 50/60Hz, 0.3A Adapter Output: 5.0V $\pm$ 2.0A, 10W DC 3.85V by Rechargeable Polymer Battery, 4400mAh
Hardware Version:	J527G_6761 & 6762_D3F_V1.0
Software Version:	j527g_65t0_hd720_1600_bopai_b6503_disddr3_4_64_drv_userdebug_2023_09_22_17_47

Technical Characteristics	
Bluetooth	
Frequency Range:	2402MHz~2480MHz
Bluetooth Channel Number:	79 channels for Bluetooth V5.0 (DSS) 40 channels for Bluetooth V5.0 (DTS)
Bluetooth Channel Spacing:	1MHz for Bluetooth V5.0 (DSS) 2MHz for Bluetooth V5.0 (DTS)
Bluetooth Modulation Type:	GFSK, $\pi/4$ -DQPSK for Bluetooth V5.0 (DSS) GFSK for Bluetooth V5.0 (DTS)
Bluetooth Version:	V5.0
Antenna Description:	PIFA Antenna, 1.8dBi (max.)
2.4G WLAN	
Frequency Range:	2412MHz~2462MHz
Channel Spacing:	5MHz
Channel Number:	11 Channels for 20MHz bandwidth (2412~2462MHz)
Modulation Type	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Description:	PIFA Antenna, 1.8dBi (max.)
5.2G WLAN	
Frequency Range:	5180MHz~5240MHz
Channel Number	4 Channels for 20MHz bandwidth(5180MHz~5240MHz) 2 channels for 40MHz bandwidth(5190MHz~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	PIFA Antenna, -3.24dBi (max.)
5.8G WLAN	
Frequency Range:	5745MHz~5825MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Channel Number	5 channels for 20MHz bandwidth(5745MHz~5825MHz) 2 channels for 40MHz bandwidth(5755MHz~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Modulation Type	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	PIFA Antenna, -0.21dBi (max.)
2G	
Support Band:	1GSM 900 (EU-Band) 1DCS 1800 (EU-Band) 1GSM 850 (U.S.-Band) 1PCS 1900 (U.S.-Band)
Release Version:	R99
GPRS Class:	Class 12
EGPRS Class:	Class 12
Type Of Modulation:	GMSK for GSM/GPRS; GMSK/8PSK for EGPRS
Antenna Description:	PIFA Antenna -1.6dBi (max.) For GSM 850 -0.6dBi (max.) For PCS 1900
3G	
Support Band:	1WCDMA Band II (U.S.-Band) 1WCDMA Band IV (U.S.-Band) 1WCDMA Band V (U.S.-Band)
Release Version:	R8
Type Of Modulation:	QPSK, 16QAM
Antenna Description:	PIFA Antenna -0.6dBi (max.) For WCDMA Band II -0.8dBi (max.) For WCDMA Band IV -1.7dBi (max.) For WCDMA Band V
LTE	
Support Band:	☒ E-UTRA Band 2(U.S.-Band) ☒ E-UTRA Band 4(U.S.-Band) ☒ E-UTRA Band 5(U.S.-Band) ☒ E-UTRA Band 12(U.S.-Band) ☒ E-UTRA Band 13(U.S.-Band) ☒ E-UTRA Band 17(U.S.-Band) ☒ E-UTRA Band 25(U.S.-Band) ☒ E-UTRA Band 26(U.S.-Band) ☒ E-UTRA Band 41(U.S.-Band) ☒ E-UTRA Band 66(U.S.-Band) ☒ E-UTRA Band 71(U.S.-Band)
LTE Release Version:	R12
Type Of Modulation:	QPSK/16QAM
Antenna Description:	PIFA Antenna -0.6dBi (max.) For E-UTRA Band 2 -0.8dBi (max.) For E-UTRA Band 4 -1.7dBi (max.) For E-UTRA Band 5 -1.9dBi (max.) For E-UTRA Band 12 -1.9dBi (max.) For E-UTRA Band 13 -1.9dBi (max.) For E-UTRA Band 17 -0.6dBi (max.) For E-UTRA Band 25 -1.7dBi (max.) For E-UTRA Band 26 -0.5dBi (max.) For E-UTRA Band 41 -0.8dBi (max.) For E-UTRA Band 66 -2.1dBi (max.) For E-UTRA Band 71
Power Class:	Class 3
Extreme temp. :	-30°C to +50°C






Tolerance:	
Extreme vol. Limits:	3.5VDC to 4.4VDC (nominal: 3.85VDC)
Exposure category:	Uncontrolled Environment General Population



1.6. DUT Antenna Locations(Front View)

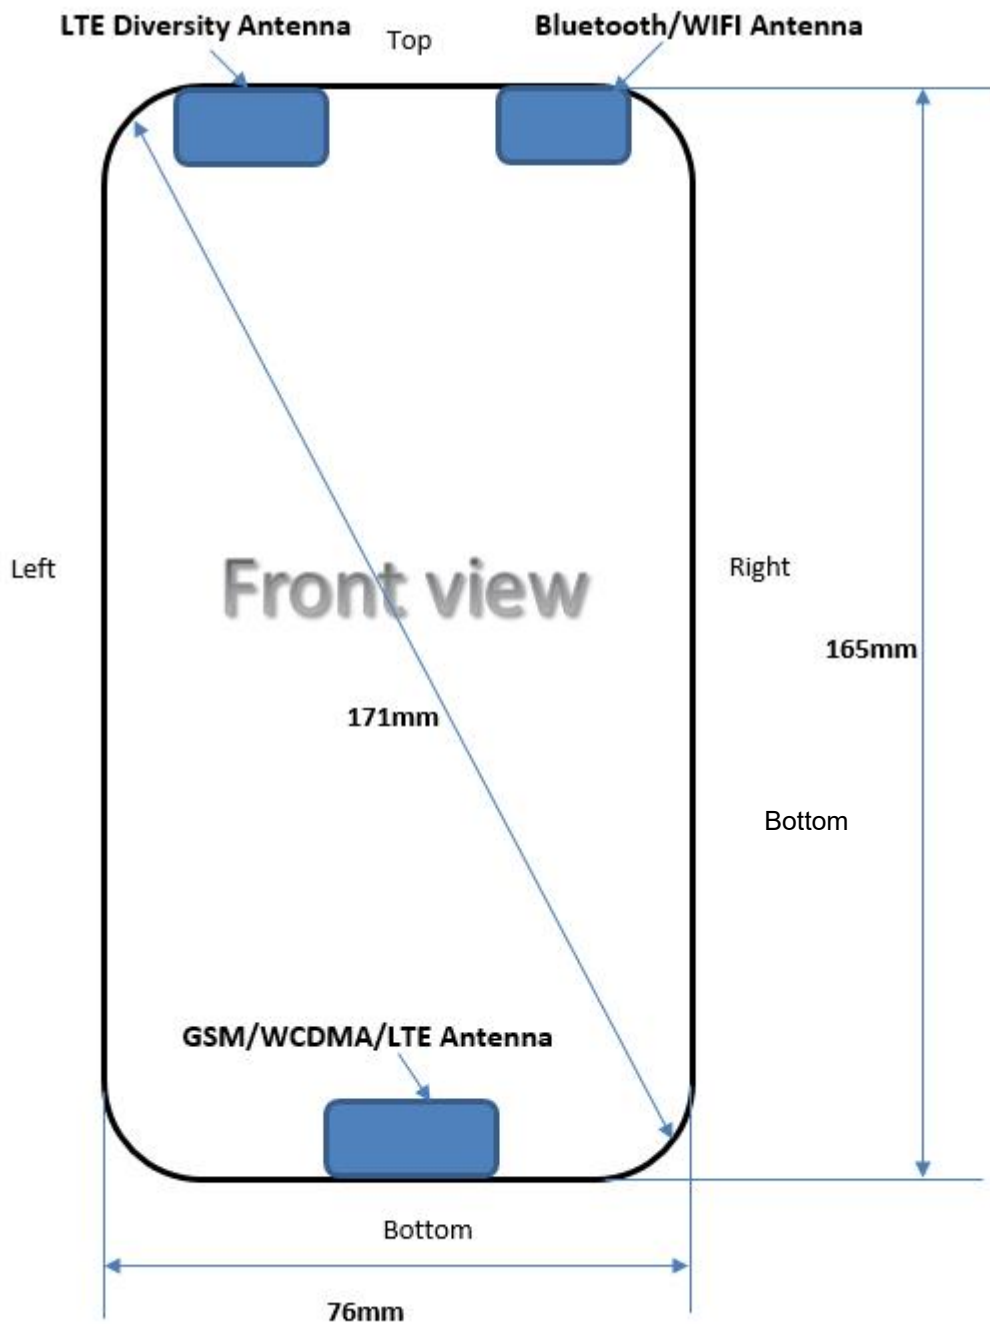

Note:

- 1) Main Antenna: GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/5/12/13/17/25/26/41/66/71, the Div ant only for Rx.
- 2) The test device is a smart phone. The overall diagonal dimension of this device is 171 mm. Per KDB 648474 D04, because the diagonal distance of this device is ≥ 160 mm, so it is a phablet.





According to the distance between LTE/WCDMA/GSM&WIFI&BT antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing							
Mode	Exposure Condition	Front	Back	Left	Right	Top	Bottom
GSM/WCDMA/LTE Antenna	Body 1g SAR	Yes	Yes	Yes	Yes	No	Yes
WIFI/BT Antenna	Body 1g SAR	Yes	Yes	No	Yes	Yes	No

Table 1: EUT Sides for SAR Testing

Note:

When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.





1.7. Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2020	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D06	Hotspot Mode SAR v02r01
KDB 248227 D01	SAR Guidance for IEEE 802.11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB 447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03





1.8. RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)





1.9. Equipment list

Test Platform		SPEAG DASY5 Professional				
Description		SAR Test System (Frequency range 300MHz-6GHz)				
Software Reference		DASY52; SEMCAD X				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	PC	Lenovo	NA	NA	NA	NA
☒	Twin Phantom	SPEAG	SAM V5.0	1850	NCR	NCR
☒	ELI Phantom	SPEAG	ELI V6.0	2010	NCR	NCR
☒	DAE	SPEAG	DAE3	419	2023/6/20	2024/6/19
☒	E-Field Probe	SPEAG	EX3DV4	3805	2023/6/21	2024/6/20
☒	Validation Kits	SPEAG	D750V3	1191	2023/6/15	2026/6/14
☒	Validation Kits	SPEAG	D835V2	4d124	2023/6/20	2026/6/19
☒	Validation Kits	SPEAG	D1750V2	1035	2023/6/12	2026/6/11
☒	Validation Kits	SPEAG	D1900V2	5d055	2023/6/20	2026/6/19
☒	Validation Kits	SPEAG	D2450V2	965	2023/6/12	2026/6/11
☒	Validation Kits	SPEAG	D2600V2	1071	2023/6/20	2026/6/19
☒	Validation Kits	SPEAG	D5GHzV2	1046	2023/6/20	2026/6/19
☒	Agilent Network Analyzer	Agilent	8753E	SU38432944	2023/6/9	2024/6/8
☒	Dielectric Probe Kit	SPEAG	DAK3.5	1425	NCR	NCR
☒	Universal Radio Communication Tester	R&S	CMW500	42115	2022/10/29	2023/10/28
☒	Directional Coupler	MCLI/USA	4426-20	03746	2023/6/9	2024/6/8
☒	Power meter	Agilent	E4419B	MY45104493	2022/10/29	2023/10/28
☒	Power meter	Agilent	E4419B	MY45100308	2022/10/29	2023/10/28
☒	Power sensor	Agilent	E9301H	MY41495616	2022/10/29	2023/10/28
☒	Power sensor	Agilent	E9301H	MY41495234	2022/10/29	2023/10/28
☒	Signal Generator	Agilent	E4438C	MY49072627	2023/6/9	2024/6/8
☒	Broadband Preamplifier	/	BP-01M18G	P190501	2023/6/15	2024/6/14
☒	DC POWER SUPPLY	I-SHENG	SP-504	NA	NCR	NCR
☒	Speed reading thermometer	HTC-1	NA	LCS-E-138	2023/6/13	2024/6/12


Note: All the equipments are within the valid period when the tests are performed.





2.1. SAR Measurement System

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

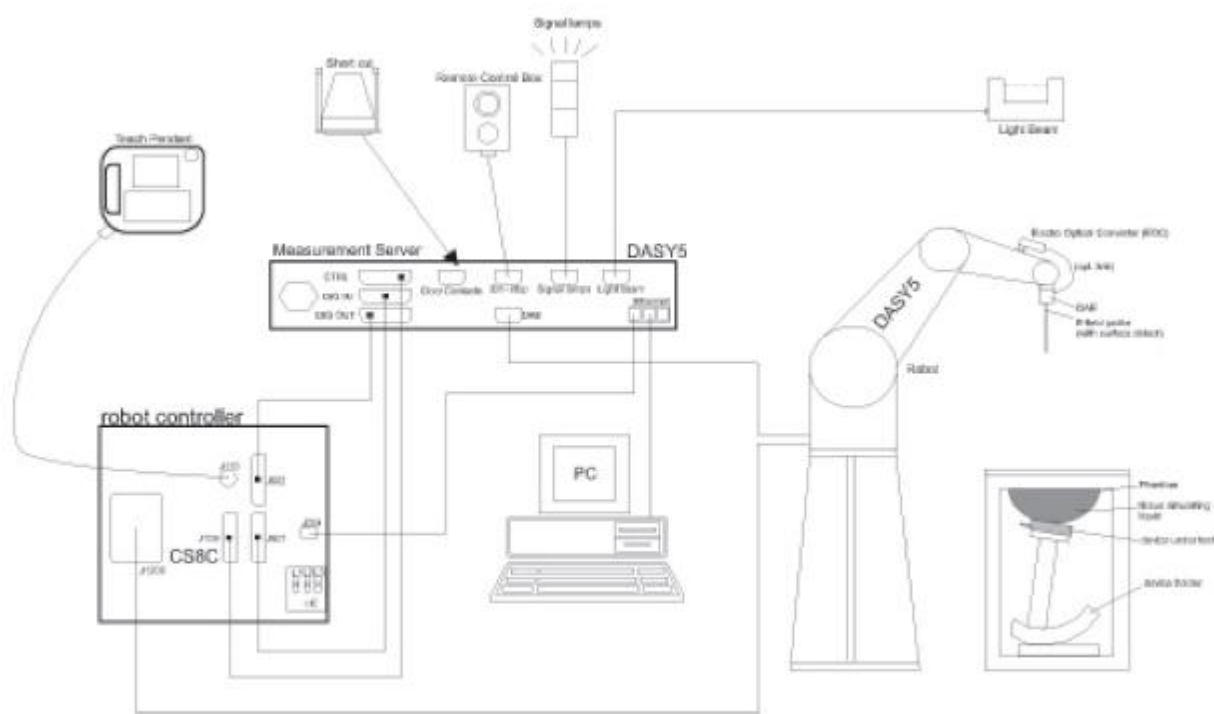

F-1. SAR Measurement System Configuration





- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.




2.2. Isotropic E-field Probe EX3DV4


	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



2.3. Data Acquisition Electronics (DAE)

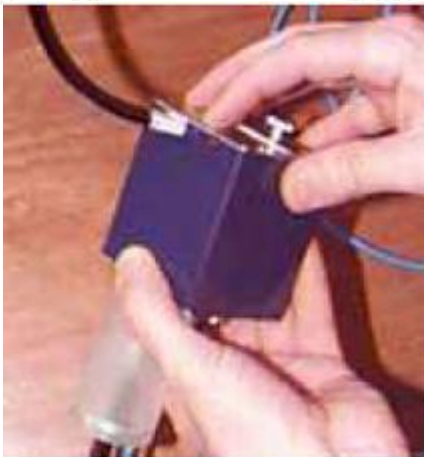Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

2.4. SAM Twin Phantom

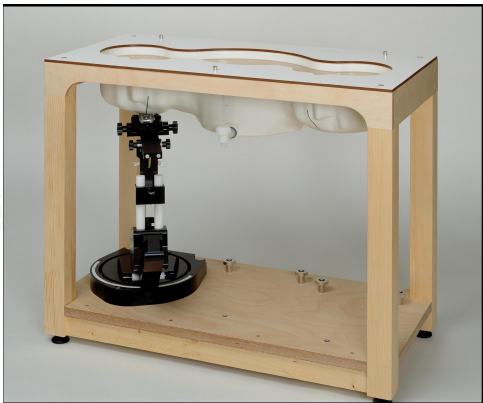Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



2.5. ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.



2.6. Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.





2.7. Measurement procedure

2.7.1. Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.





		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$

2.7.2. Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.





2.7.3. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ϵ
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$





H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm $_i$ = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3. SAR measurement variability and uncertainty

3.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

3.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



4. Description of Test Position


4.1. Head Exposure Condition

4.1.1. SAM Phantom Shape




F-3. Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only-procedures in this recommended practice are intended primarily for the phantom setup.


Note: The centre strip including the nose region has a different thickness tolerance.

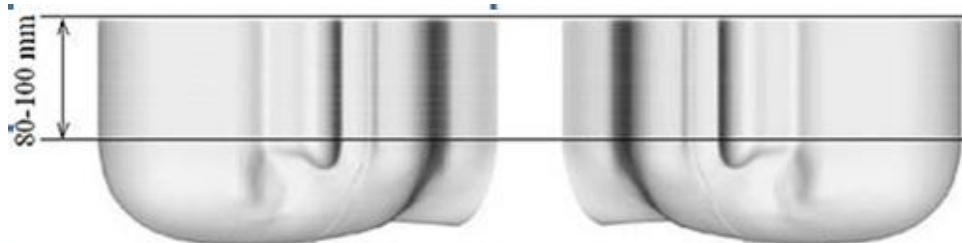

F-4. Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

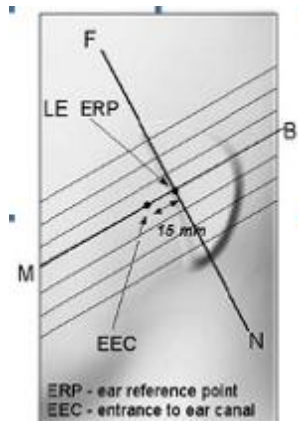


F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

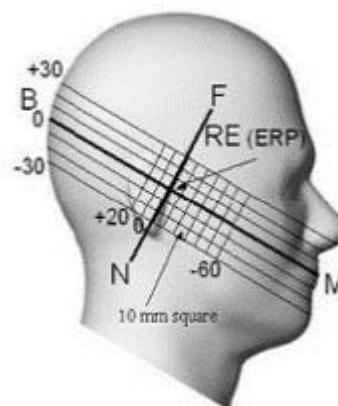


F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations



4.1.2. EUT constructions

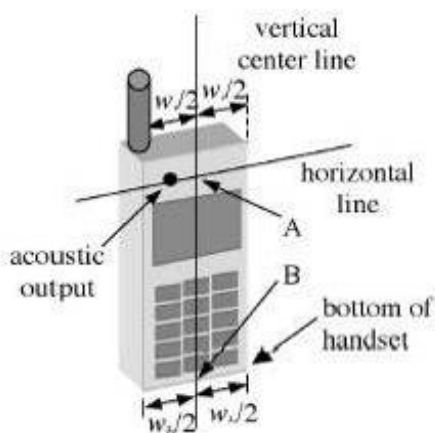

F-1. Handset vertical and horizontal reference lines—"fixed case"

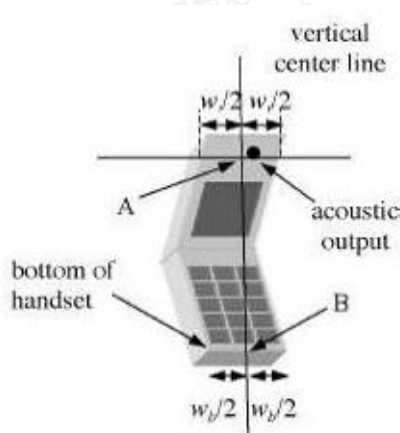

F-2. Handset vertical and horizontal reference lines—"clam-shell case"

4.1.3. Definition of the "cheek" position


a) Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position"). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.

b) Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.




4.1.4. Definition of the “tilted” position

- Position the device in the “cheek” position described above;
- While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

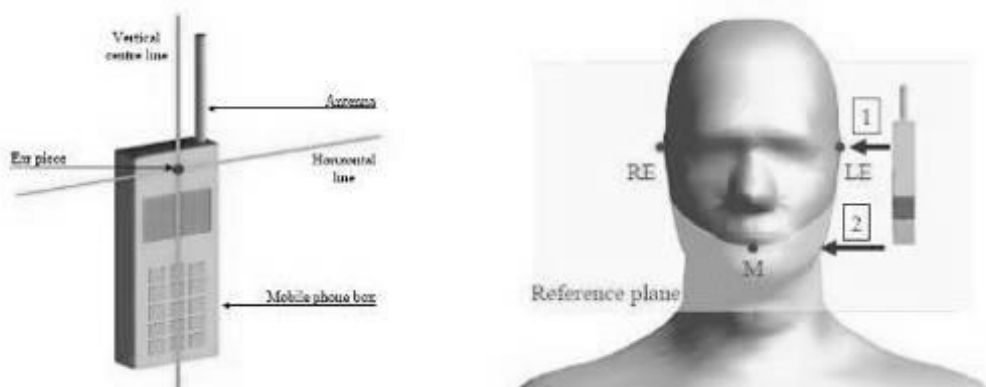

F-1. Definition of the reference lines and points, on the phone and on the phantom and initial position

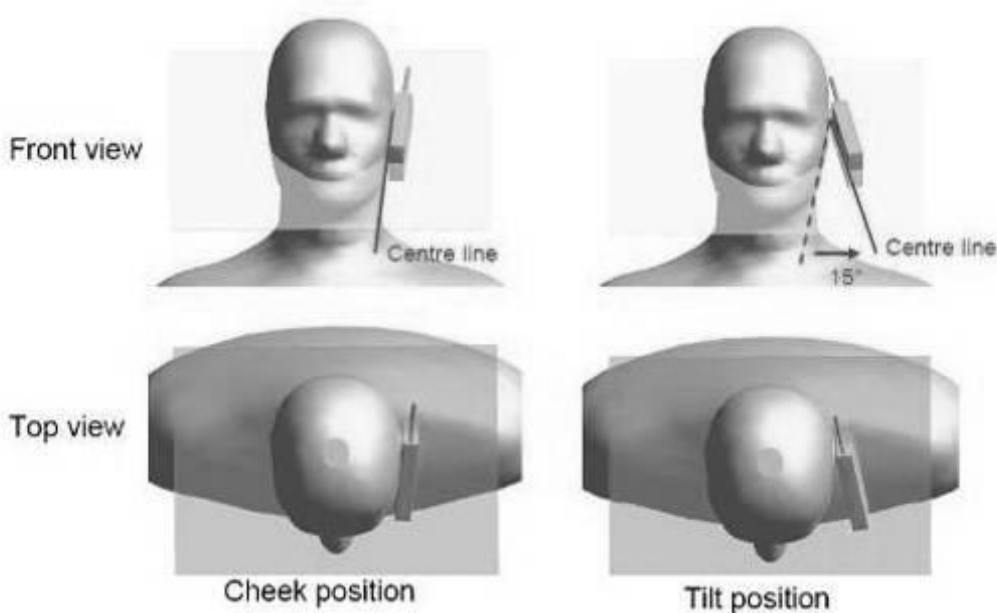

F-2. “Cheek” and “tilt” positions of the mobile phone on the left side



4.2. Body Exposure Condition


4.2.1. Body-worn accessory exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

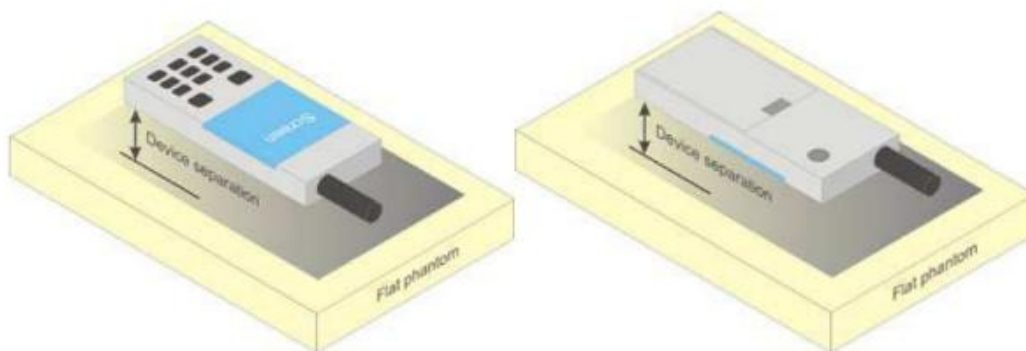

F-1. Test positions for body-worn devices





4.2.2. Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than 9 cm x 5 cm, a test separation distance of 5 mm is required.

4.3. Extremity exposure conditions

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as "Phablet".

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, the Main antenna frequency bands are not required to test with 0mm for the Product Specific 10 g SAR.





5. SAR System Verification Procedure

5.1. Tissue Simulate Liquid

5.1.1. Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride Water: De-ionized, 16 MΩ ⁺ resistivity Tween: Polyoxyethylene (20) sorbitan monolaurate Sucrose: 98+% Pure Sucrose HEC: Hydroxyethyl Cellulose					
HSL5GHz is composed of the following ingredients: Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 2: Recipe of Tissue Simulate Liquid





5.1.2. Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the DAKS. The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm 2^{\circ}\text{C}$.


Tissue Type	Measured Frequency (MHz)	Target Tissue ($\pm 5\%$)		Measured Tissue		Liquid Temp. ($^{\circ}\text{C}$)	Measured Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
750 Head	750	41.9 (39.81~44.00)	0.89 (0.85~0.93)	41.649	0.895	21.9	October 26, 2023
835 Head	835	41.5 (39.43~43.58)	0.9 (0.86~0.95)	40.789	0.886	21.9	October 27, 2023
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.392	1.313	22.2	October 30, 2023
1900 Head	1900	40 (38.00~42.00)	1.4 (1.33~1.47)	40.019	1.364	22.1	October 31, 2023
2450 Head	2450	39.2 (37.24~41.16)	1.8 (1.71~1.89)	39.891	1.823	22.3	November 1, 2023
2600 Head	2600	39 (37.05~40.95)	1.96 (1.86~2.06)	39.378	1.999	21.5	November 2, 2023
5250Head	5250	35.9 (34.11~37.70)	4.71 (4.47~4.95)	36.608	4.721	22.2	November 3, 2023
5800 Head	5800	35.4 (33.63~37.17)	5.22 (4.96~5.48)	35.073	5.328	22.2	November 3, 2023

Table 3: Measurement result of Tissue electric parameters



5.2. SAR System Check

The microwave circuit arrangement for system Check is sketched in F-1. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^{\circ}\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above $15\pm 0.5\text{ cm}$ in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

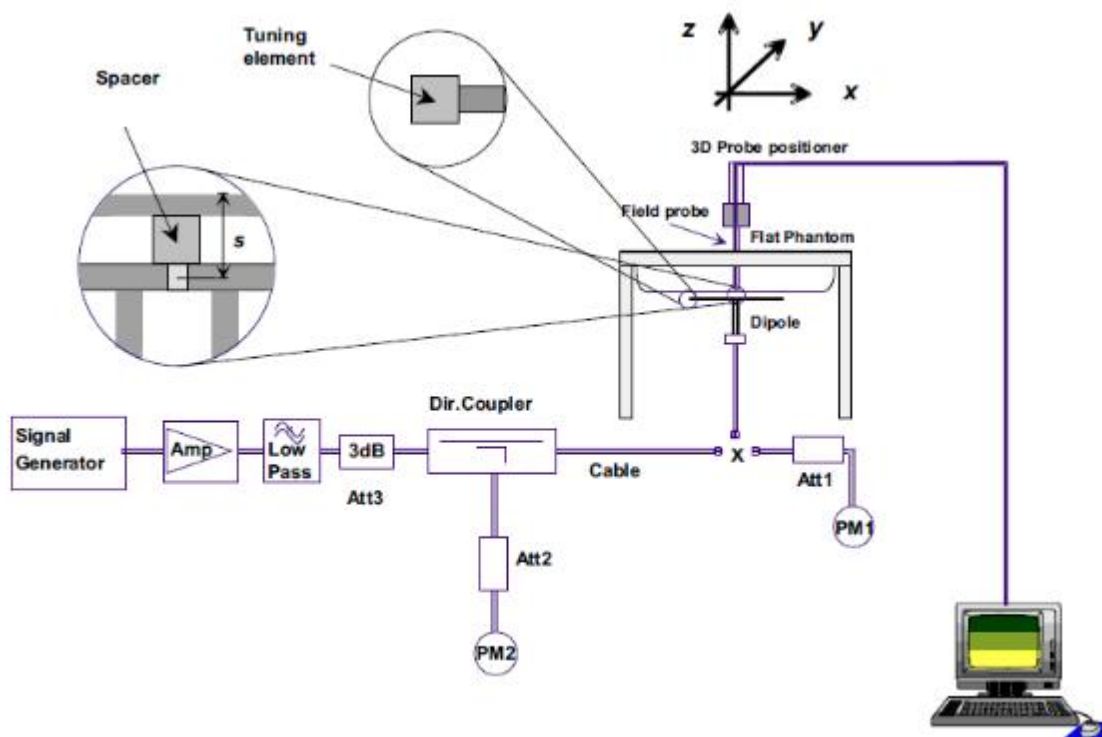

F-1. the microwave circuit arrangement used for SAR system check

5.2.1. Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- There is no physical damage on the dipole;
- System check with specific dipole is within 10% of calibrated value;
- Return-loss is within 20% of calibrated measurement;
- Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.





5.2.2. Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D750V2	Head	2.13	1.40	8.52	5.60	8.57 (7.71~9.43)	5.61 (5.05~6.17)	21.9	October 26, 2023
D835V2	Head	2.39	1.56	9.56	6.24	9.58 (8.62~10.54)	6.27 (5.64~6.90)	21.9	October 27, 2023
D1750V2	Head	9.41	5.00	37.64	20.00	35.9 (32.31~39.49)	18.9 (17.01~20.79)	22.2	October 30, 2023
D1900V2	Head	9.76	5.05	39.04	20.20	40.3 (36.27~44.33)	21.0 (18.9~23.1)	22.1	October 31, 2023
D2450V2	Head	12.80	5.87	51.20	23.48	53.5 (48.15~58.85)	25.0 (22.50~27.50)	22.3	November 1, 2023
D2600V2	Head	13.70	6.19	54.80	24.76	56.80 (51.12~62.48)	25.5 (22.95~28.05)	21.5	November 2, 2023
Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D5GHzV2	Head (5.25GHz)	8.19	2.27	81.90	22.70	76.9 (69.21~84.59)	21.6 (19.44~23.76)	22.2	November 3, 2023
	Head (5.8GHz)	8.27	2.18	82.70	21.80	76.8 (69.12~84.48)	21.3 (19.17~23.43)	22.2	November 3, 2023

Table 4: Please see the Appendix A





6. SAR measurement procedure

The measurement procedures are as follows:

6.1. Conducted power measurement

- For WWAN power measurement, use base station simulator connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously Transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

6.2. GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using CMU200 the power level is set to "5" for GSM 850, set to "0" for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 4. the EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 4.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

6.3. UMTS Test Configuration

3G SAR Test Reduction Procedure

In the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.³ This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

Output power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.





Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

1) Body-Worn Accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

2) Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices" section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set

Table 2: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8$ $\rightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \rightarrow \beta_{hs} = 30/15 * \beta_c$
Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1,TF1) to $\beta_c=11/15$ and $\beta_d=15/15$.

HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices" section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document

Table 3: Sub-Test 5 Setup for Release 6 HSUPA



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306

Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

6.4. LTE Test Configuration

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.8 When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.9

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

6.5. WIFI Test Configuration

The SAR measurement and test reduction procedures are structured according to either the DSSS or OFDM transmission mode configurations used in each standalone frequency band and aggregated band. For devices that operate in exposure configurations that require multiple test positions, additional SAR test reduction may be applied. The maximum output power specified for production units, including tune-up tolerance, are used to determine initial SAR test requirements for the 802.11 transmission modes in a frequency band. SAR is measured using the highest measured maximum output power channel for the initial test configuration. SAR measurement and test reduction for the remaining 802.11 modes and test channels are determined according to measured or specified maximum output power and reported SAR of the initial measurements. The general test reduction and SAR measurement approaches are summarized in the following:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

2. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, an "initial test configuration" is first determined for each standalone and aggregated frequency band according to the maximum output power and tune-up tolerance specified for production units.

a. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

b. SAR is measured for OFDM configurations using the initial test configuration procedures. Additional frequency band specific SAR test reduction may be considered for individual frequency bands

c. Depending on the reported SAR of the highest maximum output power channel tested in the initial test configuration, SAR test reduction may apply to subsequent highest output channels in the initial test configuration to reduce the number of SAR measurements.

3. The Initial test configuration does not apply to DSSS. The 2.4 GHz band SAR test requirements and 802.11b DSSS procedures are used to establish the transmission configurations required for SAR measurement.

4. An "initial test position" is applied to further reduce the number of SAR tests for devices operating in next to the ear, UMPC mini-tablet or hotspot mode exposure configurations that require multiple test positions.

a. SAR is measured for 802.11b according to the 2.4 GHz DSSS procedure using the exposure condition established by the initial test position.

b. SAR is measured for 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration.

802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel.

5. The Initial test position does not apply to devices that require a fixed exposure test position. SAR is measured in a fixed exposure test position for these devices in 802.11b according to the 2.4 GHz DSSS procedure or in 2.4 GHz and 5 GHz OFDM configurations using the initial test configuration procedures.

6. The "subsequent test configuration" procedures are applied to determine if additional SAR measurements are required for the remaining OFDM transmission modes that have not been tested in the initial test configuration. SAR test exclusion is determined according to reported SAR in the initial test configuration and maximum output power specified or measured for these other OFDM configurations.

2.4 GHz and 5GHz SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in section 5.2.2.

1. 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

1. 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3). SAR is not required for the following 2.4 GHz OFDM conditions.

- When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration
- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

2. SAR Test Requirements for OFDM Configurations

When SAR measurement is required for 802.11 a/g/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

3. OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance,





in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures (section 4). When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

- Channels with measured maximum output power within $\frac{1}{4}$ dB of each other are considered to have the same maximum output.
- When there are multiple test channels with the same measured maximum output power, the channel closest to mid-band frequency is selected for SAR measurement.
- When there are multiple test channels with the same measured maximum output power and equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2). SAR test reduction of subsequent highest output test channels is based on the reported SAR of the initial test configuration. For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode.²³ For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

4. Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, the procedures in section 5.3.2 are applied to determine the test configuration. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should





be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.

- 1). SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
- 2). SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is $> 1.2 \text{ W/kg}$ or until all required channels are tested.
 - a) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
 - d. SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - 1) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
 - 2) replace "initial test configuration" with "all tested higher output power configurations."

6.6. Power Reduction

The product without any power reduction.

6.7. Power Drift

To control the output power stability during the SAR test, SAR system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. This ensures that the power drift during one measurement is within $\pm 0.2\text{dB}$.





7. TEST CONDITIONS AND RESULTS

7.1. Conducted Power Results

According KDB 447498 D01 General RF Exposure Guidance v06 Section 4.1 2) states that "Unless it is specified differently in the published RF exposure KDB procedures, these requirements also apply to test reduction and test exclusion considerations. Time-averaged maximum conducted output power applies to SAR and, as required by § 2.1091(c), time-averaged ERP applies to MPE. When an antenna port is not available on the device to support conducted power measurement, such as FRS and certain Part 15 transmitters with built-in integral antennas, the maximum output power allowed for production units should be used to determine RF exposure test exclusion and compliance."

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. According to October 2013TCB Workshop, for GSM / GPRS / EGPRS, the number of time slots to test for SAR should correspond to the highest frame-average maximum output power configuration, considering the possibility of e.g. 3rd party VoIP operation for head and body-worn SAR testing, the EUT was set in GPRS (4Tx slot) for GSM850/GSM1900 band due to their highest frame-average power.
3. For hotspot mode SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (4 Tx slots) for GSM850/GSM1900 band due to its highest frame-average power.

7.1.1. Conducted power measurement results for GSM850

GSM 850										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	32.66	32.69	32.66	33.00	-9.19	23.47	23.50	23.47	23.81
GPRS/EGPRS (GMSK)	1 TX Slot	32.56	32.53	32.52	33.00	-9.19	23.37	23.34	23.33	23.81
	2 TX Slots	30.99	31.01	30.94	31.50	-6.18	24.81	24.83	24.76	25.32
	3 TX Slots	29.49	29.50	29.43	30.00	-4.42	25.07	25.08	25.01	25.58
	4 TX Slots	27.99	28.01	27.98	29.00	-3.17	24.82	24.84	24.81	25.83
EGPRS(8PSK)	1 TX Slot	25.99	25.99	25.93	27.00	-9.19	16.80	16.80	16.74	17.81
	2 TX Slots	24.50	24.52	24.44	25.00	-6.18	18.32	18.34	18.26	18.82
	3 TX Slots	22.95	22.97	22.96	24.00	-4.42	18.53	18.55	18.54	19.58
	4 TX Slots	21.48	21.48	21.43	22.00	-3.17	18.31	18.31	18.26	18.83

7.1.2. Conducted power measurement results for PCS1900

GSM 1900										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	29.68	29.73	29.65	30.00	-9.19	20.49	20.54	20.46	20.81
GPRS/EGPRS (GMSK)	1 TX Slot	29.55	29.55	29.48	30.00	-9.19	20.36	20.36	20.29	20.81
	2 TX Slots	27.98	28.00	27.98	29.00	-6.18	21.80	21.82	21.80	22.82
	3 TX Slots	26.45	26.49	26.43	27.00	-4.42	22.03	22.07	22.01	22.58
	4 TX Slots	24.98	25.03	24.93	26.00	-3.17	21.81	21.86	21.76	22.83
EGPRS(8PSK)	1 TX Slot	25.50	25.48	25.44	26.00	-9.19	16.31	16.29	16.25	16.81
	2 TX Slots	23.95	24.00	23.97	25.00	-6.18	17.77	17.82	17.79	18.82
	3 TX Slots	22.44	22.53	22.43	23.00	-4.42	18.02	18.11	18.01	18.58
	4 TX Slots	20.97	20.97	20.95	22.00	-3.17	17.80	17.80	17.78	18.83

Note:



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



1) CMW500 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

2) The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

3) Frame-averaged power = $10 \times \log(\text{Burst-averaged power mW} \times \text{Slot used} / 8)$

When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used

When multiple slots can be used, SAR should be tested to account for the maximum source-based time-averaged output power.

<UMTS Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- The EUT was connected to Base Station CMW500 referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting:
 - Set Gain Factors (β_c and β_d) and parameters were set according to each
 - Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - Set RMC 12.2Kbps + HSDPA mode.
 - Set Cell Power = -86 dBm
 - Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - Select HSDPA Uplink Parameters
 - Set Delta ACK, Delta NACK and Delta CQI = 8
 - Set Ack-Nack Repetition Factor to 3
 - Set CQI Feedback Cycle (k) to 4 ms
 - Set CQI Repetition Factor to 2
 - Power Ctrl Mode = All Up bits
- The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration



**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station R&S CMW500 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

General Note

1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR and HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.





7.1.3. Conducted Power Measurement Results(WCDMA Band II)

Item	Band	WCDMA Band II result (dBm)			
		Channel/Frequency(MHz)			
	sub-test	9262/1852.4	9400/1880	9538/1907.6	Tune up
RMC	12.2kbps RMC	23.33	23.47	23.28	24.00
HSDPA	Sub –Test 1	22.70	22.78	22.50	23.00
	Sub –Test 2	22.72	22.56	22.51	23.00
	Sub –Test 3	22.47	22.50	22.50	23.00
	Sub –Test 4	22.58	22.54	22.41	23.00
HSUPA	Sub –Test 1	22.50	22.59	22.41	23.00
	Sub –Test 2	22.35	22.59	22.37	23.00
	Sub –Test 3	22.57	22.53	22.43	23.00
	Sub –Test 4	22.44	22.31	22.42	23.00
	Sub –Test 5	21.52	21.57	21.56	22.00

Note:

- 1) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

7.1.4. Conducted Power Measurement Results(WCDMA Band IV)

Item	Band	WCDMA Band IV result (dBm)			
		Channel/Frequency(MHz)			
	sub-test	1312/1712.4	1413/1732.6	1513/1752.6	Tune up
RMC	12.2kbps RMC	23.21	23.38	23.28	24.00
HSDPA	Sub –Test 1	22.62	22.75	22.46	23.00
	Sub –Test 2	22.50	22.64	22.42	23.00
	Sub –Test 3	22.74	22.84	22.51	23.00
	Sub –Test 4	22.58	22.68	22.54	23.00
HSUPA	Sub –Test 1	22.59	22.58	22.55	23.00
	Sub –Test 2	22.56	22.69	22.55	23.00
	Sub –Test 3	22.66	22.59	22.45	23.00
	Sub –Test 4	22.34	22.59	22.36	23.00
	Sub –Test 5	21.21	21.42	21.49	22.00

Note:

- 1) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.





7.1.5. Conducted Power Measurement Results(WCDMA Band V

Item	Band	WCDMA Band V result (dBm)			
		Channel/Frequency(MHz)			
	sub-test	4132/826.4	4182/836.4	4233/846.6	Tune up
RMC	12.2kbps RMC	22.71	22.84	22.77	23.00
HSDPA	Sub –Test 1	22.43	22.78	22.60	23.00
	Sub –Test 2	22.59	22.83	22.65	23.00
	Sub –Test 3	22.58	22.75	22.46	23.00
	Sub –Test 4	22.64	22.76	22.66	23.00
HSUPA	Sub –Test 1	22.52	22.72	22.38	23.00
	Sub –Test 2	22.47	22.66	22.45	23.00
	Sub –Test 3	22.43	22.58	22.51	23.00
	Sub –Test 4	21.57	21.68	21.44	22.00
	Sub –Test 5	21.74	20.90	21.67	22.00

Note:

- 1) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.





7.1.6. Conducted Power Measurement Results(LTE Band 2)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	22.49	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	21.58	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	22.59	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	21.88	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	22.48	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	21.62	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	22.57	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	21.51	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	22.59	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	21.48	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	22.63	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	21.48	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	21.52	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	20.64	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	22.56	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	21.74	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	22.71	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	21.89	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	22.60	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	21.76	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	22.70	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	21.59	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	22.65	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	21.56	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	22.71	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	21.58	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	21.66	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	20.72	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	22.50	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	21.55	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	22.61	PASS
Band2	1.4MHz	16QAM	19193	1RB#2	21.81	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	22.43	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	21.62	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	22.58	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	21.44	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	22.56	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	21.45	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	22.53	PASS
Band2	1.4MHz	16QAM	19193	3RB#3	21.41	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	21.54	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	20.61	PASS
Band2	3MHz	QPSK	18615	1RB#0	22.51	PASS
Band2	3MHz	16QAM	18615	1RB#0	21.71	PASS
Band2	3MHz	QPSK	18615	1RB#8	22.52	PASS
Band2	3MHz	16QAM	18615	1RB#8	21.70	PASS
Band2	3MHz	QPSK	18615	1RB#14	22.53	PASS
Band2	3MHz	16QAM	18615	1RB#14	21.67	PASS
Band2	3MHz	QPSK	18615	8RB#0	21.52	PASS
Band2	3MHz	16QAM	18615	8RB#0	20.58	PASS
Band2	3MHz	QPSK	18615	8RB#4	21.57	PASS
Band2	3MHz	16QAM	18615	8RB#4	20.62	PASS
Band2	3MHz	QPSK	18615	8RB#7	21.51	PASS
Band2	3MHz	16QAM	18615	8RB#7	20.61	PASS
Band2	3MHz	QPSK	18615	15RB#0	21.51	PASS
Band2	3MHz	16QAM	18615	15RB#0	20.54	PASS
Band2	3MHz	QPSK	18900	1RB#0	22.64	PASS
Band2	3MHz	16QAM	18900	1RB#0	21.80	PASS
Band2	3MHz	QPSK	18900	1RB#8	22.69	PASS
Band2	3MHz	16QAM	18900	1RB#8	21.83	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	3MHz	QPSK	18900	1RB#14	22.61	PASS
Band2	3MHz	16QAM	18900	1RB#14	21.79	PASS
Band2	3MHz	QPSK	18900	8RB#0	21.67	PASS
Band2	3MHz	16QAM	18900	8RB#0	20.66	PASS
Band2	3MHz	QPSK	18900	8RB#4	21.66	PASS
Band2	3MHz	16QAM	18900	8RB#4	20.73	PASS
Band2	3MHz	QPSK	18900	8RB#7	21.65	PASS
Band2	3MHz	16QAM	18900	8RB#7	20.68	PASS
Band2	3MHz	QPSK	18900	15RB#0	21.64	PASS
Band2	3MHz	16QAM	18900	15RB#0	20.68	PASS
Band2	3MHz	QPSK	19185	1RB#0	22.46	PASS
Band2	3MHz	16QAM	19185	1RB#0	21.67	PASS
Band2	3MHz	QPSK	19185	1RB#8	22.51	PASS
Band2	3MHz	16QAM	19185	1RB#8	21.65	PASS
Band2	3MHz	QPSK	19185	1RB#14	22.47	PASS
Band2	3MHz	16QAM	19185	1RB#14	21.65	PASS
Band2	3MHz	QPSK	19185	8RB#0	21.54	PASS
Band2	3MHz	16QAM	19185	8RB#0	20.61	PASS
Band2	3MHz	QPSK	19185	8RB#4	21.56	PASS
Band2	3MHz	16QAM	19185	8RB#4	20.59	PASS
Band2	3MHz	QPSK	19185	8RB#7	21.52	PASS
Band2	3MHz	16QAM	19185	8RB#7	20.53	PASS
Band2	3MHz	QPSK	19185	15RB#0	21.52	PASS
Band2	3MHz	16QAM	19185	15RB#0	20.54	PASS
Band2	5MHz	QPSK	18625	1RB#0	22.56	PASS
Band2	5MHz	16QAM	18625	1RB#0	21.54	PASS
Band2	5MHz	QPSK	18625	1RB#12	22.63	PASS
Band2	5MHz	16QAM	18625	1RB#12	21.61	PASS
Band2	5MHz	QPSK	18625	1RB#24	22.53	PASS
Band2	5MHz	16QAM	18625	1RB#24	21.47	PASS
Band2	5MHz	QPSK	18625	12RB#0	21.53	PASS
Band2	5MHz	16QAM	18625	12RB#0	20.54	PASS
Band2	5MHz	QPSK	18625	12RB#6	21.55	PASS
Band2	5MHz	16QAM	18625	12RB#6	20.52	PASS
Band2	5MHz	QPSK	18625	12RB#13	21.52	PASS
Band2	5MHz	16QAM	18625	12RB#13	20.45	PASS
Band2	5MHz	QPSK	18625	25RB#0	21.55	PASS
Band2	5MHz	16QAM	18625	25RB#0	20.58	PASS
Band2	5MHz	QPSK	18900	1RB#0	22.64	PASS
Band2	5MHz	16QAM	18900	1RB#0	21.65	PASS
Band2	5MHz	QPSK	18900	1RB#12	22.73	PASS
Band2	5MHz	16QAM	18900	1RB#12	21.77	PASS
Band2	5MHz	QPSK	18900	1RB#24	22.61	PASS
Band2	5MHz	16QAM	18900	1RB#24	21.66	PASS
Band2	5MHz	QPSK	18900	12RB#0	21.71	PASS
Band2	5MHz	16QAM	18900	12RB#0	20.68	PASS
Band2	5MHz	QPSK	18900	12RB#6	21.71	PASS
Band2	5MHz	16QAM	18900	12RB#6	20.67	PASS
Band2	5MHz	QPSK	18900	12RB#13	21.61	PASS
Band2	5MHz	16QAM	18900	12RB#13	20.60	PASS
Band2	5MHz	QPSK	18900	25RB#0	21.69	PASS
Band2	5MHz	16QAM	18900	25RB#0	20.65	PASS
Band2	5MHz	QPSK	19175	1RB#0	22.45	PASS
Band2	5MHz	16QAM	19175	1RB#0	21.51	PASS
Band2	5MHz	QPSK	19175	1RB#12	22.66	PASS
Band2	5MHz	16QAM	19175	1RB#12	21.63	PASS
Band2	5MHz	QPSK	19175	1RB#24	22.52	PASS
Band2	5MHz	16QAM	19175	1RB#24	21.50	PASS
Band2	5MHz	QPSK	19175	12RB#0	21.57	PASS
Band2	5MHz	16QAM	19175	12RB#0	20.58	PASS
Band2	5MHz	QPSK	19175	12RB#6	21.61	PASS
Band2	5MHz	16QAM	19175	12RB#6	20.61	PASS
Band2	5MHz	QPSK	19175	12RB#13	21.45	PASS
Band2	5MHz	16QAM	19175	12RB#13	20.42	PASS
Band2	5MHz	QPSK	19175	25RB#0	21.54	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	5MHz	16QAM	19175	25RB#0	20.59	PASS
Band2	10MHz	QPSK	18650	1RB#0	22.54	PASS
Band2	10MHz	16QAM	18650	1RB#0	21.72	PASS
Band2	10MHz	QPSK	18650	1RB#24	22.68	PASS
Band2	10MHz	16QAM	18650	1RB#24	21.89	PASS
Band2	10MHz	QPSK	18650	1RB#49	22.59	PASS
Band2	10MHz	16QAM	18650	1RB#49	21.77	PASS
Band2	10MHz	QPSK	18650	25RB#0	21.62	PASS
Band2	10MHz	16QAM	18650	25RB#0	20.61	PASS
Band2	10MHz	QPSK	18650	25RB#12	21.63	PASS
Band2	10MHz	16QAM	18650	25RB#12	20.66	PASS
Band2	10MHz	QPSK	18650	25RB#25	21.55	PASS
Band2	10MHz	16QAM	18650	25RB#25	20.53	PASS
Band2	10MHz	QPSK	18650	50RB#0	21.58	PASS
Band2	10MHz	16QAM	18650	50RB#0	20.53	PASS
Band2	10MHz	QPSK	18900	1RB#0	22.64	PASS
Band2	10MHz	16QAM	18900	1RB#0	21.82	PASS
Band2	10MHz	QPSK	18900	1RB#24	22.68	PASS
Band2	10MHz	16QAM	18900	1RB#24	21.94	PASS
Band2	10MHz	QPSK	18900	1RB#49	22.64	PASS
Band2	10MHz	16QAM	18900	1RB#49	21.83	PASS
Band2	10MHz	QPSK	18900	25RB#0	21.78	PASS
Band2	10MHz	16QAM	18900	25RB#0	20.74	PASS
Band2	10MHz	QPSK	18900	25RB#12	21.75	PASS
Band2	10MHz	16QAM	18900	25RB#12	20.75	PASS
Band2	10MHz	QPSK	18900	25RB#25	21.62	PASS
Band2	10MHz	16QAM	18900	25RB#25	20.60	PASS
Band2	10MHz	QPSK	18900	50RB#0	21.64	PASS
Band2	10MHz	16QAM	18900	50RB#0	20.67	PASS
Band2	10MHz	QPSK	19150	1RB#0	22.56	PASS
Band2	10MHz	16QAM	19150	1RB#0	21.71	PASS
Band2	10MHz	QPSK	19150	1RB#24	22.57	PASS
Band2	10MHz	16QAM	19150	1RB#24	21.83	PASS
Band2	10MHz	QPSK	19150	1RB#49	22.57	PASS
Band2	10MHz	16QAM	19150	1RB#49	21.73	PASS
Band2	10MHz	QPSK	19150	25RB#0	21.66	PASS
Band2	10MHz	16QAM	19150	25RB#0	20.64	PASS
Band2	10MHz	QPSK	19150	25RB#12	21.61	PASS
Band2	10MHz	16QAM	19150	25RB#12	20.64	PASS
Band2	10MHz	QPSK	19150	25RB#25	21.44	PASS
Band2	10MHz	16QAM	19150	25RB#25	20.41	PASS
Band2	10MHz	QPSK	19150	50RB#0	21.50	PASS
Band2	10MHz	16QAM	19150	50RB#0	20.51	PASS
Band2	15MHz	QPSK	18675	1RB#0	22.51	PASS
Band2	15MHz	16QAM	18675	1RB#0	21.74	PASS
Band2	15MHz	QPSK	18675	1RB#38	22.60	PASS
Band2	15MHz	16QAM	18675	1RB#38	21.80	PASS
Band2	15MHz	QPSK	18675	1RB#74	22.54	PASS
Band2	15MHz	16QAM	18675	1RB#74	21.65	PASS
Band2	15MHz	QPSK	18675	38RB#0	21.65	PASS
Band2	15MHz	16QAM	18675	38RB#0	21.66	PASS
Band2	15MHz	QPSK	18675	38RB#18	21.64	PASS
Band2	15MHz	16QAM	18675	38RB#18	21.65	PASS
Band2	15MHz	QPSK	18675	38RB#37	21.65	PASS
Band2	15MHz	16QAM	18675	38RB#37	21.66	PASS
Band2	15MHz	QPSK	18675	75RB#0	21.66	PASS
Band2	15MHz	16QAM	18675	75RB#0	20.58	PASS
Band2	15MHz	QPSK	18900	1RB#0	22.56	PASS
Band2	15MHz	16QAM	18900	1RB#0	21.77	PASS
Band2	15MHz	QPSK	18900	1RB#38	22.68	PASS
Band2	15MHz	16QAM	18900	1RB#38	21.82	PASS
Band2	15MHz	QPSK	18900	1RB#74	22.56	PASS
Band2	15MHz	16QAM	18900	1RB#74	21.71	PASS
Band2	15MHz	QPSK	18900	38RB#0	21.72	PASS
Band2	15MHz	16QAM	18900	38RB#0	21.66	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	15MHz	QPSK	18900	38RB#18	21.68	PASS
Band2	15MHz	16QAM	18900	38RB#18	21.72	PASS
Band2	15MHz	QPSK	18900	38RB#37	21.70	PASS
Band2	15MHz	16QAM	18900	38RB#37	21.69	PASS
Band2	15MHz	QPSK	18900	75RB#0	21.70	PASS
Band2	15MHz	16QAM	18900	75RB#0	20.61	PASS
Band2	15MHz	QPSK	19125	1RB#0	22.50	PASS
Band2	15MHz	16QAM	19125	1RB#0	21.67	PASS
Band2	15MHz	QPSK	19125	1RB#38	22.53	PASS
Band2	15MHz	16QAM	19125	1RB#38	21.74	PASS
Band2	15MHz	QPSK	19125	1RB#74	22.42	PASS
Band2	15MHz	16QAM	19125	1RB#74	21.59	PASS
Band2	15MHz	QPSK	19125	38RB#0	21.52	PASS
Band2	15MHz	16QAM	19125	38RB#0	21.54	PASS
Band2	15MHz	QPSK	19125	38RB#18	21.51	PASS
Band2	15MHz	16QAM	19125	38RB#18	21.50	PASS
Band2	15MHz	QPSK	19125	38RB#37	21.51	PASS
Band2	15MHz	16QAM	19125	38RB#37	21.57	PASS
Band2	15MHz	QPSK	19125	75RB#0	21.51	PASS
Band2	15MHz	16QAM	19125	75RB#0	20.44	PASS
Band2	20MHz	QPSK	18700	1RB#0	22.52	PASS
Band2	20MHz	16QAM	18700	1RB#0	21.53	PASS
Band2	20MHz	QPSK	18700	1RB#49	22.83	PASS
Band2	20MHz	16QAM	18700	1RB#49	21.85	PASS
Band2	20MHz	QPSK	18700	1RB#99	22.46	PASS
Band2	20MHz	16QAM	18700	1RB#99	21.44	PASS
Band2	20MHz	QPSK	18700	50RB#0	21.76	PASS
Band2	20MHz	16QAM	18700	50RB#0	20.76	PASS
Band2	20MHz	QPSK	18700	50RB#25	21.81	PASS
Band2	20MHz	16QAM	18700	50RB#25	20.76	PASS
Band2	20MHz	QPSK	18700	50RB#50	21.74	PASS
Band2	20MHz	16QAM	18700	50RB#50	20.71	PASS
Band2	20MHz	QPSK	18700	100RB#0	21.79	PASS
Band2	20MHz	16QAM	18700	100RB#0	20.77	PASS
Band2	20MHz	QPSK	18900	1RB#0	22.58	PASS
Band2	20MHz	16QAM	18900	1RB#0	21.58	PASS
Band2	20MHz	QPSK	18900	1RB#49	22.88	PASS
Band2	20MHz	16QAM	18900	1RB#49	21.87	PASS
Band2	20MHz	QPSK	18900	1RB#99	22.52	PASS
Band2	20MHz	16QAM	18900	1RB#99	21.56	PASS
Band2	20MHz	QPSK	18900	50RB#0	21.72	PASS
Band2	20MHz	16QAM	18900	50RB#0	20.67	PASS
Band2	20MHz	QPSK	18900	50RB#25	21.71	PASS
Band2	20MHz	16QAM	18900	50RB#25	20.67	PASS
Band2	20MHz	QPSK	18900	50RB#50	21.58	PASS
Band2	20MHz	16QAM	18900	50RB#50	20.52	PASS
Band2	20MHz	QPSK	18900	100RB#0	21.65	PASS
Band2	20MHz	16QAM	18900	100RB#0	20.62	PASS
Band2	20MHz	QPSK	19100	1RB#0	22.46	PASS
Band2	20MHz	16QAM	19100	1RB#0	21.48	PASS
Band2	20MHz	QPSK	19100	1RB#49	22.76	PASS
Band2	20MHz	16QAM	19100	1RB#49	21.88	PASS
Band2	20MHz	QPSK	19100	1RB#99	22.47	PASS
Band2	20MHz	16QAM	19100	1RB#99	21.43	PASS
Band2	20MHz	QPSK	19100	50RB#0	21.64	PASS
Band2	20MHz	16QAM	19100	50RB#0	20.59	PASS
Band2	20MHz	QPSK	19100	50RB#25	21.59	PASS
Band2	20MHz	16QAM	19100	50RB#25	20.59	PASS
Band2	20MHz	QPSK	19100	50RB#50	21.44	PASS
Band2	20MHz	16QAM	19100	50RB#50	20.40	PASS
Band2	20MHz	QPSK	19100	100RB#0	21.46	PASS
Band2	20MHz	16QAM	19100	100RB#0	20.47	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.7. Conducted Power Measurement Results(LTE Band 4)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band4	1.4MHz	QPSK	19957	1RB#0	22.44	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	21.57	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	22.60	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	21.69	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	22.47	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	21.55	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	22.58	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	21.45	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	22.55	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	21.42	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	22.58	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	21.40	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	21.55	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	20.60	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	22.47	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	21.64	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	22.68	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	21.79	PASS
Band4	1.4MHz	QPSK	20175	1RB#5	22.47	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	21.65	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	22.56	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	21.45	PASS
Band4	1.4MHz	QPSK	20175	3RB#1	22.54	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	21.49	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	22.63	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	21.49	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	21.54	PASS
Band4	1.4MHz	16QAM	20175	6RB#0	20.48	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	22.40	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	21.28	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	22.50	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	21.47	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	22.38	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	21.30	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	22.50	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	21.32	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	22.52	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	21.30	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	22.49	PASS
Band4	1.4MHz	16QAM	20393	3RB#3	21.37	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	21.48	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	20.56	PASS
Band4	3MHz	QPSK	19965	1RB#0	22.47	PASS
Band4	3MHz	16QAM	19965	1RB#0	21.66	PASS
Band4	3MHz	QPSK	19965	1RB#8	22.45	PASS
Band4	3MHz	16QAM	19965	1RB#8	21.62	PASS
Band4	3MHz	QPSK	19965	1RB#14	22.45	PASS
Band4	3MHz	16QAM	19965	1RB#14	21.60	PASS
Band4	3MHz	QPSK	19965	8RB#0	21.48	PASS
Band4	3MHz	16QAM	19965	8RB#0	20.61	PASS
Band4	3MHz	QPSK	19965	8RB#4	21.53	PASS
Band4	3MHz	16QAM	19965	8RB#4	20.61	PASS
Band4	3MHz	QPSK	19965	8RB#7	21.51	PASS
Band4	3MHz	16QAM	19965	8RB#7	20.60	PASS
Band4	3MHz	QPSK	19965	15RB#0	21.50	PASS
Band4	3MHz	16QAM	19965	15RB#0	20.57	PASS
Band4	3MHz	QPSK	20175	1RB#0	22.48	PASS
Band4	3MHz	16QAM	20175	1RB#0	21.68	PASS
Band4	3MHz	QPSK	20175	1RB#8	22.48	PASS
Band4	3MHz	16QAM	20175	1RB#8	21.66	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	3MHz	QPSK	20175	1RB#14	22.43	PASS
Band4	3MHz	16QAM	20175	1RB#14	21.65	PASS
Band4	3MHz	QPSK	20175	8RB#0	21.52	PASS
Band4	3MHz	16QAM	20175	8RB#0	20.56	PASS
Band4	3MHz	QPSK	20175	8RB#4	21.50	PASS
Band4	3MHz	16QAM	20175	8RB#4	20.59	PASS
Band4	3MHz	QPSK	20175	8RB#7	21.46	PASS
Band4	3MHz	16QAM	20175	8RB#7	20.53	PASS
Band4	3MHz	QPSK	20175	15RB#0	21.49	PASS
Band4	3MHz	16QAM	20175	15RB#0	20.51	PASS
Band4	3MHz	QPSK	20385	1RB#0	22.47	PASS
Band4	3MHz	16QAM	20385	1RB#0	21.35	PASS
Band4	3MHz	QPSK	20385	1RB#8	22.43	PASS
Band4	3MHz	16QAM	20385	1RB#8	21.36	PASS
Band4	3MHz	QPSK	20385	1RB#14	22.41	PASS
Band4	3MHz	16QAM	20385	1RB#14	21.37	PASS
Band4	3MHz	QPSK	20385	8RB#0	21.48	PASS
Band4	3MHz	16QAM	20385	8RB#0	20.52	PASS
Band4	3MHz	QPSK	20385	8RB#4	21.47	PASS
Band4	3MHz	16QAM	20385	8RB#4	20.51	PASS
Band4	3MHz	QPSK	20385	8RB#7	21.47	PASS
Band4	3MHz	16QAM	20385	8RB#7	20.52	PASS
Band4	3MHz	QPSK	20385	15RB#0	21.46	PASS
Band4	3MHz	16QAM	20385	15RB#0	20.42	PASS
Band4	5MHz	QPSK	19975	1RB#0	22.44	PASS
Band4	5MHz	16QAM	19975	1RB#0	21.44	PASS
Band4	5MHz	QPSK	19975	1RB#12	22.57	PASS
Band4	5MHz	16QAM	19975	1RB#12	21.56	PASS
Band4	5MHz	QPSK	19975	1RB#24	22.41	PASS
Band4	5MHz	16QAM	19975	1RB#24	21.35	PASS
Band4	5MHz	QPSK	19975	12RB#0	21.45	PASS
Band4	5MHz	16QAM	19975	12RB#0	20.48	PASS
Band4	5MHz	QPSK	19975	12RB#6	21.49	PASS
Band4	5MHz	16QAM	19975	12RB#6	20.50	PASS
Band4	5MHz	QPSK	19975	12RB#13	21.53	PASS
Band4	5MHz	16QAM	19975	12RB#13	20.53	PASS
Band4	5MHz	QPSK	19975	25RB#0	21.46	PASS
Band4	5MHz	16QAM	19975	25RB#0	20.53	PASS
Band4	5MHz	QPSK	20175	1RB#0	22.48	PASS
Band4	5MHz	16QAM	20175	1RB#0	21.66	PASS
Band4	5MHz	QPSK	20175	1RB#12	22.68	PASS
Band4	5MHz	16QAM	20175	1RB#12	21.81	PASS
Band4	5MHz	QPSK	20175	1RB#24	22.45	PASS
Band4	5MHz	16QAM	20175	1RB#24	21.64	PASS
Band4	5MHz	QPSK	20175	12RB#0	21.51	PASS
Band4	5MHz	16QAM	20175	12RB#0	20.59	PASS
Band4	5MHz	QPSK	20175	12RB#6	21.46	PASS
Band4	5MHz	16QAM	20175	12RB#6	20.56	PASS
Band4	5MHz	QPSK	20175	12RB#13	21.48	PASS
Band4	5MHz	16QAM	20175	12RB#13	20.55	PASS
Band4	5MHz	QPSK	20175	25RB#0	21.50	PASS
Band4	5MHz	16QAM	20175	25RB#0	20.56	PASS
Band4	5MHz	QPSK	20375	1RB#0	22.46	PASS
Band4	5MHz	16QAM	20375	1RB#0	21.44	PASS
Band4	5MHz	QPSK	20375	1RB#12	22.55	PASS
Band4	5MHz	16QAM	20375	1RB#12	21.56	PASS
Band4	5MHz	QPSK	20375	1RB#24	22.44	PASS
Band4	5MHz	16QAM	20375	1RB#24	21.38	PASS
Band4	5MHz	QPSK	20375	12RB#0	21.44	PASS
Band4	5MHz	16QAM	20375	12RB#0	20.50	PASS
Band4	5MHz	QPSK	20375	12RB#6	21.45	PASS
Band4	5MHz	16QAM	20375	12RB#6	20.50	PASS
Band4	5MHz	QPSK	20375	12RB#13	21.47	PASS
Band4	5MHz	16QAM	20375	12RB#13	20.47	PASS
Band4	5MHz	QPSK	20375	25RB#0	21.46	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	5MHz	16QAM	20375	25RB#0	20.57	PASS
Band4	10MHz	QPSK	20000	1RB#0	22.51	PASS
Band4	10MHz	16QAM	20000	1RB#0	21.63	PASS
Band4	10MHz	QPSK	20000	1RB#24	22.51	PASS
Band4	10MHz	16QAM	20000	1RB#24	21.74	PASS
Band4	10MHz	QPSK	20000	1RB#49	22.42	PASS
Band4	10MHz	16QAM	20000	1RB#49	21.61	PASS
Band4	10MHz	QPSK	20000	25RB#0	21.40	PASS
Band4	10MHz	16QAM	20000	25RB#0	20.49	PASS
Band4	10MHz	QPSK	20000	25RB#12	21.44	PASS
Band4	10MHz	16QAM	20000	25RB#12	20.48	PASS
Band4	10MHz	QPSK	20000	25RB#25	21.53	PASS
Band4	10MHz	16QAM	20000	25RB#25	20.57	PASS
Band4	10MHz	QPSK	20000	50RB#0	21.43	PASS
Band4	10MHz	16QAM	20000	50RB#0	20.47	PASS
Band4	10MHz	QPSK	20175	1RB#0	22.43	PASS
Band4	10MHz	16QAM	20175	1RB#0	21.59	PASS
Band4	10MHz	QPSK	20175	1RB#24	22.62	PASS
Band4	10MHz	16QAM	20175	1RB#24	21.72	PASS
Band4	10MHz	QPSK	20175	1RB#49	22.46	PASS
Band4	10MHz	16QAM	20175	1RB#49	21.63	PASS
Band4	10MHz	QPSK	20175	25RB#0	21.54	PASS
Band4	10MHz	16QAM	20175	25RB#0	20.63	PASS
Band4	10MHz	QPSK	20175	25RB#12	21.54	PASS
Band4	10MHz	16QAM	20175	25RB#12	20.63	PASS
Band4	10MHz	QPSK	20175	25RB#25	21.50	PASS
Band4	10MHz	16QAM	20175	25RB#25	20.60	PASS
Band4	10MHz	QPSK	20175	50RB#0	21.49	PASS
Band4	10MHz	16QAM	20175	50RB#0	20.55	PASS
Band4	10MHz	QPSK	20350	1RB#0	22.48	PASS
Band4	10MHz	16QAM	20350	1RB#0	21.43	PASS
Band4	10MHz	QPSK	20350	1RB#24	22.53	PASS
Band4	10MHz	16QAM	20350	1RB#24	21.52	PASS
Band4	10MHz	QPSK	20350	1RB#49	22.36	PASS
Band4	10MHz	16QAM	20350	1RB#49	21.31	PASS
Band4	10MHz	QPSK	20350	25RB#0	21.46	PASS
Band4	10MHz	16QAM	20350	25RB#0	20.54	PASS
Band4	10MHz	QPSK	20350	25RB#12	21.46	PASS
Band4	10MHz	16QAM	20350	25RB#12	20.59	PASS
Band4	10MHz	QPSK	20350	25RB#25	21.47	PASS
Band4	10MHz	16QAM	20350	25RB#25	20.55	PASS
Band4	10MHz	QPSK	20350	50RB#0	21.46	PASS
Band4	10MHz	16QAM	20350	50RB#0	20.50	PASS
Band4	15MHz	QPSK	20025	1RB#0	22.36	PASS
Band4	15MHz	16QAM	20025	1RB#0	21.49	PASS
Band4	15MHz	QPSK	20025	1RB#38	22.42	PASS
Band4	15MHz	16QAM	20025	1RB#38	21.54	PASS
Band4	15MHz	QPSK	20025	1RB#74	22.26	PASS
Band4	15MHz	16QAM	20025	1RB#74	21.45	PASS
Band4	15MHz	QPSK	20025	38RB#0	21.47	PASS
Band4	15MHz	16QAM	20025	38RB#0	21.49	PASS
Band4	15MHz	QPSK	20025	38RB#18	21.48	PASS
Band4	15MHz	16QAM	20025	38RB#18	21.47	PASS
Band4	15MHz	QPSK	20025	38RB#37	21.42	PASS
Band4	15MHz	16QAM	20025	38RB#37	21.44	PASS
Band4	15MHz	QPSK	20025	75RB#0	21.42	PASS
Band4	15MHz	16QAM	20025	75RB#0	20.41	PASS
Band4	15MHz	QPSK	20175	1RB#0	22.34	PASS
Band4	15MHz	16QAM	20175	1RB#0	21.62	PASS
Band4	15MHz	QPSK	20175	1RB#38	22.42	PASS
Band4	15MHz	16QAM	20175	1RB#38	21.81	PASS
Band4	15MHz	QPSK	20175	1RB#74	22.31	PASS
Band4	15MHz	16QAM	20175	1RB#74	21.66	PASS
Band4	15MHz	QPSK	20175	38RB#0	21.52	PASS
Band4	15MHz	16QAM	20175	38RB#0	21.51	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	15MHz	QPSK	20175	38RB#18	21.50	PASS
Band4	15MHz	16QAM	20175	38RB#18	21.52	PASS
Band4	15MHz	QPSK	20175	38RB#37	21.48	PASS
Band4	15MHz	16QAM	20175	38RB#37	21.48	PASS
Band4	15MHz	QPSK	20175	75RB#0	21.47	PASS
Band4	15MHz	16QAM	20175	75RB#0	20.52	PASS
Band4	15MHz	QPSK	20325	1RB#0	22.43	PASS
Band4	15MHz	16QAM	20325	1RB#0	21.36	PASS
Band4	15MHz	QPSK	20325	1RB#38	22.50	PASS
Band4	15MHz	16QAM	20325	1RB#38	21.35	PASS
Band4	15MHz	QPSK	20325	1RB#74	22.30	PASS
Band4	15MHz	16QAM	20325	1RB#74	21.20	PASS
Band4	15MHz	QPSK	20325	38RB#0	21.46	PASS
Band4	15MHz	16QAM	20325	38RB#0	21.50	PASS
Band4	15MHz	QPSK	20325	38RB#18	21.50	PASS
Band4	15MHz	16QAM	20325	38RB#18	21.49	PASS
Band4	15MHz	QPSK	20325	38RB#37	21.48	PASS
Band4	15MHz	16QAM	20325	38RB#37	21.48	PASS
Band4	15MHz	QPSK	20325	75RB#0	21.48	PASS
Band4	15MHz	16QAM	20325	75RB#0	20.53	PASS
Band4	20MHz	QPSK	20050	1RB#0	22.32	PASS
Band4	20MHz	16QAM	20050	1RB#0	21.35	PASS
Band4	20MHz	QPSK	20050	1RB#49	22.70	PASS
Band4	20MHz	16QAM	20050	1RB#49	21.81	PASS
Band4	20MHz	QPSK	20050	1RB#99	22.27	PASS
Band4	20MHz	16QAM	20050	1RB#99	21.27	PASS
Band4	20MHz	QPSK	20050	50RB#0	21.38	PASS
Band4	20MHz	16QAM	20050	50RB#0	20.46	PASS
Band4	20MHz	QPSK	20050	50RB#25	21.38	PASS
Band4	20MHz	16QAM	20050	50RB#25	20.43	PASS
Band4	20MHz	QPSK	20050	50RB#50	21.36	PASS
Band4	20MHz	16QAM	20050	50RB#50	20.44	PASS
Band4	20MHz	QPSK	20050	100RB#0	21.38	PASS
Band4	20MHz	16QAM	20050	100RB#0	20.45	PASS
Band4	20MHz	QPSK	20175	1RB#0	22.30	PASS
Band4	20MHz	16QAM	20175	1RB#0	21.43	PASS
Band4	20MHz	QPSK	20175	1RB#49	22.67	PASS
Band4	20MHz	16QAM	20175	1RB#49	21.98	PASS
Band4	20MHz	QPSK	20175	1RB#99	22.23	PASS
Band4	20MHz	16QAM	20175	1RB#99	21.39	PASS
Band4	20MHz	QPSK	20175	50RB#0	21.58	PASS
Band4	20MHz	16QAM	20175	50RB#0	20.63	PASS
Band4	20MHz	QPSK	20175	50RB#25	21.55	PASS
Band4	20MHz	16QAM	20175	50RB#25	20.64	PASS
Band4	20MHz	QPSK	20175	50RB#50	21.52	PASS
Band4	20MHz	16QAM	20175	50RB#50	20.60	PASS
Band4	20MHz	QPSK	20175	100RB#0	21.51	PASS
Band4	20MHz	16QAM	20175	100RB#0	20.61	PASS
Band4	20MHz	QPSK	20300	1RB#0	22.22	PASS
Band4	20MHz	16QAM	20300	1RB#0	21.29	PASS
Band4	20MHz	QPSK	20300	1RB#49	22.52	PASS
Band4	20MHz	16QAM	20300	1RB#49	21.59	PASS
Band4	20MHz	QPSK	20300	1RB#99	22.08	PASS
Band4	20MHz	16QAM	20300	1RB#99	21.19	PASS
Band4	20MHz	QPSK	20300	50RB#0	21.47	PASS
Band4	20MHz	16QAM	20300	50RB#0	20.64	PASS
Band4	20MHz	QPSK	20300	50RB#25	21.48	PASS
Band4	20MHz	16QAM	20300	50RB#25	20.63	PASS
Band4	20MHz	QPSK	20300	50RB#50	21.52	PASS
Band4	20MHz	16QAM	20300	50RB#50	20.65	PASS
Band4	20MHz	QPSK	20300	100RB#0	21.55	PASS
Band4	20MHz	16QAM	20300	100RB#0	20.56	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.8. Conducted Power Measurement Results(LTE Band 5)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band5	1.4MHz	QPSK	20407	1RB#0	22.83	PASS
Band5	1.4MHz	16QAM	20407	1RB#0	21.90	PASS
Band5	1.4MHz	QPSK	20407	1RB#2	22.93	PASS
Band5	1.4MHz	16QAM	20407	1RB#2	22.09	PASS
Band5	1.4MHz	QPSK	20407	1RB#5	22.77	PASS
Band5	1.4MHz	16QAM	20407	1RB#5	21.98	PASS
Band5	1.4MHz	QPSK	20407	3RB#0	22.91	PASS
Band5	1.4MHz	16QAM	20407	3RB#0	21.83	PASS
Band5	1.4MHz	QPSK	20407	3RB#1	22.93	PASS
Band5	1.4MHz	16QAM	20407	3RB#1	21.82	PASS
Band5	1.4MHz	QPSK	20407	3RB#3	22.88	PASS
Band5	1.4MHz	16QAM	20407	3RB#3	21.80	PASS
Band5	1.4MHz	QPSK	20407	6RB#0	21.85	PASS
Band5	1.4MHz	16QAM	20407	6RB#0	20.91	PASS
Band5	1.4MHz	QPSK	20525	1RB#0	22.88	PASS
Band5	1.4MHz	16QAM	20525	1RB#0	21.98	PASS
Band5	1.4MHz	QPSK	20525	1RB#2	22.91	PASS
Band5	1.4MHz	16QAM	20525	1RB#2	22.19	PASS
Band5	1.4MHz	QPSK	20525	1RB#5	22.91	PASS
Band5	1.4MHz	16QAM	20525	1RB#5	22.01	PASS
Band5	1.4MHz	QPSK	20525	3RB#0	22.99	PASS
Band5	1.4MHz	16QAM	20525	3RB#0	21.89	PASS
Band5	1.4MHz	QPSK	20525	3RB#1	22.99	PASS
Band5	1.4MHz	16QAM	20525	3RB#1	21.89	PASS
Band5	1.4MHz	QPSK	20525	3RB#3	23.03	PASS
Band5	1.4MHz	16QAM	20525	3RB#3	21.94	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	21.93	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	20.88	PASS
Band5	1.4MHz	QPSK	20643	1RB#0	22.84	PASS
Band5	1.4MHz	16QAM	20643	1RB#0	21.71	PASS
Band5	1.4MHz	QPSK	20643	1RB#2	22.83	PASS
Band5	1.4MHz	16QAM	20643	1RB#2	21.70	PASS
Band5	1.4MHz	QPSK	20643	1RB#5	22.76	PASS
Band5	1.4MHz	16QAM	20643	1RB#5	21.68	PASS
Band5	1.4MHz	QPSK	20643	3RB#0	22.91	PASS
Band5	1.4MHz	16QAM	20643	3RB#0	21.76	PASS
Band5	1.4MHz	QPSK	20643	3RB#1	22.91	PASS
Band5	1.4MHz	16QAM	20643	3RB#1	21.73	PASS
Band5	1.4MHz	QPSK	20643	3RB#3	22.90	PASS
Band5	1.4MHz	16QAM	20643	3RB#3	21.69	PASS
Band5	1.4MHz	QPSK	20643	6RB#0	21.85	PASS
Band5	1.4MHz	16QAM	20643	6RB#0	20.84	PASS
Band5	3MHz	QPSK	20415	1RB#0	22.78	PASS
Band5	3MHz	16QAM	20415	1RB#0	22.02	PASS
Band5	3MHz	QPSK	20415	1RB#8	22.83	PASS
Band5	3MHz	16QAM	20415	1RB#8	21.94	PASS
Band5	3MHz	QPSK	20415	1RB#14	22.78	PASS
Band5	3MHz	16QAM	20415	1RB#14	21.97	PASS
Band5	3MHz	QPSK	20415	8RB#0	21.80	PASS
Band5	3MHz	16QAM	20415	8RB#0	20.86	PASS
Band5	3MHz	QPSK	20415	8RB#4	21.85	PASS
Band5	3MHz	16QAM	20415	8RB#4	20.87	PASS
Band5	3MHz	QPSK	20415	8RB#7	21.85	PASS
Band5	3MHz	16QAM	20415	8RB#7	20.87	PASS
Band5	3MHz	QPSK	20415	15RB#0	21.80	PASS
Band5	3MHz	16QAM	20415	15RB#0	20.77	PASS
Band5	3MHz	QPSK	20525	1RB#0	22.93	PASS
Band5	3MHz	16QAM	20525	1RB#0	22.19	PASS
Band5	3MHz	QPSK	20525	1RB#8	22.93	PASS
Band5	3MHz	16QAM	20525	1RB#8	22.05	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band5	3MHz	QPSK	20525	1RB#14	22.87	PASS
Band5	3MHz	16QAM	20525	1RB#14	22.01	PASS
Band5	3MHz	QPSK	20525	8RB#0	21.87	PASS
Band5	3MHz	16QAM	20525	8RB#0	20.91	PASS
Band5	3MHz	QPSK	20525	8RB#4	21.88	PASS
Band5	3MHz	16QAM	20525	8RB#4	20.92	PASS
Band5	3MHz	QPSK	20525	8RB#7	21.82	PASS
Band5	3MHz	16QAM	20525	8RB#7	20.92	PASS
Band5	3MHz	QPSK	20525	15RB#0	21.89	PASS
Band5	3MHz	16QAM	20525	15RB#0	20.83	PASS
Band5	3MHz	QPSK	20635	1RB#0	22.87	PASS
Band5	3MHz	16QAM	20635	1RB#0	21.82	PASS
Band5	3MHz	QPSK	20635	1RB#8	22.94	PASS
Band5	3MHz	16QAM	20635	1RB#8	21.82	PASS
Band5	3MHz	QPSK	20635	1RB#14	22.78	PASS
Band5	3MHz	16QAM	20635	1RB#14	21.72	PASS
Band5	3MHz	QPSK	20635	8RB#0	21.90	PASS
Band5	3MHz	16QAM	20635	8RB#0	20.92	PASS
Band5	3MHz	QPSK	20635	8RB#4	21.88	PASS
Band5	3MHz	16QAM	20635	8RB#4	20.93	PASS
Band5	3MHz	QPSK	20635	8RB#7	21.85	PASS
Band5	3MHz	16QAM	20635	8RB#7	20.86	PASS
Band5	3MHz	QPSK	20635	15RB#0	21.84	PASS
Band5	3MHz	16QAM	20635	15RB#0	20.81	PASS
Band5	5MHz	QPSK	20425	1RB#0	22.76	PASS
Band5	5MHz	16QAM	20425	1RB#0	21.83	PASS
Band5	5MHz	QPSK	20425	1RB#12	22.91	PASS
Band5	5MHz	16QAM	20425	1RB#12	21.93	PASS
Band5	5MHz	QPSK	20425	1RB#24	22.83	PASS
Band5	5MHz	16QAM	20425	1RB#24	21.79	PASS
Band5	5MHz	QPSK	20425	12RB#0	21.82	PASS
Band5	5MHz	16QAM	20425	12RB#0	20.82	PASS
Band5	5MHz	QPSK	20425	12RB#6	21.84	PASS
Band5	5MHz	16QAM	20425	12RB#6	20.82	PASS
Band5	5MHz	QPSK	20425	12RB#13	21.80	PASS
Band5	5MHz	16QAM	20425	12RB#13	20.74	PASS
Band5	5MHz	QPSK	20425	25RB#0	21.81	PASS
Band5	5MHz	16QAM	20425	25RB#0	20.86	PASS
Band5	5MHz	QPSK	20525	1RB#0	22.85	PASS
Band5	5MHz	16QAM	20525	1RB#0	22.09	PASS
Band5	5MHz	QPSK	20525	1RB#12	22.96	PASS
Band5	5MHz	16QAM	20525	1RB#12	22.14	PASS
Band5	5MHz	QPSK	20525	1RB#24	22.82	PASS
Band5	5MHz	16QAM	20525	1RB#24	22.01	PASS
Band5	5MHz	QPSK	20525	12RB#0	21.85	PASS
Band5	5MHz	16QAM	20525	12RB#0	20.88	PASS
Band5	5MHz	QPSK	20525	12RB#6	21.85	PASS
Band5	5MHz	16QAM	20525	12RB#6	20.92	PASS
Band5	5MHz	QPSK	20525	12RB#13	21.87	PASS
Band5	5MHz	16QAM	20525	12RB#13	20.95	PASS
Band5	5MHz	QPSK	20525	25RB#0	21.93	PASS
Band5	5MHz	16QAM	20525	25RB#0	20.92	PASS
Band5	5MHz	QPSK	20625	1RB#0	22.86	PASS
Band5	5MHz	16QAM	20625	1RB#0	21.86	PASS
Band5	5MHz	QPSK	20625	1RB#12	23.00	PASS
Band5	5MHz	16QAM	20625	1RB#12	22.06	PASS
Band5	5MHz	QPSK	20625	1RB#24	22.77	PASS
Band5	5MHz	16QAM	20625	1RB#24	21.76	PASS
Band5	5MHz	QPSK	20625	12RB#0	21.86	PASS
Band5	5MHz	16QAM	20625	12RB#0	20.84	PASS
Band5	5MHz	QPSK	20625	12RB#6	21.86	PASS
Band5	5MHz	16QAM	20625	12RB#6	20.90	PASS
Band5	5MHz	QPSK	20625	12RB#13	21.86	PASS
Band5	5MHz	16QAM	20625	12RB#13	20.85	PASS
Band5	5MHz	QPSK	20625	25RB#0	21.86	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band5	5MHz	16QAM	20625	25RB#0	20.97	PASS
Band5	10MHz	QPSK	20450	1RB#0	22.85	PASS
Band5	10MHz	16QAM	20450	1RB#0	22.01	PASS
Band5	10MHz	QPSK	20450	1RB#24	22.96	PASS
Band5	10MHz	16QAM	20450	1RB#24	22.07	PASS
Band5	10MHz	QPSK	20450	1RB#49	22.86	PASS
Band5	10MHz	16QAM	20450	1RB#49	22.07	PASS
Band5	10MHz	QPSK	20450	25RB#0	22.00	PASS
Band5	10MHz	16QAM	20450	25RB#0	20.99	PASS
Band5	10MHz	QPSK	20450	25RB#12	21.97	PASS
Band5	10MHz	16QAM	20450	25RB#12	20.95	PASS
Band5	10MHz	QPSK	20450	25RB#25	21.94	PASS
Band5	10MHz	16QAM	20450	25RB#25	20.96	PASS
Band5	10MHz	QPSK	20450	50RB#0	21.94	PASS
Band5	10MHz	16QAM	20450	50RB#0	20.94	PASS
Band5	10MHz	QPSK	20525	1RB#0	22.89	PASS
Band5	10MHz	16QAM	20525	1RB#0	22.08	PASS
Band5	10MHz	QPSK	20525	1RB#24	23.02	PASS
Band5	10MHz	16QAM	20525	1RB#24	22.22	PASS
Band5	10MHz	QPSK	20525	1RB#49	22.89	PASS
Band5	10MHz	16QAM	20525	1RB#49	22.03	PASS
Band5	10MHz	QPSK	20525	25RB#0	21.96	PASS
Band5	10MHz	16QAM	20525	25RB#0	20.97	PASS
Band5	10MHz	QPSK	20525	25RB#12	21.94	PASS
Band5	10MHz	16QAM	20525	25RB#12	20.97	PASS
Band5	10MHz	QPSK	20525	25RB#25	21.99	PASS
Band5	10MHz	16QAM	20525	25RB#25	21.00	PASS
Band5	10MHz	QPSK	20525	50RB#0	21.93	PASS
Band5	10MHz	16QAM	20525	50RB#0	20.99	PASS
Band5	10MHz	QPSK	20600	1RB#0	22.92	PASS
Band5	10MHz	16QAM	20600	1RB#0	21.81	PASS
Band5	10MHz	QPSK	20600	1RB#24	22.97	PASS
Band5	10MHz	16QAM	20600	1RB#24	21.86	PASS
Band5	10MHz	QPSK	20600	1RB#49	22.72	PASS
Band5	10MHz	16QAM	20600	1RB#49	21.69	PASS
Band5	10MHz	QPSK	20600	25RB#0	22.00	PASS
Band5	10MHz	16QAM	20600	25RB#0	21.06	PASS
Band5	10MHz	QPSK	20600	25RB#12	21.98	PASS
Band5	10MHz	16QAM	20600	25RB#12	21.03	PASS
Band5	10MHz	QPSK	20600	25RB#25	21.98	PASS
Band5	10MHz	16QAM	20600	25RB#25	21.00	PASS
Band5	10MHz	QPSK	20600	50RB#0	21.98	PASS
Band5	10MHz	16QAM	20600	50RB#0	21.00	PASS



**7.1.9. Conducted Power Measurement Results(LTE Band 12)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band12	1.4MHz	QPSK	23017	1RB#0	22.97	PASS
Band12	1.4MHz	16QAM	23017	1RB#0	22.15	PASS
Band12	1.4MHz	QPSK	23017	1RB#2	23.12	PASS
Band12	1.4MHz	16QAM	23017	1RB#2	22.35	PASS
Band12	1.4MHz	QPSK	23017	1RB#5	22.99	PASS
Band12	1.4MHz	16QAM	23017	1RB#5	22.24	PASS
Band12	1.4MHz	QPSK	23017	3RB#0	23.07	PASS
Band12	1.4MHz	16QAM	23017	3RB#0	22.05	PASS
Band12	1.4MHz	QPSK	23017	3RB#1	23.08	PASS
Band12	1.4MHz	16QAM	23017	3RB#1	22.03	PASS
Band12	1.4MHz	QPSK	23017	3RB#3	23.13	PASS
Band12	1.4MHz	16QAM	23017	3RB#3	22.03	PASS
Band12	1.4MHz	QPSK	23017	6RB#0	22.08	PASS
Band12	1.4MHz	16QAM	23017	6RB#0	21.15	PASS
Band12	1.4MHz	QPSK	23095	1RB#0	22.96	PASS
Band12	1.4MHz	16QAM	23095	1RB#0	22.12	PASS
Band12	1.4MHz	QPSK	23095	1RB#2	23.05	PASS
Band12	1.4MHz	16QAM	23095	1RB#2	22.35	PASS
Band12	1.4MHz	QPSK	23095	1RB#5	22.98	PASS
Band12	1.4MHz	16QAM	23095	1RB#5	22.18	PASS
Band12	1.4MHz	QPSK	23095	3RB#0	23.04	PASS
Band12	1.4MHz	16QAM	23095	3RB#0	22.03	PASS
Band12	1.4MHz	QPSK	23095	3RB#1	23.07	PASS
Band12	1.4MHz	16QAM	23095	3RB#1	22.00	PASS
Band12	1.4MHz	QPSK	23095	3RB#3	23.10	PASS
Band12	1.4MHz	16QAM	23095	3RB#3	22.01	PASS
Band12	1.4MHz	QPSK	23095	6RB#0	22.10	PASS
Band12	1.4MHz	16QAM	23095	6RB#0	20.99	PASS
Band12	1.4MHz	QPSK	23173	1RB#0	22.91	PASS
Band12	1.4MHz	16QAM	23173	1RB#0	21.87	PASS
Band12	1.4MHz	QPSK	23173	1RB#2	23.04	PASS
Band12	1.4MHz	16QAM	23173	1RB#2	22.04	PASS
Band12	1.4MHz	QPSK	23173	1RB#5	22.92	PASS
Band12	1.4MHz	16QAM	23173	1RB#5	21.89	PASS
Band12	1.4MHz	QPSK	23173	3RB#0	23.03	PASS
Band12	1.4MHz	16QAM	23173	3RB#0	21.91	PASS
Band12	1.4MHz	QPSK	23173	3RB#1	23.00	PASS
Band12	1.4MHz	16QAM	23173	3RB#1	21.91	PASS
Band12	1.4MHz	QPSK	23173	3RB#3	23.05	PASS
Band12	1.4MHz	16QAM	23173	3RB#3	21.84	PASS
Band12	1.4MHz	QPSK	23173	6RB#0	22.04	PASS
Band12	1.4MHz	16QAM	23173	6RB#0	20.98	PASS
Band12	3MHz	QPSK	23025	1RB#0	23.05	PASS
Band12	3MHz	16QAM	23025	1RB#0	22.31	PASS
Band12	3MHz	QPSK	23025	1RB#8	23.06	PASS
Band12	3MHz	16QAM	23025	1RB#8	22.26	PASS
Band12	3MHz	QPSK	23025	1RB#14	23.09	PASS
Band12	3MHz	16QAM	23025	1RB#14	22.31	PASS
Band12	3MHz	QPSK	23025	8RB#0	22.14	PASS
Band12	3MHz	16QAM	23025	8RB#0	21.23	PASS
Band12	3MHz	QPSK	23025	8RB#4	22.14	PASS
Band12	3MHz	16QAM	23025	8RB#4	21.20	PASS
Band12	3MHz	QPSK	23025	8RB#7	22.14	PASS
Band12	3MHz	16QAM	23025	8RB#7	21.18	PASS
Band12	3MHz	QPSK	23025	15RB#0	22.12	PASS
Band12	3MHz	16QAM	23025	15RB#0	21.14	PASS
Band12	3MHz	QPSK	23095	1RB#0	23.03	PASS
Band12	3MHz	16QAM	23095	1RB#0	22.28	PASS
Band12	3MHz	QPSK	23095	1RB#8	23.02	PASS
Band12	3MHz	16QAM	23095	1RB#8	22.24	PASS
Band12	3MHz	QPSK	23095	1RB#14	22.95	PASS
Band12	3MHz	16QAM	23095	1RB#14	22.18	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band12	3MHz	QPSK	23095	8RB#0	22.10	PASS
Band12	3MHz	16QAM	23095	8RB#0	21.12	PASS
Band12	3MHz	QPSK	23095	8RB#4	22.07	PASS
Band12	3MHz	16QAM	23095	8RB#4	21.15	PASS
Band12	3MHz	QPSK	23095	8RB#7	22.08	PASS
Band12	3MHz	16QAM	23095	8RB#7	21.08	PASS
Band12	3MHz	QPSK	23095	15RB#0	22.08	PASS
Band12	3MHz	16QAM	23095	15RB#0	21.03	PASS
Band12	3MHz	QPSK	23165	1RB#0	23.03	PASS
Band12	3MHz	16QAM	23165	1RB#0	21.96	PASS
Band12	3MHz	QPSK	23165	1RB#8	23.00	PASS
Band12	3MHz	16QAM	23165	1RB#8	21.92	PASS
Band12	3MHz	QPSK	23165	1RB#14	22.93	PASS
Band12	3MHz	16QAM	23165	1RB#14	21.97	PASS
Band12	3MHz	QPSK	23165	8RB#0	22.10	PASS
Band12	3MHz	16QAM	23165	8RB#0	21.06	PASS
Band12	3MHz	QPSK	23165	8RB#4	22.08	PASS
Band12	3MHz	16QAM	23165	8RB#4	21.05	PASS
Band12	3MHz	QPSK	23165	8RB#7	22.06	PASS
Band12	3MHz	16QAM	23165	8RB#7	21.12	PASS
Band12	3MHz	QPSK	23165	15RB#0	22.06	PASS
Band12	3MHz	16QAM	23165	15RB#0	20.96	PASS
Band12	5MHz	QPSK	23035	1RB#0	22.99	PASS
Band12	5MHz	16QAM	23035	1RB#0	22.07	PASS
Band12	5MHz	QPSK	23035	1RB#12	23.15	PASS
Band12	5MHz	16QAM	23035	1RB#12	22.20	PASS
Band12	5MHz	QPSK	23035	1RB#24	23.03	PASS
Band12	5MHz	16QAM	23035	1RB#24	22.10	PASS
Band12	5MHz	QPSK	23035	12RB#0	22.17	PASS
Band12	5MHz	16QAM	23035	12RB#0	21.18	PASS
Band12	5MHz	QPSK	23035	12RB#6	22.24	PASS
Band12	5MHz	16QAM	23035	12RB#6	21.18	PASS
Band12	5MHz	QPSK	23035	12RB#13	22.14	PASS
Band12	5MHz	16QAM	23035	12RB#13	21.14	PASS
Band12	5MHz	QPSK	23035	25RB#0	22.17	PASS
Band12	5MHz	16QAM	23035	25RB#0	21.16	PASS
Band12	5MHz	QPSK	23095	1RB#0	22.98	PASS
Band12	5MHz	16QAM	23095	1RB#0	22.26	PASS
Band12	5MHz	QPSK	23095	1RB#12	23.12	PASS
Band12	5MHz	16QAM	23095	1RB#12	22.42	PASS
Band12	5MHz	QPSK	23095	1RB#24	22.95	PASS
Band12	5MHz	16QAM	23095	1RB#24	22.25	PASS
Band12	5MHz	QPSK	23095	12RB#0	22.14	PASS
Band12	5MHz	16QAM	23095	12RB#0	21.11	PASS
Band12	5MHz	QPSK	23095	12RB#6	22.14	PASS
Band12	5MHz	16QAM	23095	12RB#6	21.10	PASS
Band12	5MHz	QPSK	23095	12RB#13	22.04	PASS
Band12	5MHz	16QAM	23095	12RB#13	21.13	PASS
Band12	5MHz	QPSK	23095	25RB#0	22.07	PASS
Band12	5MHz	16QAM	23095	25RB#0	21.08	PASS
Band12	5MHz	QPSK	23155	1RB#0	22.97	PASS
Band12	5MHz	16QAM	23155	1RB#0	22.05	PASS
Band12	5MHz	QPSK	23155	1RB#12	23.09	PASS
Band12	5MHz	16QAM	23155	1RB#12	22.20	PASS
Band12	5MHz	QPSK	23155	1RB#24	22.93	PASS
Band12	5MHz	16QAM	23155	1RB#24	22.02	PASS
Band12	5MHz	QPSK	23155	12RB#0	22.06	PASS
Band12	5MHz	16QAM	23155	12RB#0	21.15	PASS
Band12	5MHz	QPSK	23155	12RB#6	22.11	PASS
Band12	5MHz	16QAM	23155	12RB#6	21.07	PASS
Band12	5MHz	QPSK	23155	12RB#13	22.02	PASS
Band12	5MHz	16QAM	23155	12RB#13	21.08	PASS
Band12	5MHz	QPSK	23155	25RB#0	22.10	PASS
Band12	5MHz	16QAM	23155	25RB#0	21.17	PASS
Band12	10MHz	QPSK	23060	1RB#0	23.02	PASS





Band12	10MHz	16QAM	23060	1RB#0	22.26	PASS
Band12	10MHz	QPSK	23060	1RB#24	23.19	PASS
Band12	10MHz	16QAM	23060	1RB#24	22.37	PASS
Band12	10MHz	QPSK	23060	1RB#49	22.90	PASS
Band12	10MHz	16QAM	23060	1RB#49	22.20	PASS
Band12	10MHz	QPSK	23060	25RB#0	22.16	PASS
Band12	10MHz	16QAM	23060	25RB#0	21.25	PASS
Band12	10MHz	QPSK	23060	25RB#12	22.24	PASS
Band12	10MHz	16QAM	23060	25RB#12	21.22	PASS
Band12	10MHz	QPSK	23060	25RB#25	22.18	PASS
Band12	10MHz	16QAM	23060	25RB#25	21.18	PASS
Band12	10MHz	QPSK	23060	50RB#0	22.22	PASS
Band12	10MHz	16QAM	23060	50RB#0	21.22	PASS
Band12	10MHz	QPSK	23095	1RB#0	23.08	PASS
Band12	10MHz	16QAM	23095	1RB#0	22.29	PASS
Band12	10MHz	QPSK	23095	1RB#24	23.13	PASS
Band12	10MHz	16QAM	23095	1RB#24	22.40	PASS
Band12	10MHz	QPSK	23095	1RB#49	22.98	PASS
Band12	10MHz	16QAM	23095	1RB#49	22.21	PASS
Band12	10MHz	QPSK	23095	25RB#0	22.12	PASS
Band12	10MHz	16QAM	23095	25RB#0	21.18	PASS
Band12	10MHz	QPSK	23095	25RB#12	22.13	PASS
Band12	10MHz	16QAM	23095	25RB#12	21.21	PASS
Band12	10MHz	QPSK	23095	25RB#25	22.10	PASS
Band12	10MHz	16QAM	23095	25RB#25	21.11	PASS
Band12	10MHz	QPSK	23095	50RB#0	22.08	PASS
Band12	10MHz	16QAM	23095	50RB#0	21.10	PASS
Band12	10MHz	QPSK	23130	1RB#0	23.03	PASS
Band12	10MHz	16QAM	23130	1RB#0	21.99	PASS
Band12	10MHz	QPSK	23130	1RB#24	23.09	PASS
Band12	10MHz	16QAM	23130	1RB#24	22.02	PASS
Band12	10MHz	QPSK	23130	1RB#49	22.94	PASS
Band12	10MHz	16QAM	23130	1RB#49	21.90	PASS
Band12	10MHz	QPSK	23130	25RB#0	22.17	PASS
Band12	10MHz	16QAM	23130	25RB#0	21.24	PASS
Band12	10MHz	QPSK	23130	25RB#12	22.17	PASS
Band12	10MHz	16QAM	23130	25RB#12	21.25	PASS
Band12	10MHz	QPSK	23130	25RB#25	22.14	PASS
Band12	10MHz	16QAM	23130	25RB#25	21.17	PASS
Band12	10MHz	QPSK	23130	50RB#0	22.14	PASS
Band12	10MHz	16QAM	23130	50RB#0	21.14	PASS



**7.1.10. Conducted Power Measurement Results(LTE Band 13)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band13	5MHz	QPSK	23205	1RB#0	22.50	PASS
Band13	5MHz	16QAM	23205	1RB#0	21.54	PASS
Band13	5MHz	QPSK	23205	1RB#12	22.61	PASS
Band13	5MHz	16QAM	23205	1RB#12	21.67	PASS
Band13	5MHz	QPSK	23205	1RB#24	22.52	PASS
Band13	5MHz	16QAM	23205	1RB#24	21.59	PASS
Band13	5MHz	QPSK	23205	12RB#0	21.53	PASS
Band13	5MHz	16QAM	23205	12RB#0	20.63	PASS
Band13	5MHz	QPSK	23205	12RB#6	21.55	PASS
Band13	5MHz	16QAM	23205	12RB#6	20.60	PASS
Band13	5MHz	QPSK	23205	12RB#13	21.55	PASS
Band13	5MHz	16QAM	23205	12RB#13	20.67	PASS
Band13	5MHz	QPSK	23205	25RB#0	21.57	PASS
Band13	5MHz	16QAM	23205	25RB#0	20.66	PASS
Band13	5MHz	QPSK	23230	1RB#0	22.56	PASS
Band13	5MHz	16QAM	23230	1RB#0	21.73	PASS
Band13	5MHz	QPSK	23230	1RB#12	22.63	PASS
Band13	5MHz	16QAM	23230	1RB#12	21.85	PASS
Band13	5MHz	QPSK	23230	1RB#24	22.56	PASS
Band13	5MHz	16QAM	23230	1RB#24	21.82	PASS
Band13	5MHz	QPSK	23230	12RB#0	21.56	PASS
Band13	5MHz	16QAM	23230	12RB#0	20.66	PASS
Band13	5MHz	QPSK	23230	12RB#6	21.57	PASS
Band13	5MHz	16QAM	23230	12RB#6	20.69	PASS
Band13	5MHz	QPSK	23230	12RB#13	21.58	PASS
Band13	5MHz	16QAM	23230	12RB#13	20.71	PASS
Band13	5MHz	QPSK	23230	25RB#0	21.62	PASS
Band13	5MHz	16QAM	23230	25RB#0	20.68	PASS
Band13	5MHz	QPSK	23255	1RB#0	22.62	PASS
Band13	5MHz	16QAM	23255	1RB#0	21.68	PASS
Band13	5MHz	QPSK	23255	1RB#12	22.67	PASS
Band13	5MHz	16QAM	23255	1RB#12	21.72	PASS
Band13	5MHz	QPSK	23255	1RB#24	22.59	PASS
Band13	5MHz	16QAM	23255	1RB#24	21.66	PASS
Band13	5MHz	QPSK	23255	12RB#0	21.60	PASS
Band13	5MHz	16QAM	23255	12RB#0	20.66	PASS
Band13	5MHz	QPSK	23255	12RB#6	21.62	PASS
Band13	5MHz	16QAM	23255	12RB#6	20.67	PASS
Band13	5MHz	QPSK	23255	12RB#13	21.51	PASS
Band13	5MHz	16QAM	23255	12RB#13	20.60	PASS
Band13	5MHz	QPSK	23255	25RB#0	21.60	PASS
Band13	5MHz	16QAM	23255	25RB#0	20.74	PASS
Band13	10MHz	QPSK	23230	1RB#0	22.55	PASS
Band13	10MHz	16QAM	23230	1RB#0	21.76	PASS
Band13	10MHz	QPSK	23230	1RB#24	22.71	PASS
Band13	10MHz	16QAM	23230	1RB#24	21.94	PASS
Band13	10MHz	QPSK	23230	1RB#49	22.57	PASS
Band13	10MHz	16QAM	23230	1RB#49	21.82	PASS
Band13	10MHz	QPSK	23230	25RB#0	21.71	PASS
Band13	10MHz	16QAM	23230	25RB#0	20.76	PASS
Band13	10MHz	QPSK	23230	25RB#12	21.69	PASS
Band13	10MHz	16QAM	23230	25RB#12	20.78	PASS
Band13	10MHz	QPSK	23230	25RB#25	21.64	PASS
Band13	10MHz	16QAM	23230	25RB#25	20.73	PASS
Band13	10MHz	QPSK	23230	50RB#0	21.67	PASS
Band13	10MHz	16QAM	23230	50RB#0	20.70	PASS



**7.1.11. Conducted Power Measurement Results(LTE Band 17)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band17	5MHz	QPSK	23755	1RB#0	23.07	PASS
Band17	5MHz	16QAM	23755	1RB#0	21.56	PASS
Band17	5MHz	QPSK	23755	1RB#12	22.81	PASS
Band17	5MHz	16QAM	23755	1RB#12	21.57	PASS
Band17	5MHz	QPSK	23755	1RB#24	22.81	PASS
Band17	5MHz	16QAM	23755	1RB#24	21.43	PASS
Band17	5MHz	QPSK	23755	12RB#0	22.08	PASS
Band17	5MHz	16QAM	23755	12RB#0	21.21	PASS
Band17	5MHz	QPSK	23755	12RB#6	22.07	PASS
Band17	5MHz	16QAM	23755	12RB#6	21.18	PASS
Band17	5MHz	QPSK	23755	12RB#13	22.02	PASS
Band17	5MHz	16QAM	23755	12RB#13	21.10	PASS
Band17	5MHz	QPSK	23755	25RB#0	22.02	PASS
Band17	5MHz	16QAM	23755	25RB#0	21.19	PASS
Band17	5MHz	QPSK	23790	1RB#0	22.62	PASS
Band17	5MHz	16QAM	23790	1RB#0	22.33	PASS
Band17	5MHz	QPSK	23790	1RB#12	22.51	PASS
Band17	5MHz	16QAM	23790	1RB#12	22.31	PASS
Band17	5MHz	QPSK	23790	1RB#24	22.63	PASS
Band17	5MHz	16QAM	23790	1RB#24	22.29	PASS
Band17	5MHz	QPSK	23790	12RB#0	21.85	PASS
Band17	5MHz	16QAM	23790	12RB#0	21.07	PASS
Band17	5MHz	QPSK	23790	12RB#6	21.86	PASS
Band17	5MHz	16QAM	23790	12RB#6	21.07	PASS
Band17	5MHz	QPSK	23790	12RB#13	21.69	PASS
Band17	5MHz	16QAM	23790	12RB#13	21.05	PASS
Band17	5MHz	QPSK	23790	25RB#0	21.81	PASS
Band17	5MHz	16QAM	23790	25RB#0	20.98	PASS
Band17	5MHz	QPSK	23825	1RB#0	23.21	PASS
Band17	5MHz	16QAM	23825	1RB#0	21.85	PASS
Band17	5MHz	QPSK	23825	1RB#12	23.18	PASS
Band17	5MHz	16QAM	23825	1RB#12	21.82	PASS
Band17	5MHz	QPSK	23825	1RB#24	22.93	PASS
Band17	5MHz	16QAM	23825	1RB#24	21.78	PASS
Band17	5MHz	QPSK	23825	12RB#0	21.68	PASS
Band17	5MHz	16QAM	23825	12RB#0	20.90	PASS
Band17	5MHz	QPSK	23825	12RB#6	22.16	PASS
Band17	5MHz	16QAM	23825	12RB#6	20.90	PASS
Band17	5MHz	QPSK	23825	12RB#13	21.89	PASS
Band17	5MHz	16QAM	23825	12RB#13	20.96	PASS
Band17	5MHz	QPSK	23825	25RB#0	21.84	PASS
Band17	5MHz	16QAM	23825	25RB#0	21.08	PASS
Band17	10MHz	QPSK	23780	1RB#0	22.79	PASS
Band17	10MHz	16QAM	23780	1RB#0	21.98	PASS
Band17	10MHz	QPSK	23780	1RB#24	22.66	PASS
Band17	10MHz	16QAM	23780	1RB#24	21.96	PASS
Band17	10MHz	QPSK	23780	1RB#49	22.62	PASS
Band17	10MHz	16QAM	23780	1RB#49	22.07	PASS
Band17	10MHz	QPSK	23780	25RB#0	22.02	PASS
Band17	10MHz	16QAM	23780	25RB#0	21.06	PASS
Band17	10MHz	QPSK	23780	25RB#12	22.03	PASS
Band17	10MHz	16QAM	23780	25RB#12	21.05	PASS
Band17	10MHz	QPSK	23780	25RB#25	22.01	PASS
Band17	10MHz	16QAM	23780	25RB#25	21.03	PASS
Band17	10MHz	QPSK	23780	50RB#0	22.02	PASS
Band17	10MHz	16QAM	23780	50RB#0	21.04	PASS
Band17	10MHz	QPSK	23790	1RB#0	23.00	PASS
Band17	10MHz	16QAM	23790	1RB#0	22.08	PASS
Band17	10MHz	QPSK	23790	1RB#24	22.94	PASS
Band17	10MHz	16QAM	23790	1RB#24	21.98	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band17	10MHz	QPSK	23790	1RB#49	22.87	PASS
Band17	10MHz	16QAM	23790	1RB#49	21.89	PASS
Band17	10MHz	QPSK	23790	25RB#0	21.93	PASS
Band17	10MHz	16QAM	23790	25RB#0	21.35	PASS
Band17	10MHz	QPSK	23790	25RB#12	21.93	PASS
Band17	10MHz	16QAM	23790	25RB#12	21.23	PASS
Band17	10MHz	QPSK	23790	25RB#25	22.01	PASS
Band17	10MHz	16QAM	23790	25RB#25	21.20	PASS
Band17	10MHz	QPSK	23790	50RB#0	22.03	PASS
Band17	10MHz	16QAM	23790	50RB#0	21.20	PASS
Band17	10MHz	QPSK	23800	1RB#0	22.77	PASS
Band17	10MHz	16QAM	23800	1RB#0	22.81	PASS
Band17	10MHz	QPSK	23800	1RB#24	22.73	PASS
Band17	10MHz	16QAM	23800	1RB#24	22.80	PASS
Band17	10MHz	QPSK	23800	1RB#49	22.64	PASS
Band17	10MHz	16QAM	23800	1RB#49	22.65	PASS
Band17	10MHz	QPSK	23800	25RB#0	21.90	PASS
Band17	10MHz	16QAM	23800	25RB#0	21.16	PASS
Band17	10MHz	QPSK	23800	25RB#12	21.91	PASS
Band17	10MHz	16QAM	23800	25RB#12	21.16	PASS
Band17	10MHz	QPSK	23800	25RB#25	21.85	PASS
Band17	10MHz	16QAM	23800	25RB#25	21.15	PASS
Band17	10MHz	QPSK	23800	50RB#0	21.96	PASS
Band17	10MHz	16QAM	23800	50RB#0	21.25	PASS



**7.1.12. Conducted Power Measurement Results(LTE Band 25)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band25	1.4MHz	QPSK	26047	1RB#0	22.61	PASS
Band25	1.4MHz	16QAM	26047	1RB#0	21.81	PASS
Band25	1.4MHz	QPSK	26047	1RB#2	22.61	PASS
Band25	1.4MHz	16QAM	26047	1RB#2	21.91	PASS
Band25	1.4MHz	QPSK	26047	1RB#5	22.64	PASS
Band25	1.4MHz	16QAM	26047	1RB#5	21.76	PASS
Band25	1.4MHz	QPSK	26047	3RB#0	22.71	PASS
Band25	1.4MHz	16QAM	26047	3RB#0	21.61	PASS
Band25	1.4MHz	QPSK	26047	3RB#1	22.73	PASS
Band25	1.4MHz	16QAM	26047	3RB#1	21.59	PASS
Band25	1.4MHz	QPSK	26047	3RB#3	22.70	PASS
Band25	1.4MHz	16QAM	26047	3RB#3	21.57	PASS
Band25	1.4MHz	QPSK	26047	6RB#0	21.68	PASS
Band25	1.4MHz	16QAM	26047	6RB#0	20.70	PASS
Band25	1.4MHz	QPSK	26365	1RB#0	22.71	PASS
Band25	1.4MHz	16QAM	26365	1RB#0	21.87	PASS
Band25	1.4MHz	QPSK	26365	1RB#2	22.82	PASS
Band25	1.4MHz	16QAM	26365	1RB#2	22.01	PASS
Band25	1.4MHz	QPSK	26365	1RB#5	22.69	PASS
Band25	1.4MHz	16QAM	26365	1RB#5	21.80	PASS
Band25	1.4MHz	QPSK	26365	3RB#0	22.79	PASS
Band25	1.4MHz	16QAM	26365	3RB#0	21.69	PASS
Band25	1.4MHz	QPSK	26365	3RB#1	22.79	PASS
Band25	1.4MHz	16QAM	26365	3RB#1	21.69	PASS
Band25	1.4MHz	QPSK	26365	3RB#3	22.80	PASS
Band25	1.4MHz	16QAM	26365	3RB#3	21.66	PASS
Band25	1.4MHz	QPSK	26365	6RB#0	21.77	PASS
Band25	1.4MHz	16QAM	26365	6RB#0	20.80	PASS
Band25	1.4MHz	QPSK	26683	1RB#0	22.54	PASS
Band25	1.4MHz	16QAM	26683	1RB#0	21.61	PASS
Band25	1.4MHz	QPSK	26683	1RB#2	22.69	PASS
Band25	1.4MHz	16QAM	26683	1RB#2	21.82	PASS
Band25	1.4MHz	QPSK	26683	1RB#5	22.51	PASS
Band25	1.4MHz	16QAM	26683	1RB#5	21.64	PASS
Band25	1.4MHz	QPSK	26683	3RB#0	22.60	PASS
Band25	1.4MHz	16QAM	26683	3RB#0	21.46	PASS
Band25	1.4MHz	QPSK	26683	3RB#1	22.57	PASS
Band25	1.4MHz	16QAM	26683	3RB#1	21.46	PASS
Band25	1.4MHz	QPSK	26683	3RB#3	22.60	PASS
Band25	1.4MHz	16QAM	26683	3RB#3	21.44	PASS
Band25	1.4MHz	QPSK	26683	6RB#0	21.58	PASS
Band25	1.4MHz	16QAM	26683	6RB#0	20.62	PASS
Band25	3MHz	QPSK	26055	1RB#0	22.61	PASS
Band25	3MHz	16QAM	26055	1RB#0	21.88	PASS
Band25	3MHz	QPSK	26055	1RB#8	22.62	PASS
Band25	3MHz	16QAM	26055	1RB#8	21.78	PASS
Band25	3MHz	QPSK	26055	1RB#14	22.67	PASS
Band25	3MHz	16QAM	26055	1RB#14	21.82	PASS
Band25	3MHz	QPSK	26055	8RB#0	21.68	PASS
Band25	3MHz	16QAM	26055	8RB#0	20.71	PASS
Band25	3MHz	QPSK	26055	8RB#4	21.62	PASS
Band25	3MHz	16QAM	26055	8RB#4	20.71	PASS
Band25	3MHz	QPSK	26055	8RB#7	21.64	PASS
Band25	3MHz	16QAM	26055	8RB#7	20.68	PASS
Band25	3MHz	QPSK	26055	15RB#0	21.62	PASS
Band25	3MHz	16QAM	26055	15RB#0	20.60	PASS
Band25	3MHz	QPSK	26365	1RB#0	22.68	PASS
Band25	3MHz	16QAM	26365	1RB#0	21.88	PASS
Band25	3MHz	QPSK	26365	1RB#8	22.70	PASS
Band25	3MHz	16QAM	26365	1RB#8	21.86	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band25	3MHz	QPSK	26365	1RB#14	22.71	PASS
Band25	3MHz	16QAM	26365	1RB#14	21.86	PASS
Band25	3MHz	QPSK	26365	8RB#0	21.73	PASS
Band25	3MHz	16QAM	26365	8RB#0	20.76	PASS
Band25	3MHz	QPSK	26365	8RB#4	21.75	PASS
Band25	3MHz	16QAM	26365	8RB#4	20.77	PASS
Band25	3MHz	QPSK	26365	8RB#7	21.70	PASS
Band25	3MHz	16QAM	26365	8RB#7	20.75	PASS
Band25	3MHz	QPSK	26365	15RB#0	21.70	PASS
Band25	3MHz	16QAM	26365	15RB#0	20.73	PASS
Band25	3MHz	QPSK	26675	1RB#0	22.58	PASS
Band25	3MHz	16QAM	26675	1RB#0	21.73	PASS
Band25	3MHz	QPSK	26675	1RB#8	22.56	PASS
Band25	3MHz	16QAM	26675	1RB#8	21.71	PASS
Band25	3MHz	QPSK	26675	1RB#14	22.53	PASS
Band25	3MHz	16QAM	26675	1RB#14	21.65	PASS
Band25	3MHz	QPSK	26675	8RB#0	21.61	PASS
Band25	3MHz	16QAM	26675	8RB#0	20.60	PASS
Band25	3MHz	QPSK	26675	8RB#4	21.59	PASS
Band25	3MHz	16QAM	26675	8RB#4	20.59	PASS
Band25	3MHz	QPSK	26675	8RB#7	21.54	PASS
Band25	3MHz	16QAM	26675	8RB#7	20.56	PASS
Band25	3MHz	QPSK	26675	15RB#0	21.57	PASS
Band25	3MHz	16QAM	26675	15RB#0	20.53	PASS
Band25	5MHz	QPSK	26065	1RB#0	22.60	PASS
Band25	5MHz	16QAM	26065	1RB#0	21.57	PASS
Band25	5MHz	QPSK	26065	1RB#12	22.77	PASS
Band25	5MHz	16QAM	26065	1RB#12	21.80	PASS
Band25	5MHz	QPSK	26065	1RB#24	22.62	PASS
Band25	5MHz	16QAM	26065	1RB#24	21.64	PASS
Band25	5MHz	QPSK	26065	12RB#0	21.60	PASS
Band25	5MHz	16QAM	26065	12RB#0	20.61	PASS
Band25	5MHz	QPSK	26065	12RB#6	21.63	PASS
Band25	5MHz	16QAM	26065	12RB#6	20.61	PASS
Band25	5MHz	QPSK	26065	12RB#13	21.63	PASS
Band25	5MHz	16QAM	26065	12RB#13	20.60	PASS
Band25	5MHz	QPSK	26065	25RB#0	21.63	PASS
Band25	5MHz	16QAM	26065	25RB#0	20.62	PASS
Band25	5MHz	QPSK	26365	1RB#0	22.71	PASS
Band25	5MHz	16QAM	26365	1RB#0	21.68	PASS
Band25	5MHz	QPSK	26365	1RB#12	22.84	PASS
Band25	5MHz	16QAM	26365	1RB#12	21.81	PASS
Band25	5MHz	QPSK	26365	1RB#24	22.65	PASS
Band25	5MHz	16QAM	26365	1RB#24	21.64	PASS
Band25	5MHz	QPSK	26365	12RB#0	21.73	PASS
Band25	5MHz	16QAM	26365	12RB#0	20.72	PASS
Band25	5MHz	QPSK	26365	12RB#6	21.73	PASS
Band25	5MHz	16QAM	26365	12RB#6	20.73	PASS
Band25	5MHz	QPSK	26365	12RB#13	21.67	PASS
Band25	5MHz	16QAM	26365	12RB#13	20.64	PASS
Band25	5MHz	QPSK	26365	25RB#0	21.70	PASS
Band25	5MHz	16QAM	26365	25RB#0	20.75	PASS
Band25	5MHz	QPSK	26665	1RB#0	22.51	PASS
Band25	5MHz	16QAM	26665	1RB#0	21.56	PASS
Band25	5MHz	QPSK	26665	1RB#12	22.69	PASS
Band25	5MHz	16QAM	26665	1RB#12	21.60	PASS
Band25	5MHz	QPSK	26665	1RB#24	22.46	PASS
Band25	5MHz	16QAM	26665	1RB#24	21.50	PASS
Band25	5MHz	QPSK	26665	12RB#0	21.60	PASS
Band25	5MHz	16QAM	26665	12RB#0	20.51	PASS
Band25	5MHz	QPSK	26665	12RB#6	21.63	PASS
Band25	5MHz	16QAM	26665	12RB#6	20.60	PASS
Band25	5MHz	QPSK	26665	12RB#13	21.53	PASS
Band25	5MHz	16QAM	26665	12RB#13	20.52	PASS
Band25	5MHz	QPSK	26665	25RB#0	21.62	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band25	5MHz	16QAM	26665	25RB#0	20.61	PASS
Band25	10MHz	QPSK	26090	1RB#0	22.60	PASS
Band25	10MHz	16QAM	26090	1RB#0	21.83	PASS
Band25	10MHz	QPSK	26090	1RB#24	22.83	PASS
Band25	10MHz	16QAM	26090	1RB#24	21.93	PASS
Band25	10MHz	QPSK	26090	1RB#49	22.57	PASS
Band25	10MHz	16QAM	26090	1RB#49	21.61	PASS
Band25	10MHz	QPSK	26090	25RB#0	21.72	PASS
Band25	10MHz	16QAM	26090	25RB#0	20.75	PASS
Band25	10MHz	QPSK	26090	25RB#12	21.76	PASS
Band25	10MHz	16QAM	26090	25RB#12	20.76	PASS
Band25	10MHz	QPSK	26090	25RB#25	21.66	PASS
Band25	10MHz	16QAM	26090	25RB#25	20.62	PASS
Band25	10MHz	QPSK	26090	50RB#0	21.70	PASS
Band25	10MHz	16QAM	26090	50RB#0	20.70	PASS
Band25	10MHz	QPSK	26365	1RB#0	22.74	PASS
Band25	10MHz	16QAM	26365	1RB#0	21.89	PASS
Band25	10MHz	QPSK	26365	1RB#24	22.79	PASS
Band25	10MHz	16QAM	26365	1RB#24	22.01	PASS
Band25	10MHz	QPSK	26365	1RB#49	22.63	PASS
Band25	10MHz	16QAM	26365	1RB#49	21.92	PASS
Band25	10MHz	QPSK	26365	25RB#0	21.84	PASS
Band25	10MHz	16QAM	26365	25RB#0	20.87	PASS
Band25	10MHz	QPSK	26365	25RB#12	21.86	PASS
Band25	10MHz	16QAM	26365	25RB#12	20.85	PASS
Band25	10MHz	QPSK	26365	25RB#25	21.68	PASS
Band25	10MHz	16QAM	26365	25RB#25	20.64	PASS
Band25	10MHz	QPSK	26365	50RB#0	21.76	PASS
Band25	10MHz	16QAM	26365	50RB#0	20.72	PASS
Band25	10MHz	QPSK	26640	1RB#0	22.53	PASS
Band25	10MHz	16QAM	26640	1RB#0	21.75	PASS
Band25	10MHz	QPSK	26640	1RB#24	22.75	PASS
Band25	10MHz	16QAM	26640	1RB#24	21.91	PASS
Band25	10MHz	QPSK	26640	1RB#49	22.55	PASS
Band25	10MHz	16QAM	26640	1RB#49	21.69	PASS
Band25	10MHz	QPSK	26640	25RB#0	21.82	PASS
Band25	10MHz	16QAM	26640	25RB#0	20.83	PASS
Band25	10MHz	QPSK	26640	25RB#12	21.84	PASS
Band25	10MHz	16QAM	26640	25RB#12	20.80	PASS
Band25	10MHz	QPSK	26640	25RB#25	21.69	PASS
Band25	10MHz	16QAM	26640	25RB#25	20.66	PASS
Band25	10MHz	QPSK	26640	50RB#0	21.66	PASS
Band25	10MHz	16QAM	26640	50RB#0	20.68	PASS
Band25	15MHz	QPSK	26115	1RB#0	22.58	PASS
Band25	15MHz	16QAM	26115	1RB#0	21.76	PASS
Band25	15MHz	QPSK	26115	1RB#38	22.70	PASS
Band25	15MHz	16QAM	26115	1RB#38	21.89	PASS
Band25	15MHz	QPSK	26115	1RB#74	22.66	PASS
Band25	15MHz	16QAM	26115	1RB#74	21.76	PASS
Band25	15MHz	QPSK	26115	38RB#0	21.73	PASS
Band25	15MHz	16QAM	26115	38RB#0	21.72	PASS
Band25	15MHz	QPSK	26115	38RB#18	21.75	PASS
Band25	15MHz	16QAM	26115	38RB#18	21.73	PASS
Band25	15MHz	QPSK	26115	38RB#37	21.74	PASS
Band25	15MHz	16QAM	26115	38RB#37	21.77	PASS
Band25	15MHz	QPSK	26115	75RB#0	21.74	PASS
Band25	15MHz	16QAM	26115	75RB#0	20.67	PASS
Band25	15MHz	QPSK	26365	1RB#0	22.70	PASS
Band25	15MHz	16QAM	26365	1RB#0	21.85	PASS
Band25	15MHz	QPSK	26365	1RB#38	22.74	PASS
Band25	15MHz	16QAM	26365	1RB#38	21.92	PASS
Band25	15MHz	QPSK	26365	1RB#74	22.61	PASS
Band25	15MHz	16QAM	26365	1RB#74	21.75	PASS
Band25	15MHz	QPSK	26365	38RB#0	21.79	PASS
Band25	15MHz	16QAM	26365	38RB#0	21.80	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band25	15MHz	QPSK	26365	38RB#18	21.71	PASS
Band25	15MHz	16QAM	26365	38RB#18	21.75	PASS
Band25	15MHz	QPSK	26365	38RB#37	21.73	PASS
Band25	15MHz	16QAM	26365	38RB#37	21.72	PASS
Band25	15MHz	QPSK	26365	75RB#0	21.73	PASS
Band25	15MHz	16QAM	26365	75RB#0	20.70	PASS
Band25	15MHz	QPSK	26615	1RB#0	22.54	PASS
Band25	15MHz	16QAM	26615	1RB#0	21.70	PASS
Band25	15MHz	QPSK	26615	1RB#38	22.61	PASS
Band25	15MHz	16QAM	26615	1RB#38	21.81	PASS
Band25	15MHz	QPSK	26615	1RB#74	22.45	PASS
Band25	15MHz	16QAM	26615	1RB#74	21.63	PASS
Band25	15MHz	QPSK	26615	38RB#0	21.68	PASS
Band25	15MHz	16QAM	26615	38RB#0	21.69	PASS
Band25	15MHz	QPSK	26615	38RB#18	21.66	PASS
Band25	15MHz	16QAM	26615	38RB#18	21.68	PASS
Band25	15MHz	QPSK	26615	38RB#37	21.65	PASS
Band25	15MHz	16QAM	26615	38RB#37	21.63	PASS
Band25	15MHz	QPSK	26615	75RB#0	21.63	PASS
Band25	15MHz	16QAM	26615	75RB#0	20.60	PASS
Band25	20MHz	QPSK	26140	1RB#0	22.57	PASS
Band25	20MHz	16QAM	26140	1RB#0	21.61	PASS
Band25	20MHz	QPSK	26140	1RB#49	22.92	PASS
Band25	20MHz	16QAM	26140	1RB#49	21.88	PASS
Band25	20MHz	QPSK	26140	1RB#99	22.58	PASS
Band25	20MHz	16QAM	26140	1RB#99	21.58	PASS
Band25	20MHz	QPSK	26140	50RB#0	21.92	PASS
Band25	20MHz	16QAM	26140	50RB#0	20.87	PASS
Band25	20MHz	QPSK	26140	50RB#25	21.89	PASS
Band25	20MHz	16QAM	26140	50RB#25	20.89	PASS
Band25	20MHz	QPSK	26140	50RB#50	21.83	PASS
Band25	20MHz	16QAM	26140	50RB#50	20.77	PASS
Band25	20MHz	QPSK	26140	100RB#0	21.82	PASS
Band25	20MHz	16QAM	26140	100RB#0	20.82	PASS
Band25	20MHz	QPSK	26365	1RB#0	22.64	PASS
Band25	20MHz	16QAM	26365	1RB#0	21.64	PASS
Band25	20MHz	QPSK	26365	1RB#49	23.01	PASS
Band25	20MHz	16QAM	26365	1RB#49	21.96	PASS
Band25	20MHz	QPSK	26365	1RB#99	22.64	PASS
Band25	20MHz	16QAM	26365	1RB#99	21.60	PASS
Band25	20MHz	QPSK	26365	50RB#0	21.91	PASS
Band25	20MHz	16QAM	26365	50RB#0	20.88	PASS
Band25	20MHz	QPSK	26365	50RB#25	21.87	PASS
Band25	20MHz	16QAM	26365	50RB#25	20.85	PASS
Band25	20MHz	QPSK	26365	50RB#50	21.69	PASS
Band25	20MHz	16QAM	26365	50RB#50	20.63	PASS
Band25	20MHz	QPSK	26365	100RB#0	21.76	PASS
Band25	20MHz	16QAM	26365	100RB#0	20.73	PASS
Band25	20MHz	QPSK	26590	1RB#0	22.55	PASS
Band25	20MHz	16QAM	26590	1RB#0	21.53	PASS
Band25	20MHz	QPSK	26590	1RB#49	22.80	PASS
Band25	20MHz	16QAM	26590	1RB#49	21.82	PASS
Band25	20MHz	QPSK	26590	1RB#99	22.43	PASS
Band25	20MHz	16QAM	26590	1RB#99	21.41	PASS
Band25	20MHz	QPSK	26590	50RB#0	21.59	PASS
Band25	20MHz	16QAM	26590	50RB#0	20.64	PASS
Band25	20MHz	QPSK	26590	50RB#25	21.65	PASS
Band25	20MHz	16QAM	26590	50RB#25	20.57	PASS
Band25	20MHz	QPSK	26590	50RB#50	21.43	PASS
Band25	20MHz	16QAM	26590	50RB#50	20.35	PASS
Band25	20MHz	QPSK	26590	100RB#0	21.50	PASS
Band25	20MHz	16QAM	26590	100RB#0	20.48	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.13. Conducted Power Measurement Results(LTE Band 26(814-824))**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
26(814-824)	1.4MHz	QPSK	26697	1RB#0	22.77	PASS
26(814-824)	1.4MHz	16QAM	26697	1RB#0	21.99	PASS
26(814-824)	1.4MHz	QPSK	26697	1RB#2	22.90	PASS
26(814-824)	1.4MHz	16QAM	26697	1RB#2	22.26	PASS
26(814-824)	1.4MHz	QPSK	26697	1RB#5	22.78	PASS
26(814-824)	1.4MHz	16QAM	26697	1RB#5	21.97	PASS
26(814-824)	1.4MHz	QPSK	26697	3RB#0	22.99	PASS
26(814-824)	1.4MHz	16QAM	26697	3RB#0	21.89	PASS
26(814-824)	1.4MHz	QPSK	26697	3RB#1	23.00	PASS
26(814-824)	1.4MHz	16QAM	26697	3RB#1	21.90	PASS
26(814-824)	1.4MHz	QPSK	26697	3RB#3	22.95	PASS
26(814-824)	1.4MHz	16QAM	26697	3RB#3	21.81	PASS
26(814-824)	1.4MHz	QPSK	26697	6RB#0	21.83	PASS
26(814-824)	1.4MHz	16QAM	26697	6RB#0	20.94	PASS
26(814-824)	1.4MHz	QPSK	26740	1RB#0	22.77	PASS
26(814-824)	1.4MHz	16QAM	26740	1RB#0	22.00	PASS
26(814-824)	1.4MHz	QPSK	26740	1RB#2	22.78	PASS
26(814-824)	1.4MHz	16QAM	26740	1RB#2	22.18	PASS
26(814-824)	1.4MHz	QPSK	26740	1RB#5	22.75	PASS
26(814-824)	1.4MHz	16QAM	26740	1RB#5	21.93	PASS
26(814-824)	1.4MHz	QPSK	26740	3RB#0	22.92	PASS
26(814-824)	1.4MHz	16QAM	26740	3RB#0	21.85	PASS
26(814-824)	1.4MHz	QPSK	26740	3RB#1	22.93	PASS
26(814-824)	1.4MHz	16QAM	26740	3RB#1	21.84	PASS
26(814-824)	1.4MHz	QPSK	26740	3RB#3	22.99	PASS
26(814-824)	1.4MHz	16QAM	26740	3RB#3	21.82	PASS
26(814-824)	1.4MHz	QPSK	26740	6RB#0	21.85	PASS
26(814-824)	1.4MHz	16QAM	26740	6RB#0	20.76	PASS
26(814-824)	1.4MHz	QPSK	26783	1RB#0	22.79	PASS
26(814-824)	1.4MHz	16QAM	26783	1RB#0	21.72	PASS
26(814-824)	1.4MHz	QPSK	26783	1RB#2	22.92	PASS
26(814-824)	1.4MHz	16QAM	26783	1RB#2	21.92	PASS
26(814-824)	1.4MHz	QPSK	26783	1RB#5	22.84	PASS
26(814-824)	1.4MHz	16QAM	26783	1RB#5	21.68	PASS
26(814-824)	1.4MHz	QPSK	26783	3RB#0	22.91	PASS
26(814-824)	1.4MHz	16QAM	26783	3RB#0	21.77	PASS
26(814-824)	1.4MHz	QPSK	26783	3RB#1	22.91	PASS
26(814-824)	1.4MHz	16QAM	26783	3RB#1	21.77	PASS
26(814-824)	1.4MHz	QPSK	26783	3RB#3	22.92	PASS
26(814-824)	1.4MHz	16QAM	26783	3RB#3	21.72	PASS
26(814-824)	1.4MHz	QPSK	26783	6RB#0	21.84	PASS
26(814-824)	1.4MHz	16QAM	26783	6RB#0	20.87	PASS
26(814-824)	3MHz	QPSK	26705	1RB#0	22.78	PASS
26(814-824)	3MHz	16QAM	26705	1RB#0	22.06	PASS
26(814-824)	3MHz	QPSK	26705	1RB#8	22.74	PASS
26(814-824)	3MHz	16QAM	26705	1RB#8	21.90	PASS
26(814-824)	3MHz	QPSK	26705	1RB#14	22.76	PASS
26(814-824)	3MHz	16QAM	26705	1RB#14	21.90	PASS
26(814-824)	3MHz	QPSK	26705	8RB#0	21.74	PASS
26(814-824)	3MHz	16QAM	26705	8RB#0	20.85	PASS
26(814-824)	3MHz	QPSK	26705	8RB#4	21.75	PASS
26(814-824)	3MHz	16QAM	26705	8RB#4	20.87	PASS
26(814-824)	3MHz	QPSK	26705	8RB#7	21.78	PASS
26(814-824)	3MHz	16QAM	26705	8RB#7	20.81	PASS
26(814-824)	3MHz	QPSK	26705	15RB#0	21.76	PASS
26(814-824)	3MHz	16QAM	26705	15RB#0	20.81	PASS
26(814-824)	3MHz	QPSK	26740	1RB#0	22.78	PASS
26(814-824)	3MHz	16QAM	26740	1RB#0	21.96	PASS
26(814-824)	3MHz	QPSK	26740	1RB#8	22.77	PASS
26(814-824)	3MHz	16QAM	26740	1RB#8	21.96	PASS





26(814-824)	3MHz	QPSK	26740	1RB#14	22.72	PASS
26(814-824)	3MHz	16QAM	26740	1RB#14	21.88	PASS
26(814-824)	3MHz	QPSK	26740	8RB#0	21.75	PASS
26(814-824)	3MHz	16QAM	26740	8RB#0	20.76	PASS
26(814-824)	3MHz	QPSK	26740	8RB#4	21.71	PASS
26(814-824)	3MHz	16QAM	26740	8RB#4	20.78	PASS
26(814-824)	3MHz	QPSK	26740	8RB#7	21.74	PASS
26(814-824)	3MHz	16QAM	26740	8RB#7	20.74	PASS
26(814-824)	3MHz	QPSK	26740	15RB#0	21.74	PASS
26(814-824)	3MHz	16QAM	26740	15RB#0	20.70	PASS
26(814-824)	3MHz	QPSK	26775	1RB#0	22.82	PASS
26(814-824)	3MHz	16QAM	26775	1RB#0	21.67	PASS
26(814-824)	3MHz	QPSK	26775	1RB#8	22.76	PASS
26(814-824)	3MHz	16QAM	26775	1RB#8	21.68	PASS
26(814-824)	3MHz	QPSK	26775	1RB#14	22.76	PASS
26(814-824)	3MHz	16QAM	26775	1RB#14	21.77	PASS
26(814-824)	3MHz	QPSK	26775	8RB#0	21.77	PASS
26(814-824)	3MHz	16QAM	26775	8RB#0	20.74	PASS
26(814-824)	3MHz	QPSK	26775	8RB#4	21.75	PASS
26(814-824)	3MHz	16QAM	26775	8RB#4	20.77	PASS
26(814-824)	3MHz	QPSK	26775	8RB#7	21.74	PASS
26(814-824)	3MHz	16QAM	26775	8RB#7	20.78	PASS
26(814-824)	3MHz	QPSK	26775	15RB#0	21.72	PASS
26(814-824)	3MHz	16QAM	26775	15RB#0	20.71	PASS
26(814-824)	5MHz	QPSK	26715	1RB#0	22.80	PASS
26(814-824)	5MHz	16QAM	26715	1RB#0	21.84	PASS
26(814-824)	5MHz	QPSK	26715	1RB#12	22.85	PASS
26(814-824)	5MHz	16QAM	26715	1RB#12	21.85	PASS
26(814-824)	5MHz	QPSK	26715	1RB#24	22.72	PASS
26(814-824)	5MHz	16QAM	26715	1RB#24	21.73	PASS
26(814-824)	5MHz	QPSK	26715	12RB#0	21.74	PASS
26(814-824)	5MHz	16QAM	26715	12RB#0	20.71	PASS
26(814-824)	5MHz	QPSK	26715	12RB#6	21.79	PASS
26(814-824)	5MHz	16QAM	26715	12RB#6	20.72	PASS
26(814-824)	5MHz	QPSK	26715	12RB#13	21.84	PASS
26(814-824)	5MHz	16QAM	26715	12RB#13	20.75	PASS
26(814-824)	5MHz	QPSK	26715	25RB#0	21.82	PASS
26(814-824)	5MHz	16QAM	26715	25RB#0	20.87	PASS
26(814-824)	5MHz	QPSK	26740	1RB#0	22.71	PASS
26(814-824)	5MHz	16QAM	26740	1RB#0	21.94	PASS
26(814-824)	5MHz	QPSK	26740	1RB#12	22.84	PASS
26(814-824)	5MHz	16QAM	26740	1RB#12	22.05	PASS
26(814-824)	5MHz	QPSK	26740	1RB#24	22.73	PASS
26(814-824)	5MHz	16QAM	26740	1RB#24	21.88	PASS
26(814-824)	5MHz	QPSK	26740	12RB#0	21.80	PASS
26(814-824)	5MHz	16QAM	26740	12RB#0	20.82	PASS
26(814-824)	5MHz	QPSK	26740	12RB#6	21.79	PASS
26(814-824)	5MHz	16QAM	26740	12RB#6	20.82	PASS
26(814-824)	5MHz	QPSK	26740	12RB#13	21.86	PASS
26(814-824)	5MHz	16QAM	26740	12RB#13	20.88	PASS
26(814-824)	5MHz	QPSK	26740	25RB#0	21.85	PASS
26(814-824)	5MHz	16QAM	26740	25RB#0	20.85	PASS
26(814-824)	5MHz	QPSK	26765	1RB#0	22.80	PASS
26(814-824)	5MHz	16QAM	26765	1RB#0	21.78	PASS
26(814-824)	5MHz	QPSK	26765	1RB#12	22.87	PASS
26(814-824)	5MHz	16QAM	26765	1RB#12	21.92	PASS
26(814-824)	5MHz	QPSK	26765	1RB#24	22.73	PASS
26(814-824)	5MHz	16QAM	26765	1RB#24	21.82	PASS
26(814-824)	5MHz	QPSK	26765	12RB#0	21.78	PASS
26(814-824)	5MHz	16QAM	26765	12RB#0	20.85	PASS
26(814-824)	5MHz	QPSK	26765	12RB#6	21.77	PASS
26(814-824)	5MHz	16QAM	26765	12RB#6	20.80	PASS
26(814-824)	5MHz	QPSK	26765	12RB#13	21.74	PASS
26(814-824)	5MHz	16QAM	26765	12RB#13	20.80	PASS
26(814-824)	5MHz	QPSK	26765	25RB#0	21.80	PASS





26(814-824)	5MHz	16QAM	26765	25RB#0	20.90	PASS
26(814-824)	10MHz	QPSK	26740	1RB#0	22.79	PASS
26(814-824)	10MHz	16QAM	26740	1RB#0	22.02	PASS
26(814-824)	10MHz	QPSK	26740	1RB#24	22.83	PASS
26(814-824)	10MHz	16QAM	26740	1RB#24	22.06	PASS
26(814-824)	10MHz	QPSK	26740	1RB#49	22.69	PASS
26(814-824)	10MHz	16QAM	26740	1RB#49	21.93	PASS
26(814-824)	10MHz	QPSK	26740	25RB#0	21.77	PASS
26(814-824)	10MHz	16QAM	26740	25RB#0	20.84	PASS
26(814-824)	10MHz	QPSK	26740	25RB#12	21.86	PASS
26(814-824)	10MHz	16QAM	26740	25RB#12	20.83	PASS
26(814-824)	10MHz	QPSK	26740	25RB#25	21.88	PASS
26(814-824)	10MHz	16QAM	26740	25RB#25	20.88	PASS
26(814-824)	10MHz	QPSK	26740	50RB#0	21.81	PASS
26(814-824)	10MHz	16QAM	26740	50RB#0	20.79	PASS



**7.1.14. Conducted Power Measurement Results(LTE Band 26(824-849))**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
26(824-849)	1.4MHz	QPSK	26797	1RB#0	22.78	PASS
26(824-849)	1.4MHz	16QAM	26797	1RB#0	21.93	PASS
26(824-849)	1.4MHz	QPSK	26797	1RB#2	22.93	PASS
26(824-849)	1.4MHz	16QAM	26797	1RB#2	22.17	PASS
26(824-849)	1.4MHz	QPSK	26797	1RB#5	22.71	PASS
26(824-849)	1.4MHz	16QAM	26797	1RB#5	21.92	PASS
26(824-849)	1.4MHz	QPSK	26797	3RB#0	22.91	PASS
26(824-849)	1.4MHz	16QAM	26797	3RB#0	21.82	PASS
26(824-849)	1.4MHz	QPSK	26797	3RB#1	22.94	PASS
26(824-849)	1.4MHz	16QAM	26797	3RB#1	21.82	PASS
26(824-849)	1.4MHz	QPSK	26797	3RB#3	22.90	PASS
26(824-849)	1.4MHz	16QAM	26797	3RB#3	21.70	PASS
26(824-849)	1.4MHz	QPSK	26797	6RB#0	21.82	PASS
26(824-849)	1.4MHz	16QAM	26797	6RB#0	20.89	PASS
26(824-849)	1.4MHz	QPSK	26915	1RB#0	22.88	PASS
26(824-849)	1.4MHz	16QAM	26915	1RB#0	22.12	PASS
26(824-849)	1.4MHz	QPSK	26915	1RB#2	23.06	PASS
26(824-849)	1.4MHz	16QAM	26915	1RB#2	22.01	PASS
26(824-849)	1.4MHz	QPSK	26915	1RB#5	22.88	PASS
26(824-849)	1.4MHz	16QAM	26915	1RB#5	22.05	PASS
26(824-849)	1.4MHz	QPSK	26915	3RB#0	22.82	PASS
26(824-849)	1.4MHz	16QAM	26915	3RB#0	21.75	PASS
26(824-849)	1.4MHz	QPSK	26915	3RB#1	22.81	PASS
26(824-849)	1.4MHz	16QAM	26915	3RB#1	21.63	PASS
26(824-849)	1.4MHz	QPSK	26915	3RB#3	22.83	PASS
26(824-849)	1.4MHz	16QAM	26915	3RB#3	21.64	PASS
26(824-849)	1.4MHz	QPSK	26915	6RB#0	21.91	PASS
26(824-849)	1.4MHz	16QAM	26915	6RB#0	20.84	PASS
26(824-849)	1.4MHz	QPSK	27033	1RB#0	22.80	PASS
26(824-849)	1.4MHz	16QAM	27033	1RB#0	21.66	PASS
26(824-849)	1.4MHz	QPSK	27033	1RB#2	22.52	PASS
26(824-849)	1.4MHz	16QAM	27033	1RB#2	21.53	PASS
26(824-849)	1.4MHz	QPSK	27033	1RB#5	22.28	PASS
26(824-849)	1.4MHz	16QAM	27033	1RB#5	21.22	PASS
26(824-849)	1.4MHz	QPSK	27033	3RB#0	22.53	PASS
26(824-849)	1.4MHz	16QAM	27033	3RB#0	21.29	PASS
26(824-849)	1.4MHz	QPSK	27033	3RB#1	22.44	PASS
26(824-849)	1.4MHz	16QAM	27033	3RB#1	21.24	PASS
26(824-849)	1.4MHz	QPSK	27033	3RB#3	22.52	PASS
26(824-849)	1.4MHz	16QAM	27033	3RB#3	21.25	PASS
26(824-849)	1.4MHz	QPSK	27033	6RB#0	21.53	PASS
26(824-849)	1.4MHz	16QAM	27033	6RB#0	20.73	PASS
26(824-849)	3MHz	QPSK	26805	1RB#0	22.76	PASS
26(824-849)	3MHz	16QAM	26805	1RB#0	21.93	PASS
26(824-849)	3MHz	QPSK	26805	1RB#8	22.79	PASS
26(824-849)	3MHz	16QAM	26805	1RB#8	21.97	PASS
26(824-849)	3MHz	QPSK	26805	1RB#14	22.74	PASS
26(824-849)	3MHz	16QAM	26805	1RB#14	21.93	PASS
26(824-849)	3MHz	QPSK	26805	8RB#0	21.78	PASS
26(824-849)	3MHz	16QAM	26805	8RB#0	20.82	PASS
26(824-849)	3MHz	QPSK	26805	8RB#4	21.73	PASS
26(824-849)	3MHz	16QAM	26805	8RB#4	20.87	PASS
26(824-849)	3MHz	QPSK	26805	8RB#7	21.82	PASS
26(824-849)	3MHz	16QAM	26805	8RB#7	20.86	PASS
26(824-849)	3MHz	QPSK	26805	15RB#0	21.77	PASS
26(824-849)	3MHz	16QAM	26805	15RB#0	20.78	PASS
26(824-849)	3MHz	QPSK	26915	1RB#0	22.89	PASS
26(824-849)	3MHz	16QAM	26915	1RB#0	22.02	PASS
26(824-849)	3MHz	QPSK	26915	1RB#8	22.89	PASS
26(824-849)	3MHz	16QAM	26915	1RB#8	22.12	PASS





26(824-849)	3MHz	QPSK	26915	1RB#14	22.83	PASS
26(824-849)	3MHz	16QAM	26915	1RB#14	21.86	PASS
26(824-849)	3MHz	QPSK	26915	8RB#0	21.91	PASS
26(824-849)	3MHz	16QAM	26915	8RB#0	20.92	PASS
26(824-849)	3MHz	QPSK	26915	8RB#4	21.88	PASS
26(824-849)	3MHz	16QAM	26915	8RB#4	20.97	PASS
26(824-849)	3MHz	QPSK	26915	8RB#7	21.90	PASS
26(824-849)	3MHz	16QAM	26915	8RB#7	20.89	PASS
26(824-849)	3MHz	QPSK	26915	15RB#0	21.87	PASS
26(824-849)	3MHz	16QAM	26915	15RB#0	20.82	PASS
26(824-849)	3MHz	QPSK	27025	1RB#0	22.84	PASS
26(824-849)	3MHz	16QAM	27025	1RB#0	21.75	PASS
26(824-849)	3MHz	QPSK	27025	1RB#8	22.65	PASS
26(824-849)	3MHz	16QAM	27025	1RB#8	21.54	PASS
26(824-849)	3MHz	QPSK	27025	1RB#14	22.59	PASS
26(824-849)	3MHz	16QAM	27025	1RB#14	21.34	PASS
26(824-849)	3MHz	QPSK	27025	8RB#0	21.45	PASS
26(824-849)	3MHz	16QAM	27025	8RB#0	20.89	PASS
26(824-849)	3MHz	QPSK	27025	8RB#4	21.74	PASS
26(824-849)	3MHz	16QAM	27025	8RB#4	20.87	PASS
26(824-849)	3MHz	QPSK	27025	8RB#7	21.78	PASS
26(824-849)	3MHz	16QAM	27025	8RB#7	20.83	PASS
26(824-849)	3MHz	QPSK	27025	15RB#0	21.59	PASS
26(824-849)	3MHz	16QAM	27025	15RB#0	20.69	PASS
26(824-849)	5MHz	QPSK	26815	1RB#0	22.77	PASS
26(824-849)	5MHz	16QAM	26815	1RB#0	21.83	PASS
26(824-849)	5MHz	QPSK	26815	1RB#12	22.91	PASS
26(824-849)	5MHz	16QAM	26815	1RB#12	21.83	PASS
26(824-849)	5MHz	QPSK	26815	1RB#24	22.82	PASS
26(824-849)	5MHz	16QAM	26815	1RB#24	21.80	PASS
26(824-849)	5MHz	QPSK	26815	12RB#0	21.81	PASS
26(824-849)	5MHz	16QAM	26815	12RB#0	20.83	PASS
26(824-849)	5MHz	QPSK	26815	12RB#6	21.78	PASS
26(824-849)	5MHz	16QAM	26815	12RB#6	20.85	PASS
26(824-849)	5MHz	QPSK	26815	12RB#13	21.80	PASS
26(824-849)	5MHz	16QAM	26815	12RB#13	20.78	PASS
26(824-849)	5MHz	QPSK	26815	25RB#0	21.86	PASS
26(824-849)	5MHz	16QAM	26815	25RB#0	20.86	PASS
26(824-849)	5MHz	QPSK	26915	1RB#0	22.88	PASS
26(824-849)	5MHz	16QAM	26915	1RB#0	22.06	PASS
26(824-849)	5MHz	QPSK	26915	1RB#12	23.04	PASS
26(824-849)	5MHz	16QAM	26915	1RB#12	22.26	PASS
26(824-849)	5MHz	QPSK	26915	1RB#24	22.84	PASS
26(824-849)	5MHz	16QAM	26915	1RB#24	22.05	PASS
26(824-849)	5MHz	QPSK	26915	12RB#0	21.91	PASS
26(824-849)	5MHz	16QAM	26915	12RB#0	20.95	PASS
26(824-849)	5MHz	QPSK	26915	12RB#6	21.87	PASS
26(824-849)	5MHz	16QAM	26915	12RB#6	20.92	PASS
26(824-849)	5MHz	QPSK	26915	12RB#13	21.95	PASS
26(824-849)	5MHz	16QAM	26915	12RB#13	20.96	PASS
26(824-849)	5MHz	QPSK	26915	25RB#0	22.00	PASS
26(824-849)	5MHz	16QAM	26915	25RB#0	20.94	PASS
26(824-849)	5MHz	QPSK	27015	1RB#0	22.81	PASS
26(824-849)	5MHz	16QAM	27015	1RB#0	21.82	PASS
26(824-849)	5MHz	QPSK	27015	1RB#12	22.95	PASS
26(824-849)	5MHz	16QAM	27015	1RB#12	22.00	PASS
26(824-849)	5MHz	QPSK	27015	1RB#24	22.69	PASS
26(824-849)	5MHz	16QAM	27015	1RB#24	21.70	PASS
26(824-849)	5MHz	QPSK	27015	12RB#0	21.76	PASS
26(824-849)	5MHz	16QAM	27015	12RB#0	20.85	PASS
26(824-849)	5MHz	QPSK	27015	12RB#6	21.90	PASS
26(824-849)	5MHz	16QAM	27015	12RB#6	20.79	PASS
26(824-849)	5MHz	QPSK	27015	12RB#13	21.74	PASS
26(824-849)	5MHz	16QAM	27015	12RB#13	20.85	PASS
26(824-849)	5MHz	QPSK	27015	25RB#0	21.76	PASS





26(824-849)	5MHz	16QAM	27015	25RB#0	20.89	PASS
26(824-849)	10MHz	QPSK	26840	1RB#0	22.79	PASS
26(824-849)	10MHz	16QAM	26840	1RB#0	22.00	PASS
26(824-849)	10MHz	QPSK	26840	1RB#24	22.97	PASS
26(824-849)	10MHz	16QAM	26840	1RB#24	22.12	PASS
26(824-849)	10MHz	QPSK	26840	1RB#49	22.82	PASS
26(824-849)	10MHz	16QAM	26840	1RB#49	22.06	PASS
26(824-849)	10MHz	QPSK	26840	25RB#0	21.91	PASS
26(824-849)	10MHz	16QAM	26840	25RB#0	20.92	PASS
26(824-849)	10MHz	QPSK	26840	25RB#12	21.93	PASS
26(824-849)	10MHz	16QAM	26840	25RB#12	20.95	PASS
26(824-849)	10MHz	QPSK	26840	25RB#25	21.91	PASS
26(824-849)	10MHz	16QAM	26840	25RB#25	20.84	PASS
26(824-849)	10MHz	QPSK	26840	50RB#0	21.84	PASS
26(824-849)	10MHz	16QAM	26840	50RB#0	20.89	PASS
26(824-849)	10MHz	QPSK	26915	1RB#0	22.82	PASS
26(824-849)	10MHz	16QAM	26915	1RB#0	21.98	PASS
26(824-849)	10MHz	QPSK	26915	1RB#24	22.97	PASS
26(824-849)	10MHz	16QAM	26915	1RB#24	22.20	PASS
26(824-849)	10MHz	QPSK	26915	1RB#49	22.80	PASS
26(824-849)	10MHz	16QAM	26915	1RB#49	21.98	PASS
26(824-849)	10MHz	QPSK	26915	25RB#0	21.96	PASS
26(824-849)	10MHz	16QAM	26915	25RB#0	21.04	PASS
26(824-849)	10MHz	QPSK	26915	25RB#12	21.92	PASS
26(824-849)	10MHz	16QAM	26915	25RB#12	21.04	PASS
26(824-849)	10MHz	QPSK	26915	25RB#25	21.89	PASS
26(824-849)	10MHz	16QAM	26915	25RB#25	20.98	PASS
26(824-849)	10MHz	QPSK	26915	50RB#0	21.97	PASS
26(824-849)	10MHz	16QAM	26915	50RB#0	20.97	PASS
26(824-849)	10MHz	QPSK	26990	1RB#0	22.83	PASS
26(824-849)	10MHz	16QAM	26990	1RB#0	21.83	PASS
26(824-849)	10MHz	QPSK	26990	1RB#24	22.87	PASS
26(824-849)	10MHz	16QAM	26990	1RB#24	21.84	PASS
26(824-849)	10MHz	QPSK	26990	1RB#49	22.84	PASS
26(824-849)	10MHz	16QAM	26990	1RB#49	21.72	PASS
26(824-849)	10MHz	QPSK	26990	25RB#0	21.97	PASS
26(824-849)	10MHz	16QAM	26990	25RB#0	21.10	PASS
26(824-849)	10MHz	QPSK	26990	25RB#12	21.98	PASS
26(824-849)	10MHz	16QAM	26990	25RB#12	21.10	PASS
26(824-849)	10MHz	QPSK	26990	25RB#25	21.85	PASS
26(824-849)	10MHz	16QAM	26990	25RB#25	20.94	PASS
26(824-849)	10MHz	QPSK	26990	50RB#0	21.94	PASS
26(824-849)	10MHz	16QAM	26990	50RB#0	20.96	PASS
26(824-849)	15MHz	QPSK	26865	1RB#0	22.73	PASS
26(824-849)	15MHz	16QAM	26865	1RB#0	21.98	PASS
26(824-849)	15MHz	QPSK	26865	1RB#38	22.79	PASS
26(824-849)	15MHz	16QAM	26865	1RB#38	22.08	PASS
26(824-849)	15MHz	QPSK	26865	1RB#74	22.74	PASS
26(824-849)	15MHz	16QAM	26865	1RB#74	21.96	PASS
26(824-849)	15MHz	QPSK	26865	38RB#0	21.94	PASS
26(824-849)	15MHz	16QAM	26865	38RB#0	21.93	PASS
26(824-849)	15MHz	QPSK	26865	38RB#18	21.98	PASS
26(824-849)	15MHz	16QAM	26865	38RB#18	21.98	PASS
26(824-849)	15MHz	QPSK	26865	38RB#37	21.94	PASS
26(824-849)	15MHz	16QAM	26865	38RB#37	21.98	PASS
26(824-849)	15MHz	QPSK	26865	75RB#0	21.94	PASS
26(824-849)	15MHz	16QAM	26865	75RB#0	20.91	PASS
26(824-849)	15MHz	QPSK	26915	1RB#0	22.71	PASS
26(824-849)	15MHz	16QAM	26915	1RB#0	22.01	PASS
26(824-849)	15MHz	QPSK	26915	1RB#38	22.86	PASS
26(824-849)	15MHz	16QAM	26915	1RB#38	22.23	PASS
26(824-849)	15MHz	QPSK	26915	1RB#74	22.81	PASS
26(824-849)	15MHz	16QAM	26915	1RB#74	22.00	PASS
26(824-849)	15MHz	QPSK	26915	38RB#0	21.89	PASS
26(824-849)	15MHz	16QAM	26915	38RB#0	21.89	PASS





26(824-849)	15MHz	QPSK	26915	38RB#18	21.89	PASS
26(824-849)	15MHz	16QAM	26915	38RB#18	21.91	PASS
26(824-849)	15MHz	QPSK	26915	38RB#37	21.89	PASS
26(824-849)	15MHz	16QAM	26915	38RB#37	21.88	PASS
26(824-849)	15MHz	QPSK	26915	75RB#0	21.91	PASS
26(824-849)	15MHz	16QAM	26915	75RB#0	20.89	PASS
26(824-849)	15MHz	QPSK	26965	1RB#0	22.84	PASS
26(824-849)	15MHz	16QAM	26965	1RB#0	21.75	PASS
26(824-849)	15MHz	QPSK	26965	1RB#38	22.86	PASS
26(824-849)	15MHz	16QAM	26965	1RB#38	21.74	PASS
26(824-849)	15MHz	QPSK	26965	1RB#74	22.76	PASS
26(824-849)	15MHz	16QAM	26965	1RB#74	21.68	PASS
26(824-849)	15MHz	QPSK	26965	38RB#0	21.91	PASS
26(824-849)	15MHz	16QAM	26965	38RB#0	21.91	PASS
26(824-849)	15MHz	QPSK	26965	38RB#18	21.91	PASS
26(824-849)	15MHz	16QAM	26965	38RB#18	21.90	PASS
26(824-849)	15MHz	QPSK	26965	38RB#37	21.93	PASS
26(824-849)	15MHz	16QAM	26965	38RB#37	21.90	PASS
26(824-849)	15MHz	QPSK	26965	75RB#0	21.93	PASS
26(824-849)	15MHz	16QAM	26965	75RB#0	20.92	PASS



**7.1.15. Conducted Power Measurement Results(LTE Band 41)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band41	5MHz	QPSK	39675	1RB#0	24.12	PASS
Band41	5MHz	16QAM	39675	1RB#0	23.34	PASS
Band41	5MHz	QPSK	39675	1RB#12	24.22	PASS
Band41	5MHz	16QAM	39675	1RB#12	23.45	PASS
Band41	5MHz	QPSK	39675	1RB#24	24.11	PASS
Band41	5MHz	16QAM	39675	1RB#24	23.38	PASS
Band41	5MHz	QPSK	39675	12RB#0	23.07	PASS
Band41	5MHz	16QAM	39675	12RB#0	22.06	PASS
Band41	5MHz	QPSK	39675	12RB#6	23.09	PASS
Band41	5MHz	16QAM	39675	12RB#6	22.02	PASS
Band41	5MHz	QPSK	39675	12RB#13	23.12	PASS
Band41	5MHz	16QAM	39675	12RB#13	22.06	PASS
Band41	5MHz	QPSK	39675	25RB#0	23.10	PASS
Band41	5MHz	16QAM	39675	25RB#0	22.10	PASS
Band41	5MHz	QPSK	40620	1RB#0	24.23	PASS
Band41	5MHz	16QAM	40620	1RB#0	23.49	PASS
Band41	5MHz	QPSK	40620	1RB#12	24.34	PASS
Band41	5MHz	16QAM	40620	1RB#12	23.62	PASS
Band41	5MHz	QPSK	40620	1RB#24	24.24	PASS
Band41	5MHz	16QAM	40620	1RB#24	23.54	PASS
Band41	5MHz	QPSK	40620	12RB#0	23.24	PASS
Band41	5MHz	16QAM	40620	12RB#0	22.21	PASS
Band41	5MHz	QPSK	40620	12RB#6	23.24	PASS
Band41	5MHz	16QAM	40620	12RB#6	22.21	PASS
Band41	5MHz	QPSK	40620	12RB#13	23.26	PASS
Band41	5MHz	16QAM	40620	12RB#13	22.22	PASS
Band41	5MHz	QPSK	40620	25RB#0	23.28	PASS
Band41	5MHz	16QAM	40620	25RB#0	22.28	PASS
Band41	5MHz	QPSK	41565	1RB#0	24.37	PASS
Band41	5MHz	16QAM	41565	1RB#0	23.64	PASS
Band41	5MHz	QPSK	41565	1RB#12	24.48	PASS
Band41	5MHz	16QAM	41565	1RB#12	23.76	PASS
Band41	5MHz	QPSK	41565	1RB#24	24.41	PASS
Band41	5MHz	16QAM	41565	1RB#24	23.66	PASS
Band41	5MHz	QPSK	41565	12RB#0	23.39	PASS
Band41	5MHz	16QAM	41565	12RB#0	22.35	PASS
Band41	5MHz	QPSK	41565	12RB#6	23.37	PASS
Band41	5MHz	16QAM	41565	12RB#6	22.32	PASS
Band41	5MHz	QPSK	41565	12RB#13	23.37	PASS
Band41	5MHz	16QAM	41565	12RB#13	22.33	PASS
Band41	5MHz	QPSK	41565	25RB#0	23.38	PASS
Band41	5MHz	16QAM	41565	25RB#0	22.39	PASS
Band41	10MHz	QPSK	39700	1RB#0	24.17	PASS
Band41	10MHz	16QAM	39700	1RB#0	23.44	PASS
Band41	10MHz	QPSK	39700	1RB#24	24.35	PASS
Band41	10MHz	16QAM	39700	1RB#24	23.61	PASS
Band41	10MHz	QPSK	39700	1RB#49	24.23	PASS
Band41	10MHz	16QAM	39700	1RB#49	23.47	PASS
Band41	10MHz	QPSK	39700	25RB#0	23.19	PASS
Band41	10MHz	16QAM	39700	25RB#0	22.28	PASS
Band41	10MHz	QPSK	39700	25RB#12	23.20	PASS
Band41	10MHz	16QAM	39700	25RB#12	22.23	PASS
Band41	10MHz	QPSK	39700	25RB#25	23.16	PASS
Band41	10MHz	16QAM	39700	25RB#25	22.21	PASS
Band41	10MHz	QPSK	39700	50RB#0	23.22	PASS
Band41	10MHz	16QAM	39700	50RB#0	22.17	PASS
Band41	10MHz	QPSK	40620	1RB#0	24.24	PASS
Band41	10MHz	16QAM	40620	1RB#0	23.49	PASS
Band41	10MHz	QPSK	40620	1RB#24	24.50	PASS
Band41	10MHz	16QAM	40620	1RB#24	23.73	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band41	10MHz	QPSK	40620	1RB#49	24.30	PASS
Band41	10MHz	16QAM	40620	1RB#49	23.58	PASS
Band41	10MHz	QPSK	40620	25RB#0	23.31	PASS
Band41	10MHz	16QAM	40620	25RB#0	22.37	PASS
Band41	10MHz	QPSK	40620	25RB#12	23.30	PASS
Band41	10MHz	16QAM	40620	25RB#12	22.39	PASS
Band41	10MHz	QPSK	40620	25RB#25	23.29	PASS
Band41	10MHz	16QAM	40620	25RB#25	22.35	PASS
Band41	10MHz	QPSK	40620	50RB#0	23.28	PASS
Band41	10MHz	16QAM	40620	50RB#0	22.27	PASS
Band41	10MHz	QPSK	41540	1RB#0	24.44	PASS
Band41	10MHz	16QAM	41540	1RB#0	23.71	PASS
Band41	10MHz	QPSK	41540	1RB#24	24.66	PASS
Band41	10MHz	16QAM	41540	1RB#24	23.90	PASS
Band41	10MHz	QPSK	41540	1RB#49	24.44	PASS
Band41	10MHz	16QAM	41540	1RB#49	23.69	PASS
Band41	10MHz	QPSK	41540	25RB#0	23.50	PASS
Band41	10MHz	16QAM	41540	25RB#0	22.57	PASS
Band41	10MHz	QPSK	41540	25RB#12	23.49	PASS
Band41	10MHz	16QAM	41540	25RB#12	22.57	PASS
Band41	10MHz	QPSK	41540	25RB#25	23.40	PASS
Band41	10MHz	16QAM	41540	25RB#25	22.47	PASS
Band41	10MHz	QPSK	41540	50RB#0	23.46	PASS
Band41	10MHz	16QAM	41540	50RB#0	22.50	PASS
Band41	15MHz	QPSK	39725	1RB#0	24.07	PASS
Band41	15MHz	16QAM	39725	1RB#0	23.32	PASS
Band41	15MHz	QPSK	39725	1RB#38	24.19	PASS
Band41	15MHz	16QAM	39725	1RB#38	23.46	PASS
Band41	15MHz	QPSK	39725	1RB#74	24.21	PASS
Band41	15MHz	16QAM	39725	1RB#74	23.48	PASS
Band41	15MHz	QPSK	39725	38RB#0	23.24	PASS
Band41	15MHz	16QAM	39725	38RB#0	23.24	PASS
Band41	15MHz	QPSK	39725	38RB#18	23.25	PASS
Band41	15MHz	16QAM	39725	38RB#18	23.25	PASS
Band41	15MHz	QPSK	39725	38RB#37	23.25	PASS
Band41	15MHz	16QAM	39725	38RB#37	23.23	PASS
Band41	15MHz	QPSK	39725	75RB#0	23.23	PASS
Band41	15MHz	16QAM	39725	75RB#0	22.19	PASS
Band41	15MHz	QPSK	40620	1RB#0	24.17	PASS
Band41	15MHz	16QAM	40620	1RB#0	23.48	PASS
Band41	15MHz	QPSK	40620	1RB#38	24.30	PASS
Band41	15MHz	16QAM	40620	1RB#38	23.58	PASS
Band41	15MHz	QPSK	40620	1RB#74	24.28	PASS
Band41	15MHz	16QAM	40620	1RB#74	23.57	PASS
Band41	15MHz	QPSK	40620	38RB#0	23.38	PASS
Band41	15MHz	16QAM	40620	38RB#0	23.40	PASS
Band41	15MHz	QPSK	40620	38RB#18	23.38	PASS
Band41	15MHz	16QAM	40620	38RB#18	23.40	PASS
Band41	15MHz	QPSK	40620	38RB#37	23.38	PASS
Band41	15MHz	16QAM	40620	38RB#37	23.40	PASS
Band41	15MHz	QPSK	40620	75RB#0	23.40	PASS
Band41	15MHz	16QAM	40620	75RB#0	22.38	PASS
Band41	15MHz	QPSK	41515	1RB#0	24.41	PASS
Band41	15MHz	16QAM	41515	1RB#0	23.71	PASS
Band41	15MHz	QPSK	41515	1RB#38	24.42	PASS
Band41	15MHz	16QAM	41515	1RB#38	23.71	PASS
Band41	15MHz	QPSK	41515	1RB#74	24.37	PASS
Band41	15MHz	16QAM	41515	1RB#74	23.59	PASS
Band41	15MHz	QPSK	41515	38RB#0	23.48	PASS
Band41	15MHz	16QAM	41515	38RB#0	23.48	PASS
Band41	15MHz	QPSK	41515	38RB#18	23.50	PASS
Band41	15MHz	16QAM	41515	38RB#18	23.53	PASS
Band41	15MHz	QPSK	41515	38RB#37	23.48	PASS
Band41	15MHz	16QAM	41515	38RB#37	23.53	PASS
Band41	15MHz	QPSK	41515	75RB#0	23.50	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band41	15MHz	16QAM	41515	75RB#0	22.52	PASS
Band41	20MHz	QPSK	39750	1RB#0	23.91	PASS
Band41	20MHz	16QAM	39750	1RB#0	23.03	PASS
Band41	20MHz	QPSK	39750	1RB#49	24.47	PASS
Band41	20MHz	16QAM	39750	1RB#49	23.61	PASS
Band41	20MHz	QPSK	39750	1RB#99	24.24	PASS
Band41	20MHz	16QAM	39750	1RB#99	23.35	PASS
Band41	20MHz	QPSK	39750	50RB#0	23.24	PASS
Band41	20MHz	16QAM	39750	50RB#0	22.21	PASS
Band41	20MHz	QPSK	39750	50RB#25	23.20	PASS
Band41	20MHz	16QAM	39750	50RB#25	22.21	PASS
Band41	20MHz	QPSK	39750	50RB#50	23.34	PASS
Band41	20MHz	16QAM	39750	50RB#50	22.35	PASS
Band41	20MHz	QPSK	39750	100RB#0	23.28	PASS
Band41	20MHz	16QAM	39750	100RB#0	22.28	PASS
Band41	20MHz	QPSK	40620	1RB#0	23.99	PASS
Band41	20MHz	16QAM	40620	1RB#0	23.14	PASS
Band41	20MHz	QPSK	40620	1RB#49	24.51	PASS
Band41	20MHz	16QAM	40620	1RB#49	23.66	PASS
Band41	20MHz	QPSK	40620	1RB#99	24.34	PASS
Band41	20MHz	16QAM	40620	1RB#99	23.49	PASS
Band41	20MHz	QPSK	40620	50RB#0	23.29	PASS
Band41	20MHz	16QAM	40620	50RB#0	22.29	PASS
Band41	20MHz	QPSK	40620	50RB#25	23.29	PASS
Band41	20MHz	16QAM	40620	50RB#25	22.30	PASS
Band41	20MHz	QPSK	40620	50RB#50	23.41	PASS
Band41	20MHz	16QAM	40620	50RB#50	22.44	PASS
Band41	20MHz	QPSK	40620	100RB#0	23.37	PASS
Band41	20MHz	16QAM	40620	100RB#0	22.32	PASS
Band41	20MHz	QPSK	41490	1RB#0	24.19	PASS
Band41	20MHz	16QAM	41490	1RB#0	23.34	PASS
Band41	20MHz	QPSK	41490	1RB#49	24.50	PASS
Band41	20MHz	16QAM	41490	1RB#49	23.65	PASS
Band41	20MHz	QPSK	41490	1RB#99	24.19	PASS
Band41	20MHz	16QAM	41490	1RB#99	23.35	PASS
Band41	20MHz	QPSK	41490	50RB#0	23.40	PASS
Band41	20MHz	16QAM	41490	50RB#0	22.43	PASS
Band41	20MHz	QPSK	41490	50RB#25	23.40	PASS
Band41	20MHz	16QAM	41490	50RB#25	22.44	PASS
Band41	20MHz	QPSK	41490	50RB#50	23.34	PASS
Band41	20MHz	16QAM	41490	50RB#50	22.32	PASS
Band41	20MHz	QPSK	41490	100RB#0	23.41	PASS
Band41	20MHz	16QAM	41490	100RB#0	22.39	PASS



**7.1.16. Conducted Power Measurement Results(LTE Band 66)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band66	1.4MHz	QPSK	131979	1RB#0	22.61	PASS
Band66	1.4MHz	16QAM	131979	1RB#0	21.77	PASS
Band66	1.4MHz	QPSK	131979	1RB#2	22.78	PASS
Band66	1.4MHz	16QAM	131979	1RB#2	21.83	PASS
Band66	1.4MHz	QPSK	131979	1RB#5	22.63	PASS
Band66	1.4MHz	16QAM	131979	1RB#5	21.74	PASS
Band66	1.4MHz	QPSK	131979	3RB#0	22.74	PASS
Band66	1.4MHz	16QAM	131979	3RB#0	21.59	PASS
Band66	1.4MHz	QPSK	131979	3RB#1	22.73	PASS
Band66	1.4MHz	16QAM	131979	3RB#1	21.61	PASS
Band66	1.4MHz	QPSK	131979	3RB#3	22.74	PASS
Band66	1.4MHz	16QAM	131979	3RB#3	21.62	PASS
Band66	1.4MHz	QPSK	131979	6RB#0	21.68	PASS
Band66	1.4MHz	16QAM	131979	6RB#0	20.73	PASS
Band66	1.4MHz	QPSK	132322	1RB#0	22.62	PASS
Band66	1.4MHz	16QAM	132322	1RB#0	21.76	PASS
Band66	1.4MHz	QPSK	132322	1RB#2	22.77	PASS
Band66	1.4MHz	16QAM	132322	1RB#2	21.84	PASS
Band66	1.4MHz	QPSK	132322	1RB#5	22.61	PASS
Band66	1.4MHz	16QAM	132322	1RB#5	21.76	PASS
Band66	1.4MHz	QPSK	132322	3RB#0	22.71	PASS
Band66	1.4MHz	16QAM	132322	3RB#0	21.58	PASS
Band66	1.4MHz	QPSK	132322	3RB#1	22.69	PASS
Band66	1.4MHz	16QAM	132322	3RB#1	21.62	PASS
Band66	1.4MHz	QPSK	132322	3RB#3	22.74	PASS
Band66	1.4MHz	16QAM	132322	3RB#3	21.60	PASS
Band66	1.4MHz	QPSK	132322	6RB#0	21.65	PASS
Band66	1.4MHz	16QAM	132322	6RB#0	20.56	PASS
Band66	1.4MHz	QPSK	132665	1RB#0	22.57	PASS
Band66	1.4MHz	16QAM	132665	1RB#0	21.68	PASS
Band66	1.4MHz	QPSK	132665	1RB#2	22.68	PASS
Band66	1.4MHz	16QAM	132665	1RB#2	21.89	PASS
Band66	1.4MHz	QPSK	132665	1RB#5	22.58	PASS
Band66	1.4MHz	16QAM	132665	1RB#5	21.73	PASS
Band66	1.4MHz	QPSK	132665	3RB#0	22.72	PASS
Band66	1.4MHz	16QAM	132665	3RB#0	21.58	PASS
Band66	1.4MHz	QPSK	132665	3RB#1	22.69	PASS
Band66	1.4MHz	16QAM	132665	3RB#1	21.57	PASS
Band66	1.4MHz	QPSK	132665	3RB#3	22.70	PASS
Band66	1.4MHz	16QAM	132665	3RB#3	21.55	PASS
Band66	1.4MHz	QPSK	132665	6RB#0	21.60	PASS
Band66	1.4MHz	16QAM	132665	6RB#0	20.71	PASS
Band66	3MHz	QPSK	131987	1RB#0	22.65	PASS
Band66	3MHz	16QAM	131987	1RB#0	21.85	PASS
Band66	3MHz	QPSK	131987	1RB#8	22.64	PASS
Band66	3MHz	16QAM	131987	1RB#8	21.81	PASS
Band66	3MHz	QPSK	131987	1RB#14	22.64	PASS
Band66	3MHz	16QAM	131987	1RB#14	21.77	PASS
Band66	3MHz	QPSK	131987	8RB#0	21.69	PASS
Band66	3MHz	16QAM	131987	8RB#0	20.74	PASS
Band66	3MHz	QPSK	131987	8RB#4	21.68	PASS
Band66	3MHz	16QAM	131987	8RB#4	20.74	PASS
Band66	3MHz	QPSK	131987	8RB#7	21.66	PASS
Band66	3MHz	16QAM	131987	8RB#7	20.70	PASS
Band66	3MHz	QPSK	131987	15RB#0	21.64	PASS
Band66	3MHz	16QAM	131987	15RB#0	20.64	PASS
Band66	3MHz	QPSK	132322	1RB#0	22.68	PASS
Band66	3MHz	16QAM	132322	1RB#0	21.87	PASS
Band66	3MHz	QPSK	132322	1RB#8	22.66	PASS
Band66	3MHz	16QAM	132322	1RB#8	21.76	PASS





Band66	3MHz	QPSK	132322	1RB#14	22.67	PASS
Band66	3MHz	16QAM	132322	1RB#14	21.76	PASS
Band66	3MHz	QPSK	132322	8RB#0	21.62	PASS
Band66	3MHz	16QAM	132322	8RB#0	20.66	PASS
Band66	3MHz	QPSK	132322	8RB#4	21.63	PASS
Band66	3MHz	16QAM	132322	8RB#4	20.64	PASS
Band66	3MHz	QPSK	132322	8RB#7	21.62	PASS
Band66	3MHz	16QAM	132322	8RB#7	20.63	PASS
Band66	3MHz	QPSK	132322	15RB#0	21.60	PASS
Band66	3MHz	16QAM	132322	15RB#0	20.54	PASS
Band66	3MHz	QPSK	132657	1RB#0	22.56	PASS
Band66	3MHz	16QAM	132657	1RB#0	21.78	PASS
Band66	3MHz	QPSK	132657	1RB#8	22.62	PASS
Band66	3MHz	16QAM	132657	1RB#8	21.75	PASS
Band66	3MHz	QPSK	132657	1RB#14	22.60	PASS
Band66	3MHz	16QAM	132657	1RB#14	21.74	PASS
Band66	3MHz	QPSK	132657	8RB#0	21.64	PASS
Band66	3MHz	16QAM	132657	8RB#0	20.68	PASS
Band66	3MHz	QPSK	132657	8RB#4	21.66	PASS
Band66	3MHz	16QAM	132657	8RB#4	20.68	PASS
Band66	3MHz	QPSK	132657	8RB#7	21.65	PASS
Band66	3MHz	16QAM	132657	8RB#7	20.71	PASS
Band66	3MHz	QPSK	132657	15RB#0	21.63	PASS
Band66	3MHz	16QAM	132657	15RB#0	20.63	PASS
Band66	5MHz	QPSK	131997	1RB#0	22.66	PASS
Band66	5MHz	16QAM	131997	1RB#0	21.65	PASS
Band66	5MHz	QPSK	131997	1RB#12	22.74	PASS
Band66	5MHz	16QAM	131997	1RB#12	21.70	PASS
Band66	5MHz	QPSK	131997	1RB#24	22.60	PASS
Band66	5MHz	16QAM	131997	1RB#24	21.62	PASS
Band66	5MHz	QPSK	131997	12RB#0	21.58	PASS
Band66	5MHz	16QAM	131997	12RB#0	20.62	PASS
Band66	5MHz	QPSK	131997	12RB#6	21.61	PASS
Band66	5MHz	16QAM	131997	12RB#6	20.60	PASS
Band66	5MHz	QPSK	131997	12RB#13	21.65	PASS
Band66	5MHz	16QAM	131997	12RB#13	20.64	PASS
Band66	5MHz	QPSK	131997	25RB#0	21.68	PASS
Band66	5MHz	16QAM	131997	25RB#0	20.73	PASS
Band66	5MHz	QPSK	132322	1RB#0	22.66	PASS
Band66	5MHz	16QAM	132322	1RB#0	21.80	PASS
Band66	5MHz	QPSK	132322	1RB#12	22.75	PASS
Band66	5MHz	16QAM	132322	1RB#12	21.88	PASS
Band66	5MHz	QPSK	132322	1RB#24	22.62	PASS
Band66	5MHz	16QAM	132322	1RB#24	21.77	PASS
Band66	5MHz	QPSK	132322	12RB#0	21.63	PASS
Band66	5MHz	16QAM	132322	12RB#0	20.63	PASS
Band66	5MHz	QPSK	132322	12RB#6	21.61	PASS
Band66	5MHz	16QAM	132322	12RB#6	20.67	PASS
Band66	5MHz	QPSK	132322	12RB#13	21.62	PASS
Band66	5MHz	16QAM	132322	12RB#13	20.65	PASS
Band66	5MHz	QPSK	132322	25RB#0	21.61	PASS
Band66	5MHz	16QAM	132322	25RB#0	20.65	PASS
Band66	5MHz	QPSK	132647	1RB#0	22.53	PASS
Band66	5MHz	16QAM	132647	1RB#0	21.47	PASS
Band66	5MHz	QPSK	132647	1RB#12	22.66	PASS
Band66	5MHz	16QAM	132647	1RB#12	21.68	PASS
Band66	5MHz	QPSK	132647	1RB#24	22.55	PASS
Band66	5MHz	16QAM	132647	1RB#24	21.61	PASS
Band66	5MHz	QPSK	132647	12RB#0	21.68	PASS
Band66	5MHz	16QAM	132647	12RB#0	20.58	PASS
Band66	5MHz	QPSK	132647	12RB#6	21.61	PASS
Band66	5MHz	16QAM	132647	12RB#6	20.60	PASS
Band66	5MHz	QPSK	132647	12RB#13	21.61	PASS
Band66	5MHz	16QAM	132647	12RB#13	20.53	PASS
Band66	5MHz	QPSK	132647	25RB#0	21.64	PASS





Band66	5MHz	16QAM	132647	25RB#0	20.63	PASS
Band66	10MHz	QPSK	132022	1RB#0	22.65	PASS
Band66	10MHz	16QAM	132022	1RB#0	21.86	PASS
Band66	10MHz	QPSK	132022	1RB#24	22.77	PASS
Band66	10MHz	16QAM	132022	1RB#24	21.83	PASS
Band66	10MHz	QPSK	132022	1RB#49	22.60	PASS
Band66	10MHz	16QAM	132022	1RB#49	21.74	PASS
Band66	10MHz	QPSK	132022	25RB#0	21.63	PASS
Band66	10MHz	16QAM	132022	25RB#0	20.62	PASS
Band66	10MHz	QPSK	132022	25RB#12	21.59	PASS
Band66	10MHz	16QAM	132022	25RB#12	20.60	PASS
Band66	10MHz	QPSK	132022	25RB#25	21.65	PASS
Band66	10MHz	16QAM	132022	25RB#25	20.68	PASS
Band66	10MHz	QPSK	132022	50RB#0	21.62	PASS
Band66	10MHz	16QAM	132022	50RB#0	20.67	PASS
Band66	10MHz	QPSK	132322	1RB#0	22.62	PASS
Band66	10MHz	16QAM	132322	1RB#0	21.79	PASS
Band66	10MHz	QPSK	132322	1RB#24	22.80	PASS
Band66	10MHz	16QAM	132322	1RB#24	21.92	PASS
Band66	10MHz	QPSK	132322	1RB#49	22.59	PASS
Band66	10MHz	16QAM	132322	1RB#49	21.76	PASS
Band66	10MHz	QPSK	132322	25RB#0	21.64	PASS
Band66	10MHz	16QAM	132322	25RB#0	20.65	PASS
Band66	10MHz	QPSK	132322	25RB#12	21.61	PASS
Band66	10MHz	16QAM	132322	25RB#12	20.63	PASS
Band66	10MHz	QPSK	132322	25RB#25	21.65	PASS
Band66	10MHz	16QAM	132322	25RB#25	20.68	PASS
Band66	10MHz	QPSK	132322	50RB#0	21.67	PASS
Band66	10MHz	16QAM	132322	50RB#0	20.72	PASS
Band66	10MHz	QPSK	132622	1RB#0	22.56	PASS
Band66	10MHz	16QAM	132622	1RB#0	21.72	PASS
Band66	10MHz	QPSK	132622	1RB#24	22.64	PASS
Band66	10MHz	16QAM	132622	1RB#24	21.81	PASS
Band66	10MHz	QPSK	132622	1RB#49	22.58	PASS
Band66	10MHz	16QAM	132622	1RB#49	21.76	PASS
Band66	10MHz	QPSK	132622	25RB#0	21.69	PASS
Band66	10MHz	16QAM	132622	25RB#0	20.73	PASS
Band66	10MHz	QPSK	132622	25RB#12	21.70	PASS
Band66	10MHz	16QAM	132622	25RB#12	20.71	PASS
Band66	10MHz	QPSK	132622	25RB#25	21.53	PASS
Band66	10MHz	16QAM	132622	25RB#25	20.52	PASS
Band66	10MHz	QPSK	132622	50RB#0	21.59	PASS
Band66	10MHz	16QAM	132622	50RB#0	20.63	PASS
Band66	15MHz	QPSK	132047	1RB#0	22.58	PASS
Band66	15MHz	16QAM	132047	1RB#0	21.75	PASS
Band66	15MHz	QPSK	132047	1RB#38	22.64	PASS
Band66	15MHz	16QAM	132047	1RB#38	21.82	PASS
Band66	15MHz	QPSK	132047	1RB#74	22.48	PASS
Band66	15MHz	16QAM	132047	1RB#74	21.70	PASS
Band66	15MHz	QPSK	132047	38RB#0	21.66	PASS
Band66	15MHz	16QAM	132047	38RB#0	21.70	PASS
Band66	15MHz	QPSK	132047	38RB#18	21.73	PASS
Band66	15MHz	16QAM	132047	38RB#18	21.65	PASS
Band66	15MHz	QPSK	132047	38RB#37	21.67	PASS
Band66	15MHz	16QAM	132047	38RB#37	21.70	PASS
Band66	15MHz	QPSK	132047	75RB#0	21.70	PASS
Band66	15MHz	16QAM	132047	75RB#0	20.56	PASS
Band66	15MHz	QPSK	132322	1RB#0	22.60	PASS
Band66	15MHz	16QAM	132322	1RB#0	21.86	PASS
Band66	15MHz	QPSK	132322	1RB#38	22.66	PASS
Band66	15MHz	16QAM	132322	1RB#38	21.94	PASS
Band66	15MHz	QPSK	132322	1RB#74	22.54	PASS
Band66	15MHz	16QAM	132322	1RB#74	21.78	PASS
Band66	15MHz	QPSK	132322	38RB#0	21.72	PASS
Band66	15MHz	16QAM	132322	38RB#0	21.68	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band66	15MHz	QPSK	132322	38RB#18	21.70	PASS
Band66	15MHz	16QAM	132322	38RB#18	21.71	PASS
Band66	15MHz	QPSK	132322	38RB#37	21.76	PASS
Band66	15MHz	16QAM	132322	38RB#37	21.70	PASS
Band66	15MHz	QPSK	132322	75RB#0	21.76	PASS
Band66	15MHz	16QAM	132322	75RB#0	20.72	PASS
Band66	15MHz	QPSK	132597	1RB#0	22.55	PASS
Band66	15MHz	16QAM	132597	1RB#0	21.62	PASS
Band66	15MHz	QPSK	132597	1RB#38	22.60	PASS
Band66	15MHz	16QAM	132597	1RB#38	21.76	PASS
Band66	15MHz	QPSK	132597	1RB#74	22.49	PASS
Band66	15MHz	16QAM	132597	1RB#74	21.68	PASS
Band66	15MHz	QPSK	132597	38RB#0	21.76	PASS
Band66	15MHz	16QAM	132597	38RB#0	21.73	PASS
Band66	15MHz	QPSK	132597	38RB#18	21.76	PASS
Band66	15MHz	16QAM	132597	38RB#18	21.71	PASS
Band66	15MHz	QPSK	132597	38RB#37	21.72	PASS
Band66	15MHz	16QAM	132597	38RB#37	21.75	PASS
Band66	15MHz	QPSK	132597	75RB#0	21.76	PASS
Band66	15MHz	16QAM	132597	75RB#0	20.61	PASS
Band66	20MHz	QPSK	132072	1RB#0	22.49	PASS
Band66	20MHz	16QAM	132072	1RB#0	21.47	PASS
Band66	20MHz	QPSK	132072	1RB#49	22.83	PASS
Band66	20MHz	16QAM	132072	1RB#49	21.83	PASS
Band66	20MHz	QPSK	132072	1RB#99	22.46	PASS
Band66	20MHz	16QAM	132072	1RB#99	21.51	PASS
Band66	20MHz	QPSK	132072	50RB#0	21.59	PASS
Band66	20MHz	16QAM	132072	50RB#0	20.57	PASS
Band66	20MHz	QPSK	132072	50RB#25	21.57	PASS
Band66	20MHz	16QAM	132072	50RB#25	20.56	PASS
Band66	20MHz	QPSK	132072	50RB#50	21.58	PASS
Band66	20MHz	16QAM	132072	50RB#50	20.59	PASS
Band66	20MHz	QPSK	132072	100RB#0	21.56	PASS
Band66	20MHz	16QAM	132072	100RB#0	20.57	PASS
Band66	20MHz	QPSK	132322	1RB#0	22.51	PASS
Band66	20MHz	16QAM	132322	1RB#0	21.63	PASS
Band66	20MHz	QPSK	132322	1RB#49	22.72	PASS
Band66	20MHz	16QAM	132322	1RB#49	21.94	PASS
Band66	20MHz	QPSK	132322	1RB#99	22.35	PASS
Band66	20MHz	16QAM	132322	1RB#99	21.50	PASS
Band66	20MHz	QPSK	132322	50RB#0	21.60	PASS
Band66	20MHz	16QAM	132322	50RB#0	20.65	PASS
Band66	20MHz	QPSK	132322	50RB#25	21.67	PASS
Band66	20MHz	16QAM	132322	50RB#25	20.66	PASS
Band66	20MHz	QPSK	132322	50RB#50	21.71	PASS
Band66	20MHz	16QAM	132322	50RB#50	20.72	PASS
Band66	20MHz	QPSK	132322	100RB#0	21.65	PASS
Band66	20MHz	16QAM	132322	100RB#0	20.69	PASS
Band66	20MHz	QPSK	132572	1RB#0	22.39	PASS
Band66	20MHz	16QAM	132572	1RB#0	21.40	PASS
Band66	20MHz	QPSK	132572	1RB#49	22.79	PASS
Band66	20MHz	16QAM	132572	1RB#49	21.78	PASS
Band66	20MHz	QPSK	132572	1RB#99	22.36	PASS
Band66	20MHz	16QAM	132572	1RB#99	21.46	PASS
Band66	20MHz	QPSK	132572	50RB#0	21.66	PASS
Band66	20MHz	16QAM	132572	50RB#0	20.68	PASS
Band66	20MHz	QPSK	132572	50RB#25	21.71	PASS
Band66	20MHz	16QAM	132572	50RB#25	20.67	PASS
Band66	20MHz	QPSK	132572	50RB#50	21.42	PASS
Band66	20MHz	16QAM	132572	50RB#50	20.47	PASS
Band66	20MHz	QPSK	132572	100RB#0	21.57	PASS
Band66	20MHz	16QAM	132572	100RB#0	20.53	PASS



**7.1.17. Conducted Power Measurement Results(LTE Band 71)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band71	5MHz	QPSK	133147	1RB#0	22.85	PASS
Band71	5MHz	16QAM	133147	1RB#0	21.87	PASS
Band71	5MHz	QPSK	133147	1RB#12	23.02	PASS
Band71	5MHz	16QAM	133147	1RB#12	22.01	PASS
Band71	5MHz	QPSK	133147	1RB#24	22.78	PASS
Band71	5MHz	16QAM	133147	1RB#24	21.88	PASS
Band71	5MHz	QPSK	133147	12RB#0	21.87	PASS
Band71	5MHz	16QAM	133147	12RB#0	20.86	PASS
Band71	5MHz	QPSK	133147	12RB#6	21.89	PASS
Band71	5MHz	16QAM	133147	12RB#6	20.84	PASS
Band71	5MHz	QPSK	133147	12RB#13	21.97	PASS
Band71	5MHz	16QAM	133147	12RB#13	20.92	PASS
Band71	5MHz	QPSK	133147	25RB#0	21.92	PASS
Band71	5MHz	16QAM	133147	25RB#0	20.93	PASS
Band71	5MHz	QPSK	133297	1RB#0	22.82	PASS
Band71	5MHz	16QAM	133297	1RB#0	22.03	PASS
Band71	5MHz	QPSK	133297	1RB#12	22.90	PASS
Band71	5MHz	16QAM	133297	1RB#12	22.20	PASS
Band71	5MHz	QPSK	133297	1RB#24	22.75	PASS
Band71	5MHz	16QAM	133297	1RB#24	22.05	PASS
Band71	5MHz	QPSK	133297	12RB#0	21.89	PASS
Band71	5MHz	16QAM	133297	12RB#0	20.86	PASS
Band71	5MHz	QPSK	133297	12RB#6	21.87	PASS
Band71	5MHz	16QAM	133297	12RB#6	20.90	PASS
Band71	5MHz	QPSK	133297	12RB#13	21.78	PASS
Band71	5MHz	16QAM	133297	12RB#13	20.88	PASS
Band71	5MHz	QPSK	133297	25RB#0	21.89	PASS
Band71	5MHz	16QAM	133297	25RB#0	20.88	PASS
Band71	5MHz	QPSK	133447	1RB#0	22.78	PASS
Band71	5MHz	16QAM	133447	1RB#0	21.91	PASS
Band71	5MHz	QPSK	133447	1RB#12	22.91	PASS
Band71	5MHz	16QAM	133447	1RB#12	21.99	PASS
Band71	5MHz	QPSK	133447	1RB#24	22.78	PASS
Band71	5MHz	16QAM	133447	1RB#24	21.89	PASS
Band71	5MHz	QPSK	133447	12RB#0	21.96	PASS
Band71	5MHz	16QAM	133447	12RB#0	20.94	PASS
Band71	5MHz	QPSK	133447	12RB#6	21.94	PASS
Band71	5MHz	16QAM	133447	12RB#6	20.91	PASS
Band71	5MHz	QPSK	133447	12RB#13	21.86	PASS
Band71	5MHz	16QAM	133447	12RB#13	20.84	PASS
Band71	5MHz	QPSK	133447	25RB#0	21.90	PASS
Band71	5MHz	16QAM	133447	25RB#0	20.96	PASS
Band71	10MHz	QPSK	133172	1RB#0	22.82	PASS
Band71	10MHz	16QAM	133172	1RB#0	22.06	PASS
Band71	10MHz	QPSK	133172	1RB#24	22.93	PASS
Band71	10MHz	16QAM	133172	1RB#24	22.22	PASS
Band71	10MHz	QPSK	133172	1RB#49	22.77	PASS
Band71	10MHz	16QAM	133172	1RB#49	22.02	PASS
Band71	10MHz	QPSK	133172	25RB#0	21.91	PASS
Band71	10MHz	16QAM	133172	25RB#0	20.92	PASS
Band71	10MHz	QPSK	133172	25RB#12	21.90	PASS
Band71	10MHz	16QAM	133172	25RB#12	20.92	PASS
Band71	10MHz	QPSK	133172	25RB#25	22.00	PASS
Band71	10MHz	16QAM	133172	25RB#25	20.95	PASS
Band71	10MHz	QPSK	133172	50RB#0	21.95	PASS
Band71	10MHz	16QAM	133172	50RB#0	20.93	PASS
Band71	10MHz	QPSK	133297	1RB#0	22.80	PASS
Band71	10MHz	16QAM	133297	1RB#0	22.01	PASS
Band71	10MHz	QPSK	133297	1RB#24	22.87	PASS
Band71	10MHz	16QAM	133297	1RB#24	22.14	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band71	10MHz	QPSK	133297	1RB#49	22.79	PASS
Band71	10MHz	16QAM	133297	1RB#49	22.01	PASS
Band71	10MHz	QPSK	133297	25RB#0	21.99	PASS
Band71	10MHz	16QAM	133297	25RB#0	20.99	PASS
Band71	10MHz	QPSK	133297	25RB#12	21.98	PASS
Band71	10MHz	16QAM	133297	25RB#12	21.03	PASS
Band71	10MHz	QPSK	133297	25RB#25	21.88	PASS
Band71	10MHz	16QAM	133297	25RB#25	20.91	PASS
Band71	10MHz	QPSK	133297	50RB#0	21.97	PASS
Band71	10MHz	16QAM	133297	50RB#0	20.96	PASS
Band71	10MHz	QPSK	133422	1RB#0	22.82	PASS
Band71	10MHz	16QAM	133422	1RB#0	21.83	PASS
Band71	10MHz	QPSK	133422	1RB#24	22.86	PASS
Band71	10MHz	16QAM	133422	1RB#24	21.93	PASS
Band71	10MHz	QPSK	133422	1RB#49	22.81	PASS
Band71	10MHz	16QAM	133422	1RB#49	21.77	PASS
Band71	10MHz	QPSK	133422	25RB#0	21.97	PASS
Band71	10MHz	16QAM	133422	25RB#0	21.05	PASS
Band71	10MHz	QPSK	133422	25RB#12	21.97	PASS
Band71	10MHz	16QAM	133422	25RB#12	21.02	PASS
Band71	10MHz	QPSK	133422	25RB#25	21.85	PASS
Band71	10MHz	16QAM	133422	25RB#25	20.87	PASS
Band71	10MHz	QPSK	133422	50RB#0	21.98	PASS
Band71	10MHz	16QAM	133422	50RB#0	20.91	PASS
Band71	15MHz	QPSK	133197	1RB#0	22.77	PASS
Band71	15MHz	16QAM	133197	1RB#0	22.00	PASS
Band71	15MHz	QPSK	133197	1RB#38	22.84	PASS
Band71	15MHz	16QAM	133197	1RB#38	22.15	PASS
Band71	15MHz	QPSK	133197	1RB#74	22.71	PASS
Band71	15MHz	16QAM	133197	1RB#74	22.06	PASS
Band71	15MHz	QPSK	133197	38RB#0	21.98	PASS
Band71	15MHz	16QAM	133197	38RB#0	21.95	PASS
Band71	15MHz	QPSK	133197	38RB#18	22.08	PASS
Band71	15MHz	16QAM	133197	38RB#18	22.09	PASS
Band71	15MHz	QPSK	133197	38RB#37	21.98	PASS
Band71	15MHz	16QAM	133197	38RB#37	21.99	PASS
Band71	15MHz	QPSK	133197	75RB#0	21.93	PASS
Band71	15MHz	16QAM	133197	75RB#0	20.88	PASS
Band71	15MHz	QPSK	133297	1RB#0	22.77	PASS
Band71	15MHz	16QAM	133297	1RB#0	22.08	PASS
Band71	15MHz	QPSK	133297	1RB#38	22.83	PASS
Band71	15MHz	16QAM	133297	1RB#38	22.26	PASS
Band71	15MHz	QPSK	133297	1RB#74	22.73	PASS
Band71	15MHz	16QAM	133297	1RB#74	22.08	PASS
Band71	15MHz	QPSK	133297	38RB#0	22.05	PASS
Band71	15MHz	16QAM	133297	38RB#0	22.07	PASS
Band71	15MHz	QPSK	133297	38RB#18	22.19	PASS
Band71	15MHz	16QAM	133297	38RB#18	22.20	PASS
Band71	15MHz	QPSK	133297	38RB#37	22.05	PASS
Band71	15MHz	16QAM	133297	38RB#37	22.11	PASS
Band71	15MHz	QPSK	133297	75RB#0	21.97	PASS
Band71	15MHz	16QAM	133297	75RB#0	20.95	PASS
Band71	15MHz	QPSK	133397	1RB#0	22.70	PASS
Band71	15MHz	16QAM	133397	1RB#0	21.65	PASS
Band71	15MHz	QPSK	133397	1RB#38	22.82	PASS
Band71	15MHz	16QAM	133397	1RB#38	21.79	PASS
Band71	15MHz	QPSK	133397	1RB#74	22.81	PASS
Band71	15MHz	16QAM	133397	1RB#74	21.80	PASS
Band71	15MHz	QPSK	133397	38RB#0	21.67	PASS
Band71	15MHz	16QAM	133397	38RB#0	21.64	PASS
Band71	15MHz	QPSK	133397	38RB#18	21.82	PASS
Band71	15MHz	16QAM	133397	38RB#18	21.83	PASS
Band71	15MHz	QPSK	133397	38RB#37	21.78	PASS
Band71	15MHz	16QAM	133397	38RB#37	21.74	PASS
Band71	15MHz	QPSK	133397	75RB#0	21.86	PASS





Band71	15MHz	16QAM	133397	75RB#0	20.85	PASS
Band71	20MHz	QPSK	133222	1RB#0	22.77	PASS
Band71	20MHz	16QAM	133222	1RB#0	21.74	PASS
Band71	20MHz	QPSK	133222	1RB#49	23.08	PASS
Band71	20MHz	16QAM	133222	1RB#49	22.03	PASS
Band71	20MHz	QPSK	133222	1RB#99	22.63	PASS
Band71	20MHz	16QAM	133222	1RB#99	21.71	PASS
Band71	20MHz	QPSK	133222	50RB#0	21.84	PASS
Band71	20MHz	16QAM	133222	50RB#0	20.79	PASS
Band71	20MHz	QPSK	133222	50RB#25	21.87	PASS
Band71	20MHz	16QAM	133222	50RB#25	20.86	PASS
Band71	20MHz	QPSK	133222	50RB#50	21.85	PASS
Band71	20MHz	16QAM	133222	50RB#50	20.79	PASS
Band71	20MHz	QPSK	133222	100RB#0	21.79	PASS
Band71	20MHz	16QAM	133222	100RB#0	20.87	PASS
Band71	20MHz	QPSK	133322	1RB#0	22.61	PASS
Band71	20MHz	16QAM	133322	1RB#0	21.86	PASS
Band71	20MHz	QPSK	133322	1RB#49	22.98	PASS
Band71	20MHz	16QAM	133322	1RB#49	22.20	PASS
Band71	20MHz	QPSK	133322	1RB#99	22.61	PASS
Band71	20MHz	16QAM	133322	1RB#99	21.88	PASS
Band71	20MHz	QPSK	133322	50RB#0	22.07	PASS
Band71	20MHz	16QAM	133322	50RB#0	21.03	PASS
Band71	20MHz	QPSK	133322	50RB#25	22.03	PASS
Band71	20MHz	16QAM	133322	50RB#25	21.05	PASS
Band71	20MHz	QPSK	133322	50RB#50	21.93	PASS
Band71	20MHz	16QAM	133322	50RB#50	20.95	PASS
Band71	20MHz	QPSK	133322	100RB#0	22.01	PASS
Band71	20MHz	16QAM	133322	100RB#0	20.99	PASS
Band71	20MHz	QPSK	133372	1RB#0	22.53	PASS
Band71	20MHz	16QAM	133372	1RB#0	21.68	PASS
Band71	20MHz	QPSK	133372	1RB#49	22.89	PASS
Band71	20MHz	16QAM	133372	1RB#49	22.06	PASS
Band71	20MHz	QPSK	133372	1RB#99	22.54	PASS
Band71	20MHz	16QAM	133372	1RB#99	21.72	PASS
Band71	20MHz	QPSK	133372	50RB#0	21.95	PASS
Band71	20MHz	16QAM	133372	50RB#0	20.96	PASS
Band71	20MHz	QPSK	133372	50RB#25	21.92	PASS
Band71	20MHz	16QAM	133372	50RB#25	20.98	PASS
Band71	20MHz	QPSK	133372	50RB#50	21.95	PASS
Band71	20MHz	16QAM	133372	50RB#50	20.94	PASS
Band71	20MHz	QPSK	133372	100RB#0	21.88	PASS
Band71	20MHz	16QAM	133372	100RB#0	20.88	PASS



**7.1.18. Conducted Power Measurement Results(WIFI 2.4G)**

Test Mode	Antenna	Freq(MHz)	Conducted Power (dBm)	Tune up
11B	Ant1	2412	13.46	14.00
		2437	13.47	14.00
		2462	13.04	14.00
11G	Ant1	2412	9.21	10.00
		2437	9.75	10.00
		2462	9.09	10.00
11N20SISO	Ant1	2412	4.90	5.00
		2437	4.61	5.00
		2462	4.81	5.00

Note:

a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.


1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

WIFI 2.4G (802.11b):

Duty cycle=8.39/8.55=98.13%

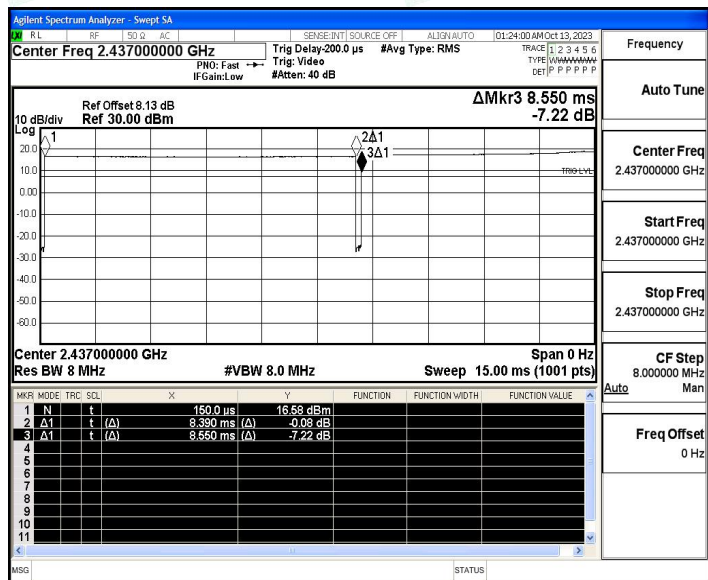

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.19. Conducted Power Measurement Results(WIFI 5.2G)**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Tune up
NVNT	a	5180	Ant1	13.13	0.50	13.63	14.00
NVNT	a	5200	Ant1	12.41	0.50	12.91	13.00
NVNT	a	5240	Ant1	11.88	0.58	12.46	13.00
NVNT	n20	5180	Ant1	13.09	0.59	13.68	14.00
NVNT	n20	5200	Ant1	12.45	1.80	14.25	15.00
NVNT	n20	5240	Ant1	11.70	0.56	12.26	13.00
NVNT	n40	5190	Ant1	12.76	1.21	13.97	14.00
NVNT	n40	5230	Ant1	11.85	1.10	12.95	13.00
NVNT	ac20	5180	Ant1	12.99	0.58	13.57	14.00
NVNT	ac20	5200	Ant1	12.37	0.59	12.96	13.00
NVNT	ac20	5240	Ant1	11.55	0.67	12.22	13.00
NVNT	ac40	5190	Ant1	12.28	1.10	13.38	14.00
NVNT	ac40	5230	Ant1	11.67	1.10	12.77	13.00
NVNT	ac80	5210	Ant1	11.13	1.89	13.02	14.00

Note:

a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.


1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

WIFI 5.2G (802.11n 20M):

Duty cycle=1.174/1.775=66.14%

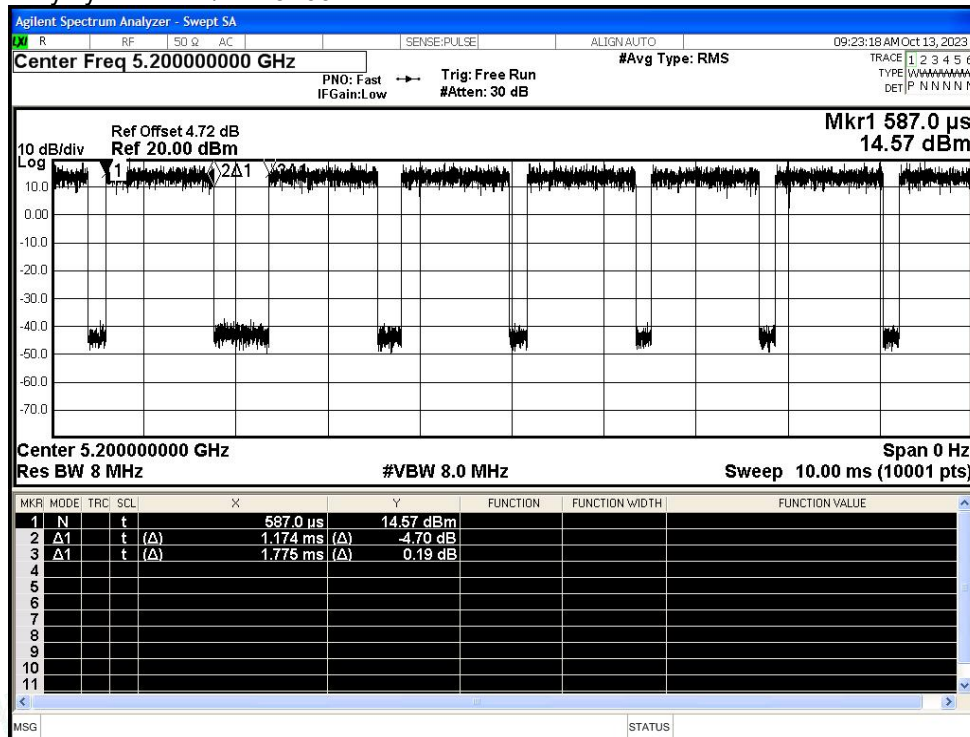

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.20. Conducted Power Measurement Results(WIFI 5.8G)**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Tune up
NVNT	a	5745	Ant1	13.41	0.50	13.91	14.00
NVNT	a	5785	Ant1	12.73	0.50	13.23	14.00
NVNT	a	5825	Ant1	11.97	0.72	12.69	13.00
NVNT	n20	5745	Ant1	13.34	0.59	13.93	14.00
NVNT	n20	5785	Ant1	12.50	0.62	13.12	14.00
NVNT	n20	5825	Ant1	11.91	0.59	12.50	13.00
NVNT	n40	5755	Ant1	12.96	1.05	14.01	15.00
NVNT	n40	5795	Ant1	12.36	1.10	13.46	14.00
NVNT	ac20	5745	Ant1	13.36	0.58	13.94	14.00
NVNT	ac20	5785	Ant1	12.57	0.59	13.16	14.00
NVNT	ac20	5825	Ant1	11.92	0.81	12.73	13.00
NVNT	ac40	5755	Ant1	12.96	1.10	14.06	15.00
NVNT	ac40	5795	Ant1	12.09	1.20	13.29	14.00
NVNT	ac80	5775	Ant1	11.41	2.79	14.20	14.50

Note:

a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.


1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

WIFI 5.8G (802.11n 40M):

Duty cycle=587/748=78.48%

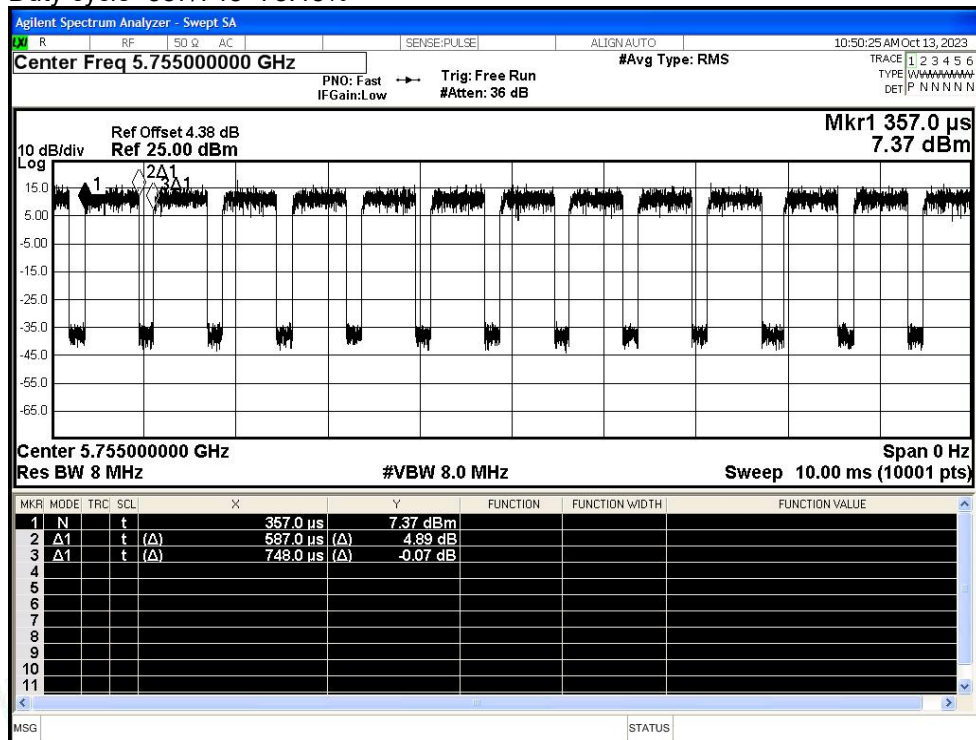

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.21. Conducted Power Measurement Results(Bluetooth)**

TestMode	Antenna	Channel	Result[dBm]	Tune up
DH5	Ant1	2402	-0.40	0.00
		2441	0.76	1.00
		2480	-0.82	0.00
2DH5	Ant1	2402	-0.63	0.00
		2441	0.69	1.00
		2480	-0.44	0.00

TestMode	Antenna	Channel	Result[dBm]	Tune up
BLE_1M	Ant1	2402	-2.89	-2.00
		2440	-2.00	-2.00
		2480	-3.66	-3.00
BLE_2M	Ant1	2402	-2.79	-2.00
		2440	-1.84	-1.00
		2480	-3.49	-3.00





7.2. Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and Product specific 10g SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freq. Band	Frequency (GHz)	Position	Average Power		Test Separation (mm)	Calculate Value	Exclusion Threshold	Exclusion (Y/N)
			dBm	mW				
Bluetooth	2.48	Head	1.00	1.26	5	0.397	3	Y
		Body-worn	1.00	1.26	10	0.198	3	Y
		hotspot	1.00	1.26	10	0.198	3	Y

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.





7.3. SAR Measurement Results

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} * 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Scaling factor} = 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Reported SAR} = \text{Measured SAR} * \text{Scaling factor}$$

Where

P_{target} is the power of manufacturing upper limit;

P_{measured} is the measured power;

Measured SAR is measured SAR at measured power which including power drift)

Reported SAR which including Power Drift and Scaling factor

7.3.1. SAR Results[GSM 850]

SAR Values [GSM850]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head								
190/836.6	GSM	Left Cheek	32.69	33.00	-0.05	1.074	0.192	0.206
190/836.6	GSM	Left Tilt	32.69	33.00	0.02	1.074	0.154	0.165
190/836.6	GSM	Right Cheek	32.69	33.00	0.04	1.074	0.209	0.224
190/836.6	GSM	Right Tilt	32.69	33.00	-0.01	1.074	0.187	0.201
measured / reported SAR numbers - Body (distance 10mm)								
190/836.6	GPRS 4TS	Front side	28.01	29.00	0.13	1.256	0.231	0.290
190/836.6	GPRS 4TS	Rear side	28.01	29.00	-0.14	1.256	0.299	0.376
190/836.6	GPRS 4TS	Left side	28.01	29.00	-0.07	1.256	0.141	0.177
190/836.6	GPRS 4TS	Right side	28.01	29.00	0.02	1.256	0.132	0.166
190/836.6	GPRS 4TS	Bottom side	28.01	29.00	-0.20	1.256	0.255	0.320

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.2. SAR Results[PCS 1900]

SAR Values [GSM1900]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head								
661/1880	GSM	Left Cheek	29.73	30.00	0.05	1.064	0.142	0.151
661/1880	GSM	Left Tilt	29.73	30.00	-0.03	1.064	0.121	0.129
661/1880	GSM	Right Cheek	29.73	30.00	-0.05	1.064	0.116	0.123
661/1880	GSM	Right Tilt	29.73	30.00	0.02	1.064	0.101	0.107
measured / reported SAR numbers - Body (distance 10mm)								
661/1880	GPRS 4TS	Front side	25.03	26.00	-0.14	1.250	0.326	0.408
661/1880	GPRS 4TS	Rear side	25.03	26.00	0.17	1.250	0.407	0.509
661/1880	GPRS 4TS	Left side	25.03	26.00	0.17	1.250	0.189	0.236
661/1880	GPRS 4TS	Right side	25.03	26.00	0.09	1.250	0.178	0.223
661/1880	GPRS 4TS	Bottom side	25.03	26.00	-0.15	1.250	0.331	0.414

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.3. SAR Results [WCDMA Band II]

SAR Values [WCDMA Band II]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head								
9400/1880	RMC	Left Cheek	23.47	24.00	-0.08	1.130	0.152	0.172
9400/1880	RMC	Left Tilt	23.47	24.00	0.14	1.130	0.128	0.145
9400/1880	RMC	Right Cheek	23.47	24.00	-0.03	1.130	0.141	0.159
9400/1880	RMC	Right Tilt	23.47	24.00	-0.15	1.130	0.130	0.147
measured / reported SAR numbers - Body (distance 10mm)								
9400/1880	RMC	Front side	23.47	24.00	-0.06	1.130	0.451	0.510
9400/1880	RMC	Rear side	23.47	24.00	-0.09	1.130	0.656	0.741
9400/1880	RMC	Left side	23.47	24.00	0.11	1.130	0.364	0.411
9400/1880	RMC	Right side	23.47	24.00	0.17	1.130	0.382	0.432
9400/1880	RMC	Bottom side	23.47	24.00	0.14	1.130	0.502	0.567

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
3. RMC* - RMC 12.2kbps mode;
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.4. SAR Results [WCDMA Band IV]

SAR Values [WCDMA Band IV]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head								
1412/1732.4	RMC	Left Cheek	23.38	24.00	0.17	1.153	0.130	0.150
1412/1732.4	RMC	Left Tilt	23.38	24.00	-0.18	1.153	0.101	0.116
1412/1732.4	RMC	Right Cheek	23.38	24.00	-0.12	1.153	0.122	0.141
1412/1732.4	RMC	Right Tilt	23.38	24.00	0.03	1.153	0.095	0.110
measured / reported SAR numbers - Body (distance 10mm)								
1412/1732.4	RMC	Front side	23.38	24.00	-0.17	1.153	0.216	0.249
1412/1732.4	RMC	Rear side	23.38	24.00	-0.02	1.153	0.374	0.431
1412/1732.4	RMC	Left side	23.38	24.00	-0.14	1.153	0.215	0.248
1412/1732.4	RMC	Right side	23.38	24.00	-0.08	1.153	0.221	0.255
1412/1732.4	RMC	Bottom side	23.38	24.00	-0.04	1.153	0.234	0.270

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) RMC* - RMC 12.2kbps mode;
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.5. SAR Results [WCDMA Band V]

SAR Values [WCDMA Band V]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head								
4182/836.4	RMC	Left Cheek	22.84	23.00	-0.16	1.038	0.281	0.292
4182/836.4	RMC	Left Tilt	22.84	23.00	0.07	1.038	0.215	0.223
4182/836.4	RMC	Right Cheek	22.84	23.00	-0.14	1.038	0.262	0.272
4182/836.4	RMC	Right Tilt	22.84	23.00	-0.17	1.038	0.198	0.205
measured / reported SAR numbers - Body (distance 10mm)								
4182/836.4	RMC	Front side	22.84	23.00	0.06	1.038	0.302	0.313
4182/836.4	RMC	Rear side	22.84	23.00	-0.03	1.038	0.417	0.433
4182/836.4	RMC	Left side	22.84	23.00	0.01	1.038	0.284	0.295
4182/836.4	RMC	Right side	22.84	23.00	0.17	1.038	0.302	0.313
4182/836.4	RMC	Bottom side	22.84	23.00	-0.04	1.038	0.319	0.331

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) RMC* - RMC 12.2kbps mode;
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.6. SAR Results [LTE Band 2]

SAR Values [LTE Band 2]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
18900/1880	20M	QPSK 1RB_49	Left Cheek	22.88	23.00	-0.05	1.028	0.149	0.153
18900/1880	20M	QPSK 1RB_49	Left Tilt	22.88	23.00	-0.17	1.028	0.126	0.130
18900/1880	20M	QPSK 1RB_49	Right Cheek	22.88	23.00	-0.19	1.028	0.131	0.135
18900/1880	20M	QPSK 1RB_49	Right Tilt	22.88	23.00	0.17	1.028	0.118	0.121
measured / reported SAR numbers – Head<50%RB>									
18700/1860	20M	QPSK 50RB_25	Left Cheek	21.81	22.00	-0.08	1.045	0.132	0.138
18700/1860	20M	QPSK 50RB_25	Left Tilt	21.81	22.00	-0.09	1.045	0.119	0.124
18700/1860	20M	QPSK 50RB_25	Right Cheek	21.81	22.00	-0.15	1.045	0.121	0.126
18700/1860	20M	QPSK 50RB_25	Right Tilt	21.81	22.00	-0.07	1.045	0.101	0.106
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
18900/1880	20M	QPSK 1RB_49	Front side	22.88	23.00	0.14	1.028	0.564	0.580
18900/1880	20M	QPSK 1RB_49	Rear side	22.88	23.00	0.03	1.028	0.615	0.632
18900/1880	20M	QPSK 1RB_49	Left side	22.88	23.00	-0.20	1.028	0.469	0.482
18900/1880	20M	QPSK 1RB_49	Right side	22.88	23.00	0.02	1.028	0.455	0.468
18900/1880	20M	QPSK 1RB_49	Bottom side	22.88	23.00	0.11	1.028	0.527	0.542
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
18700/1860	20M	QPSK 50RB_25	Front side	21.81	22.00	0.02	1.045	0.543	0.567
18700/1860	20M	QPSK 50RB_25	Rear side	21.81	22.00	0.13	1.045	0.598	0.625
18700/1860	20M	QPSK 50RB_25	Left side	21.81	22.00	-0.16	1.045	0.425	0.444
18700/1860	20M	QPSK 50RB_25	Right side	21.81	22.00	0.03	1.045	0.419	0.438
18700/1860	20M	QPSK 50RB_25	Bottom side	21.81	22.00	0.09	1.045	0.504	0.527

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.7. SAR Results [LTE Band 4]

SAR Values [LTE Band 4]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
20050/1720	20M	QPSK 1RB_49	Left Cheek	22.70	23.00	-0.06	1.072	0.125	0.134
20050/1720	20M	QPSK 1RB_49	Left Tilt	22.70	23.00	-0.10	1.072	0.104	0.111
20050/1720	20M	QPSK 1RB_49	Right Cheek	22.70	23.00	-0.18	1.072	0.112	0.120
20050/1720	20M	QPSK 1RB_49	Right Tilt	22.70	23.00	0.08	1.072	0.096	0.103
measured / reported SAR numbers – Head<50%RB>									
20175/1732.5	20M	QPSK 50RB_0	Left Cheek	21.58	22.00	-0.14	1.102	0.119	0.131
20175/1732.5	20M	QPSK 50RB_0	Left Tilt	21.58	22.00	0.15	1.102	0.098	0.108
20175/1732.5	20M	QPSK 50RB_0	Right Cheek	21.58	22.00	0.06	1.102	0.103	0.113
20175/1732.5	20M	QPSK 50RB_0	Right Tilt	21.58	22.00	-0.19	1.102	0.089	0.098
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
20050/1720	20M	QPSK 1RB_49	Front side	22.70	23.00	-0.04	1.072	0.415	0.445
20050/1720	20M	QPSK 1RB_49	Rear side	22.70	23.00	-0.05	1.072	0.577	0.618
20050/1720	20M	QPSK 1RB_49	Left side	22.70	23.00	0.16	1.072	0.363	0.389
20050/1720	20M	QPSK 1RB_49	Right side	22.70	23.00	0.01	1.072	0.371	0.398
20050/1720	20M	QPSK 1RB_49	Bottom side	22.70	23.00	-0.11	1.072	0.485	0.520
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
20175/1732.5	20M	QPSK 50RB_0	Front side	21.58	22.00	-0.09	1.102	0.401	0.442
20175/1732.5	20M	QPSK 50RB_0	Rear side	21.58	22.00	-0.18	1.102	0.534	0.588
20175/1732.5	20M	QPSK 50RB_0	Left side	21.58	22.00	-0.11	1.102	0.342	0.377
20175/1732.5	20M	QPSK 50RB_0	Right side	21.58	22.00	-0.11	1.102	0.353	0.389
20175/1732.5	20M	QPSK 50RB_0	Bottom side	21.58	22.00	-0.19	1.102	0.429	0.473

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.8. SAR Results [LTE Band 5]

SAR Values [LTE Band 5]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head <1RB>									
20525/836.5	10M	QPSK 1RB_24	Left Cheek	23.02	24.00	0.15	1.253	0.187	0.234
20525/836.5	10M	QPSK 1RB_24	Left Tilt	23.02	24.00	-0.04	1.253	0.156	0.195
20525/836.5	10M	QPSK 1RB_24	Right Cheek	23.02	24.00	-0.02	1.253	0.171	0.214
20525/836.5	10M	QPSK 1RB_24	Right Tilt	23.02	24.00	0.18	1.253	0.152	0.190
measured / reported SAR numbers – Head <50%RB>									
20450/829	10M	QPSK 25RB_0	Left Cheek	22.00	23.00	0.19	1.259	0.175	0.220
20450/829	10M	QPSK 25RB_0	Left Tilt	22.00	23.00	-0.18	1.259	0.146	0.184
20450/829	10M	QPSK 25RB_0	Right Cheek	22.00	23.00	0.05	1.259	0.159	0.200
20450/829	10M	QPSK 25RB_0	Right Tilt	22.00	23.00	0.02	1.259	0.138	0.174
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
20525/836.5	10M	QPSK 1RB_24	Front side	23.02	24.00	-0.07	1.253	0.226	0.283
20525/836.5	10M	QPSK 1RB_24	Rear side	23.02	24.00	0.05	1.253	0.311	0.390
20525/836.5	10M	QPSK 1RB_24	Left side	23.02	24.00	-0.09	1.253	0.209	0.262
20525/836.5	10M	QPSK 1RB_24	Right side	23.02	24.00	-0.01	1.253	0.193	0.242
20525/836.5	10M	QPSK 1RB_24	Bottom side	23.02	24.00	-0.16	1.253	0.284	0.356
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
20450/829	10M	QPSK 25RB_0	Front side	22.00	23.00	-0.19	1.259	0.218	0.274
20450/829	10M	QPSK 25RB_0	Rear side	22.00	23.00	-0.12	1.259	0.286	0.360
20450/829	10M	QPSK 25RB_0	Left side	22.00	23.00	-0.03	1.259	0.195	0.245
20450/829	10M	QPSK 25RB_0	Right side	22.00	23.00	0.02	1.259	0.185	0.233
20450/829	10M	QPSK 25RB_0	Bottom side	22.00	23.00	-0.12	1.259	0.257	0.324

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.9. SAR Results [LTE Band 12]

SAR Values [LTE Band 12]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
23060/704	10M	QPSK 1RB_24	Left Cheek	23.19	24.00	-0.18	1.205	0.105	0.127
23060/704	10M	QPSK 1RB_24	Left Tilt	23.19	24.00	0.12	1.205	0.079	0.095
23060/704	10M	QPSK 1RB_24	Right Cheek	23.19	24.00	-0.07	1.205	0.085	0.102
23060/704	10M	QPSK 1RB_24	Right Tilt	23.19	24.00	0.13	1.205	0.074	0.089
measured / reported SAR numbers – Head<50%RB>									
23060/704	10M	QPSK 25RB_12	Left Cheek	22.24	23.00	0.10	1.191	0.085	0.101
23060/704	10M	QPSK 25RB_12	Left Tilt	22.24	23.00	-0.19	1.191	0.068	0.081
23060/704	10M	QPSK 25RB_12	Right Cheek	22.24	23.00	-0.02	1.191	0.081	0.096
23060/704	10M	QPSK 25RB_12	Right Tilt	22.24	23.00	0.03	1.191	0.063	0.075
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
23060/704	10M	QPSK 1RB_24	Front side	23.19	24.00	0.08	1.205	0.196	0.236
23060/704	10M	QPSK 1RB_24	Rear side	23.19	24.00	0.09	1.205	0.221	0.266
23060/704	10M	QPSK 1RB_24	Left side	23.19	24.00	-0.09	1.205	0.169	0.204
23060/704	10M	QPSK 1RB_24	Right side	23.19	24.00	-0.09	1.205	0.174	0.210
23060/704	10M	QPSK 1RB_24	Bottom side	23.19	24.00	0.11	1.205	0.203	0.245
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
23060/704	10M	QPSK 25RB_12	Front side	22.24	23.00	0.03	1.191	0.185	0.220
23060/704	10M	QPSK 25RB_12	Rear side	22.24	23.00	-0.08	1.191	0.219	0.261
23060/704	10M	QPSK 25RB_12	Left side	22.24	23.00	-0.11	1.191	0.154	0.183
23060/704	10M	QPSK 25RB_12	Right side	22.24	23.00	-0.11	1.191	0.162	0.193
23060/704	10M	QPSK 25RB_12	Bottom side	22.24	23.00	-0.10	1.191	0.189	0.225

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



**7.3.10. SAR Results [LTE Band 13]**

SAR Values [LTE Band 13]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
23230/782	10M	QPSK 1RB_24	Left Cheek	22.71	23.00	0.06	1.069	0.113	0.121
23230/782	10M	QPSK 1RB_24	Left Tilt	22.71	23.00	-0.15	1.069	0.096	0.103
23230/782	10M	QPSK 1RB_24	Right Cheek	22.71	23.00	0.02	1.069	0.102	0.109
23230/782	10M	QPSK 1RB_24	Right Tilt	22.71	23.00	-0.06	1.069	0.087	0.093
measured / reported SAR numbers – Head<50%RB>									
23230/782	10M	QPSK 25RB_0	Left Cheek	21.71	22.00	-0.13	1.069	0.102	0.109
23230/782	10M	QPSK 25RB_0	Left Tilt	21.71	22.00	-0.17	1.069	0.085	0.091
23230/782	10M	QPSK 25RB_0	Right Cheek	21.71	22.00	-0.06	1.069	0.096	0.103
23230/782	10M	QPSK 25RB_0	Right Tilt	21.71	22.00	0.06	1.069	0.076	0.081
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
23230/782	10M	QPSK 1RB_24	Front side	22.71	23.00	-0.20	1.069	0.193	0.206
23230/782	10M	QPSK 1RB_24	Rear side	22.71	23.00	-0.19	1.069	0.240	0.257
23230/782	10M	QPSK 1RB_24	Left side	22.71	23.00	0.07	1.069	0.175	0.187
23230/782	10M	QPSK 1RB_24	Right side	22.71	23.00	0.07	1.069	0.168	0.180
23230/782	10M	QPSK 1RB_24	Bottom side	22.71	23.00	0.03	1.069	0.221	0.236
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
23230/782	10M	QPSK 25RB_0	Front side	21.71	22.00	0.04	1.069	0.185	0.198
23230/782	10M	QPSK 25RB_0	Rear side	21.71	22.00	0.18	1.069	0.232	0.248
23230/782	10M	QPSK 25RB_0	Left side	21.71	22.00	0.02	1.069	0.165	0.176
23230/782	10M	QPSK 25RB_0	Right side	21.71	22.00	0.02	1.069	0.154	0.165
23230/782	10M	QPSK 25RB_0	Bottom side	21.71	22.00	-0.13	1.069	0.218	0.233

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.11. SAR Results [LTE Band 17]

SAR Values [LTE Band 17]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
23790/710	10M	QPSK 1RB_0	Left Cheek	23.00	24.00	-0.05	1.259	0.130	0.164
23790/710	10M	QPSK 1RB_0	Left Tilt	23.00	24.00	-0.03	1.259	0.114	0.144
23790/710	10M	QPSK 1RB_0	Right Cheek	23.00	24.00	0.16	1.259	0.123	0.155
23790/710	10M	QPSK 1RB_0	Right Tilt	23.00	24.00	-0.20	1.259	0.105	0.132
measured / reported SAR numbers – Head<50%RB>									
23780/709	10M	QPSK 25RB_12	Left Cheek	22.03	23.00	0.11	1.250	0.122	0.153
23780/709	10M	QPSK 25RB_12	Left Tilt	22.03	23.00	-0.20	1.250	0.105	0.131
23780/709	10M	QPSK 25RB_12	Right Cheek	22.03	23.00	-0.03	1.250	0.119	0.149
23780/709	10M	QPSK 25RB_12	Right Tilt	22.03	23.00	-0.10	1.250	0.096	0.120
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
23790/710	10M	QPSK 1RB_0	Front side	23.00	24.00	0.08	1.259	0.195	0.245
23790/710	10M	QPSK 1RB_0	Rear side	23.00	24.00	-0.08	1.259	0.230	0.290
23790/710	10M	QPSK 1RB_0	Left side	23.00	24.00	-0.19	1.259	0.178	0.224
23790/710	10M	QPSK 1RB_0	Right side	23.00	24.00	-0.19	1.259	0.175	0.220
23790/710	10M	QPSK 1RB_0	Bottom side	23.00	24.00	-0.19	1.259	0.214	0.269
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
23780/709	10M	QPSK 25RB_12	Front side	22.03	23.00	0.15	1.250	0.186	0.233
23780/709	10M	QPSK 25RB_12	Rear side	22.03	23.00	-0.08	1.250	0.221	0.276
23780/709	10M	QPSK 25RB_12	Left side	22.03	23.00	-0.05	1.250	0.165	0.206
23780/709	10M	QPSK 25RB_12	Right side	22.03	23.00	-0.05	1.250	0.169	0.211
23780/709	10M	QPSK 25RB_12	Bottom side	22.03	23.00	0.11	1.250	0.201	0.251

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.12. SAR Results [LTE Band 25]

SAR Values [LTE Band 25]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
26365/1882.5	20M	QPSK 1RB_49	Left Cheek	23.01	23.50	-0.03	1.119	0.135	0.151
26365/1882.5	20M	QPSK 1RB_49	Left Tilt	23.01	23.50	0.11	1.119	0.110	0.123
26365/1882.5	20M	QPSK 1RB_49	Right Cheek	23.01	23.50	-0.07	1.119	0.123	0.138
26365/1882.5	20M	QPSK 1RB_49	Right Tilt	23.01	23.50	-0.14	1.119	0.104	0.116
measured / reported SAR numbers – Head<50%RB>									
26140/1860	20M	QPSK 50RB_0	Left Cheek	21.92	22.50	-0.17	1.143	0.128	0.146
26140/1860	20M	QPSK 50RB_0	Left Tilt	21.92	22.50	-0.12	1.143	0.102	0.117
26140/1860	20M	QPSK 50RB_0	Right Cheek	21.92	22.50	0.13	1.143	0.113	0.129
26140/1860	20M	QPSK 50RB_0	Right Tilt	21.92	22.50	-0.05	1.143	0.096	0.110
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
26365/1882.5	20M	QPSK 1RB_49	Front side	23.01	23.50	0.12	1.119	0.421	0.471
26365/1882.5	20M	QPSK 1RB_49	Rear side	23.01	23.50	0.03	1.119	0.575	0.644
26365/1882.5	20M	QPSK 1RB_49	Left side	23.01	23.50	-0.10	1.119	0.399	0.447
26365/1882.5	20M	QPSK 1RB_49	Right side	23.01	23.50	-0.14	1.119	0.375	0.420
26365/1882.5	20M	QPSK 1RB_49	Bottom side	23.01	23.50	-0.17	1.119	0.501	0.561
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
26140/1860	20M	QPSK 50RB_0	Front side	21.92	22.50	0.04	1.143	0.412	0.471
26140/1860	20M	QPSK 50RB_0	Rear side	21.92	22.50	-0.02	1.143	0.546	0.624
26140/1860	20M	QPSK 50RB_0	Left side	21.92	22.50	-0.17	1.143	0.385	0.440
26140/1860	20M	QPSK 50RB_0	Right side	21.92	22.50	0.08	1.143	0.369	0.422
26140/1860	20M	QPSK 50RB_0	Bottom side	21.92	22.50	-0.15	1.143	0.451	0.515

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



**7.3.13. SAR Results [LTE Band 26(814-824)]**

SAR Values [LTE Band 26]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head <1RB>									
26740/819	10M	QPSK 1RB_24	Left Cheek	22.83	23.00	0.02	1.040	0.257	0.267
26740/819	10M	QPSK 1RB_24	Left Tilt	22.83	23.00	-0.04	1.040	0.215	0.224
26740/819	10M	QPSK 1RB_24	Right Cheek	22.83	23.00	0.05	1.040	0.196	0.204
26740/819	10M	QPSK 1RB_24	Right Tilt	22.83	23.00	-0.03	1.040	0.154	0.160
measured / reported SAR numbers – Head <50%RB>									
26740/819	10M	QPSK 25RB_25	Left Cheek	21.88	22.00	-0.01	1.028	0.201	0.207
26740/819	10M	QPSK 25RB_25	Left Tilt	21.88	22.00	0.12	1.028	0.197	0.203
26740/819	10M	QPSK 25RB_25	Right Cheek	21.88	22.00	0.06	1.028	0.170	0.175
26740/819	10M	QPSK 25RB_25	Right Tilt	21.88	22.00	0.18	1.028	0.143	0.147
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
26740/819	10M	QPSK 1RB_24	Front side	22.83	23.00	0.12	1.040	0.302	0.314
26740/819	10M	QPSK 1RB_24	Rear side	22.83	23.00	-0.17	1.040	0.396	0.412
26740/819	10M	QPSK 1RB_24	Left side	22.83	23.00	0.07	1.040	0.256	0.266
26740/819	10M	QPSK 1RB_24	Right side	22.83	23.00	0.07	1.040	0.247	0.257
26740/819	10M	QPSK 1RB_24	Bottom side	22.83	23.00	-0.18	1.040	0.334	0.347
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
26740/819	10M	QPSK 25RB_25	Front side	21.88	22.00	0.09	1.028	0.289	0.297
26740/819	10M	QPSK 25RB_25	Rear side	21.88	22.00	0.17	1.028	0.384	0.395
26740/819	10M	QPSK 25RB_25	Left side	21.88	22.00	-0.20	1.028	0.243	0.250
26740/819	10M	QPSK 25RB_25	Right side	21.88	22.00	-0.20	1.028	0.236	0.243
26740/819	10M	QPSK 25RB_25	Bottom side	21.88	22.00	0.19	1.028	0.319	0.328

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



**7.3.14. SAR Results [LTE Band 26(824-849)]**

SAR Values [LTE Band 26]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head <1RB>									
26915/836.5	15M	QPSK 1RB_38	Left Cheek	22.86	23.00	-0.20	1.033	0.217	0.224
26915/836.5	15M	QPSK 1RB_38	Left Tilt	22.86	23.00	-0.02	1.033	0.204	0.211
26915/836.5	15M	QPSK 1RB_38	Right Cheek	22.86	23.00	0.03	1.033	0.185	0.191
26915/836.5	15M	QPSK 1RB_38	Right Tilt	22.86	23.00	-0.01	1.033	0.134	0.138
measured / reported SAR numbers – Head <50%RB>									
26865/831.5	15M	QPSK 38RB_18	Left Cheek	21.98	22.00	0.03	1.005	0.189	0.190
26865/831.5	15M	QPSK 38RB_18	Left Tilt	21.98	22.00	0.12	1.005	0.174	0.175
26865/831.5	15M	QPSK 38RB_18	Right Cheek	21.98	22.00	0.05	1.005	0.161	0.162
26865/831.5	15M	QPSK 38RB_18	Right Tilt	21.98	22.00	-0.12	1.005	0.132	0.133
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
26915/836.5	15M	QPSK 1RB_38	Front side	22.86	23.00	-0.12	1.033	0.286	0.295
26915/836.5	15M	QPSK 1RB_38	Rear side	22.86	23.00	-0.07	1.033	0.374	0.386
26915/836.5	15M	QPSK 1RB_38	Left side	22.86	23.00	0.00	1.033	0.246	0.254
26915/836.5	15M	QPSK 1RB_38	Right side	22.86	23.00	-0.19	1.033	0.251	0.259
26915/836.5	15M	QPSK 1RB_38	Bottom side	22.86	23.00	0.06	1.033	0.314	0.324
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
26865/831.5	15M	QPSK 38RB_18	Front side	21.98	22.00	-0.02	1.005	0.274	0.275
26865/831.5	15M	QPSK 38RB_18	Rear side	21.98	22.00	-0.04	1.005	0.345	0.347
26865/831.5	15M	QPSK 38RB_18	Left side	21.98	22.00	0.02	1.005	0.231	0.232
26865/831.5	15M	QPSK 38RB_18	Right side	21.98	22.00	0.04	1.005	0.225	0.226
26865/831.5	15M	QPSK 38RB_18	Bottom side	21.98	22.00	-0.06	1.005	0.305	0.306

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.15. SAR Results [LTE Band 41]

SAR Values [LTE Band 41]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
40620/2593	20M	QPSK 1RB_49	Left Cheek	24.51	25.00	0.08	1.119	0.232	0.260
40620/2593	20M	QPSK 1RB_49	Left Tilt	24.51	25.00	0.06	1.119	0.179	0.200
40620/2593	20M	QPSK 1RB_49	Right Cheek	24.51	25.00	0.18	1.119	0.213	0.238
40620/2593	20M	QPSK 1RB_49	Right Tilt	24.51	25.00	0.18	1.119	0.168	0.188
measured / reported SAR numbers – Head<50%RB>									
40620/2593	20M	QPSK 50RB_50	Left Cheek	23.41	24.00	0.11	1.146	0.205	0.235
40620/2593	20M	QPSK 50RB_50	Left Tilt	23.41	24.00	-0.19	1.146	0.145	0.166
40620/2593	20M	QPSK 50RB_50	Right Cheek	23.41	24.00	0.20	1.146	0.189	0.217
40620/2593	20M	QPSK 50RB_50	Right Tilt	23.41	24.00	0.18	1.146	0.135	0.155
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
40620/2593	20M	QPSK 1RB_49	Front side	24.51	25.00	-0.01	1.119	0.210	0.235
40620/2593	20M	QPSK 1RB_49	Rear side	24.51	25.00	0.19	1.119	0.239	0.268
40620/2593	20M	QPSK 1RB_49	Left side	24.51	25.00	0.17	1.119	0.188	0.210
40620/2593	20M	QPSK 1RB_49	Right side	24.51	25.00	0.12	1.119	0.174	0.195
40620/2593	20M	QPSK 1RB_49	Bottom side	24.51	25.00	0.13	1.119	0.196	0.219
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
40620/2593	20M	QPSK 50RB_50	Front side	23.41	24.00	0.19	1.146	0.201	0.230
40620/2593	20M	QPSK 50RB_50	Rear side	23.41	24.00	0.15	1.146	0.221	0.253
40620/2593	20M	QPSK 50RB_50	Left side	23.41	24.00	-0.10	1.146	0.167	0.191
40620/2593	20M	QPSK 50RB_50	Right side	23.41	24.00	0.06	1.146	0.159	0.182
40620/2593	20M	QPSK 50RB_50	Bottom side	23.41	24.00	-0.18	1.146	0.154	0.176

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.16. SAR Results [LTE Band 66]

SAR Values [LTE Band 66]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
132072/1720	20M	QPSK 1RB_49	Left Cheek	22.83	23.00	0.19	1.040	0.129	0.134
132072/1720	20M	QPSK 1RB_49	Left Tilt	22.83	23.00	-0.16	1.040	0.099	0.103
132072/1720	20M	QPSK 1RB_49	Right Cheek	22.83	23.00	-0.20	1.040	0.102	0.106
132072/1720	20M	QPSK 1RB_49	Right Tilt	22.83	23.00	0.10	1.040	0.089	0.093
measured / reported SAR numbers – Head <50%RB>									
132322/1745	20M	QPSK 50RB_50	Left Cheek	21.71	22.00	-0.02	1.069	0.104	0.111
132322/1745	20M	QPSK 50RB_50	Left Tilt	21.71	22.00	-0.11	1.069	0.087	0.093
132322/1745	20M	QPSK 50RB_50	Right Cheek	21.71	22.00	0.02	1.069	0.091	0.097
132322/1745	20M	QPSK 50RB_50	Right Tilt	21.71	22.00	0.09	1.069	0.082	0.088
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
132072/1720	20M	QPSK 1RB_49	Front side	22.83	23.00	0.06	1.040	0.413	0.429
132072/1720	20M	QPSK 1RB_49	Rear side	22.83	23.00	0.08	1.040	0.549	0.571
132072/1720	20M	QPSK 1RB_49	Left side	22.83	23.00	0.15	1.040	0.394	0.410
132072/1720	20M	QPSK 1RB_49	Right side	22.83	23.00	0.04	1.040	0.385	0.400
132072/1720	20M	QPSK 1RB_49	Bottom side	22.83	23.00	0.13	1.040	0.456	0.474
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
132322/1745	20M	QPSK 50RB_50	Front side	21.71	22.00	-0.16	1.069	0.405	0.433
132322/1745	20M	QPSK 50RB_50	Rear side	21.71	22.00	-0.15	1.069	0.521	0.557
132322/1745	20M	QPSK 50RB_50	Left side	21.71	22.00	0.00	1.069	0.381	0.407
132322/1745	20M	QPSK 50RB_50	Right side	21.71	22.00	-0.05	1.069	0.374	0.400
132322/1745	20M	QPSK 50RB_50	Bottom side	21.71	22.00	0.02	1.069	0.429	0.459

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.17. SAR Results [LTE Band 71]

SAR Values [LTE Band 71]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
133222/673	20M	QPSK 1RB_49	Left Cheek	23.08	24.00	0.01	1.236	0.123	0.152
133222/673	20M	QPSK 1RB_49	Left Tilt	23.08	24.00	0.10	1.236	0.102	0.126
133222/673	20M	QPSK 1RB_49	Right Cheek	23.08	24.00	0.19	1.236	0.118	0.146
133222/673	20M	QPSK 1RB_49	Right Tilt	23.08	24.00	0.07	1.236	0.089	0.110
measured / reported SAR numbers – Head<50%RB>									
133222/673	20M	QPSK 50RB_0	Left Cheek	22.07	23.00	-0.08	1.239	0.114	0.141
133222/673	20M	QPSK 50RB_0	Left Tilt	22.07	23.00	0.12	1.239	0.096	0.119
133222/673	20M	QPSK 50RB_0	Right Cheek	22.07	23.00	0.02	1.239	0.102	0.126
133222/673	20M	QPSK 50RB_0	Right Tilt	22.07	23.00	-0.06	1.239	0.079	0.098
measured / reported SAR numbers - Body (distance 10mm)<1RB>									
133222/673	20M	QPSK 1RB_49	Front side	23.08	24.00	-0.10	1.236	0.218	0.269
133222/673	20M	QPSK 1RB_49	Rear side	23.08	24.00	0.07	1.236	0.290	0.358
133222/673	20M	QPSK 1RB_49	Left side	23.08	24.00	-0.02	1.236	0.186	0.230
133222/673	20M	QPSK 1RB_49	Right side	23.08	24.00	0.19	1.236	0.174	0.215
133222/673	20M	QPSK 1RB_49	Bottom side	23.08	24.00	-0.03	1.236	0.231	0.286
measured / reported SAR numbers - Body (distance 10mm)<50%RB>									
133222/673	20M	QPSK 50RB_0	Front side	22.07	23.00	-0.12	1.239	0.207	0.256
133222/673	20M	QPSK 50RB_0	Rear side	22.07	23.00	-0.03	1.239	0.274	0.339
133222/673	20M	QPSK 50RB_0	Left side	22.07	23.00	0.15	1.239	0.174	0.216
133222/673	20M	QPSK 50RB_0	Right side	22.07	23.00	0.08	1.239	0.166	0.206
133222/673	20M	QPSK 50RB_0	Bottom side	22.07	23.00	0.09	1.239	0.216	0.268

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.18. SAR Results [WIFI 2.4G]

SAR Values [WIFI 2.4G]									
Ch/ Freq. (MHz)	Channel Type	Test Position	Duty Cycle	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head									
6/2437	802.11b	Left Cheek	1.019	13.47	14.00	0.02	1.130	0.425	0.489
6/2437	802.11b	Left Tilt	1.019	13.47	14.00	0.06	1.130	0.364	0.419
6/2437	802.11b	Right Cheek	1.019	13.47	14.00	-0.07	1.130	0.427	0.492
6/2437	802.11b	Right Tilt	1.019	13.47	14.00	-0.15	1.130	0.314	0.362
measured / reported SAR numbers - Body (hotspot open, distance 10mm)									
6/2437	802.11b	Front side	1.019	13.47	14.00	-0.07	1.130	0.185	0.213
6/2437	802.11b	Rear side	1.019	13.47	14.00	0.00	1.130	0.225	0.259
6/2437	802.11b	Right side	1.019	13.47	14.00	0.10	1.130	0.149	0.172
6/2437	802.11b	Top side	1.019	13.47	14.00	-0.06	1.130	0.201	0.231

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.3.19. SAR Results [WIFI 5.2G]

SAR Values [WIFI 5.2G]									
Ch/ Freq. (MHz)	Channel Type	Test Position	Duty Cycle Factor	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head									
40/5200	802.11n	Left Cheek	1.512	14.25	15.00	0.09	1.189	0.175	0.314
40/5200	802.11n	Left Tilt	1.512	14.25	15.00	-0.04	1.189	0.102	0.183
40/5200	802.11n	Right Cheek	1.512	14.25	15.00	0.16	1.189	0.194	0.349
40/5200	802.11n	Right Tilt	1.512	14.25	15.00	0.17	1.189	0.096	0.173
measured / reported SAR numbers - Body (hotspot open, distance 10mm)									
40/5200	802.11n	Front side	1.512	14.25	15.00	0.16	1.189	0.224	0.403
40/5200	802.11n	Rear side	1.512	14.25	15.00	0.01	1.189	0.290	0.521
40/5200	802.11n	Right side	1.512	14.25	15.00	-0.01	1.189	0.196	0.352
40/5200	802.11n	Top side	1.512	14.25	15.00	-0.09	1.189	0.246	0.442

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



**7.3.20. SAR Results [WIFI 5.8G]**

SAR Values [WIFI 5.8G]									
Ch/ Freq. (MHz)	Channel Type	Test Position	Duty Cycle Factor	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head									
151/5755	802.11n 40M	Left Cheek	1.274	14.01	15.00	-0.08	1.256	0.214	0.342
151/5755	802.11n 40M	Left Tilt	1.274	14.01	15.00	0.02	1.256	0.142	0.227
151/5755	802.11n 40M	Right Cheek	1.274	14.01	15.00	0.02	1.256	0.252	0.403
151/5755	802.11n 40M	Right Tilt	1.274	14.01	15.00	-0.19	1.256	0.157	0.251
measured / reported SAR numbers - Body (hotspot open, distance 10mm)									
151/5755	802.11n 40M	Front side	1.274	14.01	15.00	0.03	1.256	0.238	0.381
151/5755	802.11n 40M	Rear side	1.274	14.01	15.00	0.05	1.256	0.305	0.488
151/5755	802.11n 40M	Right side	1.274	14.01	15.00	0.12	1.256	0.227	0.363
151/5755	802.11n 40M	Top side	1.274	14.01	15.00	-0.16	1.256	0.265	0.424

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





7.4. Multiple Transmitter Evaluation

7.4.1. Simultaneous SAR SAR test evaluation

Simultaneous Transmission Possibilities

NO.	Simultaneous Tx Combination	Head	Body	Hotspot
1	GSM Voice + BT	Yes	Yes	Yes
2	GSM DATA + BT	Yes	Yes	Yes
3	GSM Voice + WiFi 2.4G	Yes	Yes	Yes
4	GSM DATA + WiFi 2.4G	Yes	Yes	Yes
5	GSM Voice + WiFi 5G	Yes	Yes	Yes
6	GSM DATA + WiFi 5G	Yes	Yes	Yes
7	UMTS + BT	Yes	Yes	Yes
8	UMTS + WiFi 2.4G	Yes	Yes	Yes
9	UMTS + WiFi 5G	Yes	Yes	Yes
10	LTE + WiFi 2.4G	Yes	Yes	Yes
11	LTE + WiFi 5G	Yes	Yes	Yes
12	LTE + BT	Yes	Yes	Yes

Note:

- 1) Wi-Fi and Bluetooth share the same Tx antenna and can't transmit simultaneously.
- 2) The device does not support DTM function.





7.4.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$;

Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is $< 5 \text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion.

Estimated SAR Result

Freq. Band	Frequency (GHz)	Test Position	max. power (dBm)	max. power (mw)	Test Separation (mm)	Estimated
						1g SAR (W/kg)
Bluetooth	2.48	Head	1	1.26	5	0.053
		Body-worn	1	1.26	10	0.026
		hotspot	1	1.26	10	0.026





7.4.3. Simultaneous Transmission SAR Summation Scenario

Test position		Main Antenna SARmax (W/kg)															WiFi Antenna SARmax (W/kg)				Summed 1g SARmax (W/kg)	
		GSM 850	GSM 1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 12	LTE Band 13	LTE Band 17	LTE Band 25	LTE Band 26	LTE Band 41	LTE Band 66	LTE Band 71	WLAN 2.4G	WLAN 5.2G	WLAN 5.8G		BT
Head	Left cheek	0.206	0.151	0.172	0.150	0.292	0.153	0.134	0.234	0.127	0.121	0.164	0.151	0.267	0.260	0.134	0.152	0.489	0.314	0.342	0.053	0.781
	Left tilted	0.165	0.129	0.145	0.116	0.223	0.130	0.111	0.195	0.095	0.103	0.144	0.123	0.224	0.200	0.103	0.126	0.419	0.183	0.227	0.053	0.643
	Right cheek	0.224	0.123	0.159	0.141	0.272	0.135	0.120	0.214	0.102	0.109	0.155	0.138	0.204	0.238	0.106	0.146	0.492	0.349	0.403	0.053	0.764
	Right tilted	0.201	0.107	0.147	0.110	0.205	0.121	0.103	0.190	0.089	0.093	0.132	0.116	0.160	0.188	0.093	0.110	0.362	0.173	0.251	0.053	0.567
Body	Front side	0.290	0.408	0.510	0.249	0.313	0.580	0.445	0.283	0.236	0.206	0.245	0.471	0.314	0.235	0.429	0.269	0.213	0.403	0.381	0.026	0.983
	Back side	0.376	0.509	0.741	0.431	0.433	0.632	0.618	0.390	0.266	0.257	0.290	0.644	0.412	0.268	0.571	0.358	0.259	0.521	0.488	0.026	1.262
	Left side	0.177	0.236	0.411	0.248	0.295	0.482	0.389	0.262	0.204	0.187	0.224	0.447	0.266	0.210	0.410	0.230	/	/	/	0.026	0.508
	Right side	0.166	0.223	0.432	0.255	0.313	0.468	0.398	0.242	0.210	0.180	0.220	0.420	0.257	0.195	0.400	0.215	0.172	0.352	0.363	0.026	0.831
	Top side	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.231	0.442	0.424	0.026	0.442
	Bottom side	0.320	0.414	0.567	0.270	0.331	0.542	0.520	0.356	0.245	0.236	0.269	0.561	0.347	0.219	0.474	0.286	/	/	/	0.026	0.593





Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

.....**The End of Test Report**.....

