

TEST REPORT

Reference No...... : WTD24D06151831W002
FCC ID : 2ALBPET1040
Applicant..... : BESTOM TECHNOLOGY(HK) CO., LIMITED
Address..... : R718 BuildingB1, Huayuan S&TP, No.168 BY Road, XiXiang Street,
Shenzhen, China
Manufacturer : BESTOM TECHNOLOGY(HK) CO., LIMITED
Address..... : R718 BuildingB1, Huayuan S&TP, No.168 BY Road, XiXiang Street,
Shenzhen, China
Product..... : Tablet
Model(s) : ET1040
Standards..... : FCC 47CFR Part 15.247
Date of Receipt sample : 2024-07-08
Date of Test : 2024-07-08 to 2024-07-26
Date of Issue..... : 2024-08-20
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Ford Wang

Ford Wang / Project Engineer

Approved by:

Deval Qin

Deval Qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST FACILITY	6
4.5 SUBCONTRACTED	6
4.6 ABNORMALITIES FROM STANDARD CONDITIONS	6
4.7 TEST MODE	7
5 TEST SUMMARY	8
6 EQUIPMENT USED DURING TEST	9
6.1 EQUIPMENTS LIST	9
6.2 MEASUREMENT UNCERTAINTY	10
7 DUTY CYCLE	11
8 CONDUCTED EMISSION	14
8.1 E.U.T. OPERATION	14
8.2 EUT SETUP	14
8.3 MEASUREMENT DESCRIPTION	14
8.4 CONDUCTED EMISSION TEST RESULT	15
9 RADIATED EMISSIONS	17
9.1 EUT OPERATION	17
9.2 TEST SETUP	18
9.3 SPECTRUM ANALYZER SETUP	19
9.4 TEST PROCEDURE	20
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	20
9.6 SUMMARY OF TEST RESULTS	21
10 CONDUCTED SPURIOUS EMISSIONS	30
10.1 TEST PROCEDURE	30
10.2 TEST RESULT	31
11 BAND EDGE MEASUREMENT	61
11.1 TEST PROCEDURE	61
11.2 TEST RESULT	62
12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	66
12.1 TEST PROCEDURE	66
12.2 TEST RESULT	66
13 MAXIMUM PEAK CONDUCTED OUTPUT POWER	80
13.1 TEST PROCEDURE	80
13.2 TEST RESULT	80
14 POWER SPECTRAL DENSITY	90
14.1 TEST PROCEDURE	90
14.2 TEST RESULT	90

15 ANTENNA REQUIREMENT100

16 RF EXPOSURE100

17 PHOTOGRAPHS OF TEST SETUP AND EUT.....100

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD24D06151831W002	2024-07-08	2024-07-08 to 2024-07-26	2024-08-20	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product: Tablet
Model(s): ET1040
Model Description: N/A
Test Sample No.: 1-1/1
Wi-Fi Specification: 802.11b/g/n/ax
Hardware Version: V1.1
Software Version: T104 A13-update-20240801

4.2 Details of E.U.T.

Operation Frequency: 802.11b/g/n/ax HT20: 2412~2462MHz
Max. RF output power: Ant 0: 25.21dBm, Ant 1: 23.77dBm, Ant 0+ Ant 1: 26.80dBm
Type of Modulation: DSSS, OFDM
Antenna installation: FPC Antenna
Antenna Gain: Ant 0: 3.17dBi, Ant 1: 2.42dBi

Note:
#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTERK lab has not verified the authenticity of its information.
Ratings: 5V, 5A from USB

4.3 Channel List

Wi-Fi							
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	-	-

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

4.6 Abnormalities from Standard Conditions

None.

4.7 Test Mode

Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11ax HT20	MCS8	1/6/11	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11ax HT20	MCS8	1/6/11	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11ax HT20	MCS8	1/6/11	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11ax HT20	MCS8	1/6/11	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11ax HT20	MCS8	1/6/11	TX

Note: Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Calibration Due Date
Conducted Emissions 2#						
1	EMI Test Receiver	R&S	ESCI	101155	2023-07-27	2024-07-26
2	LISN	SCHWARZBECK	NSLK 8128	8128-259	2022-11-30	2023-11-29
3	Pulse Limiter	CYBERTEK	EM5010	261115-001-0024	2023-07-27	2024-07-26
4	Cable	Laplace	RF300	-	2023-07-27	2024-07-26
3m Semi-anechoic Chamber for Radiation Emissions 1#						
1	Spectrum Analyzer	R&S	FSP30	100091	2024-04-22	2025-04-21
2	Amplifier	Agilent	8447D	2944A10178	2023-07-27	2024-07-26
3	Tri-log Broadband Antenna	SCHWARZBECK	VULB9163	336	2023-08-07	2024-08-06
4	Coaxial Cable	Top	TYPE16(13M)	-	2024-04-22	2025-04-21
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120D	667	2024-01-23	2025-01-22
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2023-08-02	2024-08-01
7	Broadband Preamplifier	COMPLIANCE	PAP-1G18	2004	2023-07-27	2024-07-26
8	Coaxial Cable	Top	ZT26-NJ-NJ-8M/FA	-	2024-04-22	2025-04-21
9	Microwave Amplifier	SCHWARZBECK	BBV 9721	100472	2023-07-27	2024-07-26
10	Coaxial Cable	Top	ZT40-2.92J-2.92J-2.0M	17100919	2024-04-22	2025-04-21
3m Semi-anechoic Chamber for Radiation Emissions 2#						
1	Test Receiver	R&S	ESCI	101296	2024-04-22	2025-04-21
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2023-11-04	2024-11-03
3	Active Loop Antenna	Com-Power	AL-130R	10160007	2023-05-07	2024-05-06
4	Amplifier	ANRITSU	MH648A	M43381	2024-04-22	2025-04-21
5	Cable	HUBER+SUHNER	CBL2	525178	2024-04-22	2025-04-21
RF Conducted Testing						
1	Spectrum Analyzer	R&S	FSP40	100501	2023-07-27	2024-07-26
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-07-27	2024-07-26

Test Software:

Test Item	Software name	Software version
Conduction disturbance Radiated Emission(3m)	EZ-EMC	EZ-EMC(RA-03A1-1)

6.2 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	$\pm 3.64\text{dB}$ (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	$\pm 5.08\text{dB}$ (Bilog antenna 30M~1000MHz)
	$\pm 5.47\text{ dB}$ (Horn antenna 1000M~25000MHz)
Radio Frequency	$\pm 1 \times 10^{-7}\text{Hz}$
RF Power	$\pm 0.42\text{ dB}$
RF Power Density	$\pm 0.7\text{dB}$
Conducted Spurious Emissions	$\pm 2.76\text{ dB}$ (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

7 Duty Cycle

Ant 0

Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
802.11b	2.65	8.49	0.31	31.21	5.06	-10.11
802.11g	1.33	1.49	0.89	89.26	0.49	-0.99
802.11n-HT20	0.11	0.26	0.42	42.31	3.74	-7.47
802.11ax-HT20	0.38	0.61	0.62	62.30	2.06	-4.11

Ant 1

Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
802.11b	5.62	8.60	0.65	65.35	1.85	-3.70
802.11g	0.81	1.50	0.54	54.00	2.68	-5.35
802.11n-HT20	0.14	0.26	0.54	53.85	2.69	-5.38
802.11ax-HT20	0.21	0.24	0.88	87.50	0.58	-1.16

Remark:


Duty cycle=On Time/period;

Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;

Average factor= $20 \log_{10} \text{Duty cycle}$


Ant 0:

Wi-Fi 802.11b

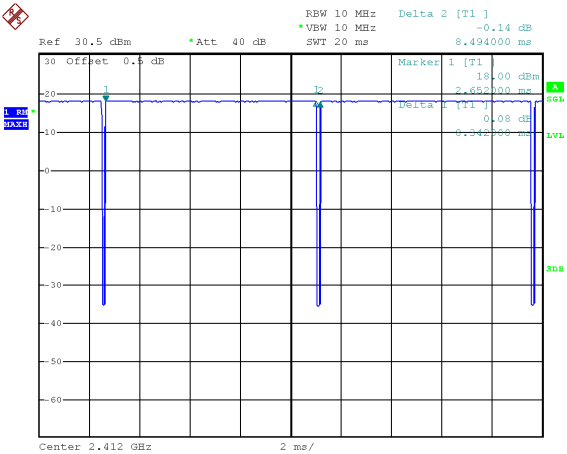


Date: 15.JUL.2024 15:59:26

Wi-Fi 802.11g

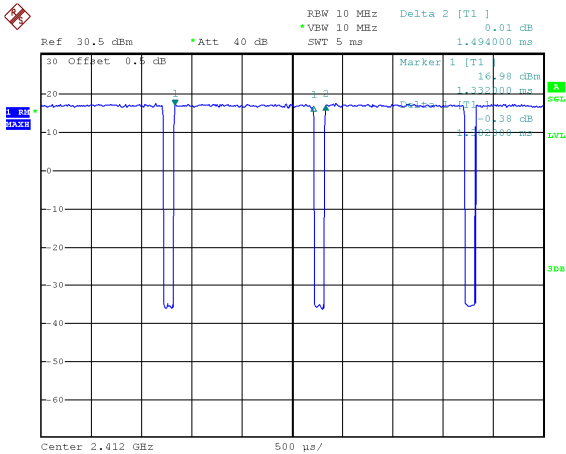


Date: 15.JUL.2024 15:58:07

Wi-Fi 802.11n-HT20

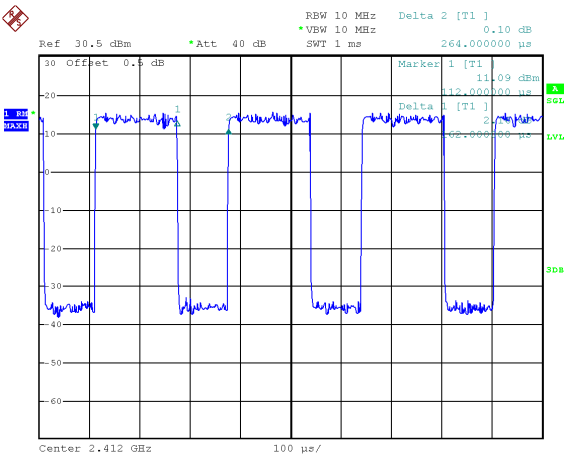

Date: 15.JUL.2024 15:56:32


Wi-Fi 802.11ax-HT20

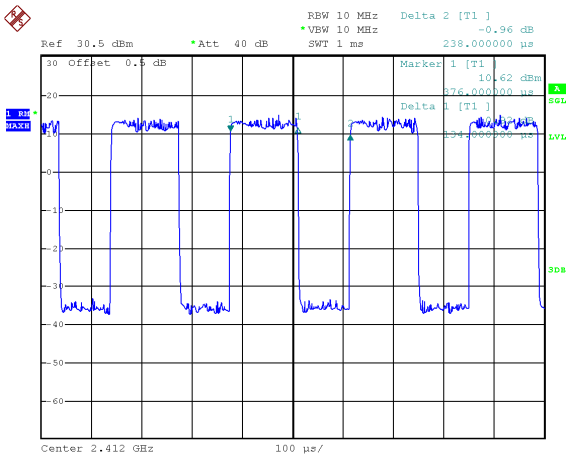

Date: 16.JUL.2024 10:16:18


Ant 1:

Wi-Fi 802.11b

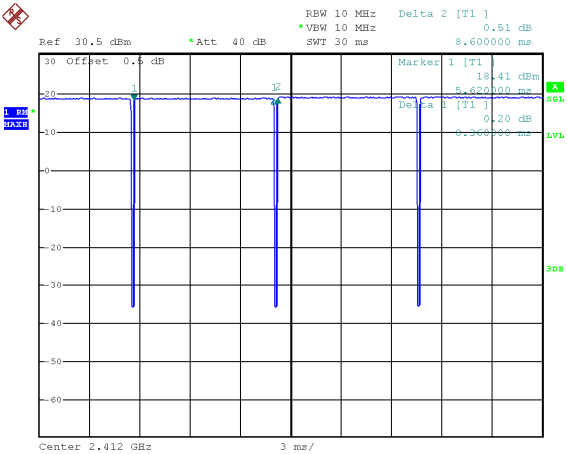


Date: 15.JUL.2024 11:51:29

Wi-Fi 802.11g

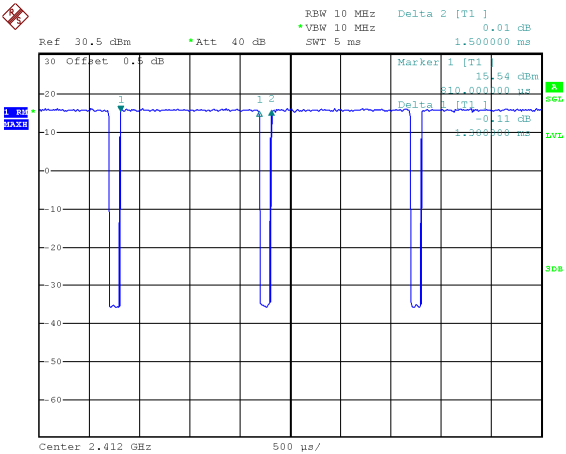


Date: 15.JUL.2024 11:52:43

Wi-Fi 802.11n-HT20

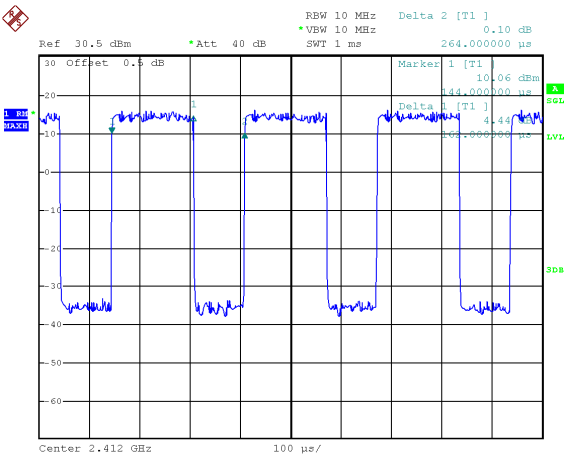

Date: 15.JUL.2024 11:54:53

Wi-Fi 802.11ax-HT20

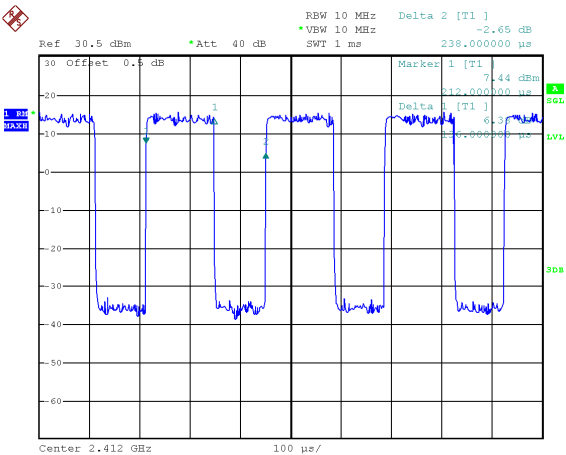

Date: 16.JUL.2024 10:17:37

8 Conducted Emission

Test Requirement: 47CFR FCC Part15 Subpart C §15.207
 Test Method: ANSI C63.10:2013
 Test Result: PASS
 Frequency Range: 150kHz to 30MHz
 Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0. to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50

*Decreases with the logarithm of the frequency.


8.1 E.U.T. Operation

Operating Environment:
 Temperature: 27.3 °C
 Humidity: 56.8 % RH
 Atmospheric Pressure: 101.6kPa
 EUT Operation:

The test was performed in Transmitting mode, the worst test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

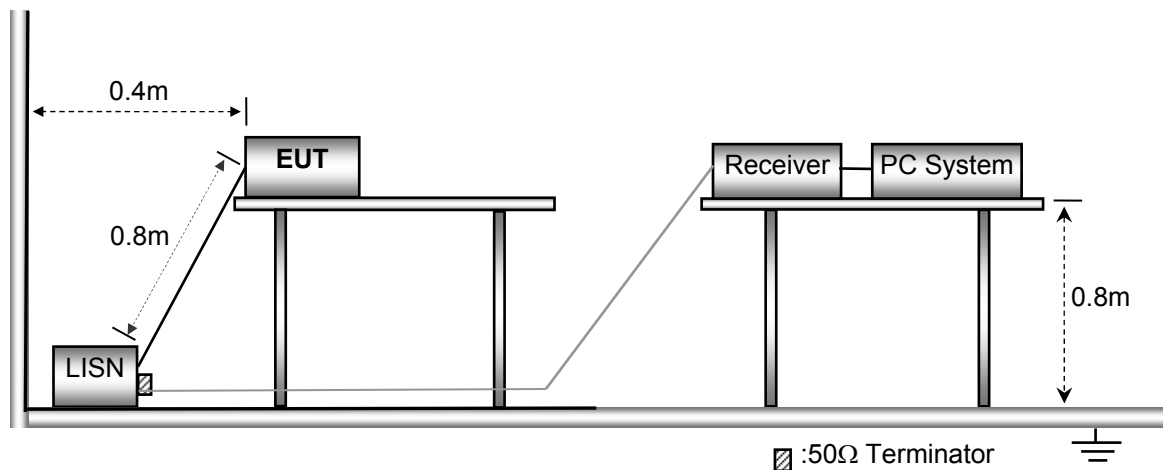


8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


8.4 Conducted Emission Test Result

Remark: only the worst data (Ant 0+Ant 1 TX 11b mode High channel mode) were reported

Live line:

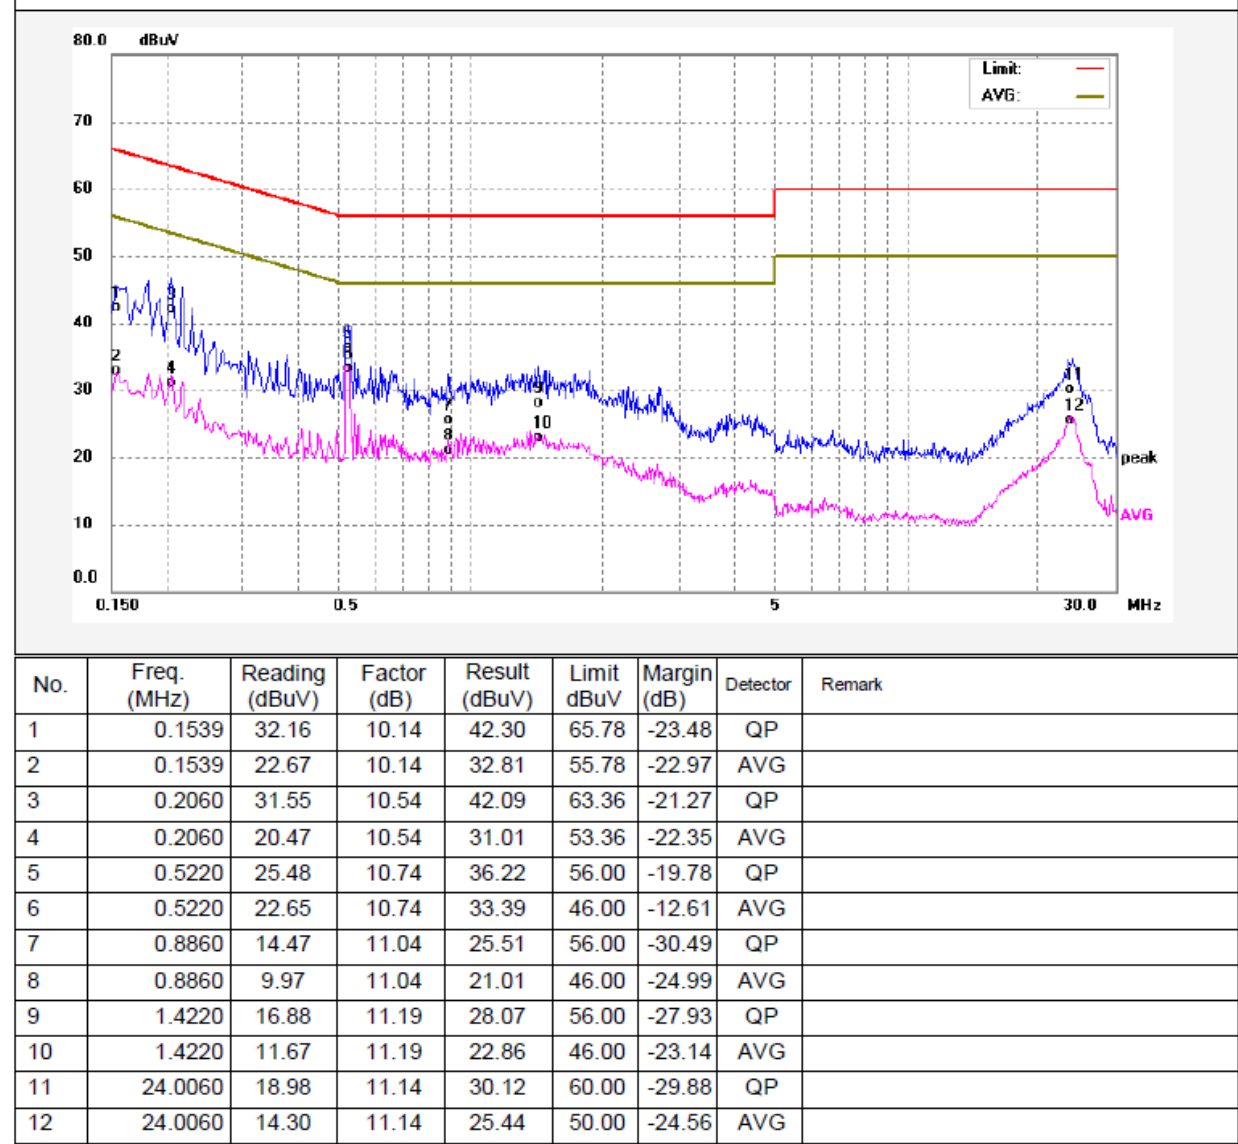

Neutral line:

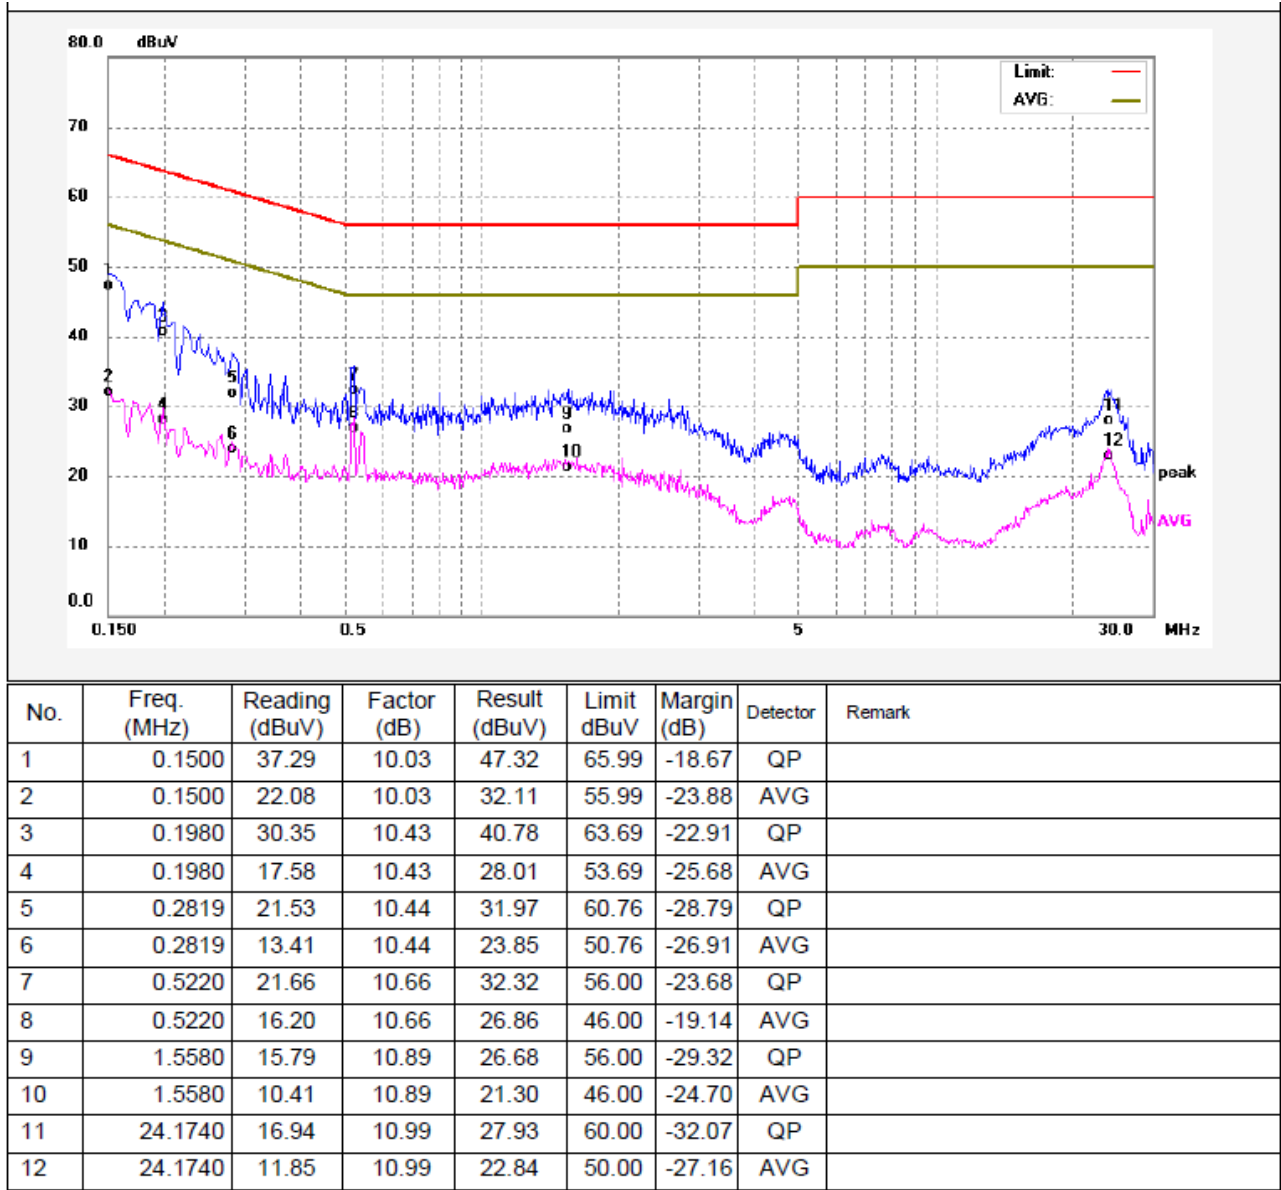

9 Radiated Emissions

Test Requirement: 47CFR FCC Part15 Subpart C §15.209&15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in Transmitting mode, the worst test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

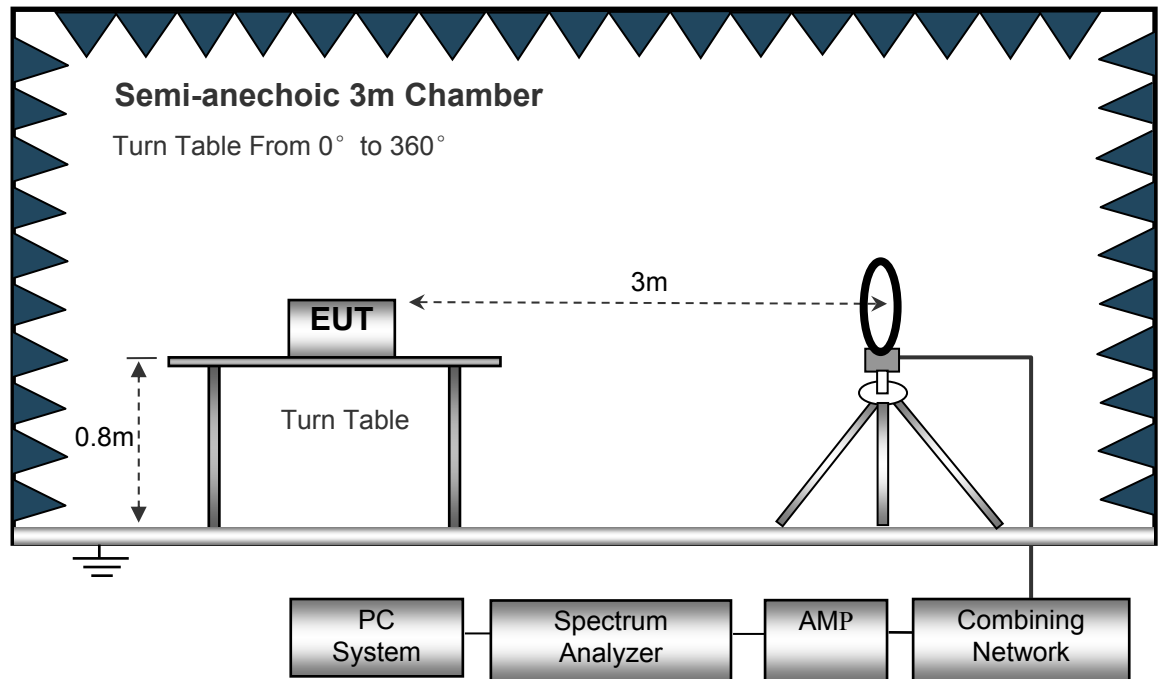

The test setup for emission measurement from 30 MHz to 1 GHz.

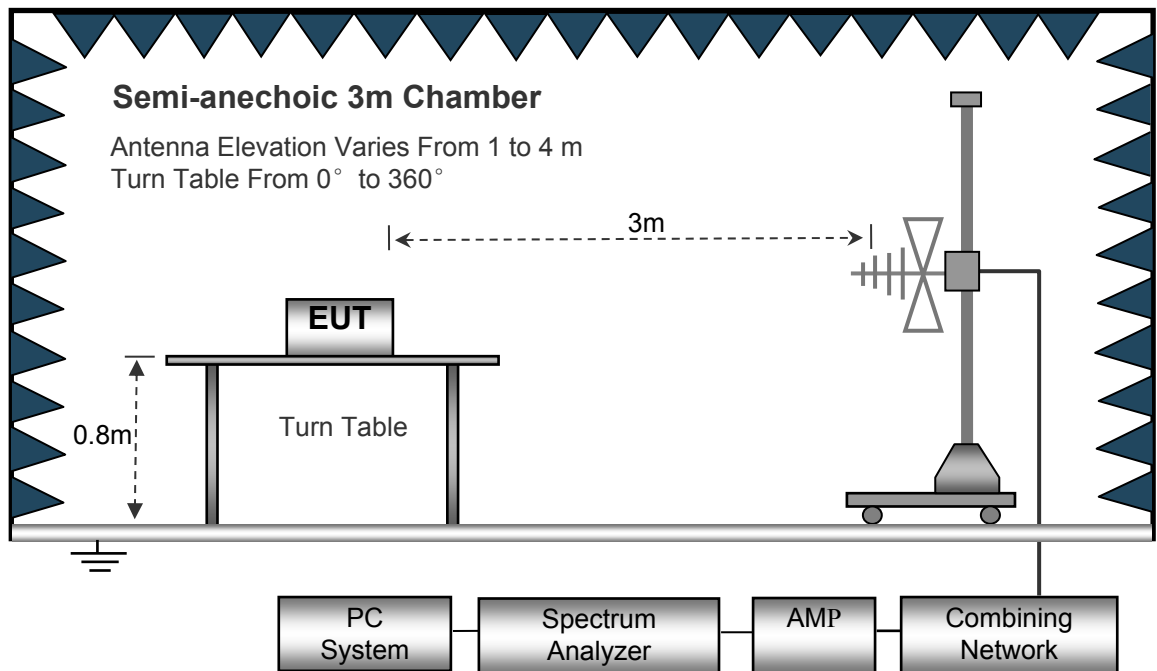

The test setup for emission measurement above 1 GHz.

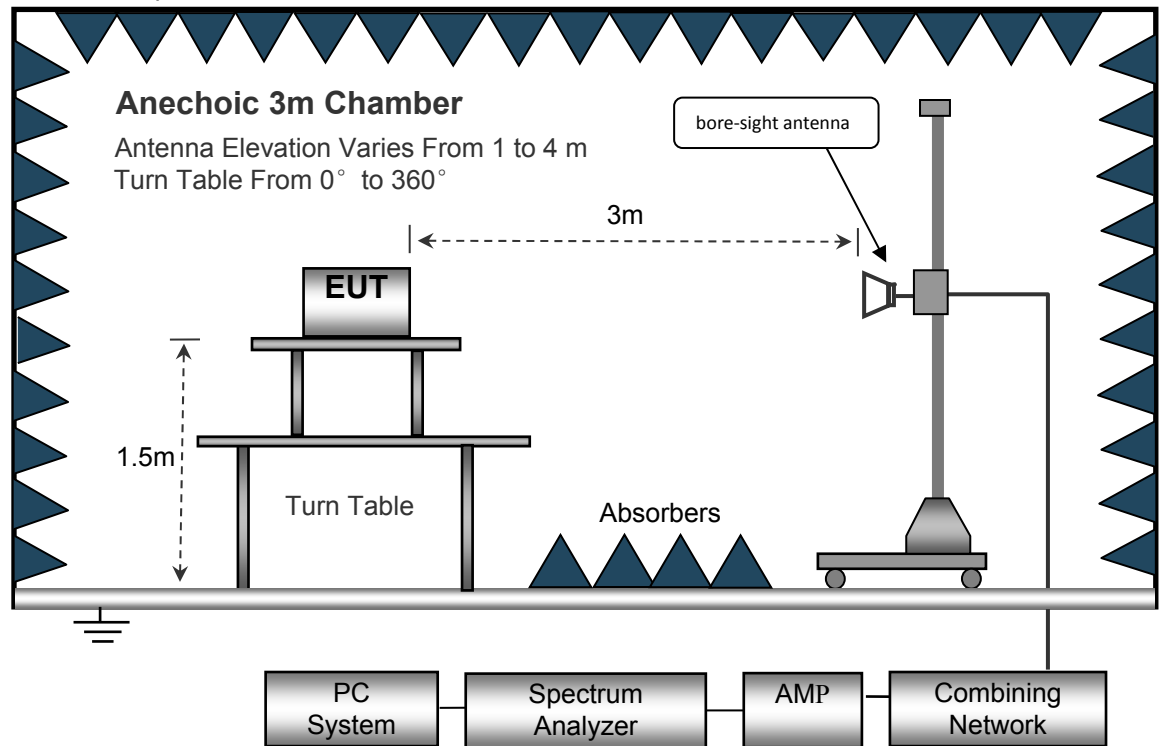

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth..... 10kHz
Video Bandwidth..... 10kHz
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 100kHz
Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 3MHz
Detector Ave.
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency: 9kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 8GHz

Ant 0:

Remark: only the worst data TX 11b mode was reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
425.16	41.38	QP	308	1.1	H	-13.21	28.17	46.00	-17.83
425.16	46.90	QP	242	1.2	V	-13.21	33.69	46.00	-12.31
4824.00	52.73	PK	312	1.6	V	-1.06	51.67	74.00	-22.33
4824.00	40.23	Ave	312	1.6	V	-1.06	39.17	54.00	-14.83
7236.00	49.24	PK	170	1.6	H	1.33	50.57	74.00	-23.43
7236.00	38.83	Ave	170	1.6	H	1.33	40.16	54.00	-13.84
2324.06	48.88	PK	208	1.6	V	-13.19	35.69	74.00	-38.31
2324.06	38.56	Ave	208	1.6	V	-13.19	25.37	54.00	-28.63
2350.56	42.09	PK	283	1.6	H	-13.14	28.95	74.00	-45.05
2350.56	38.51	Ave	283	1.6	H	-13.14	25.37	54.00	-28.63
2483.51	43.52	PK	13	1.1	V	-13.08	30.44	74.00	-43.56
2483.51	36.54	Ave	13	1.1	V	-13.08	23.46	54.00	-30.54

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
425.16	40.78	QP	330	1.6	H	-13.21	27.57	46.00	-18.43
425.16	45.80	QP	124	1.0	V	-13.21	32.59	46.00	-13.41
4874.00	52.00	PK	33	1.3	V	-0.62	51.38	74.00	-22.62
4874.00	39.99	Ave	33	1.3	V	-0.62	39.37	54.00	-14.63
7311.00	49.97	PK	154	1.4	H	2.21	52.18	74.00	-21.82
7311.00	38.54	Ave	154	1.4	H	2.21	40.75	54.00	-13.25
2347.66	46.55	PK	344	1.8	V	-13.19	33.36	74.00	-40.64
2347.66	38.74	Ave	344	1.8	V	-13.19	25.55	54.00	-28.45
2361.59	44.32	PK	190	1.9	H	-13.14	31.18	74.00	-42.82
2361.59	37.85	Ave	190	1.9	H	-13.14	24.71	54.00	-29.29
2490.91	44.90	PK	250	1.2	V	-13.08	31.82	74.00	-42.18
2490.91	37.59	Ave	250	1.2	V	-13.08	24.51	54.00	-29.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
425.16	42.27	QP	332	1.7	H	-13.21	29.06	46.00	-16.94
425.16	44.66	QP	10	1.9	V	-13.21	31.45	46.00	-14.55
4924.00	50.87	PK	332	1.2	V	-0.24	50.63	74.00	-23.37
4924.00	38.82	Ave	332	1.2	V	-0.24	38.58	54.00	-15.42
7386.00	49.98	PK	108	1.8	H	2.84	52.82	74.00	-21.18
7386.00	37.36	Ave	108	1.8	H	2.84	40.20	54.00	-13.80
2333.91	45.80	PK	256	1.9	V	-13.19	32.61	74.00	-41.39
2333.91	38.94	Ave	256	1.9	V	-13.19	25.75	54.00	-28.25
2363.54	42.36	PK	258	2.0	H	-13.14	29.22	74.00	-44.78
2363.54	37.00	Ave	258	2.0	H	-13.14	23.86	54.00	-30.14
2485.66	43.11	PK	66	1.9	V	-13.08	30.03	74.00	-43.97
2485.66	37.43	Ave	66	1.9	V	-13.08	24.35	54.00	-29.65

Ant 1:

Remark: only the worst data TX 11n H20 mode was reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n H20: Low Channel 2412MHz									
425.16	40.68	QP	292	1.7	H	-13.21	27.47	46.00	-18.53
425.16	47.03	QP	348	1.8	V	-13.21	33.82	46.00	-12.18
4824.00	52.97	PK	129	1.9	V	-1.06	51.91	74.00	-22.09
4824.00	40.91	Ave	129	1.9	V	-1.06	39.85	54.00	-14.15
7236.00	49.37	PK	105	1.7	H	1.33	50.70	74.00	-23.30
7236.00	38.85	Ave	105	1.7	H	1.33	40.18	54.00	-13.82
2342.96	48.44	PK	1	1.7	V	-13.19	35.25	74.00	-38.75
2342.96	39.27	Ave	1	1.7	V	-13.19	26.08	54.00	-27.92
2383.23	43.61	PK	239	1.6	H	-13.14	30.47	74.00	-43.53
2383.23	37.37	Ave	239	1.6	H	-13.14	24.23	54.00	-29.77
2493.43	43.87	PK	199	1.4	V	-13.08	30.79	74.00	-43.21
2493.43	36.62	Ave	199	1.4	V	-13.08	23.54	54.00	-30.46

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11n H20: Middle Channel 2437MHz									
425.16	41.61	QP	90	1.3	H	-13.21	28.40	46.00	-17.60
425.16	47.79	QP	30	1.6	V	-13.21	34.58	46.00	-11.42
4874.00	53.72	PK	132	1.4	V	-0.62	53.10	74.00	-20.90
4874.00	39.82	Ave	132	1.4	V	-0.62	39.20	54.00	-14.80
7311.00	48.36	PK	54	1.5	H	2.21	50.57	74.00	-23.43
7311.00	37.74	Ave	54	1.5	H	2.21	39.95	54.00	-14.05
2334.36	45.18	PK	117	1.0	V	-13.19	31.99	74.00	-42.01
2334.36	39.55	Ave	117	1.0	V	-13.19	26.36	54.00	-27.64
2351.34	43.81	PK	185	1.8	H	-13.14	30.67	74.00	-43.33
2351.34	36.43	Ave	185	1.8	H	-13.14	23.29	54.00	-30.71
2499.51	43.55	PK	6	1.1	V	-13.08	30.47	74.00	-43.53
2499.51	37.87	Ave	6	1.1	V	-13.08	24.79	54.00	-29.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n H20: High Channel 2462MHz									
425.16	42.05	QP	348	1.1	H	-13.21	28.84	46.00	-17.16
425.16	47.91	QP	191	1.7	V	-13.21	34.70	46.00	-11.30
4924.00	53.41	PK	43	1.6	V	-0.24	53.17	74.00	-20.83
4924.00	40.27	Ave	43	1.6	V	-0.24	40.03	54.00	-13.97
7386.00	48.40	PK	360	1.7	H	2.84	51.24	74.00	-22.76
7386.00	37.97	Ave	360	1.7	H	2.84	40.81	54.00	-13.19
2328.18	46.94	PK	329	1.3	V	-13.19	33.75	74.00	-40.25
2328.18	37.46	Ave	329	1.3	V	-13.19	24.27	54.00	-29.73
2359.92	43.33	PK	96	2.0	H	-13.14	30.19	74.00	-43.81
2359.92	38.53	Ave	96	2.0	H	-13.14	25.39	54.00	-28.61
2498.31	43.94	PK	210	1.4	V	-13.08	30.86	74.00	-43.14
2498.31	36.67	Ave	210	1.4	V	-13.08	23.59	54.00	-30.41

Ant 0+Ant 1:

Remark: only the worst data TX 11n H20 mode was reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n H20: Low Channel 2412MHz									
425.16	43.26	QP	318	1.2	H	-13.21	30.05	46.00	-15.95
425.16	46.60	QP	175	1.1	V	-13.21	33.39	46.00	-12.61
4824.00	52.92	PK	99	1.3	V	-1.06	51.86	74.00	-22.14
4824.00	40.64	Ave	99	1.3	V	-1.06	39.58	54.00	-14.42
7236.00	49.36	PK	297	1.7	H	1.33	50.69	74.00	-23.31
7236.00	38.96	Ave	297	1.7	H	1.33	40.29	54.00	-13.71
2337.89	48.36	PK	82	1.2	V	-13.19	35.17	74.00	-38.83
2337.89	37.73	Ave	82	1.2	V	-13.19	24.54	54.00	-29.46
2376.90	43.57	PK	349	1.1	H	-13.14	30.43	74.00	-43.57
2376.90	38.25	Ave	349	1.1	H	-13.14	25.11	54.00	-28.89
2491.54	44.17	PK	147	1.7	V	-13.08	31.09	74.00	-42.91
2491.54	36.46	Ave	147	1.7	V	-13.08	23.38	54.00	-30.62

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11n H20: Middle Channel 2437MHz									
425.16	42.52	QP	189	1.5	H	-13.21	29.31	46.00	-16.69
425.16	47.98	QP	40	1.1	V	-13.21	34.77	46.00	-11.23
4874.00	52.26	PK	72	1.8	V	-0.62	51.64	74.00	-22.36
4874.00	41.04	Ave	72	1.8	V	-0.62	40.42	54.00	-13.58
7311.00	50.71	PK	283	1.1	H	2.21	52.92	74.00	-21.08
7311.00	38.28	Ave	283	1.1	H	2.21	40.49	54.00	-13.51
2328.61	46.67	PK	287	1.2	V	-13.19	33.48	74.00	-40.52
2328.61	38.00	Ave	287	1.2	V	-13.19	24.81	54.00	-29.19
2363.31	43.82	PK	94	1.5	H	-13.14	30.68	74.00	-43.32
2363.31	36.51	Ave	94	1.5	H	-13.14	23.37	54.00	-30.63
2486.88	43.12	PK	214	1.6	V	-13.08	30.04	74.00	-43.96
2486.88	36.54	Ave	214	1.6	V	-13.08	23.46	54.00	-30.54

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n H20: High Channel 2462MHz									
425.16	42.50	QP	22	1.9	H	-13.21	29.29	46.00	-16.71
425.16	48.97	QP	286	1.0	V	-13.21	35.76	46.00	-10.24
4924.00	53.74	PK	275	1.5	V	-0.24	53.50	74.00	-20.50
4924.00	40.75	Ave	275	1.5	V	-0.24	40.51	54.00	-13.49
7386.00	50.61	PK	283	1.9	H	2.84	53.45	74.00	-20.55
7386.00	37.50	Ave	283	1.9	H	2.84	40.34	54.00	-13.66
2335.64	46.90	PK	8	1.8	V	-13.19	33.71	74.00	-40.29
2335.64	37.56	Ave	8	1.8	V	-13.19	24.37	54.00	-29.63
2379.94	43.91	PK	49	1.7	H	-13.14	30.77	74.00	-43.23
2379.94	37.22	Ave	49	1.7	H	-13.14	24.08	54.00	-29.92
2485.03	42.90	PK	346	2.0	V	-13.08	29.82	74.00	-44.18
2485.03	36.63	Ave	346	2.0	V	-13.08	23.55	54.00	-30.45

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to _ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW _ [3 × RBW].
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

10.2 Test Result

Ant 0:


9kHz – 150kHz

Mode: TX 11b channel 1

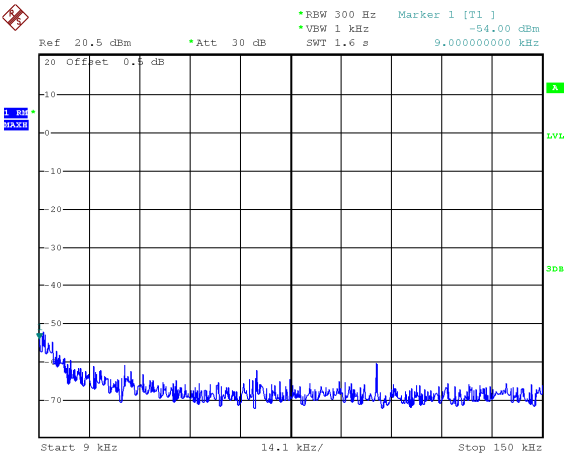


Date: 16.JUL.2024 11:12:52

Mode: TX 11b channel 6

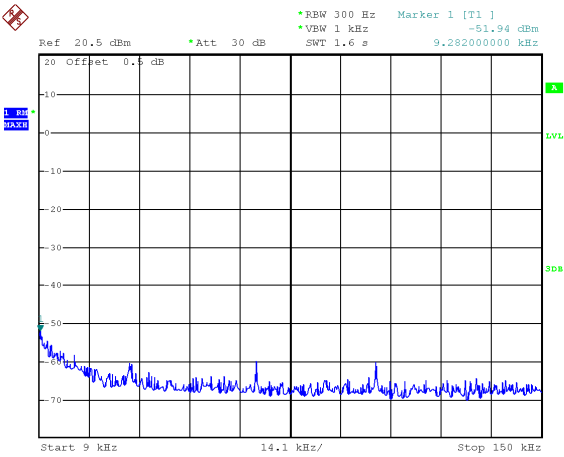


Date: 16.JUL.2024 11:09:50

Mode: TX 11b channel 11

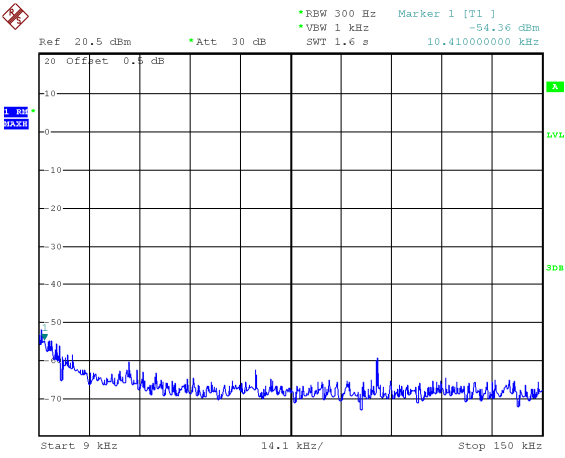


Date: 16.JUL.2024 11:10:21

Mode: TX 11g channel 1

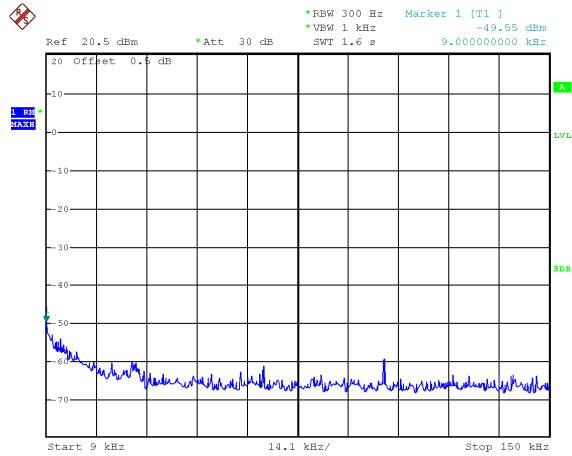


Date: 16.JUL.2024 11:12:29

Mode: TX 11g channel 6

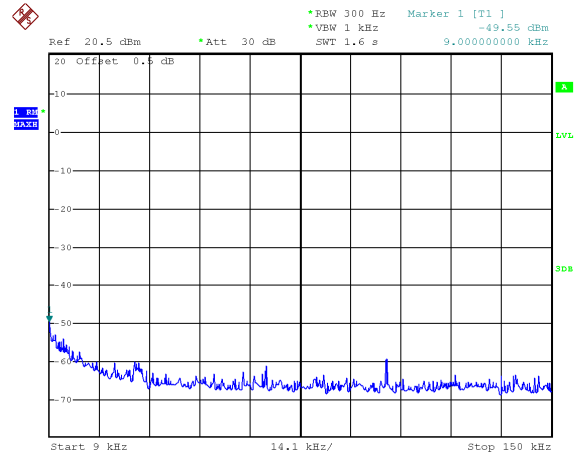


Date: 16.JUL.2024 11:12:02

Mode: TX 11g channel 11

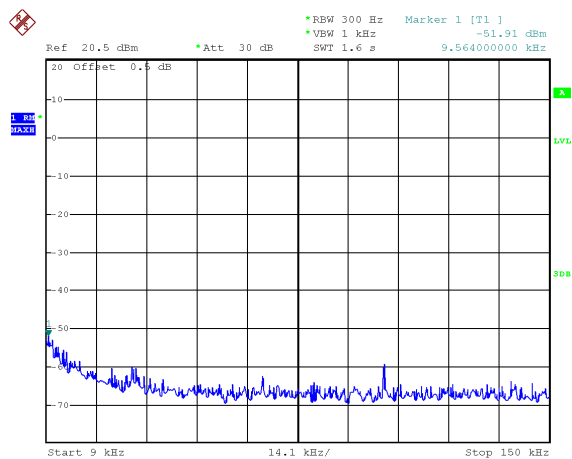


Date: 16.JUL.2024 11:11:02

Mode: TX 11n HT20 channel 1

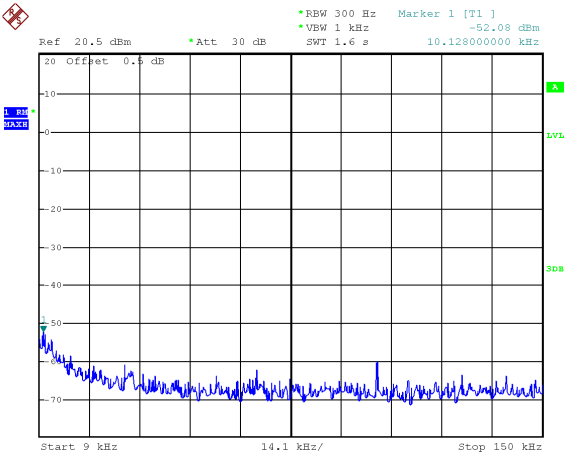


Date: 16.JUL.2024 11:13:08

Mode: TX 11 n HT20 channel 6

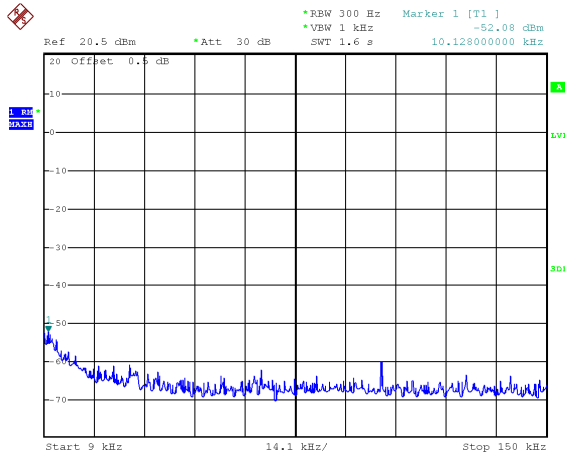


Date: 16.JUL.2024 11:13:25

Mode: TX 11 n HT20 channel 11

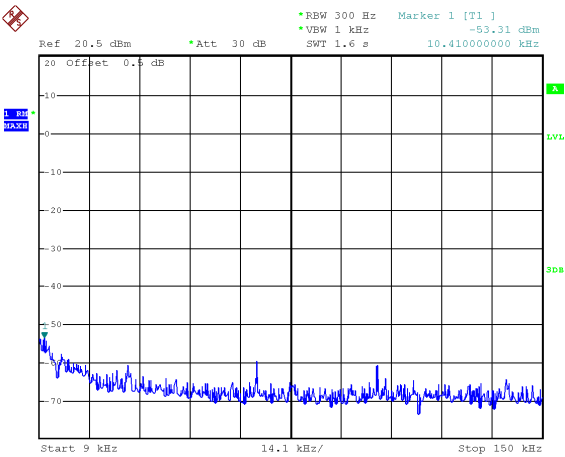


Date: 16.JUL.2024 11:13:59

Mode: TX 11ax HT20 channel 3

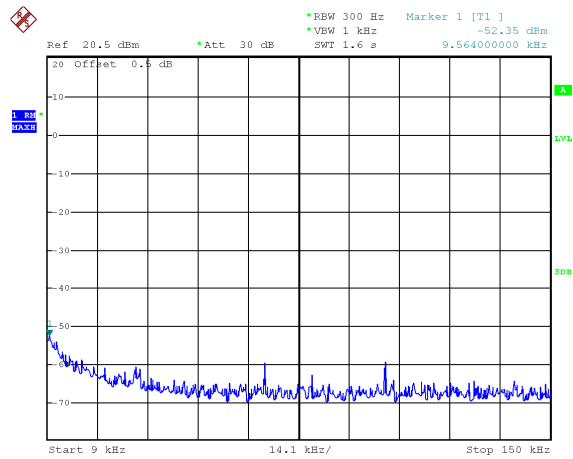


Date: 16.JUL.2024 11:14:27

Mode: TX 11 ax HT20 channel 6

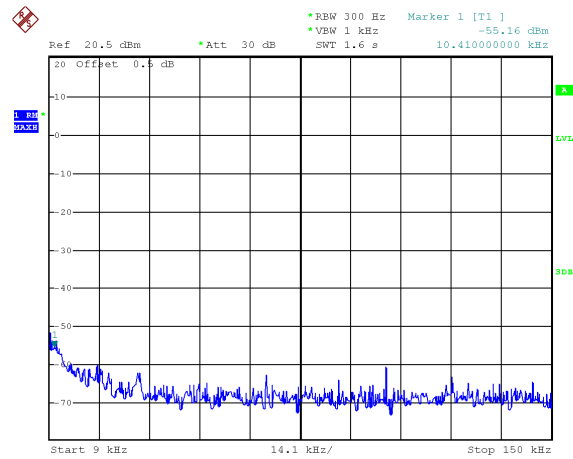

Date: 16.JUL.2024 11:14:51


Mode: TX 11 ax HT20 channel 9

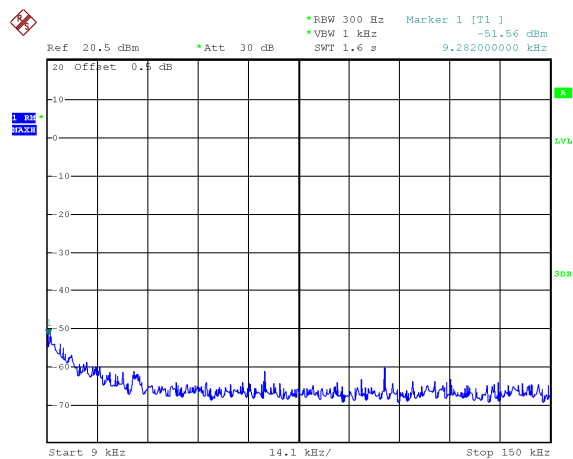

Date: 16.JUL.2024 11:15:53


150kHz – 30MHz

Mode: TX 11b channel 1

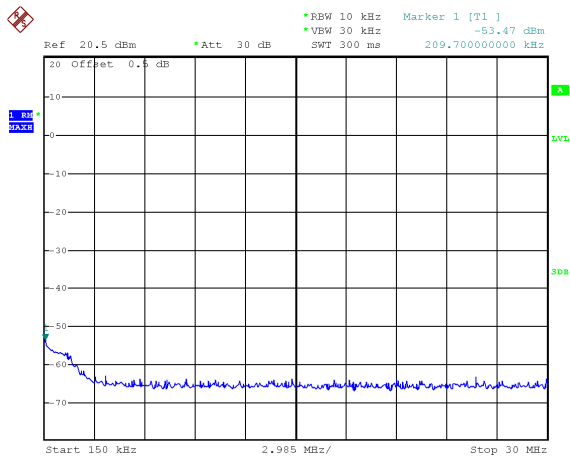


Date: 16.JUL.2024 11:40:44

Mode: TX 11b channel 6

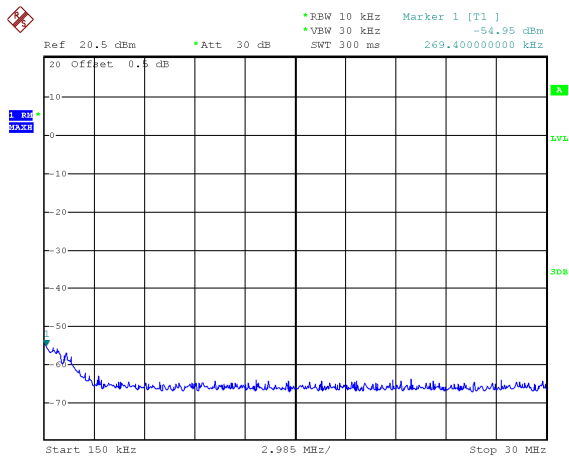


Date: 16.JUL.2024 11:41:05

Mode: TX 11b channel 11

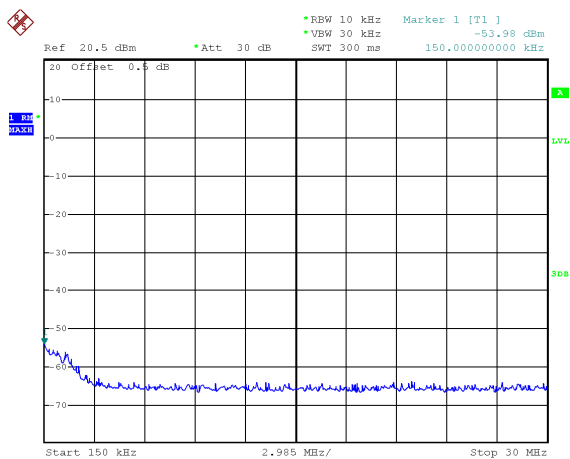


Date: 16.JUL.2024 11:41:18

Mode: TX 11g channel 1

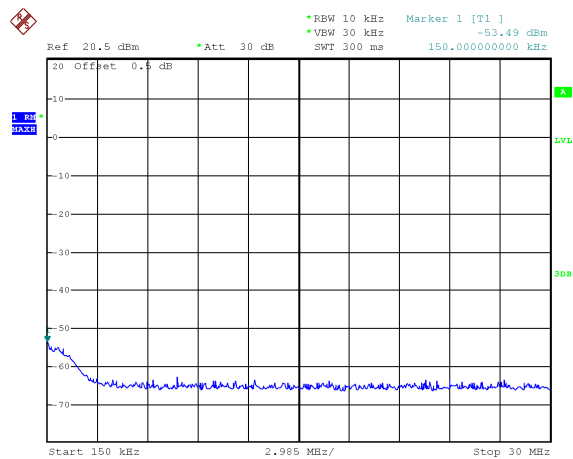


Date: 16.JUL.2024 11:42:14

Mode: TX 11g channel 6

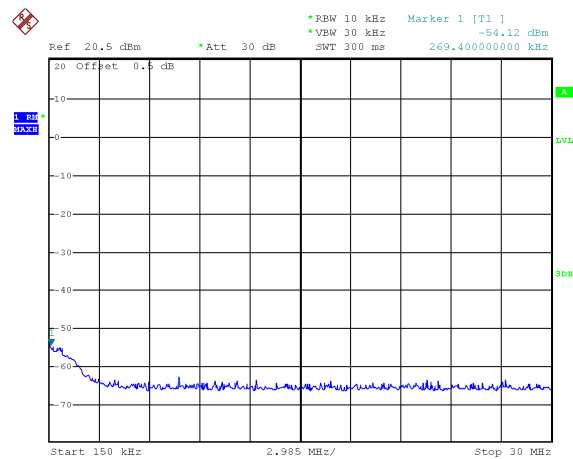


Date: 16.JUL.2024 11:41:59

Mode: TX 11g channel 11

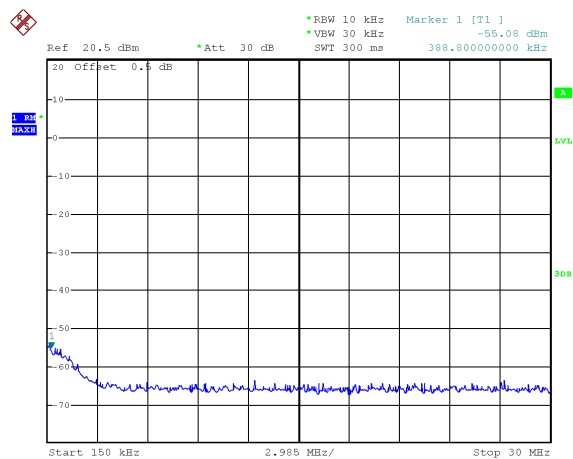


Date: 16.JUL.2024 11:41:43

Mode: TX 11n HT20 channel 1

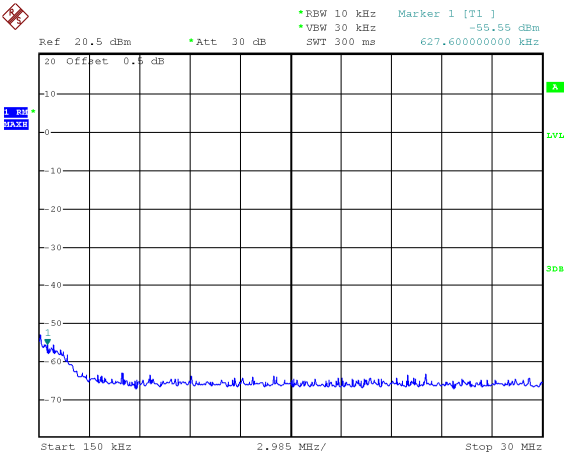


Date: 16.JUL.2024 11:42:37

Mode: TX 11 n HT20 channel 6

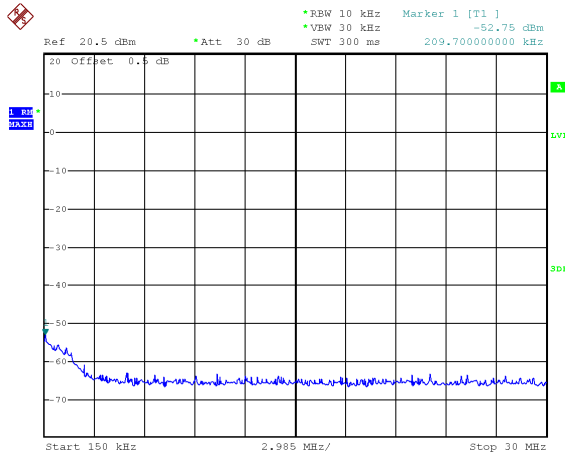


Date: 16.JUL.2024 11:42:52

Mode: TX 11 n HT20 channel 11

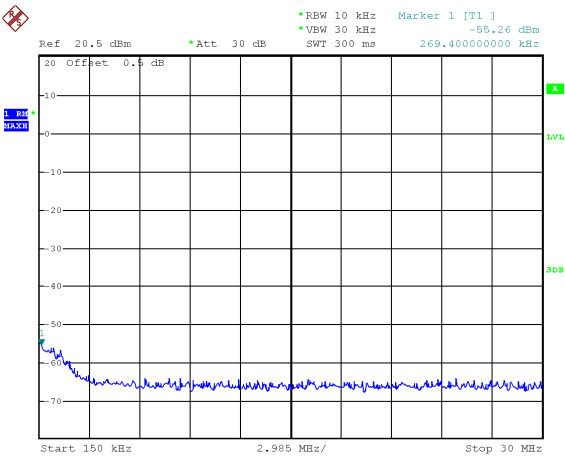


Date: 16.JUL.2024 11:43:11

Mode: TX 11 ax HT20 channel 3

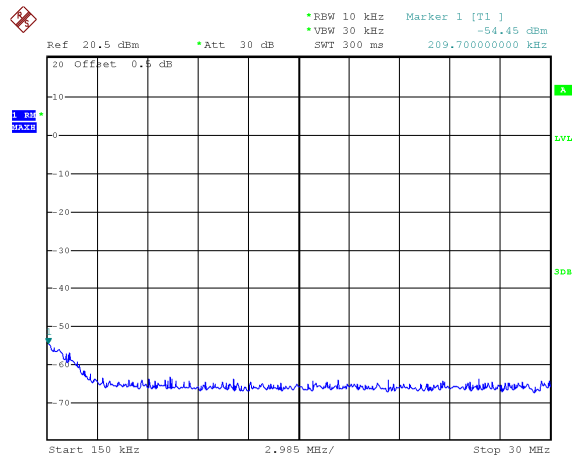


Date: 16.JUL.2024 11:44:10

Mode: TX 11 ax HT20 channel 6

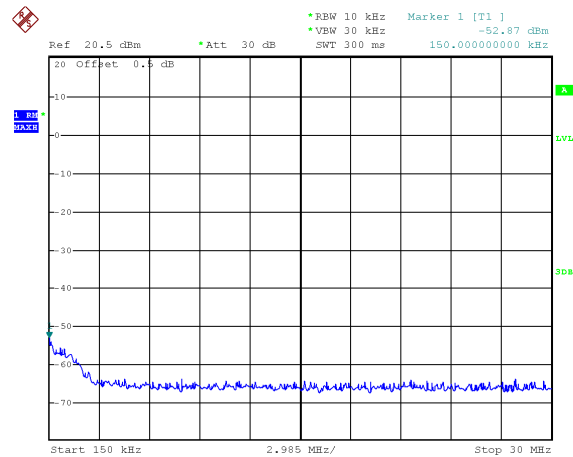

Date: 16.JUL.2024 11:43:47

Mode: TX 11 ax HT20 channel 9

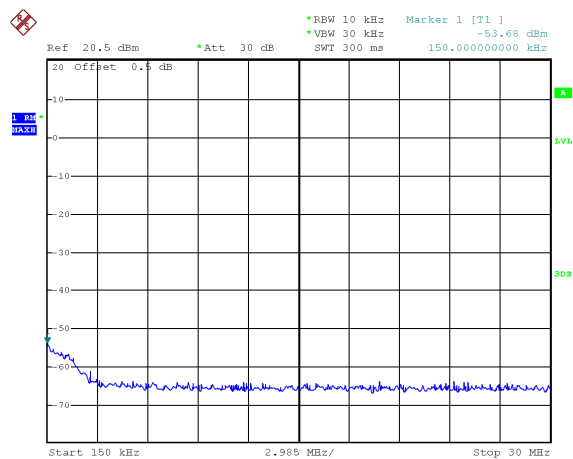


Date: 16.JUL.2024 11:43:29

Above 30MHz

Mode: TX 11b channel 1


Fundamental

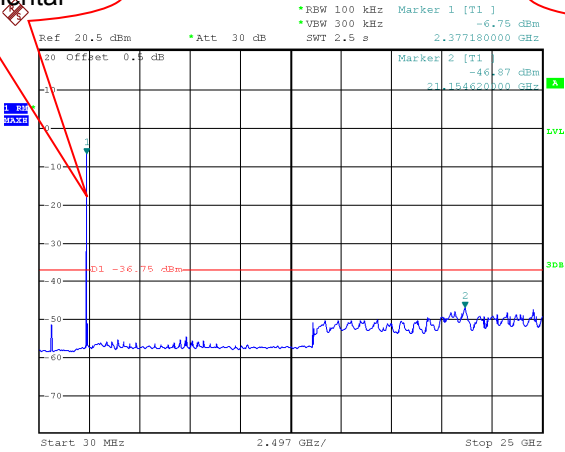

Date: 15.JUL.2024 16:51:37

Mode: TX 11b channel 6


Fundamental

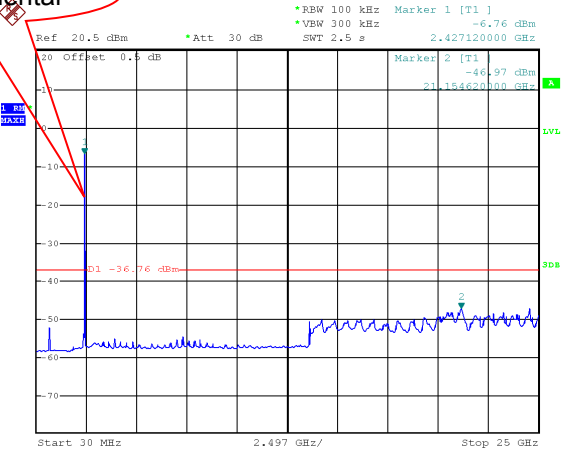

Date: 15.JUL.2024 16:50:50


Mode: TX 11b channel 11

Fundamental

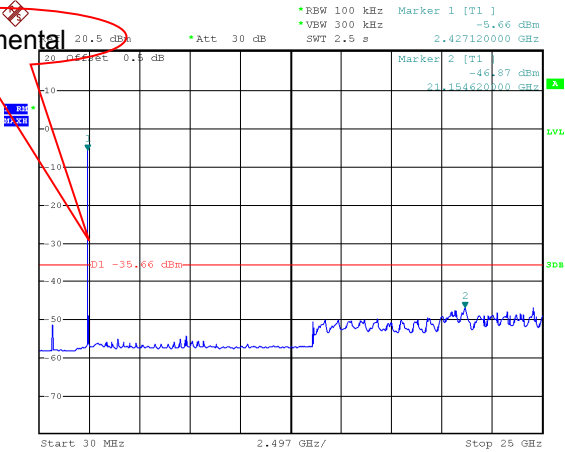

Date: 16.JUL.2024 10:53:15

Mode: TX 11g channel 1

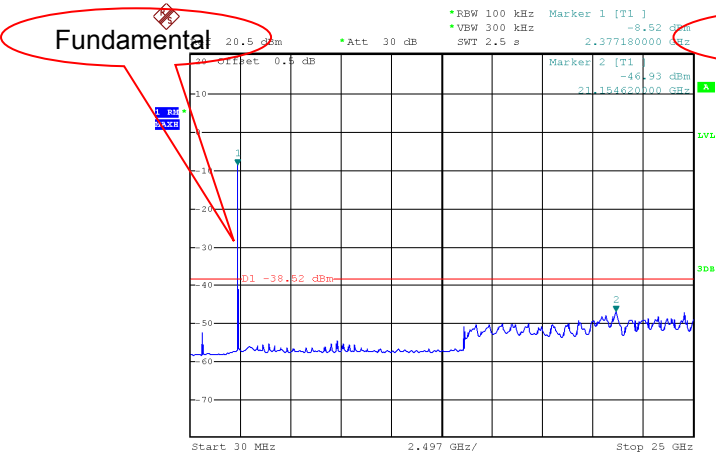


Date: 15.JUL.2024 16:44:41

Mode: TX 11g channel 6




Date: 15.JUL.2024 16:45:30

Mode: TX 11g channel 11

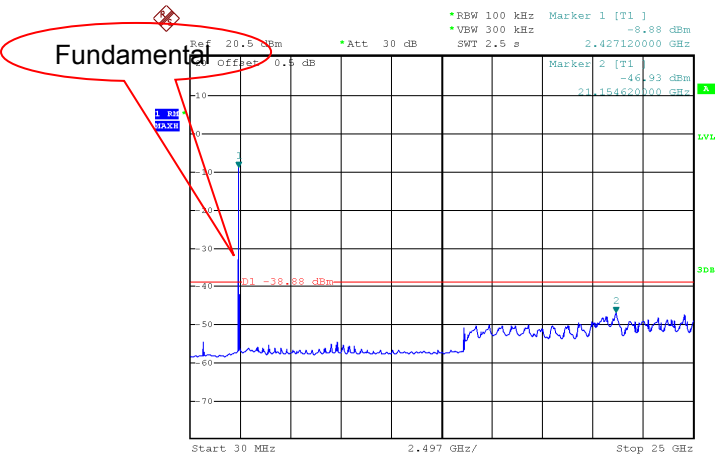


Date: 15.JUL.2024 16:46:18

Mode: TX 11n HT20 channel 1

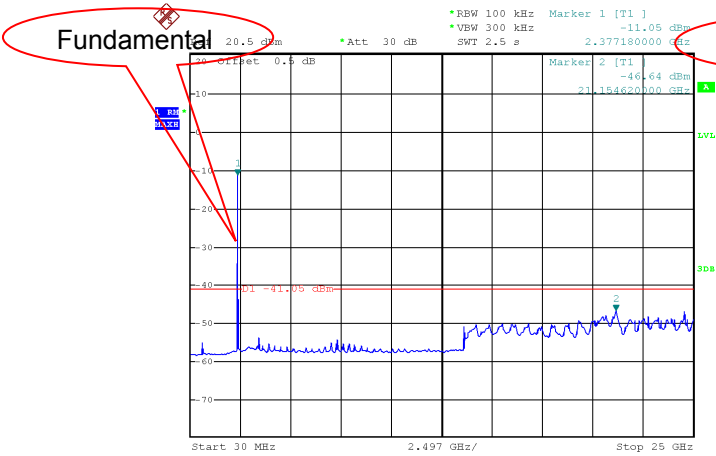


Date: 15.JUL.2024 16:42:07

Mode: TX 11 n HT20 channel 6

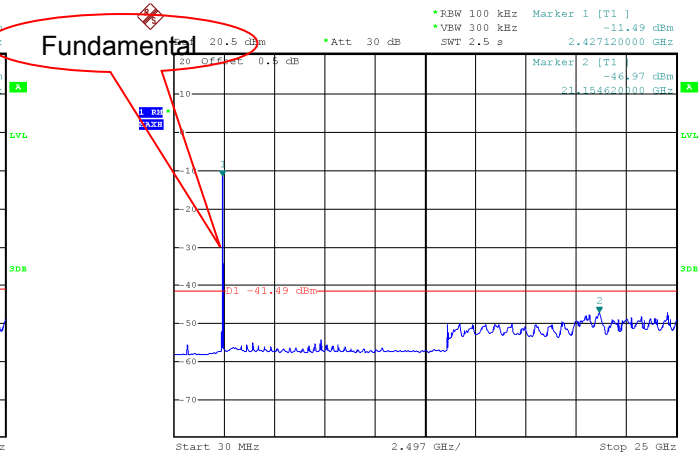


Date: 15.JUL.2024 16:41:01

Mode: TX 11 n HT20 channel 11

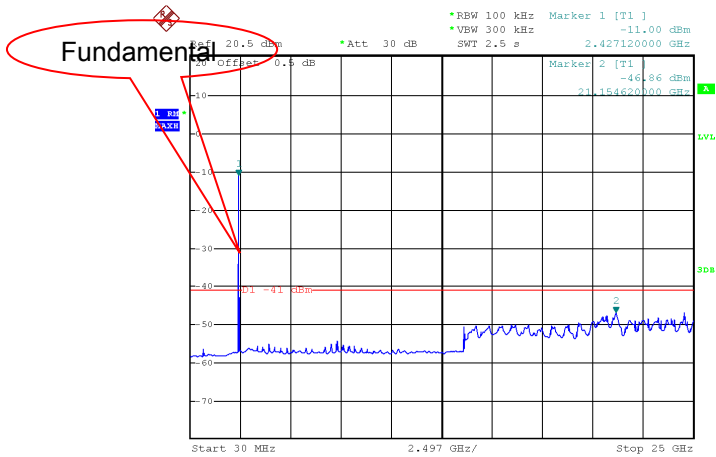


Date: 15.JUL.2024 16:37:56

Mode: TX 11 ax HT20 channel 3

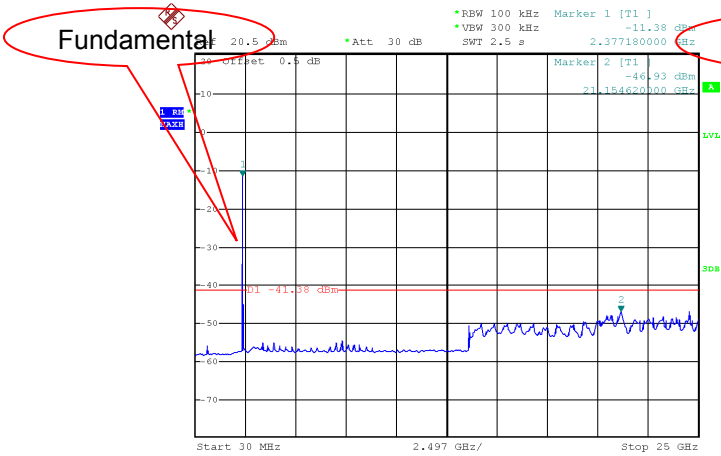


Date: 15.JUL.2024 16:53:21

Mode: TX 11 ax HT20 channel 6

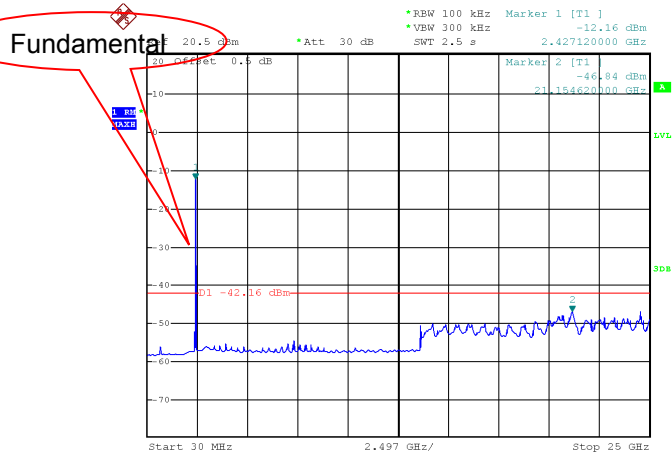

Date: 15.JUL.2024 16:54:25

Mode: TX 11 ax HT20 channel 9

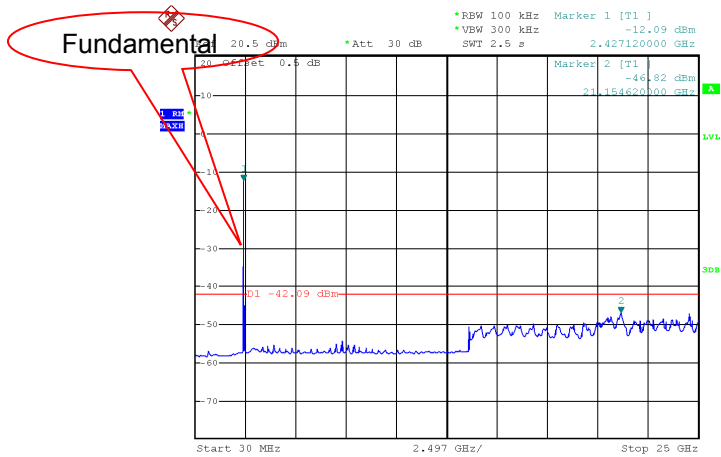


Date: 15.JUL.2024 16:55:33

Ant 1:


9kHz – 150kHz

Mode: TX 11b channel 1

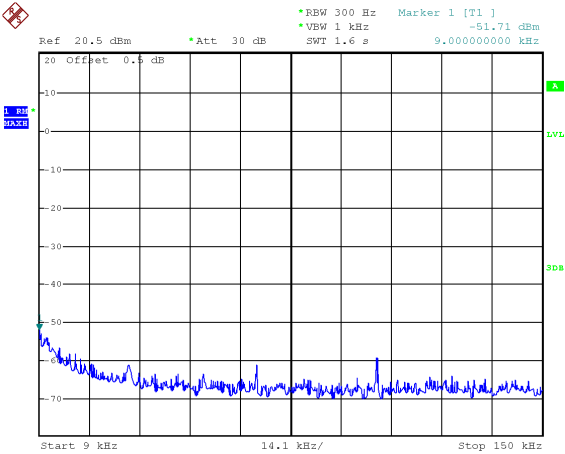


Date: 16.JUL.2024 11:19:10

Mode: TX 11b channel 6

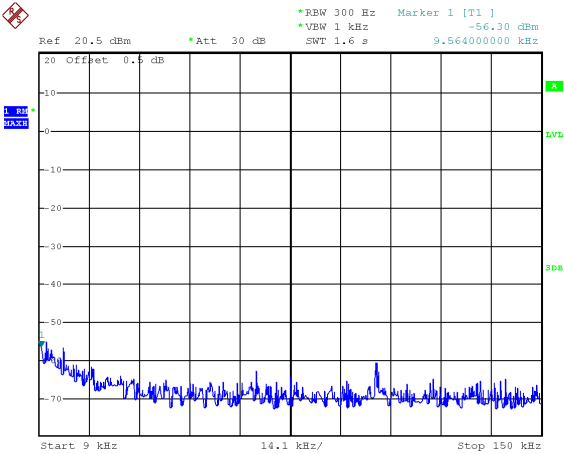


Date: 16.JUL.2024 11:19:29

Mode: TX 11b channel 11

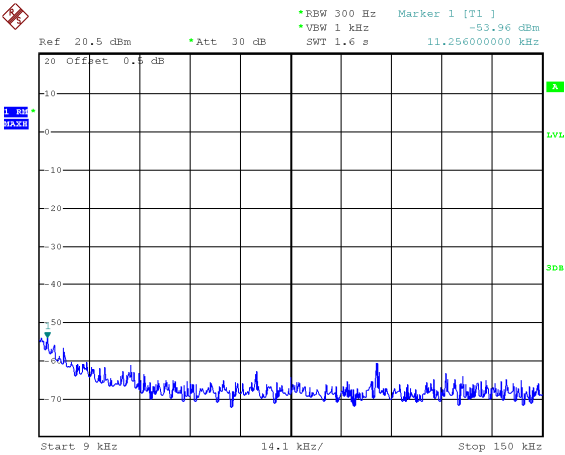


Date: 16.JUL.2024 11:19:44

Mode: TX 11g channel 1

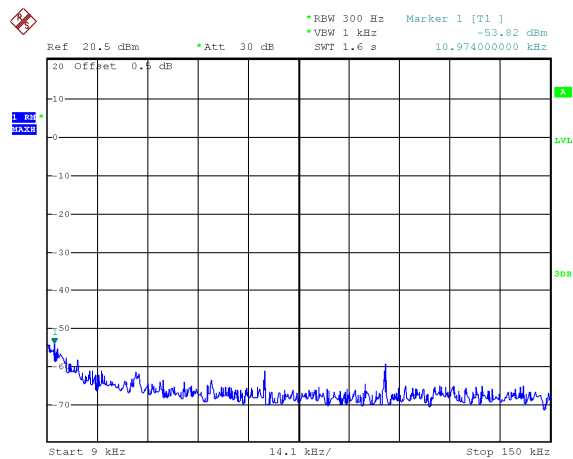


Date: 16.JUL.2024 11:18:53

Mode: TX 11g channel 6

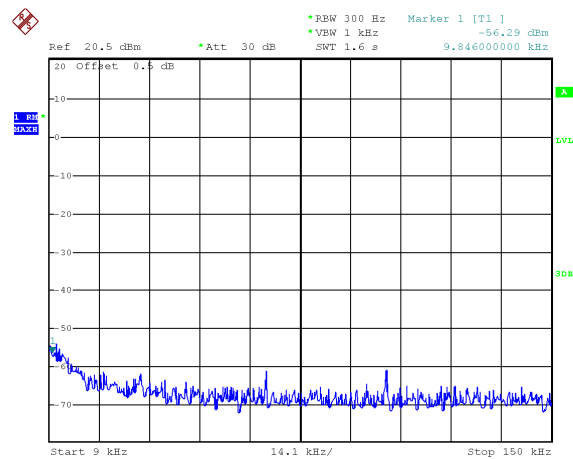


Date: 16.JUL.2024 11:18:39

Mode: TX 11g channel 11

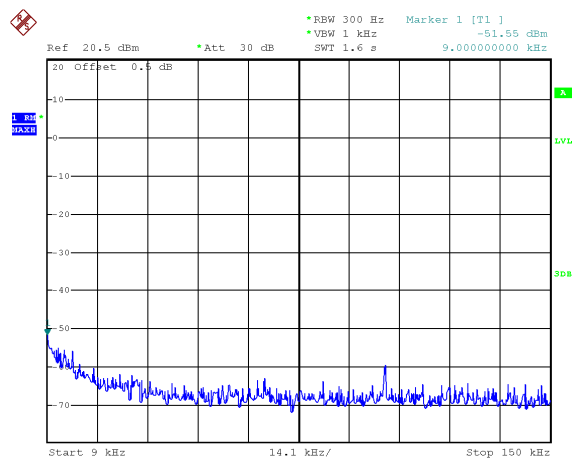


Date: 16.JUL.2024 11:18:13

Mode: TX 11n HT20 channel 1

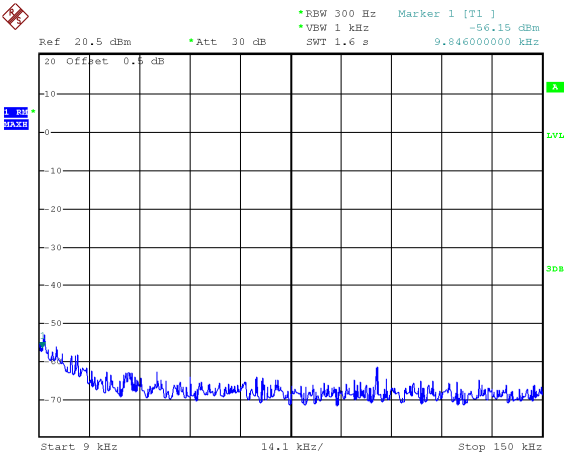


Date: 16.JUL.2024 11:17:22

Mode: TX 11 n HT20 channel 6

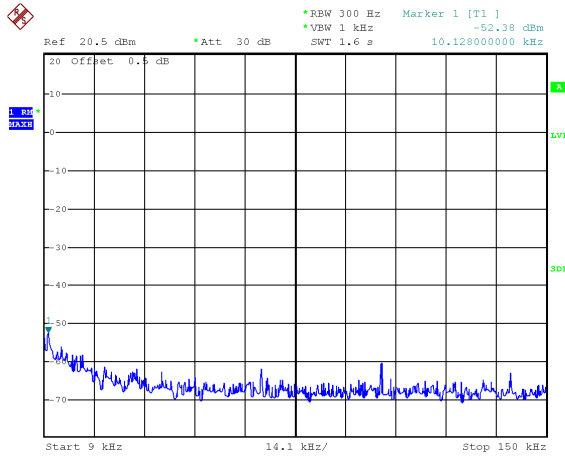


Date: 16.JUL.2024 11:17:38

Mode: TX 11 n HT20 channel 11

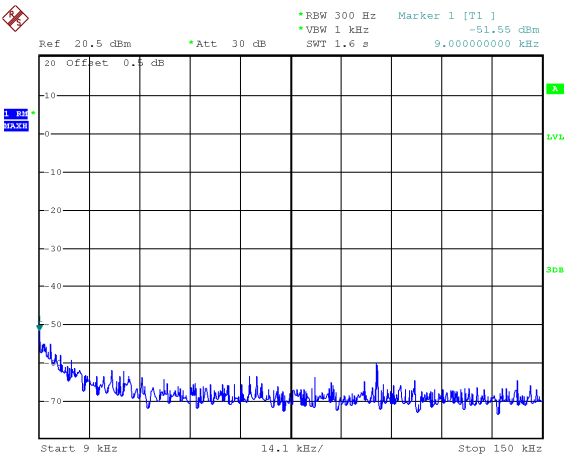


Date: 16.JUL.2024 11:17:58

Mode: TX 11ax HT20 channel 3

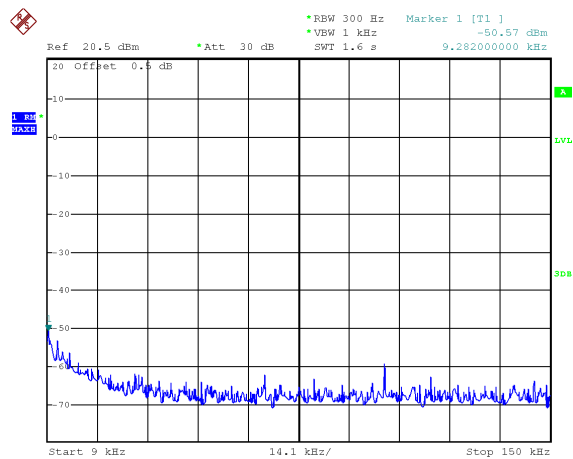


Date: 16.JUL.2024 11:16:56

Mode: TX 11 ax HT20 channel 6

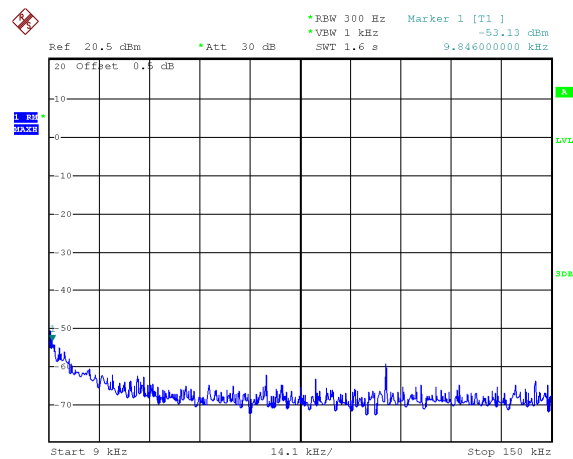

Date: 16.JUL.2024 11:16:40


Mode: TX 11 ax HT20 channel 9

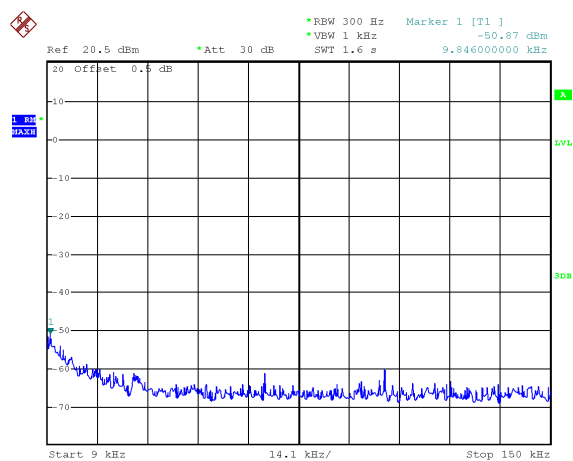

Date: 16.JUL.2024 11:16:16


150kHz – 30MHz

Mode: TX 11b channel 1

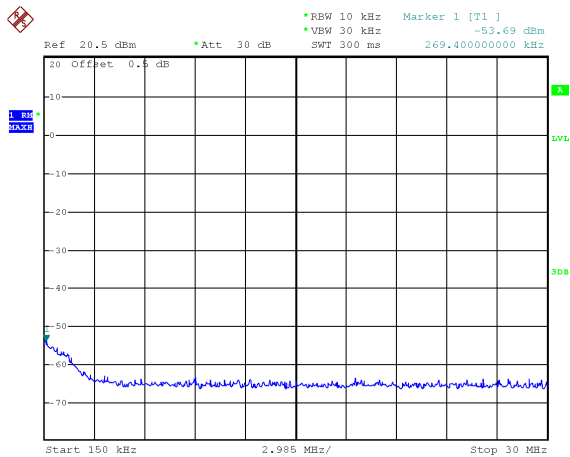


Date: 16.JUL.2024 11:35:50

Mode: TX 11b channel 6

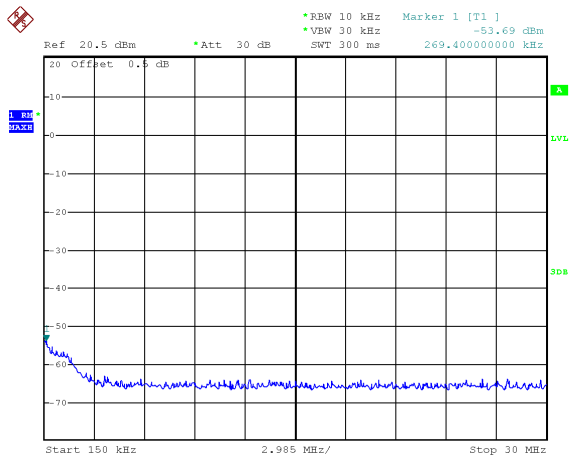


Date: 16.JUL.2024 11:35:33

Mode: TX 11b channel 11

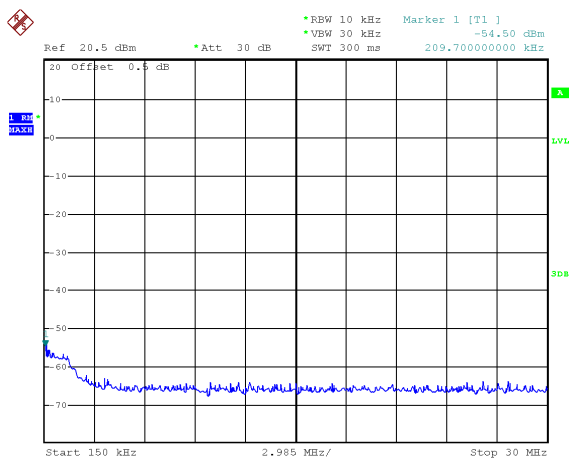


Date: 16.JUL.2024 11:35:19

Mode: TX 11g channel 1

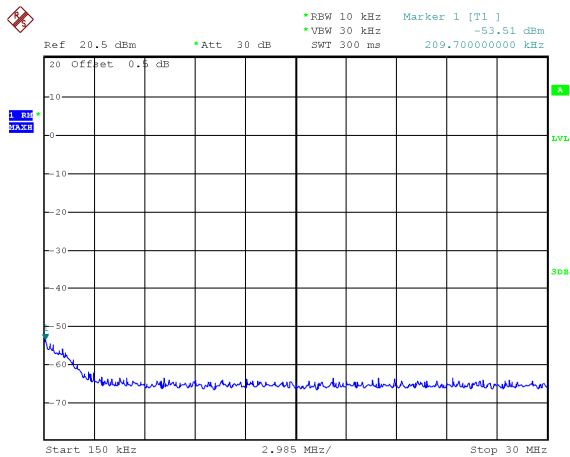


Date: 16.JUL.2024 11:33:59

Mode: TX 11g channel 6

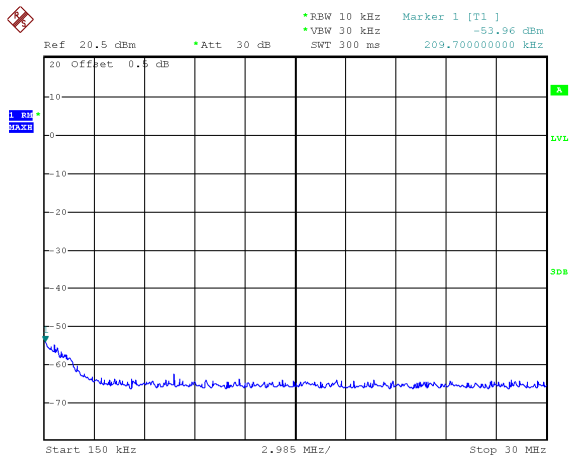


Date: 16.JUL.2024 11:33:24

Mode: TX 11g channel 11

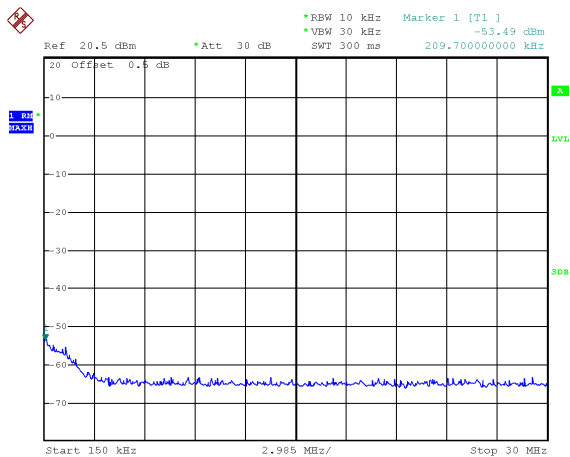


Date: 16.JUL.2024 11:35:01

Mode: TX 11n HT20 channel 1

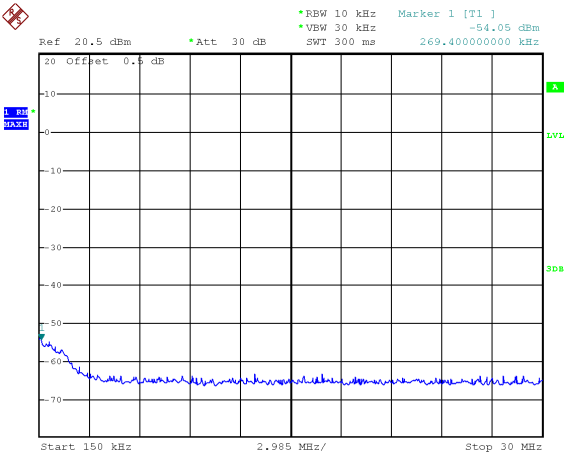


Date: 16.JUL.2024 11:31:08

Mode: TX 11 n HT20 channel 6

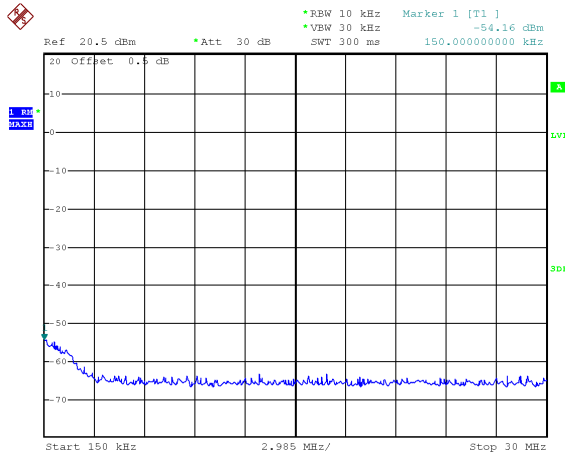


Date: 16.JUL.2024 11:30:52

Mode: TX 11 n HT20 channel 11

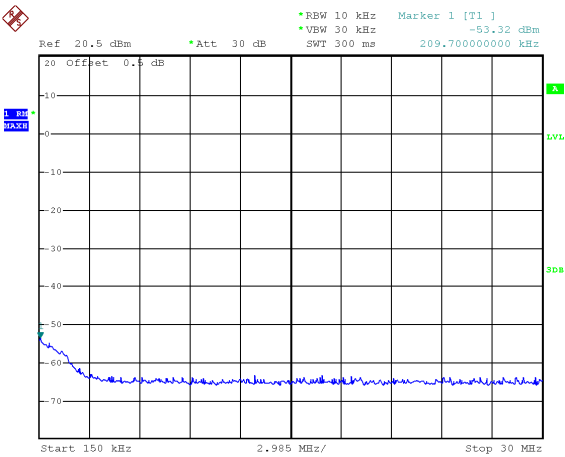


Date: 16.JUL.2024 11:31:52

Mode: TX 11 ax HT20 channel 3

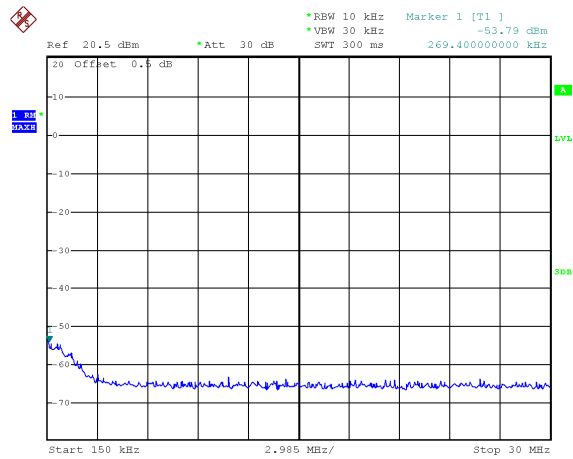


Date: 16.JUL.2024 11:32:45

Mode: TX 11 ax HT20 channel 6

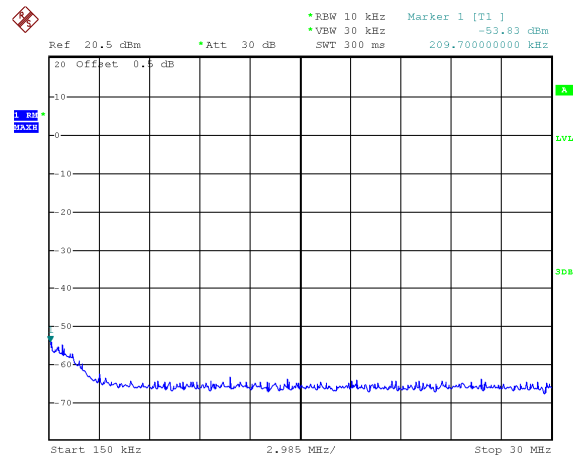

Date: 16.JUL.2024 11:32:29

Mode: TX 11 ax HT20 channel 9

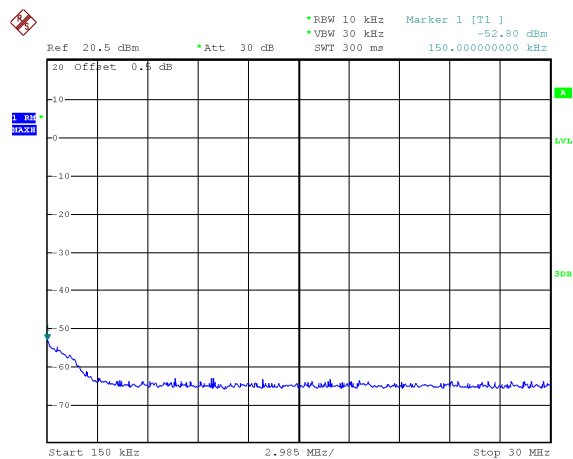


Date: 16.JUL.2024 11:32:11

Above 30MHz

Mode: TX 11b channel 1


Fundamental

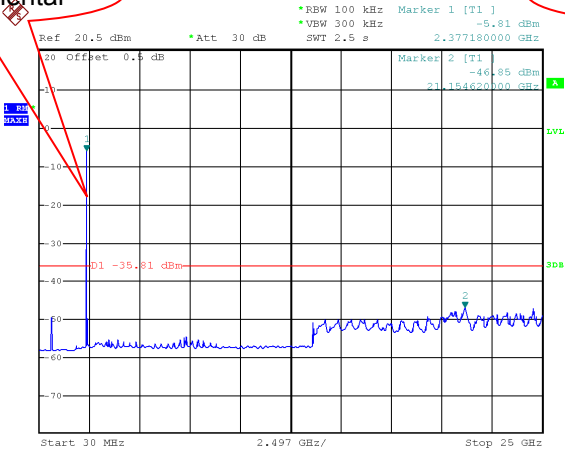

Date: 15.JUL.2024 17:08:45

Mode: TX 11b channel 6


Fundamental

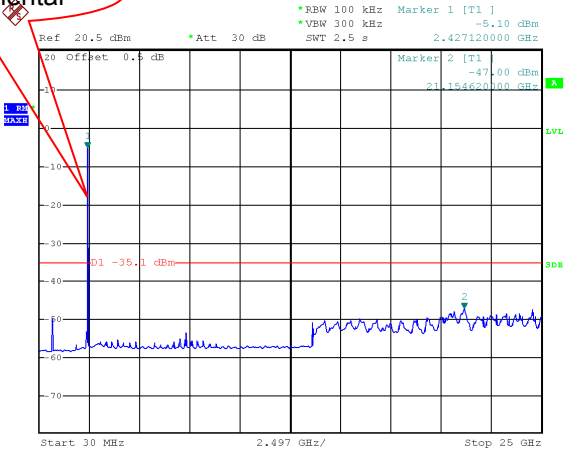

Date: 15.JUL.2024 17:09:41


Mode: TX 11b channel 11

Fundamental

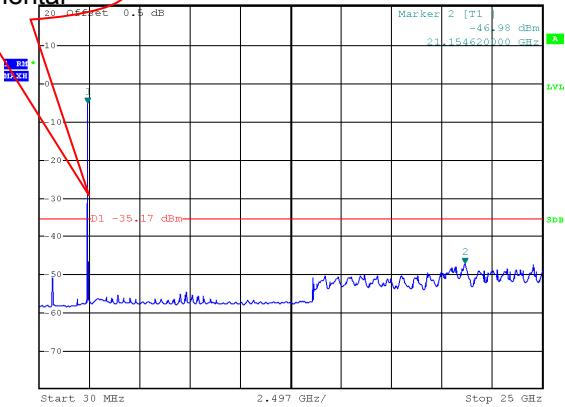


Date: 15.JUL.2024 17:10:21

Mode: TX 11g channel 1

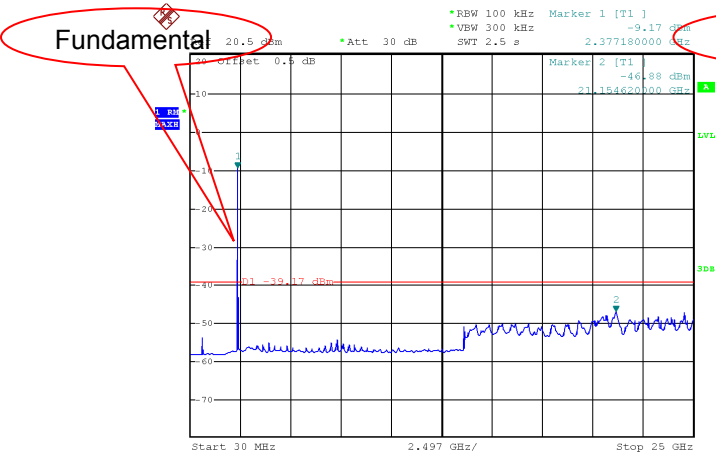


Date: 15.JUL.2024 17:06:52

Mode: TX 11g channel 6

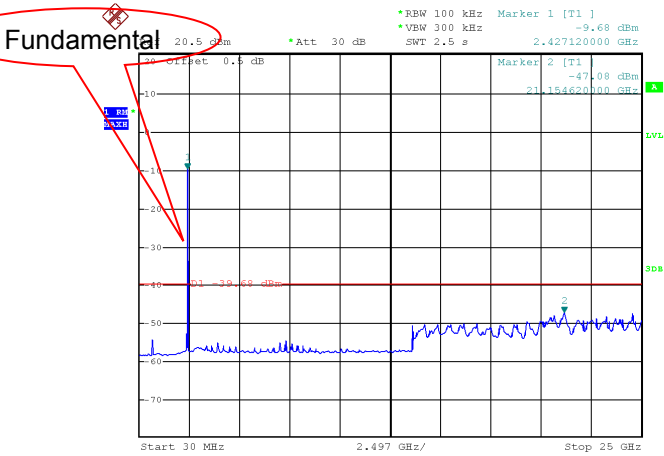


Date: 15.JUL.2024 17:05:09

Mode: TX 11g channel 11

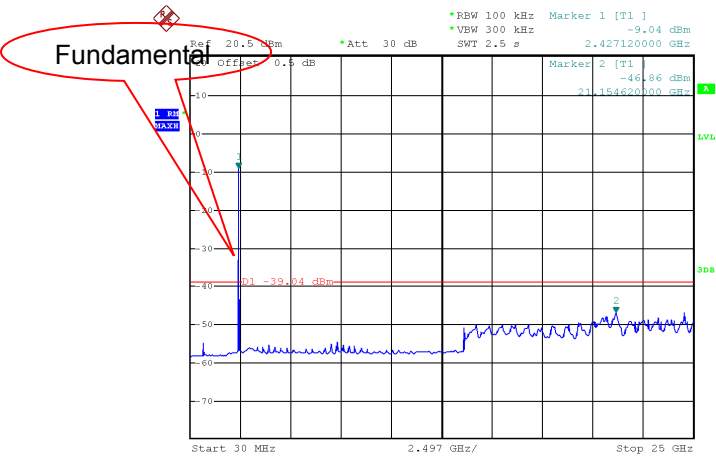


Date: 15.JUL.2024 17:04:28

Mode: TX 11n HT20 channel 1

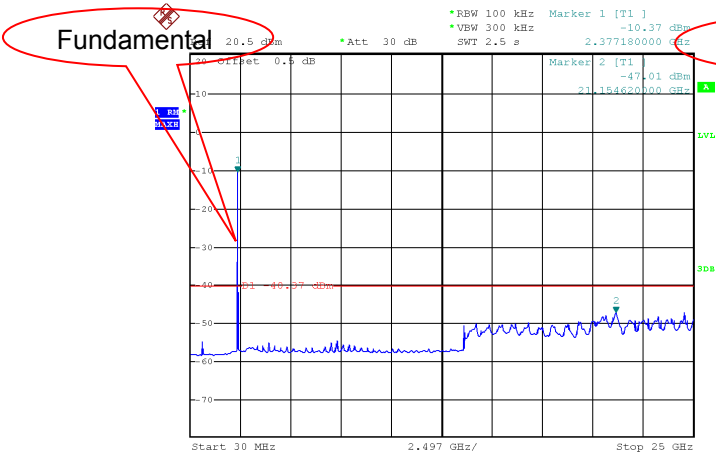


Date: 15.JUL.2024 17:00:25

Mode: TX 11 n HT20 channel 6

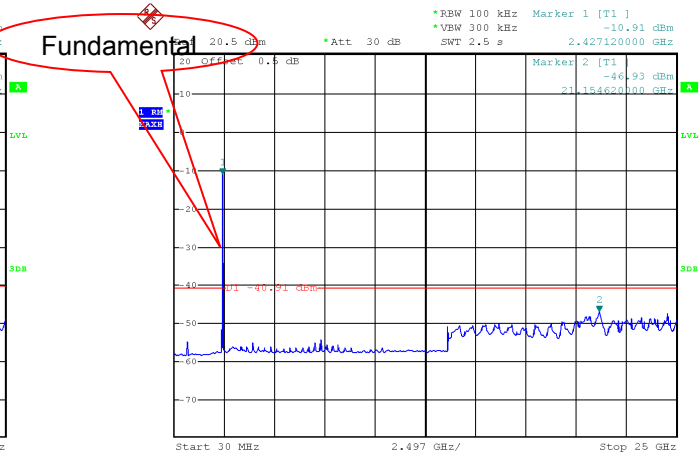


Date: 15.JUL.2024 17:01:25

Mode: TX 11 n HT20 channel 11

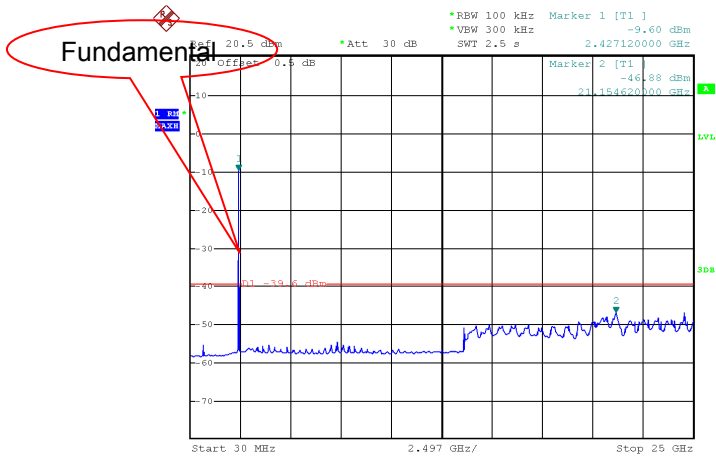


Date: 15.JUL.2024 17:02:53

Mode: TX 11 ax HT20 channel 3

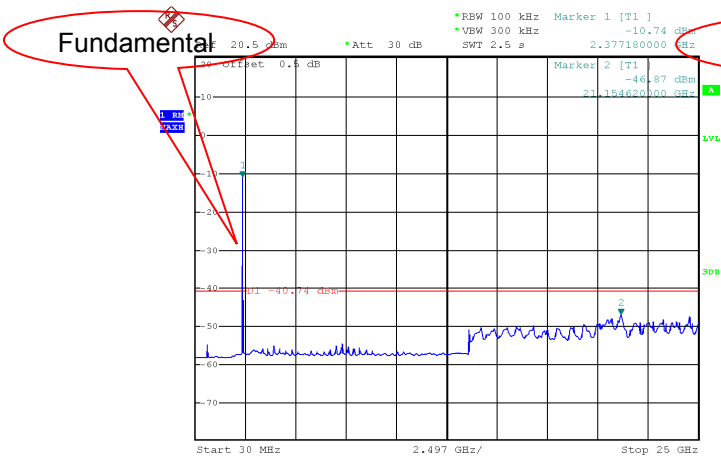


Date: 15.JUL.2024 16:59:32

Mode: TX 11 ax HT20 channel 6

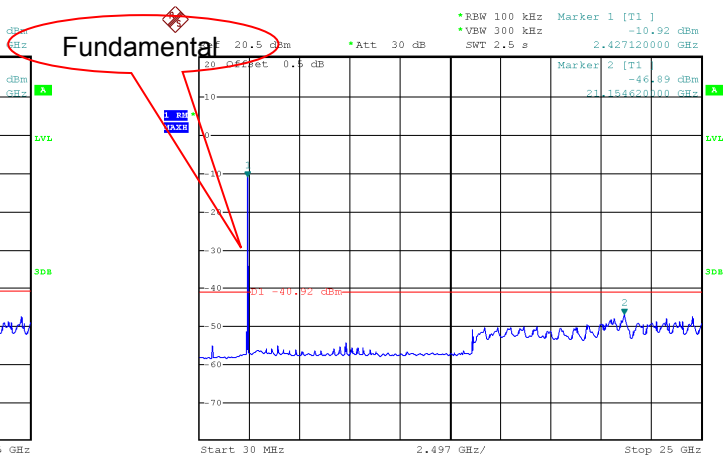

Date: 15.JUL.2024 16:58:32

Mode: TX 11 ax HT20 channel 9

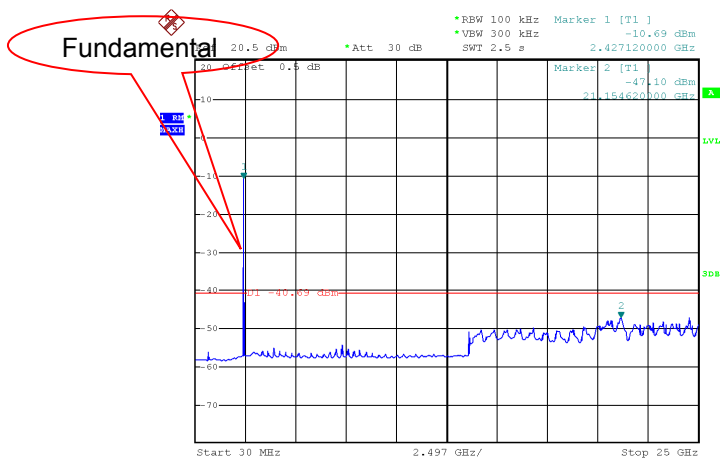


Date: 15.JUL.2024 16:57:47

Ant 0+ Ant 1:


9kHz – 150kHz

Mode: TX 11n HT20 channel 1

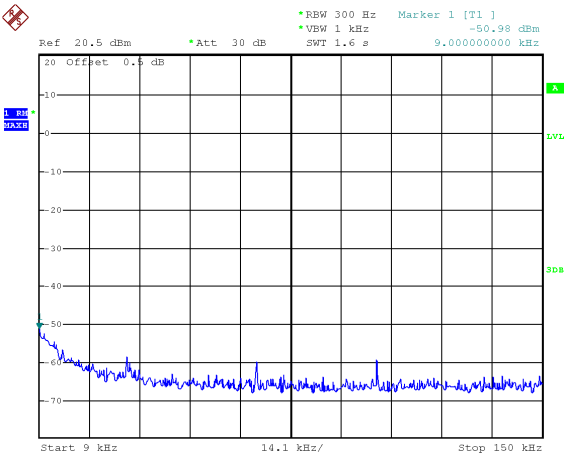


Date: 16.JUL.2024 11:24:38

Mode: TX 11 n HT20 channel 6

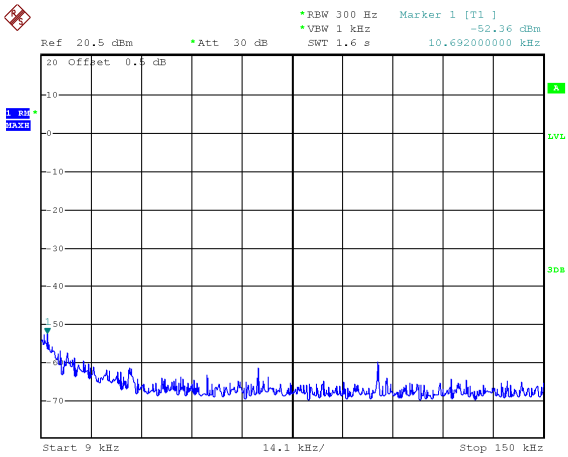


Date: 16.JUL.2024 11:21:13

Mode: TX 11 n HT20 channel 11

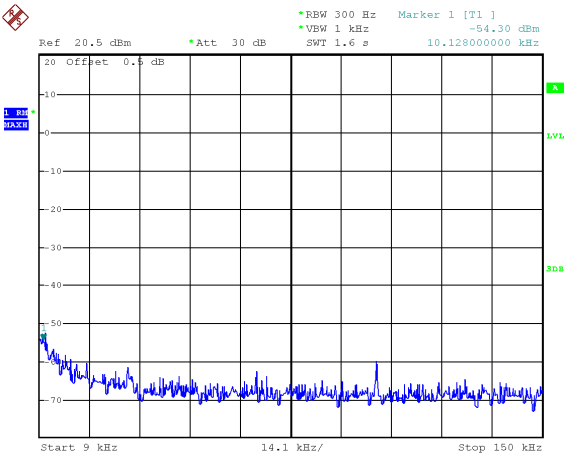


Date: 16.JUL.2024 11:20:55

Mode: TX 11ax HT20 channel 3

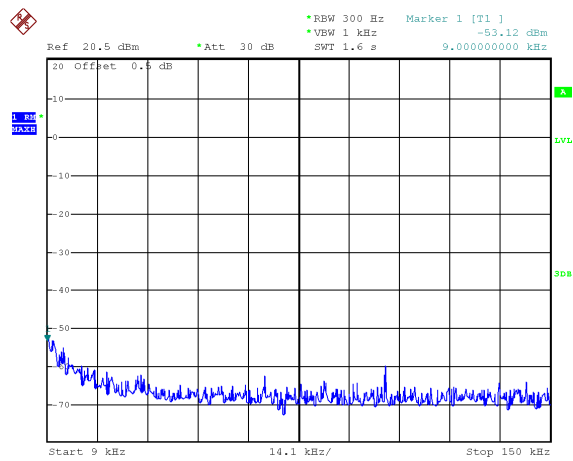


Date: 16.JUL.2024 11:25:08

Mode: TX 11 ax HT20 channel 6

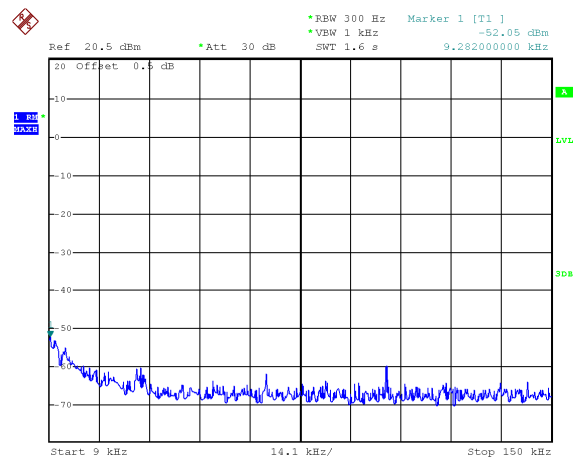

Date: 16.JUL.2024 11:25:26


Mode: TX 11 ax HT20 channel 9

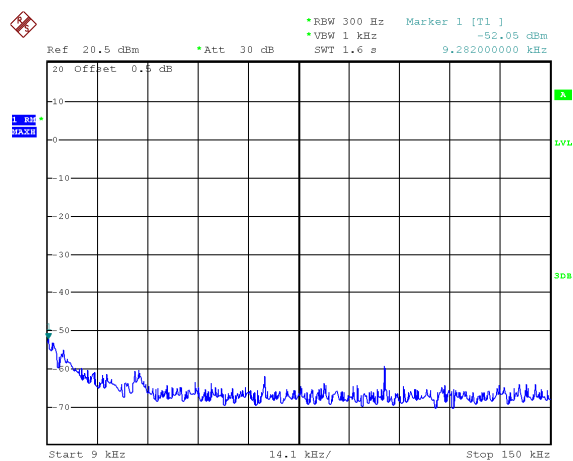

Date: 16.JUL.2024 11:25:41


150kHz – 30MHz

Mode: TX 11n HT20 channel 1

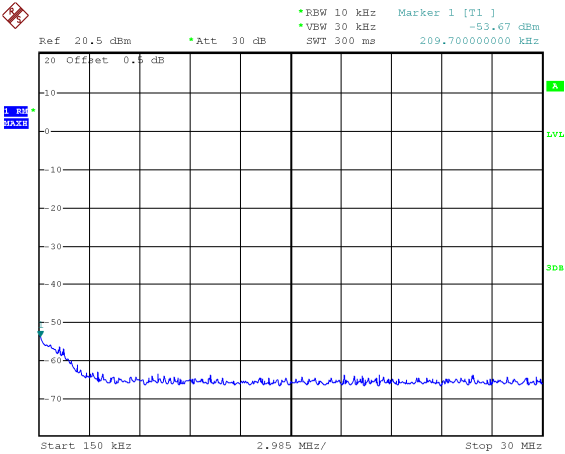


Date: 16.JUL.2024 11:29:26

Mode: TX 11 n HT20 channel 6

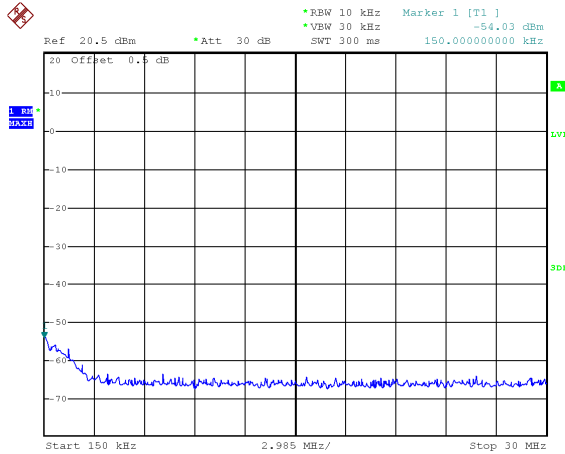


Date: 16.JUL.2024 11:29:10

Mode: TX 11 n HT20 channel 11

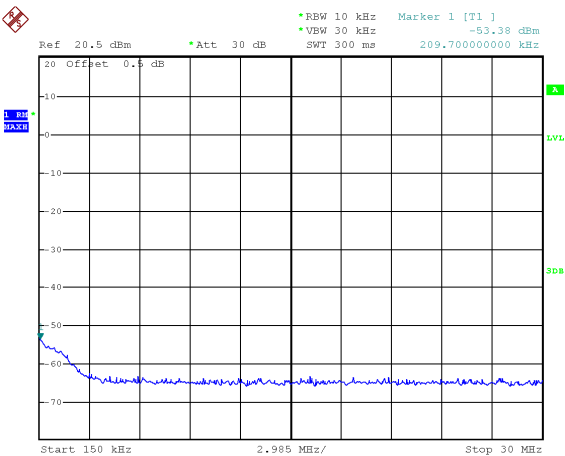


Date: 16.JUL.2024 11:28:52

Mode: TX 11 ax HT20 channel 3

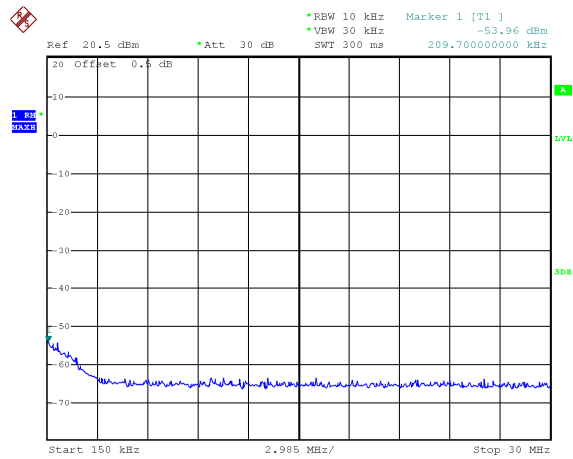


Date: 16.JUL.2024 11:26:59

Mode: TX 11 ax HT20 channel 6

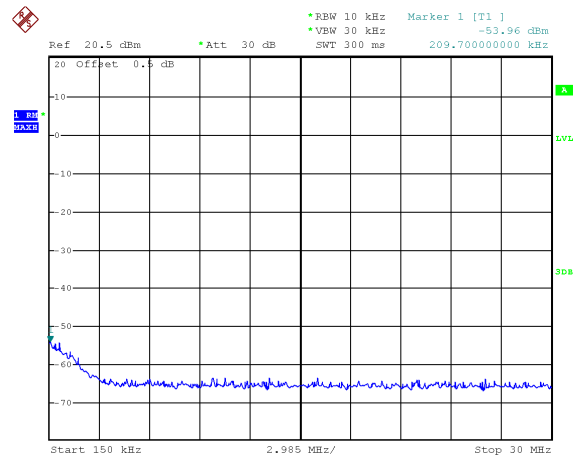

Date: 16.JUL.2024 11:26:44


Mode: TX 11 ax HT20 channel 9

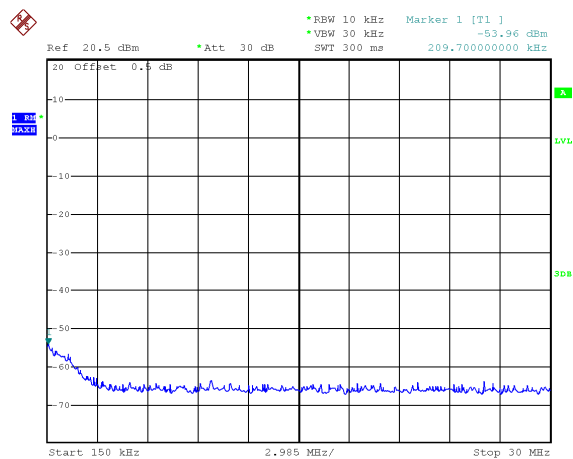

Date: 16.JUL.2024 11:26:26


Above 30MHz

Mode: TX 11n HT20 channel 1

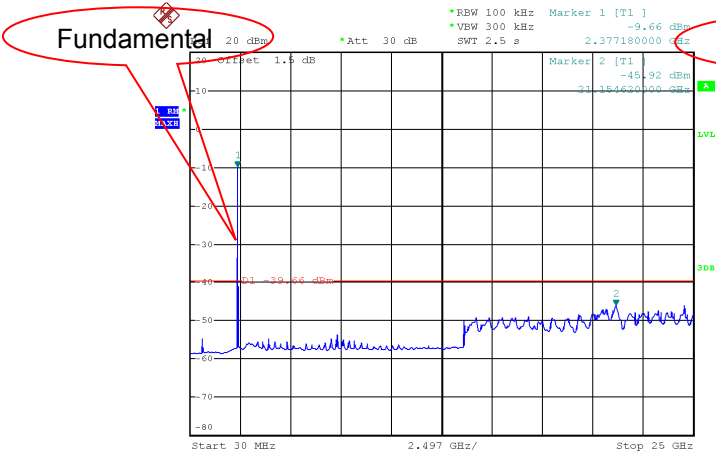


Date: 15.JUL.2024 18:19:36

Mode: TX 11 n HT20 channel 6

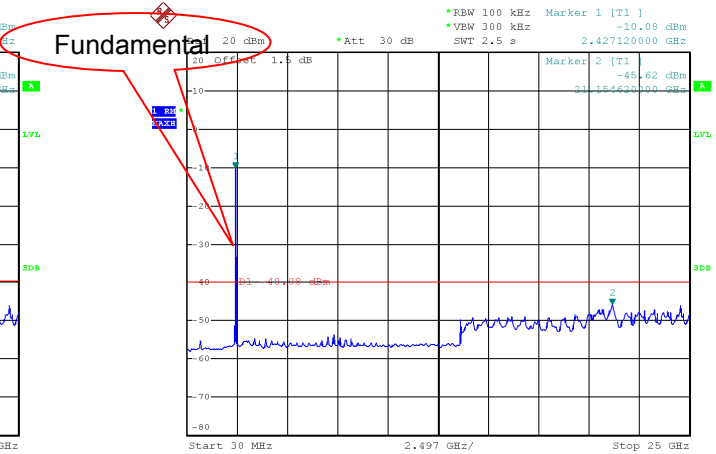


Date: 15.JUL.2024 18:16:14

Mode: TX 11 n HT20 channel 11

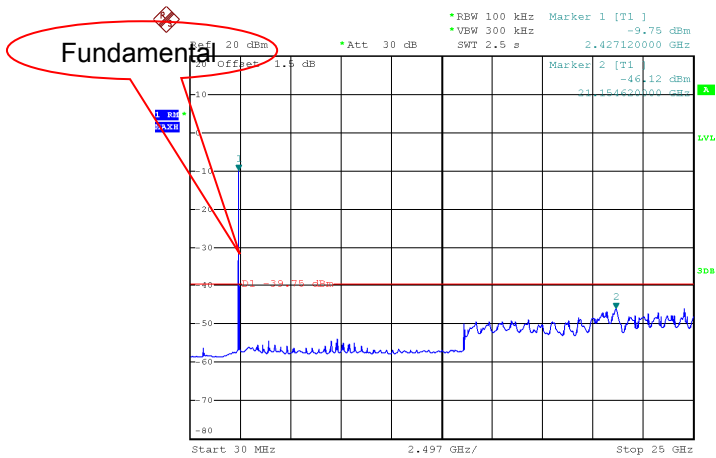


Date: 15.JUL.2024 18:17:17

Mode: TX 11 ax HT20 channel 3

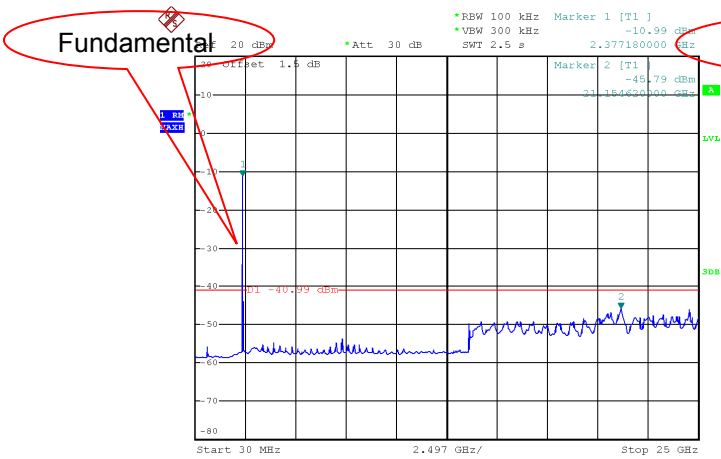


Date: 15.JUL.2024 18:20:59

Mode: TX 11 ax HT20 channel 6

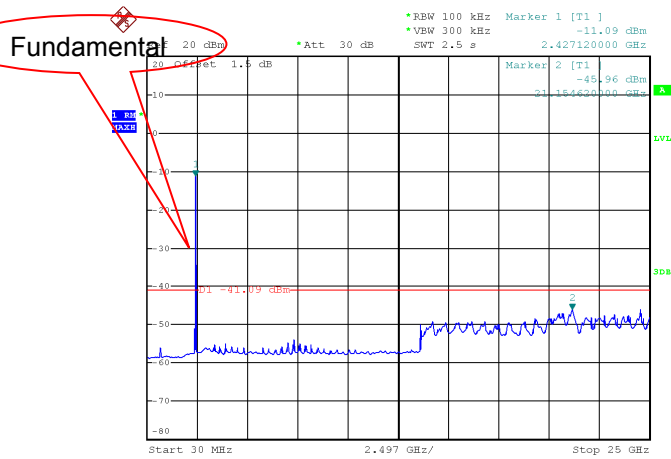

Date: 15.JUL.2024 18:21:55

Mode: TX 11 ax HT20 channel 9

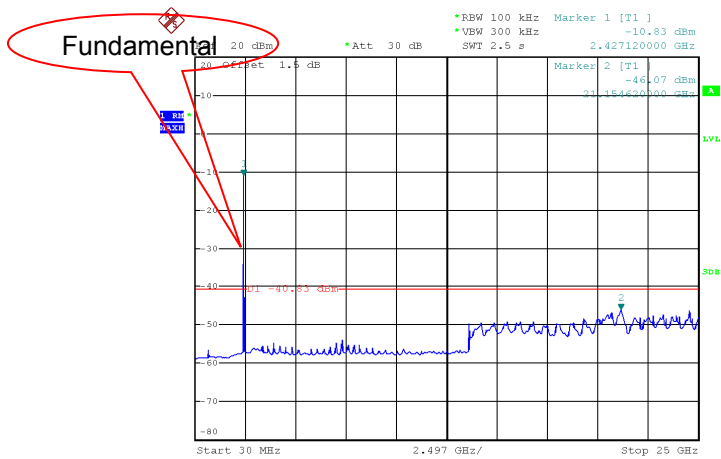

Date: 15.JUL.2024 18:22:57

11 Band Edge Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Regulation 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

11.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.2 Test Result

Test result plots shown as follows:


Ant 0:

TX 11b: Band edge-left side

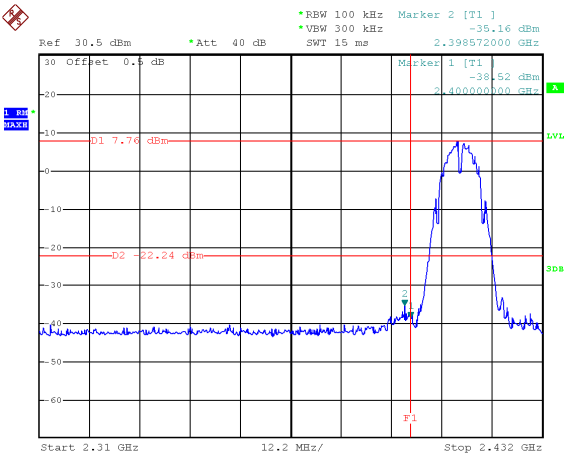


Date: 15.JUL.2024 16:28:27

TX 11b: Band edge-right side

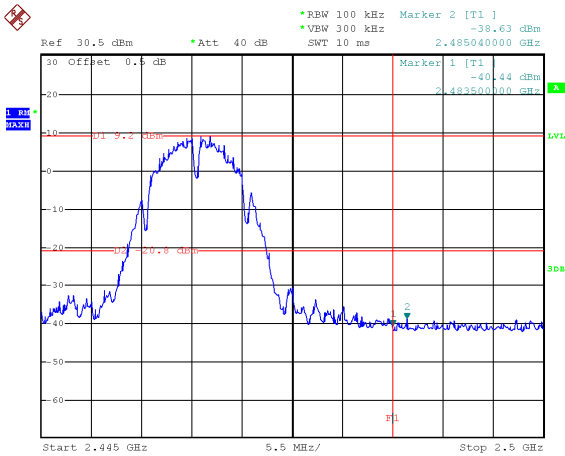


Date: 15.JUL.2024 16:30:41

TX 11g: Band edge-left side

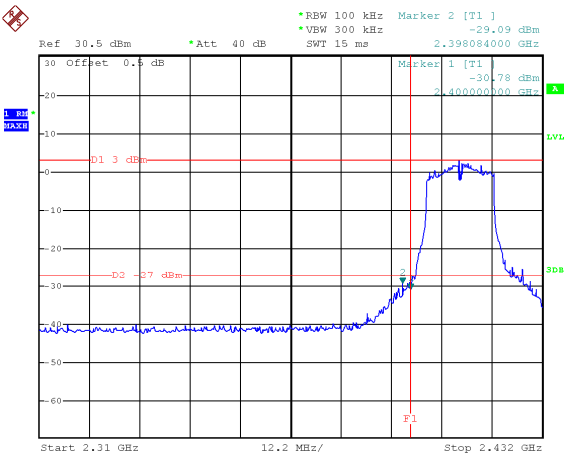


Date: 15.JUL.2024 16:24:20

TX 11g: Band edge-right side

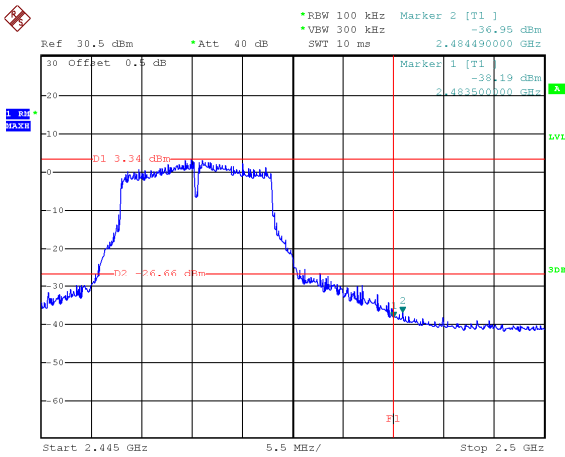


Date: 15.JUL.2024 16:32:22

TX 11n HT20: Band edge-left side

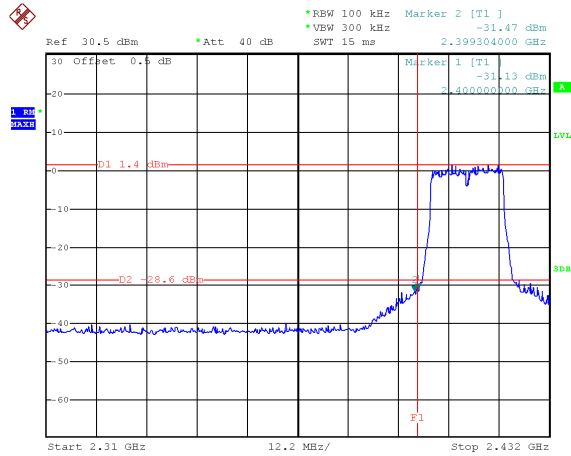


Date: 15.JUL.2024 16:14:58

TX 11n HT20: Band edge-right side

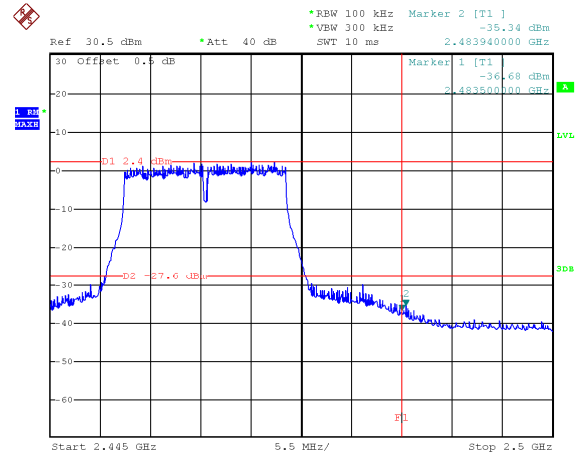


Date: 15.JUL.2024 16:34:07

TX 11ax HT20: Band edge-left side

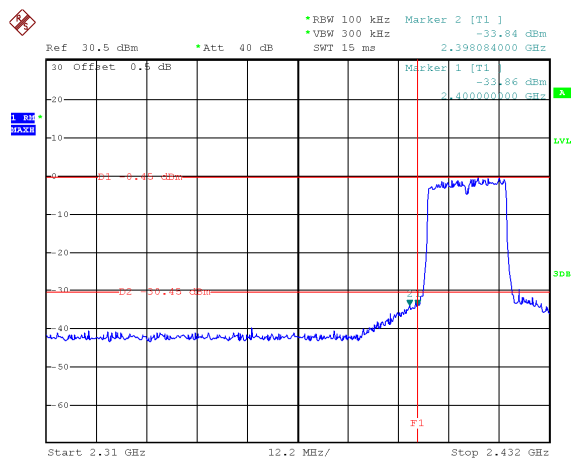

Date: 16.JUL.2024 10:22:18


TX 11 ax HT20: Band edge-right side

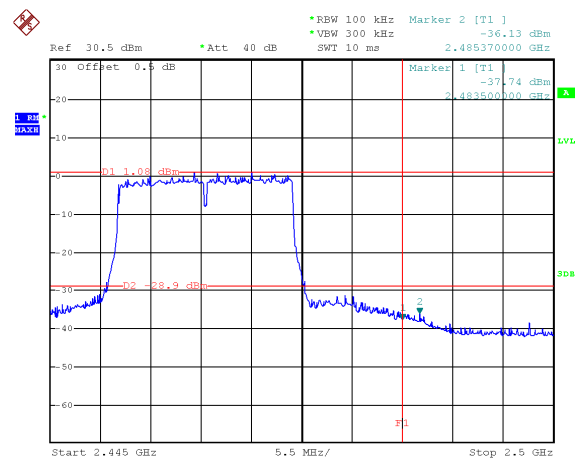

Date: 16.JUL.2024 10:24:11


Ant 1:

TX 11b: Band edge-left side

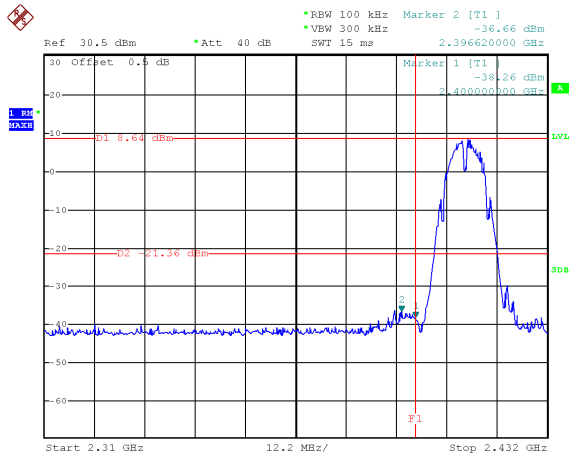


Date: 15.JUL.2024 10:49:09

TX 11b: Band edge-right side

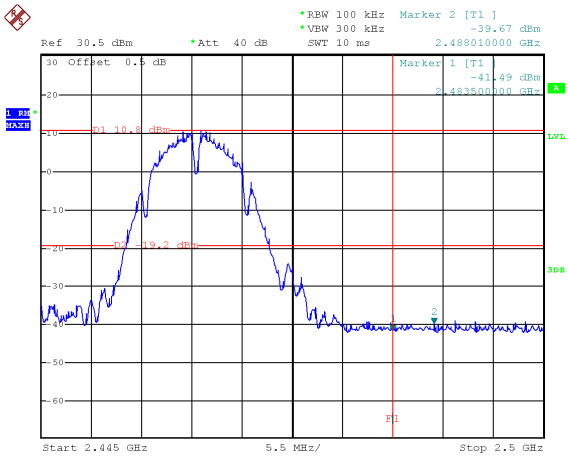


Date: 15.JUL.2024 11:09:27

TX 11g: Band edge-left side

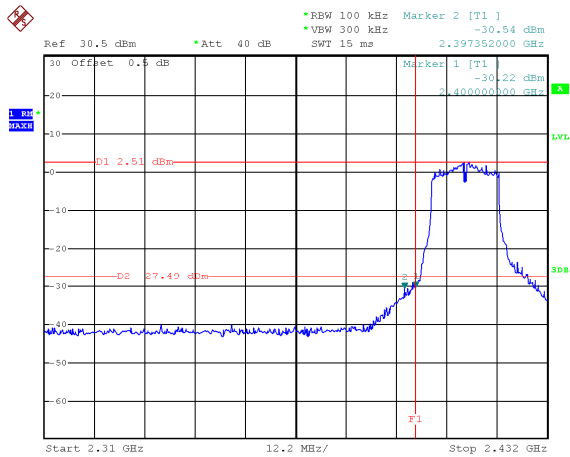


Date: 15.JUL.2024 10:44:21

TX 11g: Band edge-right side

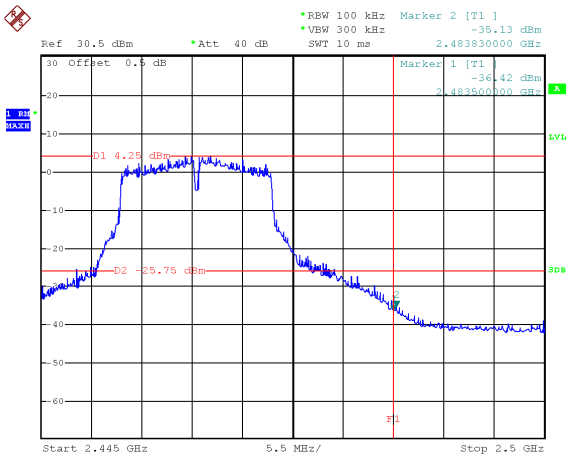


Date: 15.JUL.2024 11:10:52

TX 11n HT20: Band edge-left side

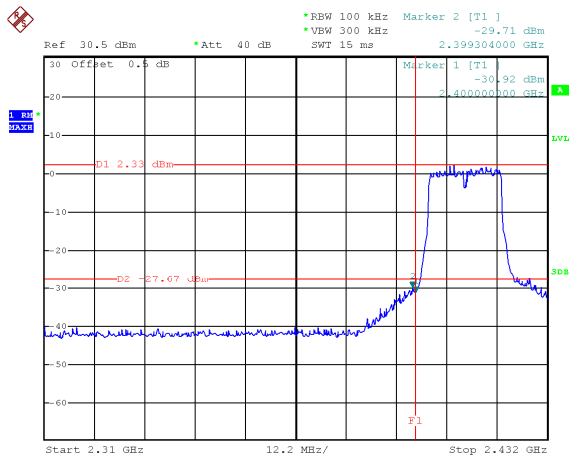


Date: 15.JUL.2024 10:47:06

TX 11n HT20: Band edge-right side

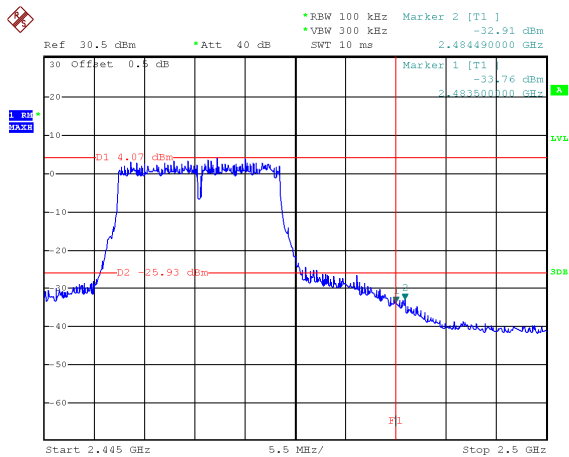


Date: 15.JUL.2024 11:12:45

TX 11ax HT20: Band edge-left side

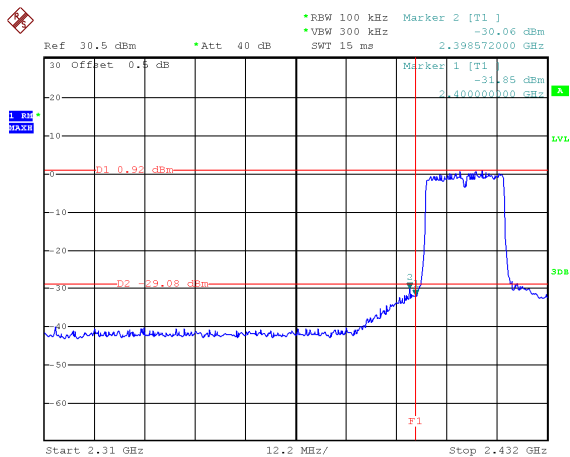

Date: 16.JUL.2024 10:20:23

TX 11 ax HT20: Band edge-right side

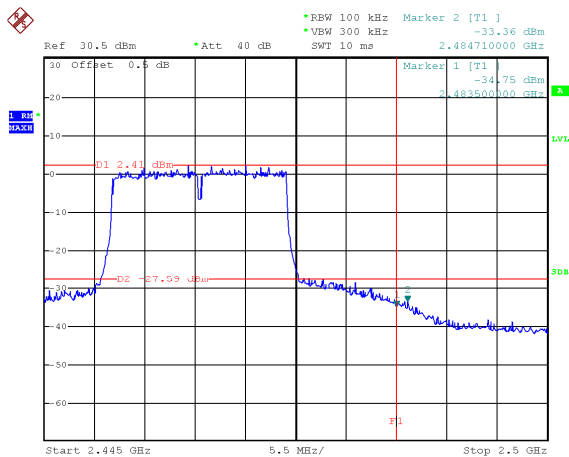

Date: 16.JUL.2024 10:26:08

12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: 47CFR FCC Part15 Subpart C §15.247
 Test Method: ANSI C63.10:2013
 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
 Test Limit: §15.247(a)(2)
 Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
 Test Mode: Transmitting

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz
 99% Bandwidth Set the spectrum analyzer: 1~5% of the OBW, VBW = 3 times the RBW

12.2 Test Result

Ant 0:

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	8.04	11.40
	Channel 6	8.04	11.28
	Channel 11	7.56	11.28
TX 11g	Channel 1	16.44	17.70
	Channel 6	16.44	17.46
	Channel 11	16.44	17.52
TX 11n HT20	Channel 1	17.76	18.18
	Channel 6	17.82	18.18
	Channel 11	17.76	18.24
TX 11ax HT20	Channel 3	19.14	19.14
	Channel 6	19.14	19.14
	Channel 9	19.14	19.26

Ant 1:

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	7.56	12.12
	Channel 6	8.04	11.76
	Channel 11	7.02	11.94
TX 11g	Channel 1	16.44	17.64
	Channel 6	16.44	17.46
	Channel 11	16.44	17.40
TX 11n HT20	Channel 1	17.82	18.78
	Channel 6	17.82	19.02
	Channel 11	17.76	18.96
TX 11ax HT20	Channel 3	19.20	19.20
	Channel 6	19.14	19.20
	Channel 9	19.20	19.14



Test result plot:

Ant 0:

6 dB Bandwidth

99% Bandwidth



Mode: TX 11b channel 1

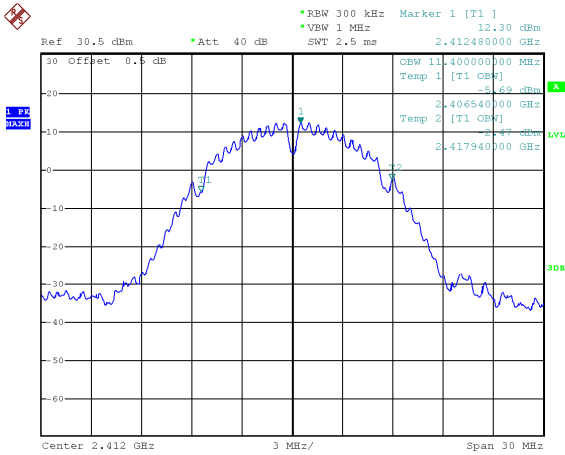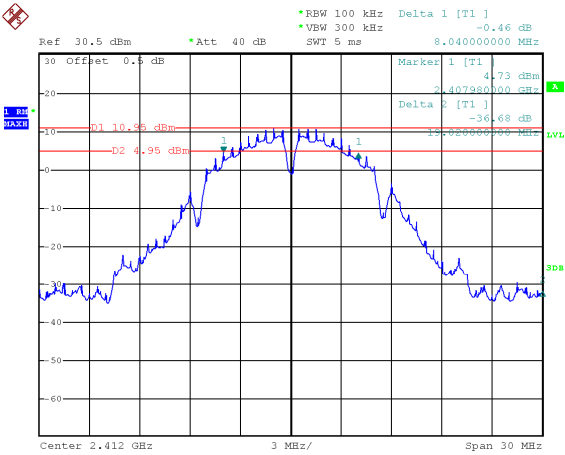

Date: 15.JUL.2024 12:25:04

Date: 15.JUL.2024 15:04:37

Mode: TX 11b channel 6

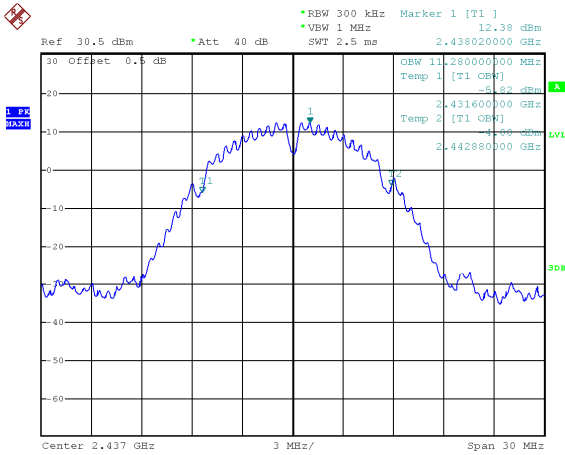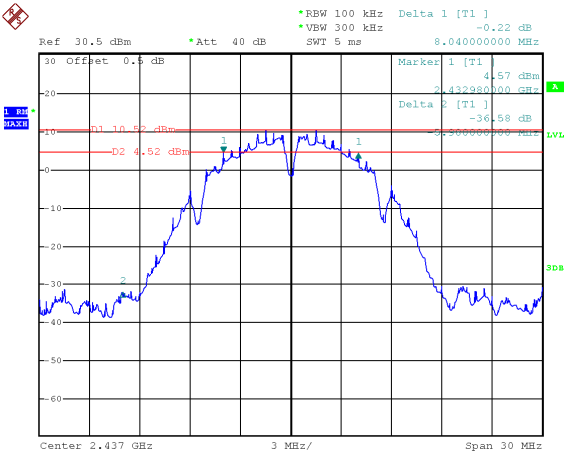



Date: 15.JUL.2024 12:27:58

Date: 15.JUL.2024 15:03:42

6 dB Bandwidth

99% Bandwidth



Mode: TX 11b channel 11

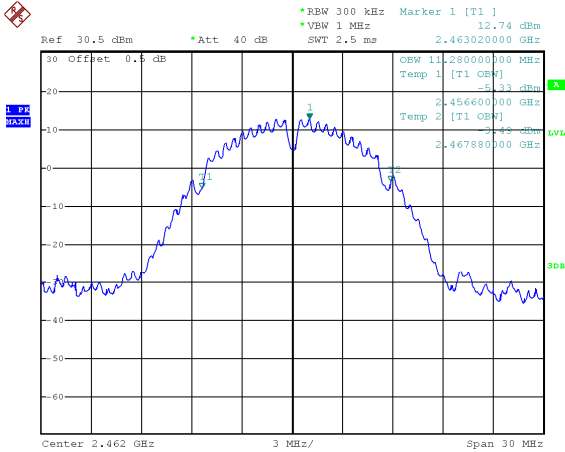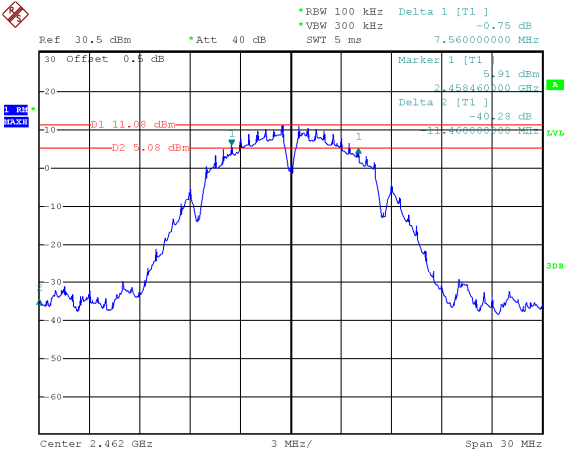

Date: 15.JUL.2024 12:29:45

Date: 15.JUL.2024 14:58:09

Mode: TX 11g channel 1

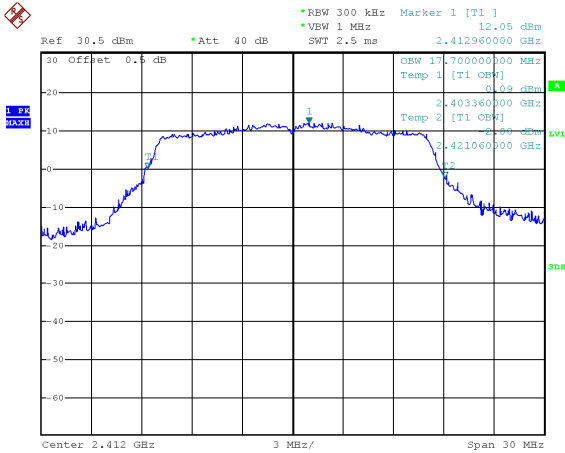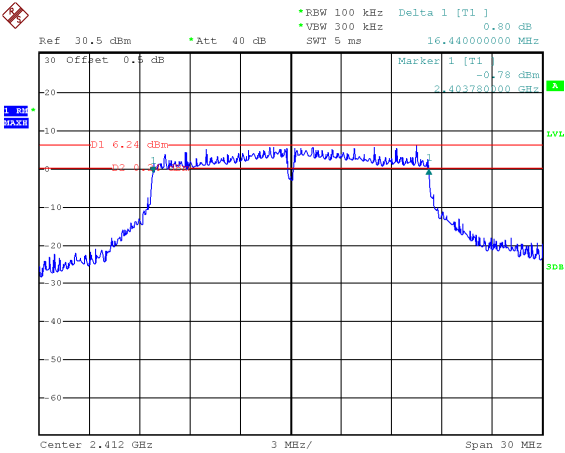



Date: 15.JUL.2024 15:36:12

Date: 15.JUL.2024 15:05:12

6 dB Bandwidth

99% Bandwidth



Mode: TX 11g channel 6

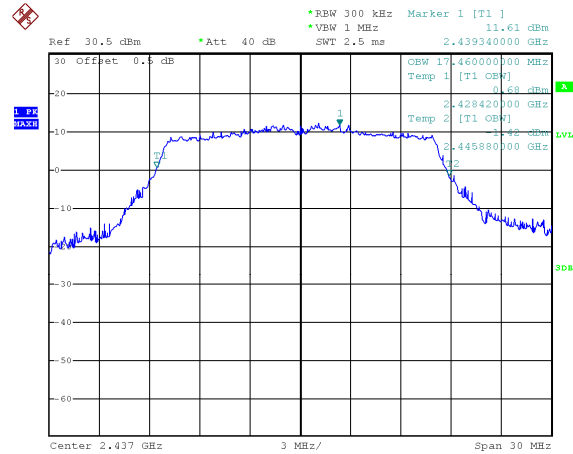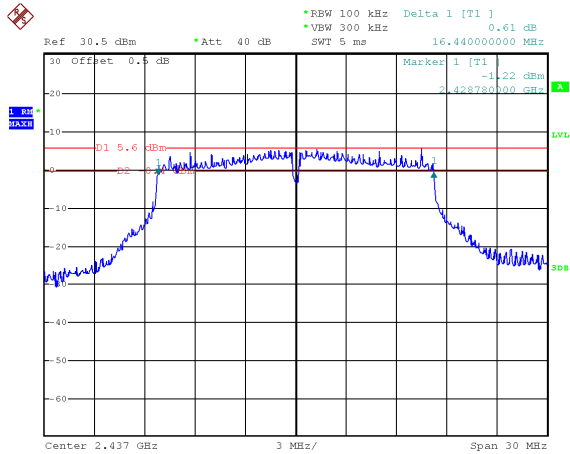

Date: 15.JUL.2024 15:34:41

Date: 15.JUL.2024 15:09:53

Mode: TX 11g channel 11

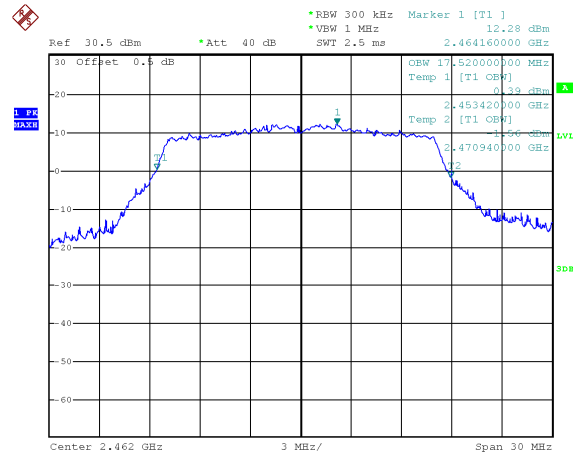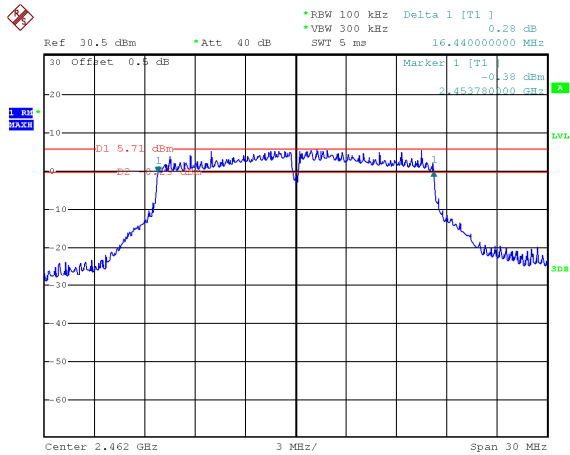



Date: 15.JUL.2024 15:32:32

Date: 15.JUL.2024 15:10:53

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT20 channel 1

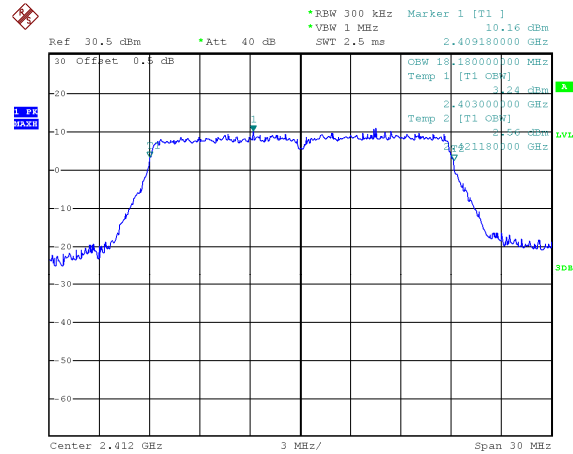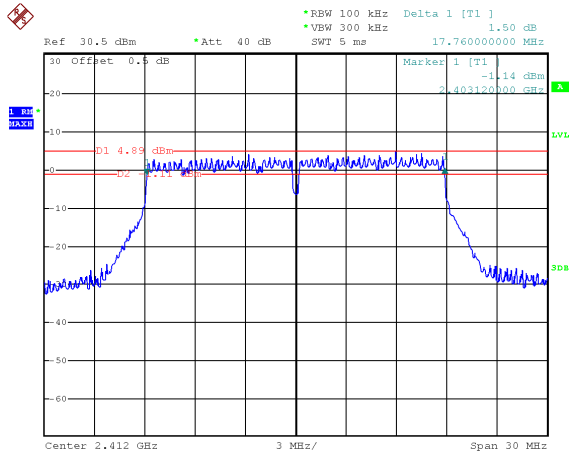

Date: 15.JUL.2024 15:18:45

Date: 15.JUL.2024 15:13:44

Mode: TX 11n HT20 channel 6

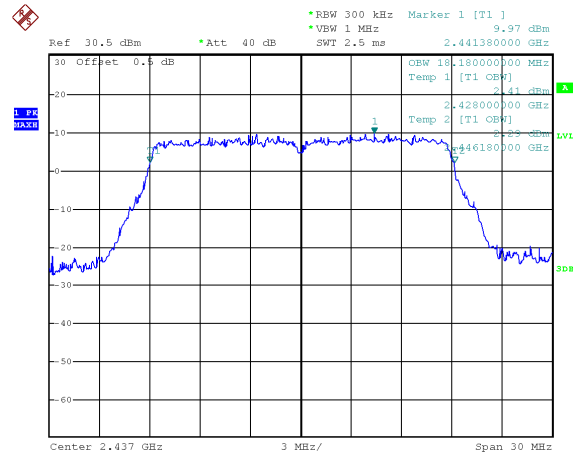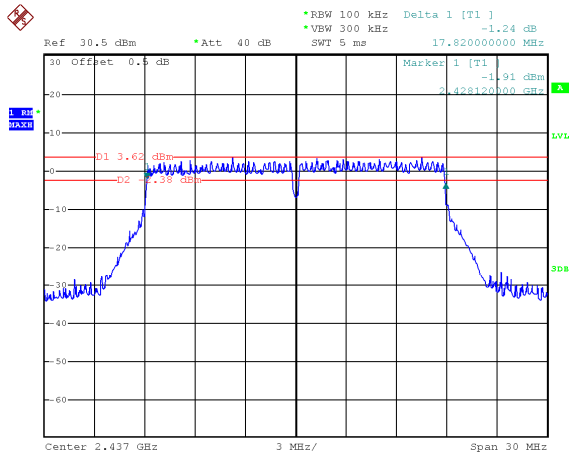



Date: 15.JUL.2024 15:20:51

Date: 15.JUL.2024 15:12:50

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT20 channel 11

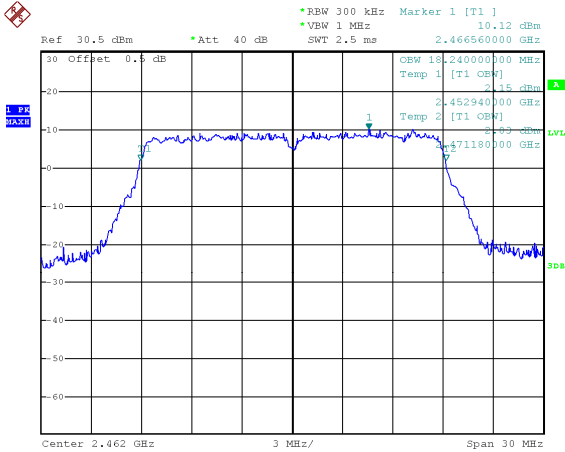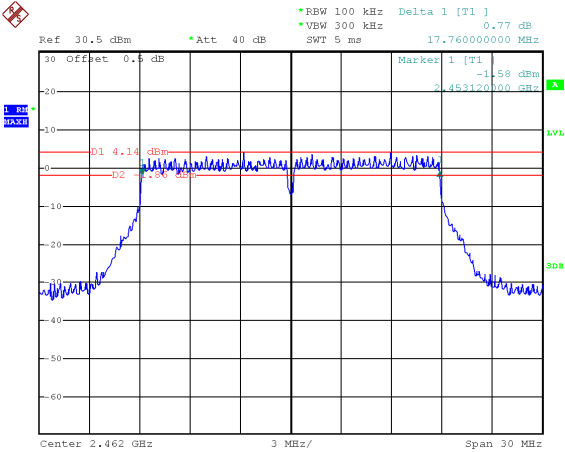

Date: 15.JUL.2024 15:22:25

Date: 15.JUL.2024 15:12:13

Mode: TX 11ax HT20 channel 3

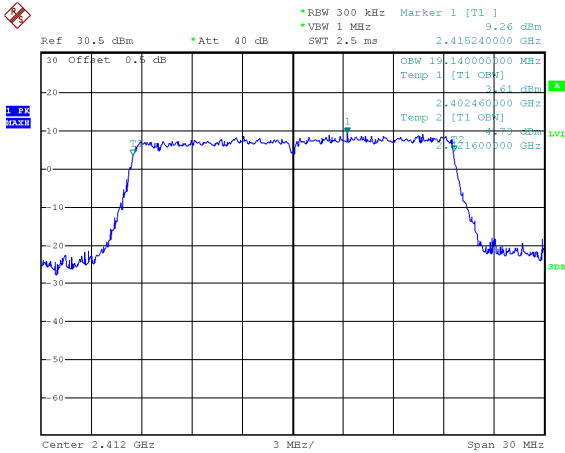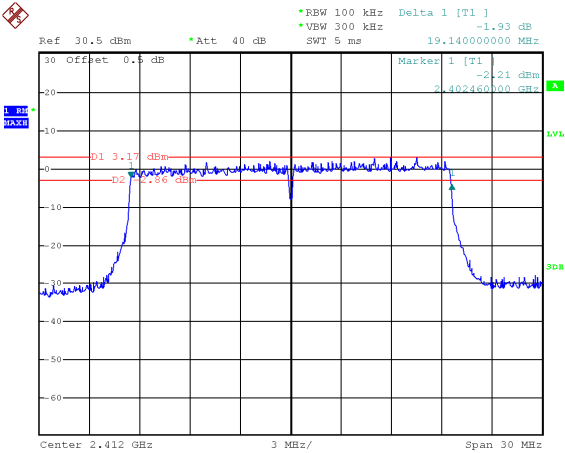



Date: 16.JUL.2024 09:58:13

Date: 16.JUL.2024 10:04:52

6 dB Bandwidth

99% Bandwidth



Mode: TX 11ax HT20 channel 6

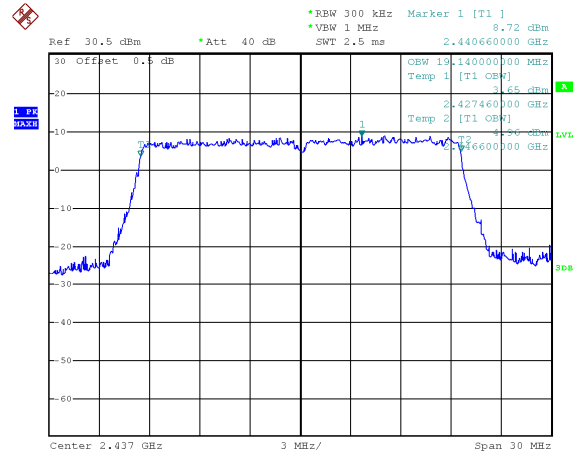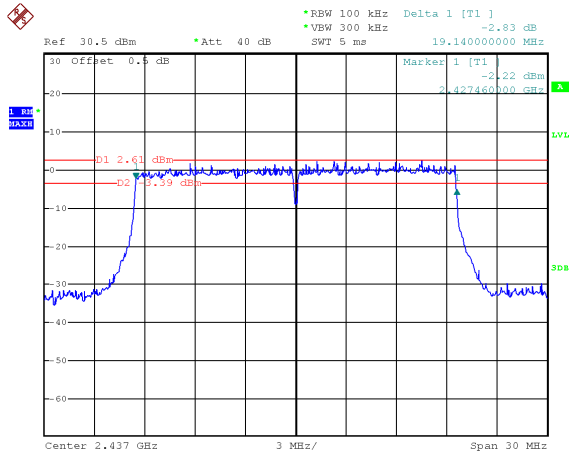

Date: 16.JUL.2024 09:59:24

Date: 16.JUL.2024 10:04:23

Mode: TX 11ax HT20 channel 9

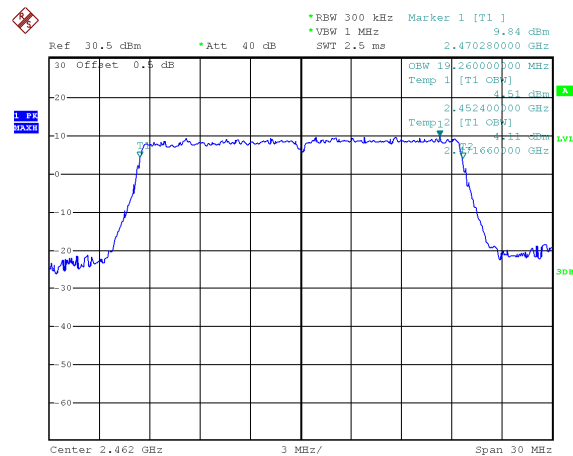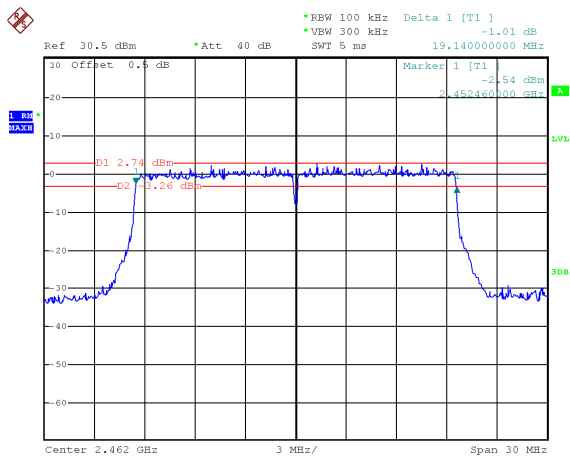

Date: 16.JUL.2024 10:00:57


Date: 16.JUL.2024 10:03:44

Ant 1:


6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 1

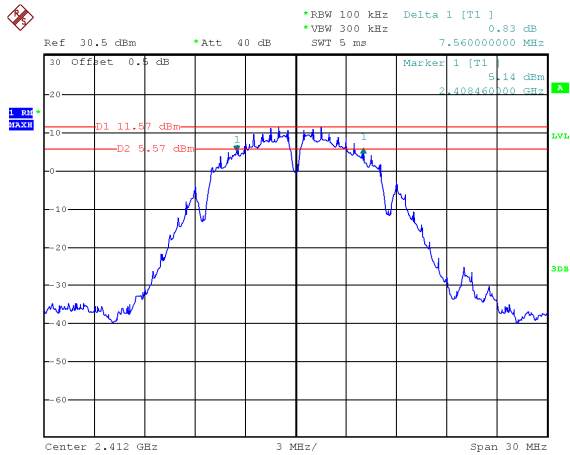


Date: 15.JUL.2024 12:14:10

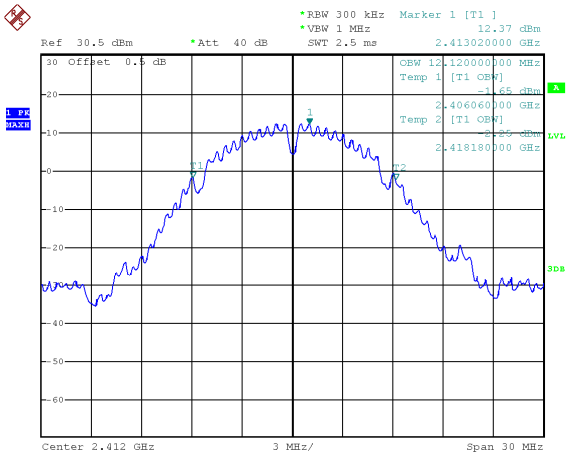


Date: 12.JUL.2024 16:43:12

Mode: TX 11b channel 6

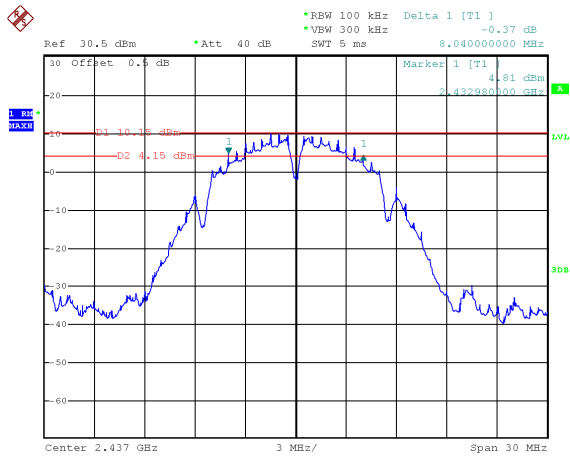

Date: 15.JUL.2024 12:31:38


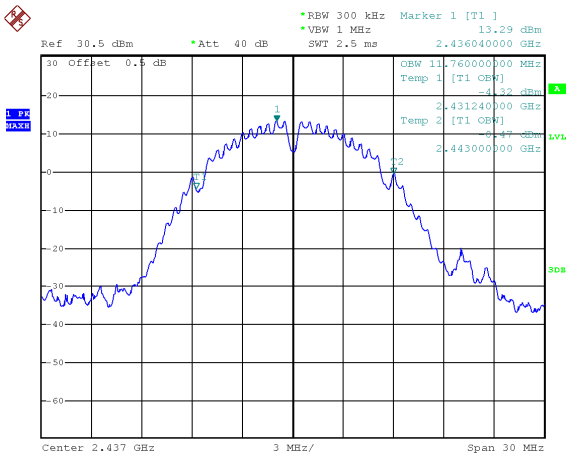


Date: 12.JUL.2024 16:43:47

6 dB Bandwidth

99% Bandwidth



Mode: TX 11b channel 11

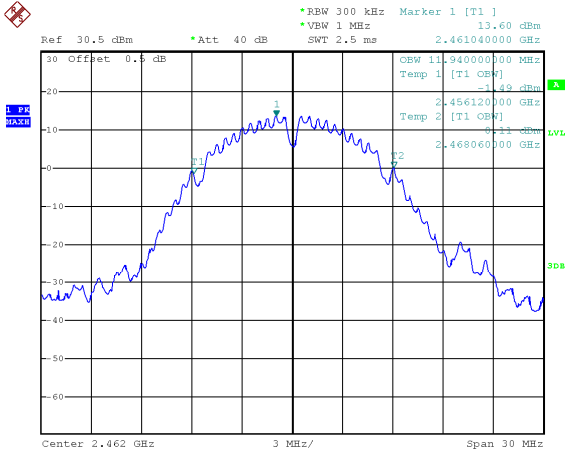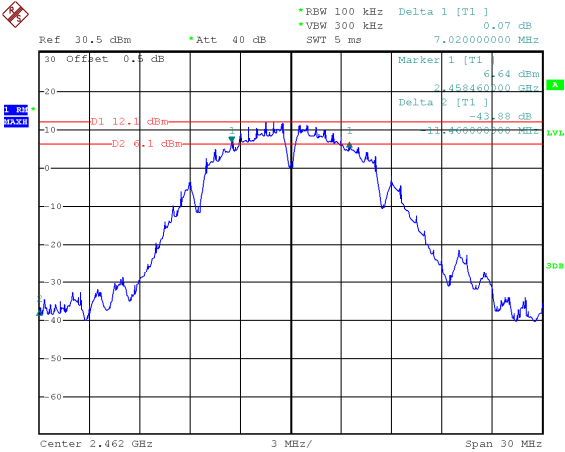

Date: 15.JUL.2024 12:16:55

Date: 12.JUL.2024 16:44:24

Mode: TX 11g channel 1

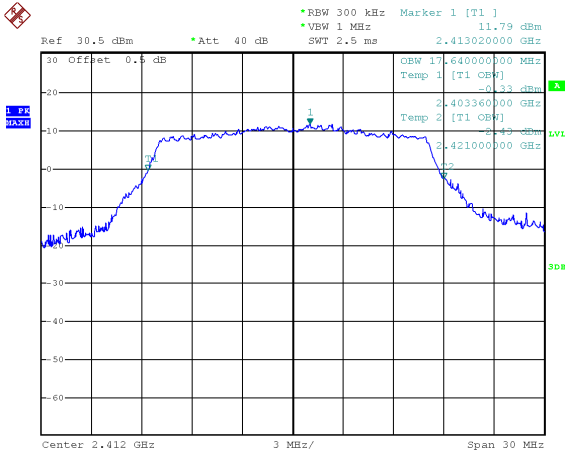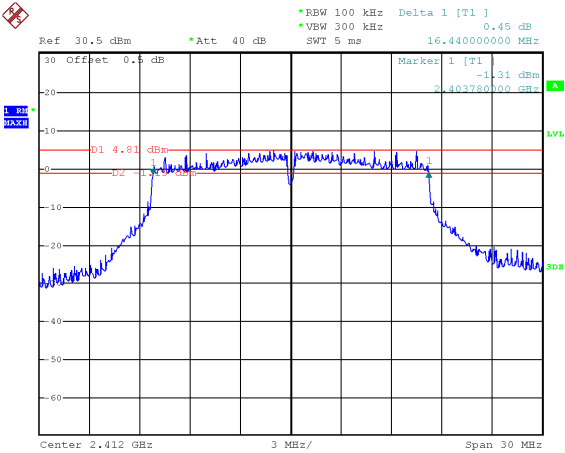



Date: 15.JUL.2024 12:10:32

Date: 12.JUL.2024 17:36:15

6 dB Bandwidth

99% Bandwidth



Mode: TX 11g channel 6

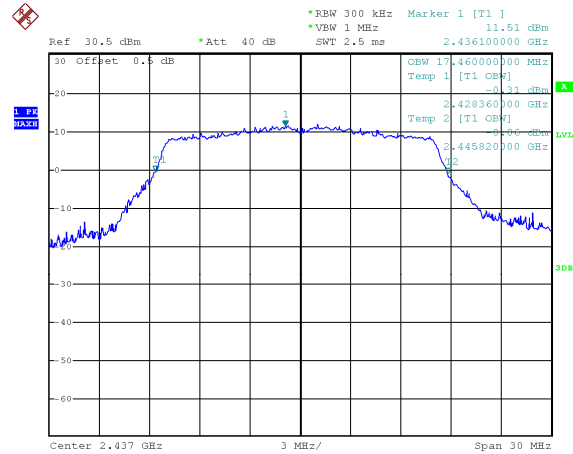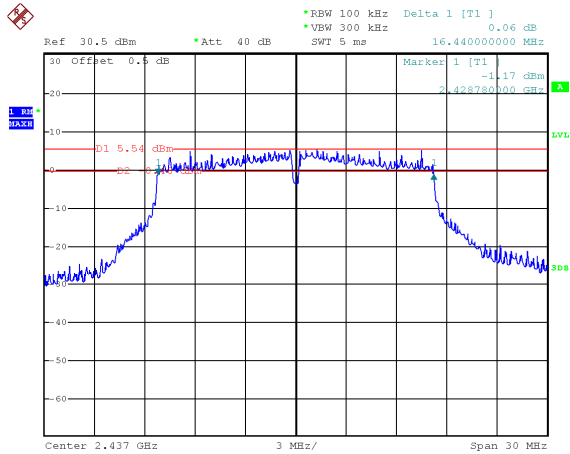

Date: 15.JUL.2024 12:12:09

Date: 12.JUL.2024 17:33:40

Mode: TX 11g channel 11

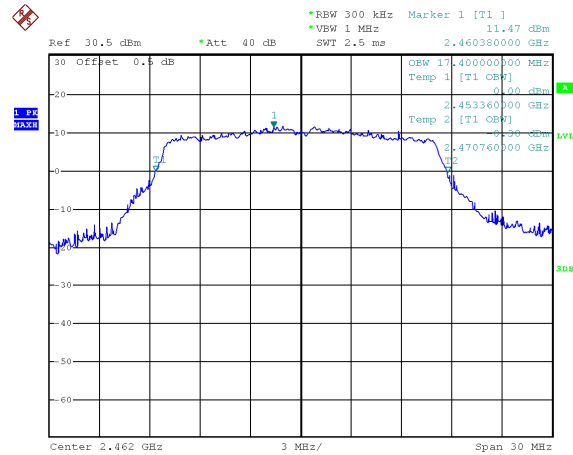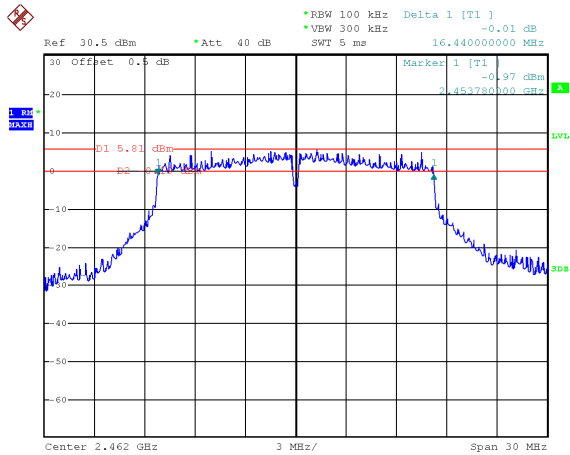



Date: 15.JUL.2024 12:08:49

Date: 12.JUL.2024 17:37:42

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT20 channel 1

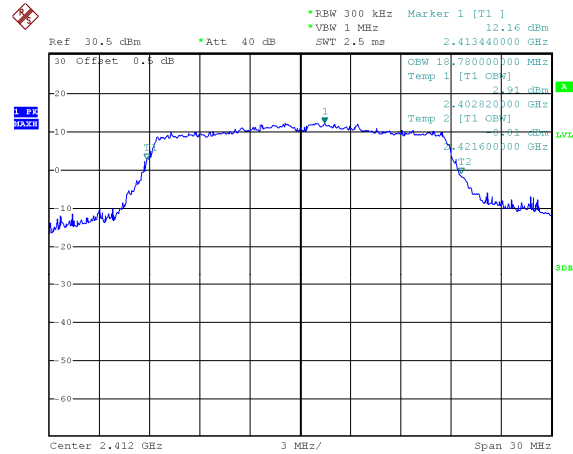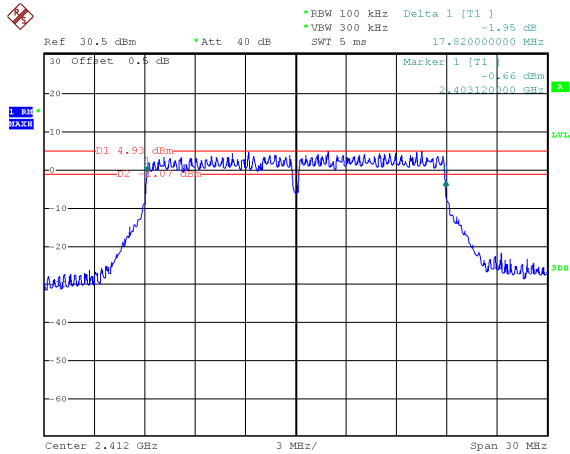

Date: 15.JUL.2024 12:03:29

Date: 12.JUL.2024 17:42:05

Mode: TX 11n HT20 channel 6

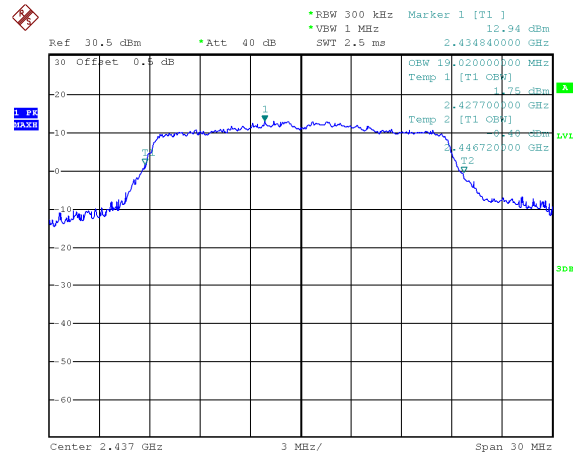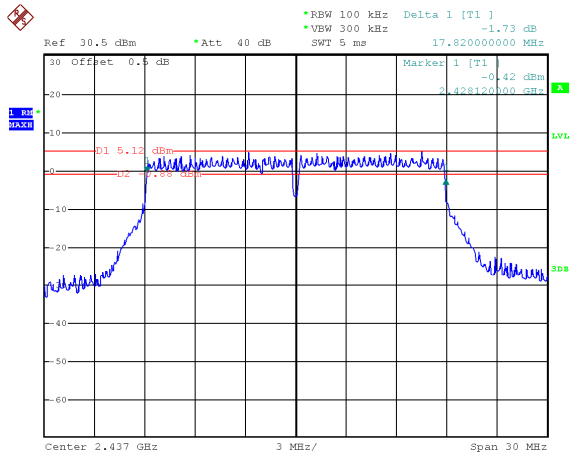



Date: 15.JUL.2024 12:04:58

Date: 12.JUL.2024 17:41:21

6 dB Bandwidth

99% Bandwidth



Mode: TX 11n HT20 channel 11

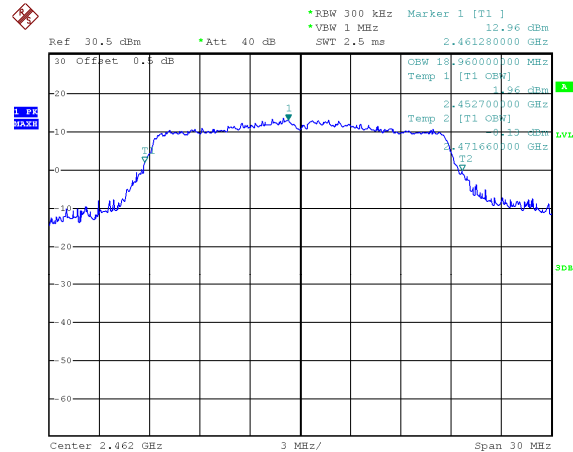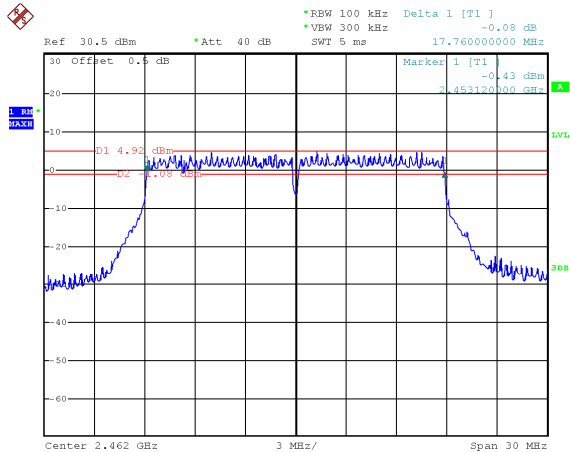

Date: 15.JUL.2024 12:06:28

Date: 12.JUL.2024 17:39:16

Mode: TX 11ax HT20 channel 3

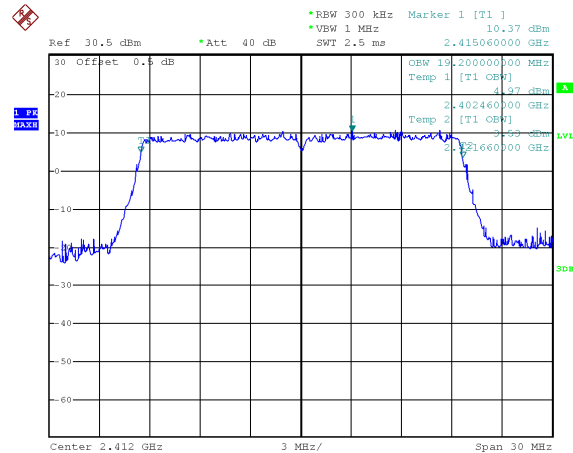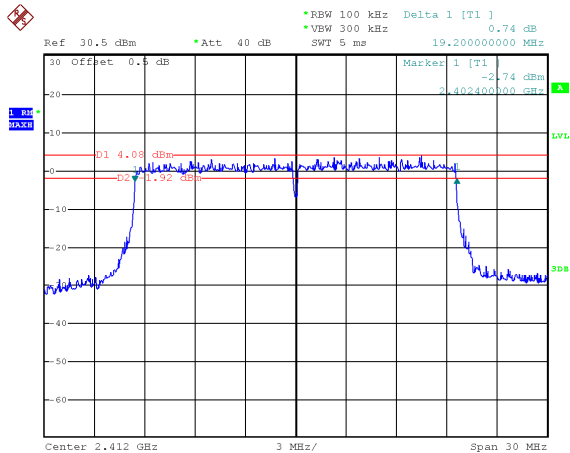



Date: 16.JUL.2024 09:48:49

Date: 16.JUL.2024 10:05:44

6 dB Bandwidth

99% Bandwidth



Mode: TX 11ax HT20 channel 6

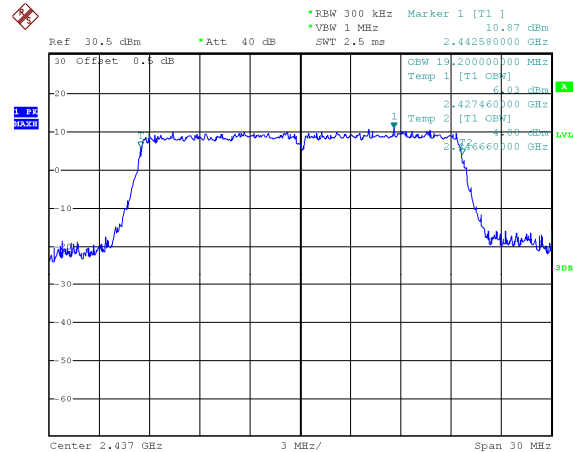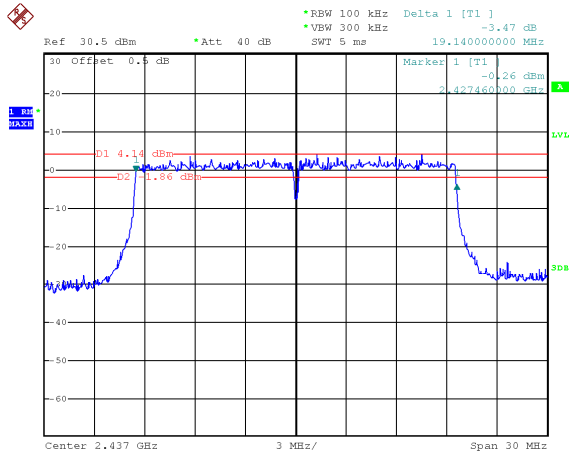

Date: 16.JUL.2024 09:47:24

Date: 16.JUL.2024 10:06:16

Mode: TX 11ax HT20 channel 9

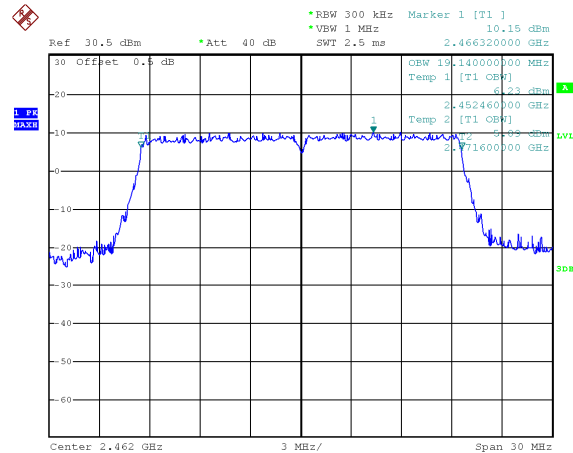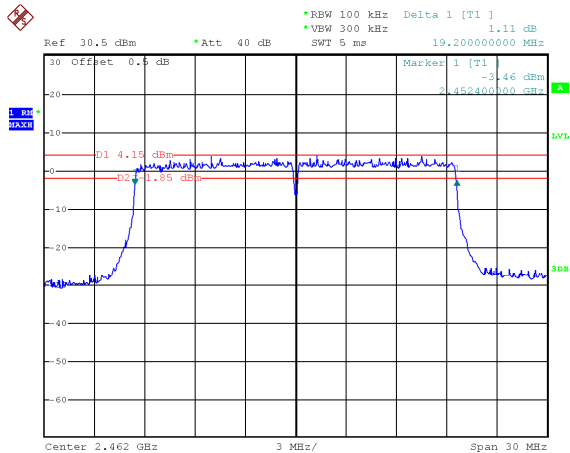

Date: 16.JUL.2024 09:45:59

Date: 16.JUL.2024 10:06:44

13 Maximum Peak conducted Output Power

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(b) The maximum peak conducted output power of the intentional radiator shall not exceed 1W.
Test Mode:	Transmitting

13.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

Section 8.3.1.1 RBW ≥ DTS bandwidth

Subclause 11.9.1.1 of ANSI C63.10 is applicable.

Section 8.3.1.2 Integrated band power method

For measuring the output power of a device transmitting a wide-band noise-like signal where the peak power amplitude is a statistical parameter, the preferred methodology is to use an integrated average power measurement, as described in 8.3.2. The peak integrated band power method of 11.9.1 in ANSI C63.10 is not applicable.

Subclause 11.9.2 of ANSI C63.10 is applicable.

13.2 Test Result

Ant 0:

Operation mode	Channel Frequency (MHz)	Measurements (dBm)	Duty Cycle Factor (dB)	Conducted Output Power (dBm)	Limit
TX 11b	Low-2412	19.91	5.06	24.97	1W/30dBm
	Middle-2437	19.69		24.75	1W/30dBm
	High-2462	20.15		25.21	1W/30dBm
TX 11g	Low-2412	21.22	0.49	21.71	1W/30dBm
	Middle-2437	20.74		21.23	1W/30dBm
	High-2462	21.00		21.49	1W/30dBm
TX 11n HT20	Low-2412	19.70	3.74	23.44	1W/30dBm
	Middle-2437	19.57		23.31	1W/30dBm
	High-2462	20.06		23.80	1W/30dBm
TX 11ax HT20	Low-2422	19.14	2.06	21.20	1W/30dBm
	Middle-2437	18.93		20.99	1W/30dBm
	High-2452	19.22		21.28	1W/30dBm

Ant 1:

Operation mode	Channel Frequency (MHz)	Measurements (dBm)	Duty Cycle Factor (dB)	Conducted Output Power (dBm)	Limit
TX 11b	Low-2412	20.54	1.85	22.39	1W/30dBm
	Middle-2437	20.95		22.80	1W/30dBm
	High-2462	21.34		23.19	1W/30dBm
TX 11g	Low-2412	20.24	2.68	22.92	1W/30dBm
	Middle-2437	20.70		23.38	1W/30dBm
	High-2462	21.08		23.76	1W/30dBm
TX 11n HT20	Low-2412	20.37	2.69	23.06	1W/30dBm
	Middle-2437	20.54		23.23	1W/30dBm
	High-2462	21.08		23.77	1W/30dBm
TX 11ax HT20	Low-2422	20.32	0.58	20.90	1W/30dBm
	Middle-2437	20.72		21.30	1W/30dBm
	High-2452	20.91		21.49	1W/30dBm

Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)			Limit ¹
		ANT1	ANT2	SUM	
TX 11n HT20	Low-2412	23.44	23.06	26.26	30dBm
	Middle-2437	23.31	23.23	26.28	
	High-2462	23.8	23.77	26.80	
TX 11ax HT20	Low-2422	21.2	20.9	24.06	
	Middle-2437	20.99	21.3	24.16	
	High-2452	21.28	21.49	24.40	

Note:

¹ According to ANSI C63.10 clause 14.6.3.2.4,

a) If transmit signals are correlated, then:

$$\text{Directional gain} = 10 \log \left[\left(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20} \right)^2 / N_{\text{ANT}} \right] \text{ dBi} \quad (40)$$

NOTE— the purpose of the factor 20 in the denominator of each exponent and the square of the sum of terms is to combine the signal levels coherently.

According to ANSI C63.10 clause 11.7,

For those cases where it is specified that the conducted output power be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6dBi, the output power effective limit shall be calculated as follows in Equation:


$$P_{\text{out}} = P_{\text{Limit}} - (G_{\text{TX}} - 6)$$

The Directional gain is 5.58dBi that less than 6dBi, Limit of power (SUM) is **30dBm**.

Test Plot:


Ant 0:

Mode: TX 11b channel 1

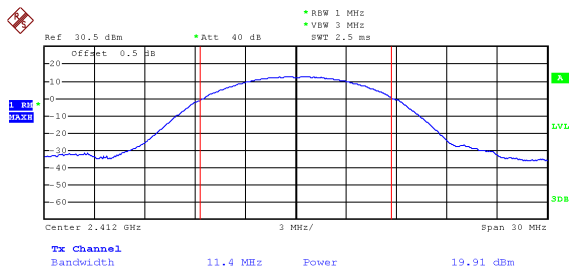


Date: 15.JUL.2024 15:41:00

Mode: TX 11b channel 6

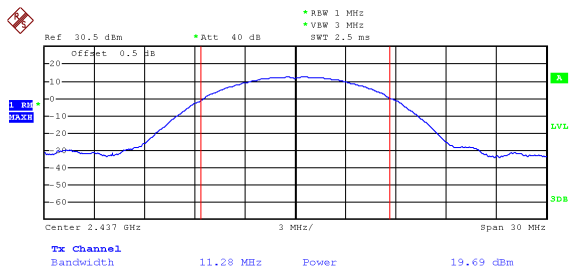


Date: 15.JUL.2024 15:42:07

Mode: TX 11b channel 11

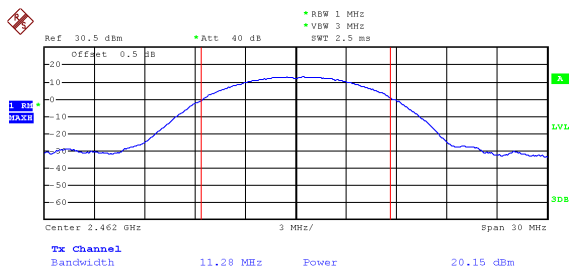


Date: 15.JUL.2024 15:43:38

Mode: TX 11g channel 1

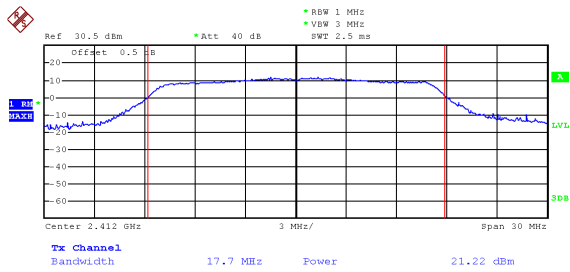


Date: 15.JUL.2024 15:44:55

Mode: TX 11g channel 6

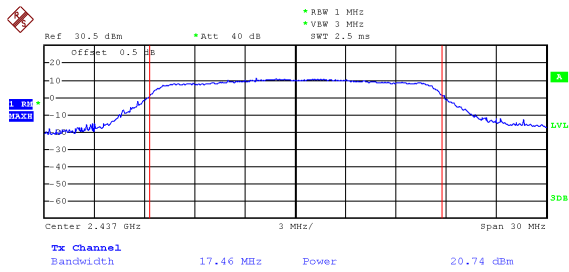


Date: 15.JUL.2024 15:45:45

Mode: TX 11g channel 11

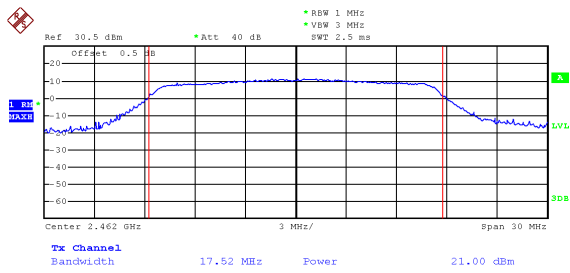


Date: 15.JUL.2024 15:46:35

Mode: TX 11n HT20 channel 1

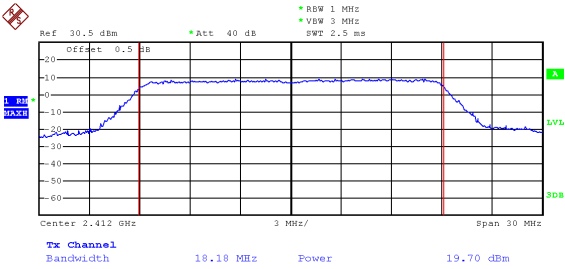


Date: 15.JUL.2024 15:55:03

Mode: TX 11n HT20 channel 6

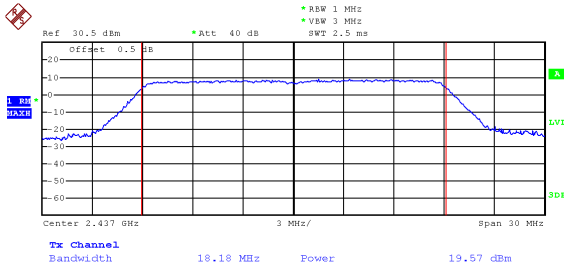


Date: 15.JUL.2024 15:53:26

Mode: TX 11n HT20 channel 11

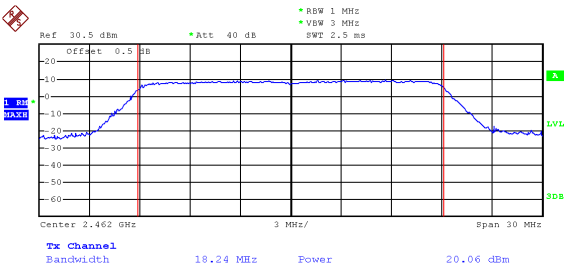


Date: 15.JUL.2024 15:51:54

Mode: TX 11ax HT20 channel 3

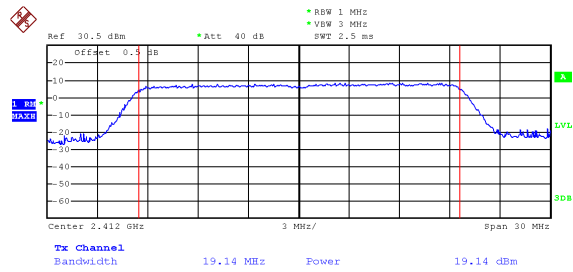


Date: 16.JUL.2024 10:12:08

Mode: TX 11ax HT20 channel 6

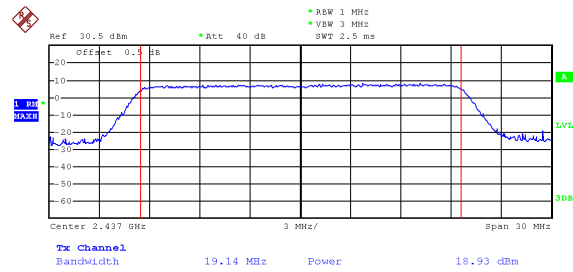

Date: 16.JUL.2024 10:12:50


Mode: TX 11ax HT20 channel 9

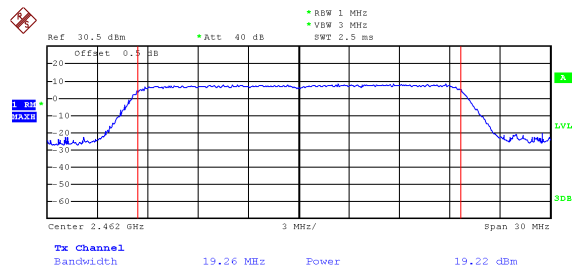

Date: 16.JUL.2024 10:13:32


Ant 1:

Mode: TX 11b channel 1

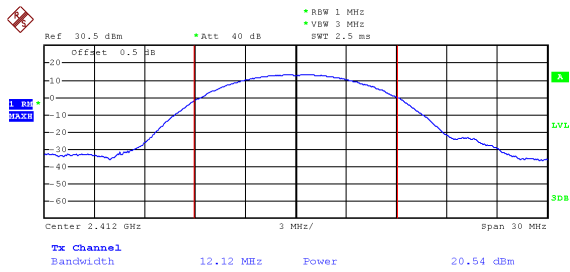


Date: 12.JUL.2024 17:14:46

Mode: TX 11b channel 6

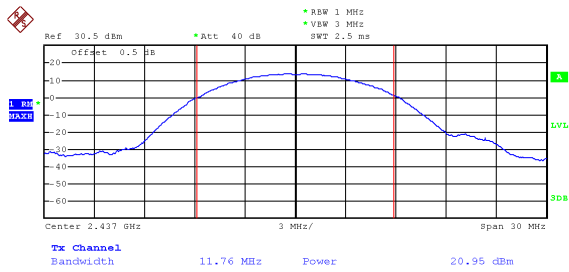


Date: 12.JUL.2024 17:12:05

Mode: TX 11b channel 11

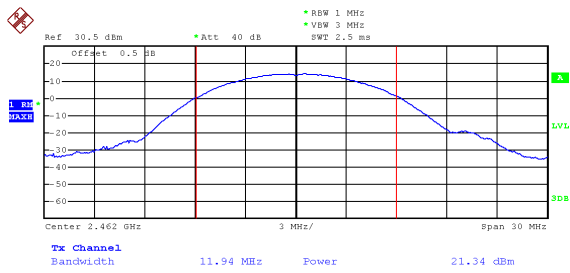


Date: 12.JUL.2024 17:28:12

Mode: TX 11g channel 1

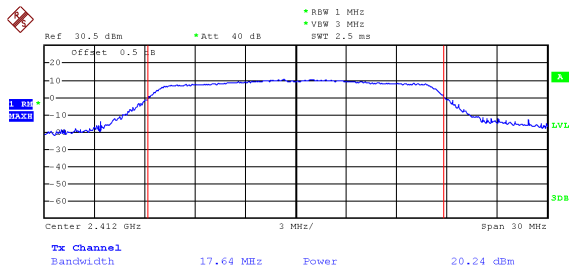


Date: 15.JUL.2024 11:19:59

Mode: TX 11g channel 6

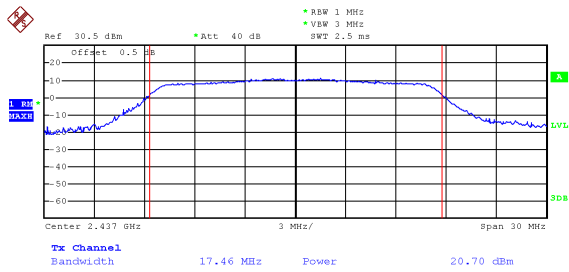


Date: 15.JUL.2024 11:18:32

Mode: TX 11g channel 11

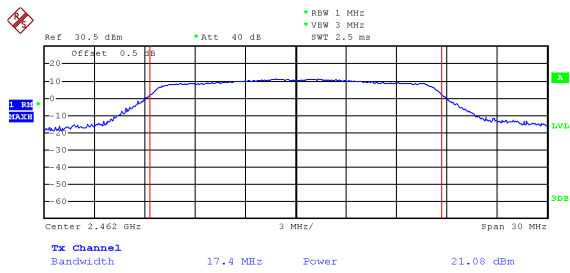


Date: 15.JUL.2024 11:16:47

Mode: TX 11n HT20 channel 1

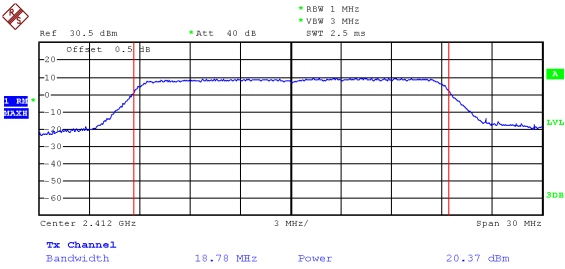


Date: 15.JUL.2024 11:22:09

Mode: TX 11n HT20 channel 6

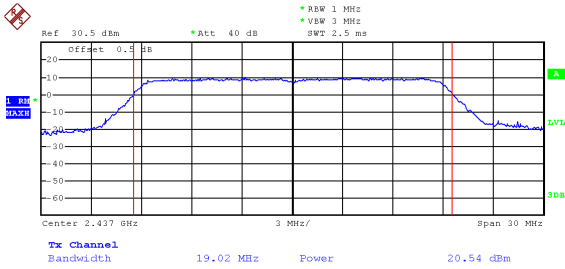


Date: 15.JUL.2024 11:22:51

Mode: TX 11n HT20 channel 11

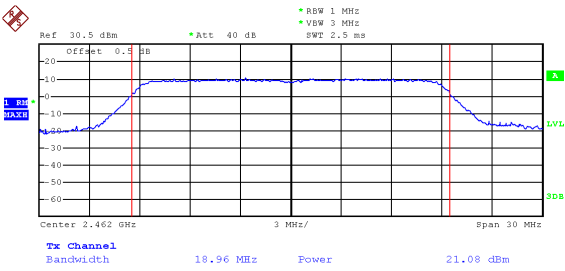


Date: 15.JUL.2024 11:21:19

Mode: TX 11ax HT20 channel 3

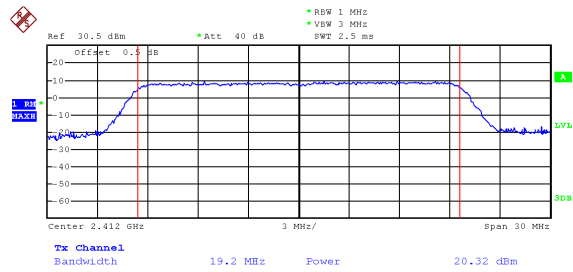


Date: 16.JUL.2024 10:11:02

Mode: TX 11ax HT20 channel 6

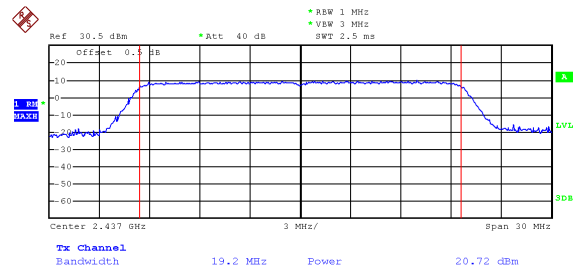

Date: 16.JUL.2024 10:10:26

Mode: TX 11ax HT20 channel 9

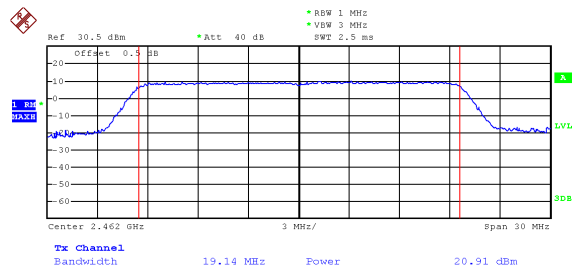

Date: 16.JUL.2024 10:09:29

14 Power Spectral density

Test Requirement:	47CFR FCC Part15 Subpart C §15.247
Test Method:	ANSI C63.10:2013 KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019
Test Limit:	§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Test Mode:	Transmitting

14.1 Test Procedure

According to KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 8.4

Subclause 11.10 of ANSI C63.10 is applicable.

Choose the test procedure according to the product type

Peak PSD

Subclause 11.10.2 of ANSI C63.10 is applicable.

AVG PSD

Subclause 11.10.3/4/5/6/7/8 of ANSI C63.10 is applicable.

14.2 Test Result

Ant 0:

Operation mode	Channel Frequency (MHz)	Measurements (dBm per 3kHz)	Duty Cycle Factor (dB)	Power Spectral density (dBm per 3kHz)	Limit
TX 11b	Low-2412	-10.53	5.06	-5.47	8dBm per 3kHz
	Middle-2437	-11.12		-6.06	8dBm per 3kHz
	High-2462	-10.93		-5.87	8dBm per 3kHz
TX 11g	Low-2412	-12.35	0.49	-11.86	8dBm per 3kHz
	Middle-2437	-13.20		-12.71	8dBm per 3kHz
	High-2462	-12.71		-12.22	8dBm per 3kHz
TX 11n HT20	Low-2412	-16.24	3.74	-12.50	8dBm per 3kHz
	Middle-2437	-16.94		-13.20	8dBm per 3kHz
	High-2462	-16.68		-12.94	8dBm per 3kHz
TX 11ax HT20	Low-2422	-18.50	2.06	-16.44	8dBm per 3kHz
	Middle-2437	-18.78		-16.72	8dBm per 3kHz
	High-2452	-18.17		-16.11	8dBm per 3kHz

Ant 1:

Operation mode	Channel Frequency (MHz)	Measurements (dBm per 3kHz)	Duty Cycle Factor (dB)	Power Spectral density (dBm per 3kHz)	Limit
TX 11b	Low-2412	-10.51	1.85	-8.66	8dBm per 3kHz
	Middle-2437	-9.11		-7.26	8dBm per 3kHz
	High-2462	-8.03		-6.18	8dBm per 3kHz
TX 11g	Low-2412	-14.18	2.68	-11.50	8dBm per 3kHz
	Middle-2437	-13.45		-10.77	8dBm per 3kHz
	High-2462	-13.29		-10.61	8dBm per 3kHz
TX 11n HT20	Low-2412	-16.43	2.69	-13.74	8dBm per 3kHz
	Middle-2437	-15.53		-12.84	8dBm per 3kHz
	High-2462	-15.47		-12.78	8dBm per 3kHz
TX 11ax HT20	Low-2422	-17.16	0.58	-16.58	8dBm per 3kHz
	Middle-2437	-17.09		-16.51	8dBm per 3kHz
	High-2452	-18.31		-17.73	8dBm per 3kHz

Operation mode	Channel Frequency (MHz)	Power Spectral density (dBm)			Limit ¹
		ANT1	ANT2	SUM	
TX 11n HT20	Low-2412	-12.5	-13.74	-10.07	8dBm per 3kHz
	Middle-2437	-13.2	-12.84	-10.01	
	High-2462	-12.94	-12.78	-9.85	
TX 11ax HT20	Low-2422	-16.44	-16.58	-13.50	
	Middle-2437	-16.72	-16.51	-13.60	
	High-2452	-16.11	-17.73	-13.83	

Note:

¹ According to ANSI C63.10 clause 14.6.3.2.4,

a) If transmit signals are correlated, then:

$$\text{Directional gain} = 10 \log \left[\left(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20} \right)^2 / N_{\text{ANT}} \right] \text{ dBi} \quad (40)$$

NOTE— the purpose of the factor 20 in the denominator of each exponent and the square of the sum of terms is to combine the signal levels coherently.

According to ANSI C63.10 clause 11.7,

For those cases where it is specified that the conducted output power be reduced by the amount in dB that the directional gain of the transmitting antenna exceeds 6dBi, the output power effective limit shall be calculated as follows in Equation:


$$P_{\text{out}} = P_{\text{Limit}} - (G_{\text{Tx}} - 6)$$

The Directional gain is 5.58dBi that less than 6dBi, Limit of PSD (SUM) is **8dBm**.

Test Plot:


Ant 0:

Mode: TX 11b channel 1

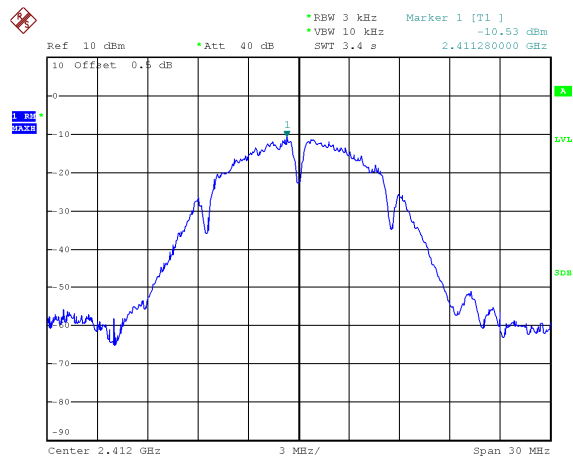


Date: 15.JUL.2024 16:00:24

Mode: TX 11b channel 6

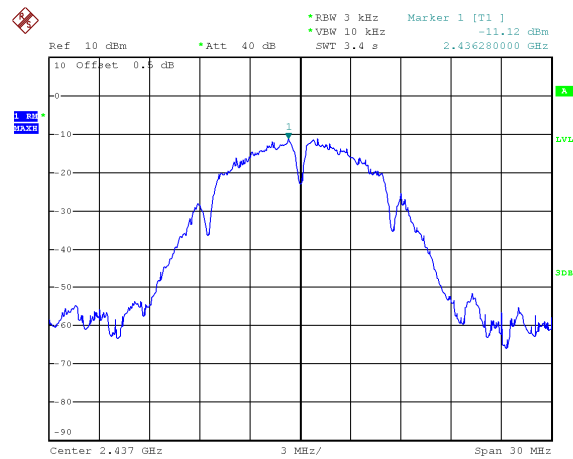


Date: 15.JUL.2024 16:02:25

Mode: TX 11b channel 11

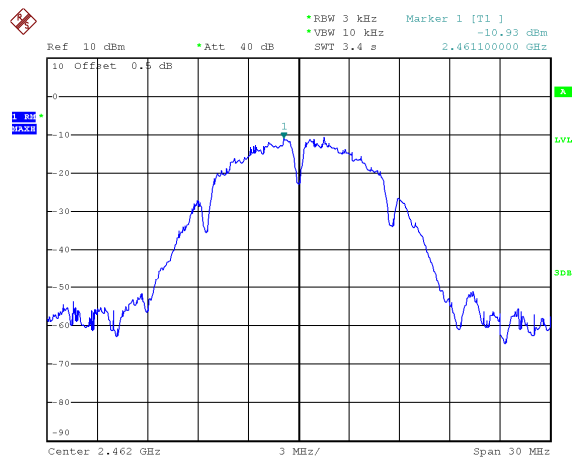


Date: 15.JUL.2024 16:03:09

Mode: TX 11g channel 1

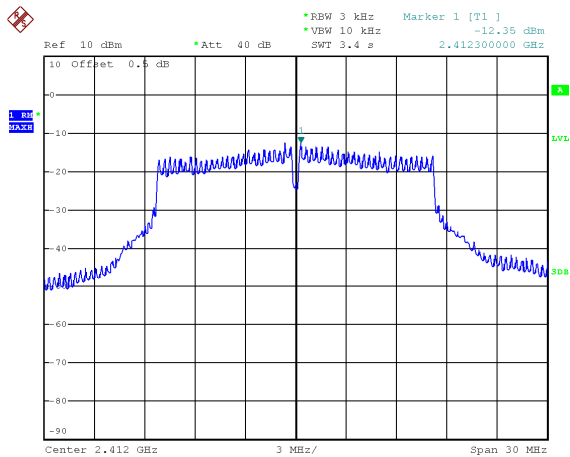


Date: 15.JUL.2024 16:06:07

Mode: TX 11g channel 6

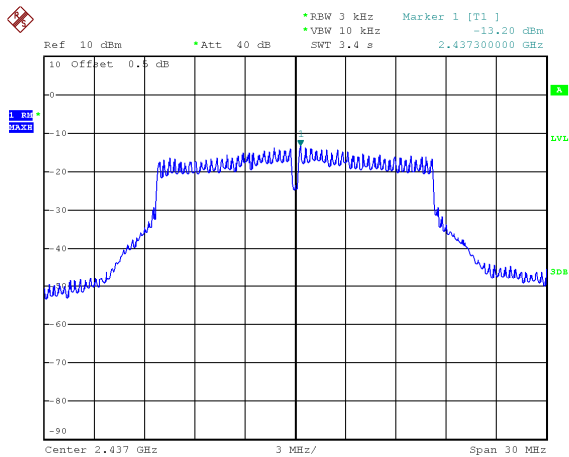


Date: 15.JUL.2024 16:04:58

Mode: TX 11g channel 11

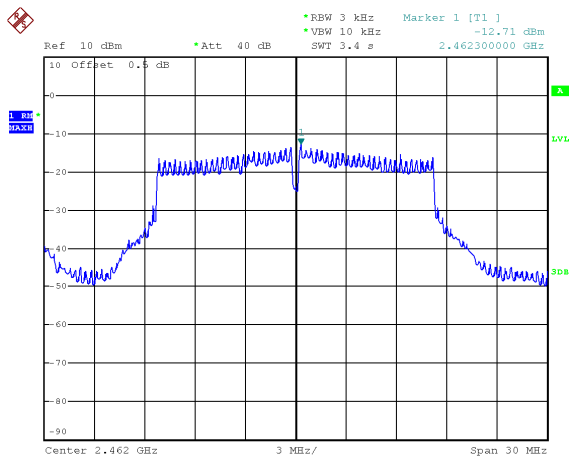


Date: 15.JUL.2024 16:04:03

Mode: TX 11n HT20 channel 1

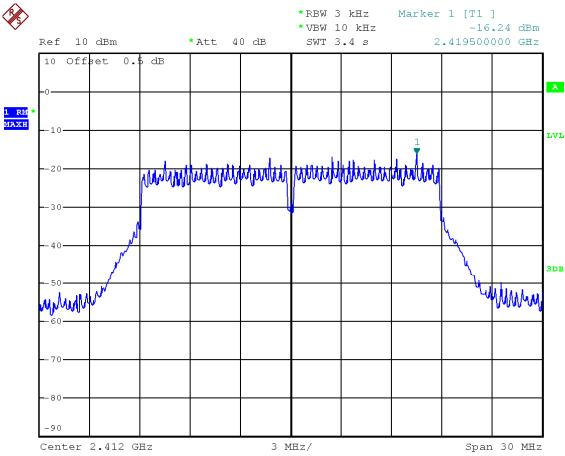


Date: 15.JUL.2024 16:11:59

Mode: TX 11n HT20 channel 6

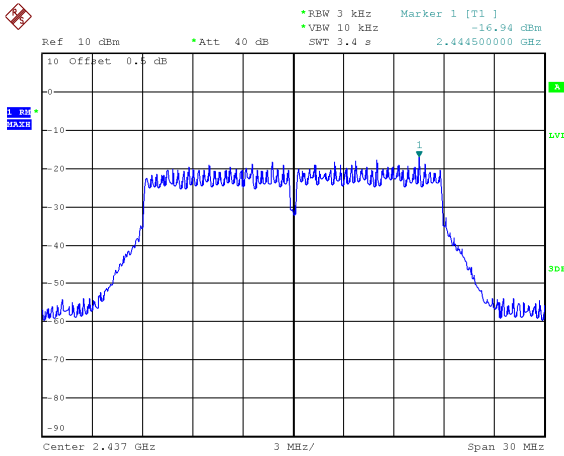


Date: 15.JUL.2024 16:08:18

Mode: TX 11n HT20 channel 11

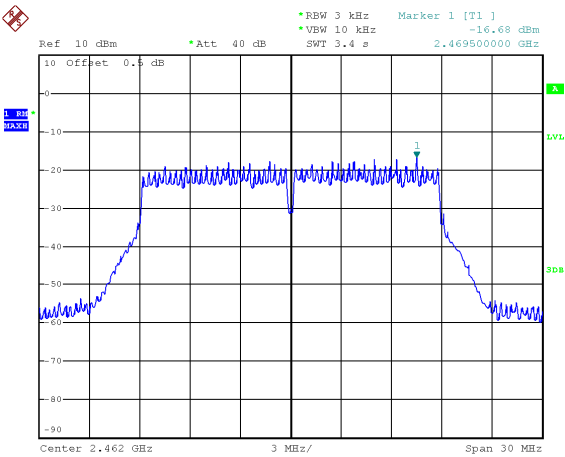


Date: 23.JUL.2024 15:58:51

Mode: TX 11ax HT20 channel 3

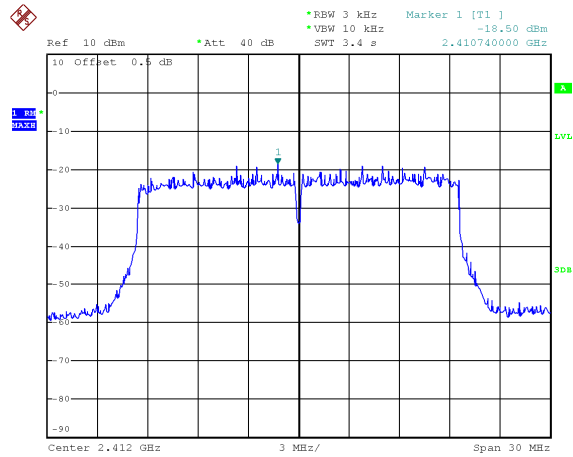


Date: 16.JUL.2024 10:41:31

Mode: TX 11ax HT20 channel 6

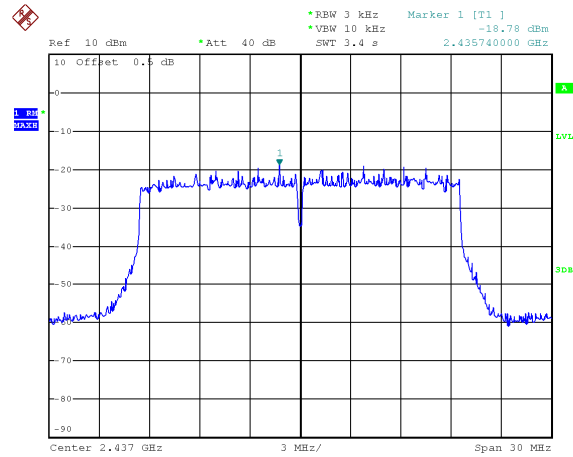

Date: 16.JUL.2024 10:41:00


Mode: TX 11ax HT20 channel 9

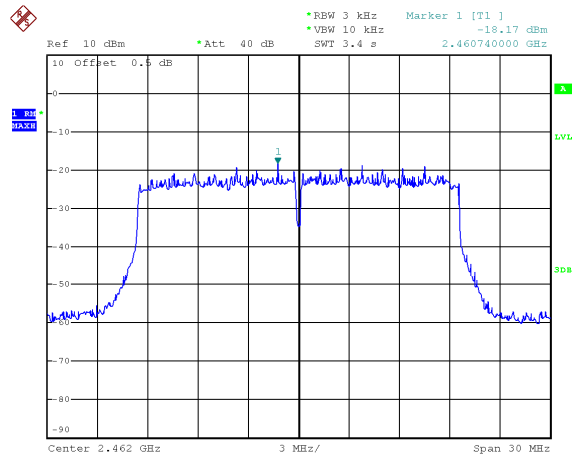

Date: 16.JUL.2024 10:40:26


Ant 1:

Mode: TX 11b channel 1

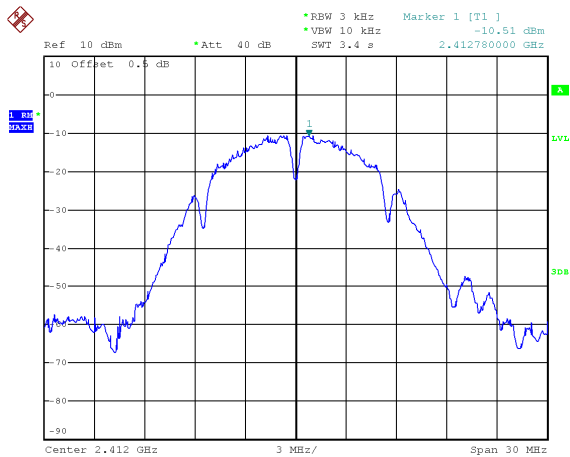


Date: 15.JUL.2024 11:48:42

Mode: TX 11b channel 6

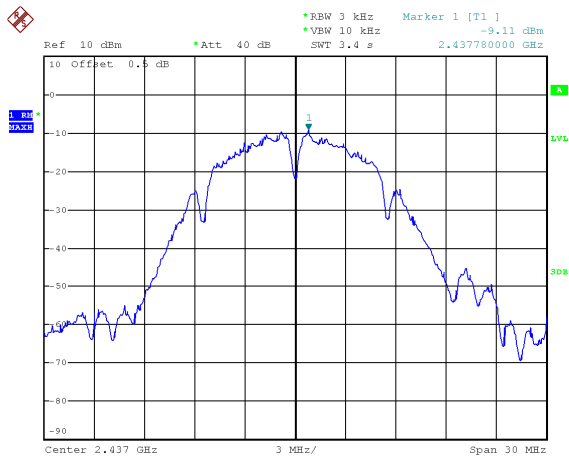


Date: 15.JUL.2024 11:47:33

Mode: TX 11b channel 11

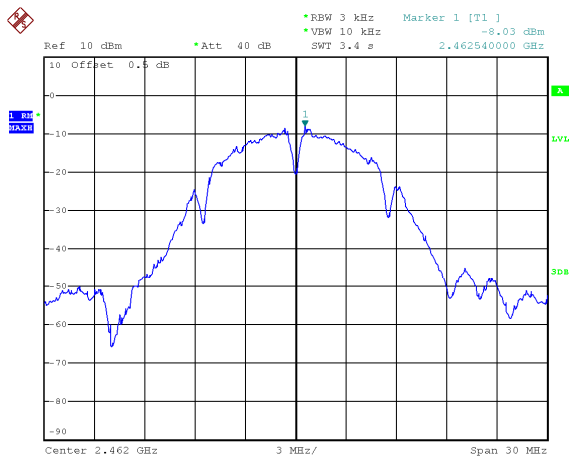


Date: 15.JUL.2024 11:46:36

Mode: TX 11g channel 1

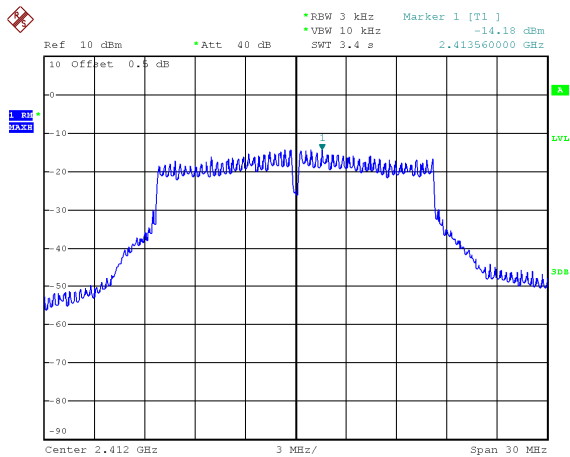


Date: 15.JUL.2024 11:28:52

Mode: TX 11g channel 6

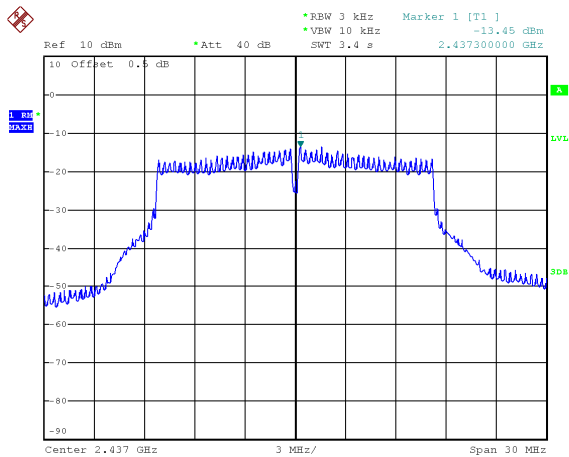


Date: 15.JUL.2024 11:27:51

Mode: TX 11g channel 11

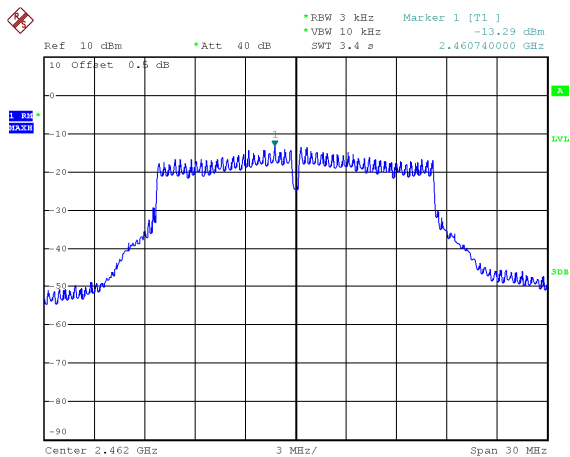


Date: 15.JUL.2024 11:26:49

Mode: TX 11n HT20 channel 1

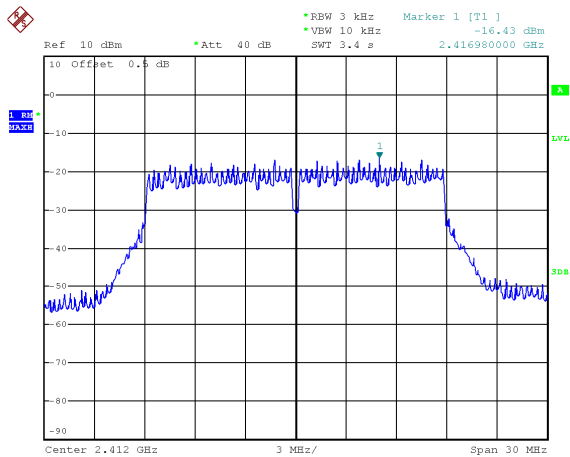


Date: 15.JUL.2024 11:24:54

Mode: TX 11n HT20 channel 6

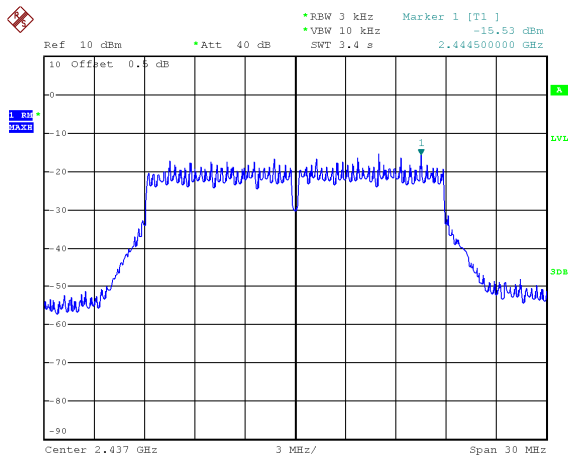


Date: 15.JUL.2024 11:24:10

Mode: TX 11n HT20 channel 11

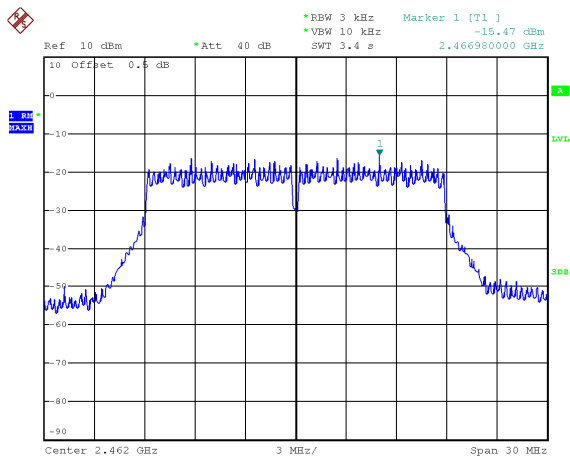


Date: 15.JUL.2024 11:25:57

Mode: TX 11ax HT20 channel 3

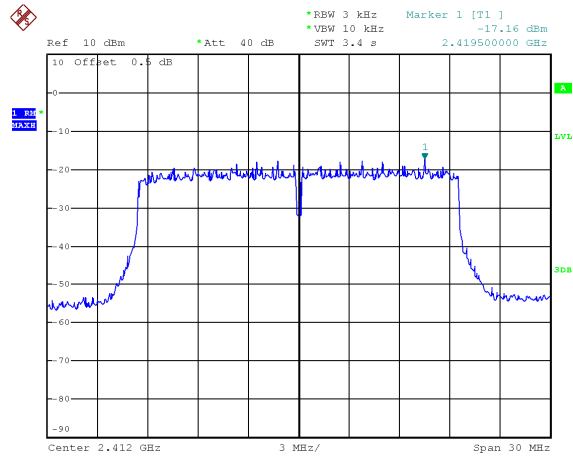


Date: 16.JUL.2024 10:43:56

Mode: TX 11ax HT20 channel 6

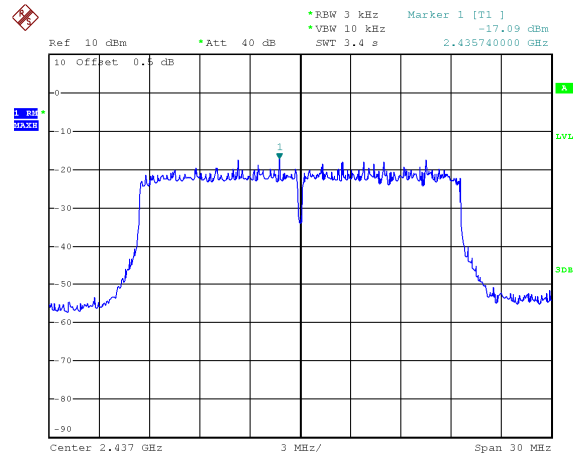

Date: 16.JUL.2024 10:36:10

Mode: TX 11ax HT20 channel 9

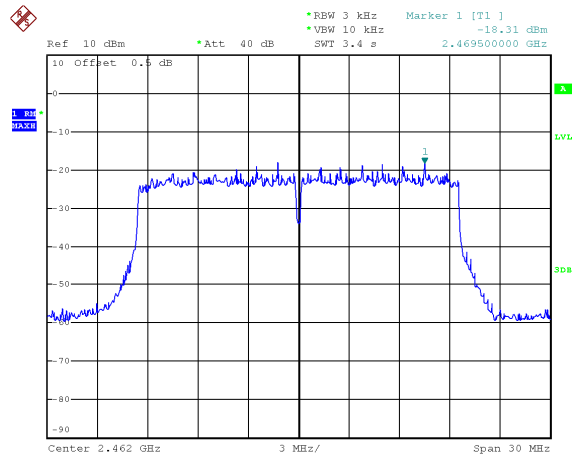

Date: 16.JUL.2024 10:39:01

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a FPC antenna fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

16 RF Exposure

Note: Please refer to RF Exposure Report: WTD24D06151831W006.

17 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-ET1040-Photos

=====End of Report=====