

TEST REPORT

| Product Name Model Number FCC ID | | | | | |
|--|---|--|--|--|--|
| Prepared for Address | : | SHENZHEN GROWATT NEW ENERGY CO., LTD. 4-13/F,Building A,Sino-German(Europe) Industrial Park,Hangcheng Ave,Bao'an District,Shenzhen,China | | | |
| Prepared by : Address : | | EMTEK (SHENZHEN) CO., LTD. Building 69, Majialong Industry Zone,Nanshan District, Shenzhen, Guangdong, China | | | |
| | | Tel: (0755) 26954280 Fax: (0755) 26954282 | | | |
| | | ENS2407080293W00702R September 12, 2024 to October 11, 2024 October 11, 2024 | | | |

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn



Table of Contents

| 1 TEST RESULT CERTIFICATION | |
|--|--|
| 2 EUT TECHNICAL DESCRIPTION | |
| 3 SUMMARY OF TEST RESULT | 6 |
| 4 TEST METHODOLOGY | 7 |
| 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS 4.2 MEASUREMENT EQUIPMENT USED 4.3 DESCRIPTION OF TEST MODES | 7 |
| 5 FACILITIES AND ACCREDITATIONS | 9 |
| 5.1 FACILITIES 5.2 EQUIPMENT 5.3 LABORATORY ACCREDITATIONS AND LISTINGS | |
| 6 TEST SYSTEM UNCERTAINTY | 10 |
| 7 SETUP OF EQUIPMENT UNDER TEST | |
| 7.1 RADIO FREQUENCY TEST SETUP 1 7.2 RADIO FREQUENCY TEST SETUP 2 7.3 CONDUCTED EMISSION TEST SETUP 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM 7.5 SUPPORT EQUIPMENT | |
| 8 FREQUENCY HOPPING SYSTEM REQUIREMENTS | 15 |
| 8.1 Standard Applicable 8.2 EUT Pseudorandom Frequency Hopping Sequence 8.3 Equal Hopping Frequency Use 8.4 Frequency Hopping System | |
| 9 TEST REQUIREMENTS | |
| 9.1 20DB&99%BANDWIDTH 9.2 CARRIER FREQUENCY SEPARATION | 24 29 32 35 40 52 76 79 |
| 10 APPENDIX PHOTOGRAPHS OF EUT | |
| 11 APPENDIX PHOTOGRAPHS OF TEST SETUP | |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



1 TEST RESULT CERTIFICATION

| Applicant | : | SHENZHEN GROWATT NEW ENERGY CO., LTD. |
|--------------|---|---|
| Address | : | 4-13/F,Building A,Sino-German(Europe) Industrial Park,Hangcheng Ave,Bao'an District,Shenzhen,China |
| Manufacturer | : | SHENZHEN GROWATT NEW ENERGY CO., LTD. |
| Address | : | 4-13/F,Building A,Sino-German(Europe) Industrial Park,Hangcheng Ave,Bao'an District,Shenzhen,China |
| EUT | : | Datalogger |
| Model Name | : | ShineWeLink |
| Trade Mark | : | GROWATT |

Measurement Procedure Used:

| APPLICABLE STANDARDS | | | | |
|---|-------------|--|--|--|
| STANDARD | TEST RESULT | | | |
| FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C | PASS | | | |
| IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 3(08-2023) | PASS | | | |

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.247, IC RSS-247 Issue 3 and IC RSS-GEN, Issue 5.

The test results of this report relate only to the tested sample identified in this report

| Date of Test : | September 12, 2024 to October 11, 2024 |
|----------------|--|
| Prepared by : | Una yu |
| | Una Yu /Editor |
| Reviewer : | Foe Xia SHENZA |
| | Joe Xia /Supervisor |
| | TA * |

Approve & Authorized Signer :

Lisa Wang/Manager

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

NG



Modified History

| Version | Report No. | Revision Date | Summary |
|---------|----------------------|---------------|-----------------|
| Ver.1.0 | ENS2407080293W00702R | 1 | Original Report |
| | | | |
| | | | |



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ENS2407080293W00702R



2 EUT TECHNICAL DESCRIPTION

| Characteristics | Description | |
|-----------------------------------|---|--|
| Product: | Datalogger | |
| Model Number: | ShineWeLink | |
| Test Sample S/N: | N/A | |
| Variant Number: | N/A | |
| Device Type: | Bluetooth | |
| Data Rate: | 1Mbps for GFSK modulation 2Mbps forπ/4-DQPSK modulation 3Mbps for 8DPSK modulation | |
| Modulation: | GFSK, π/4-DQPSK, 8DPSK | |
| Operating Frequency Range(s) : | 2402-2480MHz | |
| Number of Channels: | 79 channels | |
| Antenna Type: | Internal Antenna | |
| Antenna Gain: | 3.02 dBi (Note: The antenna information is provided by the customers, which will have a certain impact on the test results) | |
| Power supply: | USB 5V(DC 5V from adapter) | |
| Adapter 1: | MODEL:KA06E-0501000US INPUT:100-240V~50/60Hz 0.25A Max OUTPUT:5.0V/1.0A 5.0W | |
| Adapter 2: | MODEL:MKA-0501000VU INPUT:100-240V~50/60Hz 0.4A OUTPUT:5.0V/1.0A 5.0W | |
| Test Voltage: | AC 120V/60Hz | |
| Temperature Range: | -20℃~+65℃ | |
| Software Version: | 7.7.0.8 | |
| Hardware Version: | A Versions | |

Note: for more details, please refer to the User's manual of the EUT.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



| FCC Part Clause | IC Part Clause | Test Parameter | Verdict | Remark |
|---|--|--|---------|--------|
| 15.247(a)(1) | RSS-247.5.1 RSS-Gen.6.7 | Emission Bandwidth | PASS | |
| 15.247(a)(1) | RSS-247.5.1 | Carrier Frequency Separation | PASS | |
| 15.247(a)(1) | RSS-247.5.1 | Number of Hopping Frequencies | PASS | |
| 15.247(a)(1) | RSS-247.5.1 | Average Time of Occupancy (Dwell Time) | PASS | |
| 15.247(b)(1) | RSS-247.5.4 RSS-Gen 6.12 | Maximum Peak Conducted Output Power | PASS | |
| 15.247(d) | RSS-247.5.5 | Conducted Spurious Emissions | PASS | |
| 15.247(d) 15.209 15.205 | RSS-Gen 8.9 7(d) RSS-Gen 8.10 0 RSS-Gen 6.13 Radiated Spurious Emissions | | PASS | |
| 15.207 | RSS-Gen 8.8 | Conducted Emission | PASS | |
| 15.203 RSS-Gen 6.8 15.247(b) RSS-247.5.4 | | Antenna Application | PASS | |
| 15.247 (a) (1)/g/h | - | Frequency Hopping System | PASS | |

SUMMARY OF TEST RESULT 3

NOTE1: N/A (Not Applicable)

NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID:2AAJ9-WELINK filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards: FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 3(02-2023) FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

Conducted Emission Test Equipment

| Equipment Manufacturer | | Serial No. Last Cal. | | Cal. Interval |
|------------------------|-----------------|----------------------|---------------------------|---|
| Rohde & Schwarz | ESCI | 101384 | 2024/5/11 | 1Year |
| Rohde & Schwarz | ENV216 | 101161 | 2024/5/10 | 1Year |
| | Rohde & Schwarz | Rohde & Schwarz ESCI | Rohde & SchwarzESCI101384 | Rohde & Schwarz ESCI 101384 2024/5/11 |

For Spurious Emissions Test

| Equipment | Manufacturer | Manufacturer Model No. Serial No. | | Last Cal. | Cal. Interval |
|-----------------------------------|---------------------------------------|-----------------------------------|--------------|-----------|------------------|
| EMI Test Receiver | Rohde & Schwarz | ESU 26 | 100154 | 2024/5/10 | 1Year |
| Pre-Amplifie | Lunar EM | LNA30M3G-25 | J1010000070 | 2024/5/10 | 1Year |
| Bilog Antenna | • • • • • • • • • • • • • • • • • • • | | 661 | 2023/6/2 | 2 Year |
| Horn antenna | | | 9120D-1177 | 2023/5/12 | 2 Year |
| Pre-Amplifie | | | SK2019051801 | 2024/5/10 | 1Year |
| Loop Antenna | Loop Antenna Schwarzbeck | | 1519-012 | 2023/5/12 | 2 Year |
| Spectrum Analyzer Rohde & Schwarz | | FSV40 | 100967 | 2024/5/10 | 1Year |
| Horn antenna | Schwarzbeck | BBHA9170 | 9170-399 | 2023/5/12 | 2 Year |

For other test items:

| Equipment | Manufacturer | Model No. Serial No. | | Last Cal. | Cal. Interval |
|--|--------------|----------------------|------------|-----------|------------------|
| Wideband Radio Communication Tester | R&S | CMW500 | 171168 | 2023/9/14 | 1Year |
| Frequency Extender | R&S | CMW-Z800A | 100430 | 2023/11/2 | 1Year |
| Spectrum Analyzer | R&S | FSV3044 | 101289 | 2023/9/14 | 1Year |
| Analog Signal Generator | R&S | SMB100A | 183237 | 2023/9/16 | 1Year |
| Vector Signal Generator | R&S | SMM100A | 101808 | 2023/9/16 | 1Year |
| RF Control Unit(Power Meter) | Tonscend | JS0806-2 | 22C8060567 | 2023/9/14 | 1Year |
| Temperature&Humidity Chamber | ESPEC | EL-02KA | 12107166 | 2024/5/10 | 1 Year |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation(DH5); 2Mbps for π /4-DQPSK modulation(2DH5); 3Mbps for 8DPSK modulation(3DH5);)were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | | | | |
|---------------------------------------|--------------------|---------|--------------------|---------|--------------------|--|--|--|--|
| 0 | 2402 | 39 | 2441 | | | | | | |
| 1 | 2403 | 40 | 2442 | 76 | 2478 | | | | |
| 2 | 2404 | 41 | 2443 | 77 | 2479 | | | | |
| | | | | 78 | 2480 | | | | |
| Note: fc=2402MHz+(k-1)×1MHz k=1 to 79 | | | | | | | | | |

Test Frequency and channel for Bluetooth

| Lowest F | Frequency | Middle Frequency | | Highest Frequency | |
|----------|--------------------|------------------|--------------------|-------------------|--------------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 0 | 2402 | 39 | 2441 | 78 | 2480 |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (Shenzhen) Co., Ltd.

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTINGS

| Site Description | |
|------------------|--|
| EMC Lab. | Accredited by CNAS The Certificate Registration Number is L2291. The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017) |
| | Accredited by FCC Designation Number: CN1204 Test Firm Registration Number: 882943 |
| | Accredited by A2LA The Certificate Number is 4321.01. |
| | Accredited by Industry Canada The Conformity Assessment Body Identifier is CN0008 |
| Name of Firm | EMTEK (SHENZHEN) CO., LTD. Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Test Parameter | Measurement Uncertainty |
|------------------------------|-------------------------|
| Frequency error | ±20Hz |
| Occupied Bandwidth | ±0.5KHz |
| Transmitter output power | ±0.6dB |
| Conducted spurious emissions | ±3.2dB |
| Radiated spurious emissions | ±4.5dB |
| Temperature | ±1.2℃ |
| Humidity | ±3% |
| DC voltages | ±0.25V |
| Time | ±1% |

Measurement Uncertainty for a level of Confidence of 95%

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)


The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

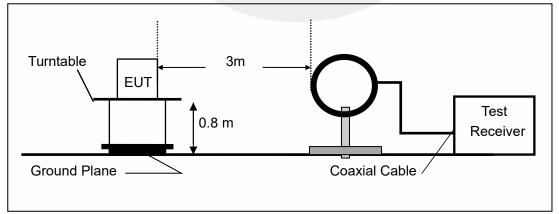


深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn



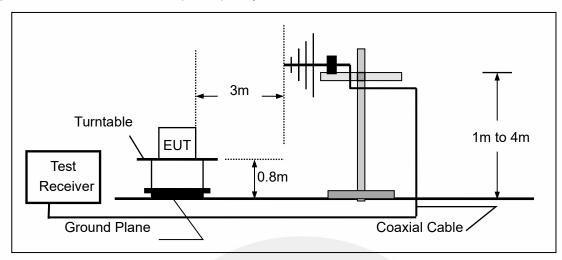

(b)Radiated Emission Test Set-Up, Frequency Below 1000MHz

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

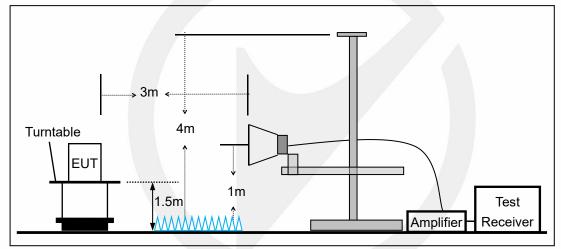

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn




7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Perfect Share Mini) must be connected to LISN. The LISN shall be placed 0.8m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8m.


According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

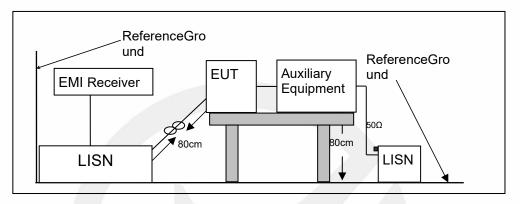

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

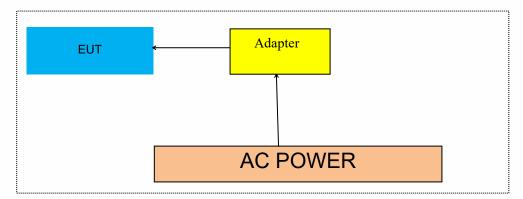

7.5 SUPPORT EQUIPMENT

| EUT Cable List and Details | | | |
|----------------------------|------------|---------------------|------------------------|
| Cable Description | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| 1 | 1 | / | / |

| Auxiliary Cable List and Details | | | | | | |
|----------------------------------|------------|---------------------|------------------------|--|--|--|
| Cable Description | Length (m) | Shielded/Unshielded | With / Without Ferrite | | | |
| 1 | 1 | 1 | 1 | | | |

| Auxiliary Equipment List and Details | | | | | |
|--------------------------------------|--------------|-------|---------------|--|--|
| Description | Manufacturer | Model | Serial Number | | |
| | / | 1 | 1 | | |

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn



8 FREQUENCY HOPPING SYSTEM REQUIREMENTS

8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

8.2 EUT Pseudorandom Frequency Hopping Sequence


The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; thephase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divide into time slots where each slot corresponds to an RF hop frequency. Consecutive hopscorrespond to different RF hop frequencies. The normal hop is 1 600 hops/s.

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: 29-1 = 511 bits Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

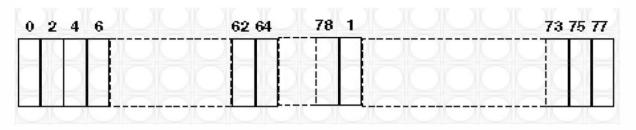

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode: 35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53 Each Frequency used equally on the average by each transmitter

8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH- enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn



9 TEST REQUIREMENTS

9.1 20DB&99%BANDWIDTH

9.1.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1 and RSS-Gen.6.7

9.1.2 Conformance Limit

No limit requirement.

9.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.1.4 Test Procedure

The EUT was operating inBluetoothmode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) =100kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize.Use the marker-to-peak function to set the marker to the peak of the emission. Use themarker-delta function to measure 20 dB down one side of the emission. Reset the markerdeltafunction, and move the marker to the other side of the emission, until it is (asclose as possible to) even with the reference marker level. The marker-delta reading atthis point is the 20 dB bandwidth of the emission.

If this value varies with differentmodes of operation (e.g., data rate, modulation format, etc.), repeat this test for eachvariation.

Measure and record the results in the test report.

Test Results

| Temperature: | 25° C |
|--------------------|-----------|
| Relative Humidity: | 45% |
| ATM Pressure: | 1011 mbar |

Note: N/A

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



20dB Emission Bandwidth

| TestMode | Antenna | Frequency[MHz] | 20db EBW[MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|----------|---------|----------------|---------------|----------|----------|------------|---------|
| | | 2402 | 0.960 | 2401.529 | 2402.489 | | |
| DH5 | Ant1 | 2441 | 0.963 | 2440.532 | 2441.495 | | |
| | | 2480 | 0.942 | 2479.538 | 2480.480 | | |
| | | 2402 | 1.281 | 2401.370 | 2402.651 | | |
| 2DH5 | Ant1 | 2441 | 1.323 | 2440.340 | 2441.663 | | |
| | | 2480 | 1.296 | 2479.361 | 2480.657 | | |
| | | 2402 | 1.332 | 2401.331 | 2402.663 | | |
| 3DH5 | Ant1 | 2441 | 1.275 | 2440.373 | 2441.648 | | |
| | | 2480 | 1.272 | 2479.373 | 2480.645 | | |



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn



Access to the World



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn





3DH5_Ant1_2441

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Access to the World



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Occupied Channel Bandwidth

| TestMode | Antenna | Frequency[MHz] | OCB [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|----------|---------|----------------|-----------|-----------|-----------|------------|---------|
| | | 2402 | 0.89505 | 2401.5580 | 2402.4530 | | |
| DH5 | Ant1 | 2441 | 0.88746 | 2440.5563 | 2441.4437 | | |
| | | 2480 | 0.89718 | 2479.5566 | 2480.4538 | | |
| | | 2402 | 1.1979 | 2401.4034 | 2402.6013 | | |
| 2DH5 | Ant1 | 2441 | 1.1875 | 2440.4065 | 2441.5940 | | |
| | | 2480 | 1.1932 | 2479.4056 | 2480.5988 | | |
| | | 2402 | 1.1888 | 2401.4036 | 2402.5924 | | |
| 3DH5 | Ant1 | 2441 | 1.1754 | 2440.4147 | 2441.5901 | | |
| | | 2480 | 1.1899 | 2479.4014 | 2480.5913 | | |



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ENS2407080293W00702R







深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Access to the World



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Access to the World



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



9.2 CARRIER FREQUENCY SEPARATION

9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hoppingchannel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW,the frequency hopping system may have channels separated by a minimum of 25kHz ortwo-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.2.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzersettings:

Set the RBW =300kHz. Set VBW =300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test Results

| Temperature: | 25° C |
|--------------------|-----------|
| Relative Humidity: | 45% |
| ATM Pressure: | 1011 mbar |

Note: For GFSK, pi/4-DQPSK, 8DPSKLimit = 20dB bandwidth * 2/3

| TestMode | Antenna | Frequency[MHz] | Result[MHz] | Limit[MHz] | Verdict |
|----------|---------|----------------|-------------|------------|---------|
| DH5 | Ant1 | Нор | 0.866 | ≥0.642 | PASS |
| 2DH5 | Ant1 | Нор | 0.956 | ≥0.882 | PASS |
| 3DH5 | Ant1 | Нор | 1.008 | ≥0.888 | PASS |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



| Access | to | the | World | |
|--------|----|-----|-------|--|
|--------|----|-----|-------|--|

| | trum Analyzer - Swept SA | | | | | - # - × | |
|-----------------------|-------------------------------------|--------------------------|----------------------------------|--------------------|---|---|--|
| Center F | RF 50 Ω AC req 2.441500000 GH | NO: Fast Trig: Free | #Avg Type: F Run Avg Hold: 50 | RMS | 25:57 PM Oct 08, 2024 TRACE 2 3 4 5 6 TYPE MWWWW DET P P P P P | Frequency | |
| 10 dB/div | Ref Offset 8.67 dB Ref 30.00 dBm | Gain:Low #Atten: 40 | dB | ΔMkr 2 | 2 1.008 MHz 0.073 dB | Auto Tune | |
| 20.0 | | | | | | Center Freq 2.441500000 GHz | |
| 0.00 | <u>↓</u> 1 | 142-613 D | 20 | | | Start Freq 2.440500000 GHz | |
| -10.0 | www.nh.n | alanana, proprioringatan | Winning P | L. Mardan Mard | halenn van person | Stop Freq 2.442500000 GHz | |
| -30.0 | | | | | | CF Step 200.000 kHz <u>Auto</u> Man | |
| -40.0 | | | | | | Freq Offset 0 Hz | |
| -60.0 | | | | | | | |
| Start 2.44 #Res BW | 0500 GHz 300 kHz | #VBW 300 kHz | Sv | Stop reep 1.000 | 2.442500 GHz ms (1001 pts) | | |
| MSG | | | | STATUS | | | |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



9.3 NUMBER OF HOPPING FREQUENCIES

9.3.1 Applicable Standard

According to FCC Part 15.247(a)(1)and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least15 channels.

9.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.3.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Span = the frequency band of operation (2400-2483.5MHz) RBW =300KHz VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections, inorder to clearly show all of the hopping frequencies.

Test Results

| Temperature: | 25° C |
|--------------------|-----------|
| Relative Humidity: | 45% |
| ATM Pressure: | 1011 mbar |

Note: N/A

| TestMode | Antenna | Frequency[MHz] | Result[Num] | Limit[Num] | Verdict |
|----------|---------|----------------|-------------|------------|---------|
| DH5 | Ant1 | Нор | 79 | ≥15 | PASS |
| 2DH5 | Ant1 | Нор | 79 | ≥15 | PASS |
| 3DH5 | Ant1 | Нор | 79 | ≥15 | PASS |

深圳值测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



| Access | to | the | World |
|--------|----|-----|-------|
|--------|----|-----|-------|

| Agilent Spectrum Analyzer - Swept SA | | | - # × |
|---|--|---|--|
| Center Freq 2.441750000 GHz | z #Avg Typ | ALIGN AUTO 05:26:13 PM Oct 08, 2024 e: RMS TRACE 1 2 3 4 5 6 TYPE MWWWWW DET P P P P P P | Frequency |
| PNO | 0: Fast Trig: Free Run ain:Low #Atten: 40 dB | DETPPPPP | |
| Ref Offset 8.48 dB 10 dB/div Ref 30.00 dBm | | | Auto Tune |
| 20.0 | | | Center Freq 2.441750000 GHz |
| 0.00 | ana mana mana mana mana mana mana mana | | Start Freq 2.400000000 GHz |
| -100 | and have how | andra Tyll AT INTIA Yayahiylad ba | Stop Freq 2.483500000 GHz |
| -30.0 A | | | CF Step 8.350000 MHz <u>Auto</u> Man |
| -40.0 | | | Freq Offset 0 Hz |
| -60.0 | | | |
| Start 2.40000 GHz #Res BW 300 kHz | #VBW 300 kHz | Stop 2.48350 GHz Sweep 1.133 ms (1001 pts) | |
| MSG | | STATUS | |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

9.4.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.4.2 Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the averagetime of occupancy on any channel shall not be greater than 0.4s within a period of 0.4smultiplied by the number of hopping channels employed.

9.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.4.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzersettings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

 $VBW \ge RBW$

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value

varies with different modes of operation (e.g., data rate, modulation format, etc.),

repeat this test for each variation. The limit is specified in one of the subparagraphsof this Section.

9.4.5 Test Results

| Temperature: | 25° C |
|--------------------|-----------|
| Relative Humidity: | 45% |
| ATM Pressure: | 1011 mbar |

Note: TotalHops(DH1)=(1600/2/79)*31.6 TotalHops(DH3)=(1600/4/79)*31.6 TotalHops(DH5)=(1600/6/79)*31.6 DwellTime=BurstWidth*TotalHops

All the antenna(Antenna 1) and modes(GFSK, π /4-DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1,GFSK) result recorded was report as below:

| TestMode | Antenna | Frequency[MHz] | BurstWidth [ms] | TotalHops [Num] | Result[s] | Limit[s] | Verdict |
|----------|---------|----------------|--------------------|--------------------|-----------|----------|---------|
| DH1 | Ant1 | Нор | 0.380 | 320 | 0.122 | ≤0.4 | PASS |
| DH3 | Ant1 | Нор | 1.637 | 160 | 0.262 | ≤0.4 | PASS |
| DH5 | Ant1 | Нор | 2.880 | 106.67 | 0.307 | ≤0.4 | PASS |
| 2DH1 | Ant1 | Нор | 0.390 | 320 | 0.125 | ≤0.4 | PASS |
| 2DH3 | Ant1 | Нор | 1.642 | 160 | 0.263 | ≤0.4 | PASS |
| 2DH5 | Ant1 | Нор | 2.891 | 106.67 | 0.308 | ≤0.4 | PASS |
| 3DH1 | Ant1 | Нор | 6.637 | 320 | 2.124 | ≤5 | PASS |
| 3DH3 | Ant1 | Нор | 0.649 | 160 | 0.104 | ≤0.4 | PASS |
| 3DH5 | Ant1 | Нор | 0.894 | 106.67 | 0.095 | ≤0.4 | PASS |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn




| DH1_Ant1_Hop | |
|---|--|
| iii Aginet spectrum Analyser Swert SA. SSNE-SIWTI ALION AUTO 05:127:10 FNO-68, 202 Off RL SP SOO AC Trigo Delays-2000 ms #Avg Type: RMS Track Tigo Avg Type: RMS Center Freq 2.441000000 GHz PNC: Fast → Trigo Video Trigo Video Trigo Video PNC: Fast → Trigo Video O PC PC PC | P P |
| Ref 0ffset8.61 dB △Mkr2 380.0 µ 10 dB/div Ref 30.00 dBm 3.74 d | |
| | 2.441000000 GHz |
| Δ.CO Δ1.0 | Start Freq 2.441000000 GHz |
| -10.0 | 2.441000000 GHz |
| -200 Antipitation of the standard s | CF Step 1.000000 MHz <u>Auto</u> Man |
| | Freq Offset 0 Hz |
| Center 2.441000000 GHz Span 0 H Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8000 pt | z s) |
| DH3 Ant1 Hop | |
| Mill Agilent Spectrum Analyzer - Swept SA Mill R.L RF S0 Ω AC SEISES:INT ALIGN AUTO 05:17:46 PM Oct 08, 202 | - @ * |
| Center Freq 2.441000000 CHz Trace PND: Fast | Prequency |
| Ref Offset 8.61 dB ΔMkr2 1.637 m 10 dB/div Ref 30.00 dBm 14.62 d | |
| 20.0 | Center Freq 2.441000000 GHz |
| 10.0 0.00 2Δ1 | Start Freq 2.441000000 GHz |
| -10.0 | C Stop Freq 2.441000000 GHz |
| | CF Step 1.000000 MHz |
| | Auto Man Freq Offset |
| | 0 Hz |
| Center 2.44/1000000 GHz Span 0 H Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8000 pt | z 5) |
| MSGSTATUS | |
| | |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn




Access to the World

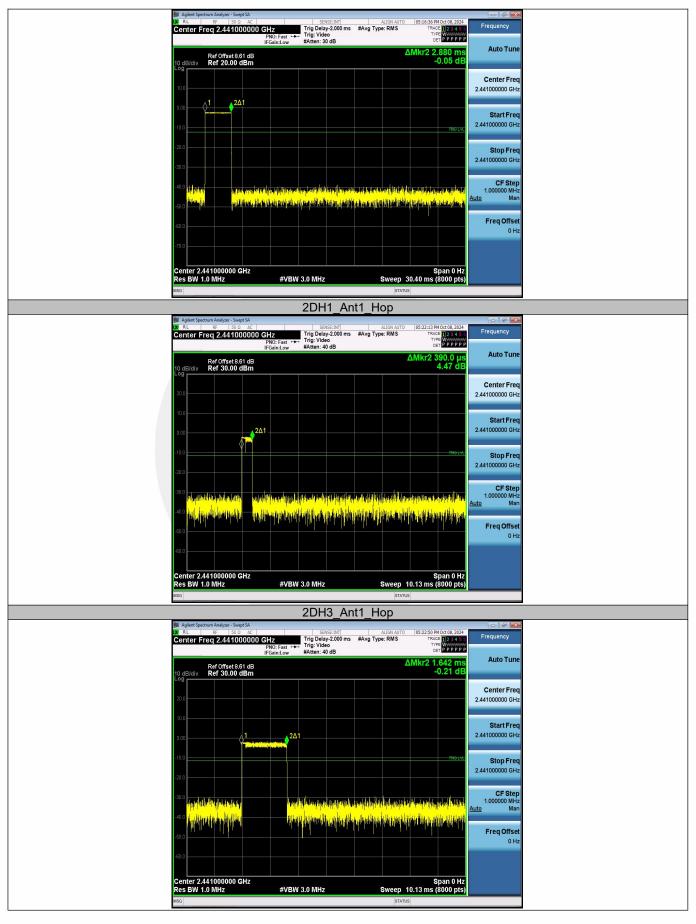

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



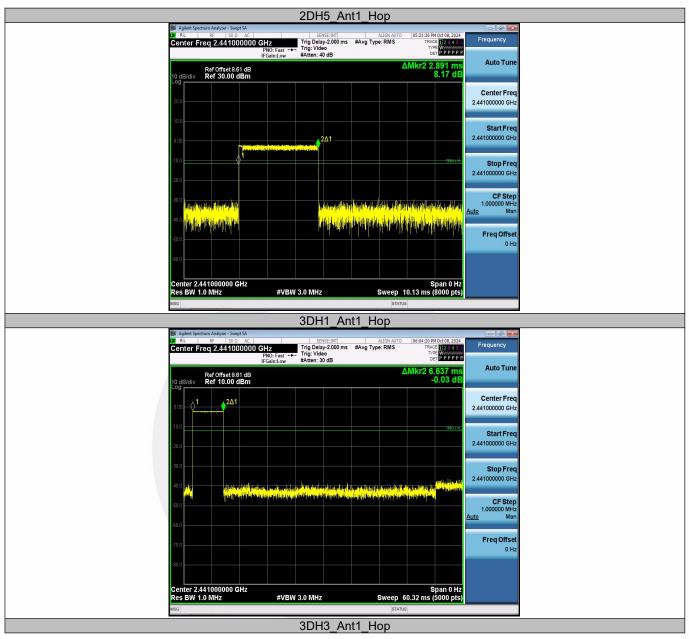

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Access to the World

| 🗱 Agilent Spectrum Analyzer - Swept SA | |
|--|---|
| Mg RL RF 50 Ω AC SENSE:INT ALIGN AUTO 06:0 Center Freq 2.441000000 GHz Trig Delay-2.000 ms #Avg Type: RMS | 05259M040802024 Trace 12-34 Frequency |
| IFGain:Low #Atten: 40 dB | cr2 649.0 us Auto Tune |
| Ref Offset 8.61 dB Annk 10 dB/div Ref 30.00 dBm | 0.94 dB |
| | Center Freq |
| 20.0 | 2.44100000 GHz |
| 10.0 | Start Freq |
| 0.002 ² Δ1 | 2.441000000 GHz |
| -10.0 | TRULIVL |
| | Stop Freq 2.441000000 GHz |
| -20.0 | |
| 200 nutreasing dent there is a surface surface of the period of the peri | CF Step 1.000000 MHz |
| 40.0 Control of the local sector of the sector of the sector of the life in the life in the sector of the life in the life | n Man |
| 200 Marting and Article Marting and Article 19 (19 Article 19 Arti | Freq Offset |
| | 0 Hz |
| -60.0 | |
| Center 2.441000000 GHz | Span 0 Hz |
| Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 | ms (8000 pts) |
| 3DH5 Ant1 Hop | |
| Julient Spectrum Analyzer - Swept SA | |
| MRL RF 50.0 AC SENSENT ALION AUTO 05:2 Center Freq 2.441000000 GHz Trig Delay-2.000 ms #Avg Type: RMS Trig: Video | |
| IFGain:Low #Atten: 40 dB | rz 894.0 us Auto Tune |
| Ref Offset 8.61 dB Annk 10 dB/div Ref 30.00 dBm | 4.71 dB |
| | Center Freq |
| 20.0 | 2.441000000 GHz |
| 10.0 | Start Freq |
| 201 | 2.441000000 GHz |
| | 10/11/1 |
| | 2.44100000 GHz |
| -20.0 | |
| -200 hannelle petite yaar dit neer tii neer tii neer tii gaataa tii gaataa tii dhannelle algaan ditte neeraanaa daa | CF Step 1.000000 MHz |
| the second se | aligning and a second |
| a so a panaha ta ina la sa ta sa ta sa ta sa | Freq Offset |
| | 0.11- |
| 500 | 0 Hz |
| 60.0 | 0 Hz |
| 600 Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 | Span 0 Hz |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.4 and RSS-Gen 6.12

9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.5.4 Test Procedure

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel(about 8MHz)

Set RBW > the 20 dB bandwidth of the emission being measured(about 3MHz)

Set VBW ≥ RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emissionto determine the peak amplitude level.

Test Results


| Temperature: | 25° C |
|--------------------|-----------|
| Relative Humidity: | 45% |
| ATM Pressure: | 1011 mbar |

Note: N/A

| Test Mode | Antenna | Frequency[MHz] | Conducted Peak Powert[dBm] | Conducted Limit[dBm] | Verdict |
|--------------|---------|----------------|-------------------------------|-------------------------|---------|
| | | 2402 | 7.61 | ≤20.97 | PASS |
| DH5 | Ant1 | 2441 | 7.10 | ≤20.97 | PASS |
| | | 2480 | 8.54 | ≤20.97 | PASS |
| | | 2402 | 7.59 | ≤20.97 | PASS |
| 2DH5 | Ant1 | 2441 | 7.08 | ≤20.97 | PASS |
| | | 2480 | 8.67 | ≤20.97 | PASS |
| | | 2402 | 8.03 | ≤20.97 | PASS |
| 3DH5 | Ant1 | 2441 | 7.51 | ≤20.97 | PASS |
| | | 2480 | 8.93 | ≤20.97 | PASS |

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



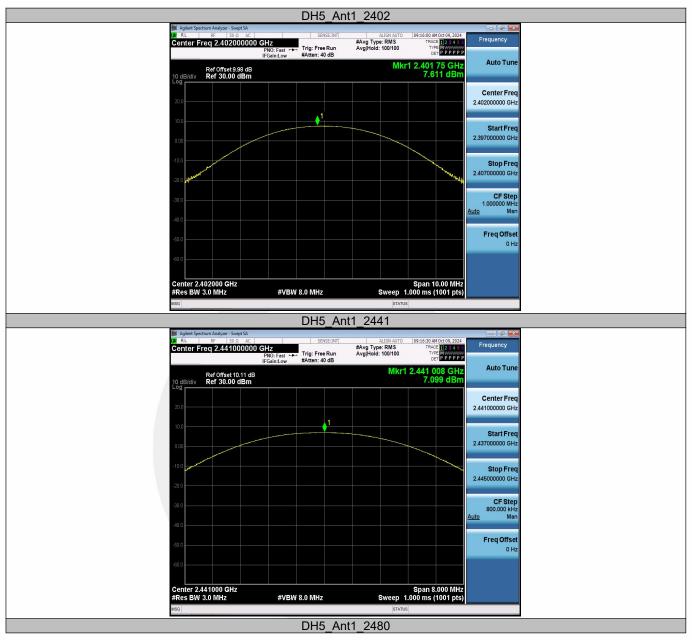

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn