


说明书为折叠式
尺寸：630*120MM
材质：100g双胶纸（彩色）
版本：V1.1
类型：环保

版本	修改内容	日期
Ver: 1.0	文件首发。	2023/01/03
Ver: 1.1	文件改多国语言,ECO。	2023/06/19

设计	审核	审批
王勇		
2023/06/19		

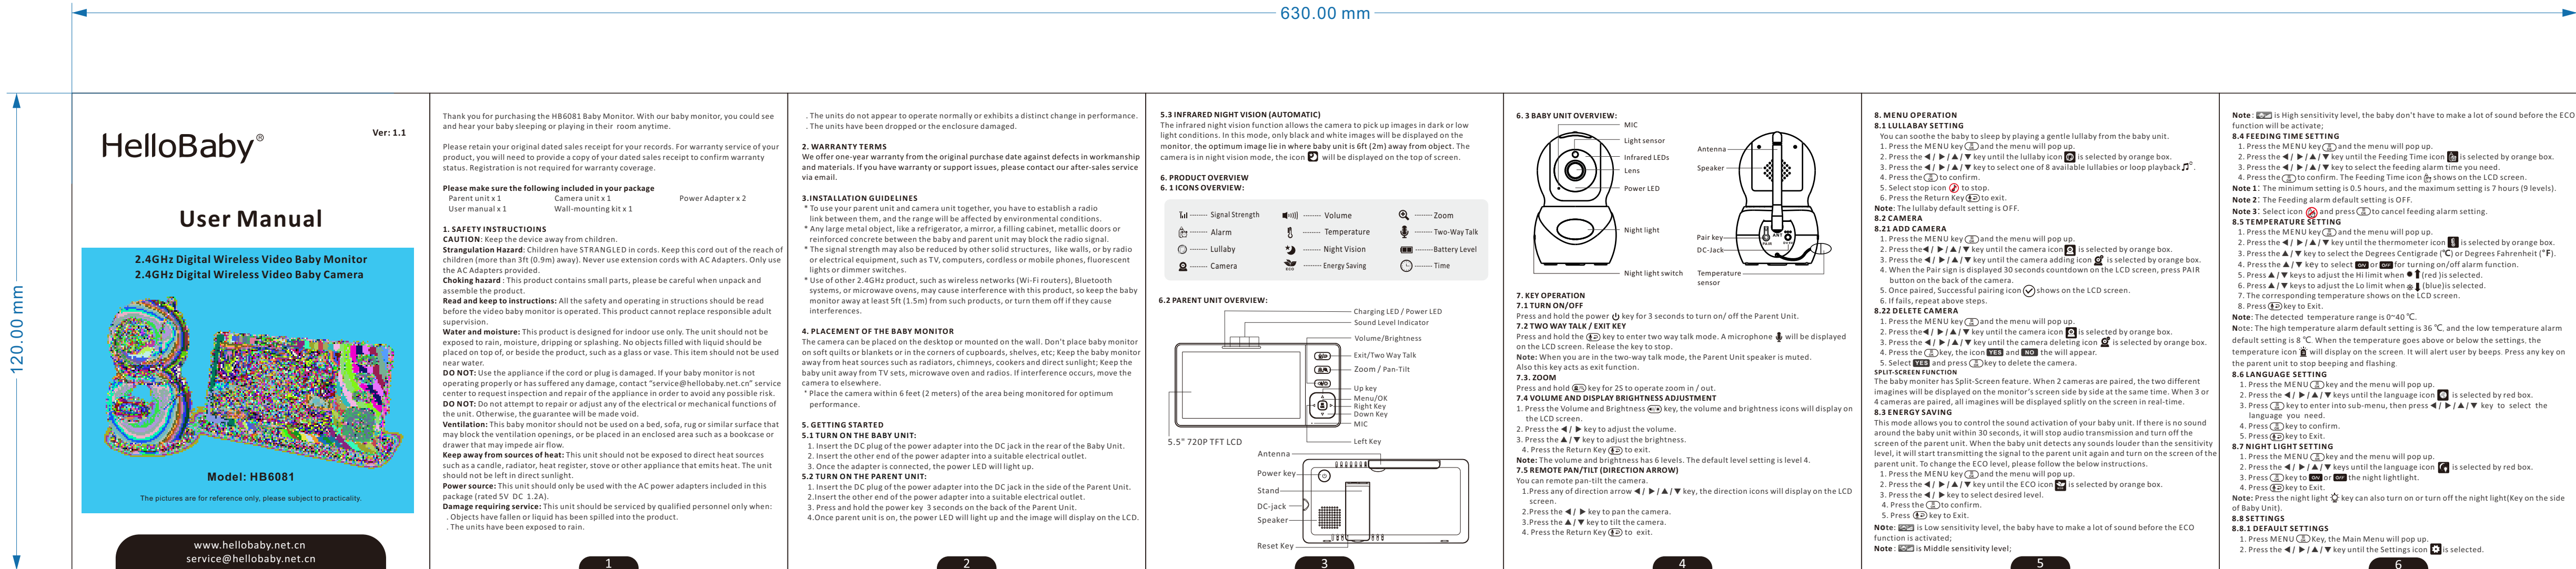

3. Press the MENU Key [M]. The sub-menu Settings will pop up.

4. Press <|> / [A] / [V] to select default settings [D], press the MANU Key [M] to enter.

5. Select icon [YES] to restore default setting; Select icon [NO] to cancel the default setting.

6. Press the Return Key [R] one time to exit sub-menu, and two times exit main menu.

8.2 ALARM VOLUME SETTING

- Press MENU [M] Key, the Main Menu will pop up.
- Press the <|> / [A] / [V] key until the Setting icon [S] is selected.
- Press the MENU Key [M]. The sub-menu Settings will pop up.
- Press <|> / [A] / [V] to select default settings [D], press the MANU Key [M] to enter.
- Select icon [YES] to restore default setting; Set icon [NO] to cancel the default setting.
- Press the Return Key [R] one time to exit sub-menu, and two times exit main menu.

8.2.2 ALARM VOLUME SETTING

- Press MENU [M] Key, the Main Menu will pop up.
- Press the <|> / [A] / [V] key until the Setting icon [S] is selected.
- Press the MENU Key [M]. The sub-menu Settings will pop up.
- Press <|> / [A] / [V] to select ALARM [A].
- Select volume increase icon [+] press MANU key [M] to increase the alarm volume.
- Select volume decrease icon [-] press MANU key [M] to decrease the alarm volume.
- Press the Return Key [R] one time to exit sub-menu, and two times exit main menu.

8.3 CONTACT

- Press MENU [M] Key, the Main Menu will pop up.
- Press the <|> / [A] / [V] key until the Setting icon [S] is selected.
- Press the MENU Key [M]. The sub-menu Settings will pop up.
- Press <|> / [A] / [V] to select CONTACT [C].
- Press MANU key [M]. You can see our brand HelloBaby, our Email address and Website.
- Press the Return Key [R] one time to exit sub-menu, and two times exit main menu.

8.4 DATE/TIME SETTING

- Press MENU [M] Key, the Main Menu will pop up.
- Press the <|> / [A] / [V] key until the Setting icon [S] is selected.
- Press the MENU Key [M]. The sub-menu Settings will pop up.
- Press <|> / [A] / [V] key until the time icon [T] is selected.
- Press <|> / [A] / [V] key to select Month, Day and Year setting; Press <|> / [A] / [V] key to set your desired month, date and year.
- Press the <|> / [A] / [V] key to select the timing method 12H or 24H.
- Press <|> / [A] / [V] key to select Hour, Minute setting; Press <|> / [A] / [V] key to set your desired hour and Minute.
- Press the Return Key [R] one time to exit sub-menu, and two times exit main menu.

8.5 DISPLAY REVERSE

- Press MENU [M] Key, the Main Menu will pop up.
- Press the <|> / [A] / [V] key until the Setting icon [S] is selected.
- Press the MENU Key [M]. The sub-menu Settings will pop up.
- Press <|> / [A] / [V] key to select Display Reverse [R].
- Press MANU key [M] to open Display Reverse [on] or close Display Reverse [off].

9. TECHNICAL DATA	
Frequency	2412MHz-2462MHz
Power Adapter	Parent Unit: Input: 100-240VAC 50/60Hz Output: 5V DC 1.2A Camera Unit: Input: 100-240VAC 50/60Hz Output: 5V DC 1.2A
Operating Range	Up to 1000ft(300m) outdoor (line of sight) Up to 165ft(50m) indoor
Display	5.5" 720P TFT LCD
Battery (Parent Unit)	Li-ion 3.7V 4000mAh (14.8Wh)
Operating time	Up to 10 hours
Maximum power	<19dBm
Operation environment	Operation Temperature: +32°F~+104°F (0°C~40°C) Battery Charging Temperature: +50°F~+104°F (10°C~40°C) Relative Humidity: 15%-85%

10. TROUBLE SHOOTING

No reception on the monitor	<ul style="list-style-type: none"> The power adapters may not be properly connected; * Confirm that the camera and monitor are ON; * Camera may be far away from the monitor; * Camera and monitor may not be properly paired; follow PAIRING instructions;
Interference or poor reception	<ul style="list-style-type: none"> * Move the monitor closer to the camera; * The camera or monitor may be placed too close to many metal objects; reception * Other electronic devices may be interfering with the signal; * The battery power may be too low;
Audio feedback (high pitched noise)	<ul style="list-style-type: none"> * The camera and monitor may be placed too closed; * The volume on the monitor may be set too high;
Frozen picture on screen	<ul style="list-style-type: none"> * Repower the battery (plug out the adapter, then plug it into the socket again); * Press the RESET key at the back of parent unit

11. MAINTENANCE

- * Clean your baby monitor with a slightly damp or anti-static cloth.
- * Never use cleaning agents or solvents.

12. DISPOSAL GUIDE FOR BATTERY AND PRODUCT

- * Do not attempt to repair or adjust any of the electrical or mechanical functions of the unit.
- * Remember to dispose of the product in an environmentally responsible way;
- * For proper collection and processing of these products, take them to the collection points designated by local authorities. You can also contact the store where you purchased the product.

Improper or incorrect use of batteries may cause corrosion or battery leakage, which could cause personal injury or damage to property. Use only the types of the batteries which are indicated in this manual.

CAUTION: Risk of Fire and Burns. Do Not Open, Crush, Heat Above 45 degree C or Incinerate. Follow Manufacturer's Instructions.

- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
- Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas;
- A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

The battery shall not be exposed to excessive heat such as sunshine, fire or the like;

FC&C ISDE Statement

This device complies with Part 15 of the FCC Rules and with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1)This device may not cause harmful interference, and (2)This device must accept any interference received, including interference that may cause undesired operation. Cet appareil est conforme à la partie 15 des règles de la FCC et aux normes RSS exemptées de licence d'Industrie Canada. Le fonctionnement est soumis aux deux conditions suivantes : [1]cet appareil ne doit pas causer d'interférences nuisibles, et [2]cet appareil doit accepter toute interférence reçue, y compris les interférences pouvant entraîner un fonctionnement indesirable.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is

encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and complies with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cr- 102 et conformément avec RSS 102 de l'exposition aux RF, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs RF et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

Radiation Exposure Statement for camera
This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.
Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.
SAR Statement for Monitor
Specific Absorption Rate (SAR) Information:
This Monitor meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards RSS standard(s). Operation is subject to the following two conditions: (1)This device may not cause harmful interference, and (2)This device must accept any interference received, including interference that may cause undesired operation. Cet appareil est conforme à la partie 15 des règles de la FCC et aux normes RSS exemptées de licence d'Industrie Canada. Le fonctionnement est soumis aux deux conditions suivantes : [1]cet appareil ne doit pas causer d'interférences nuisibles, et [2]cet appareil doit accepter toute interférence reçue, y compris les interférences pouvant entraîner un fonctionnement indesirable.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is

de 1.6 W / kg en moyenne sur un gramme de tissu. Types d'appareils: La Moniteur a également été testée par rapport à cette limite SAR. Cet appareil a été testé pour des opérations typiques portées sur le corps avec le dos de la Moniteur gardé à 0 mm du corps. Pour maintenir la conformité avec les exigences d'exposition RF d'ISDE, utilisez des accessoires qui maintiennent une distance de séparation de 6 mm entre le corps de l'utilisateur et l'arrière de la Moniteur. L'utilisation de clips de ceinture, d'étuis et d'accessoires similaires ne doit pas contenir de composants métalliques dans son assemblage. L'utilisation d'accessories que nous ne satisfait pas à ces exigences peut ne pas être conforme aux exigences d'exposition aux RF d'ISDE et doit être évitée.

EU Declaration of Conformity (DOC)

Hereby, videotimes declares that the radio equipment type is in compliance with RED Directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the website: www.hellobaby.net.cn

Model: HB6081
Responsible Party(UK): Startline LLC
Add: 22 Hazelwood Drive, Jericho, NY 11753 Tel: 1-516-681-3729
Authorized UK Representative(UK): APEX CE SPECIALISTS LIMITED
Add: 89 Princess Street, M14HT, UK info@apex-ce.com

Shenzhen Videotimes Technology Co., Ltd
Room 2106, Building 11, Tianan Yungu Phase II, Gangtuo Community, Bantian Street, Longgang District, Shenzhen, Guangdong, China

Risk Group 1
WARNING! IR emitted from this product. Do not stare at operating lamp
Product tested against EN62471

Made in China



Strangulation Hazard: Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3 ft (0.9 m) away). Do not remove this tag

⚠ Avertissement

DANGER D'ÉTRANGLEMENT: Des enfants se sont
ÉTRANGLÉS avec des cordons électriques. Gardez
le cordon électrique hors de la portée des enfants (à
plus de 0.9m/3 pi du lit d'enfant). Ne pas enlever
cette étiquette.



Made in China