



Shenzhen CTL Testing Technology Co., Ltd.

Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com


1. Duty Cycle


1.1 Ant1

1.1.1 Test Result


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.144	2.501	85.73	0.67	0.03
		2440	2.143	2.500	85.72	0.67	0.03
		2480	2.144	2.501	85.73	0.67	0.03
2M	SISO	2402	1.090	1.251	87.13	0.60	0.03
		2440	1.089	1.250	87.12	0.60	0.03
		2480	1.089	1.250	87.12	0.60	0.03

1.1.2 Test Graph

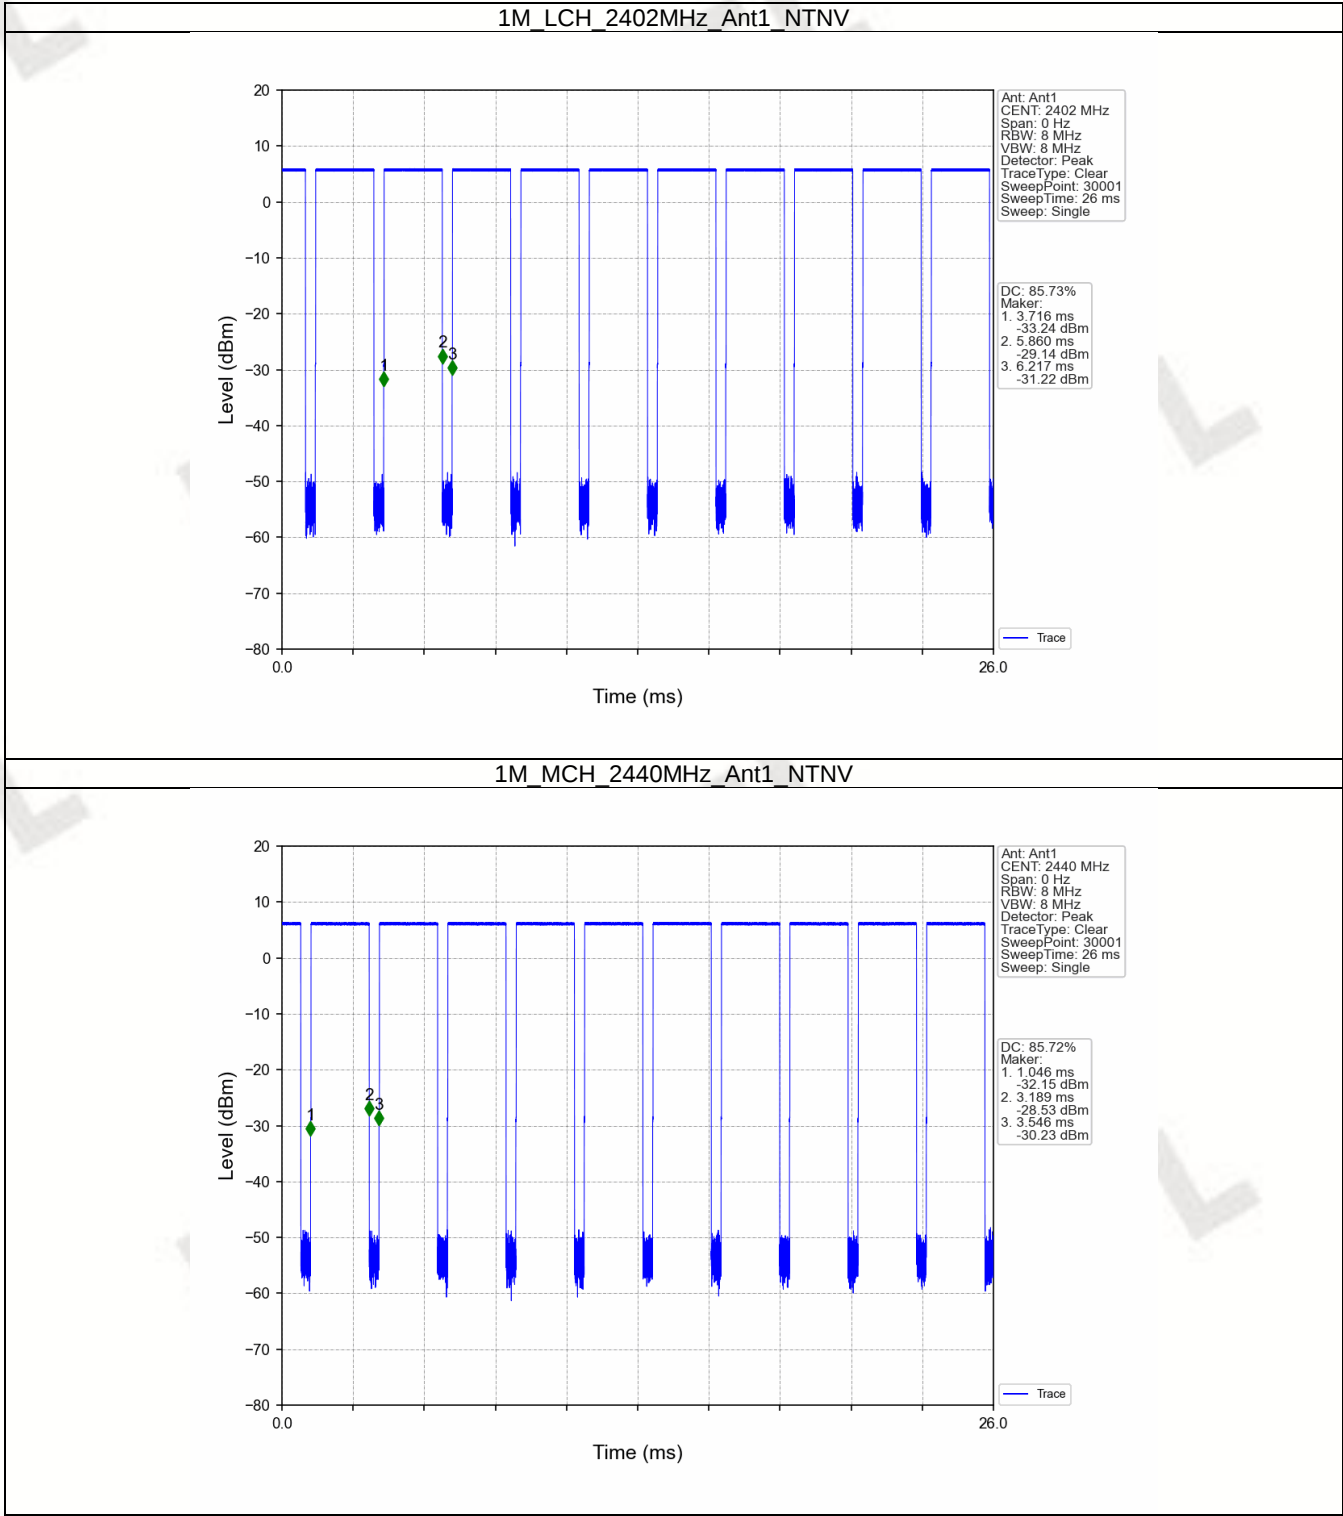


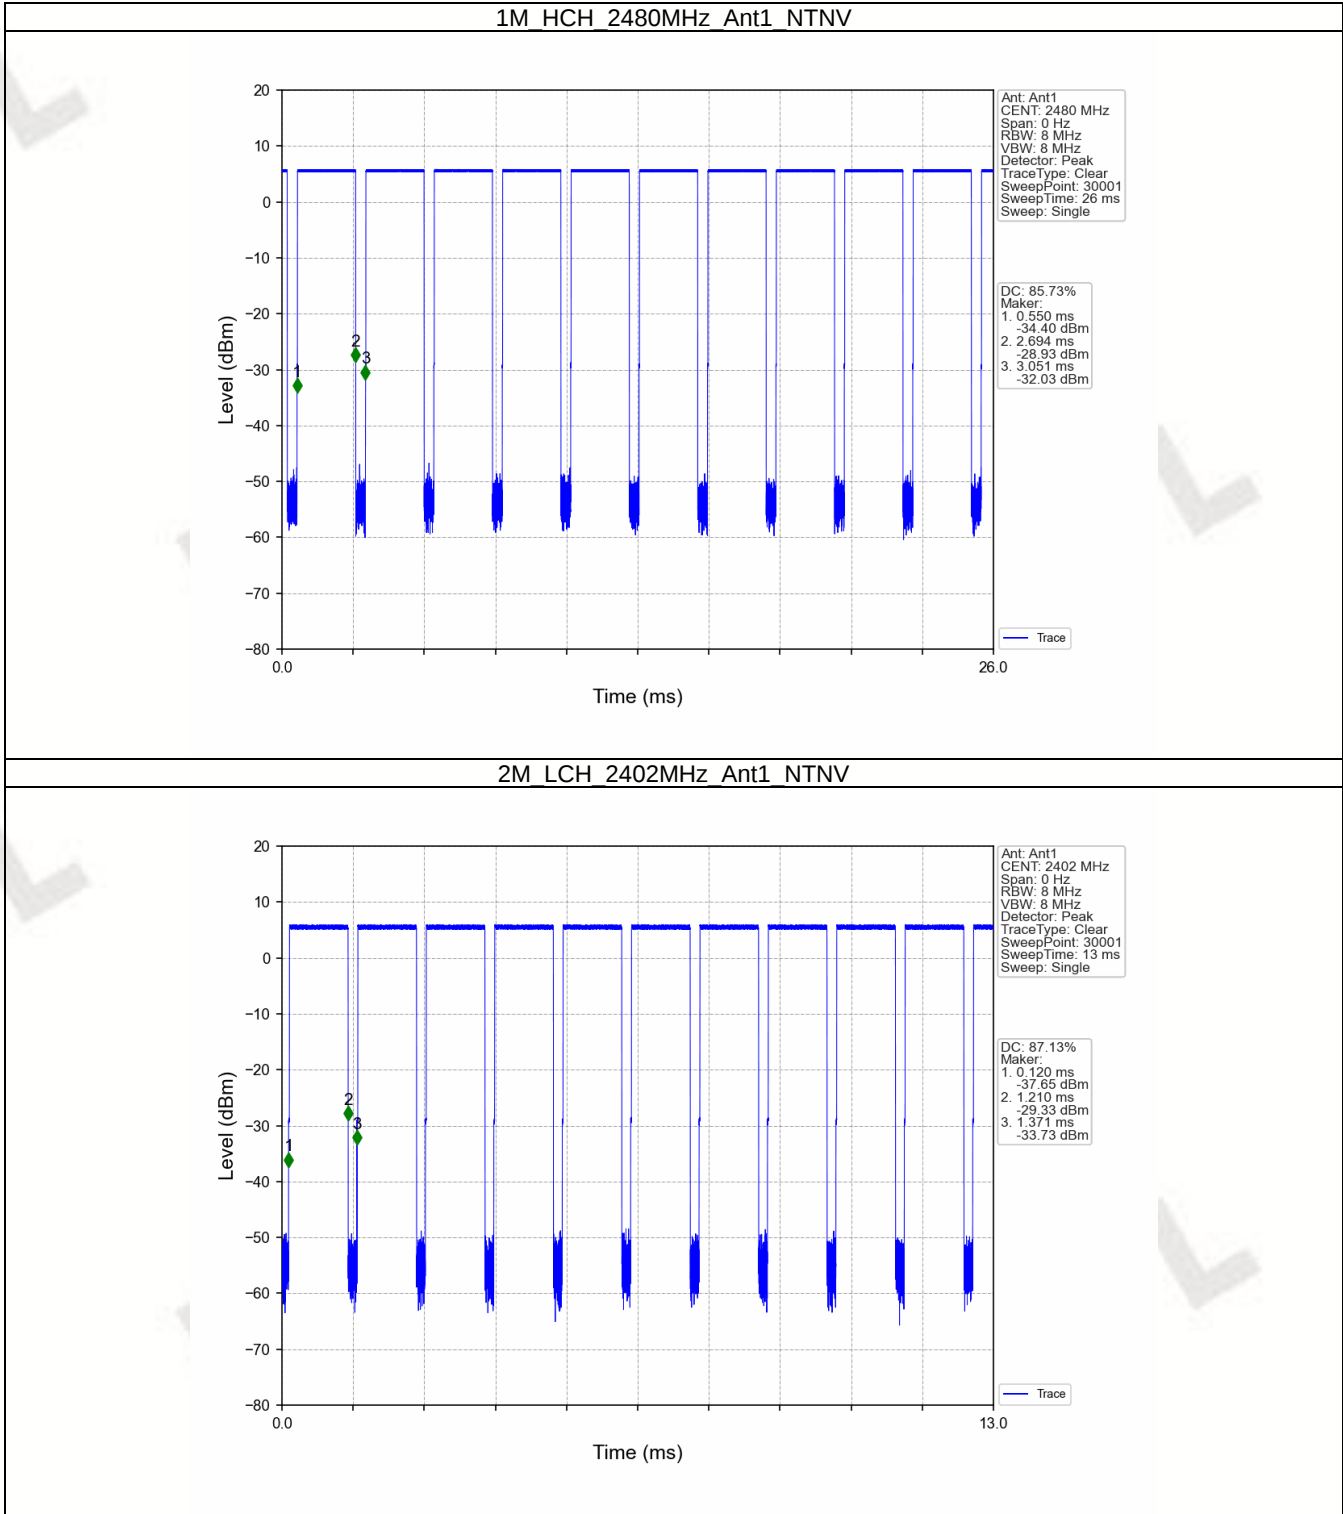

2M MCH 2440MHz Ant1 NTNV

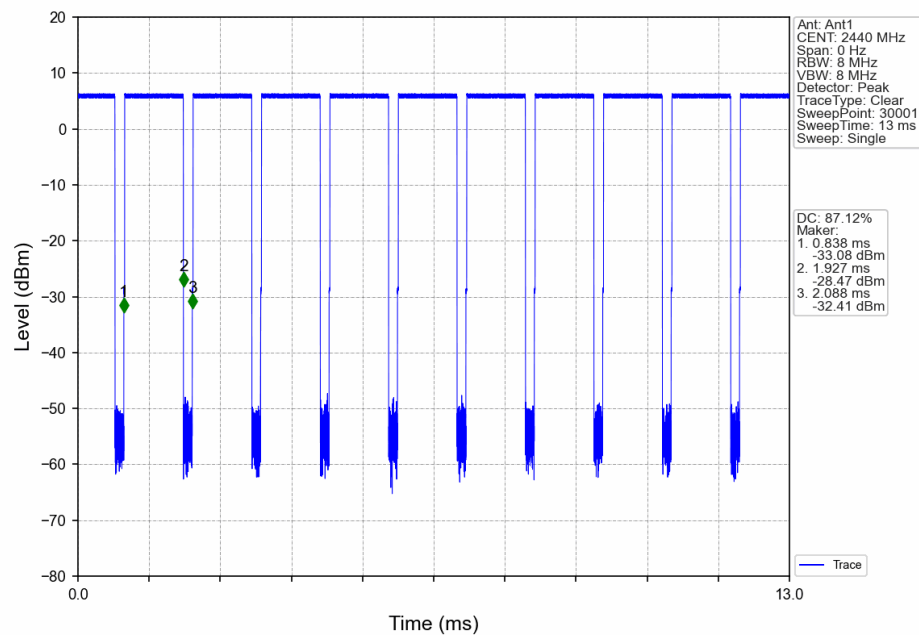

2M HCH 2480MHz Ant1 NTNV

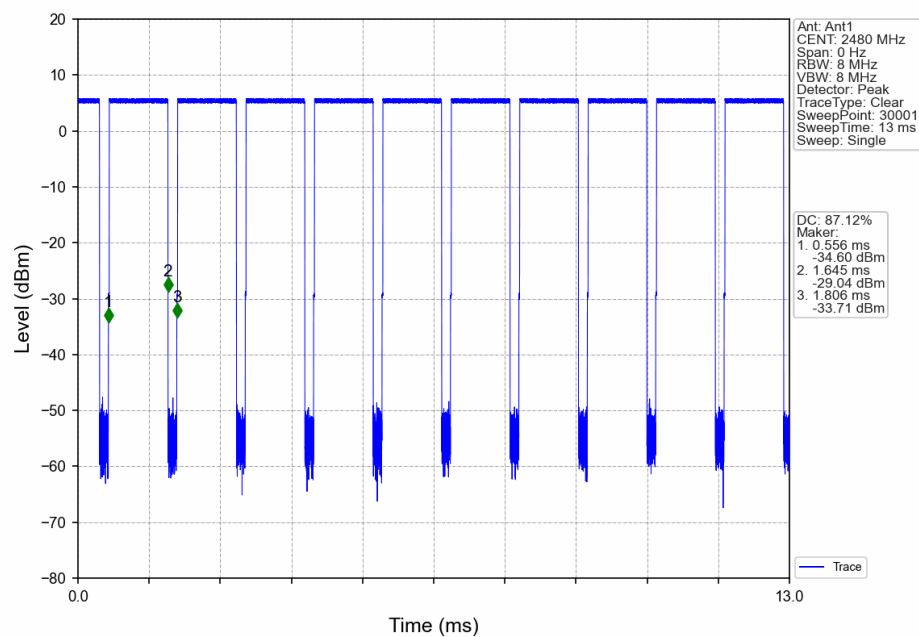


2. Bandwidth


2.1 OBW


2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.058	/	Pass
		2440	1	1.058	/	Pass
		2480	1	1.061	/	Pass
2M	SISO	2402	1	2.046	/	Pass
		2440	1	2.047	/	Pass
		2480	1	2.046	/	Pass

2.1.2 Test Graph

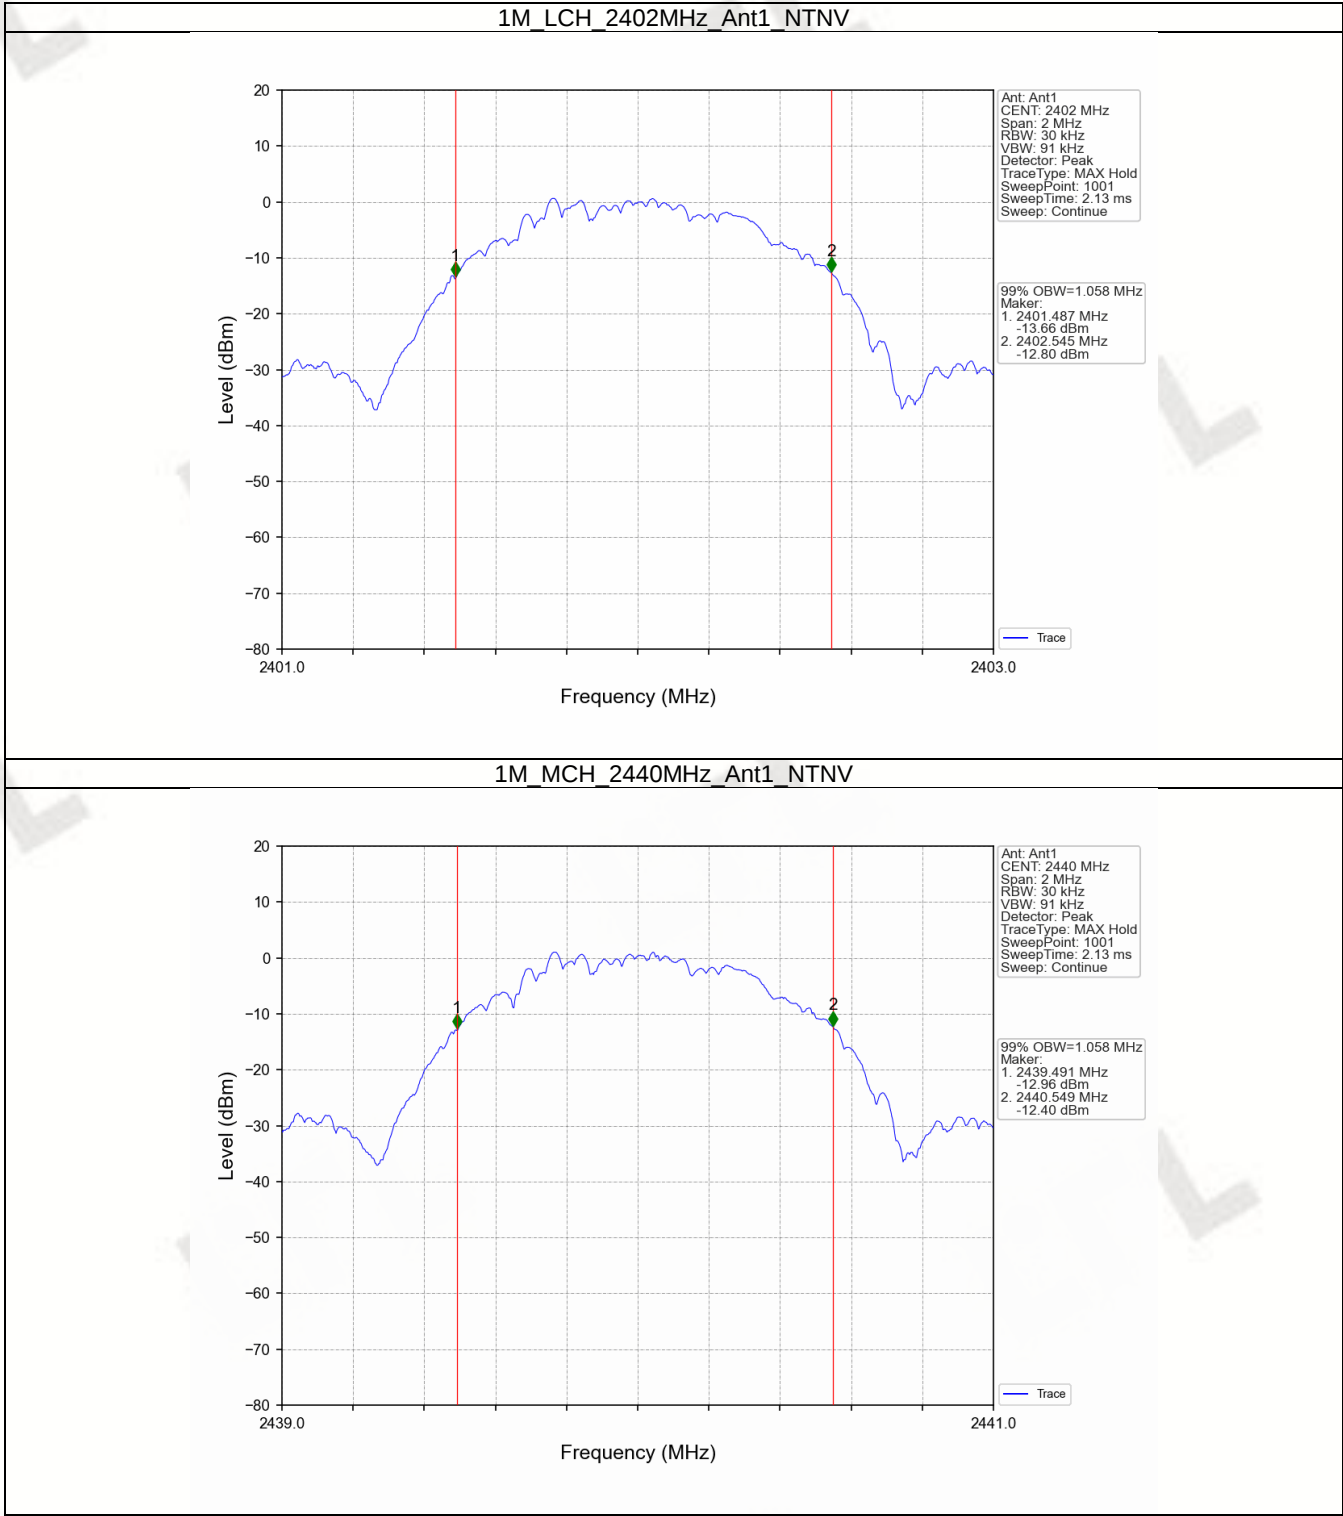

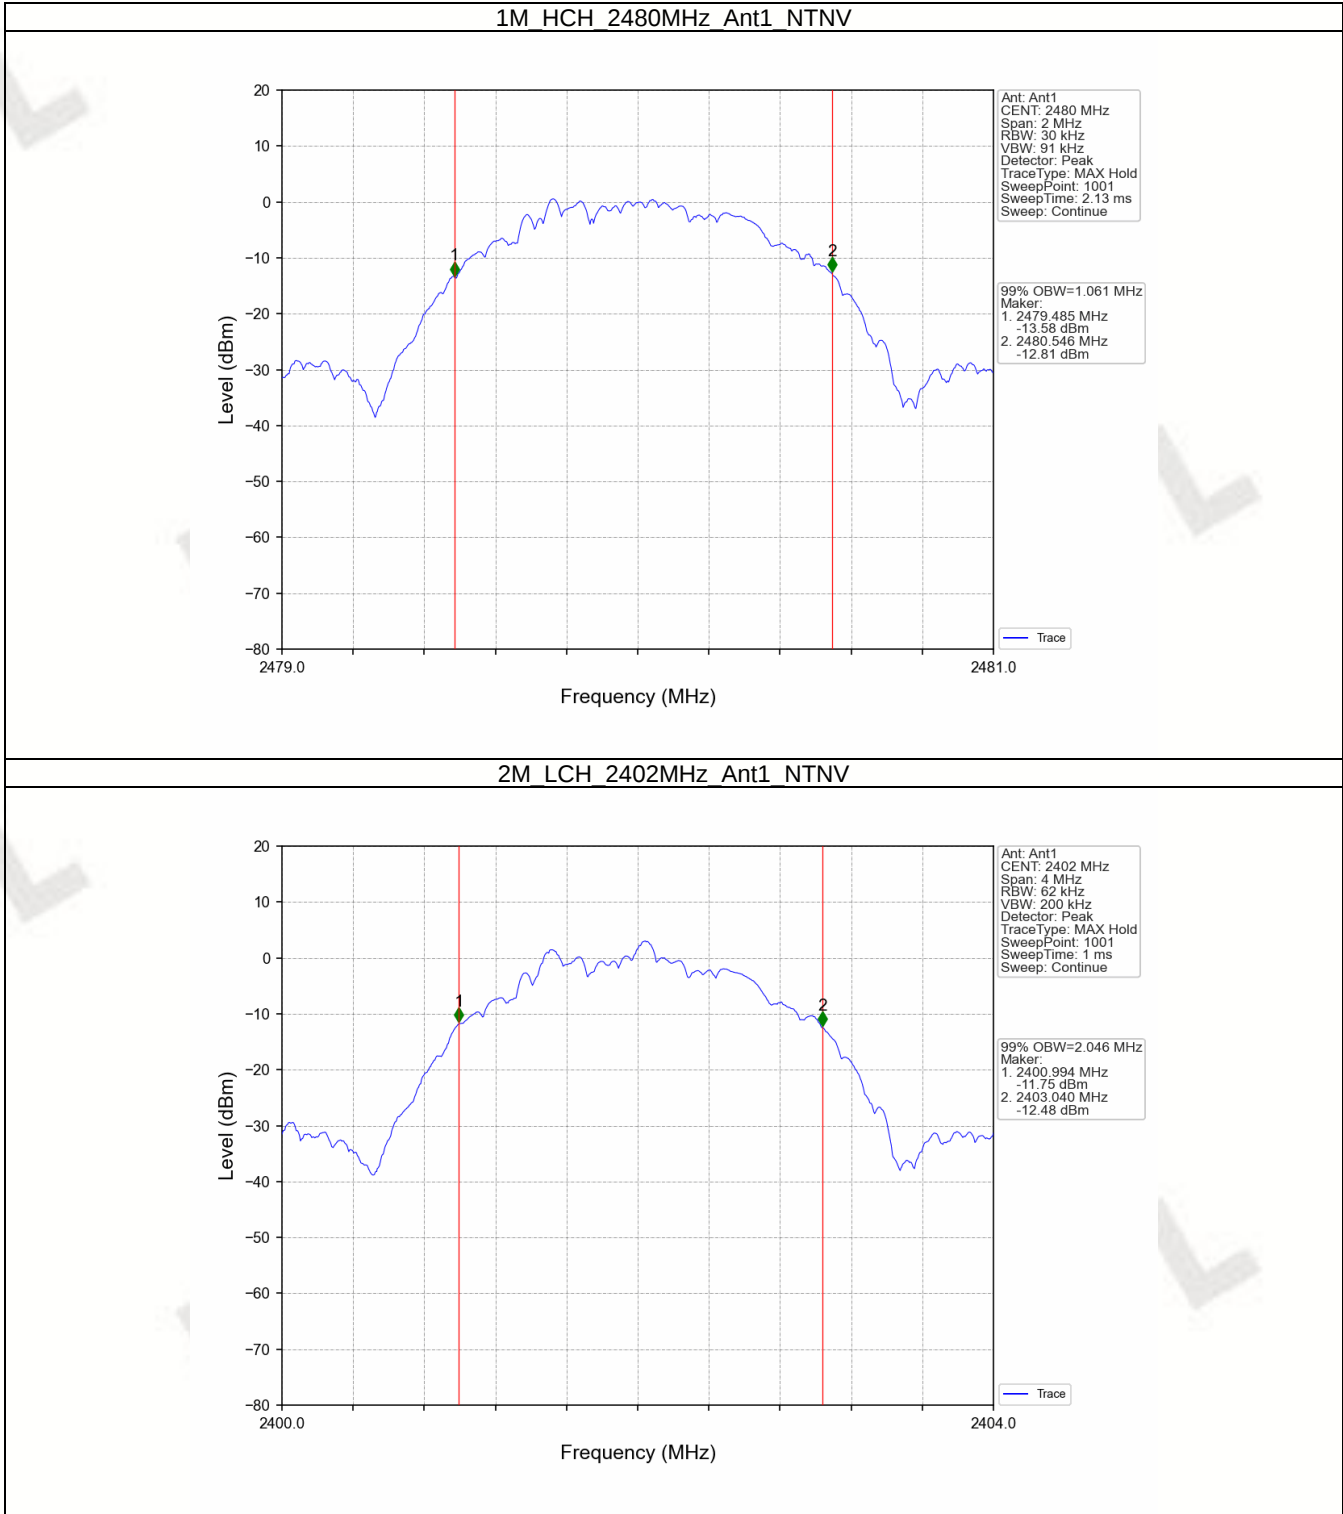

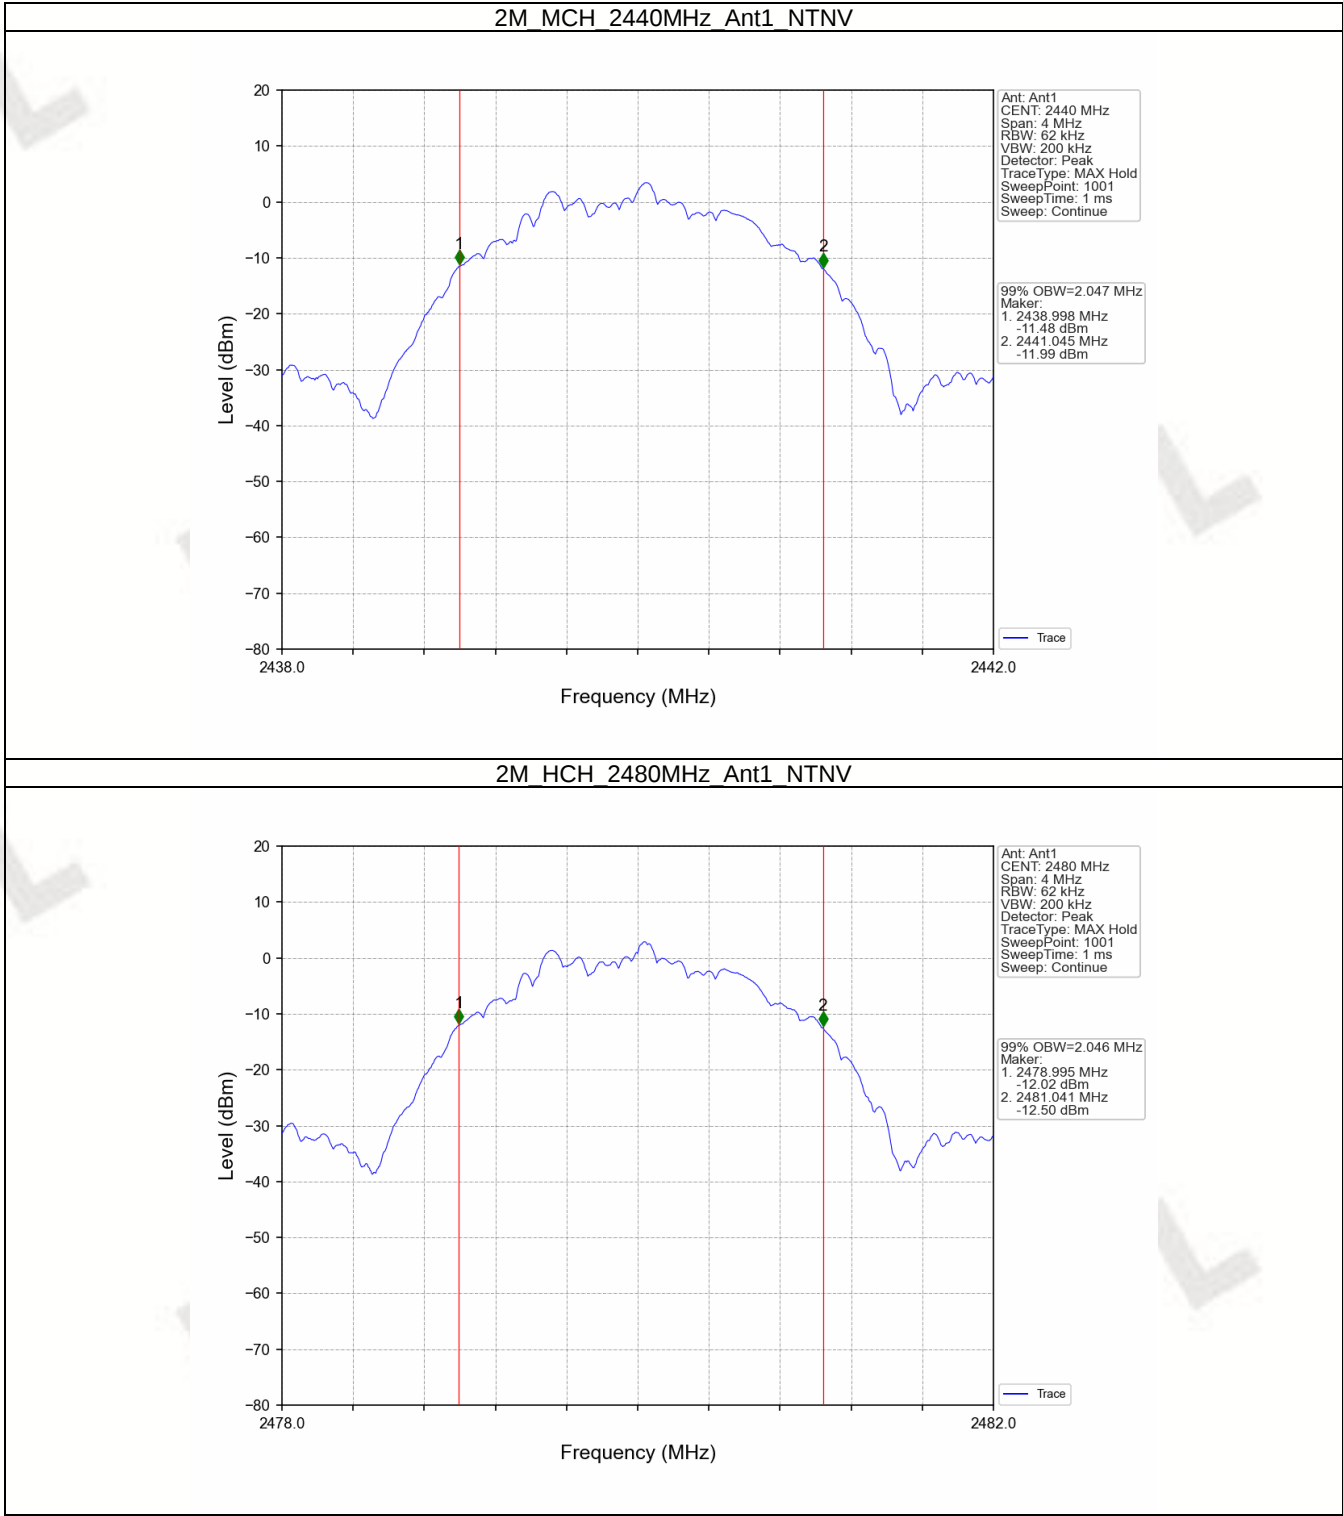



2.2 6dB BW


2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.724	≥ 0.5	Pass
		2440	1	0.725	≥ 0.5	Pass
		2480	1	0.720	≥ 0.5	Pass
2M	SISO	2402	1	1.175	≥ 0.5	Pass
		2440	1	1.176	≥ 0.5	Pass
		2480	1	1.175	≥ 0.5	Pass

2.2.2 Test Graph

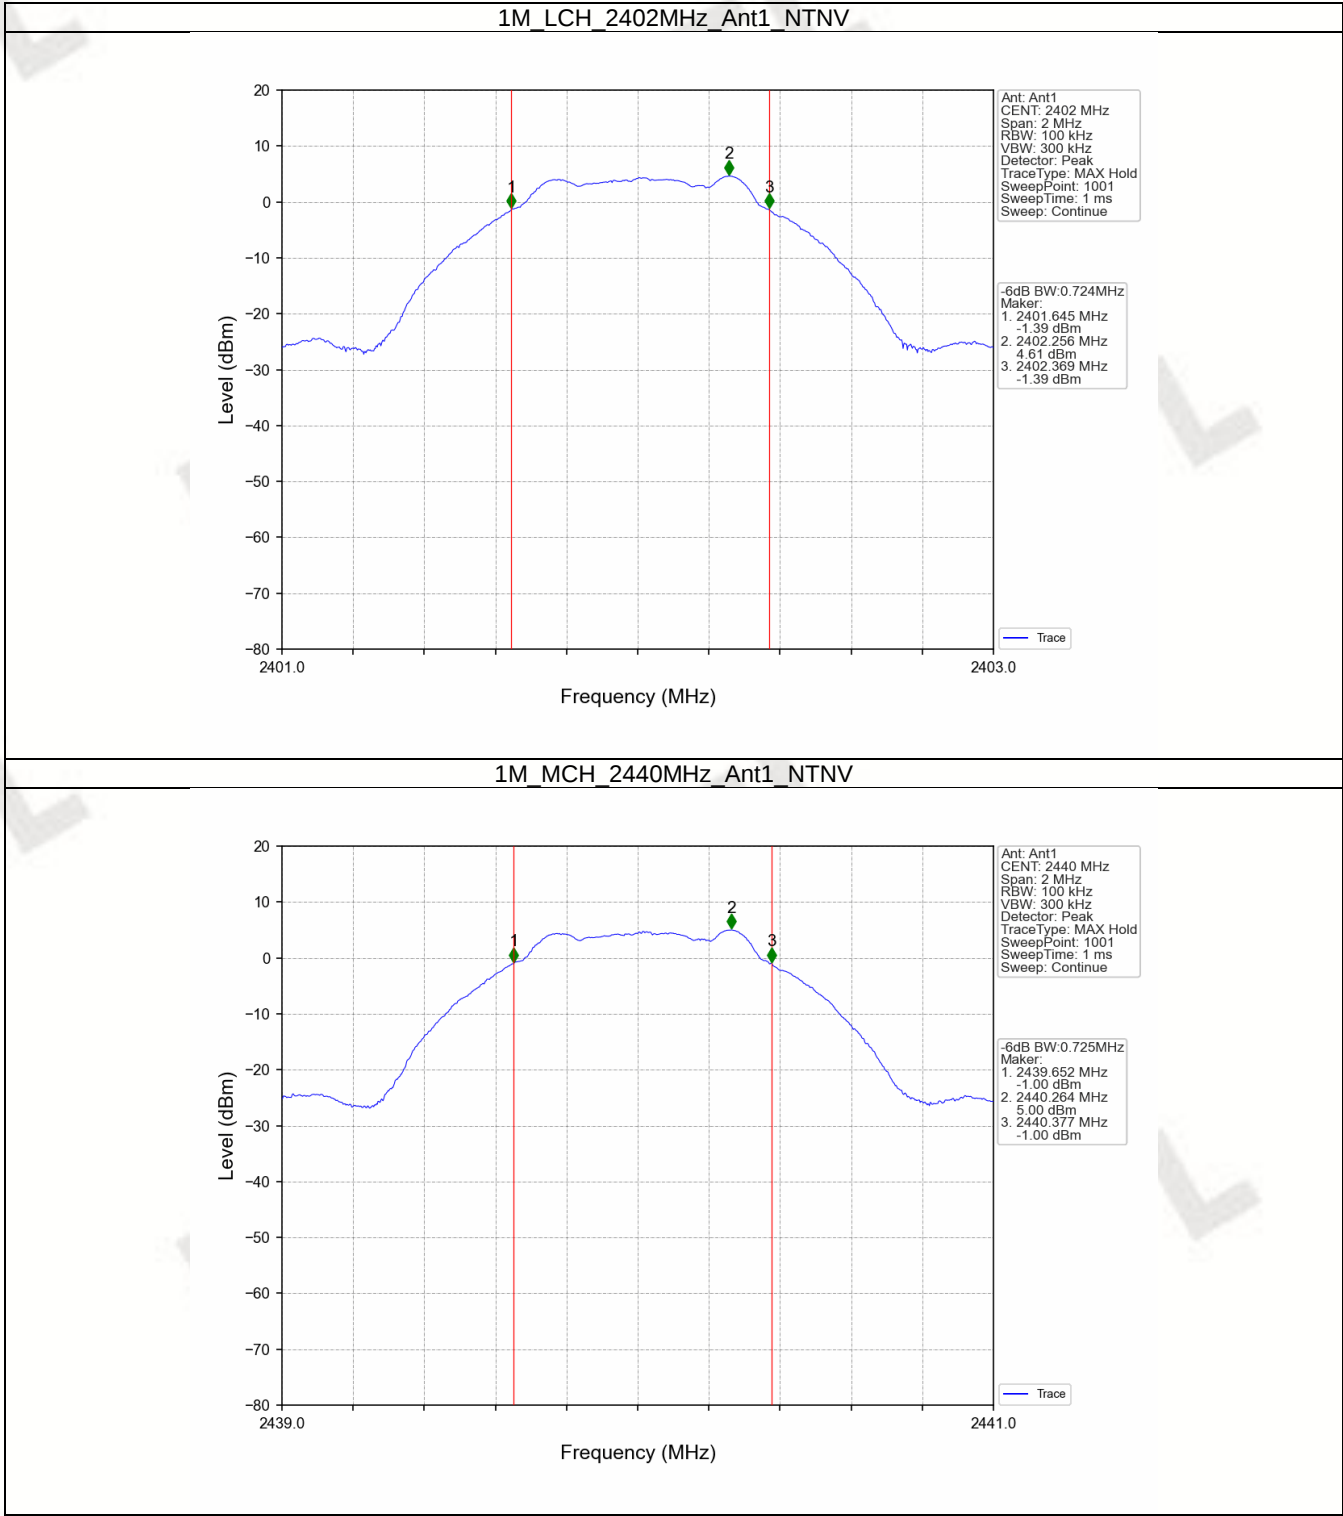

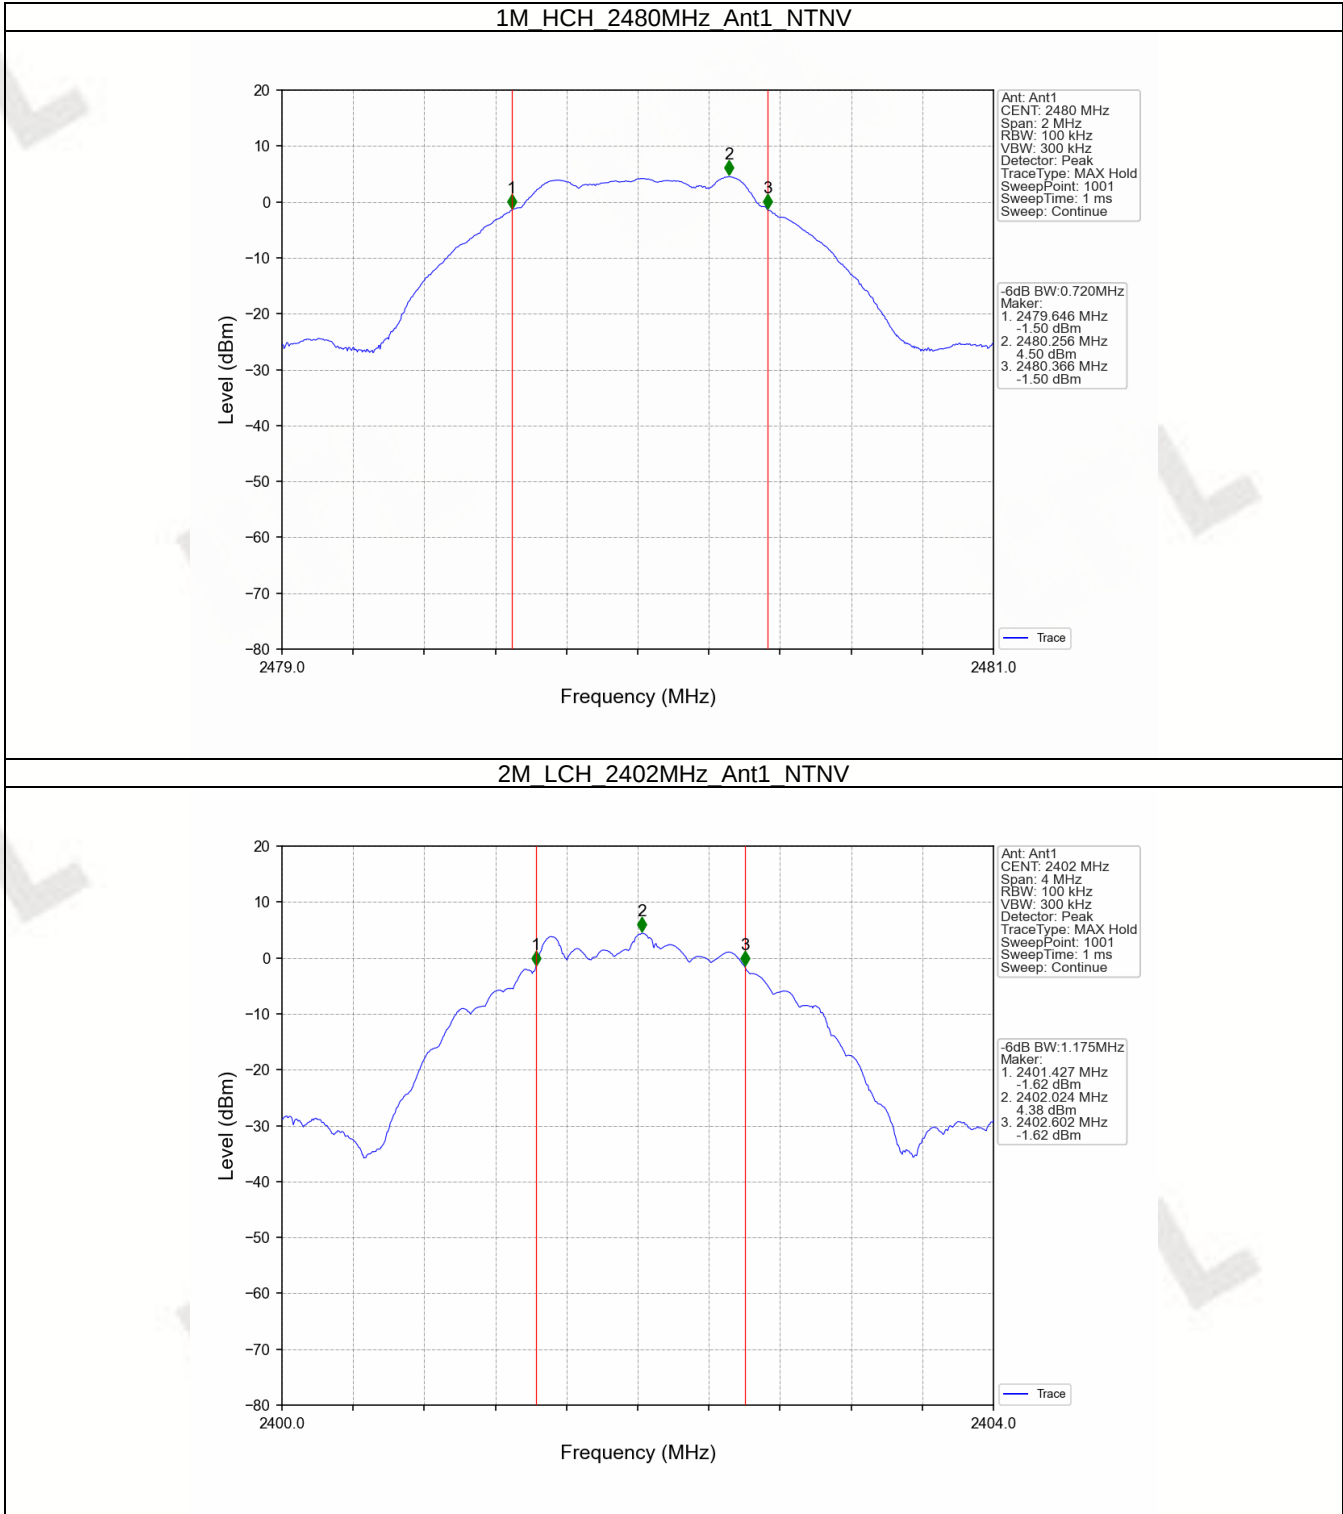

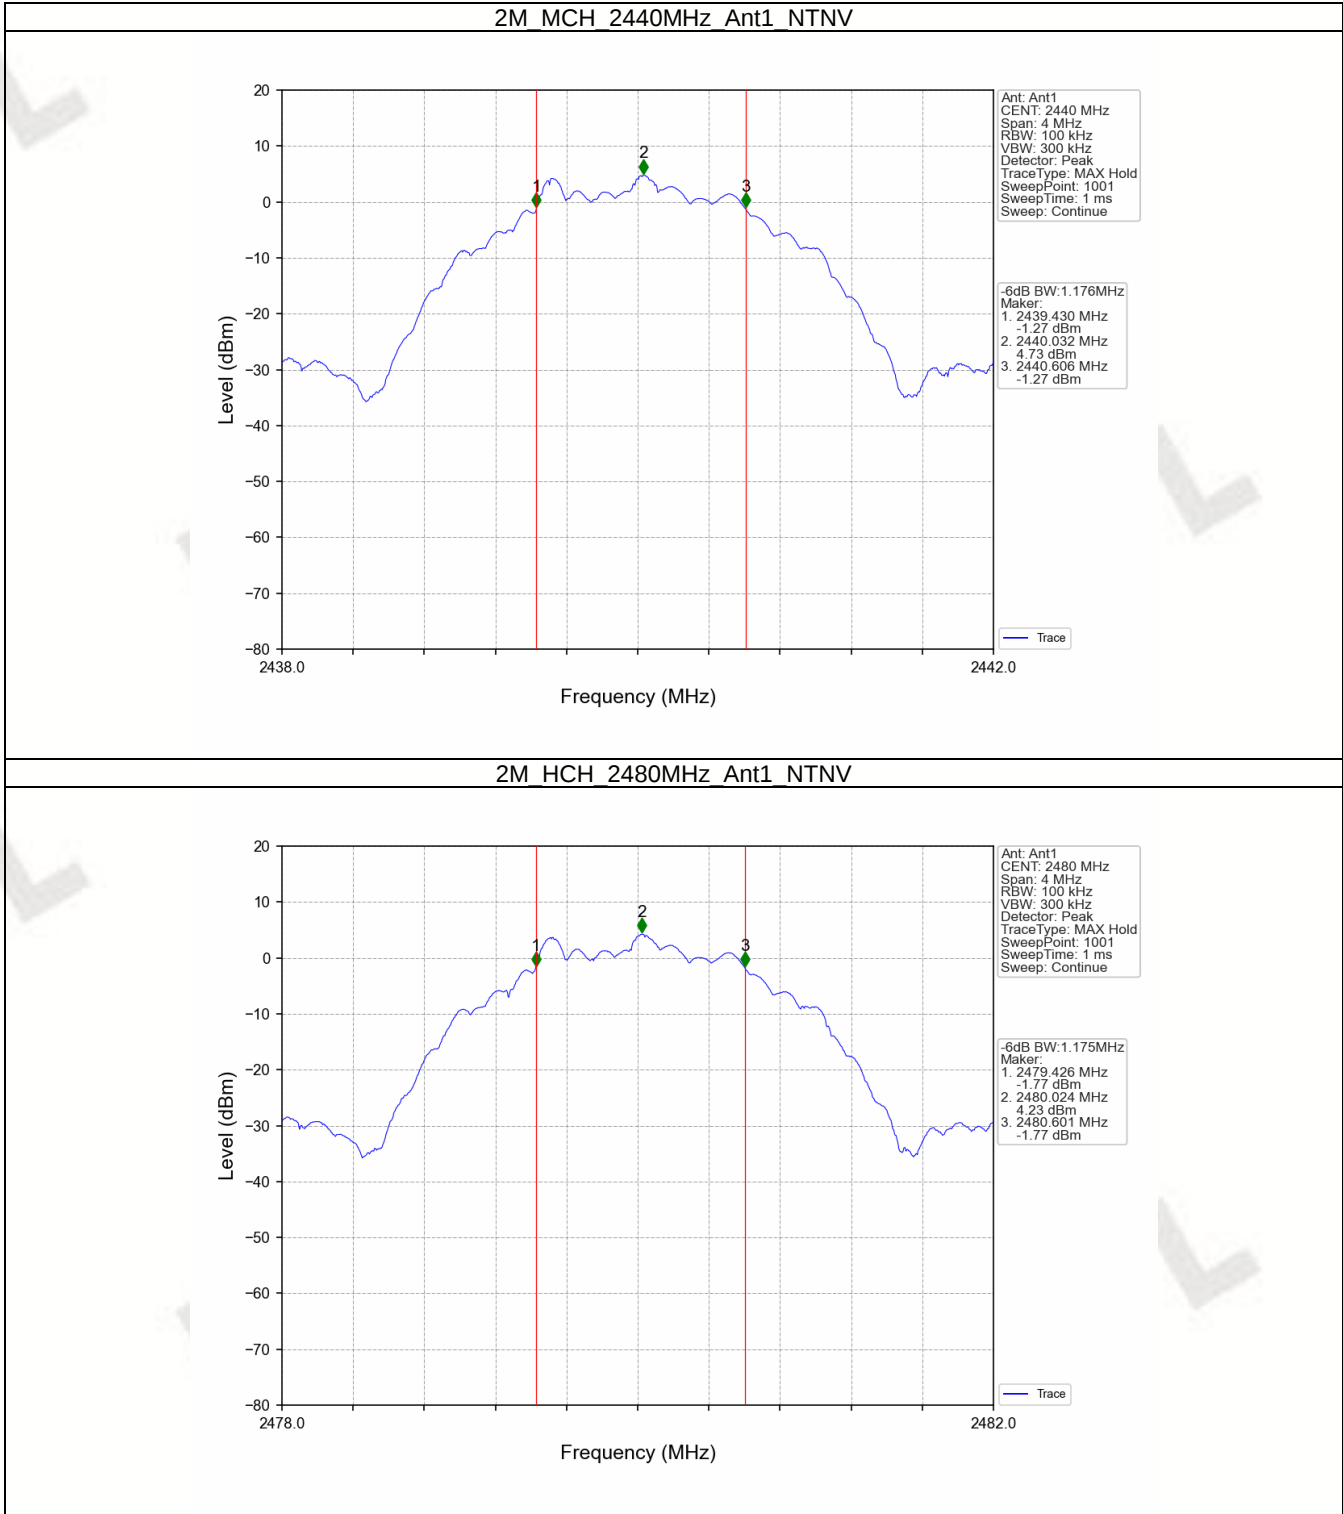

3. Maximum Conducted Output Power


3.1 Power


3.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	5.79	<=30	Pass
		2440	6.18	<=30	Pass
		2480	5.66	<=30	Pass
2M	SISO	2402	5.76	<=30	Pass
		2440	6.13	<=30	Pass
		2480	5.62	<=30	Pass

Note1: Antenna Gain: Ant1: 3.79dBi;

3.1.2 Test Graph

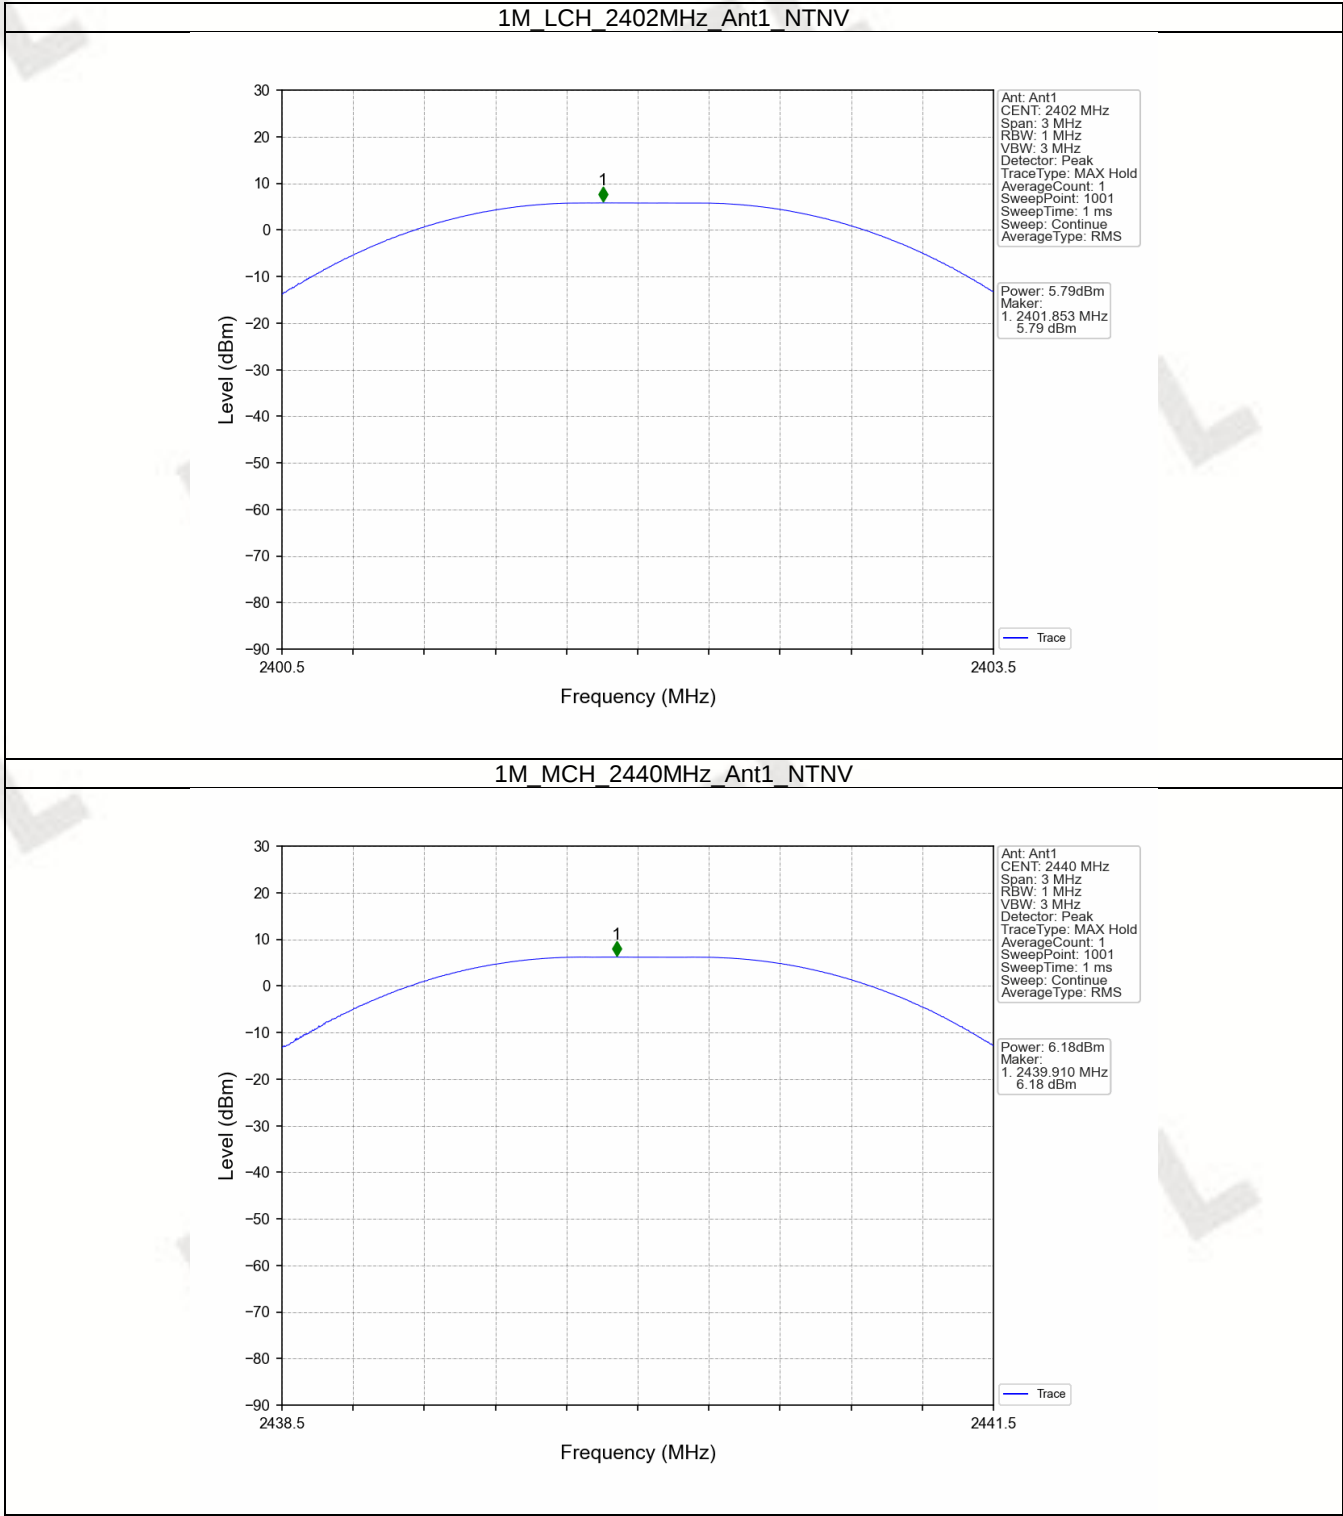

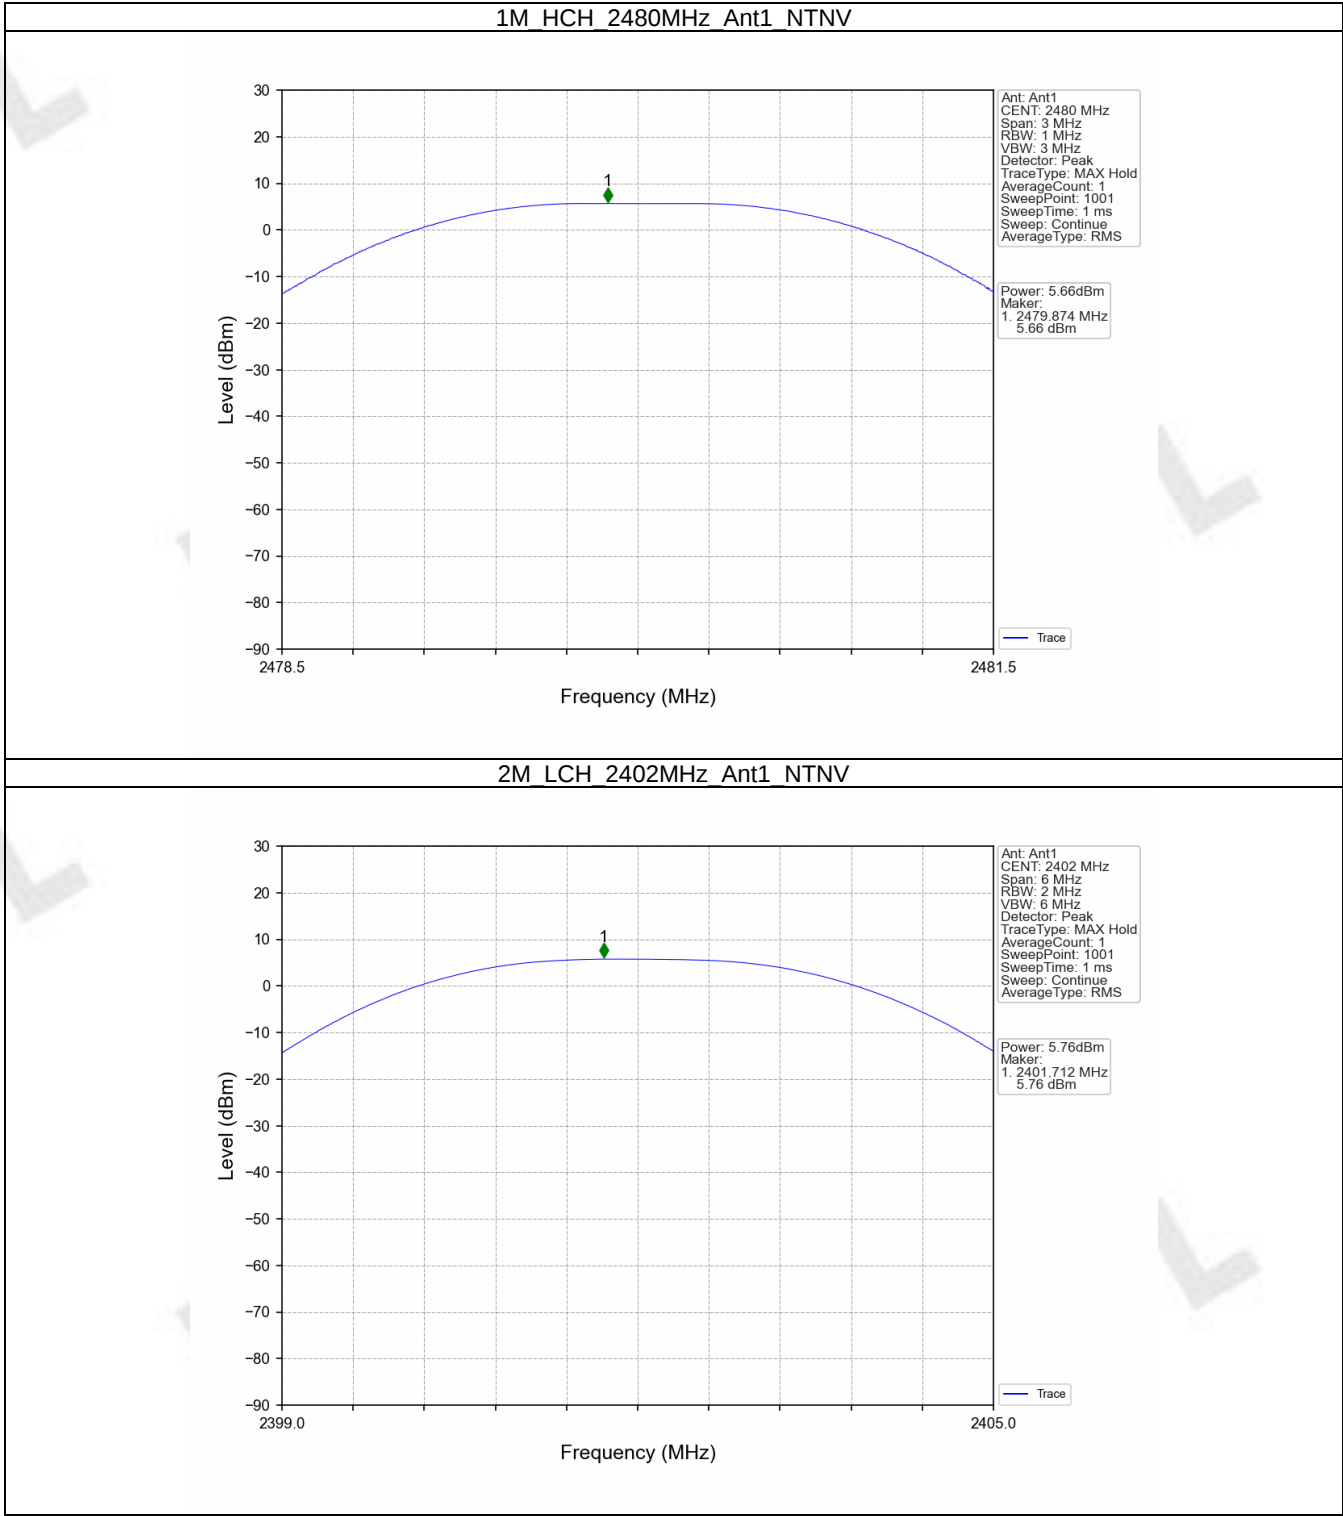

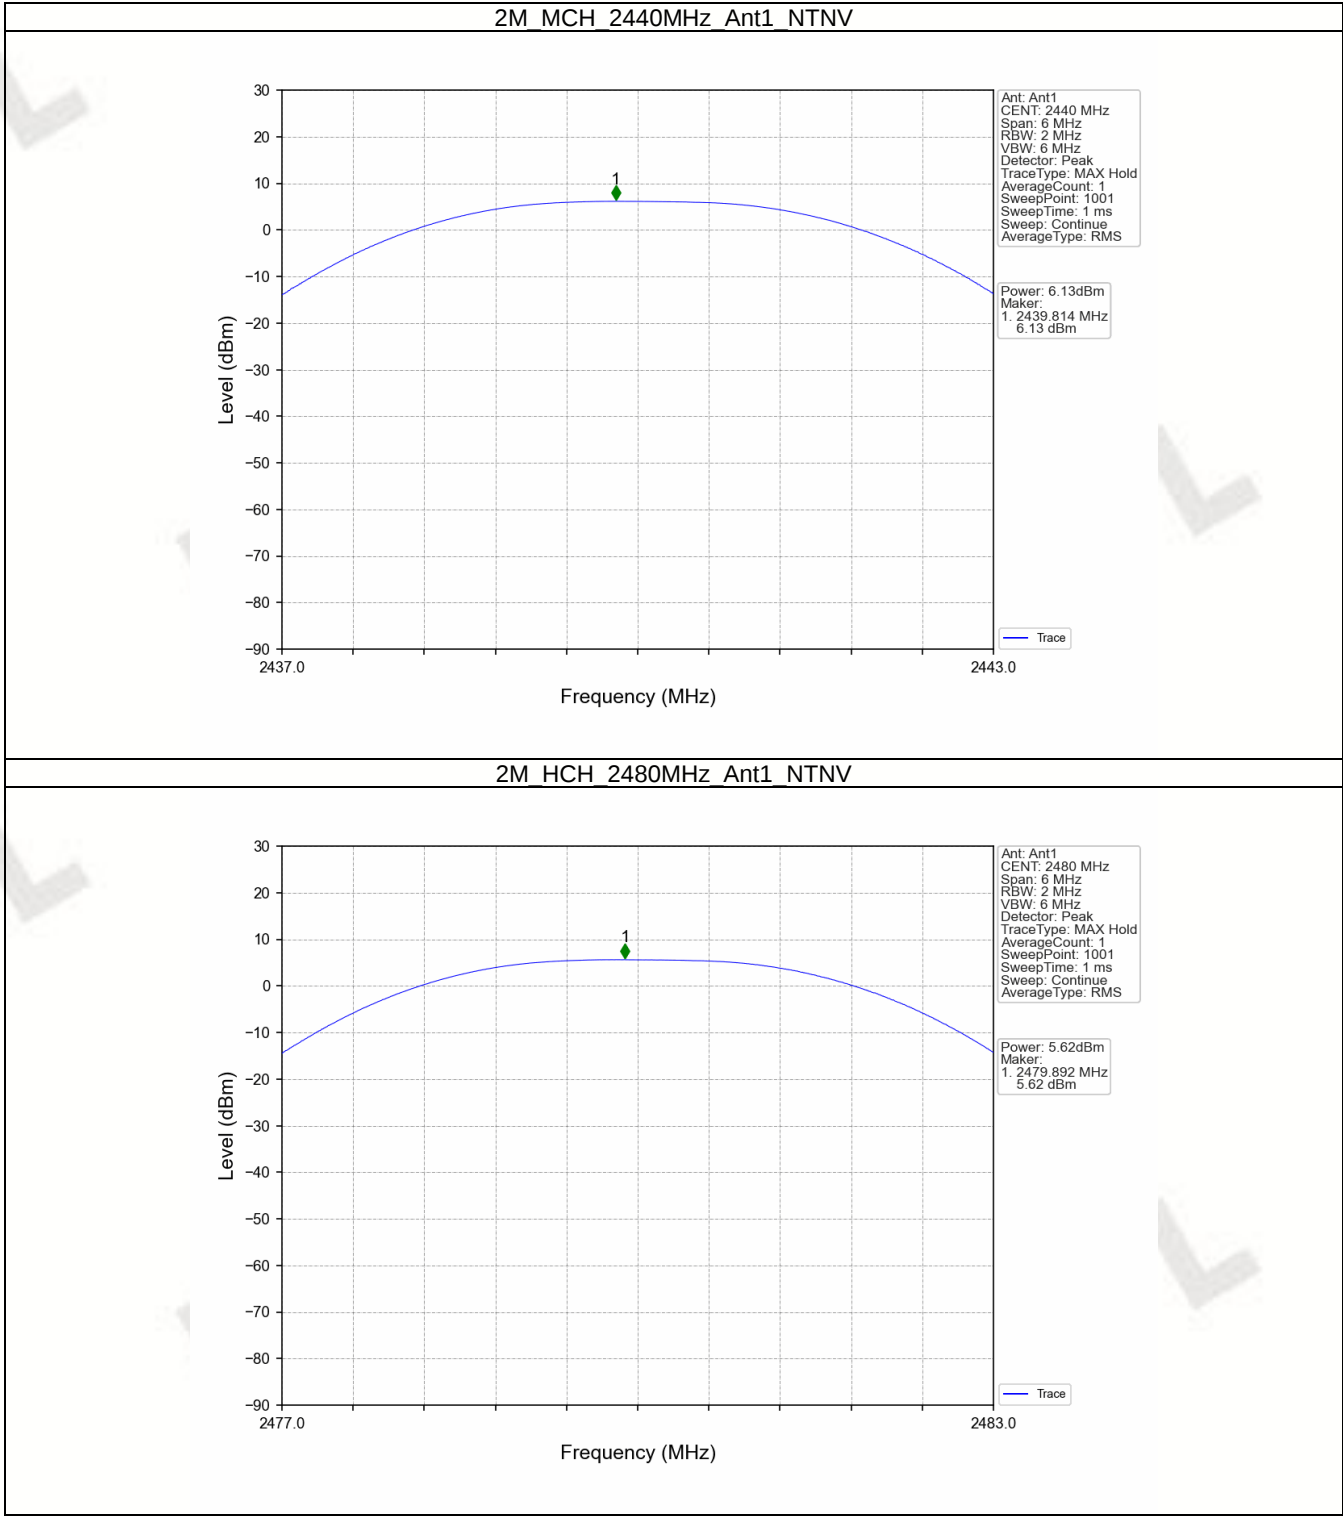

4. Maximum Power Spectral Density


4.1 PSD


4.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-9.91	<=8	Pass
		2440	-9.53	<=8	Pass
		2480	-10.30	<=8	Pass
2M	SISO	2402	-13.40	<=8	Pass
		2440	-13.01	<=8	Pass
		2480	-13.49	<=8	Pass

Note1: Antenna Gain: Ant1: 3.79dBi;

4.1.2 Test Graph

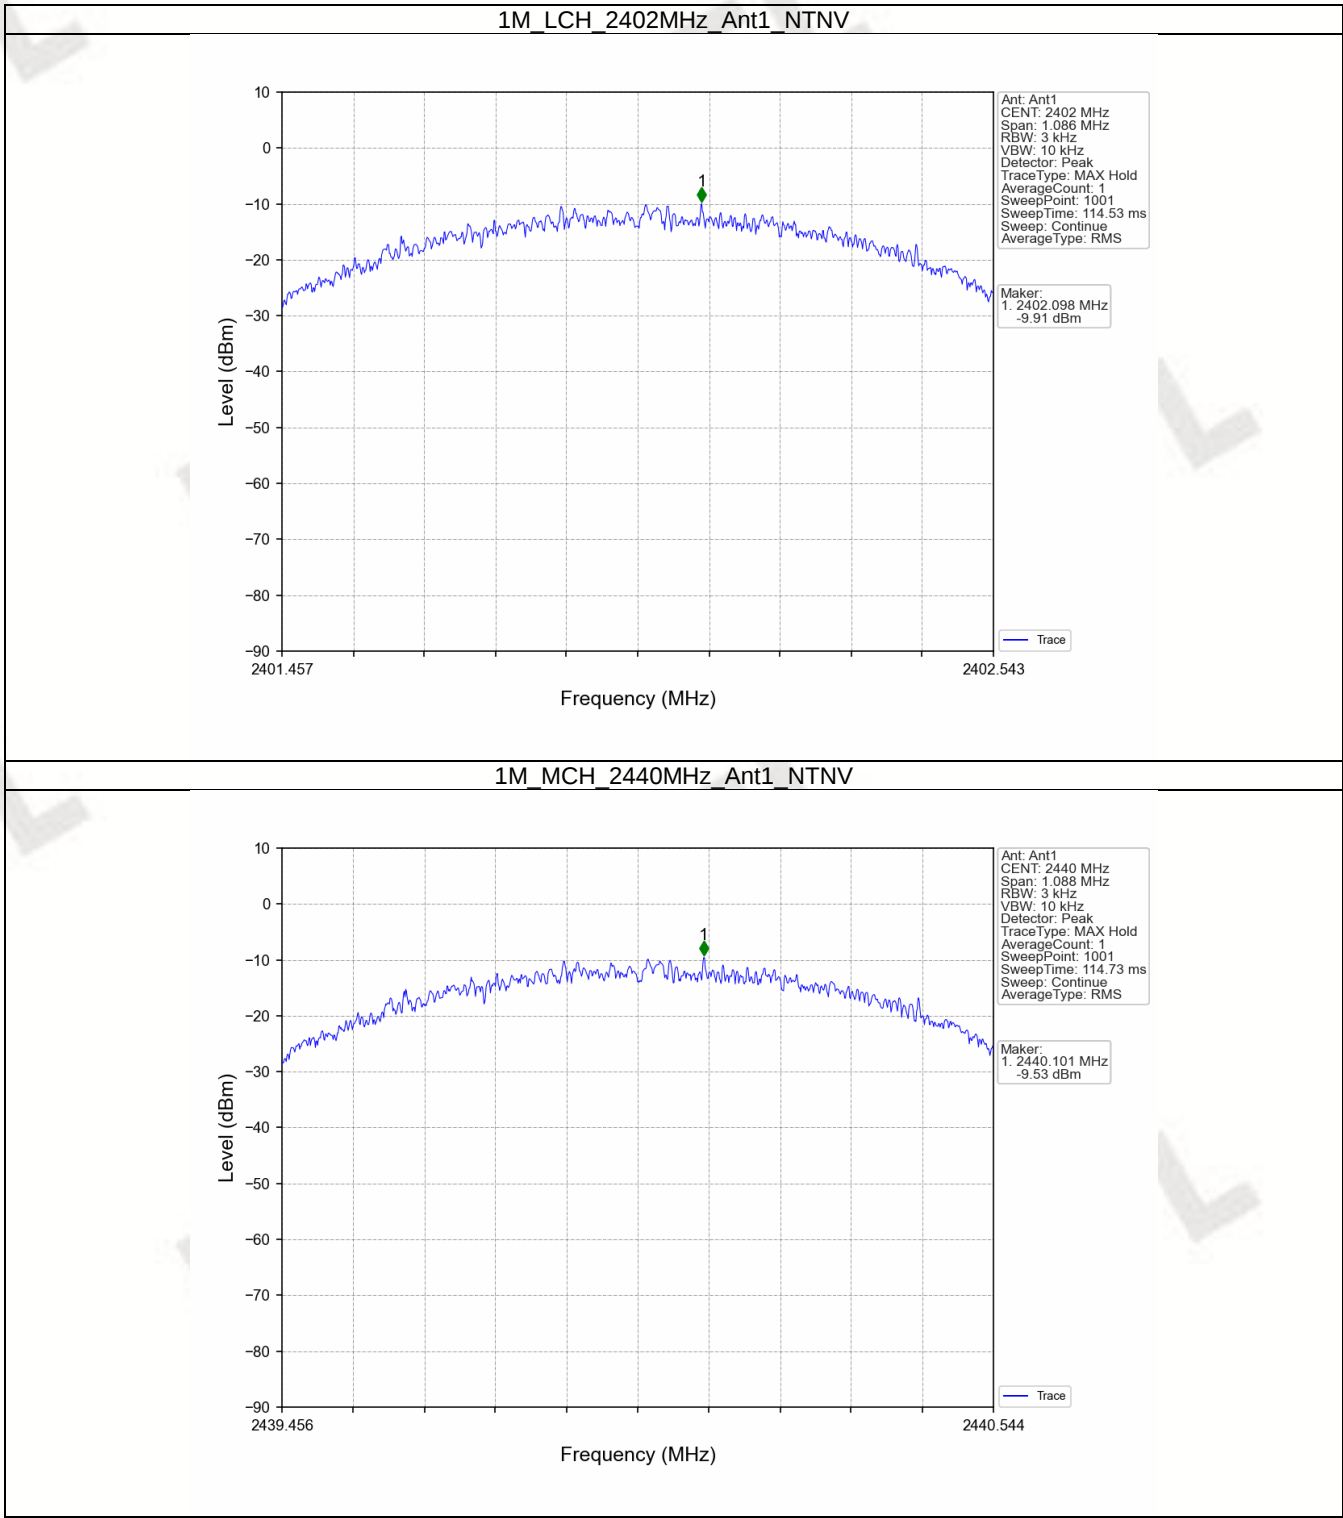

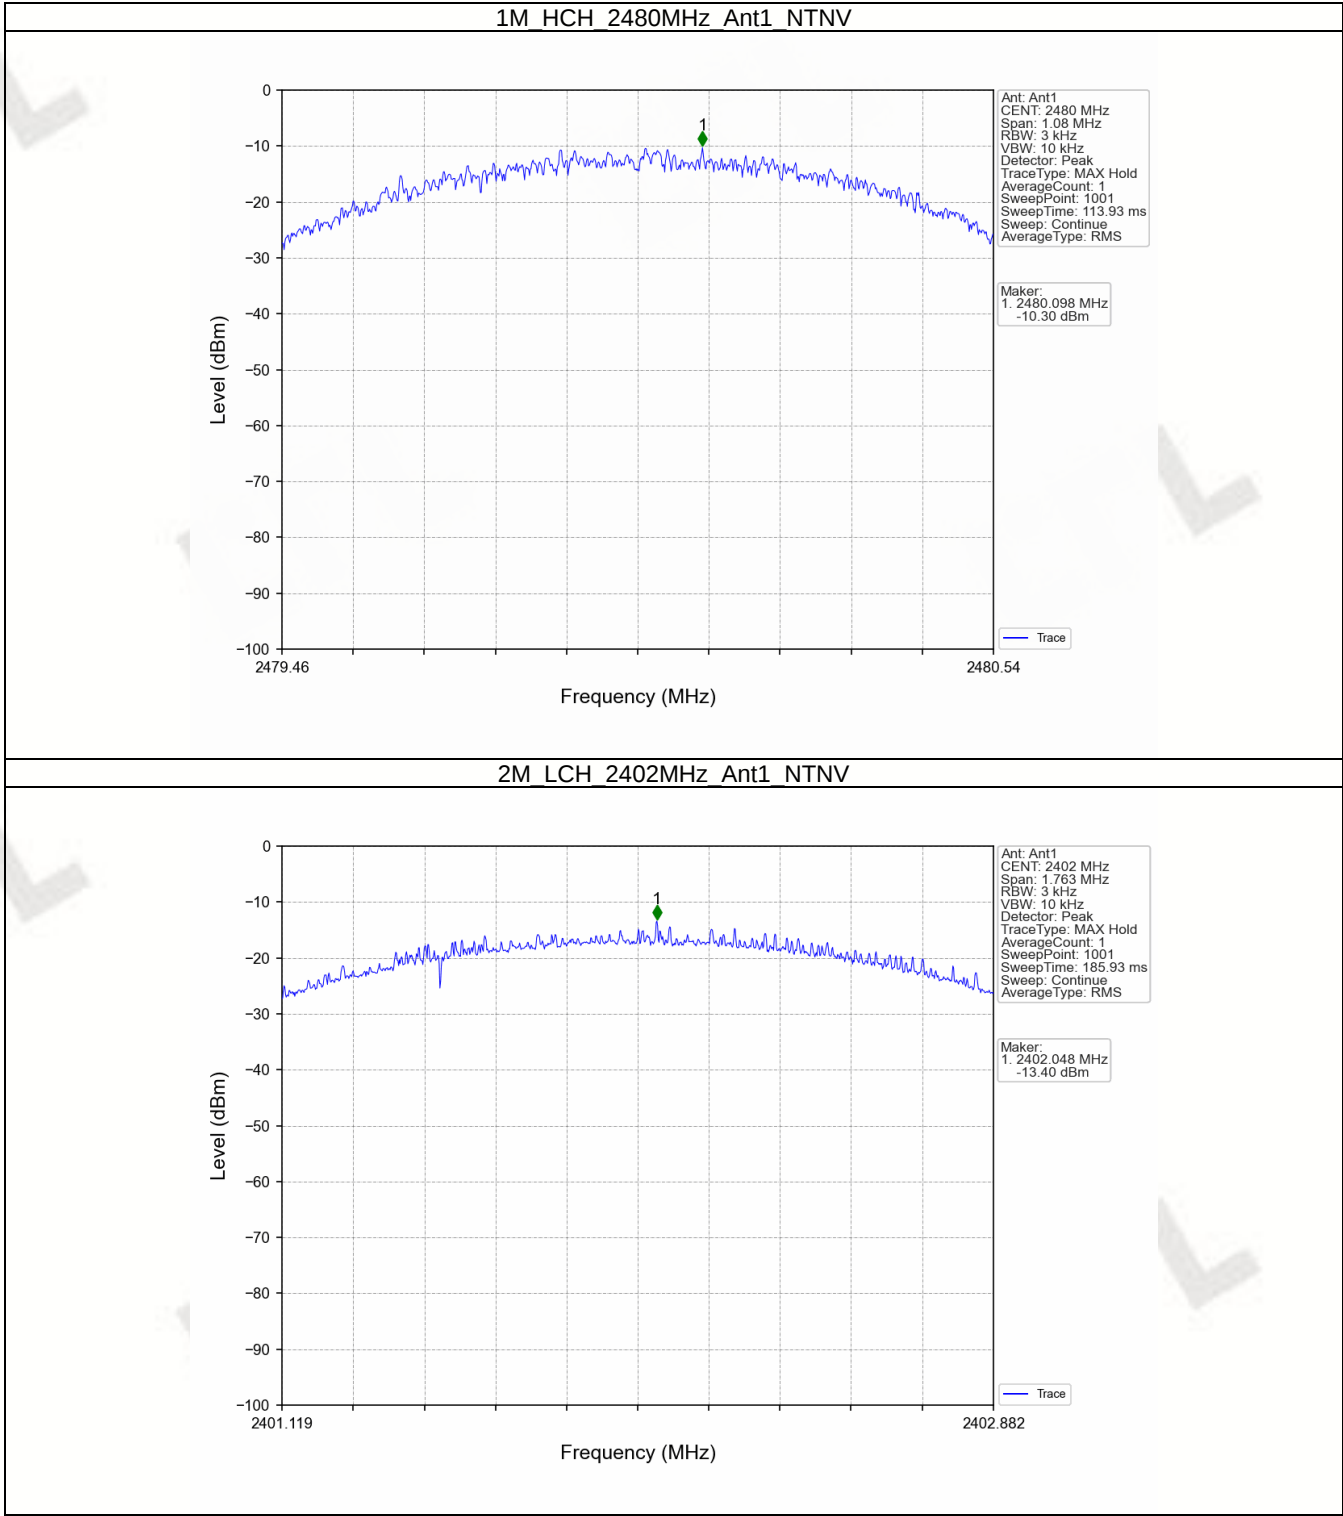

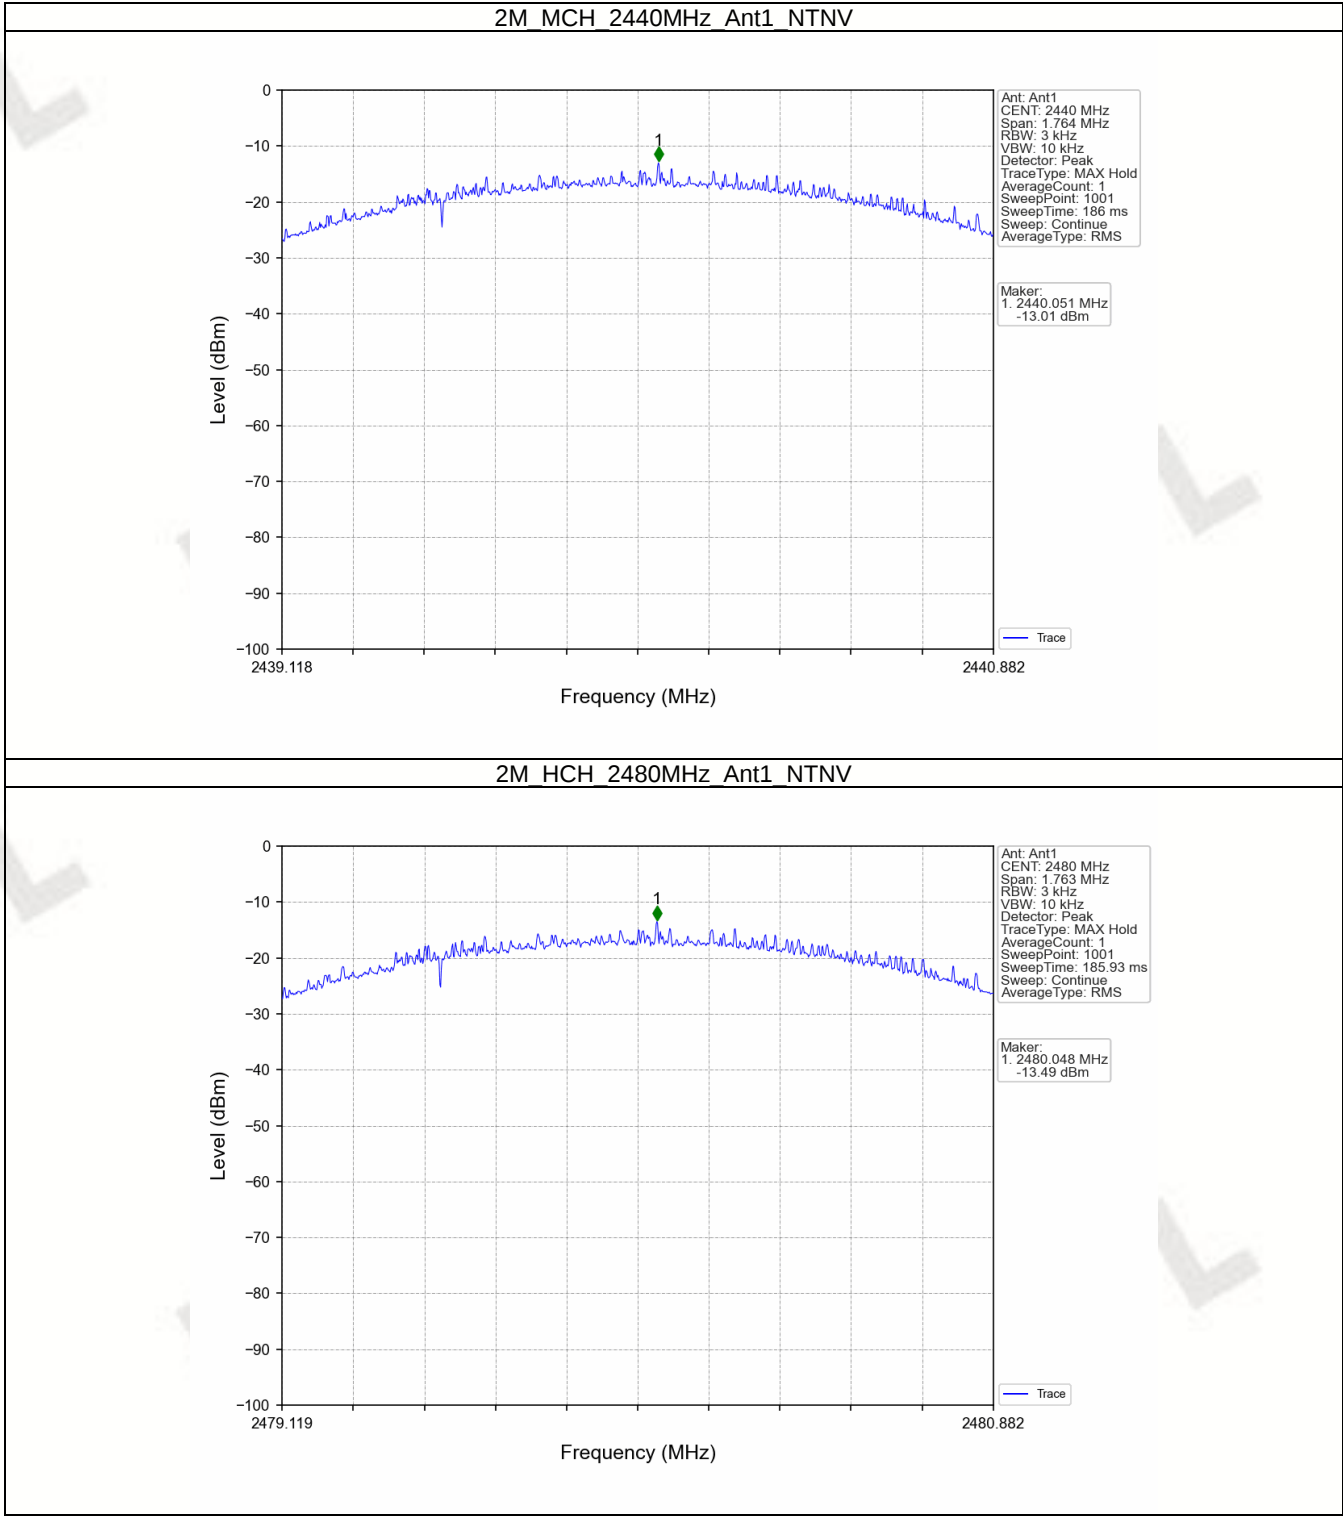


5. Unwanted Emissions In Non-restricted Frequency Bands


5.1 Ref


5.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	4.62
		2440	1	4.98
		2480	1	4.48
2M	SISO	2402	1	4.24
		2440	1	4.61
		2480	1	4.08
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.				

5.1.2 Test Graph

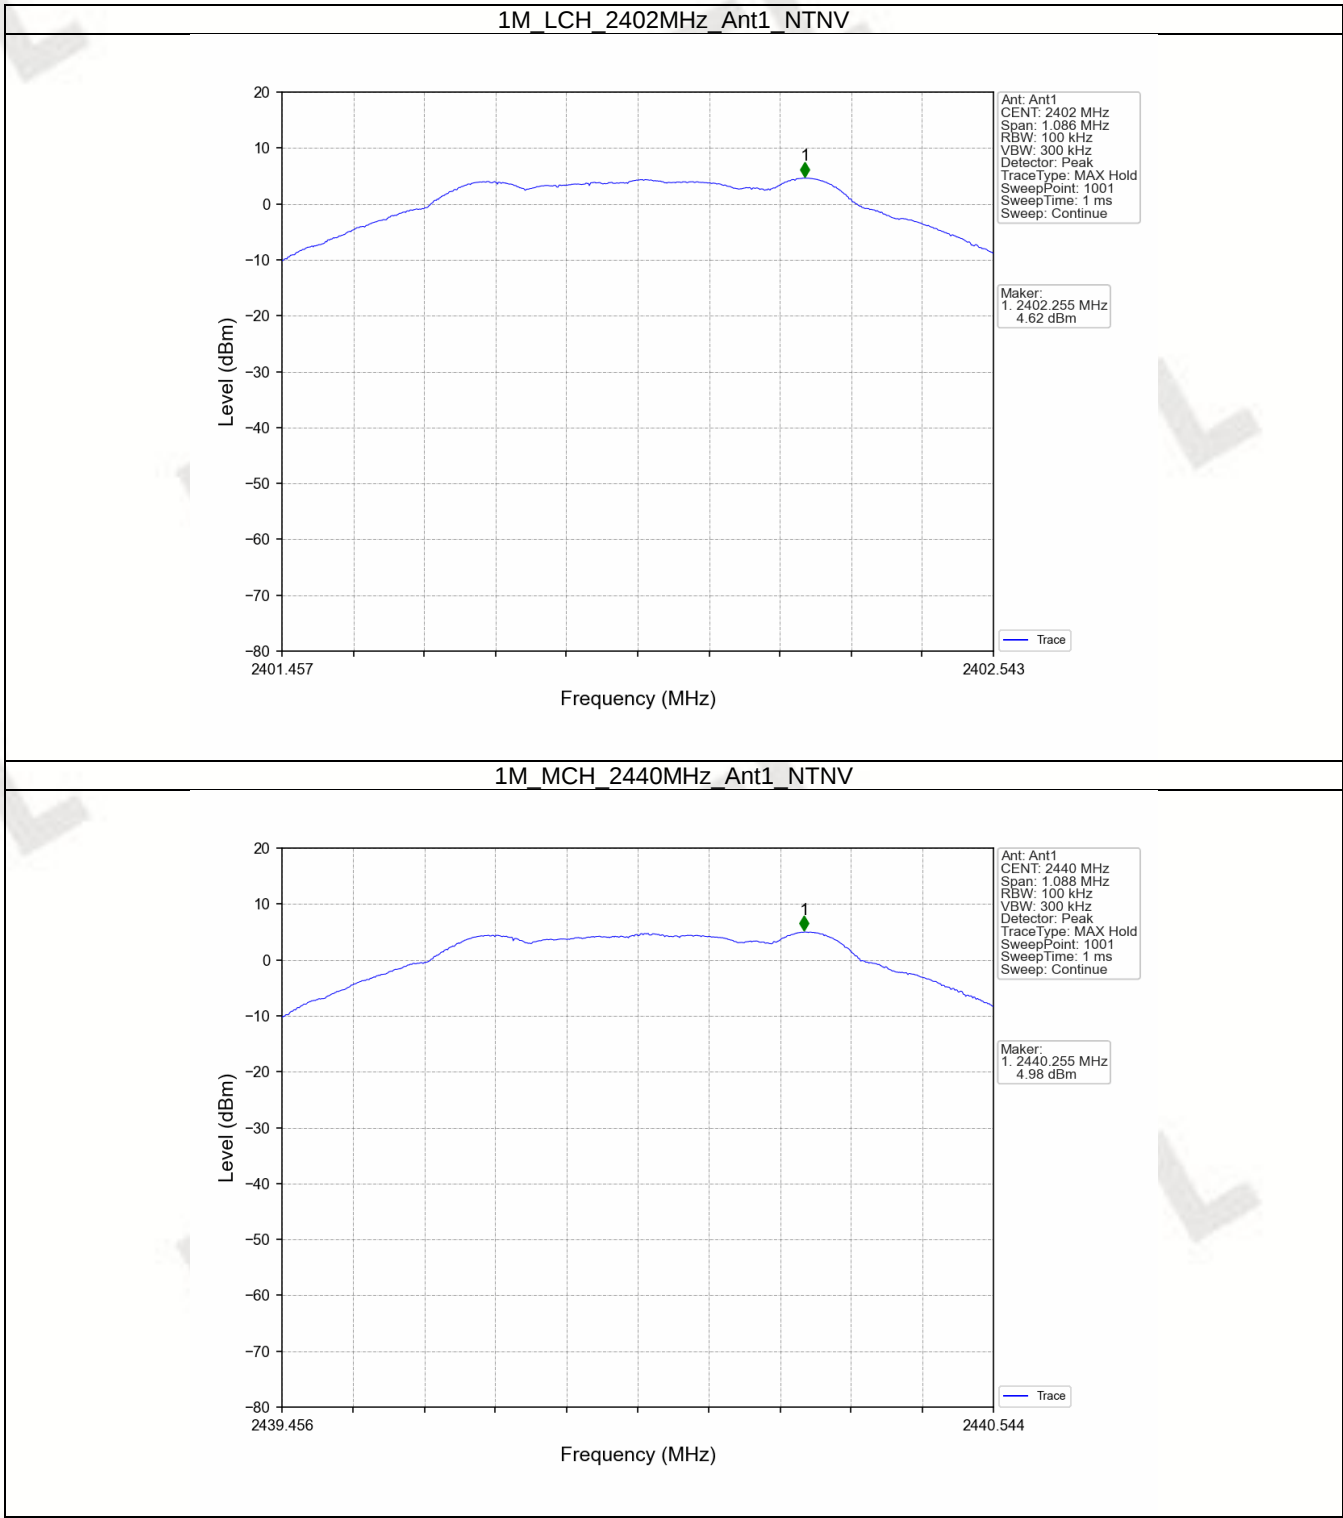

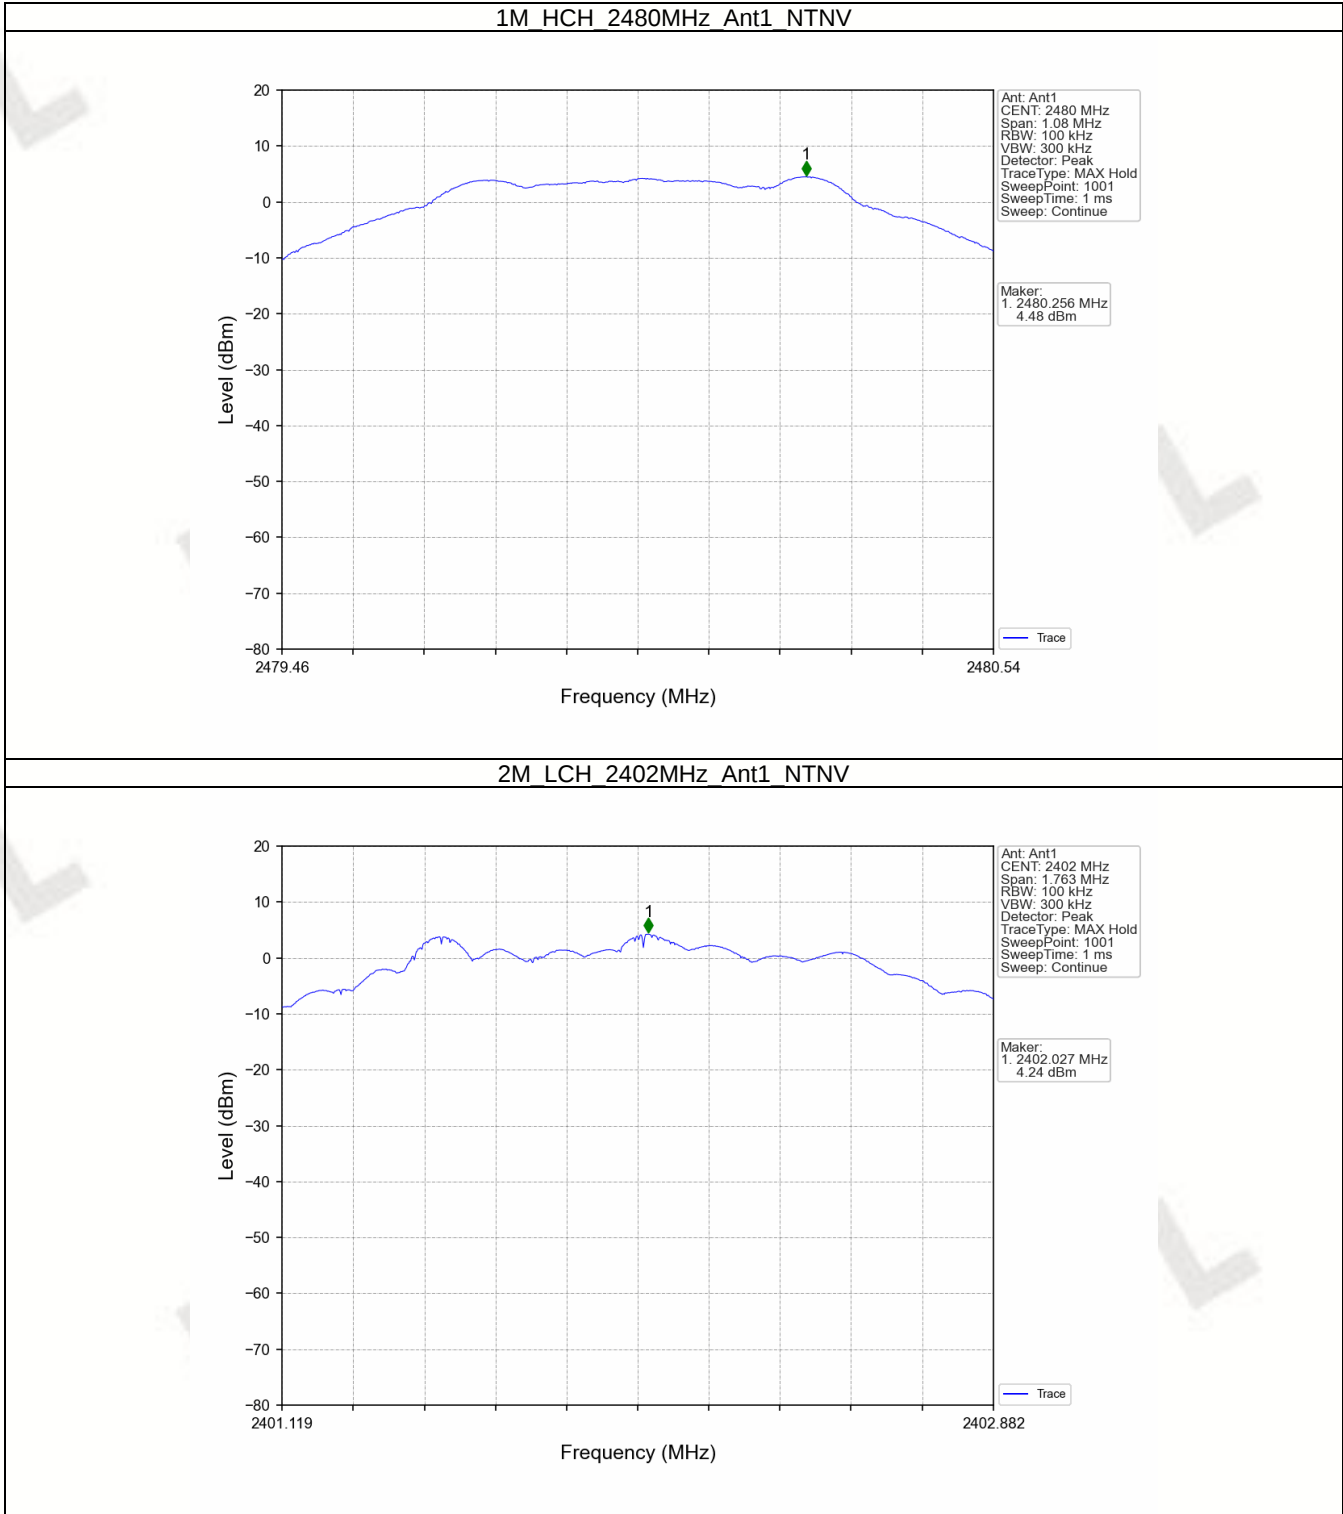

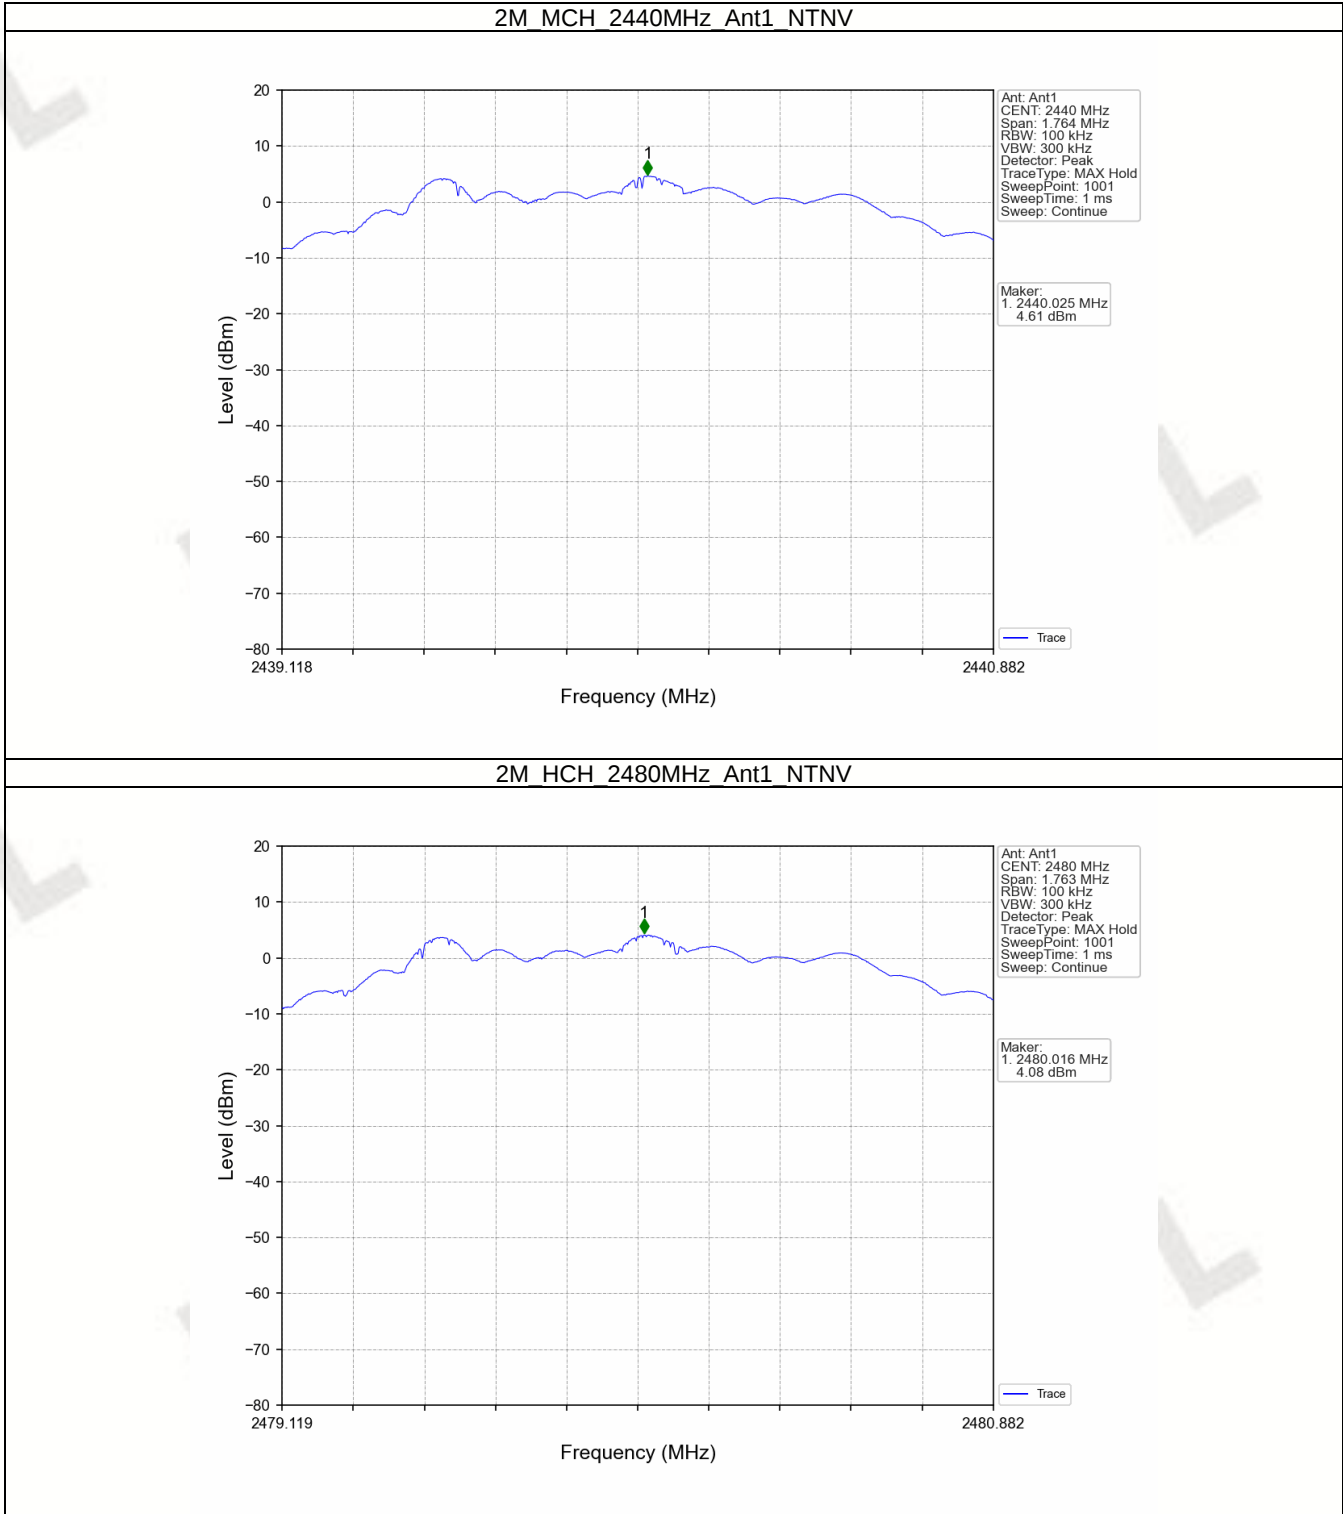

5.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	4.98	-15.02	Pass
		2440	1	4.98	-15.02	Pass
		2480	1	4.98	-15.02	Pass
2M	SISO	2402	1	4.61	-15.39	Pass
		2440	1	4.61	-15.39	Pass
		2480	1	4.61	-15.39	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						

5.2.2 Test Graph

