

## 4.6. Conducted Spurious Emissions and Band Edge Compliance of RF Emission

### TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE

According to KDB 558074 D01 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:  

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test dures until all measured frequencies were complete.


### LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).


**TEST RESULTS****4.6.1 For Radiated Bandedge Measurement**

|               |            |                |                  |
|---------------|------------|----------------|------------------|
| Temperature   | 23.8℃      | Humidity       | 53.7%            |
| Test Engineer | Jenny Zeng | Configurations | IEEE 802.11b/g/n |

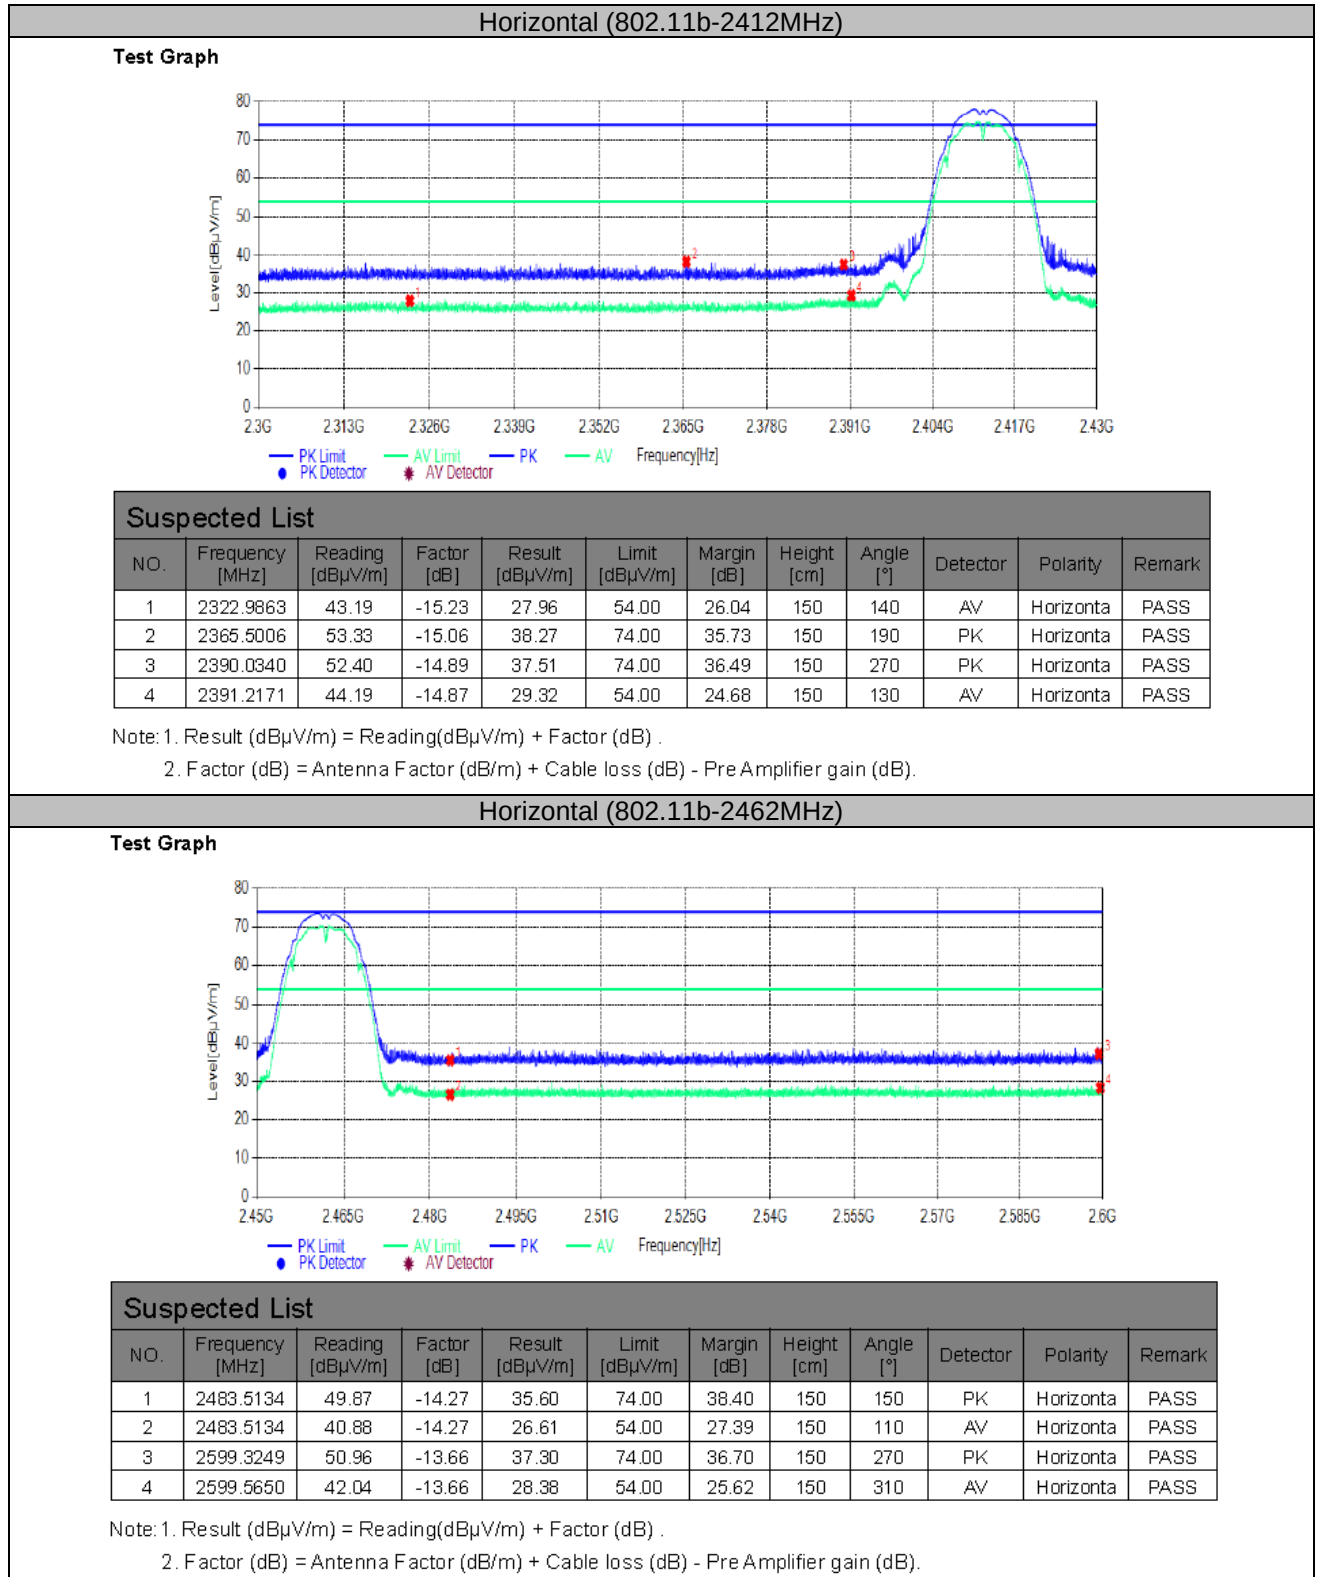

## Vertical(802.11b-2412MHz)

## Test Graph

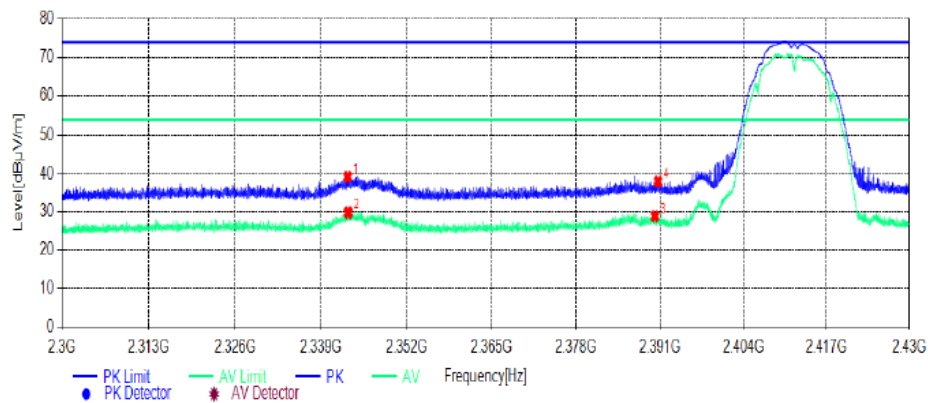

## Suspected List


| NO. | Frequency [MHz] | Reading [dBμV/m] | Factor [dB] | Result [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity | Remark |
|-----|-----------------|------------------|-------------|-----------------|----------------|-------------|-------------|-----------|----------|----------|--------|
| 1   | 2343.0343       | 54.33            | -15.13      | 39.20           | 74.00          | 34.80       | 150         | 180       | PK       | Vertical | PASS   |
| 2   | 2343.1123       | 44.96            | -15.13      | 29.83           | 54.00          | 24.17       | 150         | 100       | AV       | Vertical | PASS   |
| 3   | 2390.2290       | 43.76            | -14.89      | 28.87           | 54.00          | 25.13       | 150         | 210       | AV       | Vertical | PASS   |
| 4   | 2390.7231       | 52.84            | -14.88      | 37.96           | 74.00          | 36.04       | 150         | 130       | PK       | Vertical | PASS   |

Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

## Vertical(802.11b-2462MHz)

## Test Graph

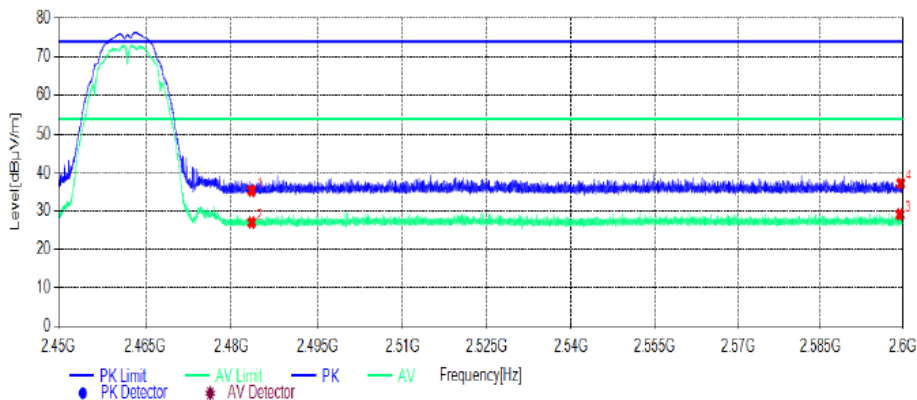

## Suspected List

| NO. | Frequency [MHz] | Reading [dBμV/m] | Factor [dB] | Result [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity | Remark |
|-----|-----------------|------------------|-------------|-----------------|----------------|-------------|-------------|-----------|----------|----------|--------|
| 1   | 2483.5134       | 49.65            | -14.27      | 35.38           | 74.00          | 38.62       | 150         | 280       | PK       | Vertical | PASS   |
| 2   | 2483.5134       | 41.29            | -14.27      | 27.02           | 54.00          | 26.98       | 150         | 140       | AV       | Vertical | PASS   |
| 3   | 2599.4599       | 42.79            | -13.66      | 29.13           | 54.00          | 24.87       | 150         | 240       | AV       | Vertical | PASS   |
| 4   | 2599.5950       | 50.93            | -13.66      | 37.27           | 74.00          | 36.73       | 150         | 220       | PK       | Vertical | PASS   |

Note: 1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

**NOTE: All the modes have been tested and recorded worst mode in the report.**

**4.6.2 For Conducted Bandedge Measurement**

For reporting purpose only.

Please refer to Appendix A.5.

**4.6.3 For Conducted Spurious Emissions Measurement**

For reporting purpose only.

Please refer to Appendix A.6.

## 4.7. Antenna Requirement

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **Antenna Information**

The antenna is on board Antenna, through the buckle stretched out, The directional gains of antenna used for transmitting is 1.94dBi.


Reference to the **Internal photos**.

## 5. TEST SETUP PHOTOS OF THE EUT

Speed 23T:


Adapter: TPA-46B050100UU

Radiated Emission

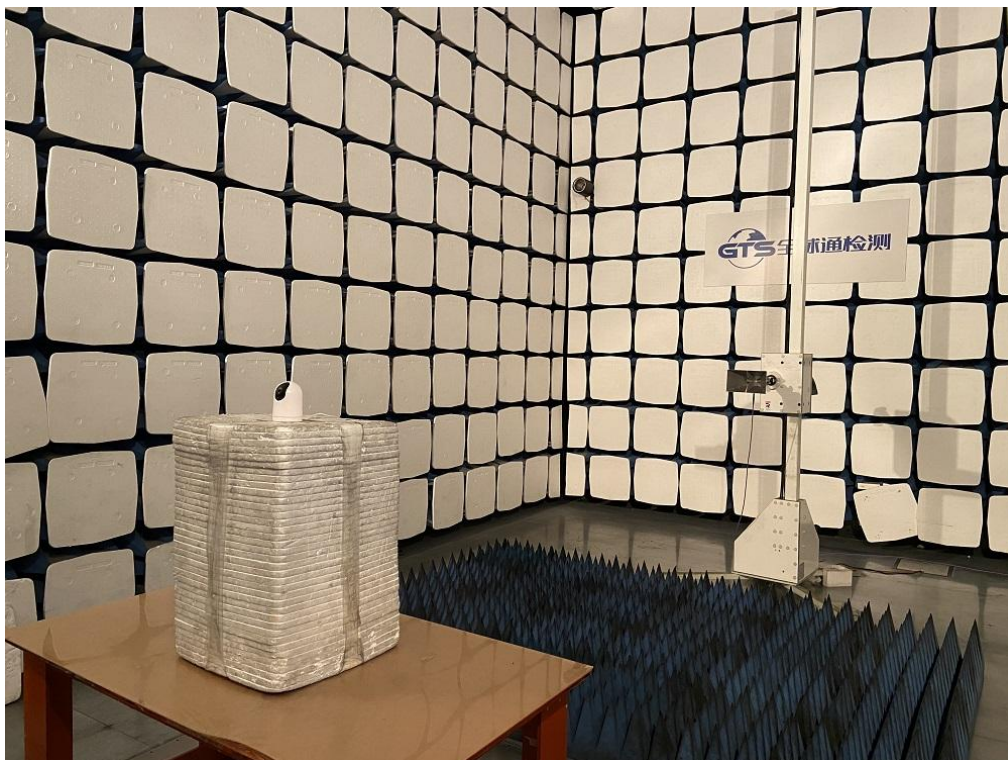





### Conducted Emission

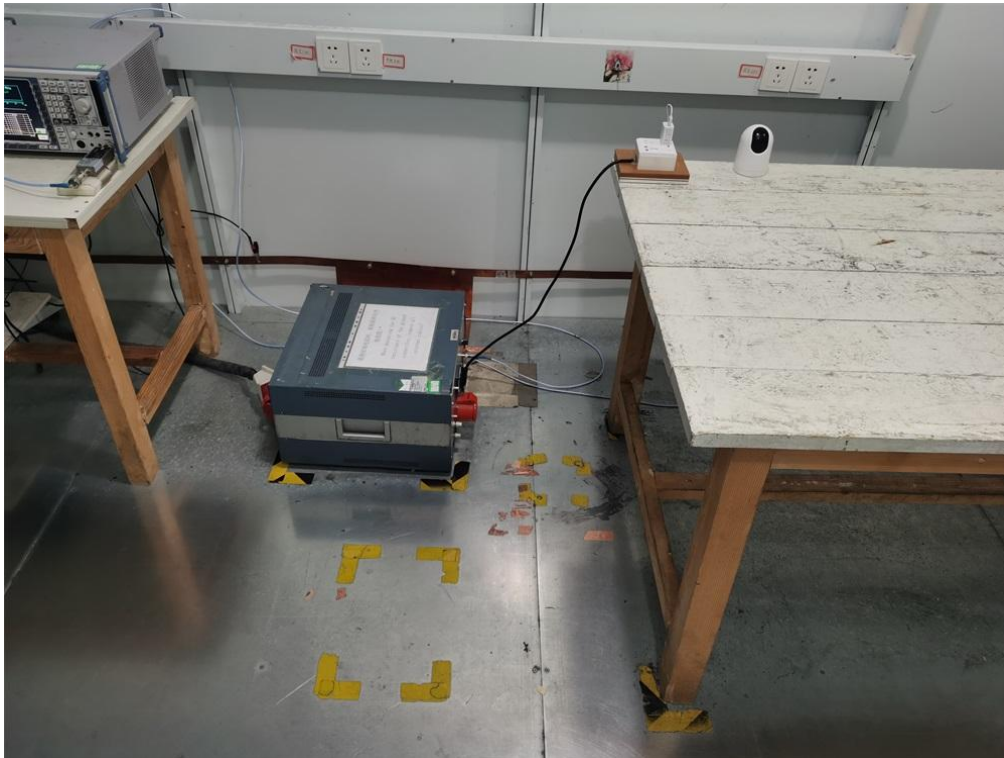


Adapter:DCT07W050100US-C1

### Radiated Emission

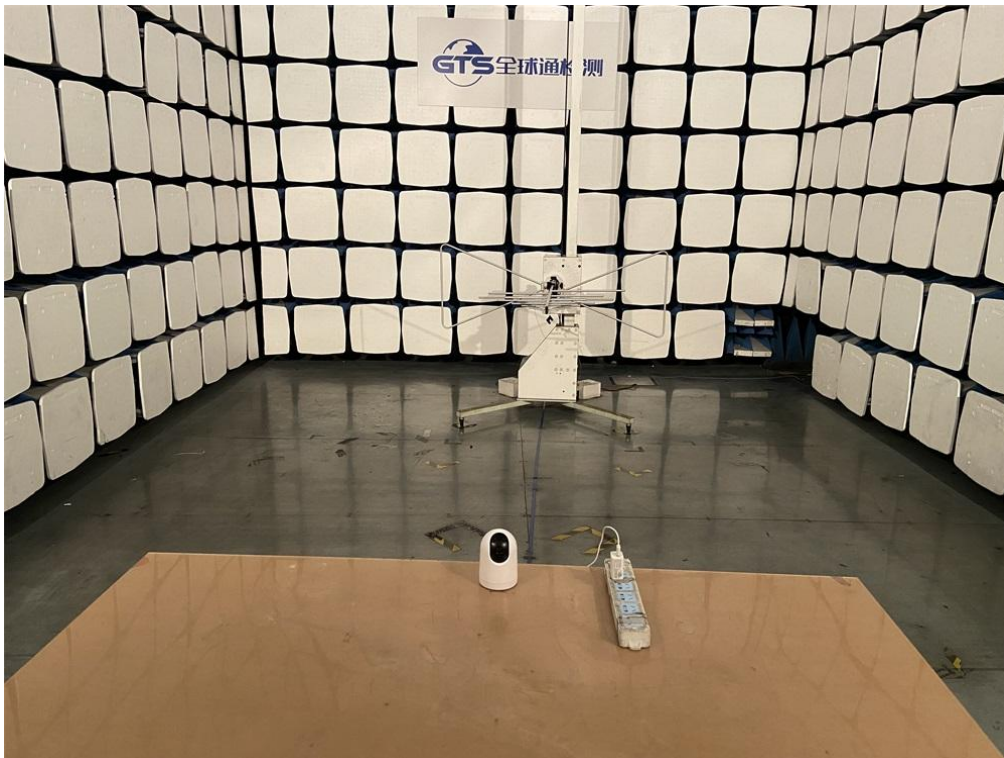

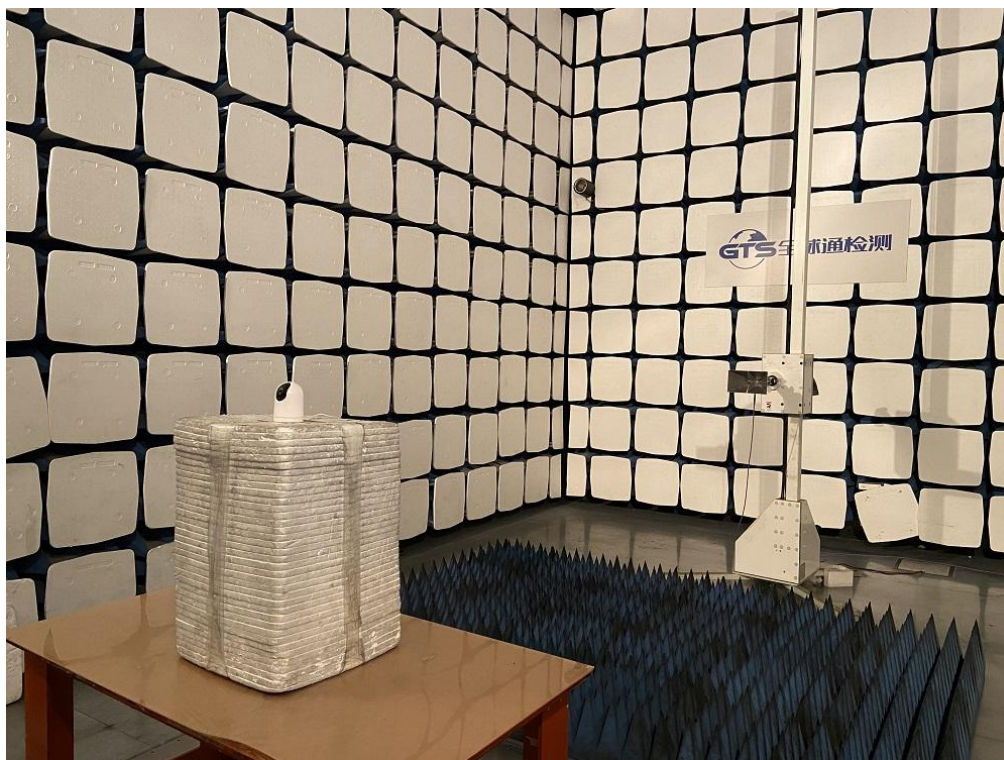

Conducted Emission

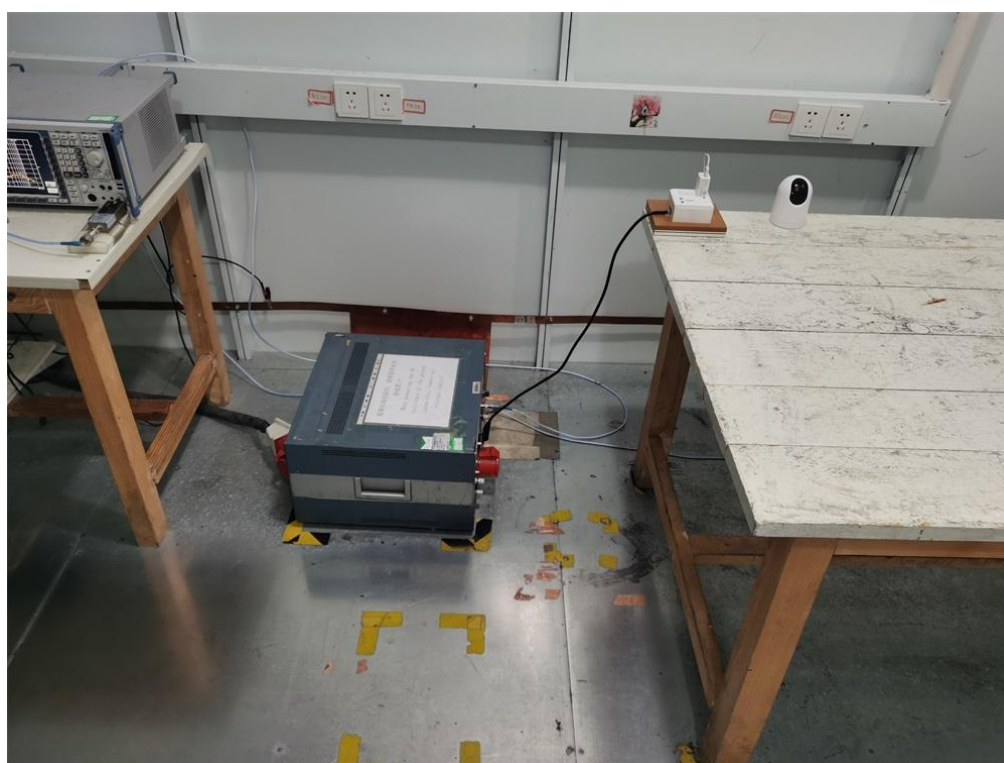





Speed 17S:

Adapter: TPA-46B050100UU

Radiated Emission

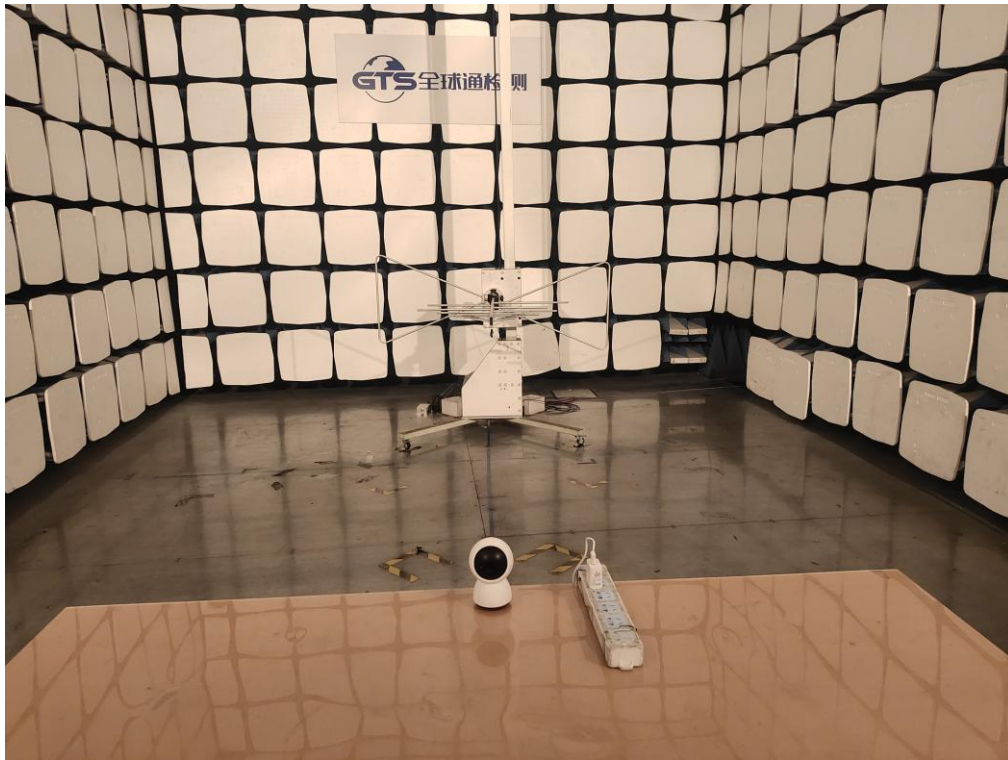


### Conducted Emission

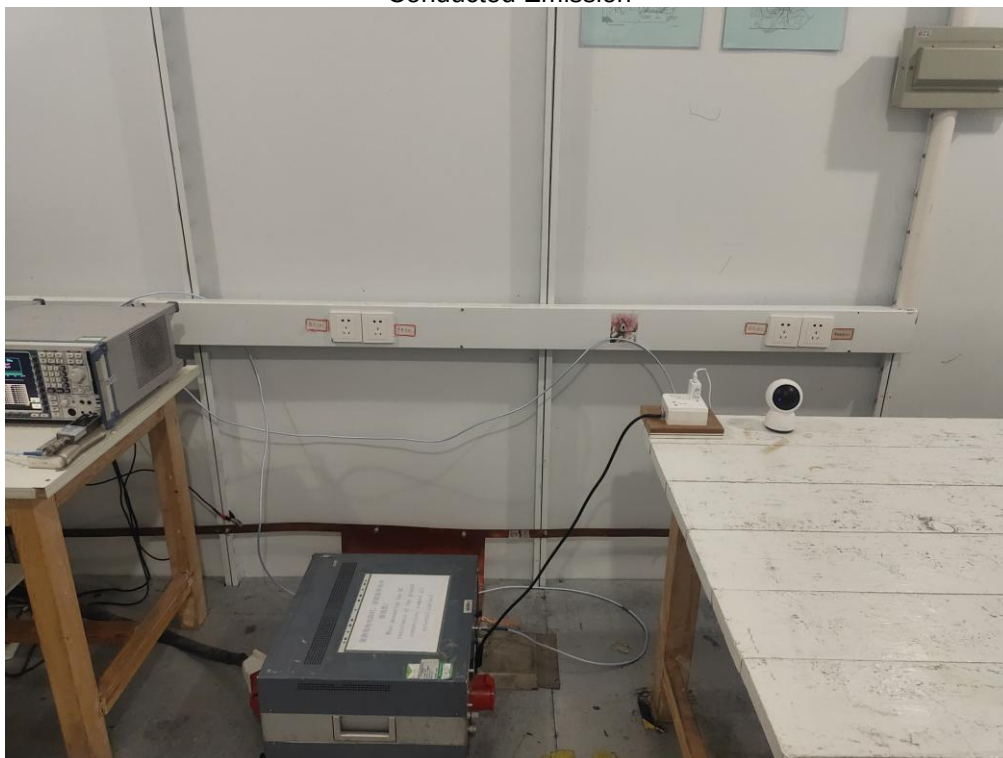

Adapter:DCT07W050100US-C1

### Radiated Emission

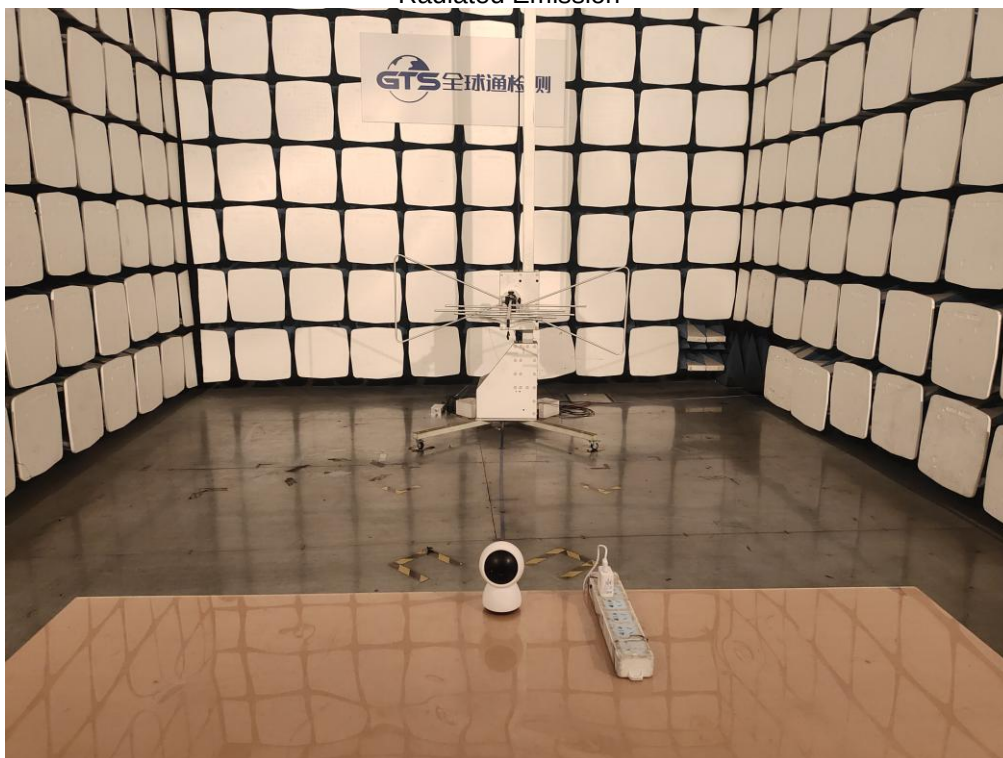



Conducted Emission





6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

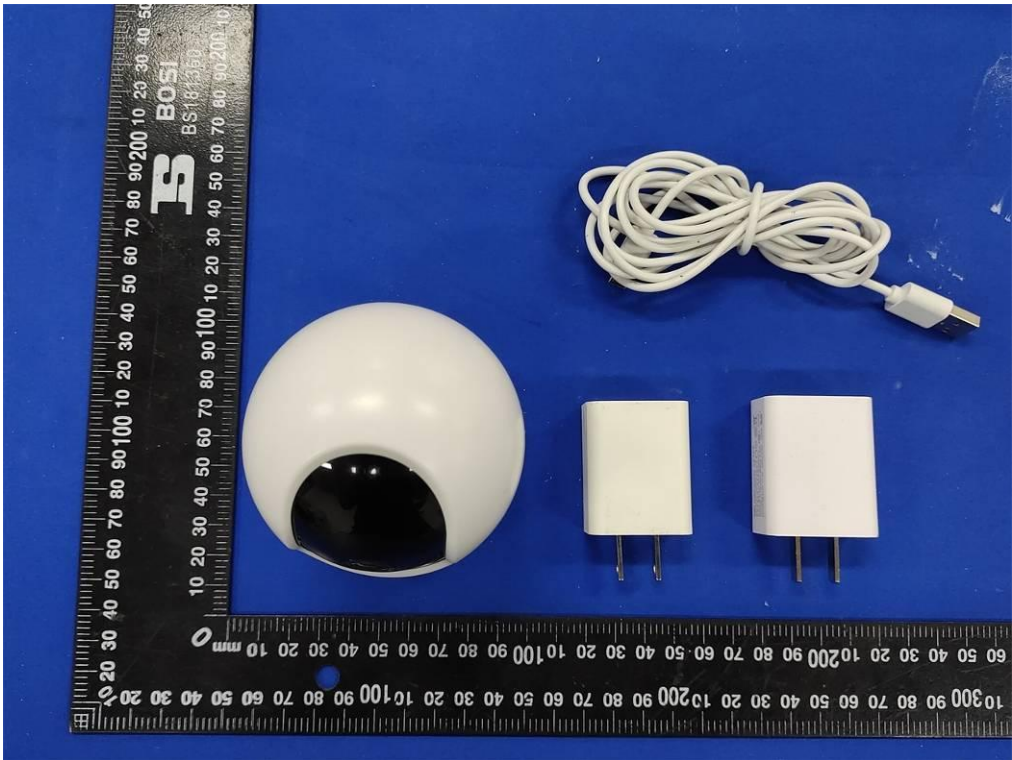


Fig. 1

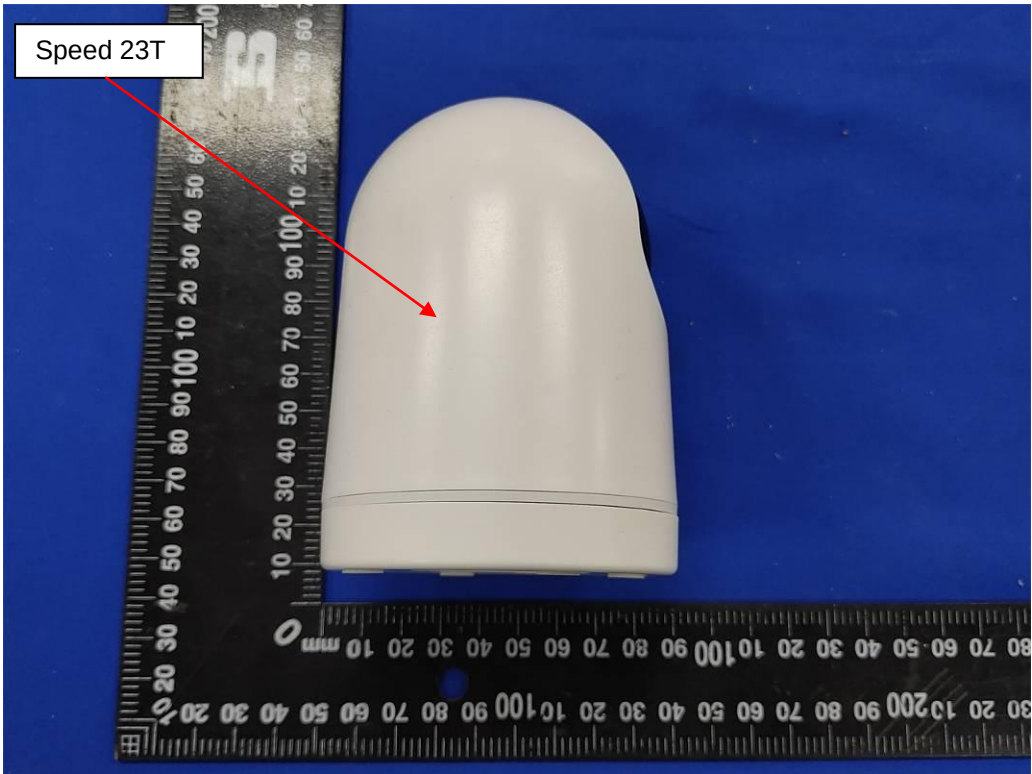


Fig. 2





Fig. 3



Fig. 4



Fig. 5

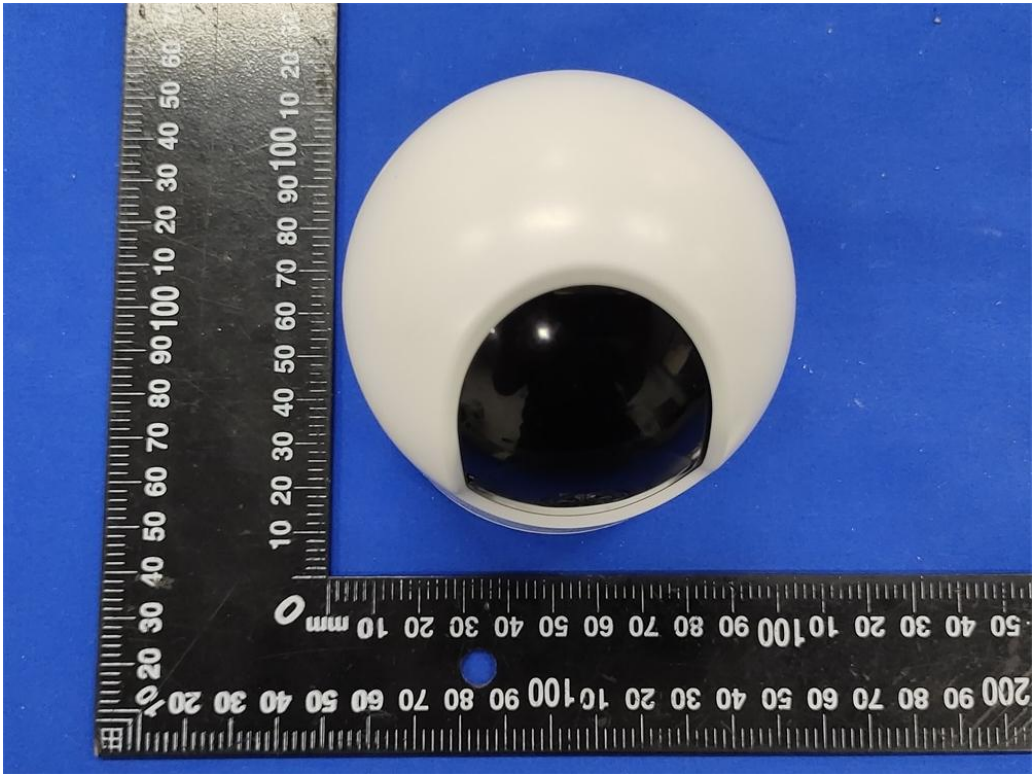


Fig. 6



Fig. 7



Fig. 8





Fig. 9



Fig. 10





Fig. 11



Fig. 12



Fig. 13



Fig. 14





Fig. 15

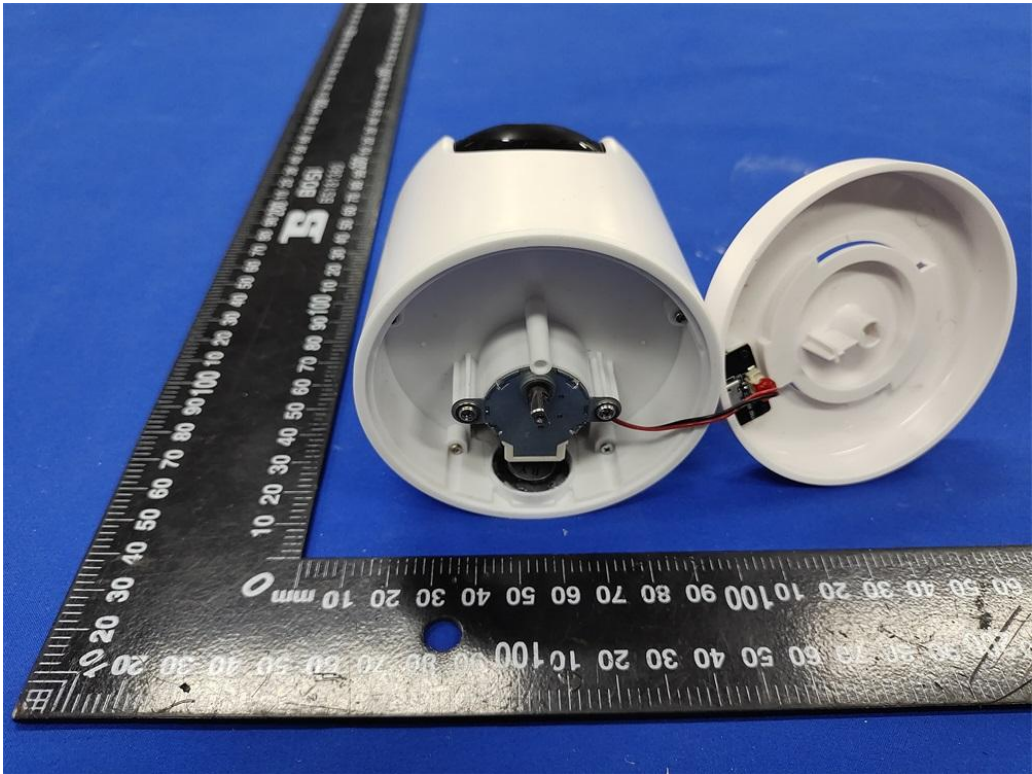


Fig. 16



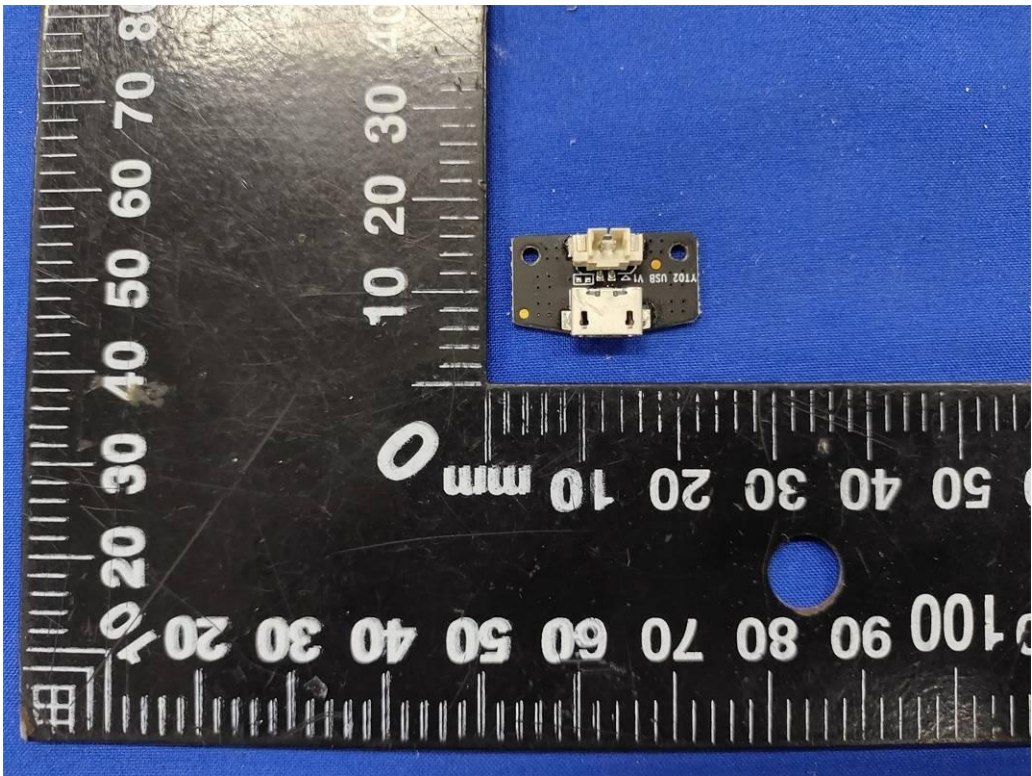


Fig. 17

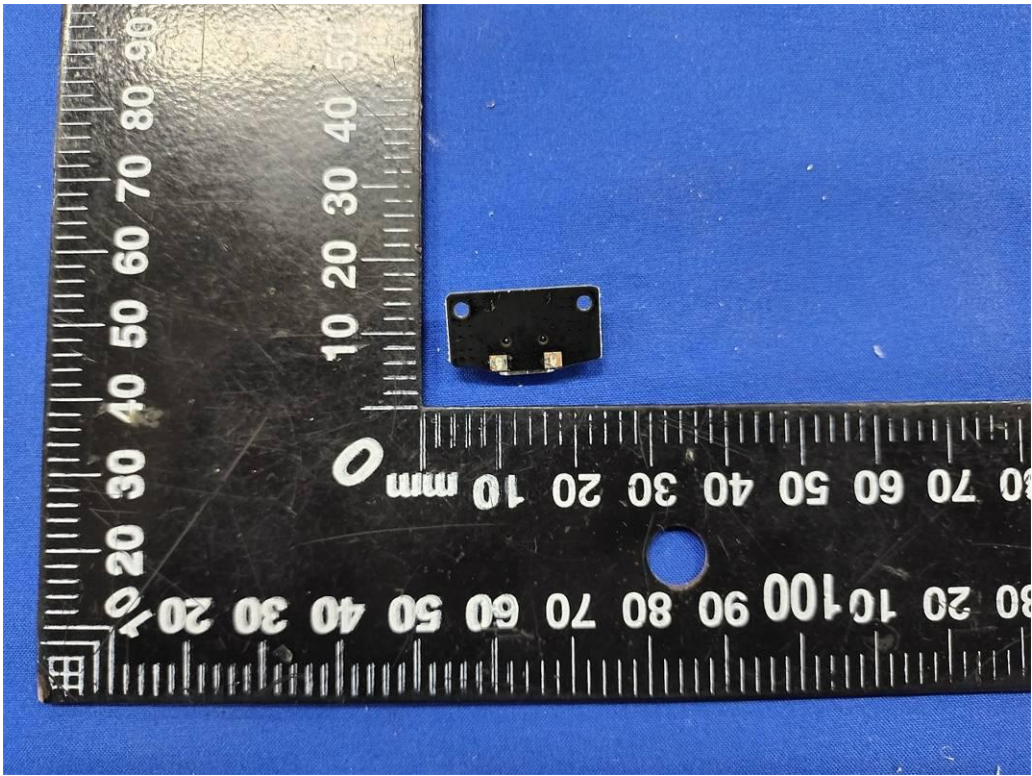


Fig. 18



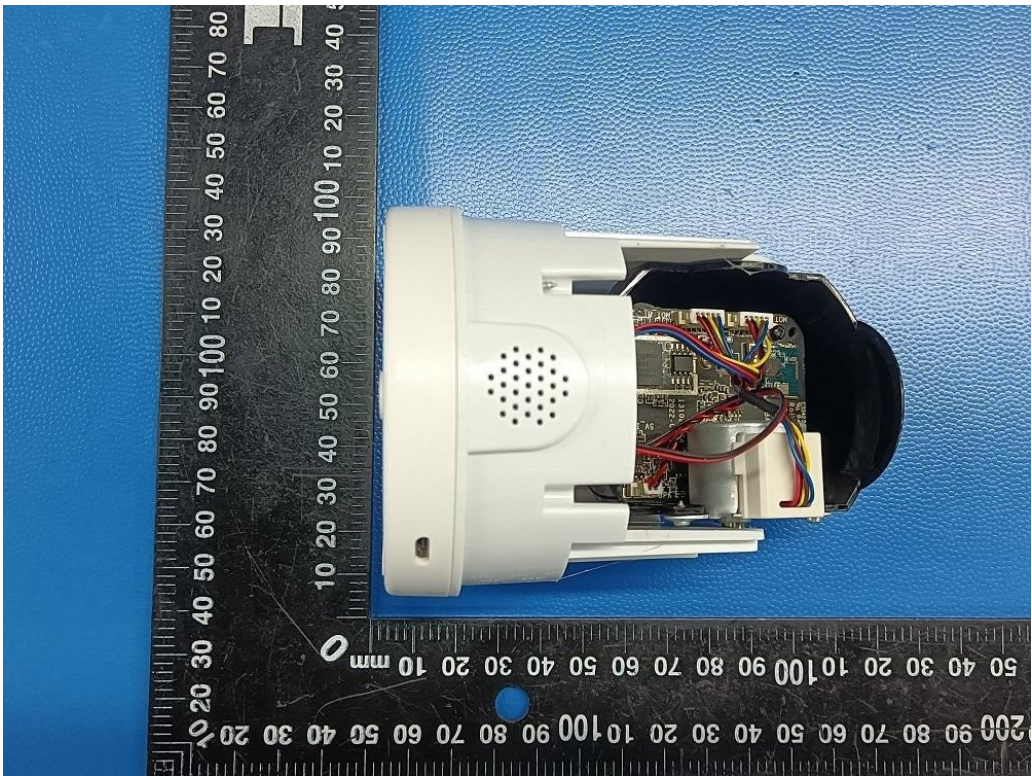


Fig. 19

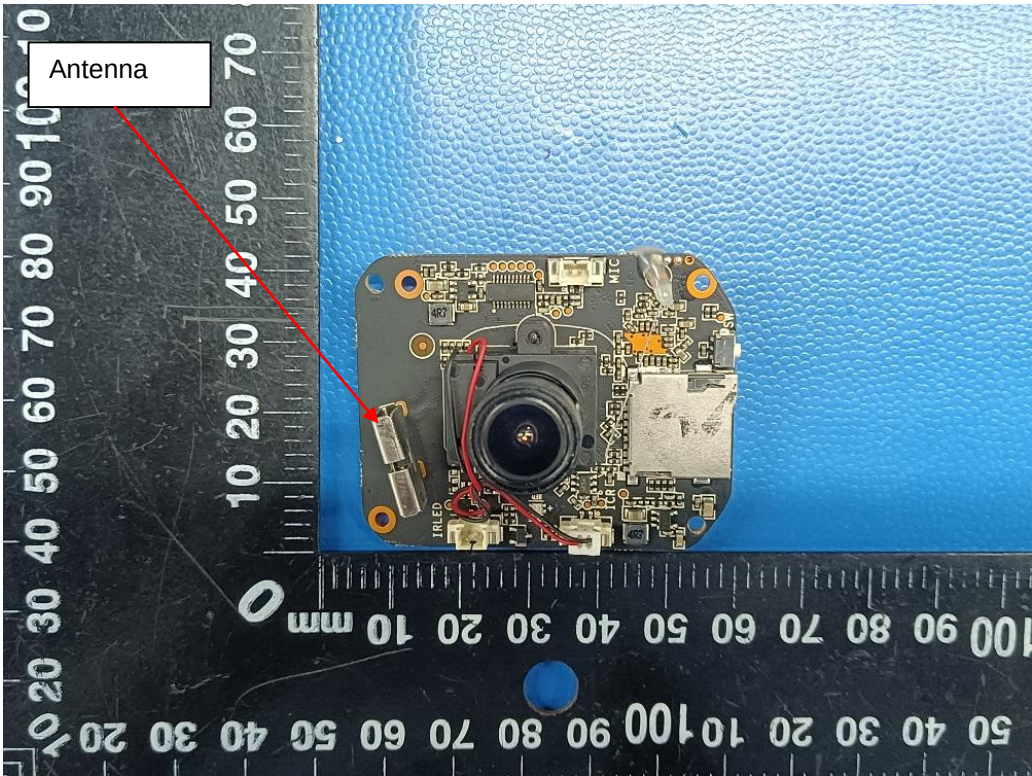


Fig. 20



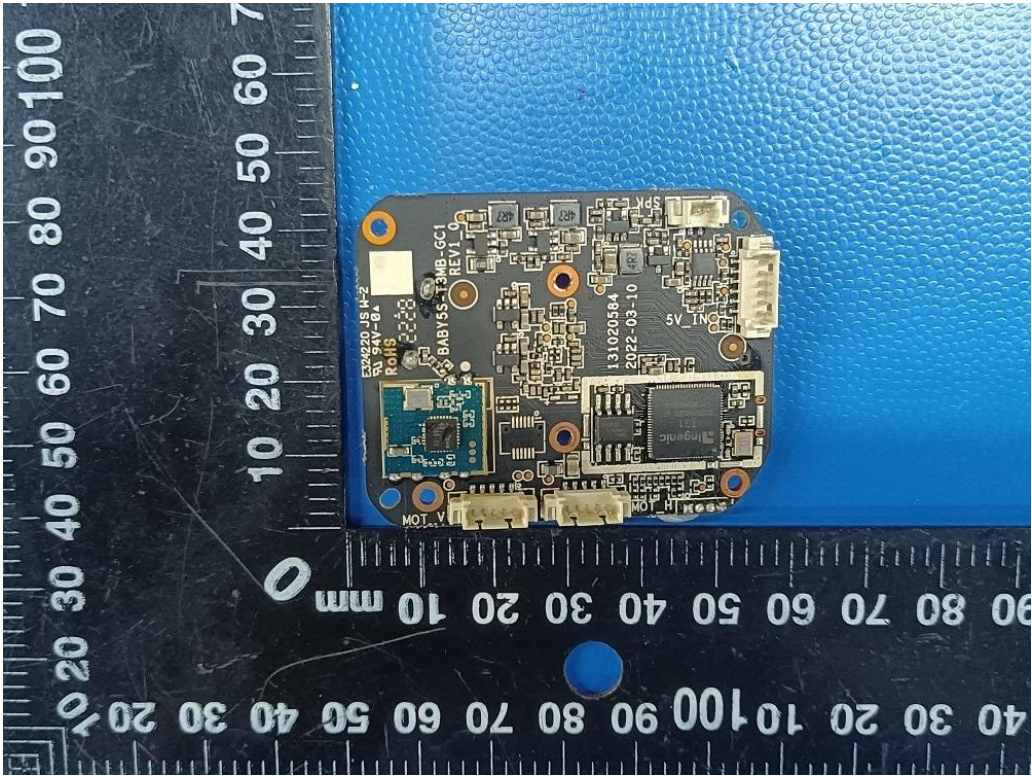


Fig. 21

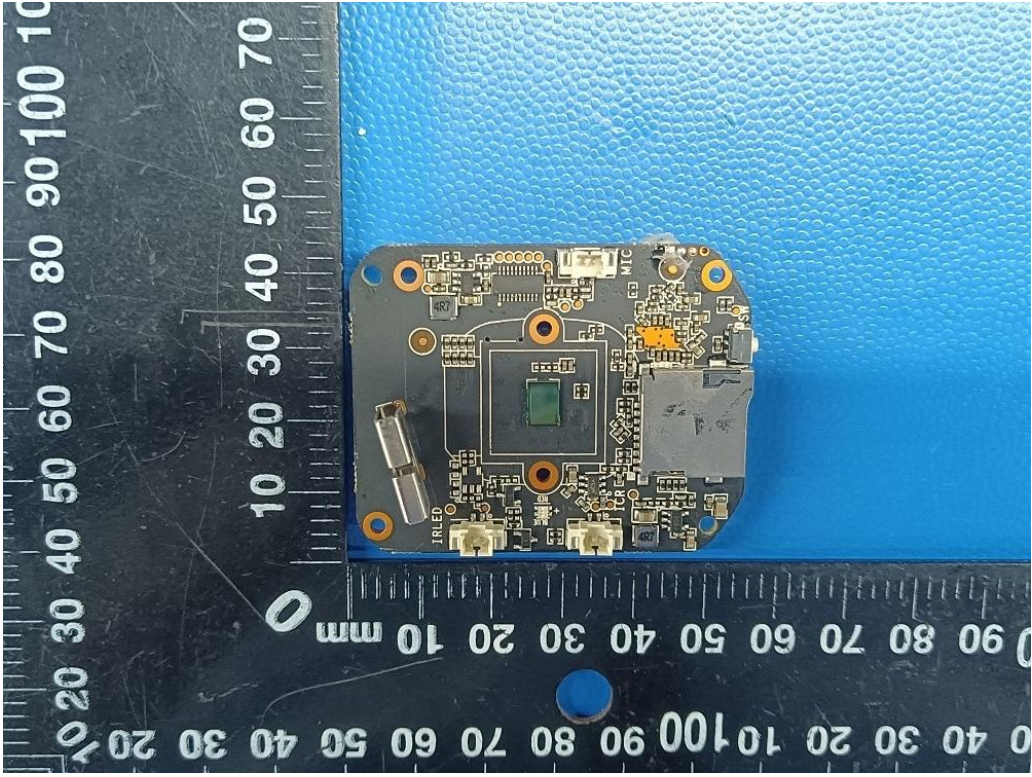


Fig. 22



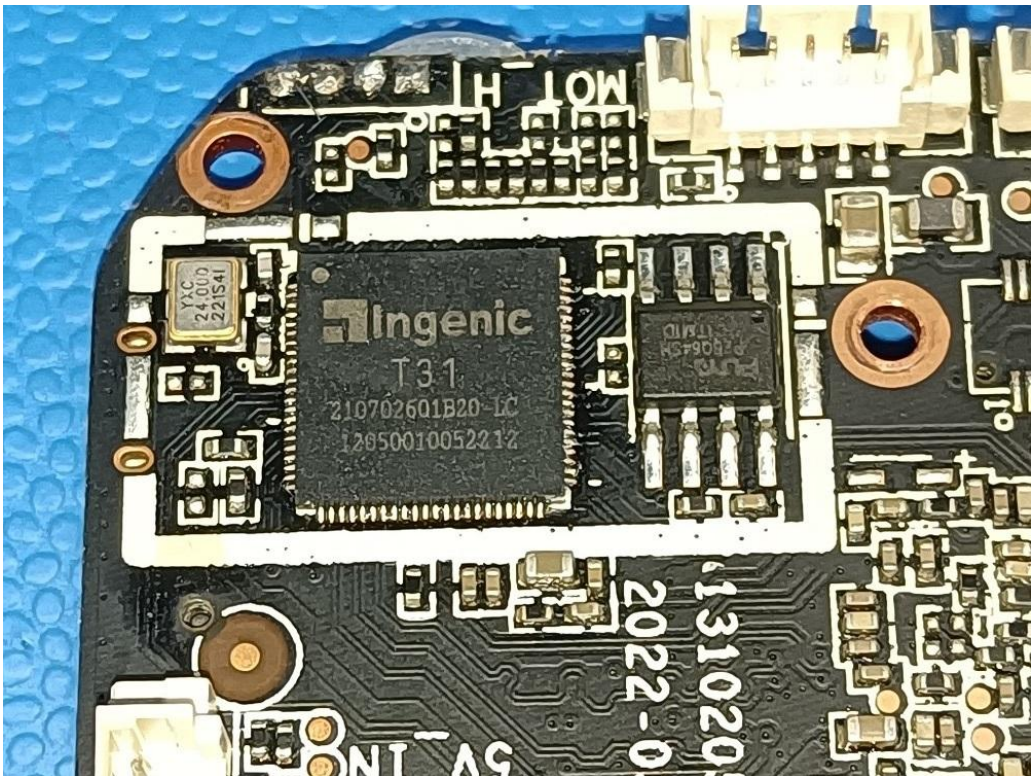


Fig. 23

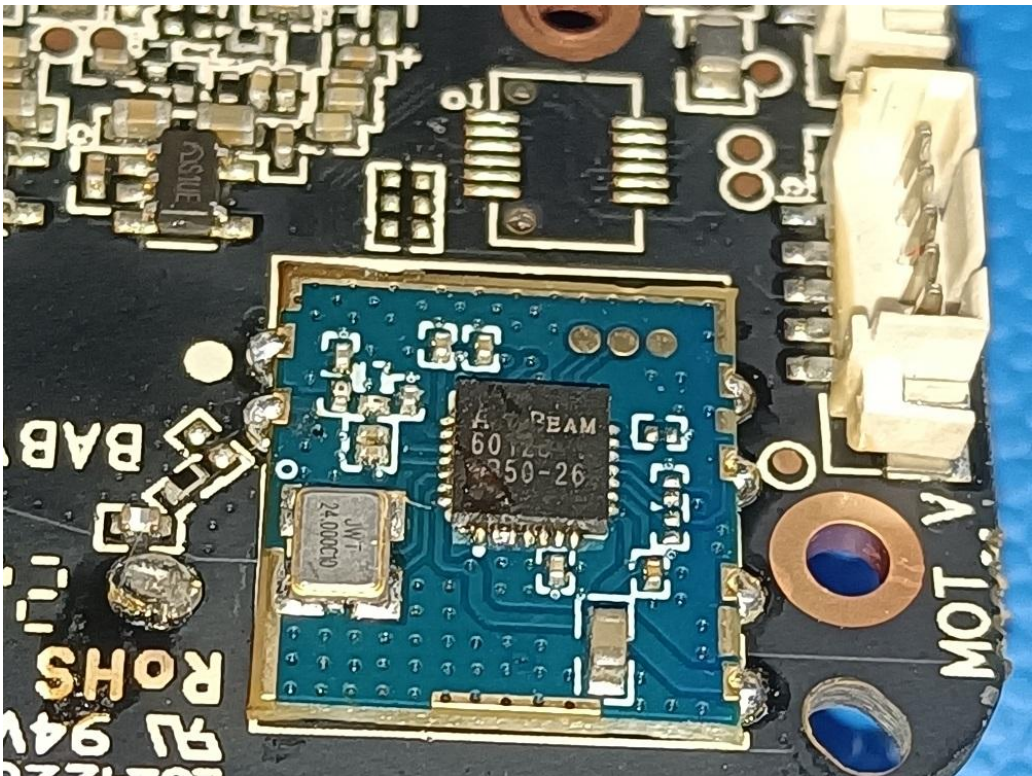


Fig. 24



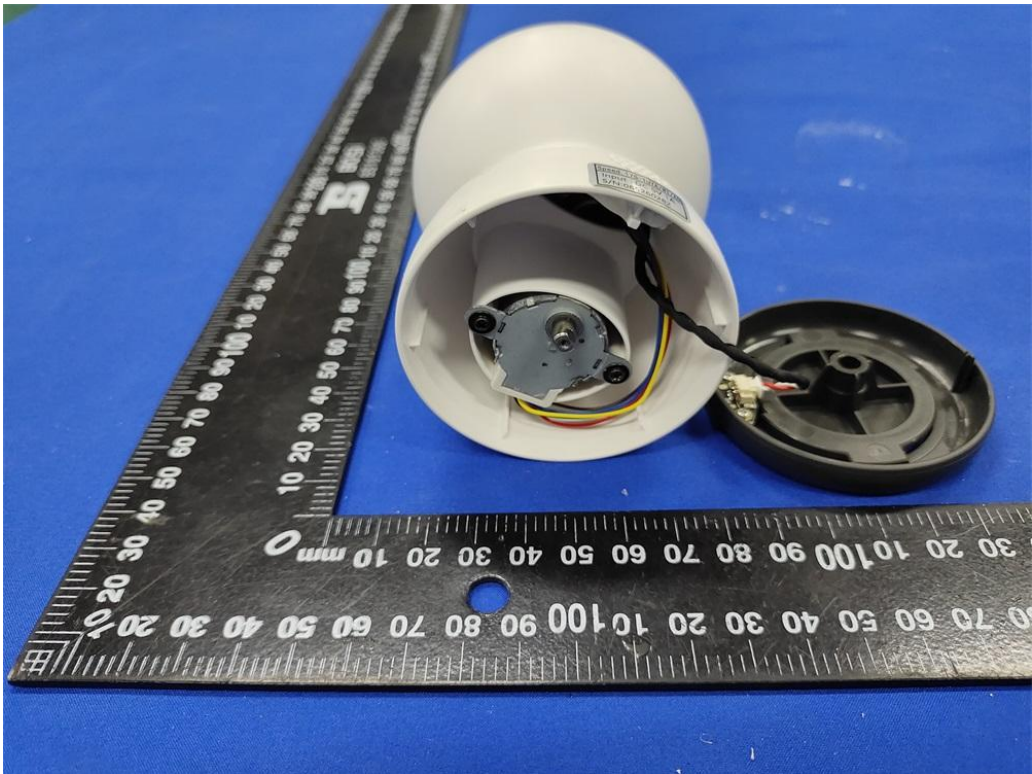


Fig. 25

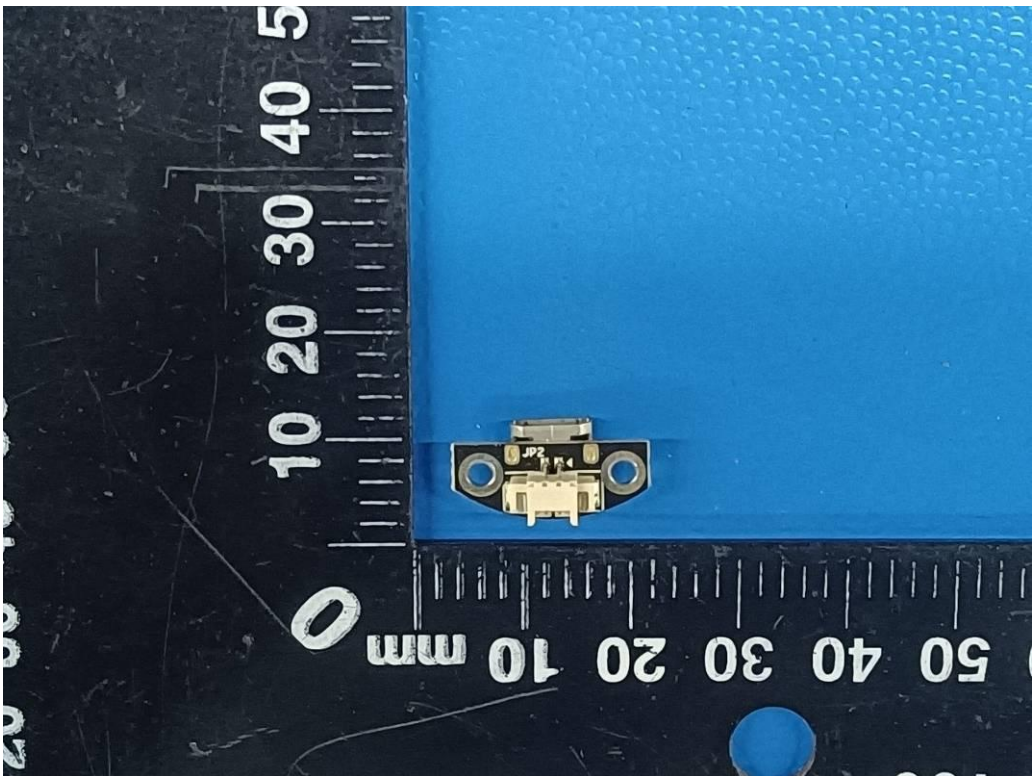


Fig. 26



Fig. 27

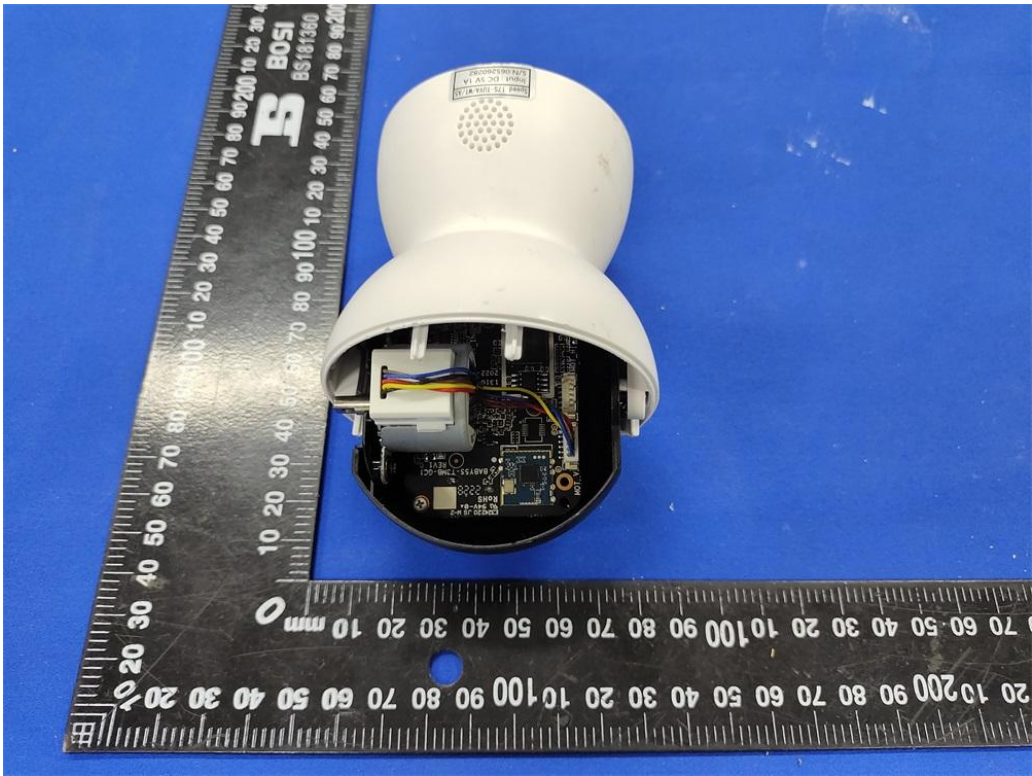


Fig. 28



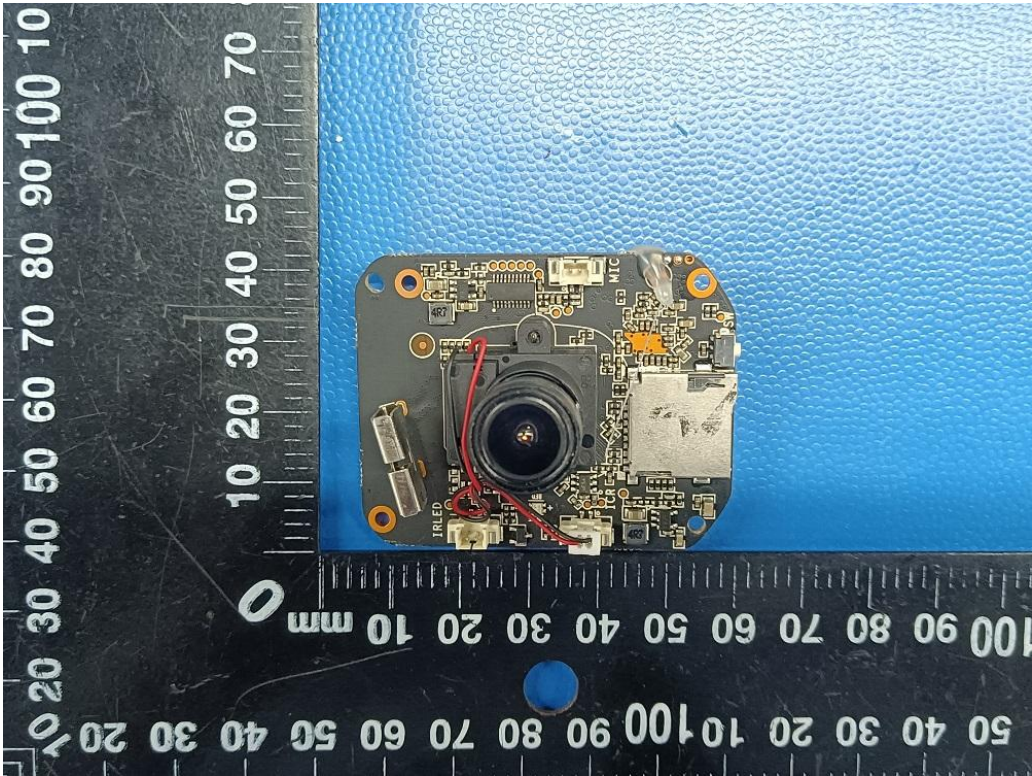


Fig. 29

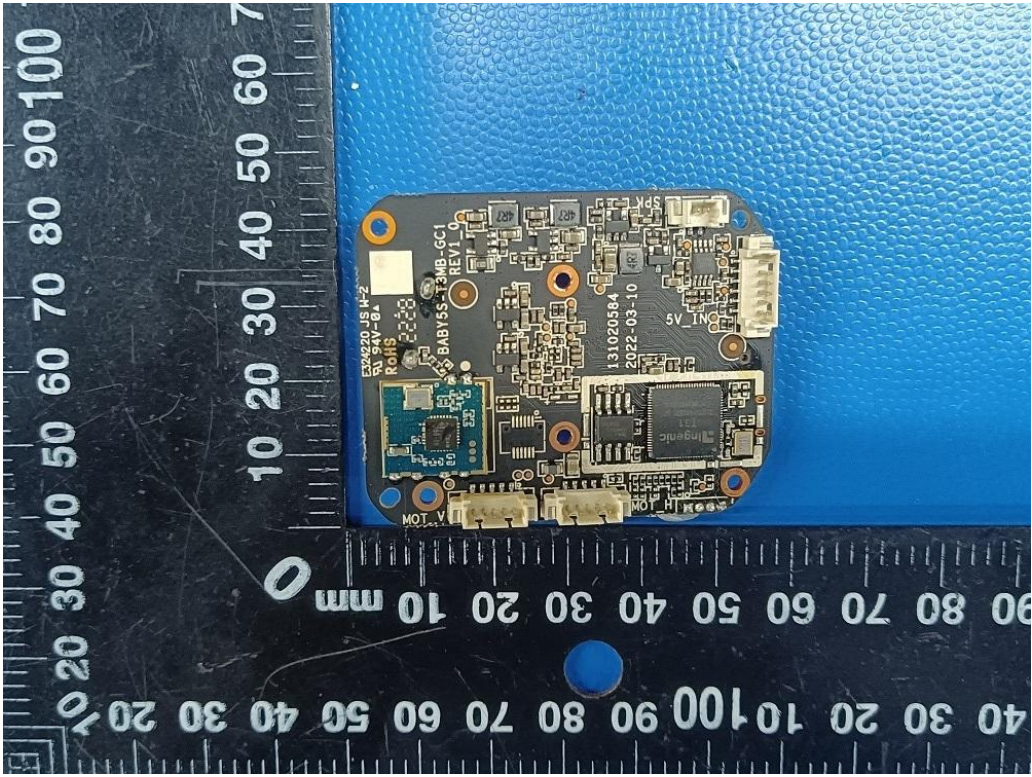


Fig. 30



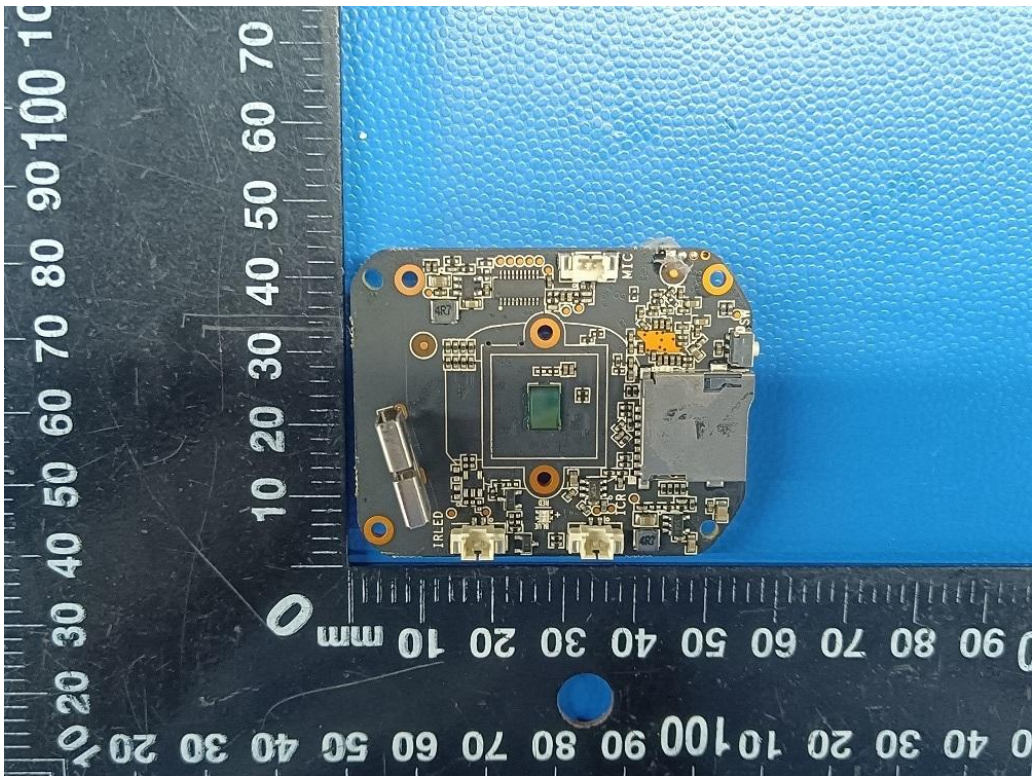


Fig. 31

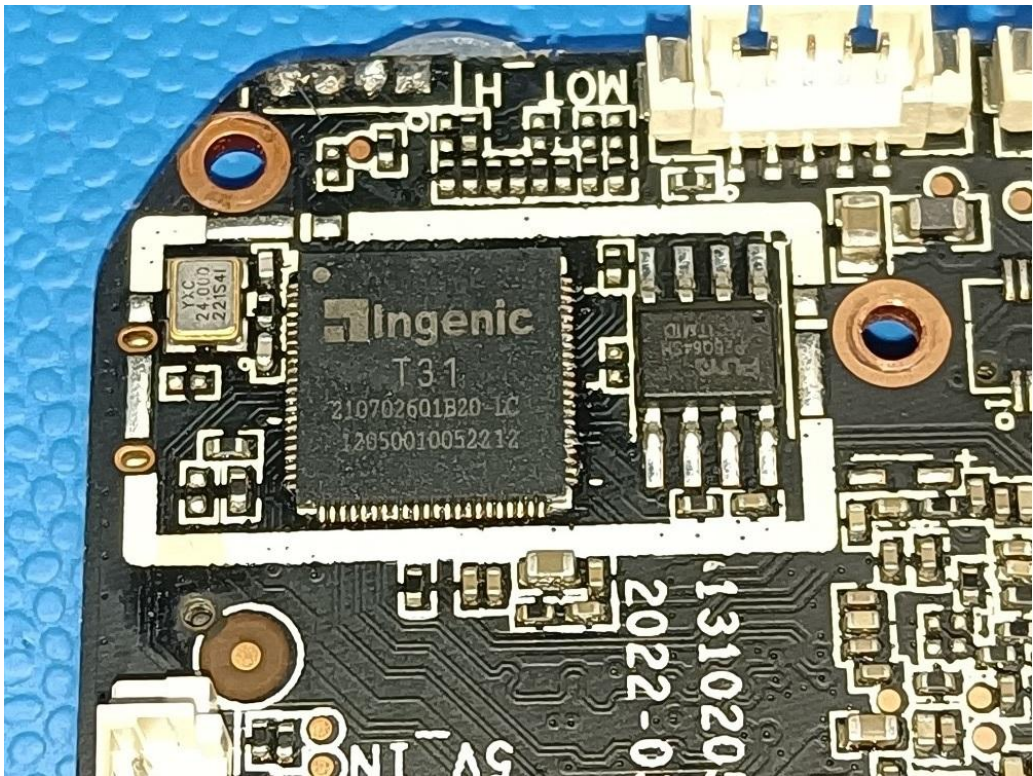


Fig. 32



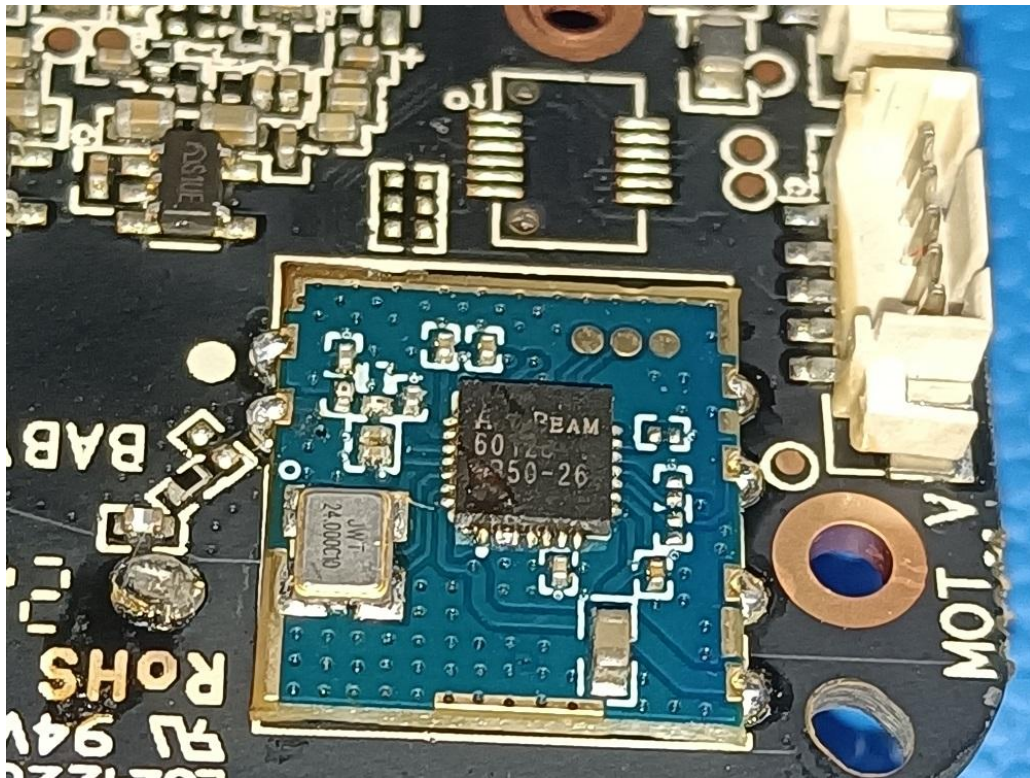


Fig. 33

.....End of Report.....