



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION**

TEST REPORT

FOR

802.11 b/g GSB MODULE

MODEL NUMBER: GSB

FCC ID: P9J-GSB

REPORT NUMBER: 05U3483-1

ISSUE DATE: MAY 25, 2005

Prepared for
**TROPOS NETWORKS
555 DEL REY AVENUE
SUNNYVALE, CA 94085
U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

**Details of specific model(s) tested and model differences shall be identified in body of report*



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
A	5/25/05	As Issued	Yan Zheng

TABLE OF CONTENTS

1. TEST RESULT DECLARATION	4
2. EUT INFORMATION.....	5
2.1. EUT DESCRIPTION.....	5
2.2. MODEL DIFFERENCE.....	5
3. TEST METHODOLOGY	6
4. FACILITIES AND ACCREDITATION	6
5. CALIBRATION AND UNCERTAINTY.....	7
5.1. MEASURING INSTRUMENT CALIBRATION.....	7
5.2. MEASUREMENT UNCERTAINTY.....	7
5.3. TEST AND MEASUREMENT EQUIPMENT.....	8
6. SETUP OF EQUIPMENT UNDER TEST	9
7. APPLICABLE LIMITS AND TEST RESULTS	11
7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND	11
7.1.1. 6 dB BANDWIDTH	11
7.1.2. 99% BANDWIDTH.....	18
7.1.3. PEAK OUTPUT POWER	25
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE.....	39
7.1.5. AVERAGE POWER.....	42
7.1.6. PEAK POWER SPECTRAL DENSITY	44
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	51
7.2. RADIATED EMISSIONS.....	64
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	64
7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH 7.4dBi OMNI ANTENNA	67
7.2.3. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH 12dBi OMNI ANTENNA	85
7.2.4. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH 12dBi SECTOR ANTENNA.....	103
7.2.5. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 7.4dBi OMNI ANTENNA	121
7.2.6. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 12dBi OMNI ANTENNA	125
7.2.7. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 12dBi SECTOR ANTENNA	129
7.3. POWERLINE CONDUCTED EMISSIONS	133
8. SETUP PHOTOS.....	137

1. TEST RESULT DECLARATION

COMPANY NAME: TROPOS NETWORKS
555 DEL REY AVENUE
SUNNYVALE, CA 94085, U.S.A.

EUT DESCRIPTION: 802.11b/g GSB MODULE

MODEL TESTED: GSB

DATE TESTED: OCTOBER 11 - 18, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

Tested By:



YAN ZHENG
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



CHIN PANG, DAVID GARCIA, NEELESH RAJ
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. EUT INFORMATION

2.1. EUT DESCRIPTION

The EUT is an 802.11b/g GSB Module. The EUT was installed in the enclosure during the test.

The device has a maximum peak conducted output power as follows:

7.4 dBi Antenna

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	28.54	714.50
2412 - 2462	802.11g	27.16	520.00

9.9dBi & 12 dBi Antennas

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	23.98	250.03
2412 - 2462	802.11g	23.96	248.89

There are four antenna options for the radio, each with a maximum gain of 7.4dBi (Omni Antenna), 9.9dBi (Omni Antenna), 12dBi (Omni Antenna) and 12dBi (Sector Patch type Antenna).

2.2. MODEL DIFFERENCE

The EUT model number was changed after testing commenced. All data in this report is applicable to the model tested documented in Section 1 above.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer 20 Hz ~ 44 GHz	Agilent	E4446A	US42070220	1/13/2005
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924342	8/17/05
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	2/4/05
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/20/04
RF Filter Section	HP	85420E	3705A00256	11/20/04
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/05
Line Filter	Lindgren	LMF-3489	497	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	10/13/05
AC Power Source, 10KVA	ACS	AFC-10K-AFC-2	J1568	CNR
4.6GHz HPF	MiLCROWAVE	4570-9SS	3	CNR
Peak / Average Power Sensor	Agilent	E9327A	US40440755	11/7/04
10dB Attenuator	MCE/WEINSCHEL	56-10	K6158	CNR

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	PP10L	NA	QDS-BRCM1005-D
AC Adapter	Dell	HP0Q065B83	NA	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	5m	N/A
2	Mgt	1	RJ45	Shielded	5m	Connected to Laptop

TEST SETUP

The EUT is connected to a laptop computer via an RJ45 cable during the tests. Test software exercised the radio.

SETUP DIAGRAM FOR TESTS

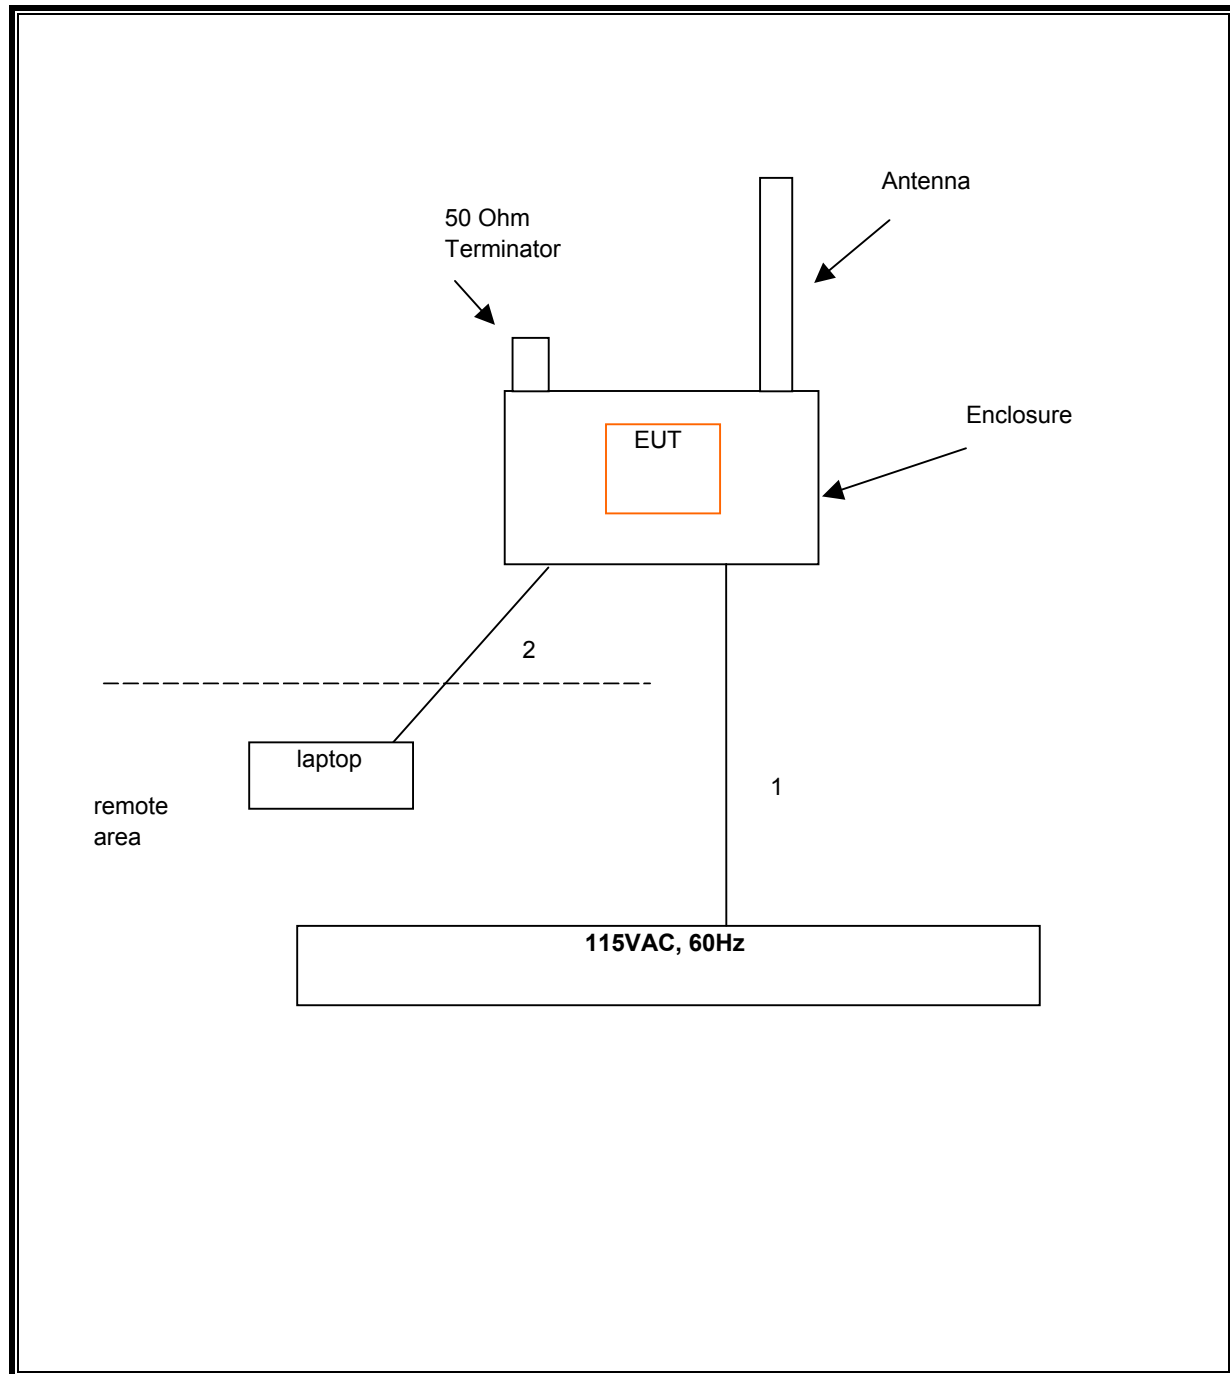

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	12030	500	11530
Middle	2437	12000	500	11500
High	2462	11570	500	11070


802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16580	500	16080
Middle	2437	16670	500	16170
High	2462	16500	500	16000


6 DB BANDWIDTH (802.11b MODE)

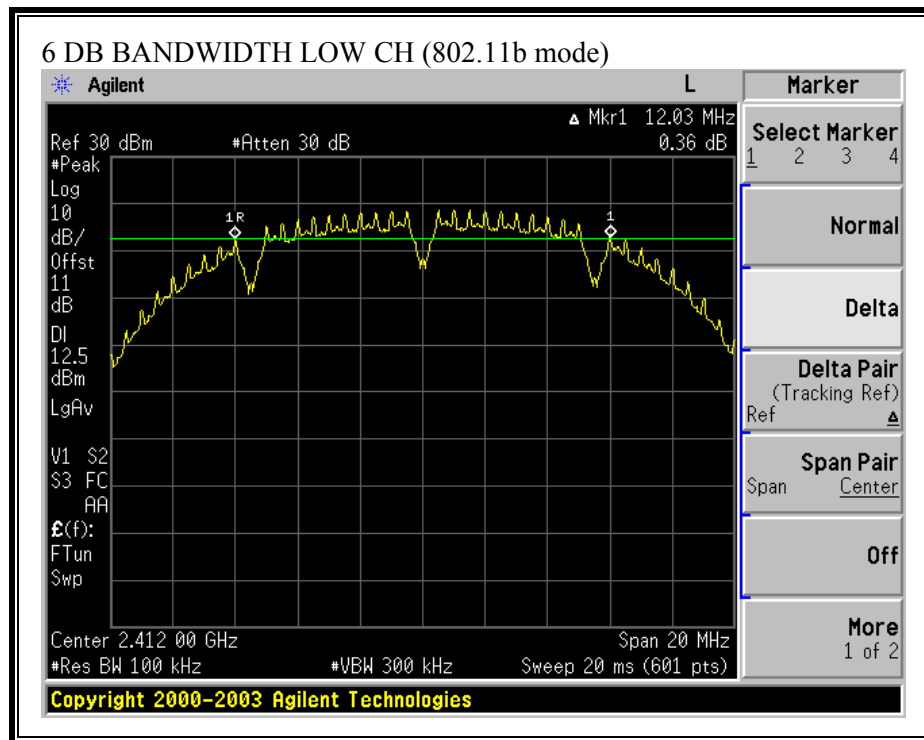


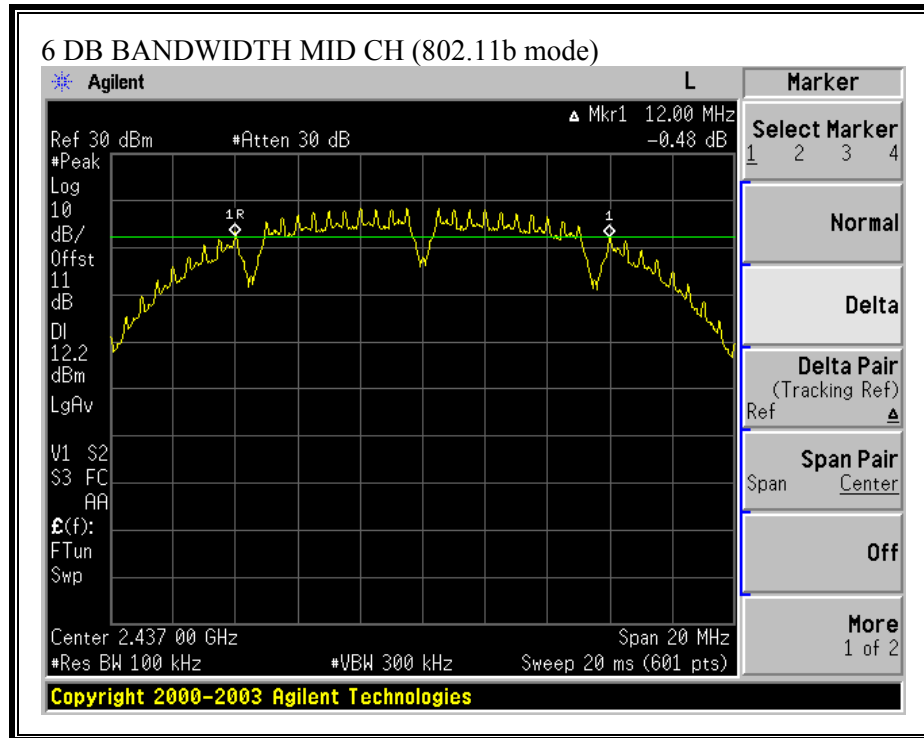


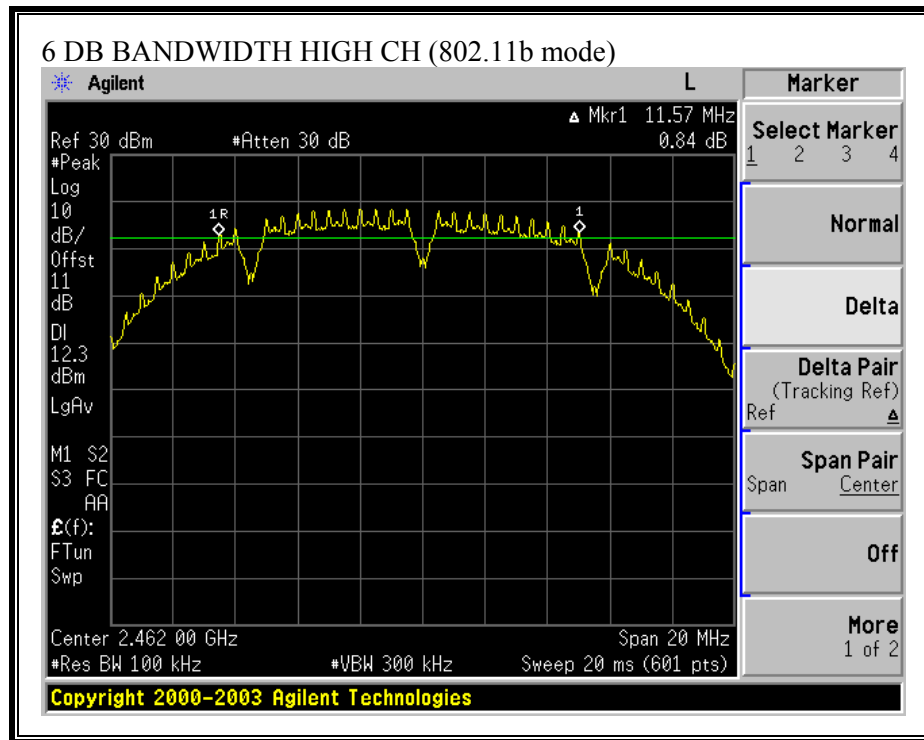

6 DB BANDWIDTH (802.11g MODE)

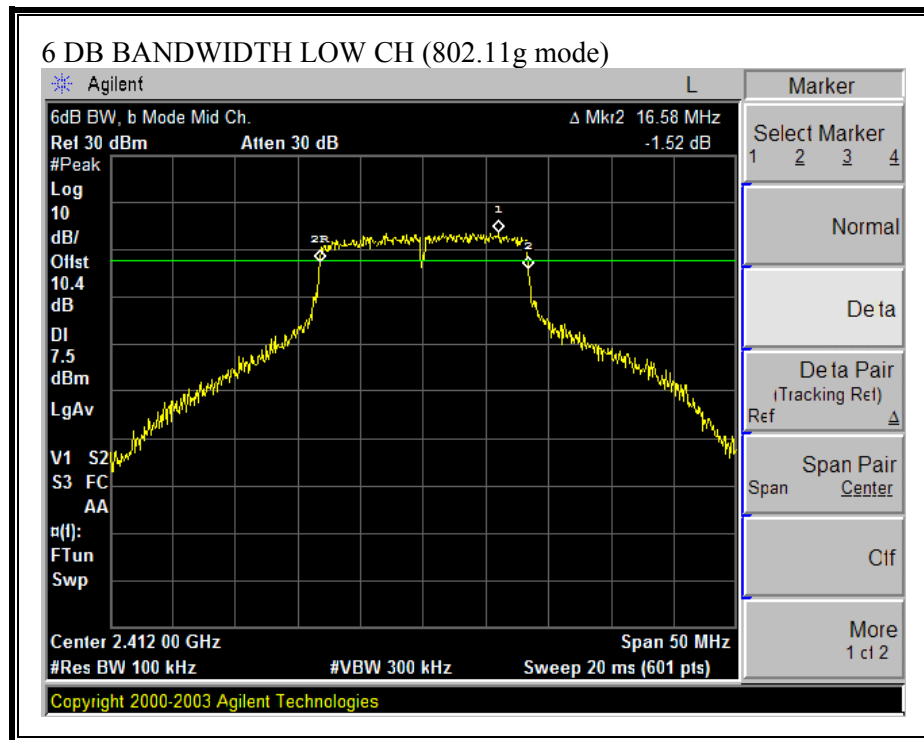

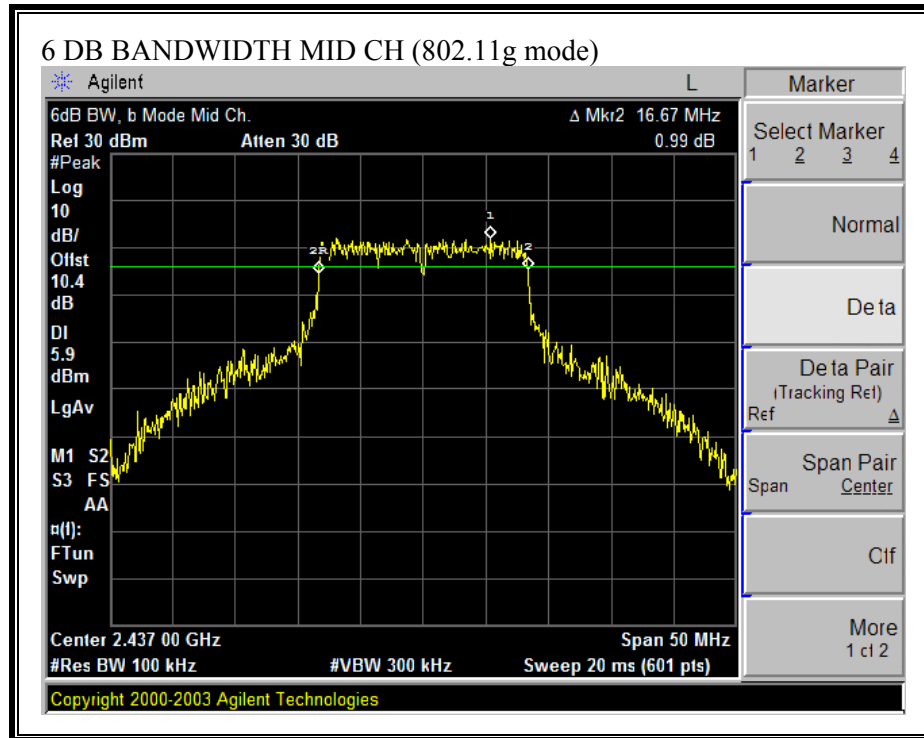

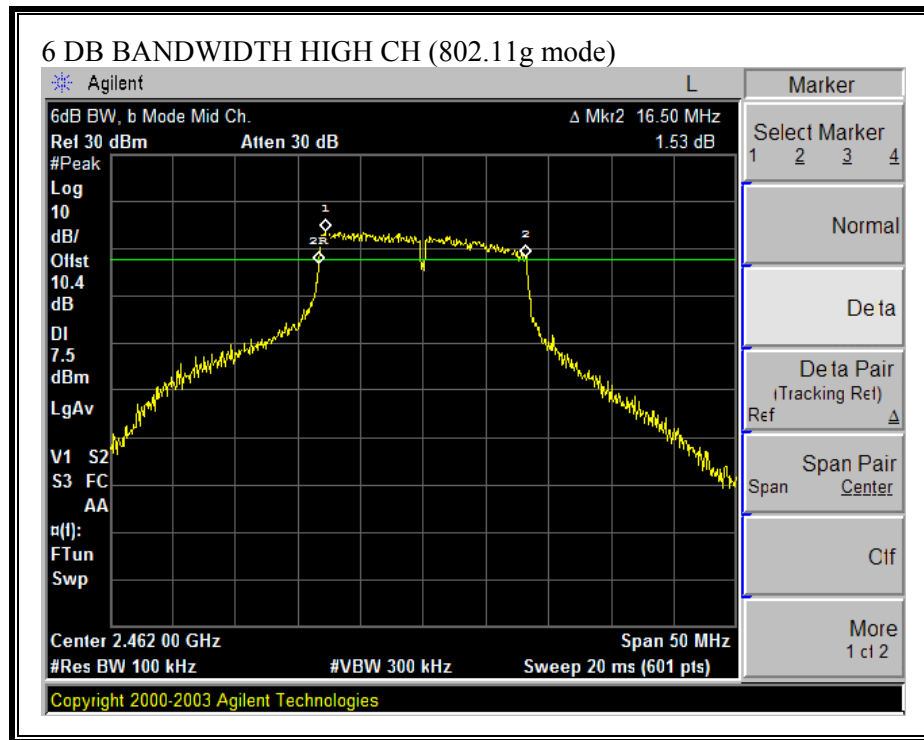

7.1.2. 99% BANDWIDTH

LIMIT

None: for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.5124
Middle	2437	15.9130
High	2462	15.5645


802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.4704
Middle	2437	16.5498
High	2462	16.4743


99% BANDWIDTH (802.11b MODE)

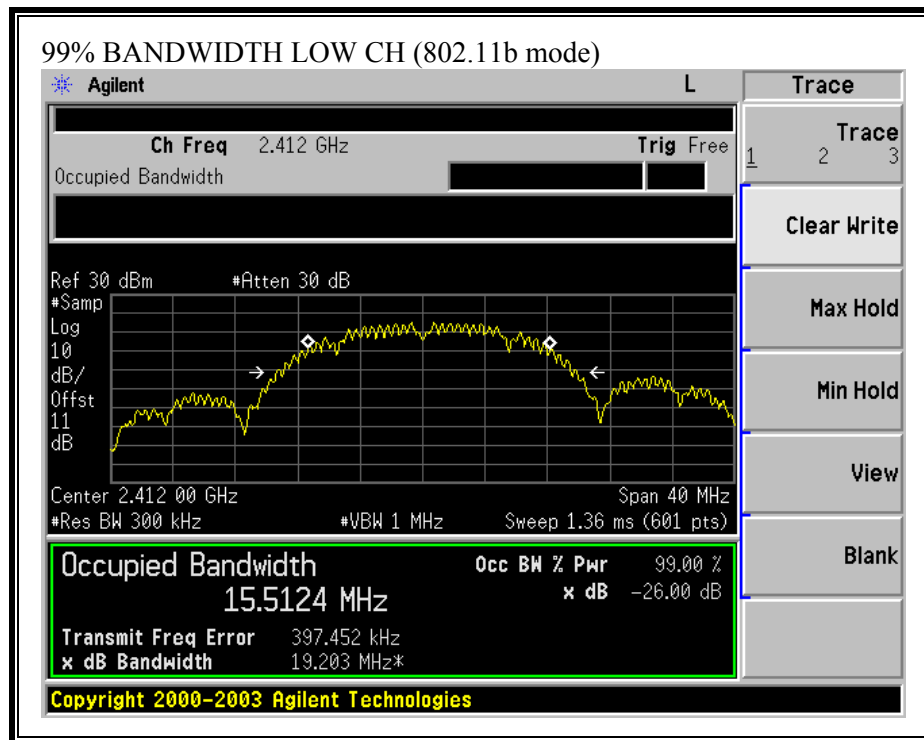


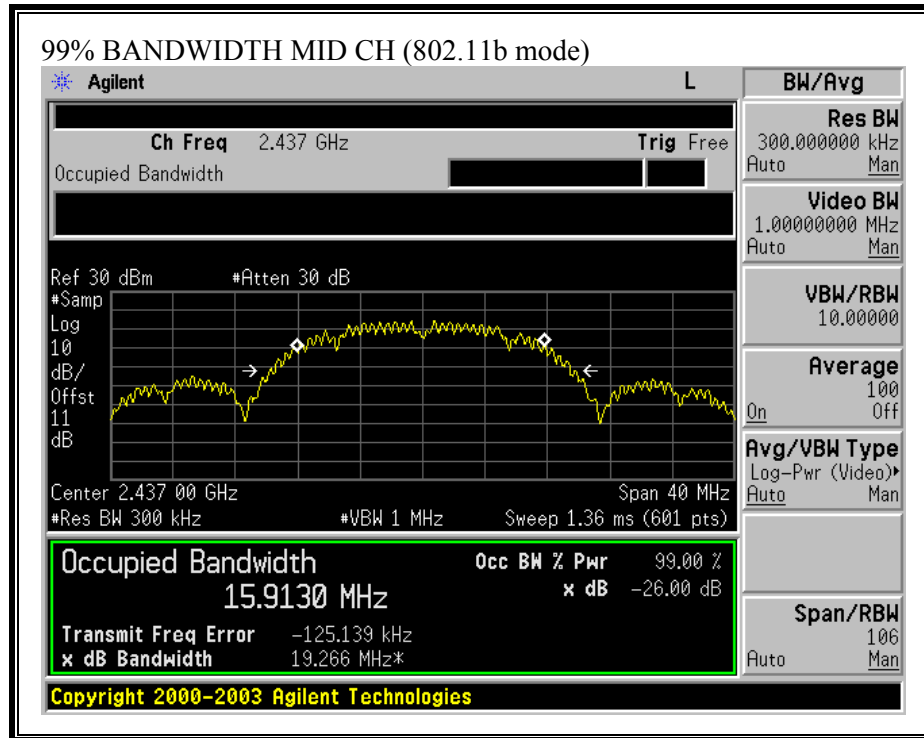


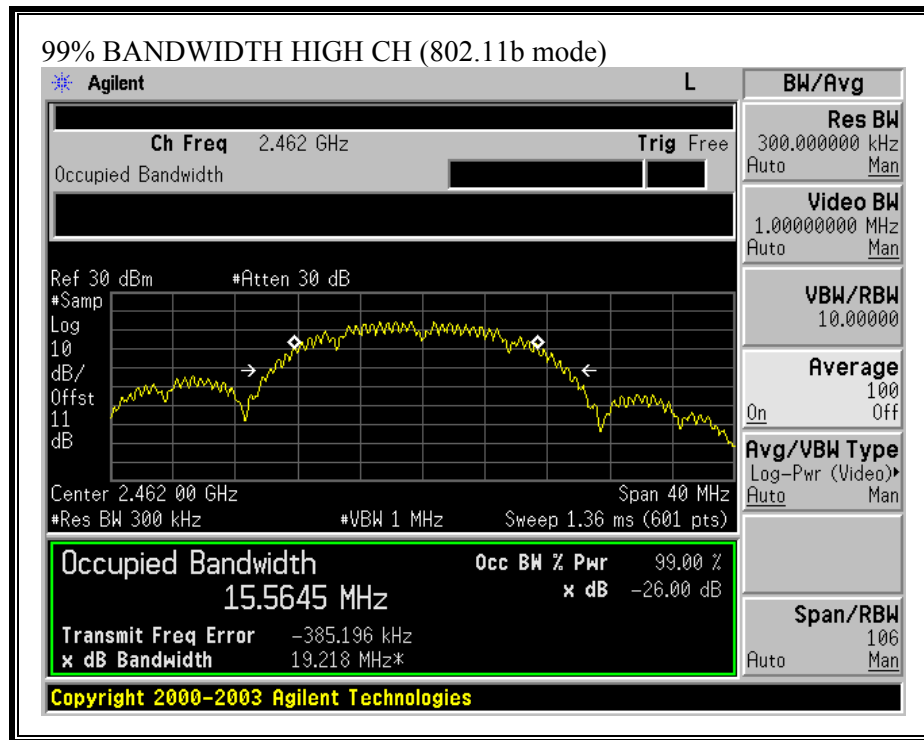

99% BANDWIDTH (802.11g MODE)

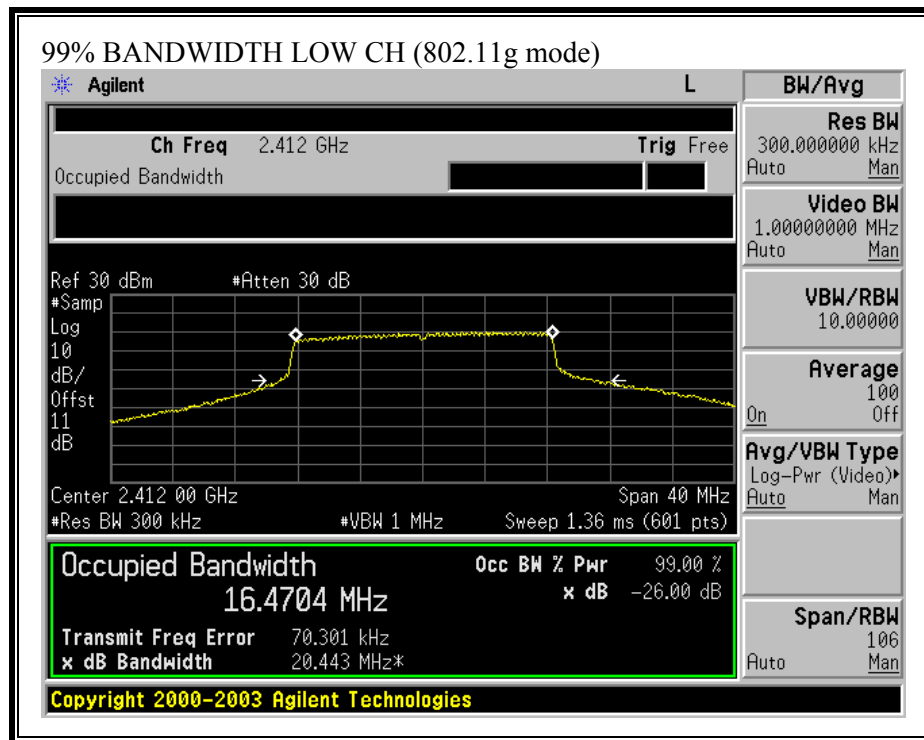



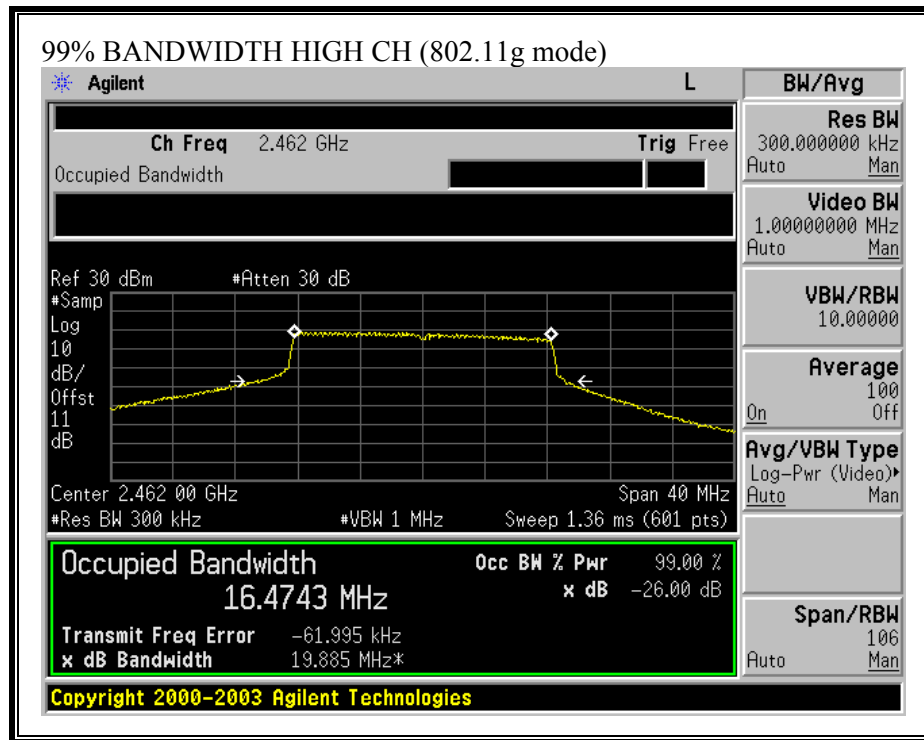

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator should not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(4) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

This is not fixed, point-to-point operation system. Therefore, for the maximum antenna gain of 7.4dBi, the limit is 28.6dBm; and for the maximum antenna gain of 12dBi, the limit is 24dBm.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 26dB bandwidth.

RESULTS

No non-compliance noted:

For 7.4dBi Antenna

802.11b Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	28.54	28.6	-0.06
Middle	2437	28.15	28.6	-0.45
High	2462	28.39	28.6	-0.21

802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	27.16	28.6	-1.44
Middle	2437	26.69	28.6	-1.91
High	2462	26.66	28.6	-1.94

For 9.9dBi & 12dBi Antennas

802.11b Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	23.98	24	-0.02
Middle	2437	23.98	24	-0.02
High	2462	23.76	24	-0.24


802.11g Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	23.96	24	-0.04
Middle	2437	23.95	24	-0.05
High	2462	23.85	24	-0.15

For 7.4dBi Antenna


OUTPUT POWER (802.11b MODE), 7.4dBi OMNI ANTENNA

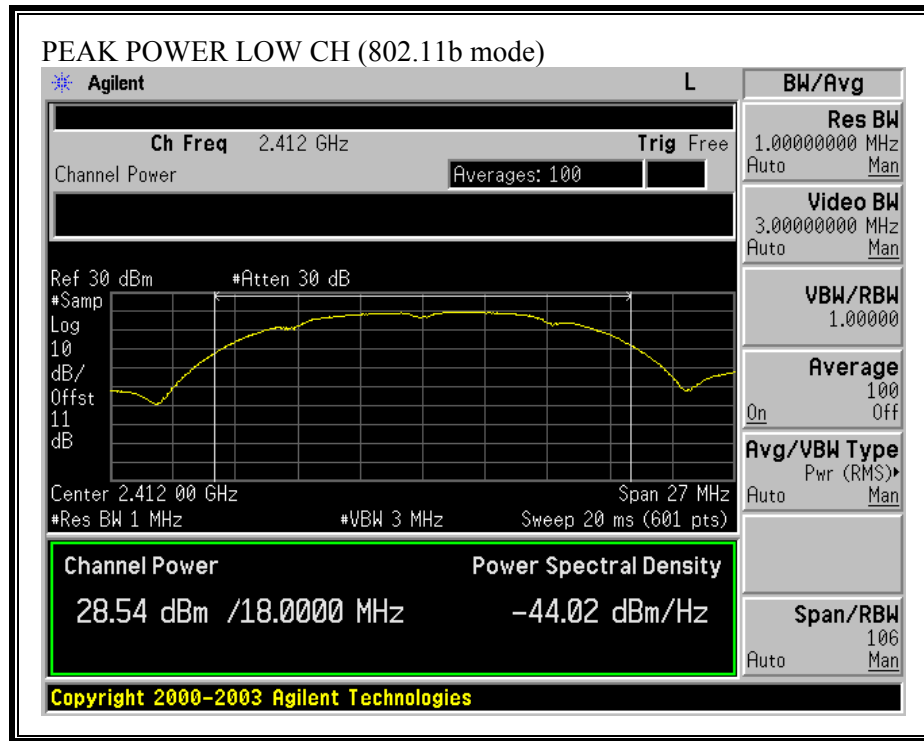


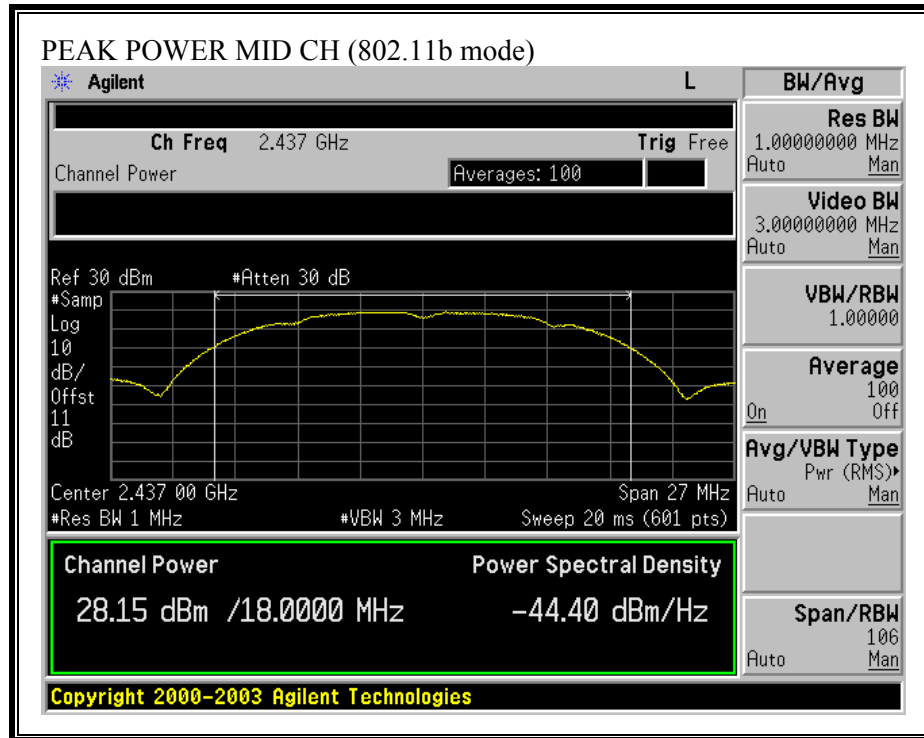


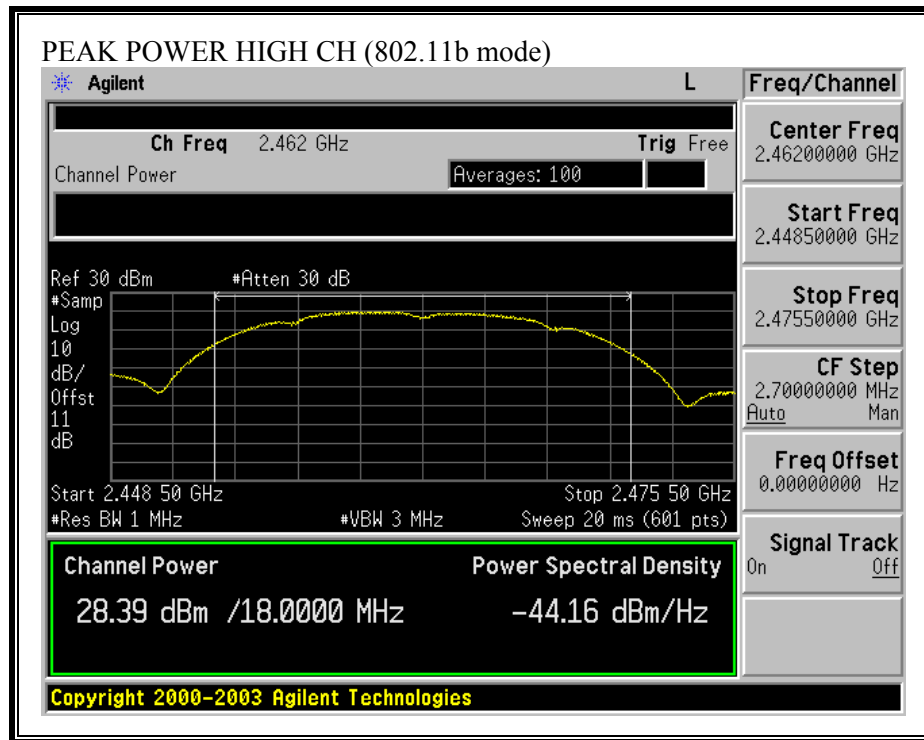

OUTPUT POWER (802.11g MODE) 7.4dBi OMNI ANTENNA

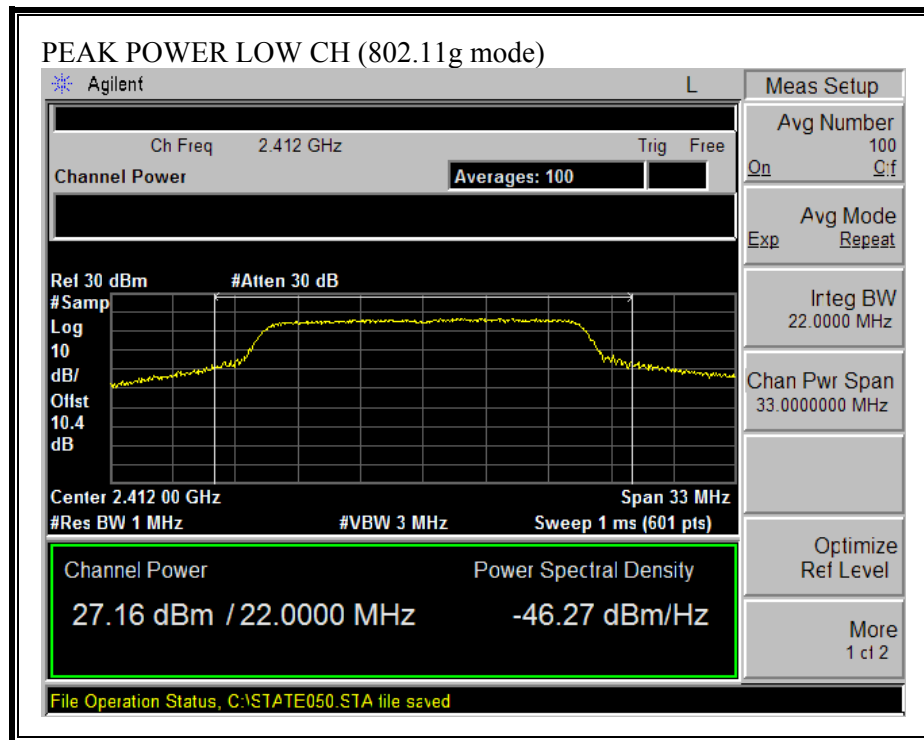


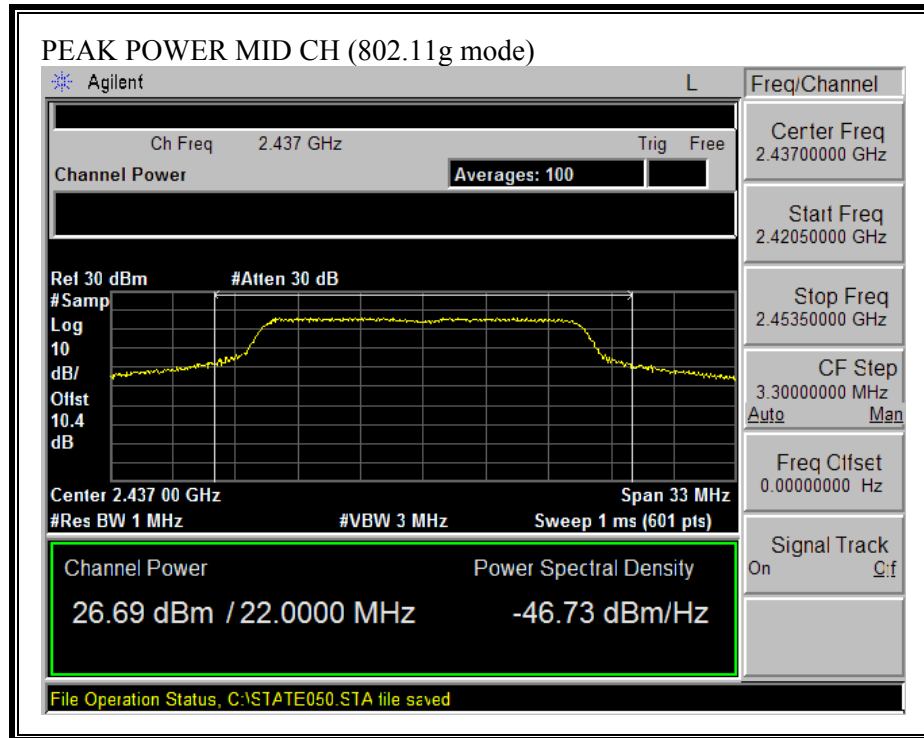


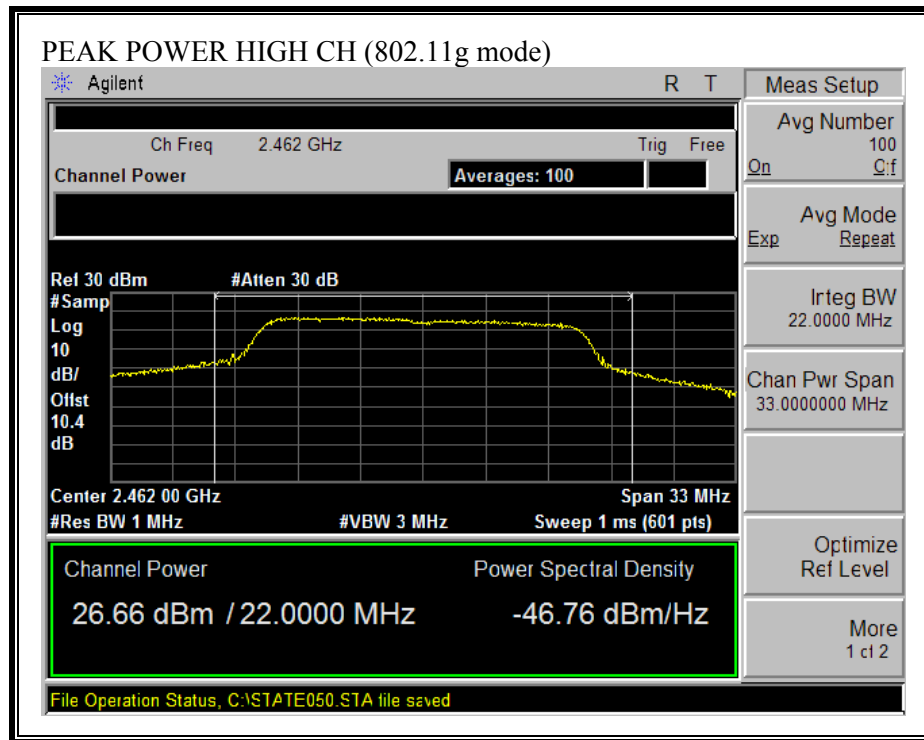


For 12dBi Antenna


OUTPUT POWER (802.11b MODE), 12dBi ANTENNA

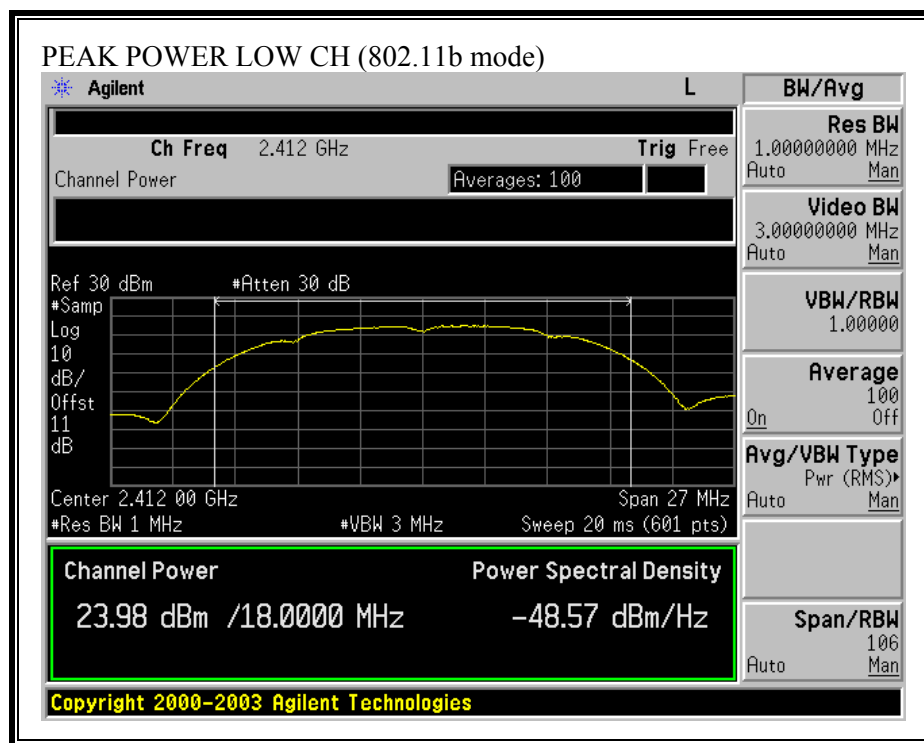


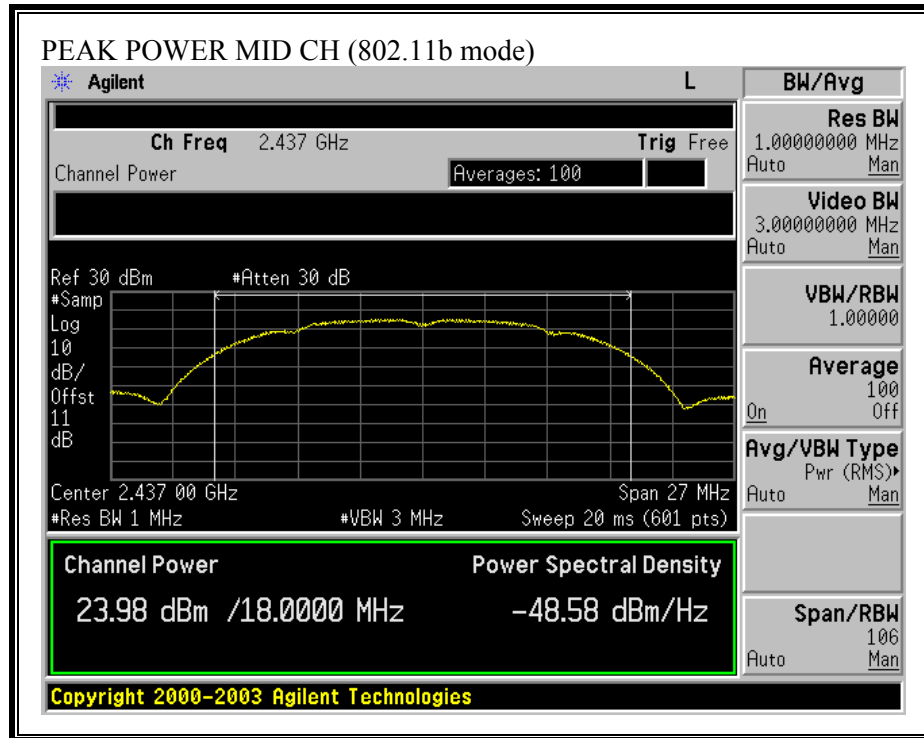


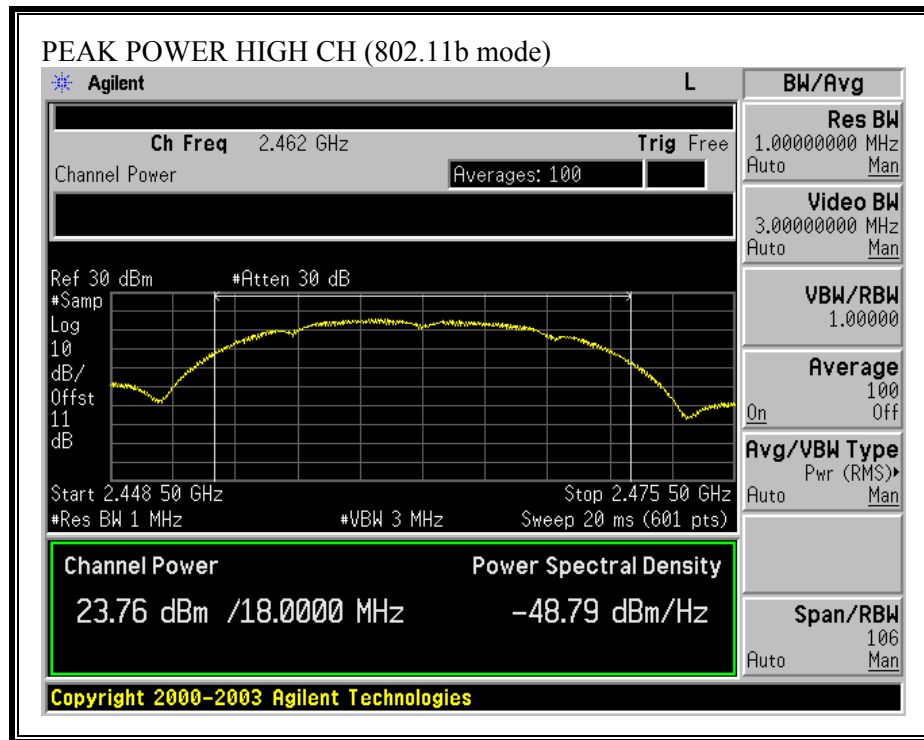

OUTPUT POWER (802.11g MODE) 12dBi ANTENNA

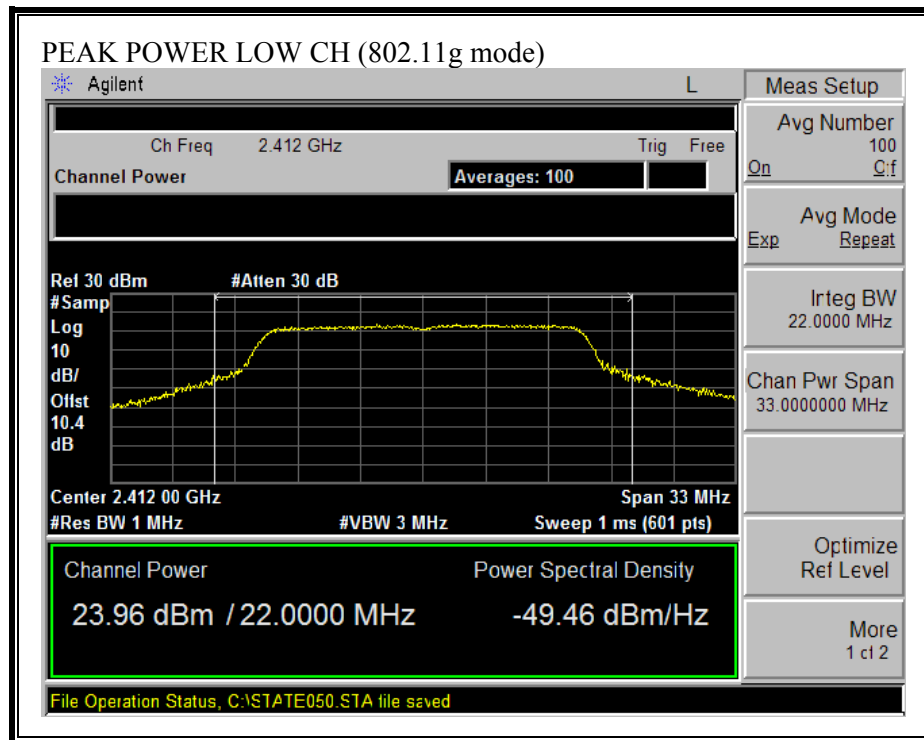

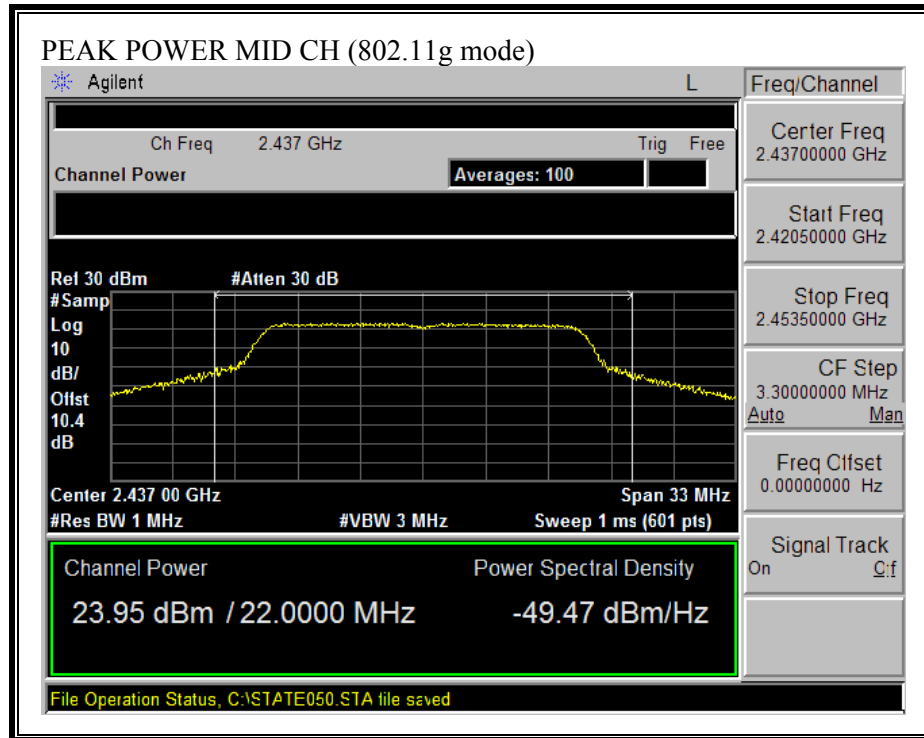

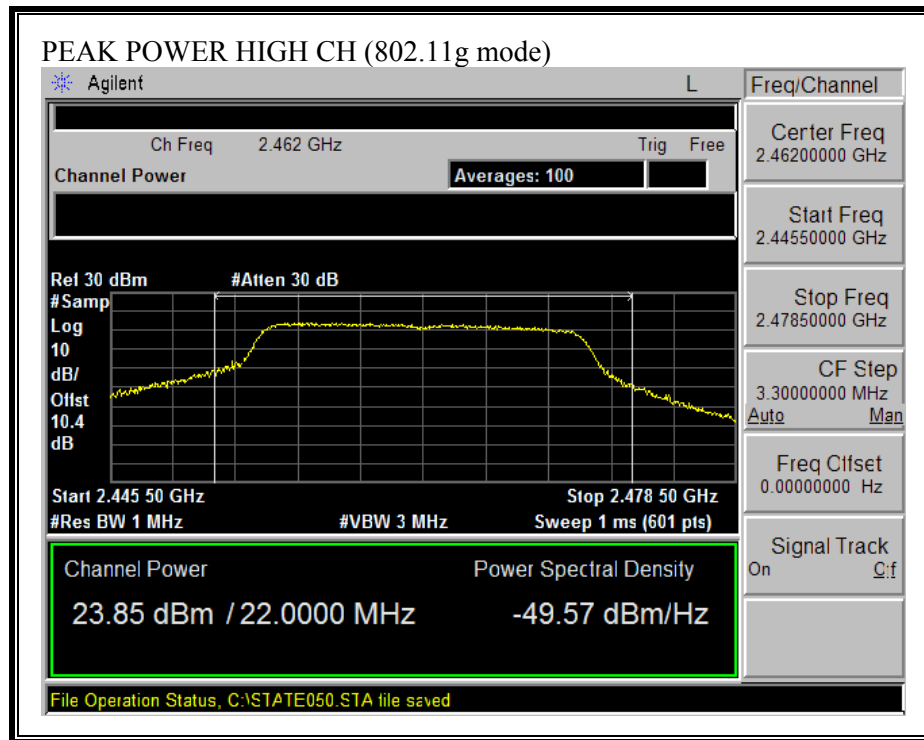

7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Equation (1) and the measured peak power is used to calculate the MPE distance.

LIMITS

From §1.1310 Table 1 (B), $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted:

7.4dBi Omni Antenna

Mode	Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	28.54	7.40	17.67
802.11g	1.0	27.16	7.40	15.07

9.9dBi & 12dBi Antennas

Mode	Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	23.98	12.00	17.75
802.11g	1.0	23.96	12.00	17.71

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None: for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10 dB (including 10 dB pad and 0.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

For 7.4dBi Antenna

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	28.50
Middle	2437	28.20
High	2462	28.20

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	27.20
Middle	2437	26.70
High	2462	26.70

For 9.9dBi & 12dBi Antennas

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	23.90
Middle	2437	23.80
High	2462	23.90

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	23.90
Middle	2437	23.90
High	2462	23.90

7.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:

The test was performed with the worst-case, which is higher power level (the power was applied to 7.4dBi antenna).


802.11b Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	4.74	8	-3.26
Middle	2437	4.78	8	-3.22
High	2462	6.41	8	-1.59


802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	3.64	8	-4.36
Middle	2437	2.33	8	-5.67
High	2462	3.77	8	-4.23


PEAK POWER SPECTRAL DENSITY (802.11b MODE)

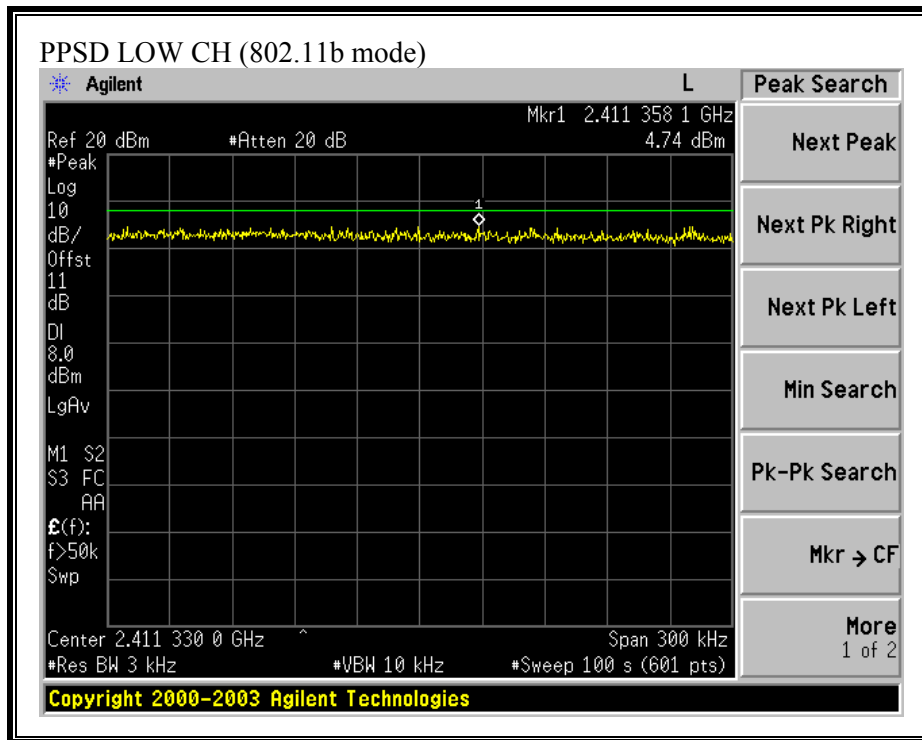


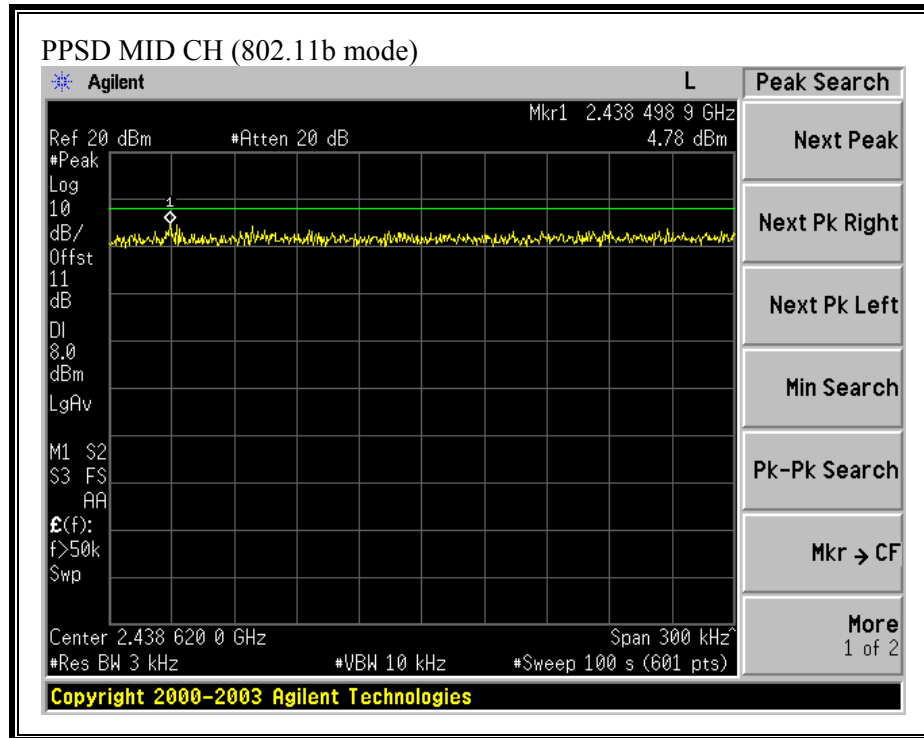


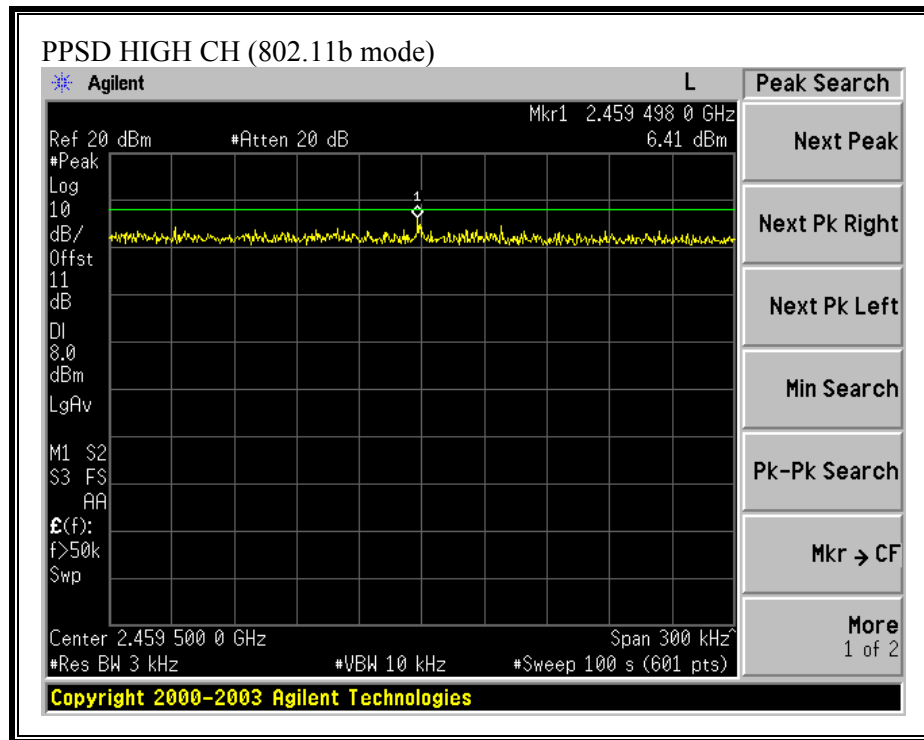

PEAK POWER SPECTRAL DENSITY (802.11g MODE)

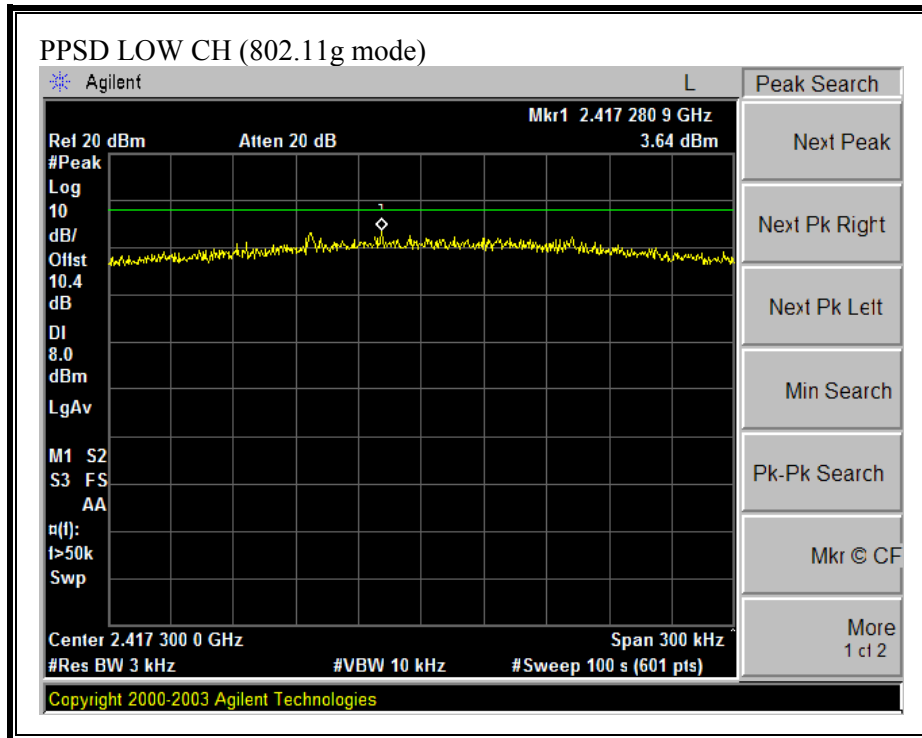

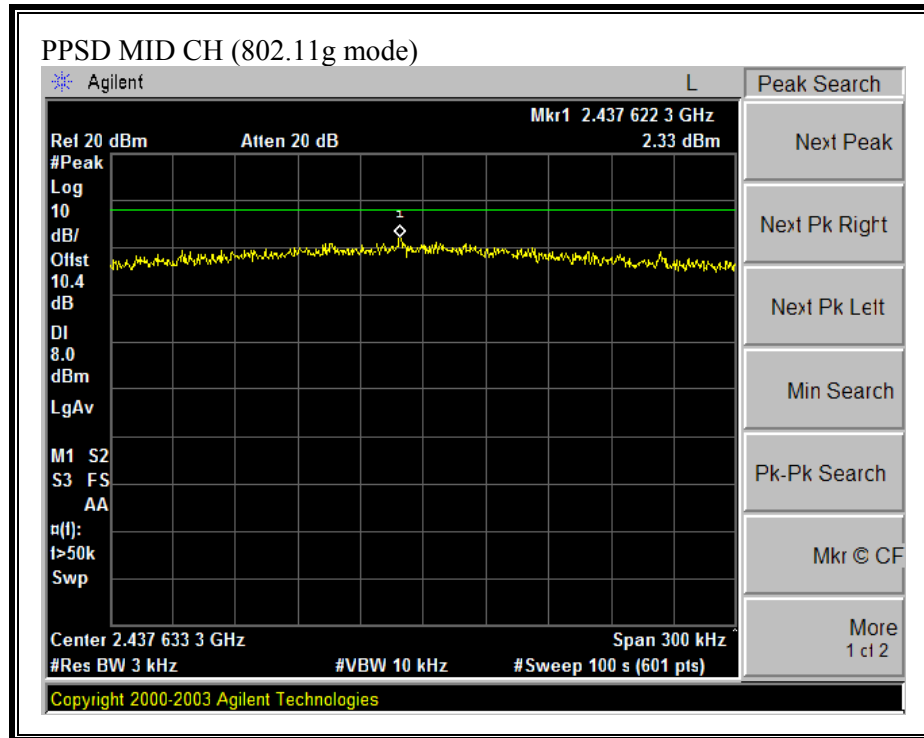

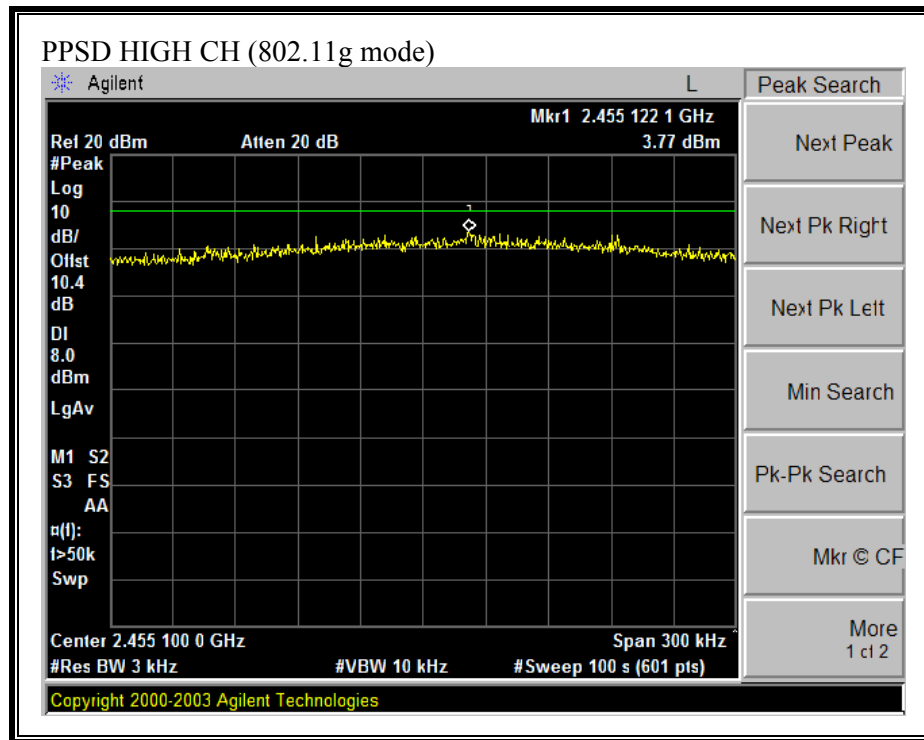

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions, which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Due to the conducted power was measured based on the use of RMS averaging over a time interval, the attenuation required here shall be 30 dB instead of 20 dB.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS

No non-compliance noted:


The test was performed with the worst-case, which is higher power level (the power was applied to 7.4dBi antenna).


SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

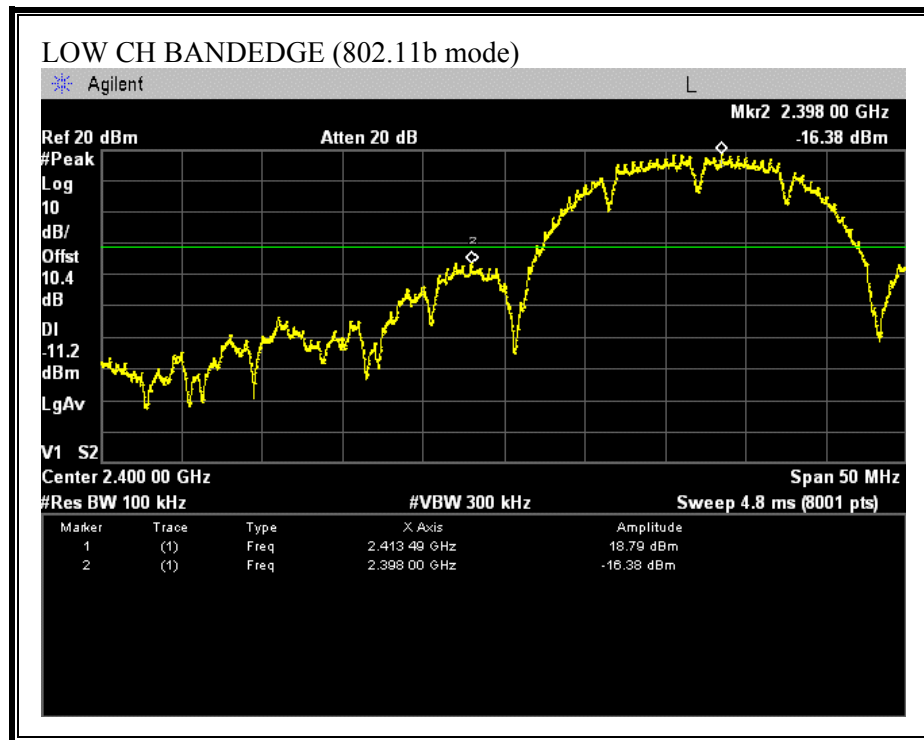

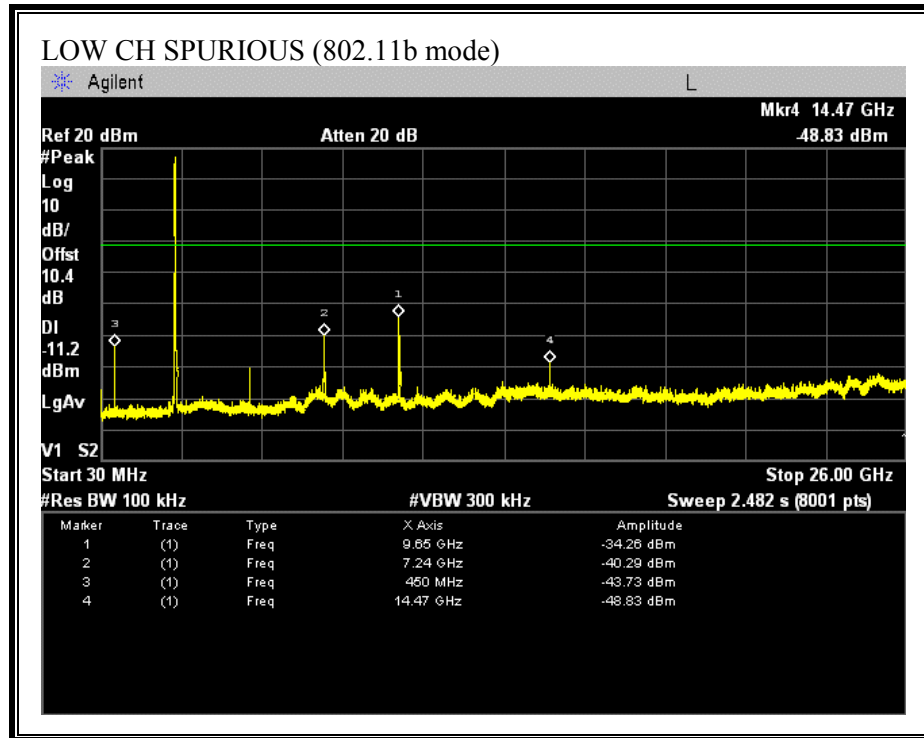



SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

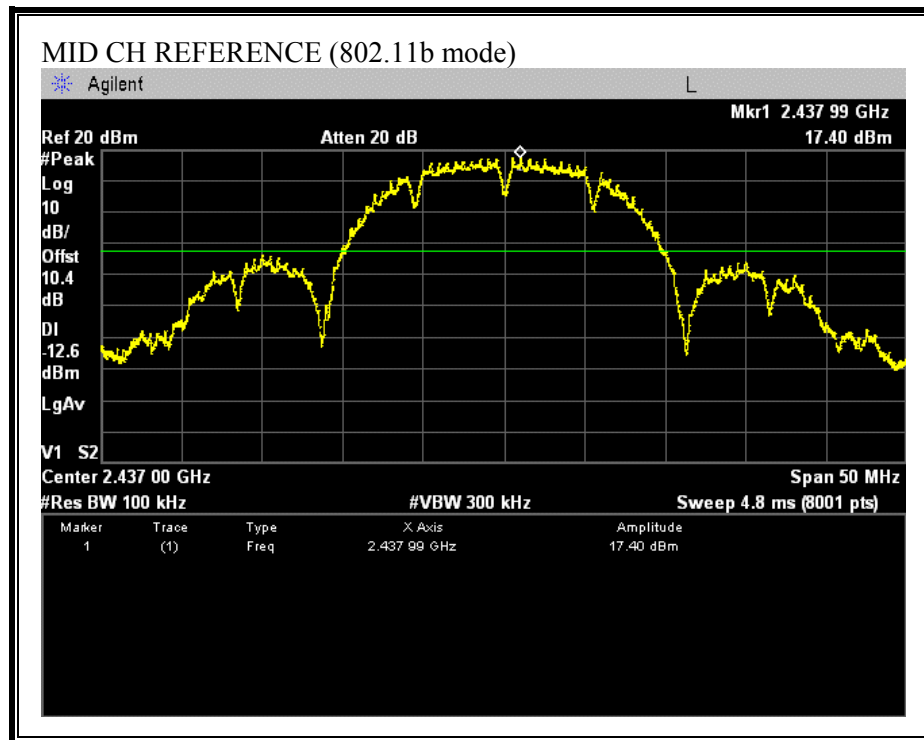

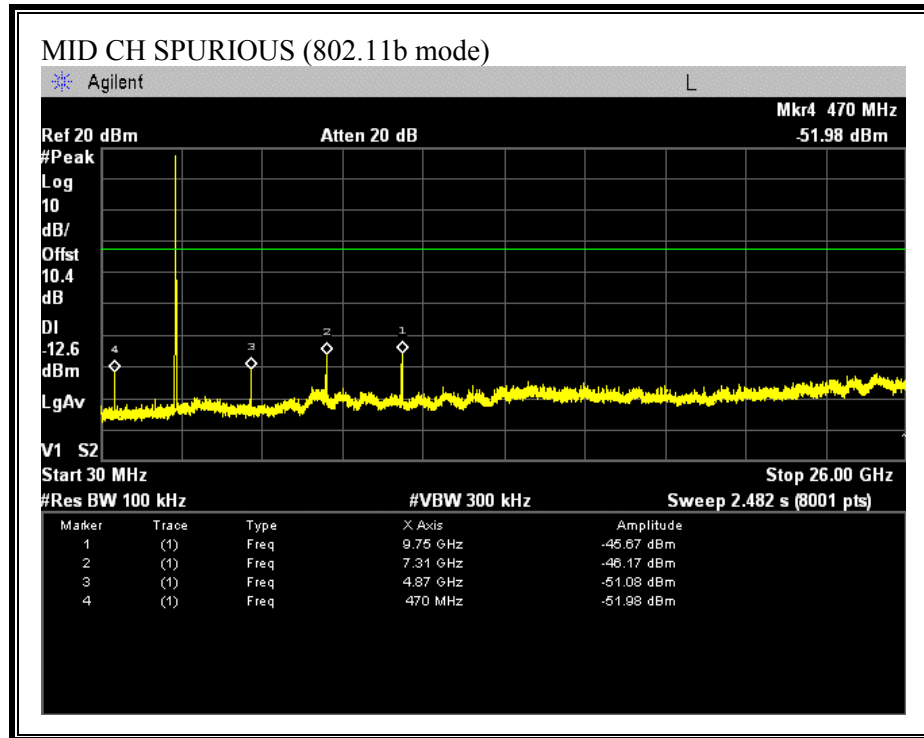



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

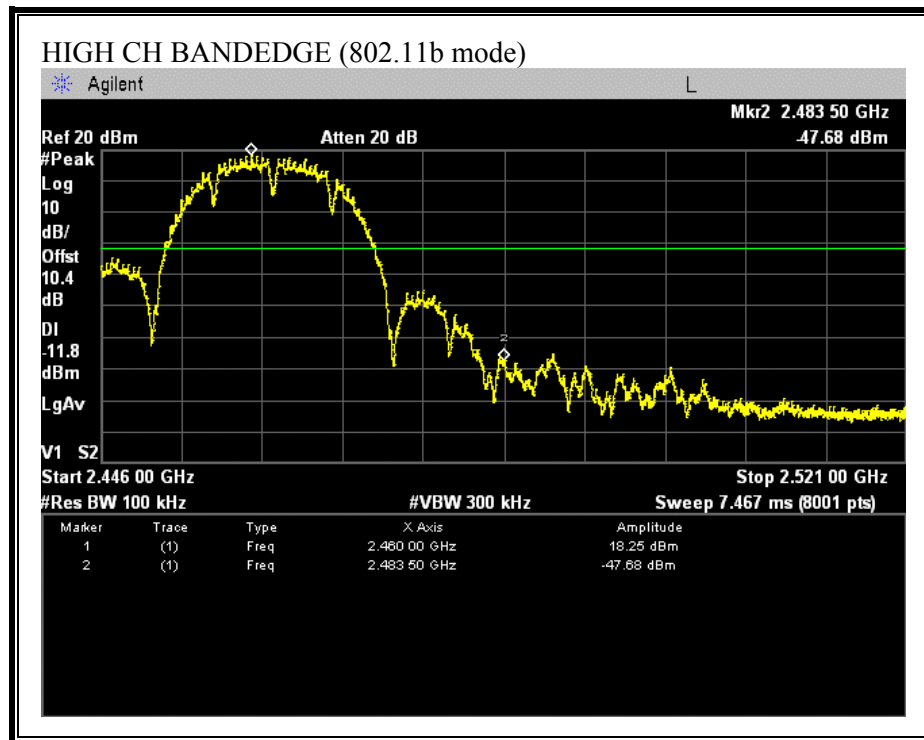

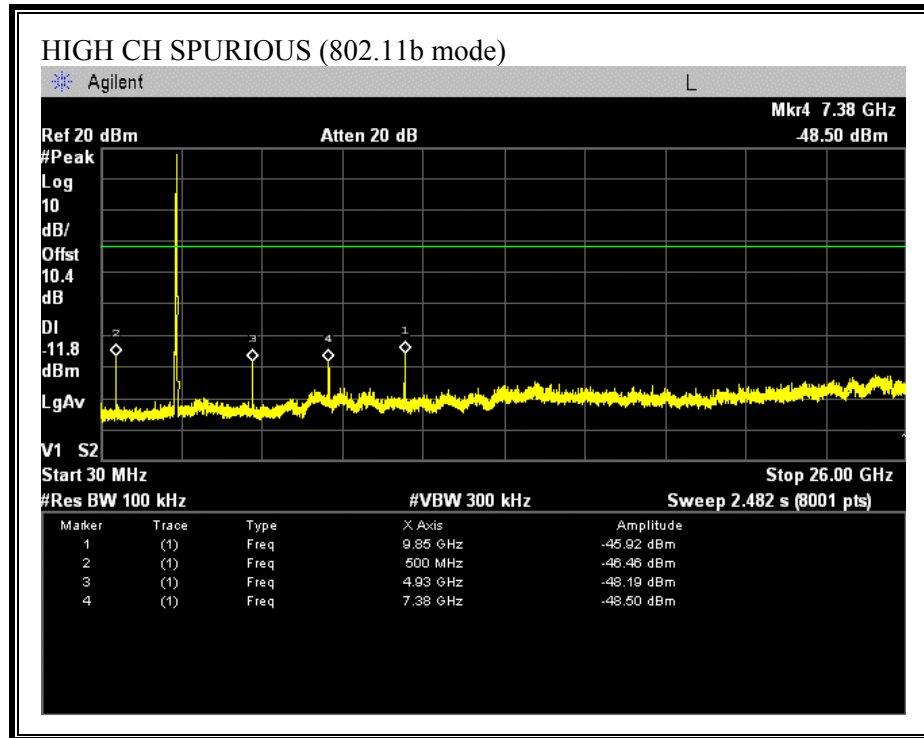



SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

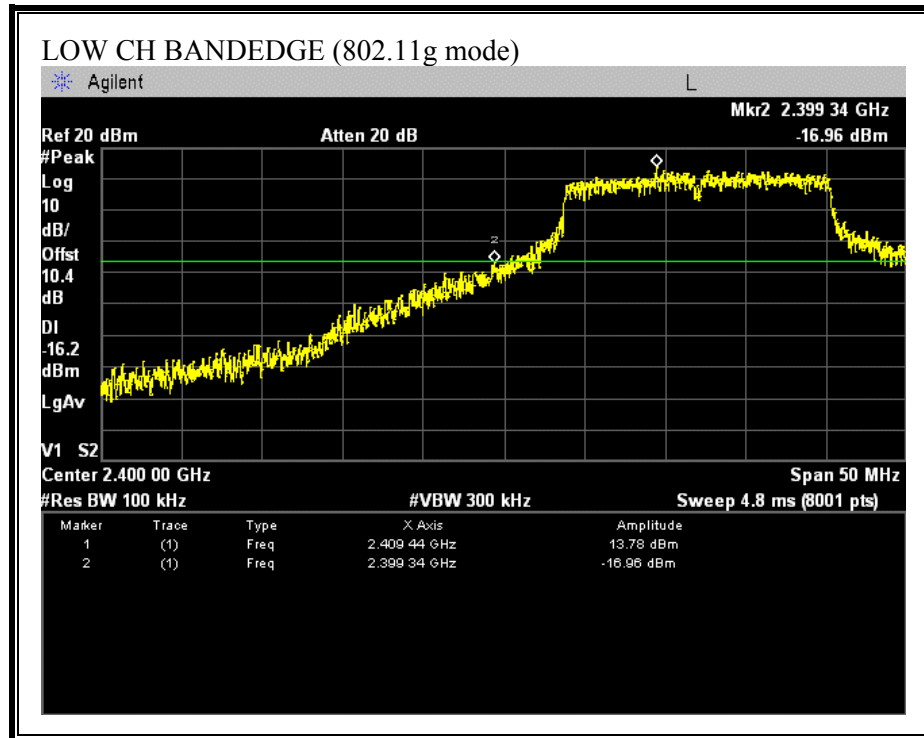

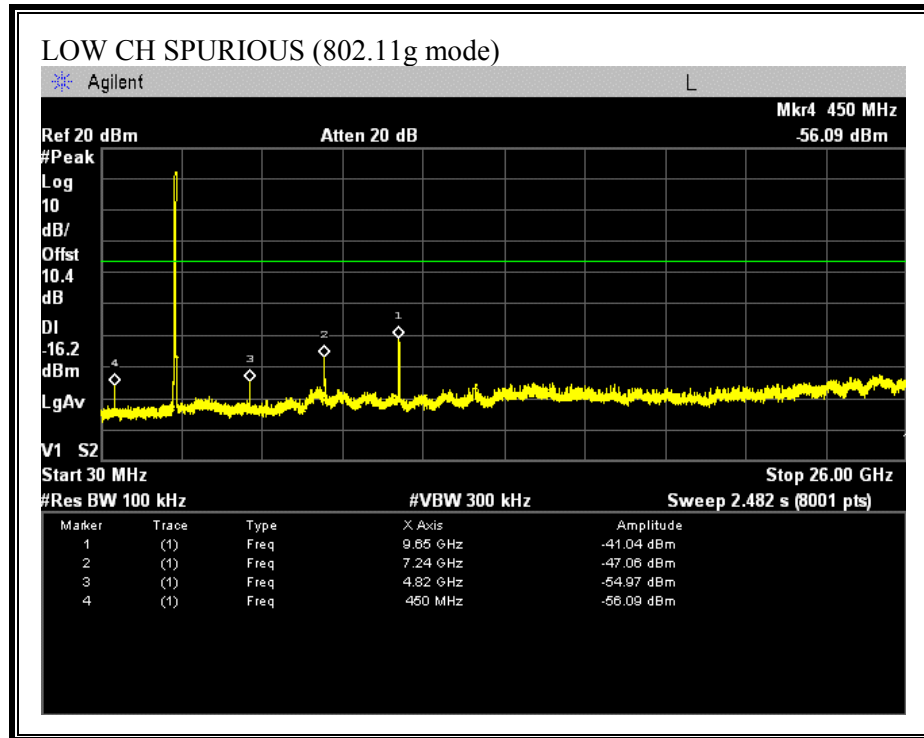



SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

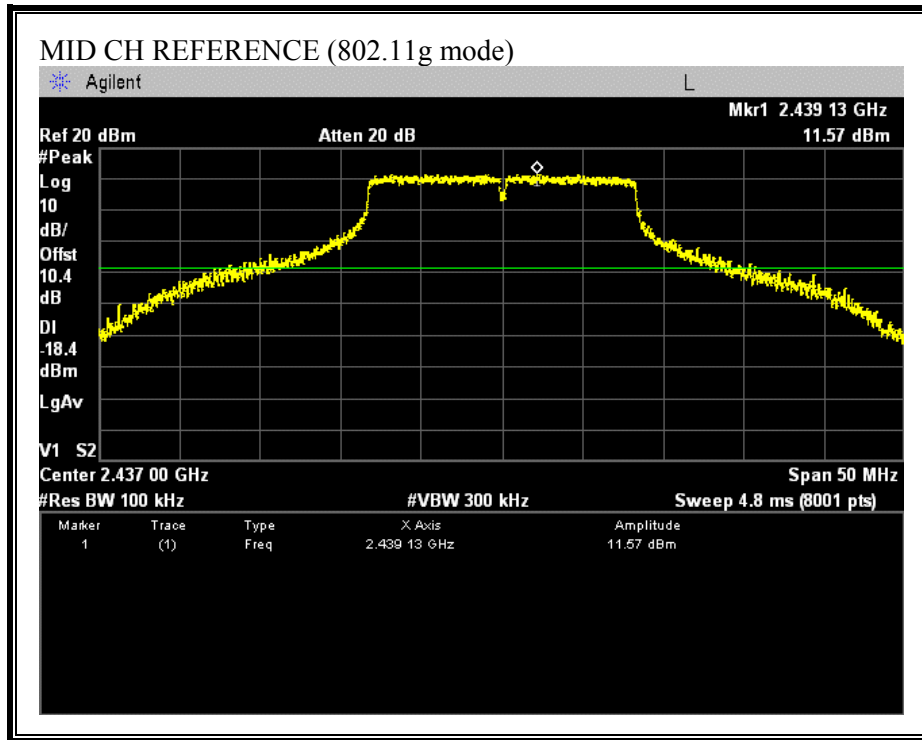

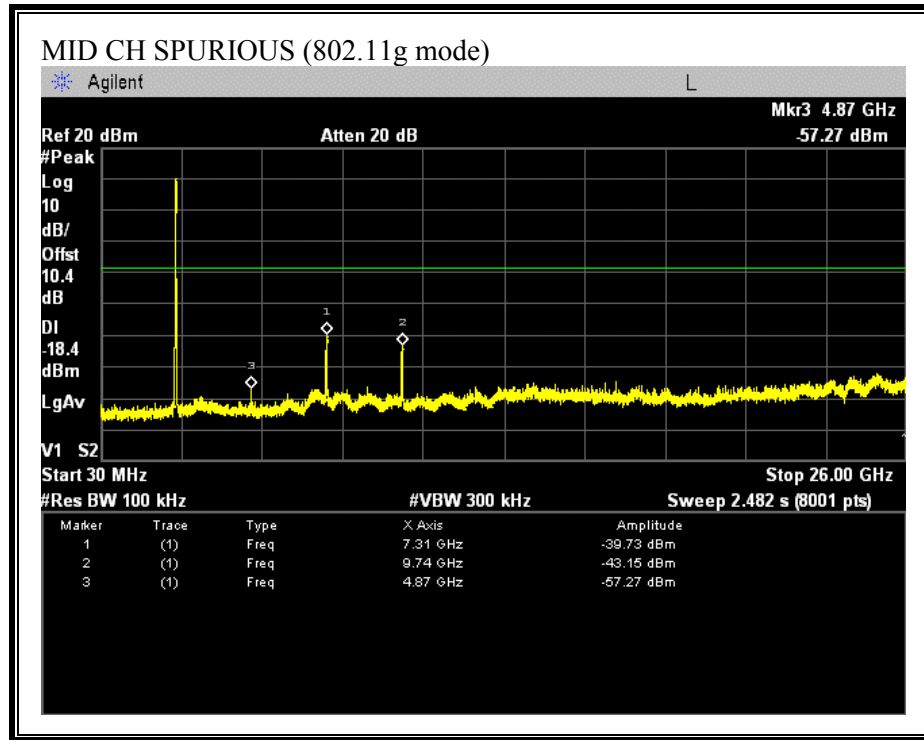

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

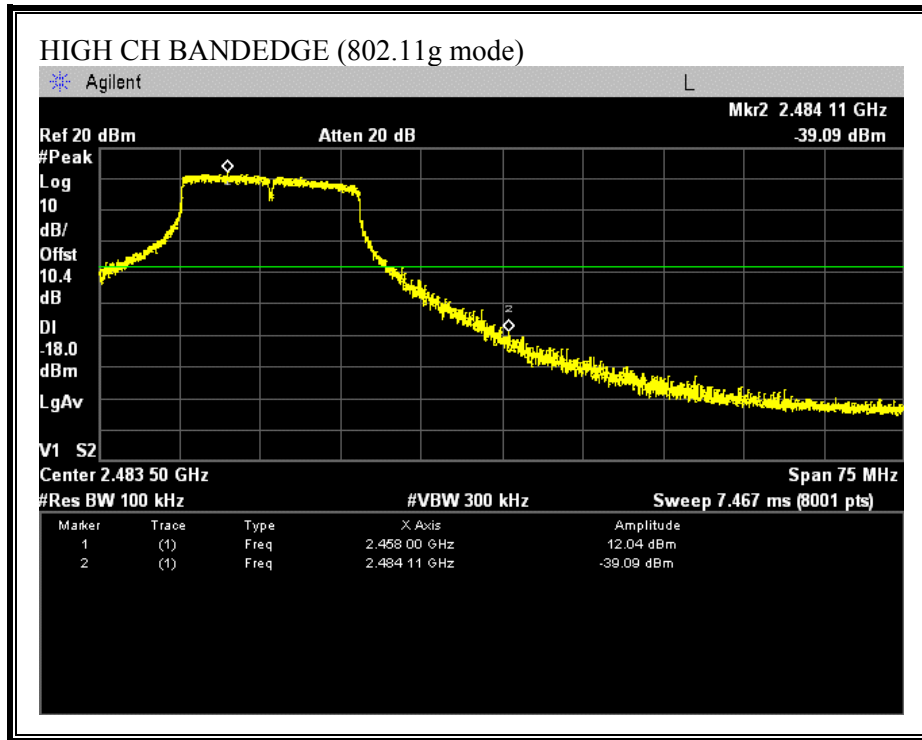

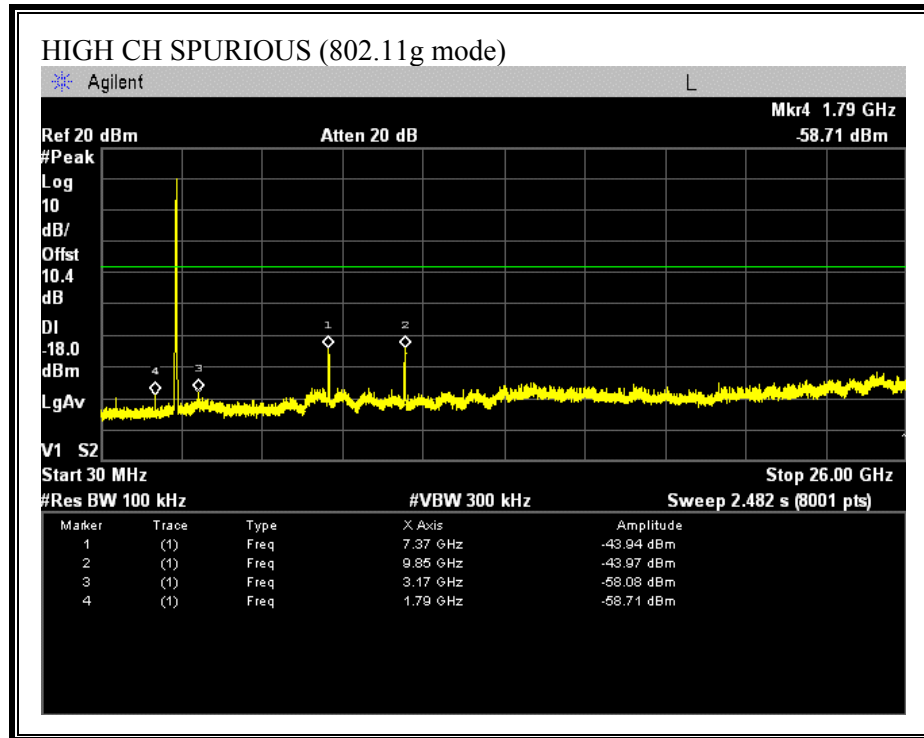

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH 7.4dBi OMNI ANTENNA


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

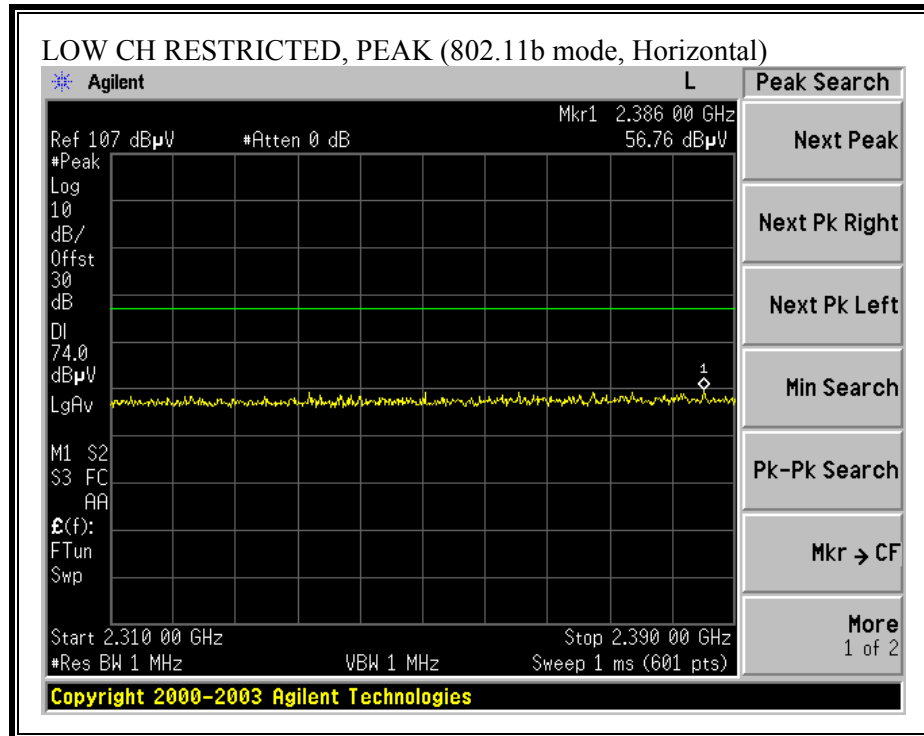

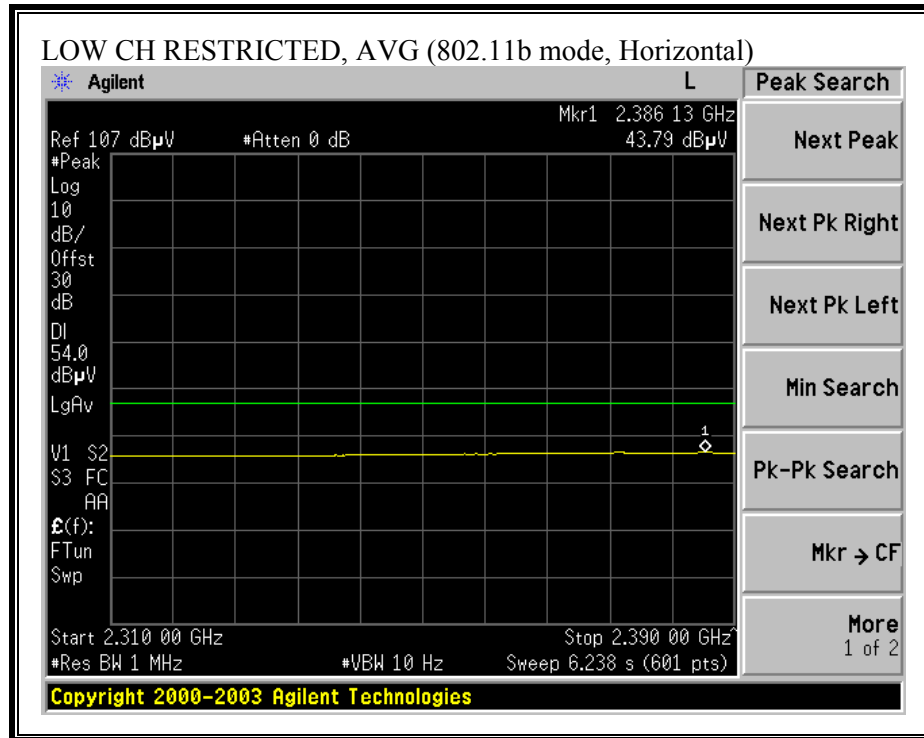



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

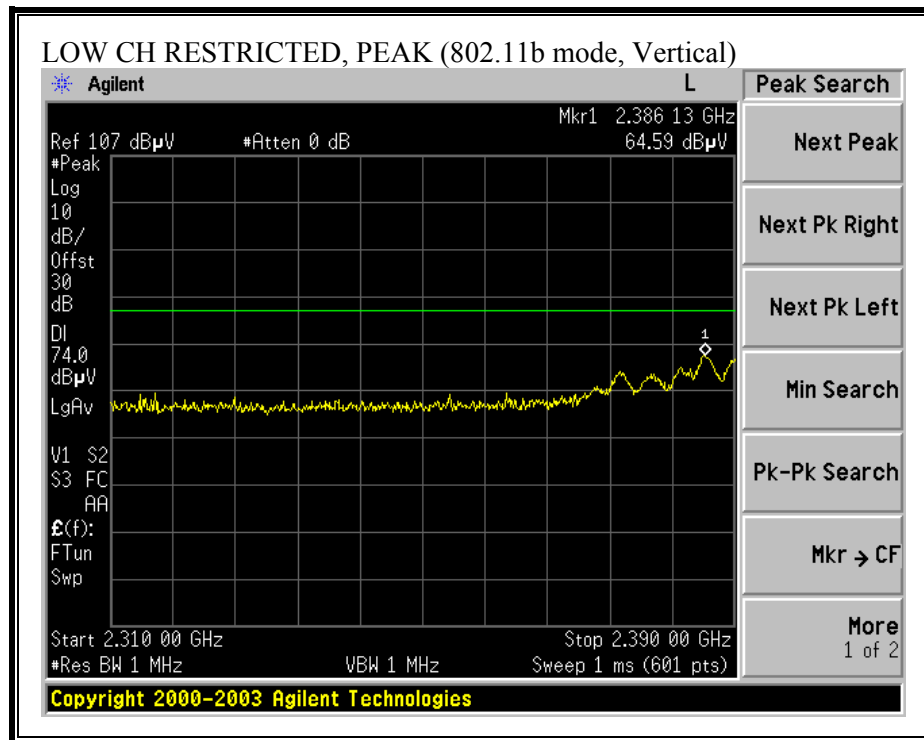

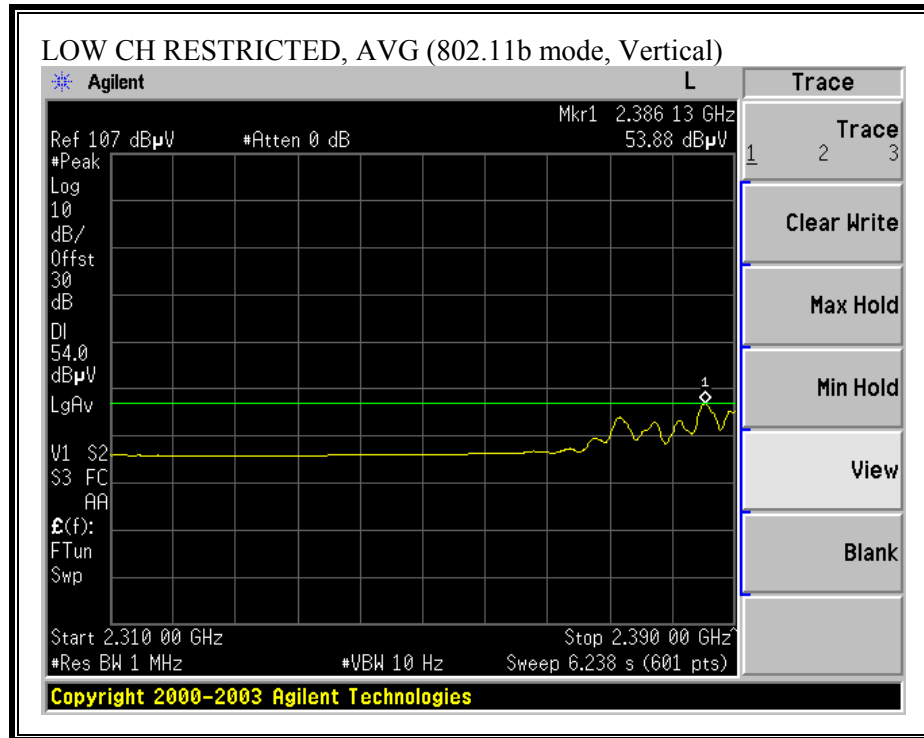



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

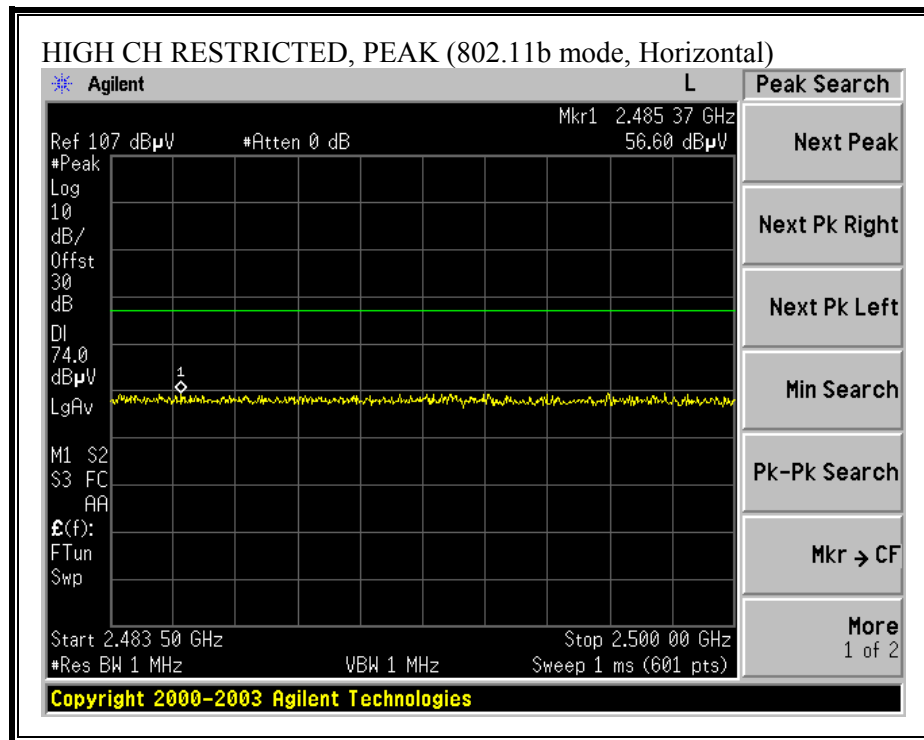

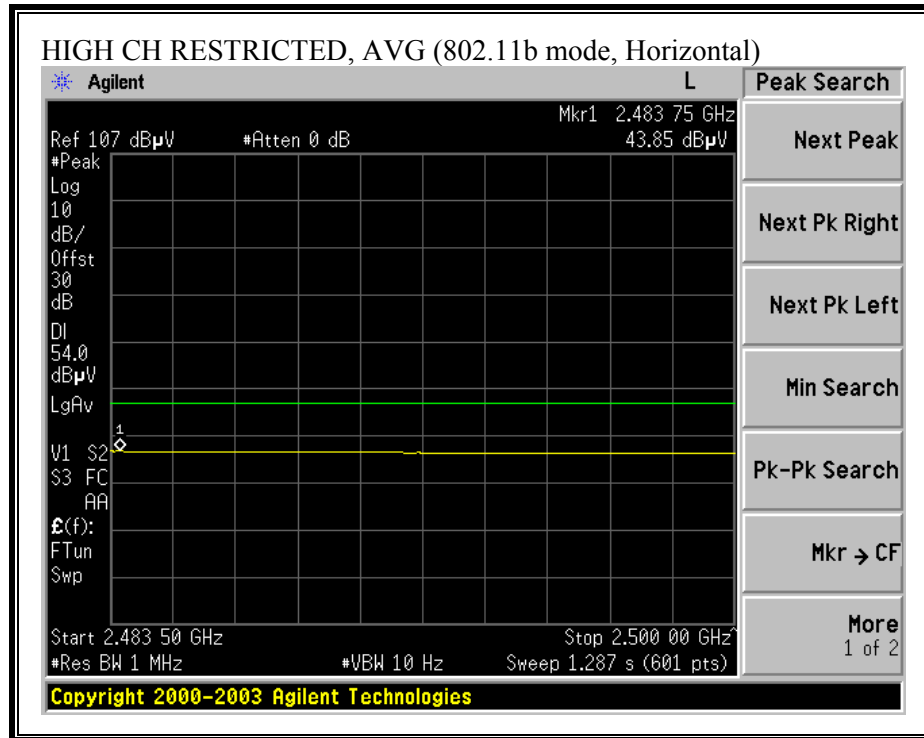

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

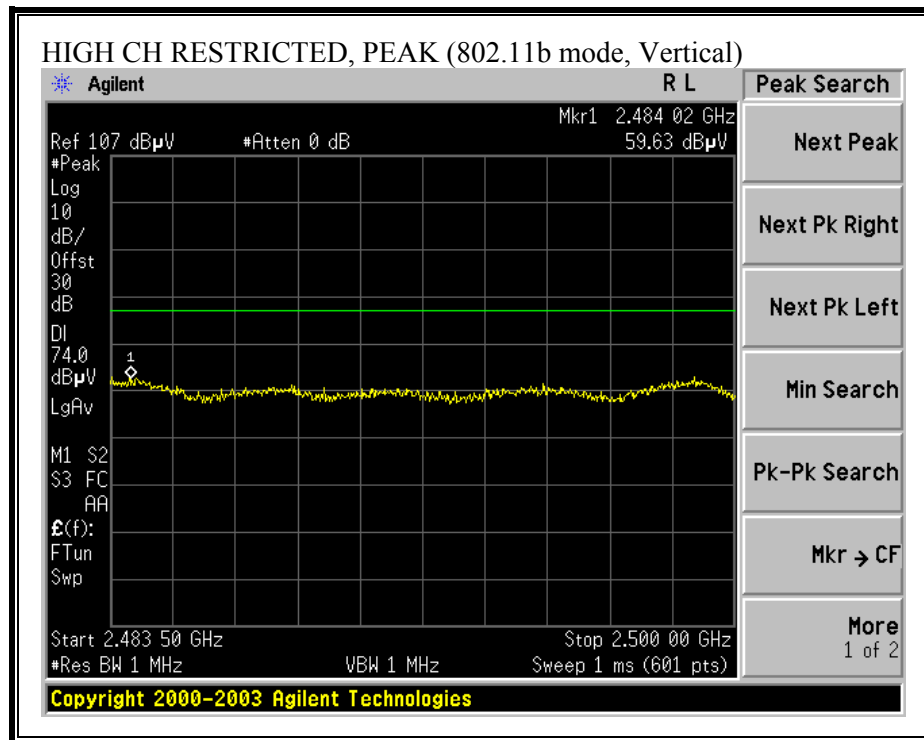


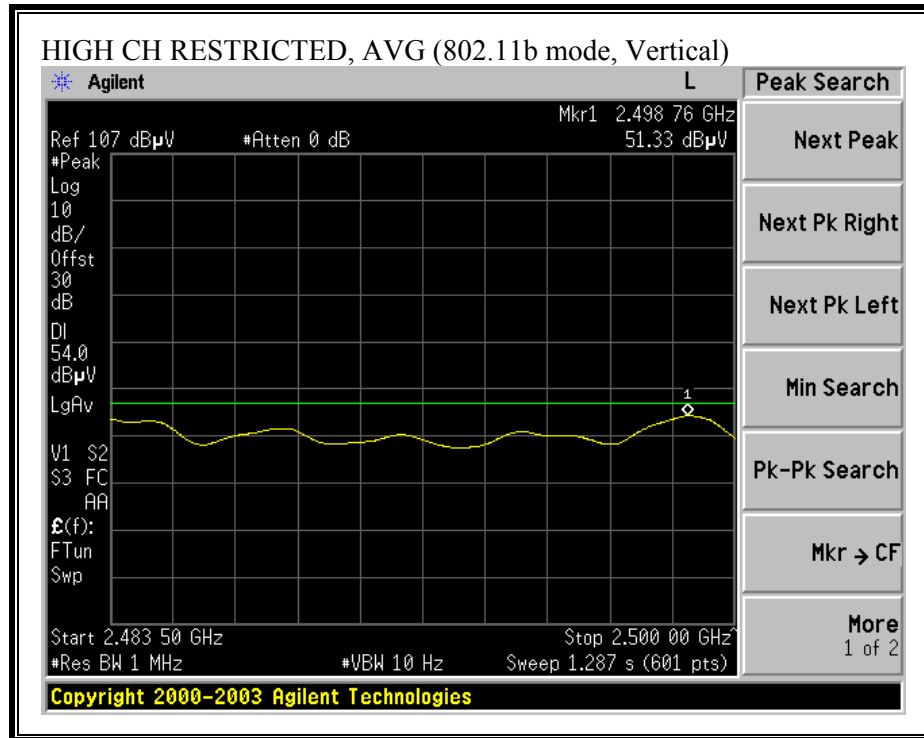


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


10/14/04 High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr:Chin Pang															
Project #:04U3022-1															
Company:Tropos Networks															
EUT Descrp.:802.11 b/g Outdoor Wi-Fi Cellular Base Station															
EUT M/N:TROPOS 5210															
Test Target:FCC Class B															
Mode Oper:Tx, b mode, 7.4dBi															
Test Equipment:															
EMCO Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz			
T73; S/N: 6717 @3m				T87 Miteq924342											
Hi Frequency Cables															
2 foot cable				3 foot cable				4 foot cable				12 foot cable			
				4_Thanh				12_Vien							
								HPF				Reject Filter			
								HPF_ 4.6GHz							
Peak Measurements RBW=VBW=1MHz															
Average Measurements RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Transmitting at low ch															
4.824	3.0	50.3	43.0	32.9	3.6	-39.6	0.0	2.4	49.6	42.3	74	54	-24.4	-11.7	V
12.060	3.0	45.0	33.0	38.8	6.9	-39.2	0.0	0.7	52.3	40.3	74	54	-21.7	-13.7	V
4.824	3.0	47.0	35.4	32.9	3.6	-39.6	0.0	2.4	46.3	34.7	74	54	-27.7	-19.3	H
12.060	3.0	45.3	33.0	38.8	6.9	-39.2	0.0	0.7	52.6	40.3	74	54	-21.4	-13.7	H
Transmitting at mid ch															
4.874	3.0	48.9	37.0	32.9	3.6	-39.6	0.0	2.5	48.3	36.4	74	54	-25.7	-17.6	V
7.311	3.0	57.0	51.7	35.8	4.6	-40.3	0.0	1.4	58.5	53.2	74	54	-15.5	-0.8	V
12.185	3.0	45.3	33.2	38.8	6.9	-39.3	0.0	0.7	52.5	40.4	74	54	-21.5	-13.6	V
4.874	3.0	47.7	35.0	32.9	3.6	-39.6	0.0	2.5	47.1	34.4	74	54	-26.9	-19.6	H
7.311	3.0	56.2	51.8	35.8	4.6	-40.3	0.0	1.4	57.7	53.3	74	54	-16.3	-0.7	H
12.185	3.0	45.3	33.2	38.8	6.9	-39.3	0.0	0.7	52.5	40.4	74	54	-21.5	-13.6	H
Transmitting at high ch															
4.924	3.0	49.0	38.8	33.0	3.7	-39.7	0.0	2.5	48.4	38.2	74	54	-25.6	-15.8	V
7.386	3.0	57.7	51.8	36.0	4.6	-40.3	0.0	1.4	59.4	53.5	74	54	-14.6	-0.5	V
12.310	3.0	45.6	33.4	38.8	6.9	-39.4	0.0	0.7	52.7	40.5	74	54	-21.3	-13.5	V
4.924	3.0	47.3	34.8	33.0	3.7	-39.7	0.0	2.5	46.7	34.2	74	54	-27.3	-19.8	H
7.386	3.0	56.7	51.5	36.0	4.6	-40.3	0.0	1.4	58.4	53.2	74	54	-15.6	-0.8	H
12.310	3.0	44.5	33.0	38.8	6.9	-39.4	0.0	0.7	51.6	40.1	74	54	-22.4	-13.9	H
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

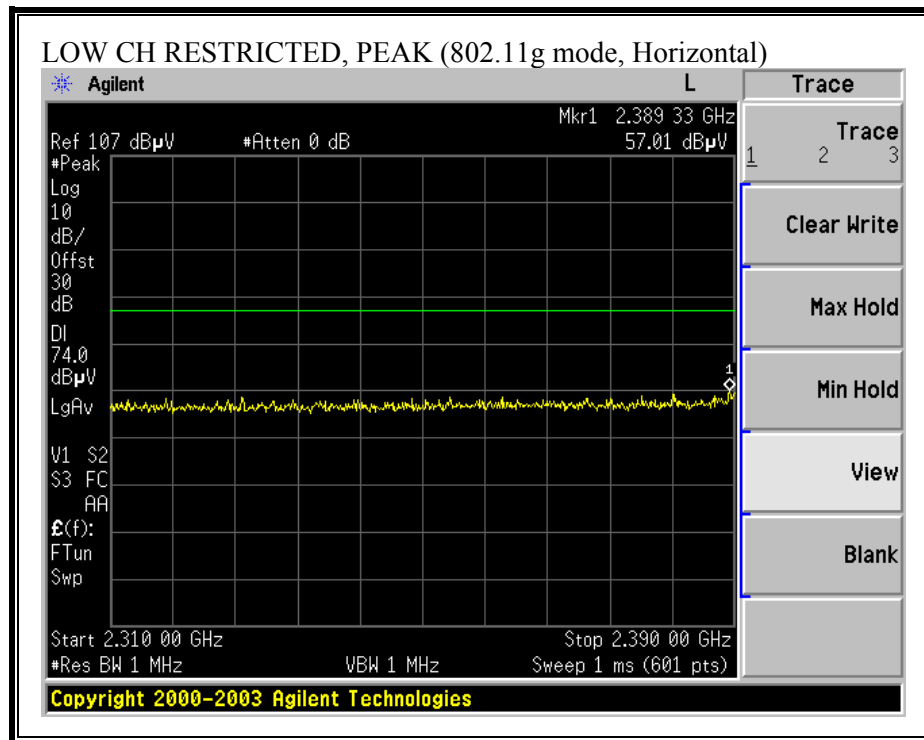

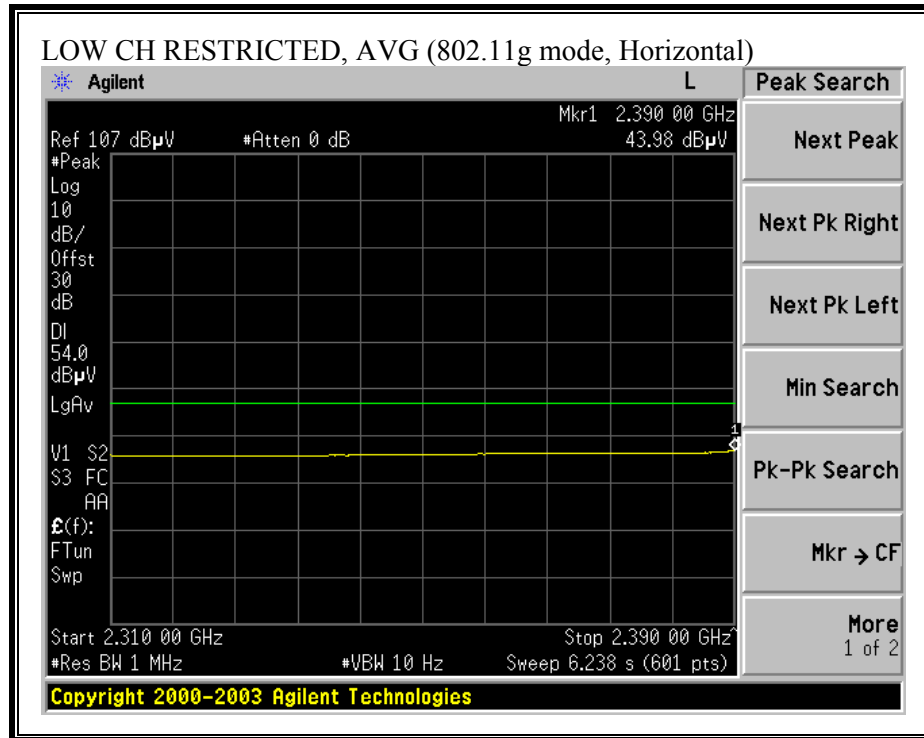



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

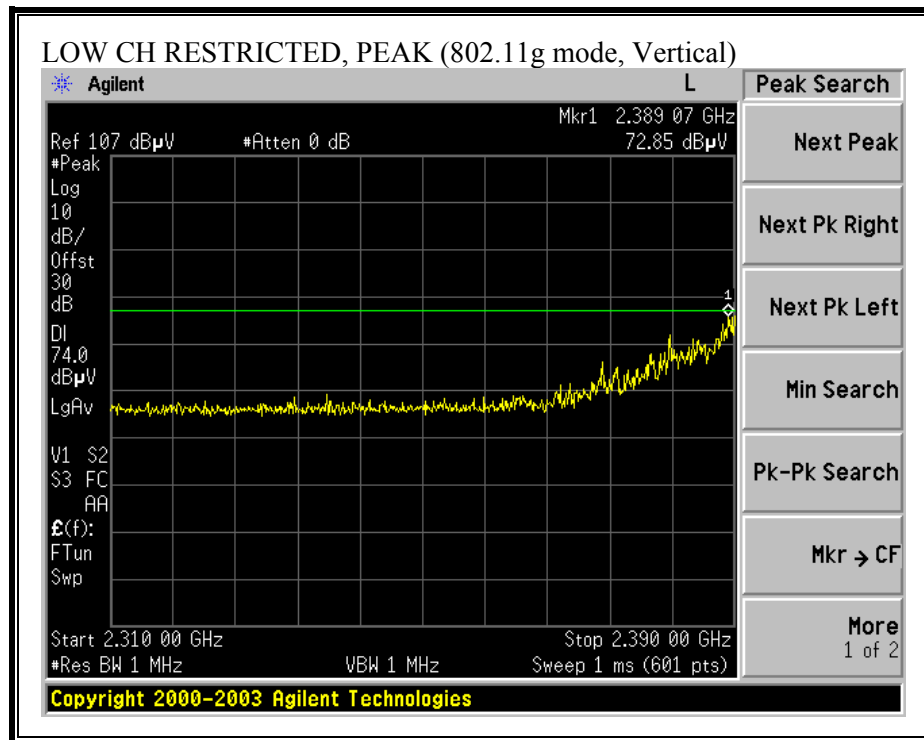

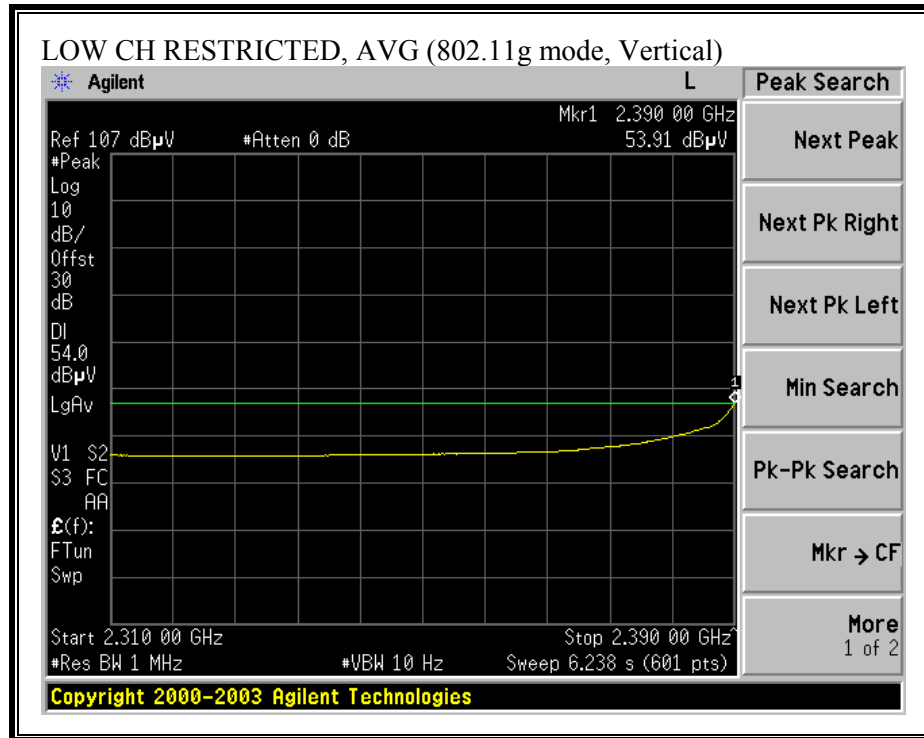



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

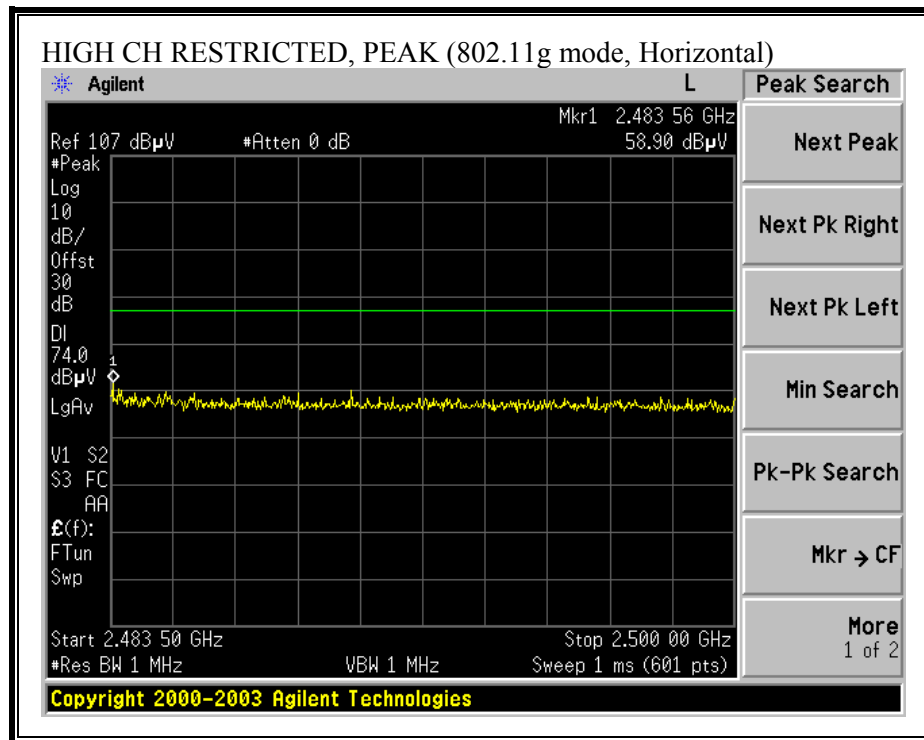

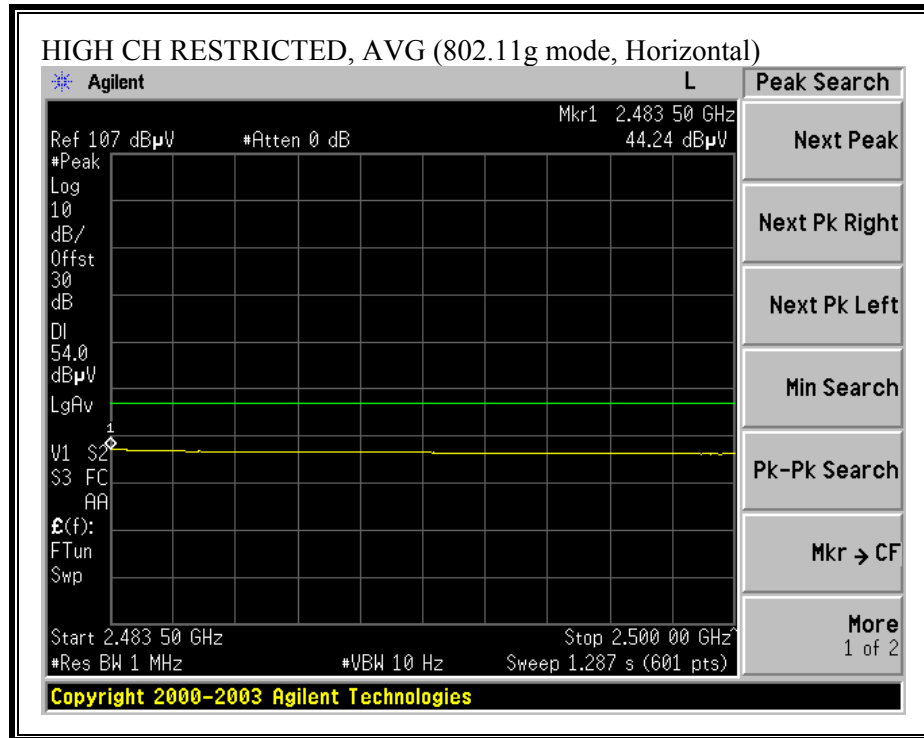

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

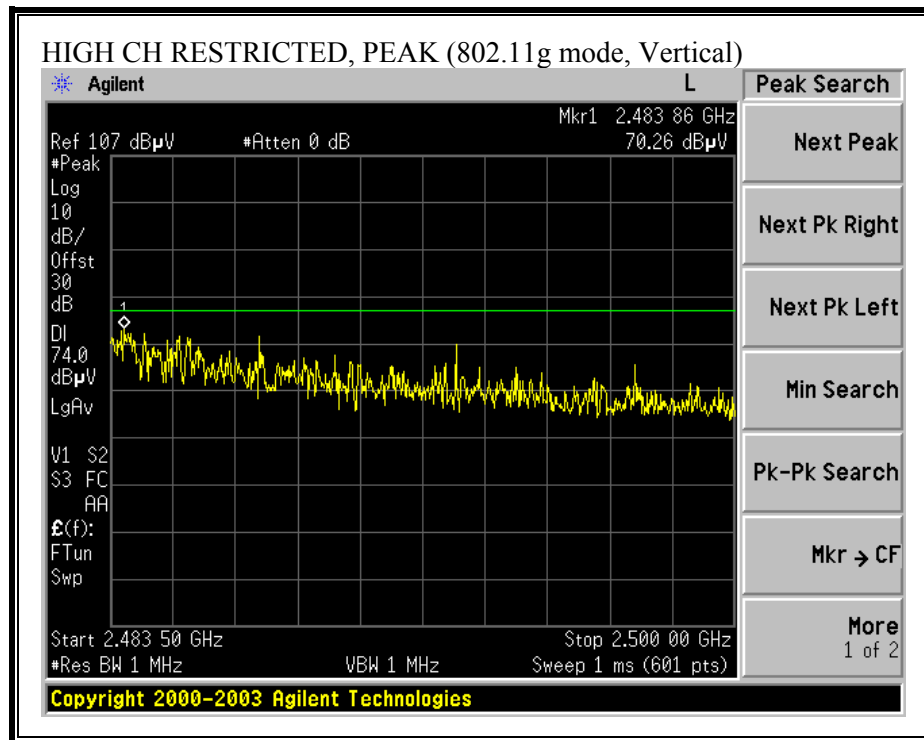

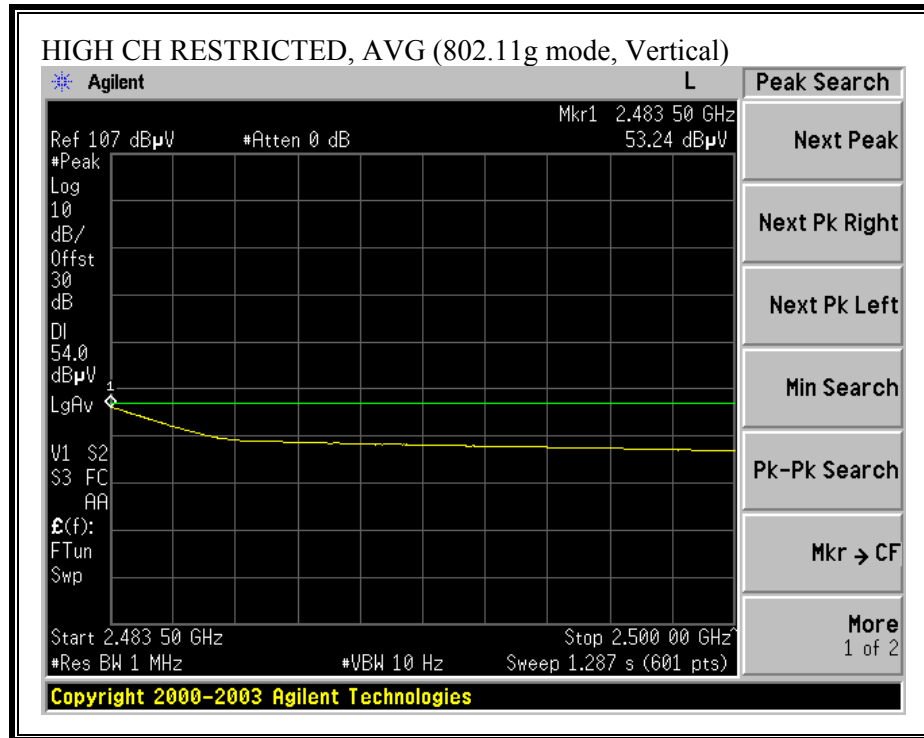



HARMONICS AND SPURIOUS EMISSIONS (g MODE)

10/14/04 High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:Chin Pang																
Project #:04U3022-1																
Company:Tropos Networks																
EUT Descip.:802.11 b/g Outdoor Wi-Fi Cellular Base Station																
EUT M/N:TROPOS 5210																
Test Target:FCC Class B																
Mode Oper:Tx, g mode, 7.4dBi																
Test Equipment:																
EMCO Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz										
T73; S/N: 6717 @3m		T87 Miteq924342														
Hi Frequency Cables																
2 foot cable		3 foot cable		4 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements				
				4_Thanh		12_Vien		HPF_4.6GHz				RBW=VBW=1MHz				
Average Measurements																
RBW=1MHz ; VBW=10Hz																
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Transmitting at low ch																
4.824	3.0	47.6	36.0	32.9	3.6	-39.6	0.0	2.4	46.9	35.3	74	54	-27.1	-18.7	V	
12.060	3.0	45.5	33.3	38.8	6.9	-39.2	0.0	0.7	52.8	40.6	74	54	-21.2	-13.4	V	
4.824	3.0	57.0	35.6	32.9	3.6	-39.6	0.0	2.4	56.3	34.9	74	54	-17.7	-19.1	H	
12.060	3.0	45.0	33.1	38.8	6.9	-39.2	0.0	0.7	52.3	40.4	74	54	-21.7	-13.6	H	
Transmitting at mid ch																
4.874	3.0	48.9	37.0	32.9	3.6	-39.6	0.0	2.5	48.3	36.4	74	54	-25.7	-17.6	V	
7.311	3.0	61.7	44.0	35.8	4.6	-40.3	0.0	1.4	63.2	45.5	74	54	-10.8	-8.5	V	
12.185	3.0	45.5	33.3	38.8	6.9	-39.3	0.0	0.7	52.7	40.5	74	54	-21.3	-13.5	V	
4.874	3.0	47.0	35.0	32.9	3.6	-39.6	0.0	2.5	46.4	34.4	74	54	-27.6	-19.6	H	
7.311	3.0	57.1	45.2	35.8	4.6	-40.3	0.0	1.4	58.6	46.7	74	54	-15.4	-7.3	H	
12.185	3.0	45.0	33.0	38.8	6.9	-39.3	0.0	0.7	52.2	40.2	74	54	-21.8	-13.8	H	
Transmitting at high ch																
4.924	3.0	49.0	38.8	33.0	3.7	-39.7	0.0	2.5	48.4	38.2	74	54	-25.6	-15.8	V	
7.386	3.0	62.0	44.2	36.0	4.6	-40.3	0.0	1.4	63.7	45.9	74	54	-10.3	-8.1	V	
12.310	3.0	45.6	33.4	38.8	6.9	-39.4	0.0	0.7	52.7	40.5	74	54	-21.3	-13.5	V	
4.924	3.0	47.3	34.8	33.0	3.7	-39.7	0.0	2.5	46.7	34.2	74	54	-27.3	-19.8	H	
7.386	3.0	57.8	45.5	36.0	4.6	-40.3	0.0	1.4	59.5	47.2	74	54	-14.5	-6.8	H	
12.310	3.0	45.5	33.3	38.8	6.9	-39.4	0.0	0.7	52.6	40.4	74	54	-21.4	-13.6	H	
Note: No other emissions were detected above the system noise floor.																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									


7.2.3. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH 12dBi OMNI ANTENNA


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

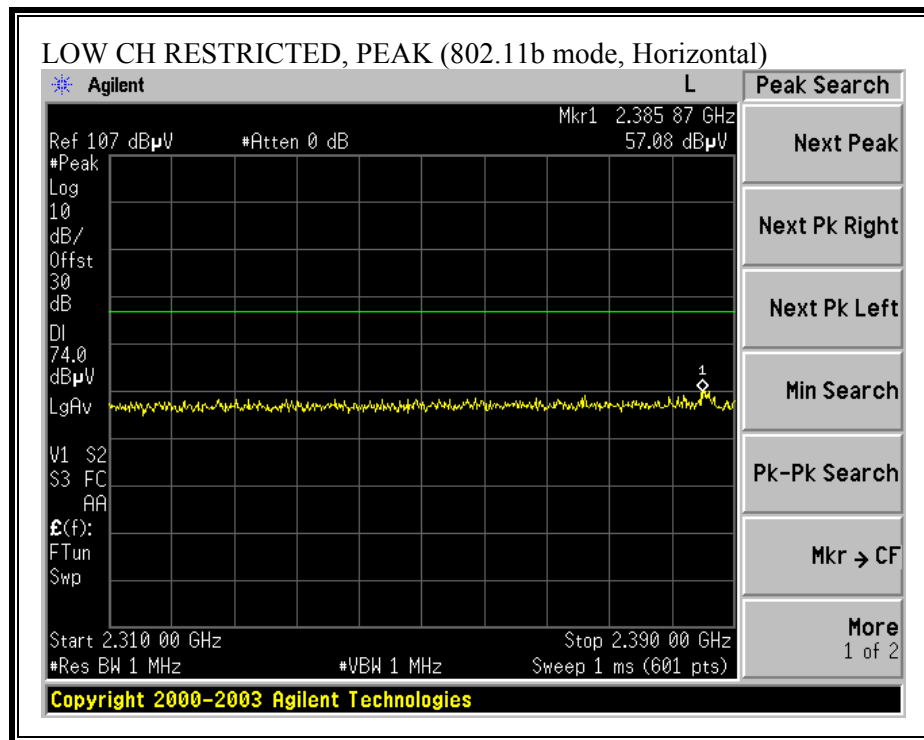

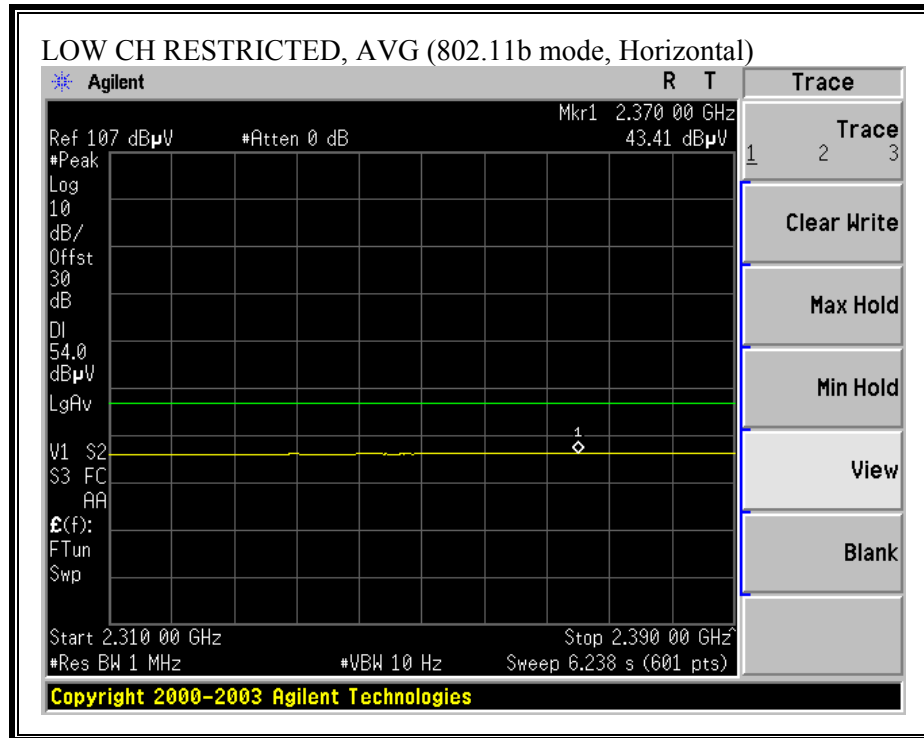



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

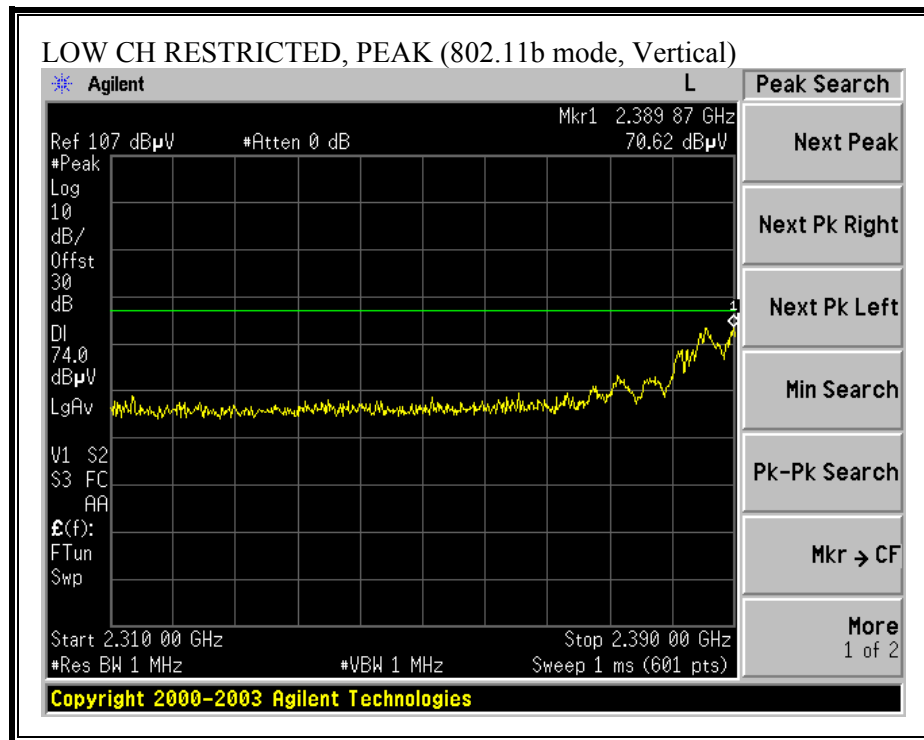

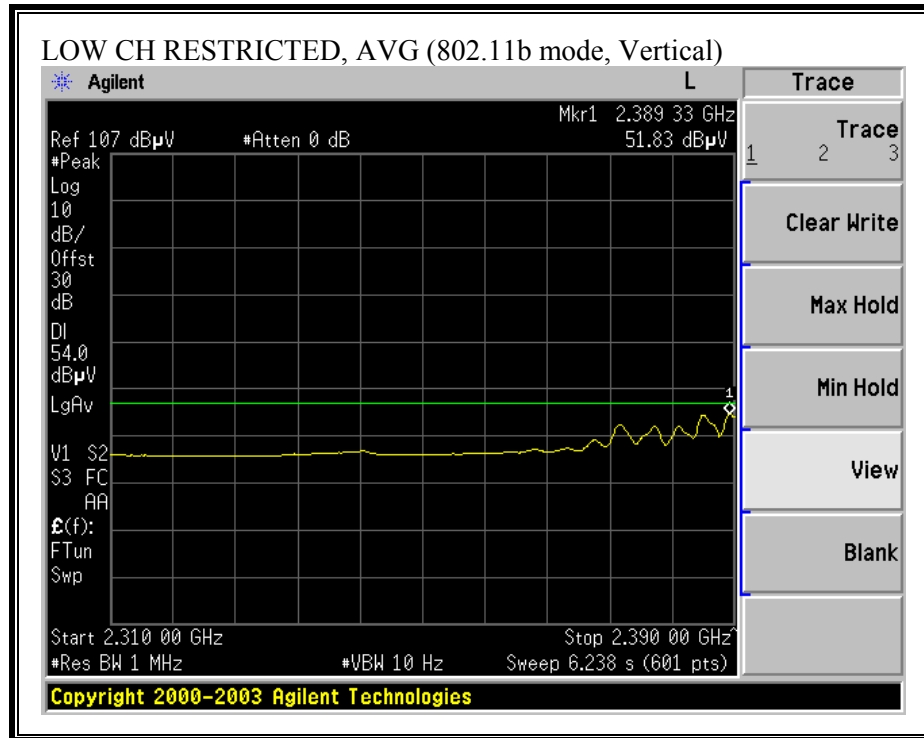



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

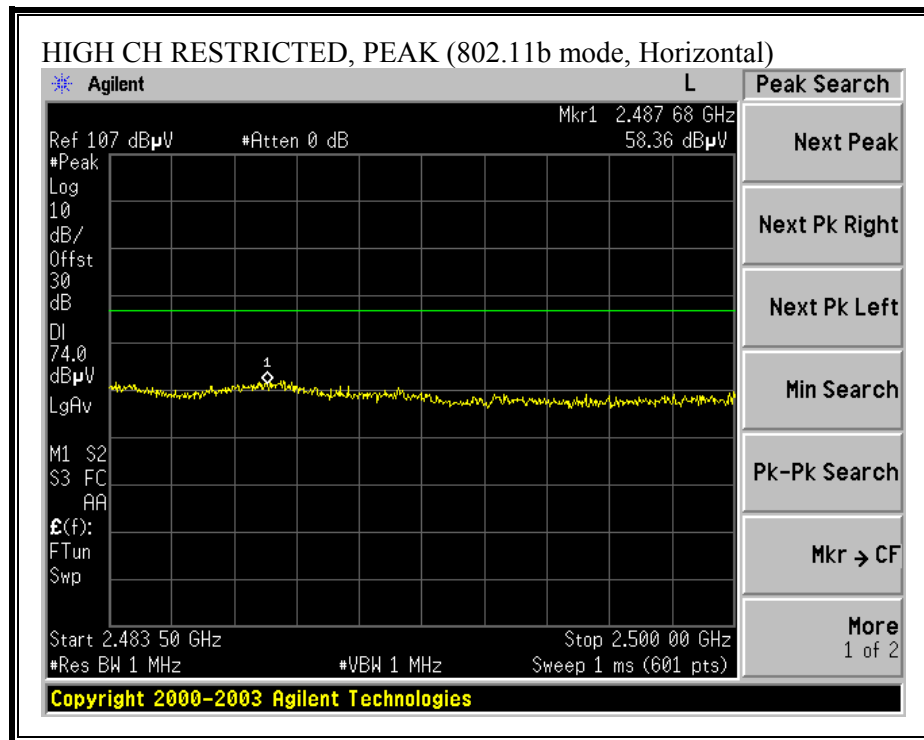

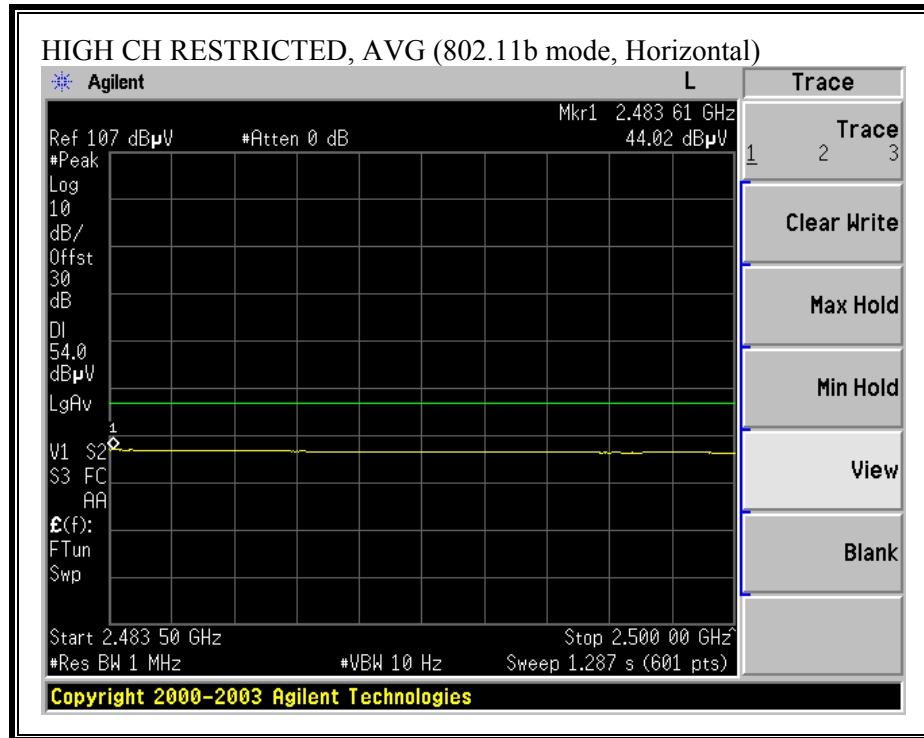

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

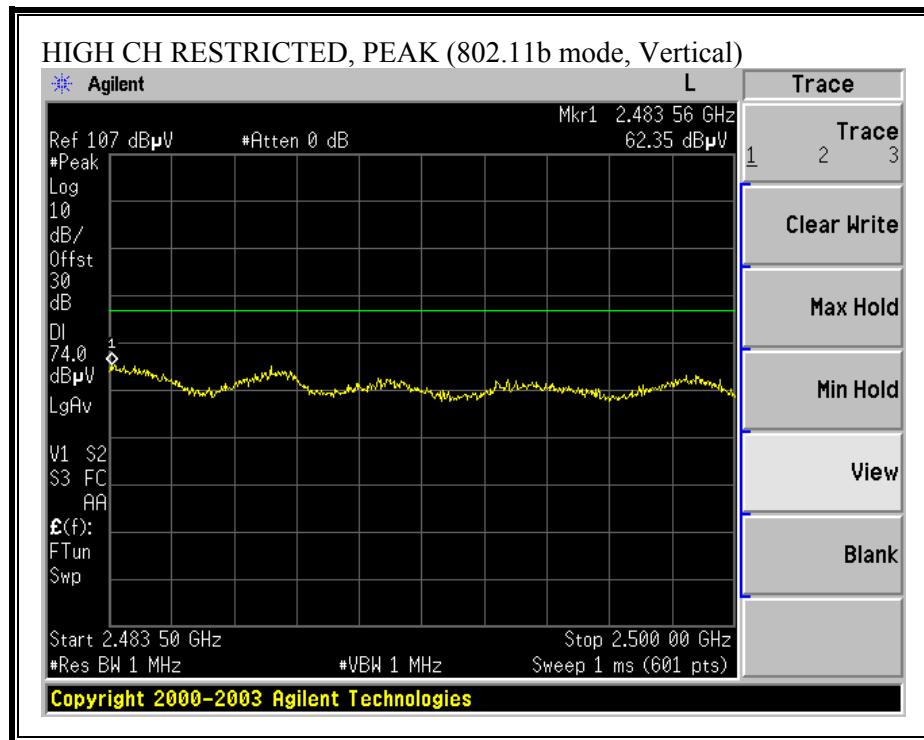


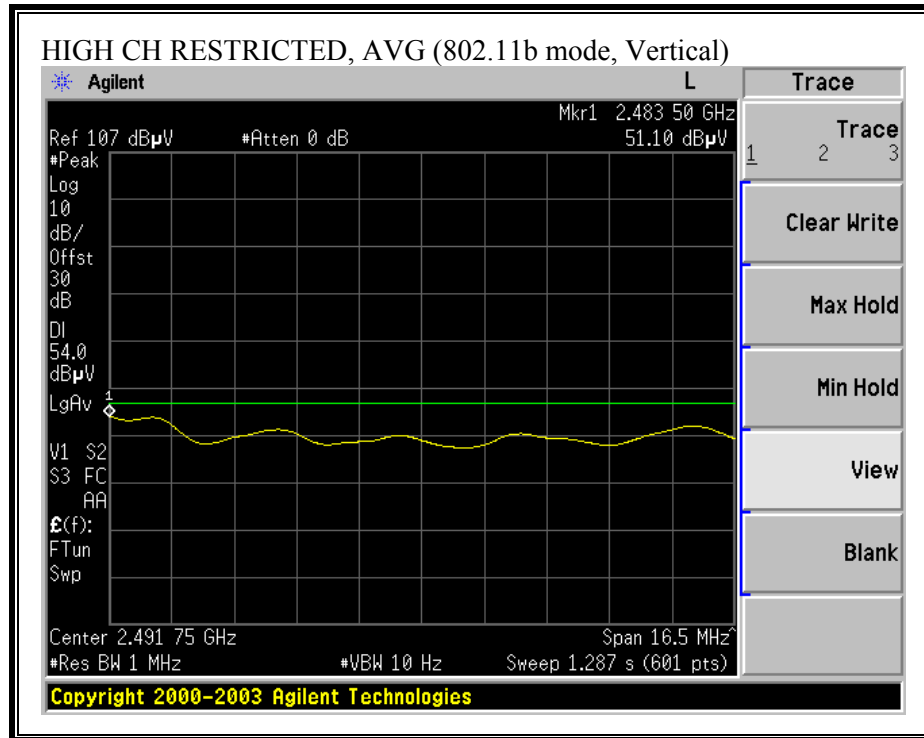


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


10/13/04 High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:Chin Pang																
Project #:04U3022-1																
Company:Tropos Networks																
EUT Descip.:802.11 b/g Outdoor Wi-Fi Cellular Base Station																
EUT M/N:TROPOS 5210																
Test Target:FCC Class B																
Mode Oper:Tx, b mode, 12dBi Omni																
Test Equipment:																
EMCO Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz										
T73; S/N: 6717 @3m		T87 Miteq924342														
Hi Frequency Cables																
2 foot cable		3 foot cable		4 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements				
				4_Thanh		12_Vien		HPF_4.6GHz				RBW=VBW=1MHz				
Average Measurements																
RBW=1MHz ; VBW=10Hz																
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Transmitting at low ch																
4.824	3.0	48.0	34.6	32.9	3.6	-39.6	0.0	2.4	47.3	33.9	74	54	-26.7	-20.1	V	
12.060	3.0	46.2	33.5	38.8	6.9	-39.2	0.0	0.7	53.5	40.8	74	54	-20.5	-13.2	V	
4.824	3.0	47.3	34.3	32.9	3.6	-39.6	0.0	2.4	46.6	33.6	74	54	-27.4	-20.4	H	
12.060	3.0	45.0	33.0	38.8	6.9	-39.2	0.0	0.7	52.3	40.3	74	54	-21.7	-13.7	H	
Transmitting at mid ch																
4.874	3.0	48.3	34.8	32.9	3.6	-39.6	0.0	2.5	47.7	34.2	74	54	-26.3	-19.8	V	
7.311	3.0	47.7	36.0	35.8	4.6	-40.3	0.0	1.4	49.2	37.5	74	54	-24.8	-16.5	V	
12.185	3.0	45.0	33.5	38.8	6.9	-39.3	0.0	0.7	52.2	40.7	74	54	-21.8	-13.3	V	
4.874	3.0	46.3	34.0	32.9	3.6	-39.6	0.0	2.5	45.7	33.4	74	54	-28.3	-20.6	H	
7.311	3.0	47.0	35.2	35.8	4.6	-40.3	0.0	1.4	48.5	36.7	74	54	-25.5	-17.3	H	
12.185	3.0	45.3	33.3	38.8	6.9	-39.3	0.0	0.7	52.5	40.5	74	54	-21.5	-13.5	H	
Transmitting at high ch																
4.924	3.0	47.8	34.4	33.0	3.7	-39.7	0.0	2.5	47.2	33.8	74	54	-26.8	-20.2	V	
7.386	3.0	47.3	35.7	36.0	4.6	-40.3	0.0	1.4	49.0	37.4	74	54	-25.0	-16.6	V	
12.310	3.0	44.8	33.6	38.8	6.9	-39.4	0.0	0.7	51.9	40.7	74	54	-22.1	-13.3	V	
4.924	3.0	46.5	34.0	33.0	3.7	-39.7	0.0	2.5	45.9	33.4	74	54	-28.1	-20.6	H	
7.386	3.0	47.4	35.0	36.0	4.6	-40.3	0.0	1.4	49.1	36.7	74	54	-24.9	-17.3	H	
12.310	3.0	44.5	33.4	38.8	6.9	-39.4	0.0	0.7	51.6	40.5	74	54	-22.4	-13.5	H	
Note: No other emissions were detected above the system noise floor.																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

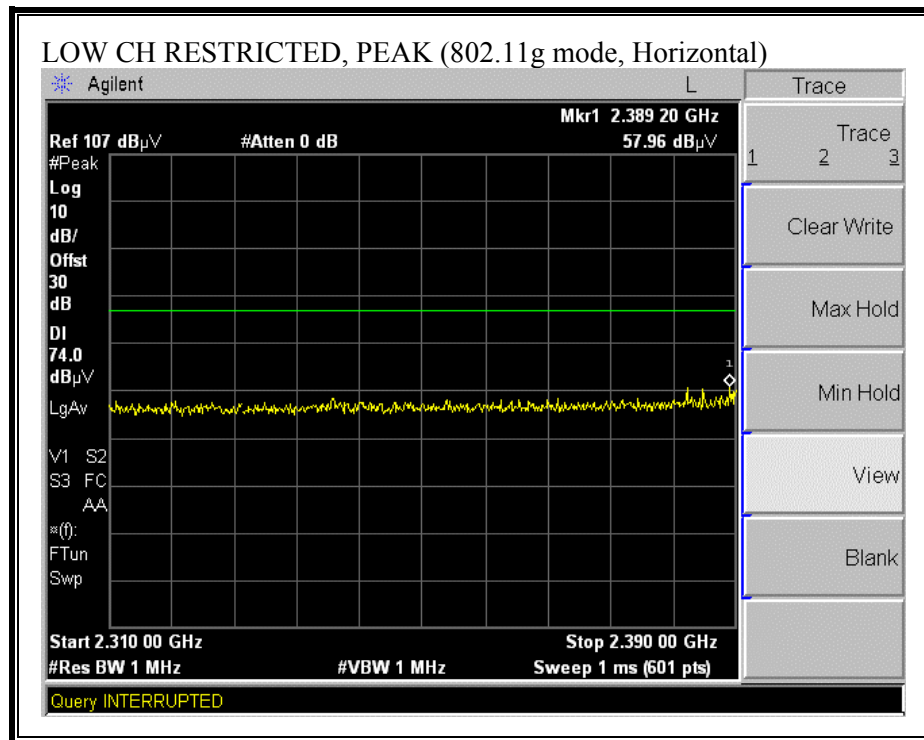

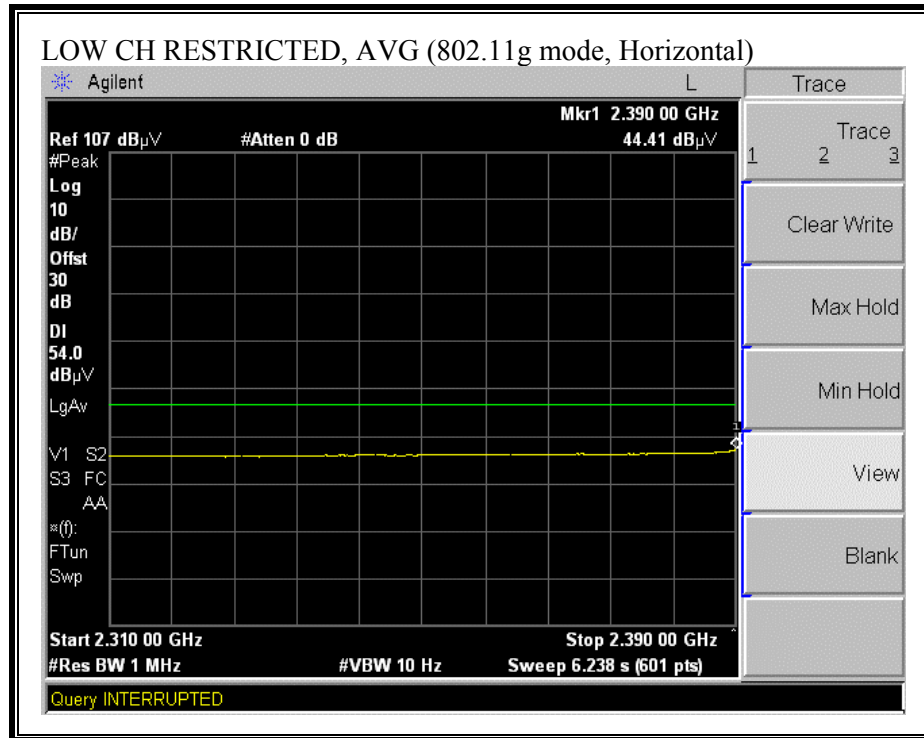



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

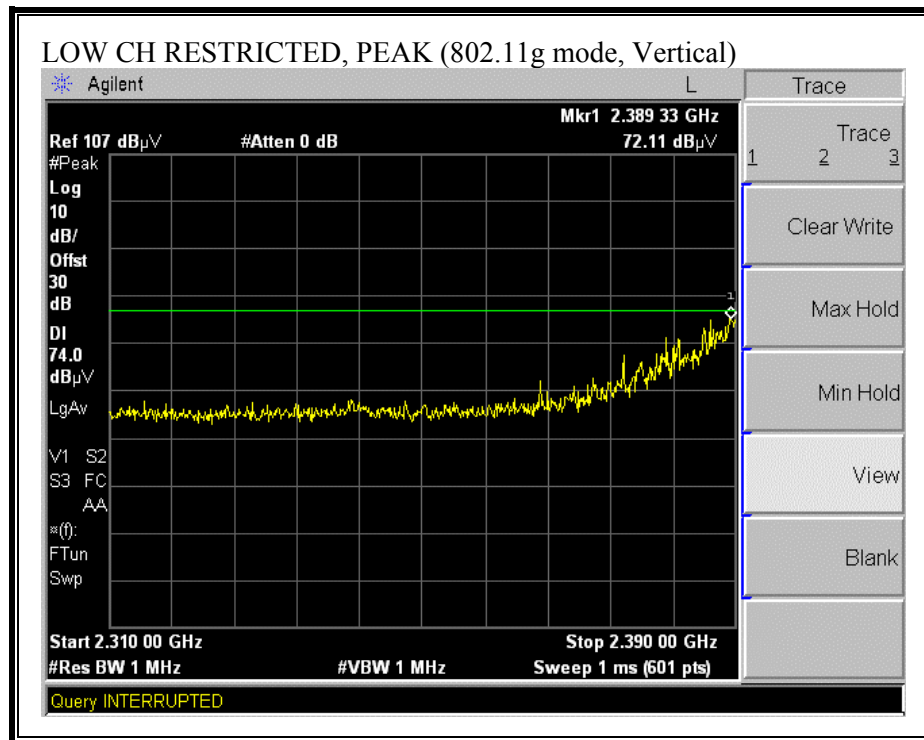

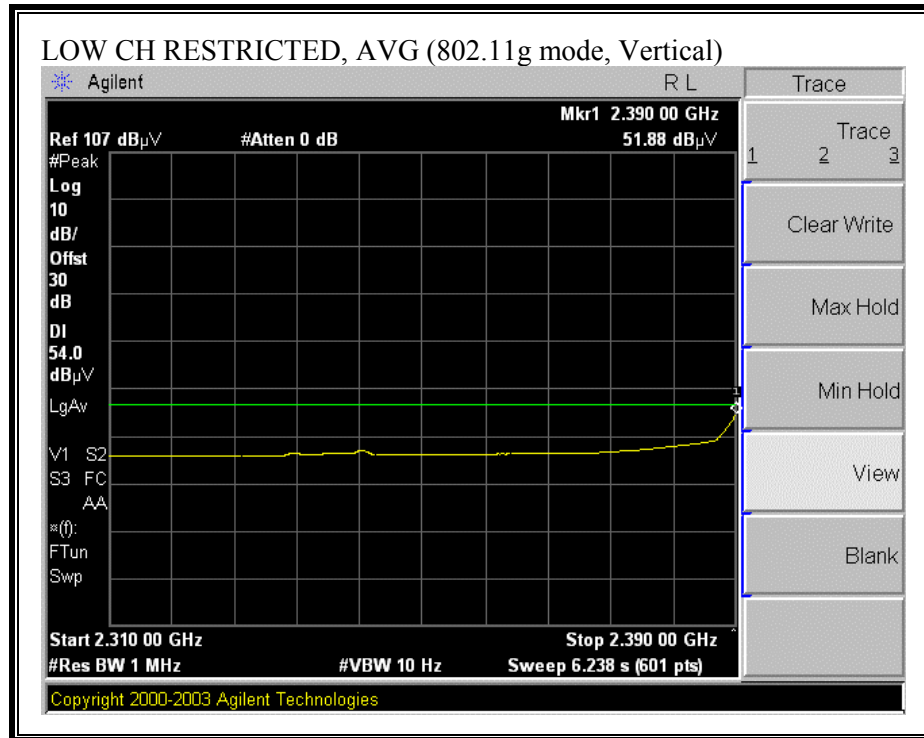



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

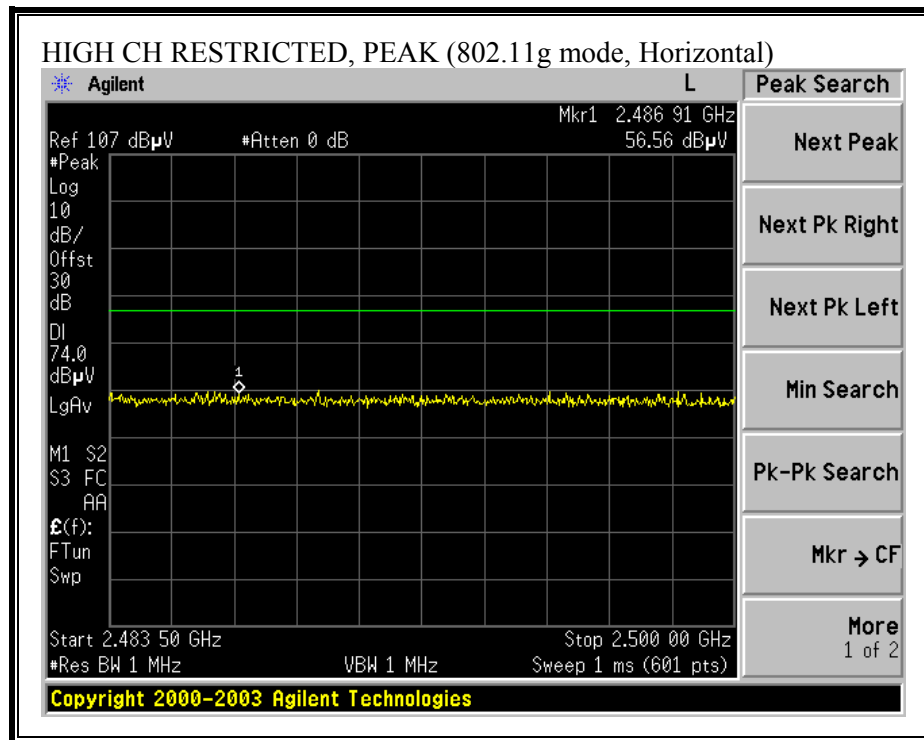

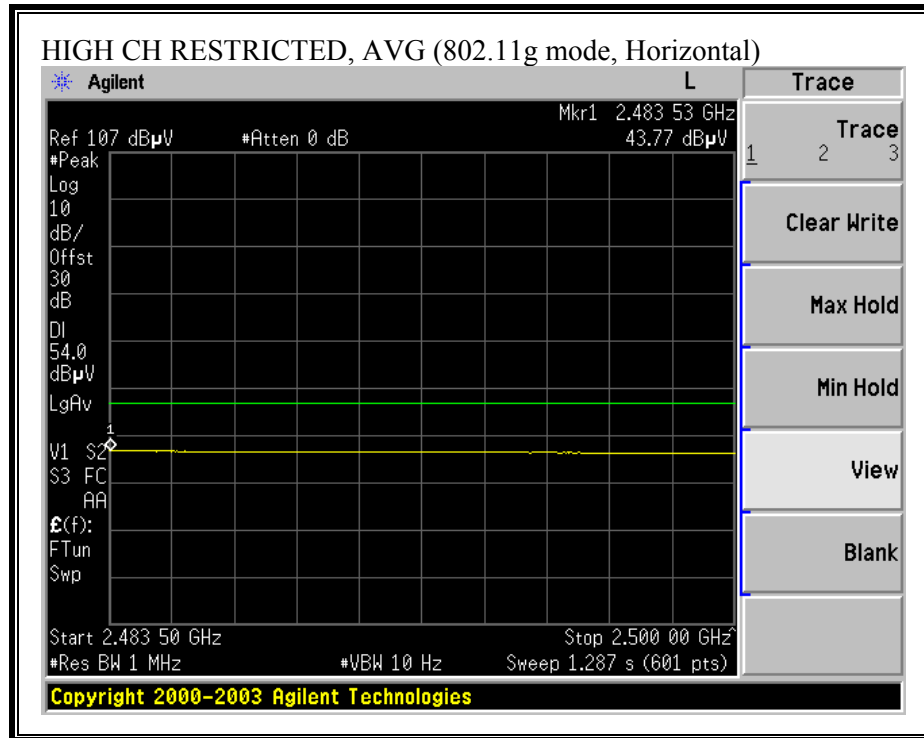

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

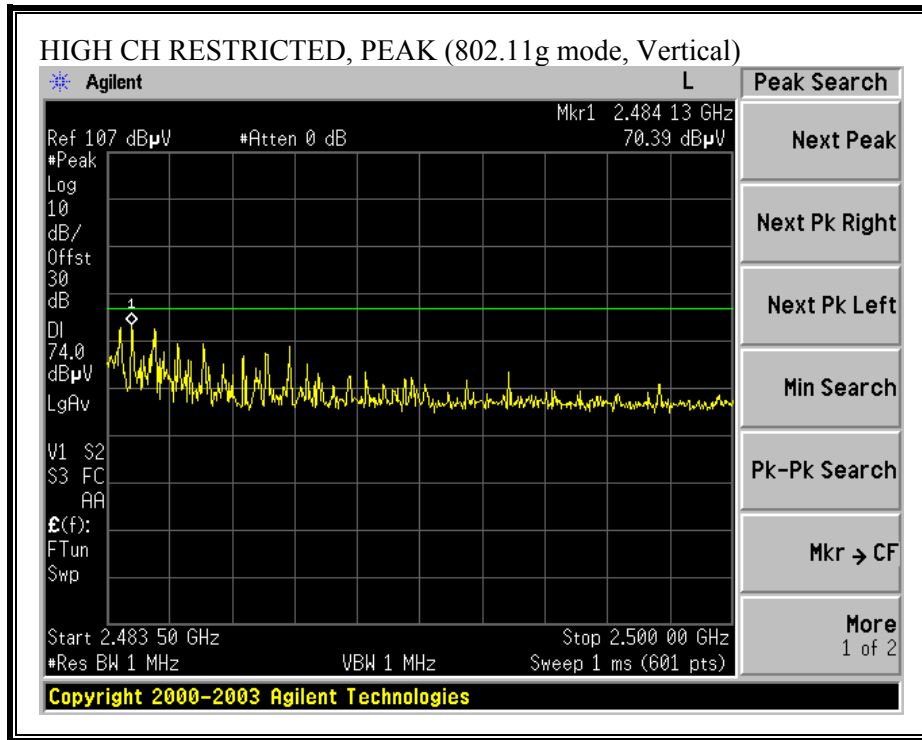

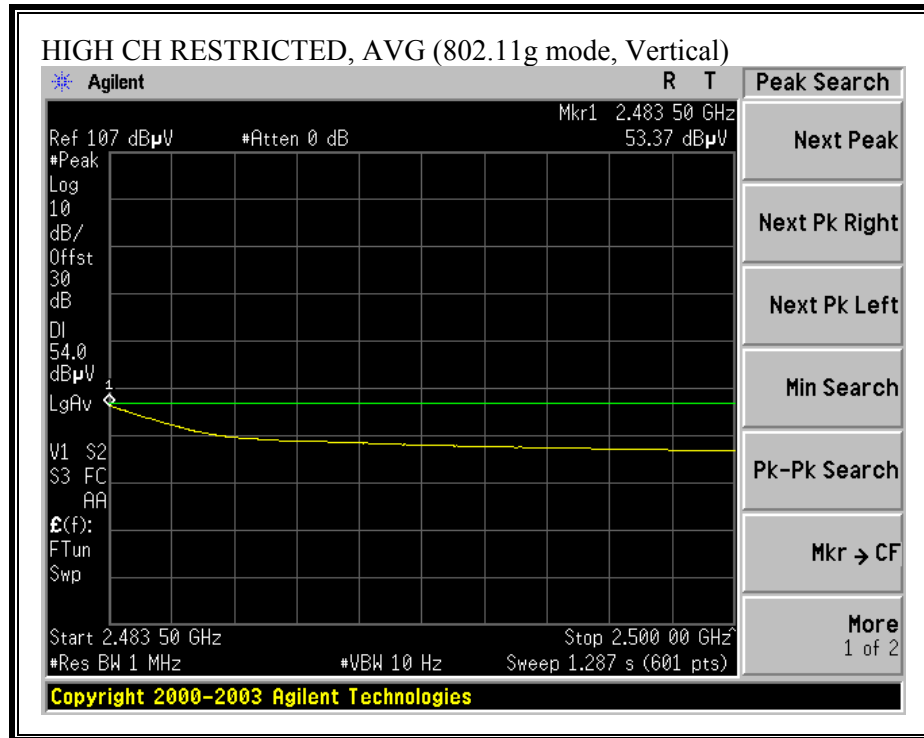

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

10/13/04
High Frequency Measurement

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:Chin Pang
Project #:04U3022-1
Company:Tropos Networks
EUT Descip.:802.11 b/g Outdoor Wi-Fi Cellular Base Station
EUT M/N:TROPOS 5210
Test Target:FCC Class B
Mode Oper:Tx, g mode, 12dBi Omni

Test Equipment:

EMCO Horn 1-18GHz
T73; S/N: 6717 @3m

Pre-amplifier 1-26GHz
T87 Miteq924342

Pre-amplifier 26-40GHz

Horn > 18GHz

Hi Frequency Cables

2 foot cable
3 foot cable
4 foot cable
12 foot cable

4_Thanh
12_Vien

HPF
HPF_4.6GHz

Reject Filter


Peak Measurements
RBW=VBW=1MHz


Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Transmitting at low ch															
4.824	3.0	48.3	34.8	32.9	3.6	-39.6	0.0	2.4	47.6	34.1	74	54	-26.4	-19.9	V
12.060	3.0	45.4	33.4	38.8	6.9	-39.2	0.0	0.7	52.7	40.7	74	54	-21.3	-13.3	V
4.824	3.0	47.3	34.3	32.9	3.6	-39.6	0.0	2.4	46.6	33.6	74	54	-27.4	-20.4	H
12.060	3.0	45.0	33.0	38.8	6.9	-39.2	0.0	0.7	52.3	40.3	74	54	-21.7	-13.7	H
Transmitting at mid ch															
4.874	3.0	47.8	34.5	32.9	3.6	-39.6	0.0	2.5	47.2	33.9	74	54	-26.8	-20.1	V
7.311	3.0	47.5	35.3	35.8	4.6	-40.3	0.0	1.4	49.0	36.8	74	54	-25.0	-17.2	V
12.185	3.0	44.6	33.5	38.8	6.9	-39.3	0.0	0.7	51.8	40.7	74	54	-22.2	-13.3	V
4.874	3.0	47.0	34.3	32.9	3.6	-39.6	0.0	2.5	46.4	33.7	74	54	-27.6	-20.3	H
7.311	3.0	47.4	35.0	35.8	4.6	-40.3	0.0	1.4	48.9	36.5	74	54	-25.1	-17.5	H
12.185	3.0	45.0	33.3	38.8	6.9	-39.3	0.0	0.7	52.2	40.5	74	54	-21.8	-13.5	H
Transmitting at high ch															
4.924	3.0	48.0	35.0	33.0	3.7	-39.7	0.0	2.5	47.4	34.4	74	54	-26.6	-19.6	V
7.386	3.0	47.1	34.8	36.0	4.6	-40.3	0.0	1.4	48.8	36.5	74	54	-25.2	-17.5	V
12.310	3.0	44.3	33.4	38.8	6.9	-39.4	0.0	0.7	51.4	40.5	74	54	-22.6	-13.5	V
4.924	3.0	47.2	34.1	33.0	3.7	-39.7	0.0	2.5	46.6	33.5	74	54	-27.4	-20.5	H
7.386	3.0	47.4	35.0	36.0	4.6	-40.3	0.0	1.4	49.1	36.7	74	54	-24.9	-17.3	H
12.310	3.0	46.0	33.8	38.8	6.9	-39.4	0.0	0.7	53.1	40.9	74	54	-20.9	-13.1	H
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								


7.2.4. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND WITH 12dBi SECTOR ANTENNA


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

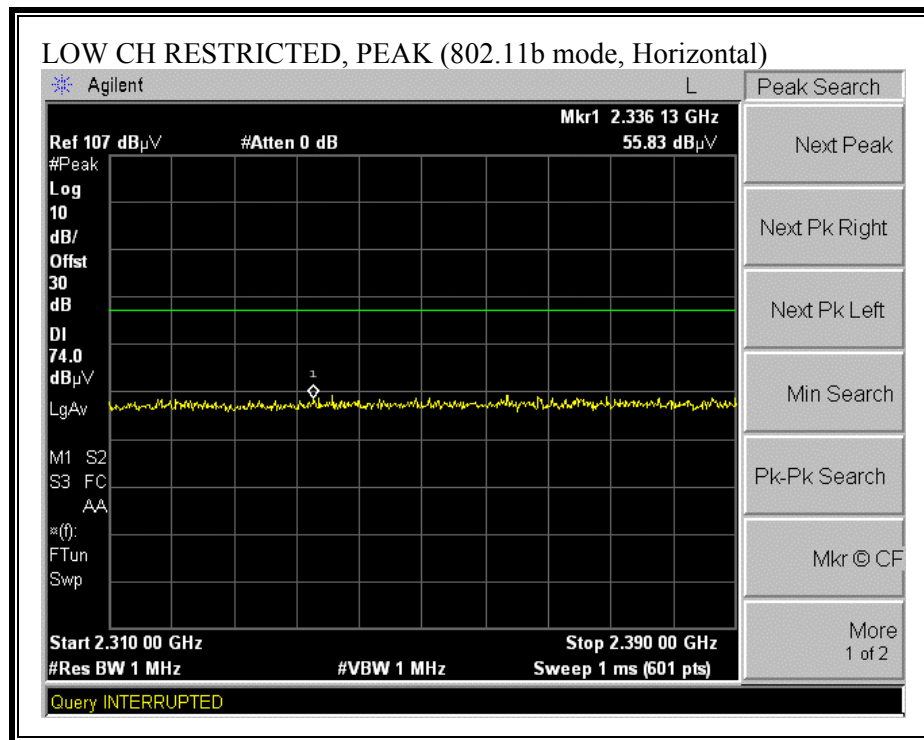

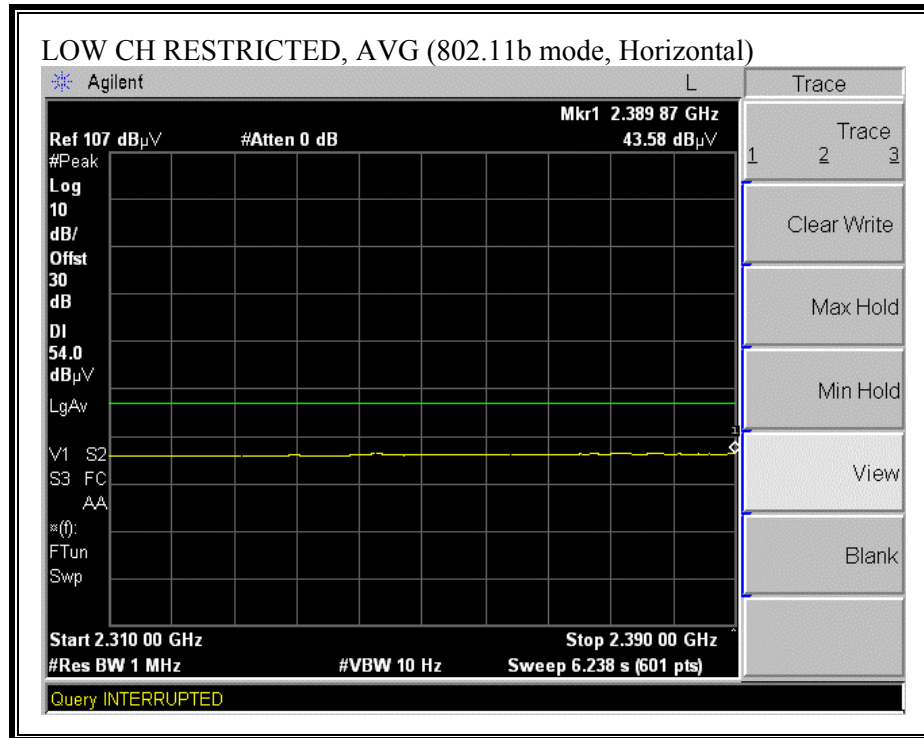



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

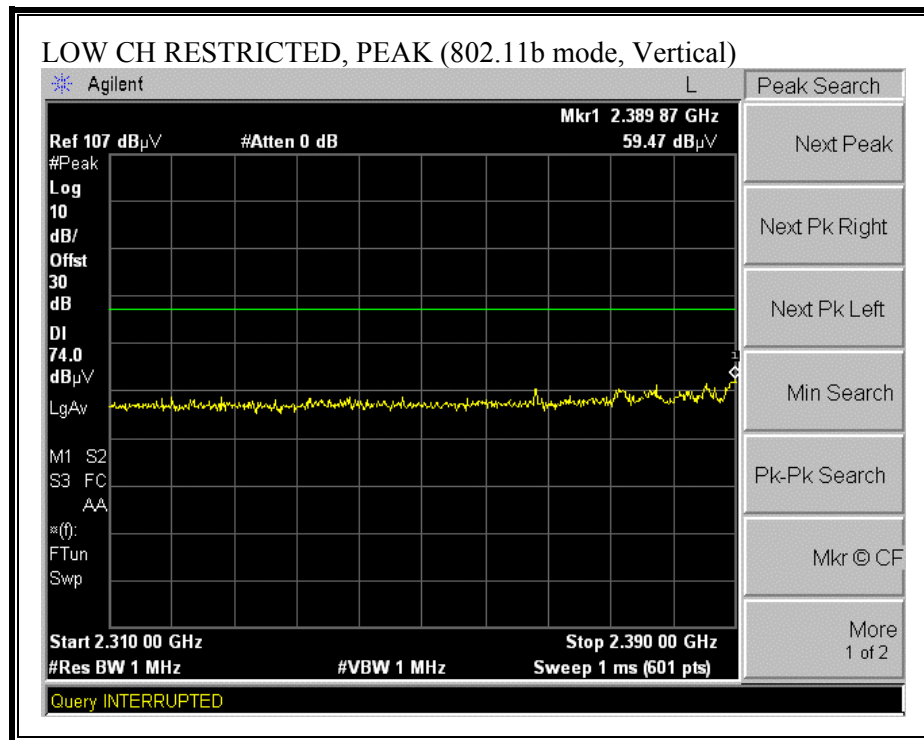

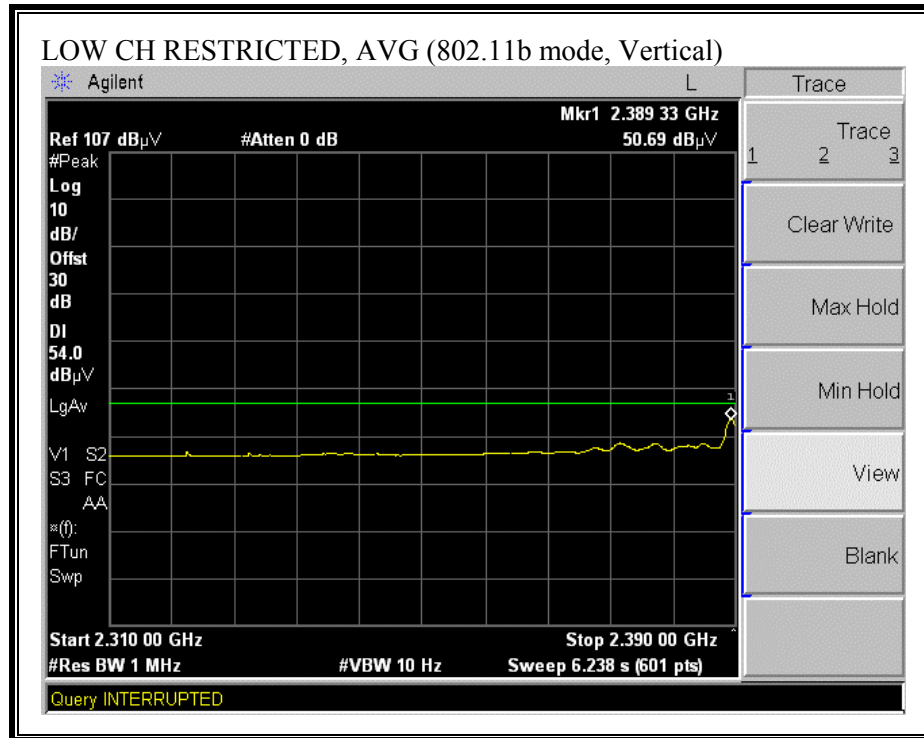



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

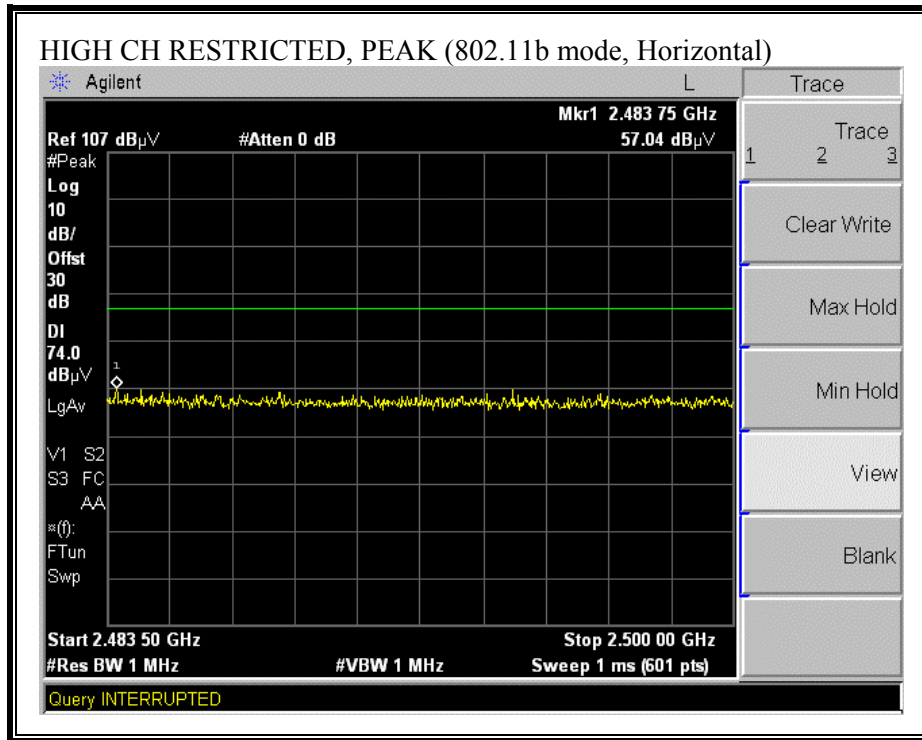

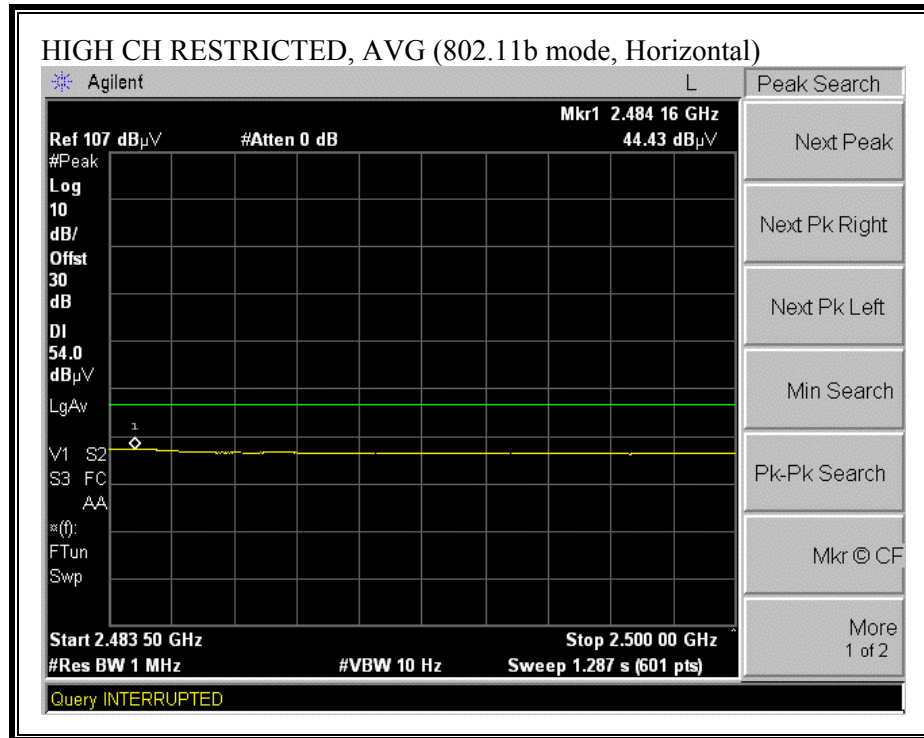

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

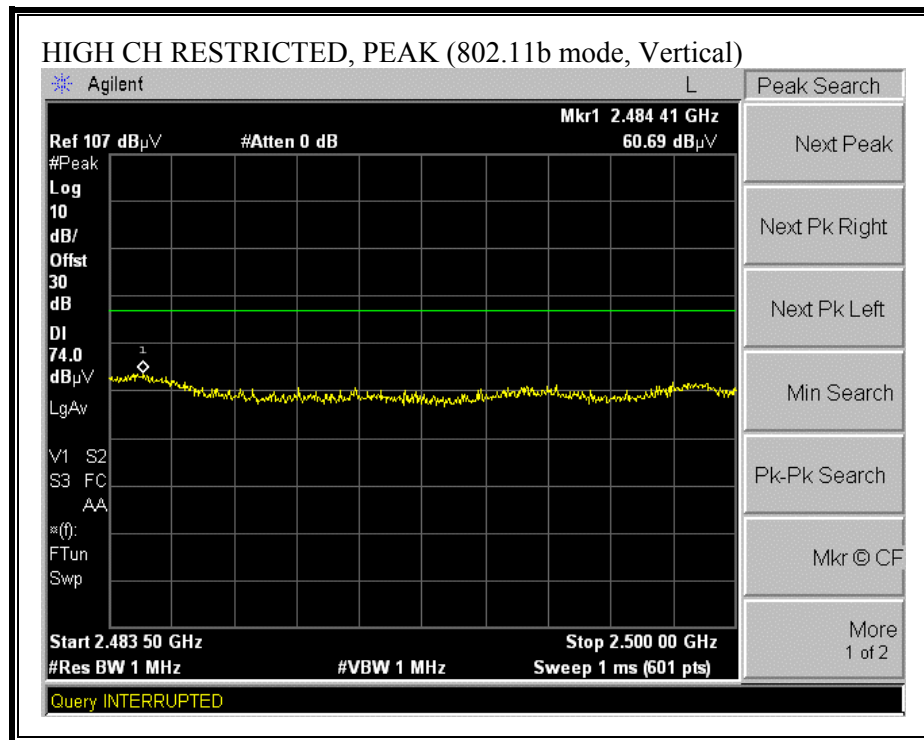


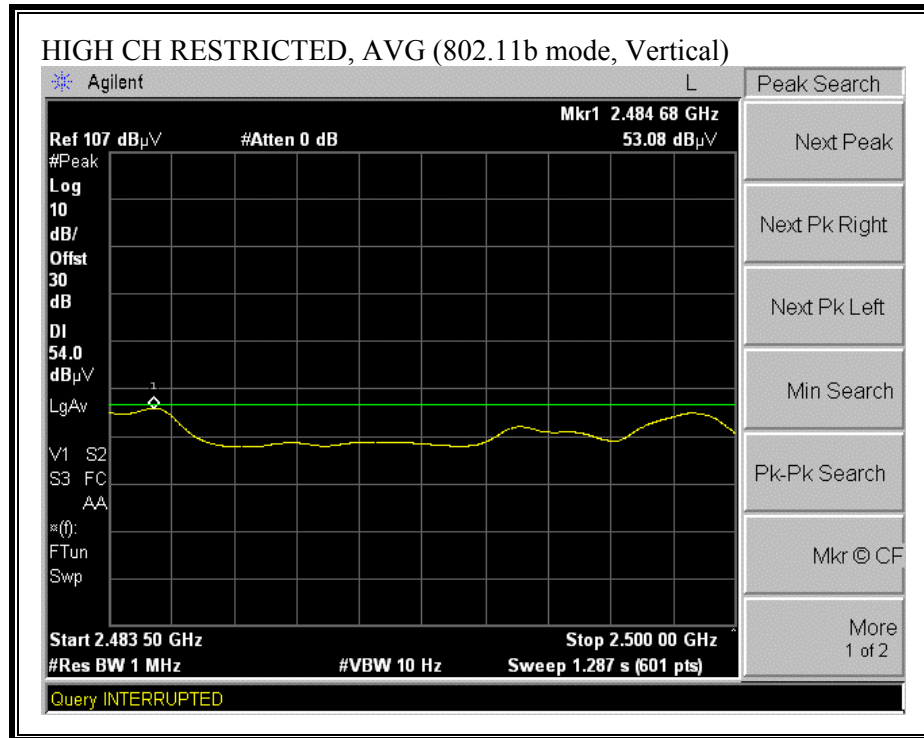


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


10/13/04 High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:Chin Pang																
Project #:04U3022-1																
Company:Tropos Networks																
EUT Descip.:802.11 b/g Outdoor Wi-Fi Cellular Base Station																
EUT M/N:TROPOS 5210																
Test Target:FCC Class B																
Mode Oper:Tx, b mode, 12dBi Sector																
Test Equipment:																
EMCO Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz										
T73; S/N: 6717 @3m		T87 Miteq924342														
Hi Frequency Cables																
2 foot cable		3 foot cable		4 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements				
				4_Thanh		12_Vien		HPF_4.6GHz				RBW=VBW=1MHz				
Average Measurements																
RBW=1MHz ; VBW=10Hz																
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Transmitting at low ch																
4.824	3.0	47.3	37.0	32.9	3.6	-39.6	0.0	2.4	46.6	36.3	74	54	-27.4	-17.7	V	
12.060	3.0	43.5	33.0	38.8	6.9	-39.2	0.0	0.7	50.8	40.3	74	54	-23.2	-13.7	V	
4.824	3.0	47.5	35.0	32.9	3.6	-39.6	0.0	2.4	46.8	34.3	74	54	-27.2	-19.7	H	
12.060	3.0	43.4	33.0	38.8	6.9	-39.2	0.0	0.7	50.7	40.3	74	54	-23.3	-13.7	H	
Transmitting at mid ch																
4.874	3.0	47.8	34.0	32.9	3.6	-39.6	0.0	2.5	47.2	33.4	74	54	-26.8	-20.6	V	
7.311	3.0	52.5	47.0	35.8	4.6	-40.3	0.0	1.4	54.0	48.5	74	54	-20.0	-5.5	V	
12.185	3.0	44.8	33.4	38.8	6.9	-39.3	0.0	0.7	52.0	40.6	74	54	-22.0	-13.4	V	
4.874	3.0	47.6	33.4	32.9	3.6	-39.6	0.0	2.5	47.0	32.8	74	54	-27.0	-21.2	H	
7.311	3.0	52.2	45.6	35.8	4.6	-40.3	0.0	1.4	53.7	47.1	74	54	-20.3	-6.9	H	
12.185	3.0	44.6	33.4	38.8	6.9	-39.3	0.0	0.7	51.8	40.6	74	54	-22.2	-13.4	H	
Transmitting at high ch																
4.924	3.0	49.5	43.2	33.0	3.7	-39.7	0.0	2.5	48.9	42.6	74	54	-25.1	-11.4	V	
7.386	3.0	55.2	49.0	36.0	4.6	-40.3	0.0	1.4	56.9	50.7	74	54	-17.1	-3.3	V	
12.310	3.0	44.0	33.5	38.8	6.9	-39.4	0.0	0.7	51.1	40.6	74	54	-22.9	-13.4	V	
4.924	3.0	47.3	37.5	33.0	3.7	-39.7	0.0	2.5	46.7	36.9	74	54	-27.3	-17.1	H	
7.386	3.0	55.9	50.2	36.0	4.6	-40.3	0.0	1.4	57.5	51.9	74	54	-16.5	-2.1	H	
12.310	3.0	44.6	33.5	38.8	6.9	-39.4	0.0	0.7	51.7	40.6	74	54	-22.3	-13.4	H	
Note: No other emissions were detected above the system noise floor.																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

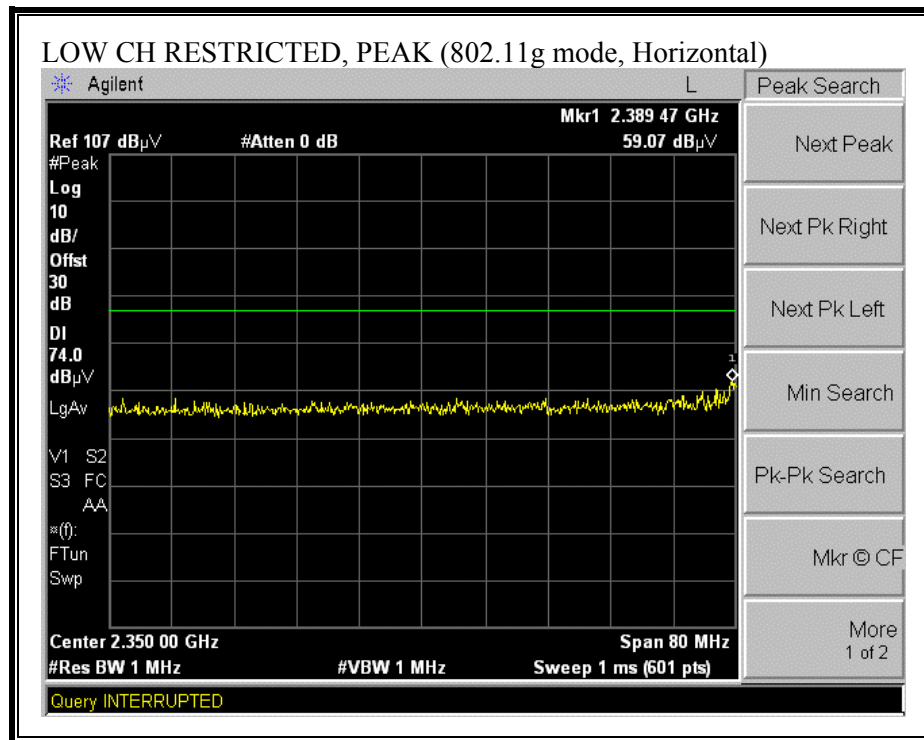

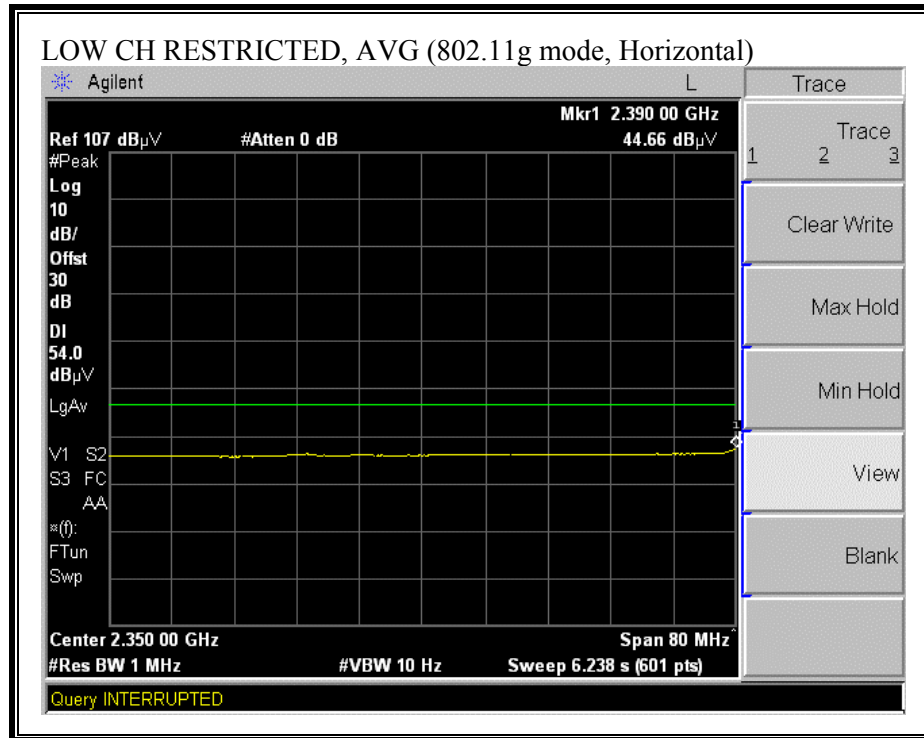



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

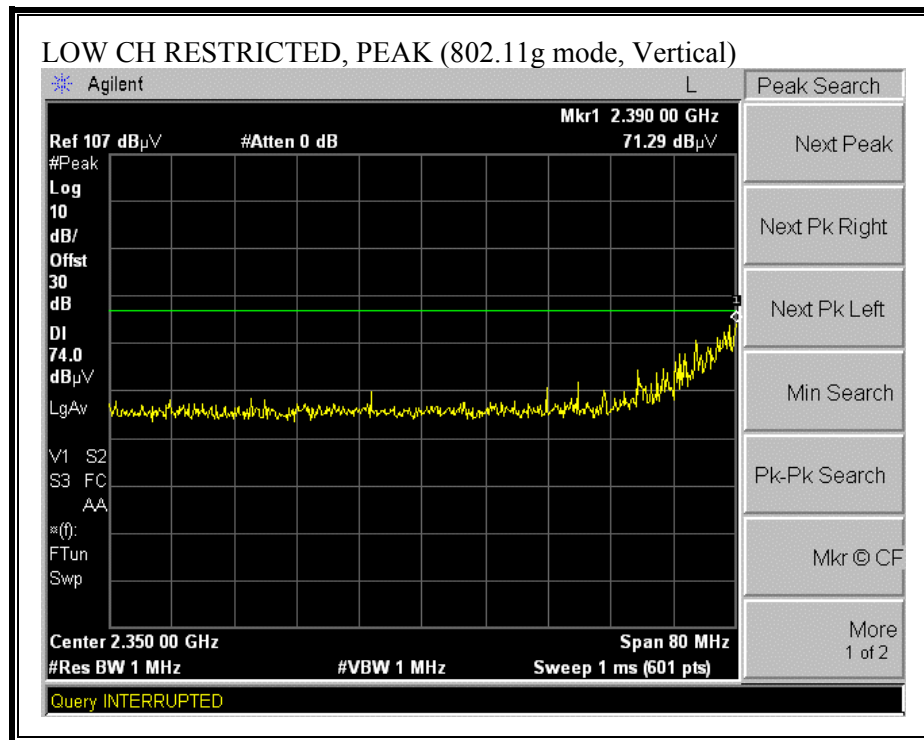

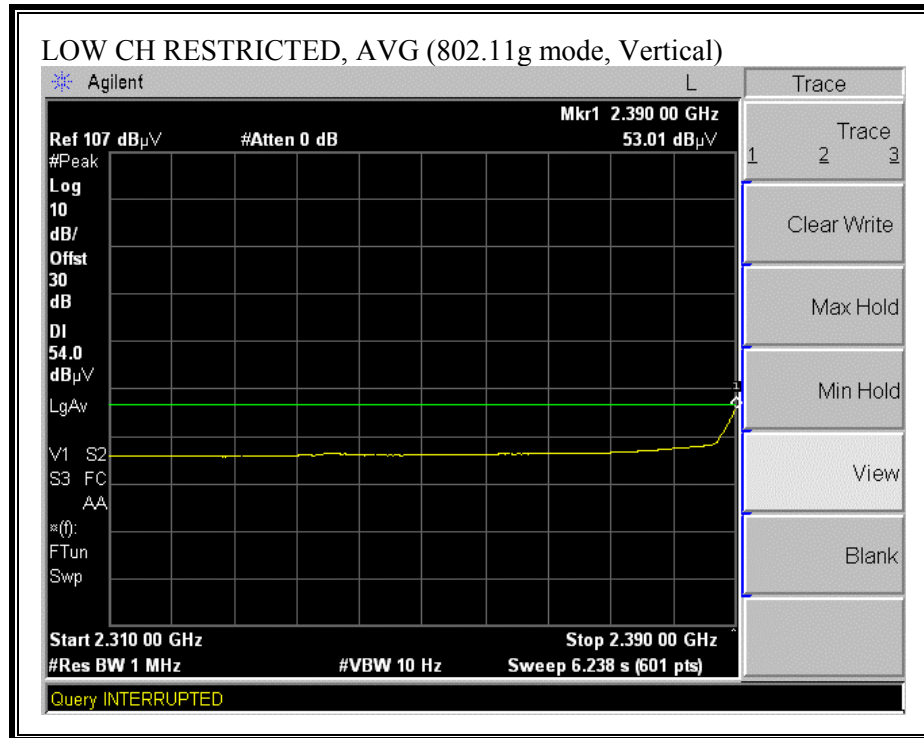



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

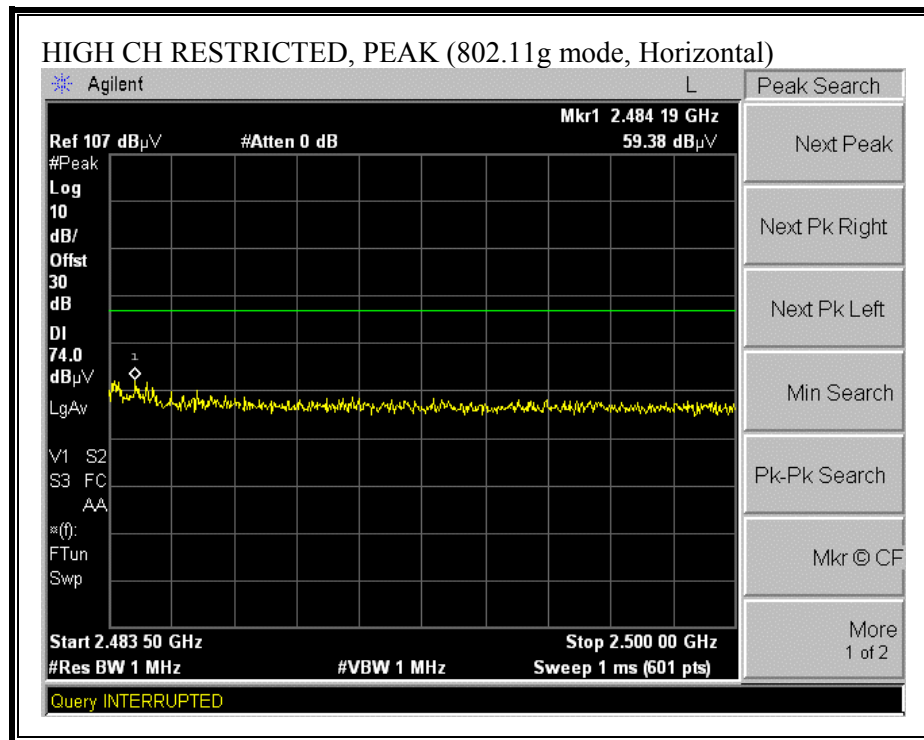

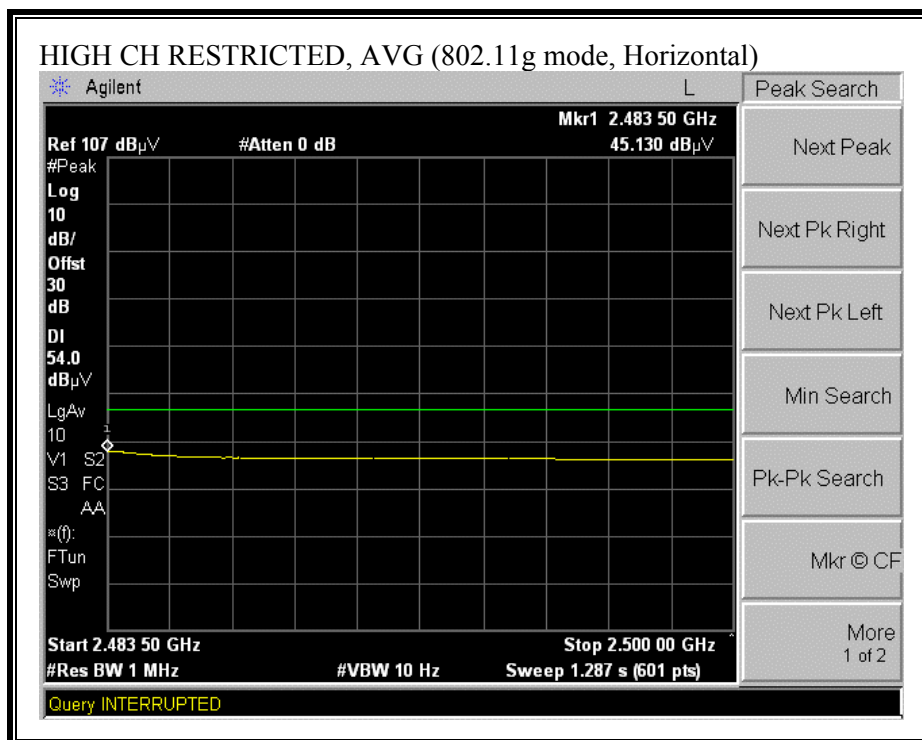

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

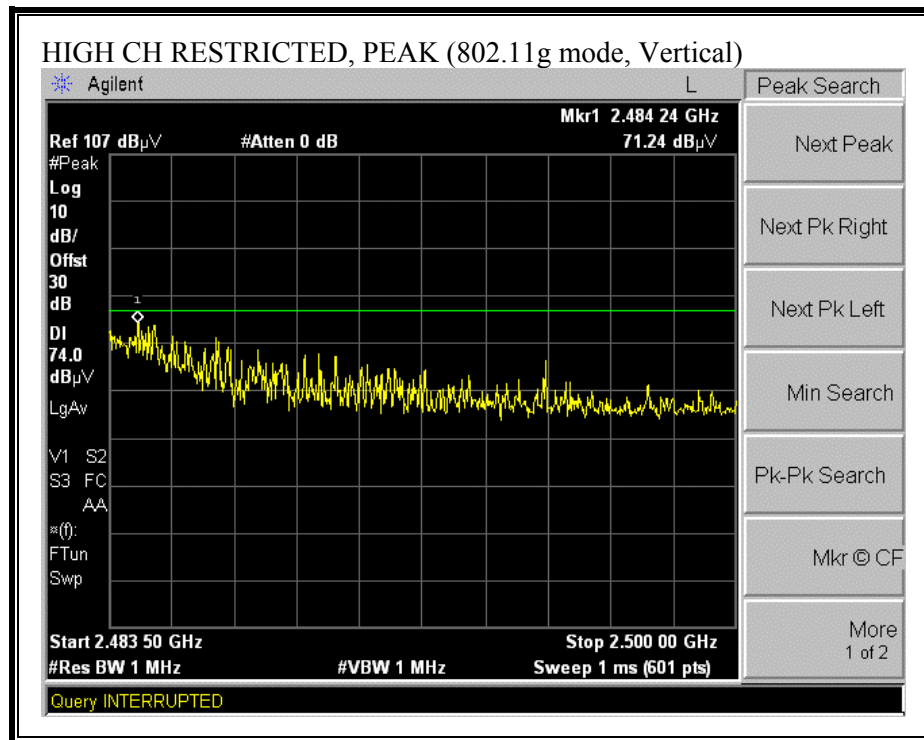

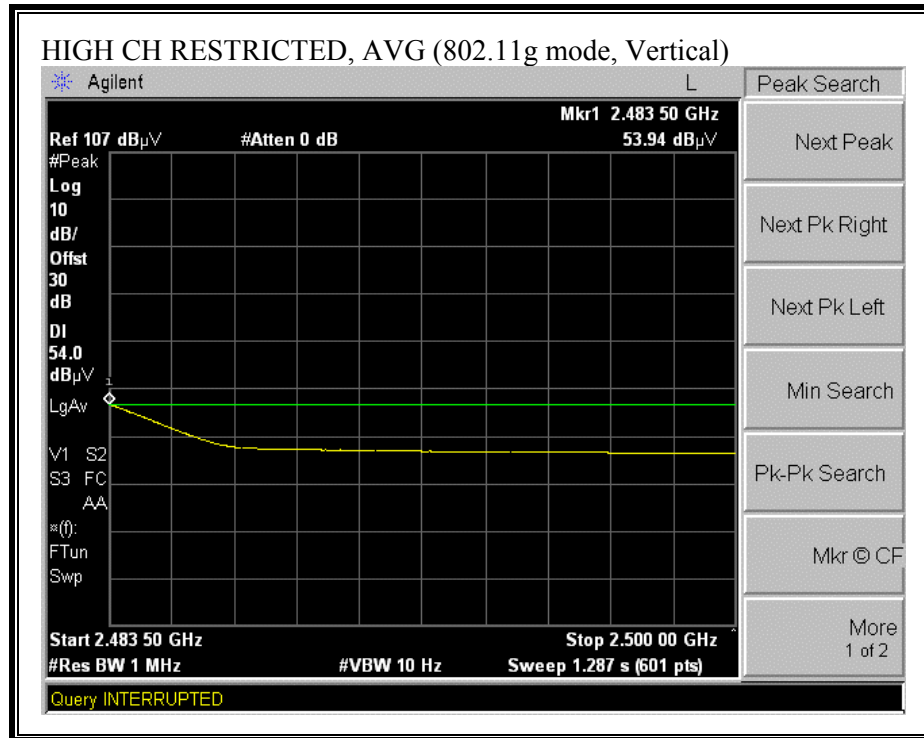

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

10/13/04 High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:Chin Pang																
Project #:04U3022-1																
Company:Tropos Networks																
EUT Descip.:802.11 b/g Outdoor Wi-Fi Cellular Base Station																
EUT M/N:TROPOS 5210																
Test Target:FCC Class B																
Mode Oper:Tx, g mode, 12dBi Sector																
Test Equipment:																
EMCO Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz										
T73; S/N: 6717 @3m		T87 Miteq924342														
Hi Frequency Cables																
2 foot cable		3 foot cable		4 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements				
				4_Thanh		12_Vien		HPF_4.6GHz				RBW=VBW=1MHz				
Average Measurements																
RBW=1MHz ; VBW=10Hz																
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Transmitting at low ch																
4.824	3.0	47.8	34.3	32.9	3.6	-39.6	0.0	2.4	47.1	33.6	74	54	-26.9	-20.4	V	
12.060	3.0	45.0	34.4	38.8	6.9	-39.2	0.0	0.7	52.3	41.7	74	54	-21.7	-12.3	V	
4.824	3.0	46.6	34.1	32.9	3.6	-39.6	0.0	2.4	45.9	33.4	74	54	-28.1	-20.6	H	
12.060	3.0	44.0	33.0	38.8	6.9	-39.2	0.0	0.7	51.3	40.3	74	54	-22.7	-13.7	H	
Transmitting at mid ch																
4.874	3.0	48.4	34.8	32.9	3.6	-39.6	0.0	2.5	47.8	34.2	74	54	-26.2	-19.8	V	
7.311	3.0	57.0	42.3	35.8	4.6	-40.3	0.0	1.4	58.5	43.8	74	54	-15.5	-10.2	V	
12.185	3.0	45.0	33.5	38.8	6.9	-39.3	0.0	0.7	52.2	40.7	74	54	-21.8	-13.3	V	
4.874	3.0	47.0	33.5	32.9	3.6	-39.6	0.0	2.5	46.4	32.8	74	54	-27.6	-21.2	H	
7.311	3.0	58.0	42.5	35.8	4.6	-40.3	0.0	1.4	59.5	44.0	74	54	-14.5	-10.0	H	
12.185	3.0	44.0	33.2	38.8	6.9	-39.3	0.0	0.7	51.2	40.4	74	54	-22.8	-13.6	H	
Transmitting at high ch																
4.924	3.0	48.4	34.9	33.0	3.7	-39.7	0.0	2.5	47.8	34.3	74	54	-26.2	-19.7	V	
7.386	3.0	57.0	41.2	36.0	4.6	-40.3	0.0	1.4	58.7	42.9	74	54	-15.3	-11.1	V	
12.310	3.0	44.2	33.4	38.8	6.9	-39.4	0.0	0.7	51.3	40.5	74	54	-22.7	-13.5	V	
4.924	3.0	45.0	34.1	33.0	3.7	-39.7	0.0	2.5	44.4	33.5	74	54	-29.6	-20.5	H	
7.386	3.0	59.7	44.9	36.0	4.6	-40.3	0.0	1.4	61.4	46.6	74	54	-12.6	-7.4	H	
12.310	3.0	44.0	33.0	38.8	6.9	-39.4	0.0	0.7	51.1	40.1	74	54	-22.9	-13.9	H	
Note: No other emissions were detected above the system noise floor.																
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit							
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit							
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit							
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit							
CL	Cable Loss			HPF	High Pass Filter											

7.2.5. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 7.4dBi OMNI ANTENNA


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)7.4dBi OMNI ANTENNA

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 18 File#: Tropos TX.EMI Date: 10-13-2004 Time: 10:10:07

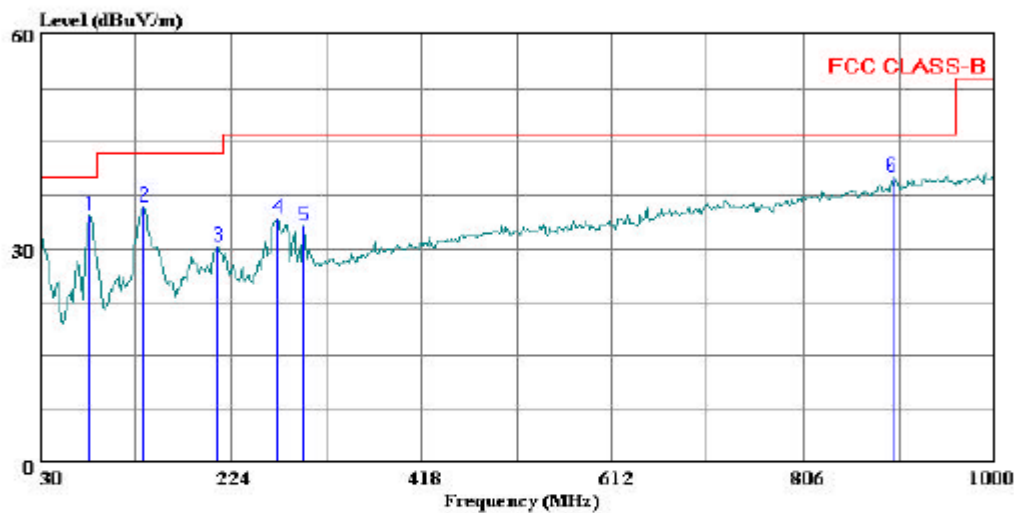

(Auxiliary ATC)

Trace: 17

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Chin Pang
Project #: : 04U3022-1
Company: : Tropos Networks
EUT: : 802.11b/g Outdoor Wi-Fi Cellular Base
: Station
Model No: : TROPUS 5210
Configuration: : EUT/ 7.4dBi Omni antenna
Target of Test: : FCC Class B
Mode of Operation: b mode, Tx, (Worst Case)

HORIZONTAL DATA

Page: 1

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	80.440	Peak	24.95	9.69	34.64	40.00	-5.36
2	135.730	Peak	20.12	15.76	35.88	43.50	-7.62
3	211.390	Peak	17.10	13.22	30.32	43.50	-13.18
4	271.530	Peak	18.64	15.52	34.16	46.00	-11.84
5	298.690	Peak	16.96	16.28	33.23	46.00	-12.77
6	895.240	Peak	13.55	26.49	40.04	46.00	-5.96


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL) 7.4dBi OMNI ANTENNA

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 20 File#: Tropos TX.EMI Date: 10-13-2004 Time: 10:13:59

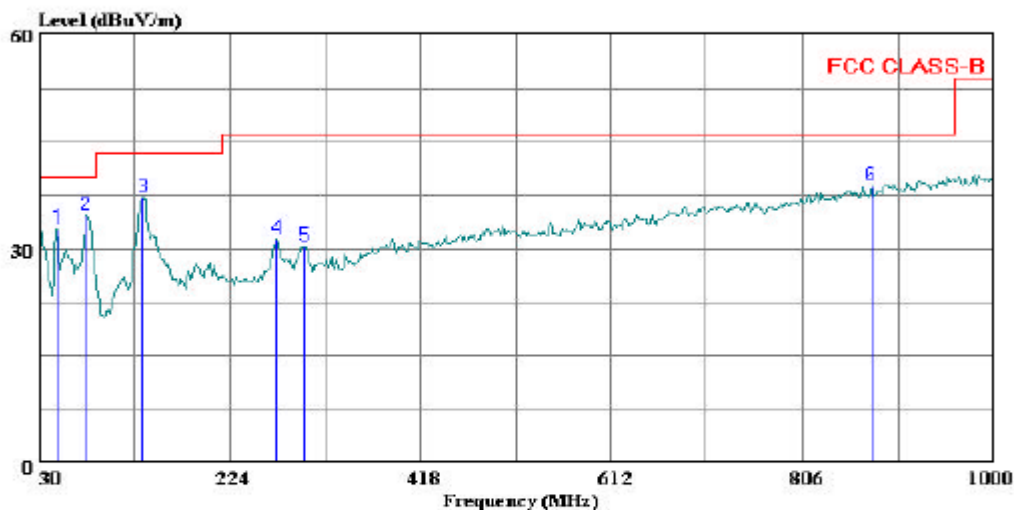

(Aux ATC)

Trace: 19

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Chin Pang
Project #: : 04U3022-1
Company: : Tropos Networks
EUT: : 802.11b/g Outdoor Wi-Fi Cellular Base
: Station
Model No: : TROPOS 5210
Configuration: : EUT/ 7.4dBi Omni antenna
Target of Test: : FCC Class B
Mode of Operation: b mode, Tx, (Worst Case)

VERTICAL DATA

Page: 1

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	48.430	Peak	21.92	10.97	32.89	40.00	-7.11
2	77.530	Peak	24.99	9.71	34.70	40.00	-5.30
3	135.730	Peak	21.41	15.76	37.17	43.50	-6.33
4	271.530	Peak	15.79	15.52	31.31	46.00	-14.69
5	299.660	Peak	14.00	16.29	30.29	46.00	-15.71
6	875.840	Peak	12.80	26.10	38.90	46.00	-7.10

7.2.6. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 12dBi OMNI ANTENNA


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL (12dBi OMNI ANTENNA)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 16 File#: Tropos TX.EMI Date: 10-13-2004 Time: 10:03:22

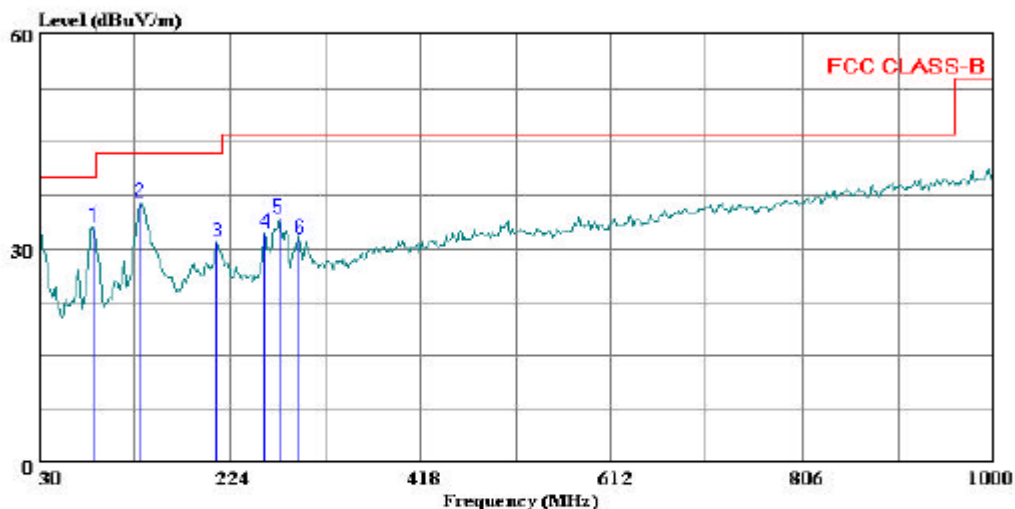

(Auxiliary ATC)

Trace: 15

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Chin Pang
Project #: : 04U3022-1
Company: : Tropos Networks
EUT: : 802.11b/g Outdoor Wi-Fi Cellular Base
: Station
Model No: : TROPOS 5210
Configuration: : EUT/ 12 dBi Omni antenna
Target of Test: : FCC Class B
Mode of Operation: b mode, Tx, (Worst Case)

HORIZONTAL DATA

Page: 1

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	85.290	Peak	23.57	9.45	33.02	40.00	-6.98
2	133.790	Peak	20.71	15.85	36.56	43.50	-6.94
3	211.390	Peak	17.63	13.22	30.85	43.50	-12.65
4	259.890	Peak	17.31	14.93	32.24	46.00	-13.76
5	274.440	Peak	18.56	15.64	34.20	46.00	-11.80
6	294.810	Peak	15.16	16.18	31.34	46.00	-14.67


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL) (12dBi OMNI ANTENNA)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 14 File#: Tropos TX.EMI Date: 10-13-2004 Time: 09:59:05

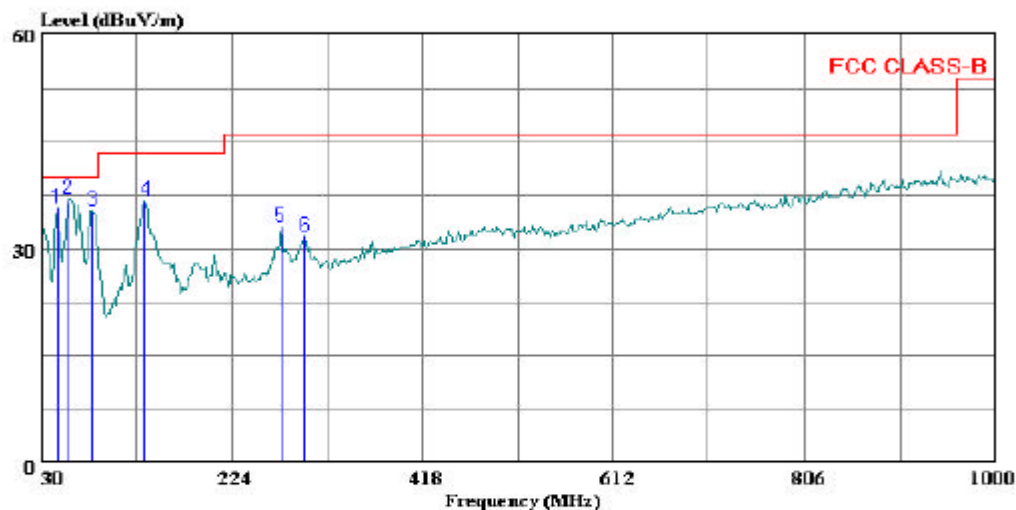

(Aux1:ATC)

Trace: 13

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Chin Pang
Project #: : 04U3022-1
Company: : Tropos Networks
EUT: : 802.11b/g Outdoor Wi-Fi Cellular Base
: Station
Model No: : TROPUS 5210
Configuration: : EUT/ 12 dBi Omni antenna
Target of Test: : FCC Class B
Mode of Operation: b mode, Tx, (Worst Case)

VERTICAL DATA

Page: 1

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	46.490	Peak	23.04	12.68	35.72	40.00	-4.28
2	58.130	Peak	27.95	9.10	37.05	40.00	-2.95
3	82.380	Peak	25.75	9.60	35.35	40.00	-4.65
4	135.730	Peak	21.06	15.76	36.82	43.50	-6.68
5	274.440	Peak	17.33	15.64	32.97	46.00	-13.03
6	298.690	Peak	15.50	16.28	31.78	46.00	-14.23

7.2.7. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz WITH 12dBi SECTOR ANTENNA


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL) (12dBi SECTOR ANTENNA)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 10 File#: Tropos TX.EMI Date: 10-13-2004 Time: 09:44:55

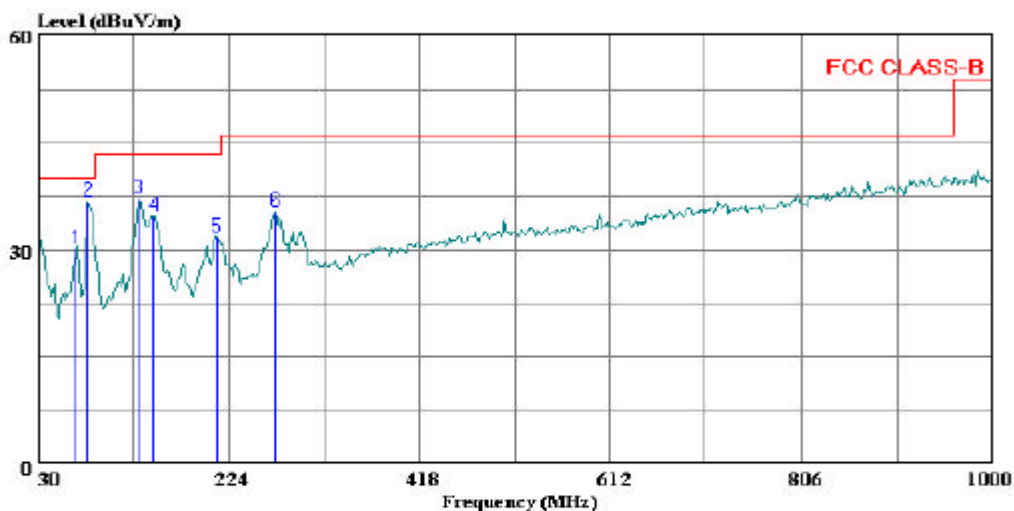

(Auxiliary ATC)

Trace: 9

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Chin Pang
Project #: : 04U3022-1
Company: : Tropos Networks
EUT: : 802.11b/g Outdoor Wi-Fi Cellular Base
: Station
Model No: : TROPOS 5210
Configuration: : EUT/ 12 dBi Sector antenna
Target of Test: : FCC Class B
Mode of Operation: b mode, Tx, (Worst Case)

HORIZONTAL DATA

Page: 1

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	68.800	Peak	20.30	9.74	30.04	40.00	-9.96
2	80.440	Peak	27.05	9.69	36.74	40.00	-3.26
3	133.790	Peak	21.25	15.85	37.10	43.50	-6.40
4	147.370	Peak	19.70	14.94	34.64	43.50	-8.86
5	212.360	Peak	18.61	13.22	31.83	43.50	-11.67
6	271.530	Peak	19.75	15.52	35.27	46.00	-10.73


**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL) (12dBi
SECTOR ANTENNA)**

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 12 File#: Tropos TX.EMI Date: 10-13-2004 Time: 09:51:10

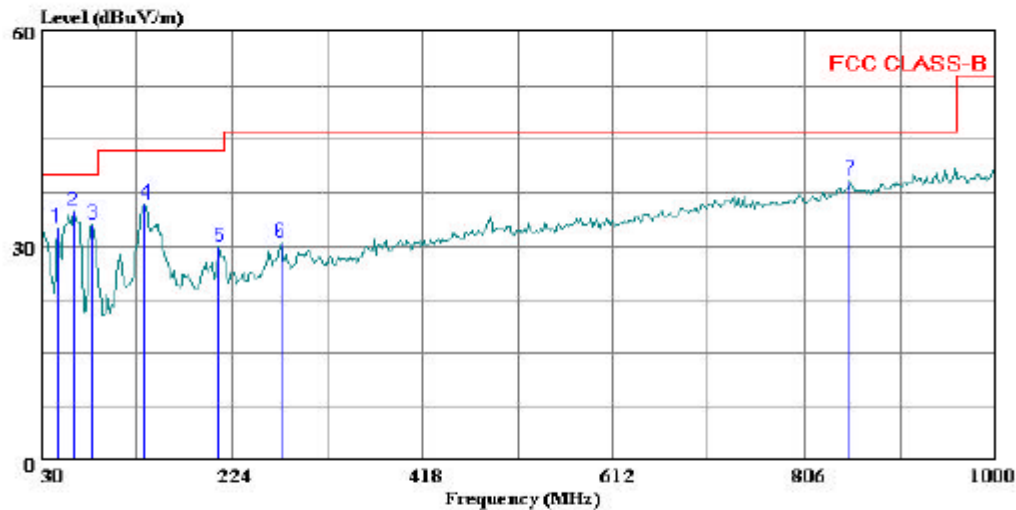

(Auxiliary ATC)

Trace: 11

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Chin Pang
Project #: : 04U3022-1
Company: : Tropos Networks
EUT: : 802.11b/g Outdoor Wi-Fi Cellular Base
: Station
Model No: : TROPOS 5210
Configuration: : EUT/ 12 dBi Sector antenna
Target of Test: : FCC Class B
Mode of Operation: b mode, Tx, (Worst Case)

VERTICAL DATA

Page: 1

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	46.490	Peak	19.93	12.68	32.61	40.00	-7.39
2	62.980	Peak	25.41	9.47	34.88	40.00	-5.12
3	82.380	Peak	23.45	9.60	33.05	40.00	-6.95
4	135.730	Peak	20.14	15.76	35.90	43.50	-7.60
5	211.390	Peak	16.63	13.22	29.85	43.50	-13.65
6	274.440	Peak	14.97	15.64	30.61	46.00	-15.39
7	851.590	Peak	13.27	25.89	39.16	46.00	-6.84

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.26	56.86	--	43.52	0.00	62.80	52.80	-5.94	-9.28	L1
0.39	51.86	--	36.34	0.00	59.06	49.06	-7.20	-12.72	L1
26.84	50.58	--	34.44	0.00	60.00	50.00	-9.42	-15.56	L1
0.26	58.04	--	44.24	0.00	62.80	52.80	-4.76	-8.56	L2
0.39	51.88	--	37.00	0.00	59.06	49.06	-7.18	-12.06	L2
9.50	46.00	--	35.56	0.00	60.00	50.00	-14.00	-14.44	L2
6 Worst Data									

LINE 1 RESULTS

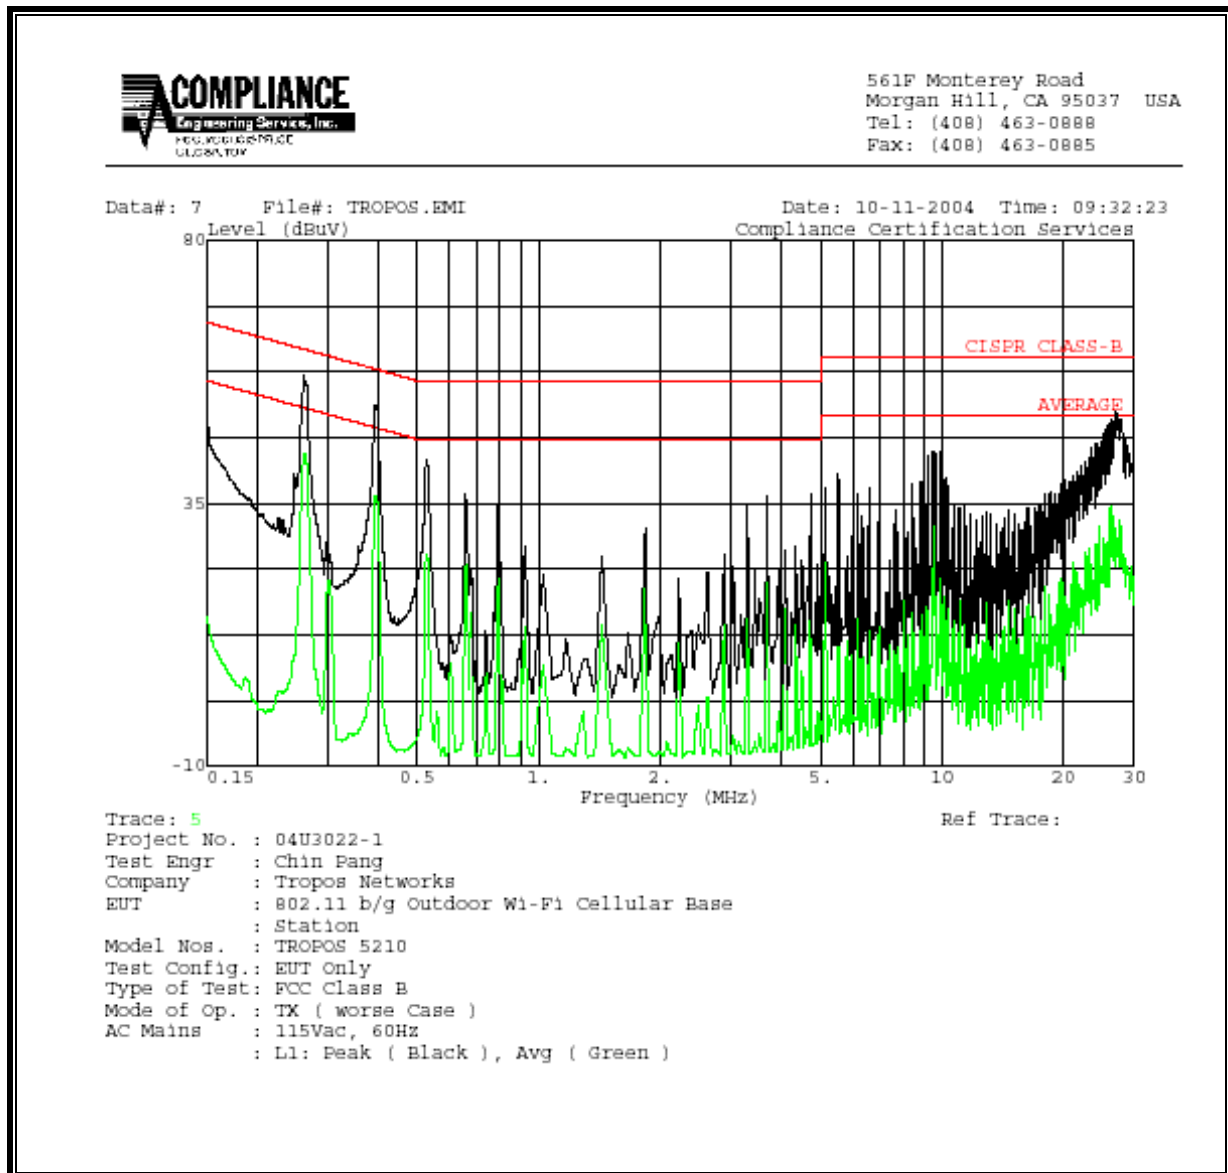

LINE 2 RESULTS

