



SL-IMG01 Antenna Datasheet

Apr. 25, 2023

Prepared by Shian Chuang

Outline


- Antenna Structure & Placement
- Matching Circuit
- Return Loss
- Peak Gain & Efficiency

Antenna Structure & Placement


Ant No.	Operating Band	Type	Material	Feeding	Dimension
LoRa Antenna	LoRa 915 MHz	PIFA	Metal	Trace	55 mm x 7 mm x 10 mm
BLE Antenna	2400MHz ~ 2500MHz	Chip	Ceramic	Trace	8mm x 7mm x 2mm

Matching Circuit


LoRa Antenna

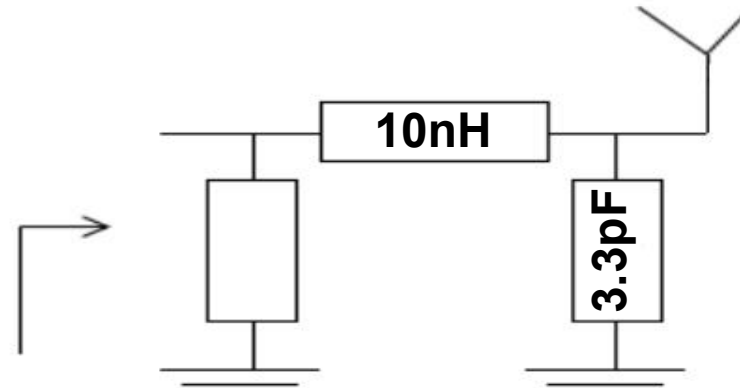


BLE Antenna

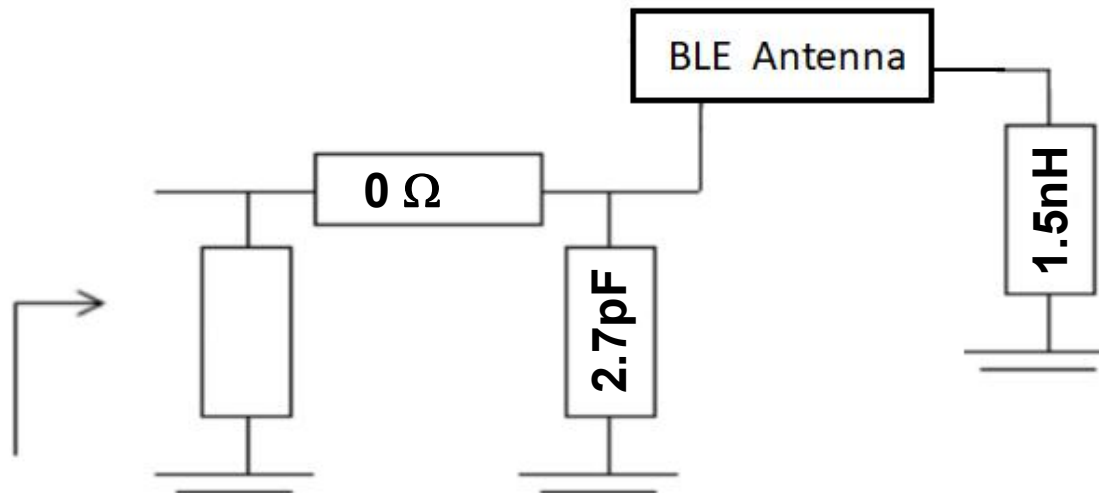



Return Loss – LoRa Ant

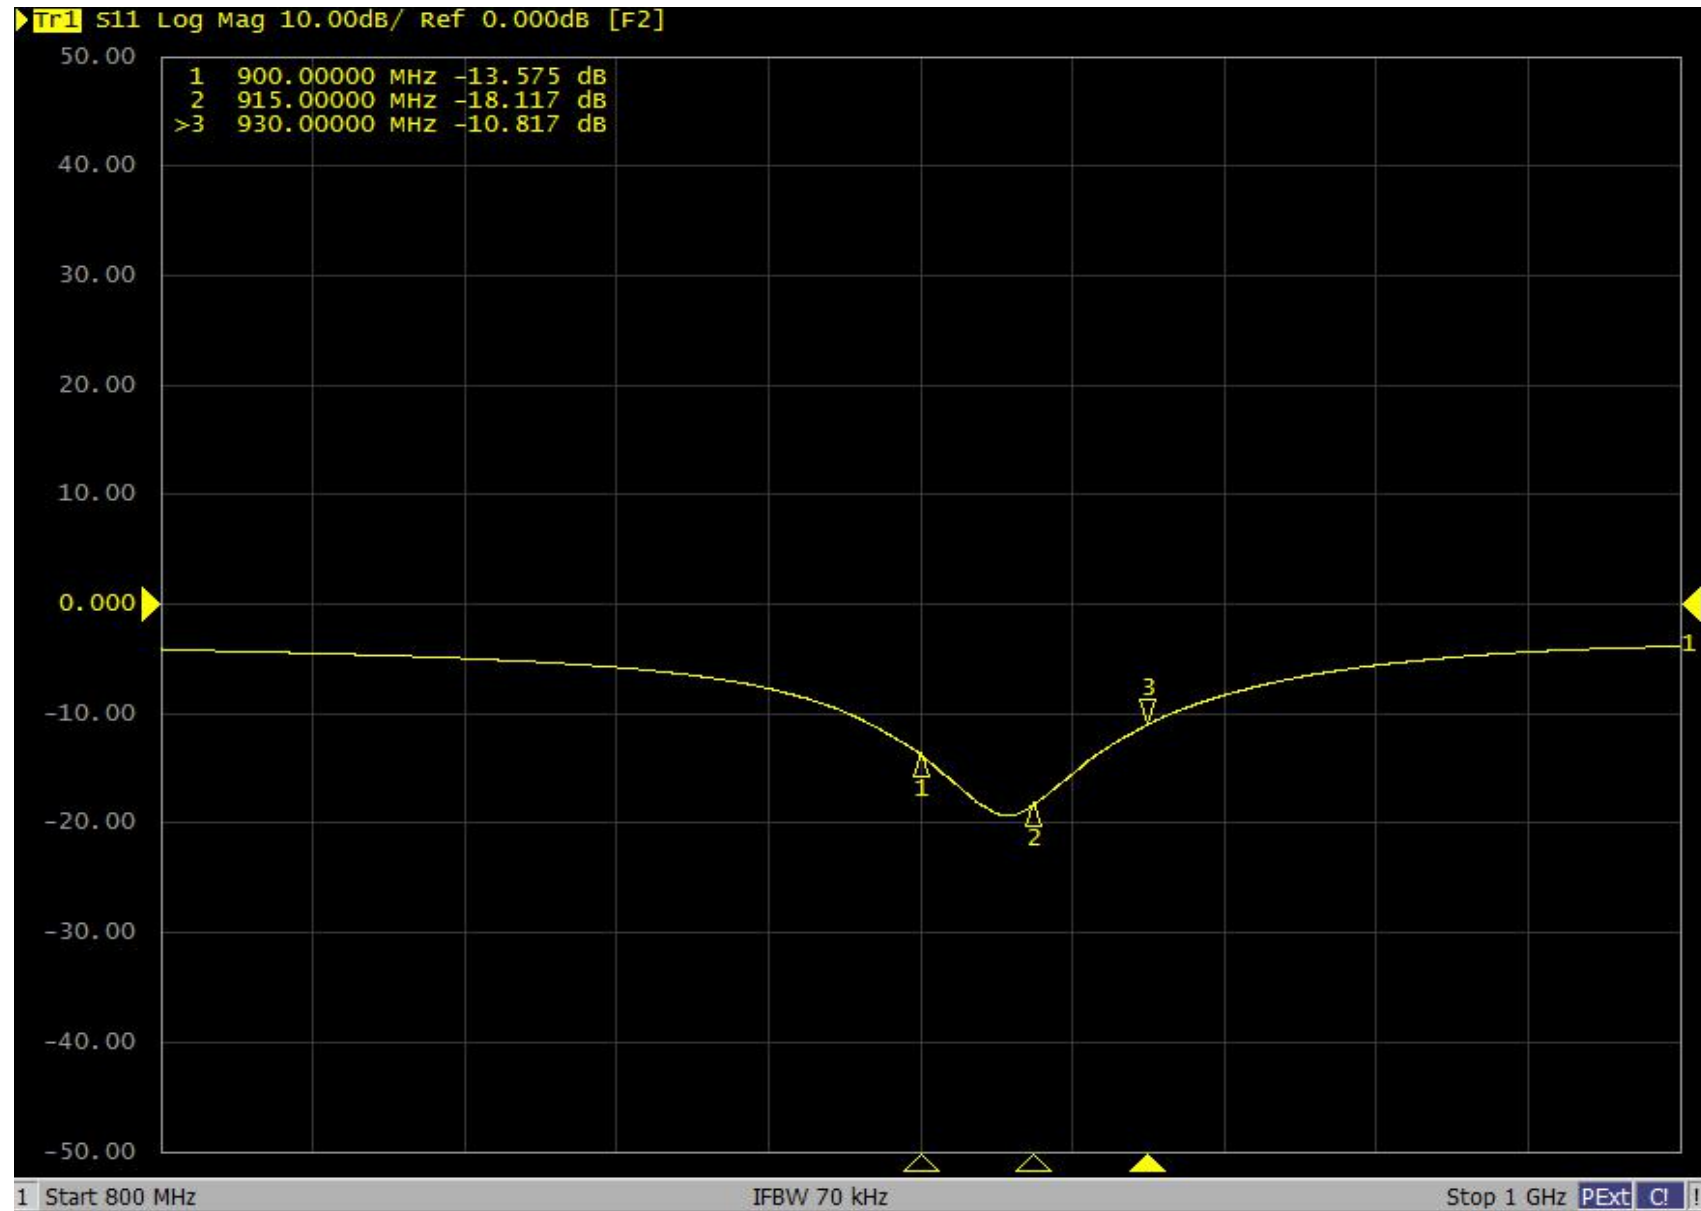


Return Loss – BLE Ant

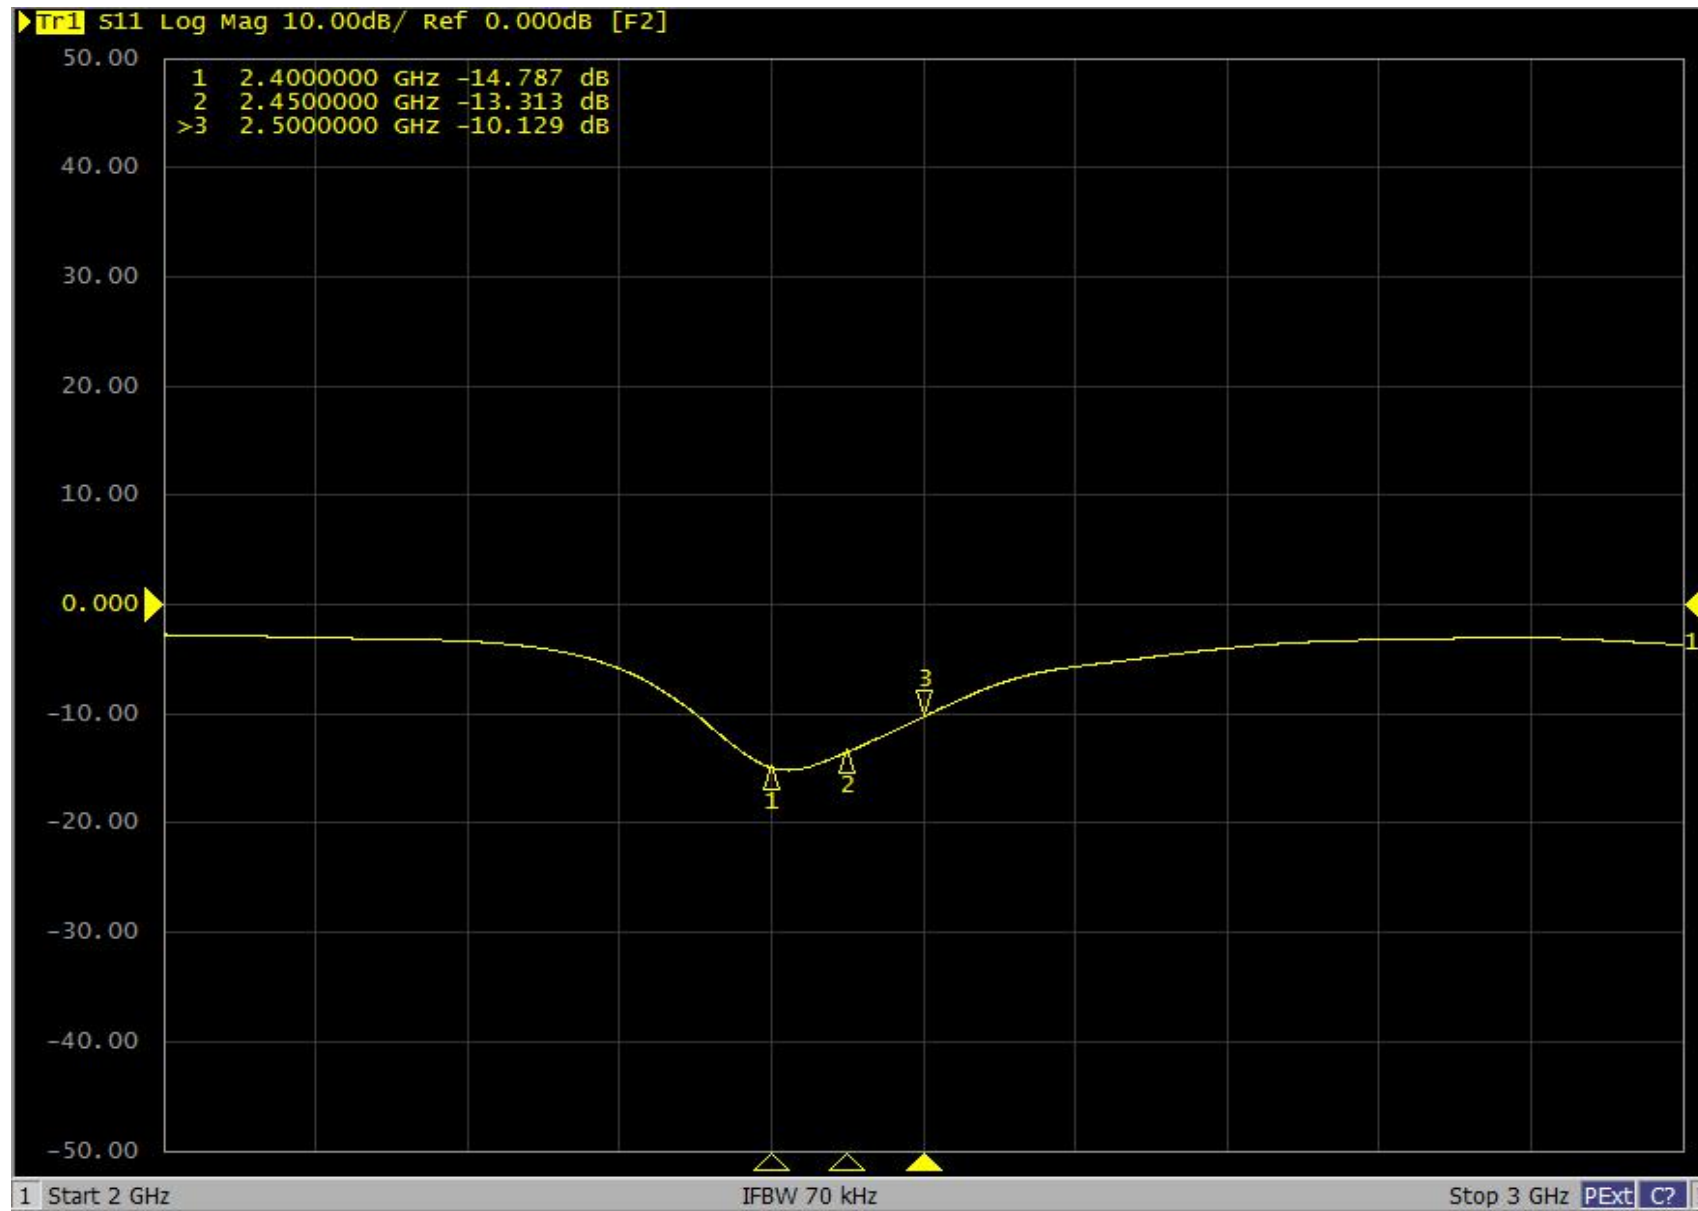



3D Radiation Pattern – LoRa Antenna @ 915MHz

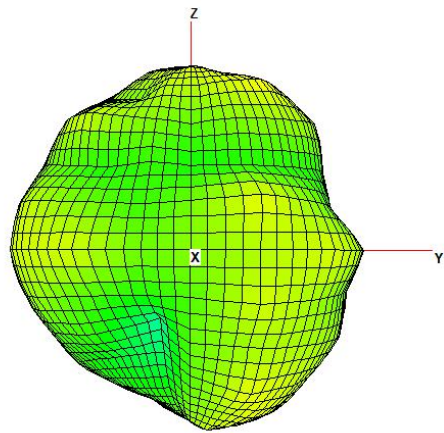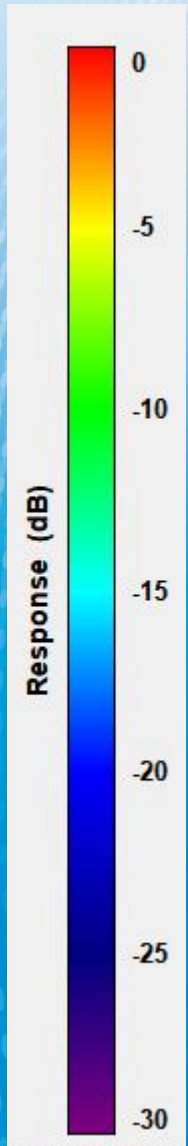



YZ-Plane

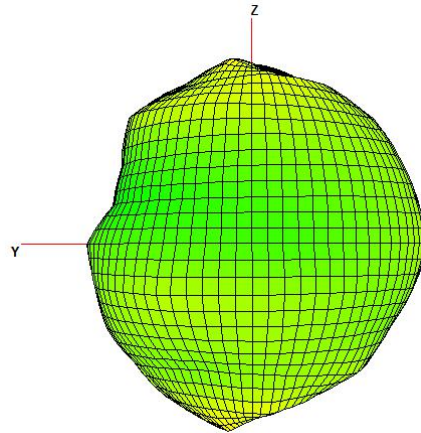



XY-Plane

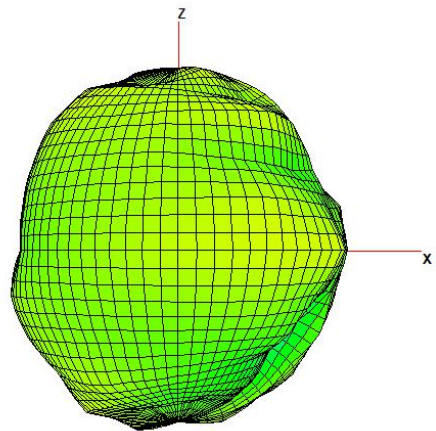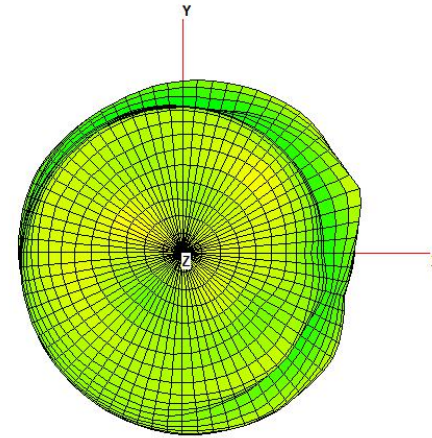


XZ-Plane

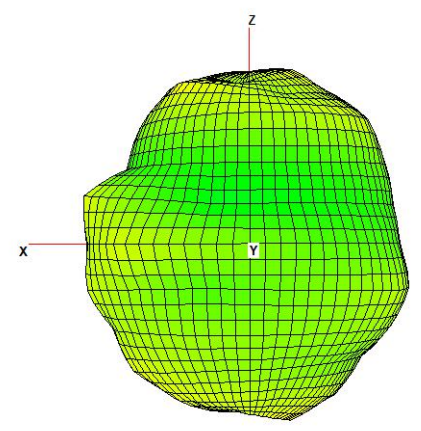


3D Radiation Pattern – LoRa Antenna @ 915MHz

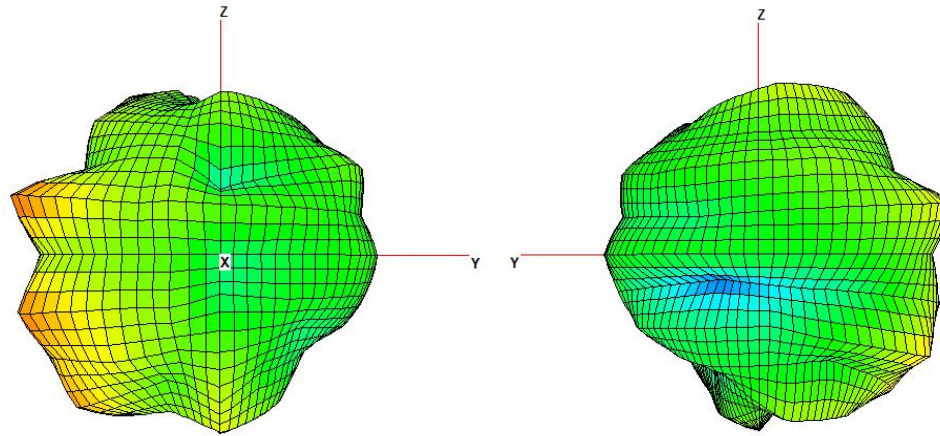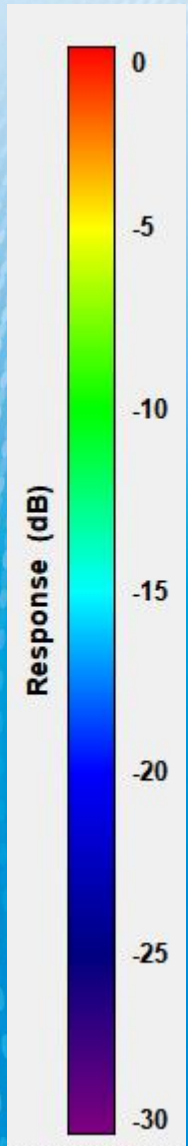


YZ-Plane

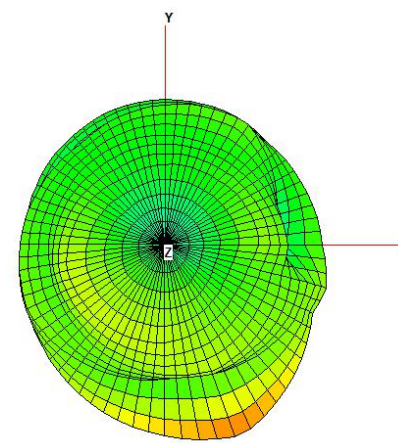

XY-Plane

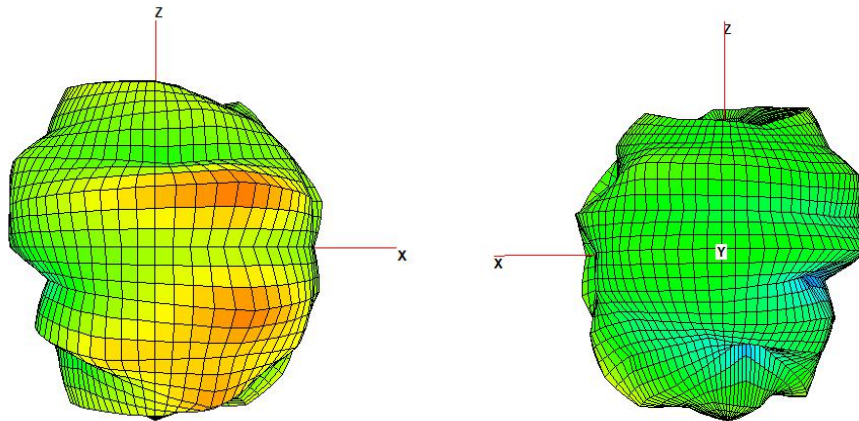

XZ-Plane



Peak Gain & Efficiency

LoRa Antenna Performance

Frequency (MHz)	Efficiency (%)	Peak Gain (dBi)
900	21.0	-3.3
915	23.2	-2.8
930	20.1	-3.5

BLE Antenna Performance

Frequency (MHz)	Efficiency (%)	Peak Gain (dBi)
2400	23.4	-1.2
2450	25.3	-0.7
2500	23.6	-1.1

SERCOMM

www.sercomm.com