


ENGINEERING TEST REPORT



UHF P25 Transceiver

Model No.: IC-F7520

FCC ID: AFJ384611

IC: 202D-384611

HVIN: 384611-01

Applicant:

ICOM Incorporated

1-1-32, Kamiminami, Hirano-ku

Osaka, Japan, 547-0003

Tested in Accordance With

Federal Communications Commission (FCC)

47 CFR, Parts 2, 22, 74, 80 and 90 (Subpart I)

And

Industry Canada, RSS-119, Issue 12

Land Mobile and Fixed Transmitters and Receivers

Operating in the Frequency Range 27.41-960 MHz

UltraTech's File No.: 22ICOM591_FCC90

This Test report is Issued under the Authority of
Tri M. Luu, BAsC,
Vice President of Engineering
UltraTech Group of Labs

Date: October 25, 2022

Report Prepared by: Santhosh Fernandez

Tested by: Nimisha Desai

Issued Date: October 25, 2022

Test Dates: October 12-19, 2022

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by any agency of the US Government.*
- *This test report shall not be reproduced, except in full, without a written approval from UltraTech.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4

Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com



APEC TEL
CA0001



1309



46390-2049



AT-1945



SL2-IN-E-
1119R



Korea
KCC-RRR
CA0001

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	1
1.1. SCOPE.....	1
1.2. RELATED SUBMITTAL(S)/GRANT(S).....	1
1.3. NORMATIVE REFERENCES.....	1
EXHIBIT 2. PERFORMANCE ASSESSMENT.....	2
2.1. CLIENT INFORMATION	2
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	2
2.3. EUT'S TECHNICAL SPECIFICATIONS	3
2.4. LIST OF EUT'S PORTS.....	3
2.5. ANCILLARY EQUIPMENT	4
EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	5
3.1. CLIMATE TEST CONDITIONS	5
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS.....	5
EXHIBIT 4. SUMMARY OF TEST RESULTS	6
4.1. LOCATION OF TESTS	6
4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS.....	6
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	7
4.3.1. <i>DEVIATION OF STANDARD TEST PROCEDURES</i>	7
EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	8
5.1. TEST PROCEDURES	8
5.2. MEASUREMENT UNCERTAINTIES.....	8
5.3. MEASUREMENT EQUIPMENT USED	8
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER	8
5.5. RF POWER OUTPUT [§§ 2.1046, 22.565, 74.461, 80.215 & 90.205] [RSS-119 § 5.4].....	9
5.5.1. <i>Limits</i>	9
5.5.2. <i>Method of Measurements</i>	9
5.5.3. <i>Test Data</i>	9
5.6. AUDIO FREQUENCY RESPONSE [§ 2.1047(A), 80.213(E) & 90.242(B)(8)].....	10
5.6.1. <i>Limits</i>	10
5.6.2. <i>Method of Measurements</i>	10
5.6.3. <i>Test Data</i>	11
5.7. MODULATION LIMITING [§§ 2.1047 (B), 74.463, 80.213 & 90.210].....	15
5.7.1. <i>Limits</i>	15
5.7.2. <i>Method of Measurements</i>	15
5.7.3. <i>Test Data</i>	16
5.8. OCCUPIED BANDWIDTH & EMISSION MASK [§§ 2.1049, 74.462, 80.211(F), 90.209 & 90.210] [RSS-119 §§ 5.5 & 5.8] [RSS-119 § 5.5 & 5.8].....	20
5.8.1. <i>Limits</i>	20
5.8.2. <i>Method of Measurements</i>	21
5.8.3. <i>Test Data</i>	21
5.9. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 2.1051, 2.1057, 22.359, 80.211(F)(3) & 90.210] [RSS-119 § 5.8]	58
5.9.1. <i>Limits</i>	58
5.9.2. <i>Method of Measurements</i>	58
5.9.3. <i>Test Data</i>	58

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.10.	TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 2.1057, 22.359, 80.211(F)(3) & 90.210] [RSS-119, § 5.5 & 5.8].....	71
5.10.1.	<i>Limits</i>	71
5.10.2.	<i>Method of Measurements</i>	71
5.10.3.	<i>Test Data</i>	71
5.11.	FREQUENCY STABILITY [§§ 2.1055, 22.355, 74.464, 80.209 & 90.213] [RSS-119 § 5.3].....	73
5.11.1.	<i>Limits</i>	73
5.11.2.	<i>Method of Measurements</i>	74
5.11.3.	<i>Test Data</i>	74
5.12.	TRANSIENT FREQUENCY BEHAVIOR [§ 90.214 & 74.462(c)] [RSS-119 § 5.9]	75
5.12.1.	<i>Limits</i>	75
5.12.2.	<i>Method of Measurements</i>	75
5.12.3.	<i>Test Data</i>	76
5.13.	RF EXPOSURE REQUIREMENTS [§§ 1.1310 & 2.1091] [RSS GEN SEC 5.6 & RSS-102].....	80
5.13.1.	<i>Limits</i>	80
5.13.2.	<i>Method of Measurements</i>	82
5.13.3.	<i>Evaluation of RF Exposure Compliance Requirements</i>	82
5.14.	RECEIVER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [RSS-119 § 5.11, RSS-GEN §§ 4.10 & 6]	83
5.14.1.	<i>Limits</i>	83
5.14.2.	<i>Method of Measurements</i>	83
5.14.3.	<i>Test Data</i>	83
5.15.	RECEIVER SPURIOUS EMISSIONS (RADIATED) [RSS-119 § 5.11, RSS-GEN §§ 4.10 & 6].....	89
5.15.1.	<i>Limits</i>	89
5.15.2.	<i>Method of Measurements</i>	89
5.15.3.	<i>Test Data</i>	89
5.16.	POWER LINE CONDUCTED EMISSIONS [ICES-003, RSS-GEN § 7.2.2]	91
5.16.1.	<i>Limit(s)</i>	91
5.16.2.	<i>Method of Measurements</i>	91
5.16.3.	<i>Test Data</i>	91
5.17.	RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS [ICES-003]	93
5.17.1.	<i>Limits</i>	93
5.17.2.	<i>Method of Measurements</i>	93
5.17.3.	<i>Test Data</i>	93
EXHIBIT 6.	TEST SETUP AND EQUIPMENT LIST	94
6.1.	CONDUCTED POWER.....	94
6.2.	MODULATION LIMIT.....	95
6.3.	AUDIO FREQUENCY RESPONSE.....	96
6.4.	TRANSIENT FREQUENCY BEHAVIOR	97
6.5.	99% OBW AND MASK	98
6.6.	RX CONDUCTED EMISSION	99
6.7.	TX CONDUCTED EMISSION	100
6.8.	FREQUENCY STABILITY	101
6.9.	TX RADIATED.....	102
6.10.	RX RADIATED.....	104
6.11.	POWER LINE CONDUCTED EMISSION	105
EXHIBIT 7.	MEASUREMENT UNCERTAINTY	106
EXHIBIT 8.	MEASUREMENT METHODS	107
8.1.	CONDUCTED POWER MEASUREMENTS.....	107
8.2.	RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD	108

8.2.1.	MAXIMIZING RF EMISSION LEVEL (E-FIELD).....	108
8.2.2.	Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method	109
8.3.	FREQUENCY STABILITY	111
8.4.	EMISSION MASK	112
8.5.	SPURIOUS EMISSIONS (CONDUCTED)	112
8.6.	TRANSIENT FREQUENCY BEHAVIOR	113

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Parts 2, 22, 74, 80 and 90 (Subpart I) RSS-119
Title:	Code of Federal Regulations (CFR), Title 47 Telecommunication – Parts 2, 22, 74, 80 and 90 (Subpart I) Land Mobile and Fixed Radio Transmitters and Receivers Operating in the Frequency Range 27.41-960 MHz
Purpose of Test:	To obtain FCC Certification Authorization for Radio operating in the Frequency Band 380-470 MHz and RSS-119
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with TIA/EIA Standard TIA/EIA-603-E – Land Mobile FM or PM Communications Equipment Measurement and performance Standards.

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2022	Code of Federal Regulations – Telecommunication
ANSI C63.4	2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/TIA-603-E	2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI C63.26	2015	American National Standard for Compliance Testing of Transmitters used in Licensed Radio Services
RSS-119, Issue 12	2015	Land Mobile and Fixed Transmitters and Receivers, 27.41-960 MHz
RSS-Gen, Issue 5	2018	General Requirements for Compliance of Radio Apparatus
ICES-003, ISSUE 7	2020	Information Technology Equipment (Including Digital Apparatus) — Limits and Methods of Measurement

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Atsushi Tomiyama Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: world_support@icom.co.jp

MANUFACTURER	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Atsushi Tomiyama Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: world_support@icom.co.jp

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The applicant has supplied the following information (with the exception of the Date of Receipt).

Brand Name:	ICOM Incorporated
Product Name:	UHF P25 Transceiver
Model Name or Number:	IC-F7520
Serial Number:	13000001
Type of Equipment:	Licensed Non-Broadcast Station Transmitter
Power Supply Requirement:	13.6 VDC nominal
Transmitting/Receiving Antenna Type:	Non-integral
Primary User Functions of EUT:	2-Way Wireless Voice & Data Communication

2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Mobile
Intended Operating Environment:	Restricted to Occupational Use only
Power Supply Requirement:	13.6 VDC Nominal
RF Output Power Rating:	45 Watt (High) / 5 Watt (Low)
Operating Frequency Range:	380-470 MHz (FCC) 406.1-430 MHz and 450-470 MHz (ISED Canada)
RF Output Impedance:	50 Ω
Channel Spacing:	25 kHz, 12.5 kHz
Occupied Bandwidth (99%):	15.54 kHz (25 kHz Analog) 10.54 kHz (12.5 kHz Analog), 8.21 kHz (12.5 kHz P1 Digital) 8.09 kHz (12.5 kHz P2 Digital)
Emission Designation*:	16K0F3E**, 11K0F3E, 8K10F1E, 8K10F1D, 8K10F1W
Antenna Connector Type:	UHF
<p>* For an average case of commercial telephony, the Necessary Bandwidth is calculated as follows:</p> <p>For FM Voice Modulation: Channel Spacing = 25 KHz, D = 5 KHz max, K = 1, M = 3 KHz $B_n = 2M + 2DK = 2(3) + 2(5)(1) = \mathbf{16\ KHz}$ Emission designation: 16K0F3E Channel Spacing = 12.5 KHz, D = 2.5 KHz max, K = 1, M = 3 KHz $B_n = 2M + 2DK = 2(3) + 2(2.5)(1) = \mathbf{11\ KHz}$ Emission designation: 11K0F3E **Note: The emission designation 16K0F3E with 25 KHz Channel bandwidth is only applied to the device operated in FCC Rules Part 22, 74 & 80 frequencies. The operation of 16K0F3E emission will be disabled in the firmware by the manufacturer for device that operates in FCC Rules Part 90 frequencies (Private Land Mobile) as declared by the applicant.</p>	

2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type/Termination
1	Antenna Connector	1	N type	Terminated to 50Ω Load
2	External Speaker Jack	1	Mini Jack	Non-shielded
3	D-Sub	1	DB 25	Shielded
4	Microphone	1	10 pin Round Jack	Non
5	DC Power Receptacle	1	Plug-In Jack	Non
6	USB	1	USB Micro B	Shielded
7	Ignition lead	1	lead	Non-shielded
8	GPS antenna connector	1	SMA	GNSS Antenna

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	Speaker Microphone
Brand name:	ICOM
Model Name or Number:	HM-218
Connected to EUT's Port:	Microphone Port

Ancillary Equipment # 2	
Description:	External Speaker
Brand name:	ICOM
Model Name or Number:	SP-35L
Connected to EUT's Port:	Mini Jack

Ancillary Equipment # 3	
Description:	GNSS Antenna
Brand name:	ICOM
Model Name or Number:	UX-241
Connected to EUT's Port:	SMA- GPS Antenna

Ancillary Equipment # 4	
Description:	Hand Microphone
Brand name:	ICOM
Model Name or Number:	HM-220T
Connected to EUT through:	RMK-7

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C - 24°C
Humidity:	45% to 58%
Pressure:	102 kPa
Power Input Source:	13.6 VDC Nominal

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
Special Test Software:	N/A
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT is tested with the antenna port terminated to a 50 Ohm RF Load.

Transmitter Test Signals	
Frequency Band(s):	380-470 MHz (FCC) 406.1-430 MHz and 450-470 MHz (ISED Canada)
Test Frequencies: (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	406.2 MHz, 450.1 MHz, 469.975 MHz
Transmitter Wanted Output Test Signals:	
Transmitter Power (measured maximum output power):	44.87 W High
Normal Test Modulation:	FM Voice/Digital
Modulating signal source:	External

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with ANAB File No.: AT-1945.

4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS

FCC/RSS Section(s)	Test Requirements	Applicability (Yes/No)
1.1307, 1.1310, 2.1091 & 2.1093 RSS-Gen, §3.4 & RSS-102	RF Exposure Limit	Yes
2.1046, 22.565, 74.461, 80.215 & 90.205 RSS-119 § 5.4	RF Power Output	Yes
2.1047(a), 80.213(e) & 90.242(b)(8)	Audio Frequency Response	Not applicable to new standard. However, tests are conducted under FCC's recommendation.
2.1047(b), 74.463, 80.213 & 90.210	Modulation Limiting	Yes
2.1049, 74.462, 80.211(f), 90.209 & 90.210 RSS-Gen § 6.7 RSS-119 § 5.5	Emission Limitation & Emission Mask	Yes
2.1051, 2.1057, 80.211(f)(3), & 90.210 RSS-119 § 5.8	Emission Limits - Spurious Emissions at Antenna Terminal	Yes
2.1053, 2.1057, 22.359, 80.211(f)(3), & 90.210 RSS-119 § 5.8	Emission Limits - Field Strength of Spurious Emissions	Yes
2.1055, 22.355, 74.464 80.209 & 90.213 RSS-119 § 5.3	Frequency Stability	Yes
74.462(c) & 90.214 RSS-119 § 5.9	Transient Frequency Behavior	Yes
ICES-003	Radiated Emissions from Digital Apparatus – Radiated	Yes
RSS-Gen § 8.8 ICES-003	Power Line Conducted Emissions from Digital Apparatus	Yes
RSS-119 § 5.11 RSS-Gen, Section 7.3	Receiver Spurious Emissions (Radiated)	Yes
RSS-119 § 5.11 RSS-Gen, Section 7.4	Receiver Spurious Emissions (Antenna Conducted)	Yes

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90
 October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

UHF DIGITAL TRANSCEIVER, Model No.: IC-F7520, by ICOM Incorporated has also been tested and found to comply with FCC Part 15, Subpart B - Radio Receivers and Digital Devices. The engineering test report has been documented and kept on file and is available upon request.

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

4.3.1. DEVIATION OF STANDARD TEST PROCEDURES

None

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in EXHIBIT 8 of this report.

5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement. Refer to Exhibit 7 for Measurement Uncertainties.

5.3. MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1.

5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

The essential function of the EUT is to communicate to and from radios over RF link.

5.5. RF POWER OUTPUT [§§ 2.1046, 22.565, 74.461, 80.215 & 90.205] [RSS-119 § 5.4]

5.5.1. Limits

Please refer to FCC 47 CFR 90.205, 74.461, 80.215 & 22.565 for specification details.

RSS-119- The output power shall be within ± 1.0 dB of the manufacturer's rated power and RSS 119 Section 5.4 table 2

5.5.2. Method of Measurements

Refer to Section 8.1 (Conducted) of this report for measurement details

5.5.3. Test Data

Frequencies MHz	Wide/Narrow	Power Rating Watts	Power Rating dBm	Actual Power dBm	Actual Power Watts
406.200	Narrow	45.0	46.53	46.48	44.46
450.100	Narrow	45.0	46.53	46.52	44.87
469.975	Narrow	45.0	46.53	46.43	43.95
406.200	Narrow	5.0	36.99	36.98	4.99
450.100	Narrow	5.0	36.99	36.88	4.88
469.975	Narrow	5.0	36.99	36.91	4.91
406.200	Narrow	25.0	43.98	44.05	25.41
450.100	Narrow	25.0	43.98	43.79	23.93
469.975	Narrow	25.0	43.98	43.85	24.27

5.6. AUDIO FREQUENCY RESPONSE [§ 2.1047(a), 80.213(e) & 90.242(b)(8)]

5.6.1. Limits

§ 2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

§ 90.242(b)(8): Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 kHz Attenuation
5 –20 KHz	$83\log_{10}(f/5)$ dB where f is in kHz
20 – 30 KHz	50dB

80.213(e) Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 kHz Attenuation
3 –20 KHz	$60\log_{10}(f/3)$ dB where f is in kHz
20 – 30 KHz	50dB

5.6.2. Method of Measurements

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

5.6.3. Test Data

5.6.3.1. 12.5 KHz Channel Spacing, F3E

Remark: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 kHz in comparison with the recommended audio filter attenuation.

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 1 KHz (dB)	Recommended Attenuation (dB)
0.1	-43.48	-60.00	-16.5	-60.5	--
0.2	-43.48	-56.86	-13.4	-57.3	--
0.4	-43.48	-8.39	35.1	-8.9	--
0.6	-43.48	-4.10	39.4	-4.6	--
0.8	-43.48	-1.35	42.1	-1.8	--
1.0	-43.48	0.49	44.0	0.0	--
1.5	-43.48	2.92	46.4	2.4	--
2.0	-43.48	3.25	46.7	2.8	--
2.5	-43.48	2.45	45.9	2.0	--
3.0	-43.48	-0.47	43.0	-1.0	0
3.5	-43.48	-60.00	-16.5	-60.5	-4
4.0	-43.48	-60.00	-16.5	-60.5	-7
4.5	-43.48	-60.00	-16.5	-60.5	-11
5.0	-43.48	-60.00	-16.5	-60.5	-13
6.0	-43.48	-60.00	-16.5	-60.5	-18
7.0	-43.48	-60.00	-16.5	-60.5	-22
8.0	-43.48	-60.00	-16.5	-60.5	-26
9.0	-43.48	-60.00	-16.5	-60.5	-29
10.0	-43.48	-60.00	-16.5	-60.5	-31
12.0	-43.48	-60.00	-16.5	-60.5	-36
14.0	-43.48	-60.00	-16.5	-60.5	-40
16.0	-43.48	-60.00	-16.5	-60.5	-44
18.0	-43.48	-60.00	-16.5	-60.5	-47
20.0	-43.48	-60.00	-16.5	-60.5	-50
25.0	-43.48	-60.00	-16.5	-60.5	-50
30.0	-43.48	-60.00	-16.5	-60.5	-50
35.0	-43.48	-60.00	-16.5	-60.5	-50
40.0	-43.48	-60.00	-16.5	-60.5	-50
45.0	-43.48	-60.00	-16.5	-60.5	-50
50.0	-43.48	-60.00	-16.5	-60.5	-50

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Audio Frequency Response 12.5 kHz Channel Spacing

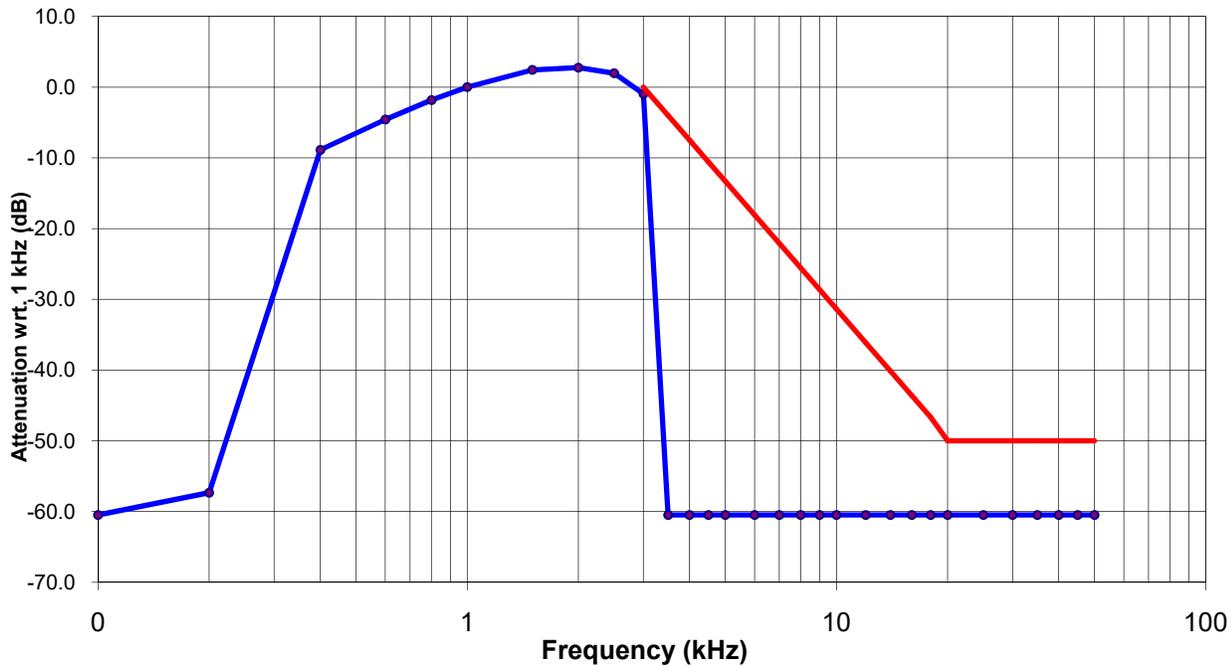

5.6.3.2. 25 KHz Channel Spacing, F3E

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 1 KHz (dB)	Recommended Attenuation (dB)
0.1	-43.22	-56.61	-13.4	-63.1	--
0.2	-43.22	-53.25	-10.0	-59.8	--
0.4	-43.22	-2.28	40.9	-8.8	--
0.6	-43.22	1.86	45.1	-4.7	--
0.8	-43.22	4.56	47.8	-2.0	--
1.0	-43.22	6.52	49.7	0.0	--
1.5	-43.22	8.83	52.1	2.3	--
2.0	-43.22	9.14	52.4	2.6	--
2.5	-43.22	8.45	51.7	1.9	--
3.0	-43.22	5.89	49.1	-0.6	0
3.5	-43.22	-54.38	-11.2	-60.9	-4
4.0	-43.22	-60.00	-16.8	-66.5	-7
4.5	-43.22	-60.00	-16.8	-66.5	-11
5.0	-43.22	-60.00	-16.8	-66.5	-13
6.0	-43.22	-60.00	-16.8	-66.5	-18
7.0	-43.22	-60.00	-16.8	-66.5	-22
8.0	-43.22	-60.00	-16.8	-66.5	-26
9.0	-43.22	-60.00	-16.8	-66.5	-29
10.0	-43.22	-60.00	-16.8	-66.5	-31
12.0	-43.22	-60.00	-16.8	-66.5	-36
14.0	-43.22	-60.00	-16.8	-66.5	-40
16.0	-43.22	-60.00	-16.8	-66.5	-44
18.0	-43.22	-60.00	-16.8	-66.5	-47
20.0	-43.22	-60.00	-16.8	-66.5	-50
25.0	-43.22	-60.00	-16.8	-66.5	-50
30.0	-43.22	-60.00	-16.8	-66.5	-50
35.0	-43.22	-60.00	-16.8	-66.5	-50
40.0	-43.22	-60.00	-16.8	-66.5	-50
45.0	-43.22	-60.00	-16.8	-66.5	-50
50.0	-43.22	-60.00	-16.8	-66.5	-50

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Audio Frequency Response 25 kHz Channel Spacing

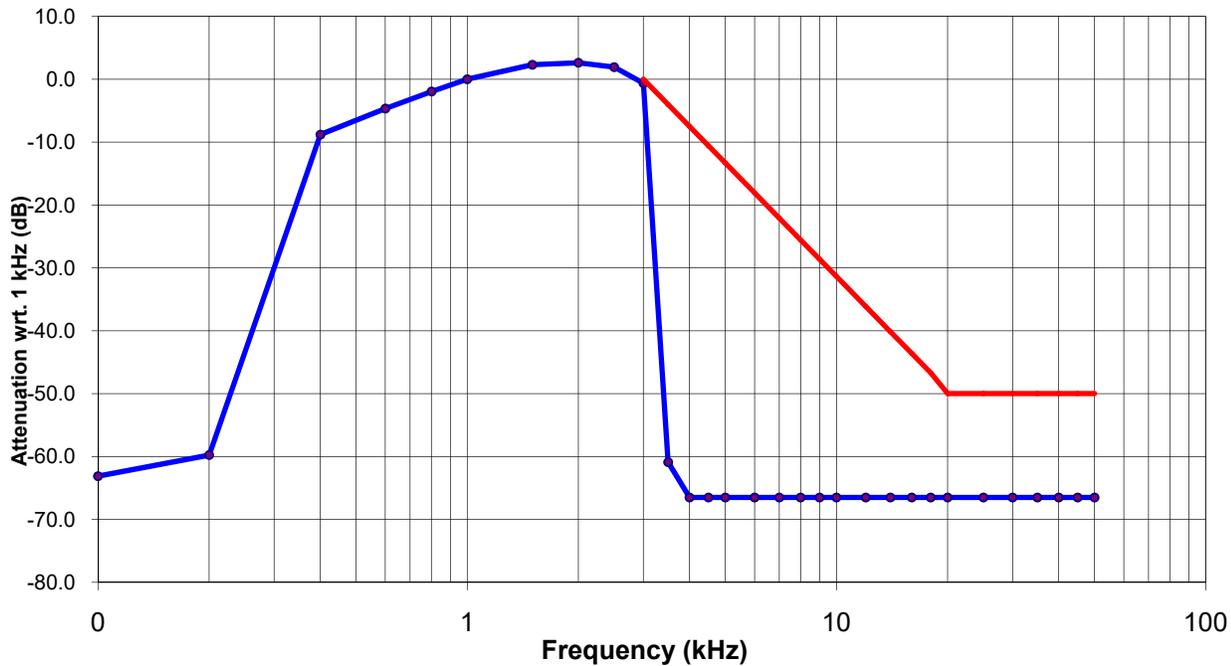

5.7. MODULATION LIMITING [§§ 2.1047 (b), 74.463, 80.213 & 90.210]

5.7.1. Limits

§ 2.1047(b): Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

Recommended frequency deviation characteristics are given below:

- 1.25 kHz for 6.25 kHz Channel Spacing System
- 2.5 KHz for 12.5 kHz Channel Spacing System

5.7.2. Method of Measurements

For Audio Transmitter: The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

For Data Transmitter with Maximum Frequency Deviation set by Factory: The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

5.7.3. Test Data

Test Frequency: 406.2 MHz

5.7.3.1. Voice Modulation Limiting for 12.5 KHz Channel Spacing Operation

Modulating Signal Level (mVrms)	Peak Frequency Deviation (kHz) at the following modulating frequency:					Maximum Limit (kHz)
	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	
2	0.05	0.26	0.53	0.97	0.06	2.5
4	0.05	0.46	0.99	1.33	0.06	2.5
6	0.06	0.67	1.39	1.36	0.06	2.5
8	0.06	0.89	1.73	1.38	0.06	2.5
10	0.06	1.04	1.90	1.46	0.06	2.5
15	0.06	1.43	2.08	1.48	0.06	2.5
20	0.06	1.72	2.15	1.48	0.06	2.5
25	0.06	1.82	2.18	1.48	0.06	2.5
30	0.06	1.84	2.16	1.48	0.06	2.5
35	0.06	1.82	2.18	1.48	0.06	2.5
40	0.06	1.84	2.14	1.48	0.06	2.5
45	0.06	1.86	2.17	1.48	0.06	2.5
50	0.06	1.84	2.19	1.48	0.06	2.5
60	0.06	1.82	2.16	1.48	0.06	2.5
70	0.06	1.84	2.18	1.48	0.06	2.5
80	0.06	1.84	2.15	1.48	0.06	2.5
90	0.06	1.85	2.16	1.48	0.06	2.5
100	0.06	1.82	2.18	1.48	0.06	2.5

CH07 12.5KHz Digital deviation

2.82 kHz

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

STD MOD Level =6.7mV Voice Signal Input Level = STD MOD Level + 16 dB =42.27 mVrms		
Modulation Frequency (kHz)	Peak Deviation (kHz)	Maximum Limit (kHz)
0.1	0.06	2.5
0.2	0.06	2.5
0.4	1.79	2.5
0.6	1.89	2.5
0.8	2.09	2.5
1.0	2.19	2.5
1.2	2.18	2.5
1.4	2.20	2.5
1.6	2.21	2.5
1.8	2.26	2.5
2.0	2.25	2.5
2.5	2.10	2.5
3.0	1.47	2.5
3.5	0.05	2.5
4.0	0.05	2.5
4.5	0.05	2.5
5.0	0.06	2.5
6.0	0.05	2.5
7.0	0.05	2.5
8.0	0.05	2.5
9.0	0.05	2.5
10.0	0.05	2.5

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7.3.2. Voice Modulation Limiting for 25 KHz Channel Spacing Operation

Modulating Signal Level (mVrms)	Peak Frequency Deviation (kHz) at the following modulating frequency:					Maximum Limit (kHz)
	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	
2	0.06	0.49	1.02	1.96	0.06	5.0
4	0.07	0.89	1.93	2.74	0.07	5.0
6	0.06	1.29	2.71	2.85	0.07	5.0
8	0.07	1.70	3.36	2.99	0.07	5.0
10	0.07	2.02	3.69	3.00	0.07	5.0
15	0.08	2.80	4.03	3.00	0.08	5.0
20	0.08	3.35	4.18	3.00	0.10	5.0
25	0.08	3.53	4.25	3.00	0.10	5.0
30	0.08	3.58	4.21	3.00	0.10	5.0
35	0.07	3.53	4.26	3.00	0.10	5.0
40	0.07	3.57	4.18	3.00	0.10	5.0
45	0.07	3.55	4.22	3.00	0.10	5.0
50	0.07	3.57	4.25	3.00	0.09	5.0
60	0.07	3.58	4.20	3.00	0.09	5.0
70	0.07	3.58	4.25	3.00	0.09	5.0
80	0.07	3.52	4.18	3.00	0.09	5.0
90	0.07	3.54	4.22	3.00	0.09	5.0
100	0.07	3.58	4.25	3.00	0.09	5.0

STD MOD Level =6.9 mV Voice Signal Input Level = STD MOD Level + 16 dB =43.54 mVrms		
Modulation Frequency (KHz)	Peak Deviation (KHz)	Maximum Limit (KHz)
0.1	0.07	5.0
0.2	0.07	5.0
0.4	3.49	5.0
0.6	3.63	5.0
0.8	4.08	5.0
1.0	4.26	5.0
1.2	4.25	5.0
1.4	4.26	5.0
1.6	4.32	5.0
1.8	4.36	5.0
2.0	4.38	5.0
2.5	4.16	5.0
3.0	2.99	5.0
3.5	0.06	5.0
4.0	0.06	5.0
4.5	0.05	5.0
5.0	0.09	5.0
6.0	0.06	5.0
7.0	0.06	5.0
8.0	0.05	5.0
9.0	0.05	5.0
10.0	0.06	5.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8. OCCUPIED BANDWIDTH & EMISSION MASK [§§ 2.1049, 74.462, 80.211(f), 90.209 & 90.210] [RSS-119 §§ 5.5 & 5.8] [RSS-119 § 5.5 & 5.8]

5.8.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

Frequency Range (MHz)	Maximum Authorized BW (KHz)	Channel Spacing (KHz)	Recommended Frequency Deviation (KHz)	FCC Applicable Mask
156-174, 421-512	11.25	12.5	2.5	Mask D – Voice & Data
156-174, 421-512	20	25	5.0	Mask B – Voice & Data
150-174, 421-512	6	6.25	1.25	Mask E – Voice & Data

§80.211(f) Emission limitations

Emissions shall be attenuated below the mean output power of the transmitter as follows:

(1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;

(2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and

(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.

RSS119

Table 3 - Channel Spacing, Authorized Bandwidths and Applicable Spectrum Masks

Frequency Band (MHz)	Related SRSP for Channelling Plan and e.r.p.	Channel Spacing (kHz)	Authorized Bandwidth (kHz)	Spectrum Masks with Audio Filter	Spectrum Masks Without Audio Filter
27.41-28.0 and 29.7-50.0	N/A	20	20	B	C
72-76	N/A	20	20	B	C
138-144; 148-149.9 and 150.05-174	SRSP-500	30	20	B	C
		15	11.25	D	D
		7.4	6	E	E
217-218 and 219-220	N/A	12.5	11.25	D or I	D or J
220-222	SRSP-512	5	4	F	F
406.1-430 and 450-470	SRSP-501	25	20	B	C (G, Note 1)
		12.5	11.25	D	D
		6.25	6	E	E

Paging transmitters in the bands 406.1-430 MHz or 450-470 MHz are to use Mask G.

5.8.2. Method of Measurements

Refer to Section 8.4 of this report for measurement details.

5.8.3. Test Data

5.8.3.1. 99% Occupied Bandwidth

Frequency (MHz)	Channel Spacing (kHz)	Modulation	Measured 99% OBW at Maximum Freq. Deviation (kHz)	Maximum Authorized Bandwidth (kHz)
406.2	25.0	FM with 2.5 KHz sine wave signal	15.54	20.0
450.1	25.0	FM with 2.5 KHz sine wave signal	15.54	20.0
469.975	25.0	FM with 2.5 KHz sine wave signal	15.54	20.0
406.2	12.5	FM with 2.5 KHz sine wave signal	10.50	11.25
450.1	12.5	FM with 2.5 KHz sine wave signal	10.50	11.25
469.975	12.5	FM with 2.5 KHz sine wave signal	10.54	11.25
406.2	12.5	Digital (F1D, F1E) Phase 1	8.21	11.25
450.1	12.5	Digital (F1D, F1E) Phase 1	8.21	11.25
469.975	12.5	Digital (F1D, F1E) Phase 1	8.21	11.25
406.2	12.5	Digital Phase 2	8.09	11.25
450.1	12.5	Digital Phase 2	8.01	11.25
469.975	12.5	Digital Phase 2	8.09	11.25


* Not for FCC Part 90 Certification, refer to cover letter for details.

Refer to the following test data plots for details.

Analog

5.8.3.2. Configuration: 99% OBW, 406.2MHz, 12.5 KHz, Analog, High power

OBW: 10.497 KHz

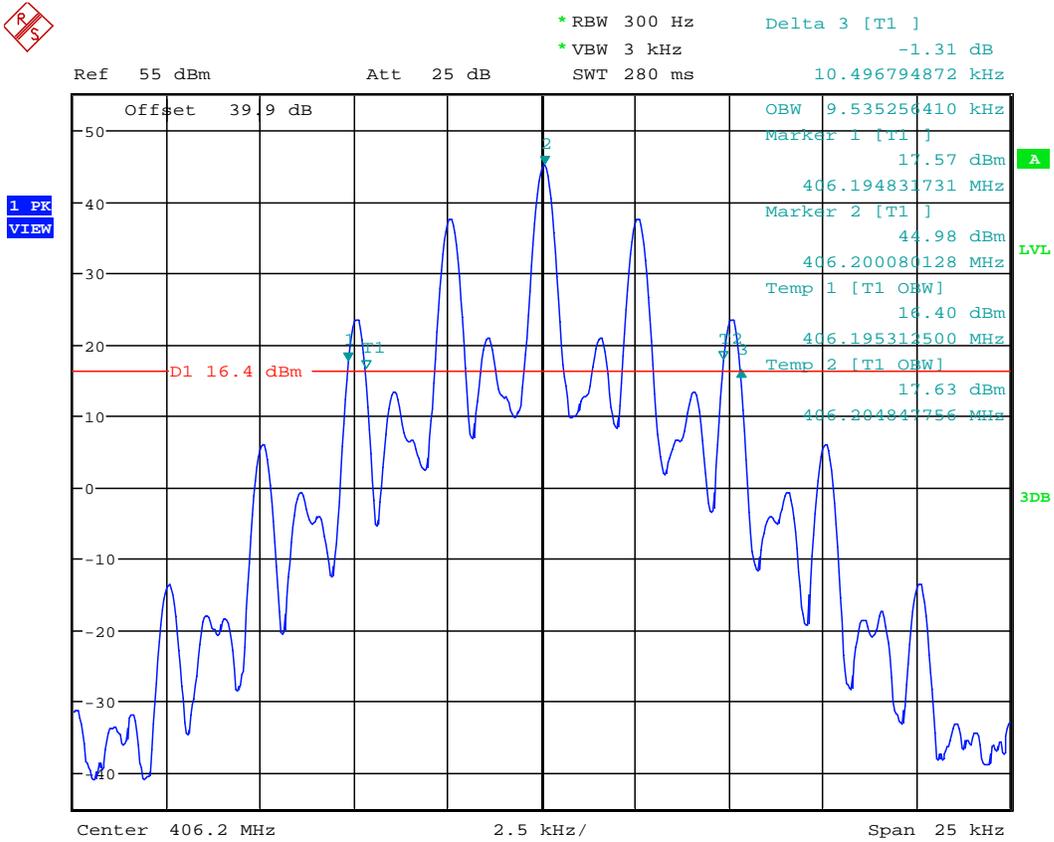

Date: 13.OCT.2022 09:21:46

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.3. Configuration: 99% OBW, 450.1MHz, 12.5 KHz, Analog, High power


OBW: 10.497 KHz

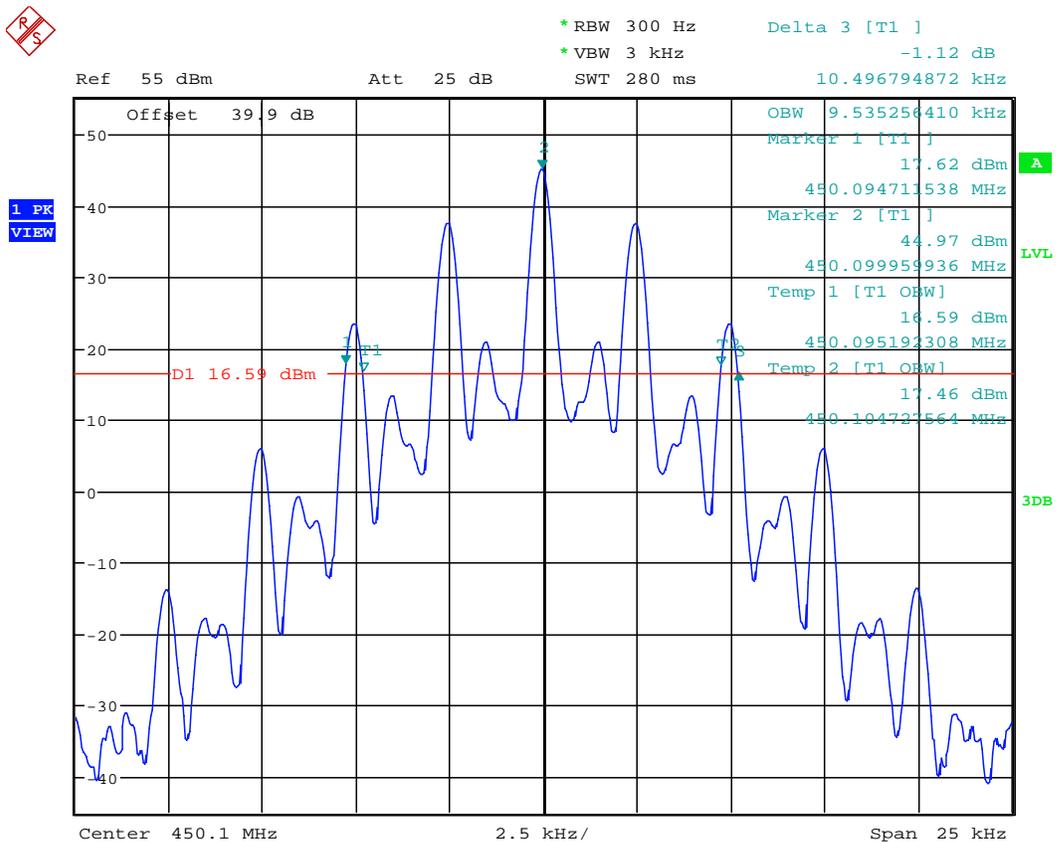

Date: 13.OCT.2022 09:23:36

5.8.3.4. Configuration: 99% OBW, 469.975MHz, 12.5 KHz, Analog, High power


OBW: 10.537 KHz

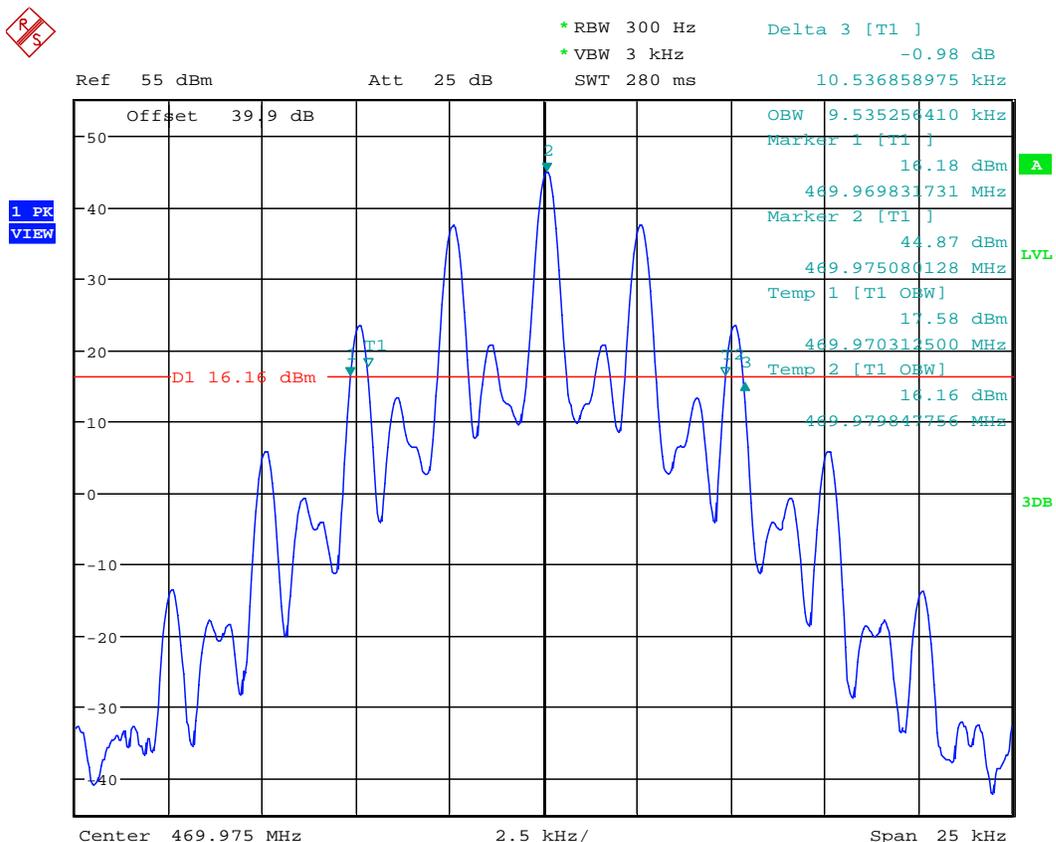

Date: 13.OCT.2022 09:25:14

5.8.3.5. Configuration: 99% OBW, 406.2MHz, 25 KHz, Analog, High power


OBW: 15.537 KHz

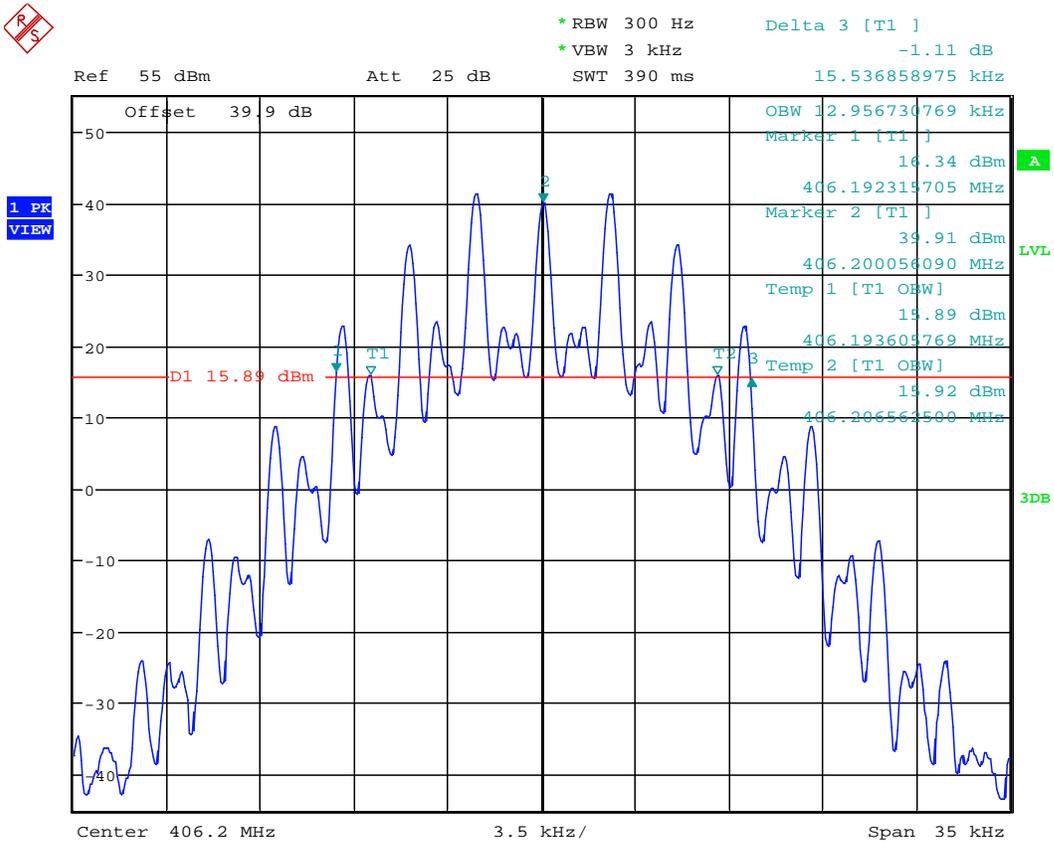

Date: 13.OCT.2022 09:27:10

5.8.3.6. Configuration: 99% OBW, 450.1MHz, 25 KHz, Analog, High power


OBW: 15.537 KHz

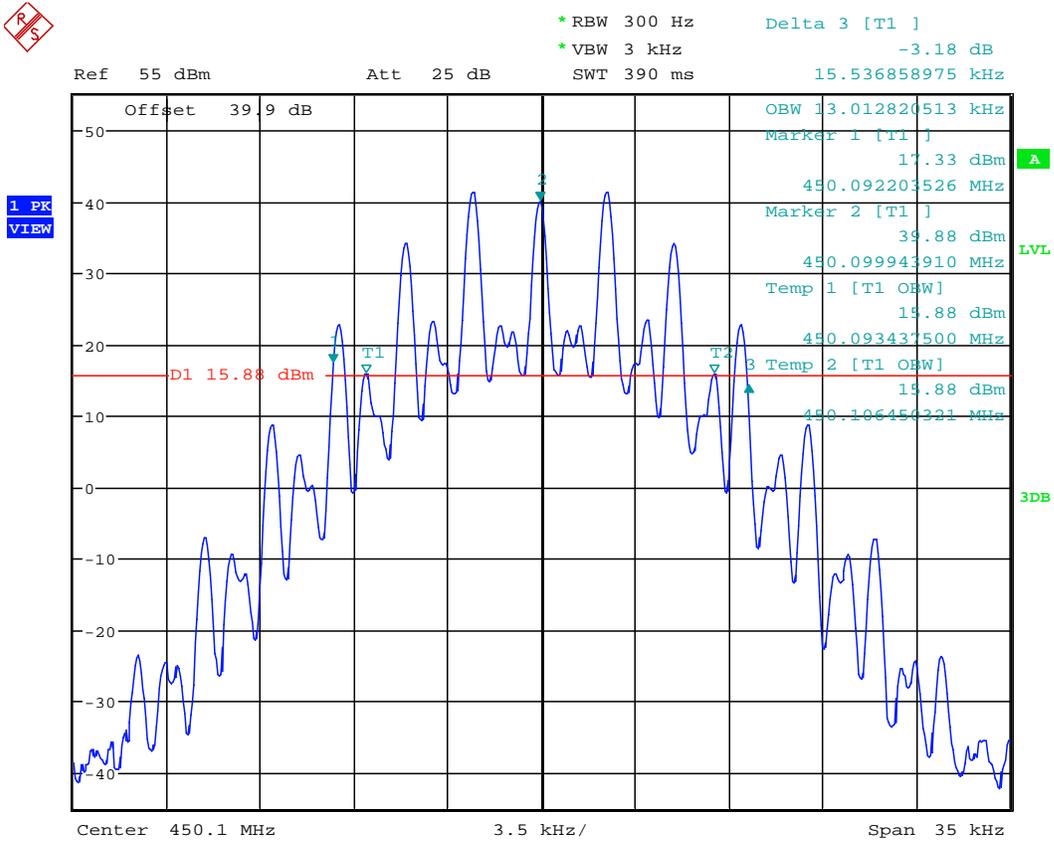

Date: 13.OCT.2022 09:29:04

5.8.3.7. Configuration: 99% OBW, 469.975MHz, 25 KHz, Analog, High power

OBW: 15.537 KHz

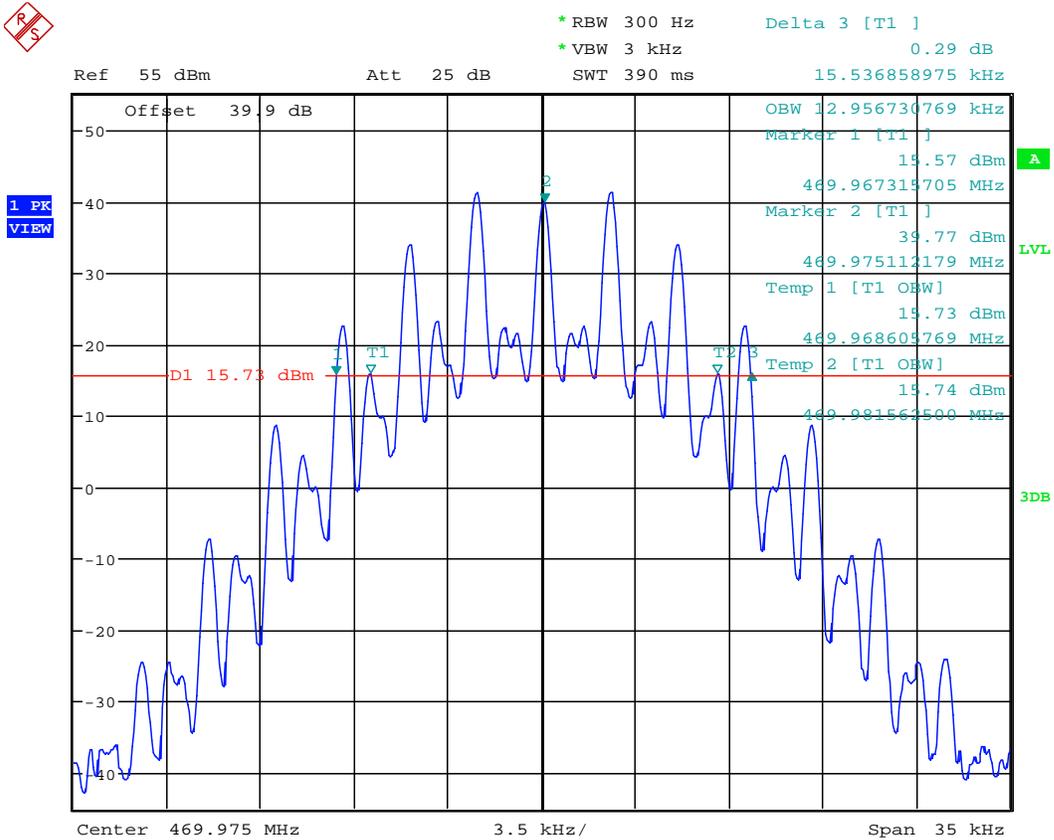


Date: 13.OCT.2022 09:30:43

Digital

5.8.3.8. Configuration: 99% OBW, 406.2MHz, 12.5 KHz, Phase 1 Digital, High power


OBW: 8.213 KHz

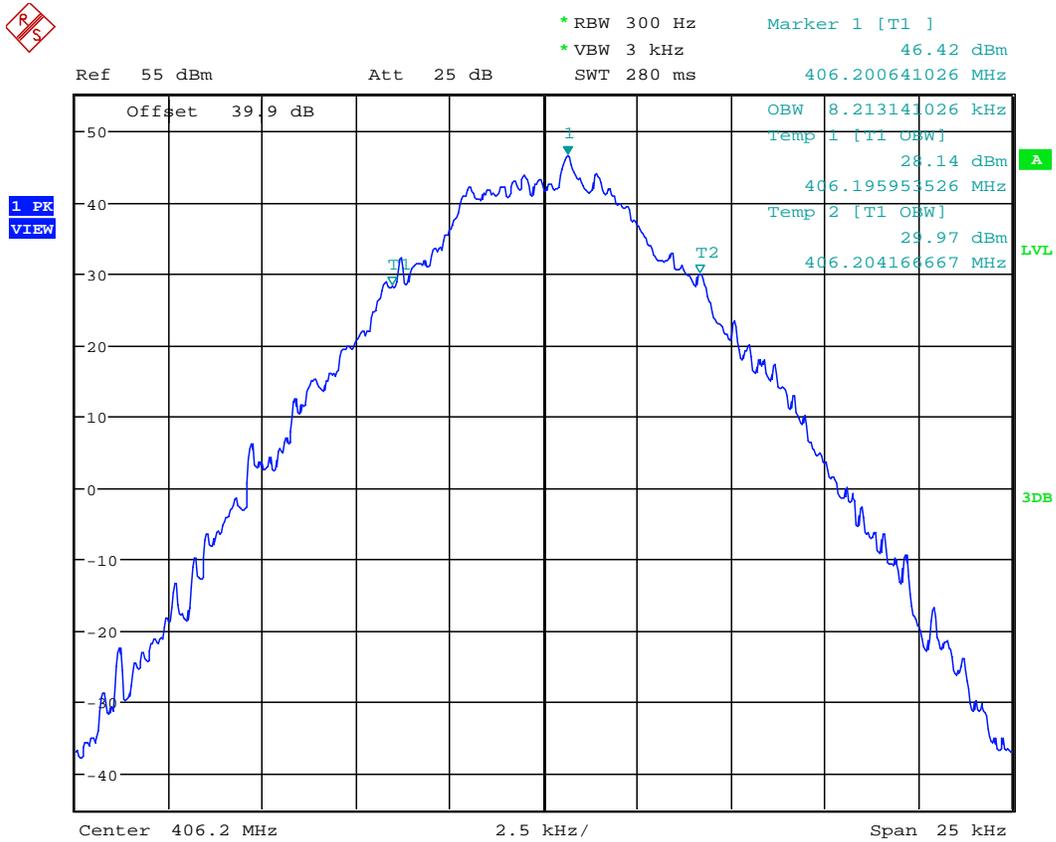

Date: 13.OCT.2022 09:34:01


5.8.3.9. Configuration: 99% OBW, 450.1MHz, 12.5 KHz, Phase 1 Digital, High power

OBW: 8.213 KHz

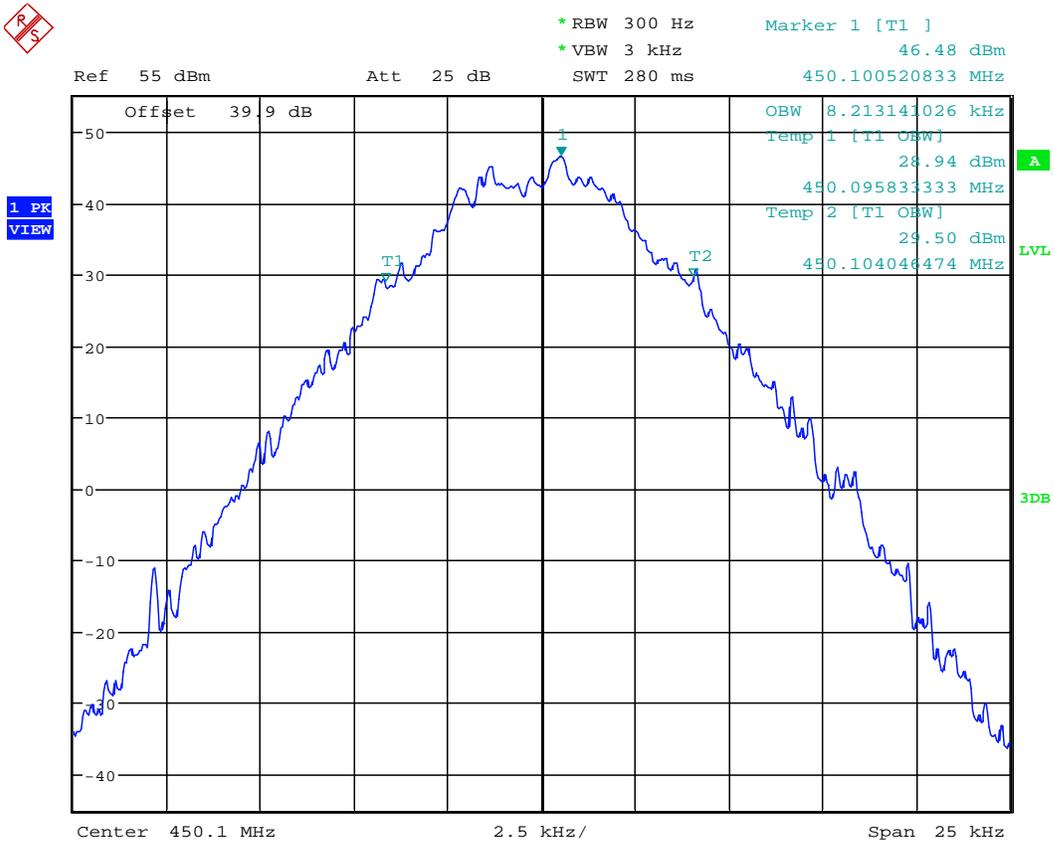


Date: 13.OCT.2022 09:36:15

5.8.3.11. Configuration: 99% OBW, 406.2MHz, 12.5 KHz, Phase 2 Digital, High power
 OBW: 8.093 KHz

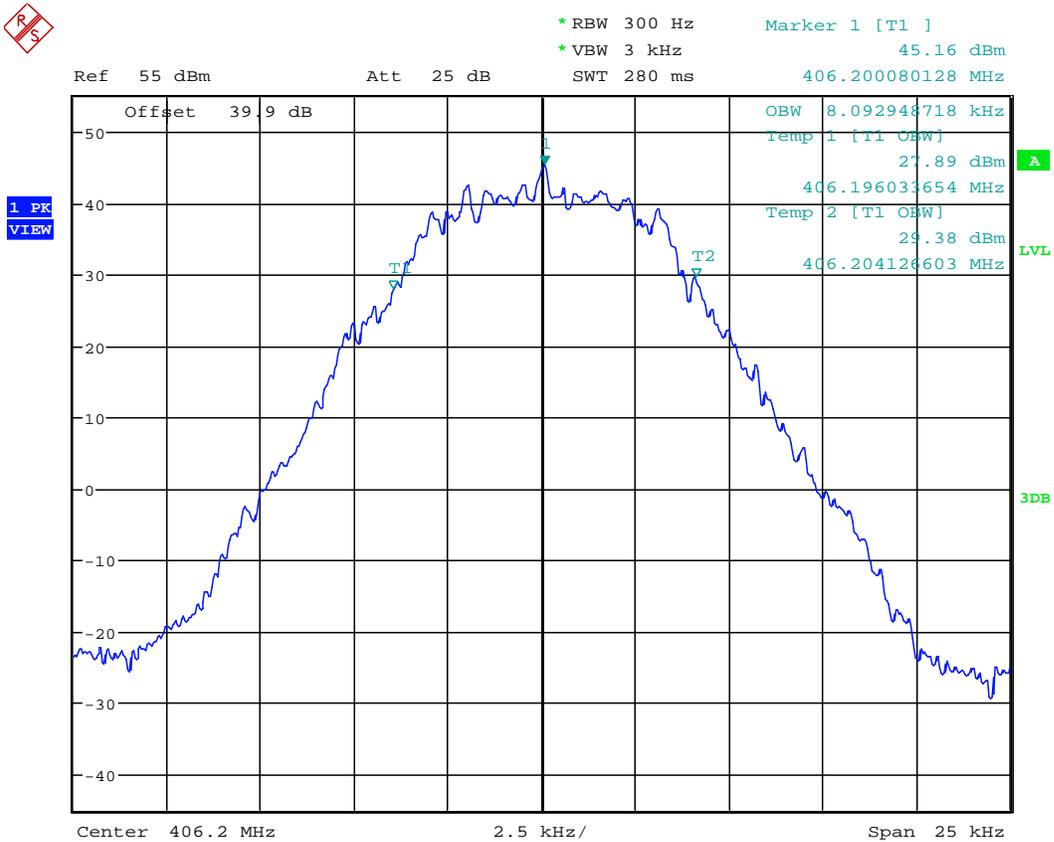


Date: 13.OCT.2022 09:40:04

5.8.3.12. Configuration: 99% OBW, 450.1MHz, 12.5 KHz, Phase 2 Digital, High power
 OBW: 8.013 KHz

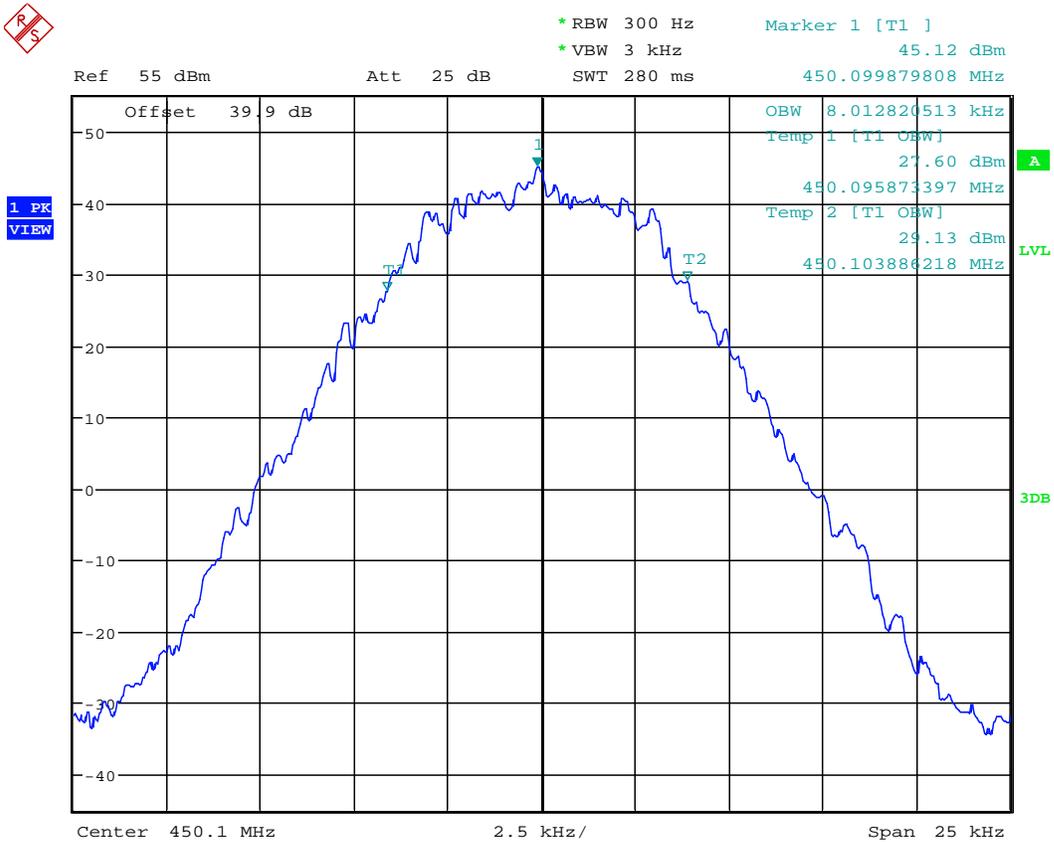

Date: 13.OCT.2022 09:41:40


5.8.3.13. Configuration: 99% OBW, 469.975MHz, 12.5 KHz, Phase 2 Digital, High power
OBW: 8.093 KHz

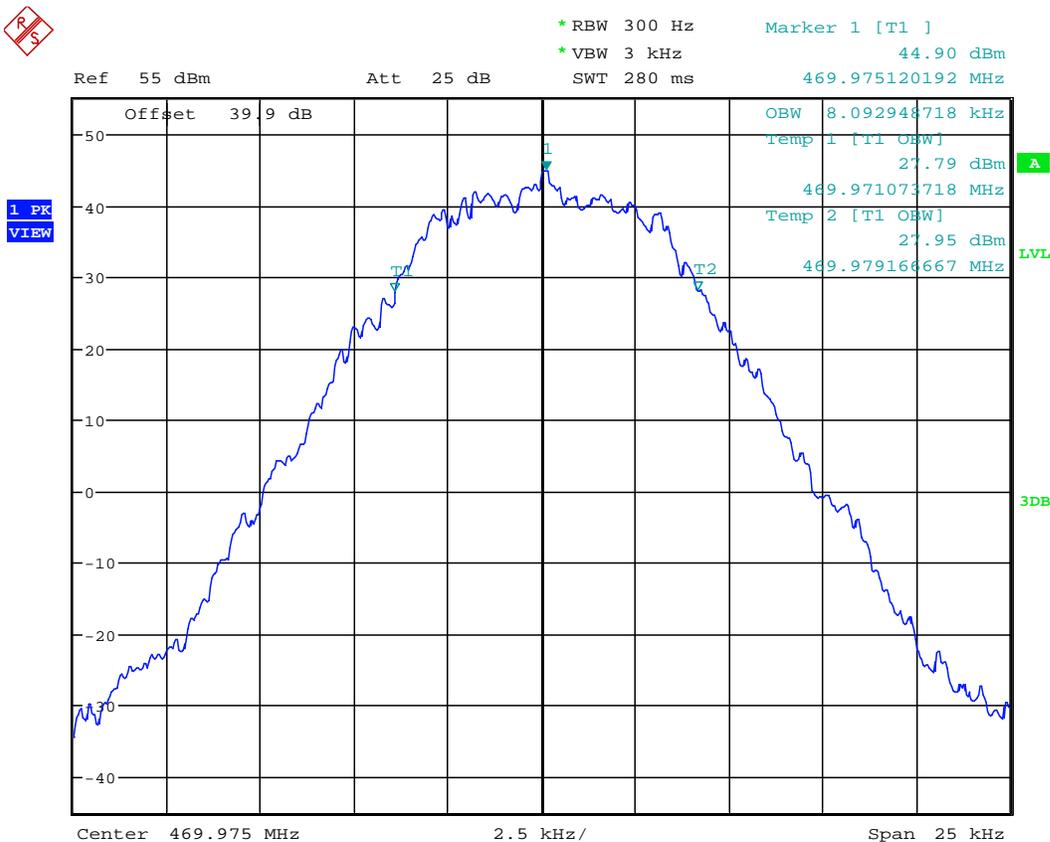

Date: 13.OCT.2022 09:44:03


High Power

5.8.3.14. Configuration: Mask B, 406.2MHz, 25 KHz, Analog, High power

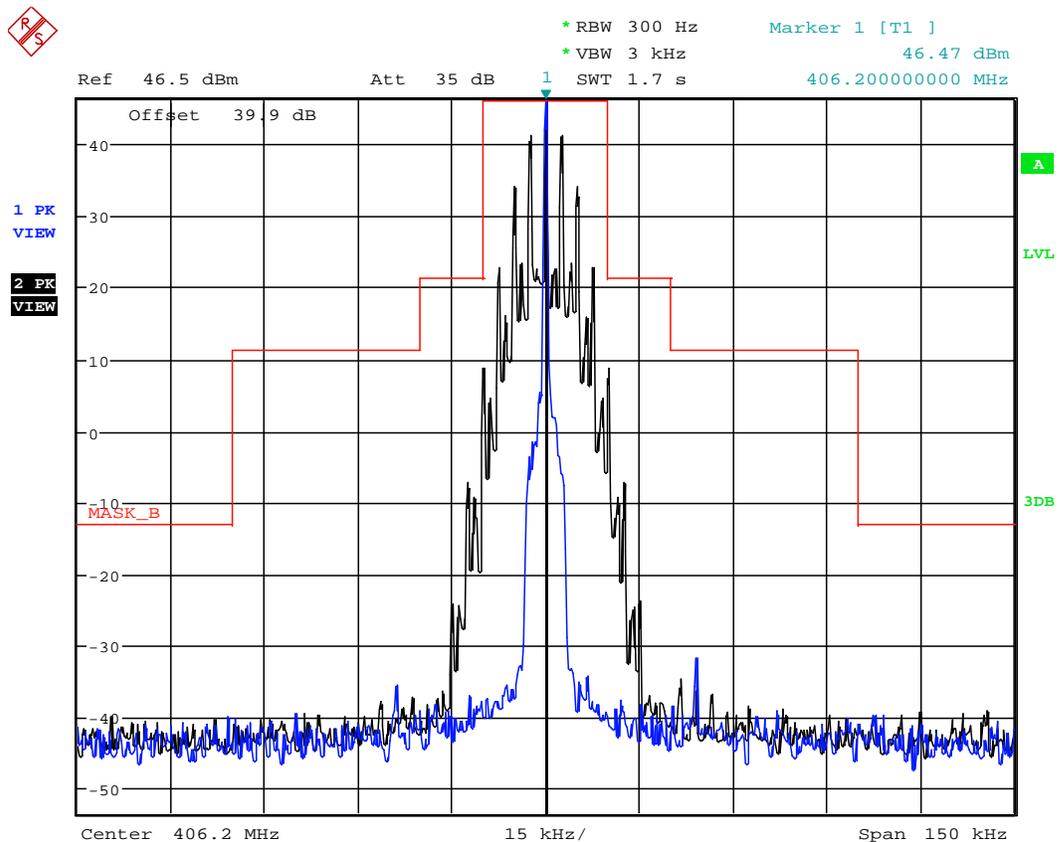


Date: 13.OCT.2022 09:59:20

5.8.3.15. Configuration: Mask B, 450.1MHz, 25 KHz, Analog, High power

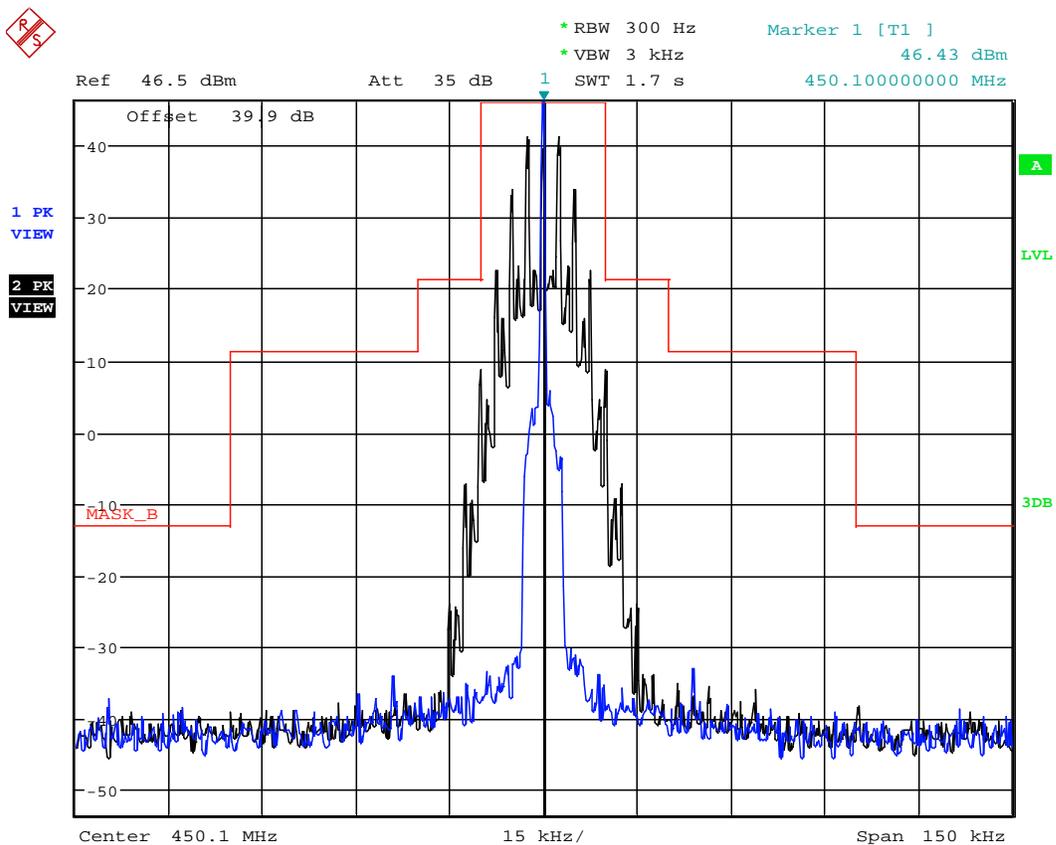

Date: 13.OCT.2022 10:01:24


5.8.3.16. Configuration: Mask B, 469.975MHz, 25 KHz, Analog, High power

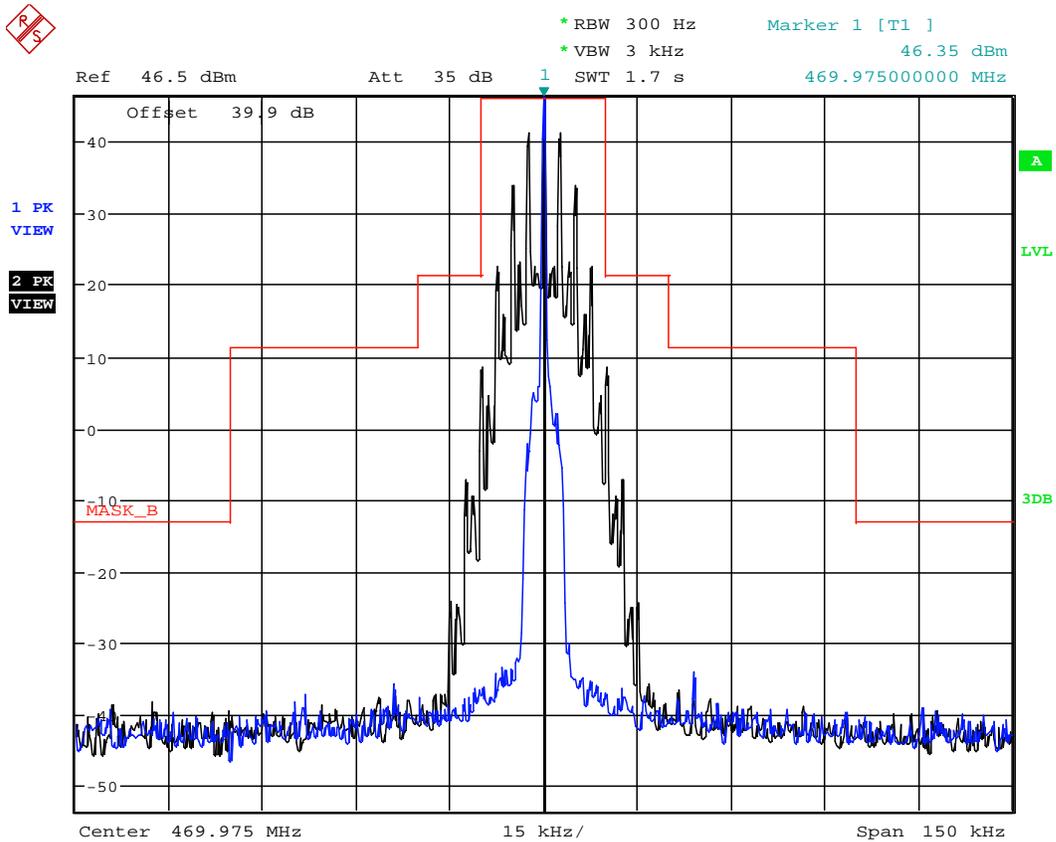

Date: 13.OCT.2022 10:03:38

Low Power

5.8.3.17. Configuration: Mask B, 406.2MHz, 25 KHz, Analog, Low power

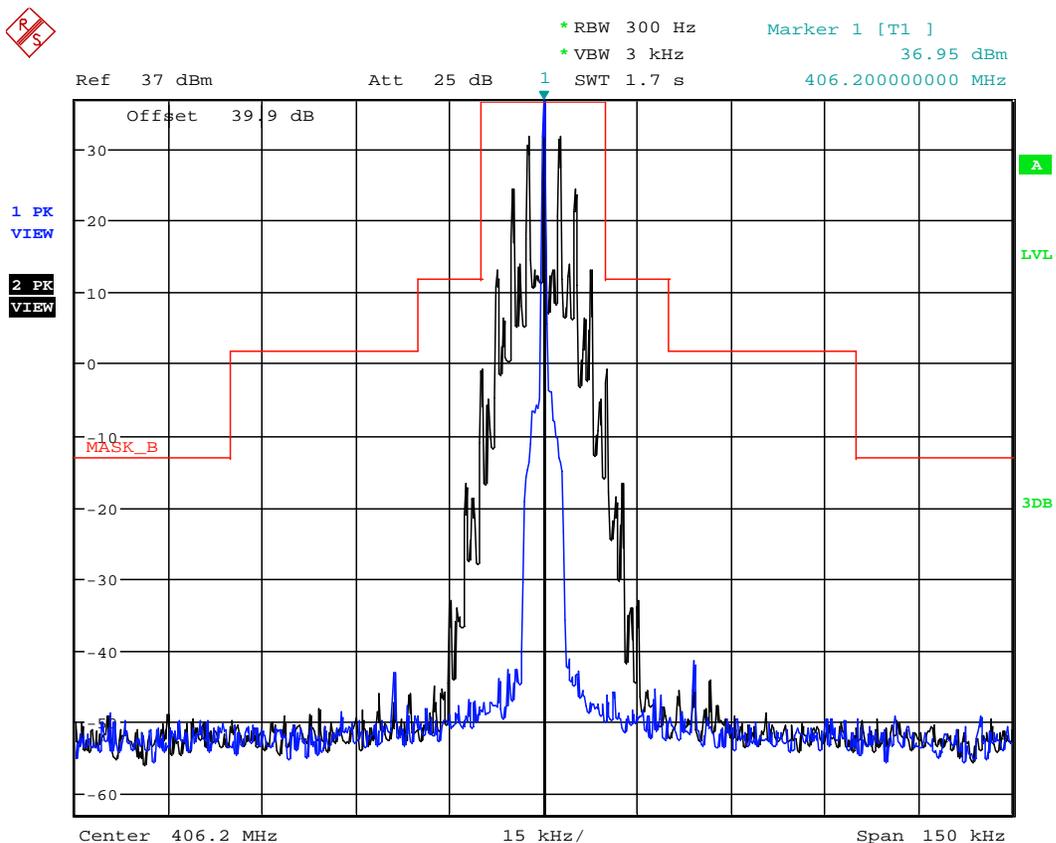

Date: 13.OCT.2022 10:06:30

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.18. Configuration: Mask B, 450.1MHz, 25 KHz, Analog, Low power

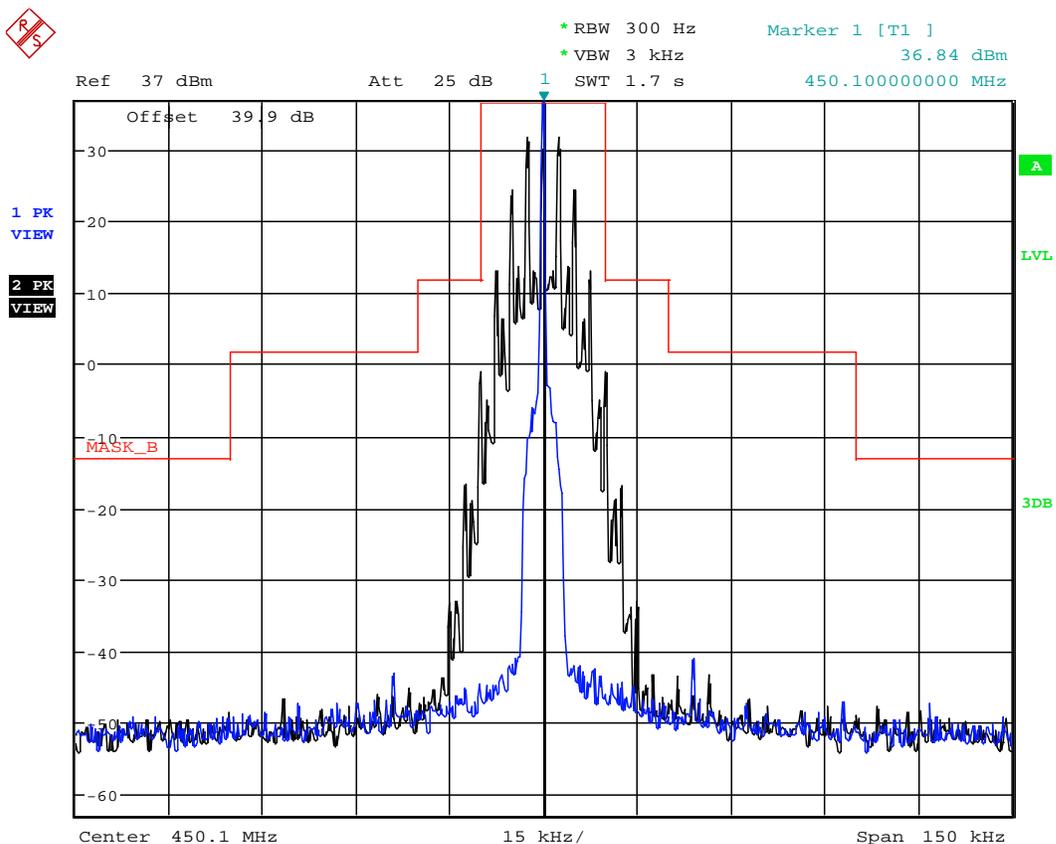

Date: 13.OCT.2022 10:08:54

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.8.3.19. Configuration: Mask B, 469.975MHz, 25 KHz, Analog, Low power

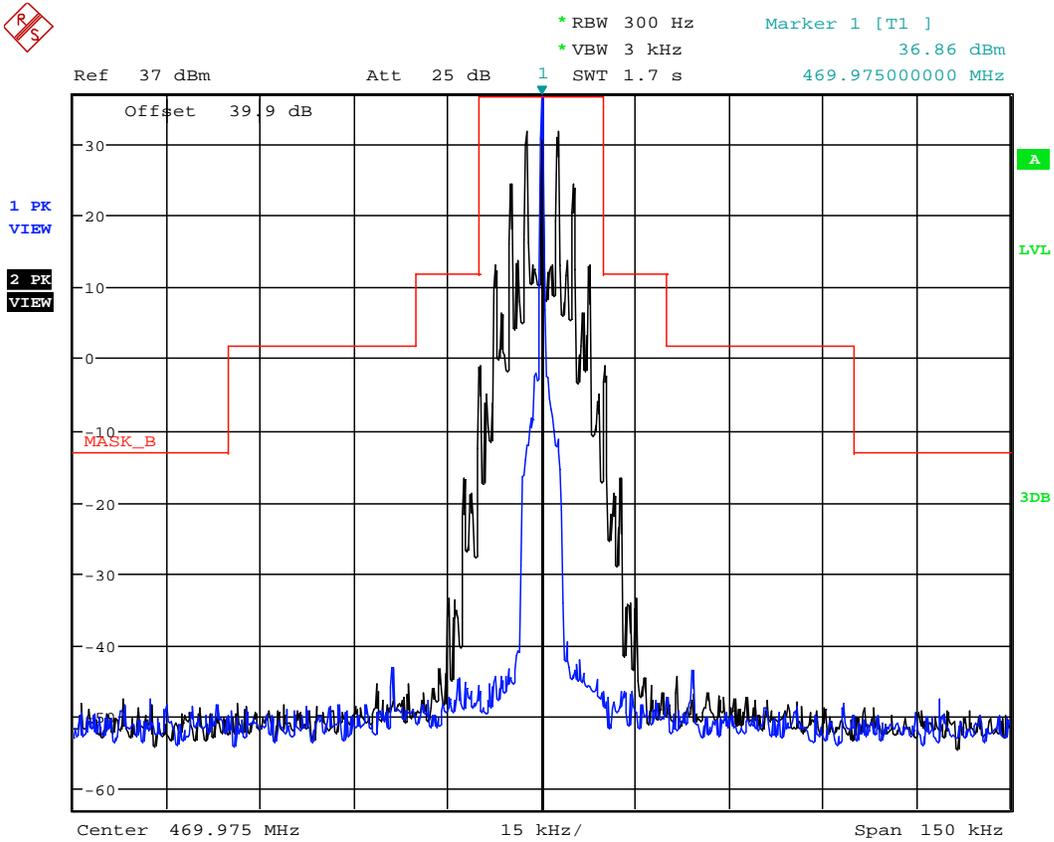

Date: 13.OCT.2022 10:11:17


High Power

5.8.3.20. Configuration: Mask D, 406.2MHz, 12.5 KHz, Analog, High power

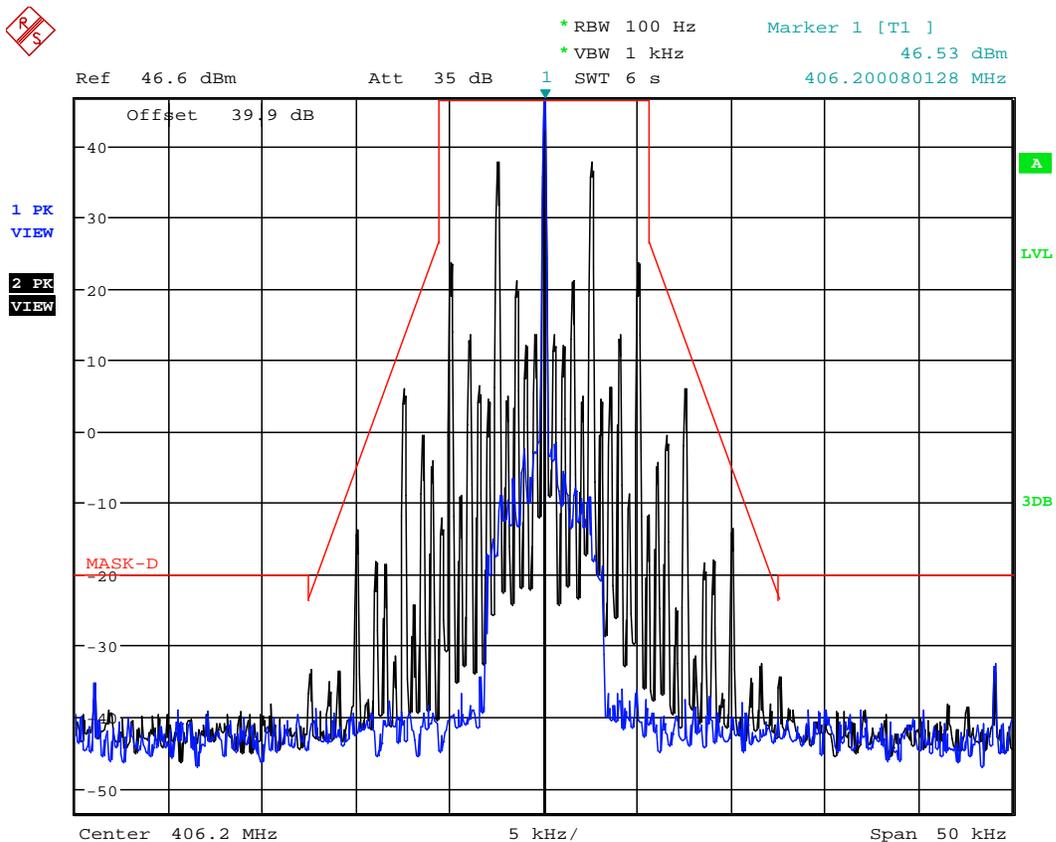

Date: 13.OCT.2022 10:30:51

5.8.3.21. Configuration: Mask D, 450.1MHz, 12.5 KHz, Analog, High power

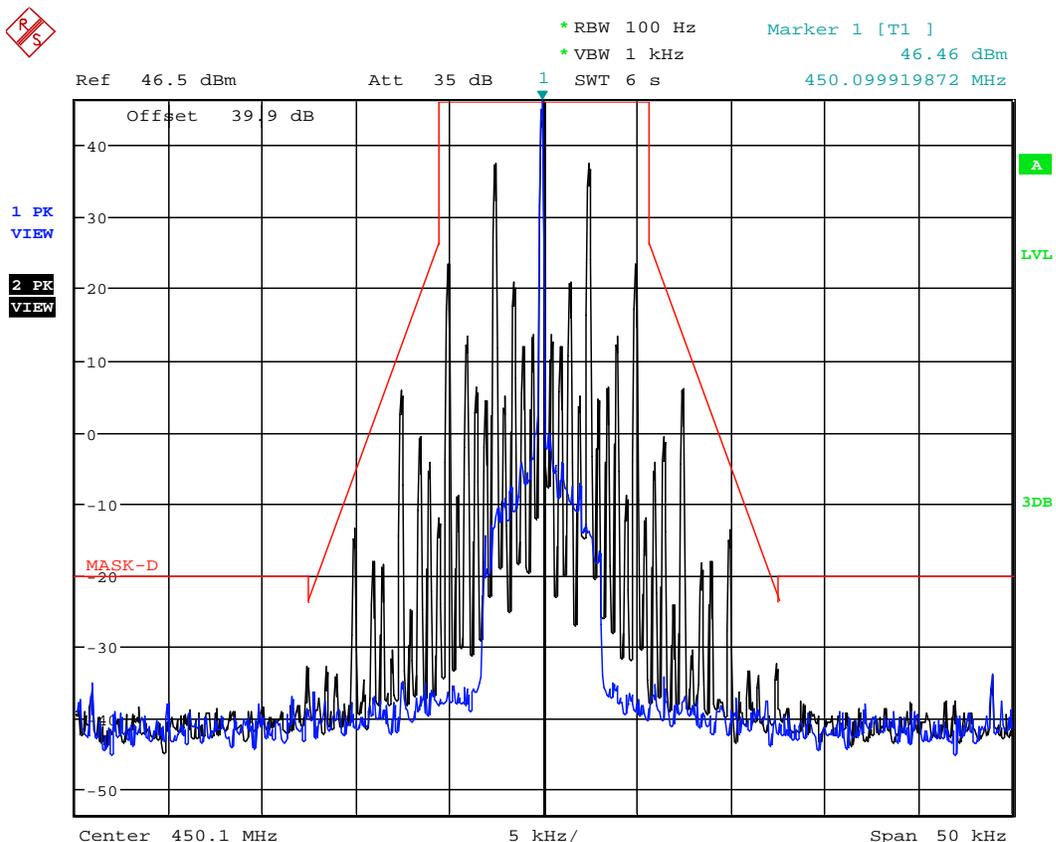

Date: 13.OCT.2022 10:41:28

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.22. Configuration: Mask D, 469.975MHz, 12.5 KHz, Analog, High power

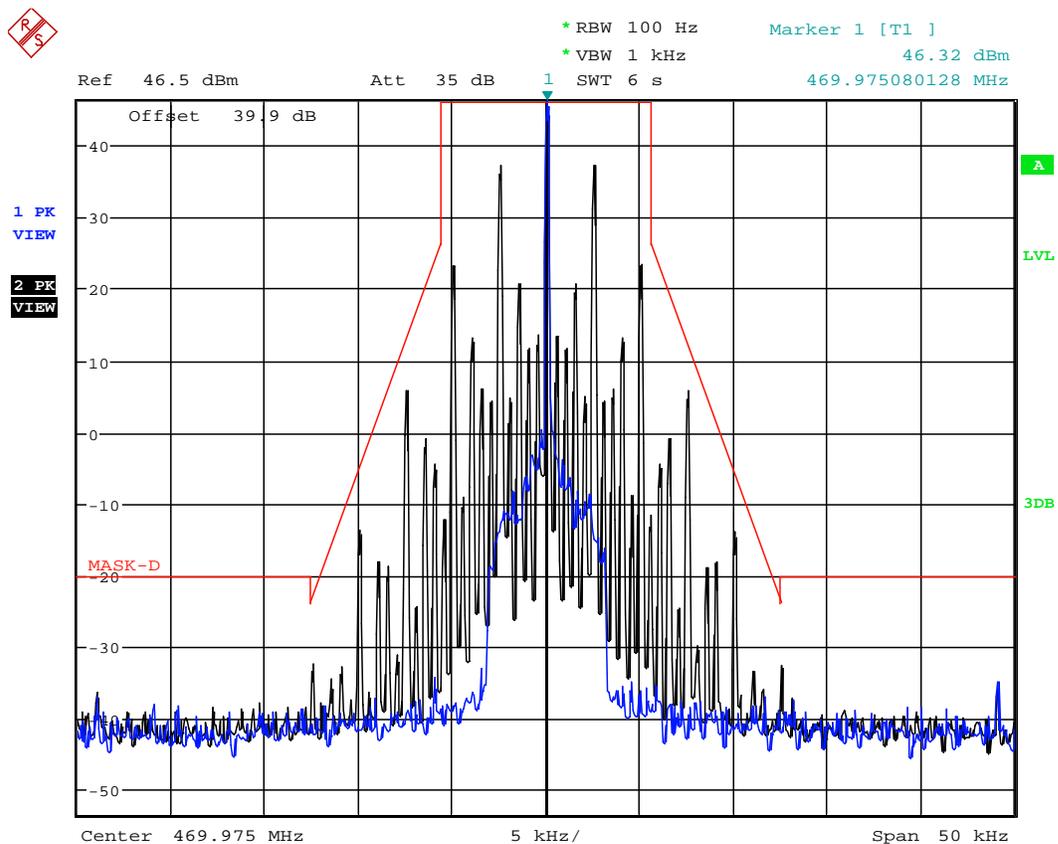

Date: 13.OCT.2022 10:55:22

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


Low Power

5.8.3.23. Configuration: Mask D, 406.2MHz, 12.5 KHz, Analog, Low power

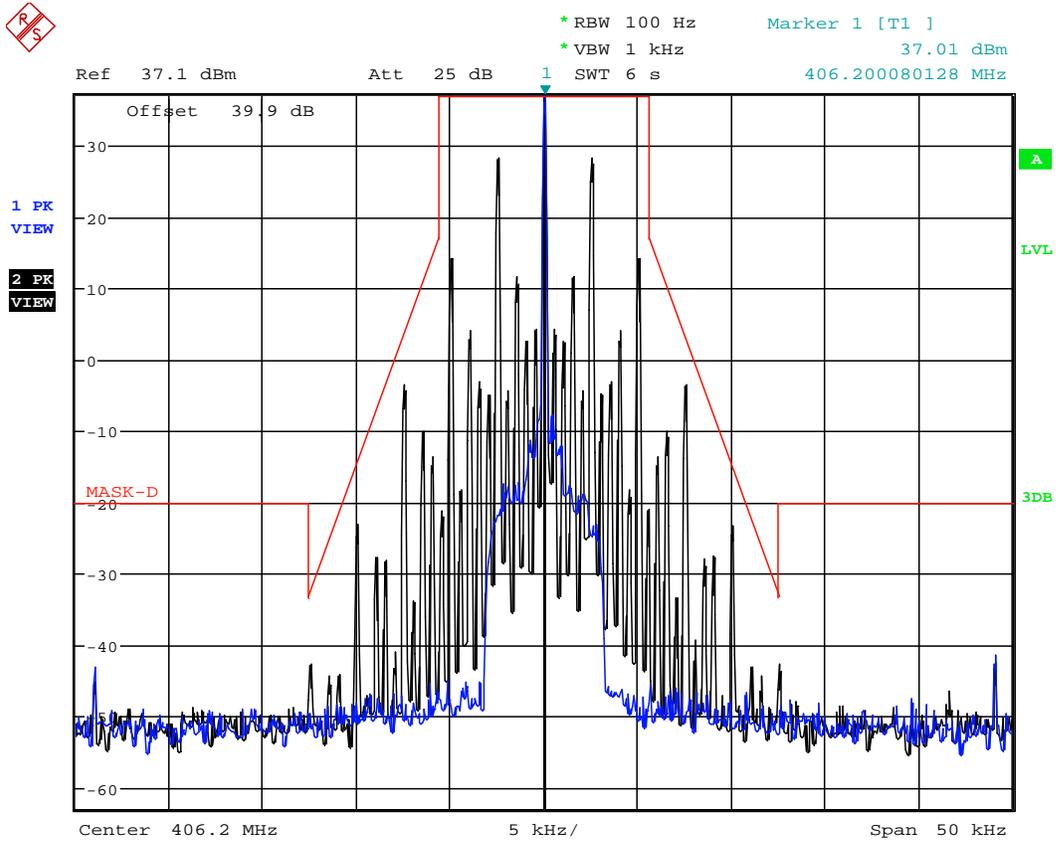

Date: 13.OCT.2022 11:13:42

5.8.3.24. Configuration: Mask D, 450.1MHz, 12.5 KHz, Analog, Low power

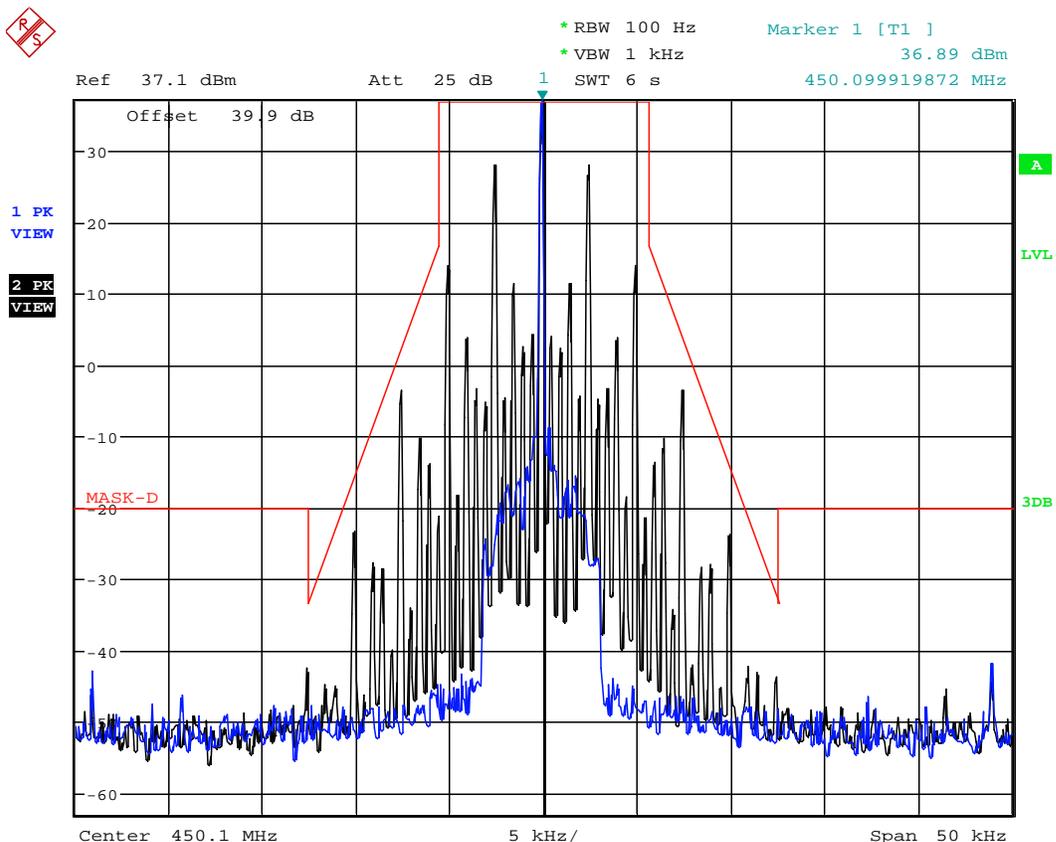

Date: 13.OCT.2022 11:20:21

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.8.3.25. Configuration: Mask D, 469.975MHz, 12.5 KHz, Analog, Low power

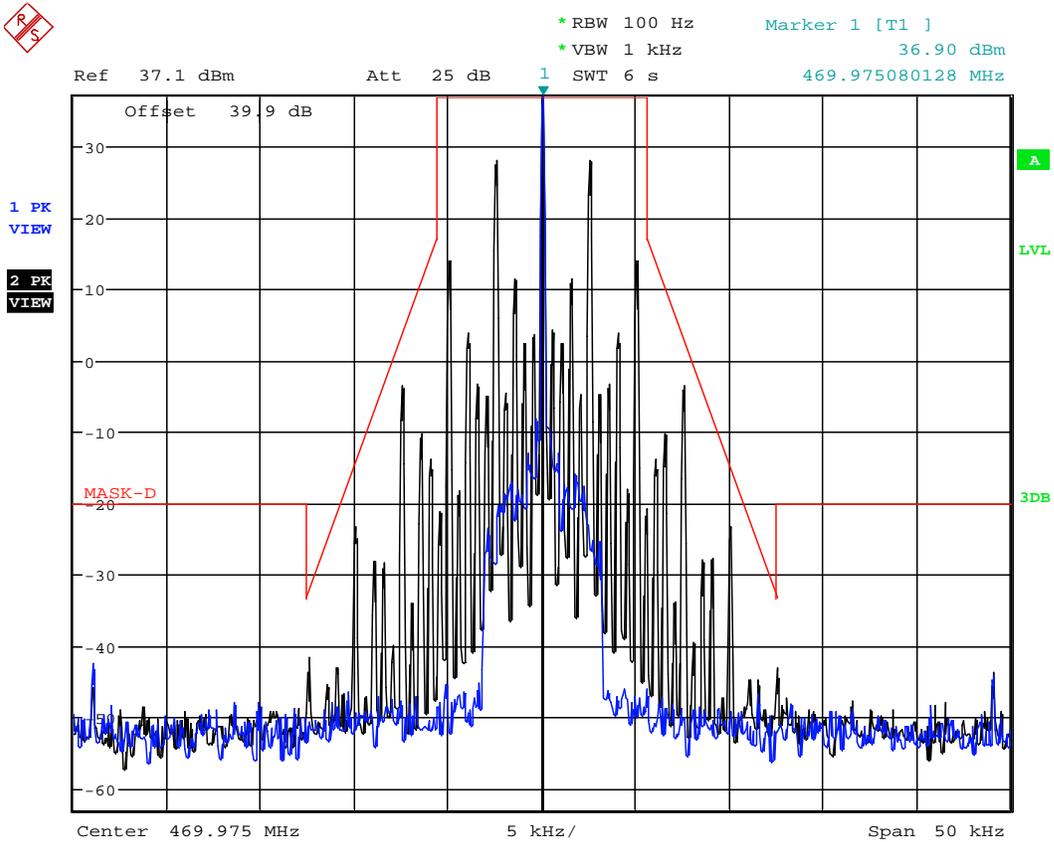

Date: 13.OCT.2022 11:26:00

High Power

5.8.3.26. Configuration: Mask D, 406.2MHz, 12.5 KHz, Phase 1 Digital, High power

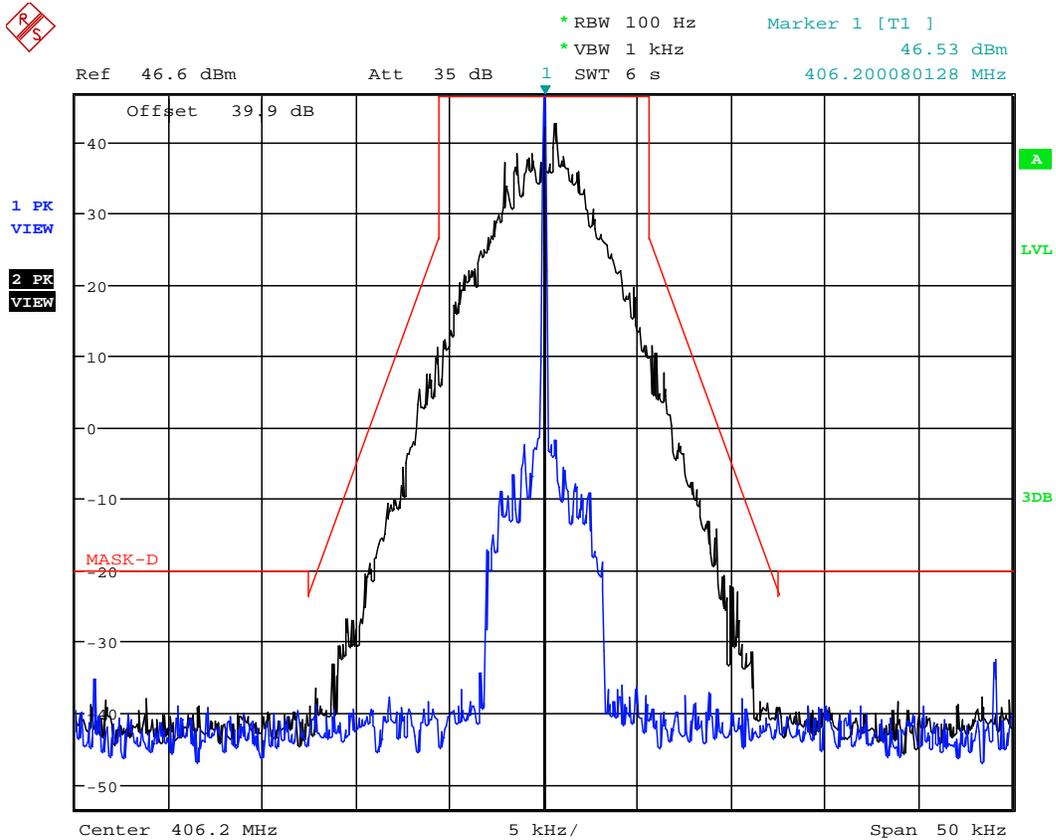

Date: 13.OCT.2022 10:33:14

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.27. Configuration: Mask D, 450.1MHz, 12.5 KHz, Phase 1 Digital, High power

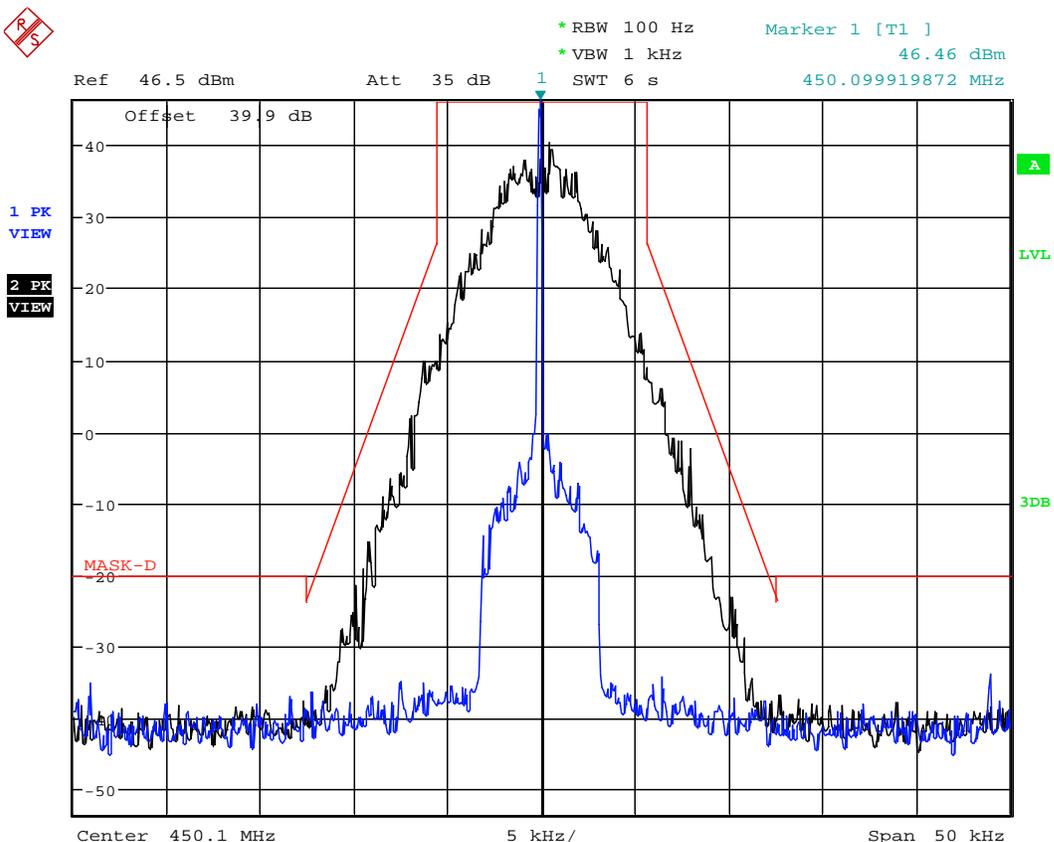

Date: 13.OCT.2022 10:45:39

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.28. Configuration: Mask D, 469.975MHz, 12.5 KHz, Phase 1 Digital, High power

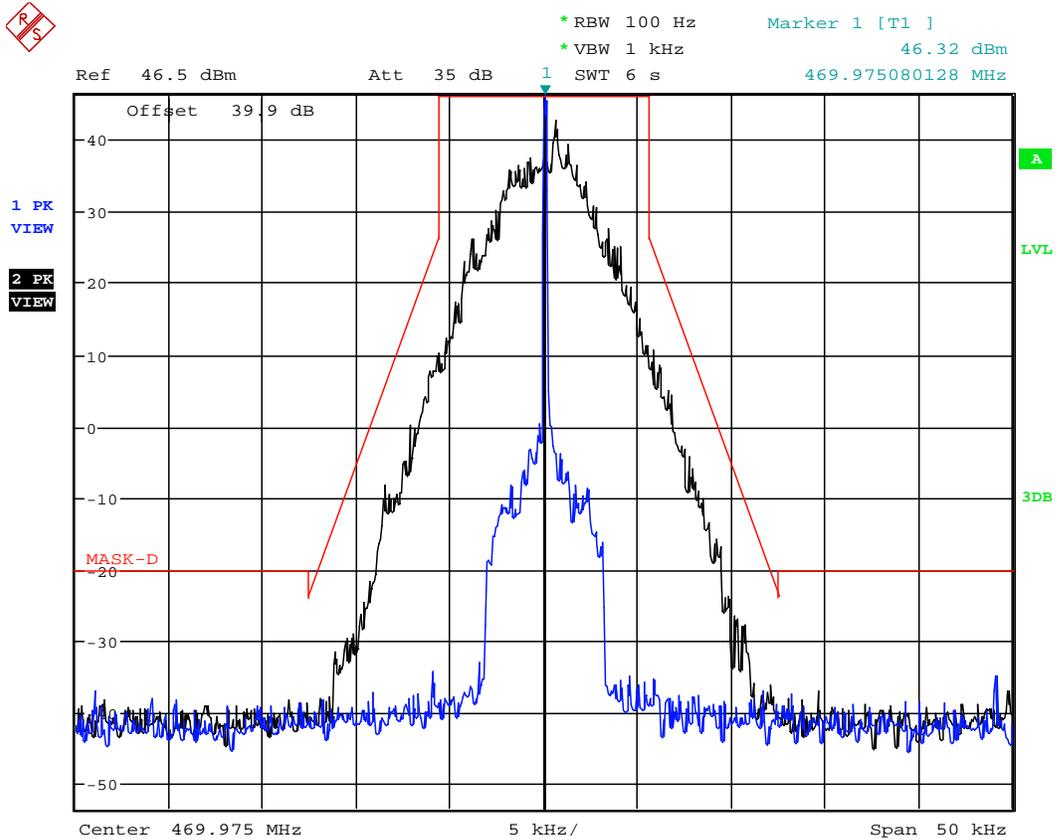

Date: 13.OCT.2022 10:58:00

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.29. Configuration: Mask D, 406.2MHz, 12.5 KHz, Phase 2 Digital, High power

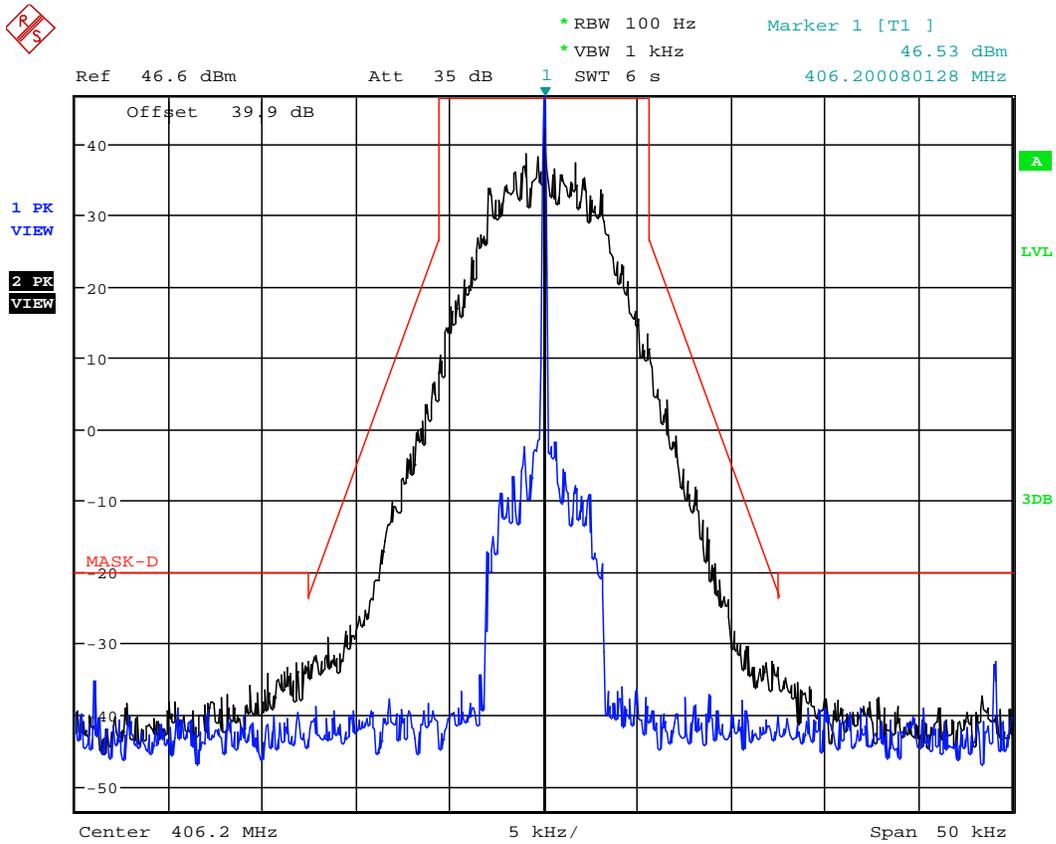

Date: 13.OCT.2022 10:35:12

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.30. Configuration: Mask D, 450.1MHz, 12.5 KHz, Phase 2 Digital, High power

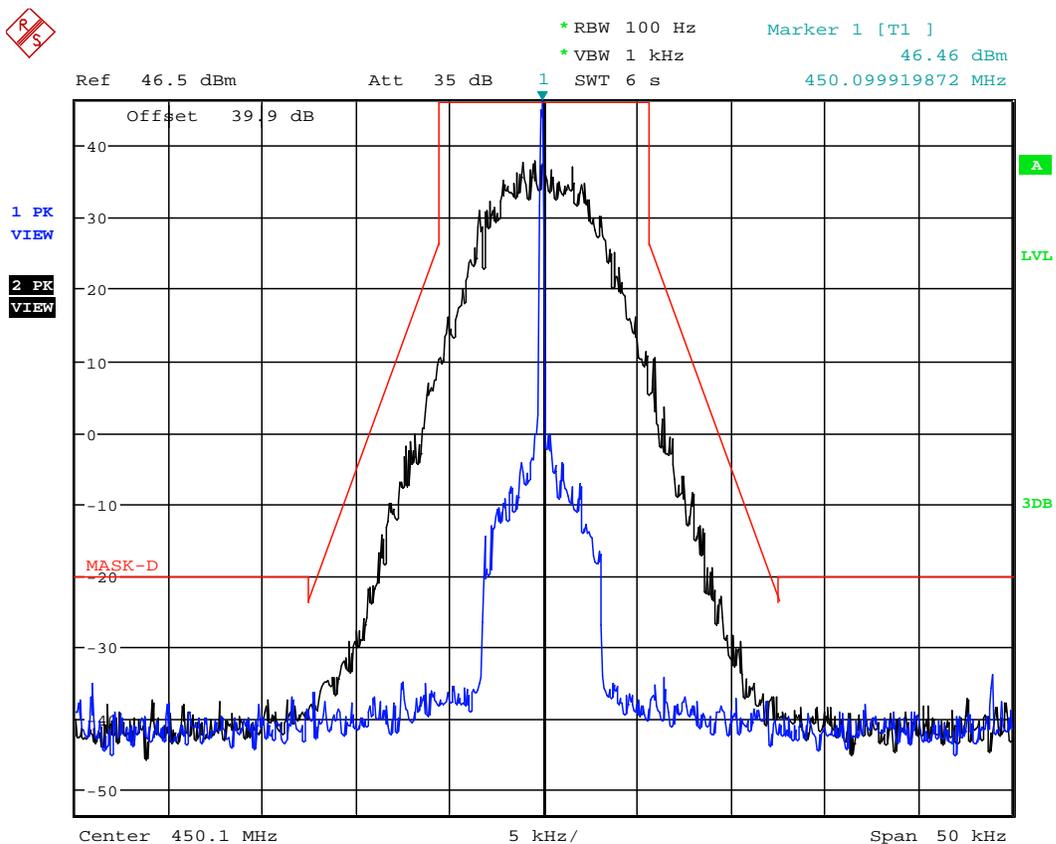

Date: 13.OCT.2022 10:47:30


5.8.3.31. Configuration: Mask D, 469.975MHz, 12.5 KHz, Phase 2 Digital, High power

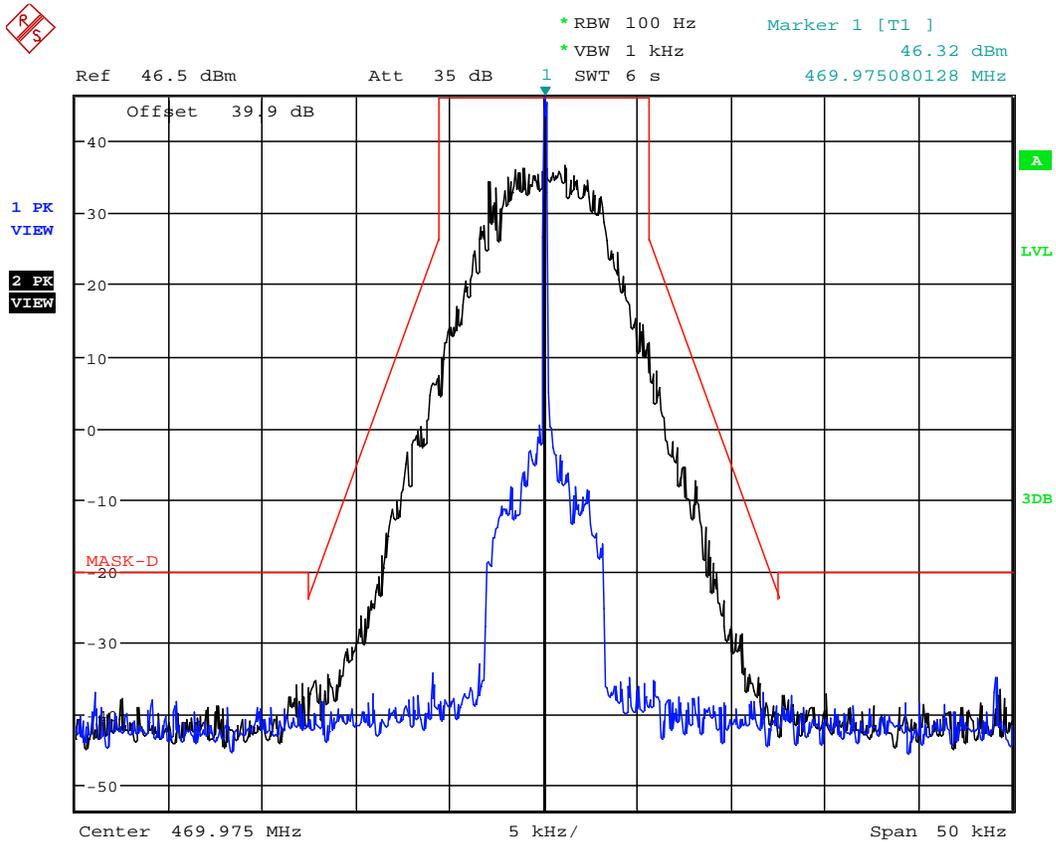

Date: 13.OCT.2022 10:59:50


Low Power

5.8.3.32. Configuration: Mask D, 406.2MHz, 12.5 KHz, Phase 1 Digital, Low power

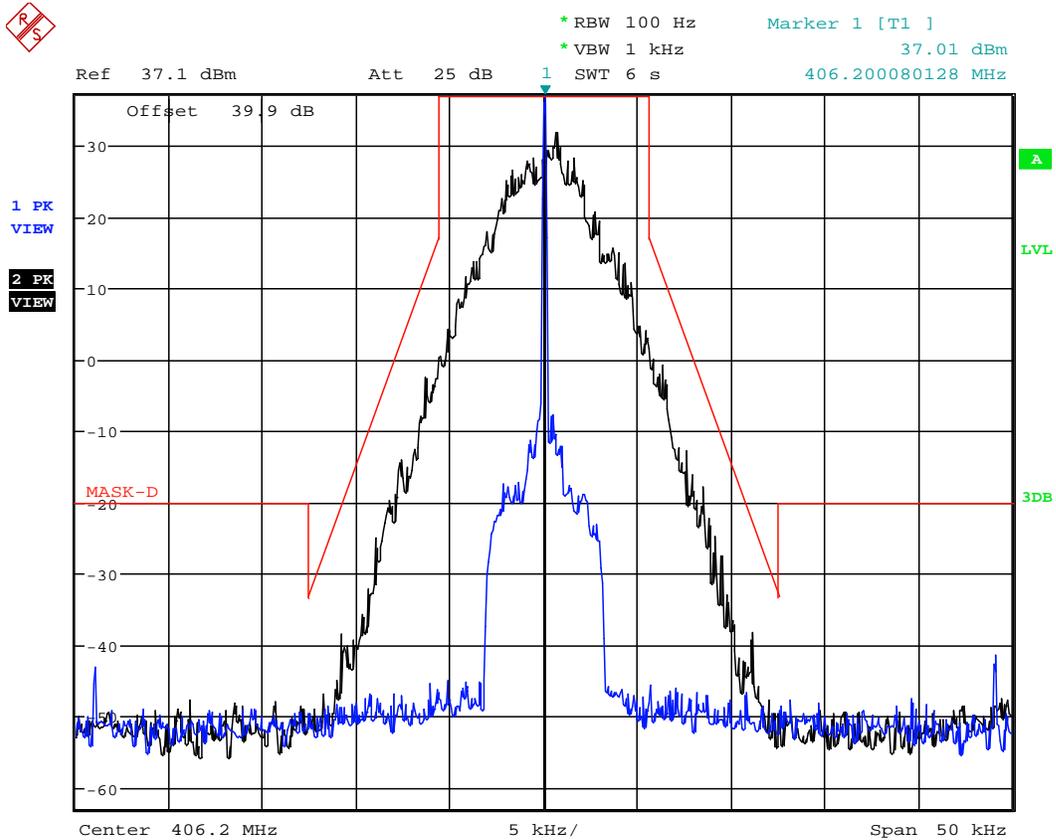

Date: 13.OCT.2022 11:17:16

5.8.3.33. Configuration: Mask D, 450.1MHz, 12.5 KHz, Phase 1 Digital, Low power

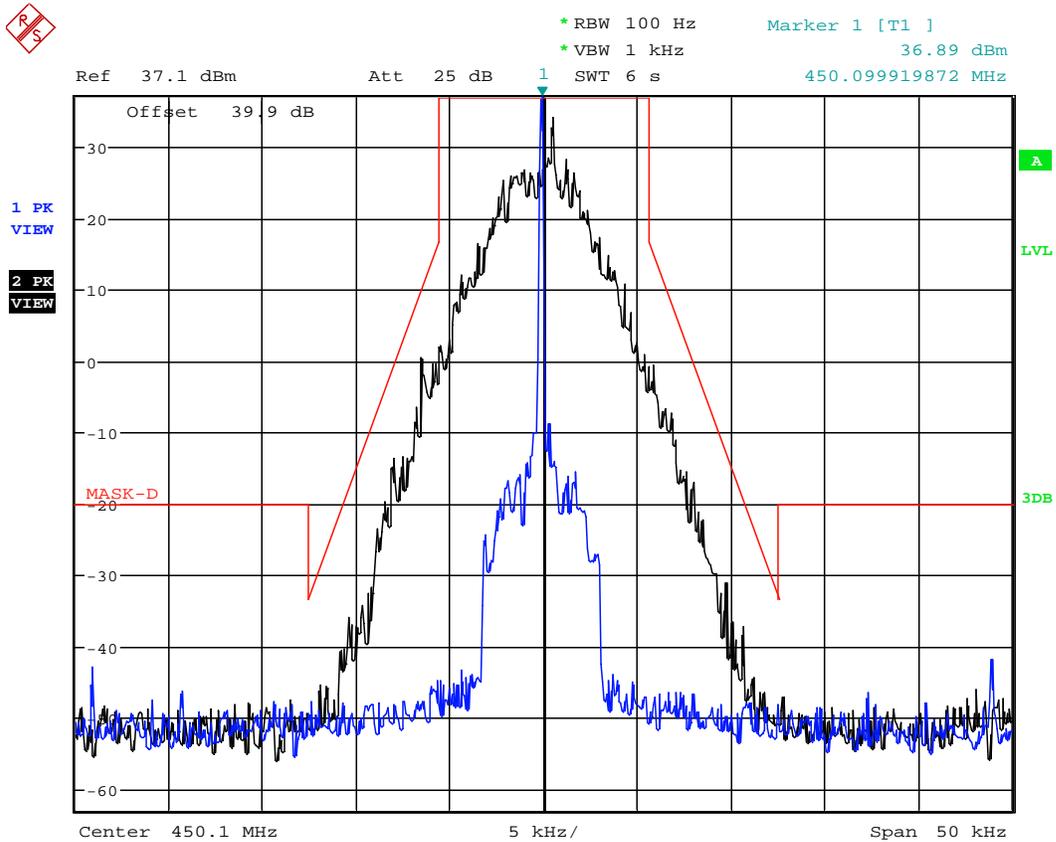

Date: 13.OCT.2022 11:21:51

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.34. Configuration: Mask D, 469.975MHz, 12.5 KHz, Phase 1 Digital, Low power

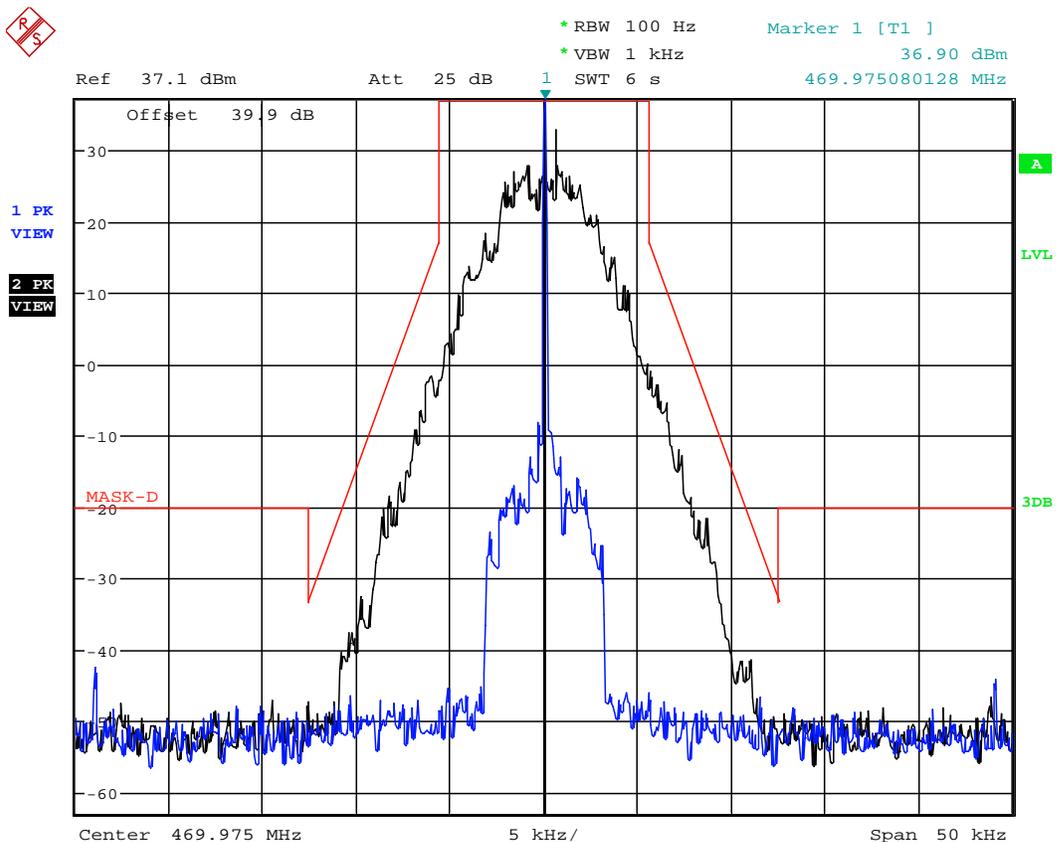

Date: 13.OCT.2022 11:27:47

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.35. Configuration: Mask D, 406.2MHz, 12.5 KHz, Phase 2 Digital, Low power

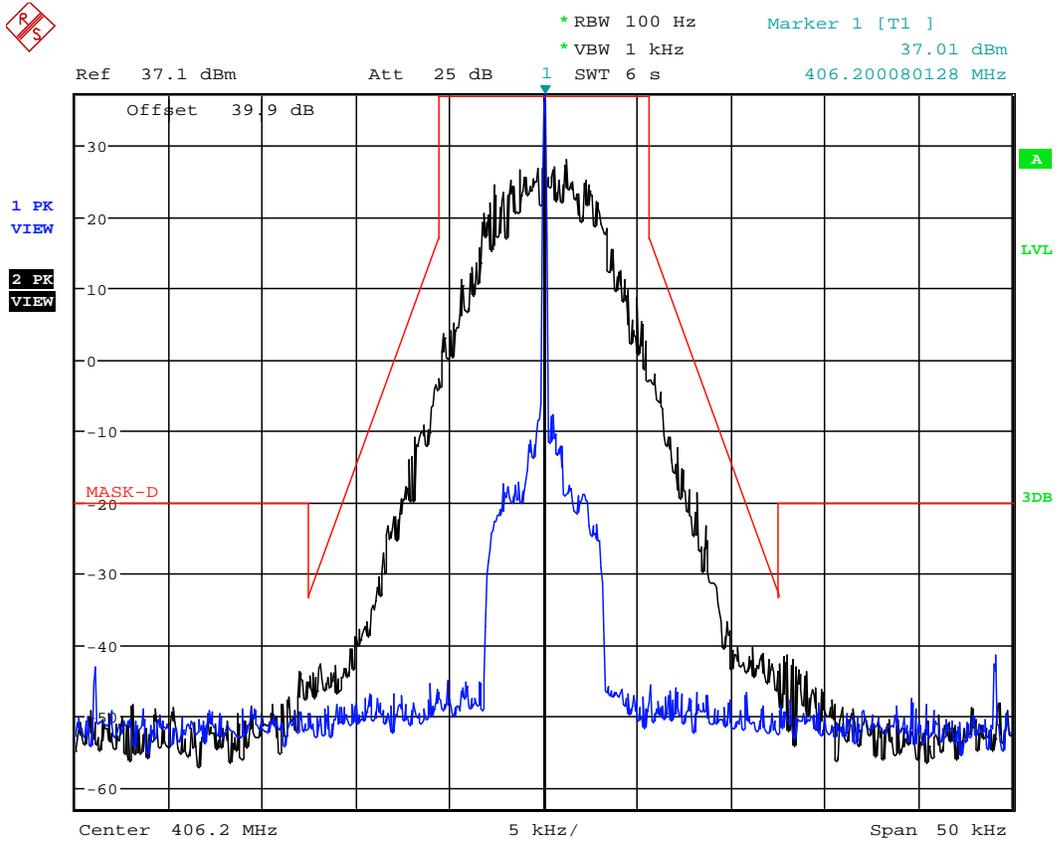


Date: 13.OCT.2022 11:15:48

5.8.3.36. Configuration: Mask D, 450.1MHz, 12.5 KHz, Phase 2 Digital, Low power

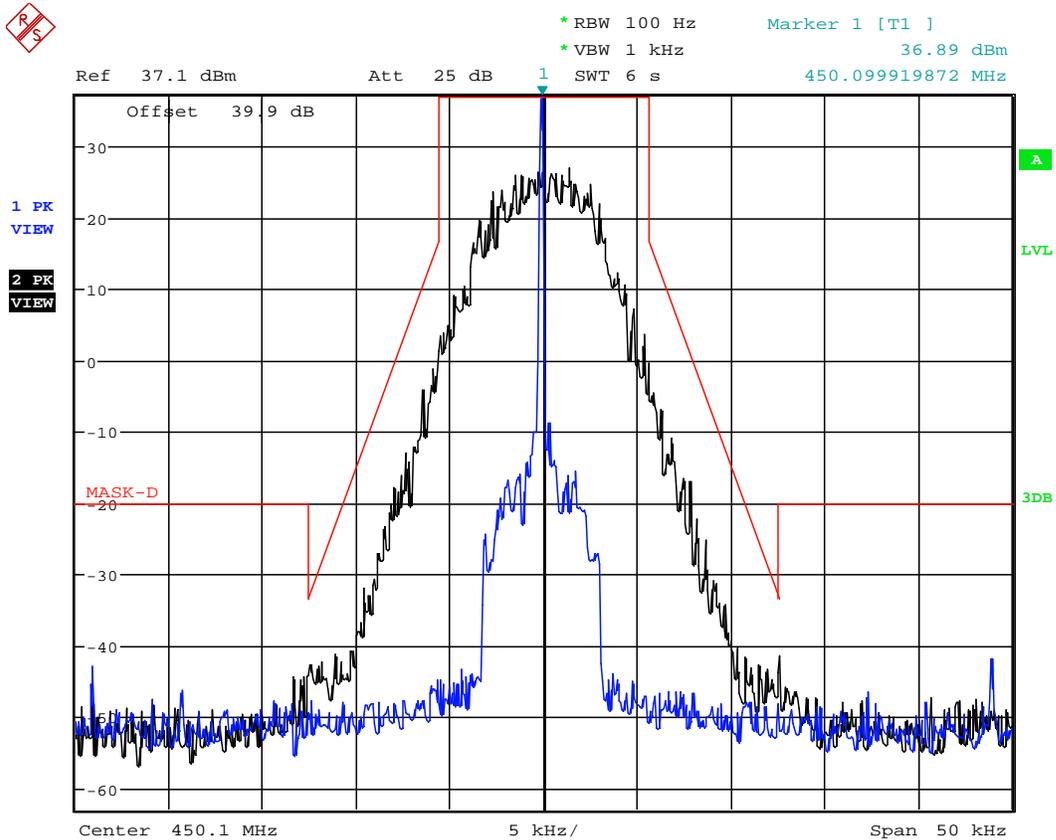

Date: 13.OCT.2022 11:23:11

5.8.3.37. Configuration: Mask D, 469.975MHz, 12.5 KHz, Phase 2 Digital, Low power

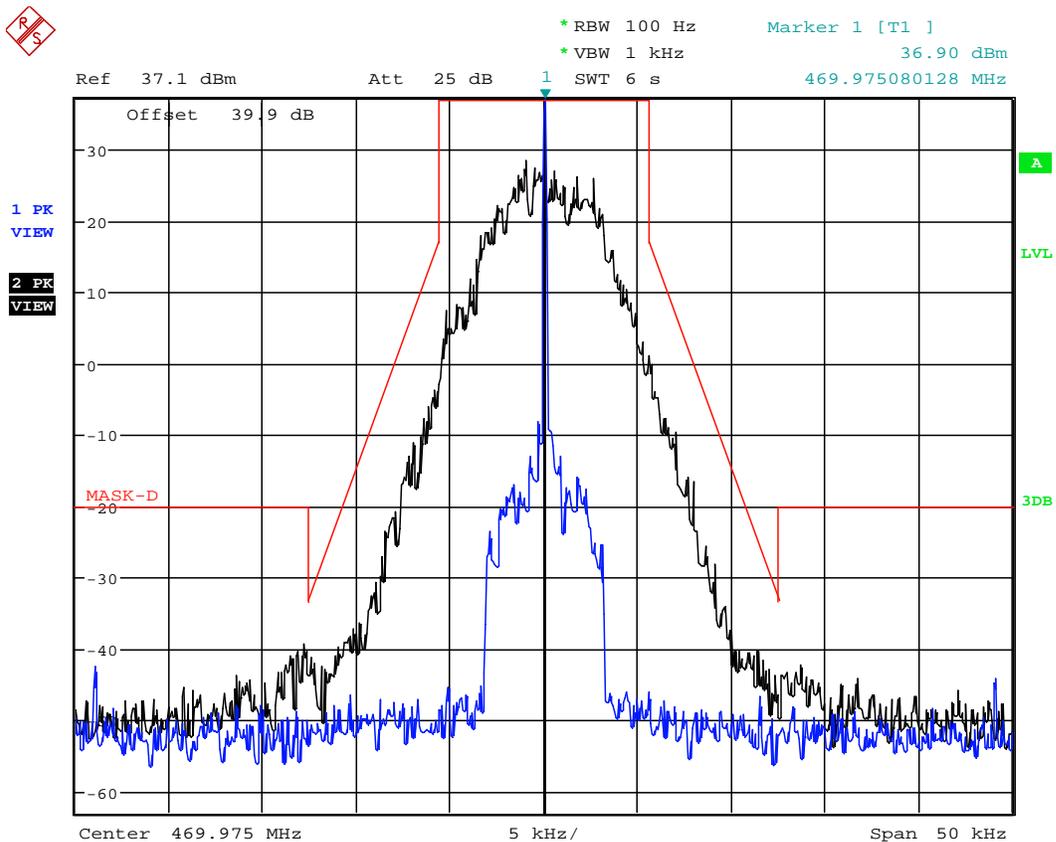

Date: 13.OCT.2022 11:29:23

5.9. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 2.1051, 2.1057, 22.359, 80.211(f)(3) & 90.210] [RSS-119 § 5.8]

5.9.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)
§ 22.359	At least 43 + 10 log (P) dB.
§ 80.211(f)(3),	At least 43 + 10log ₁₀ (mean power in watts) dB
§ 90.210(b)	At least 43 + 10 log (P) dB
§ 90.210(d)	At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.
§ 90.210(e)	At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.

RSS-119, Issue 12 Table 8	Frequency Range	Attenuation Limit (dBc)
Mask D	30 MHz or lowest radio frequency signal generated in the device to the tenth harmonic of the highest fundamental frequency.	At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.

5.9.2. Method of Measurements


Refer to Section 8.5 of this report for measurement details

5.9.3. Test Data

Note: here was no difference in spurious/harmonic emissions on the pre-scans for different channel spacing and modulation types. Therefore, the RF spurious/harmonic emissions in this section would be performed for Phase 2 Digital modulation with 12.5 kHz channel spacing.

High Power

5.9.3.1. Configuration: Tx Conducted, 406.2MHz, 12.5 KHz, P2 Digital, High power

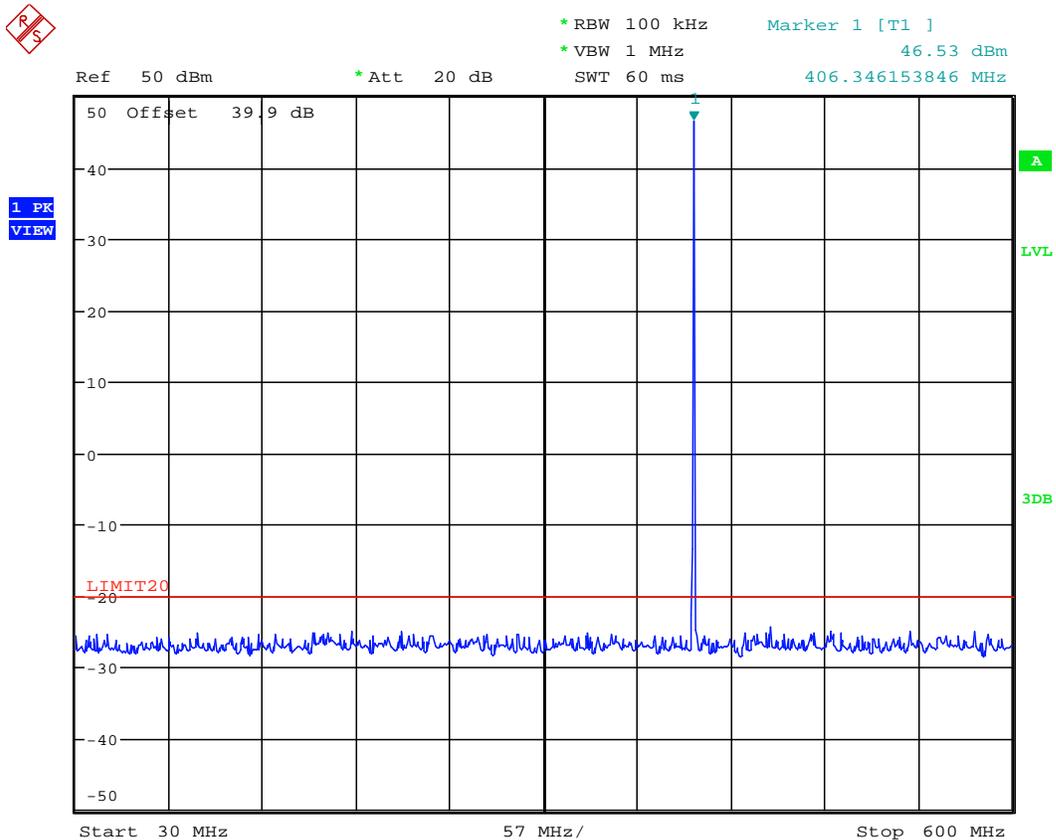

Date: 13.OCT.2022 11:52:40


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

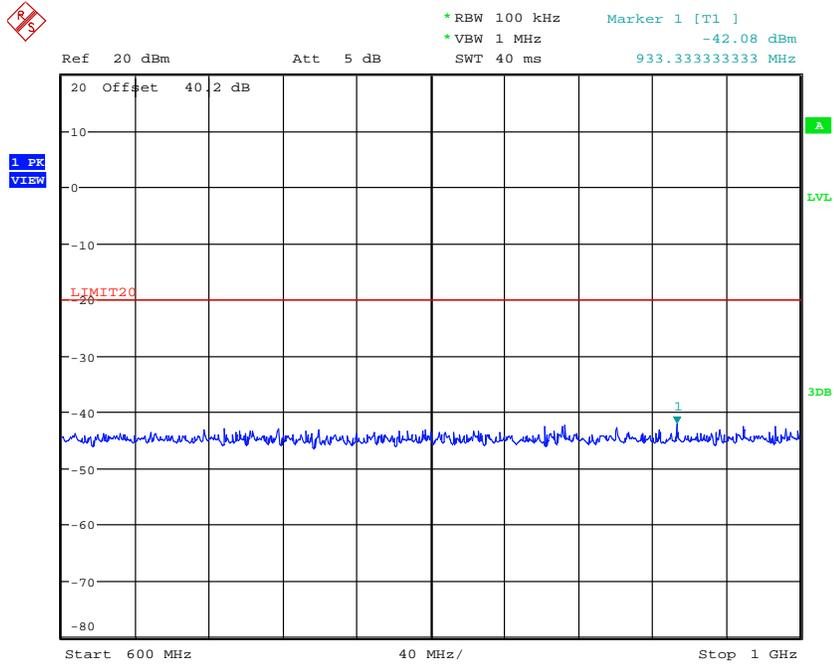

Date: 13.OCT.2022 11:58:37

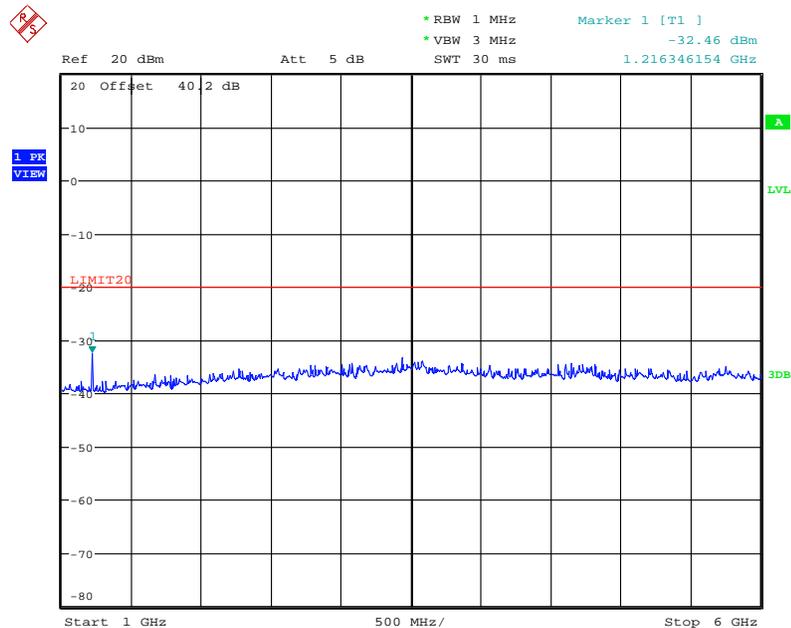

Date: 13.OCT.2022 12:04:34

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90


October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.9.3.2. Configuration: Tx Conducted, 450.1MHz, 12.5 KHz, P2 Digital, High power

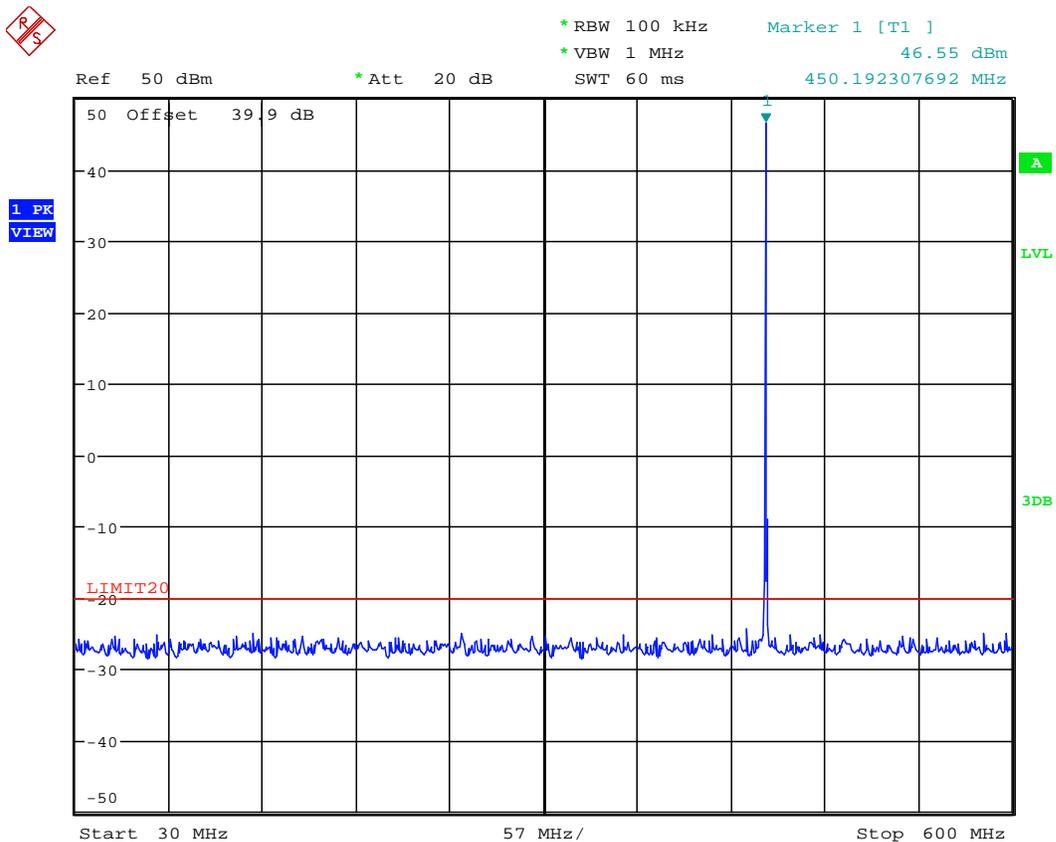

Date: 13.OCT.2022 11:53:26

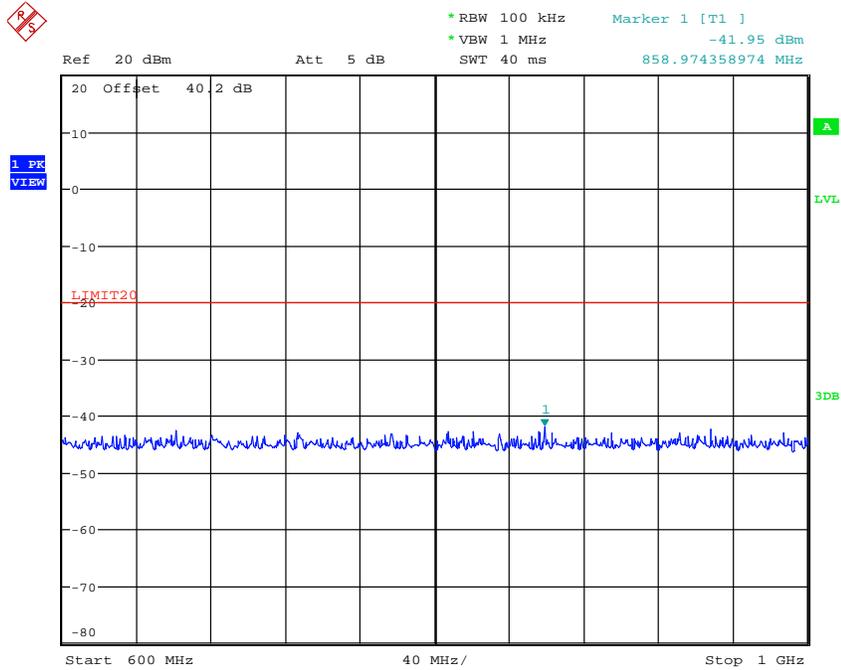

Date: 13.OCT.2022 11:59:31

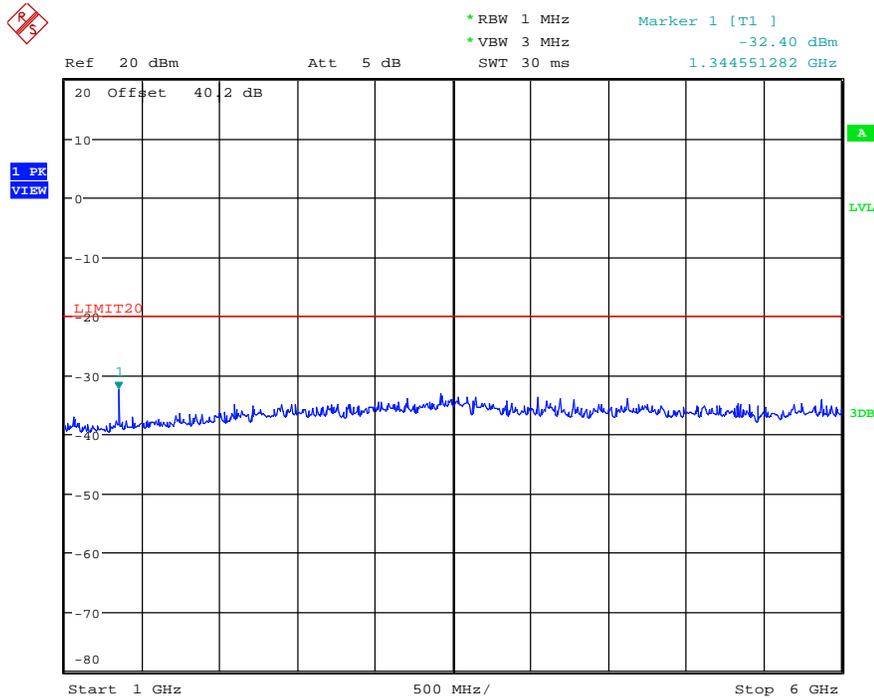

Date: 13.OCT.2022 12:05:17

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90


October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.9.3.3. Configuration: Tx Conducted, 469.975MHz, 12.5 KHz, P2 Digital, High power

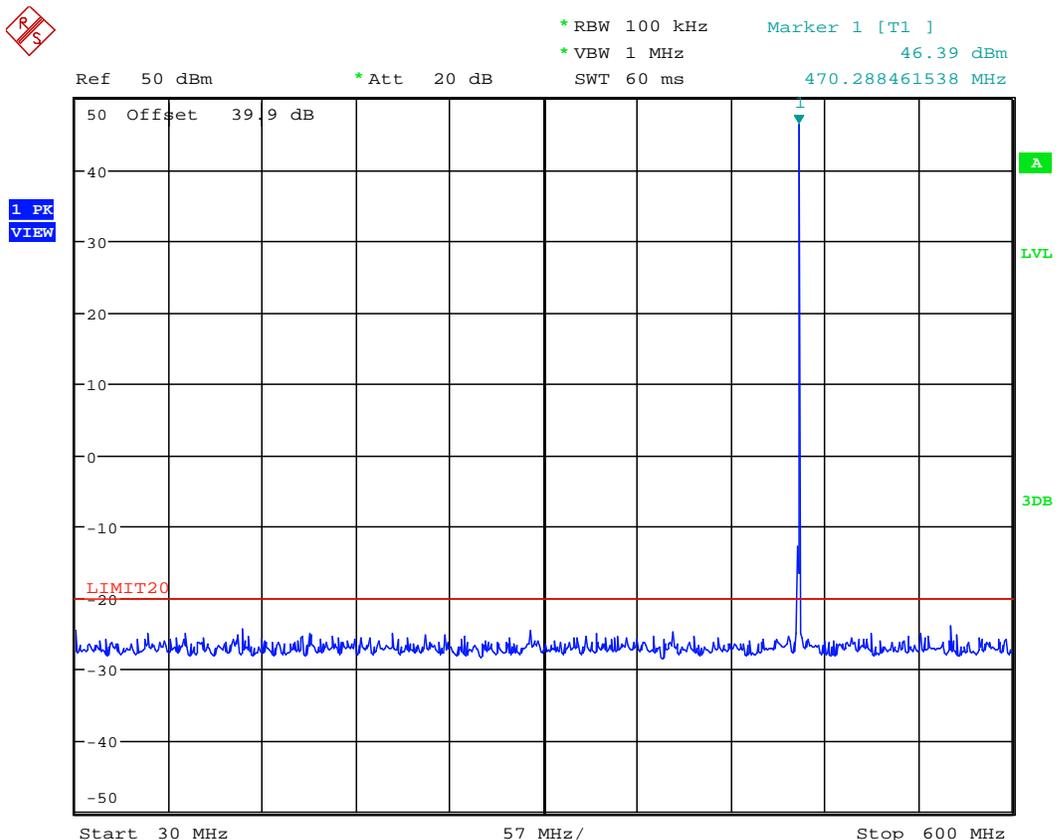

Date: 13.OCT.2022 11:54:13

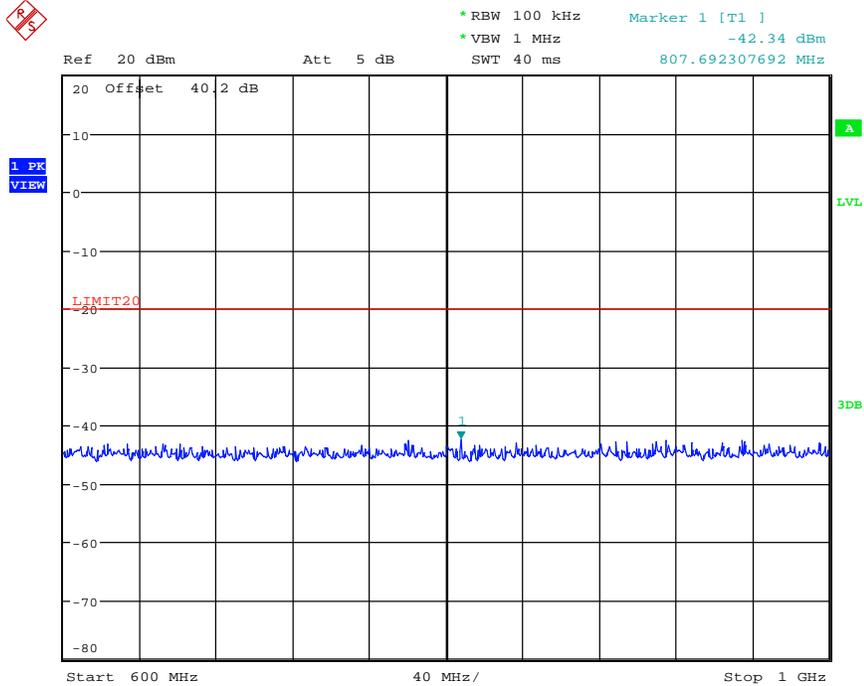

Date: 13.OCT.2022 12:00:27

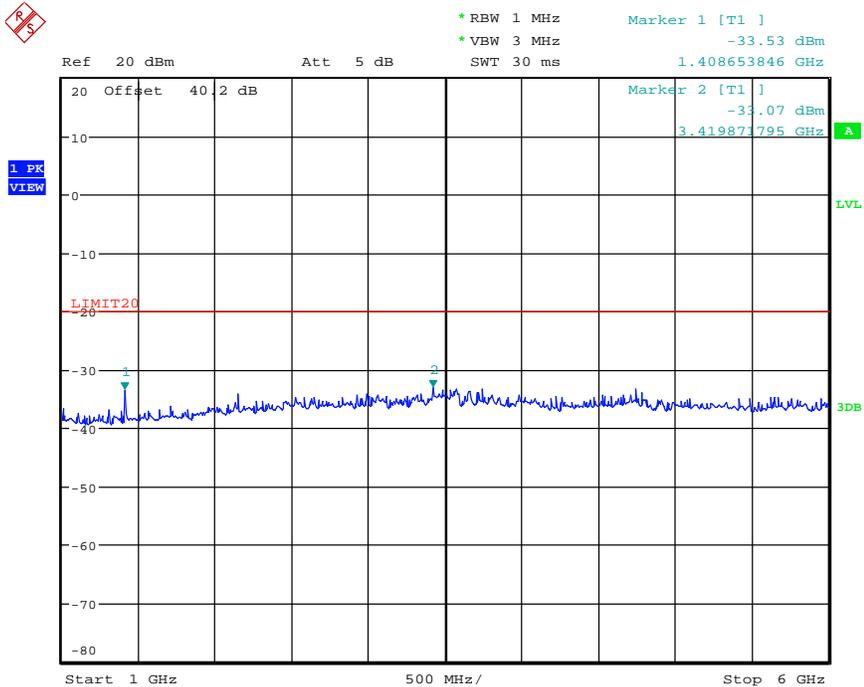

Date: 13.OCT.2022 12:07:13

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM591_FCC90

October 25, 2022


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Low Power


5.9.3.4. Configuration: Tx Conducted, 406.2MHz, 12.5 KHz, P2 Digital, Low power

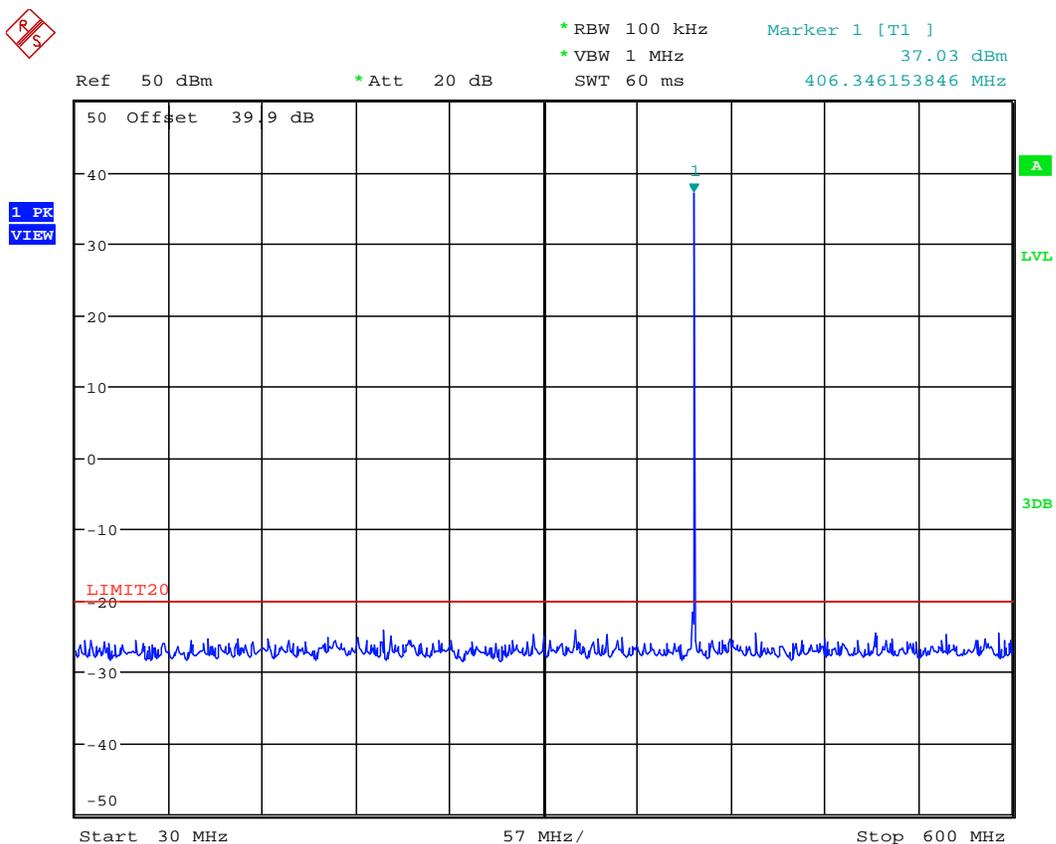

Date: 13.OCT.2022 11:54:59

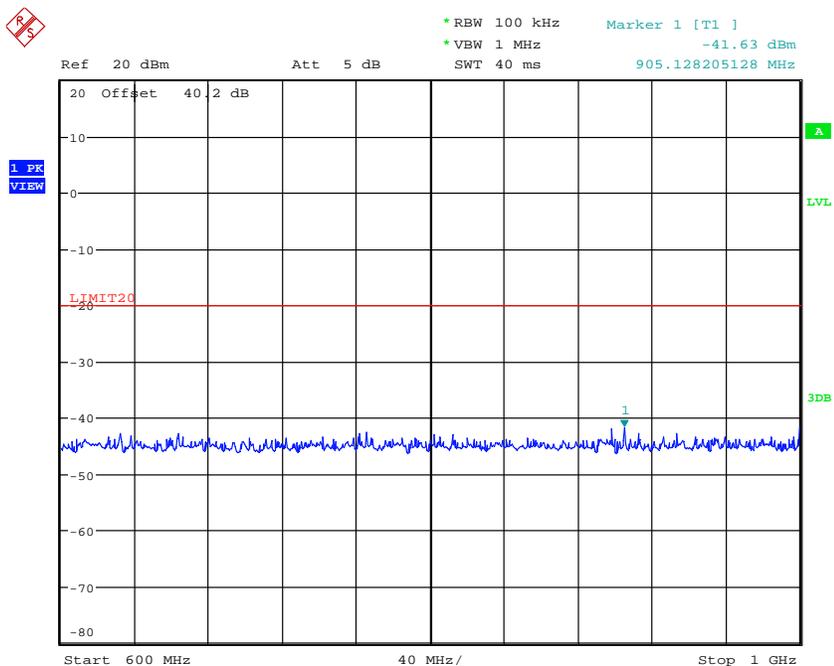

Date: 13.OCT.2022 12:02:08

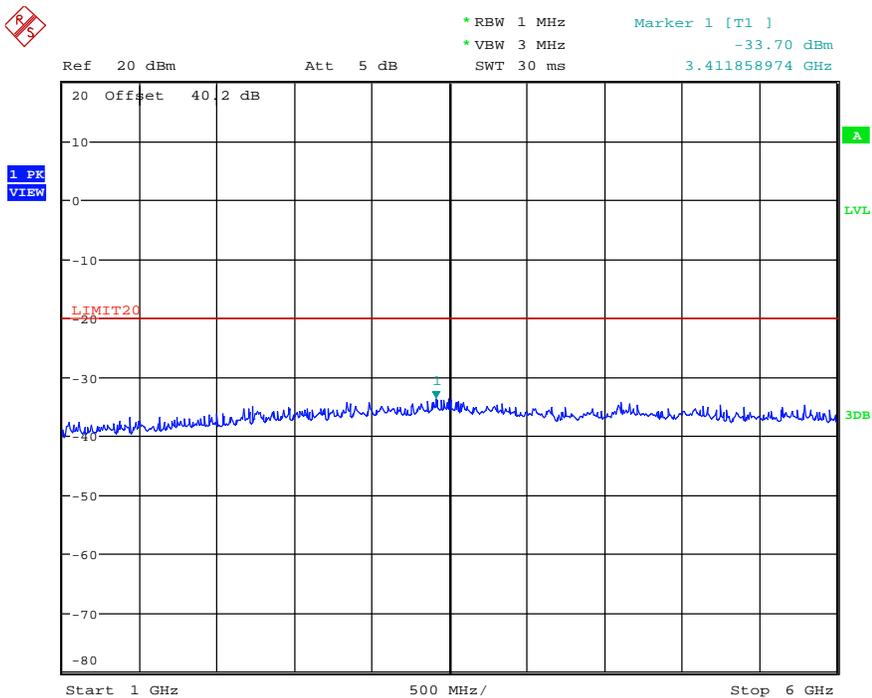

Date: 13.OCT.2022 12:08:28

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90


October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.9.3.5. Configuration: Tx Conducted, 450.1MHz, 12.5 KHz, P2 Digital, Low power

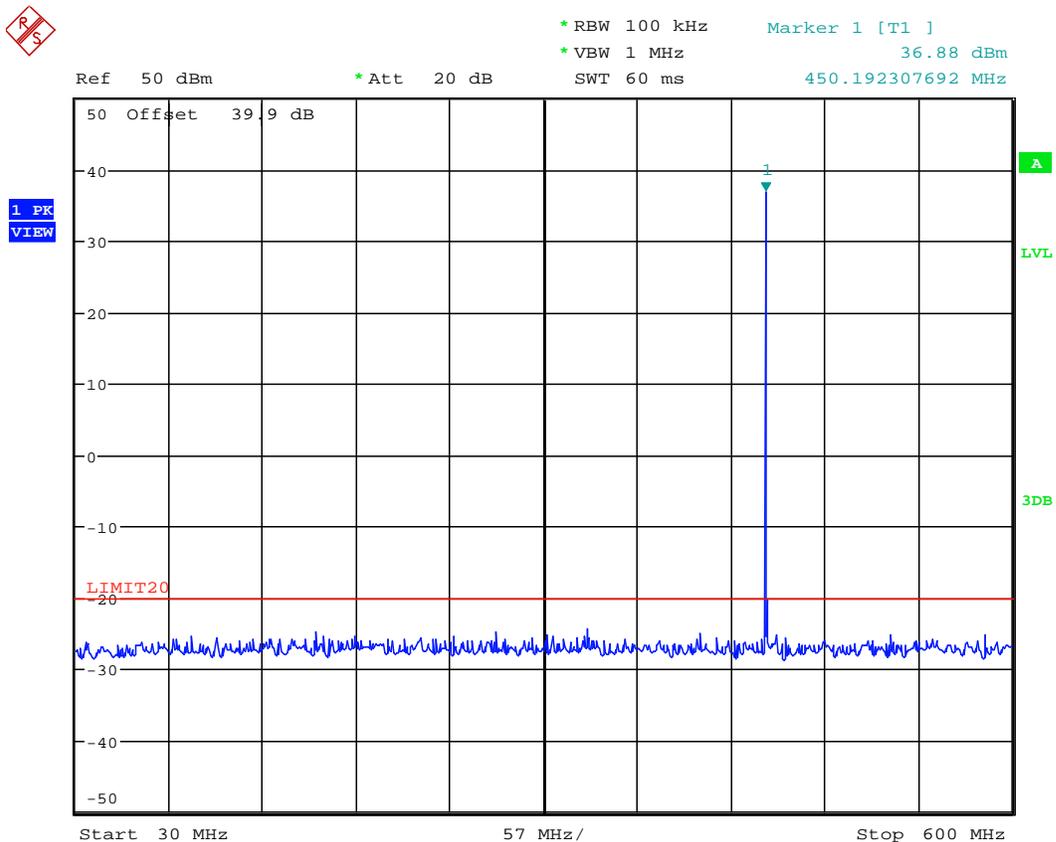

Date: 13.OCT.2022 11:55:34

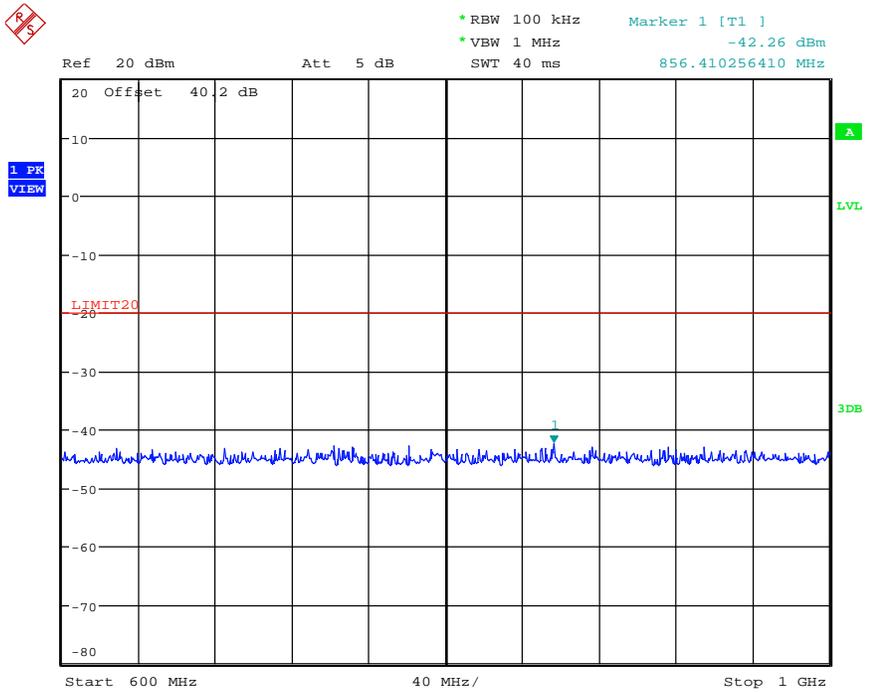


Date: 13.OCT.2022 12:02:44

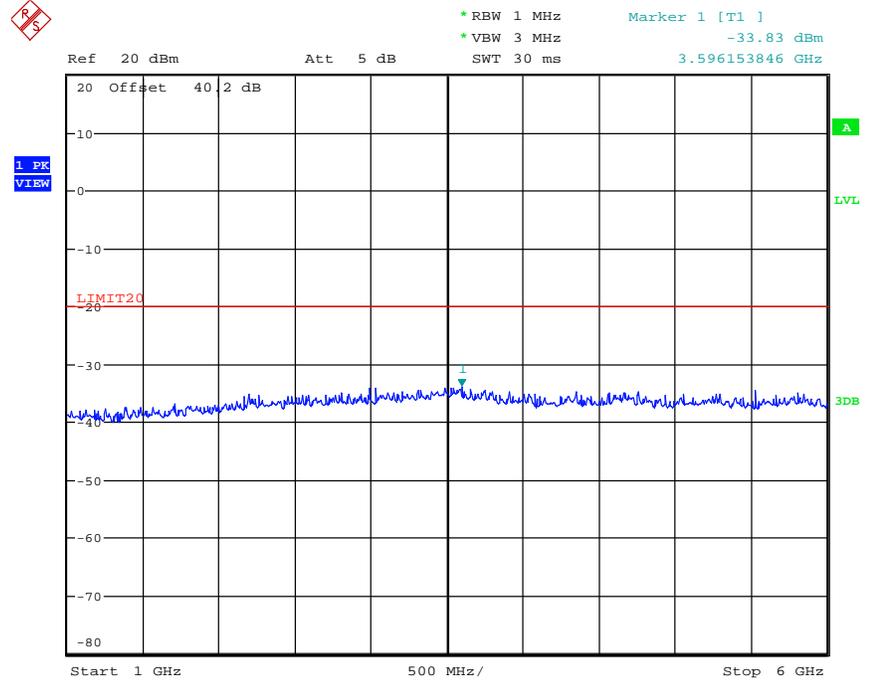


Date: 13.OCT.2022 12:09:05

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.9.3.6. Configuration: Tx Conducted, 469.975MHz, 12.5 KHz, P2 Digital, Low power

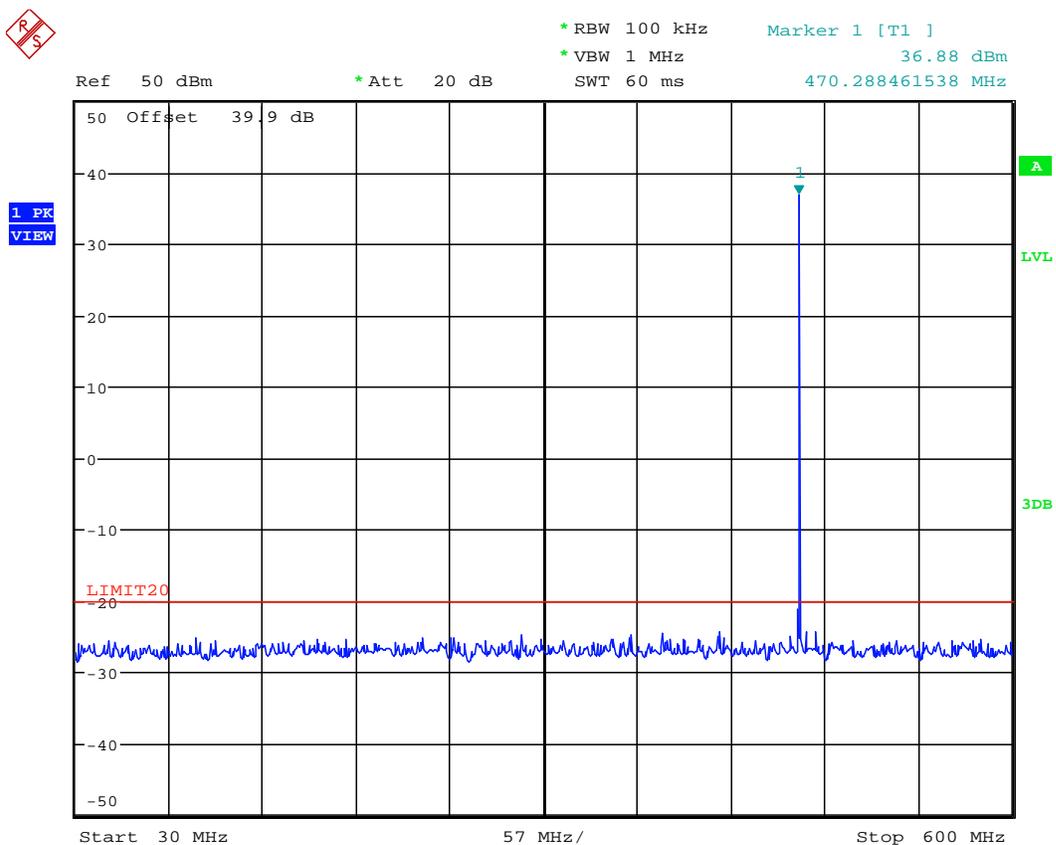

Date: 13.OCT.2022 11:56:05

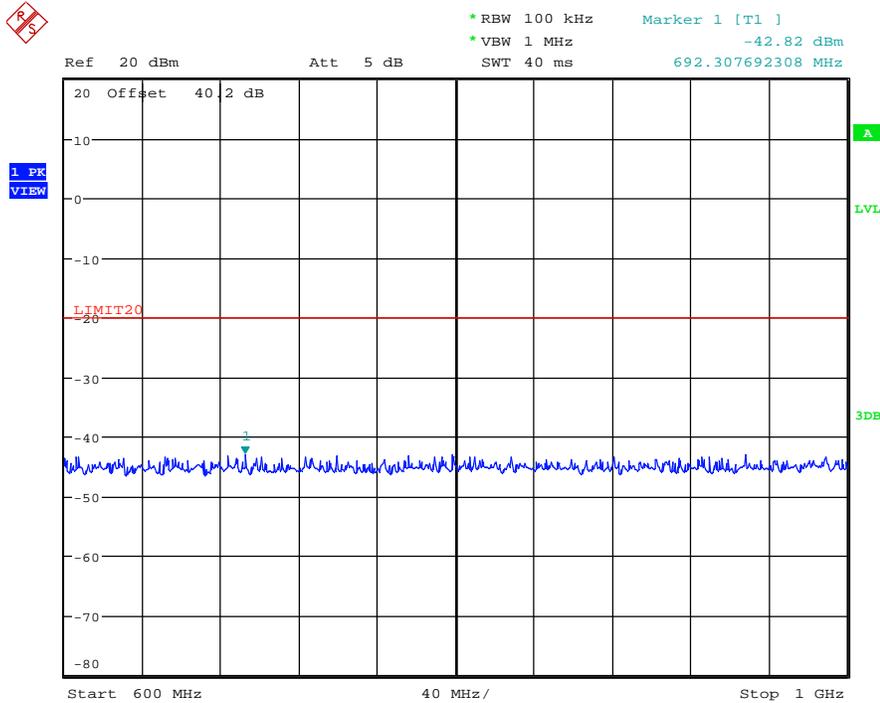

Date: 13.OCT.2022 12:03:25

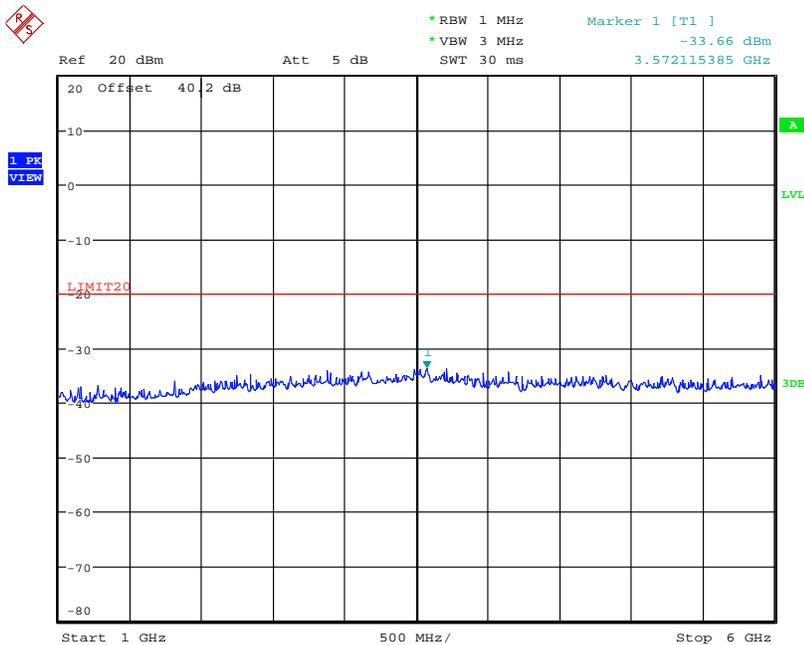

Date: 13.OCT.2022 12:09:39

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.10. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 2.1057, 22.359, 80.211(f)(3) & 90.210] [RSS-119, § 5.5 & 5.8]

5.10.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)
§ 22.359	At least 43 + 10 log (P) dB.
§ 80.211(f)(3),	At least 43 + 10log ₁₀ (mean power in watts) dB
§ 90.210(b)	At least 43 + 10 log (P) dB
§ 90.210(d)	At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.
§ 90.210(e)	At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.

RSS-119, Issue 12	Frequency Range	Attenuation Limit (dBc)
Mask D	30 MHz or lowest radio frequency signal generated in the device to the tenth harmonic of the highest fundamental frequency.	At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.

5.10.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Section 8.2 of this report.

5.10.3. Test Data

Remarks:

- The RF spurious/harmonic emission characteristics for different channel spacing are indistinguishable. Therefore, the following radiated emissions were performed at P2 digital 12.5 kHz channel spacing operation, and the results were compared with the for the worst-case.
- The radiated emissions were performed with high power setting (45 Watts) at 3 m distance to represents the worst-case test configuration.
- The emissions were scanned from 30 MHz to 10th harmonics; all spurious emissions that are in excess of 20dB below the specified limit shall be recorded.

5.10.3.1. Far Lowest Frequency (406.2 MHz)

Test Frequency (MHz):		406.2				
Power setting:		High				
Limit (dBm):		-20.0				
Frequency (MHz)	E-Field (dB μ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP Measured (dBm)	Limit (dBm)	Margin (dB)
All emissions are more than 20 dB below the limit line.						

5.10.3.2. Near Middle Frequency (450.1 MHz)

Test Frequency (MHz):		450.1				
Power setting:		High				
Limit (dBm):		-20.0				
Frequency (MHz)	E-Field (dB μ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP Measured (dBm)	Limit (dBm)	Margin (dB)
All emissions are more than 20 dB below the limit line.						

5.10.3.3. Near Highest Frequency (469.975 MHz)

Test Frequency (MHz):		469.975				
Power setting:		High				
Limit (dBm):		-20.0				
Frequency (MHz)	E-Field (dB μ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP Measured (dBm)	Limit (dBm)	Margin (dB)
939.950	61.35	PEAK	V	-38.29	-20	-18.29
939.950	60.84	PEAK	H	-38.79	-20	-18.79
2819.850	59.76	PEAK	V	-37.35	-20	-17.35
All emissions are more than 20 dB below the limit line.						

5.11. FREQUENCY STABILITY [§§ 2.1055, 22.355, 74.464, 80.209 & 90.213] [RSS-119 § 5.3]

5.11.1. Limits

§ 90.213 Transmitters used must have minimum frequency stability as specified in the following table.

Frequency Range (MHz)	Channel Bandwidth (KHz)	Frequency Tolerance (ppm)		
		Fixed and Base Stations	Mobile Stations	
			> 2 W	≤ 2 W
150-174 MHz	6.25	1.0	2.0	2.0
	12.5	2.5	5.0	5.0
	25	5.0	5.0	50.0*
421-512 MHz	6.25	0.5	1.0	1.0
	12.5	1.5	2.5	2.5
	25	2.5	5.0	5.0

- Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5 ppm.
- Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150-174 MHz band and 2.5 ppm in the 421-512 MHz band.

§ 22.355 Transmitters used must have minimum frequency stability as specified in the following table.

TABLE C-1—FREQUENCY TOLERANCE FOR TRANSMITTERS IN THE PUBLIC MOBILE SERVICES

Frequency range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

§ 74.464 - For operations on frequencies above 25 MHz using authorized bandwidths up to 30 kHz, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in compliance with the frequency tolerance requirements of §90.213 of this chapter. For all other operations, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in accordance with the following:

Frequency range	Tolerance (percent)	
	Base station	Mobile station
25 to 30 MHz:		
3 W or less002	.005
Over 3 W002	.002
30 to 300 MHz:		
3 W or less0005	.005
Over 3 W0005	.0005
300 to 500 MHz, all powers00025	.0005

[RSS-119 § 5.3]

The carrier frequency shall not depart from the reference frequency in excess of the values given in Table 1.

Table 1 - Transmitter Frequency Stability

Frequency Band (MHz)	Authorized Bandwidth (kHz)	Frequency Stability (ppm)		
		Base/Fixed	Mobile Station	
			>2 watts	≤ 2 watts
138-174	30	5	5	5
	15	2.5	5	5
	7.4	1	2	5
406.1-430 and 450-470 (Note 6)	25(Note 2)	0.5	1	1
	25	2.5	5	5
	12.5	1.5	2.5	2.5
	6.25	0.5	1	1

5.11.2. Method of Measurements

Refer to Section 8.3 of this report for measurement details

5.11.3. Test Data

Test Frequency:	406.2 MHz		
Full Power Level:	44.46W		
Frequency Tolerance Limit:	± 1 ppm or ± 406Hz		
Max. Frequency Tolerance Measured:	200Hz or 0.49 ppm		
Input Voltage Rating:	13.6 VDC (nominal)		
Ambient Temperature (°C)	Frequency Drift (Hz)		
	Supply Voltage (Nominal) 13.6 VDC	Supply Voltage (-15%) 11.56 VDC	Supply Voltage (+15%) 15.64 VDC
-30	112	--	--
-20	155	--	--
-10	152	--	--
0	114	--	--
10	77	--	--
20	70	59	69
30	75	--	--
40	63	--	--
50	97	--	--
60	200	--	--

5.12. TRANSIENT FREQUENCY BEHAVIOR [§ 90.214 & 74.462(c)] [RSS-119 § 5.9]

5.12.1. Limits

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 KHz Channels			
t ₁ ⁴	± 25.0 KHz	5.0 ms	10.0 ms
t ₂	± 12.5 KHz	20.0 ms	25.0 ms
t ₃ ⁴	± 25.0 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 KHz Channels			
t ₁ ⁴	± 12.5 KHz	5.0 ms	10.0 ms
t ₂	± 6.25 KHz	20.0 ms	25.0 ms
t ₃ ⁴	± 12.5 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 KHz Channels			
t ₁ ⁴	±6.25 KHz	5.0 ms	10.0 ms
t ₂	±3.125 KHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 KHz	5.0 ms	10.0 ms

- t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.
 t₁ is the time period immediately following t_{on}.
 t₂ is the time period immediately following t₁.
 t₃ is the time period from the instant when the transmitter is turned off until t_{off}.
 t_{off} is the instant when the 1 kHz test signal starts to rise.
- During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in § 90.213.
- Difference between the actual transmitter frequency and the assigned transmitter frequency.
- If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.


5.12.2. Method of Measurements

ANSI/TIA/EIA-603-E, Section 2.

5.12.3. Test Data

Plot 5.12.3.1. Transient Frequency Behavior for 12.5 kHz Channel Spacing

Test Frequency:	406.2 MHz
Channel Spacing:	12.5 kHz
Power:	High
Test Conditions:	Switch on condition t_{on} , t_1 , and t_2

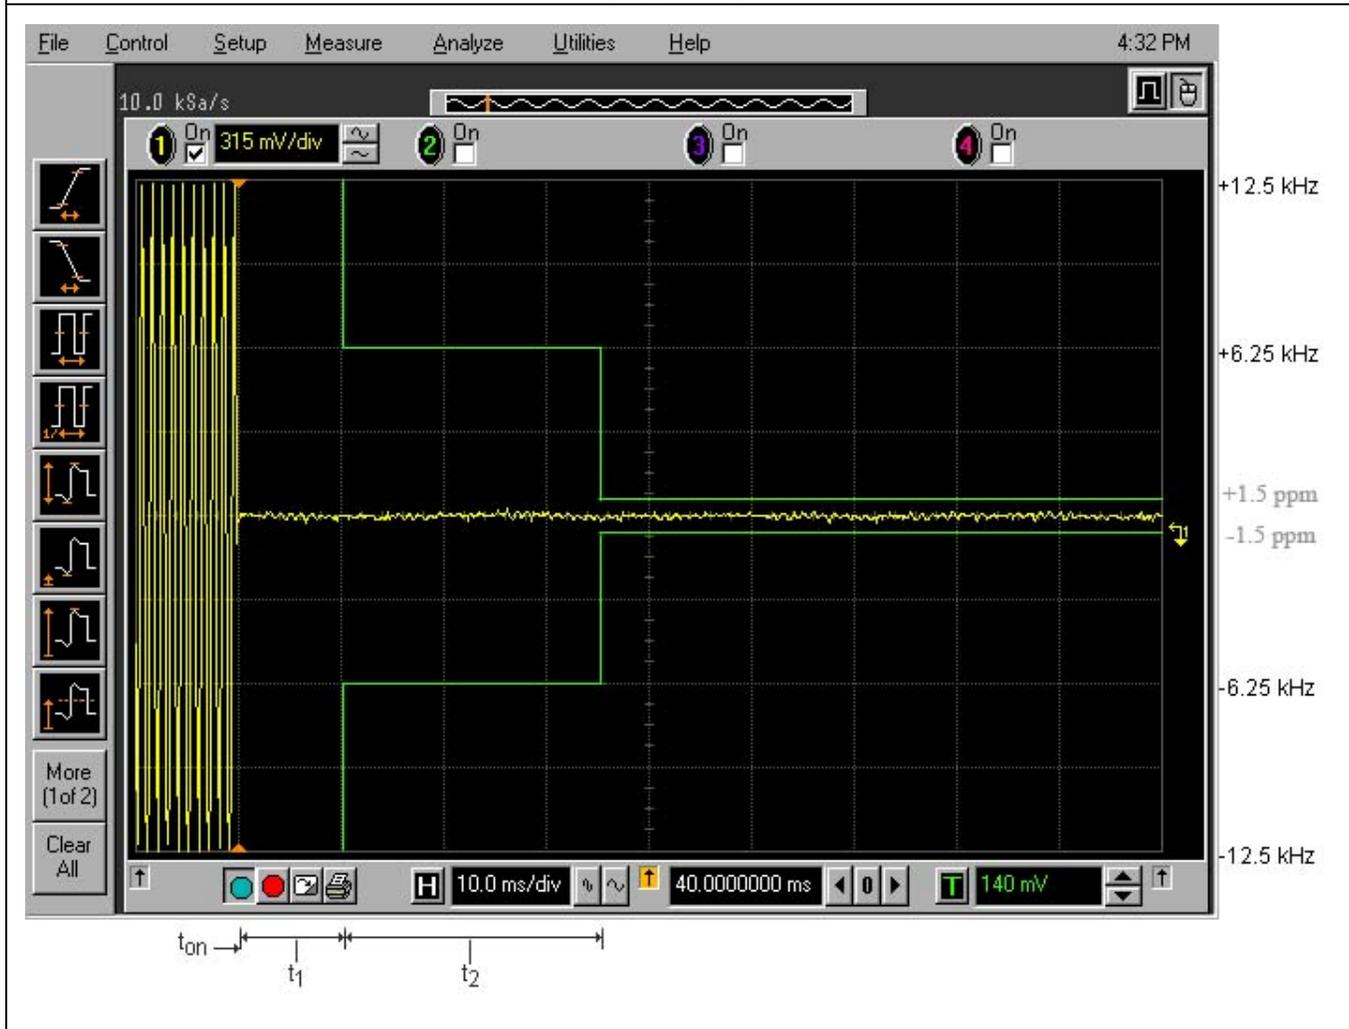

Plot 5.12.3.2. Transient Frequency Behavior for 12.5 kHz Channel Spacing

Test Frequency:	406.2 MHz
Channel Spacing:	12.5 kHz
Power:	High
Test Conditions:	Switch off condition t_3 , t_{off}



ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.12.3.3. Transient Frequency Behavior for 25 kHz Channel Spacing

Test Frequency:	406.2 MHz
Channel Spacing:	25 kHz
Power:	High
Test Conditions:	Switch on condition t_{on} , t_1 , and t_2

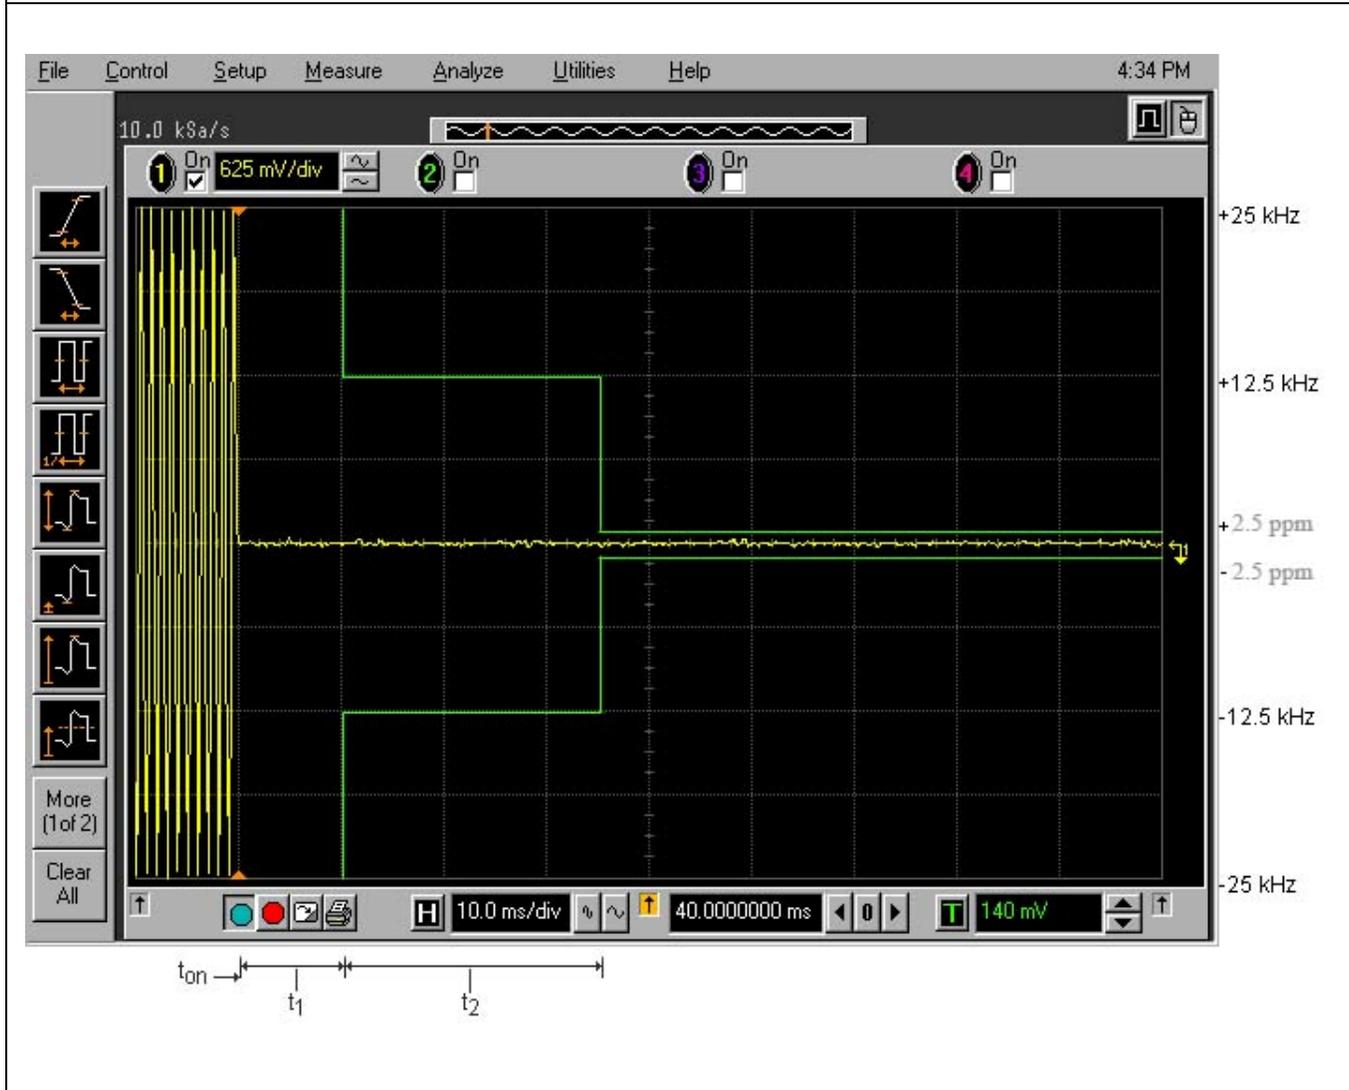

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.12.3.4. Transient Frequency Behavior for 25 kHz Channel Spacing

Test Frequency:	406.2 MHz
Channel Spacing:	25 kHz
Power:	High
Test Conditions:	Switch off condition t_3 , t_{off}



ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.13. RF EXPOSURE REQUIREMENTS [§§ 1.1310 & 2.1091] [RSS Gen Sec 5.6 & RSS-102]

5.13.1. Limits

§ 1.1310: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

[RSS Gen Sec 5.6 & RSS-102]

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ <i>f</i>	-	6**
1.1-10	87/ <i>f</i> ^{0.5}	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ <i>f</i> ^{0.25}	0.1540/ <i>f</i> ^{0.25}	8.944/ <i>f</i> ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 <i>f</i> ^{0.3417}	0.008335 <i>f</i> ^{0.3417}	0.02619 <i>f</i> ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ <i>f</i> ^{1.2}
150000-300000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616000/ <i>f</i> ^{1.2}

Note: *f* is frequency in MHz.

*Based on nerve stimulation (NS).

** Based on specific absorption rate (SAR).

Table 6: RF Field Strength Limits for Controlled Use Devices (Controlled Environment)

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²³	170	180	-	Instantaneous*
0.1-10	-	1.6/ <i>f</i>	-	6**
1.29-10	193/ <i>f</i> ^{0.5}	-	-	6**
10-20	61.4	0.163	10	6
20-48	129.8/ <i>f</i> ^{0.25}	0.3444/ <i>f</i> ^{0.25}	44.72/ <i>f</i> ^{0.5}	6
48-100	49.33	0.1309	6.455	6
100-6000	15.60 <i>f</i> ^{0.25}	0.04138 <i>f</i> ^{0.25}	0.6455 <i>f</i> ^{0.5}	6
6000-15000	137	0.364	50	6
15000-150000	137	0.364	50	616000/ <i>f</i> ^{1.2}
150000-300000	0.354 <i>f</i> ^{0.5}	9.40 x 10 ⁻⁴ <i>f</i> ^{0.5}	3.33 x 10 ⁻⁴ <i>f</i>	616000/ <i>f</i> ^{1.2}

Note: *f* is frequency in MHz.

*Based on nerve stimulation (NS).

** Based on specific absorption rate (SAR).

Note 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

5.13.2. Method of Measurements

Calculation Method of RF Safety Distance:

$$S = \frac{PG}{4\pi \cdot r^2} = \frac{EIRP}{4\pi \cdot r^2}$$

Where,
 P: power input to the antenna in mW
 EIRP: Equivalent (effective) isotropic radiated power.
 S: power density mW/cm²
 G: numeric gain of antenna relative to isotropic radiator
 r: distance to centre of radiation in cm

$$r = \sqrt{\frac{PG}{4\pi \cdot S}} = \sqrt{\frac{EIRP}{4\pi \cdot S}}$$

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device.

5.13.3. Evaluation of RF Exposure Compliance Requirements

This mobile radio also contains a **Bluetooth Module** which may transmit simultaneously with Tx output power of 0.00204 Watts which is very low and category excluded for mobile application where minimum 20cm user separation distance from the radio is always maintained.

Maximum RF Power conducted, P_{conducted}[W] :	45.0
Maximum Antenna Gain, G[dBi] :	0
Maximum EIRP, P_{EIRP}[W] :	45.0
User-based time-average for PTT	50 %

MPE Environment	FCC Power Density limit , S (mW/m ²)	FCC Minimum Distance (Cm)	Distance In user's manual (Cm)	Power Density at user's manual distance, S (mW/m ²)
Occupational/Controlled Exposure	1.26	38	42	1.02
General Population/Uncontrolled Exposure	0.25	85	119	0.126

MPE Environment	ISED Power Density limit , S (mW/m ²)	ISED Minimum Distance (Cm)	Distance In user's manual (Cm)	Power Density at user's manual distance, S (mW/m ²)
Occupational/Controlled Exposure	1.258	38	42	1.02
General Population/Uncontrolled Exposure	0.151	109	119	0.126

5.14. RECEIVER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [RSS-119 § 5.11, RSS-Gen §§ 4.10 & 6]

5.14.1. Limits


No spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

5.14.2. Method of Measurements

Refer to Industry Canada RSS-119, Issue 9 and ANSI C63.4.


5.14.3. Test Data

5.14.3.1. Configuration: Rx Conducted, 406.2 MHz

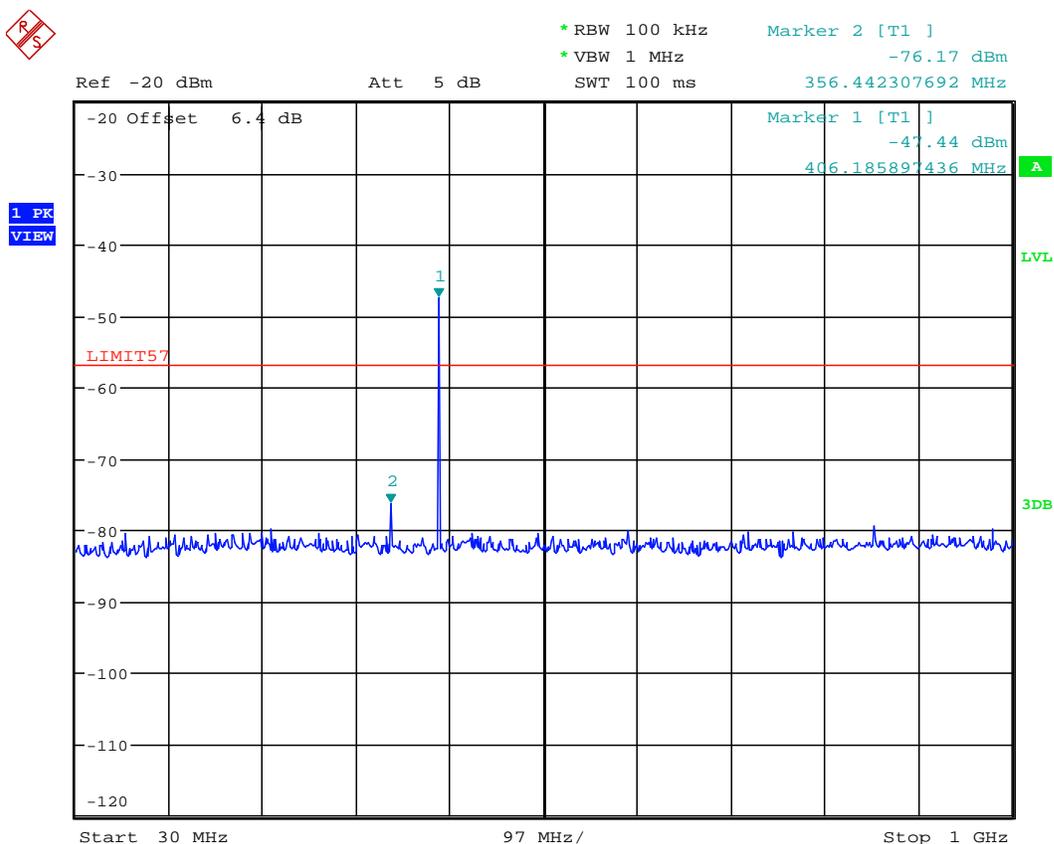


Date: 14.OCT.2022 09:33:28

Highest peak is Rx Signal input (1mV rms)

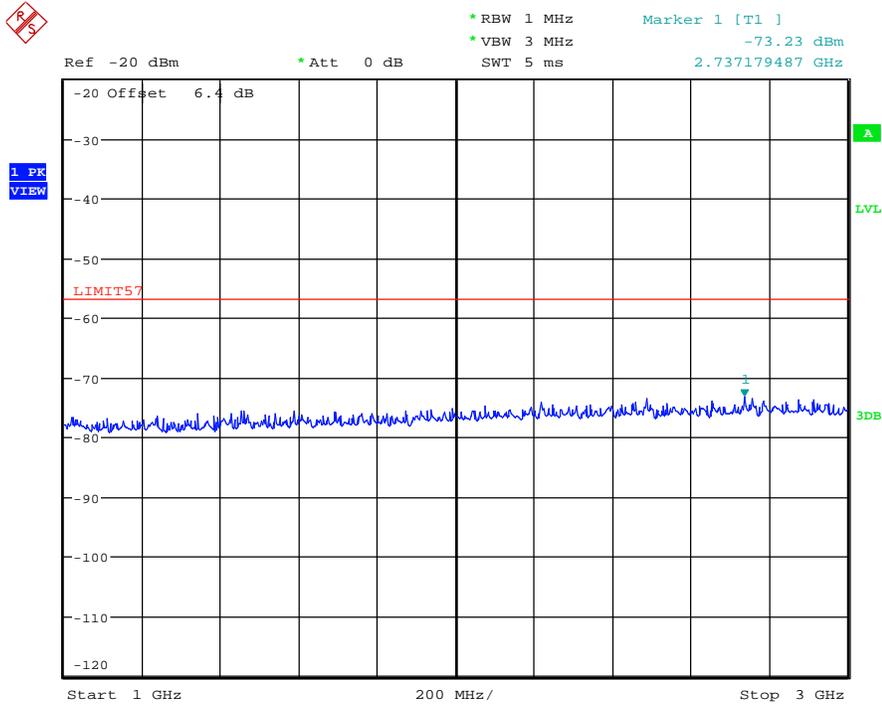

Date: 14.OCT.2022 09:28:45

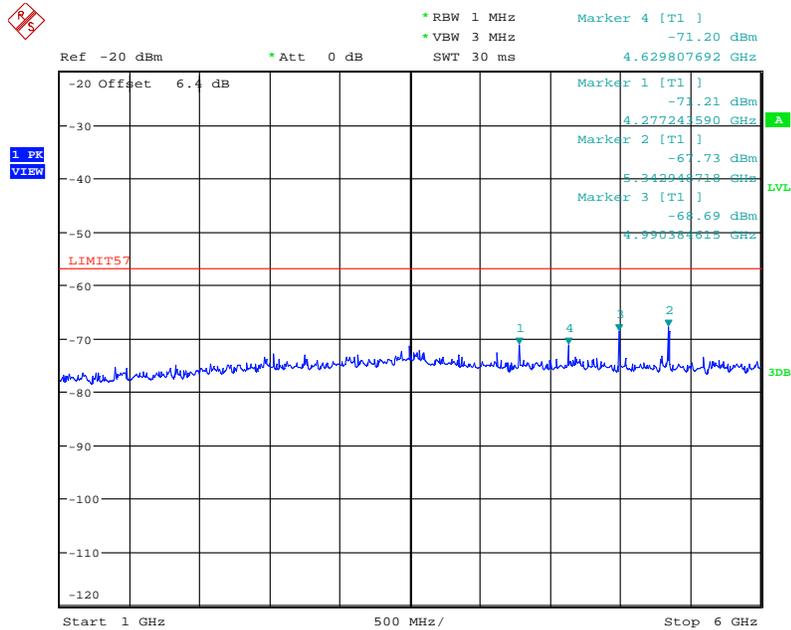

Date: 14.OCT.2022 09:32:23

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.14.3.2. Configuration: Rx Conducted, 450.1 MHz

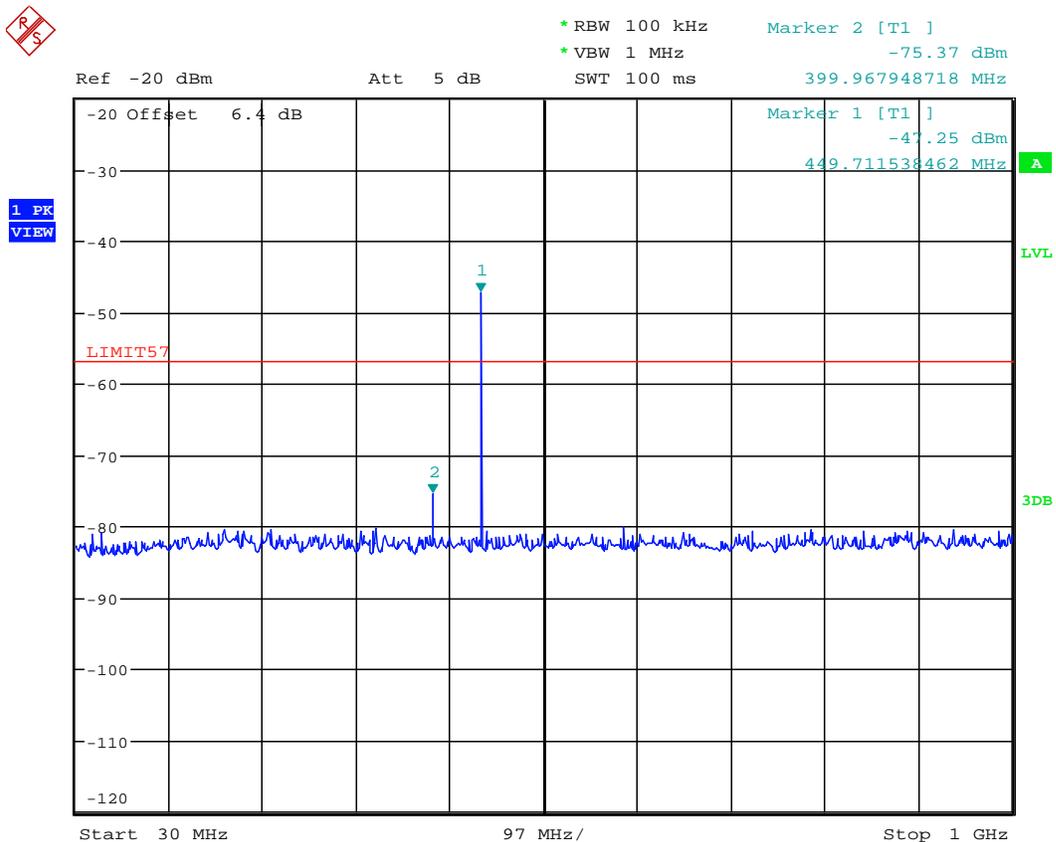


Date: 14.OCT.2022 09:26:03

Highest peak is Rx Signal input (1mV rms)

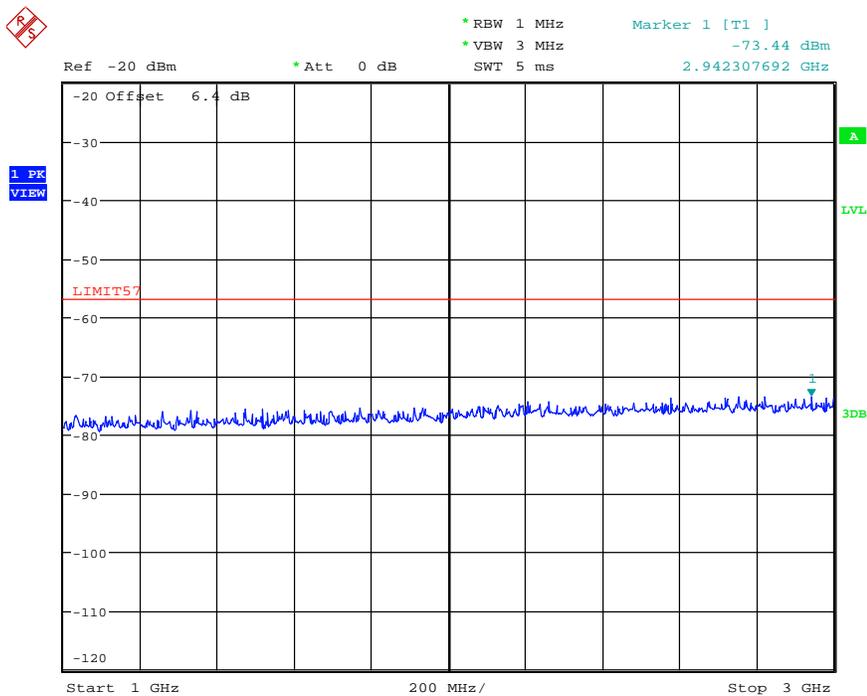

Date: 14.OCT.2022 09:27:51

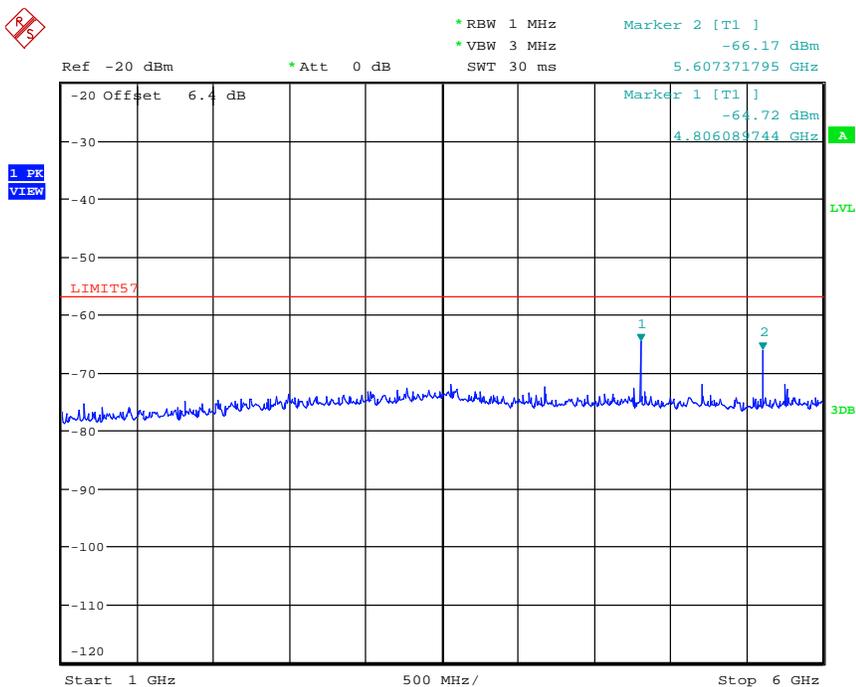

Date: 14.OCT.2022 09:27:07

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.14.3.3. Configuration: Rx Conducted, 469.975 MHz

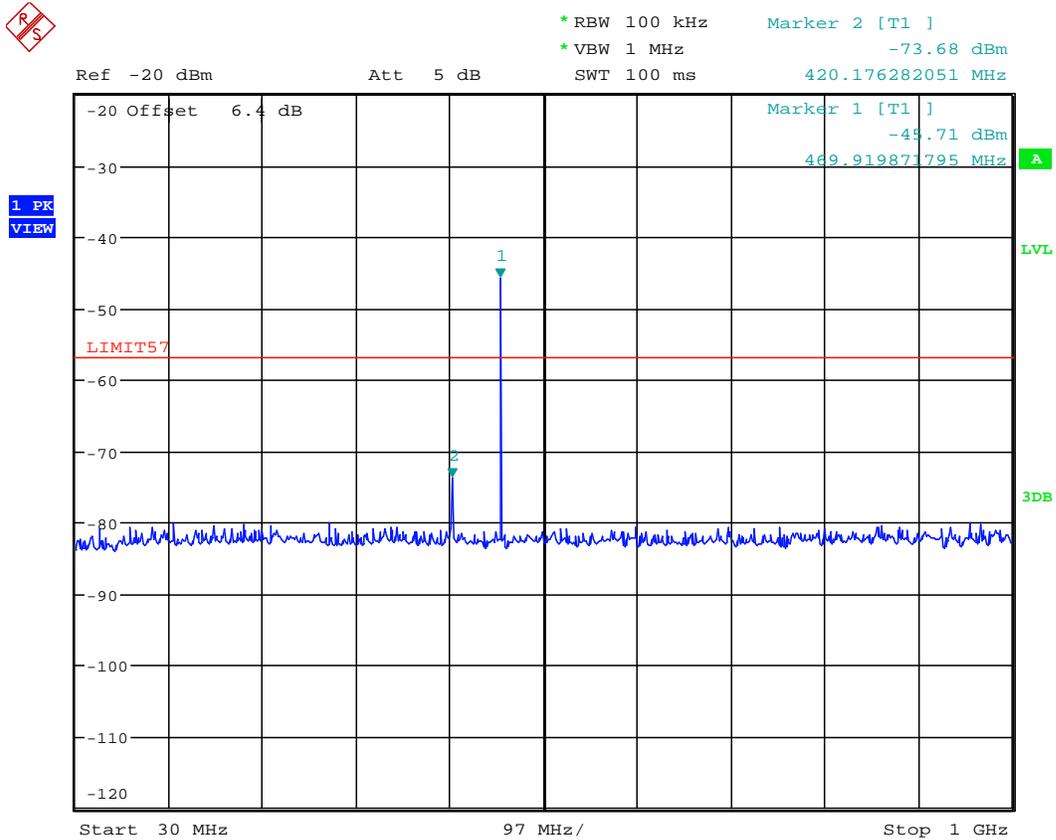


Date: 14.OCT.2022 09:25:01

Highest peak is Rx Signal input (1mV rms)

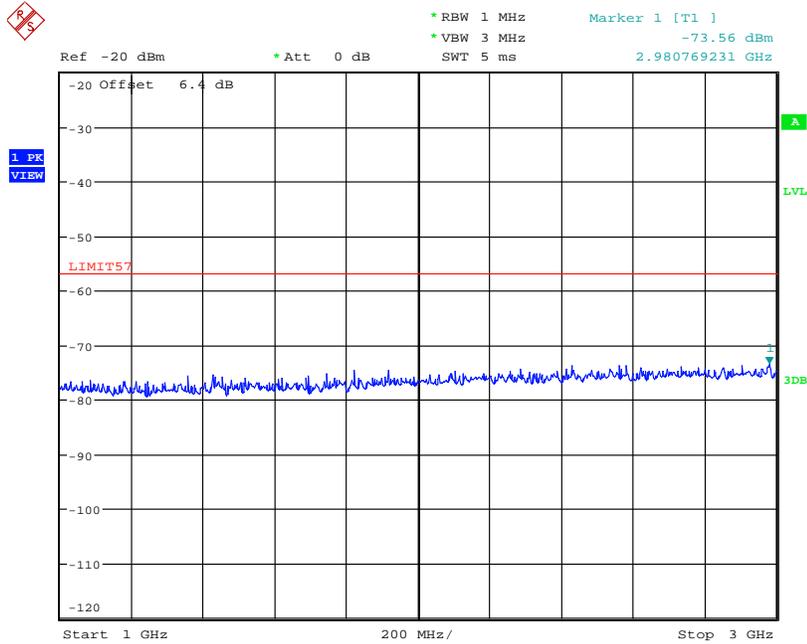

Date: 14.OCT.2022 09:23:46

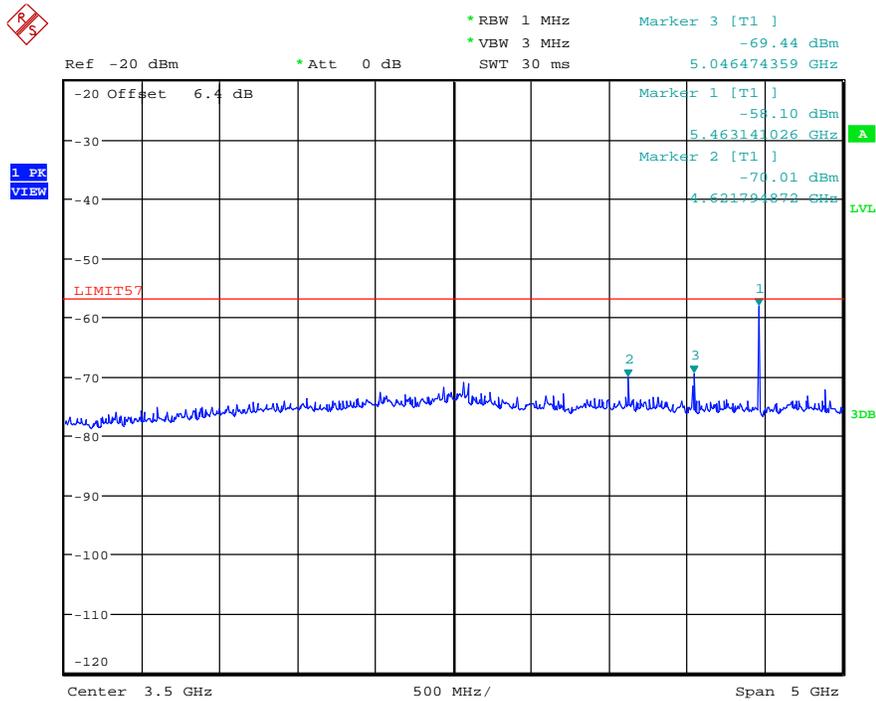

Date: 14.OCT.2022 09:49:34

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.15. RECEIVER SPURIOUS EMISSIONS (RADIATED) [RSS-119 § 5.11, RSS-Gen §§ 4.10 & 6]

5.15.1. Limits

The equipment shall meet the limits of the following table:

Spurious Frequency (MHz)	Field Strength at 3 meters	
	(μ V/m)	(dB μ V/m)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

5.15.2. Method of Measurements

RSS-Gen and ANSI C63.4

5.15.3. Test Data

IF=49.95 MHz

The emissions were scanned from 30 MHz to 6.0 GHz at 3 Meters distance and all emissions less than 20 dB below the limits were recorded.

Lowest Frequency (406.200 MHz)

FREQUENCY (MHz)	RF LEVEL (dB μ V/m)	DETECTOR USED (PEAK/AVG)	ANTENNA PLANE (H/V)	LIMIT (dB μ V/m)	MARGIN (dB)	PASS/ FAIL
4275	35.14	AVG	V	54	-18.86	PASS
4275	30.86	AVG	H	54	-23.14	PASS
4631.25	39.51	AVG	V	54	-14.49	PASS
4631.25	35.72	AVG	H	54	-18.28	PASS
4987.5	48.16	AVG	V	54	-5.84	PASS
4987.5	47.36	AVG	H	54	-6.64	PASS

Near Frequency (450.100 MHz)

FREQUENCY (MHz)	RF LEVEL (dBuV/m)	DETECTOR USED (PEAK/AVG)	ANTENNA PLANE (H/V)	LIMIT (dBuV/m)	MARGIN (dB)	PASS/ FAIL
4801.8	50.16	AVG	V	54	-3.84	PASS
4801.8	50.81	AVG	H	54	-3.19	PASS

Near Frequency (469.975 MHz)

FREQUENCY (MHz)	RF LEVEL (dBuV/m)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	LIMIT (dBuV/m)	MARGIN (dB)	PASS/ FAIL
4620.275	36.91	AVG	V	54	-17.09	PASS
4620.275	35.11	AVG	H	54	-18.89	PASS
5040.3	44.25	AVG	V	54	-9.75	PASS
5040.3	43.86	AVG	H	54	-10.14	PASS
5460.325	34.85	AVG	V	54	-19.15	PASS

5.16. POWER LINE CONDUCTED EMISSIONS [ICES-003, RSS-Gen § 7.2.2]

5.16.1. Limit(s)

The equipment shall meet the limits of the following table:

Frequency of emission (MHz)	Conducted Limits (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5-30	60	50


*Decreases with the logarithm of the frequency

5.16.2. Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-2004 & ANSI C63.4 for method of measurements.

5.16.3. Test Data

Description: Line Voltage: 13.6 Vdc
 Setup Name: DC; Conducted

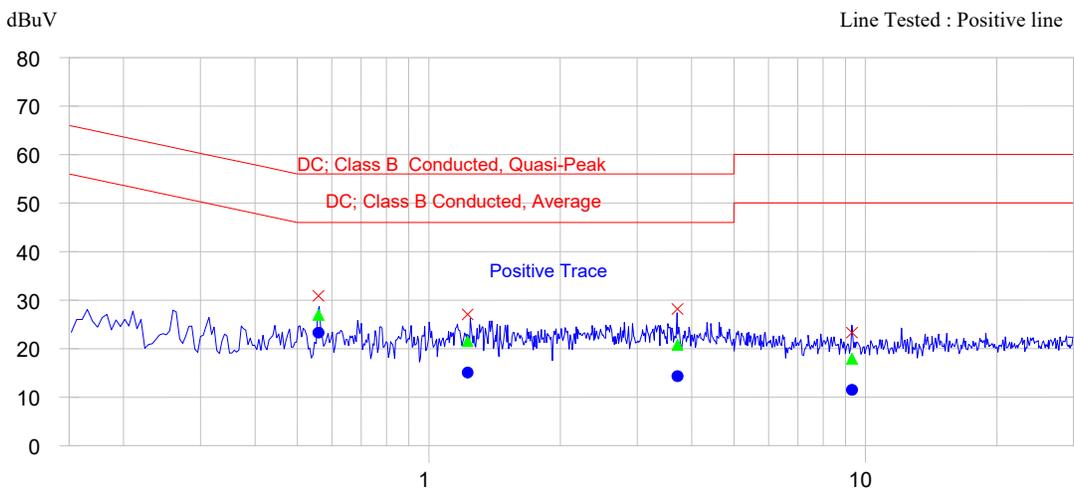


10/18/2022 10:50:56 AM

(Start = 0.15, Stop = 30.00) MHz

No significant emissions were found

Description: Line Voltage: 13.6 Vdc
 Setup Name: DC; Conducted

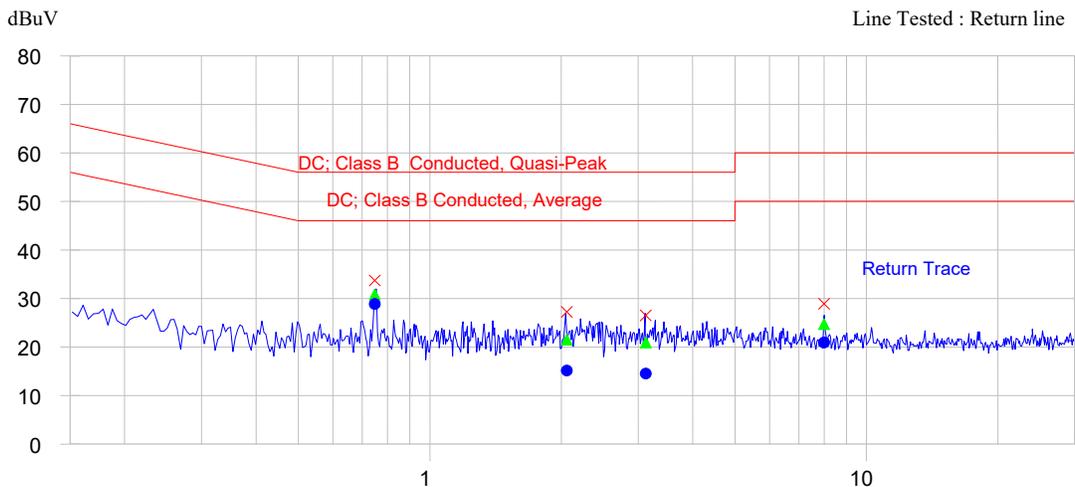

10/18/2022 11:11:14 AM

(Start = 0.15, Stop = 30.00) MHz

Frequency MHz	Peak dBuV	QP dBuV	Qp-Qp Limit dB	Avg dBuV	Avg-Avg Limit dB	Trace Name
0.749	33.7	30.8	-25.2	28.9	-17.1	Return Trace

5.17. RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS [ICES-003]

5.17.1. Limits

The equipment shall meet the limits of the following table:

Frequency of emission (MHz)	Class B Limits	
	(dB μ V/m at 3 m)	(dB μ V/m at 10 m)
30 – 88	40.0	29.5
88 – 216	43.5	33.1
216 – 960	46.0	35.6
Above 960	54.0	43.5

5.17.2. Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-2004 & ANSI C63.4 for method of measurements.


5.17.3. Test Data

The emissions were scanned from 30 MHz to 18.0 GHz. All emissions found above than 20 dB below the permissible limits were recorded

FREQUENCY (MHz)	RF LEVEL (dBuV/m)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	LIMIT (dBuV/m)	MARGIN (dB)	PASS/ FAIL
87.01	23.76	PEAK	V	40	-16.24	PASS
87.01	20.55	PEAK	H	40	-19.45	PASS
149.69	25.25	PEAK	V	43.5	-18.25	PASS
149.69	21.74	PEAK	H	43.5	-21.76	PASS
162.13	23.76	PEAK	V	43.5	-19.74	PASS
162.13	28.77	PEAK	H	43.5	-14.73	PASS
227.41	28.61	PEAK	V	46	-17.39	PASS
227.41	18.69	PEAK	H	46	-27.31	PASS
264.72	24.44	PEAK	V	46	-21.56	PASS
264.72	31.96	PEAK	H	46	-14.04	PASS
441.93	30.11	PEAK	V	46	-15.89	PASS
441.93	29.11	PEAK	H	46	-16.89	PASS
2413	40.43	PEAK	V	54	-13.57	PASS
2413	36.93	PEAK	H	54	-17.07	PASS
4786	46.8	PEAK	V	54	-7.2	PASS
4786	45.97	PEAK	H	54	-8.03	PASS
7592	46.69	PEAK	V	54	-7.31	PASS
7592	44.11	PEAK	H	54	-9.89	PASS

EXHIBIT 6. TEST SETUP AND EQUIPMENT LIST

6.1. Conducted Power

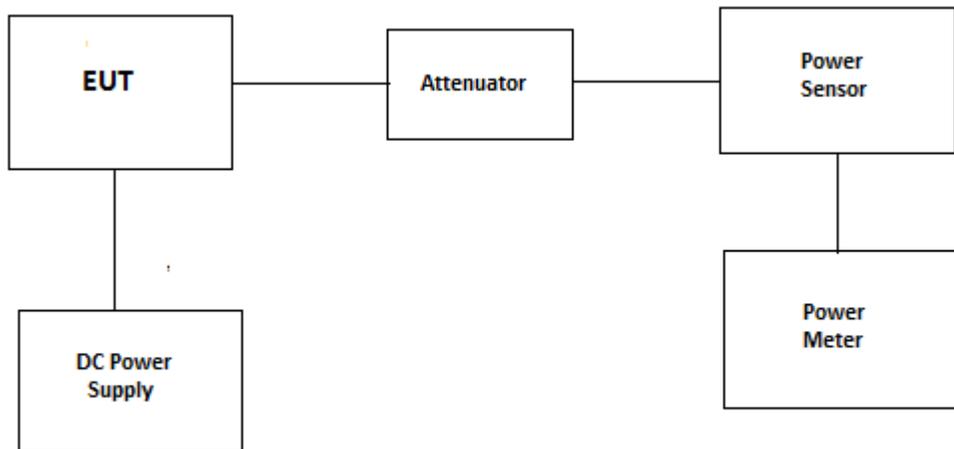

Test Date: Oct 12, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Power Meter	HP	436A	2016A07747	100KHz-sensor dependant	22 Oct 2023
Power Sensor	HP	8482A	MY41172054	0.1MHz-4.2GHz	25 Aug 2023
Attenuator(30dB)	Aeroflex/Weinschel	49-30-34-LIM	RA725	DC-8.5GHz	Cal before use
Attenuator(10dB)	Aeroflex/Weinschel	46-10-34	BS4336	DC-18GHz	Cal before use
Power supply	Pyramid	PS-36KX	--	12-15 Vdc, 35A	--
Multimeter	Fluke	8842A	5021295	---	12 Jan 2023

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.2. Modulation Limit

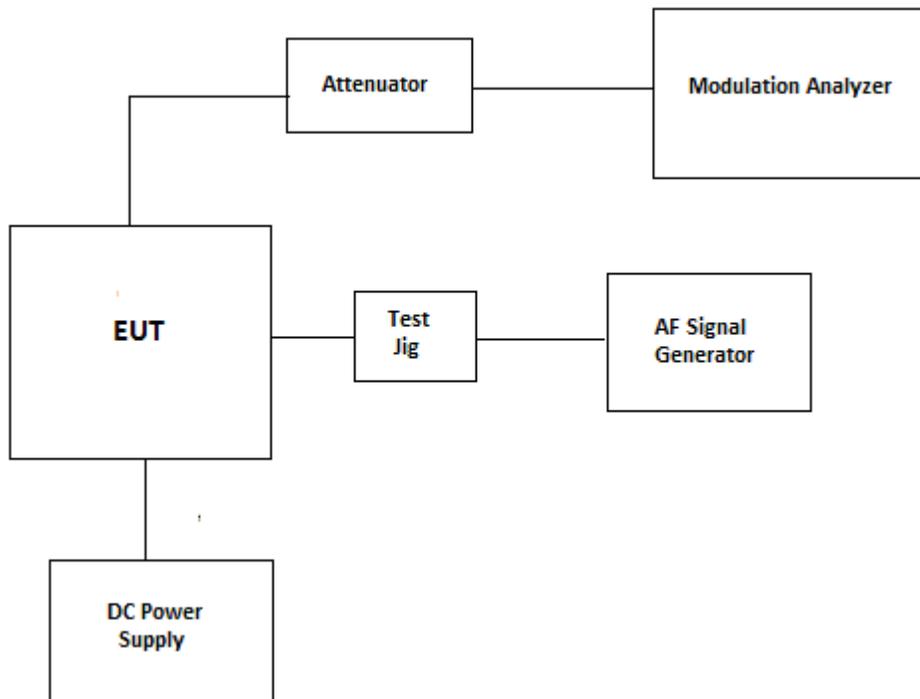

Test date: Oct 12, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	29 Mar 2024
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	29 Mar 2024
Digital Voltmeter	HP	3456A	2015A04523	--	08 Feb 2024
Attenuator(30dB)	Aeroflex/Weinschel	49-30-34-LIM	RA725	DC-8.5GHz	Cal before use
Attenuator(10dB)	Aeroflex/Weinschel	46-10-34	BS4336	DC-18GHz	Cal before use
Power supply	Pyramid	PS-36KX	--	12-15 Vdc, 35A	--
Multimeter	Fluke	8842A	5021295	---	12 Jan 2023

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.3. Audio Frequency Response

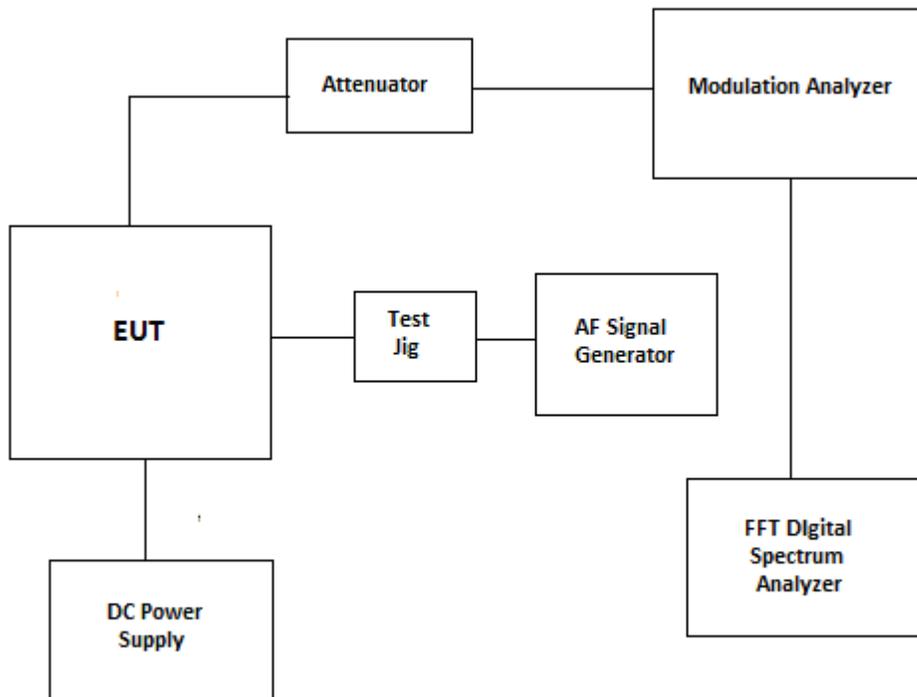

Test Date: Oct 12, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	29 Mar 2024
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	29 Mar 2024
Digital Voltmeter	HP	3456A	2015A04523	--	08 Feb 2024
FFT Digital Spectrum Analyzer	Advantest	R9211E	8202336	10MHz-100KHz	02 Nov 2022
Attenuator(30dB)	Aeroflex/Wein schel	49-30-34-LIM	RA725	DC-8.5GHz	Cal before use
Attenuator(10dB)	Aeroflex/Wein schel	46-10-34	BS4336	DC-18GHz	Cal before use
Power supply	Pyramid	PS-36KX	--	12-15 Vdc, 35A	--
Multimeter	Fluke	8842A	5021295	---	12 Jan 2023

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.4. Transient Frequency Behavior

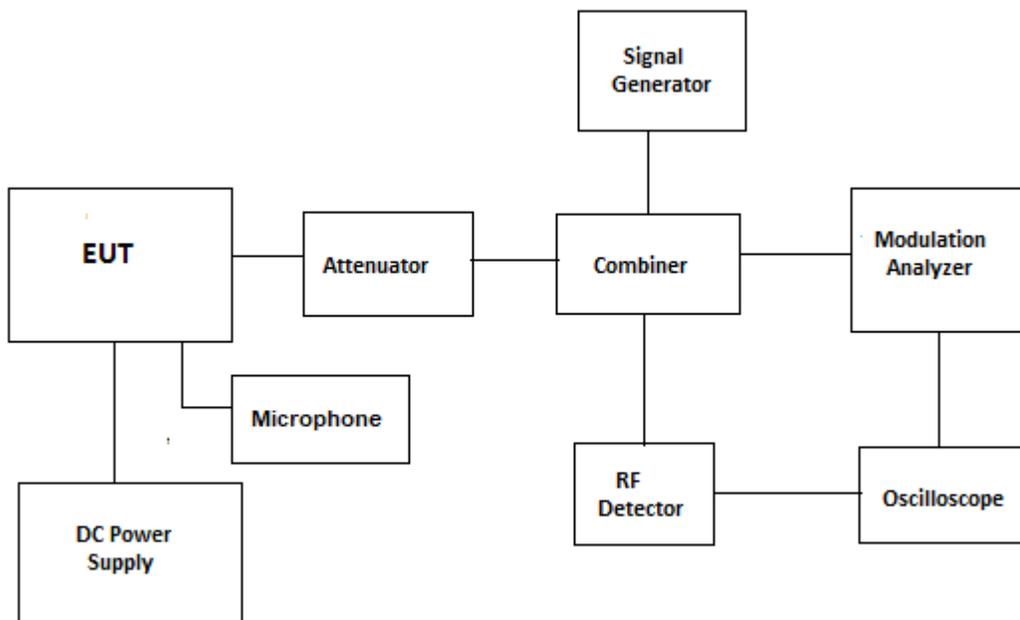

Test Date: Oct 12, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	29 Mar 2024
Signal Generator	Marconi	2024	112255164	9KHz-2.5GHz	22 Oct 2023
Combiner	Mini-Circuit	ZFSC-3-4	15542	1MHz-1GHz	Cal before use
RF Detector	Pasternack	PE8000-50	--	10MHz-1GHz	Cal before use
Attenuator(30dB)	Aeroflex/Weinschel	49-30-34-LIM	RA725	DC-8.5GHz	Cal before use
Attenuator(5dB)	Weinschel	23-3-34/23-2-34	AM2548/B J0020	DC-18GHz	Cal before use
Oscilloscope	HP	54810A	US38380192	DC-500MHz	19 Nov 2023
Power supply	Pyramid	PS-36KX	--	12-15 Vdc, 35A	--
Multimeter	Fluke	8842A	5021295	---	12 Jan 2023

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.5. 99% OBW and Mask

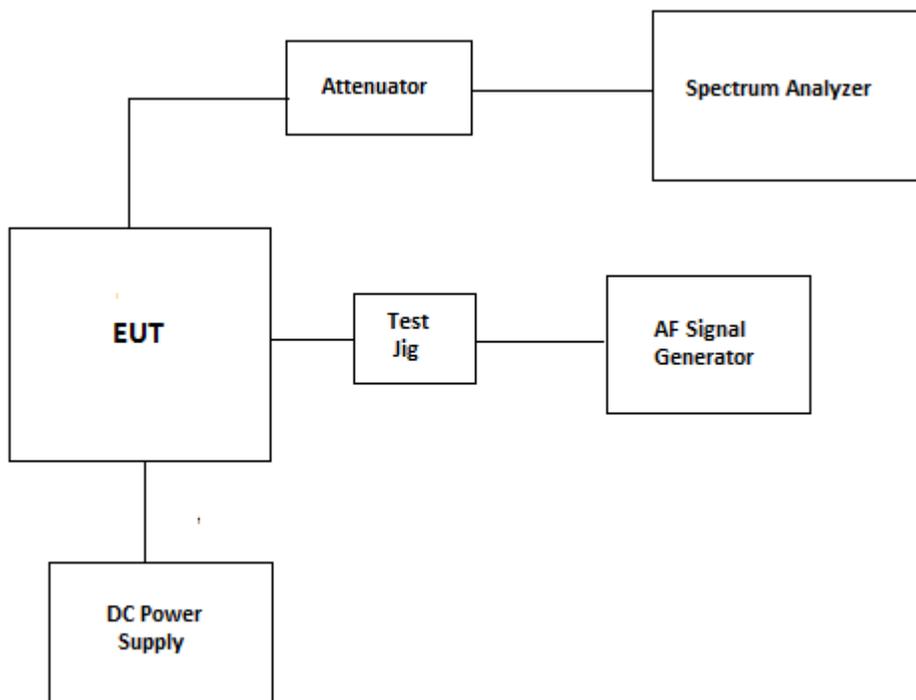

Test Date: Oct 13, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	29 Mar 2024
Digital Voltmeter	HP	3456A	2015A04523	--	08 Feb 2024
Attenuator(30dB)	Aeroflex/Wein schel	49-30-34-LIM	RA725	DC-8.5GHz	Cal before use
Attenuator(10dB)	Aeroflex/Wein schel	46-10-34	BS4336	DC-18GHz	Cal before use
Power supply	Pyramid	PS-36KX	--	12-15 Vdc, 35A	--
Multimeter	Fluke	8842A	5021295	---	12 Jan 2023

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.6. Rx Conducted Emission

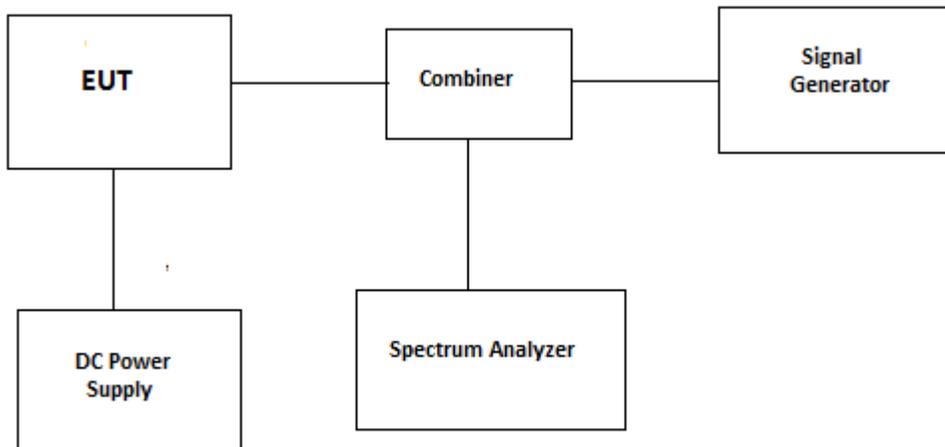

Test Date: Oct 14, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023
Signal Generator	Marconi	2024	112255164	9KHz-2.5GHz	22 Oct 2023
Combiner	Weinschel 93458	1515	PS119	DC-18GHz	Cal before use
Power supply	Pyramid	PS-36KX	--	12-15 Vdc, 35A	--
Multimeter	Fluke	8842A	5021295	---	12 Jan 2023

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.7. Tx Conducted Emission

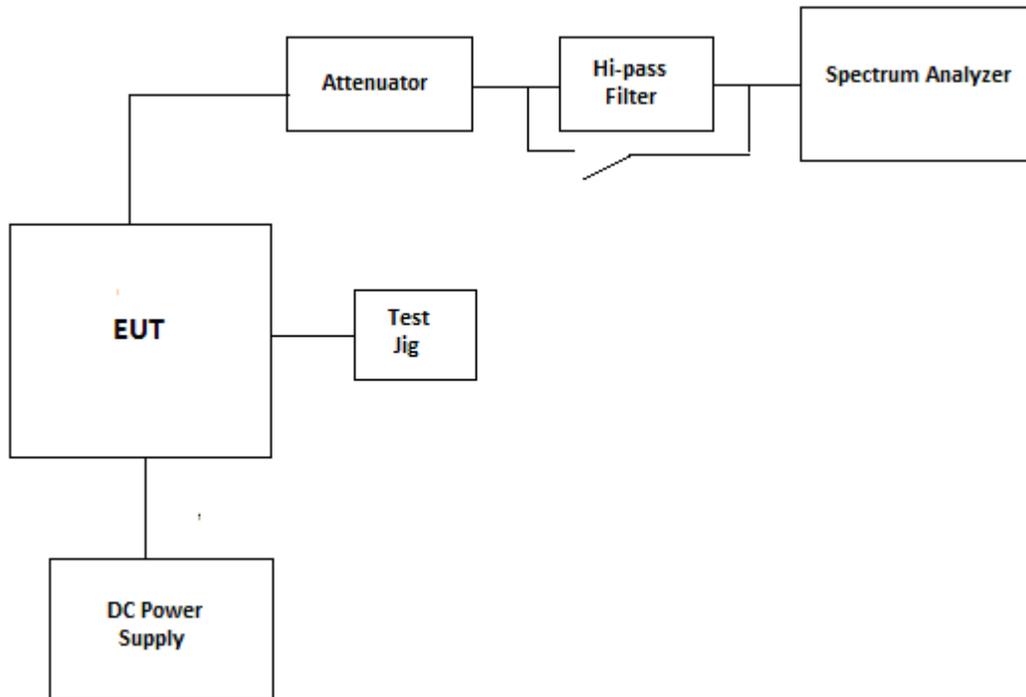

Test Date: Oct 13, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023
Hi-pass filter	Mini-Circuit	SHP-600	--	Cut off 600MHz	Cal before use
Attenuator(30dB)	Aeroflex/Weinschel	49-30-34-LIM	RA725	DC-8.5GHz	Cal before use
Attenuator(10dB)	Aeroflex/Weinschel	46-10-34	BS4336	DC-18GHz	Cal before use
Power supply	Pyramid	PS-36KX	--	12-15 Vdc, 35A	--
Multimeter	Fluke	8842A	5021295	---	12 Jan 2023

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.8. Frequency Stability

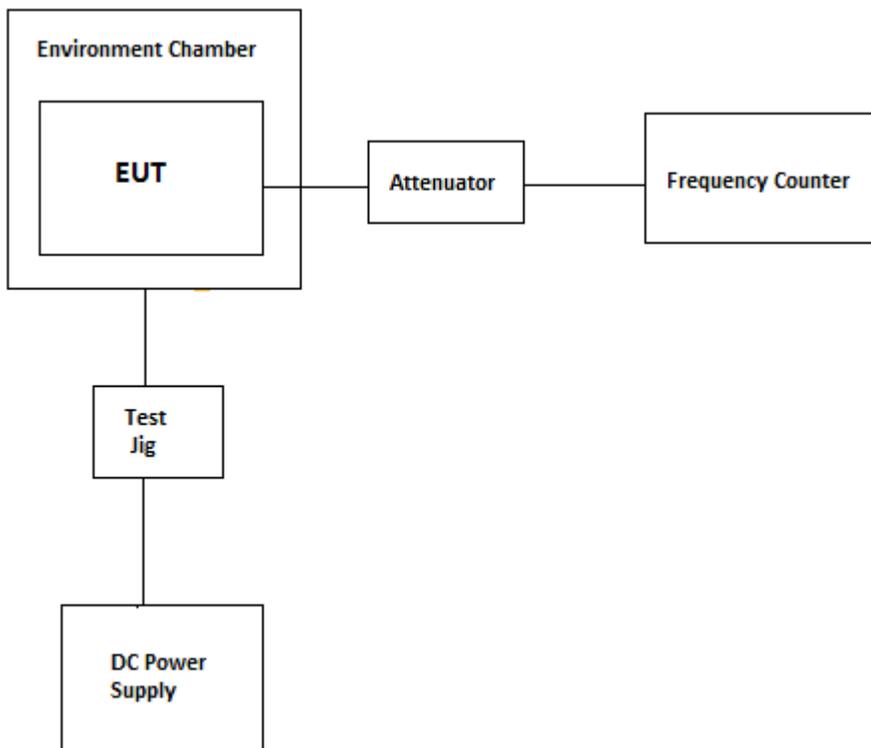

Test Date: Oct 18~19, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Environmental Chamber	Envirotronics	SSH32C	11994847-S-11059	-60 to 177° C	25 Aug 2023
Frequency Counter	HP	5352B	3049A04423	10Hz-40GHz	15 Sep 2024
Attenuator(20dB)	Aeroflex\Weinschel	34-20-34	BP6023	DC-18GHz	Cal before use
Attenuator(20dB)	Narda	26298	A577	DC-1GHz	Cal before use
Power Supply	XANTREX	XKW 60-50	--	1-60V, DC 50A	----
Multimeter	Fluke	8842A	5021295	---	12 Jan 2023

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.9. Tx Radiated

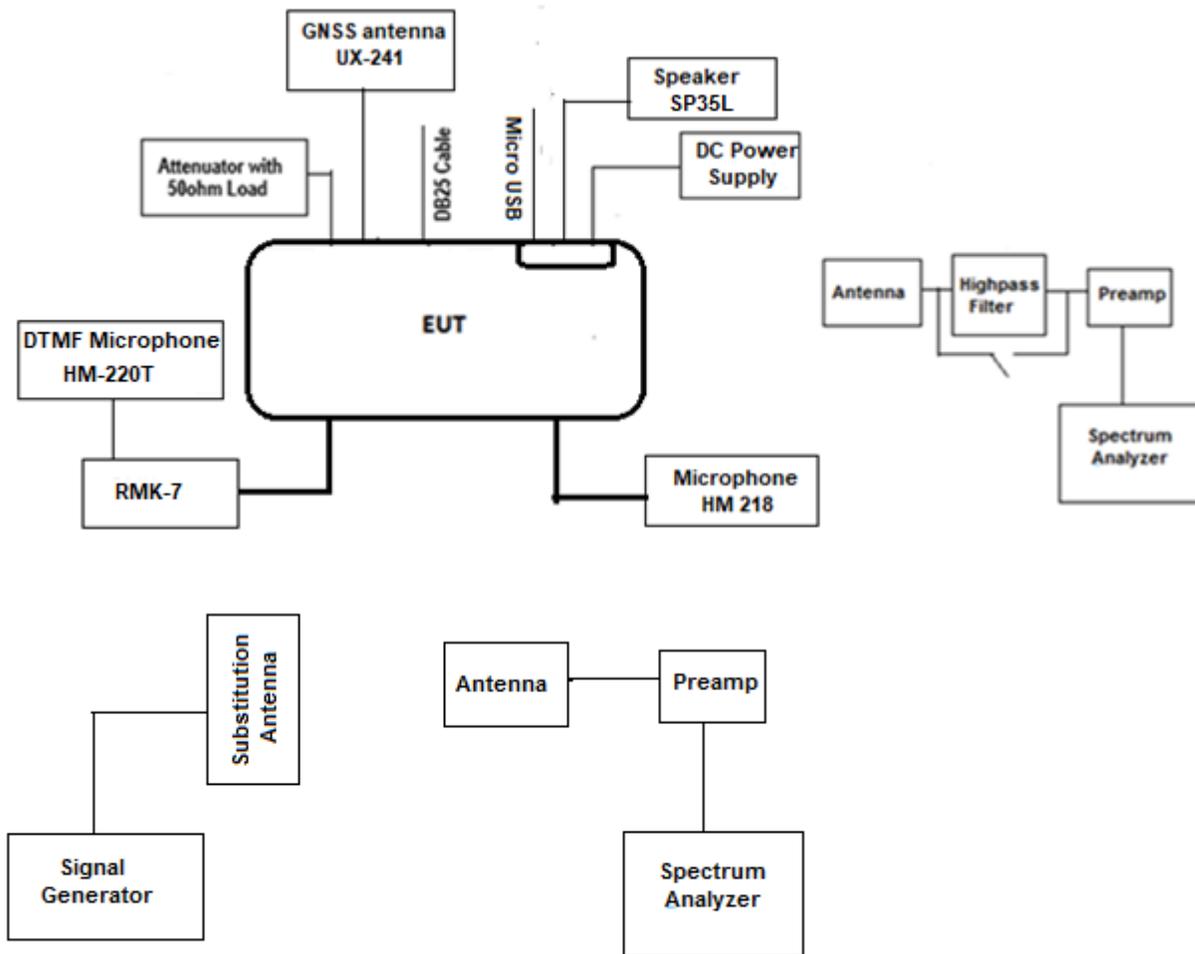

Test Date: Oct 17, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023
EMI Receiver	Rohde & Schwarz	ESU40	100037	20Hz-40GHz	26 Sep 2023
Biconilog Antenna	EMCO	3142C	0002687 3	26-2000MHz	16 Dec 2023
Log Periodic Antenna	ETS	3148	0002384 5	200-2000MHz	14 Apr 2023
Dipole Antenna	EMCO	3121C-DB4	434	400-1000MHz	13 Apr 2023
Horn Antenna	ETS	3117	0011942 5	1-18GHz	20 Jan 2024
Horn Antenna	ETS	3115	9701-5061	1-18GHz	15 Aug 2024
Preamplifier	Com-Power	PAM-118A	551016	500MHz-18GHz	04 Mar 2023
Preamplifier	Com-Power	PAM-103	1802018 1	1MHz-1000MHz	04 Mar 2023
Signal Generator	Rohde & Schwarz	SMIQ06ATE	100086	300KHz-6.4GHz	26 Oct 2022
Hi-pass filter	Mini-Circuit	SHP-600	--	Cut off 600MHz	Cal before use
Attenuator(30dB)	Aeroflex/Weinsche I	49-30-34-LIM	RA725	DC-8.5GHz	Cal before use
Load(50ohm)	Db products	--	--	DC-18GHz	Cal before use
Power supply	Pyramid	PS-36KX	--	12-15 Vdc, 35A	--
Multimeter	Fluke	8842A	5021295	---	12 Jan 2023

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.10. Rx Radiated

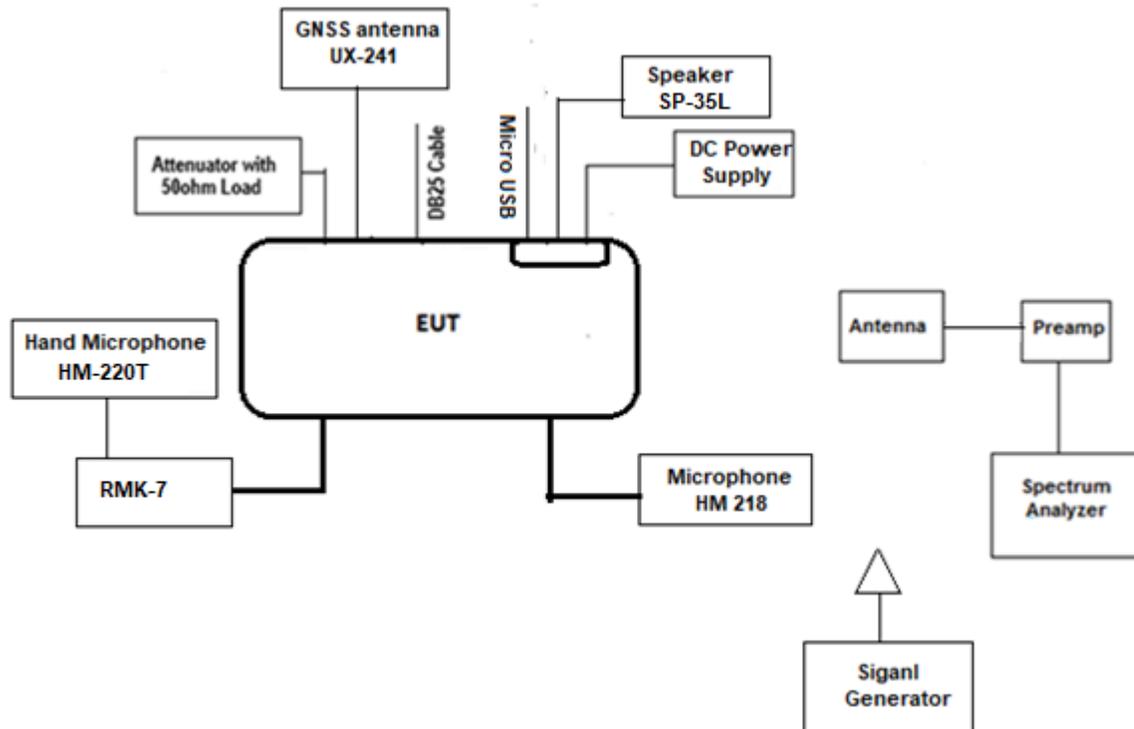

Test Date: Oct 17, 2022, Unintentional Radiated: Oct 12, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023
EMI Receiver	Rohde & Schwarz	ESU40	100037	20Hz-40GHz	26 Sep 2023
Biconilog Antenna	EMCO	3142C	00026873	26-2000MHz	16 Dec 2023
Log Periodic Antenna	ETS	3148	00023845	200-2000MHz	14 Apr 2023
Horn Antenna	ETS	3117	00119425	1-18GHz	20 Jan 2024
Horn Antenna	ETS	3115	9701-5061	1-18GHz	15 Aug 2024
Preamplifier	Com-Power	PAM-118A	551016	500MHz-18GHz	04 Mar 2023
Preamplifier	Com-Power	PAM-103	18020181	1MHz-1000MHz	04 Mar 2023
Signal Generator	Marconi	2024	112255164	9KHz-2.5GHz	22 Oct 2023
Attenuator(30dB)	Aeroflex/Weinschel	49-30-34-LIM	RA725	DC-8.5GHz	Cal before use
Load(50ohm)	Db products	--	--	DC-18GHz	Cal on use
Power supply	Pyramid	PS-36KX	--	12-15 Vdc, 35A	--
Multimeter	Fluke	8842A	5021295	---	12 Jan 2023

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.11. Power Line Conducted Emission

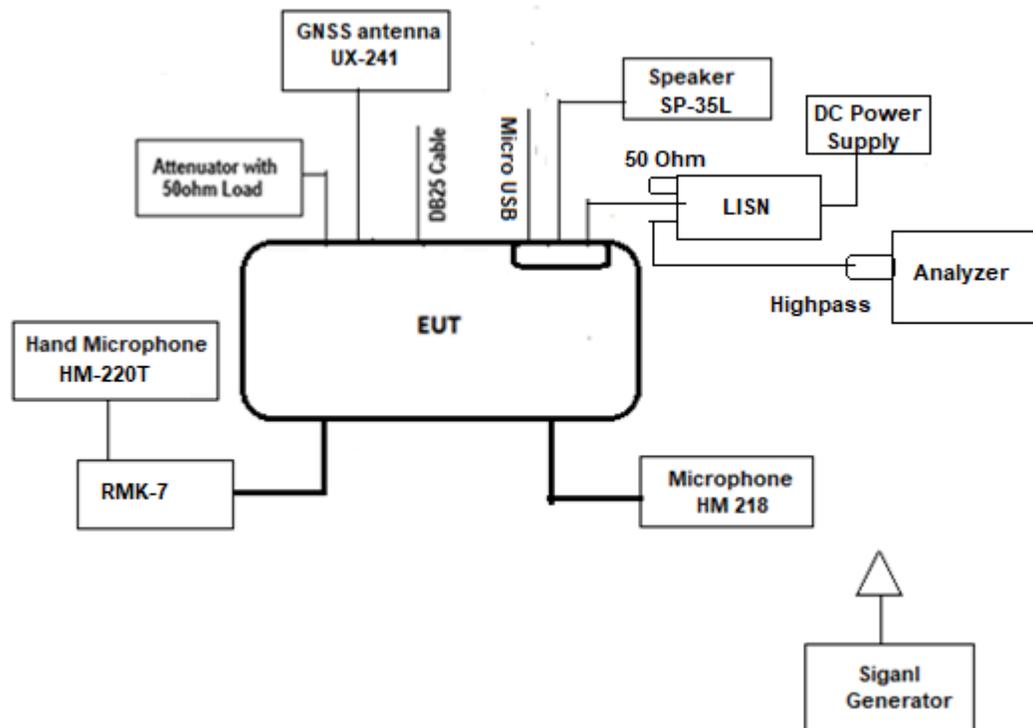

Test Date: Oct 18, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Analyzer	HP	8593EM	3710A0022 3	9KHz-26.5GHz	05 Nov 2022
High pass filter	Rhode&Schwarz	EZ-25	100064	150KHz-30MHz	09 Aug 2023
LISN	Schwarzbeck	NDTV8160	9443	150KHz-30MHz	03 Mar 2023
Signal Generator	Marconi	2024	112255164	9KHz-2.5GHz	22 Oct 2023
Power supply	Pyramid	PS-36KX	--	12-15 Vdc, 35A	--
Multimeter	Fluke	8842A	5021295	---	12 Jan 2023

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM591_FCC90

October 25, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT UNCERTAINTY

Test description		Uncertainty
Conducted Output Power		+/- 0.62 dB
Occupied bandwidth		+/-0.2Hz
Emission Mask	Amplitude	+/- 0.63 dB
	Frequency	+/-0.2Hz
Conducted Out of Band/Spurious Emissions		+/- 0.72 dB
Radiated Out of Band/Spurious Emissions	<30 MHz	+/-2.69dB
	30-1000 MHz	+/-4.20dB
	>1 GHz	+/-2.70dB
Frequency Stability		+/-1.2 Hz
Transient Frequency Behavior		+/- 0.05%
Power Line Conducted Emission		+ 2.62dB

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

EXHIBIT 8. MEASUREMENT METHODS

8.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = \text{A} + \text{G} + 10\log(1/x)$$

{X = 1 for continuous transmission => $10\log(1/x) = 0$ dB}

Figure 1.

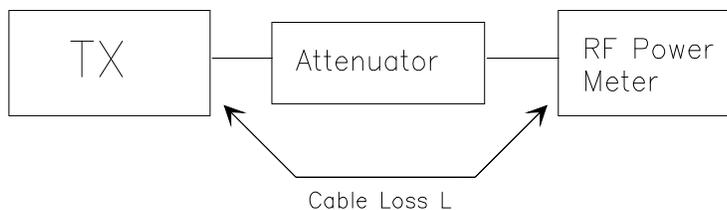

8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

8.2.1. MAXIMIZING RF EMISSION LEVEL (E-FIELD)

- (a) The measurements were performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{Total Correction Factor (dB/m)}$

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency
Resolution BW: 100 KHz
Video BW: same
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies.

8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source
Resolution BW: 100 KHz
Video BW: VBW > RBW
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
♦ DIPOLE antenna for frequency from 30-1000 MHz or
♦ HORN antenna for frequency above 1 GHz }.
(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
(f) Use one of the following antenna as a receiving antenna:
♦ DIPOLE antenna for frequency from 30-1000 MHz or
♦ HORN antenna for frequency above 1 GHz }.
(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
(i) Tune the EMI Receivers to the test frequency.
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$

$$ERP = EIRP - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.
P1: Power output from the signal generator
P2: Power measured at attenuator A input
P3: Power reading on the Average Power Meter
EIRP: EIRP after correction
ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
(p) Repeat step (d) to (o) for different test frequency
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2


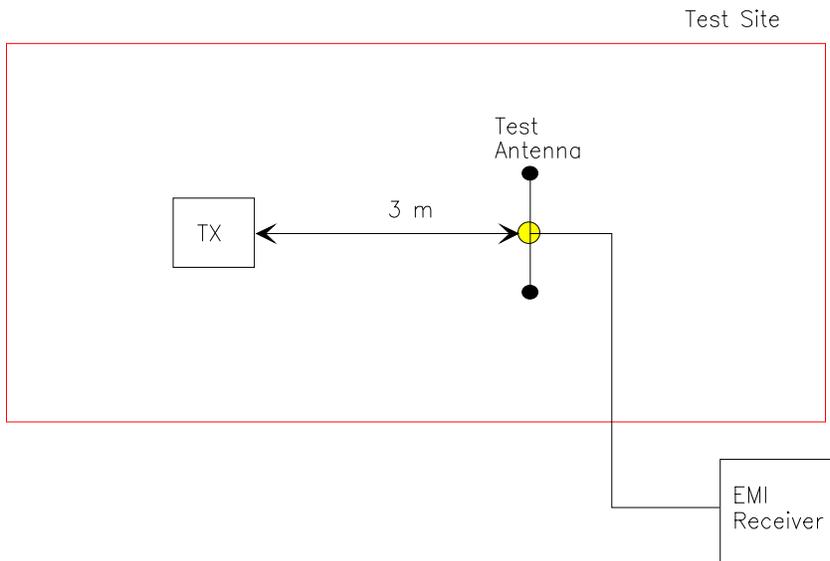


Figure 3

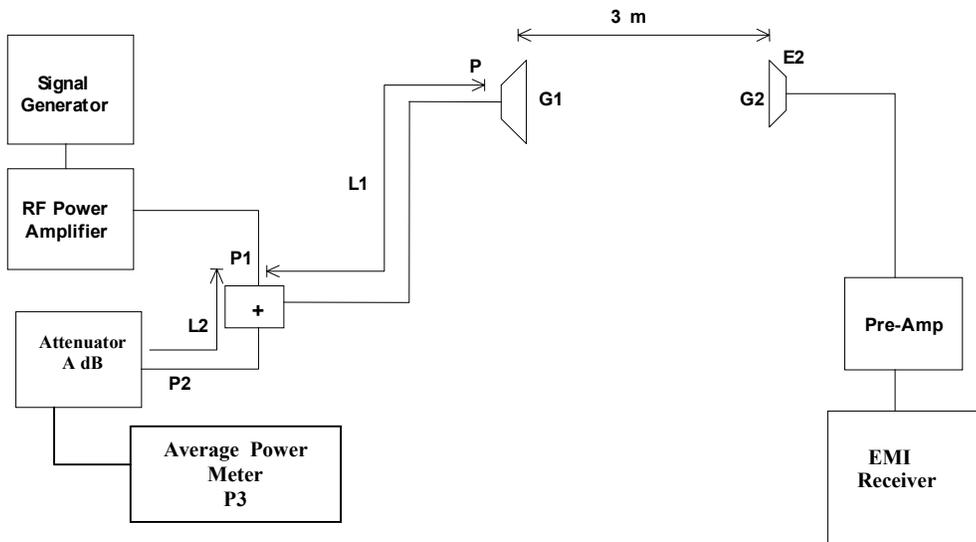

8.3. FREQUENCY STABILITY

Refer to FCC @ 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

8.4. EMISSION MASK

Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i):- The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: ± 2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

Digital Modulation Through a Data Input Port @ 2.1049(h):- Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

- (1) For 25 KHz Channel Spacing: RBW = 300 Hz
- (2) For 12.5 KHz or 6.25 KHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

8.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 KHz minimum , VBW \geq RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

FCC 47 CFR 2.1057 - Frequency spectrum to be investigated: The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC 47 CFR 2.1051 - Spurious Emissions at Antenna Terminal: The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions, which are attenuated more than 20 dB below the permissible value, need not be specified.

8.6. TRANSIENT FREQUENCY BEHAVIOR

1. Connect the transmitter under tests as shown in the above block diagram
2. Set the signal generator to the assigned frequency and modulate with a 1 KHz tone at ± 12.5 KHz deviation and its output level to be 50 dB below the transmitter rf output at the test receiver end.
3. Set the horizontal sweep rate on the storage scope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone from the Demodulator Output Port (DOP) of the Test Receiver. Adjust the vertical scale amplitude control of the scope to display the 1000 Hz at ± 4 divisions vertical Center at the display.
4. Adjust the scope so it will trigger on an increasing magnitude from the RF trigger signal of the transmitter under test when the transmitter was turned on. Set the controls to store the display.
5. The output at the DOP, due to the change in the ratio of the power between the signal generator input power and transmitter output power will, because of the capture effect of the test receiver, produce a change in display: For the first part of the sweep it will show the 1 KHz test signal. Then once the receiver's demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 KHz test signal is completely suppressed (including any capture time due to phasing) is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
6. During the time from the end of t_2 to the beginning of t_3 the frequency difference should not exceed the limits set by the FCC in Part 90.214 and the outlined in the Carrier Frequency Stability sections. The allowed limit is equal to FCC frequency tolerance limits specified in FCC 90.213.
7. Repeat the above steps when the transmitter was turned off for measuring t_3 .

END OF REPORT