


REVISIONS				
REV	APP	DESCRIPTION	E.C.	BY
A	~	RELEASED PER EDR #55484	~	MB
			APVD.	DATE
			~	03/17/00

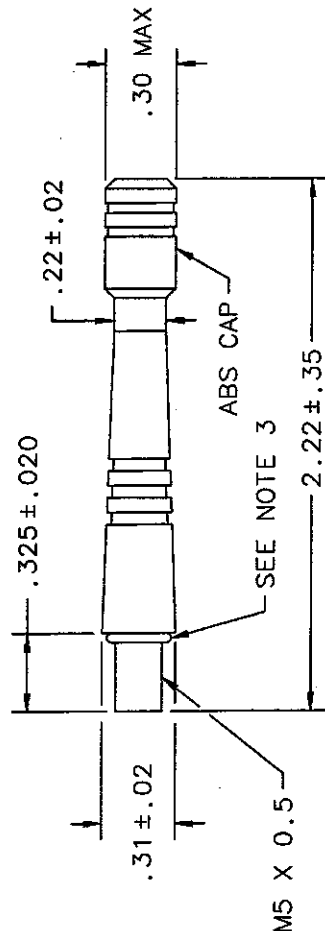

NOTES UNLESS OTHERWISE SPECIFIED

- 1) SPECIFICATIONS: GAIN: UNITY
VSWR 1.5:1 MAX AT RESONANCE
POWER RATING: 50 WATTS
IMPEDANCE: 50 OHMS NOMINAL
OPERATING TEMPERATURE: -40°C TO +85°C
LINEAR PULL: 22LBS (10Kg) MINIMUM
FLEX TEST: 180° 50/MIN. 2.50" ABOVE BASE
- 2) PARTS SHALL MEET THE CRITERIA PER STI WORKMANSHIP STANDARD SS-03800-57.
- 3) INSTALL "O" RING, PARKER SEAL PART NUMBER 5-669 OR SYMBOL APPROVED EQUIVALENT.
- 4) PACKAGE ITEMS IN ACCORDANCE WITH STI GENERAL PACKAGING SPEC #50-04100-013.
1 PER PACKAGE WITH THE FOLLOWING IDENTIFICATION:
- SYMBOL PART NUMBER
- ID BARCODE OF SYMBOL PART NUMBER
- REVISION

APPROVALS		DATE	SYMBOL TECHNOLOGIES INC.	
DESIGNED BY	A. BUNTON	10/6/99	One Symbol Plaza Holtsville, NY 11742	
CHECKED BY	M. SAVONA	10/6/99	ANTENNA: DATA TAC	
ENGINEER	C. THELEMAN	10/6/99		
APPROVED BY	A. DOKKOWSKI	10/6/99		
MFG. ENG.				
PRODUCT				
QUALITY				

TOLERANCE CHART			
* UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES			
XX	± .01	± .01	± .01
XXX	± .005	± .005	± .005
* PROPRIETARY CONTENT - THE DRAWING CONTENT AND SPECIFICATION ARE NOT TO BE REPRODUCED OR COPIED WITHOUT THE WRITTEN INSTRUCTIONS RECEIVED FROM: SYMBOL TECHNOLOGIES INC.			
COMPUTER GENERATED DRAWING DO NOT SCALE			

SIZE	DWG. NO.	SCALE	2:1	SHEET 1 OF 1
B	10-38335-01			