



Speakerphone Manual

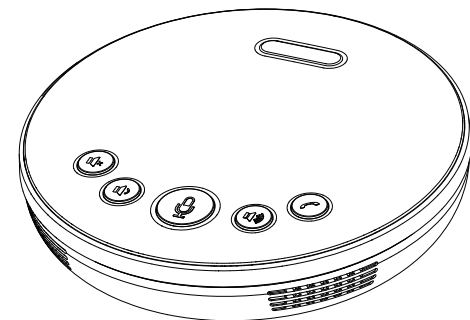


Version V2.0

1. Packing List


1. USB device



Speakerphone




USB Cable




Manual


2. Bluetooth device




Speakerphone



USB Cable



Manual




Bluetooth Dongle




OTG Adapter

2. Charging

Plug the device into a USB power source. The device lasts for up to 6 hours of talk time and takes approximately 3 hours (5V/500mA) to fully charge.

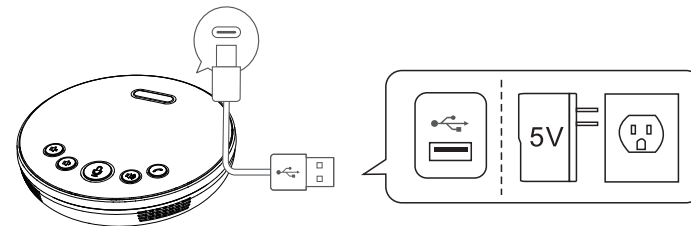


3. Low battery warning

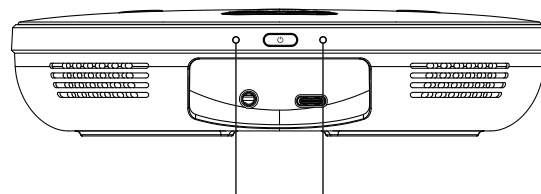


When the battery is low, the led lights turn red and flash with voice prompt.

4. Button Function

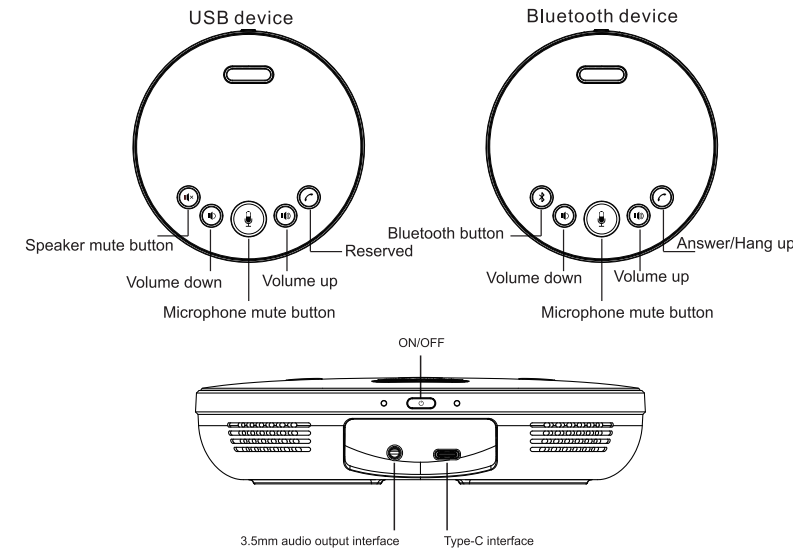

	Volume button	Reduce/Increase volume
	Speaker mute button	ON/OFF Speaker mute (only for USB device)
	Answer/Hang up	Answer/Hang up when calling (only for Bluetooth device)
	Microphone mute button	ON/OFF Microphone mute
	Bluetooth button	Turn ON/OFF Bluetooth function (only for Bluetooth device)
	Press ON/OFF button, speaker and microphone will be mute, microphone and speaker LED status will be red; press ON/OFF button again, microphone and speaker will be on, microphone and speaker LED indicator will turn green. Power ON/OFF button: ON/OFF(Long press) MUTE/UNMUTE(Shot press)	


5. LED Indicator Function

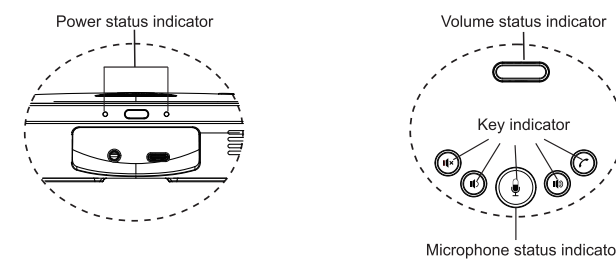


Bluetooth status indicator (only for Bluetooth device)	Blue light flashing	Bluetooth is paring
	Green light on	Bluetooth connected
Microphone status indicator	Red light on	Microphone mute
	Green light on	Microphone working normally
Power status indicator	Green light on	Powered on
	Red light on	Speaker mute

6. Connection Introduction


6.1 USB Connection

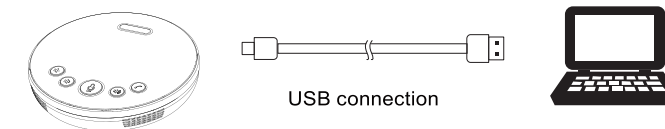

- We suggest you to use the original USB data cable to connect the speakerphone when connecting computer or other audio and video terminals;
- Turn on automatically after connection; nce connected to your computer, it will automatically power on. It will automatically power off after 10 minutes of inactivity or no source.




6.2 Bluetooth Connection

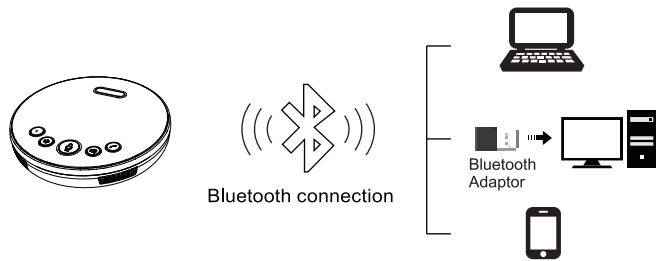

1. When the device is under normally working condition, press"**✱**"to turn on Bluetooth for pairing. Then the Bluetooth status indicator will flash;
2. Put the mobile device in the Bluetooth device search mode, and select the model of the device. After Bluetooth connection is succeeded, the Bluetooth status indicator will be ON.
3. Plug the Bluetooth Adaptor in your computer or other devices to enter pairing mode. The Bluetooth adapter will search for the Bluetooth automatically, and establish Bluetooth connection between the speakerphone and the adapter. After a sussessful connection, the Bluetooth indicator is always on.
4. Each time you power on the device, it will automatically connect with the last successfully connected device if available.
5. To disconnect Bluetooth, please press the Bluetooth button again.

6.3 Headset Connection

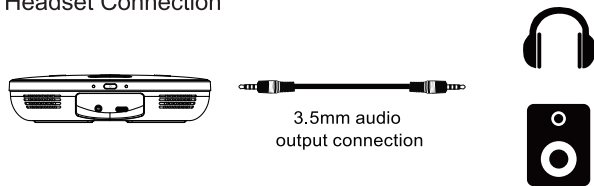

Connect to headset jack using a 3.5mm cable.

7. Technical Specifications

Product Type	USB Speakerphone	Bluetooth Speakerphone
Picture		
Bluetooth	N/A	BT 5.0
Battery	N/A	2400mAH(Built-in lithium battery) Music time (up to 8 hours) Battery life(call) up to 6 hours. Charge time up to 3 hours
Connection type	USB/AUX	USB/Bluetooth/AUX
Meeting room size	15-30m ²	
Meeting with	3-12 attendees	
Pickup range	5 meters (16.4 feet)	
Mics	2x professional mics array	
Microphone type	Omni-directional (360 degree pickup range)	
Microphone sensitivity	-29dBFS	
Noise reduction	Yes	
Full duplex audio	Yes	
AEC	Yes	
Frequency range	100Hz to 22kHz	
Speaker	5W/95dB	
Interface	1 x Type-C, 1 x 3.5mm audio port	
System requirements	Windows 7/8/10 or above, MacOS 10.7 or above, Chrome OS V29.01547 or above	
Application support	Software: Skype, FaceTime, Zoom, Microsoft Teams, Google Hangouts, OBS and Xsplit, etc.	
Work temperature	0° -- 50°C	
Storage temperature	-10° -- +60°C	
Work humidity	20% -- 85% RH (non-condensing)	
Power supply	USB:5V DC @ 500 mA Maximum	
Product size	160mm*160mm*38mm/221mm*190mm*55mm((before / after packing)	
Product weight	0.44KG / 0.77KG(Net / Gross Weight)	

8. Warranty

All products purchased from our company are guaranteed to keep in good repair for 36 months. If there are any quality problems during the guarantee period, we will maintain them for free. Under any of the following conditions, related maintenance costs will be collected:

1. Product was not normally used.
2. Fire, electric shock, outside object collapse or other natural disasters causing the equipment damaged.
3. Unauthorized repair, misuse, abuse or change.

Warranty Card

Thank you very much for choosing our products.

User Info

Name _____ Tel _____

Email _____ Post code _____

Address _____

Product information

Product Name _____


Factory Serial Number _____

Fault description


Attention

1. This card is considered as the Protection to fix warranty, so please reserve them carefully. Please fill in truthfully.
2. Please indicate the model number, Factory Serial Number and the detailed description of the fault information.

展开585X158 成品117X158 风琴折 128哑粉纸

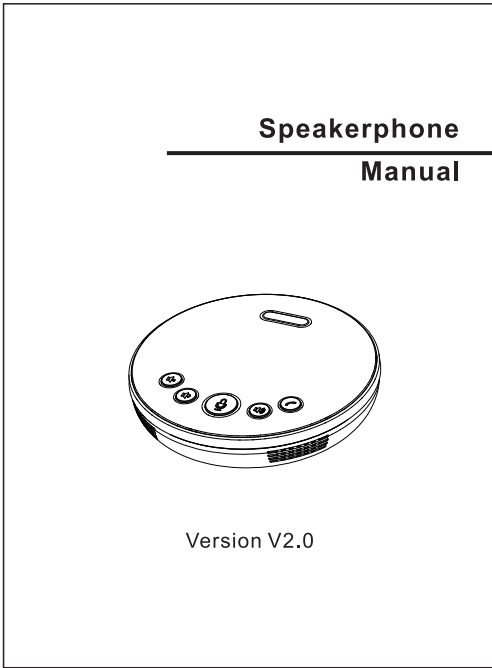

封面

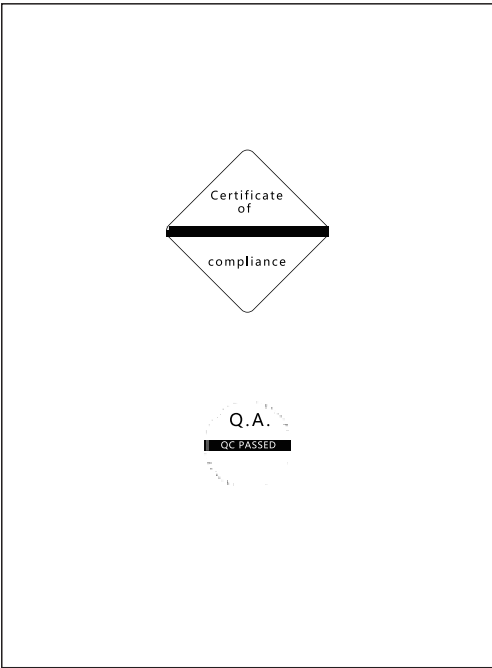

封底

FCC regulatory conformance:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a **Class B** digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

RF Exposure

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.