

(台灣) 謹裕實業股份有限公司

(大陸) 東莞台霖電子通訊有限公司
蘇州華廣電通有限公司
普翔電子貿易(上海)有限公司
東莞倍能電子有限公司

品名： 無線網路設備用天線

規格： RF Antenna Assembly

料號： C059-510394-A

客戶： 訊舟科技股份有限公司

客戶料號：

日期： 2017/07/10

謹裕實業地址： No. 326, Sec. 2, Kung Tao 5 Road, Hsin Chu City,
Taiwan, R.O.C.

電話： +886-3-5714225(REP.)

傳真： + 886-3-5713853 · + 886-3-5723600

東莞台霖地址： Hupan Industrial District, Tai Ling Shan Town, Dong Guan
City, Guangdong, China

電話： +86-769-85655858

傳真： +86-769-85655258

蘇州華廣地址： Limin North Road, LiLi Town, LiLi Industrial Park, LinHu
Economic Zone, Wujiang City, Jiangsu Province, China

電話： +86-512-63627980

傳真： +86-512-63627981

普翔電子地址： Flat 501, 5F, Build 27, NO. 68, Guiqing Road, Huhui
District, Shanghai, China



電話： +86-21-64959151


傳真： +86-21-64959059

東莞倍能地址： Hupan Industrial District, Shida Road, Tai Ling Shan
Town, Dong Guan City, Guangdong, China

電話： +86-769-81662366

傳真： +86-769-81602681

確認				客戶確認
製作	審核	核准	業務	
熊伊				



Contents

<i>Item</i>	<i>Description</i>	<i>Page</i>
1.	規格表	 1
2.	成品圖	 2
3.	爆炸圖	 3
4.	BOM List	 4
5.	測試報告	 5~18
6.	Cable 材質特性/UL	 19~22
7.	Connector 材質特性/UL	 23~26
8.	塑件材質特性/UL	 27~35
9.	套管材質特性/UL	 36~38
10.	SGS測試	 39~194
11.	RoHS 排外條款	 195
12.	附檔資料	 196~198

RF Antenna Assembly

Specification



1. Electrical Properties :

- 1.1 Frequency Range..... 2.4GHz ~ 2.5GHz ;4.9GHz~5.825GHz
- 1.2 Impedance 50Ω Nominal
- 1.3 VSWR 1.92 :1Max.
- 1.4 Return Loss..... -10 dB Max.
- 1.5 Radiation Omni-directional
- 1.6 Gain(peak)..... 3.9dBi @ 2.4GHz ~ 2.5GHz
4.4dBi @ 4.9GHz ~ 5.825GHz
- 1.7 Polarization..... Linear; Vertical
- 1.8 Admitted Power..... 1W
- 1.9 Cable..... RG-178 Coaxial Cable
- 1.10 Connector..... SMA Plug Straight/Reverse


2. Physical Properties :

- 2.1 Antenna Body..... TPE
- 2.2 Antenna Base..... PC
- 2.3 Antenna Base..... PC+PBT
- 2.4 Operating Temp. -10 ~ +60
- 2.5 Storage Temp. -10 ~ +70
- 2.6 Color White

REV	DATE	DESCRIPTION
X1	07/03-2017	New Issue

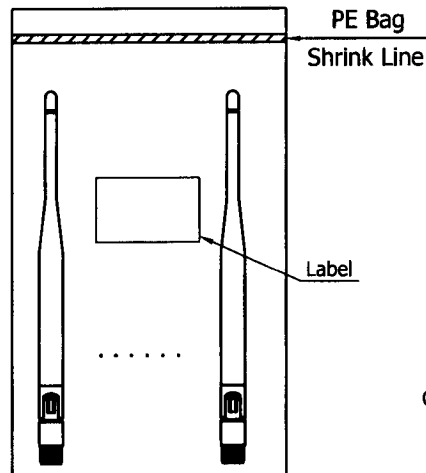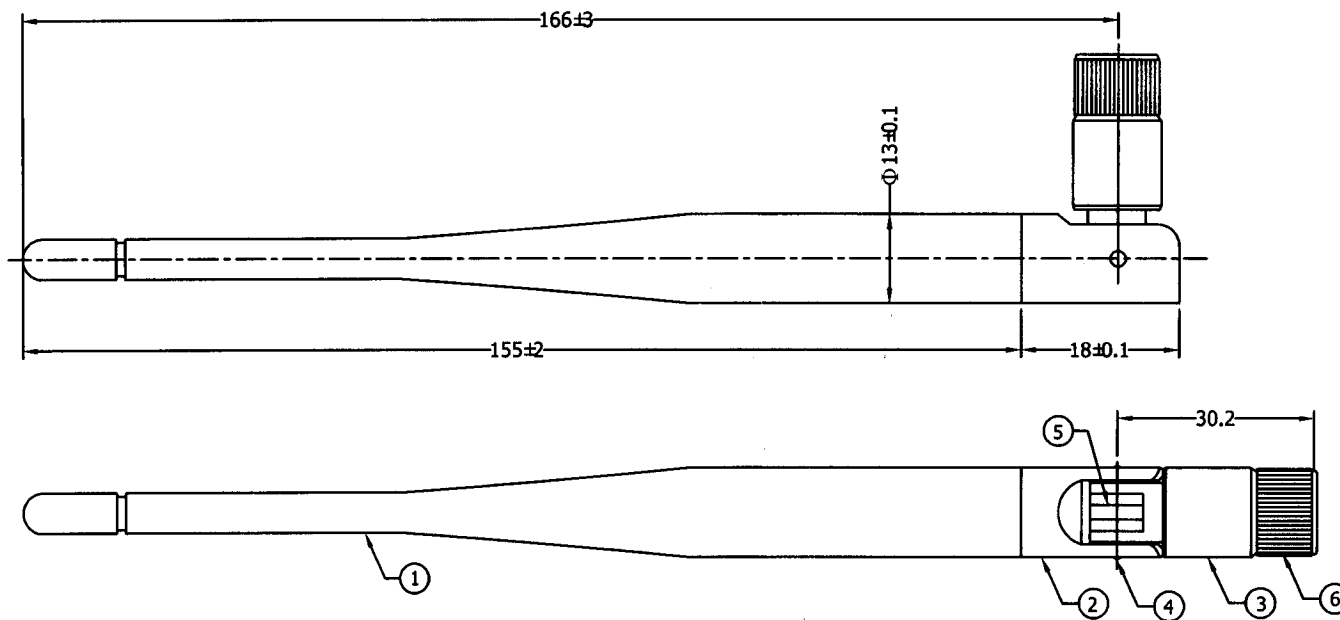

Packing:10pcs/bag




GP標籤貼於紙箱側麥左上角(共2PCS)
外箱標籤貼於紙箱側麥右上角(共1PCS)
成品淨重:23600±5%mg

NO	DESCRIPTION	Q'TY	REMARK
6	Connector	SMA Straight Plug Reverse	1
5	Cable	RG-178 Cable,Transparency Brown,50Ω	1
4	Rivet	POM;Color:White	2
3	Antenna Base	(CD-13)PC+PBT;Color:White	1
2	Antenna Base	(CD-384)PC;Color:White	1
1	Antenna Body	(CD-383)TPE;Color:White	1

CUSTOMER'S SINGATURE	XX.	±5.0	APPROVED	CUSTOMER: 訊舟		
	X.	±3.0	何四春	PART NO :		
	.X	±1.0	2017.07.03	PART NAME: RF Antenna Assembly		
	.XX	±0.5	CHECKED	W.Y P/NO : C059-510394-A		
	.XXX	±0.1	DRAWING	REV UNIT FILE : SRF2017901		
	⊙	⊙	熊伊	X1 mm SHEET : 1/1		
			2017.07.03			

M.gear Wha Yu Group
THIS DRAWING, AND IT'S INHERANT DESIGN CONCEPTS, ARE THE PROPERTY OF WHA YU AND AS SUCH MAY NOT BE COPIED, REPRODUCED, OR GIVEN TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF WHA YU.

爆炸圖

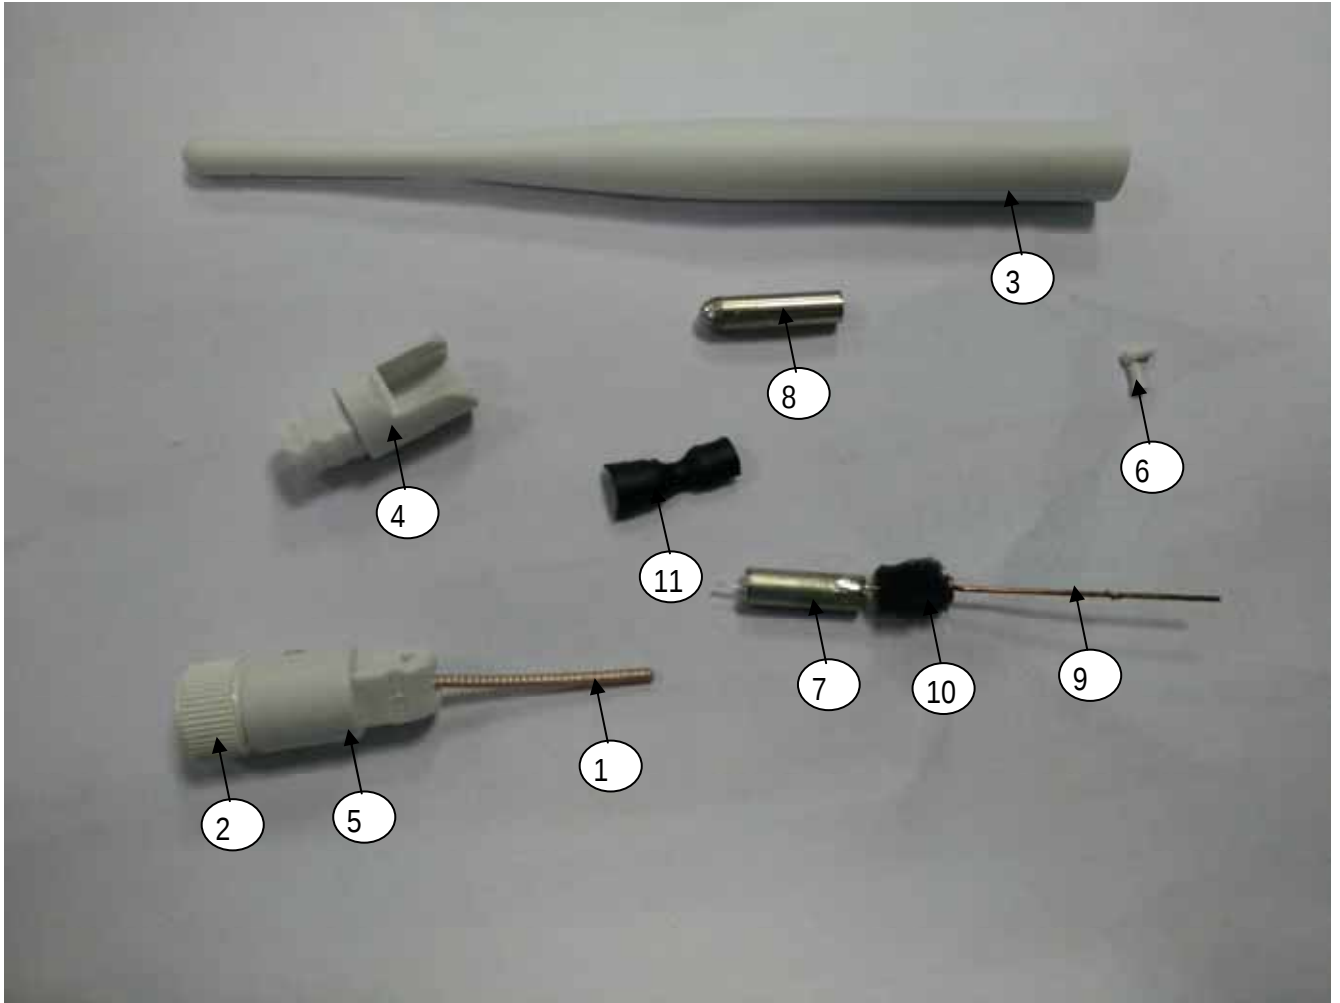

BILL OF MATERIAL

CUSTOMER P/N: 訊舟科技股份有限公司

DATE:2017.07.17

W.Y.P/N:C059-510394-A

PART NO:SRF2017901


PART NAME:RF Antenna Assembly

序號	零件名稱	供應商	規格描述	用量/PCS
1	Cable	SHEN YU	RG-178 Cable	1
2	Connector	KAIXUAN	Reverse;Straight;Plug;RG-178;6GHz(白色塑膠外殼包銅牙;本體壓鑄鍍白鎳)	1
3	Antenna Cap	CHANGCHUN	(CD-383) ϕ 13.0*154.0mm;TPEE 55D(純料>90%);White	1
4	Antenna Base	CHIMEI	(CD-384) ϕ 13*28.2mm;PC-110(純料100%);White	1
5	Antenna Base	SHINKONG	(CD-13) ϕ 13.0*25.30mm;PC+PBT(純料100%);White	1
6	Rivet	YOU SHENG	Φ 2.4*5.1mm,POM,White	2
7	Signal Tube	GUANGDONG	ϕ 5.5*18;鋅合金 ; for:1.37Cable;鍍錫	1
8	Ground Tube	GUANGDONG	ϕ 5.5*23mm(T)0.25mm;Brass;For RG-178;鍍錫;抽心式	1
9	Helix	JUEMAO	ϕ 0.8 $\times$ 10T;OD:4.3mm;F:7.0mm;B:39mm;P:1mm;Phosphor Bronze	1
10	泡棉	JUNZHANG	黑色海綿+3M9448單面背膠;(L)18*(W)16*(T)3.0mm	1
11	H.S TUBE	WOER	W3F2 1/4 ϕ 6.4 $\times$ 22 mm .含膠	1

RF Antenna Assembly


P/No. C059-510394-A

Spec:2.4~2.5GHz / 4.9~5.825GHz

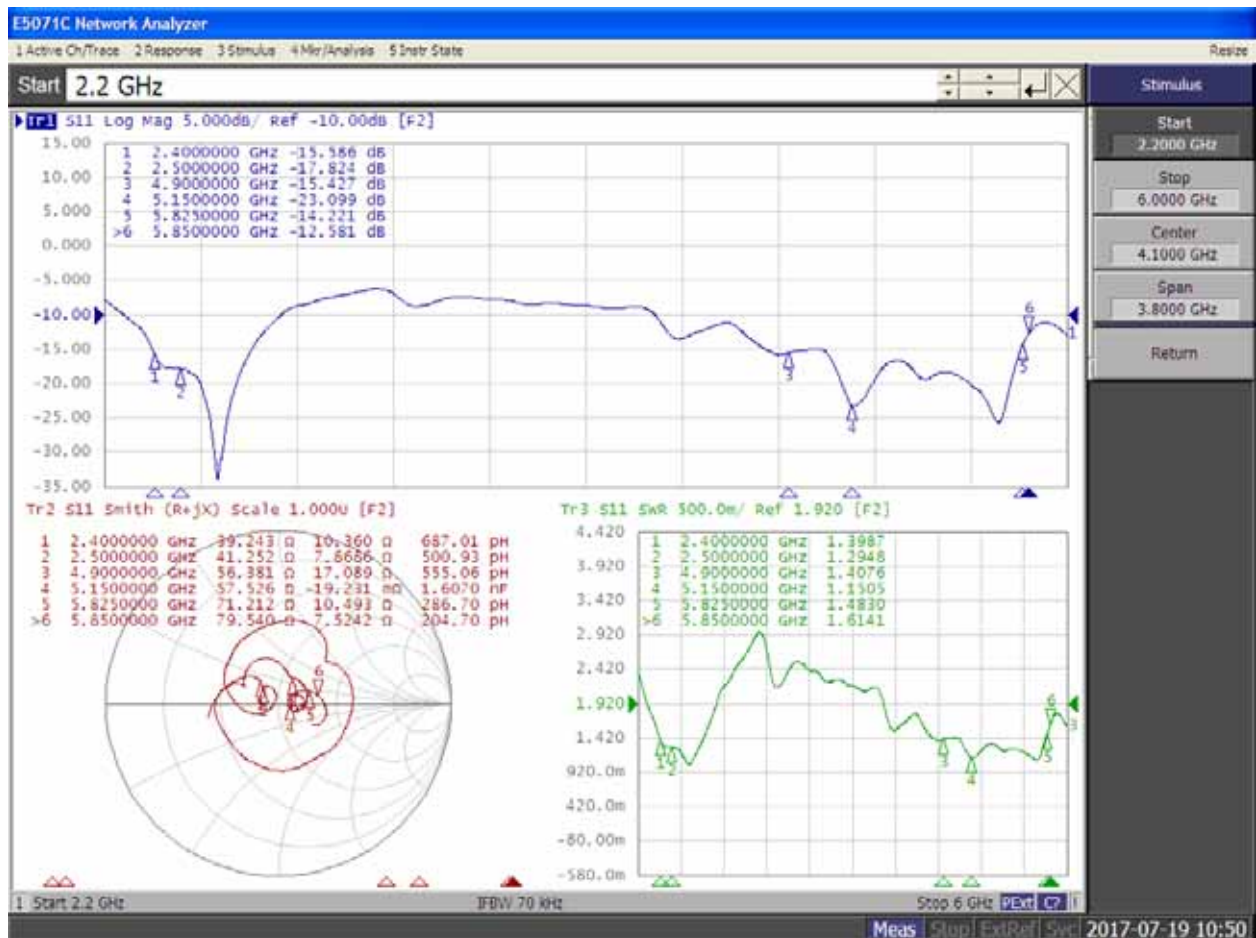


Far-field Power Distribution(H+V) on X-Z Plane

Plot Peak Gain(H+V)= 3.0 dBi; Plot AvgGain(H+V)= -3.2dBi @2.40000 GHz

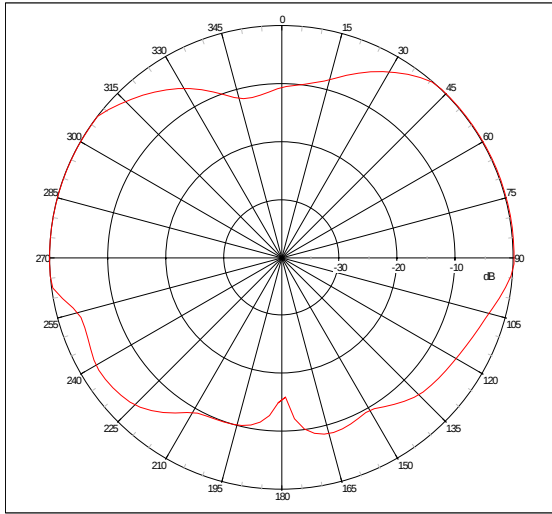


Far-field Power Distribution(H+V) on Y-Z Plane

Plot Peak Gain(H+V)= 4.1 dBi; Plot AvgGain(H+V)= -2.7dBi @2.40000 GHz

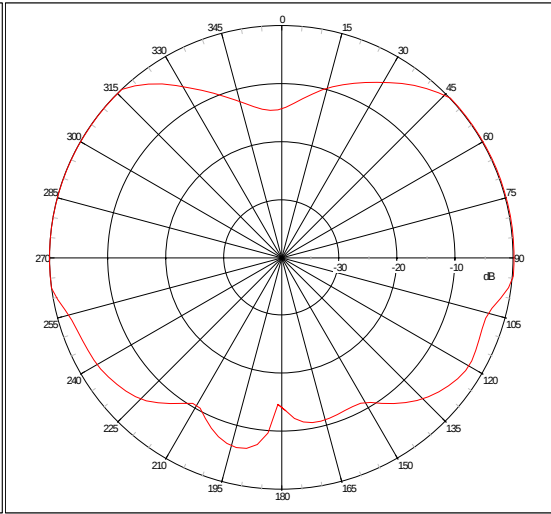

Far-field Power Distribution(H+V) on X-Y Plane


Plot Peak Gain(H+V)= 2.6 dBi; Plot AvgGain(H+V)= 1.8dBi @2.40000 GHz

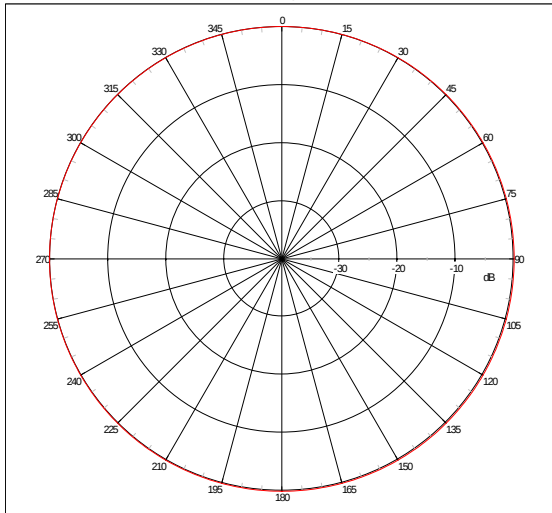

Far-field Patterns of H-Pol & V-Pol @ Phi=0 deg/(X-Z Plane-Cut)

Plot PeakGain(H-Pol): 3.0 dBi; Plot PeakGain(V-Pol): -12.0dBi @ Freq: 2.40000 GHz


Ppol Xpol

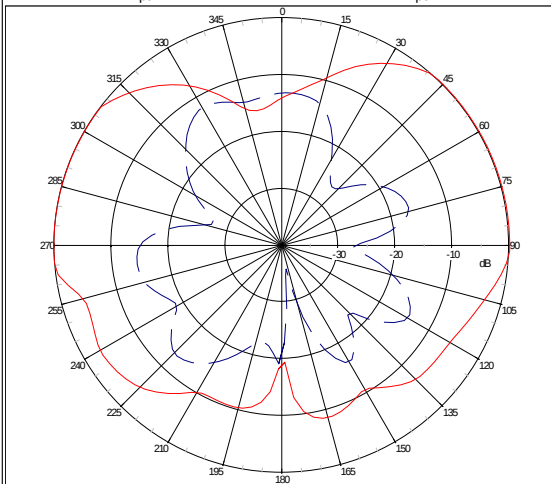

Far-field Patterns of H-Pol & V-Pol @ Phi=90 deg/(Y-Z Plane-Cut)

Plot PeakGain(H-Pol): 4.1 dBi; Plot PeakGain(V-Pol): -12.2dBi @ Freq: 2.40000 GHz


Ppol Xpol

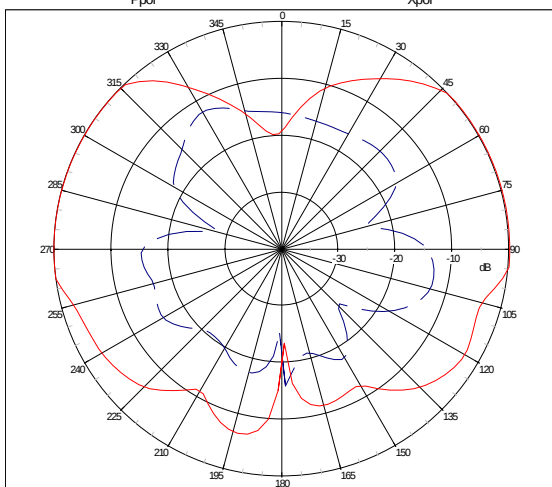

Far-field Patterns of H-Pol & V-Pol @ Theta=90 deg/(X-Y Plane-Cut)


Plot PeakGain(H-Pol): 2.5 dBi; Plot PeakGain(V-Pol): -13.0dBi @ Freq: 2.40000 GHz

Ppol Xpol

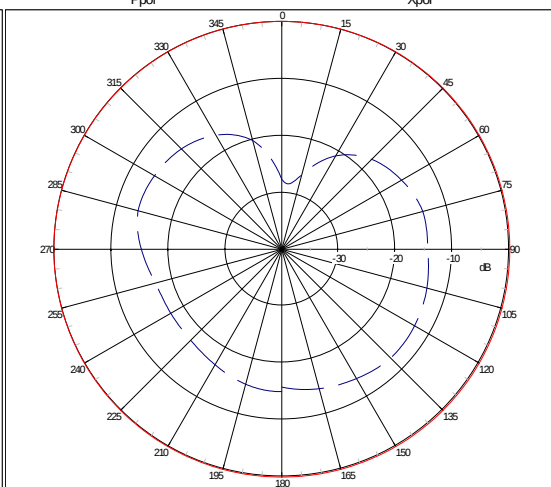


Far-field Power Distribution(H+V) on X-Z Plane

Plot Peak Gain(H+V)= 3.2 dBi; Plot AvgGain(H+V)= -3.3dBi @2.45000 GHz

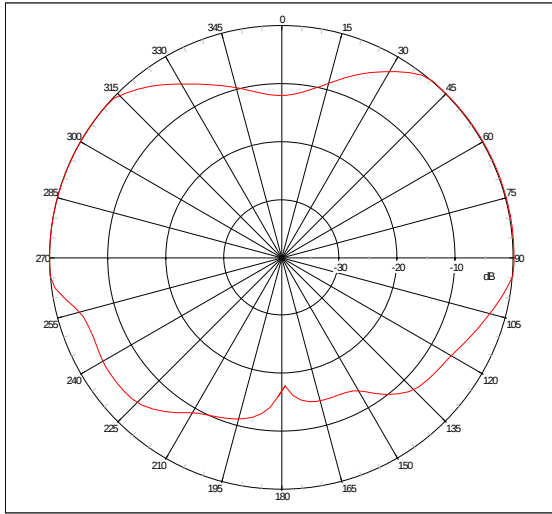


Far-field Power Distribution(H+V) on Y-Z Plane

Plot Peak Gain(H+V)= 4.5 dBi; Plot AvgGain(H+V)= -2.7dBi @2.45000 GHz

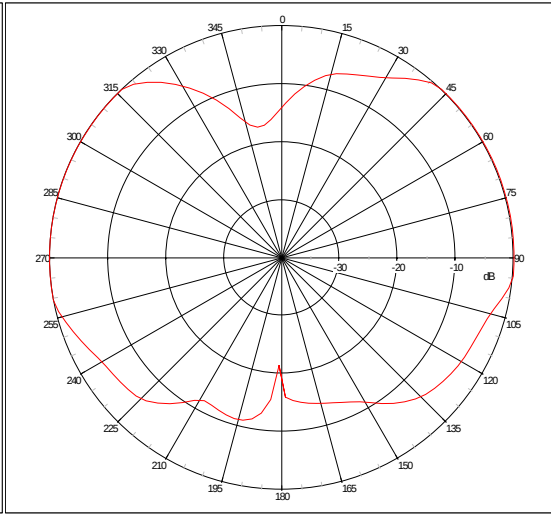


Far-field Power Distribution(H+V) on X-Y Plane

Plot Peak Gain(H+V)= 2.6 dBi; Plot AvgGain(H+V)= 1.8dBi @2.45000 GHz

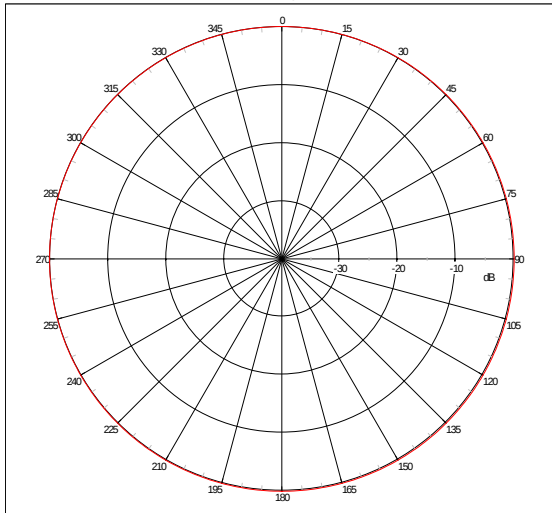


Far-field Patterns of H-Pol & V-Pol @ Phi=0 deg/(X-Z Plane-Cut)

Plot PeakGain(H-Pol): 3.2 dBi; Plot PeakGain(V-Pol): -12.8dBi @ Freq: 2.45000 GHz

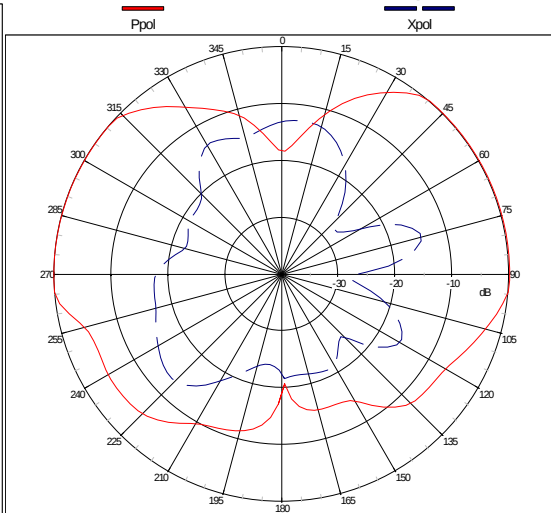


Far-field Patterns of H-Pol & V-Pol @ Phi=90 deg/(Y-Z Plane-Cut)

Plot PeakGain(H-Pol): 4.5 dBi; Plot PeakGain(V-Pol): -14.0dBi @ Freq: 2.45000 GHz

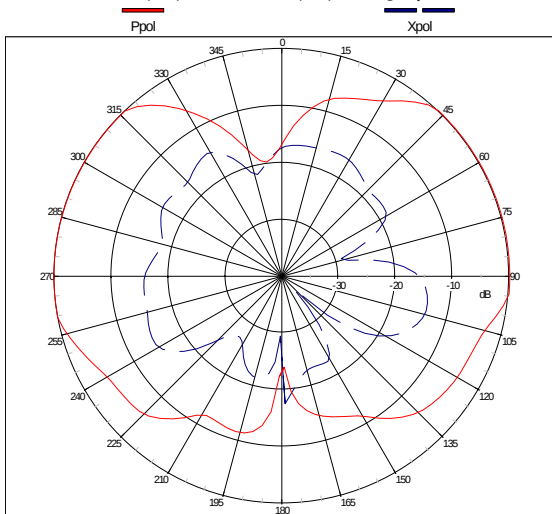


Far-field Patterns of H-Pol & V-Pol @ Theta=90 deg/(X-Y Plane-Cut)

Plot PeakGain(H-Pol): 2.6 dBi; Plot PeakGain(V-Pol): -14.6dBi @ Freq: 2.45000 GHz

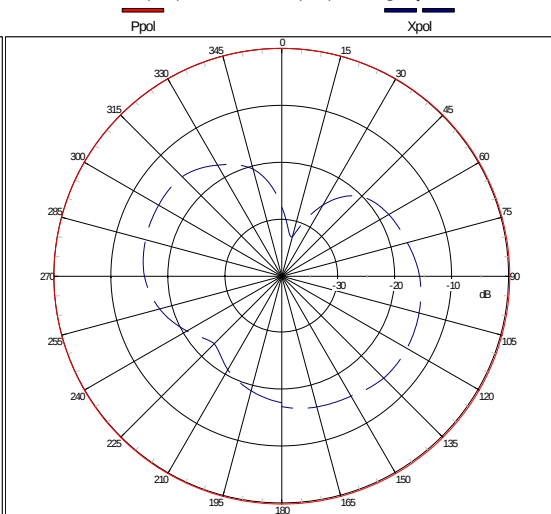


Far-field Power Distribution(H+V) on X-Z Plane

Plot Peak Gain(H+V)= 3.8 dBi; Plot AvgGain(H+V)= -3.1dBi @2.50000 GHz

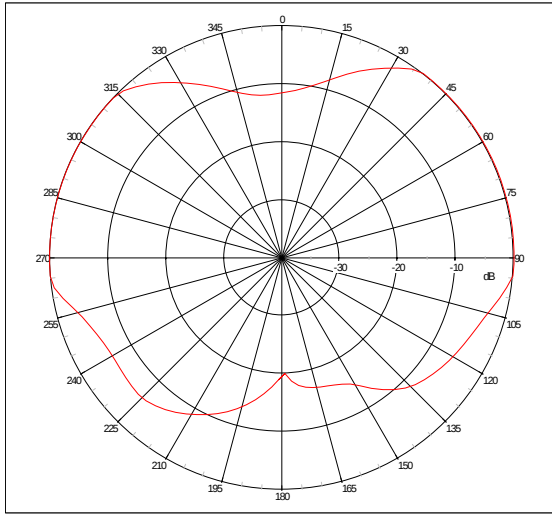


Far-field Power Distribution(H+V) on Y-Z Plane

Plot Peak Gain(H+V)= 4.8 dBi; Plot AvgGain(H+V)= -2.5dBi @2.50000 GHz

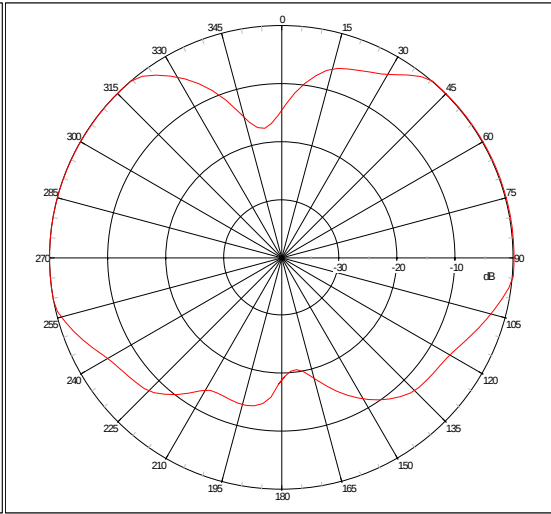

Far-field Power Distribution(H+V) on X-Y Plane

Plot Peak Gain(H+V)= 2.7 dBi; Plot AvgGain(H+V)= 1.9dBi @2.50000 GHz

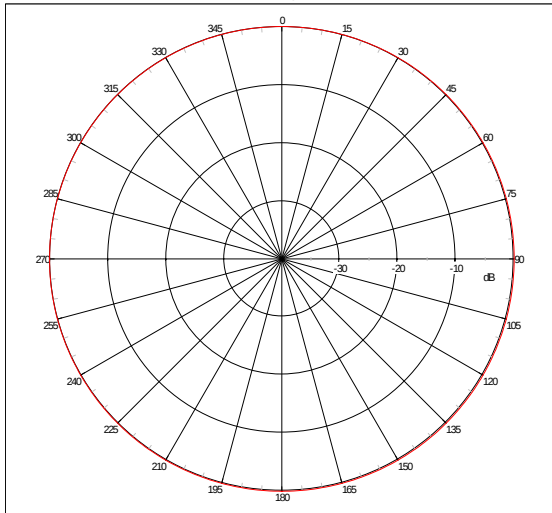


Far-field Patterns of H-Pol & V-Pol @ Phi=0 deg/(X-Z Plane-Cut)

Plot PeakGain(H-Pol): 3.8 dBi; Plot PeakGain(V-Pol): -12.0dBi @ Freq: 2.50000 GHz

Ppol

Xpol

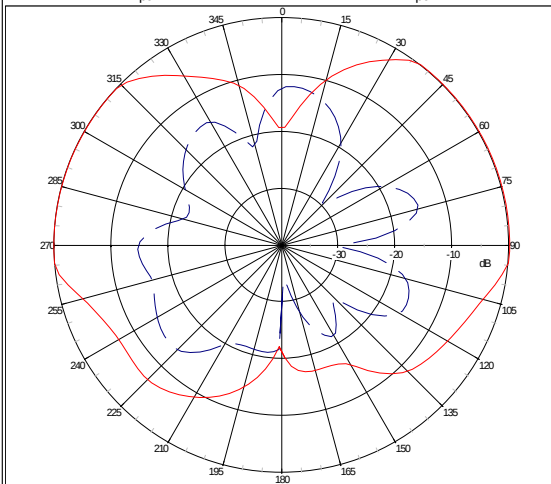


Far-field Patterns of H-Pol & V-Pol @ Phi=90 deg/(Y-Z Plane-Cut)

Plot PeakGain(H-Pol): 4.8 dBi; Plot PeakGain(V-Pol): -15.5dBi @ Freq: 2.50000 GHz

Ppol

Xpol

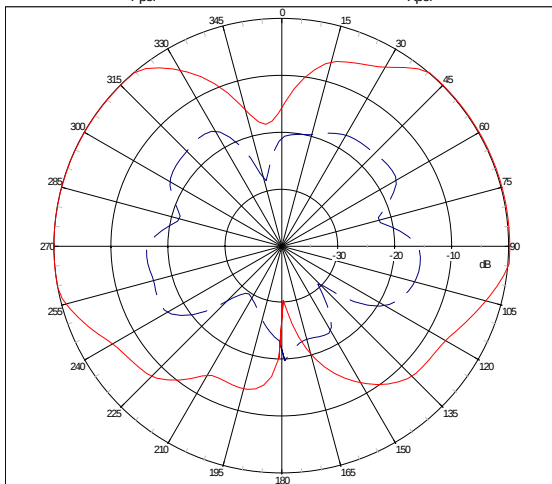


Far-field Patterns of H-Pol & V-Pol @ Theta=90 deg/(X-Y Plane-Cut)

Plot PeakGain(H-Pol): 2.6 dBi; Plot PeakGain(V-Pol): -14.6dBi @ Freq: 2.50000 GHz


Ppol

Xpol

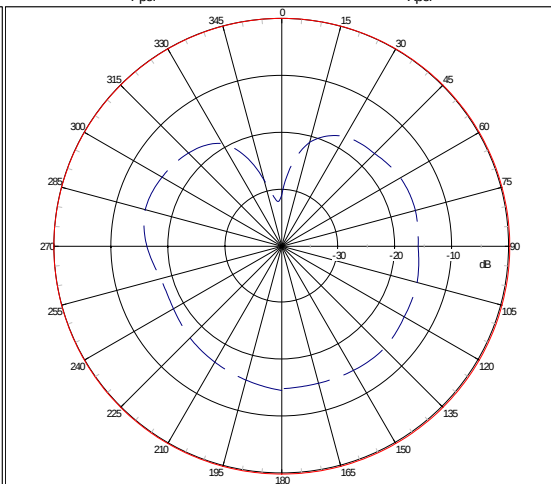


Far-field Power Distribution(H+V) on X-Z Plane

Plot Peak Gain(H+V)= 1.4 dB; Plot AvgGain(H+V)= -4.9dB @4.90000 GHz

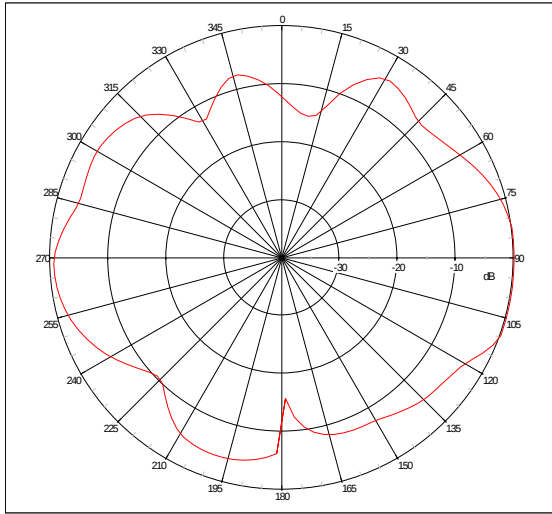


Far-field Power Distribution(H+V) on Y-Z Plane

Plot Peak Gain(H+V)= -0.7 dB; Plot AvgGain(H+V)= -5.7dB @4.90000 GHz

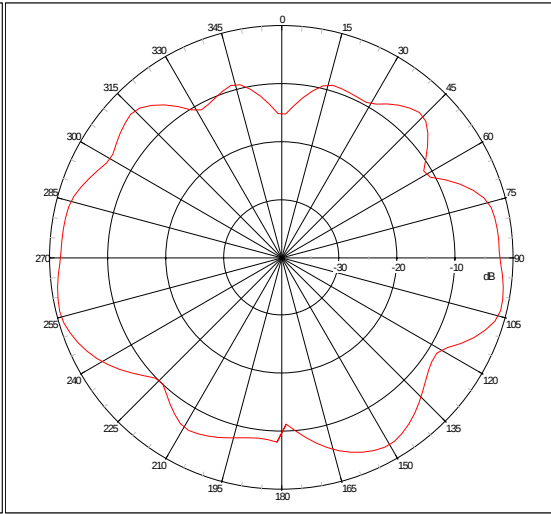

Far-field Power Distribution(H+V) on X-Y Plane


Plot Peak Gain(H+V)= 0.7 dB; Plot AvgGain(H+V)= -1.5dB @4.90000 GHz

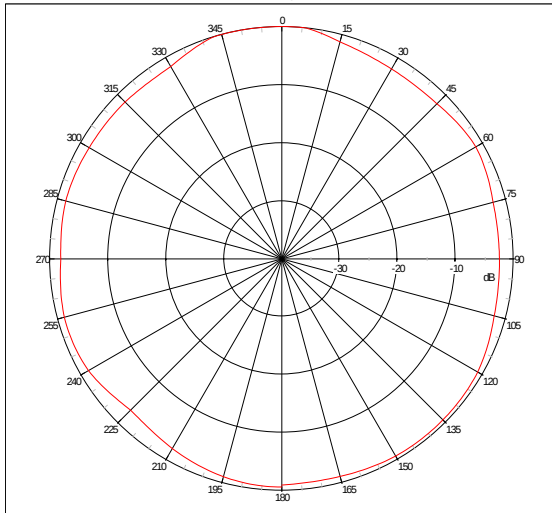

Far-field Patterns of H-Pol & V-Pol @ Phi=0 deg/(X-Z Plane-Cut)

Plot PeakGain(H-Pol): 1.3 dB; Plot PeakGain(V-Pol): -8.1dB @ Freq: 4.90000 GHz


Legend: Ppol (red line), Xpol (blue line)

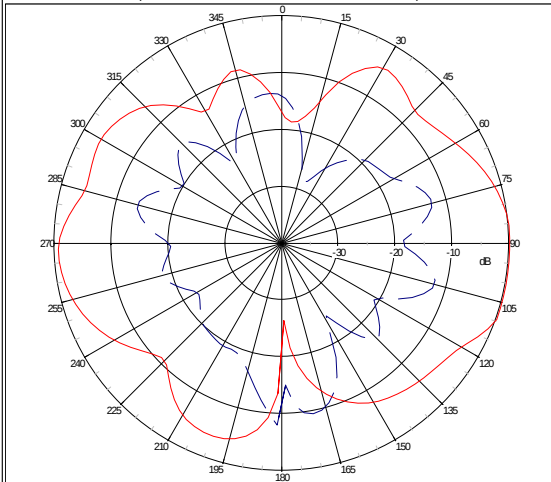

Far-field Patterns of H-Pol & V-Pol @ Phi=90 deg/(Y-Z Plane-Cut)

Plot PeakGain(H-Pol): -0.7 dB; Plot PeakGain(V-Pol): -9.1dB @ Freq: 4.90000 GHz


Legend: Ppol (red line), Xpol (blue line)

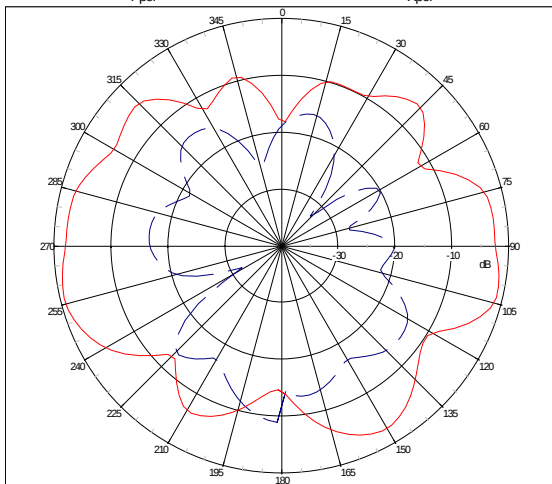

Far-field Patterns of H-Pol & V-Pol @ Theta=90 deg/(X-Y Plane-Cut)


Plot PeakGain(H-Pol): 0.7 dB; Plot PeakGain(V-Pol): -12.9dB @ Freq: 4.90000 GHz

Legend: Ppol (red line), Xpol (blue line)

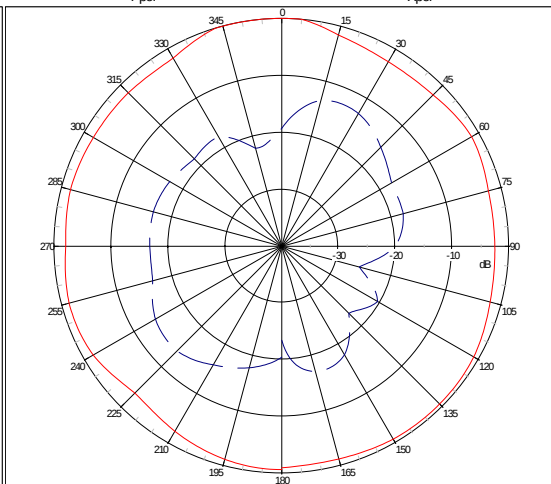


Far-field Power Distribution(H+V) on X-Z Plane

Plot Peak Gain(H+V)= 2.1 dBi; Plot AvgGain(H+V)= -3.1dBi @5.15000 GHz

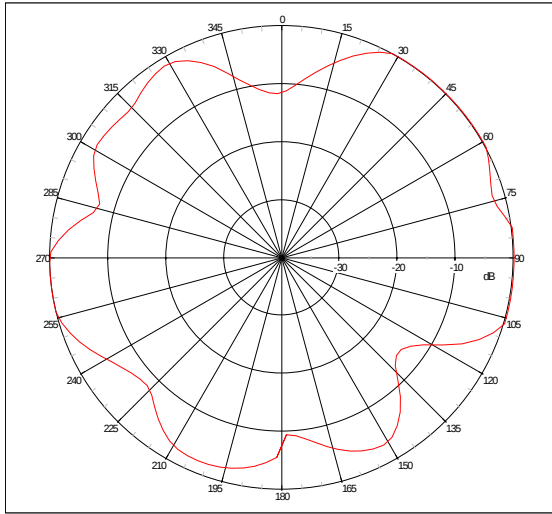


Far-field Power Distribution(H+V) on Y-Z Plane

Plot Peak Gain(H+V)= 2.6 dBi; Plot AvgGain(H+V)= -2.9dBi @5.15000 GHz

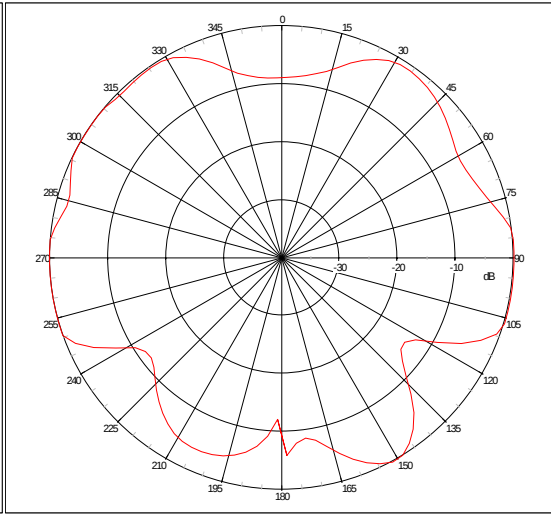

Far-field Power Distribution(H+V) on X-Y Plane


Plot Peak Gain(H+V)= 2.3 dBi; Plot AvgGain(H+V)= 0.8dBi @5.15000 GHz

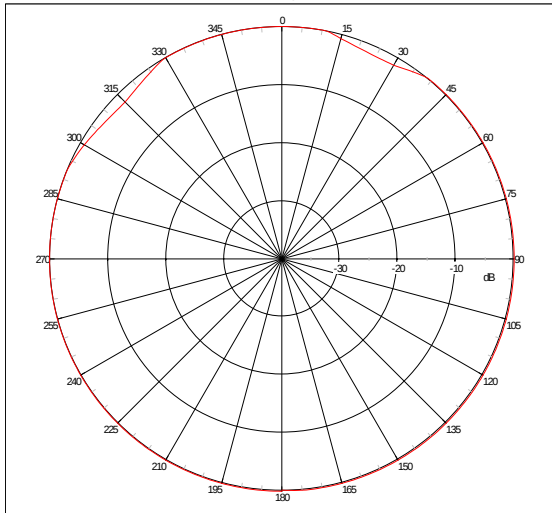

Far-field Patterns of H-Pol & V-Pol @ Phi=0 deg/(X-Z Plane-Cut)

Plot PeakGain(H-Pol): 2.1 dBi; Plot PeakGain(V-Pol): -8.2dBi @ Freq: 5.15000 GHz


— Ppol — Xpol

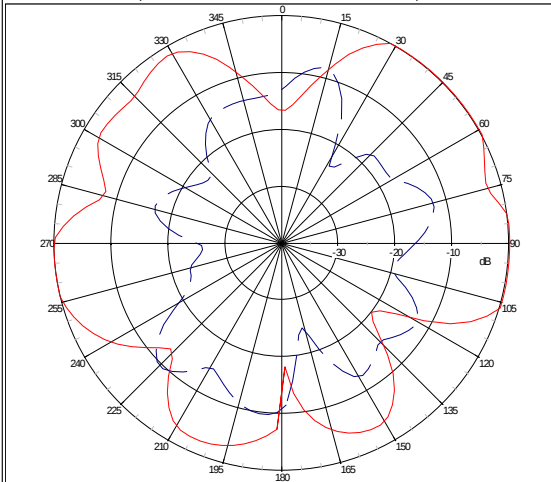

Far-field Patterns of H-Pol & V-Pol @ Phi=90 deg/(Y-Z Plane-Cut)

Plot PeakGain(H-Pol): 2.5 dBi; Plot PeakGain(V-Pol): -6.9dBi @ Freq: 5.15000 GHz


— Ppol — Xpol

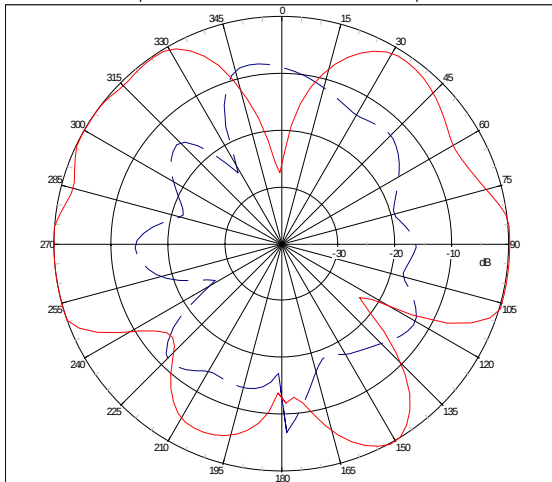

Far-field Patterns of H-Pol & V-Pol @ Theta=90 deg/(X-Y Plane-Cut)


Plot PeakGain(H-Pol): 2.3 dBi; Plot PeakGain(V-Pol): -9.5dBi @ Freq: 5.15000 GHz

— Ppol — Xpol

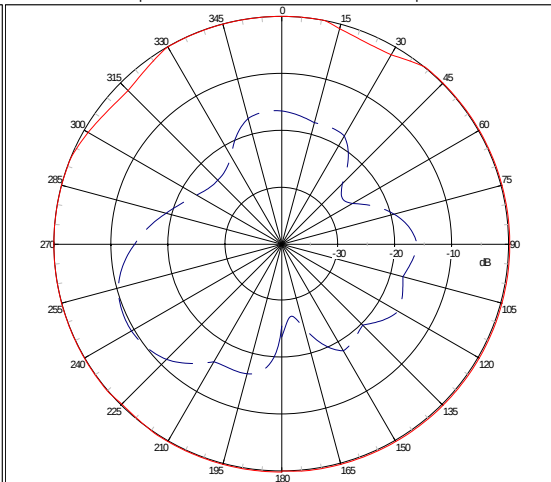


Far-field Power Distribution(H+V) on X-Z Plane

Plot Peak Gain(H+V)= 3.4 dBi; Plot AvgGain(H+V)= -2.1dBi @5.35000 GHz

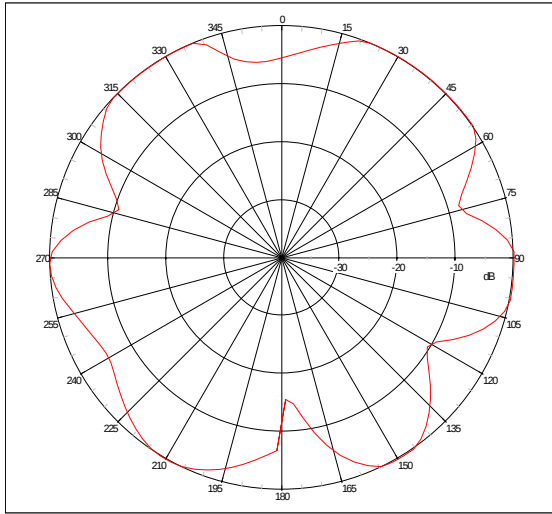


Far-field Power Distribution(H+V) on Y-Z Plane

Plot Peak Gain(H+V)= 3.7 dBi; Plot AvgGain(H+V)= -2.1dBi @5.35000 GHz

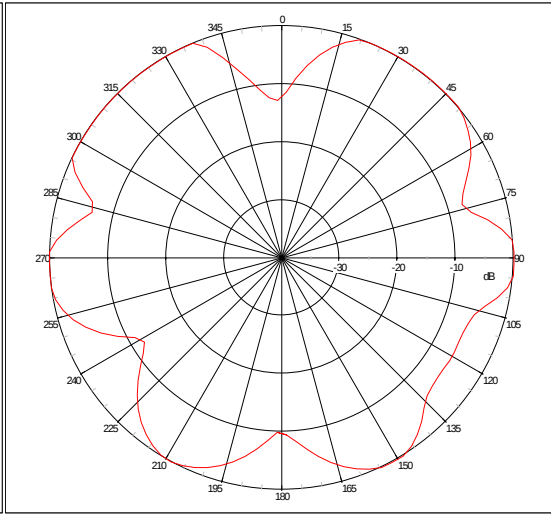

Far-field Power Distribution(H+V) on X-Y Plane


Plot Peak Gain(H+V)= 2.6 dBi; Plot AvgGain(H+V)= 0.5dBi @5.35000 GHz

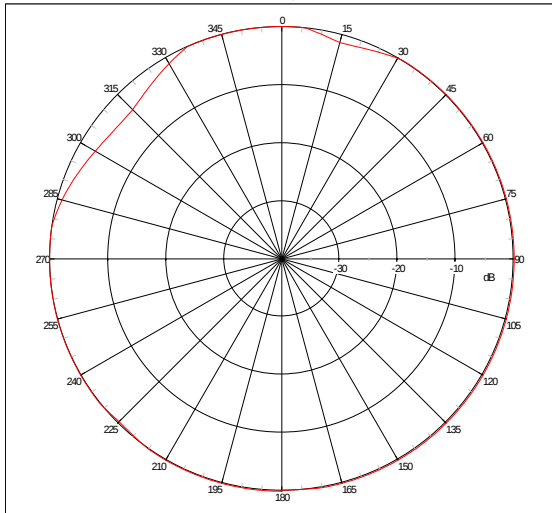

Far-field Patterns of H-Pol & V-Pol @ Phi=0 deg/(X-Z Plane-Cut)

Plot PeakGain(H-Pol): 3.4 dBi; Plot PeakGain(V-Pol): -6.5dBi @ Freq: 5.35000 GHz


Legend: Ppol (red line), Xpol (blue line)

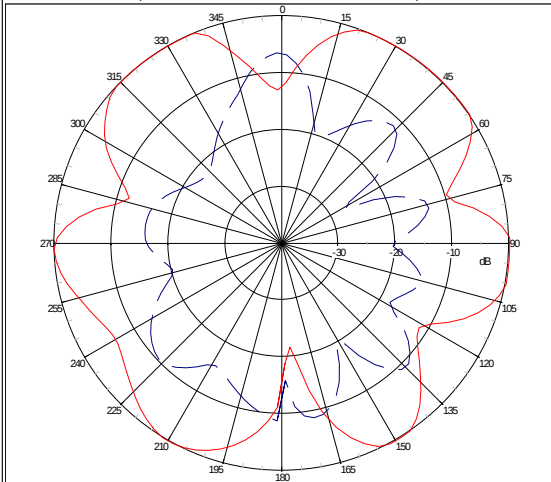

Far-field Patterns of H-Pol & V-Pol @ Phi=90 deg/(Y-Z Plane-Cut)

Plot PeakGain(H-Pol): 3.6 dBi; Plot PeakGain(V-Pol): -7.1dBi @ Freq: 5.35000 GHz


Legend: Ppol (red line), Xpol (blue line)

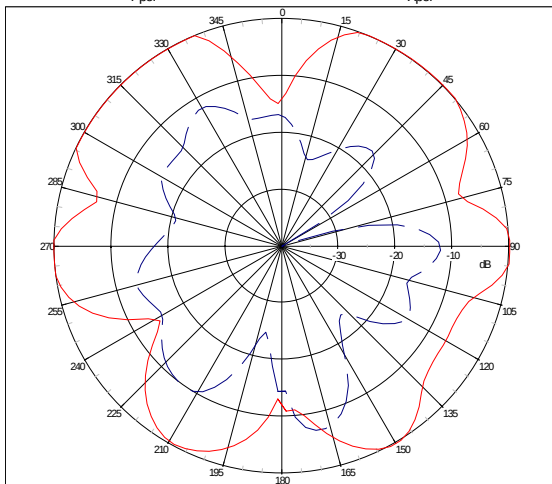

Far-field Patterns of H-Pol & V-Pol @ Theta=90 deg/(X-Y Plane-Cut)


Plot PeakGain(H-Pol): 2.6 dBi; Plot PeakGain(V-Pol): -11.9dBi @ Freq: 5.35000 GHz

Legend: Ppol (red line), Xpol (blue line)

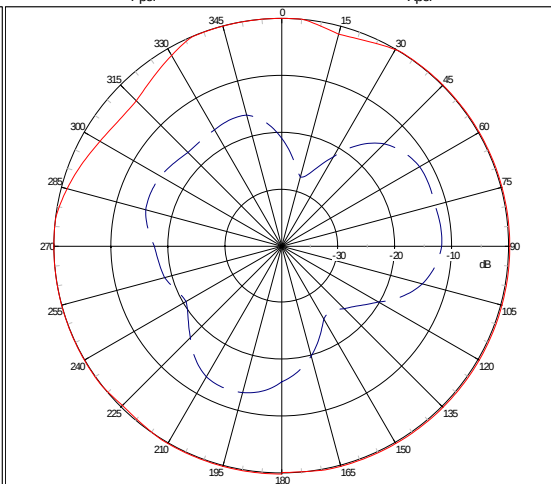


Far-field Power Distribution(H+V) on X-Z Plane

Plot Peak Gain(H+V)= 2.9 dBi; Plot AvgGain(H+V)= -2.3dBi @5.75000 GHz

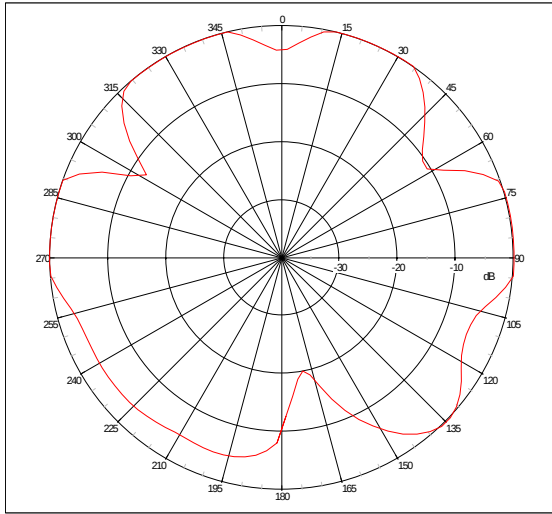


Far-field Power Distribution(H+V) on Y-Z Plane

Plot Peak Gain(H+V)= 3.3 dBi; Plot AvgGain(H+V)= -2.7dBi @5.75000 GHz

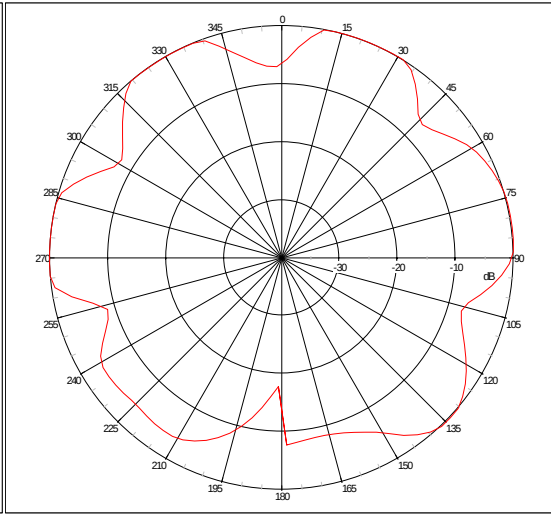

Far-field Power Distribution(H+V) on X-Y Plane


Plot Peak Gain(H+V)= 3.4 dBi; Plot AvgGain(H+V)= 1.6dBi @5.75000 GHz

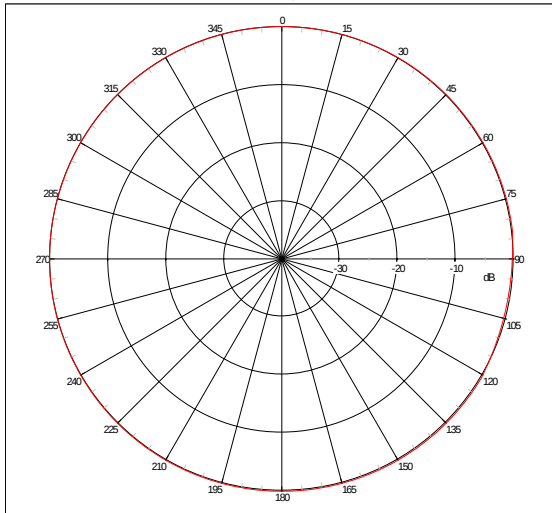

Far-field Patterns of H-Pol & V-Pol @ Phi=0 deg/(X-Z Plane-Cut)

Plot PeakGain(H-Pol): 2.7 dBi; Plot PeakGain(V-Pol): -5.5dBi @ Freq: 5.75000 GHz


Legend: Ppol (red line), Xpol (blue line)

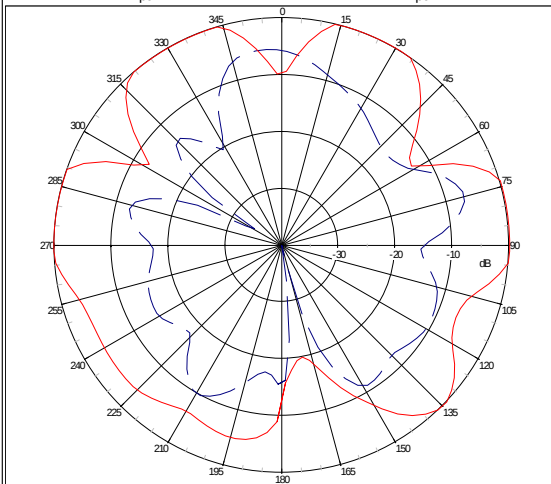

Far-field Patterns of H-Pol & V-Pol @ Phi=90 deg/(Y-Z Plane-Cut)

Plot PeakGain(H-Pol): 3.2 dBi; Plot PeakGain(V-Pol): -7.8dBi @ Freq: 5.75000 GHz


Legend: Ppol (red line), Xpol (blue line)

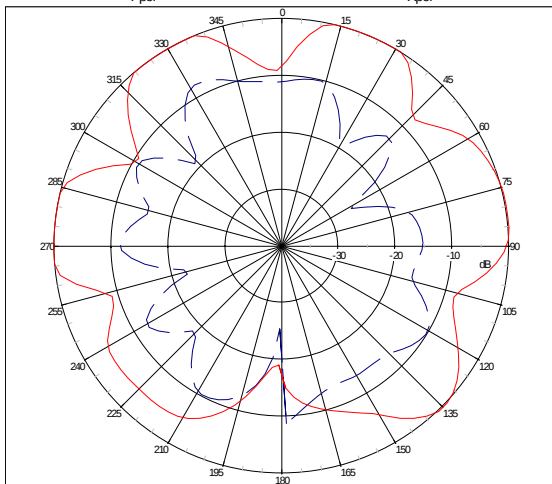

Far-field Patterns of H-Pol & V-Pol @ Theta=90 deg/(X-Y Plane-Cut)


Plot PeakGain(H-Pol): 3.2 dBi; Plot PeakGain(V-Pol): -8.9dBi @ Freq: 5.75000 GHz

Legend: Ppol (red line), Xpol (blue line)

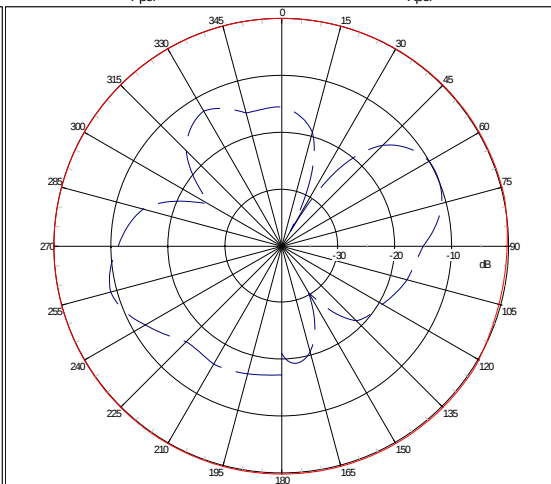


Far-field Power Distribution(H+V) on X-Z Plane

Plot Peak Gain(H+V)= 2.9 dB; Plot AvgGain(H+V)= -2.1dBi @5.82500 GHz

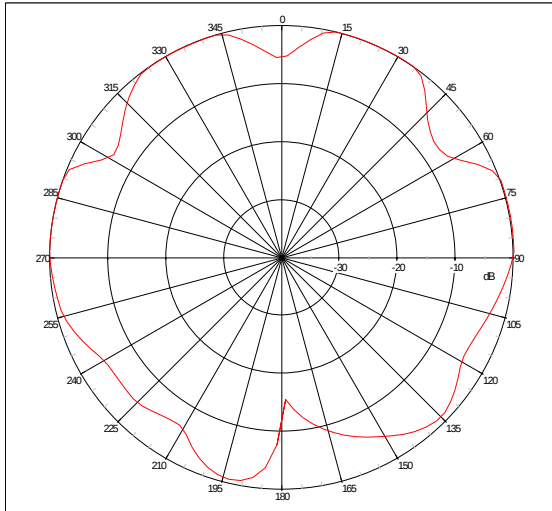


Far-field Power Distribution(H+V) on Y-Z Plane

Plot Peak Gain(H+V)= 3.0 dB; Plot AvgGain(H+V)= -2.9dBi @5.82500 GHz

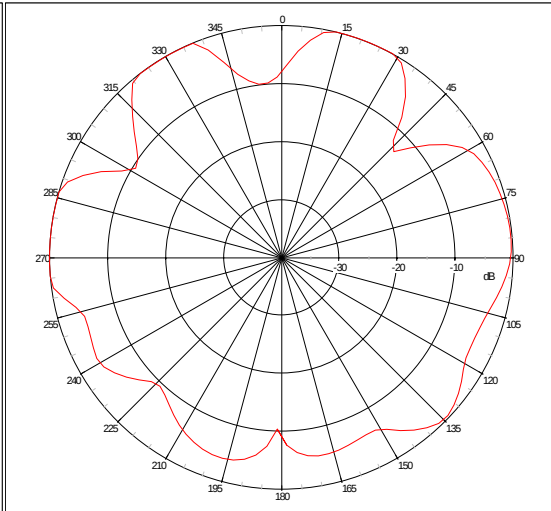

Far-field Power Distribution(H+V) on X-Y Plane


Plot Peak Gain(H+V)= 2.6 dB; Plot AvgGain(H+V)= 0.8dBi @5.82500 GHz

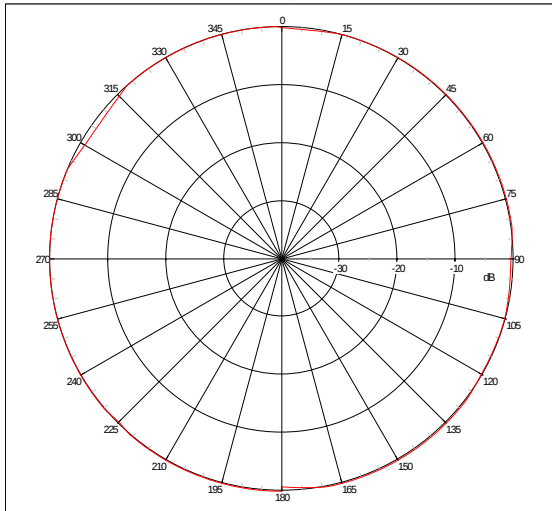

Far-field Patterns of H-Pol & V-Pol @ Phi=0 deg/(X-Z Plane-Cut)

Plot PeakGain(H-Pol): 2.7 dB; Plot PeakGain(V-Pol): -5.3dBi @ Freq: 5.82500 GHz


— Ppol — Xpol

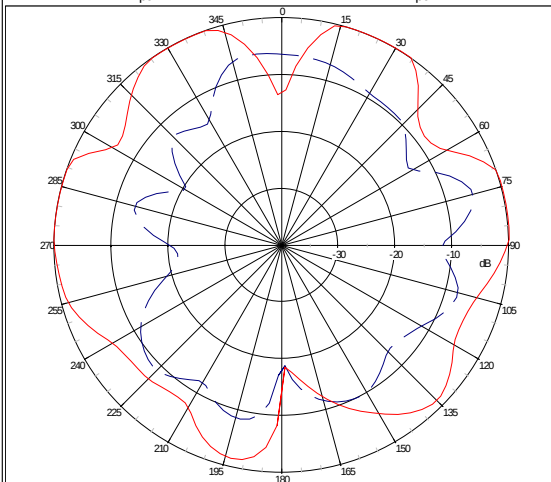

Far-field Patterns of H-Pol & V-Pol @ Phi=90 deg/(Y-Z Plane-Cut)

Plot PeakGain(H-Pol): 2.6 dB; Plot PeakGain(V-Pol): -7.0dBi @ Freq: 5.82500 GHz


— Ppol — Xpol


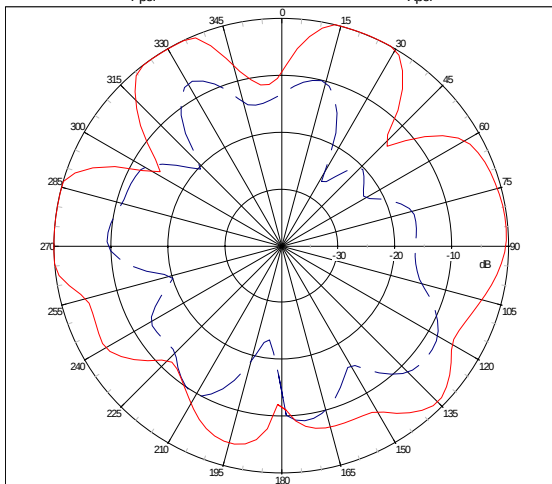




Far-field Patterns of H-Pol & V-Pol @ Theta=90 deg/(X-Y Plane-Cut)



Plot PeakGain(H-Pol): 2.4 dB; Plot PeakGain(V-Pol): -7.1dBi @ Freq: 5.82500 GHz



— Ppol — Xpol

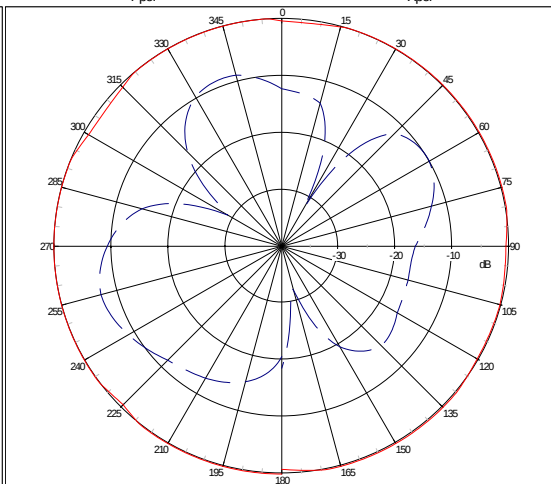

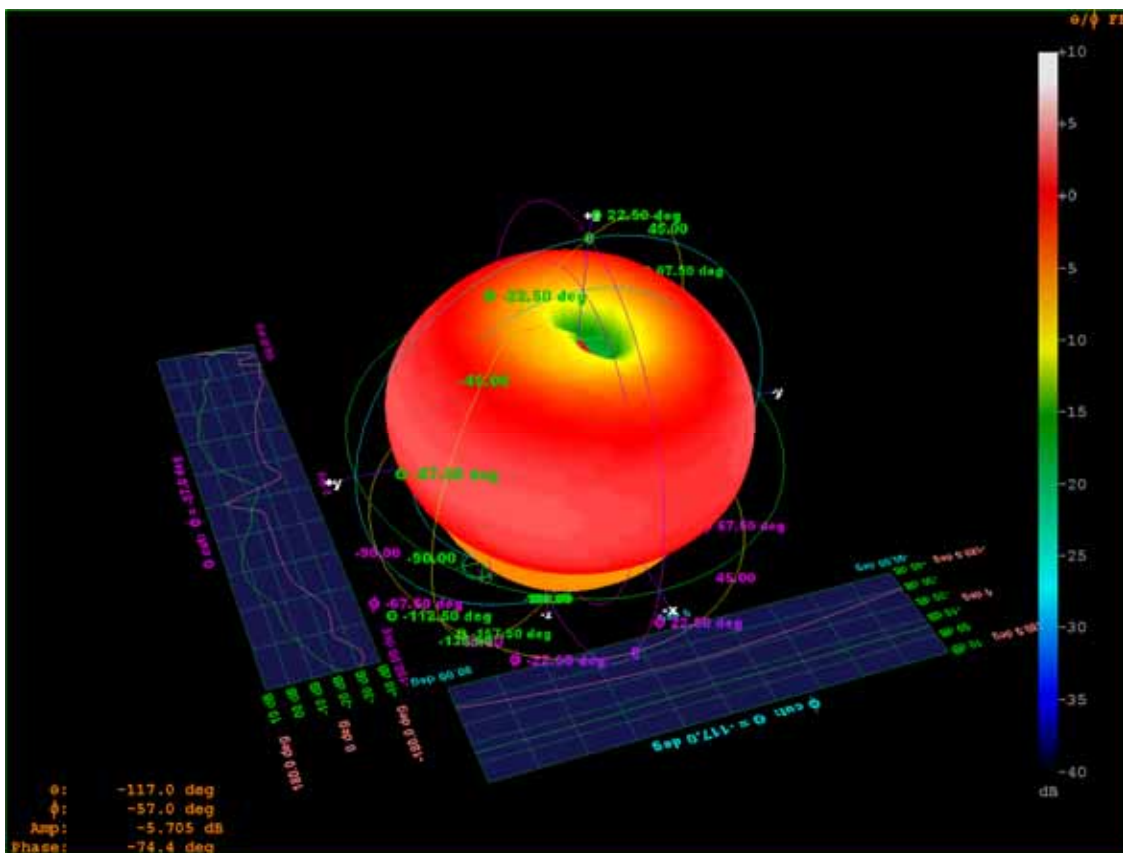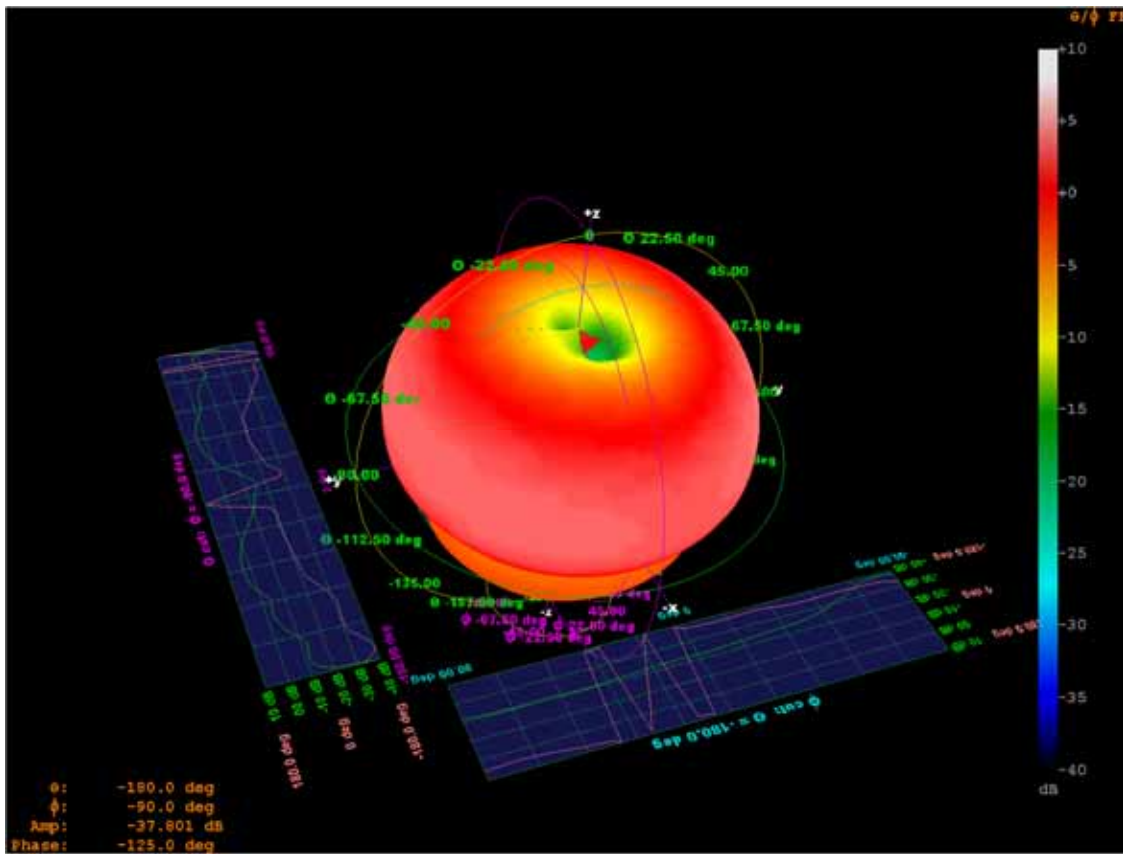

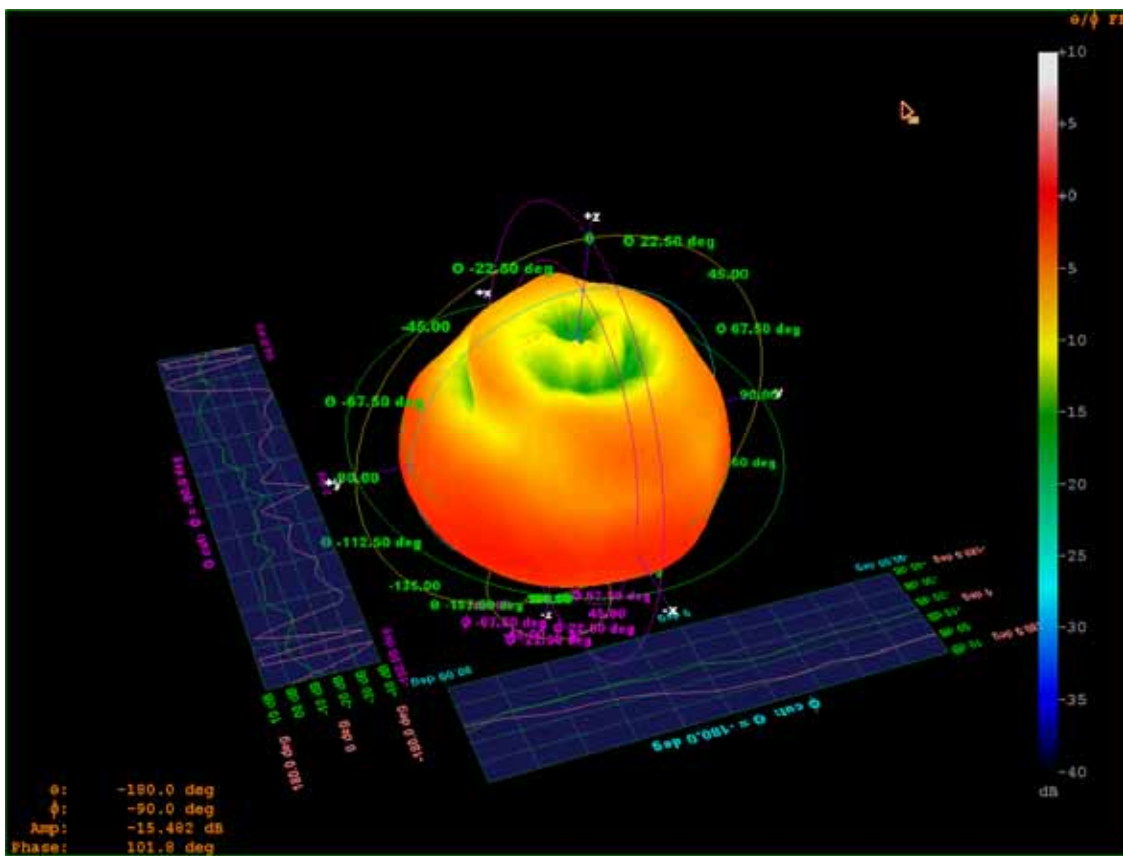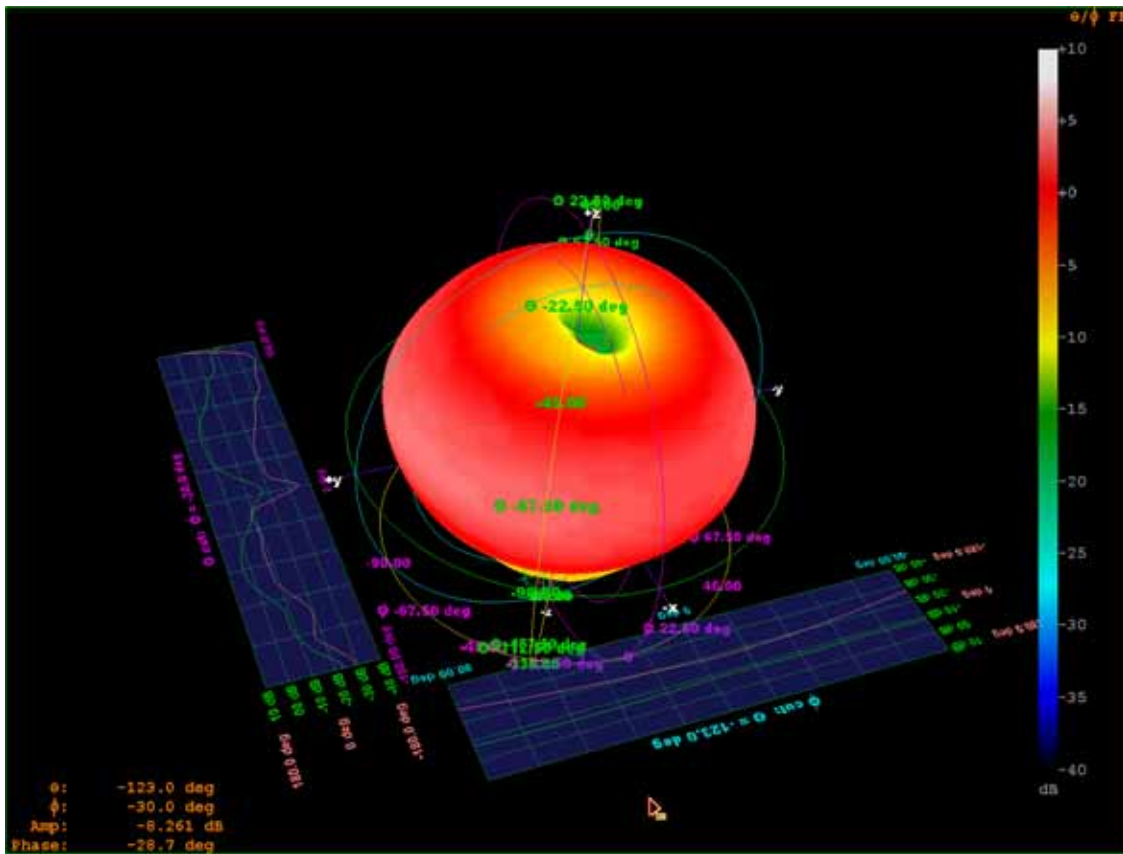

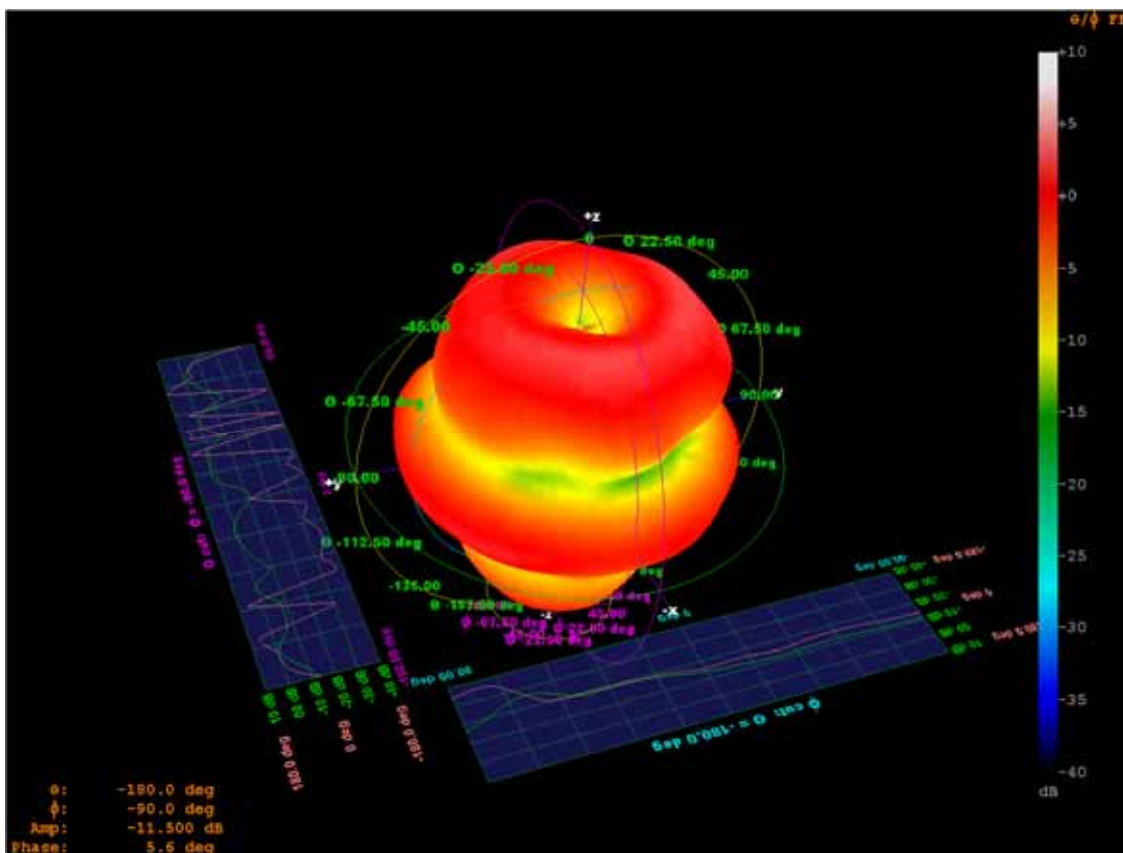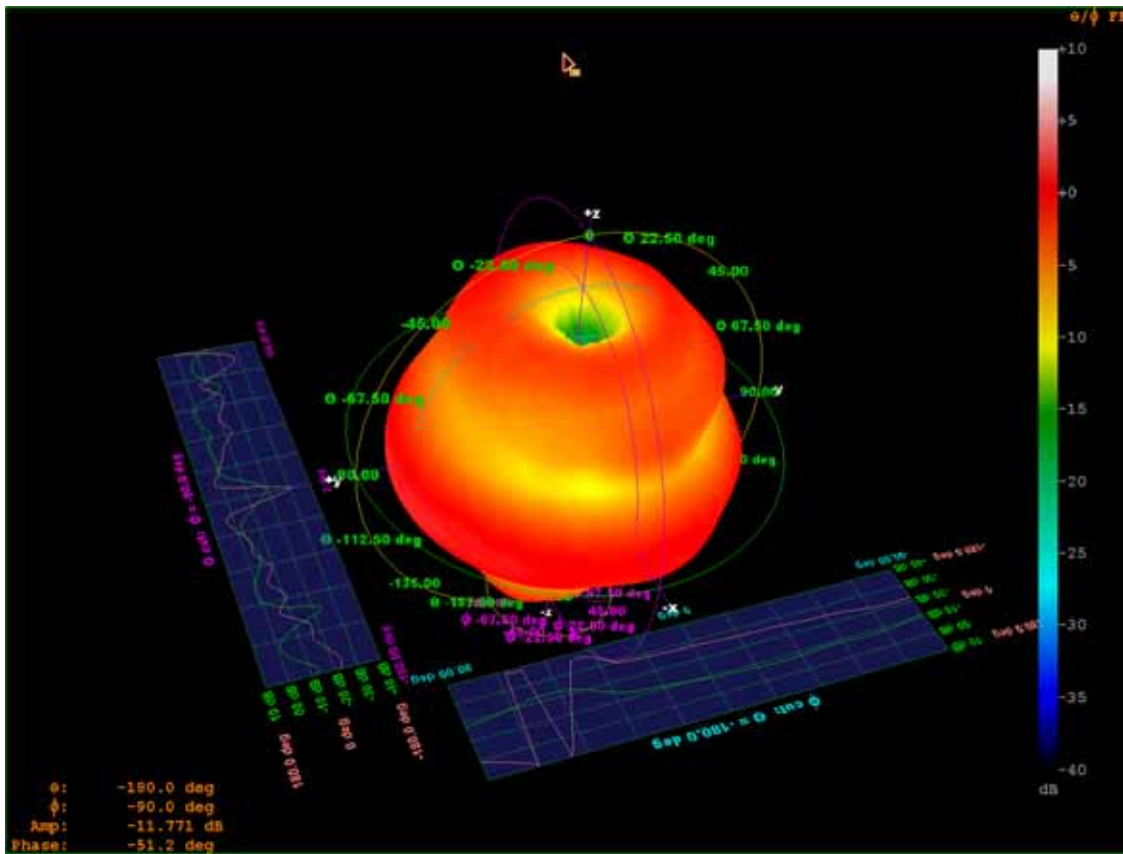

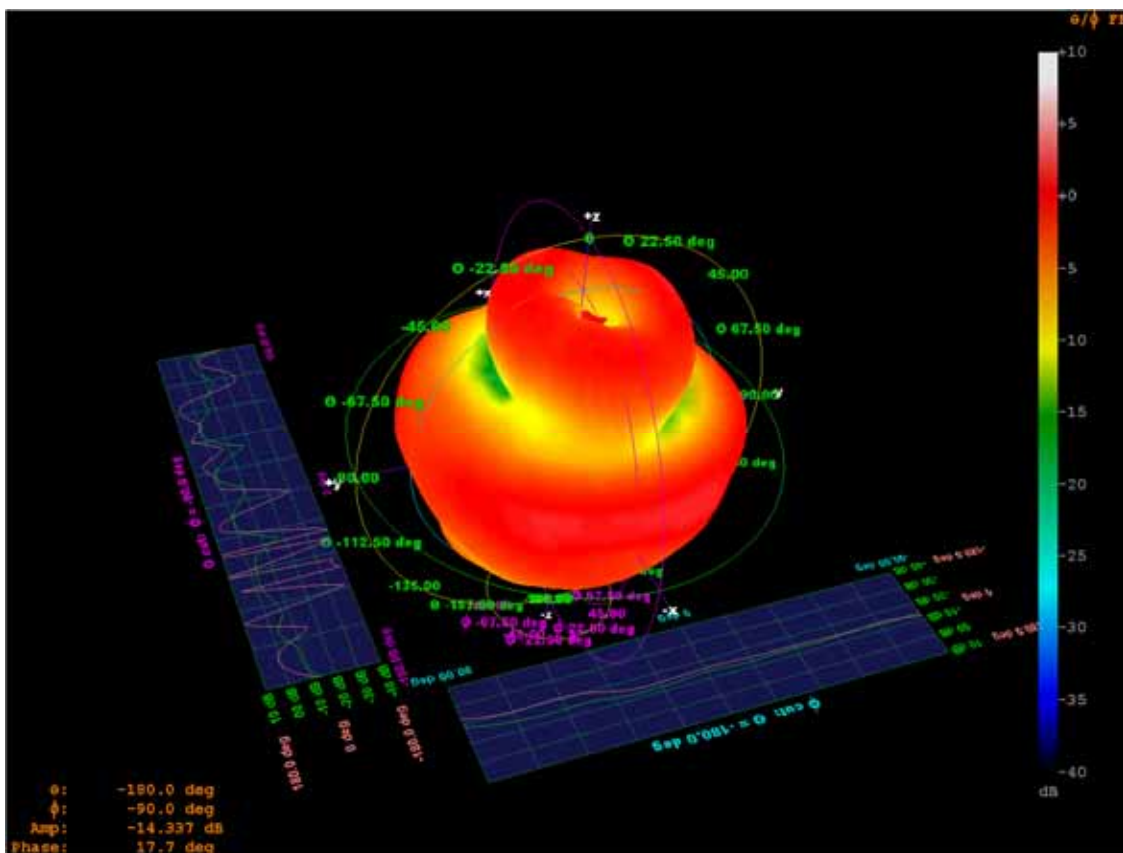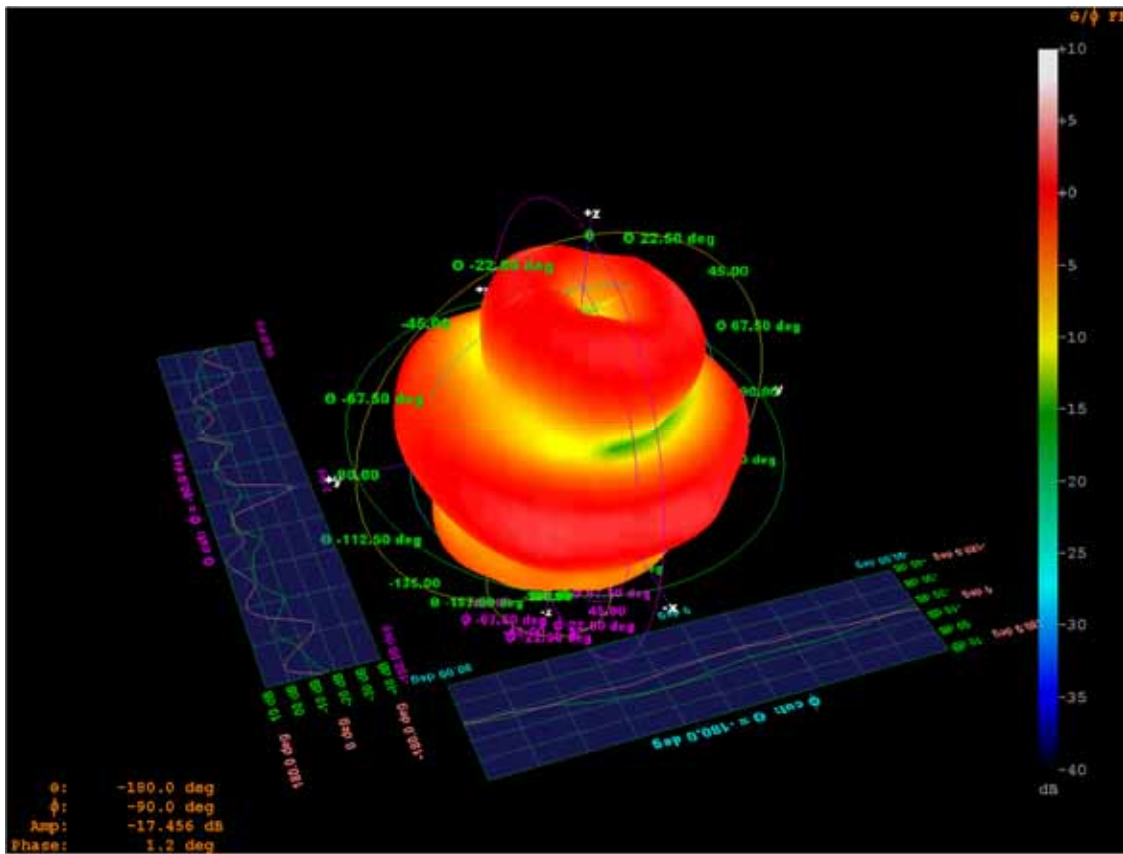

Frequency(MHz)	X-Z plane(Phi=0)		Y-Z plane(Phi=90)		X-Y plane(Theta=90)		Gain-3D (H+V) dBi	Efficiency (%)
	Peak Gain (H+V)	Avg. Gain (H+V)	Peak Gain (H+V)	Avg. Gain (H+V)	Peak Gain (H+V)	Avg. Gain (H+V)		
2400	3	-3.2	3.1	-2.7	2.6	1.8	3.1	82
2450	3.2	-3.3	3.5	-2.7	2.6	1.8	3.5	88
2500	3.8	-3.1	3.9	-2.5	2.7	1.9	3.9	87
4900	2.4	-4.9	-0.7	-5.7	0.7	-1.5	2.4	39
5150	2.1	-3.1	2.6	-2.9	2.3	0.8	2.7	66
5350	3.4	-2.1	3.7	-2.1	2.6	0.5	3.7	72
5750	2.9	-2.3	3.3	-2.7	3.4	1.6	4.2	74
5825	2.9	-2.1	3	-2.9	2.6	0.8	4.4	72