


Overview




Note: we recommend that you try middle EarGel first as it fits most people.




How to Wear

Gently push EarBud into ear canal and adjust its end towards your mouth then shake your head to check its stability.

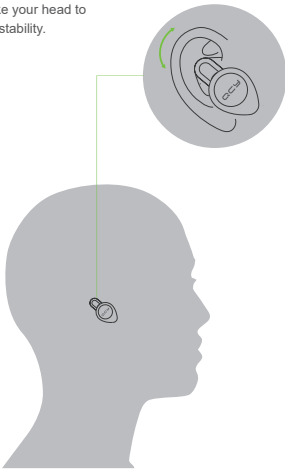

How to Connect

Maiden pairing: once powering on, earphone will auto enter pairing mode (LED blinks red and blue). Non-maiden pairing: power off the earphone then hold MFB for 5s to enter pairing mode.



On cellphone, search for QCY-J11 and tap to connect (Earphone will auto reconnect to the last device in connectivity records, if any.)



How to Charge

Low battery will be warned by voice prompt. (LED will be solid red when charging and turn to blue once fully charged.)



Function

Power-on
Hold MFB for 2s(LED will be blue for 1s).

Power-off
Hold MFB for 3s(LED will be red for 2s).

Answer/End Call
Tap MFB to answer incoming call and tap again to end it.

Ignore Call
Hold MFB for 1s to ignore incoming call.

Mute on/off
When calling, double tap MFB.

Pause/Play
When playing, tap MFB to pause and tap again to play.

Operation

Skip Track Forward
When playing, double tap MFB.

Voice Assistant
When standby, hold MFB for 1s to activate voice assistant (like Siri).

Switch Audio Output
When calling, hold MFB for 1s to switch audio output between earphone and cellphone.

Multi-point Connectivity

1. Refer How to Connect to build connectivity with phone1 then power off Bluetooth earphone.
2. Hold MFB until LED blinks red and blue. On phone2, search for QCY-J11 and tap to connect.
3. On phone1, search for QCY-J11 and tap to finish multi-point connectivity.

Three-way Calling & Switch

Tap MFB to answer incoming call. If another call is coming in sync, tap MFB to put the first call on hold while activate the second call. Double tap MFB to switch between active call and held call.

Basic Parameter

Model:J11
Bluetooth version:V4.1
Bluetooth profile:HFP,HSP,AVRCP,A2DP
Operation range: 10m(crow-fly distance with no obstacle)
Noise isolation: DSP
Standby time: approx. 70hr
Talk time: approx. 3hr
Charging time: approx. 1 or 2hr
Battery type: li-ion
Battery capacity:3.7V 55mAh
Input Parameter:5V 70mA
(All technical specifications shall be subject to practical performance)

Perform standard:Q/HL 2-2017

Manufacturer:
Dongguan Hele Electronics Co., Ltd.
Address: Dalingya Industrial Zone, Daojiao
Town, Dongguan City, Guangdong,
China.

Hazardous substances and their contents in the item

Part Name	Hazardous Substances					
	(Pb)	(Hg)	(Cd)	(Cr(VI))	(PBB)	(PBDE)
Main body	X	O	O	O	O	O
Battery	O	O	O	O	O	O
Ear tips	O	O	O	O	O	O
Accessories	O	O	O	O	O	O
Charging cable	X	O	O	O	O	O

This form is made by SJ/T 11384 regulation.
O: means that hazardous substance content in the homogeneous materials of this part is within the limits of GB/T 26572 regulation.
X: means that hazardous substance content in, at least, one certain homogeneous material of this part is beyond the limits of GB/T 26572 regulation.

Lifespan:

As the booklet states, the eco-lifespan of the item is 5 years while using it in normal ways. During the period, no dangerous material will be leaked. The item must be recycled by the local law.

Notes: Please arrange using time properly as your hearing may be damaged by using the device for a long time.

Tips

1. Before using the headset, please read the manual carefully and keep it for future references.
2. The headset need to be fully charged prior to first-time use.
3. If the headset is left unused for over two weeks, please recharge it periodically.
4. Please use the chargers made by qualified manufacturer.
5. If the headset cannot be found by your phone, please check whether it is in pairing mode; if left unconnected for a long while, the headset will exit pairing mode, please re-enter the mode; if a procedure error of your phone occurs, reboot it; if a procedure error of the headset occurs, reboot or reset it.

Caveats

1. Never disassemble or modify your headset for any reasons to avoid any damages and danger.
2. Do not store the headset in extreme temperatures (under 0°C or over 45°C).
3. Avoid using the indicator close to the eyes of children or animals.
4. Do not use this headset during a thunderstorm to avoid irregular function and increased risk of electric shock.
5. Do not use harsh chemicals or strong detergents to clean the headset.
6. Keep the headset dry.

Warranty Card

Warranty Period
12 months after you purchase this item.(or you may inquire your local shopper for more details.)
Free Service:
Supposing any defects caused by quality issues occur within the warranty period, please take this warranty card and purchase receipts to your distributor for free repairing service.

Model Number:
Date of Purchasing:
User's Name:
User's Phone:
User's Address:
Shop's Name:
Shop's Address:
Comments:

Free repairing will not be accessed under following circumstances:
1. Damages caused unauthorized disassembly.
2. Defects or physical damages caused by leaking or dropping off.
3. Damages by act of God. Supposing your item is within any damages or defects except the above circumstances, please return to us or your distributor for free repairing.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

