



# Hearing Aid Compatibility (HAC) T-Coil Test Report

**APPLICANT** : BLU Products, Inc.  
**PRODUCT NAME** : Smart Phone  
**MODEL NAME** : G53  
**BRAND NAME** : BLU  
**FCC ID** : YHLBLUG53  
**STANDARD(S)** : FCC 47 CFR Part 20(20.19)  
ANSI C63.19-2011  
**RECEIPT DATE** : 2023-04-18  
**TEST DATE** : 2023-04-24 to 2023-05-19  
**ISSUE DATE** : 2023-06-20

Edited by:

*Xie Yiyun*

Xie Yiyun (Rapporteur)

Approved by:

*Shen Junsheng*

Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





## DIRECTORY

|                                                   |    |
|---------------------------------------------------|----|
| 1. Attestation of Testing Summary .....           | 4  |
| 2. Technical Information .....                    | 5  |
| 2.1. Applicant and Manufacturer Information ..... | 5  |
| 2.2. Equipment under Test (EUT) Description ..... | 5  |
| 2.3. Photographs of the EUT .....                 | 7  |
| 2.4. Applied Reference Documents .....            | 7  |
| 3. Air Interface and Operating Mode .....         | 8  |
| 4. Measurement standards for T-Coil .....         | 10 |
| 4.1. T-Coil Signal Quality Categories .....       | 10 |
| 4.2. Frequency Response .....                     | 10 |
| 5. HAC (T-Coil) Measurement System .....          | 12 |
| 5.1. T-Coil Measurement Setup .....               | 12 |
| 5.2. System Validation .....                      | 13 |
| 5.3. Base Station Gain Factor .....               | 14 |
| 6. T-Coil Measurement Procedure .....             | 16 |
| 6.1. General Guidance .....                       | 16 |
| 6.2. T-Coil Test Flow .....                       | 18 |
| 6.3. Information of EUT Test Position .....       | 19 |
| 7. Test Equipment List .....                      | 20 |
| 8. T-Coil Testing for CMRS Voice .....            | 21 |
| 8.1. Test Guidance .....                          | 21 |
| 8.2. Test Results .....                           | 21 |
| 9. T-Coil Testing for CMRS IP Voice .....         | 23 |
| 9.1. T-Coil Testing for VoLTE .....               | 23 |
| 9.2. T-Coil Testing for VoWi-Fi .....             | 25 |
| 10. Uncertainty Assessment .....                  | 27 |



REPORT No.: SZ23040220S03

|                                             |           |
|---------------------------------------------|-----------|
| <b>Annex A General Information.....</b>     | <b>28</b> |
| <b>Annex B Test Setup Photos</b>            |           |
| <b>Annex C Plots of T-Coil Test Results</b> |           |
| <b>Annex D DASY Calibration Certificate</b> |           |

| Change History |            |                   |
|----------------|------------|-------------------|
| Version        | Date       | Reason for Change |
| 1.0            | 2023-06-20 | First edition     |
|                |            |                   |



# 1. Attestation of Testing Summary

| Air Interface                | Frequency Band   | T-Rating | Frequency Response | Magnetic Intensity |
|------------------------------|------------------|----------|--------------------|--------------------|
| GSM CMRS Voice               | GSM850           | T3       | PASS               | PASS               |
|                              | GSM1900          | T3       | PASS               | PASS               |
| UMTS CMRS Voice              | Band II          | T4       | PASS               | PASS               |
|                              | Band IV          | T4       | PASS               | PASS               |
|                              | Band V           | T4       | PASS               | PASS               |
| VoLTE                        | Band 2           | T4       | PASS               | PASS               |
|                              | Band 4           | T4       | PASS               | PASS               |
|                              | Band 5           | T4       | PASS               | PASS               |
|                              | Band 7           | T4       | PASS               | PASS               |
|                              | Band 12          | T4       | PASS               | PASS               |
|                              | Band 17          | T4       | PASS               | PASS               |
|                              | Band 66          | T4       | PASS               | PASS               |
| VoWi-Fi                      | 2.4GHz           | T4       | PASS               | PASS               |
|                              | 5.2GHz(U-NII-1)  | T4       | PASS               | PASS               |
|                              | 5.3GHz(U-NII-2A) | T4       | PASS               | PASS               |
|                              | 5.5GHz(U-NII-2C) | T4       | PASS               | PASS               |
|                              | 5.8GHz(U-NII-3)  | T4       | PASS               | PASS               |
| <b>HAC Rate Category: T3</b> |                  |          |                    |                    |

**Note:**

1. It is compliance with HAC limits for this device that specified in FCC 47 CFR Part 20(20.19) and ANSI C63.19.
2. When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



## 2. Technical Information

**Note:** Provide by applicant.

### 2.1. Applicant and Manufacturer Information

|                              |                                                      |
|------------------------------|------------------------------------------------------|
| <b>Applicant:</b>            | BLU Products, Inc.                                   |
| <b>Applicant Address:</b>    | 8600 NW 36th Street, Suite #200 Doral, FL 33166, USA |
| <b>Manufacturer:</b>         | BLU Products, Inc.                                   |
| <b>Manufacturer Address:</b> | 8600 NW 36th Street, Suite #200 Doral, FL 33166, USA |

### 2.2. Equipment under Test (EUT) Description

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Name:</b>     | Smart Phone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>EUT IMEI:</b>         | 867696067158201/01<br>112222223333316/01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Hardware Version:</b> | FS310-MB-V5.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Software Version:</b> | BLU_G0850_V13.0.02.00_GENERIC_03-04-2023_10:05                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Frequency Bands:</b>  | GSM 850: 824 MHz ~ 849 MHz<br>GSM 1900: 1850 MHz ~ 1910 MHz<br>WCDMA Band II: 1850 MHz ~ 1910 MHz<br>WCDMA Band IV: 1710 MHz ~ 1755 MHz<br>WCDMA Band V: 824 MHz ~ 849 MHz<br>LTE Band 2: 1850 MHz ~ 1910 MHz<br>LTE Band 4: 1710 MHz ~ 1755 MHz<br>LTE Band 5: 824 MHz ~ 849 MHz<br>LTE Band 7: 2500MHz ~ 2570 MHz<br>LTE Band 12: 699 MHz ~ 716 MHz<br>LTE Band 17: 704 MHz ~ 716 MHz<br>LTE Band 66: 1710 MHz ~ 1780 MHz<br>LTE Band 71: 663 MHz ~ 698 MHz<br>WLAN 2.4GHz: 2412 MHz ~ 2472 MHz<br>WLAN 5.2GHz: 5180 MHz ~ 5240 MHz<br>WLAN 5.3GHz: 5260 MHz ~ 5320 MHz<br>WLAN 5.5GHz: 5500 MHz ~ 5700 MHz<br>WLAN 5.8GHz: 5745 MHz ~ 5825 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz |
| <b>Modulation Mode:</b>  | GSM/GPRS: GMSK<br>EDGE: 8PSK<br>WCDMA: QPSK, 16QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



|                               |                                                                                                                                                                                  |               |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
|                               | LTE: QPSK, 16QAM<br>802.11b: DSSS<br>802.11a/g/n-HT20/HT40/ac-VHT20/40/80: OFDM<br>BR+EDR: GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps), 8-DPSK(3Mbps)<br>Bluetooth LE: GFSK(1Mbps, 2Mbps) |               |
| <b>VoLTE Mode:</b>            | Support                                                                                                                                                                          |               |
| <b>VoWi-Fi Mode:</b>          | Support                                                                                                                                                                          |               |
| <b>SIM Cards Description:</b> | SIM 1                                                                                                                                                                            | GSM+WCDMA+LTE |
|                               | SIM 2                                                                                                                                                                            | GSM+WCDMA+LTE |

**Note:** For more detailed description, please refer to specification or user manual supplied by the applicant and/or manufacturer.



## 2.3. Photographs of the EUT

Please refer to the External Photos for the Photos of the EUT

## 2.4. Applied Reference Documents

Leading reference documents for testing:

| No.                                                                                                                                                                                                                                   | Identity                  | Document Title                                                                                                              | Method determination<br>Remark |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| 1                                                                                                                                                                                                                                     | FCC 47 CFR Part 20(20.19) | Hearing aid-compatible mobile handsets.                                                                                     | No deviation                   |
| 2                                                                                                                                                                                                                                     | ANSI C63.19-2011          | American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids | No deviation                   |
| 3                                                                                                                                                                                                                                     | KDB 285076 D01v06r03      | HAC Guidance                                                                                                                | No deviation                   |
| 4                                                                                                                                                                                                                                     | KDB 285076 D02v04         | T-Coil testing for CMRS IP                                                                                                  | No deviation                   |
| 5                                                                                                                                                                                                                                     | KDB 285076 D03V01r06      | HAC FAQ                                                                                                                     | No deviation                   |
| <b>Note 1:</b> Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table. |                           |                                                                                                                             |                                |

### 3. Air Interface and Operating Mode

| Air Interface | Band            | Transport Type | Simultaneous Transmitter | Name of Voice Service | Power Reduction |
|---------------|-----------------|----------------|--------------------------|-----------------------|-----------------|
| GSM           | GSM850          | VO             | Wi-Fi & BT               | CMRS Voice            | No              |
|               | GSM1900         |                |                          |                       | No              |
| WCDMA (UMTS)  | Band II         | VO             | Wi-Fi & BT               | CMRS Voice            | No              |
|               | Band IV         |                |                          |                       | No              |
|               | Band V          |                |                          |                       | No              |
| LTE           | Band 2          | VD             | Wi-Fi & BT               | VoLTE                 | No              |
|               | Band 4          |                |                          |                       | No              |
|               | Band 5          |                |                          |                       | No              |
|               | Band 7          |                |                          |                       | No              |
|               | Band 12         |                |                          |                       | No              |
|               | Band 17         |                |                          |                       | No              |
|               | Band 66         |                |                          |                       | No              |
|               | Band 71         |                |                          |                       | No              |
| Wi-Fi         | 2450            | VD             | GSM,UMTS, LTE            | Wi-Fi Calling         | No              |
|               | 5200 (U-NII-1)  |                |                          |                       | No              |
|               | 5300 (U-NII-2A) |                |                          |                       | No              |
|               | 5500 (U-NII-2C) |                |                          |                       | No              |
|               | 5800 (U-NII-3)  |                |                          |                       | No              |
| BT            | 2450            | DT             | GSM,UMTS, LTE            | N/A                   | No              |

**Where:**

VO=Voice Only

DT=Digital Transport only

VD=CMRS and IP Voice Service over Digital Transport

BT=Bluetooth

\* Ref Lev in accordance with 7.4.2.1 of ANSI C63.19-2011 and the July 2012 VoLTE interpretation

\*\* Ref Lev -20 dBm0

\*\*\* Ref Lev XYNet established by KDB Inquiry NNNNNN @ -16 dBm0

**Note:**
**1) Air Interface/Band MHz:** List of all air interfaces and bands supported by the handset.

**2) Type: For each air interface, indicate the type of voice transport mode:**

- i. VO = legacy Cellular Voice Service, from Table 7.1 in 7.4.2.1 of ANSI C63.19-2011;
- ii. DT = Digital Transport only (no voice); and
- iii. VD = IP Voice Service over Digital Transport.



- 3) Simultaneous Transmitter:** Indicate any air interface/bands that operate in simultaneous or concurrent service transmission mode.
- 4) Name of Voice Service:** See Q4 in 285076 D03 HAC FAQ for further clarification.
- a) Ref Lev in accordance with 7.4.2.1 of ANSI C63.19-2011 and the July 2012 VoLTE interpretation
  - b) \*\* Ref Lev -20 dBm0
  - c) \*\*\* Ref Lev XY Net established by KDB Inquiry NNNNNN @ -16 dBm0
- 5) LTE-FDD Band 71:** The frequency range of LTE-FDD Band 71 is out of ANSI C63.19-2011, therefore T-Coil for VoLTE of LTE Band 71 is not required.

## 4. Measurement standards for T-Coil

### 4.1. T-Coil Signal Quality Categories

This sub clause specifies the signal-to-noise quality requirement for the intended T-Coil signal from a WD. The worst signal to noise of the two T-Coil signal measurements, as determined in Clause 7, shall be used to determine the T-Coil mode category per Table 2.1.

Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criterion that can be measured is the RF immunity in T-Coil mode. The RF measurements made for the T-Coil evaluation are used to assign the category T1 through T4. The limitation is given in Table 1. This establishes the RF environment presented by the WD to a hearing aid.

| Category    | Telephone parameters WD signal quality<br>[(signal + noise)-to-noise ratio in decibels] |
|-------------|-----------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                           |
| Category T2 | 10 dB to 20 dB                                                                          |
| Category T3 | 20 dB to 30 dB                                                                          |
| Category T4 | >30 dB                                                                                  |


Table 4.1 T-Coil signal-to-noise categories

### 4.2. Frequency Response

This sub clause describes the relationship between the M rating, which is based on the RF emission tests performed in Clause 5, and the T rating, which is based on the T-Coil tests performed in Clause 7.


If the WD achieves an acceptable category rating per ANSI C63.19-2011 section 8.2, as determined by the appropriate regulating authority, it becomes a candidate for the T designation (see ANSI C63.19-2011 section 8.3.4).

The frequency response of the perpendicular component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz.

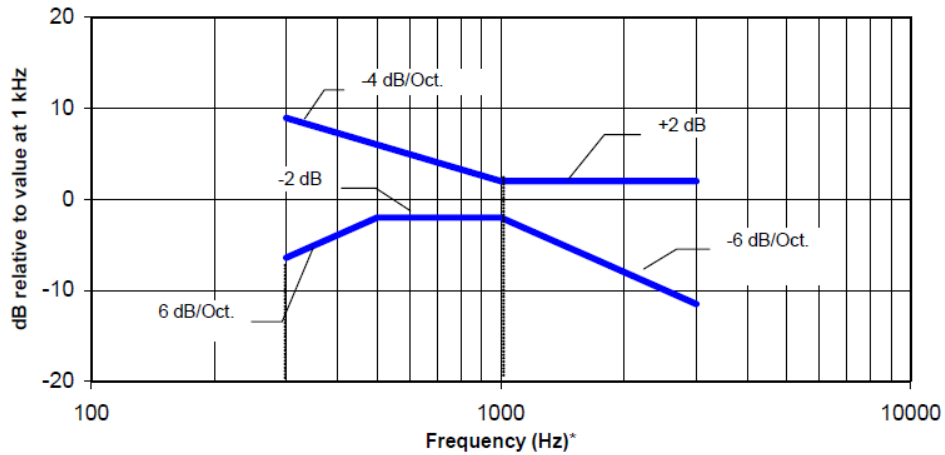

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Fig 4.1 Magnetic field frequency response for WDs with field strength  $\leq -15$  dB (A/m) at 1 kHz**

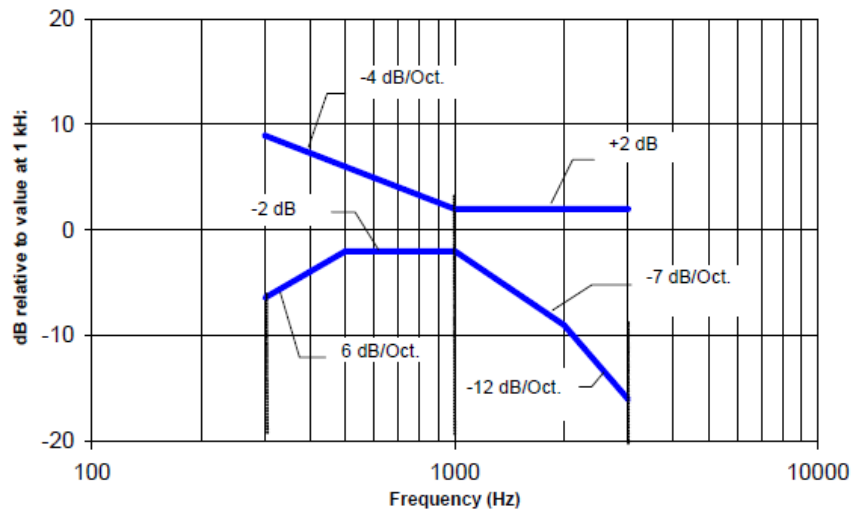

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Fig 4.2 Magnetic field frequency response for WDs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

## 5. HAC (T-Coil) Measurement System

### 5.1.T-Coil Measurement Setup

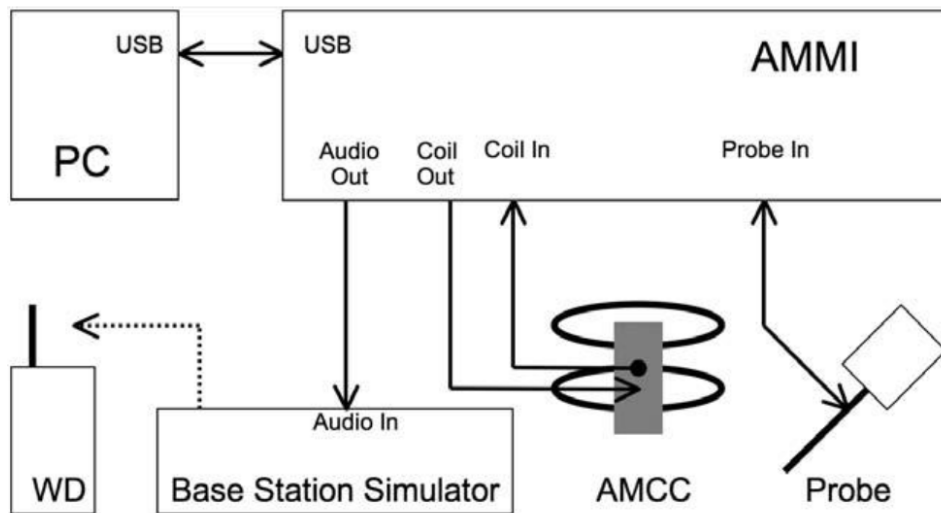


Fig 5.1 SPEAG T-Coil System Configurations

**Note:**


- 1、Per C63 & KDB 285076 D02v03, define the all applicable input audio level:
  - 1) GSM input level: -16dBm0
  - 2) UMTS input level: -16dBm0
  - 3) VoLTE input level: -16dBm0
  - 4) VoWiFi input level: -20dBm0
  - 5) OTT Voip input level: -20dBm0
- 2、A communication base station CMU200 is used for testing GSM / UMTS / CDMA, and it's "Decode Cal" and "Codec Cal" with audio option B52 and B85 to set the correct audio input level.
- 3、CMU200 is able to output 1KHz audio signal equivalent to 3.14dBm0 at "Decode Cal", the signal reference is used to adjust the AMMI gain setting to reach -16dBm0 for GSM/UMTS and -18dBm0 for CDMA.
- 4、The callbox of CMW500 is used for VoLTE over IMS and VoWiFi over IMS T-Coil measurement, the data application unit of the CMW500 was used to simulate the IP multimedia subsystem server. And the CMW500 can be manually configured to ensure and control the speech input level result is -16dBm0 for VoLTE and -20dBm0 for VoWiFi when the device during the IMS connection.



## 5.2. System Validation

For correct and calibrated measurement of the voltages and ABM filed, DASY will perform a calibration job follows below:

1. In phase 1, the audio output is switched off, and a 200 mW symmetric rectangular signal of 1 kHz is connected directly to both channels of the sampling unit(Coil in, Probe in).
2. In phase 2, the audio output is off, and a 20 mW symmetric 100 Hz signal is internally connected. The signals during phases 1 and 2 are available at the output on the rear panel of the AMMI. However, the output must not be loaded, in order to avoid influencing the calibration, an RMS voltmeter would indicate 100mWRMS, during the second phase after the first two phases, the two input channels are both calibrated for absolute ants of voltages. The resulting factors are displayed above the multi-meter window.
3. After phases 1 and 2, the input channels are calibrated to measure exact voltages. This is required to use the inputs for measuring voltages with their peak and RMS value.
4. In phase 3, a mulit-sine signal covering each third-octave band from 50 Hz to 10 kHz is generated and applied to both audio outputs. The probe should be positioned in the center of the AMCC and aligned in the z-direction, the filed orientation of the AMCC. The "Coil In" channel is measuring the voltage over the AMCC internal shunt, which is proportional to the magnetic filed in the AMCC. At the same time, the "Probe In" channel samples the amplified signal picked up by the probe coil and provides a numerical integrator. The radio of two voltages in each third-octave filter leads to the spectral representation over the frequency band of interest. The coil signal is scaled in dBV, and the probe signal is first integrated and normalized to show dB A/m. The radio probe-to-coil at the frequency of 1KHz is the sensitivity which will be used in the consecutive T-coil jobs,.
5. The ABM validation during testing as below.

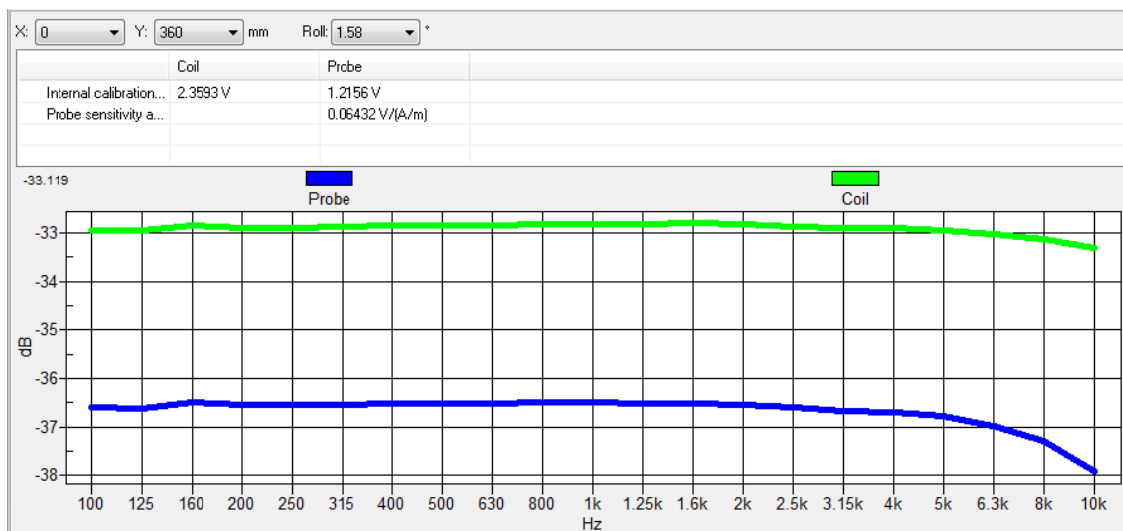

### 5.3. Base Station Gain Factor

1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal.
2. The calculation formula as below showing how to determine the input level for air interface for this device.

The predefined signal types have the following differences / factors compared to the 1kHz sine signal:

| Signal<br>[file name]         | Duration<br>[s] | Peak-to-<br>RMS [dB] | RMS<br>[dB] | Required gain<br>factor *) | Gain<br>setting |
|-------------------------------|-----------------|----------------------|-------------|----------------------------|-----------------|
| 1kHz sine                     | ---             | 3.0                  | 0.0         | 1.00                       |                 |
| 48k_1.025kHz_10s.wav          | 10              | 3.0                  | 0.0         | 1.00                       |                 |
| 48k_1kHz_3.15kHz_10s.wav      | 10              | 6.0                  | -3.0        | 1.42                       |                 |
| 48k_315Hz_1kHz_10s.wav        | 10              | 6.0                  | -2.9        | 1.40                       |                 |
| 48k_csek_8k_441_white_10s.wav | 10              | 13.8                 | -10.5       | 3.34                       |                 |
| 48k_multisine_50-5000_10s.wav | 10              | 11.1                 | -7.9        | 2.49                       |                 |
| 48k_voice_1kHz_1s.wav         | 1               | 16.2                 | -12.7       | 4.33                       |                 |
| 48k_voice_300-3000_2s.wav     | 2               | 21.6                 | -18.6       | 8.48                       |                 |

(\*) The gain for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal.

Insert the gain applicable for your setup in the last column of the table.

#### CMU200 for GSM WCDMA

##### <Input level determination >

| Gain Value | 20* log(gain) | AMCC Coil in | Level  |
|------------|---------------|--------------|--------|
| (linear)   | dB            | (dBv RMS)    | dBm0   |
| -          | -             | -2.44        | 3.14   |
| 10         | 20            | -20.96       | -15.38 |
| 9.31       | 19.38         | -21.58       | -16    |

##### <Base station gain factor calculation>

| Signal Type        | Duration<br>(s) | Peak to<br>RMS<br>(dB) | RMS<br>(dB) | Gain Factor | Gain Setting |
|--------------------|-----------------|------------------------|-------------|-------------|--------------|
| 1kHz sine          | -               | 3                      | 0           | 1           | 8.17         |
| 48k_voice_1kHz     | 1               | 16.2                   | -12.7       | 4.33        | 40.32        |
| 48k_voice_300-3000 | 2               | 21.6                   | -18.6       | 8.48        | 78.96        |



## CMW500 for VoLTE

## &lt;Input level determination&gt;

| Gain Value | dBm  | Full scal Voltage | dB    | AMMI audio out (dBv) (RMS) | AMCC Coil Out (dBv) (RMS) |
|------------|------|-------------------|-------|----------------------------|---------------------------|
| N/A        | 3.14 | 1.5               | N/A   | 0.51                       | N/A                       |
| 100        | 5.61 | N/A               | 40    | 2.98                       | 3.13                      |
| 8.31       | -16  | N/A               | 18.39 | N/A                        | -18.48                    |

## &lt;Base station gain factor calculation&gt;

| Signal Type        | Duration (s) | Peak to RMS (dB) | RMS (dB) | Gain Factor | Gain Setting |
|--------------------|--------------|------------------|----------|-------------|--------------|
| 48k_voice_1kHz     | 1            | 16.2             | -12.7    | 4.33        | 35.98        |
| 48k_voice_300-3000 | 2            | 21.6             | -18.6    | 8.48        | 70.46        |



## 6. T-Coil Measurement Procedure

### 6.1. General Guidance

T-Coil measurement follows ANSI C63.19-2011, Section 7.4

This section describes the procedures used to measure the ABM (T-Coil) performance of the WD. In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. To assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for each measurement position. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.

Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load, there might still be RF leakage from the WD, which can interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be performed with the WD operating on battery power with an appropriate normal speech audio signal input level given in ANSI C63.19-2011 Table 7.1. If the device display can be turned off during a phone call, then that may be done during the measurement as well.

Measurement shall be performed at two locations specified in ANSI C63.19-2011 A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage.

The following steps summarize the basic test flow for determining ABM1 and ABM2. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.

- 1) A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil. Measure the emissions and confirm that they are within the specified tolerance.
- 2) Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in ANSI C63.19-2011 clause 7.3.1.
- 3) The drive level to the WD is set such that the reference input level specified in ANSI C63.19-2011 Table 7.1 is input to the base station simulator (or manufacturer's test mode equivalent) in 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at  $f = 1$  kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in ANSI C63.19-2011 clause 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an



alternative nearby reference audio signal frequency may be used. The same drive level shall be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.

- 4) Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in ANSI C63.19-2011 clause 7.4.4.1.1 and 7.4.4.2.
- 5) At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at  $f_i$ ) as described in ANSI C63.19-2011 clause 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency ( $f_i$ ) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band. Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)
- 6) All Measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in ANSI C63.19-2011 clause 7.3.1.
- 7) At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in ANSI C63.19-2011 clause 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality). Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on ANSI C63.19-2011 Table 8.5.

## 6.2. T-Coil Test Flow

This section follows ANSI C63.19-2011 section 7.4.1:

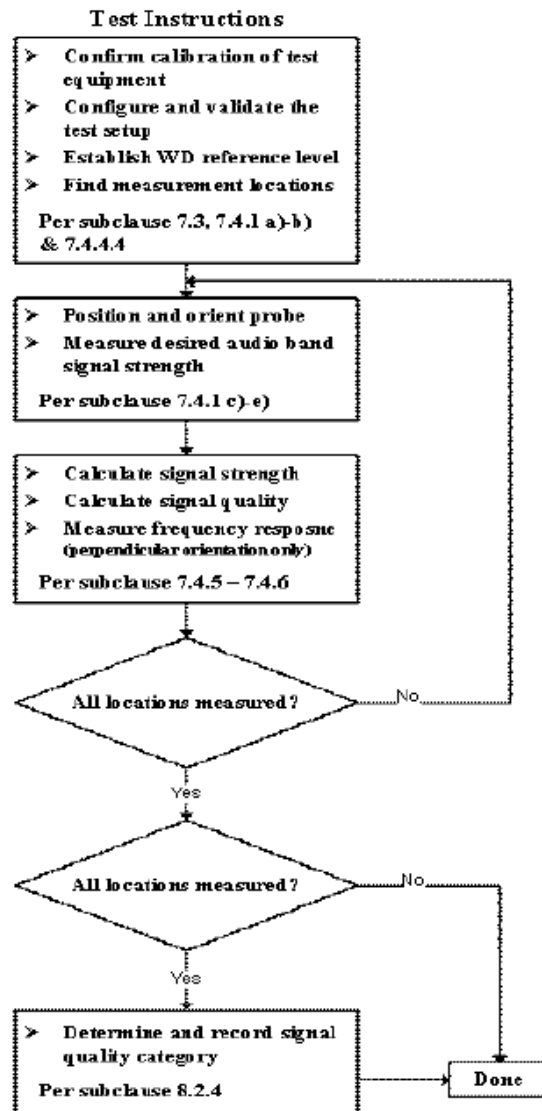



Fig 6.1 WD T-Coil signal test flowchart

### 6.3.Information of EUT Test Position

Fig2.2 illustrates the measurement locations and reference plane to be used for the T-Coil measurements.

And measurement setup follows:

- 1、 The scan area is 5cm\*5cm.
- 2、 The area is centered on the audio frequency output transducer of the EUT.
- 3、 The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It's parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which in normal handset use, rests against the ear.
- 4、 The measurement plane is parallel to, and 10mm in front of the reference plane.

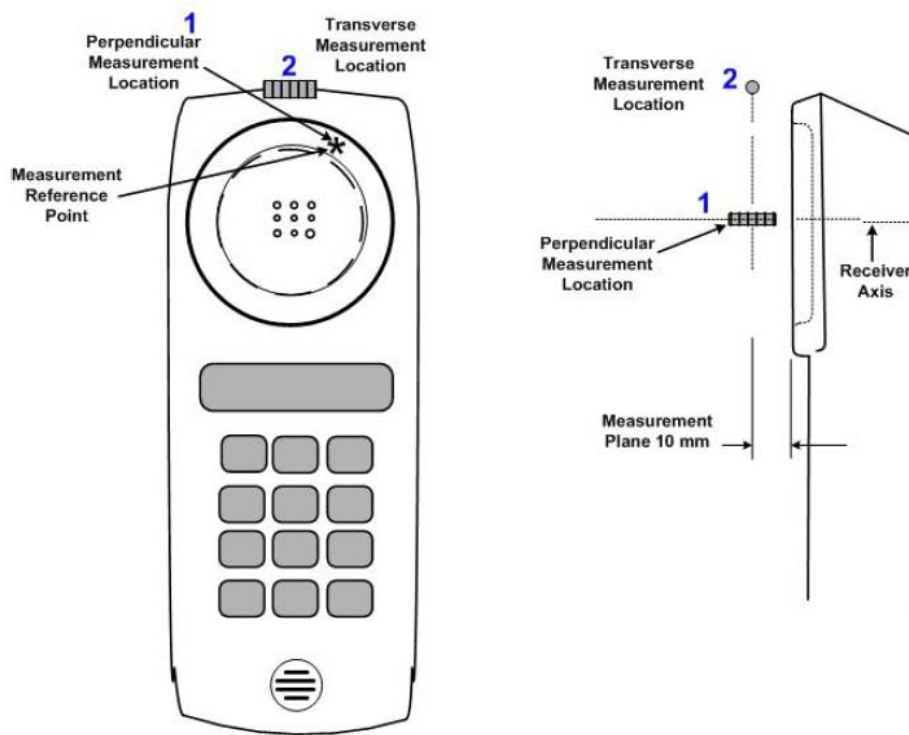

**Fig 6.2 A typical EUT reference and plane for T-Coil measurement**



REPORT No.: SZ23040220S03

## 7. Test Equipment List

| Manufacturer | Name of Equipment               | Type/Model | Serial No./<br>SW Version | Calibration |            |
|--------------|---------------------------------|------------|---------------------------|-------------|------------|
|              |                                 |            |                           | Last Cal.   | Due Date   |
| SPEAG        | Audio Magnetic 1D Field Probe   | AM1DV3     | 3128                      | 2022.07.19  | 2023.07.18 |
| SPEAG        | Audio Magnetic Calibration Coil | AMCC       | 1044                      | NCR         | NCR        |
| SPEAG        | Audio Measuring Instrument      | AMMI       | 1032                      | NCR         | NCR        |
| SPEAG        | Audio Holder                    | N/A        | 1094                      | NCR         | NCR        |
| SPEAG        | Data Acquisition Electronics    | DAE4       | 480                       | 2022.06.22  | 2023.06.21 |
| R&S          | Network Emulator                | CMW500     | 165755                    | 2023.02.09  | 2024.02.08 |
| R&S          | Base Station                    | CMU200     | 107082                    | 2022.07.04  | 2023.07.03 |

## 8. T-Coil Testing for CMRS Voice

### 8.1. Test Guidance

1. The middle channel of each frequency band is used for T-Coil testing according ANSI C63.19 2011.
2. For VoLTE radio configuration investigation is choose either one codec and an investigation was performed on all frequency band, data rates and modulations and RB configuration to determine the radio configuration to be used for testing, the following tests results which the worst case configuration would be remarked to be used for the testing for the handset.
3. According to KDB 285076, reporting results involves a two-step process: (1) Codec Investigation to determine the worst-case codec for each voice service, and (2) Air Interface Investigation. Using the worst-case codec for a voice service, a range of channels and bands shall be tested.

### 8.2. Test Results

#### ➤ GSM Test Results

| Air Interface | Mode      | Channel | Probe Position  | ABM1<br>dB (A/m) | ABM2<br>dB (A/m) | Signal<br>Quality<br>(dB) | T<br>Rating | Frequency<br>Response |
|---------------|-----------|---------|-----------------|------------------|------------------|---------------------------|-------------|-----------------------|
| GSM850        | GSM Voice | 189     | Axial (Z)       | 0.07             | -26.41           | 26.48                     | T3          | PASS                  |
|               |           |         | Transversal (Y) | -10.42           | -37.61           | 27.19                     | T3          |                       |
| GSM1900       | GSM Voice | 661     | Axial (Z)       | 1.58             | -29.21           | 30.79                     | T4          | PASS                  |
|               |           |         | Transversal (Y) | -10.56           | -38.28           | 27.72                     | T3          |                       |

#### ➤ UMTS Test Results

##### <Codec Investigation>

| Air Interface | Modulation          | Channel | Probe Position | ABM1<br>dB (A/m) | ABM2<br>dB (A/m) | Signal<br>Quality<br>(dB) |
|---------------|---------------------|---------|----------------|------------------|------------------|---------------------------|
| WCDMA Band II | AMR 4.75Kbps        | 9400    | Axial (Z)      | -3.52            | -49.33           | 45.81                     |
|               | AMR 7.95Kbps        | 9400    | Axial (Z)      | -3.43            | -49.21           | 45.78                     |
|               | <b>AMR 12.2Kbps</b> | 9400    | Axial (Z)      | -3.99            | -49.36           | 45.37                     |

#### Note:

The highlight part of the worst codec would be used to testing the other air interface.



| Air Interface | Channel | Probe Position  | ABM1<br>dB (A/m) | ABM2<br>dB (A/m) | Signal<br>Quality<br>(dB) | T<br>Rating | Frequency<br>Response |
|---------------|---------|-----------------|------------------|------------------|---------------------------|-------------|-----------------------|
| WCDMA Band II | 9400    | Axial (Z)       | -3.99            | -49.36           | 45.37                     | T4          | PASS                  |
|               |         | Transversal (Y) | -8.83            | -50.80           | 41.97                     | T4          |                       |
| WCDMA Band IV | 1413    | Axial (Z)       | -3.22            | -50.43           | 47.21                     | T4          | PASS                  |
|               |         | Transversal (Y) | -7.01            | -48.78           | 41.77                     | T4          |                       |
| WCDMA Band V  | 4182    | Axial (Z)       | 1.03             | -44.23           | 45.26                     | T4          | PASS                  |
|               |         | Transversal (Y) | -7.49            | -49.63           | 42.14                     | T4          |                       |

**Note:**

The highlight part of the worst codec would be used to testing the other air interface.

## 9. T-Coil Testing for CMRS IP Voice

### 9.1. T-Coil Testing for VoLTE

#### ➤ General Test Guidance

1. The middle channel of each frequency band is used for T-Coil testing to determine the worst HAC T-Coil rating according ANSI C63.19 2011.
2. For VoLTE radio configuration investigation is choose either one codec and an investigation was performed on all frequency band, data rates and modulations and RB configuration to determine the radio configuration to be used for testing, the following tests results which the worst case configuration would be remarked to be used for the testing for the handset.
3. According to KDB 285076, reporting results involves a two-step process:
  - a. Codec Investigation to determine the worst-case codec for each voice service.
  - b. Air Interface Investigation: Using the worst-case codec for a voice service, a range of channels and bands shall be tested.

#### ➤ T-Coil Testing for VoLTE

##### <Radio Configuration Investigation>

| Air Interface | Modulation             | Channel | Probe Position | ABM1 dB (A/m) | ABM2 dB (A/m) | Signal Quality (dB) |
|---------------|------------------------|---------|----------------|---------------|---------------|---------------------|
| LTE Band 2    | <b>QPSK</b> 1RB0 20MHz | 18900   | Axial (Z)      | 0.30          | -43.68        | 43.98               |
|               | 16QAM 1RB0 20MHz       |         | Axial (Z)      | 0.35          | -43.71        | 44.06               |
|               | 64QAM 1RB0 20MHz       |         | Axial (Z)      | 0.41          | -43.86        | 44.27               |

#### Note:

The highlight part of the worst modulation would be applied to air interface testing.

##### <EVS Codec Investigation>

| Code          |       | Channel | ABM 1 (dBA/m) | ABM 2 (dBA/m) | SNR (dB) | Fre. Response |
|---------------|-------|---------|---------------|---------------|----------|---------------|
| NB AMR(Kbps)  | 4.75  | 18900   | 0.37          | -43.81        | 44.18    | PASS          |
|               | 12.2  |         | 0.30          | -43.68        | 43.98    | PASS          |
| WB AMR(Kbps)  | 6.60  |         | 0.41          | -43.66        | 44.07    | PASS          |
|               | 23.85 |         | 0.35          | -43.76        | 44.11    | PASS          |
| EVS SWB(Kbps) | 9.6   |         | 0.39          | -43.79        | 44.18    | PASS          |
|               | 128   |         | 0.42          | -43.85        | 44.27    | PASS          |
| EVS NB(Kbps)  | 5.9   |         | 0.35          | -43.97        | 44.32    | PASS          |
|               | 24.4  |         | 0.41          | -43.85        | 44.26    | PASS          |
| EVS WB(Kbps)  | 5.9   |         | 0.50          | -43.88        | 44.38    | PASS          |
|               | 128   |         | 0.37          | -43.84        | 44.21    | PASS          |



**Note:** The worst codec for WB AMR 12.2Kbps will be applied to air interface investigation.

| Air Interface | Mode       | Channel | Probe Position  | ABM1<br>dB (A/m) | ABM2<br>dB (A/m) | Signal<br>Quality<br>(dB) | T<br>Rating | Frequency<br>Response |
|---------------|------------|---------|-----------------|------------------|------------------|---------------------------|-------------|-----------------------|
| LTE Band 2    | 1RB0 20MHz | 18900   | Axial (Z)       | 0.30             | -43.68           | 43.98                     | T4          | PASS                  |
|               |            |         | Transversal (Y) | -10.23           | -50.98           | 40.75                     | T4          |                       |
| LTE Band 4    | 1RB0 20MHz | 20175   | Axial (Z)       | -4.47            | -48.28           | 43.81                     | T4          | PASS                  |
|               |            |         | Transversal (Y) | -7.41            | -49.53           | 42.12                     | T4          |                       |
| LTE Band 5    | 1RB0 10MHz | 20525   | Axial (Z)       | -4.88            | -51.87           | 46.99                     | T4          | PASS                  |
|               |            |         | Transversal (Y) | -6.38            | -49.61           | 43.23                     | T4          |                       |
| LTE Band 7    | 1RB0 20MHz | 21100   | Axial (Z)       | -4.26            | -48.21           | 43.95                     | T4          | PASS                  |
|               |            |         | Transversal (Y) | -6.75            | -48.62           | 41.87                     | T4          |                       |
| LTE Band 12   | 1RB0 10MHz | 23095   | Axial (Z)       | -4.55            | -51.47           | 46.92                     | T4          | PASS                  |
|               |            |         | Transversal (Y) | -6.36            | -49.17           | 42.81                     | T4          |                       |
| LTE Band 17   | 1RB0 10MHz | 23790   | Axial (Z)       | -3.94            | -51.36           | 47.42                     | T4          | PASS                  |
|               |            |         | Transversal (Y) | -10.60           | -51.78           | 41.18                     | T4          |                       |
| LTE Band 66   | 1RB0 20MHz | 132322  | Axial (Z)       | -4.42            | -48.24           | 43.82                     | T4          | PASS                  |
|               |            |         | Transversal (Y) | -7.17            | -48.65           | 41.48                     | T4          |                       |

## 9.2. T-Coil Testing for VoWi-Fi

### ➤ General Test Guidance

1. The middle channel of each frequency band is used for T-Coil testing according ANSI C63.19 2011.
2. According to KDB 285076, recording the results involves follow process:
  - I. Codec Investigation to determine the worst-case codec for each voice service.
  - II. Air Interface Investigation: Using the worst-case codec for a voice service, a range of channels and bands shall be tested.
3. For VoWi-Fi, the lowest data rate of each wireless system for 2.4G WLAN will be used to testing according to the conducted power list.
4. The T-Coil measurement procedure given of VoWi-Fi should be applied:
 

Step 1: Comparing the output power of the WLAN systems, the maximum output power including tune-up tolerance for 2.4GHz WLAN was selected to perform codec investigation of Z axial, recording the results of ABM1, ABM2, SNR and frequency response at the same time.

Step 2: Per step 1, selecting the worst codec perform air interface investigation of all of the WLAN modes including to 2.4GHz and 5GHz WLAN.

Step 3: Per step 2, selecting the worst SNR of 2.4G WLAN and 5GHz WLAN to perform the T-Coil testing of Z axial and Y transversal and the test results would be recorded in the report.

### ➤ Air Interface Investigation

| Bands       | Wireless System | Data Rate (Mbps) | Channel | ABM 1 (dBA/m) | ABM 2 (dBA/m) | SNR(dB) |
|-------------|-----------------|------------------|---------|---------------|---------------|---------|
| WLAN 2.4GHz | 802.11b         | 1                | 7       | -10.57        | -45.64        | 35.07   |
|             | 802.11g         | 6                | 7       | -5.66         | -40.39        | 34.73   |
|             | 802.11n-HT20    | MCS 0            | 7       | -5.82         | -40.42        | 34.60   |
|             | 802.11n-HT40    | MCS 0            | 7       | -6.14         | -42.13        | 35.99   |
| WLAN 5.2GHz | 802.11a         | 6                | 44      | -12.16        | -43.94        | 31.78   |
| WLAN 5.3GHz | 802.11a         | 6                | 60      | -10.63        | -44.28        | 33.65   |
| WLAN 5.5GHz | 802.11a         | 6                | 120     | -10.67        | -44.42        | 33.75   |
| WLAN 5.8GHz | 802.11a         | 6                | 157     | -5.92         | -39.71        | 33.79   |



➤ **Test Results**

| Air Interface | Mode               | Channel | Probe Position  | ABM1<br>dB (A/m) | ABM2<br>dB (A/m) | SNR<br>(dB) | T<br>Rating | Frequency<br>Response |
|---------------|--------------------|---------|-----------------|------------------|------------------|-------------|-------------|-----------------------|
| WLAN 2.4GHz   | 802.11b            | 7       | Axial (Z)       | -10.57           | -45.64           | 35.07       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -15.62           | -48.88           | 33.26       | T4          |                       |
|               | 802.11g            | 7       | Axial (Z)       | -5.66            | -40.39           | 34.73       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -15.29           | -48.62           | 33.33       | T4          |                       |
|               | 802.11n-HT20       | 7       | Axial (Z)       | -5.82            | -40.42           | 34.60       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -15.27           | -48.81           | 33.54       | T4          |                       |
|               | 802.11n-HT40       | 7       | Axial (Z)       | -6.14            | -42.13           | 35.99       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -15.23           | -48.66           | 33.43       | T4          |                       |
| WLAN 5.2GHz   | 802.11a<br>6Mbps   | 44      | Axial (Z)       | -12.16           | -43.94           | 31.78       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -15.44           | -47.45           | 32.01       | T4          |                       |
| WLAN 5.3GHz   | 802.11a<br>6Mbps   | 60      | Axial (Z)       | -10.63           | -44.28           | 33.65       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -15.48           | -47.12           | 31.64       | T4          |                       |
| WLAN 5.5GHz   | 802.11a<br>6Mbps   | 120     | Axial (Z)       | -10.67           | -44.42           | 33.75       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -15.77           | -47.49           | 31.72       | T4          |                       |
| WLAN 5.8GHz   | 802.11a<br>6Mbps   | 157     | Axial (Z)       | -5.92            | -39.71           | 33.79       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -15.47           | -47.70           | 32.23       | T4          |                       |
| WLAN 5.2GHz   | 802.11n20<br>MCS0  | 44      | Axial (Z)       | -9.14            | -40.57           | 31.43       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -14.28           | -47.03           | 32.75       | T4          |                       |
|               | 802.11n40<br>MCS0  | 46      | Axial (Z)       | -8.82            | -40.86           | 32.04       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -14.58           | -47.44           | 32.86       | T4          |                       |
|               | 802.11ac20<br>MCS0 | 44      | Axial (Z)       | -5.25            | -37.28           | 32.03       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -12.05           | -44.62           | 32.57       | T4          |                       |
|               | 802.11ac40<br>MCS0 | 46      | Axial (Z)       | -6.13            | -38.07           | 31.94       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -12.14           | -45.00           | 32.86       | T4          |                       |
|               | 802.11ac80<br>MCS0 | 42      | Axial (Z)       | -8.60            | -40.86           | 32.26       | T4          | PASS                  |
|               |                    |         | Transversal (Y) | -14.43           | -47.08           | 32.65       | T4          |                       |

**Remark:**

Phone condition: HAC Air on, Backlight off, maximum volume.

## 10. Uncertainty Assessment

| Error Description                  | Uncertainty Value (±%) | Probability | Divisor | (Ci) ABM1 | (Ci) ABM2 | Standard Uncertainty (ABM1) (±%) | Standard Uncertainty (ABM2) (±%) |
|------------------------------------|------------------------|-------------|---------|-----------|-----------|----------------------------------|----------------------------------|
| <b>Probe Sensitivity</b>           |                        |             |         |           |           |                                  |                                  |
| Reference level                    | 3.0                    | N           | 1       | 1         | 1         | 3.0                              | 3.0                              |
| AMCC geometry                      | 0.4                    | R           | 1.732   | 1         | 1         | 0.2                              | 0.2                              |
| AMCC current                       | 1.0                    | R           | 1.732   | 0.7       | 0.7       | 0.6                              | 0.6                              |
| Probe positioning during calibrate | 0.1                    | R           | 1.732   | 1         | 1         | 0.1                              | 0.1                              |
| Noise contribution                 | 0.7                    | R           | 1.732   | 0.0143    | 1         | 0.0                              | 0.4                              |
| Frequency slope                    | 5.9                    | R           | 1.732   | 0.1       | 1         | 0.3                              | 3.5                              |
| <b>Probe System</b>                |                        |             |         |           |           |                                  |                                  |
| Repeatability/drift                | 1.0                    | R           | 1.732   | 1         | 1         | 0.6                              | 0.6                              |
| Linearity/dynamic range            | 0.6                    | R           | 1.732   | 1         | 1         | 0.4                              | 0.4                              |
| Acoustic noise                     | 1.0                    | R           | 1.732   | 0.1       | 1         | 0.1                              | 0.6                              |
| Probe angle                        | 2.3                    | R           | 1.732   | 1         | 1         | 1.4                              | 1.4                              |
| Spectral processing                | 0.9                    | R           | 1.732   | 1         | 1         | 0.5                              | 0.5                              |
| Integration time                   | 0.6                    | N           | 1       | 1         | 5         | 0.6                              | 3.0                              |
| Field disturbance                  | 0.2                    | R           | 1.732   | 1         | 1         | 0.1                              | 0.1                              |
| <b>Test Signal</b>                 |                        |             |         |           |           |                                  |                                  |
| Reference signal spectral response | 0.6                    | R           | 1.732   | 0         | 1         | 0.0                              | 0.4                              |
| <b>Positioning</b>                 |                        |             |         |           |           |                                  |                                  |
| Probe positioning                  | 1.9                    | R           | 1.732   | 1         | 1         | 1.1                              | 1.1                              |
| Phantom thickness                  | 0.9                    | R           | 1.732   | 1         | 1         | 0.5                              | 0.5                              |
| EUT positioning                    | 1.9                    | N           | 1       | 0.78      | 0.71      | 0.1                              | 0.1                              |
| <b>External contributions</b>      |                        |             |         |           |           |                                  |                                  |
| RF interference                    | 0.0                    | R           | 1.732   | 1         | 0.3       | 0.0                              | 0.0                              |
| Test signal variation              | 2.0                    | R           | 1.732   | 1         | 1         | 1.2                              | 1.2                              |
| <b>Combined Std. Uncertainty</b>   |                        |             |         |           |           | 4.1                              | 6.1                              |
| <b>Coverage Factor for 95 %</b>    |                        |             |         |           |           | K=2                              | K=2                              |
| <b>Expanded STD Uncertainty</b>    |                        |             |         |           |           | 8.1                              | 12.3                             |



## Annex A General Information

### 1. Identification of the Responsible Testing Laboratory

|                     |                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Laboratory Name:    | Shenzhen Morlab Communications Technology Co., Ltd.                                                                              |
| Laboratory Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |
| Telephone:          | +86 755 36698555                                                                                                                 |
| Facsimile:          | +86 755 36698525                                                                                                                 |

### 2. Identification of the Responsible Testing Location

|          |                                                                                                                                  |
|----------|----------------------------------------------------------------------------------------------------------------------------------|
| Name:    | Shenzhen Morlab Communications Technology Co., Ltd.                                                                              |
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |

### 3. Facilities and Accreditations

The FCC designation number is CN1192, the test firm registration number is 226174.

#### Note:

The main report is end here and the other annex (B,C,D) will be submitted separately.

\*\*\*\*\* END OF MAIN REPORT \*\*\*\*\*