

TEST REPORT

FCC LTE B12 Test for TM19FNNABD2
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2412-FC026

DATE OF ISSUE
December 13, 2024

Tested by
Jae Ryang Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2412-FC026

DATE OF ISSUE

December 13, 2024

Applicant**LG Electronics Inc.**

128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea

Product Name

Telematics

Model Name

TM19FNNNAHD2

Date of Test

September 30, 2024 ~ December 10, 2024

FCC ID

BEJTM19FNNNAHD2

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCB Licensed Transmitter (PCB)

Test Standard Used

FCC Rule Part: § 27

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 13, 2024	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 CONDUCTED OUTPUT POWER	9
3.3 RADIATED POWER	10
3.4 RADIATED SPURIOUS EMISSIONS	11
3.5 OCCUPIED BANDWIDTH	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 PEAK- TO- AVERAGE RATIO	17
3.10 WORST CASE(RADIATED TEST)	19
3.11 WORST CASE(CONDUCTED TEST)	20
4. LIST OF TEST EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	24
8. TEST DATA	26
8.1 Conducted Output Power	26
8.2 EFFECTIVE RADIATED POWER	30
8.3 RADIATED SPURIOUS EMISSIONS	32
8.4 PEAK-TO-AVERAGE RATIO	33
8.5 OCCUPIED BANDWIDTH	34
8.6 CONDUCTED SPURIOUS EMISSIONS	35
8.7 BAND EDGE	35
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	36
9. TEST PLOTS	48
10. ANNEX A_ TEST SETUP PHOTO	121

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	LG Electronics Inc.
Address:	128, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea
FCC ID:	BEJTM19FNNNAHD2
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 27
EUT Type:	Telematics
Model(s):	TM19FNNNAHD2
Tx Frequency:	699.7 MHz – 715.3 MHz (LTE – Band 12 (1.4 MHz)) 700.5 MHz – 714.5 MHz (LTE – Band 12 (3 MHz)) 701.5 MHz – 713.5 MHz (LTE – Band 12 (5 MHz)) 704.0 MHz – 711.0 MHz (LTE – Band 12 (10 MHz))
Date(s) of Tests:	September 30, 2024 ~ December 10, 2024
Serial number:	Radiated : Honda MY26 #03 Conducted : Honda MY26 #01
Antenna Information	Please refer to the Antenna Approval Specification document.

1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 12 (1.4)	699.7 – 715.3	1M09G7D	QPSK	0.198	22.96
		1M10W7D	16QAM	0.170	22.31
		1M09W7D	64QAM	0.134	21.26
		1M09W7D	256QAM	0.067	18.25
LTE – Band 12 (3)	700.5 – 714.5	2M70G7D	QPSK	0.203	23.08
		2M71W7D	16QAM	0.173	22.38
		2M70W7D	64QAM	0.134	21.28
		2M70W7D	256QAM	0.067	18.23
LTE – Band 12 (5)	701.5 – 713.5	4M52G7D	QPSK	0.206	23.14
		4M49W7D	16QAM	0.174	22.40
		4M51W7D	64QAM	0.136	21.35
		4M51W7D	256QAM	0.067	18.27
LTE – Band 12 (10)	704.0 – 711.0	9M00G7D	QPSK	0.203	23.08
		8M98W7D	16QAM	0.175	22.44
		8M96W7D	64QAM	0.136	21.35
		8M94W7D	256QAM	0.068	18.34

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Telematics with LTE, Sub 6.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 CONDUCTED OUTPUT POWER

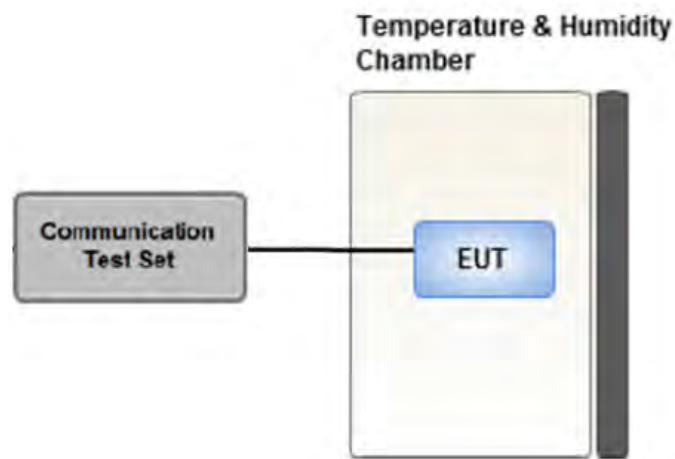

Test setup

Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.


Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is
driven by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;

$$\text{Result}_{(\text{dBm})} = P_{\text{g}}_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_{g} is the generator output power into the substitution antenna.

3.5 OCCUPIED BANDWIDTH.

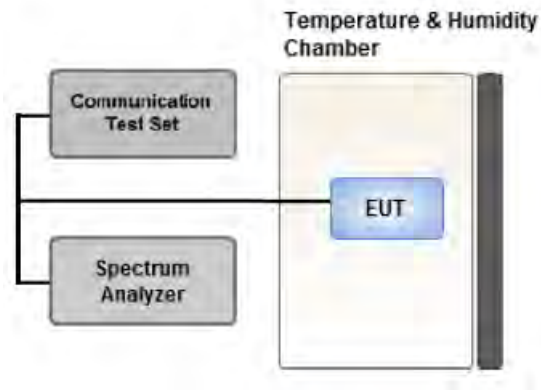

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

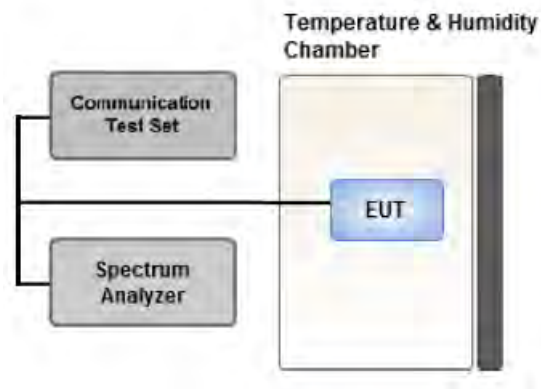

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

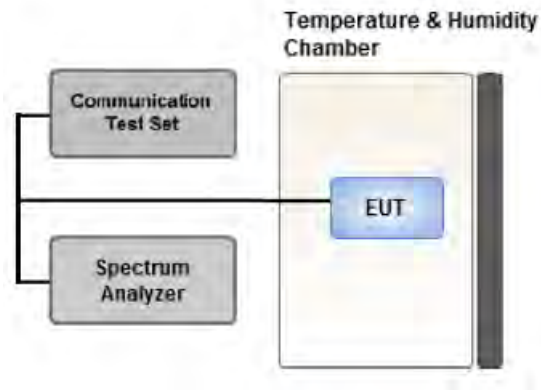

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where $\text{Margin} < 1$ dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

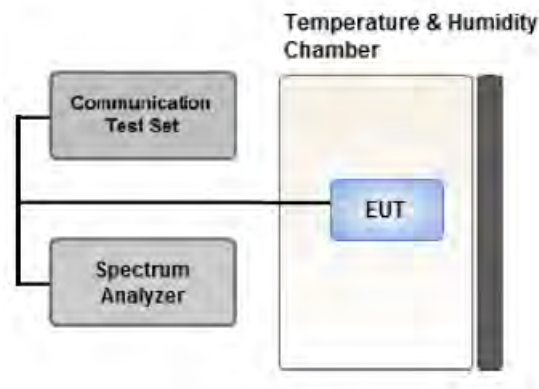

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.


2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 PEAK- TO- AVERAGE RATIO

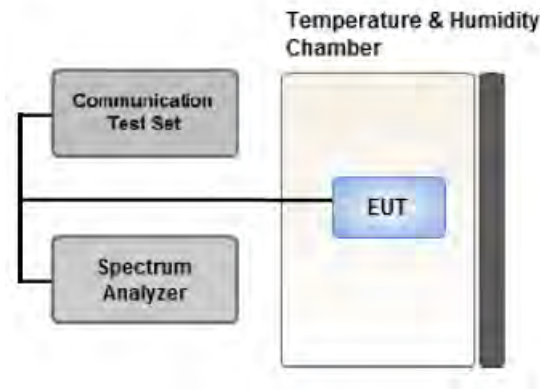

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 10 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data
- Please refer to the table below.

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.2		Z
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.3		Y

3.11 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10	Mid	Full RB	0
PEAK- TO- AVERAGE RATIO	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
Band Edge	QPSK	1.4, 3, 5, 10	Low, High	Full RB	0
		1.4, 3, 5, 10	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	Switch box(1.2 G HPF+LNA)	HCT CO., LTD.,	F1L1	11/11/2025	Annual
RF Switching System	Switch box(3.3 G HPF+LNA)	HCT CO., LTD.,	F1L2	11/11/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F1L4	11/11/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.,	F1L7	11/11/2025	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/06/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/13/2025	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	12/11/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 27.50(c)(10)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(g)	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 Conducted Output Power

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)			Target MPR (dB)	Target Power
				23017	23095	23173		
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	22.83	22.86	22.85	0	23
		1	3	22.96	22.90	22.86	0	23
		1	5	22.90	22.83	22.78	0	23
		3	0	22.88	22.89	22.80	1	22
		3	1	22.87	22.92	22.85	1	22
		3	3	22.89	22.95	22.75	1	22
		6	0	21.96	21.91	21.82	1	22
	16QAM	1	0	22.18	22.18	22.11	1	22
		1	3	22.31	22.28	22.23	1	22
		1	5	22.15	22.24	22.23	1	22
		3	0	21.95	21.98	21.93	2	21
		3	1	21.98	21.99	21.91	2	21
		3	3	21.97	21.99	21.99	2	21
		6	0	20.96	20.95	20.99	2	21
	64QAM	1	0	21.02	21.26	20.97	2	21
		1	3	20.96	21.26	20.90	2	21
		1	5	20.89	21.13	20.97	2	21
		3	0	20.96	20.99	20.88	3	20
		3	1	20.98	20.98	20.92	3	20
		3	3	20.85	20.98	20.92	3	20
		6	0	19.82	20.00	19.83	3	20
	256QAM	1	0	18.13	17.95	17.97	5	18
		1	3	18.12	18.25	18.07	5	18
		1	5	18.07	18.06	17.93	5	18
		3	0	18.06	18.12	17.99	5	18
		3	1	18.15	18.10	18.10	5	18
		3	3	18.07	18.07	17.98	5	18
		6	0	17.97	17.96	17.98	5	18

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)			Target MPR (dB)	Target Power
				23025	23095	23165		
				700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	22.95	23.04	22.89	0	23
		1	7	23.08	22.99	22.94	0	23
		1	14	22.95	22.88	22.89	0	23
		8	0	22.07	22.01	21.95	1	22
		8	3	22.09	22.01	22.02	1	22
		8	7	21.97	22.08	21.98	1	22
		15	0	22.11	22.01	21.94	1	22
	16QAM	1	0	22.38	22.36	22.35	1	22
		1	7	22.30	22.21	22.24	1	22
		1	14	22.32	22.28	22.27	1	22
		8	0	21.14	21.12	21.02	2	21
		8	3	21.10	21.11	21.03	2	21
		8	7	21.12	21.12	21.00	2	21
		15	0	21.09	21.01	20.97	2	21
	64QAM	1	0	21.10	21.28	21.26	2	21
		1	7	21.10	21.16	20.91	2	21
		1	14	21.19	21.19	20.88	2	21
		8	0	19.94	20.14	20.01	3	20
		8	3	19.95	20.15	19.94	3	20
		8	7	19.97	20.15	19.85	3	20
		15	0	19.96	20.02	19.90	3	20
	256QAM	1	0	18.13	18.16	18.16	5	18
		1	7	18.14	18.23	18.08	5	18
		1	14	18.11	18.06	18.02	5	18
		8	0	18.15	18.09	18.03	5	18
		8	3	18.10	18.06	18.08	5	18
		8	7	18.11	18.08	18.03	5	18
		15	0	18.07	18.08	17.97	5	18

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)			Target MPR (dB)	Target Power
				23035	23095	23155		
				701.5 MHz	707.5 MHz	713.5 MHz		
5 MHz	QPSK	1	0	23.14	23.09	22.93	0	23
		1	12	22.87	22.94	22.94	0	23
		1	24	22.84	22.90	22.86	0	23
		12	0	22.09	22.08	22.05	1	22
		12	6	22.09	22.11	21.97	1	22
		12	11	22.05	22.05	22.01	1	22
		25	0	22.07	22.02	22.02	1	22
	16QAM	1	0	22.40	22.37	22.33	1	22
		1	12	22.33	22.36	22.28	1	22
		1	24	22.24	22.36	22.26	1	22
		12	0	21.07	21.18	21.11	2	21
		12	6	21.18	21.16	21.04	2	21
		12	11	21.07	21.09	21.00	2	21
		25	0	21.12	21.08	20.97	2	21
	64QAM	1	0	21.10	21.35	21.27	2	21
		1	12	21.13	21.35	21.25	2	21
		1	24	21.25	21.32	21.10	2	21
		12	0	19.93	20.10	20.09	3	20
		12	6	20.03	20.11	20.09	3	20
		12	11	20.00	20.13	20.03	3	20
		25	0	20.08	20.06	20.02	3	20
	256QAM	1	0	18.04	18.27	18.16	5	18
		1	12	18.17	18.19	18.08	5	18
		1	24	18.12	18.25	18.09	5	18
		12	0	18.12	18.06	18.04	5	18
		12	6	18.14	18.08	17.97	5	18
		12	11	18.04	18.04	18.03	5	18
		25	0	18.08	18.00	18.02	5	18

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)			Target MPR (dB)	Target Power
				23060	23095	23130		
				704 MHz	707.5 MHz	711 MHz		
10 MHz	QPSK	1	0	22.92	22.92	23.08	0	23
		1	24	22.79	22.88	22.87	0	23
		1	49	22.91	22.87	22.69	0	23
		25	0	22.17	22.17	22.10	1	22
		25	12	22.12	22.07	22.03	1	22
		25	24	22.08	22.04	21.97	1	22
		50	0	22.11	22.05	22.03	1	22
	16QAM	1	0	22.29	22.38	22.36	1	22
		1	24	22.27	22.44	22.30	1	22
		1	49	22.22	22.43	22.28	1	22
		25	0	21.09	21.11	21.11	2	21
		25	12	21.19	21.06	21.03	2	21
		25	24	21.08	21.05	21.06	2	21
		50	0	21.06	21.05	21.01	2	21
	64QAM	1	0	21.19	21.26	21.27	2	21
		1	24	21.14	21.35	21.12	2	21
		1	49	21.29	21.14	21.21	2	21
		25	0	20.10	20.17	20.19	3	20
		25	12	20.17	20.07	20.07	3	20
		25	24	20.04	20.14	20.08	3	20
		50	0	20.16	20.15	20.03	3	20
	256QAM	1	0	18.06	18.03	18.01	5	18
		1	24	17.96	18.34	17.96	5	18
		1	49	18.19	18.18	18.11	5	18
		25	0	18.13	18.12	18.07	5	18
		25	12	17.98	18.00	18.00	5	18
		25	24	17.97	18.03	18.07	5	18
		50	0	18.06	18.03	18.06	5	18

8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
699.7	LTE B12 (1.4 MHz)	QPSK	-29.16	30.84	-9.89	1.29	V	< 3.00	0.092	19.66	1	3
		16-QAM	-29.88	30.12	-9.89	1.29	V		0.078	18.94		
		64-QAM	-31.53	28.47	-9.89	1.29	V		0.054	17.29		
		256-QAM	-33.94	26.06	-9.89	1.29	V		0.031	14.88		
707.5		QPSK	-28.90	30.77	-9.90	1.30	V		0.091	19.57	1	3
		16-QAM	-29.61	30.06	-9.90	1.30	V		0.077	18.86		
		64-QAM	-30.64	29.03	-9.90	1.30	V		0.061	17.83		
		256-QAM	-33.67	26.00	-9.90	1.30	V		0.030	14.80		
715.3		QPSK	-28.92	30.38	-9.91	1.32	V		0.082	19.15	1	0
		16-QAM	-29.63	29.67	-9.91	1.32	V		0.070	18.44		
		64-QAM	-30.64	28.66	-9.91	1.32	V		0.055	17.43		
		256-QAM	-33.61	25.69	-9.91	1.32	V		0.028	14.46		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
700.5	LTE B12 (3 MHz)	QPSK	-28.76	31.24	-9.89	1.29	V	< 3.00	0.101	20.06	1	14
		16-QAM	-29.48	30.52	-9.89	1.29	V		0.086	19.34		
		64-QAM	-30.65	29.35	-9.89	1.29	V		0.066	18.17		
		256-QAM	-33.54	26.46	-9.89	1.29	V		0.034	15.28		
707.5		QPSK	-28.42	31.25	-9.90	1.30	V		0.101	20.05	1	8
		16-QAM	-29.14	30.53	-9.90	1.30	V		0.086	19.33		
		64-QAM	-30.18	29.49	-9.90	1.30	V		0.067	18.29		
		256-QAM	-33.20	26.47	-9.90	1.30	V		0.034	15.27		
714.5		QPSK	-28.37	30.89	-9.90	1.31	V		0.093	19.68	1	0
		16-QAM	-29.09	30.17	-9.90	1.31	V		0.079	18.96		
		64-QAM	-30.34	28.92	-9.90	1.31	V		0.059	17.71		
		256-QAM	-33.27	25.99	-9.90	1.31	V		0.030	14.78		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
701.5	LTE B12 (5 MHz)	QPSK	-28.64	31.27	-9.89	1.29	V	< 3.00	0.102	20.09	1	24
		16-QAM	-29.36	30.55	-9.89	1.29	V		0.086	19.37		
		64-QAM	-30.35	29.56	-9.89	1.29	V		0.069	18.38		
		256-QAM	-33.41	26.50	-9.89	1.29	V		0.034	15.32		
707.5		QPSK	-28.50	31.17	-9.90	1.30	V		0.099	19.97	1	24
		16-QAM	-29.15	30.52	-9.90	1.30	V		0.086	19.32		
		64-QAM	-30.18	29.49	-9.90	1.30	V		0.067	18.29		
		256-QAM	-33.20	26.47	-9.90	1.30	V		0.034	15.27		
713.5		QPSK	-28.36	30.90	-9.90	1.31	V		0.093	19.69	1	0
		16-QAM	-29.06	30.20	-9.90	1.31	V		0.079	18.99		
		64-QAM	-30.11	29.15	-9.90	1.31	V		0.062	17.94		
		256-QAM	-33.05	26.21	-9.90	1.31	V		0.032	15.00		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured	Substitute	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
704.0	LTE B12 (10 MHz)	QPSK	-28.66	31.29	-9.89	1.29	V	< 3.00	0.103	20.11	1	49
		16-QAM	-29.28	30.67	-9.89	1.29	V		0.089	19.49		
		64-QAM	-30.32	29.63	-9.89	1.29	V		0.070	18.45		
		256-QAM	-33.33	26.62	-9.89	1.29	V		0.035	15.44		
707.5		QPSK	-28.90	30.77	-9.90	1.30	V		0.091	19.57	1	0
		16-QAM	-29.54	30.13	-9.90	1.30	V		0.078	18.93		
		64-QAM	-30.66	29.01	-9.90	1.30	V		0.060	17.81		
		256-QAM	-33.64	26.03	-9.90	1.30	V		0.030	14.83		
711.0		QPSK	-28.57	30.82	-9.90	1.30	V		0.092	19.62	1	0
		16-QAM	-29.29	30.10	-9.90	1.30	V		0.078	18.90		
		64-QAM	-30.35	29.04	-9.90	1.30	V		0.061	17.84		
		256-QAM	-33.37	26.02	-9.90	1.30	V		0.030	14.82		

8.3 RADIATED SPURIOUS EMISSIONS

■ MODE: LTE B12
 ■ MODULATION SIGNAL: 10 MHz QPSK
 ■ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
23060 (704.0)	1 408.00	-27.44	7.68	-40.65	1.87	H	-34.84	-13.00	1	49
	2 112.00	-45.05	9.45	-56.99	2.34	H	-49.88	-13.00		
	2 816.00	-46.12	10.79	-55.92	2.69	H	-47.82	-13.00		
23095 (707.5)	1 415.00	-27.77	7.71	-40.85	1.87	H	-35.01	-13.00	1	0
	2 122.50	-45.73	9.38	-57.08	2.28	H	-49.98	-13.00		
	2 830.00	-45.87	10.79	-55.28	2.70	H	-47.19	-13.00		
23130 (711.0)	1 422.00	-32.94	7.74	-45.89	1.87	H	-40.02	-13.00	1	0
	2 133.00	-44.14	9.34	-55.13	2.25	H	-48.04	-13.00		
	2 844.00	-44.69	10.78	-54.44	2.71	H	-46.37	-13.00		

8.4 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
12	1.4 MHz	707.5	QPSK	6	0	5.27
			16-QAM			6.00
			64-QAM			6.68
			256-QAM			6.74
	3 MHz		QPSK	15		5.17
			16-QAM			6.01
			64-QAM			6.62
			256-QAM			6.71
	5 MHz		QPSK	25		5.04
			16-QAM			5.89
			64-QAM			6.57
			256-QAM			6.69
	10 MHz		QPSK	50		4.99
			16-QAM			5.85
			64-QAM			6.56
			256-QAM			6.65

Note:

1. Plots of the EUT's P.A.P.R are shown Page 49 ~ 64.
2. P.A.P.R is not required. These values are reported for information only.

8.5 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
12	1.4 MHz	707.5	QPSK	Full RB		1.0896
			16-QAM			1.0957
			64-QAM			1.0942
			256-QAM			1.0893
	3 MHz		QPSK			2.7007
			16-QAM			2.7104
			64-QAM			2.7011
			256-QAM			2.7041
	5 MHz		QPSK			4.5169
			16-QAM			4.4846
			64-QAM			4.5084
			256-QAM			4.5083
	10 MHz		QPSK			8.9992
			16-QAM			8.9814
			64-QAM			8.9609
			256-QAM			8.9426

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 65 ~ 80.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
B12	1.4	699.7	3.6740	28.112	-56.762	-28.650	-13.00
		707.5	6.5524	28.634	-56.792	-28.158	
		715.3	6.1421	28.634	-58.021	-29.387	
	3	700.5	3.3051	28.112	-57.684	-29.572	
		707.5	3.6860	28.112	-57.658	-29.546	
		714.5	3.6955	28.112	-57.388	-29.276	
	5	701.5	3.1332	28.112	-57.743	-29.631	
		707.5	3.1087	28.112	-57.250	-29.138	
		713.5	6.5623	28.634	-57.625	-28.991	
	10	704.0	5.9796	28.634	-57.809	-29.175	
		707.5	3.1601	28.112	-57.596	-29.484	
		711.0	3.7005	28.112	-57.263	-29.151	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 81 ~ 92.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.500
1 – 5	28.112
5 – 10	28.634
10 – 15	29.245
15 – 20	29.511
Above 20(26.5)	30.210


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 93 ~ 120.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE B12</u>
OPERATING FREQUENCY:	<u>699,700,000 Hz</u>
CHANNEL:	<u>23017 (1.4 MHz)</u>
REFERENCE VOLTAGE:	<u>13.200 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.200	+20(Ref)	699 700 004	0.0	0.000 000	0.000
100 %		-30	699 700 008	3.7	0.000 001	0.005
100 %		-20	699 700 009	4.8	0.000 001	0.007
100 %		-10	699 700 008	3.6	0.000 001	0.005
100 %		0	699 700 009	5.1	0.000 001	0.007
100 %		+10	699 699 998	-6.1	-0.000 001	-0.009
100 %		+30	699 700 009	4.6	0.000 001	0.007
100 %		+40	699 699 997	-7.0	-0.000 001	-0.010
100 %		+50	699 699 999	-5.5	-0.000 001	-0.008
115 %		+20	699 700 000	-4.1	-0.000 001	-0.006
85 %		+20	699 699 999	-5.3	-0.000 001	-0.008

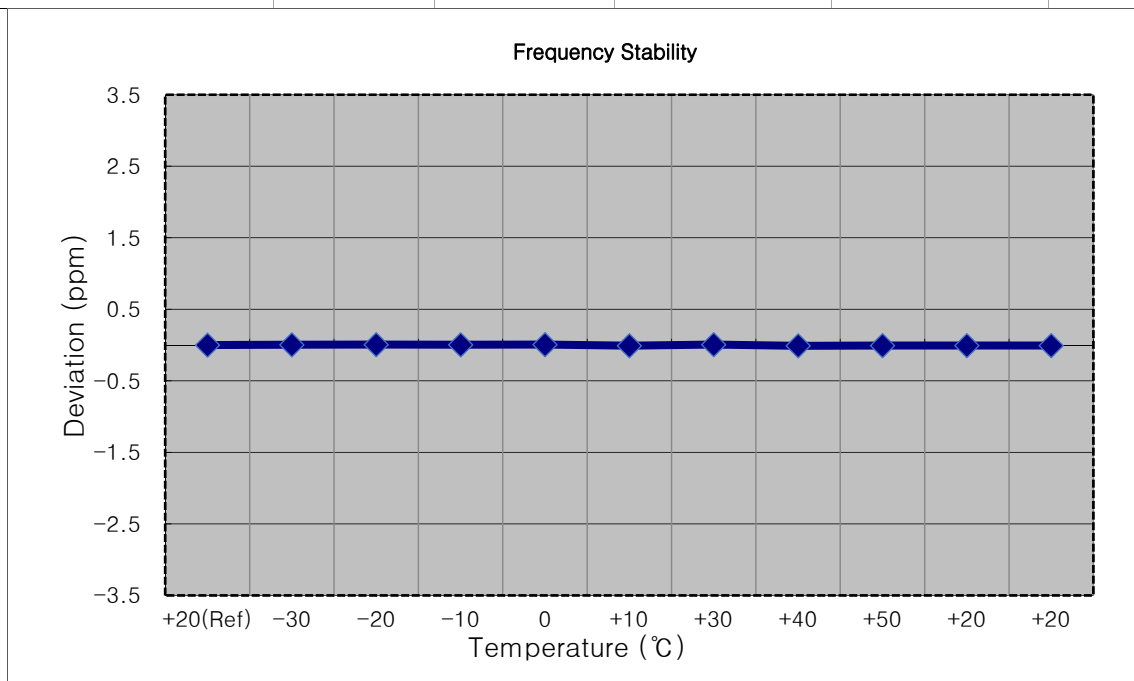


■ MODE: LTE B12
 ■ OPERATING FREQUENCY: 700,500,000 Hz
 ■ CHANNEL: 23025 (3 MHz)
 ■ REFERENCE VOLTAGE: 13.200 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.200	+20(Ref)	700 499 994	0.0	0.000 000	0.000
100 %		-30	700 499 999	5.0	0.000 001	0.007
100 %		-20	700 499 986	-7.7	-0.000 001	-0.011
100 %		-10	700 499 999	4.9	0.000 001	0.007
100 %		0	700 499 985	-8.5	-0.000 001	-0.012
100 %		+10	700 499 987	-6.3	-0.000 001	-0.009
100 %		+30	700 499 985	-9.1	-0.000 001	-0.013
100 %		+40	700 499 996	2.1	0.000 000	0.003
100 %		+50	700 499 996	2.6	0.000 000	0.004
115 %		+20	700 499 995	1.4	0.000 000	0.002
85 %		+20	700 499 997	3.4	0.000 000	0.005

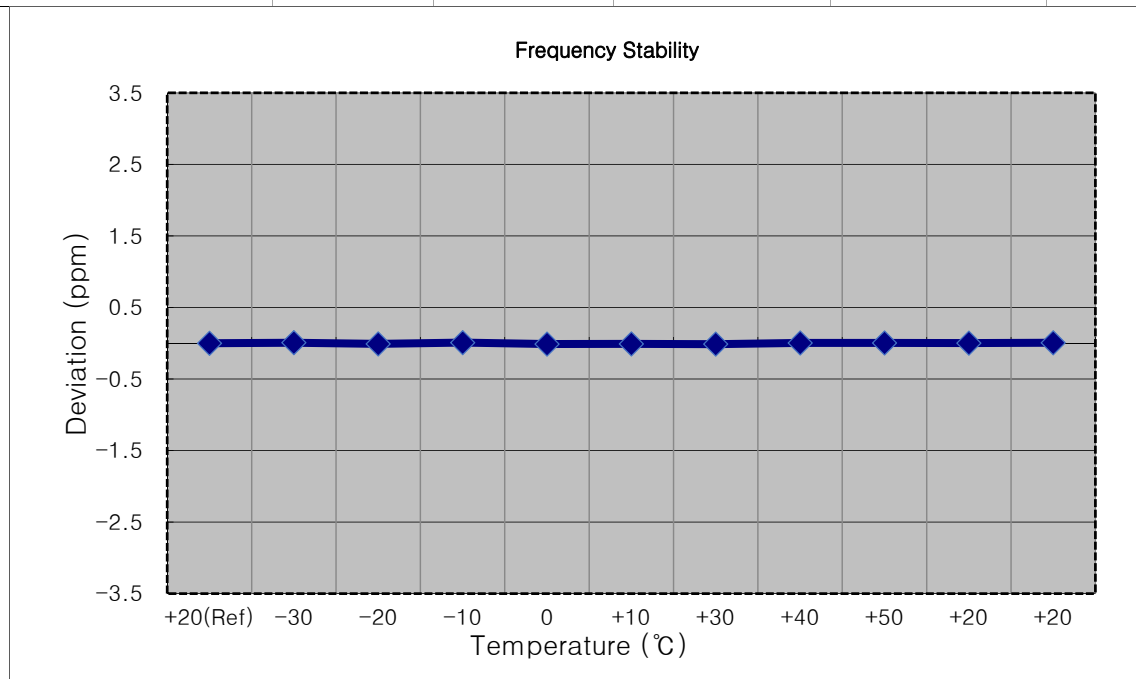


MODE:	<u>LTE B12</u>
OPERATING FREQUENCY:	<u>701,500,000 Hz</u>
CHANNEL:	<u>23035 (5 MHz)</u>
REFERENCE VOLTAGE:	<u>13.200 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	13.200	+20(Ref)	701 499 995	0.0	0.000 000	0.000
100 %		-30	701 499 988	-6.1	-0.000 001	-0.009
100 %		-20	701 499 989	-5.6	-0.000 001	-0.008
100 %		-10	701 499 989	-5.5	-0.000 001	-0.008
100 %		0	701 499 990	-4.6	-0.000 001	-0.007
100 %		+10	701 499 990	-4.2	-0.000 001	-0.006
100 %		+30	701 499 990	-4.4	-0.000 001	-0.006
100 %		+40	701 499 990	-4.7	-0.000 001	-0.007
100 %		+50	701 499 988	-6.6	-0.000 001	-0.009
115 %		+20	701 499 991	-3.9	-0.000 001	-0.006
85 %		+20	701 499 990	-4.8	-0.000 001	-0.007

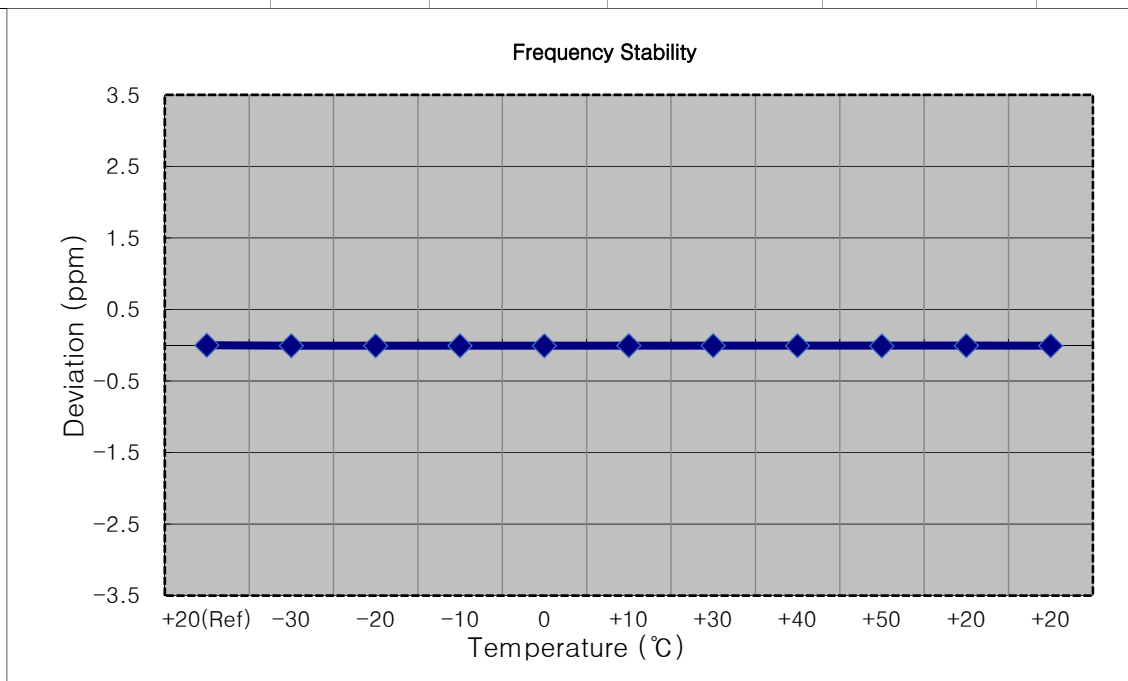


■ MODE: LTE B12
 ■ OPERATING FREQUENCY: 704,000,000 Hz
 ■ CHANNEL: 23060 (10 MHz)
 ■ REFERENCE VOLTAGE: 13.200 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.200	+20(Ref)	704 000 003	0.0	0.000 000	0.000
100 %		-30	704 000 006	3.2	0.000 000	0.005
100 %		-20	704 000 007	3.5	0.000 000	0.005
100 %		-10	704 000 006	3.1	0.000 000	0.004
100 %		0	704 000 008	4.5	0.000 001	0.006
100 %		+10	704 000 007	4.1	0.000 001	0.006
100 %		+30	704 000 007	3.4	0.000 000	0.005
100 %		+40	704 000 006	3.1	0.000 000	0.004
100 %		+50	704 000 006	2.5	0.000 000	0.004
115 %		+20	704 000 005	1.7	0.000 000	0.002
85 %		+20	704 000 006	3.3	0.000 000	0.005

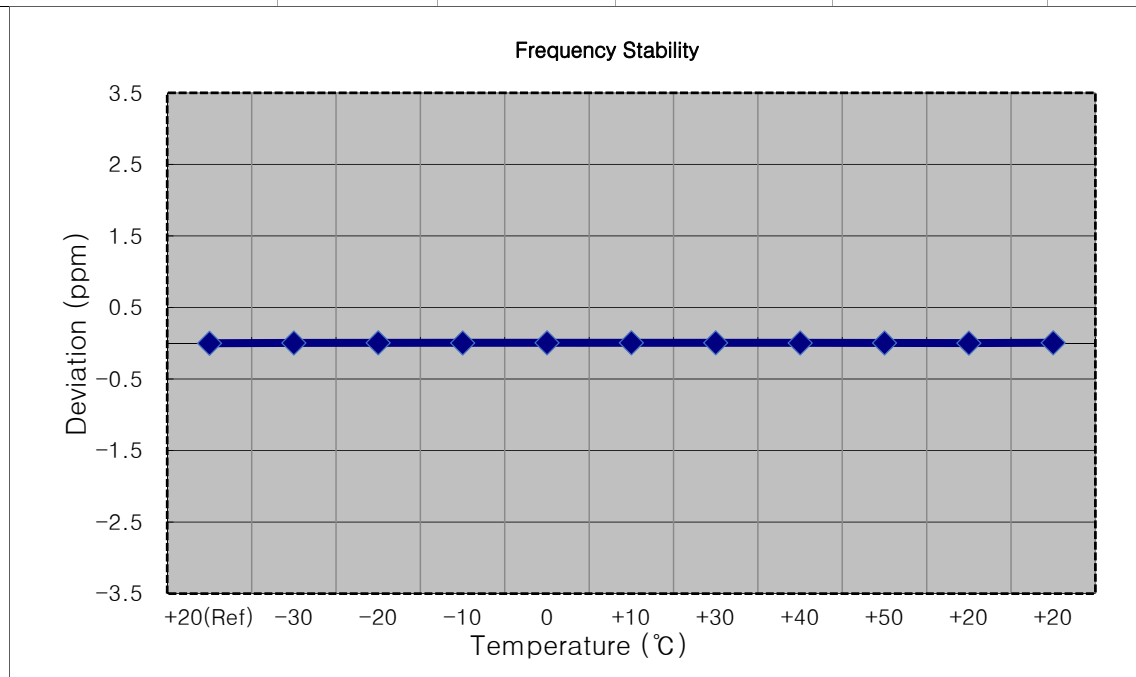


■ MODE: LTE B12
 ■ OPERATING FREQUENCY: 707,500,000 Hz
 ■ CHANNEL: 23095 (1.4 MHz)
 ■ REFERENCE VOLTAGE: 13.200 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.200	+20(Ref)	707 499 993	0.0	0.000 000	0.000
100 %		-30	707 499 997	4.4	0.000 001	0.006
100 %		-20	707 499 994	1.8	0.000 000	0.003
100 %		-10	707 499 990	-2.7	0.000 000	-0.004
100 %		0	707 499 990	-3.1	0.000 000	-0.004
100 %		+10	707 499 987	-5.6	-0.000 001	-0.008
100 %		+30	707 499 988	-4.2	-0.000 001	-0.006
100 %		+40	707 499 987	-5.8	-0.000 001	-0.008
100 %		+50	707 499 987	-5.8	-0.000 001	-0.008
115 %		+20	707 499 989	-3.9	-0.000 001	-0.006
85 %		+20	707 499 986	-7.0	-0.000 001	-0.010

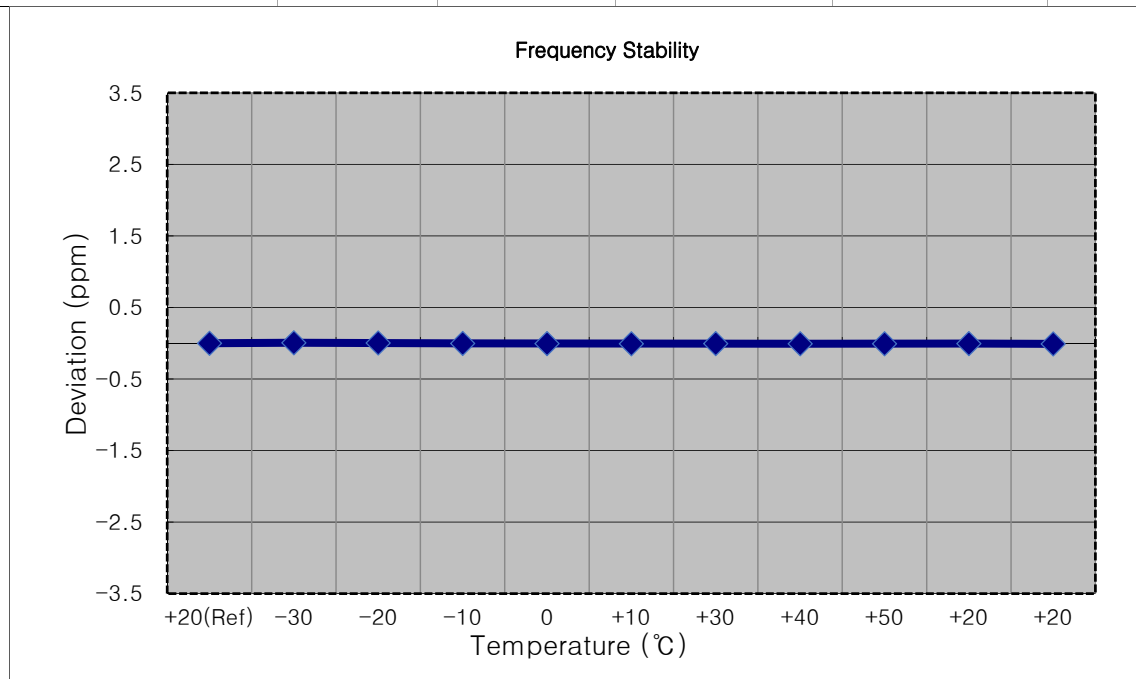


■ MODE: LTE B12
 ■ OPERATING FREQUENCY: 707,500,000 Hz
 ■ CHANNEL: 23095 (3 MHz)
 ■ REFERENCE VOLTAGE: 13.200 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.200	+20(Ref)	707 500 005	0.0	0.000 000	0.000
100 %		-30	707 500 008	3.0	0.000 000	0.004
100 %		-20	707 500 007	2.7	0.000 000	0.004
100 %		-10	707 500 001	-4.1	-0.000 001	-0.006
100 %		0	707 499 999	-5.8	-0.000 001	-0.008
100 %		+10	707 499 997	-7.3	-0.000 001	-0.010
100 %		+30	707 499 998	-6.6	-0.000 001	-0.009
100 %		+40	707 500 010	5.6	0.000 001	0.008
100 %		+50	707 500 008	3.3	0.000 000	0.005
115 %		+20	707 500 011	6.7	0.000 001	0.009
85 %		+20	707 500 007	2.3	0.000 000	0.003

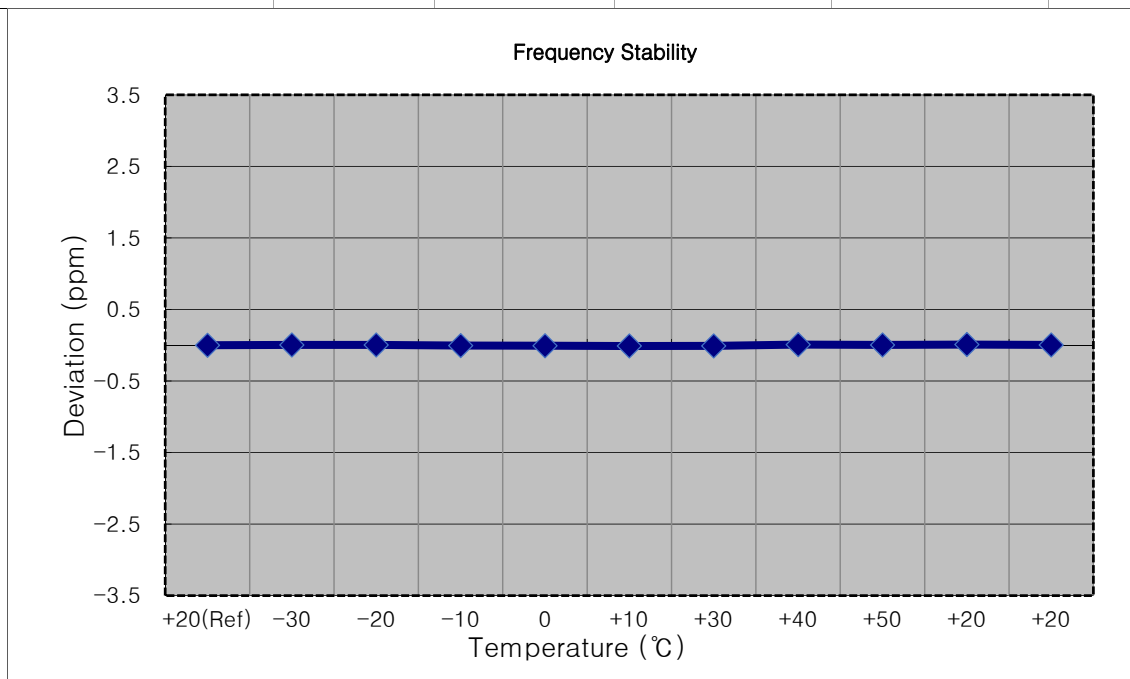


■ MODE: LTE B12
 ■ OPERATING FREQUENCY: 707,500,000 Hz
 ■ CHANNEL: 23095 (5 MHz)
 ■ REFERENCE VOLTAGE: 13.200 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.200	+20(Ref)	707 499 997	0.0	0.000 000	0.000
100 %		-30	707 499 992	-4.7	-0.000 001	-0.007
100 %		-20	707 500 004	7.0	0.000 001	0.010
100 %		-10	707 500 002	5.1	0.000 001	0.007
100 %		0	707 500 000	3.4	0.000 000	0.005
100 %		+10	707 499 995	-1.9	0.000 000	-0.003
100 %		+30	707 499 995	-2.3	0.000 000	-0.003
100 %		+40	707 499 993	-4.0	-0.000 001	-0.006
100 %		+50	707 499 991	-5.6	-0.000 001	-0.008
115 %		+20	707 499 991	-5.5	-0.000 001	-0.008
85 %		+20	707 499 991	-5.6	-0.000 001	-0.008

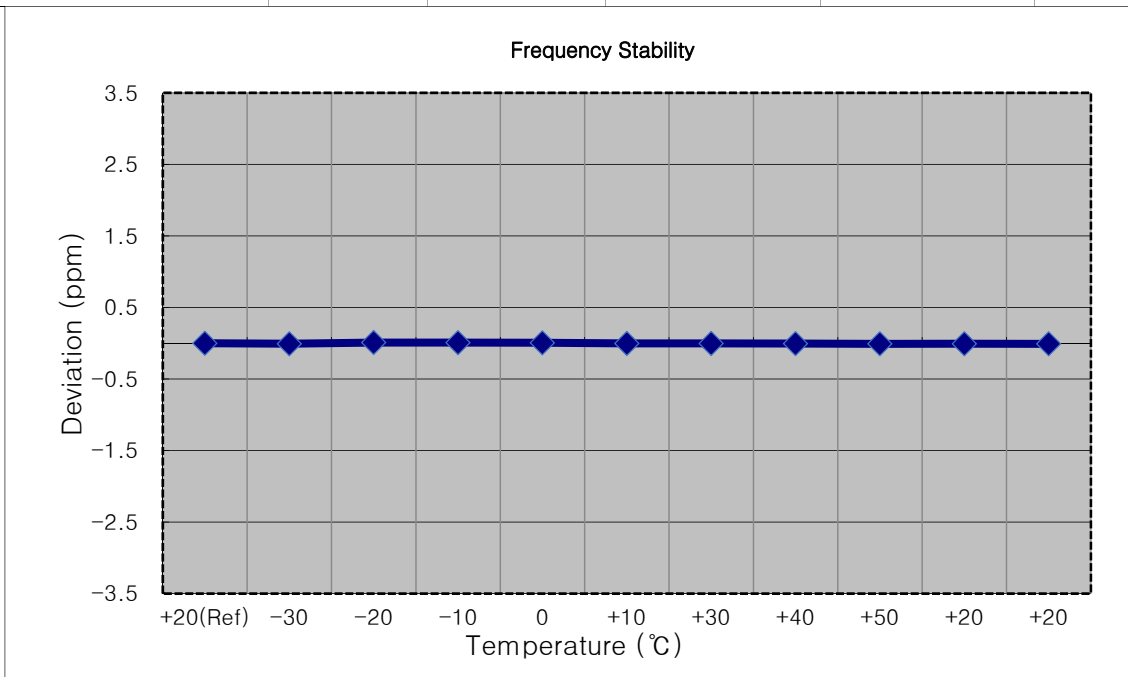


■ MODE: LTE B12
 ■ OPERATING FREQUENCY: 707,500,000 Hz
 ■ CHANNEL: 23095 (10 MHz)
 ■ REFERENCE VOLTAGE: 13.200 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.200	+20(Ref)	707 500 007	0.0	0.000 000	0.000
100 %		-30	707 500 011	4.1	0.000 001	0.006
100 %		-20	707 500 012	5.0	0.000 001	0.007
100 %		-10	707 500 010	2.7	0.000 000	0.004
100 %		0	707 500 004	-3.2	0.000 000	-0.005
100 %		+10	707 500 015	8.4	0.000 001	0.012
100 %		+30	707 500 012	5.3	0.000 001	0.007
100 %		+40	707 500 011	4.2	0.000 001	0.006
100 %		+50	707 500 011	4.2	0.000 001	0.006
115 %		+20	707 500 010	2.8	0.000 000	0.004
85 %		+20	707 500 010	3.2	0.000 000	0.005

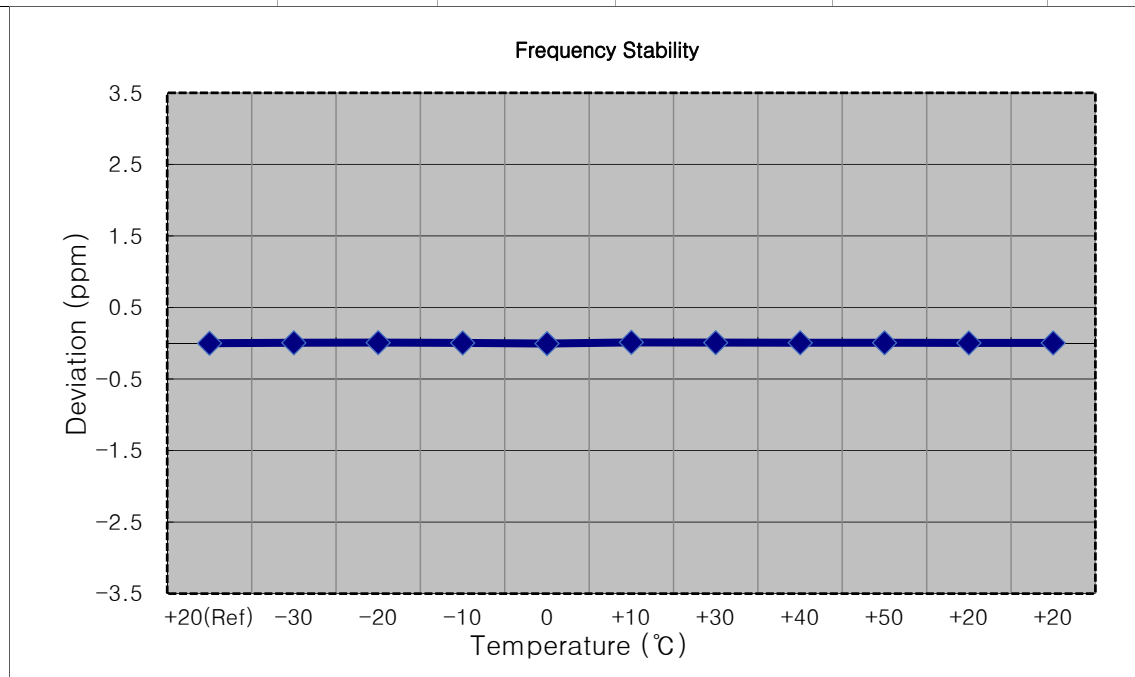


MODE:	<u>LTE B12</u>
OPERATING FREQUENCY:	<u>715,300,000 Hz</u>
CHANNEL:	<u>23173 (1.4 MHz)</u>
REFERENCE VOLTAGE:	<u>13.200 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	13.200	+20(Ref)	715 299 994	0.0	0.000 000	0.000
100 %		-30	715 299 991	-3.4	0.000 000	-0.005
100 %		-20	715 299 991	-3.1	0.000 000	-0.004
100 %		-10	715 299 992	-2.6	0.000 000	-0.004
100 %		0	715 299 991	-3.3	0.000 000	-0.005
100 %		+10	715 299 989	-5.7	-0.000 001	-0.008
100 %		+30	715 299 989	-5.0	-0.000 001	-0.007
100 %		+40	715 299 988	-6.8	-0.000 001	-0.010
100 %		+50	715 299 989	-4.9	-0.000 001	-0.007
115 %		+20	715 299 993	-1.7	0.000 000	-0.002
85 %		+20	715 299 989	-5.8	-0.000 001	-0.008

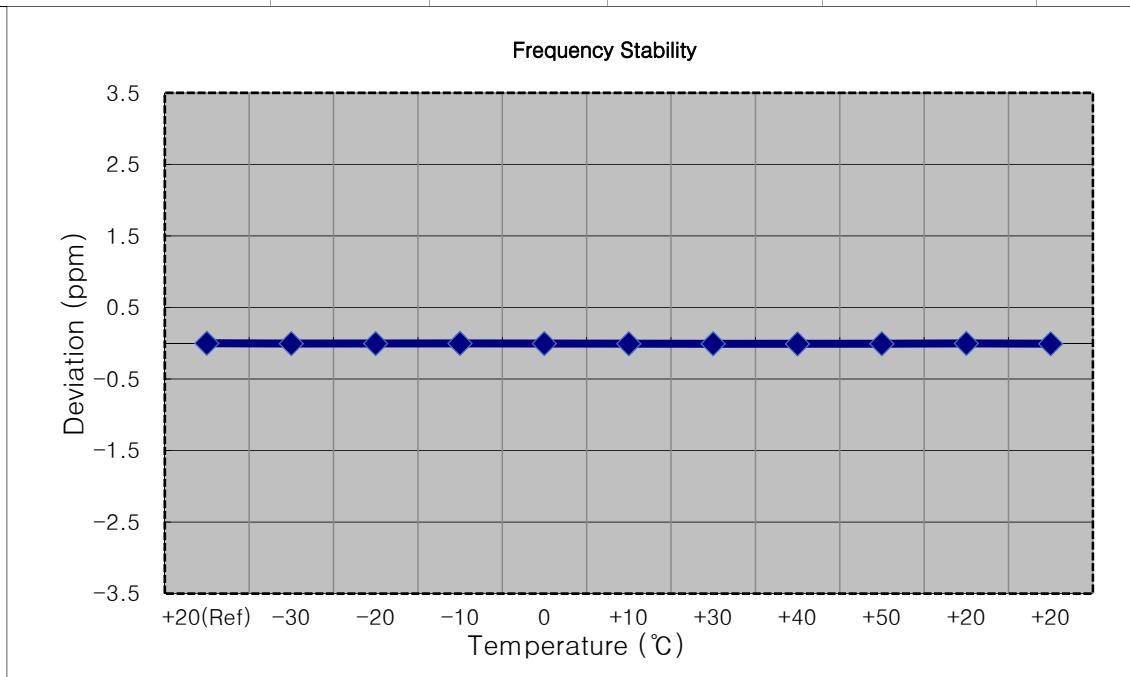


MODE:	<u>LTE B12</u>
OPERATING FREQUENCY:	<u>714,500,000 Hz</u>
CHANNEL:	<u>23165 (3 MHz)</u>
REFERENCE VOLTAGE:	<u>13.200 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.200	+20(Ref)	714 499 993	0.0	0.000 000	0.000
100 %		-30	714 499 983	-9.3	-0.000 001	-0.013
100 %		-20	714 500 001	8.0	0.000 001	0.011
100 %		-10	714 500 000	7.4	0.000 001	0.010
100 %		0	714 499 997	4.5	0.000 001	0.006
100 %		+10	714 499 998	5.2	0.000 001	0.007
100 %		+30	714 499 984	-9.2	-0.000 001	-0.013
100 %		+40	714 499 986	-6.4	-0.000 001	-0.009
100 %		+50	714 499 985	-7.9	-0.000 001	-0.011
115 %		+20	714 499 989	-3.5	0.000 000	-0.005
85 %		+20	714 499 986	-6.7	-0.000 001	-0.009

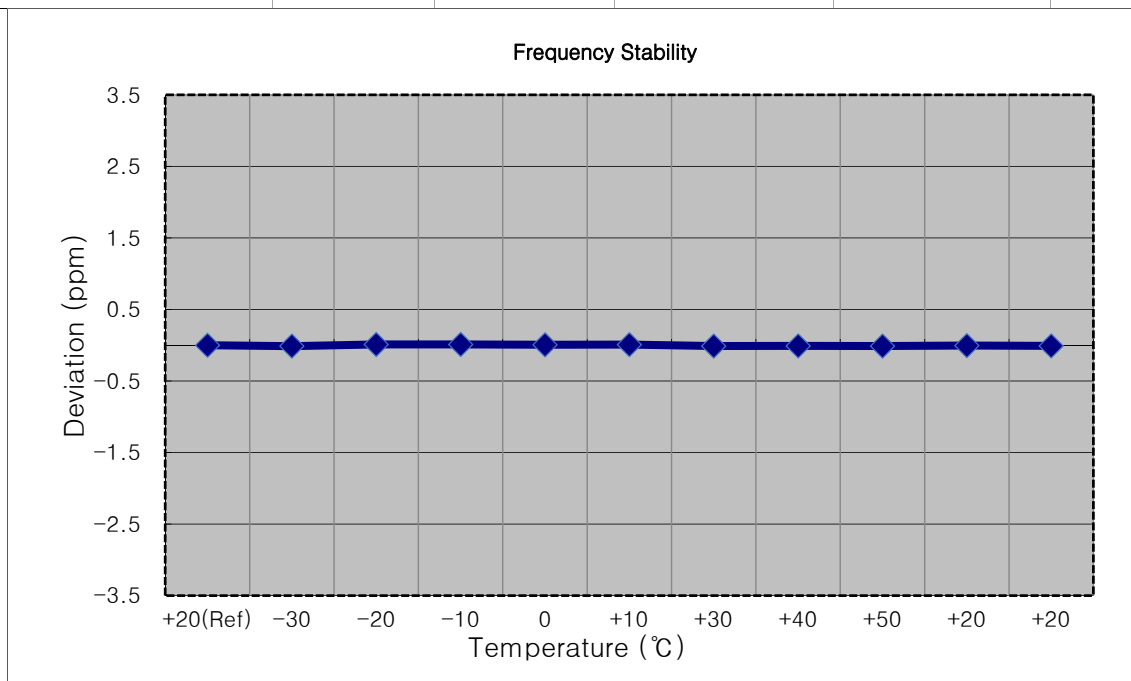


MODE:	<u>LTE B12</u>
OPERATING FREQUENCY:	<u>713,500,000 Hz</u>
CHANNEL:	<u>23155 (5 MHz)</u>
REFERENCE VOLTAGE:	<u>13.200 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.200	+20(Ref)	713 499 992	0.0	0.000 000	0.000
100 %		-30	713 499 985	-6.8	-0.000 001	-0.010
100 %		-20	713 499 984	-8.6	-0.000 001	-0.012
100 %		-10	713 499 983	-9.7	-0.000 001	-0.014
100 %		0	713 499 983	-9.1	-0.000 001	-0.013
100 %		+10	713 499 983	-9.1	-0.000 001	-0.013
100 %		+30	713 499 982	-9.9	-0.000 001	-0.014
100 %		+40	713 499 980	-11.9	-0.000 002	-0.017
100 %		+50	713 499 990	-2.7	0.000 000	-0.004
115 %		+20	713 499 990	-1.9	0.000 000	-0.003
85 %		+20	713 499 981	-11.4	-0.000 002	-0.016

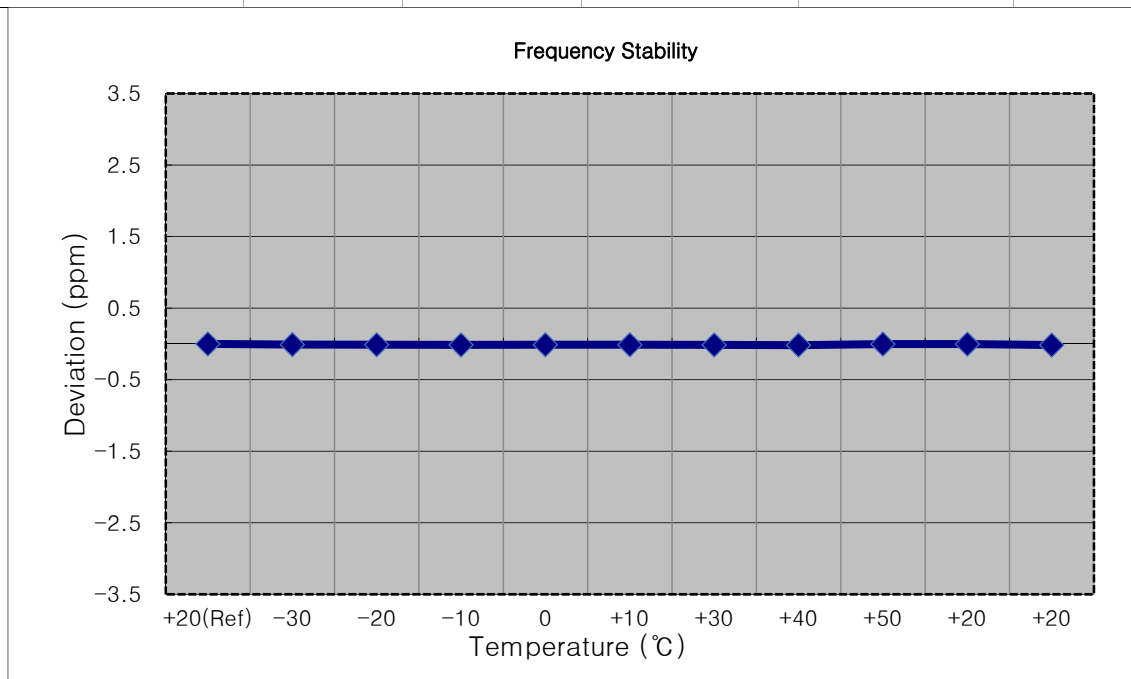


MODE:	<u>LTE B12</u>
OPERATING FREQUENCY:	<u>711,000,000 Hz</u>
CHANNEL:	<u>23130 (10 MHz)</u>
REFERENCE VOLTAGE:	<u>13.200 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.200	+20(Ref)	710 999 998	0.0	0.000 000	0.000
100 %		-30	710 999 994	-3.4	0.000 000	-0.005
100 %		-20	710 999 993	-4.4	-0.000 001	-0.006
100 %		-10	710 999 992	-5.6	-0.000 001	-0.008
100 %		0	710 999 993	-4.9	-0.000 001	-0.007
100 %		+10	710 999 992	-5.5	-0.000 001	-0.008
100 %		+30	710 999 991	-6.6	-0.000 001	-0.009
100 %		+40	710 999 991	-6.8	-0.000 001	-0.010
100 %		+50	710 999 991	-7.0	-0.000 001	-0.010
115 %		+20	711 000 001	3.6	0.000 001	0.005
85 %		+20	710 999 989	-9.0	-0.000 001	-0.013

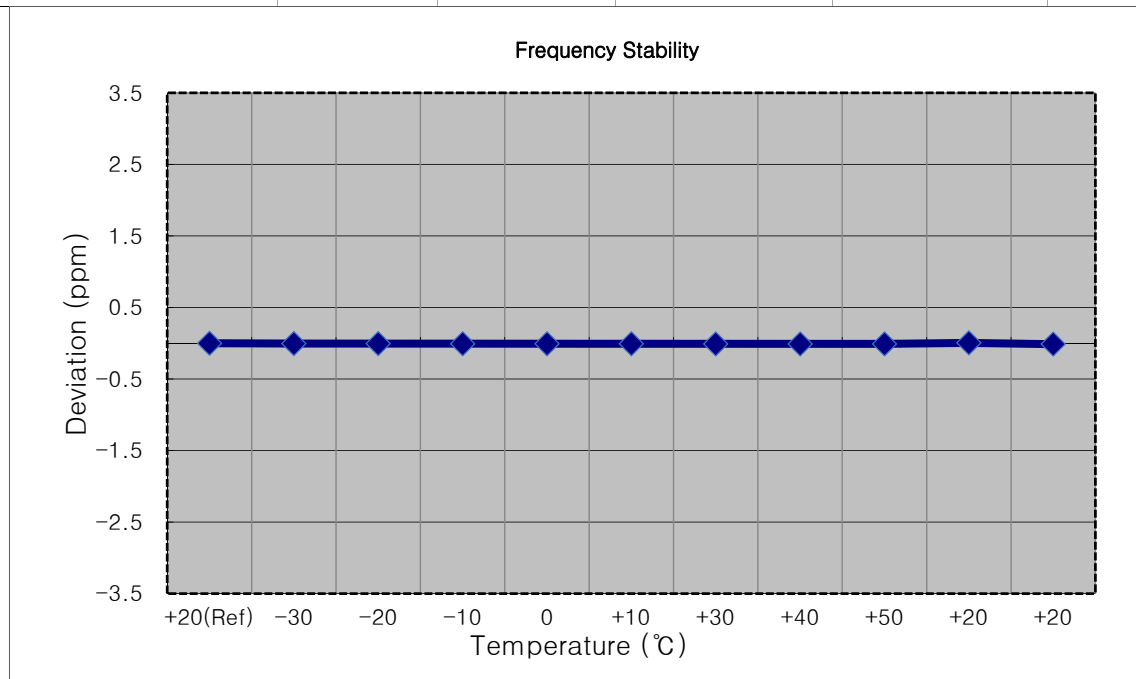


9. TEST PLOTS


LTE B12_1.4M_PAR_Mid_QPSK_FullRB

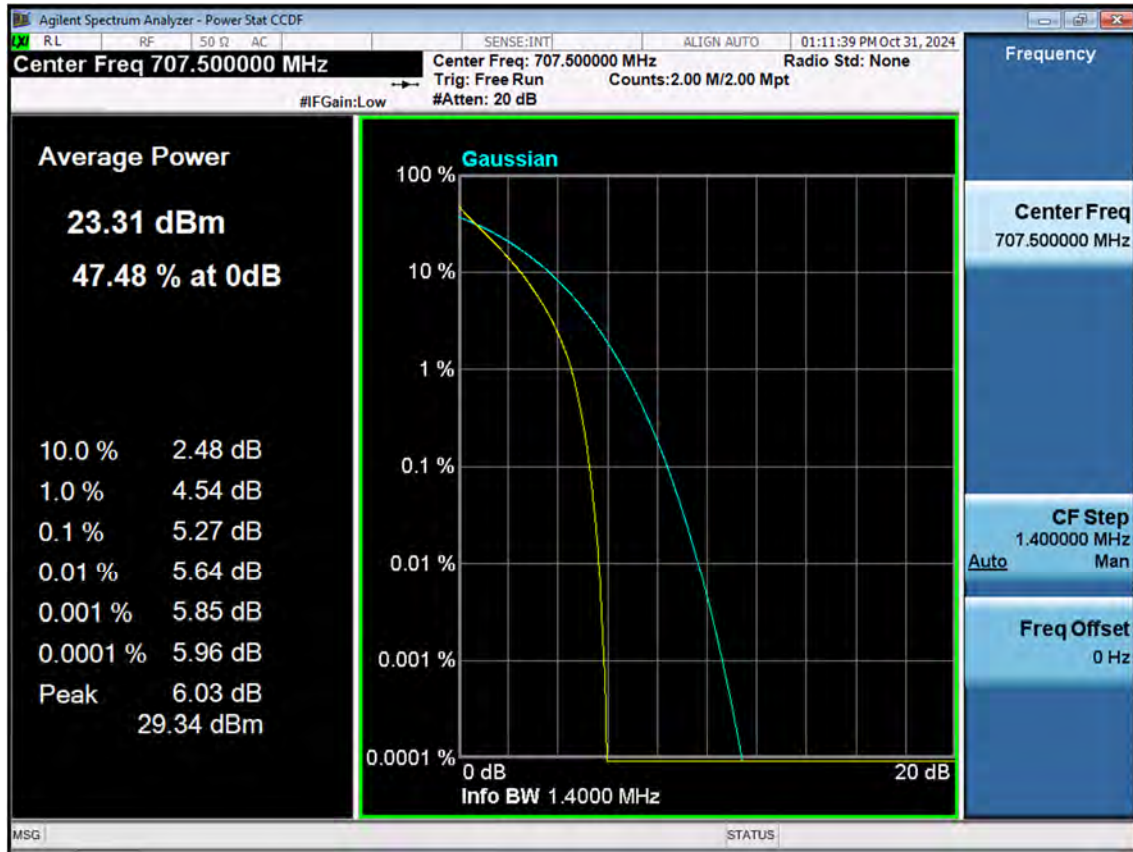


LTE B12_1.4M_PAR_Mid_16QAM_FullRB

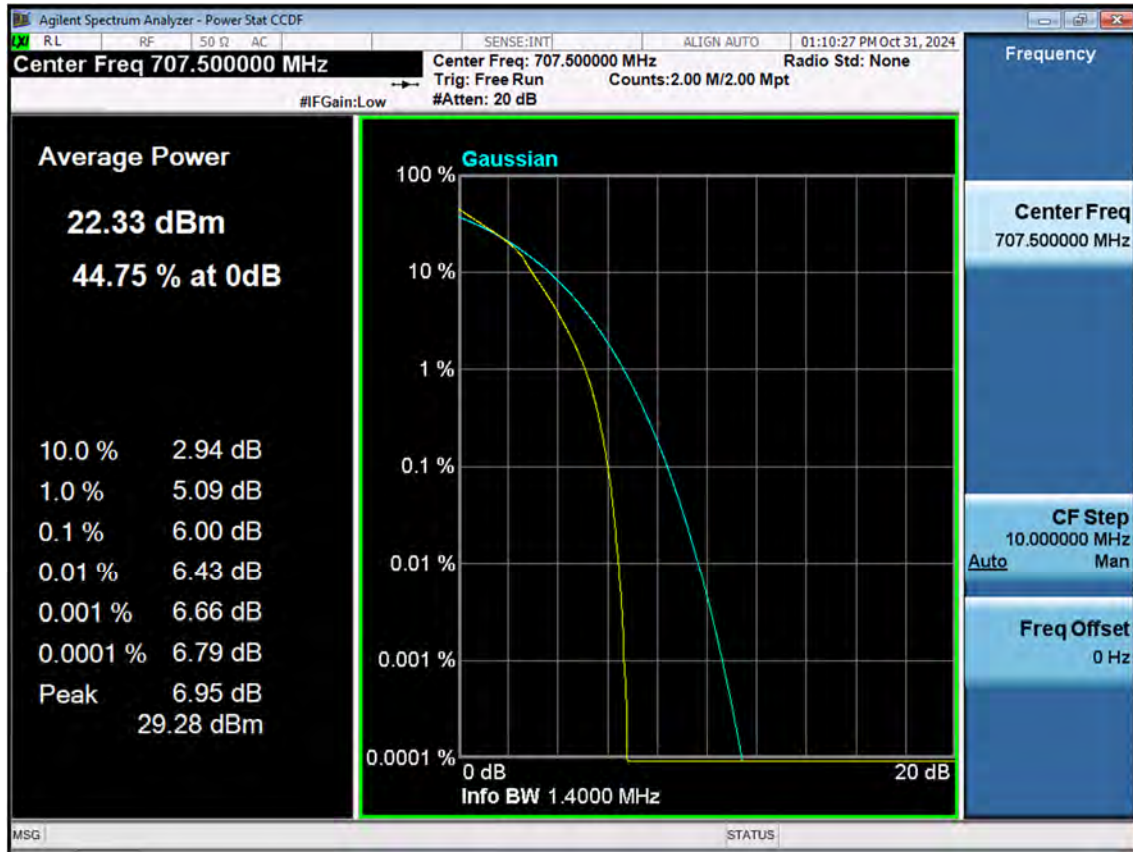


LTE B12_1.4M_PAR_Mid_64QAM_FullRB

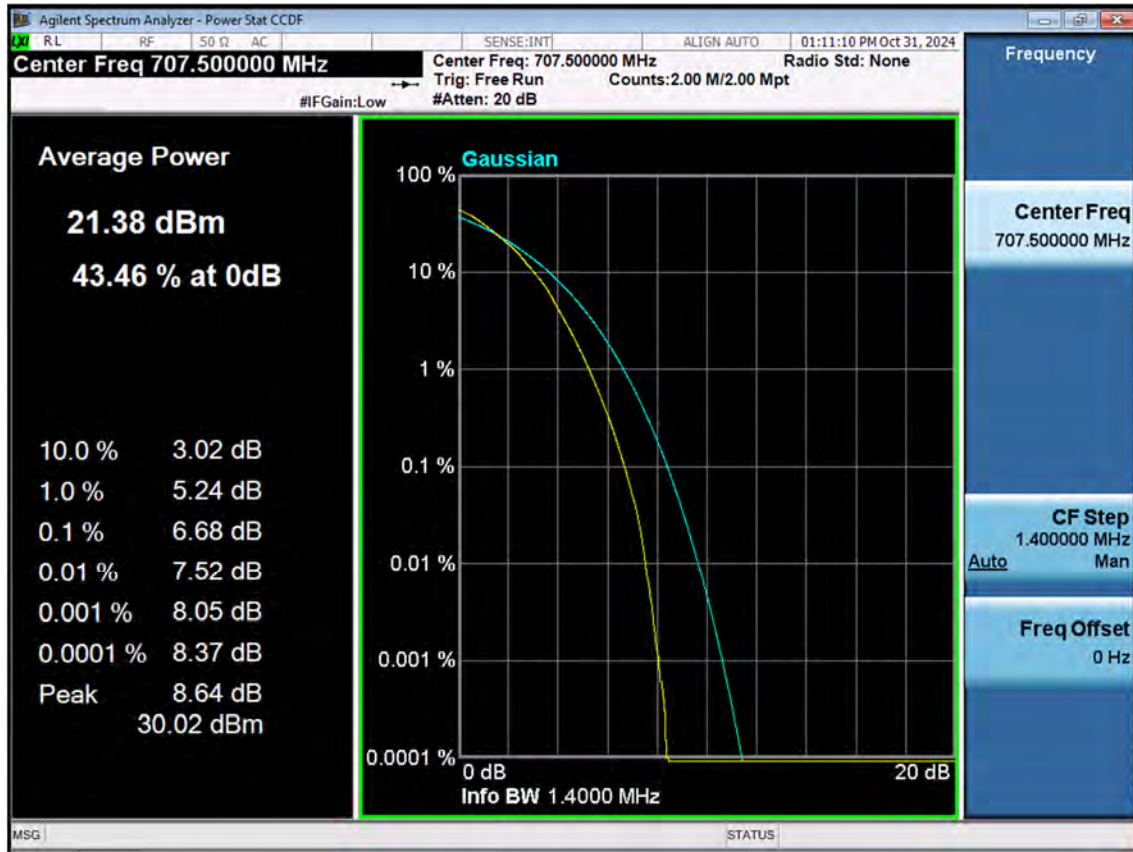


LTE B12_1.4M_PAR_Mid_256QAM_FullRB

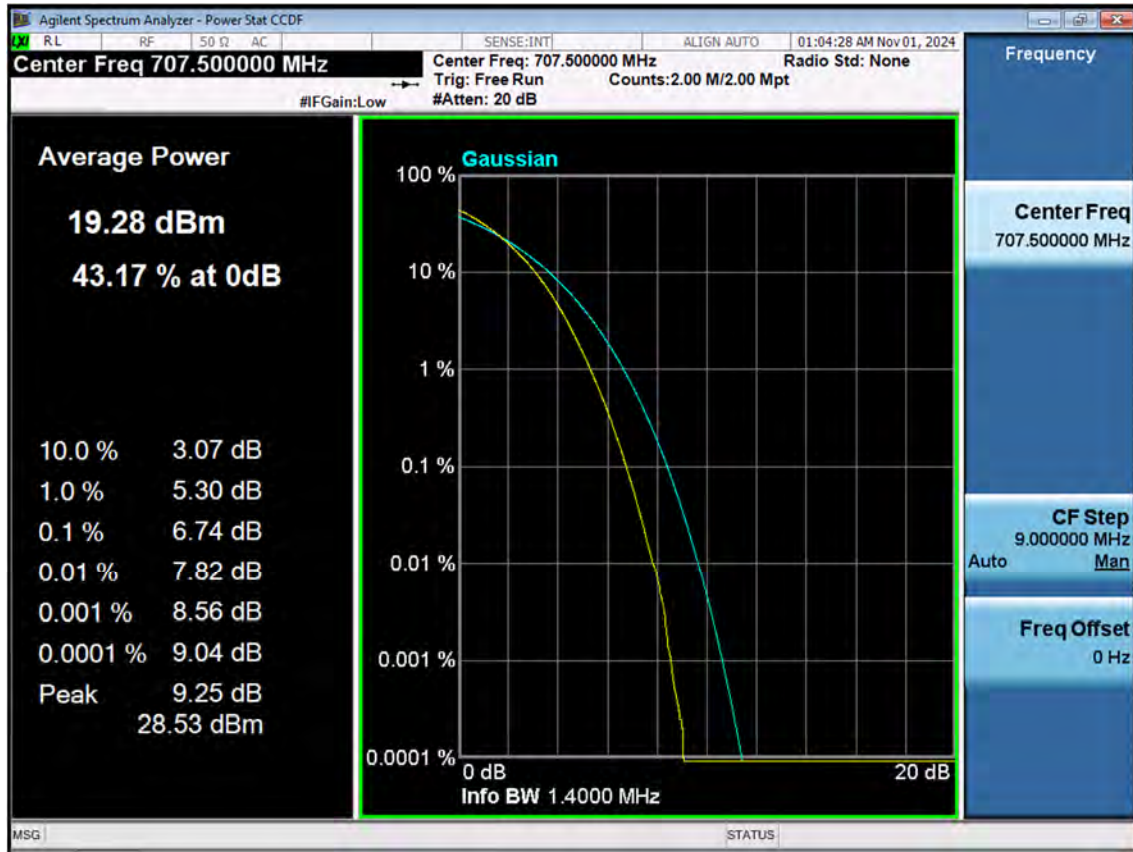


LTE B12_3 M_PAR_Mid_QPSK_FullRB

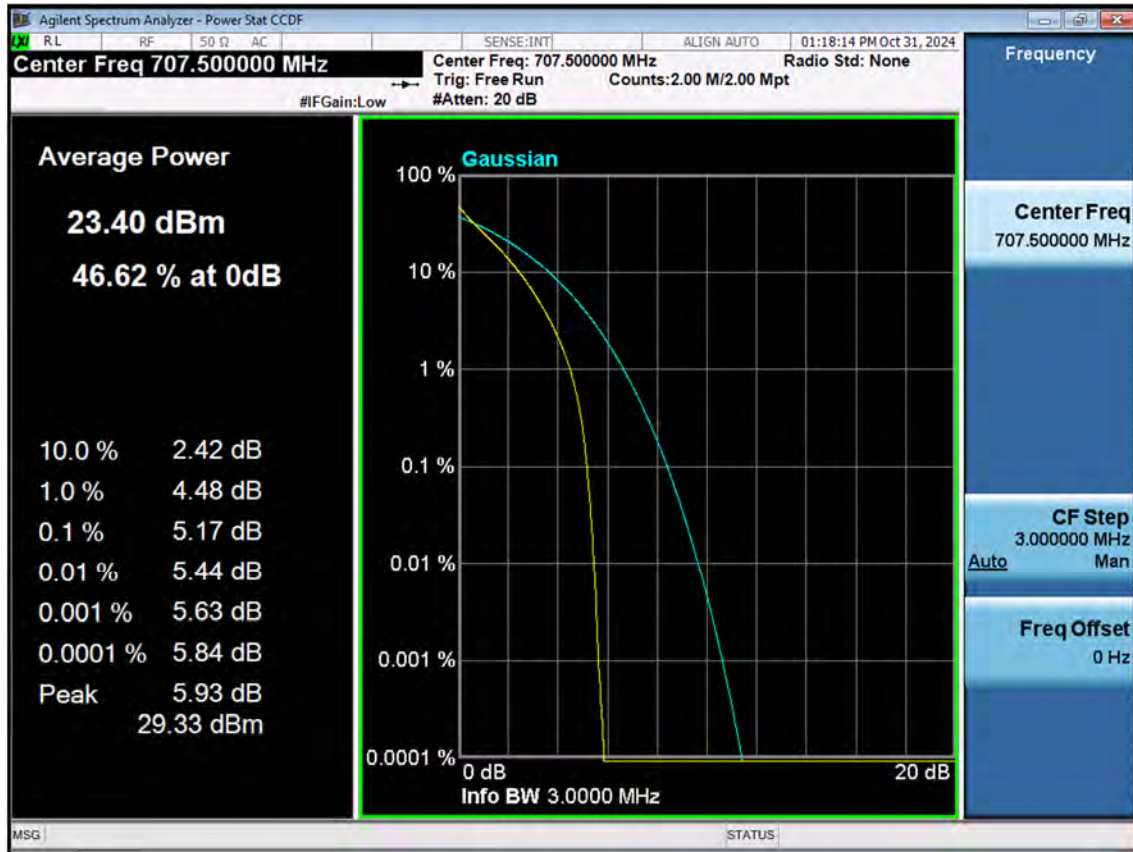


LTE B12_3 M_PAR_Mid_16QAM_FullRB

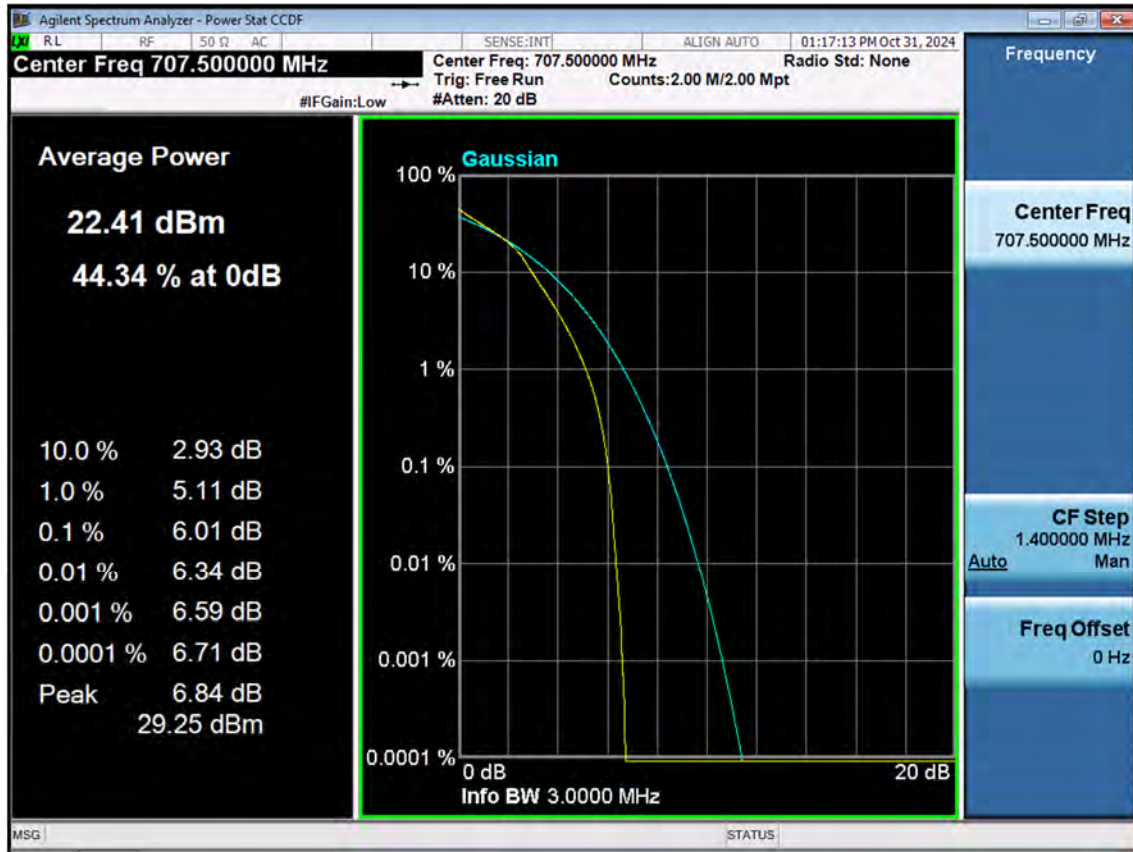


LTE B12_3 M_PAR_Mid_64QAM_FullRB

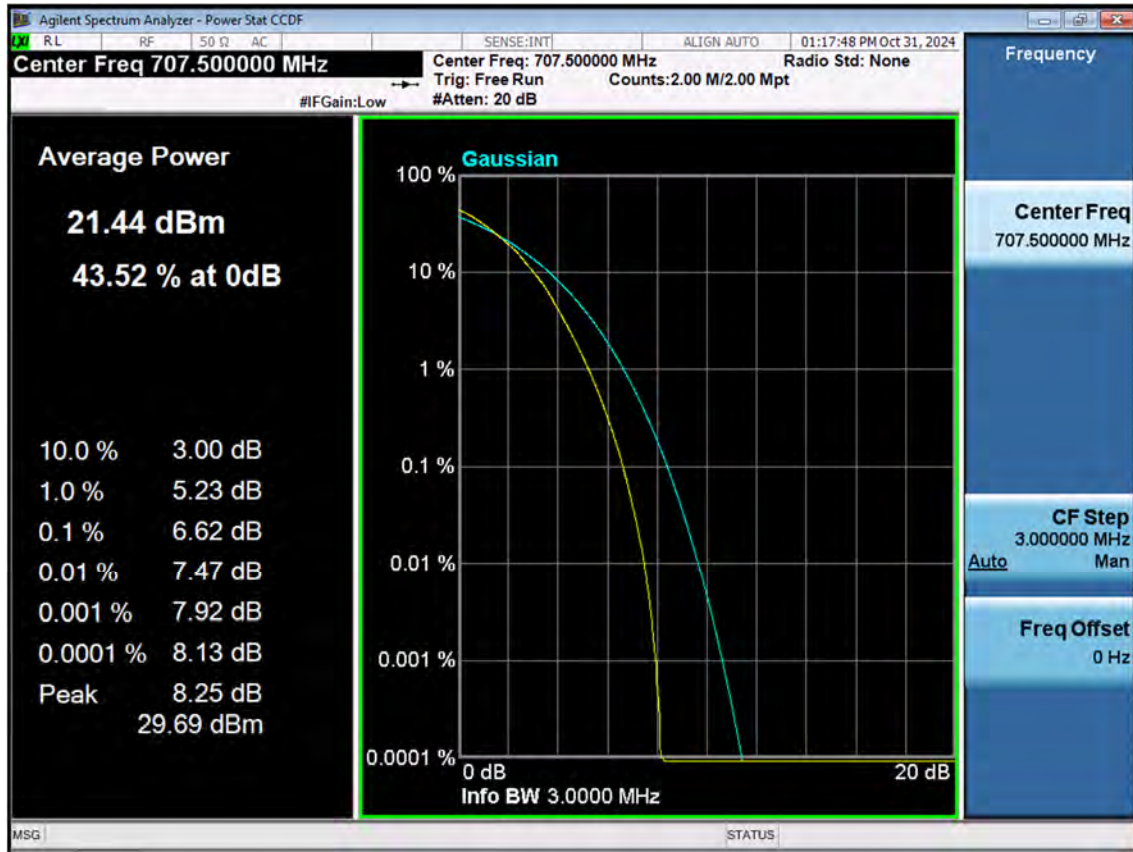


LTE B12_3 M_PAR_Mid_256QAM_FullRB

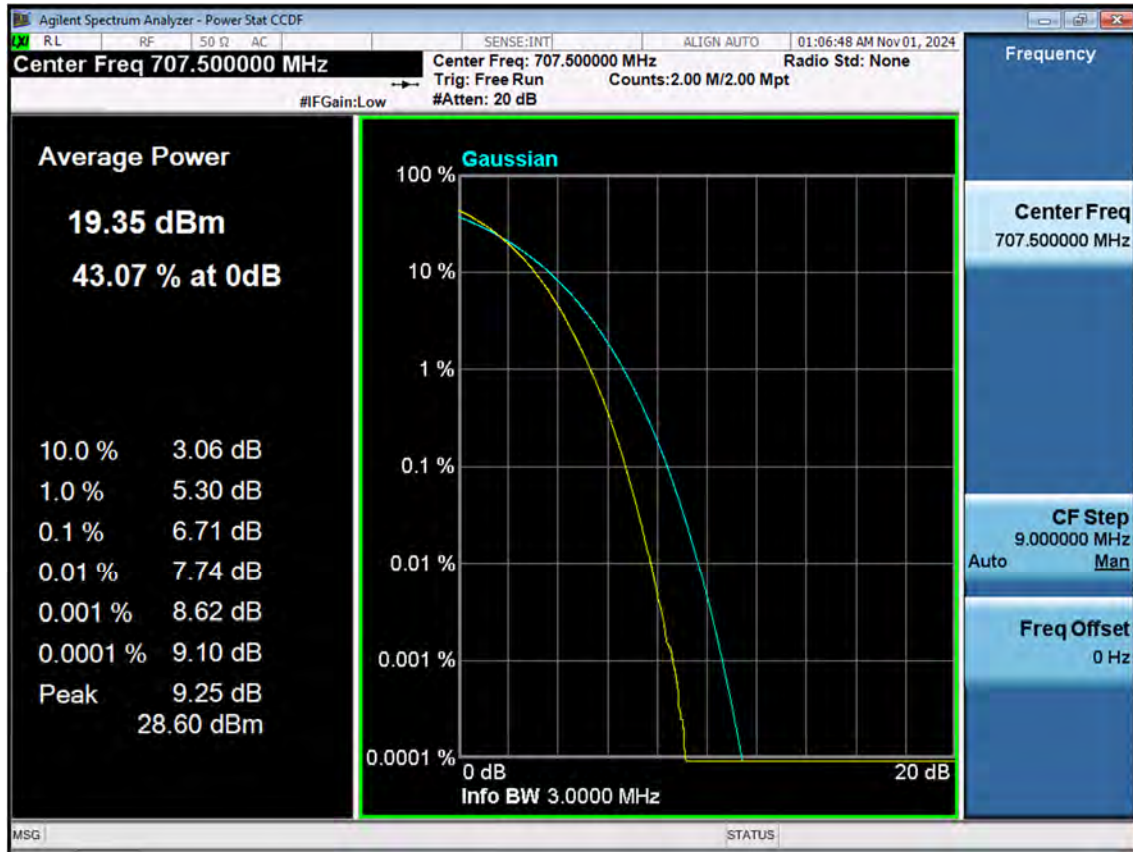


LTE B12_5 M_PAR_Mid_QPSK_FullRB

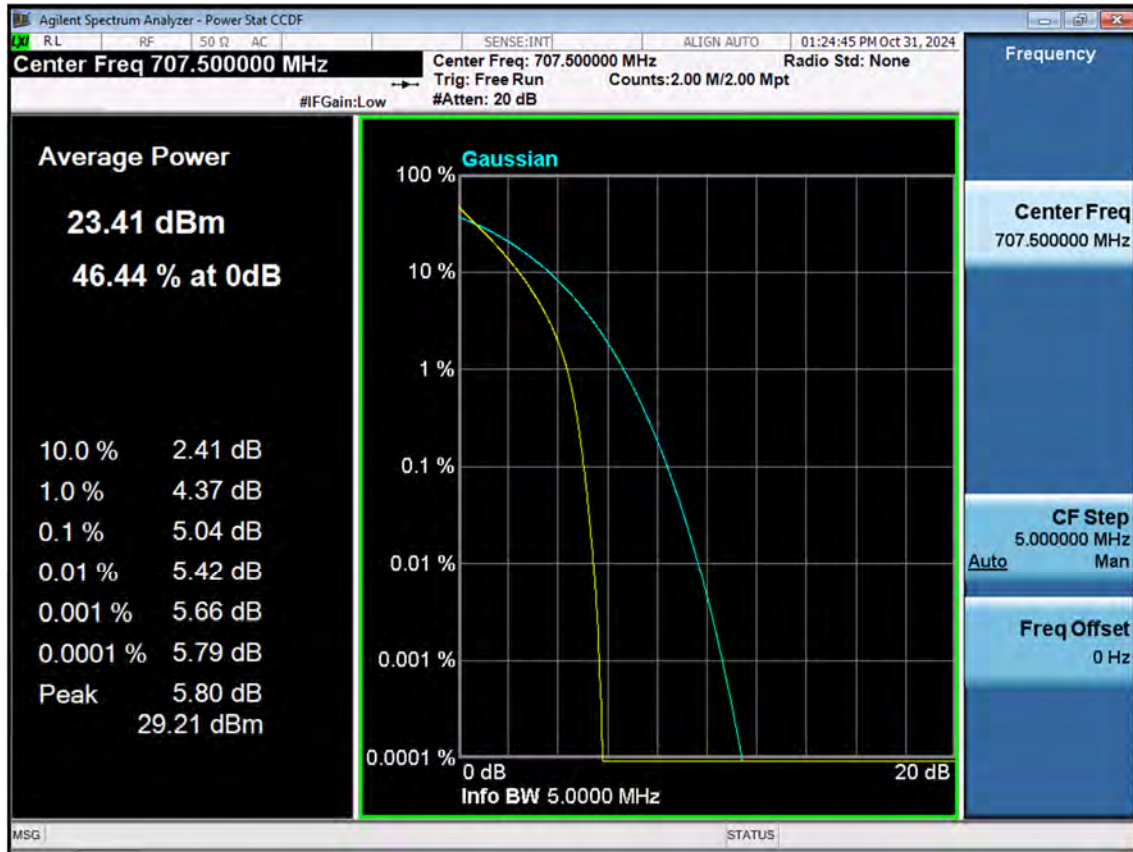


LTE B12_5 M_PAR_Mid_16QAM_FullRB

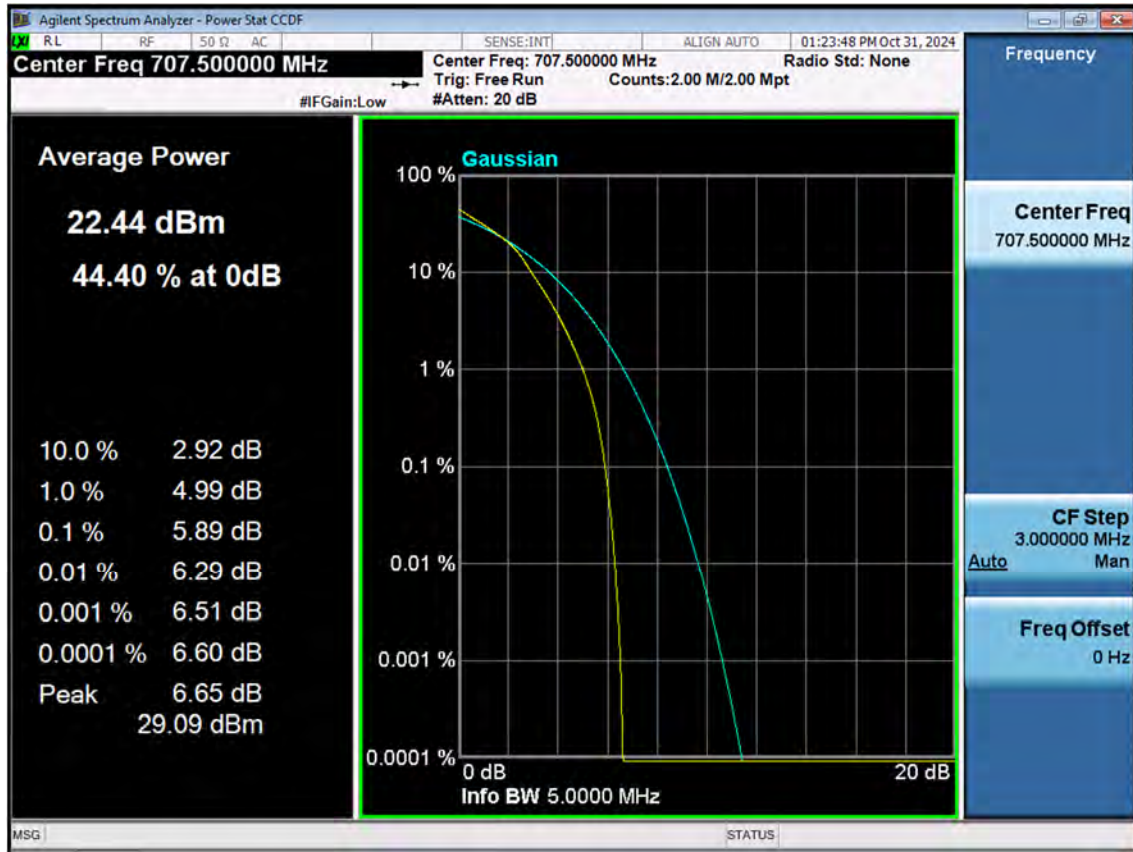


LTE B12_5 M_PAR_Mid_64QAM_FullRB

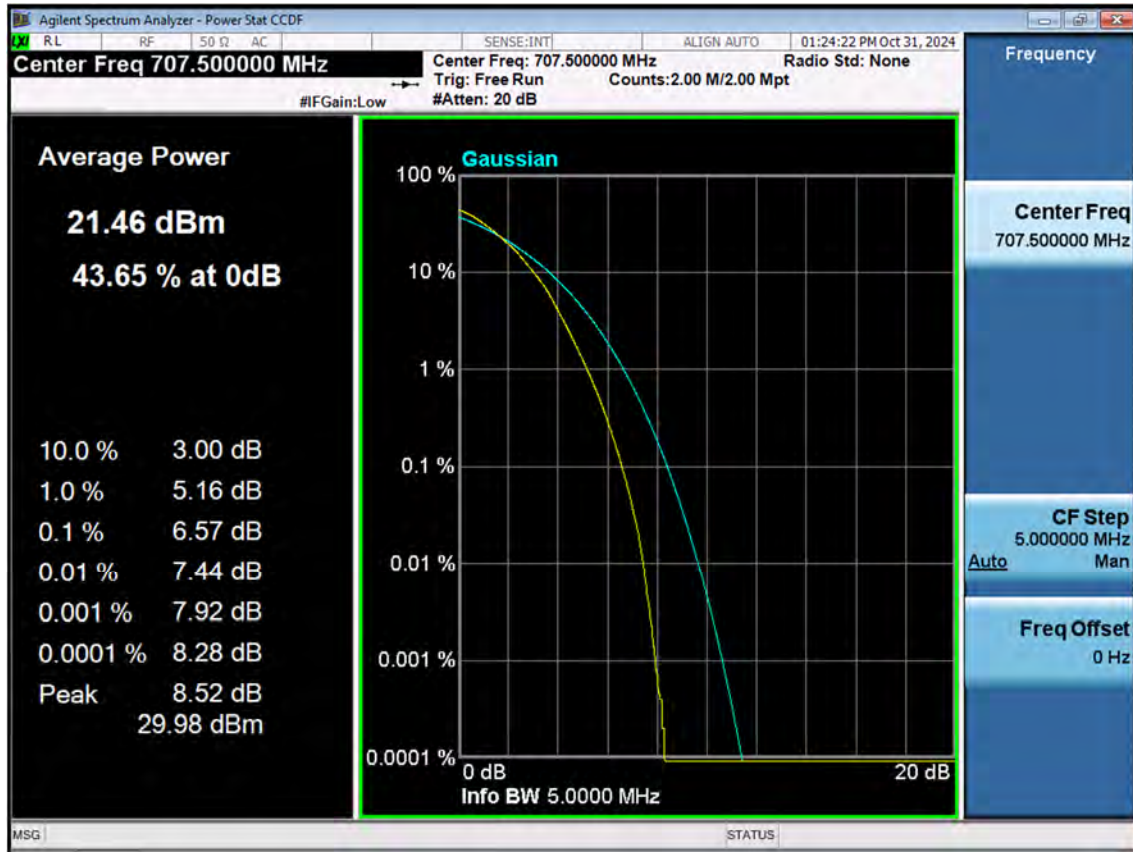


LTE B12_5 M_PAR_Mid_256QAM_FullRB

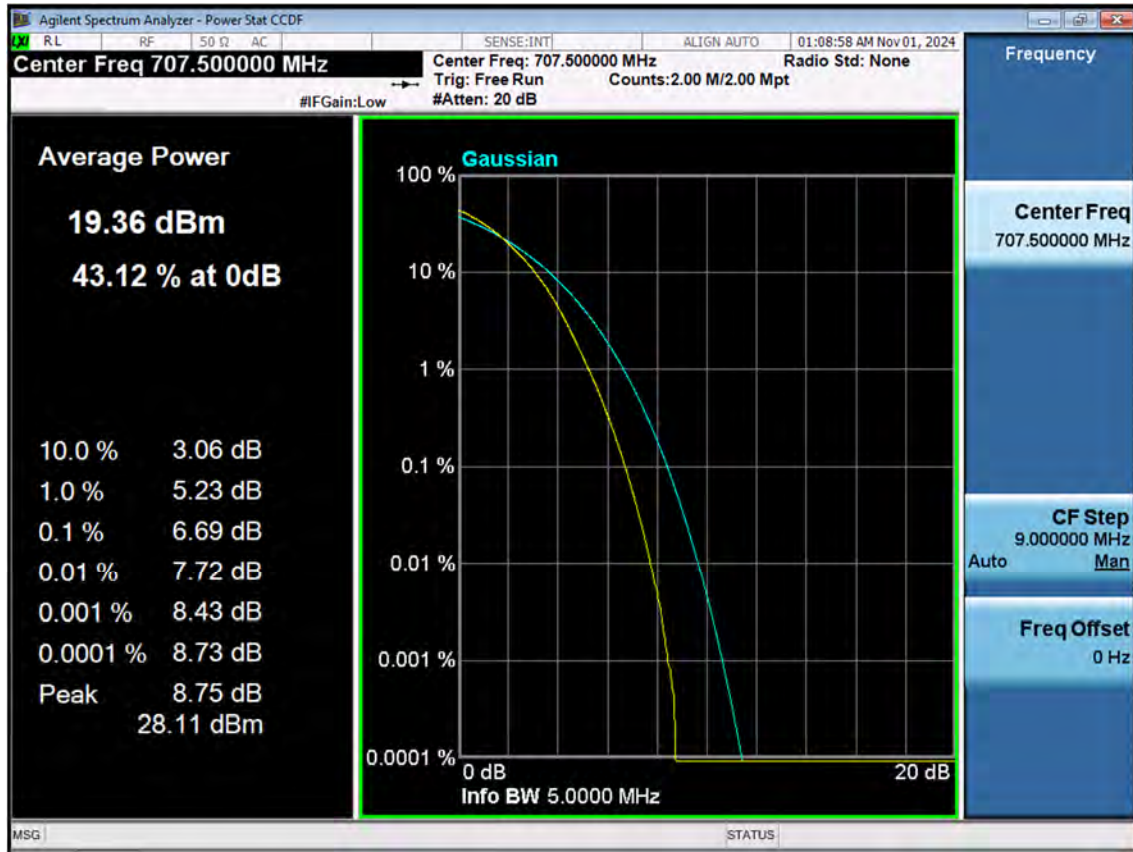


LTE B12_10 M_PAR_Mid_QPSK_FullRB

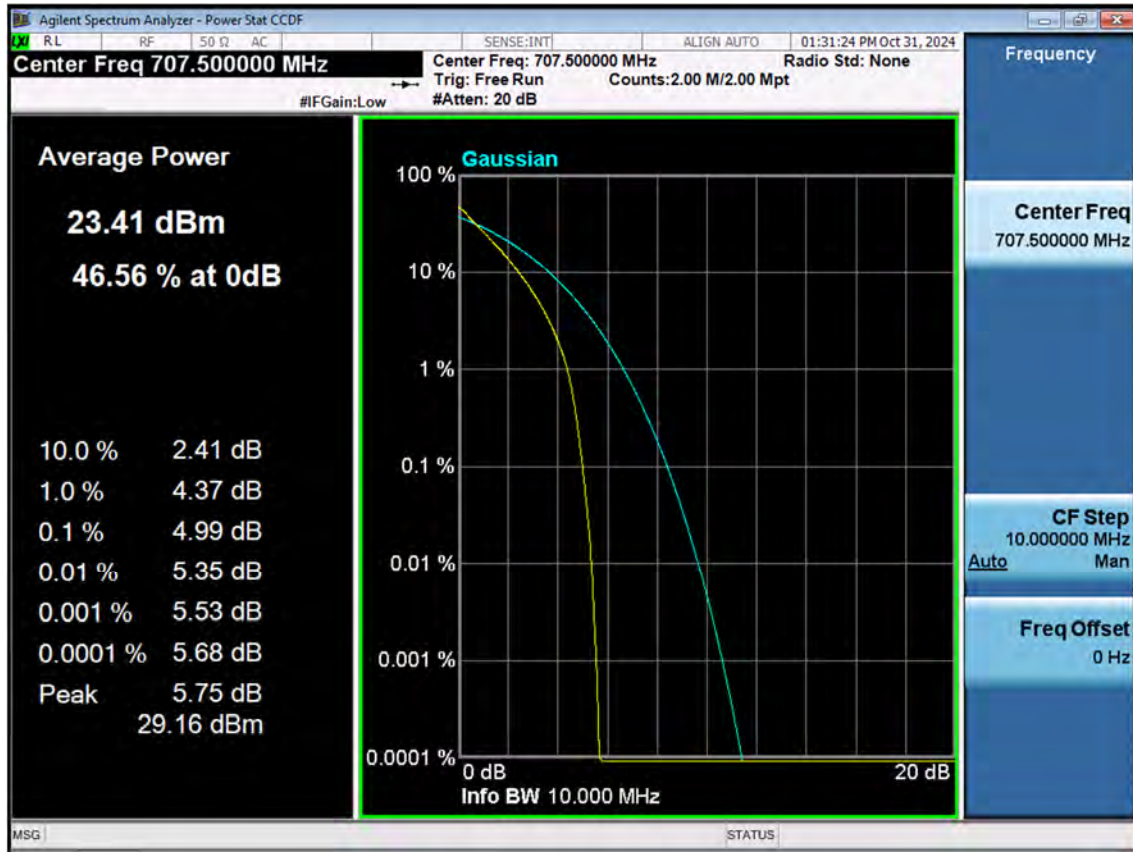


LTE B12_10 M_PAR_Mid_16QAM_FullRB

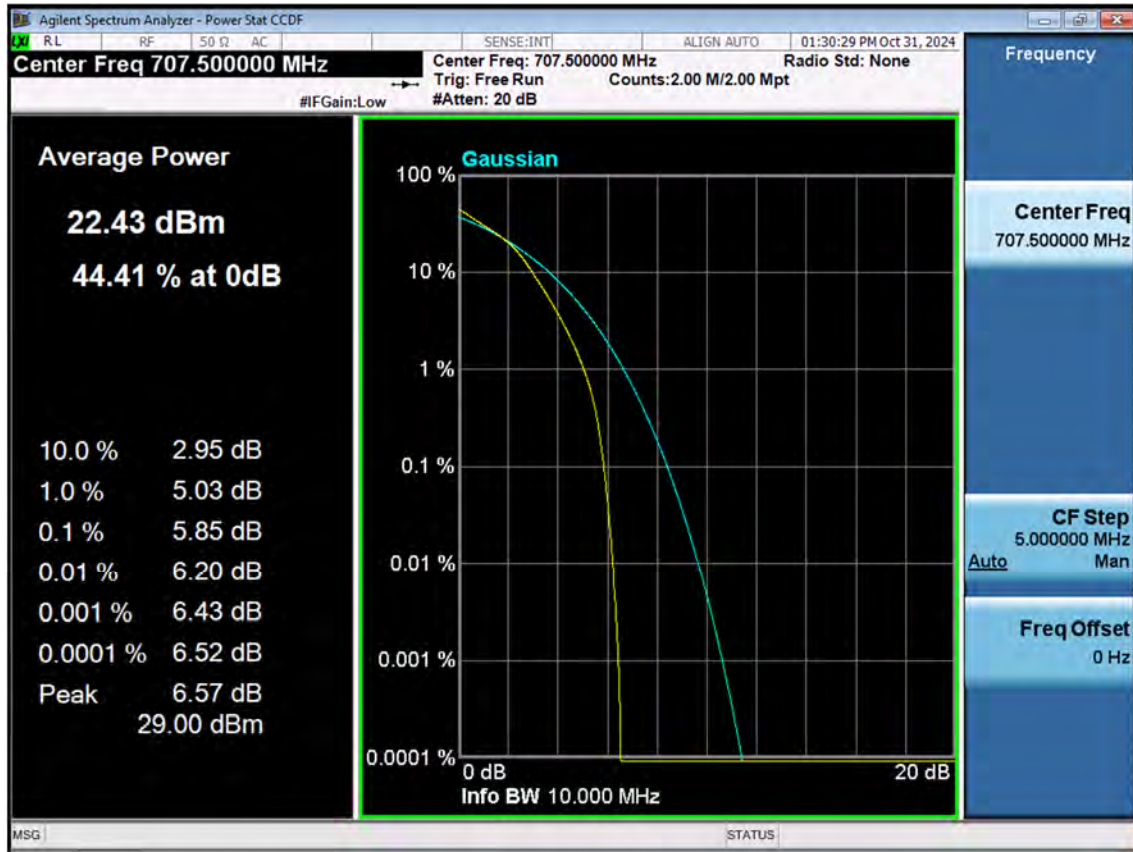


LTE B12_10 M_PAR_Mid_64QAM_FullRB

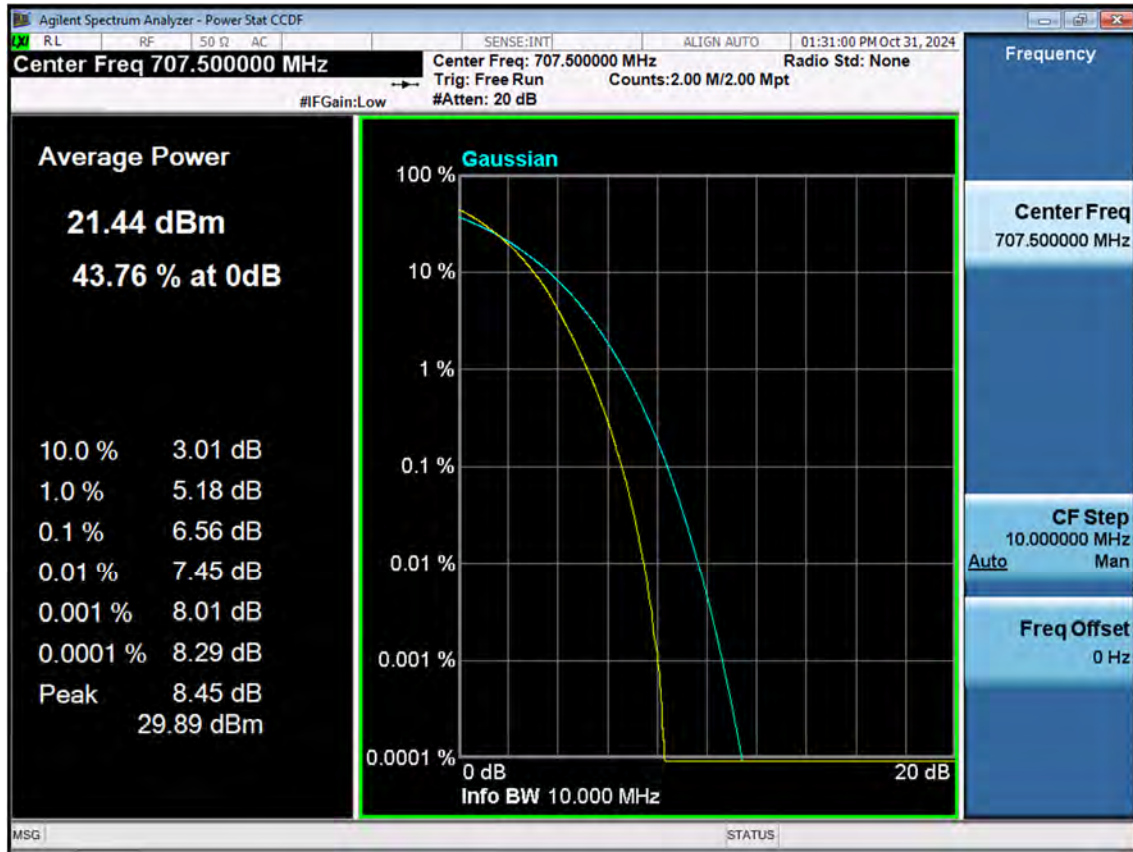


LTE B12_10 M_PAR_Mid_256QAM_FullRB

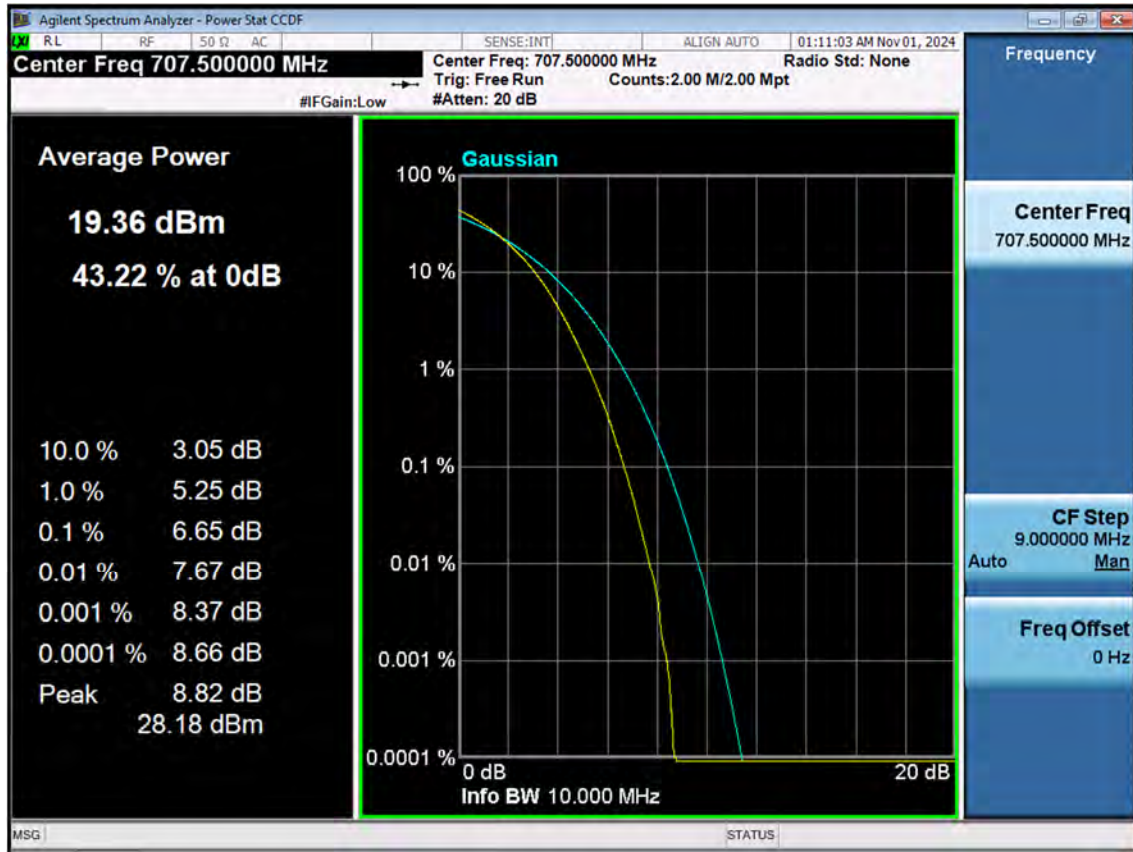


LTE B12_1.4M_OBW_Mid_QPSK_FullRB

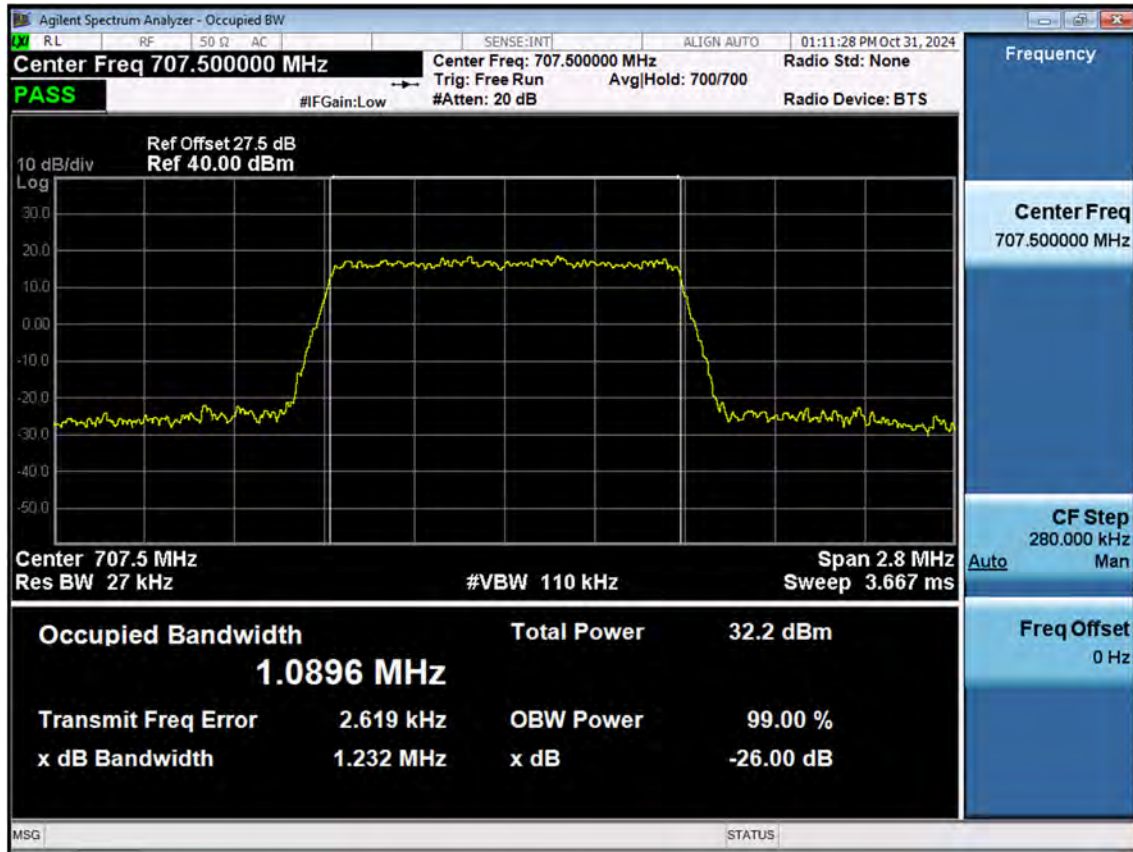


LTE B12_1.4M_OBW_Mid_16QAM_FullRB

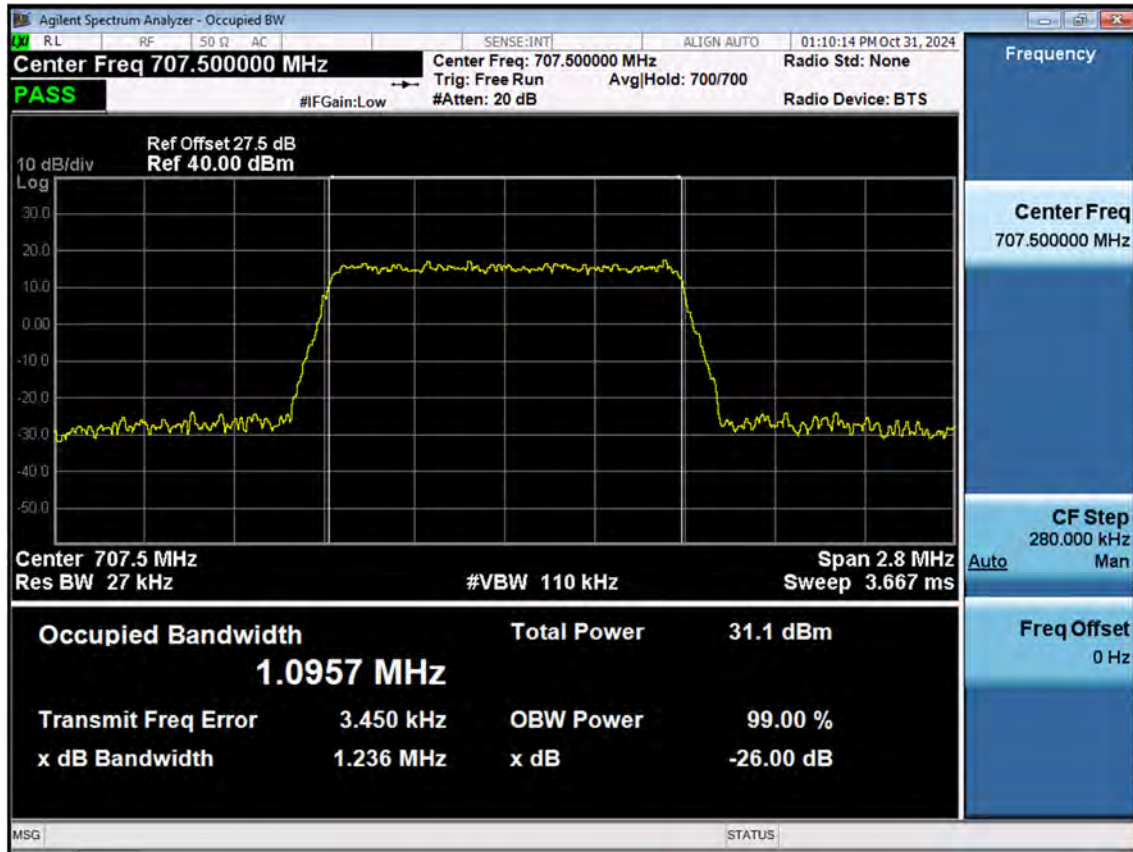


LTE B12_1.4M_OBW_Mid_64QAM_FullRB

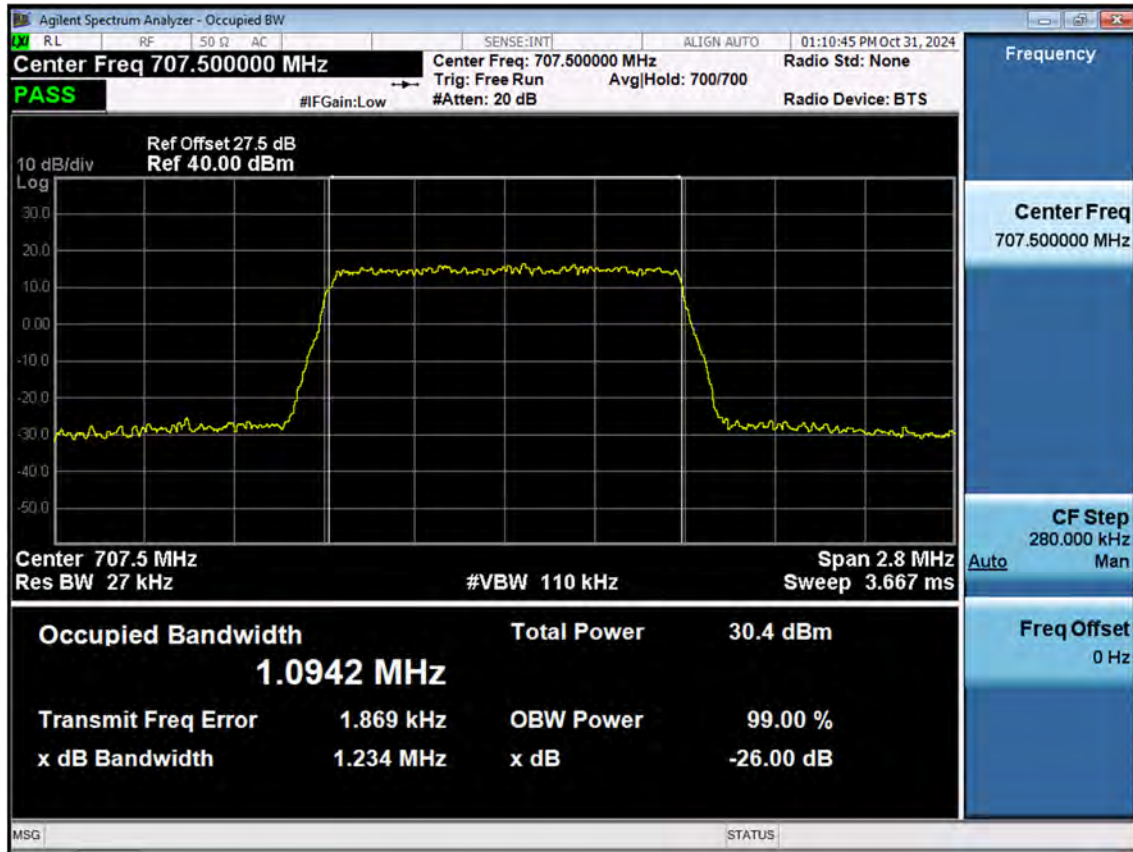


LTE B12_1.4M_OBW_Mid_256QAM_FullRB

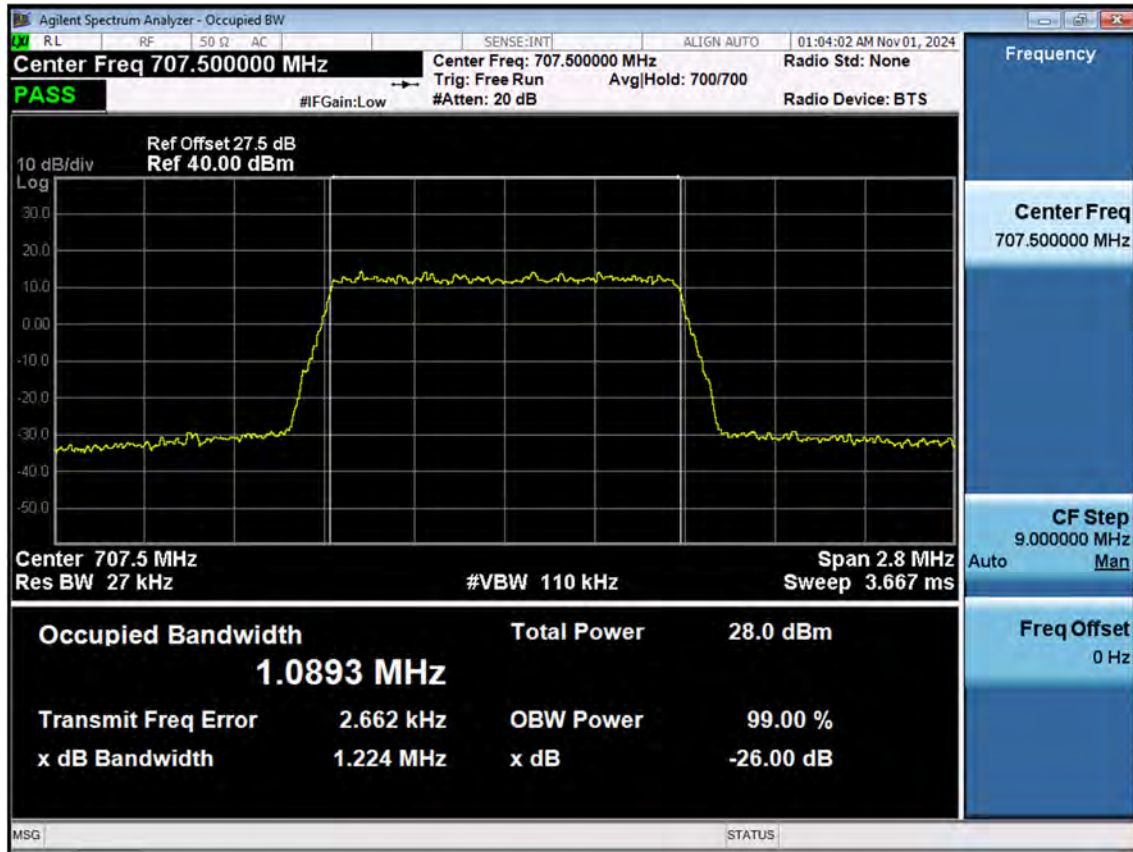


LTE B12_3 M_OBW_Mid_QPSK_FullRB

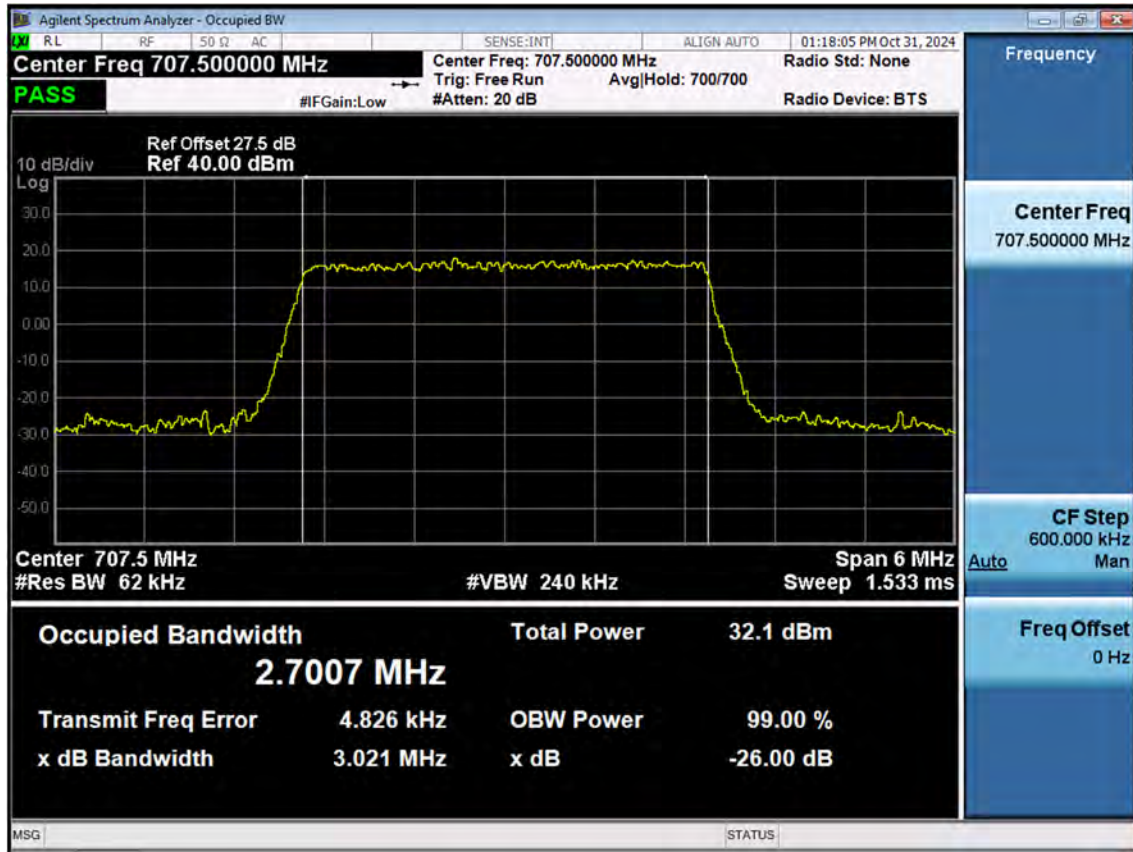


LTE B12_3 M_OBW_Mid_16QAM_FullRB

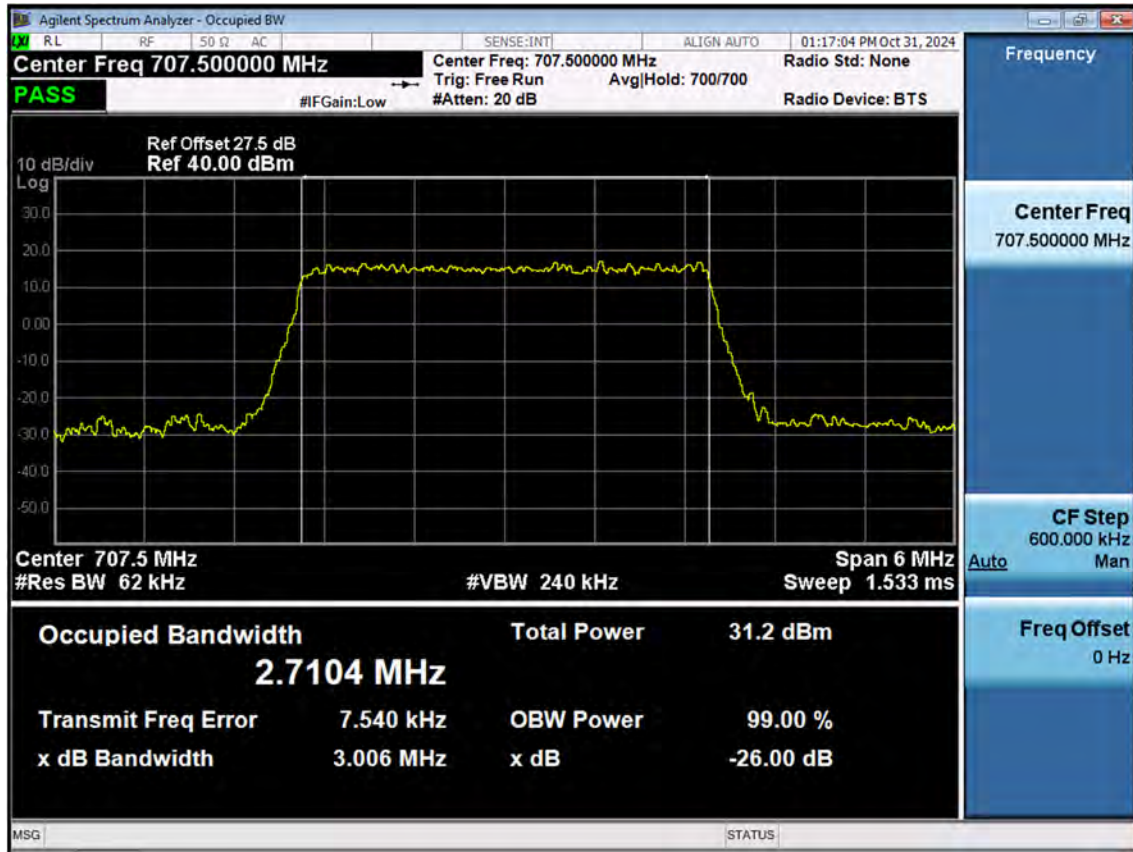


LTE B12_3 M_OBW_Mid_64QAM_FullRB

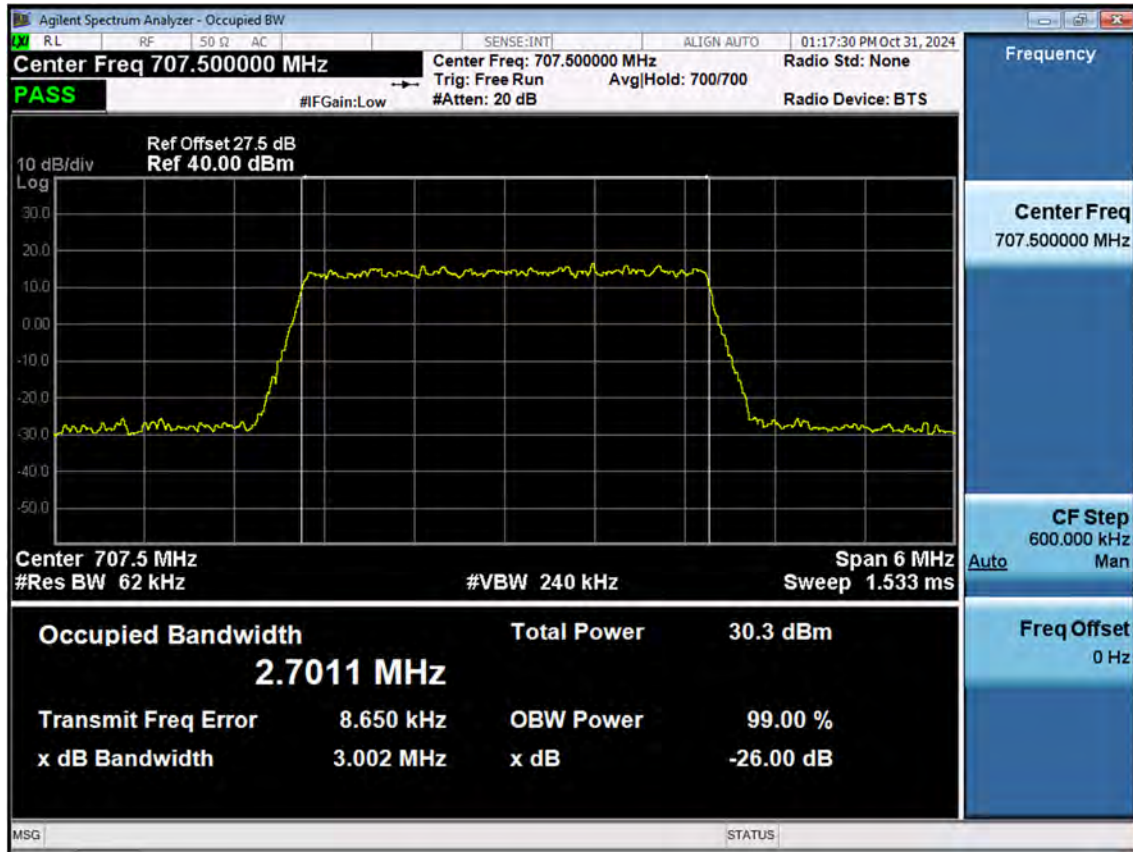


LTE B12_3 M_OBW_Mid_256QAM_FullRB

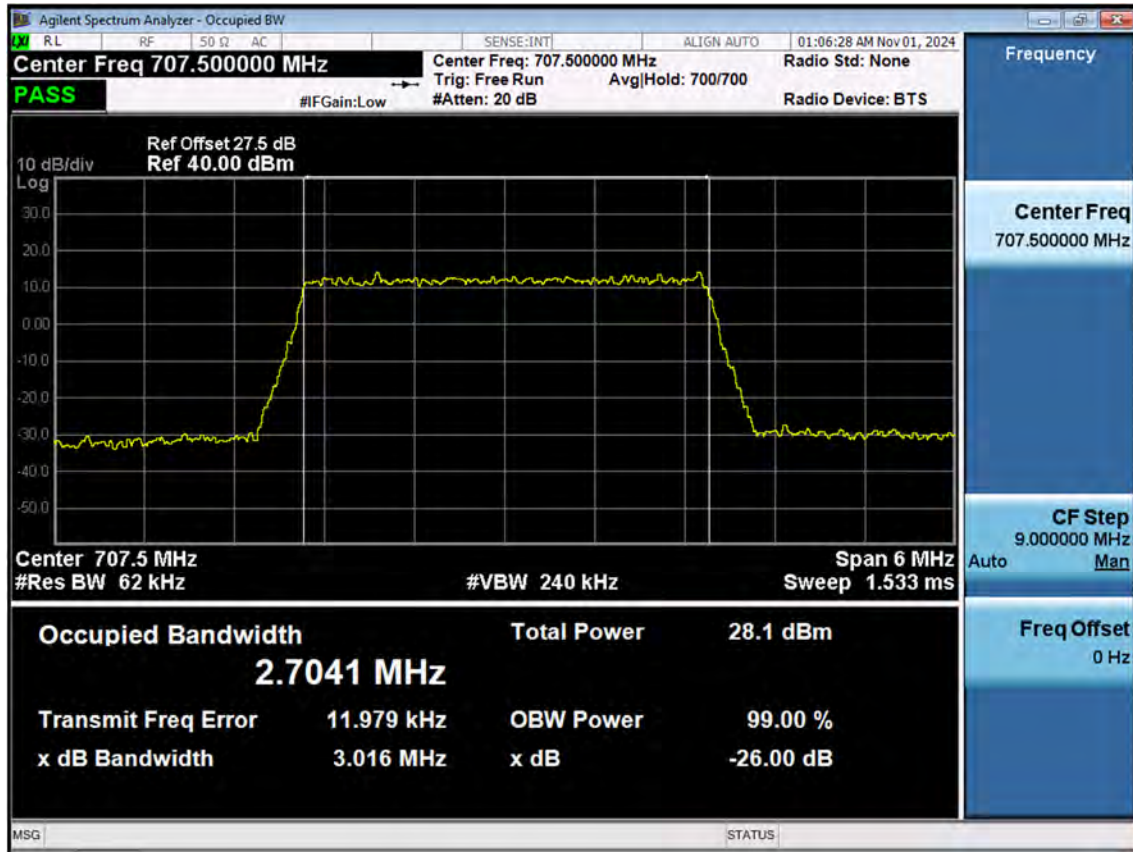


LTE B12_5 M_OBW_Mid_QPSK_FullRB

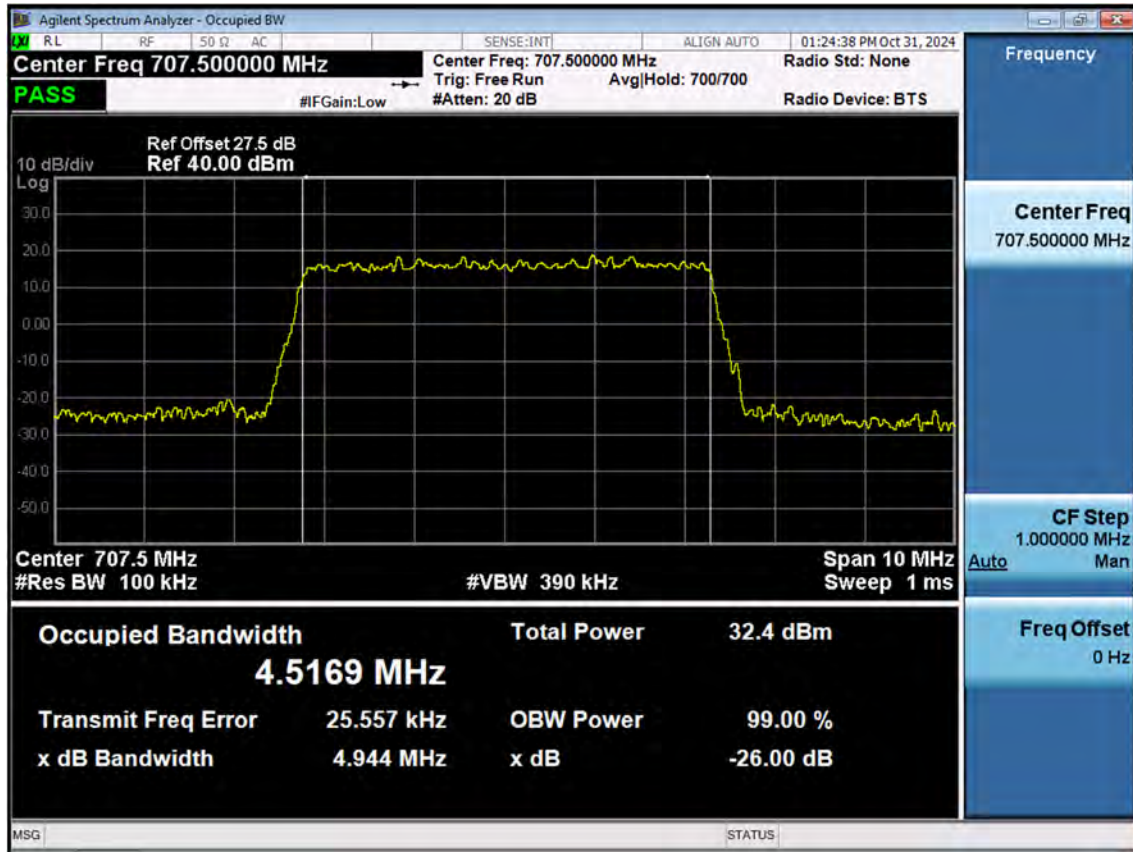


LTE B12_5 M_OBW_Mid_16QAM_FullRB

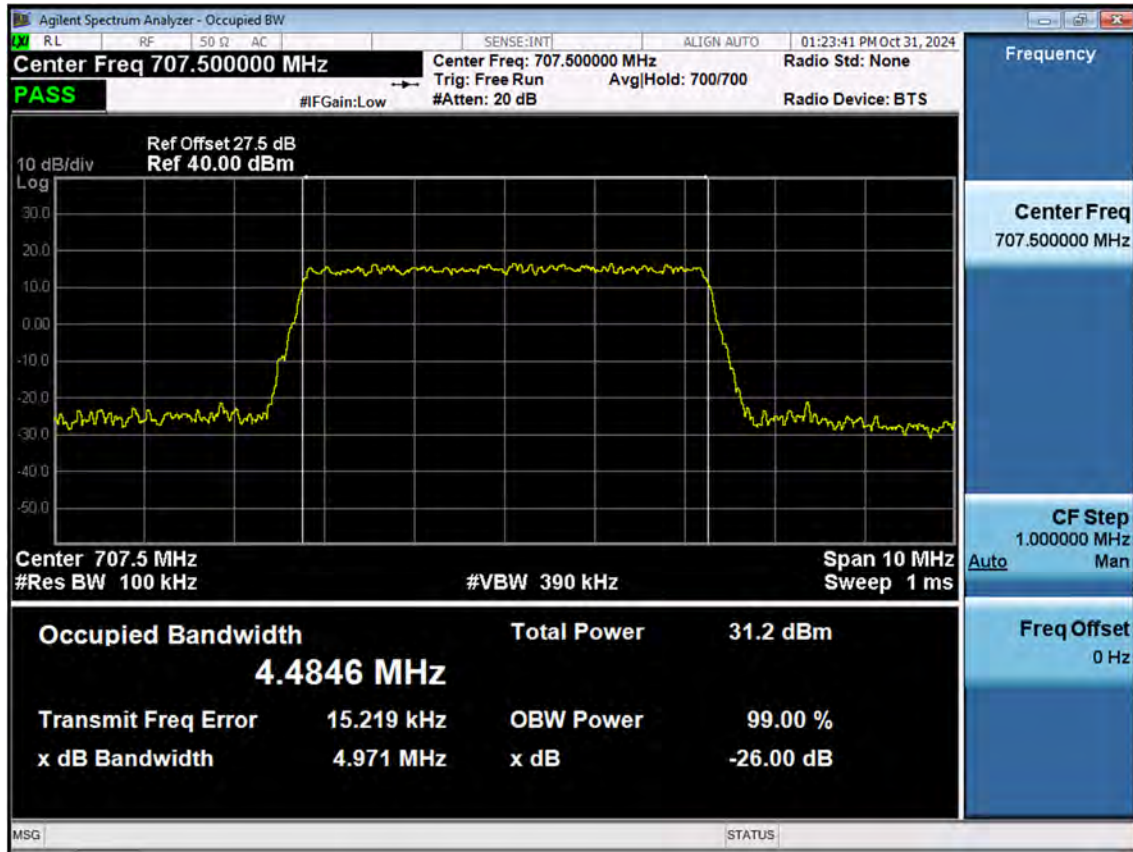


LTE B12_5 M_OBW_Mid_64QAM_FullRB

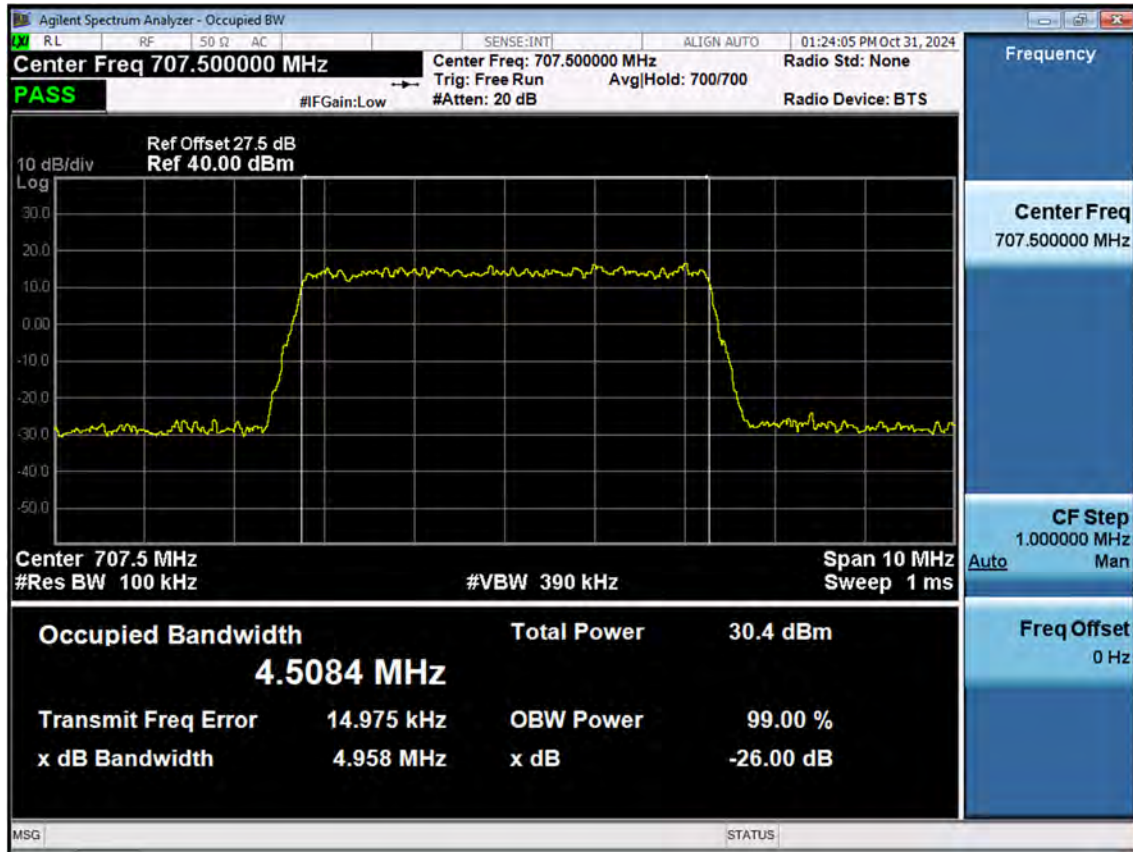


LTE B12_5 M_OBW_Mid_256QAM_FullRB

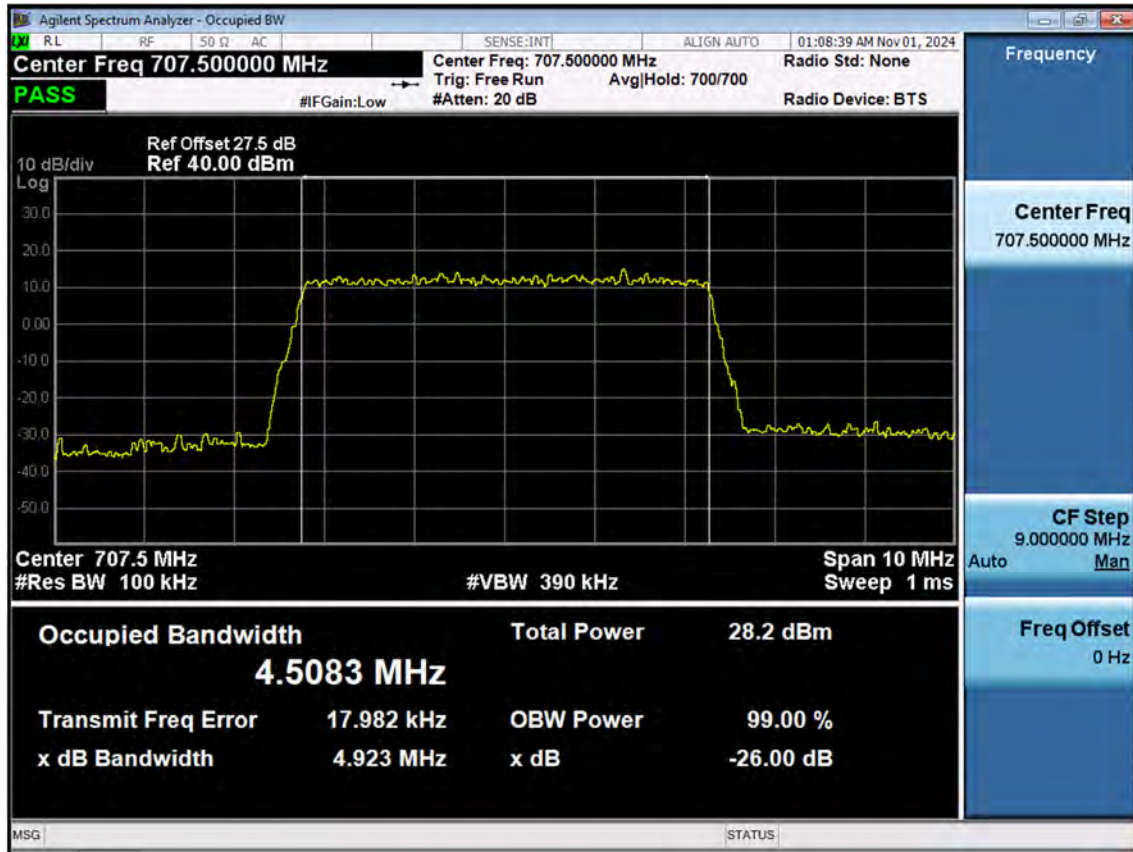


LTE B12_10 M_OBW_Mid_QPSK_FullRB

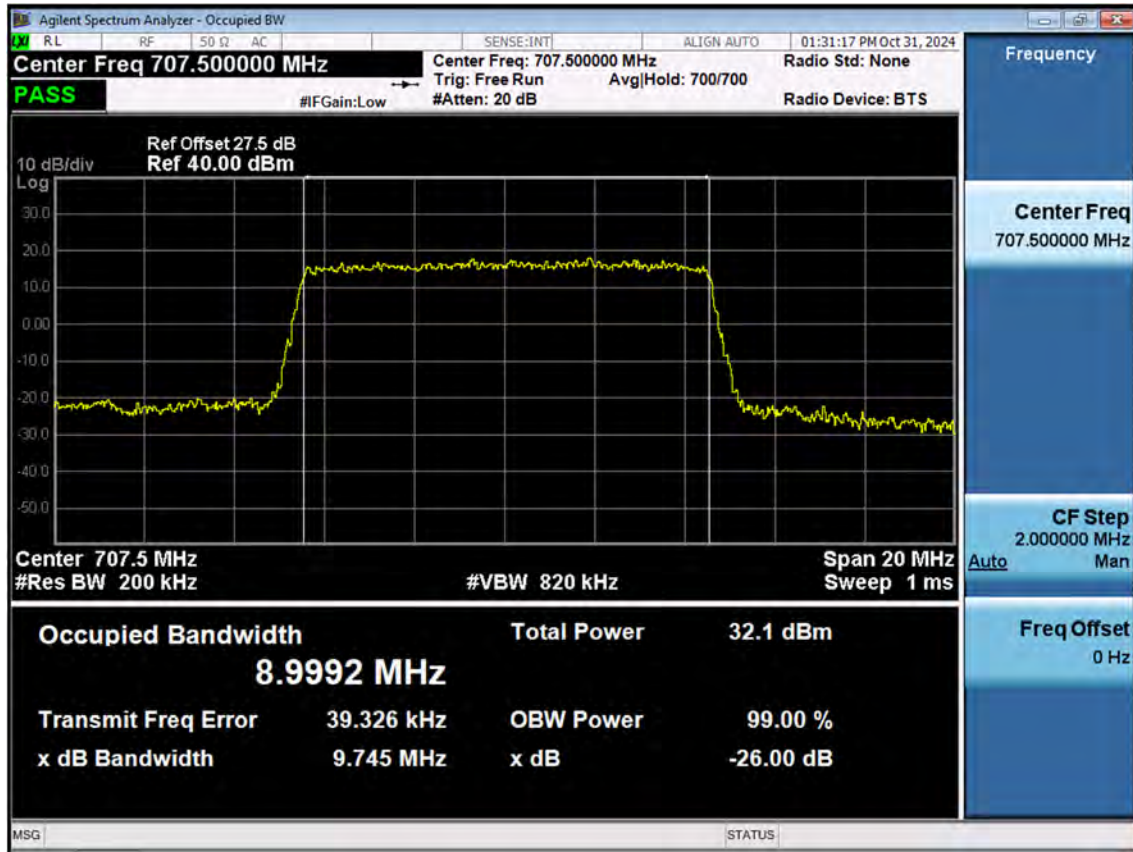


LTE B12_10 M_OBW_Mid_16QAM_FullRB

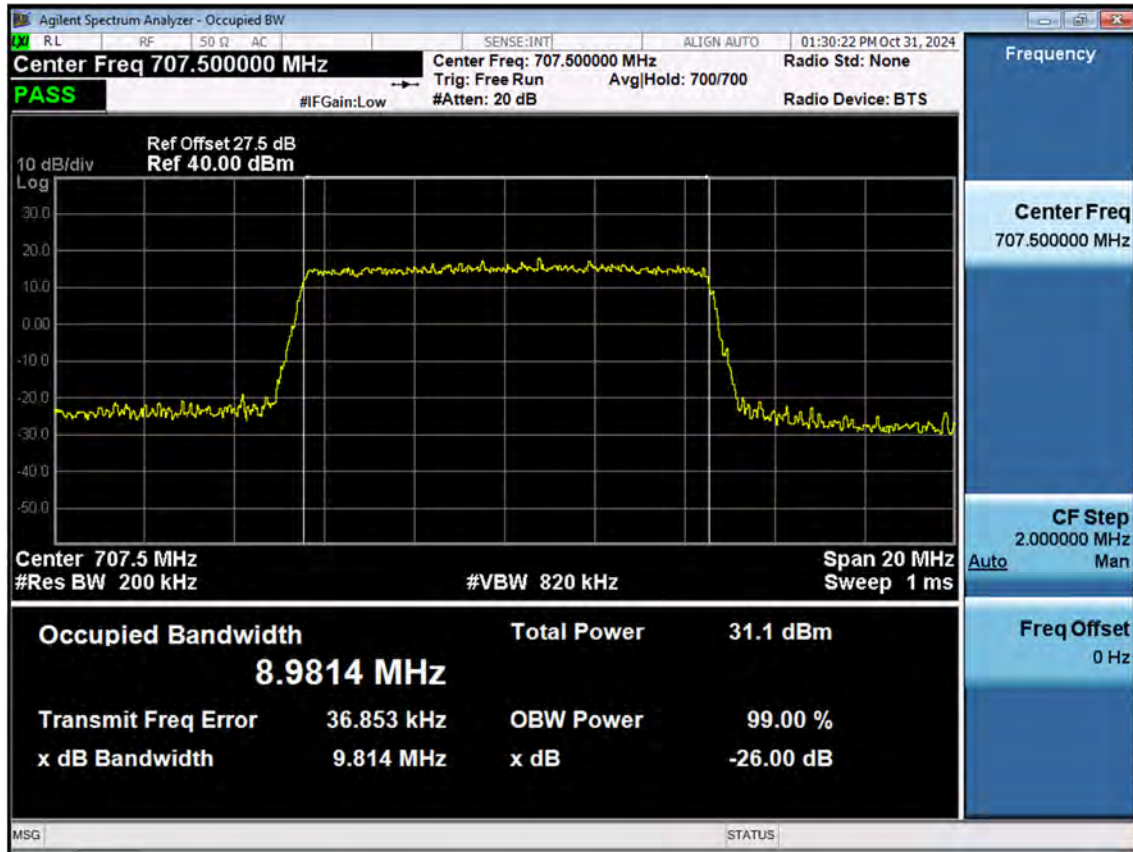


LTE B12_10 M_OBW_Mid_64QAM_FullRB

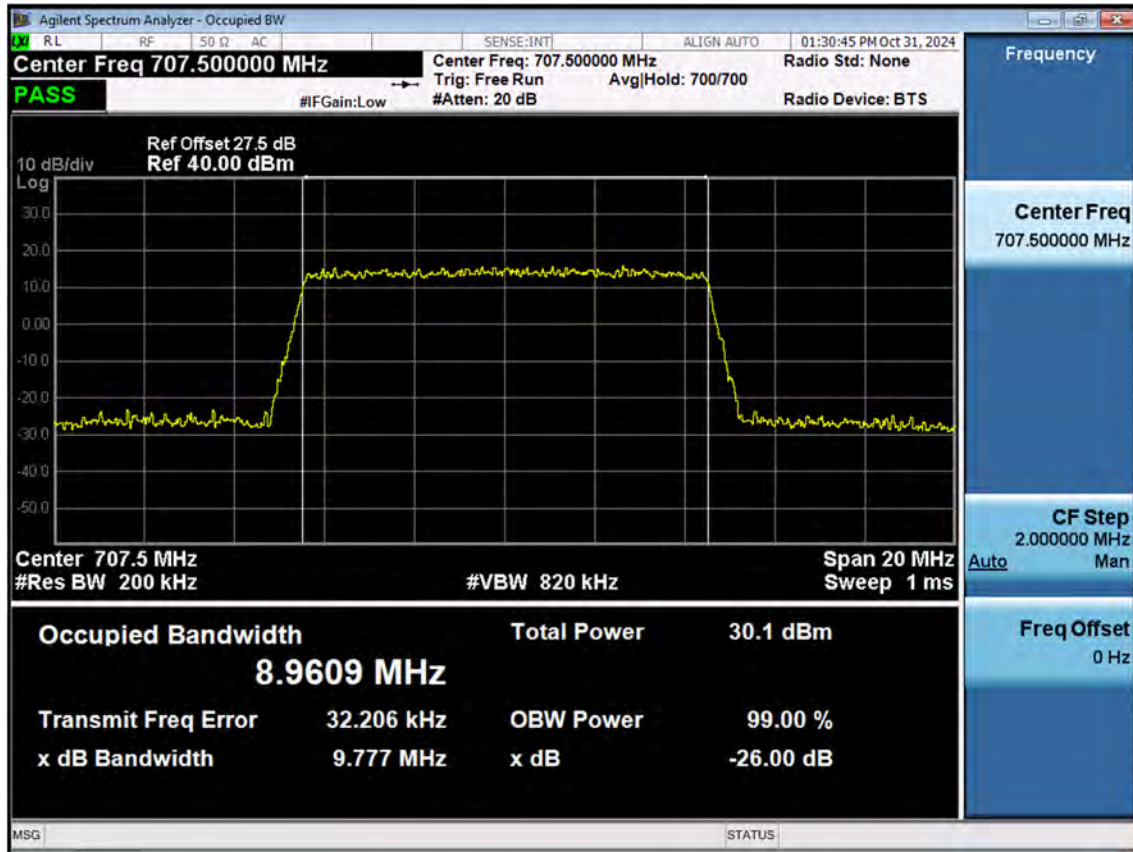


LTE B12_10 M_OBW_Mid_256QAM_FullRB

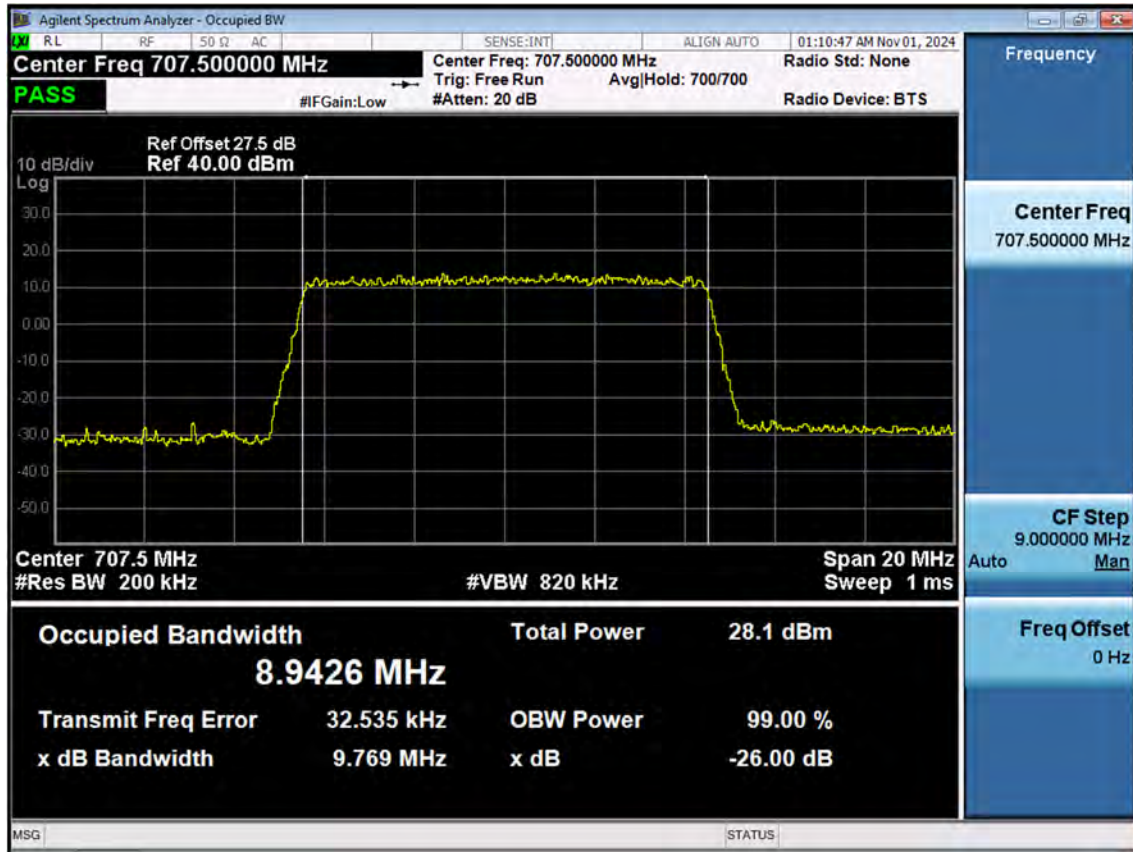


LTE B12_1.4M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

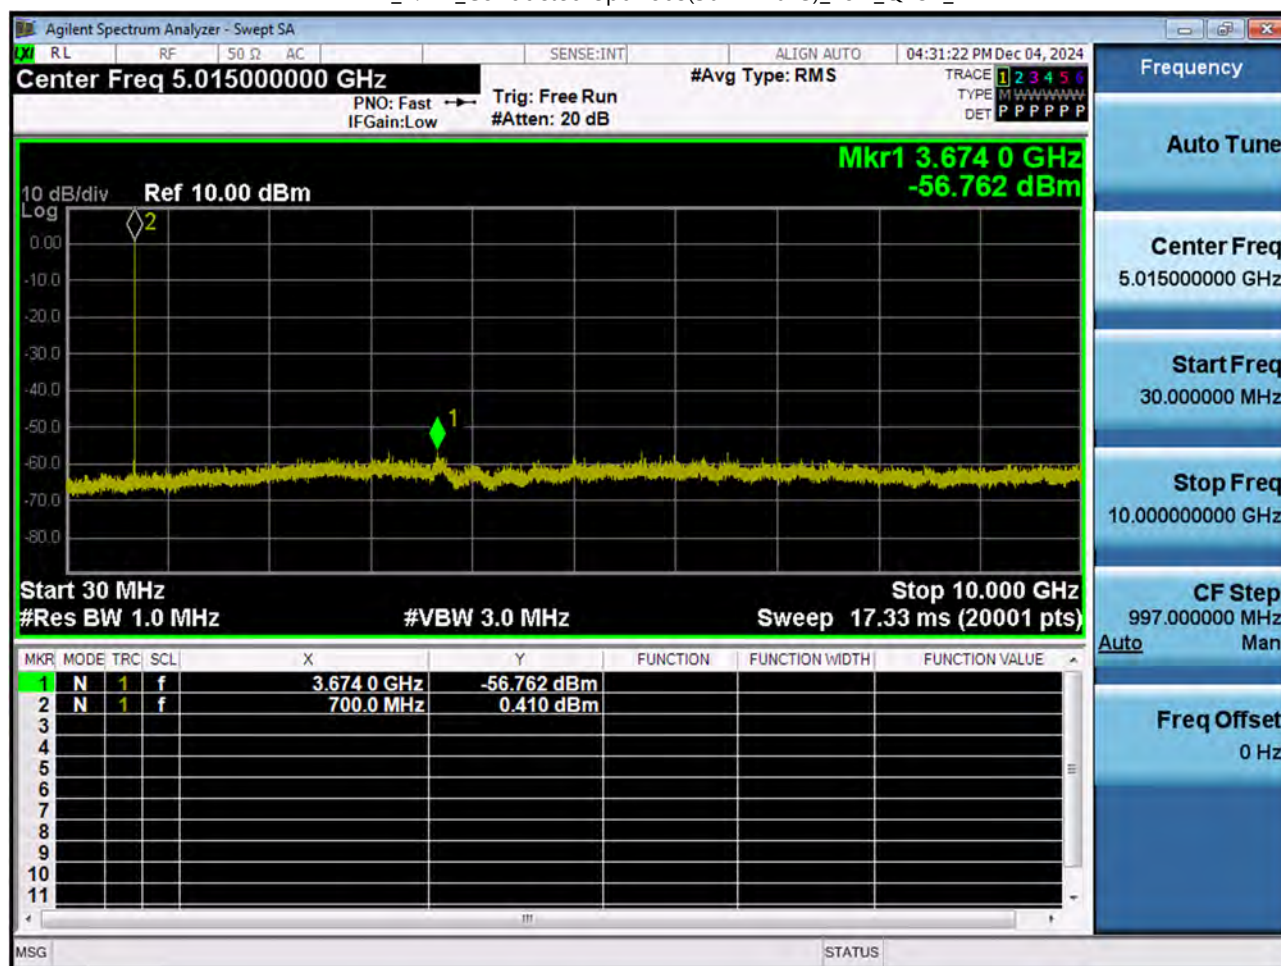

LTE B12_1.4M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

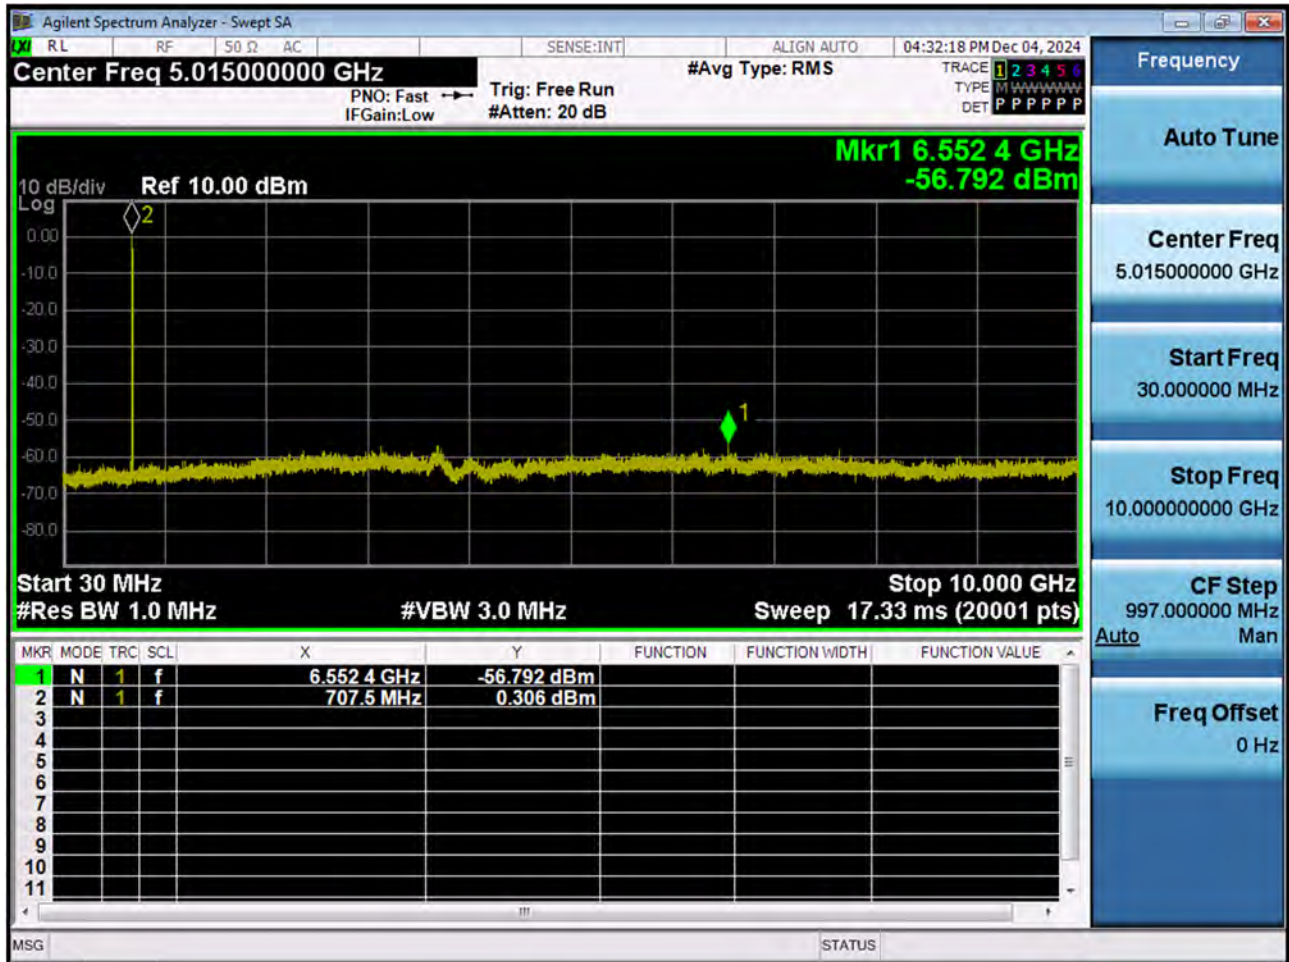


LTE B12_1.4M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

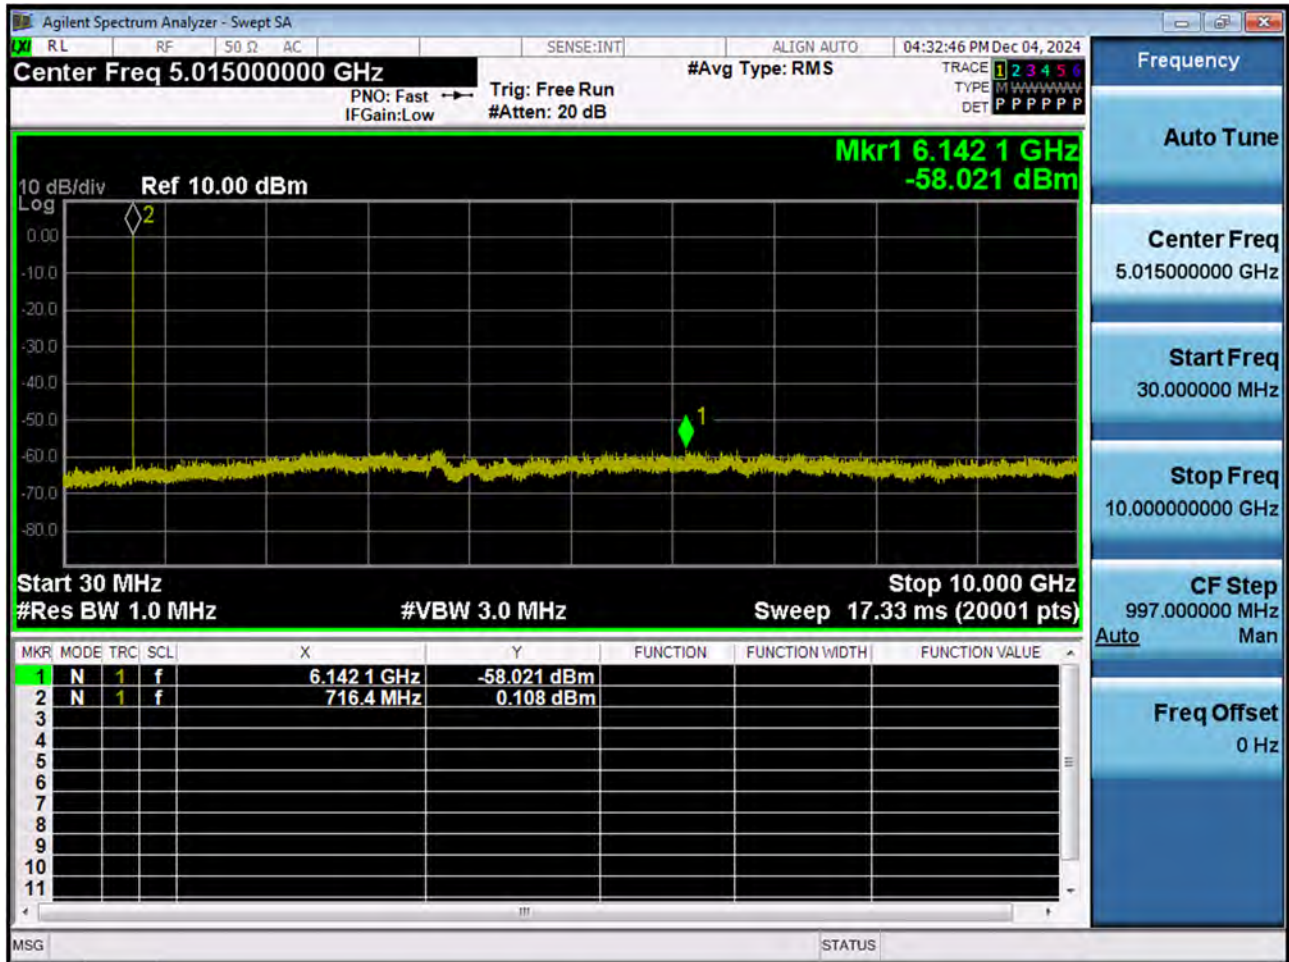


[illegible]

LTE B12_3 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

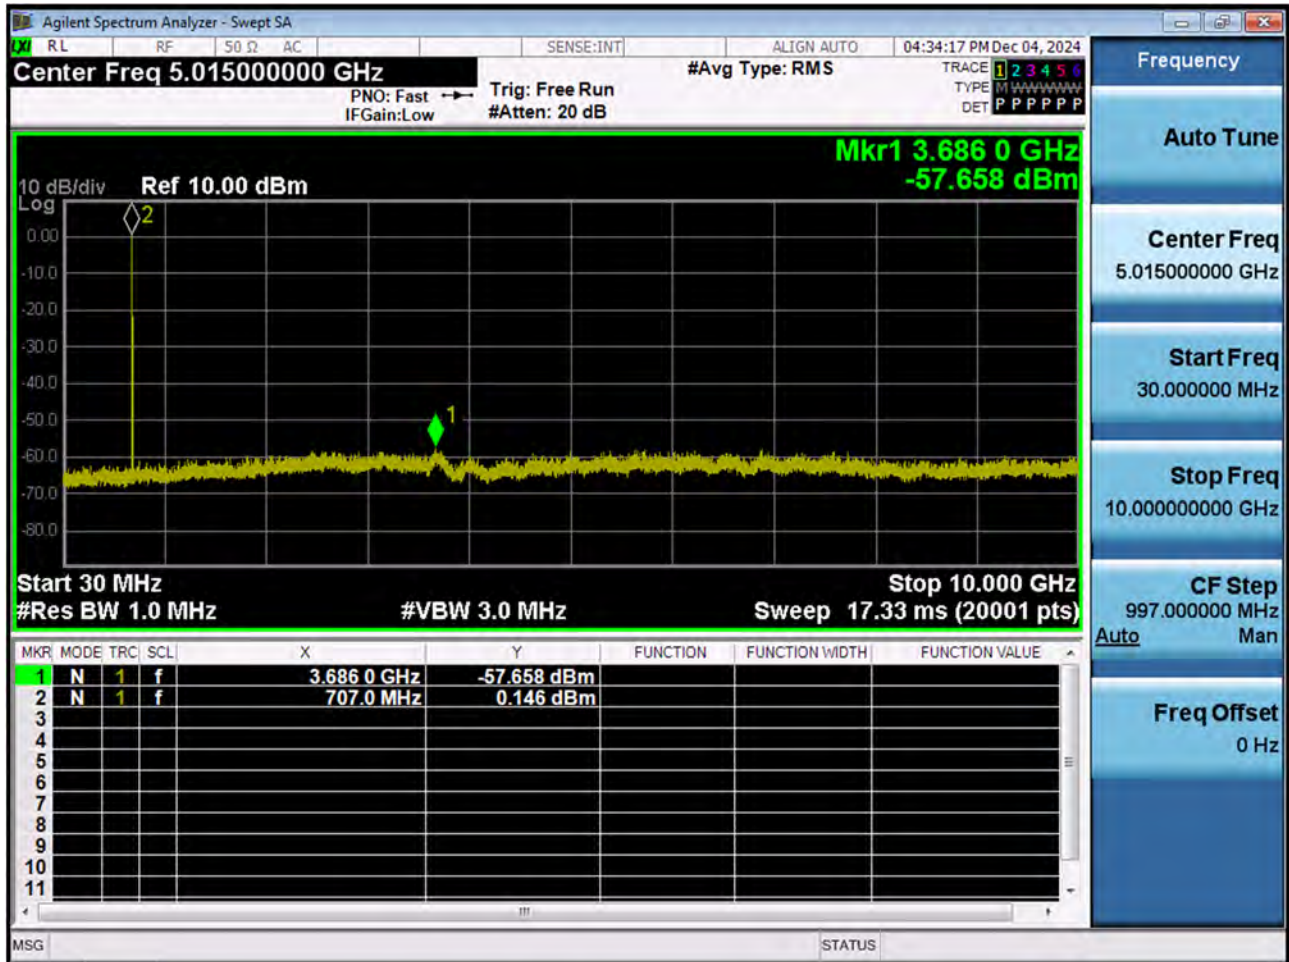


[illegible]

LTE B12_5 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

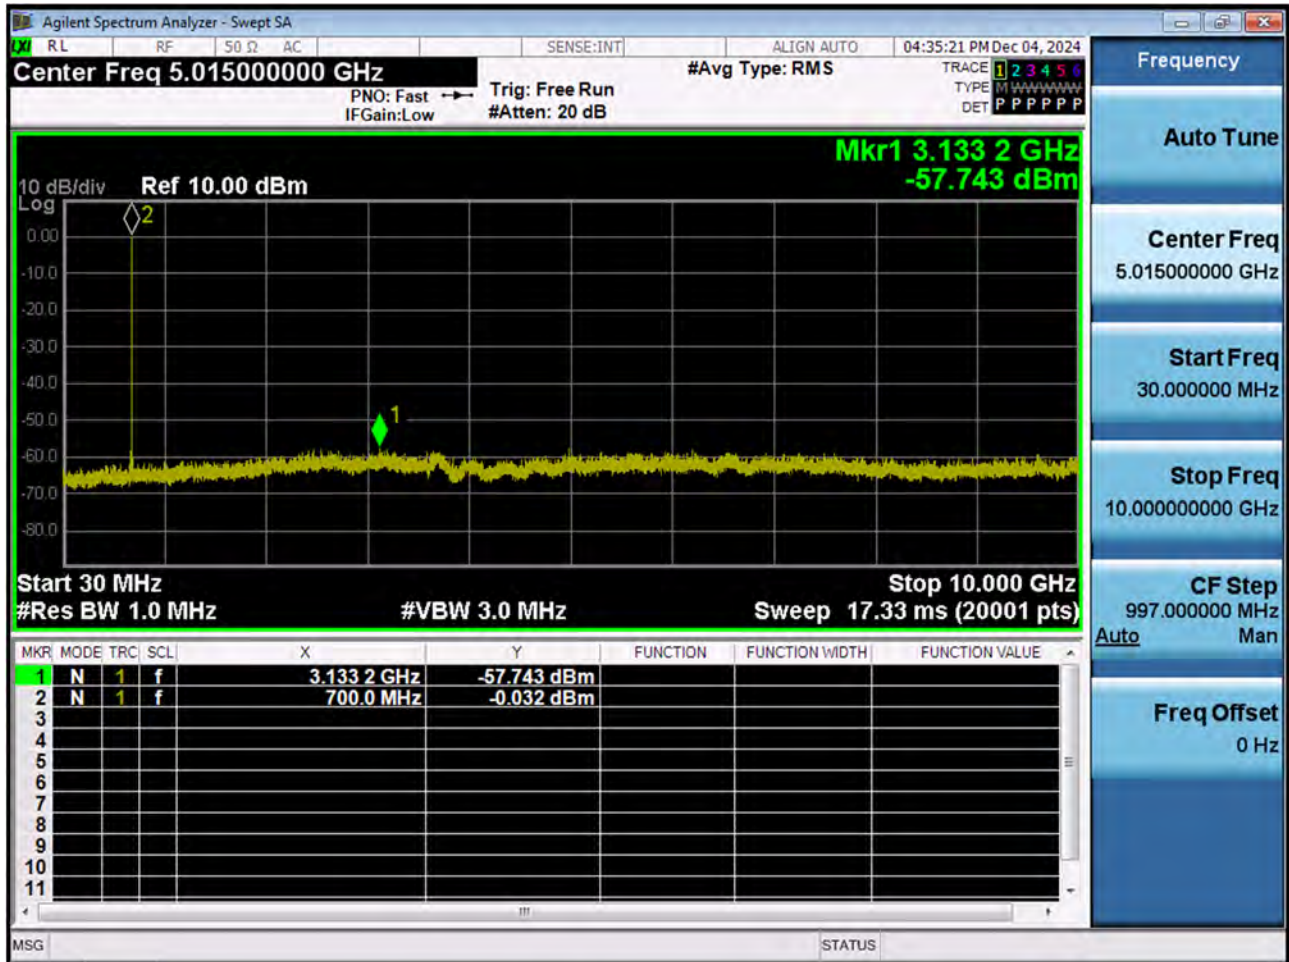


LTE B12_5 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

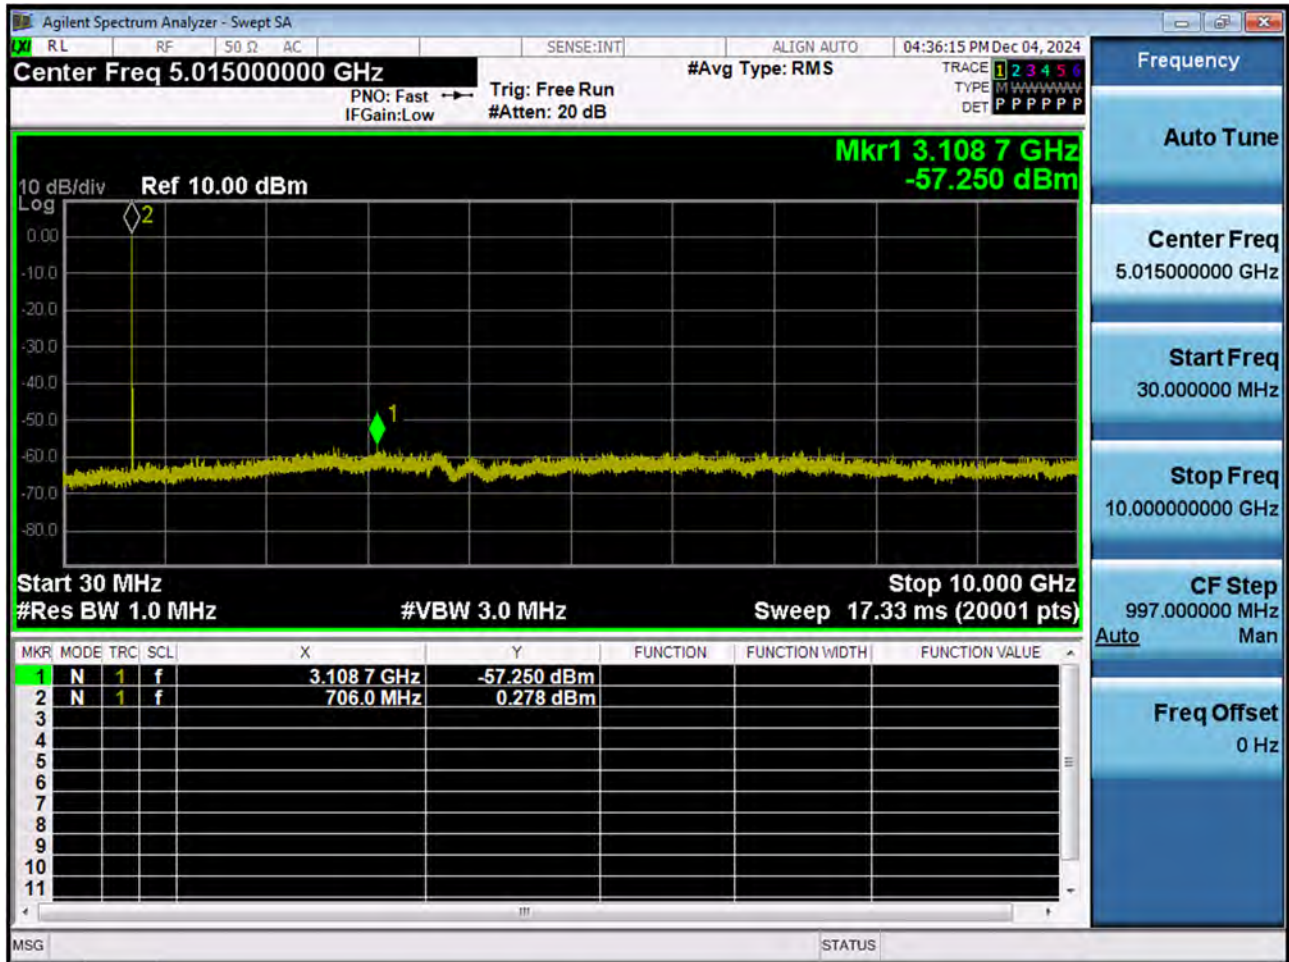


[illegible]


LTE B12_10 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

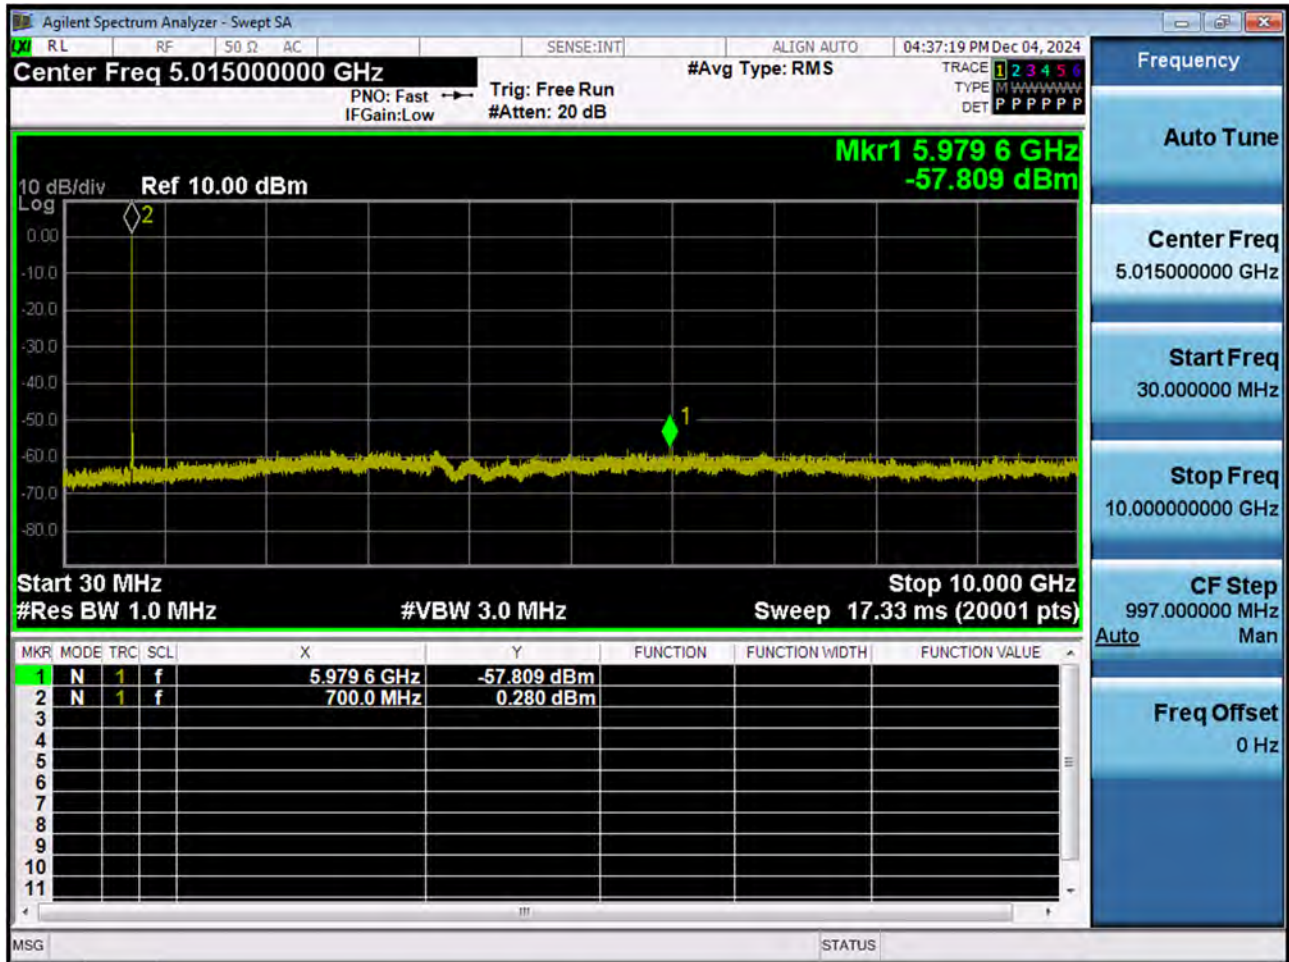

LTE B12_10 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

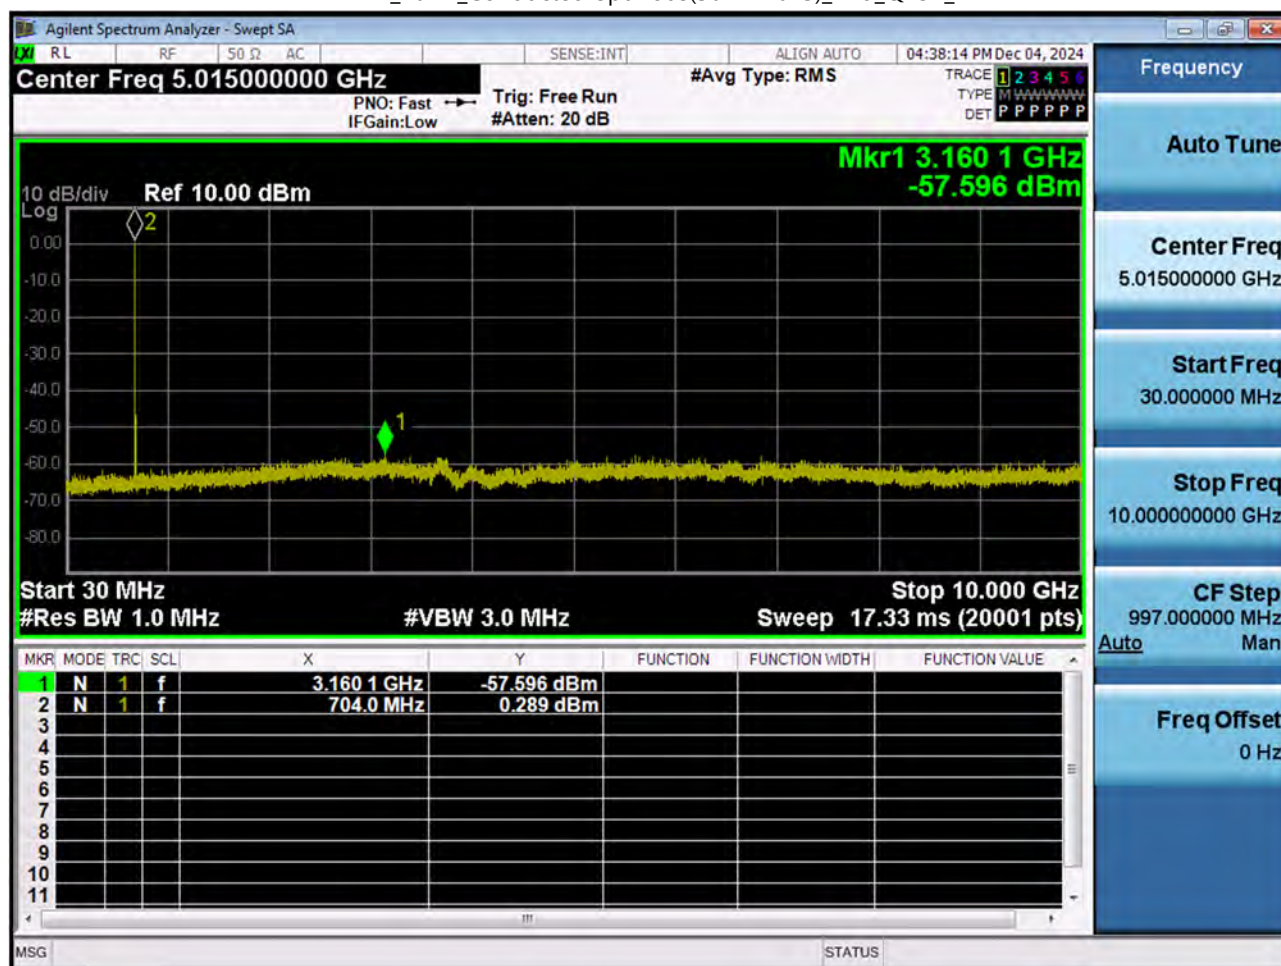


LTE B12_10 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

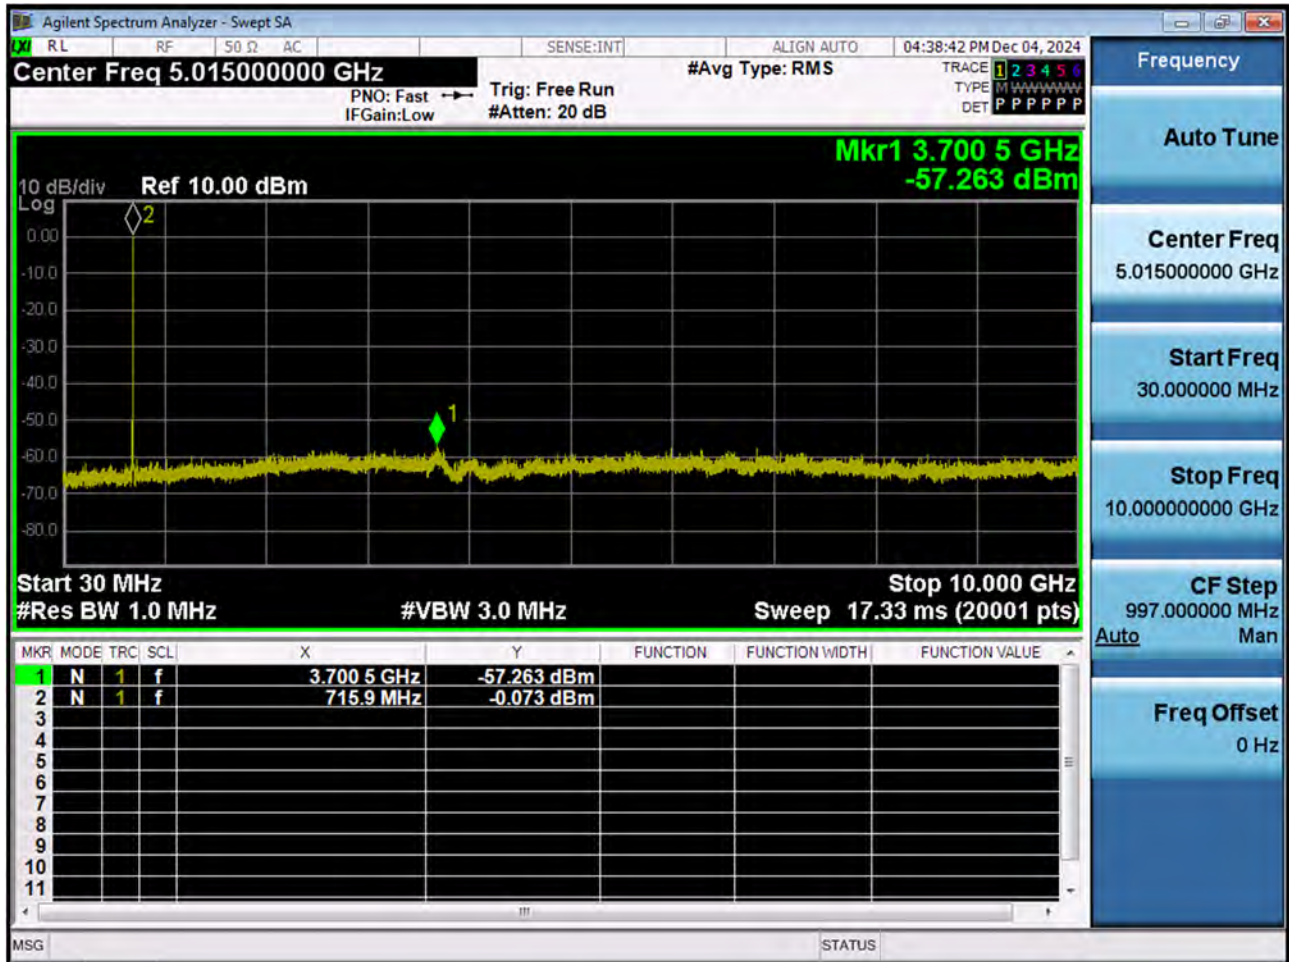


LTE B12_1.4M_Band Edge_Low_QPSK_1RB




LTE B12_1.4M_Band Edge_Low_QPSK_FullRB

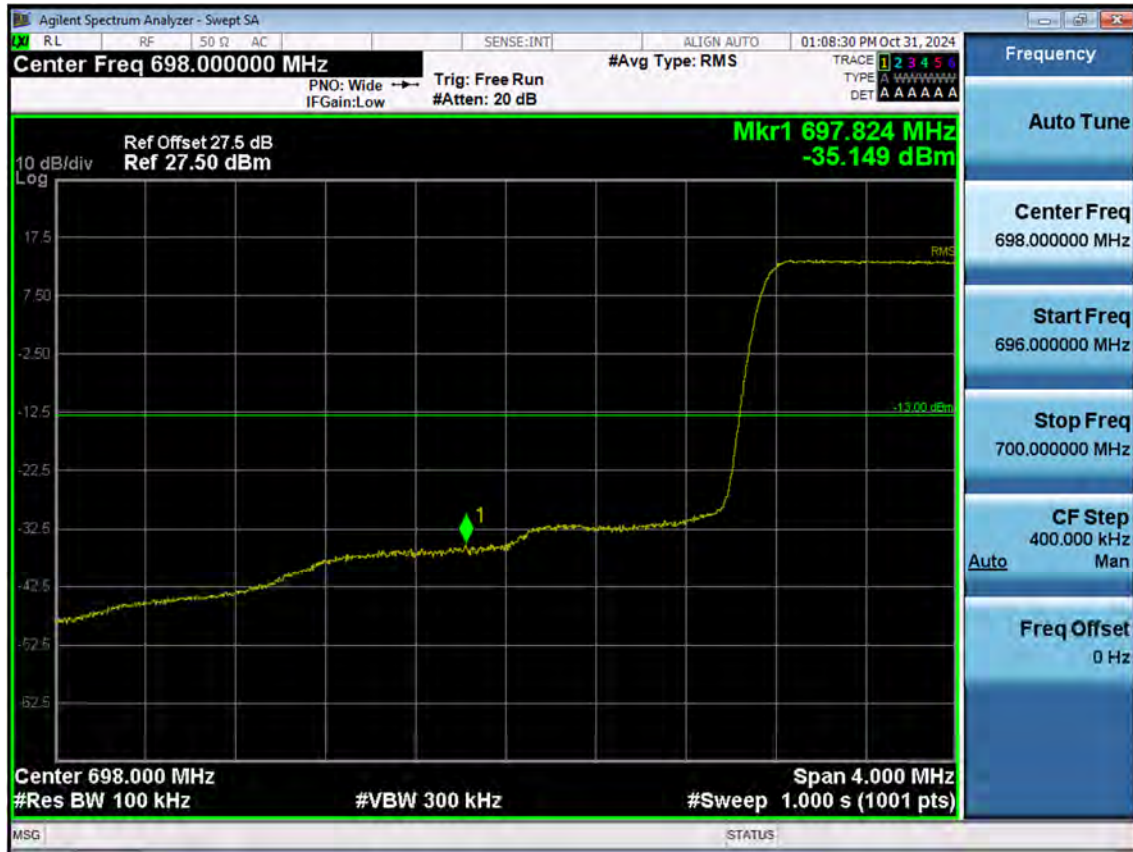

LTE B12_1.4M_Extended Band Edge_Low_QPSK_FullRB

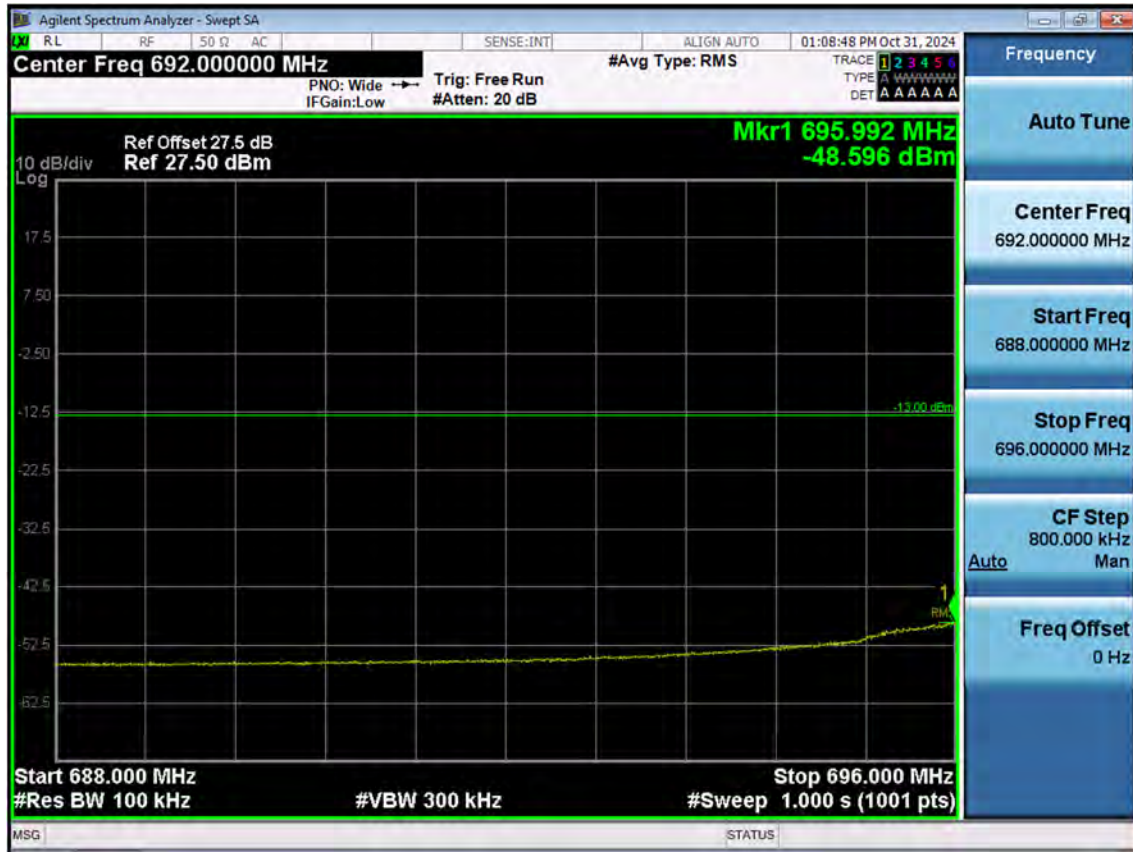

LTE B12_1.4M_Band Edge_High_QPSK_1RB(1)

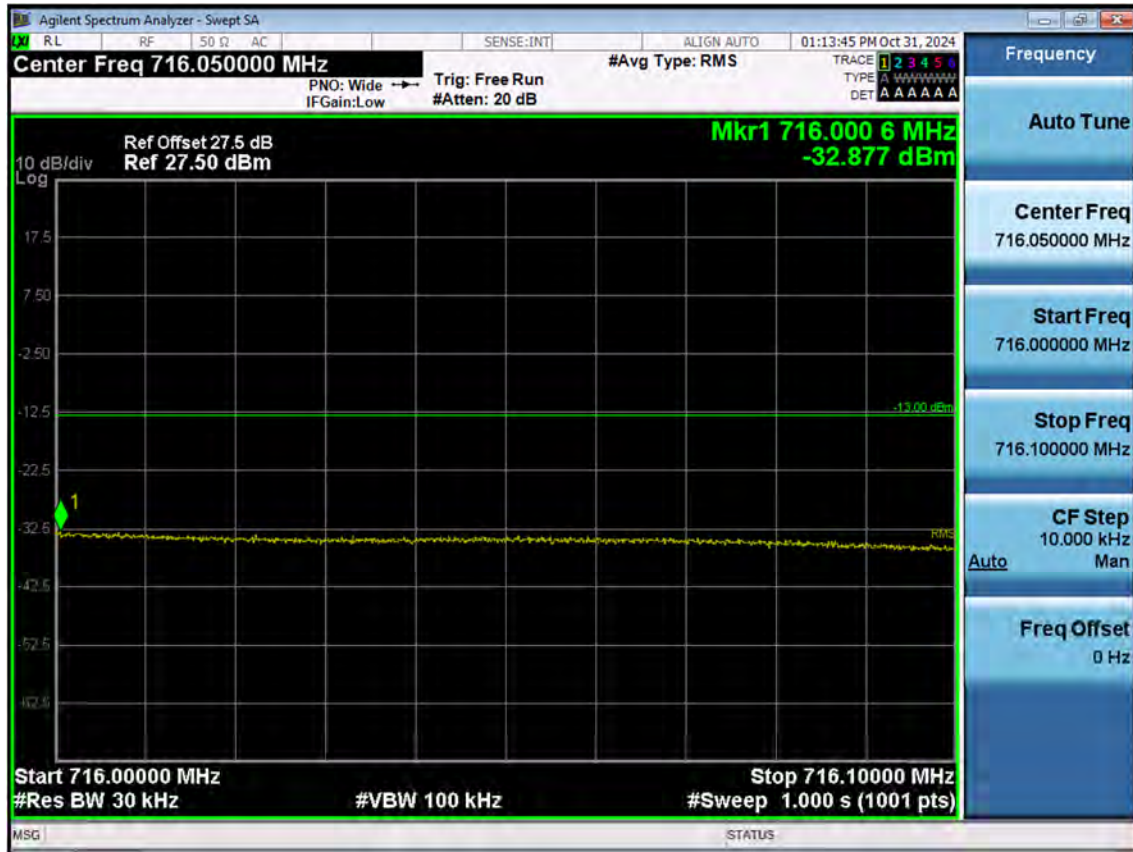

LTE B12_1.4M_Band Edge_High_QPSK_1RB(2)




LTE B12_1.4M_Band Edge_High_QPSK_FullRB



LTE B12_1.4M_Extended Band Edge_High_QPSK_FullRB



LTE B12_3 M_Band Edge_Low_QPSK_1RB

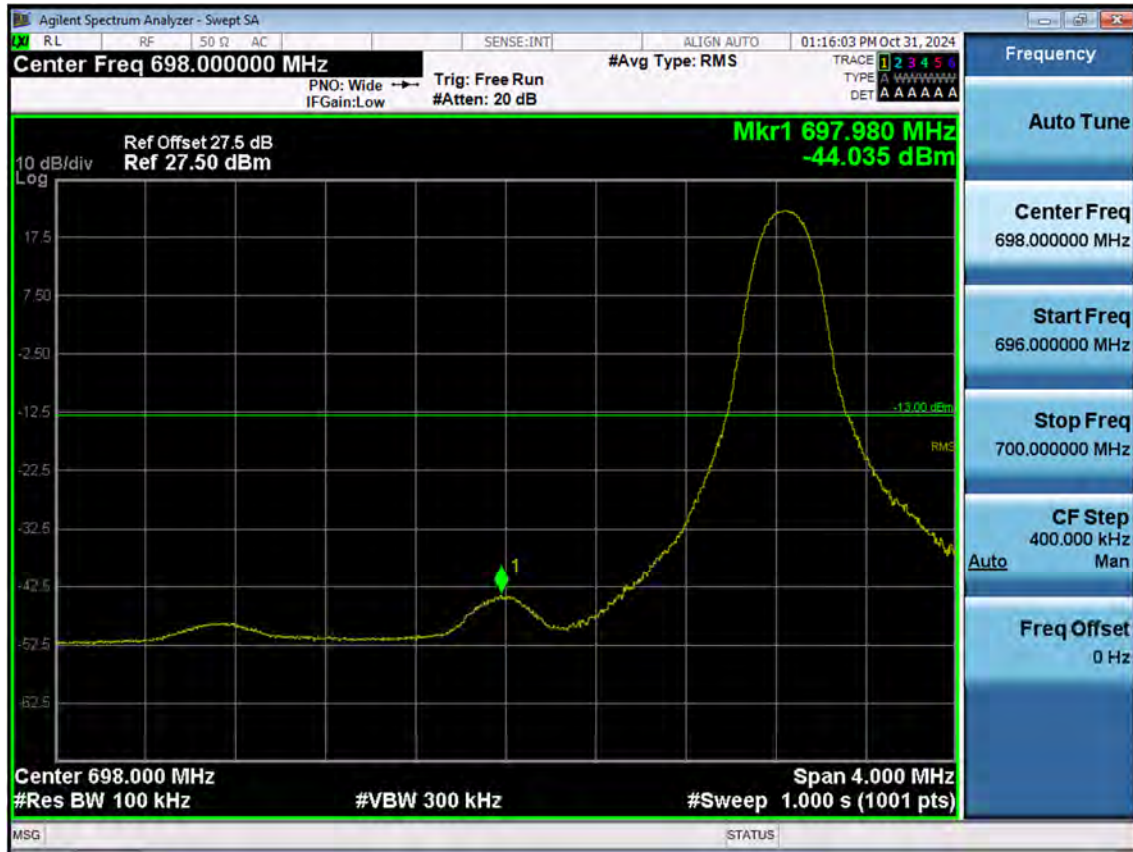


LTE B12_3 M_Band Edge_Low_QPSK_FullRB



LTE B12_3 M_Extended Band Edge_Low_QPSK_FullIRB



LTE B12_3 M_Band Edge_High_QPSK_1RB(1)

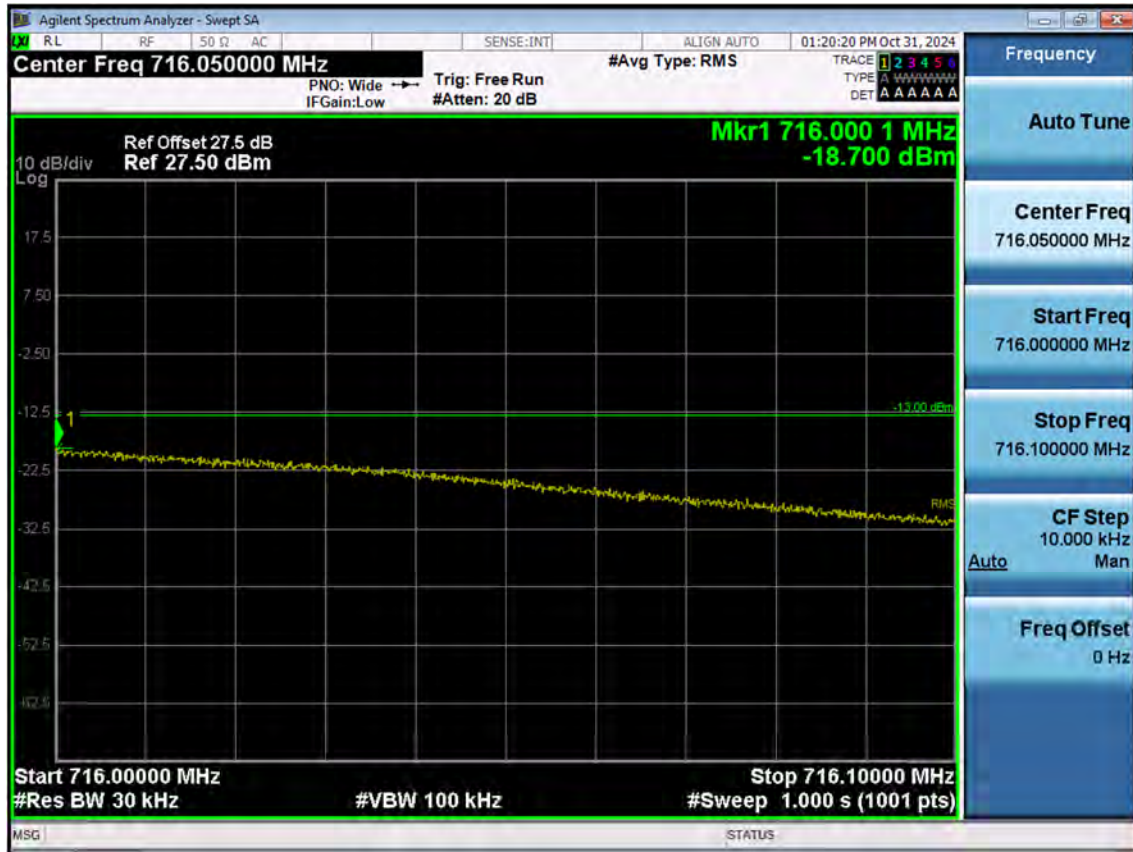

LTE B12_3 M_Band Edge_High_QPSK_1RB(2)




LTE B12_3 M_Band Edge_High_QPSK_FullRB




LTE B12_3 M_Extended Band Edge_High_QPSK_FullRB



LTE B12_5 M_Band Edge_Low_QPSK_1RB

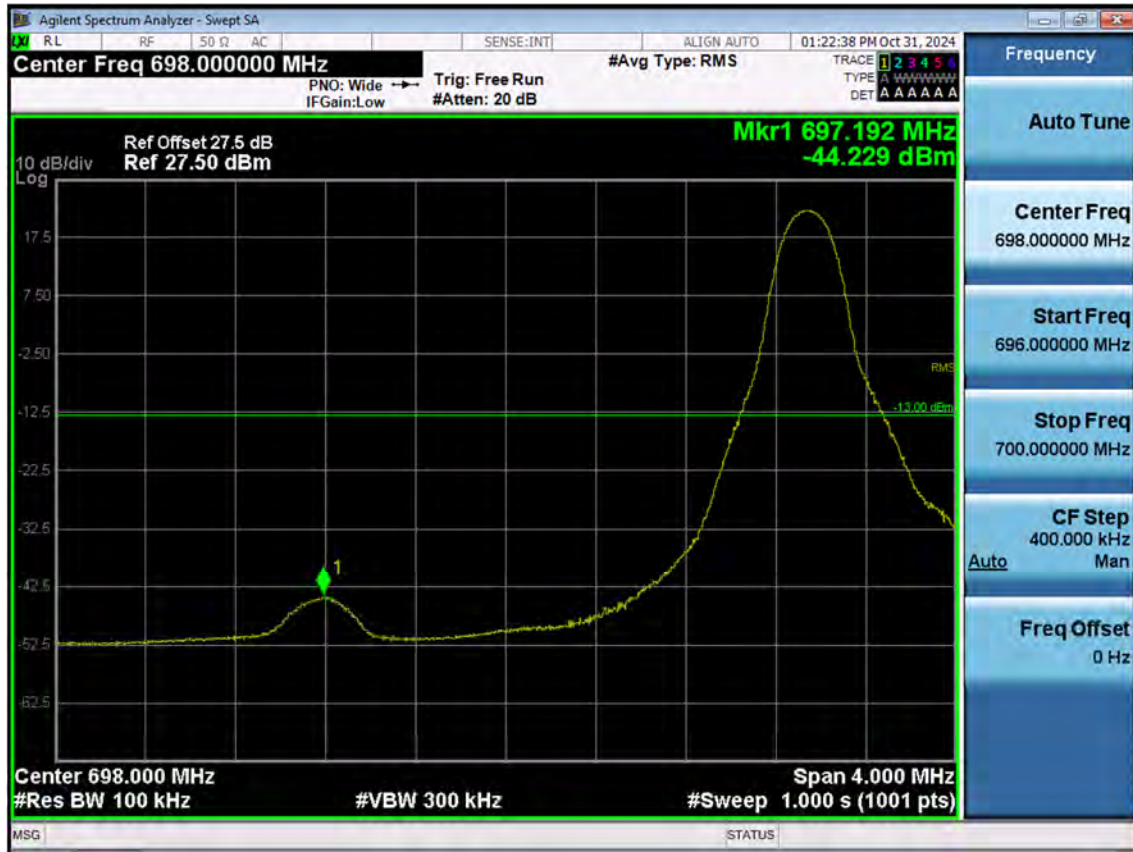


LTE B12_5 M_Band Edge_Low_QPSK_FullRB

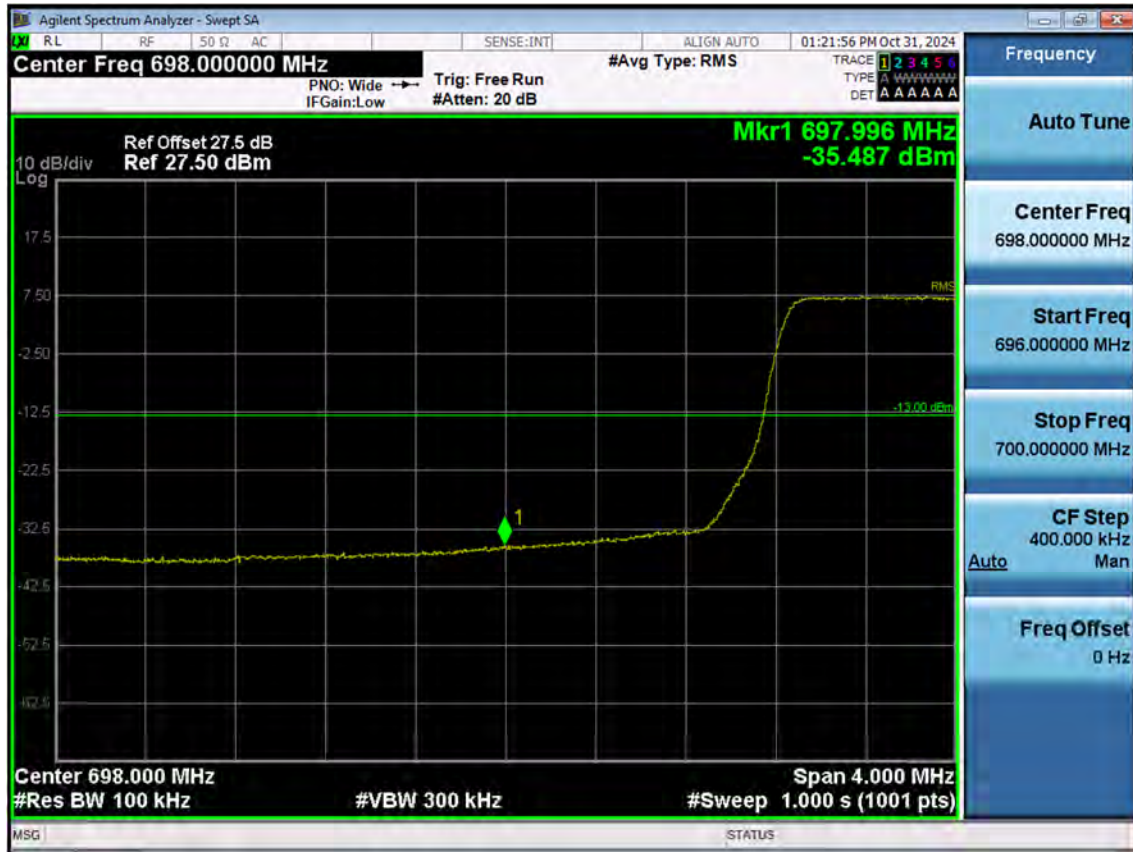

LTE B12_5 M_Extended Band Edge_Low_QPSK_FullRB



LTE B12_5 M_Band Edge_High_QPSK_1RB(1)

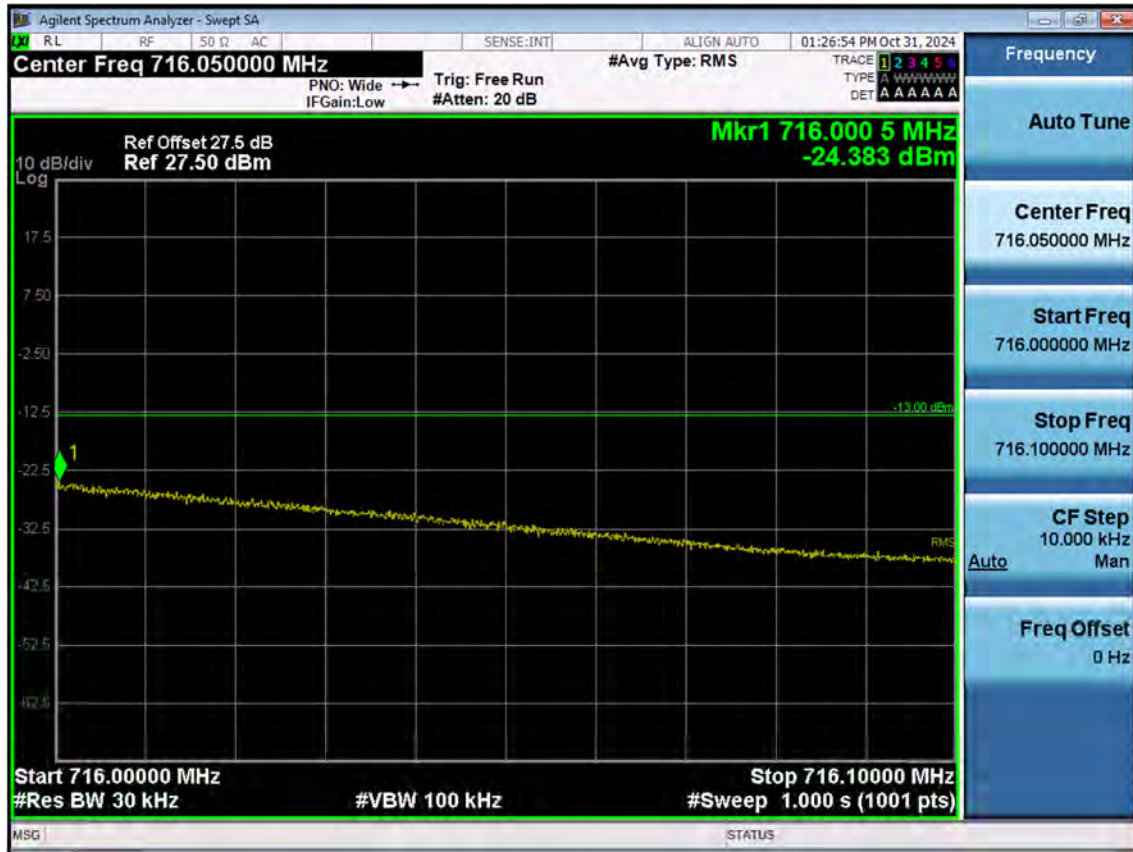

LTE B12_5 M_Band Edge_High_QPSK_1RB(2)



LTE B12_5 M_Band Edge_High_QPSK_FullRB




LTE B12_5 M_Extended Band Edge_High_QPSK_FullRB



LTE B12_10 M_Band Edge_Low_QPSK_1RB




LTE B12_10 M_Band Edge_Low_QPSK_FullRB

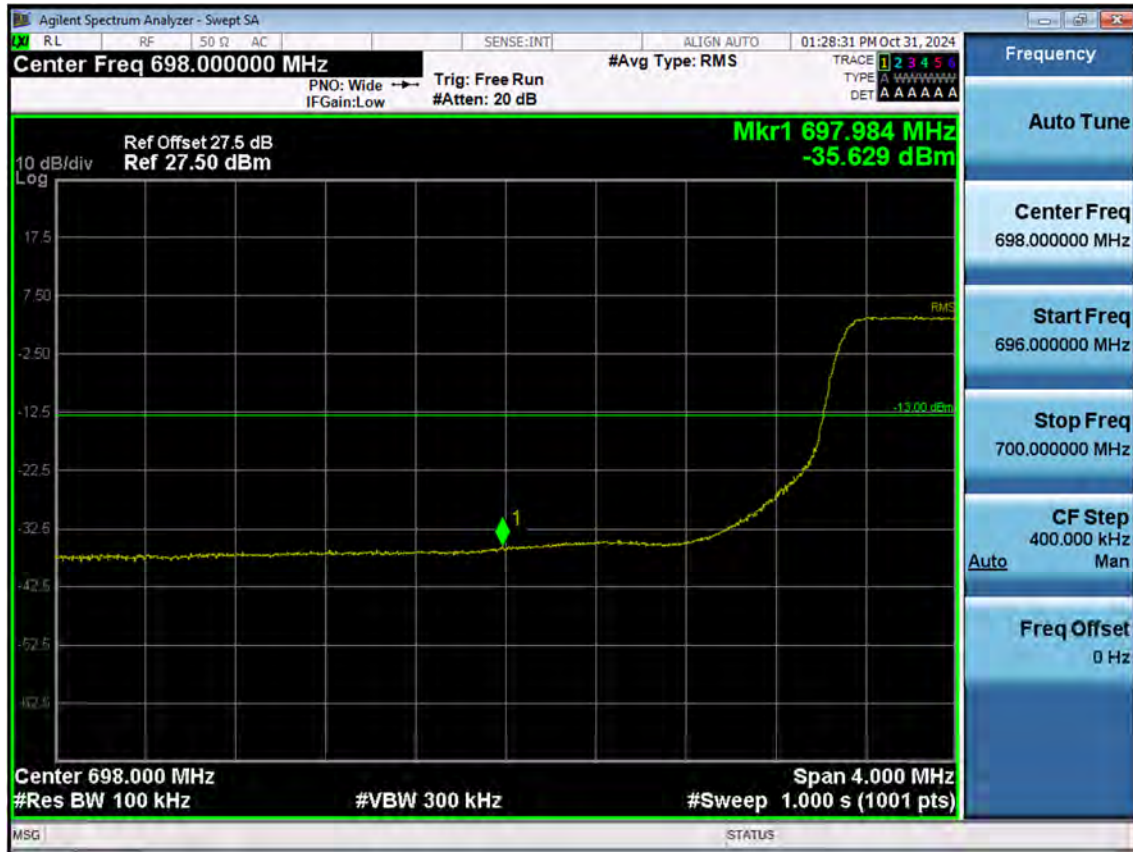

LTE B12_10 M_Extended Band Edge_Low_QPSK_FullRB



LTE B12_10 M_Band Edge_High_QPSK_1RB(1)

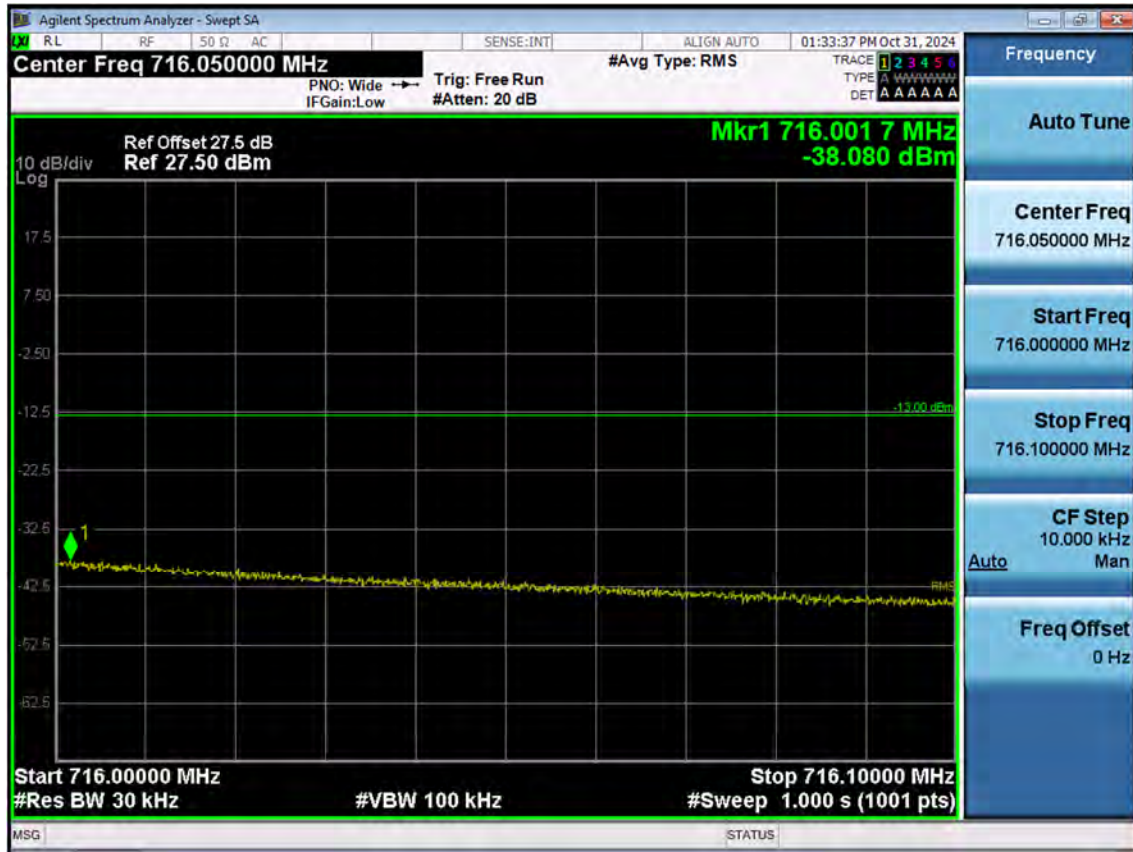

LTE B12_10 M_Band Edge_High_QPSK_1RB(2)





LTE B12_10 M_Extended Band Edge_High_QPSK_FullRB



10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2412-FC026-P