


Appendix A. Test Result of AC Power Line Conducted Emission


Site :HY-SR01
Condition :Line
Mode :TX_BLE2M_2440MHz
test by :James

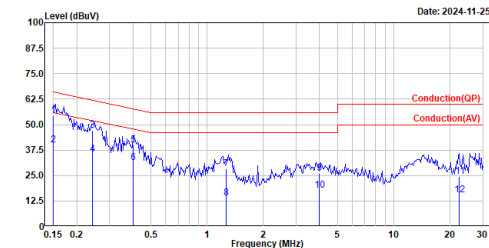

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.150	54.44	65.98	-11.54	44.76	9.68	QP
2	0.150	40.07	55.98	-15.91	30.39	9.68	Average
3	0.242	47.02	62.02	-15.00	37.34	9.68	QP
4	0.242	35.35	52.02	-16.67	25.67	9.68	Average
5	0.403	40.06	57.79	-17.73	30.38	9.68	QP
6	0.403	31.27	47.79	-16.52	21.59	9.68	Average
7	1.262	28.13	56.00	-27.87	18.39	9.74	QP
8	1.262	13.85	46.00	-32.15	4.11	9.74	Average
9	3.986	26.03	56.00	-29.97	15.54	10.49	QP
10	3.986	17.89	46.00	-28.11	7.40	10.49	Average
11	22.452	24.39	60.00	-35.61	13.77	10.62	QP
12	22.452	15.62	50.00	-34.38	5.00	10.62	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX_BLE2M_2440MHz
test by :James

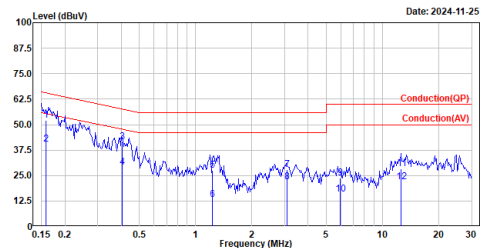


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.158	51.98	65.57	-13.59	42.32	9.66	QP
2	0.158	40.44	55.57	-15.13	30.78	9.66	Average
3	0.405	41.55	57.76	-16.21	31.89	9.66	QP
4	0.405	29.21	47.76	-18.55	19.55	9.66	Average
5	1.229	27.72	56.00	-28.28	18.00	9.72	QP
6	1.229	13.24	46.00	-32.76	3.52	9.72	Average
7	3.072	28.02	56.00	-27.98	17.85	10.17	QP
8	3.072	21.94	46.00	-24.06	11.77	10.17	Average
9	5.926	23.75	60.00	-36.25	12.93	10.82	QP
10	5.926	15.86	50.00	-34.14	5.04	10.82	Average
11	12.609	28.40	60.00	-31.60	17.58	10.82	QP
12	12.609	21.72	50.00	-28.28	10.90	10.82	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK (1Mbps)	2402	0.72	0.50	Pass
	2440	0.71	0.50	Pass
	2480	0.71	0.50	Pass
GFSK (2Mbps)	2402	1.16	0.50	Pass
	2440	1.14	0.50	Pass
	2480	1.13	0.50	Pass


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1

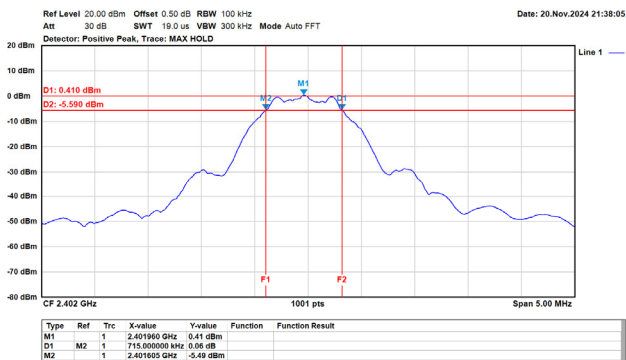


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

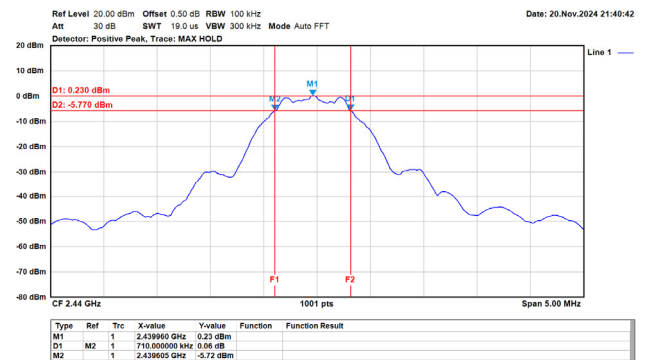


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

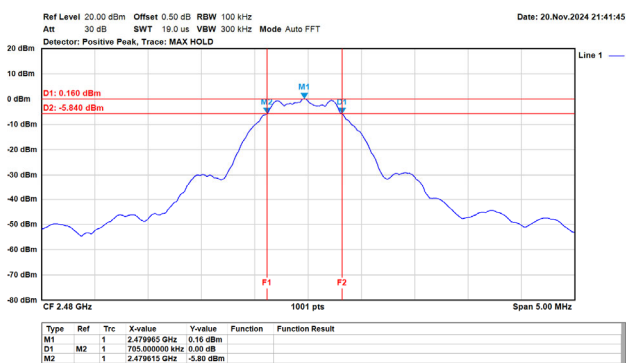


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1

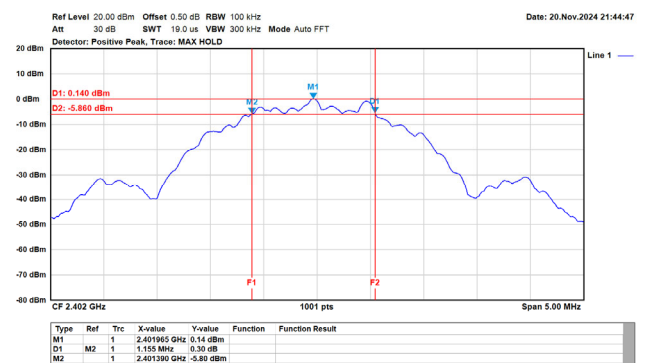

GFSK/2MHz/2M/2440MHz/Ch19/Ant.1

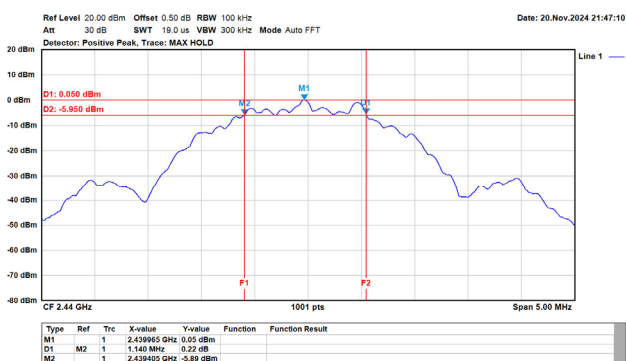

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1

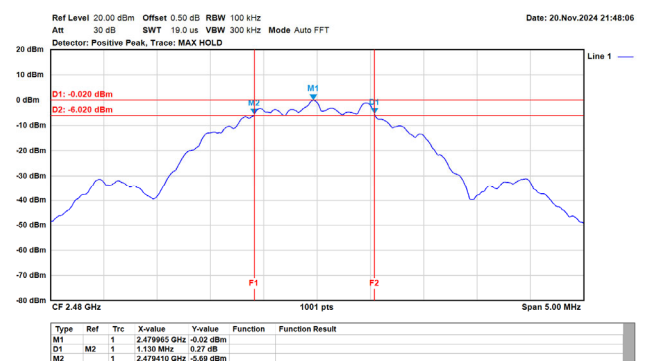


Appendix C. Test Result of Maximum Conducted Output Power


Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	1.66	30.00	Pass
	2440	1.43	30.00	Pass
	2480	1.19	30.00	Pass
GFSK (2Mbps)	2402	1.71	30.00	Pass
	2440	1.45	30.00	Pass
	2480	1.20	30.00	Pass


Appendix D. Test Result of Power Spectral Density

Modulation	Frequency (MHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
GFSK (1Mbps)	2402	-14.80	8.00	Pass
	2440	-15.08	8.00	Pass
	2480	-15.34	8.00	Pass
GFSK (2Mbps)	2402	-17.82	8.00	Pass
	2440	-18.04	8.00	Pass
	2480	-17.94	8.00	Pass

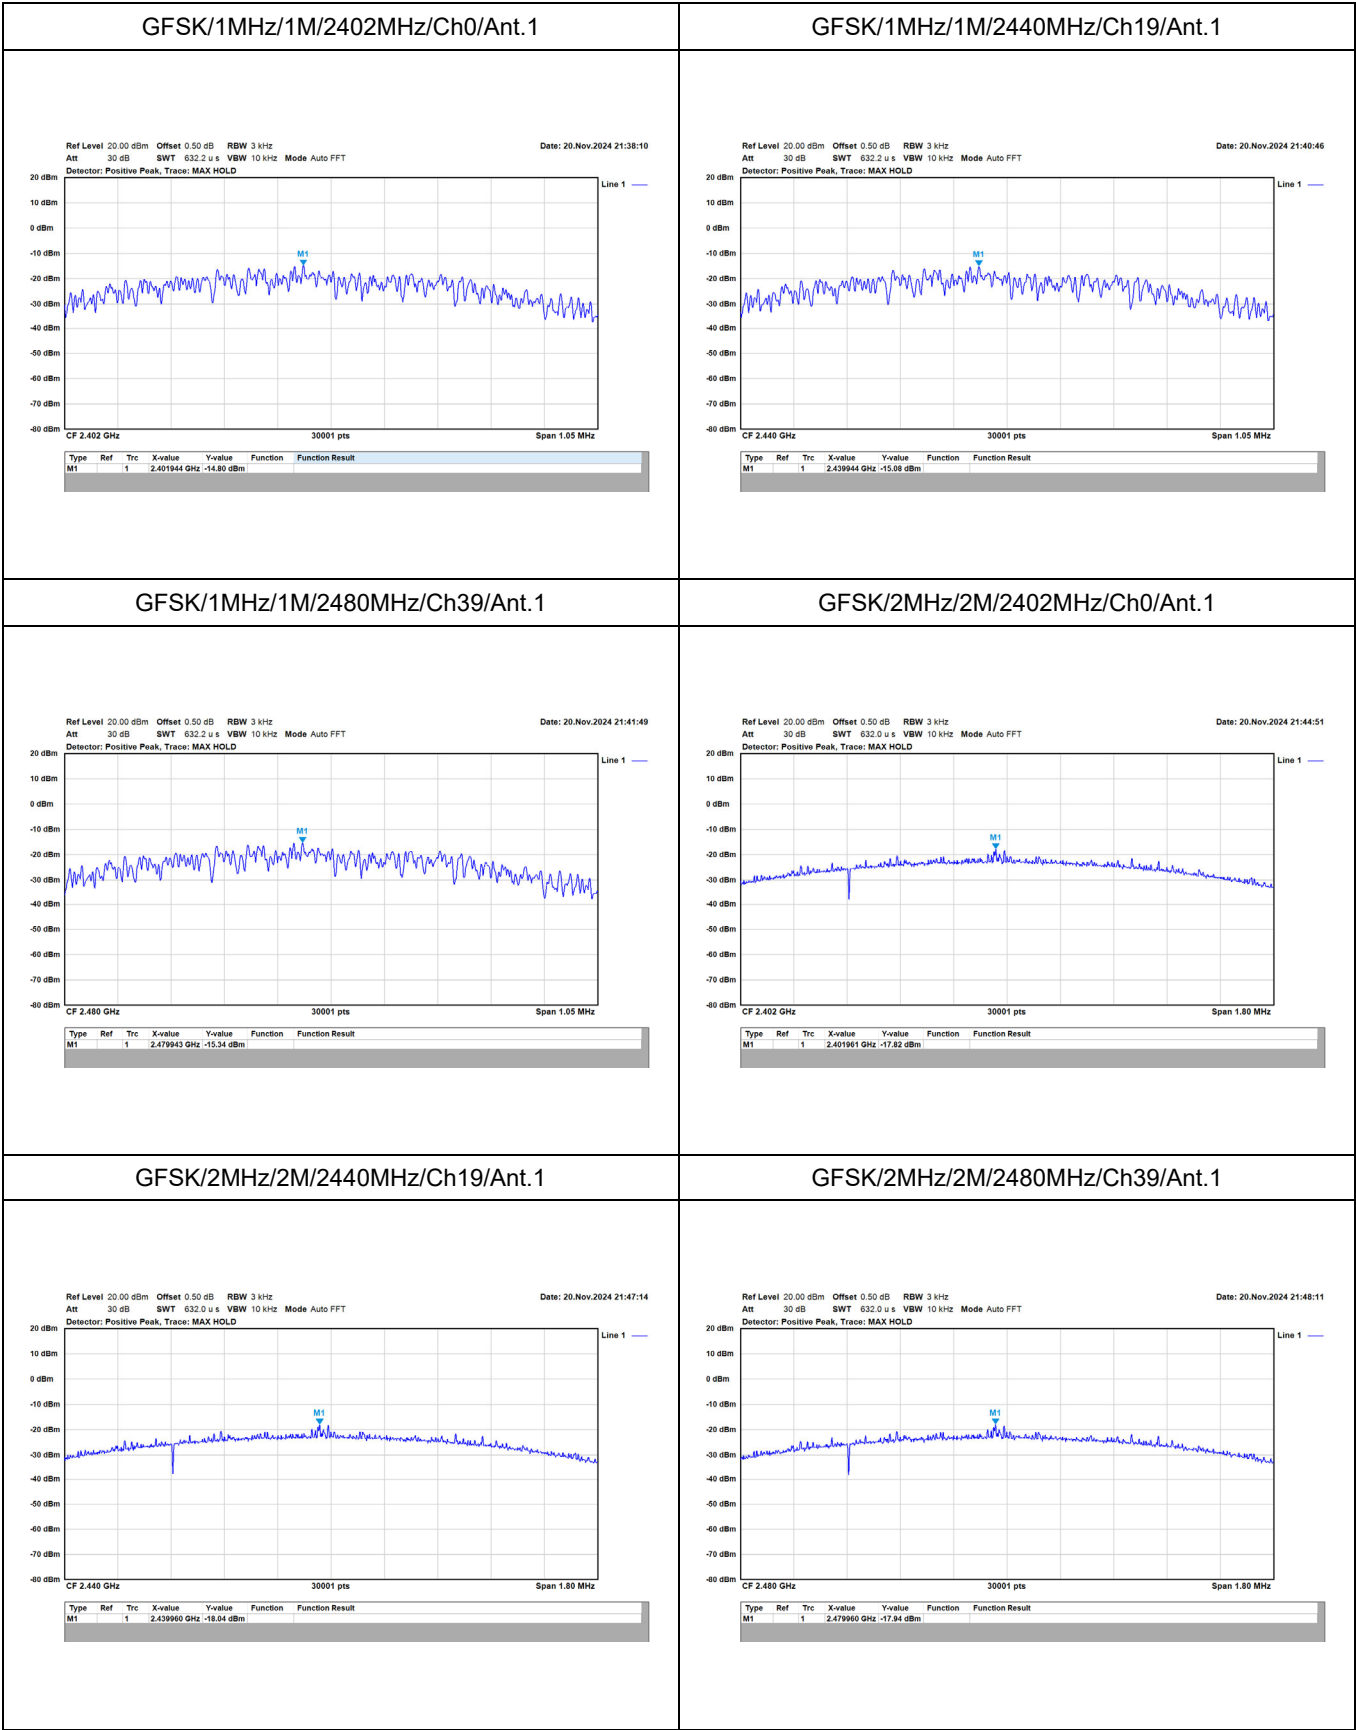


Appendix E. Test Result of Antenna Port Conducted Emission

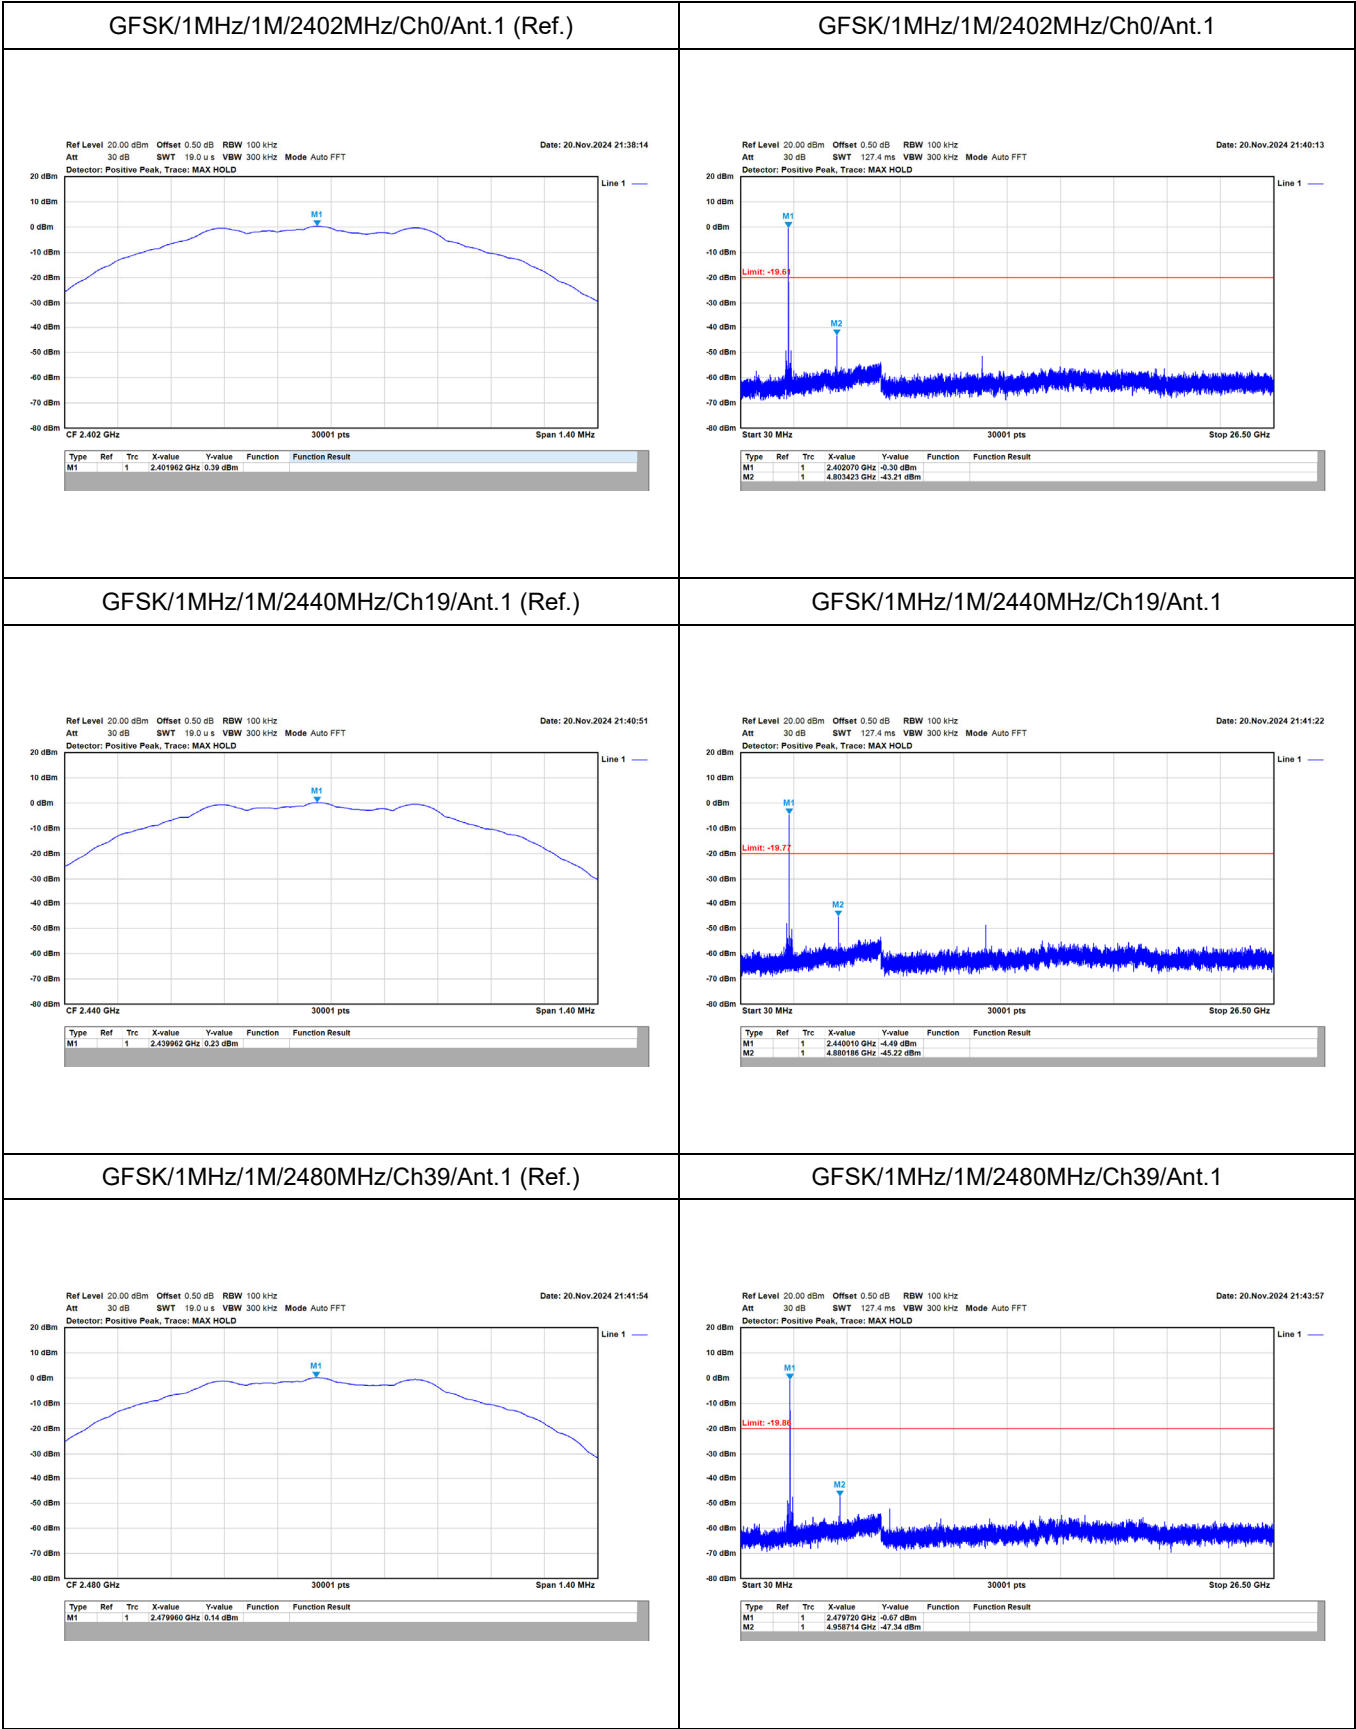

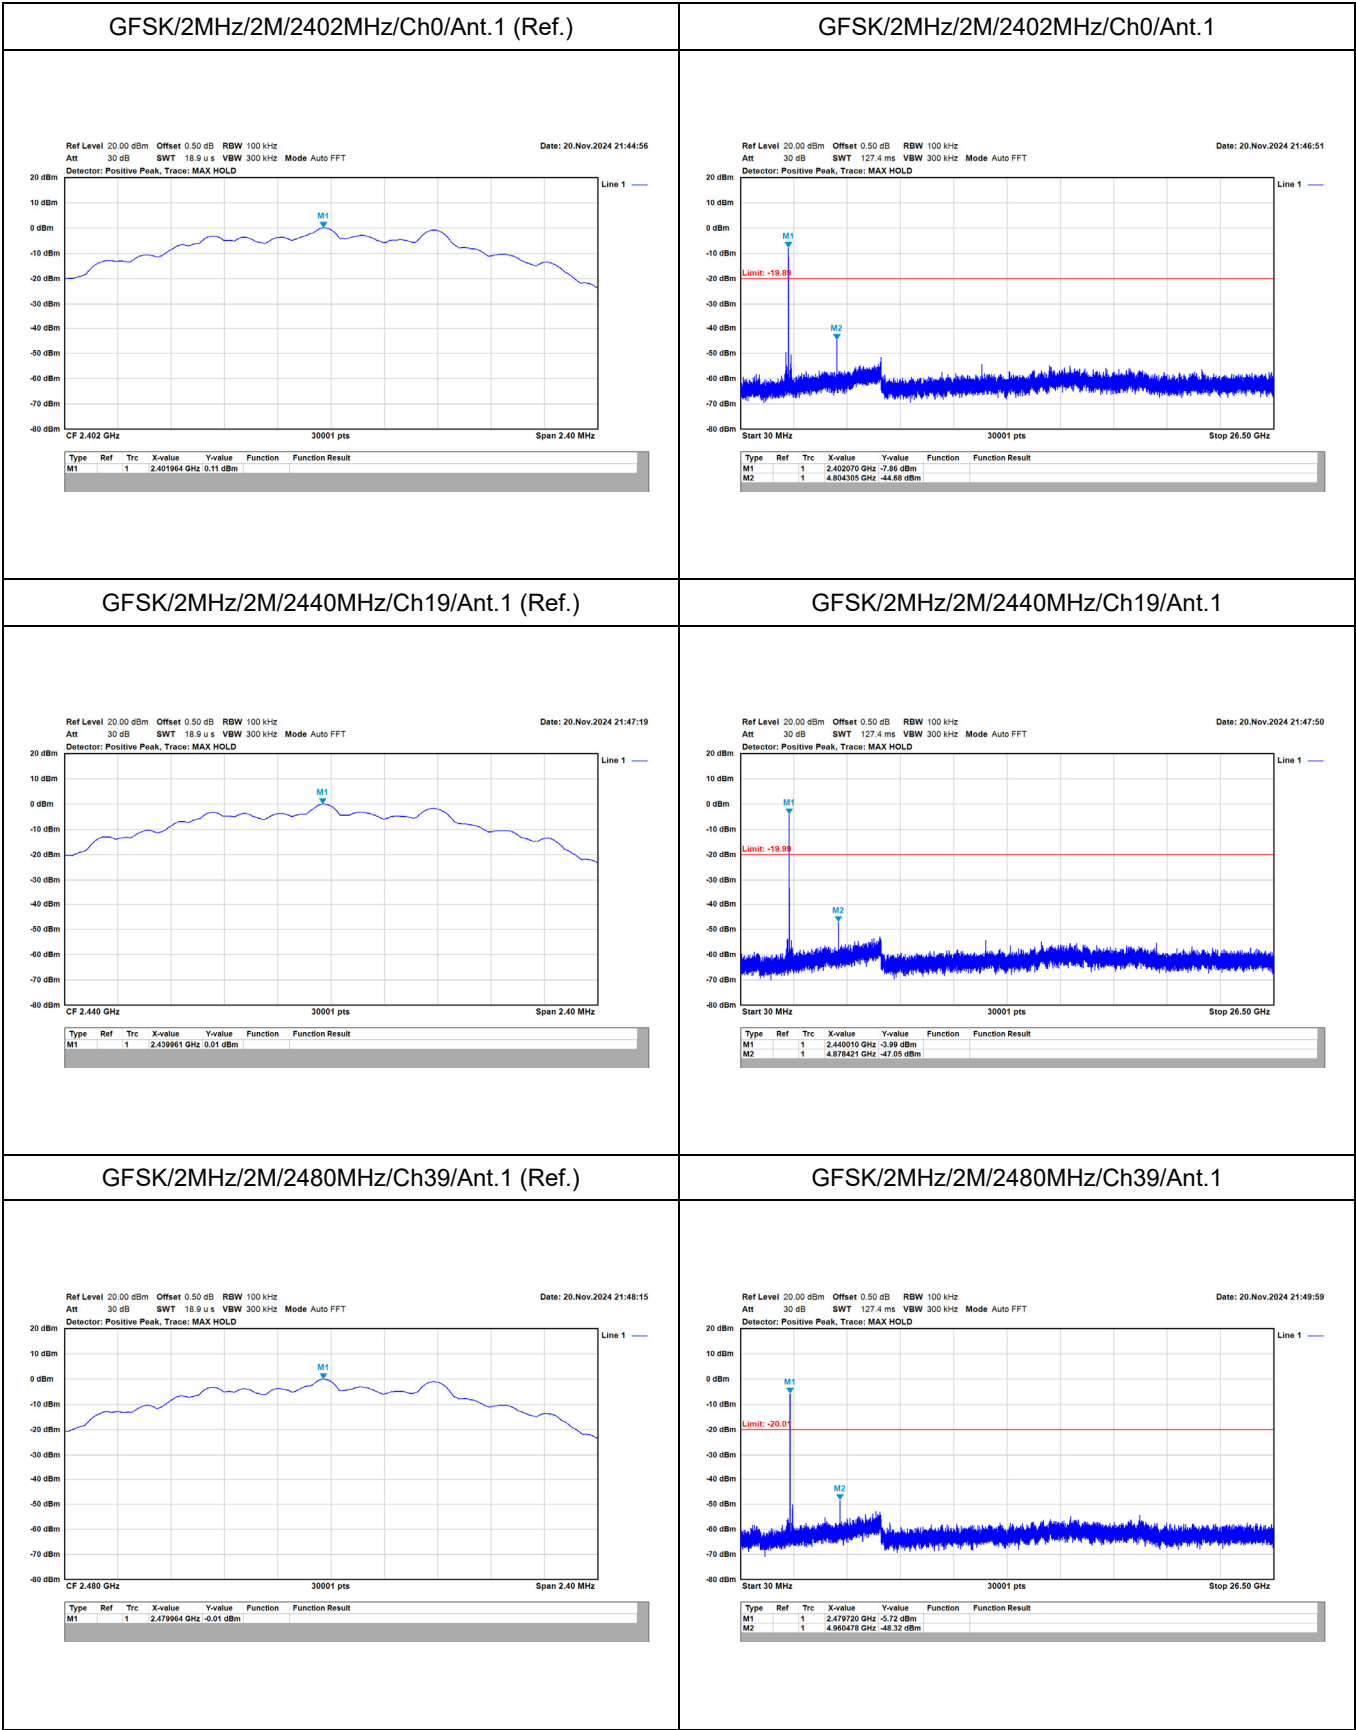


Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	Pass
8DPSK	> 20	Pass

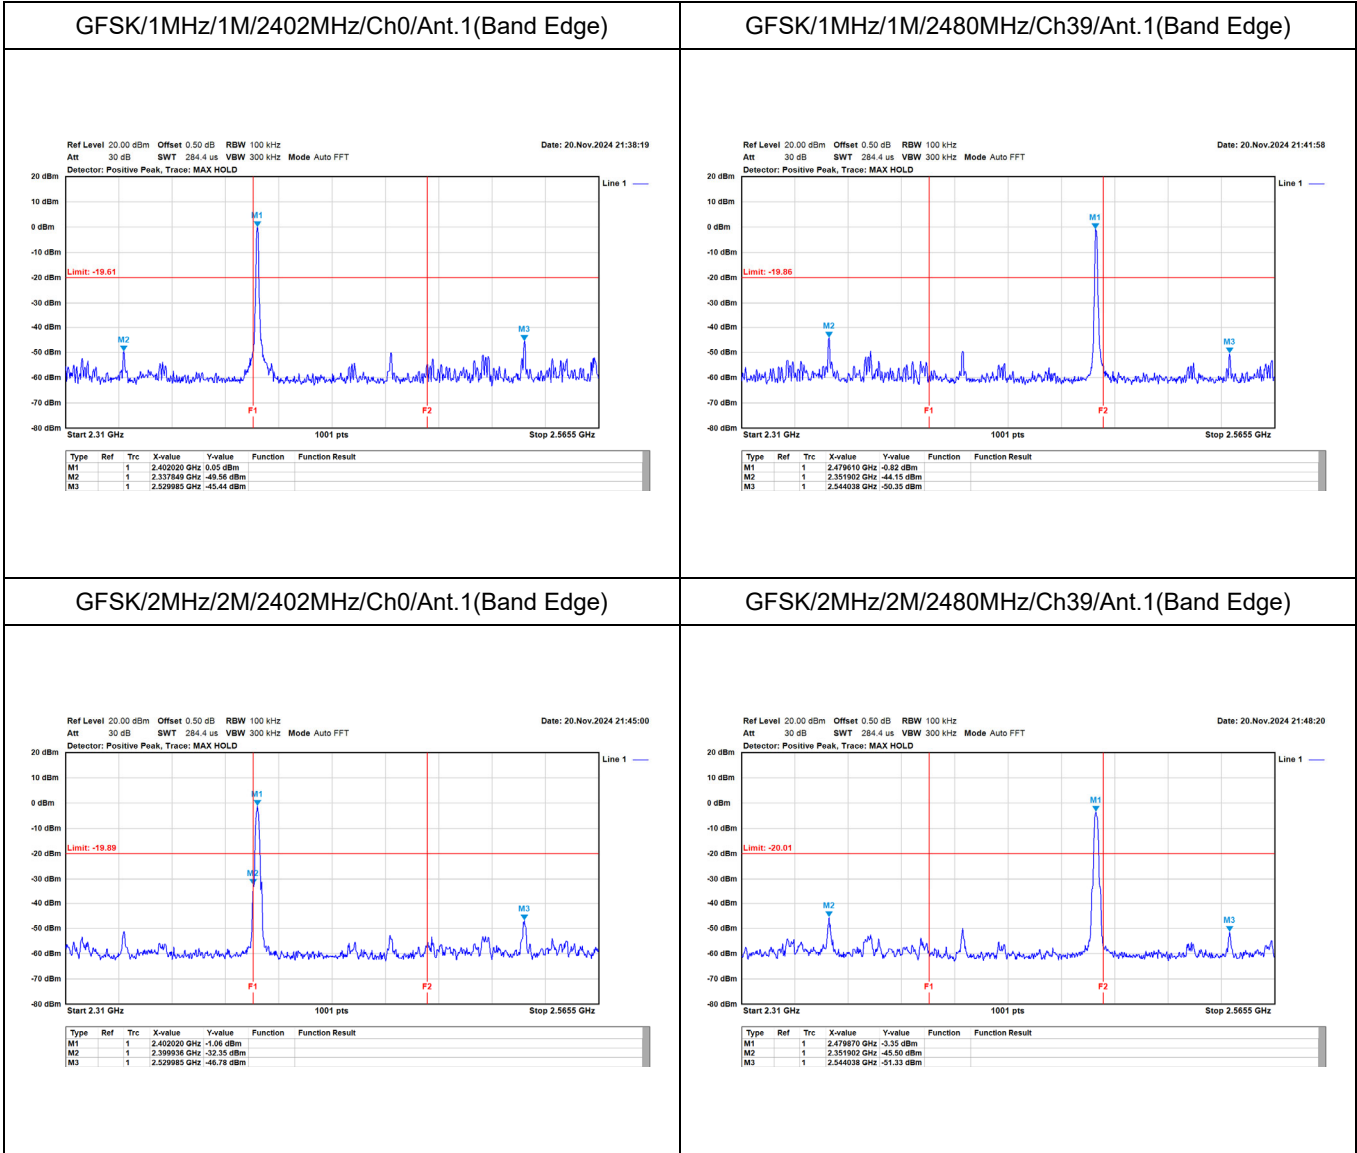

Appendix F. Test Result of Radiated Emission

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE1M_2402MHz
Test by :Caster

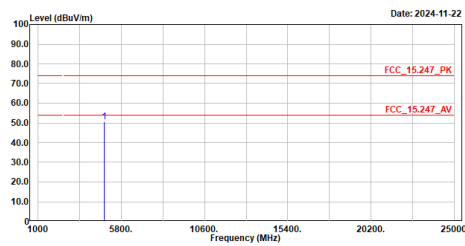


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4884.000	58.40	74.00	-23.60	57.54	-7.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2402MHz
Test by :Caster

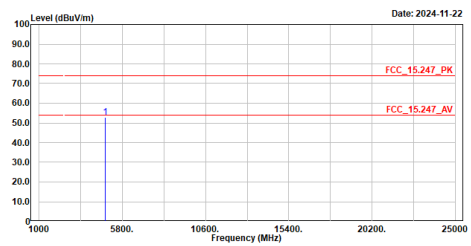


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4884.000	52.68	74.00	-21.32	59.82	-7.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE1M_2440MHz
Test by :Caster

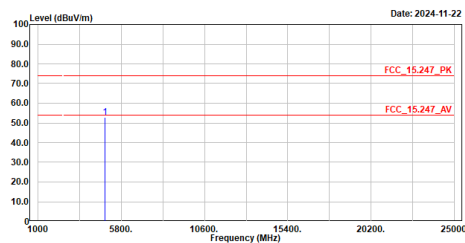


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	52.90	74.00	-21.10	59.71	-6.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2440MHz
Test by :Caster

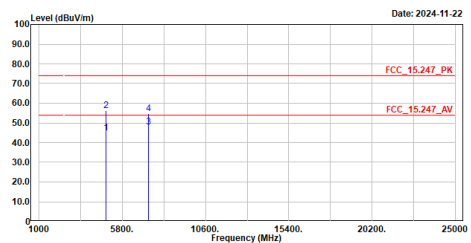


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	44.88	74.00	-9.12	51.69	-6.81	Average
2	4880.000	56.16	74.00	-17.84	62.97	-6.81	Peak
3	7320.000	48.07	74.00	-5.93	48.47	-0.40	Average
4	7320.000	54.79	74.00	-19.21	55.19	-0.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE1M_2480MHz
Test by :Caster

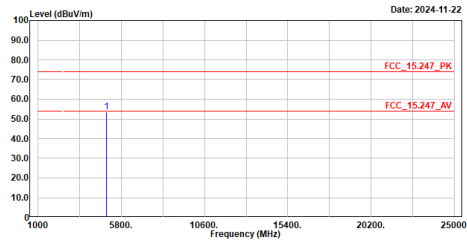


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
		dBuV/m	dB	dB	dB	dB/m	
1	4960.000	53.63	74.00	-20.37	60.14	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2480MHz
Test by :Caster

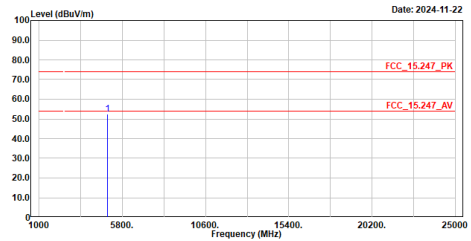


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
		dBuV/m	dB	dB	dB	dB/m	
1	4960.000	52.44	74.00	-21.56	58.95	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2402MHz
Test by :Caster

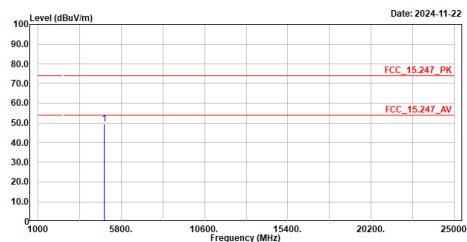


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
		dBuV/m	dB	dB	dB	dB/m	
1	4804.000	49.46	74.00	-24.54	56.60	-7.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2402MHz
Test by :Caster

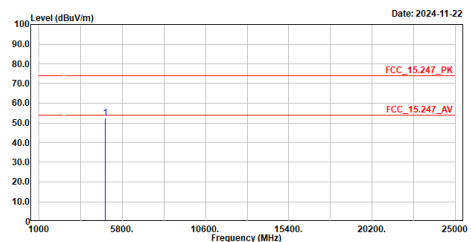


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
		dBuV/m	dB	dB	dB	dB/m	
1	4804.000	52.50	74.00	-21.50	59.64	-7.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2440MHz
Test by :Caster

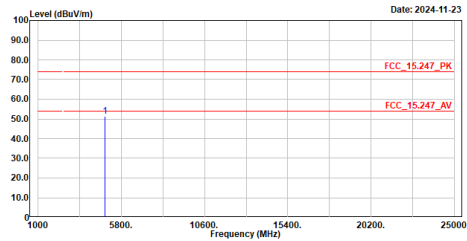


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	51.27	74.00	-22.73	58.08	-6.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2440MHz
Test by :Caster

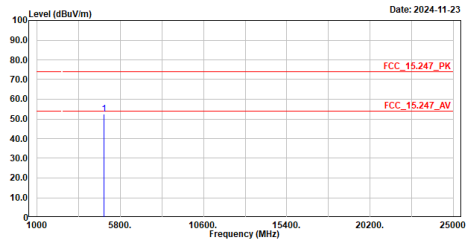


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	52.59	74.00	-21.41	59.40	-6.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2480MHz
Test by :Caster

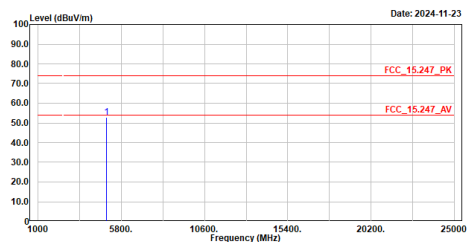


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	52.73	74.00	-21.27	59.24	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2480MHz
Test by :Caster

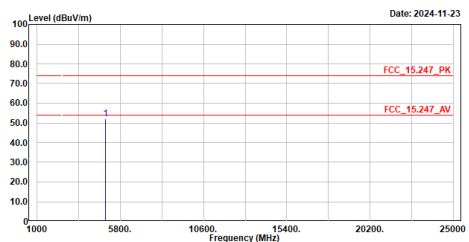


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	52.14	74.00	-21.86	58.65	-6.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2440MHz
Test by :Peter

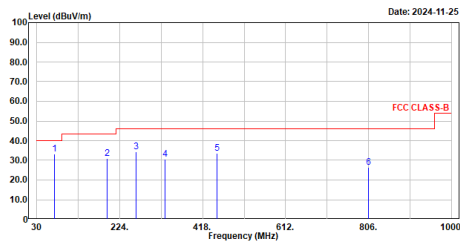

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2440MHz
Test by :Peter

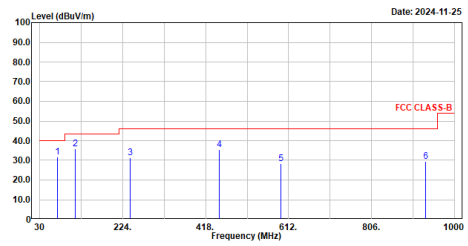

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2402MHz
Test by :Caster

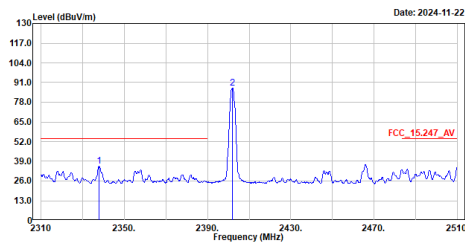

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2337.800	35.84	54.00	-18.16	29.77	6.07	Average
2	2402.000	87.51	-----	-----	81.51	6.00	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2402MHz
Test by :Caster

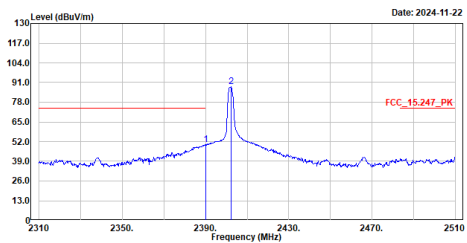

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	50.12	74.00	-23.88	44.03	6.09	Peak
2	2402.200	88.10	-----	-----	82.10	6.00	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2402MHz
Test by :Caster

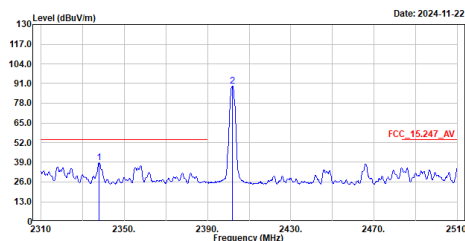

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2338.000	38.79	54.00	-15.21	32.72	6.07	Average
2	2402.000	89.45	-----	-----	83.45	6.00	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE1M_2402MHz
Test by :Caster

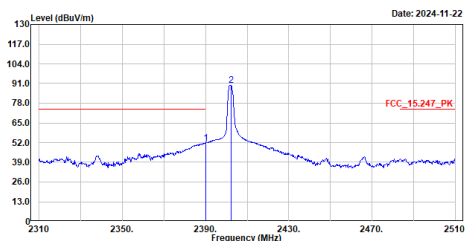

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2390.000	51.74	74.00	-22.26	45.65	6.09	Peak
2	2402.200	89.98	-----	-----	83.98	6.00	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2480MHz
Test by :Caster

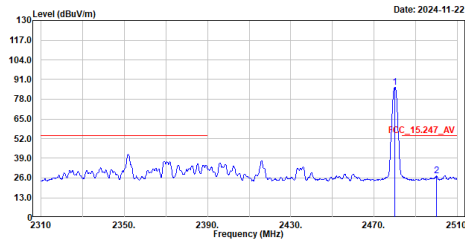

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2480.000	85.84	-----	-----	79.90	5.94	Average
2	2500.000	27.38	54.00	-26.62	21.33	6.05	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_BLE1M_2480MHz
Test by :Caster

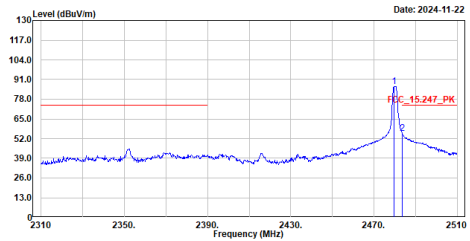

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2479.800	86.37	-----	-----	80.43	5.94	Peak
2	2483.600	55.42	74.00	-18.58	49.44	5.98	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE1M_2480MHz
Test by :Caster

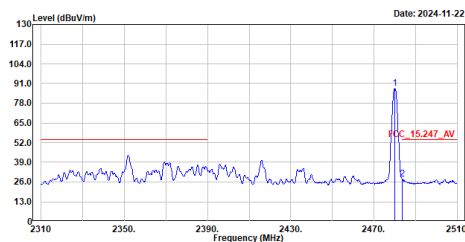

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2480.000	87.65	-----	-----	81.71	5.94	Average
2	2483.600	27.87	54.00	-26.13	21.89	5.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE1M_2480MHz
Test by :Caster

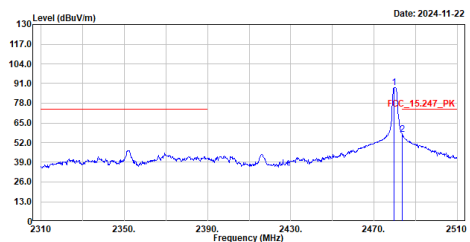

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	2479.800	88.23	-----	-----	82.29	5.94	Peak
2	2483.600	57.19	74.00	-16.81	51.21	5.98	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2402MHz
Test by :Caster

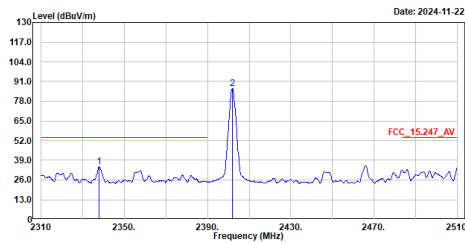

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2337.800	34.67	54.00	-19.33	28.68	6.07	Average
2	2402.000	86.40	-----	-----	80.40	6.00	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2402MHz
Test by :Caster

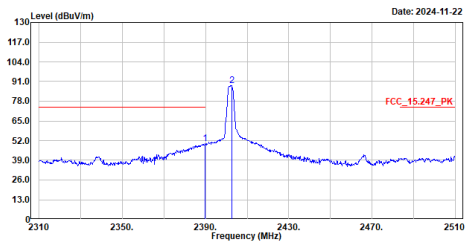

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	49.92	74.00	-24.08	43.83	6.09	Peak
2	2402.600	88.25	-----	-----	82.25	6.00	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE2M_2402MHz
Test by :Caster

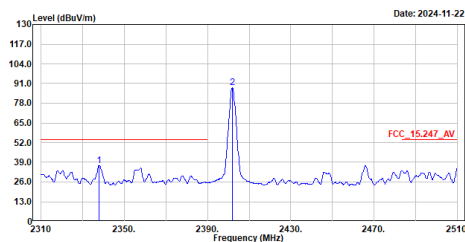

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2338.000	37.00	54.00	-17.00	30.93	6.07	Average
2	2402.000	88.22	-----	-----	82.22	6.00	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_BLE2M_2402MHz
Test by :Caster

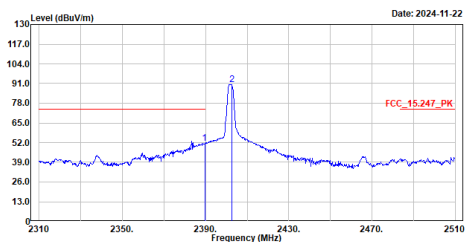

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.600	51.75	74.00	-22.25	45.66	6.09	Peak
2	2402.600	90.19	-----	-----	84.19	6.00	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2480MHz
Test by :Caster

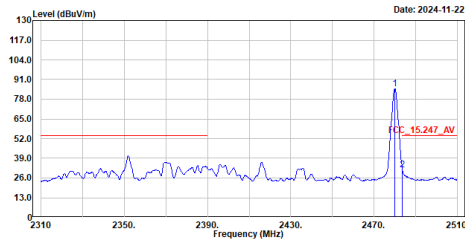

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	2480.000	84.75	-----	-----	78.81	5.94	Average
2	2483.600	31.62	54.00	-22.38	25.64	5.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_BLE2M_2480MHz
Test by :Caster

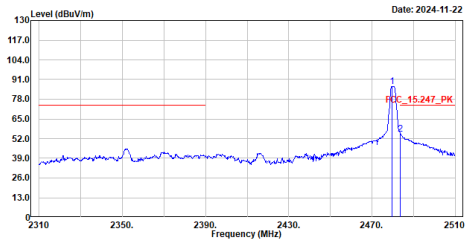

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	2479.600	86.52	-----	-----	80.58	5.94	Peak
2	2483.600	55.09	74.00	-18.91	49.11	5.98	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2480MHz
Test by :Caster

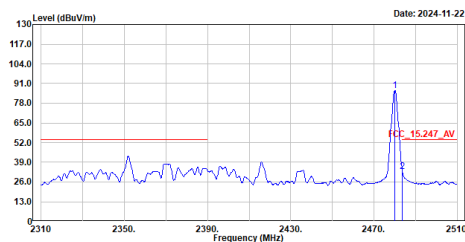

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	2480.000	86.31	-----	-----	80.37	5.94	Average
2	2483.600	32.84	54.00	-21.16	26.86	5.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_BLE2M_2480MHz
Test by :Caster

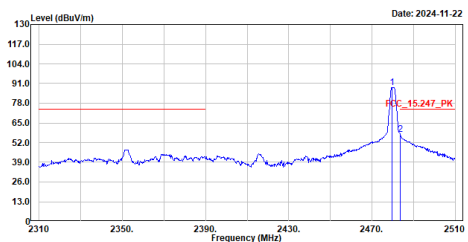

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	2479.600	88.34	-----	-----	82.40	5.94	Peak
2	2483.600	57.19	74.00	-16.81	51.21	5.98	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.