



FCC RF Test Report

APPLICANT : Quectel Wireless Solutions Co., Ltd.
EQUIPMENT : Wi-Fi & Bluetooth Module
BRAND NAME : Quectel
MODEL NAME : FCU743R
FCC ID : XMR2024FCU743R
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Jun. 19, 2024 ~ Jul. 08, 2024

We, Sporton International Inc.(ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc.(ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Test Software	7
1.8 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode	10
2.3 Connection Diagram of Test System	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example	11
3 TEST RESULT	12
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	12
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	18
3.4 Unwanted Emissions Measurement	21
3.5 AC Conducted Emission Measurement	26
3.6 Antenna Requirements	28
4 LIST OF MEASURING EQUIPMENT	29
5 MEASUREMENT UNCERTAINTY	30
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR460512D	Rev. 01	Initial issue of report	Jul. 24, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.08 dB at 5149.99 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 8.98 dB at 0.16 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.2 Manufacturer

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wi-Fi & Bluetooth Module
Brand Name	Quectel
Model Name	FCU743R
FCC ID	XMR2024FCU743R
SN	Conducted: E1M24DD05000036 Conduction: E1M24DD05000013 Radiation: E1M24DD05000036
HW Version	R1.0
SW Version	NA
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 19.26 dBm / 0.0843 W 802.11n HT20 : 18.23 dBm / 0.0665 W 802.11n HT40 : 18.11 dBm / 0.0647 W <5260 MHz ~ 5320 MHz> 802.11a : 19.65 dBm / 0.0923 W 802.11n HT20 : 18.54 dBm / 0.0714 W 802.11n HT40 : 18.56 dBm / 0.0718 W <5500 MHz ~ 5700 MHz > 802.11a : 19.24 dBm / 0.0839 W 802.11n HT20 : 18.12 dBm / 0.0649 W 802.11n HT40 : 18.21 dBm / 0.0662 W <5745 MHz ~ 5825 MHz> 802.11a : 18.78 dBm / 0.0755 W 802.11n HT20 : 17.59 dBm / 0.0574 W 802.11n HT40 : 17.66 dBm / 0.0583 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 16.58 MHz 802.11n HT20 : 17.63 MHz 802.11n HT40 : 35.66 MHz <5260 MHz ~ 5320 MHz> 802.11a : 16.63 MHz 802.11n HT20 : 17.63 MHz 802.11n HT40 : 35.76 MHz <5500 MHz ~ 5700 MHz> 802.11a : 16.63 MHz 802.11n HT20 : 17.58 MHz 802.11n HT40 : 35.76 MHz <5745 MHz ~ 5825 MHz> 802.11a : 16.63 MHz 802.11n HT20 : 17.63 MHz 802.11n HT40 : 35.76 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> Dipole Antenna type with gain -0.7 dBi <5260 MHz ~ 5320 MHz> Dipole Antenna type with gain -0.8 dBi <5500 MHz ~ 5700 MHz> Dipole Antenna type with gain -1.2 dBi <5745 MHz ~ 5825 MHz> Dipole Antenna type with gain -1.5 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5700MHz U-NII-2C	100	5500	116	5580
	102*	5510	132	5660
	104	5520	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
	112	5560	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	159*	5795
	151*	5755	161	5805
	153	5765	165	5825
	157	5785	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	-	-	128	5640

Note: The above Frequency and Channel in "*" are 40MHz bandwidth.

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

SISO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

AC Conducted Emission	Mode 1 : BT Link + WIFI 5G Link + Powered from Test Jig
Remark: For Radiated Test Cases, The tests were performance with Test Jig.	

2.3 Connection Diagram of Test System

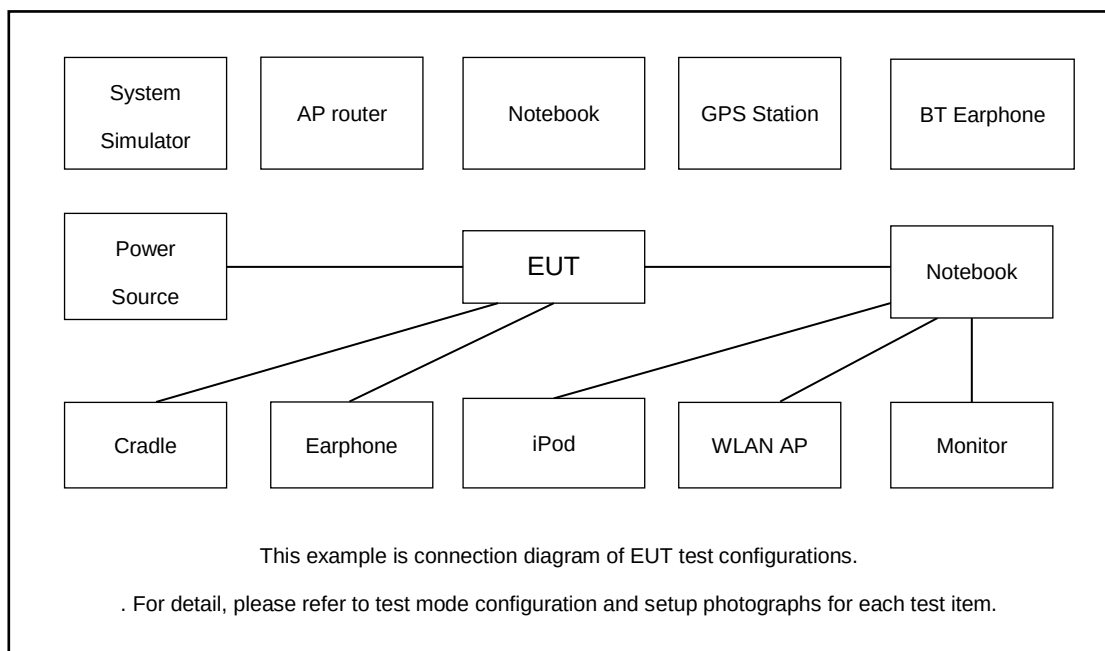

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	NOTE BOOK	DELL	3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	Iopd	apple	MC69029/A	N/A	N/A	N/A
4.	Test Jig	Quectel	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.00 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.00 + 10 = 15.00 \text{ (dB)}\end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 * RBW$. 7. Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	1. Set RBW = 100kHz. 2. Set the VBW $\geq 3 * RBW$. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.



3.1.4 Test Setup


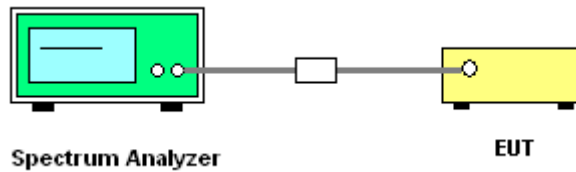


3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

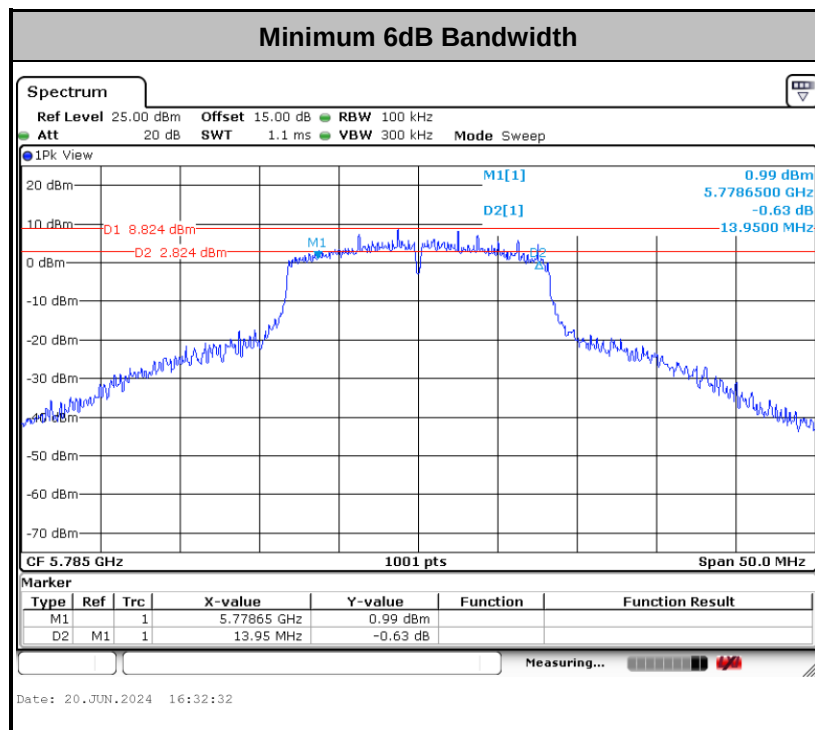

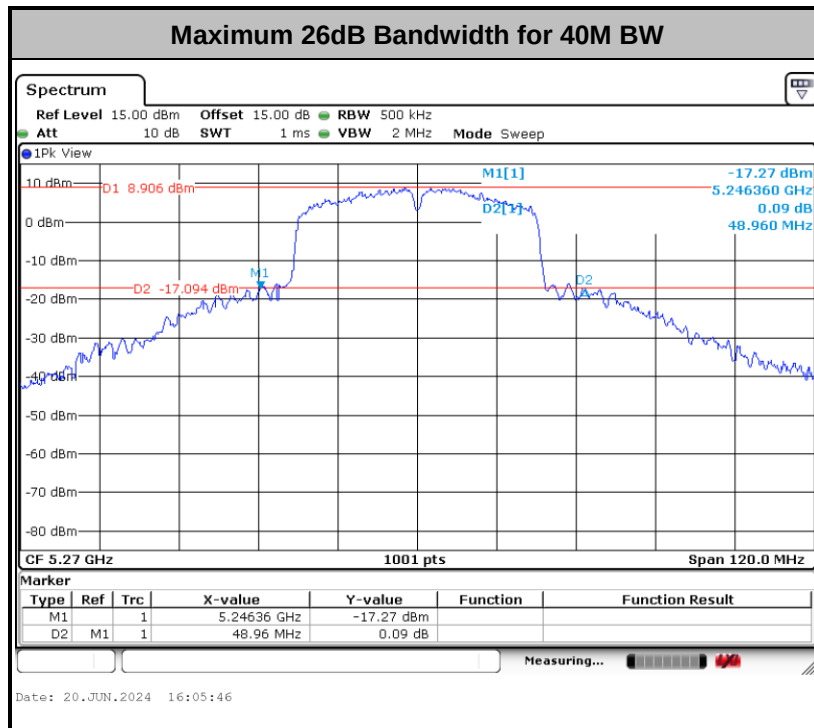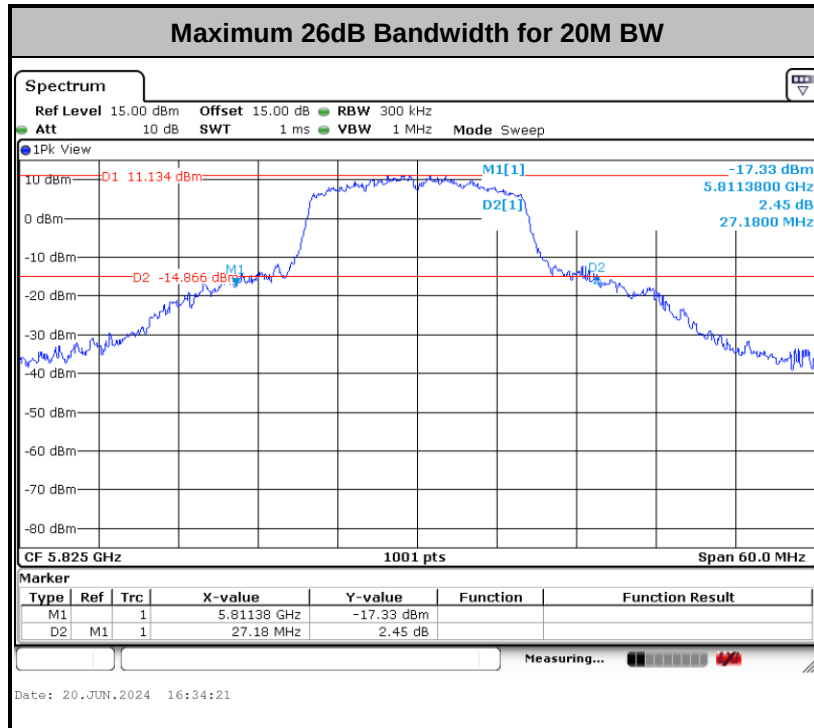

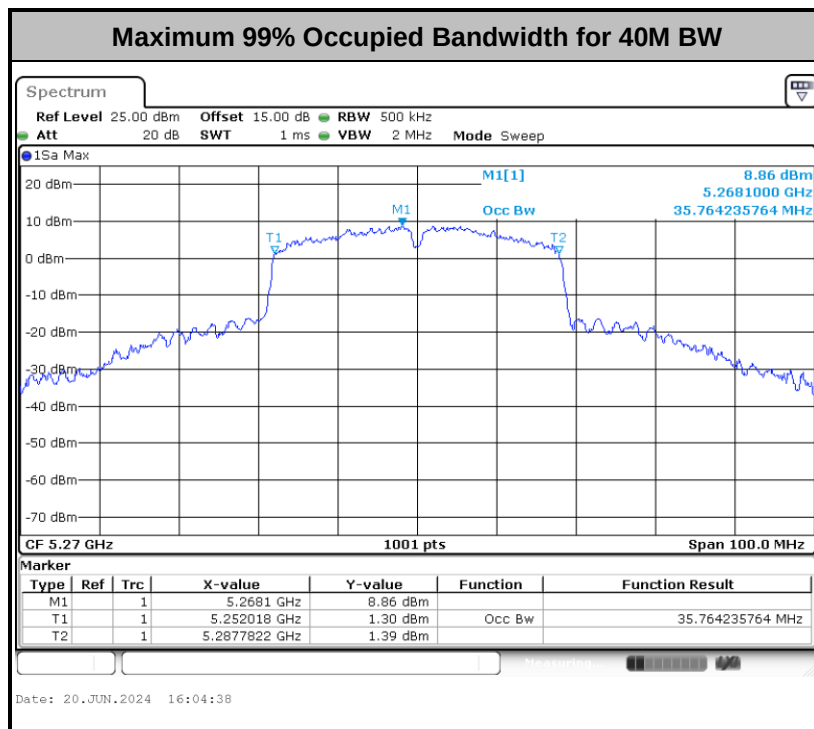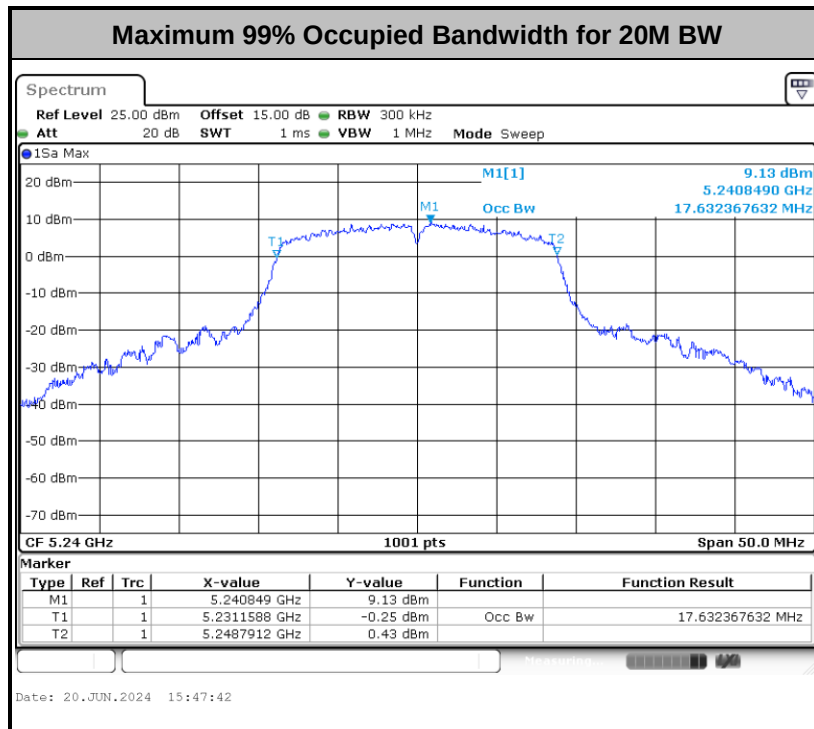

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log_{10} B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

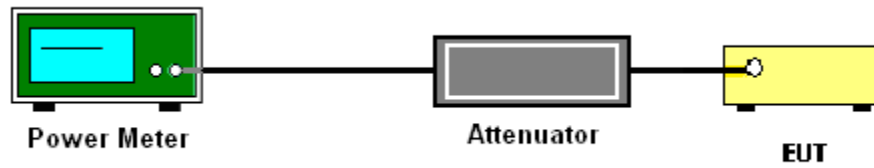

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


For devices operating in the band UNII-3**# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
 - Set VBW ≥ 1 MHz.
 - Number of points in sweep ≥ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

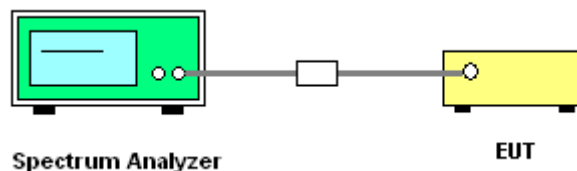3.3.4 Test Setup**3.3.5 Test Result of Power Spectral Density**

Please refer to Appendix A.

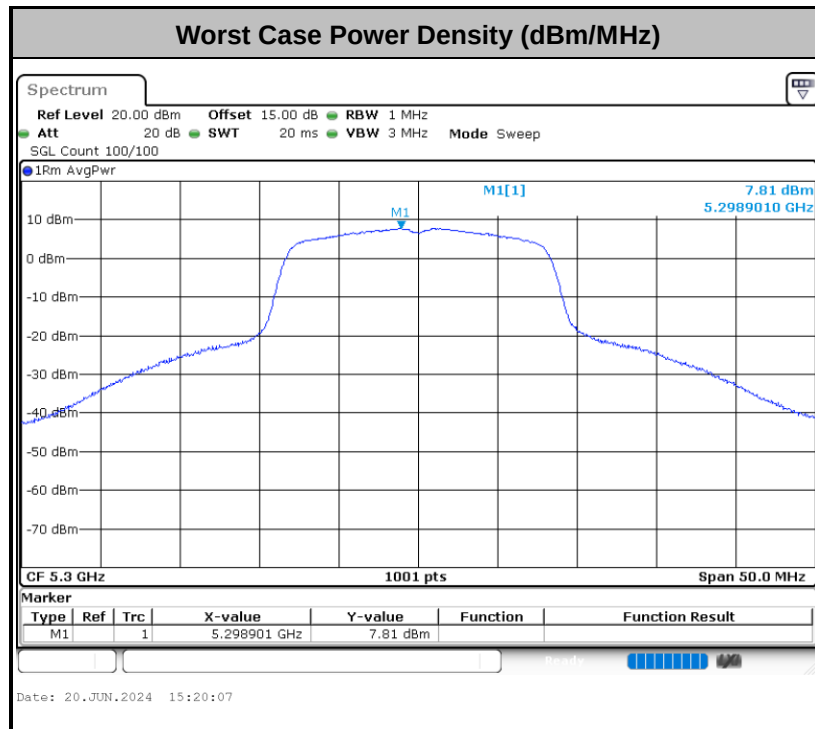For UNII-1/2A/2C

Note: Average Power Density (dB) = Measured value+ Duty Factor

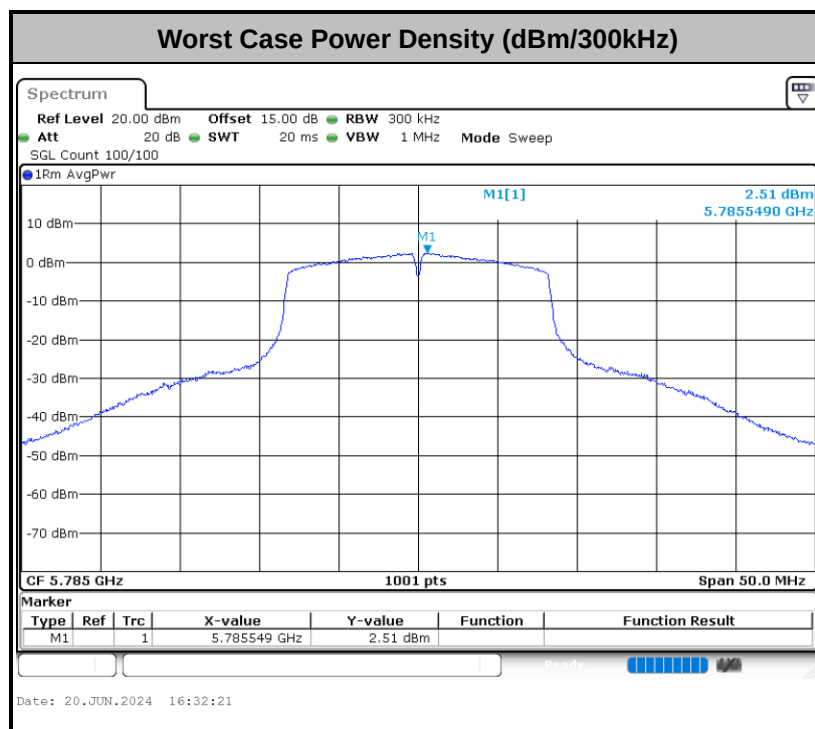For UNII-3

Note: Average Power Density (dB) = Measured value + Duty Factor + RBW offset.

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

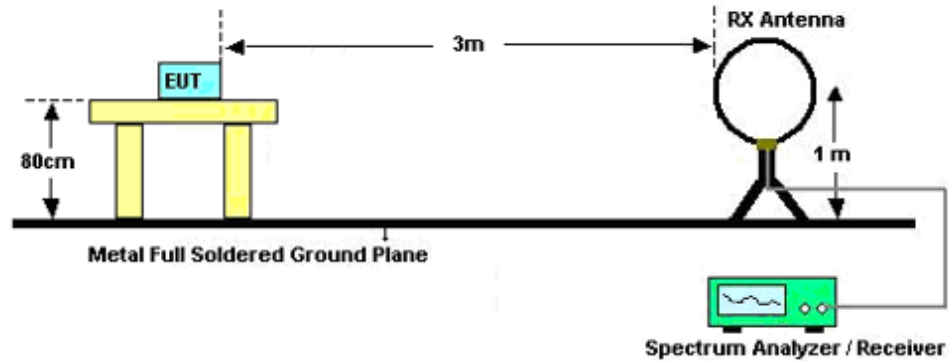

For radiated emissions from 30MHz to 1GHz

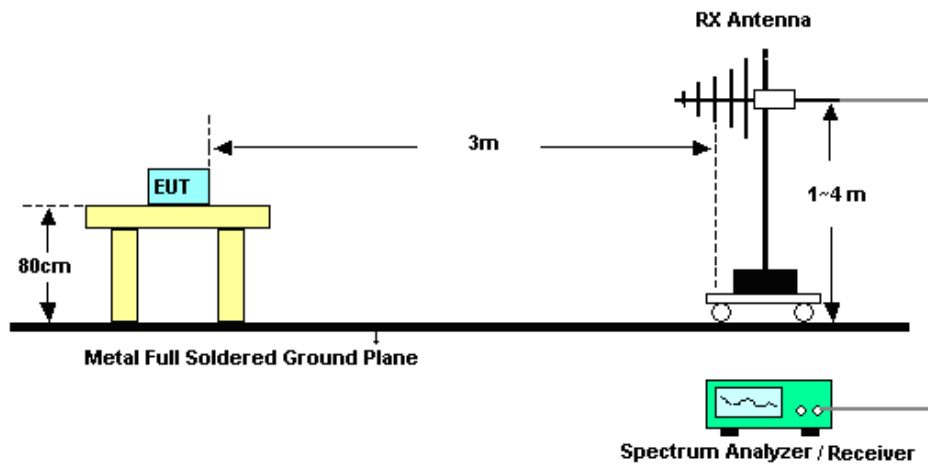

For radiated emissions above 1GHz

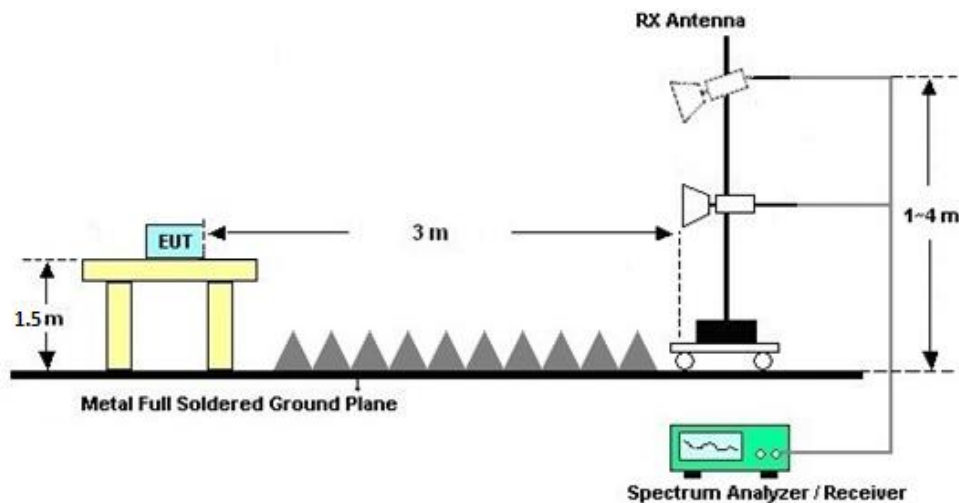

**3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

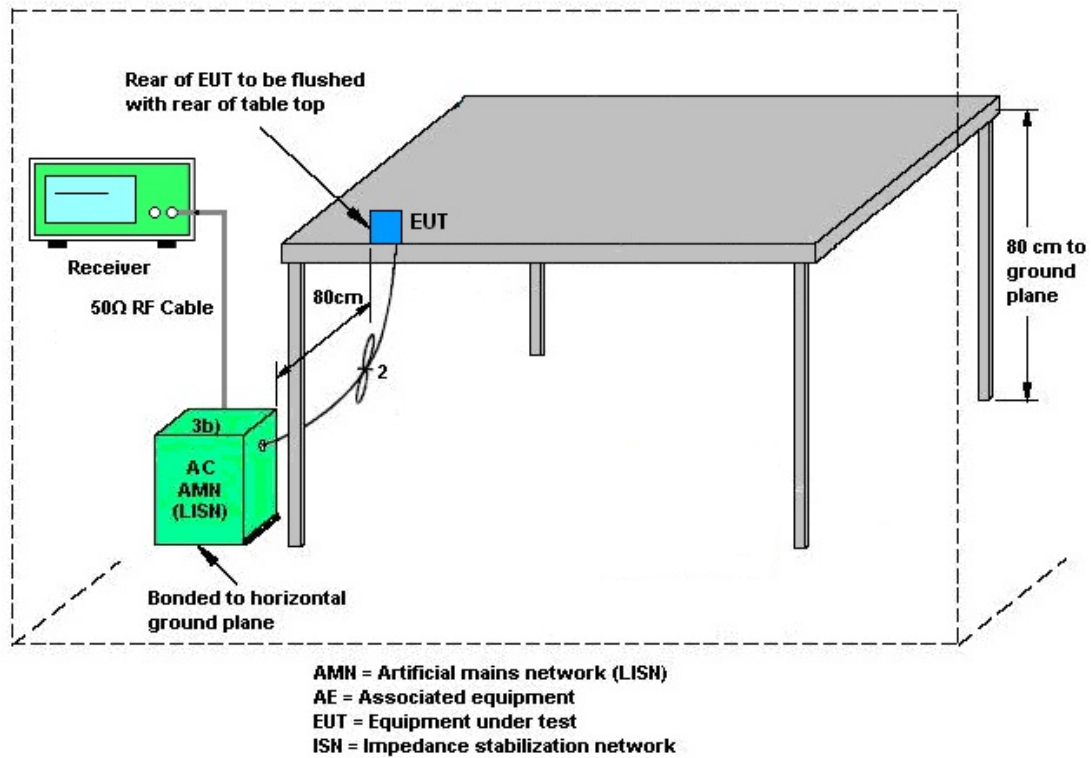

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Jun. 19, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Jun. 19, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Jun. 19, 2024	Jul. 27, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Jun. 19, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Jun. 19, 2024	Jul. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 09, 2024	Jun. 19, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Jun. 19, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Jun. 19, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 18, 2023	Jun. 19, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 07, 2023	Jun. 19, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	Oct. 18, 2023	Jun. 19, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 19, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 19, 2024	NCR	Radiation (03CH01-SZ)
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	Apr. 09, 2024	Jul. 08, 2024	Apr. 08, 2025	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Jul. 08, 2024	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Jul. 08, 2024	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	Oct. 18, 2023	Jul. 08, 2024	Oct. 17, 2024	Conduction (CO01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jun. 20, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Jun. 20, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 21, 2023	Jun. 20, 2024	Aug. 20, 2024	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	PiShun	Temperature:	21~25	°C
Test Date:	2024/6/20	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

<5180 MHz ~ 5240 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)		IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	16.58	26.88	-	22.20		
11a	6Mbps	1	44	5220	16.58	26.88	-	22.20		
11a	6Mbps	1	48	5240	16.58	26.82	-	22.20		
HT20	MCS0	1	36	5180	17.63	21.48	-	22.46		
HT20	MCS0	1	44	5220	17.58	21.54	-	22.45		
HT20	MCS0	1	48	5240	17.63	21.36	-	22.46		
HT40	MCS0	1	38	5190	35.66	48.84	-	23.01		
HT40	MCS0	1	46	5230	35.66	45.00	-	23.01		

TEST RESULTS DATA
Average Power Table

<5180 MHz ~ 5240 MHz>										Power Setting
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	
11a	6Mbps	1	36	5180	1.36	18.77	24.00	-0.70	Pass	
11a	6Mbps	1	44	5220	1.36	19.26	24.00	-0.70	Pass	
11a	6Mbps	1	48	5240	1.36	19.18	24.00	-0.70	Pass	
HT20	MCS0	1	36	5180	1.47	18.23	24.00	-0.70	Pass	
HT20	MCS0	1	44	5220	1.47	18.12	24.00	-0.70	Pass	
HT20	MCS0	1	48	5240	1.47	18.18	24.00	-0.70	Pass	
HT40	MCS0	1	38	5190	2.59	15.17	24.00	-0.70	Pass	
HT40	MCS0	1	46	5230	2.59	18.11	24.00	-0.70	Pass	

TEST RESULTS DATA
Power Spectral Density

<5180 MHz ~ 5240 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	1.36	8.51	11.00	-0.70		Pass
11a	6Mbps	1	44	5220	1.36	8.35	11.00	-0.70		Pass
11a	6Mbps	1	48	5240	1.36	8.58	11.00	-0.70		Pass
HT20	MCS0	1	36	5180	1.47	6.98	11.00	-0.70		Pass
HT20	MCS0	1	44	5220	1.47	7.53	11.00	-0.70		Pass
HT20	MCS0	1	48	5240	1.47	7.32	11.00	-0.70		Pass
HT40	MCS0	1	38	5190	2.59	3.77	11.00	-0.70		Pass
HT40	MCS0	1	46	5230	2.59	3.99	11.00	-0.70		Pass

TEST RESULTS DATA
26dB and 99% OBW

<5260 MHz ~ 5320 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	16.58	27.12	23.20	29.20	23.98	
11a	6M bps	1	60	5300	16.63	26.88	23.21	29.21	23.98	
11a	6M bps	1	64	5320	16.63	26.94	23.21	29.21	23.98	
HT20	MCS 0	1	52	5260	17.63	21.54	23.46	29.46	23.98	
HT20	MCS 0	1	60	5300	17.63	21.48	23.46	29.46	23.98	
HT20	MCS 0	1	64	5320	17.63	21.30	23.46	29.46	23.98	
HT40	MCS 0	1	54	5270	35.76	48.96	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	35.76	48.96	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

<5260 MHz ~ 5320 MHz>											Power Setting
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	
11a	6M bps	1	52	5260	1.36	19.65	23.98	-0.80	30.00	Pass	19
11a	6M bps	1	60	5300	1.36	19.56	23.98	-0.80	30.00	Pass	19
11a	6M bps	1	64	5320	1.36	19.55	23.98	-0.80	30.00	Pass	19
HT20	MCS 0	1	52	5260	1.47	18.50	23.98	-0.80	30.00	Pass	18
HT20	MCS 0	1	60	5300	1.47	18.54	23.98	-0.80	30.00	Pass	18
HT20	MCS 0	1	64	5320	1.47	18.48	23.98	-0.80	30.00	Pass	18
HT40	MCS 0	1	54	5270	2.59	18.56	23.98	-0.80	30.00	Pass	18
HT40	MCS 0	1	62	5310	2.59	16.01	23.98	-0.80	30.00	Pass	15.5

TEST RESULTS DATA
Power Spectral Density

<5260 MHz ~ 5320 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	1.36	9.10	11.00	-0.80		Pass
11a	6M bps	1	60	5300	1.36	9.17	11.00	-0.80		Pass
11a	6M bps	1	64	5320	1.36	8.79	11.00	-0.80		Pass
HT20	MCS 0	1	52	5260	1.47	8.71	11.00	-0.80		Pass
HT20	MCS 0	1	60	5300	1.47	7.57	11.00	-0.80		Pass
HT20	MCS 0	1	64	5320	1.47	7.33	11.00	-0.80		Pass
HT40	MCS 0	1	54	5270	2.59	4.67	11.00	-0.80		Pass
HT40	MCS 0	1	62	5310	2.59	4.60	11.00	-0.80		Pass

TEST RESULTS DATA
26dB and 99% OBW

<5500 MHz ~ 5700 MHz >										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	16.58	24.90	23.20	29.20	23.98	
11a	6M bps	1	116	5580	16.53	25.08	23.18	29.18	23.98	
11a	6M bps	1	140	5700	16.63	27.00	23.21	29.21	23.98	
HT20	MCS 0	1	100	5500	17.58	21.42	23.45	29.45	23.98	
HT20	MCS 0	1	116	5580	17.58	21.24	23.45	29.45	23.98	
HT20	MCS 0	1	140	5700	17.58	21.36	23.45	29.45	23.98	
HT40	MCS 0	1	102	5510	35.56	39.00	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	35.66	44.52	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	35.76	41.04	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

<5500 MHz ~ 5700 MHz >											Power Setting
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	
11a	6M bps	1	100	5500	1.36	19.16	23.98	-1.20	30.00	Pass	19
11a	6M bps	1	116	5580	1.36	19.24	23.98	-1.20	30.00	Pass	19
11a	6M bps	1	140	5700	1.36	18.09	23.98	-1.20	30.00	Pass	18
HT20	MCS 0	1	100	5500	1.47	18.08	23.98	-1.20	30.00	Pass	18
HT20	MCS 0	1	116	5580	1.47	18.12	23.98	-1.20	30.00	Pass	18
HT20	MCS 0	1	140	5700	1.47	17.72	23.98	-1.20	30.00	Pass	17.75
HT40	MCS 0	1	102	5510	2.59	15.97	23.98	-1.20	30.00	Pass	15.75
HT40	MCS 0	1	110	5550	2.59	18.21	23.98	-1.20	30.00	Pass	18
HT40	MCS 0	1	134	5670	2.59	18.00	23.98	-1.20	30.00	Pass	18

TEST RESULTS DATA
Power Spectral Density

<5500 MHz ~ 5700 MHz >										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	1.36	8.61	11.00	-1.20		Pass
11a	6M bps	1	116	5580	1.36	8.92	11.00	-1.20		Pass
11a	6M bps	1	140	5700	1.36	8.81	11.00	-1.20		Pass
HT20	MCS 0	1	100	5500	1.47	7.15	11.00	-1.20		Pass
HT20	MCS 0	1	116	5580	1.47	7.59	11.00	-1.20		Pass
HT20	MCS 0	1	140	5700	1.47	7.46	11.00	-1.20		Pass
HT40	MCS 0	1	102	5510	2.59	4.26	11.00	-1.20		Pass
HT40	MCS 0	1	110	5550	2.59	5.38	11.00	-1.20		Pass
HT40	MCS 0	1	134	5670	2.59	4.90	11.00	-1.20		Pass

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

<5745 MHz ~ 5825 MHz>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	16.53	25.14	14.15	0.5	Pass
11a	6Mbps	1	157	5785	16.63	27.00	13.95	0.5	Pass
11a	6Mbps	1	165	5825	16.63	27.18	15.15	0.5	Pass
HT20	MCS 0	1	149	5745	17.58	21.42	15.10	0.5	Pass
HT20	MCS 0	1	157	5785	17.58	21.30	15.15	0.5	Pass
HT20	MCS 0	1	165	5825	17.63	21.30	15.20	0.5	Pass
HT40	MCS 0	1	151	5755	35.76	46.68	35.19	0.5	Pass
HT40	MCS 0	1	159	5795	35.76	46.68	32.76	0.5	Pass

Average Power Table

Setting
19
19
19
18
18
18
18
18


TEST RESULTS DATA
Power Spectral Density

<5745 MHz ~ 5825 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	1.36	2.22	6.03	30.00	-1.50	Pass
11a	6Mbps	1	157	5785	1.36	2.22	6.09	30.00	-1.50	Pass
11a	6Mbps	1	165	5825	1.36	2.22	6.00	30.00	-1.50	Pass
HT20	MCS 0	1	149	5745	1.47	2.22	5.23	30.00	-1.50	Pass
HT20	MCS 0	1	157	5785	1.47	2.22	4.56	30.00	-1.50	Pass
HT20	MCS 0	1	165	5825	1.47	2.22	4.81	30.00	-1.50	Pass
HT40	MCS 0	1	151	5755	2.59	2.22	2.13	30.00	-1.50	Pass
HT40	MCS 0	1	159	5795	2.59	2.22	1.45	30.00	-1.50	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

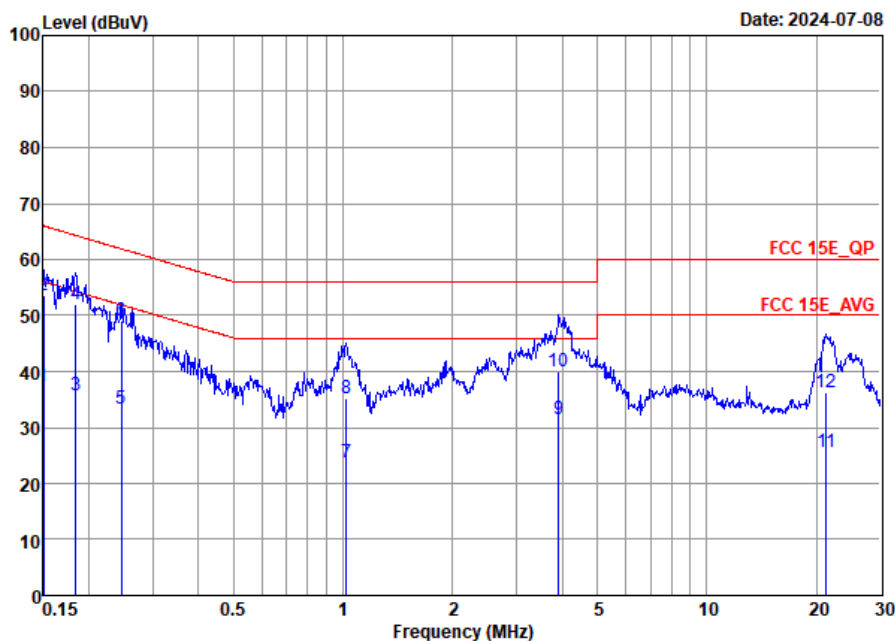


Site : CO01-SZ

Condition: FCC 15E_QP AC LISN 100063_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	37.22	-18.78	56.00	16.70	10.39	10.13	Average
2 *	0.15	53.72	-12.28	66.00	33.20	10.39	10.13	QP
3	0.18	35.81	-18.47	54.28	15.30	10.36	10.15	Average
4	0.18	51.91	-12.37	64.28	31.40	10.36	10.15	QP
5	0.25	33.41	-18.50	51.91	13.10	10.16	10.15	Average
6	0.25	49.11	-12.80	61.91	28.80	10.16	10.15	QP
7	1.02	23.80	-22.20	46.00	3.40	10.24	10.16	Average
8	1.02	35.20	-20.80	56.00	14.80	10.24	10.16	QP
9	3.92	31.52	-14.48	46.00	11.00	10.20	10.32	Average
10	3.92	40.02	-15.98	56.00	19.50	10.20	10.32	QP
11	21.26	25.66	-24.34	50.00	4.90	10.14	10.62	Average
12	21.26	36.26	-23.74	60.00	15.50	10.14	10.62	QP



Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

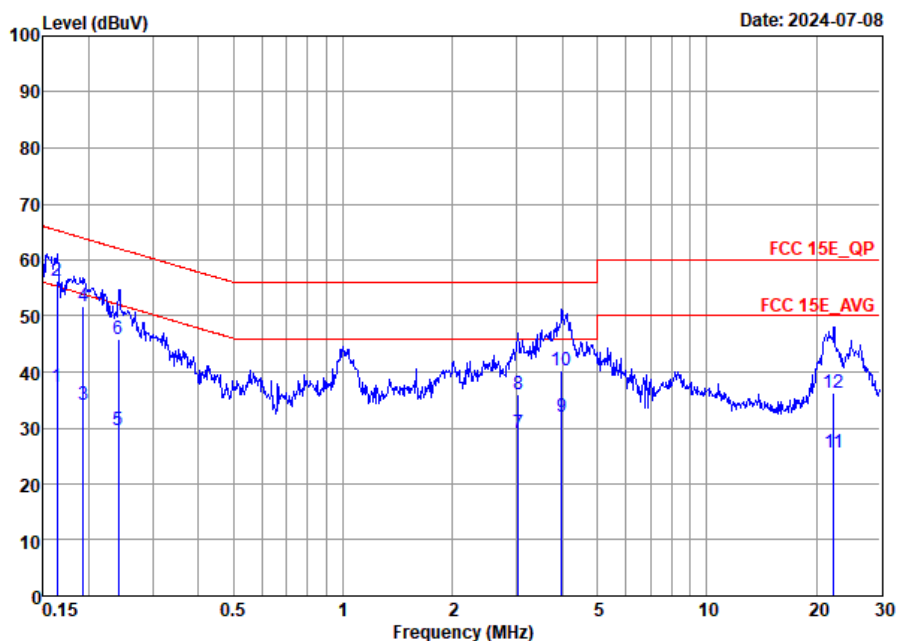

Site : CO01-SZ

Condition: FCC 15E_QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	37.32	-17.98	55.30	16.80	10.38	10.14	Average
2 *	0.16	56.32	-8.98	65.30	35.80	10.38	10.14	QP
3	0.19	34.27	-19.62	53.89	13.80	10.32	10.15	Average
4	0.19	51.87	-12.02	63.89	31.40	10.32	10.15	QP
5	0.24	29.72	-22.32	52.04	9.40	10.17	10.15	Average
6	0.24	45.92	-16.12	62.04	25.60	10.17	10.15	QP
7	3.03	29.06	-16.94	46.00	8.30	10.48	10.28	Average
8	3.03	35.96	-20.04	56.00	15.20	10.48	10.28	QP
9	3.99	32.00	-14.00	46.00	11.20	10.48	10.32	Average
10	3.99	40.30	-15.70	56.00	19.50	10.48	10.32	QP
11	22.30	25.68	-24.32	50.00	4.91	10.12	10.65	Average
12	22.30	36.38	-23.62	60.00	15.61	10.12	10.65	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Zhaohui Liang	Relative Humidity :	48~49%
		Temperature :	24~25℃

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-
Mode 2	U-NII-1	5.15-5.25	1	802.11a	44	5220	6Mbps	-
Mode 3	U-NII-1	5.15-5.25	1	802.11a	48	5240	6Mbps	-
Mode 4	U-NII-1	5.15-5.25	1	802.11n HT20	36	5180	MCS0	-
Mode 5	U-NII-1	5.15-5.25	1	802.11n HT20	44	5220	MCS0	-
Mode 6	U-NII-1	5.15-5.25	1	802.11n HT20	48	5240	MCS0	-
Mode 7	U-NII-1	5.15-5.25	1	802.11n HT40	38	5190	MCS0	-
Mode 8	U-NII-1	5.15-5.25	1	802.11n HT40	46	5230	MCS0	-
Mode 9	U-NII-2A	5.25-5.35	1	802.11a	52	5260	6Mbps	-
Mode 10	U-NII-2A	5.25-5.35	1	802.11a	60	5300	6Mbps	-
Mode 11	U-NII-2A	5.25-5.35	1	802.11a	64	5320	6Mbps	-
Mode 12	U-NII-2A	5.25-5.35	1	802.11n HT20	52	5260	MCS0	-
Mode 13	U-NII-2A	5.25-5.35	1	802.11n HT20	60	5300	MCS0	-
Mode 14	U-NII-2A	5.25-5.35	1	802.11n HT20	64	5320	MCS0	-
Mode 15	U-NII-2A	5.25-5.35	1	802.11n HT40	54	5270	MCS0	-
Mode 16	U-NII-2A	5.25-5.35	1	802.11n HT40	62	5310	MCS0	-
Mode 17	U-NII-2C	5.47-5.725	1	802.11a	100	5500	6Mbps	-
Mode 18	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-
Mode 19	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-
Mode 20	U-NII-2C	5.47-5.725	1	802.11n HT20	100	5500	MCS0	-
Mode 21	U-NII-2C	5.47-5.725	1	802.11n HT20	116	5580	MCS0	-
Mode 22	U-NII-2C	5.47-5.725	1	802.11n HT20	140	5700	MCS0	-
Mode 23	U-NII-2C	5.47-5.725	1	802.11n HT40	102	5510	MCS0	-
Mode 24	U-NII-2C	5.47-5.725	1	802.11n HT40	110	5550	MCS0	-
Mode 25	U-NII-2C	5.47-5.725	1	802.11n HT40	134	5670	MCS0	-
Mode 26	U-NII-3	5.725-5.85	1	802.11a	149	5745	6Mbps	-
Mode 27	U-NII-3	5.725-5.85	1	802.11a	157	5785	6Mbps	-
Mode 28	U-NII-3	5.725-5.85	1	802.11a	165	5825	6Mbps	-
Mode 29	U-NII-3	5.725-5.85	1	802.11n HT20	149	5745	MCS0	-
Mode 30	U-NII-3	5.725-5.85	1	802.11n HT20	157	5785	MCS0	-
Mode 31	U-NII-3	5.725-5.85	1	802.11n HT20	165	5825	MCS0	-
Mode 32	U-NII-3	5.725-5.85	1	802.11n HT40	151	5755	MCS0	-
Mode 33	U-NII-3	5.725-5.85	1	802.11n HT40	159	5795	MCS0	-
Mode 34	U-NII-1	5.15-5.25	1	802.11n HT40	38	5190	MCS0	LF
Mode 35	U-NII-3	5.725-5.85	1	802.11a	149	5745	6Mbps	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.85	50.42	54.00	-3.58	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	49.25	68.30	-19.05	H	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	49.83	68.30	-18.47	H	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	49.27	68.30	-19.03	V	Peak	Pass	Harmonic
4	802.11n HT20	36	5149.89	50.37	54.00	-3.63	H	AVERAGE	Pass	Band Edge
4	802.11n HT20	36	10360.00	48.55	68.30	-19.75	H	Peak	Pass	Harmonic
5	802.11n HT20	44	-	-	-	-	-	-	-	Band Edge
5	802.11n HT20	44	10440.00	48.97	68.30	-19.33	V	Peak	Pass	Harmonic
6	802.11n HT20	48	-	-	-	-	-	-	-	Band Edge
6	802.11n HT20	48	10480.00	49.10	68.30	-19.20	V	Peak	Pass	Harmonic
7	802.11n HT40	38	5149.99	50.92	54.00	-3.08	H	AVERAGE	Pass	Band Edge
7	802.11n HT40	38	10380.00	48.99	68.30	-19.31	H	Peak	Pass	Harmonic
8	802.11n HT40	46	5069.81	43.82	54.00	-10.18	V	AVERAGE	Pass	Band Edge
8	802.11n HT40	46	-	-	-	-	-	-	-	Harmonic
9	802.11a	52	-	-	-	-	-	-	-	Band Edge
9	802.11a	52	10520.00	49.29	68.30	-19.01	H	Peak	Pass	Harmonic
10	802.11a	60	-	-	-	-	-	-	-	Band Edge
10	802.11a	60	10600.00	48.56	74.00	-25.44	H	Peak	Pass	Harmonic
11	802.11a	64	5350.00	49.16	54.00	-4.84	H	AVERAGE	Pass	Band Edge
11	802.11a	64	10640.00	48.76	74.00	-25.24	V	Peak	Pass	Harmonic
12	802.11n HT20	52	-	-	-	-	-	-	-	Band Edge
12	802.11n HT20	52	10520.00	48.76	68.30	-19.54	V	Peak	Pass	Harmonic
13	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge
13	802.11n HT20	60	10600.00	48.61	74.00	-25.39	H	Peak	Pass	Harmonic
14	802.11n HT20	64	5350.00	47.63	54.00	-6.37	H	AVERAGE	Pass	Band Edge
14	802.11n HT20	64	15960.00	49.21	74.00	-24.79	H	Peak	Pass	Harmonic
15	802.11n HT40	54	5094.93	43.85	54.00	-10.15	H	AVERAGE	Pass	Band Edge
15	802.11n HT40	54	-	-	-	-	-	-	-	Harmonic
16	802.11n HT40	62	5350.43	50.50	54.00	-3.50	H	AVERAGE	Pass	Band Edge
16	802.11n HT40	62	-	-	-	-	-	-	-	Harmonic
17	802.11a	100	5469.04	64.92	68.30	-3.38	H	PEAK	Pass	Band Edge
17	802.11a	100	16500.00	49.18	68.30	-19.12	H	Peak	Pass	Harmonic
18	802.11a	116	-	-	-	-	-	-	-	Band Edge
18	802.11a	116	16740.00	48.55	68.30	-19.75	H	Peak	Pass	Harmonic
19	802.11a	140	5725.12	63.93	68.30	-4.37	H	PEAK	Pass	Band Edge
19	802.11a	140	17100.00	49.22	68.30	-19.08	H	Peak	Pass	Harmonic
20	802.11n HT20	100	5469.34	61.91	68.30	-6.39	H	PEAK	Pass	Band Edge
20	802.11n HT20	100	16500.00	49.10	68.30	-19.20	H	Peak	Pass	Harmonic
21	802.11n HT20	116	-	-	-	-	-	-	-	Band Edge
21	802.11n HT20	116	16740.00	48.92	68.30	-19.38	H	Peak	Pass	Harmonic
22	802.11n HT20	140	5729.81	62.96	68.30	-5.34	H	PEAK	Pass	Band Edge
22	802.11n HT20	140	17100.00	48.87	68.30	-19.43	H	Peak	Pass	Harmonic







23	802.11n HT40	102	5469.30	64.18	68.30	-4.12	H	PEAK	Pass	Band Edge
23	802.11n HT40	102	-	-	-	-	-	-	-	Harmonic
24	802.11n HT40	110	-	-	-	-	-	-	-	Band Edge
24	802.11n HT40	110	16650.00	47.19	68.30	-21.11	V	Peak	Pass	Harmonic
25	802.11n HT40	134	5726.57	59.09	68.30	-9.21	H	PEAK	Pass	Band Edge
25	802.11n HT40	134	-	-	-	-	-	-	-	Harmonic
26	802.11a	149	5639.01	54.29	68.30	-14.01	V	PEAK	Pass	Band Edge
26	802.11a	149	17235.00	49.01	68.30	-19.29	H	Peak	Pass	Harmonic
27	802.11a	157	-	-	-	-	-	-	-	Band Edge
27	802.11a	157	17355.00	48.46	68.30	-19.84	H	Peak	Pass	Harmonic
28	802.11a	165	5948.08	53.75	68.30	-14.55	V	PEAK	Pass	Band Edge
28	802.11a	165	17475.00	48.72	68.30	-19.58	H	Peak	Pass	Harmonic
29	802.11n HT20	149	5613.41	53.66	68.30	-14.64	V	PEAK	Pass	Band Edge
29	802.11n HT20	149	17235.00	48.18	68.30	-20.12	V	Peak	Pass	Harmonic
30	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
30	802.11n HT20	157	17355.00	48.34	68.30	-19.96	V	Peak	Pass	Harmonic
31	802.11n HT20	165	5931.19	53.31	68.30	-14.99	V	PEAK	Pass	Band Edge
31	802.11n HT20	165	17475.00	48.83	68.30	-19.47	H	Peak	Pass	Harmonic
32	802.11n HT40	151	5628.61	53.29	68.30	-15.01	H	PEAK	Pass	Band Edge
32	802.11n HT40	151	-	-	-	-	-	-	-	Harmonic
33	802.11n HT40	159	5612.58	53.34	68.30	-14.96	H	PEAK	Pass	Band Edge
33	802.11n HT40	159	-	-	-	-	-	-	-	Harmonic
34	802.11n HT40	38	944.71	31.06	46.00	-14.94	V	Peak	Pass	LF
35	802.11a	149	837.04	31.33	46.00	-14.67	H	Peak	Pass	LF



Mode	1																																																																															
	Band Edge																																																																															
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.77</td><td>63.35</td><td>74.00</td><td>-10.65</td><td>49.17</td><td>34.87</td><td>11.09</td><td>31.78</td><td>361</td><td>70</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5148.77	63.35	74.00	-10.65	49.17	34.87	11.09	31.78	361	70	PEAK	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>108.56</td><td>-----</td><td>-----</td><td>94.45</td><td>34.86</td><td>11.07</td><td>31.82</td><td>361</td><td>70</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5180.00	108.56	-----	-----	94.45	34.86	11.07	31.82	361	70	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	5148.77	63.35	74.00	-10.65	49.17	34.87	11.09	31.78	361	70	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	5180.00	108.56	-----	-----	94.45	34.86	11.07	31.82	361	70	PEAK																																																																					
Avg	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.85</td><td>50.42</td><td>54.00</td><td>-3.58</td><td>36.24</td><td>34.87</td><td>11.09</td><td>31.78</td><td>361</td><td>70</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5149.85	50.42	54.00	-3.58	36.24	34.87	11.09	31.78	361	70	AVERAGE	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>102.20</td><td>-----</td><td>-----</td><td>88.09</td><td>34.86</td><td>11.07</td><td>31.82</td><td>361</td><td>70</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5180.00	102.20	-----	-----	88.09	34.86	11.07	31.82	361	70	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	5149.85	50.42	54.00	-3.58	36.24	34.87	11.09	31.78	361	70	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																								
1	5180.00	102.20	-----	-----	88.09	34.86	11.07	31.82	361	70	AVERAGE																																																																					

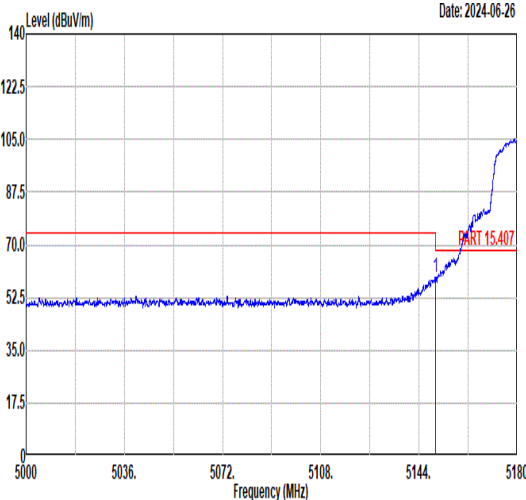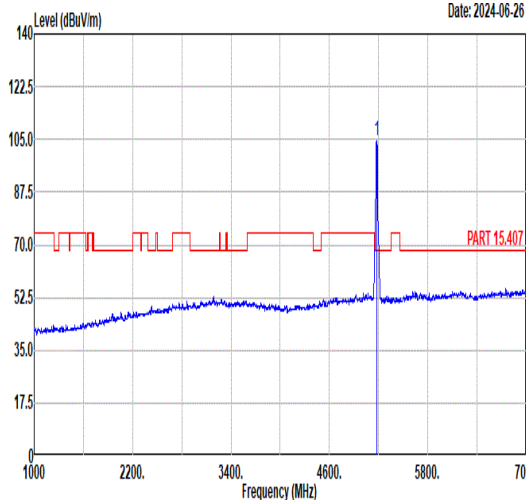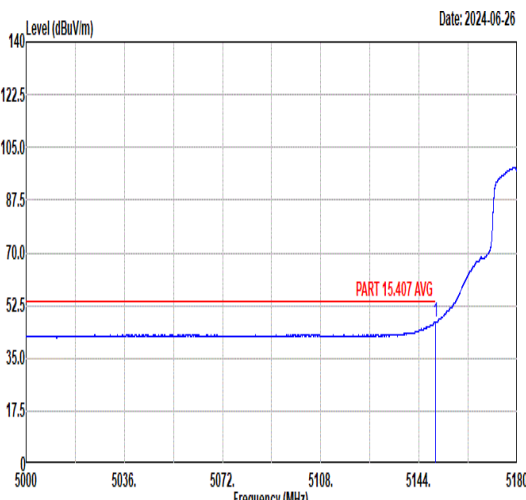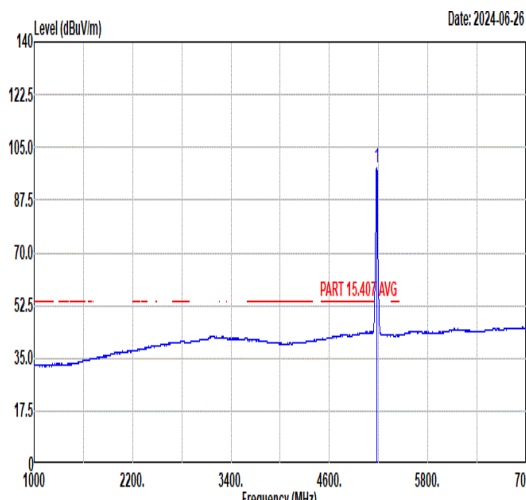

Mode	1																																																																																																																																																																		
	Band Edge																																																																																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																																																																		
ANT	1																																																																																																																																																																		
Pol.	Vertical	Fundamental																																																																																																																																																																	
Peak	Level (dBuV/m) Date: 2024-06-26 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.99</td><td>59.29</td><td>74.00</td><td>-14.71</td><td>45.12</td><td>34.87</td><td>11.08</td><td>31.78</td><td>398 360 PEAK</td></tr></table> Level (dBuV/m) Date: 2024-06-26 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.70</td><td>-----</td><td>90.59</td><td>34.86</td><td>11.07</td><td>31.82</td><td>398</td><td>360 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.99	59.29	74.00	-14.71	45.12	34.87	11.08	31.78	398 360 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	104.70	-----	90.59	34.86	11.07	31.82	398	360 PEAK	Avg	Level (dBuV/m) Date: 2024-06-26 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.99</td><td>46.92</td><td>54.00</td><td>-7.08</td><td>32.75</td><td>34.87</td><td>11.08</td><td>31.78</td><td>398 360 AVERAGE</td></tr></table> Level (dBuV/m) Date: 2024-06-26 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>98.32</td><td>-----</td><td>84.21</td><td>34.86</td><td>11.07</td><td>31.82</td><td>398</td><td>360 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.99	46.92	54.00	-7.08	32.75	34.87	11.08	31.78	398 360 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	98.32	-----	84.21	34.86	11.07	31.82	398	360 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	5149.99	59.29	74.00	-14.71	45.12	34.87	11.08	31.78	398 360 PEAK																																																																																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	5180.00	104.70	-----	90.59	34.86	11.07	31.82	398	360 PEAK																																																																																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	5149.99	46.92	54.00	-7.08	32.75	34.87	11.08	31.78	398 360 AVERAGE																																																																																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	5180.00	98.32	-----	84.21	34.86	11.07	31.82	398	360 AVERAGE																																																																																																																																																										





Mode	1																																																																																																																				
	Harmonic																																																																																																																				
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																				
ANT	1																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																														
Peak Avg	Date: 2024-06-26						Date: 2024-06-26																																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10360.00</td><td>49.25</td><td>68.30</td><td>-19.05</td><td>46.43</td><td>39.44</td><td>14.15</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>40.96</td><td>41.82</td><td>16.85</td><td>51.43</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	49.25	68.30	-19.05	46.43	39.44	14.15	50.77	--	--	Peak	2	15540.00	48.20	74.00	-25.80	40.96	41.82	16.85	51.43	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10360.00</td><td>49.18</td><td>68.30</td><td>-19.12</td><td>46.36</td><td>39.44</td><td>14.15</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.70</td><td>74.00</td><td>-26.30</td><td>40.46</td><td>41.82</td><td>16.85</td><td>51.43</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	49.18	68.30	-19.12	46.36	39.44	14.15	50.77	--	--	Peak	2	15540.00	47.70	74.00	-26.30	40.46	41.82	16.85	51.43	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10360.00	49.25	68.30	-19.05	46.43	39.44	14.15	50.77	--	--	Peak																																																																																																										
2	15540.00	48.20	74.00	-25.80	40.96	41.82	16.85	51.43	--	--	Peak																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10360.00	49.18	68.30	-19.12	46.36	39.44	14.15	50.77	--	--	Peak																																																																																																										
2	15540.00	47.70	74.00	-26.30	40.46	41.82	16.85	51.43	--	--	Peak																																																																																																										



Mode	2																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz)						Level (dBuV/m) Date: 2024-06-26 Frequency (MHz)																																																																																																																											
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>49.83</td><td>68.30</td><td>-18.47</td><td>46.94</td><td>39.48</td><td>14.20</td><td>50.79</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.61</td><td>74.00</td><td>-26.39</td><td>40.30</td><td>41.90</td><td>16.94</td><td>51.53</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	49.83	68.30	-18.47	46.94	39.48	14.20	50.79	--	--	Peak	2	15660.00	47.61	74.00	-26.39	40.30	41.90	16.94	51.53	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>49.12</td><td>68.30</td><td>-19.18</td><td>46.23</td><td>39.48</td><td>14.20</td><td>50.79</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>46.91</td><td>74.00</td><td>-27.09</td><td>39.60</td><td>41.90</td><td>16.94</td><td>51.53</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	49.12	68.30	-19.18	46.23	39.48	14.20	50.79	--	--	Peak	2	15660.00	46.91	74.00	-27.09	39.60	41.90	16.94	51.53	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10440.00	49.83	68.30	-18.47	46.94	39.48	14.20	50.79	--	--	Peak																																																																																																																							
2	15660.00	47.61	74.00	-26.39	40.30	41.90	16.94	51.53	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10440.00	49.12	68.30	-19.18	46.23	39.48	14.20	50.79	--	--	Peak																																																																																																																							
2	15660.00	46.91	74.00	-27.09	39.60	41.90	16.94	51.53	--	--	Peak																																																																																																																							



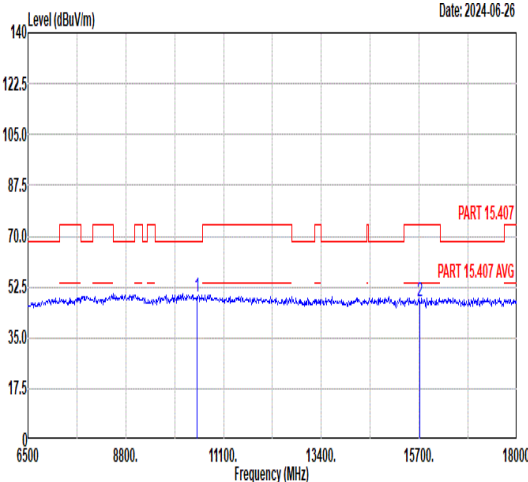
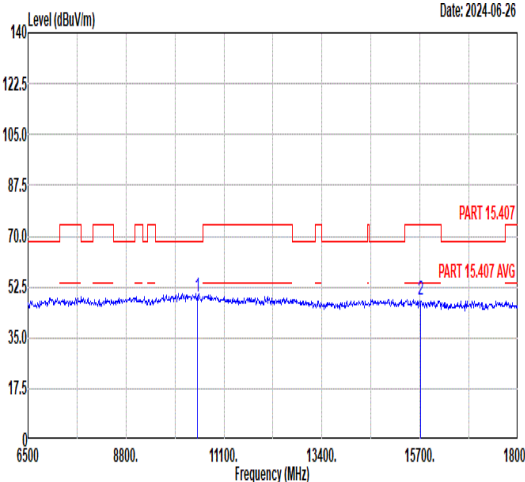


Mode	3																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10480.00</td><td>48.99</td><td>68.30</td><td>-19.31</td><td>46.07</td><td>39.49</td><td>14.23</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2 15720.00</td><td>47.30</td><td>74.00</td><td>-26.70</td><td>39.96</td><td>41.93</td><td>16.99</td><td>51.58</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10480.00	48.99	68.30	-19.31	46.07	39.49	14.23	50.80	--	--	Peak		2 15720.00	47.30	74.00	-26.70	39.96	41.93	16.99	51.58	--	--	Peak		<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10480.00</td><td>49.27</td><td>68.30</td><td>-19.03</td><td>46.35</td><td>39.49</td><td>14.23</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2 15720.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>40.50</td><td>41.93</td><td>16.99</td><td>51.58</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10480.00	49.27	68.30	-19.03	46.35	39.49	14.23	50.80	--	--	Peak		2 15720.00	47.84	74.00	-26.16	40.50	41.93	16.99	51.58	--	--	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10480.00	48.99	68.30	-19.31	46.07	39.49	14.23	50.80	--	--	Peak																																																																																																																								
2 15720.00	47.30	74.00	-26.70	39.96	41.93	16.99	51.58	--	--	Peak																																																																																																																								
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10480.00	49.27	68.30	-19.03	46.35	39.49	14.23	50.80	--	--	Peak																																																																																																																								
2 15720.00	47.84	74.00	-26.16	40.50	41.93	16.99	51.58	--	--	Peak																																																																																																																								





Mode	4	
	Band Edge	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2024-06-26	

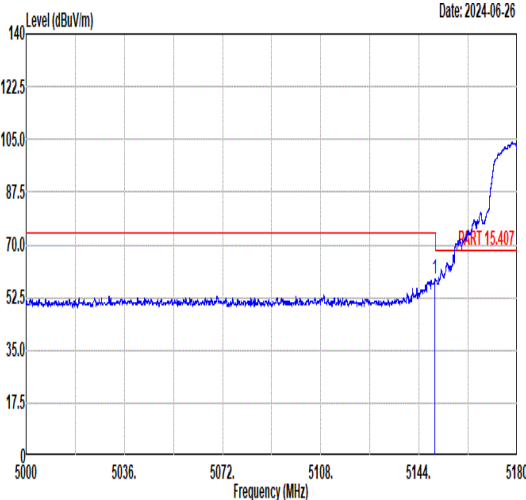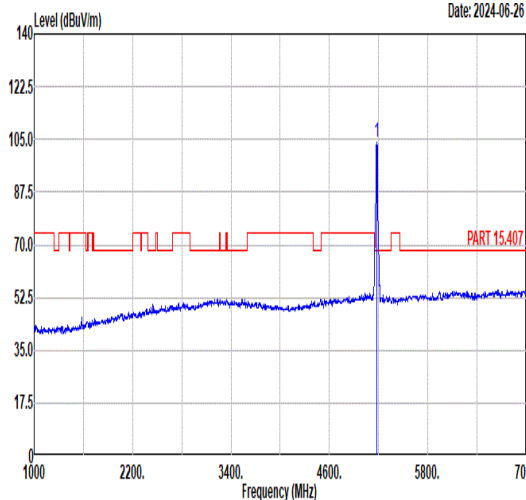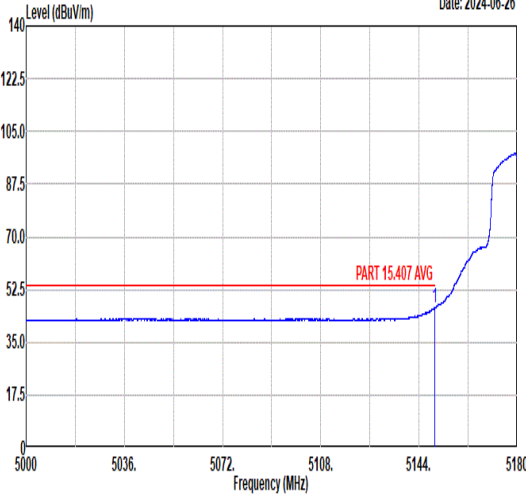
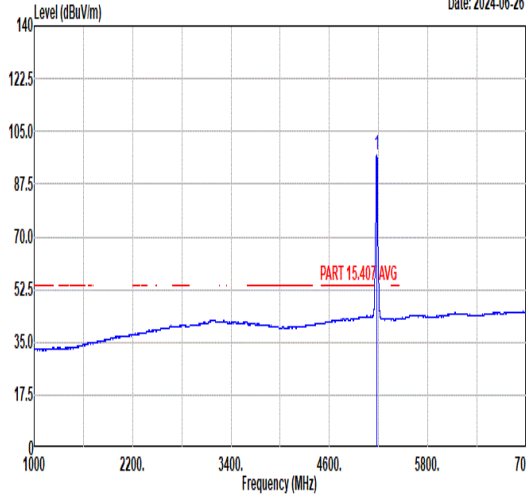


Mode	4																																					
	Band Edge																																					
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																					
ANT	1																																					
Pol.	Vertical	Fundamental																																				
Peak	Date: 2024-06-26  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><thead><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5149.85</td><td>58.80</td><td>74.00</td><td>-15.20</td><td>44.62</td><td>34.87</td><td>11.09</td><td>31.78</td><td>398 360 PEAK</td></tr></tbody></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5149.85	58.80	74.00	-15.20	44.62	34.87	11.09	31.78	398 360 PEAK	Date: 2024-06-26  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><thead><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5180.00</td><td>104.09</td><td>-----</td><td>-----</td><td>89.98</td><td>34.86</td><td>11.07</td><td>31.82</td><td>398 360 PEAK</td></tr></tbody></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5180.00	104.09	-----	-----	89.98	34.86	11.07	31.82	398 360 PEAK
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																													
1 5149.85	58.80	74.00	-15.20	44.62	34.87	11.09	31.78	398 360 PEAK																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																														
1 5180.00	104.09	-----	-----	89.98	34.86	11.07	31.82	398 360 PEAK																														
Avg	Date: 2024-06-26  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><thead><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5149.67</td><td>46.72</td><td>54.00</td><td>-7.28</td><td>32.54</td><td>34.87</td><td>11.09</td><td>31.78</td><td>398 360 AVERAGE</td></tr></tbody></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5149.67	46.72	54.00	-7.28	32.54	34.87	11.09	31.78	398 360 AVERAGE	Date: 2024-06-26  Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><thead><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5180.00</td><td>97.46</td><td>-----</td><td>-----</td><td>83.35</td><td>34.86</td><td>11.07</td><td>31.82</td><td>398 360 AVERAGE</td></tr></tbody></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5180.00	97.46	-----	-----	83.35	34.86	11.07	31.82	398 360 AVERAGE
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																														
1 5149.67	46.72	54.00	-7.28	32.54	34.87	11.09	31.78	398 360 AVERAGE																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																														
1 5180.00	97.46	-----	-----	83.35	34.86	11.07	31.82	398 360 AVERAGE																														

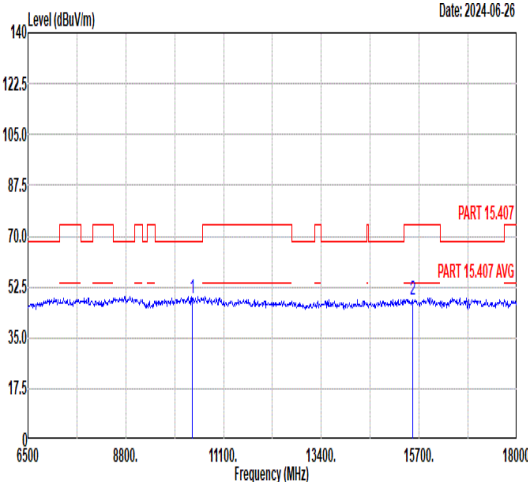
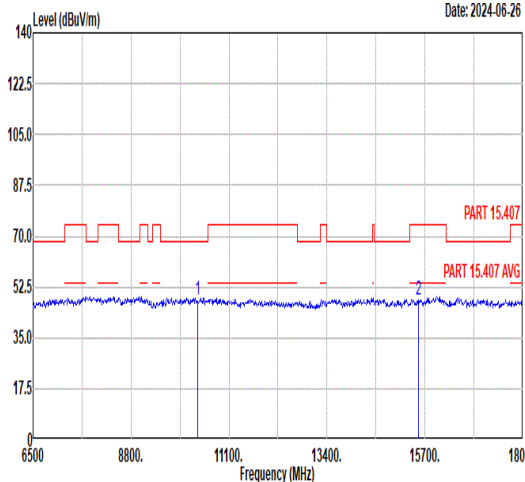


Mode	4																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10360.00</td><td>48.55</td><td>68.30</td><td>-19.75</td><td>45.73</td><td>39.44</td><td>14.15</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>40.96</td><td>41.82</td><td>16.85</td><td>51.43</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10360.00	48.55	68.30	-19.75	45.73	39.44	14.15	50.77	--	--	Peak	2	15540.00	48.20	74.00	-25.80	40.96	41.82	16.85	51.43	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10360.00</td><td>48.00</td><td>68.30</td><td>-20.30</td><td>45.18</td><td>39.44</td><td>14.15</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>40.60</td><td>41.82</td><td>16.85</td><td>51.43</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10360.00	48.00	68.30	-20.30	45.18	39.44	14.15	50.77	--	--	Peak	2	15540.00	47.84	74.00	-26.16	40.60	41.82	16.85	51.43	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10360.00	48.55	68.30	-19.75	45.73	39.44	14.15	50.77	--	--	Peak																																																																																																																							
2	15540.00	48.20	74.00	-25.80	40.96	41.82	16.85	51.43	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10360.00	48.00	68.30	-20.30	45.18	39.44	14.15	50.77	--	--	Peak																																																																																																																							
2	15540.00	47.84	74.00	-26.16	40.60	41.82	16.85	51.43	--	--	Peak																																																																																																																							



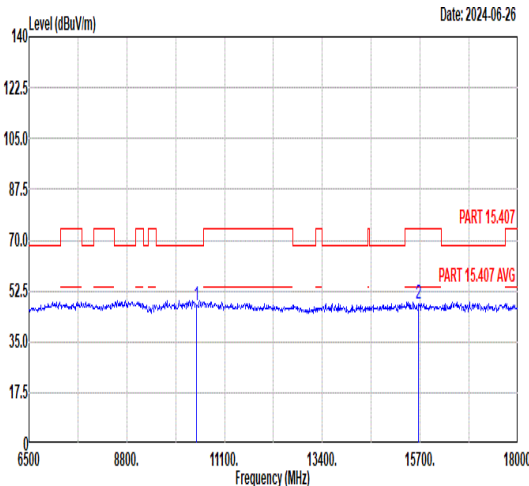
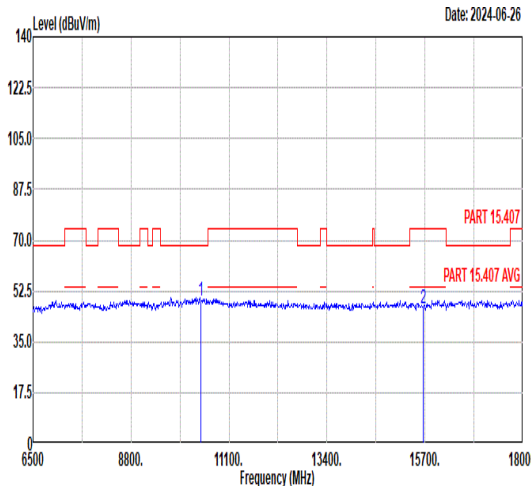


Mode	5																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>47.46</td><td>68.30</td><td>-20.84</td><td>44.57</td><td>39.48</td><td>14.20</td><td>50.79</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>48.05</td><td>74.00</td><td>-25.95</td><td>40.74</td><td>41.90</td><td>16.94</td><td>51.53</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	47.46	68.30	-20.84	44.57	39.48	14.20	50.79	--	--	Peak	2	15660.00	48.05	74.00	-25.95	40.74	41.90	16.94	51.53	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>48.97</td><td>68.30</td><td>-19.33</td><td>46.08</td><td>39.48</td><td>14.20</td><td>50.79</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>46.70</td><td>74.00</td><td>-27.30</td><td>39.39</td><td>41.90</td><td>16.94</td><td>51.53</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	48.97	68.30	-19.33	46.08	39.48	14.20	50.79	--	--	Peak	2	15660.00	46.70	74.00	-27.30	39.39	41.90	16.94	51.53	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10440.00	47.46	68.30	-20.84	44.57	39.48	14.20	50.79	--	--	Peak																																																																																																																							
2	15660.00	48.05	74.00	-25.95	40.74	41.90	16.94	51.53	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10440.00	48.97	68.30	-19.33	46.08	39.48	14.20	50.79	--	--	Peak																																																																																																																							
2	15660.00	46.70	74.00	-27.30	39.39	41.90	16.94	51.53	--	--	Peak																																																																																																																							

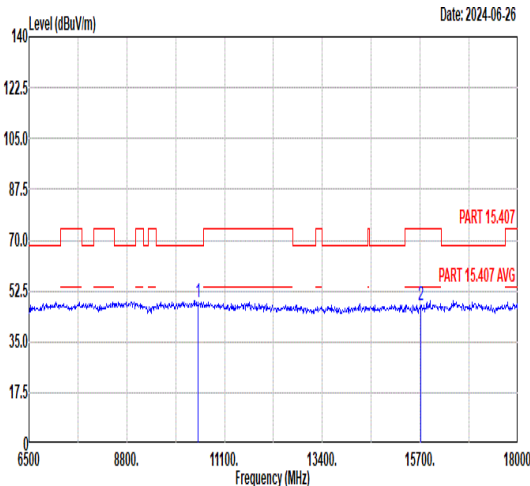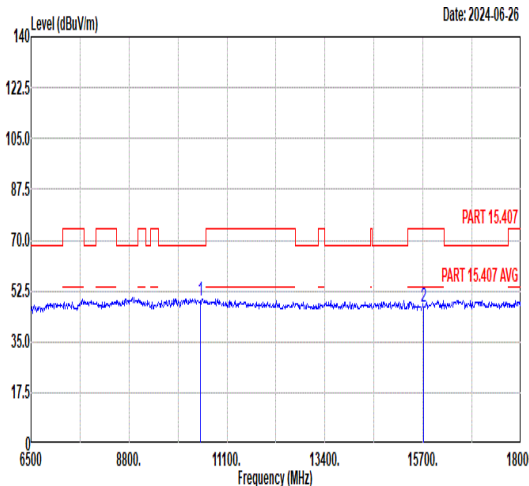

Mode	6																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10480.00</td><td>48.43</td><td>68.30</td><td>-19.87</td><td>45.51</td><td>39.49</td><td>14.23</td><td>50.80</td><td>-- -- Peak</td></tr><tr><td>2 15720.00</td><td>47.53</td><td>74.00</td><td>-26.47</td><td>40.19</td><td>41.93</td><td>16.99</td><td>51.58</td><td>-- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10480.00	48.43	68.30	-19.87	45.51	39.49	14.23	50.80	-- -- Peak	2 15720.00	47.53	74.00	-26.47	40.19	41.93	16.99	51.58	-- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10480.00</td><td>49.10</td><td>68.30</td><td>-19.20</td><td>46.18</td><td>39.49</td><td>14.23</td><td>50.80</td><td>-- -- Peak</td></tr><tr><td>2 15720.00</td><td>47.04</td><td>74.00</td><td>-26.96</td><td>39.70</td><td>41.93</td><td>16.99</td><td>51.58</td><td>-- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10480.00	49.10	68.30	-19.20	46.18	39.49	14.23	50.80	-- -- Peak	2 15720.00	47.04	74.00	-26.96	39.70	41.93	16.99	51.58	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1 10480.00	48.43	68.30	-19.87	45.51	39.49	14.23	50.80	-- -- Peak																																																																																														
2 15720.00	47.53	74.00	-26.47	40.19	41.93	16.99	51.58	-- -- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1 10480.00	49.10	68.30	-19.20	46.18	39.49	14.23	50.80	-- -- Peak																																																																																														
2 15720.00	47.04	74.00	-26.96	39.70	41.93	16.99	51.58	-- -- Peak																																																																																														

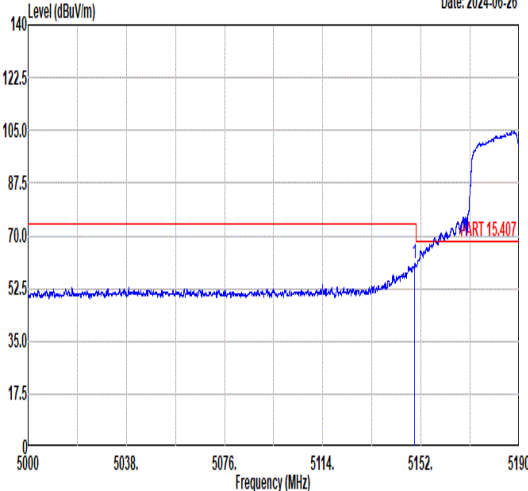
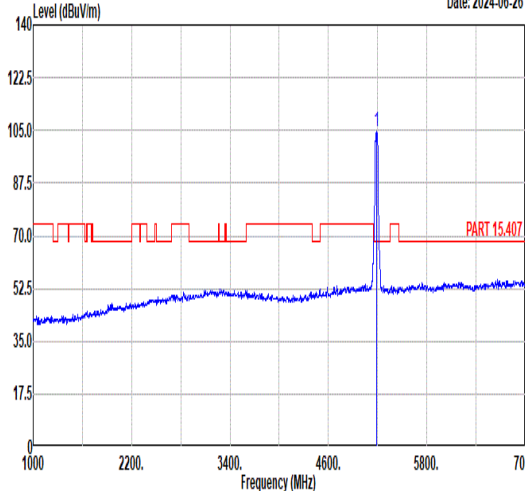
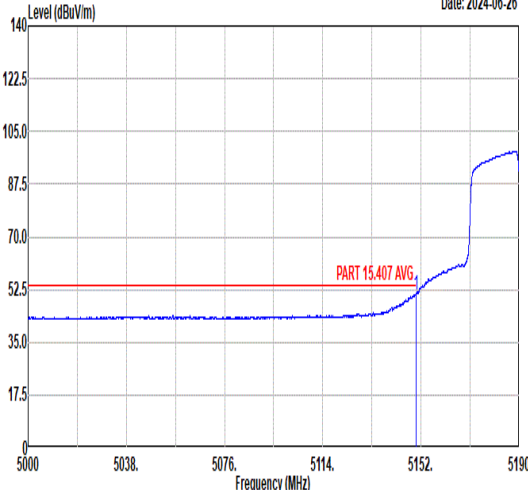
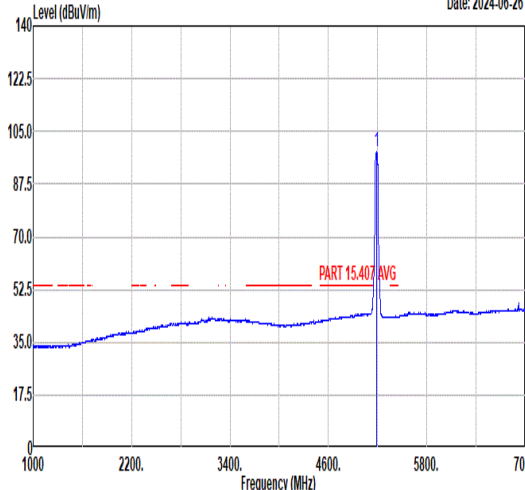


Mode	7																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.63</td><td>60.82</td><td>74.00</td><td>-13.18</td><td>46.64</td><td>34.87</td><td>11.09</td><td>31.78</td><td>348 90 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.63	60.82	74.00	-13.18	46.64	34.87	11.09	31.78	348 90 PEAK	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>104.36</td><td>-----</td><td>90.27</td><td>34.86</td><td>11.06</td><td>31.83</td><td>348</td><td>90 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	104.36	-----	90.27	34.86	11.06	31.83	348	90 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5149.63	60.82	74.00	-13.18	46.64	34.87	11.09	31.78	348 90 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5190.00	104.36	-----	90.27	34.86	11.06	31.83	348	90 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.99</td><td>50.92</td><td>54.00</td><td>-3.08</td><td>36.75</td><td>34.87</td><td>11.08</td><td>31.78</td><td>348 90 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.99	50.92	54.00	-3.08	36.75	34.87	11.08	31.78	348 90 AVERAGE	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>98.26</td><td>-----</td><td>84.17</td><td>34.86</td><td>11.06</td><td>31.83</td><td>348</td><td>90 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	98.26	-----	84.17	34.86	11.06	31.83	348	90 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5149.99	50.92	54.00	-3.08	36.75	34.87	11.08	31.78	348 90 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5190.00	98.26	-----	84.17	34.86	11.06	31.83	348	90 AVERAGE																																																																									



Mode	7																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																										
ANT	1																																										
Pol.	Horizontal	Fundamental																																									
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5424.77</td><td>51.56</td><td>74.00</td><td>-22.44</td><td>37.89</td><td>34.82</td><td>10.97</td><td>32.12</td><td>348</td><td>90 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5424.77	51.56	74.00	-22.44	37.89	34.82	10.97	32.12	348	90 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5424.77	51.56	74.00	-22.44	37.89	34.82	10.97	32.12	348	90 PEAK																																	
Avg	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.47</td><td>42.85</td><td>54.00</td><td>-11.15</td><td>29.10</td><td>34.81</td><td>11.10</td><td>32.16</td><td>348</td><td>90 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5454.47	42.85	54.00	-11.15	29.10	34.81	11.10	32.16	348	90 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5454.47	42.85	54.00	-11.15	29.10	34.81	11.10	32.16	348	90 AVERAGE																																	

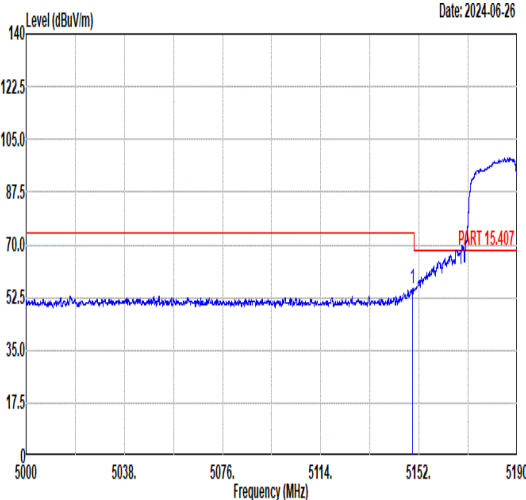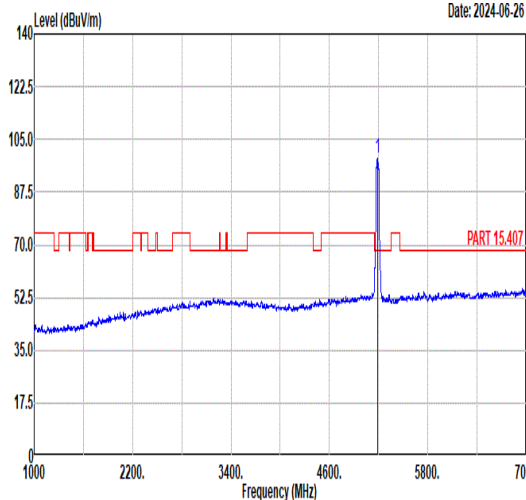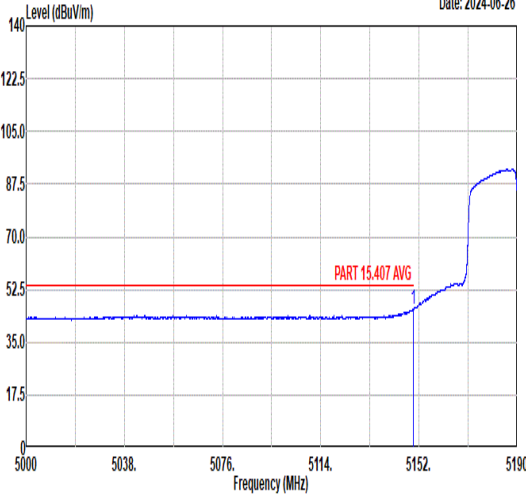
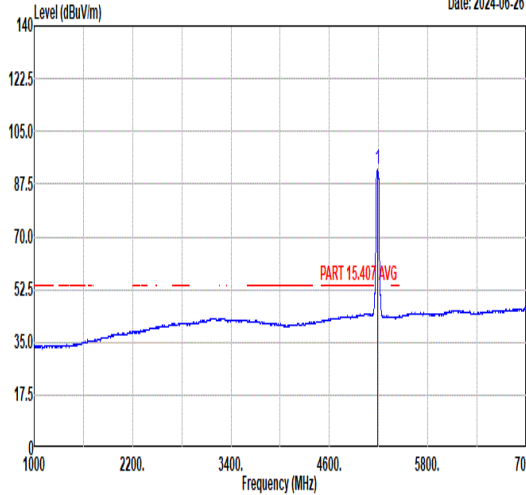


Mode	7																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	 Date: 2024-06-26 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.63</td><td>55.51</td><td>74.00</td><td>-18.49</td><td>41.33</td><td>34.87</td><td>11.09</td><td>31.78</td><td>397</td><td>360</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.63	55.51	74.00	-18.49	41.33	34.87	11.09	31.78	397	360	PEAK	 Date: 2024-06-26 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>98.65</td><td>-----</td><td>-----</td><td>84.54</td><td>34.86</td><td>11.07</td><td>31.82</td><td>397</td><td>360</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	98.65	-----	-----	84.54	34.86	11.07	31.82	397	360	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5149.63	55.51	74.00	-18.49	41.33	34.87	11.09	31.78	397	360	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5190.00	98.65	-----	-----	84.54	34.86	11.07	31.82	397	360	PEAK																																																																															
Avg	 Date: 2024-06-26 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.83</td><td>46.16</td><td>54.00</td><td>-7.84</td><td>31.98</td><td>34.87</td><td>11.09</td><td>31.78</td><td>397</td><td>360</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.83	46.16	54.00	-7.84	31.98	34.87	11.09	31.78	397	360	AVERAGE	 Date: 2024-06-26 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>92.29</td><td>-----</td><td>-----</td><td>78.18</td><td>34.86</td><td>11.07</td><td>31.82</td><td>397</td><td>360</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	92.29	-----	-----	78.18	34.86	11.07	31.82	397	360	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5149.83	46.16	54.00	-7.84	31.98	34.87	11.09	31.78	397	360	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5190.00	92.29	-----	-----	78.18	34.86	11.07	31.82	397	360	AVERAGE																																																																															



Mode	7																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5453.14</td><td>51.90</td><td>74.00</td><td>-22.10</td><td>38.16</td><td>34.81</td><td>11.09</td><td>32.16</td><td>397</td><td>360</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5453.14	51.90	74.00	-22.10	38.16	34.81	11.09	32.16	397	360	PEAK	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	5453.14	51.90	74.00	-22.10	38.16	34.81	11.09	32.16	397	360	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5376.19</td><td>42.85</td><td>54.00</td><td>-11.15</td><td>29.17</td><td>34.82</td><td>10.92</td><td>32.06</td><td>397</td><td>360</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5376.19	42.85	54.00	-11.15	29.17	34.82	10.92	32.06	397	360	AVERAGE	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	5376.19	42.85	54.00	-11.15	29.17	34.82	10.92	32.06	397	360	AVERAGE																																								

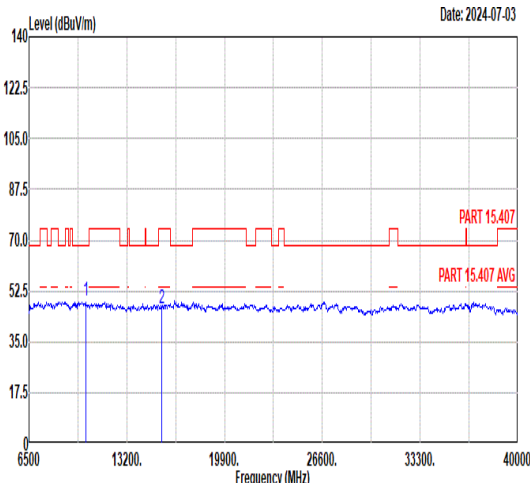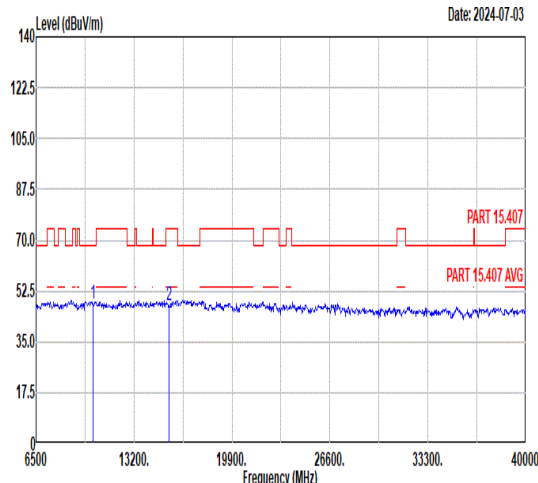

Mode	7																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10380.00</td><td>48.99</td><td>68.30</td><td>-19.31</td><td>46.16</td><td>39.45</td><td>14.16</td><td>50.78</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15570.00</td><td>46.70</td><td>74.00</td><td>-27.30</td><td>39.45</td><td>41.84</td><td>16.87</td><td>51.46</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10380.00	48.99	68.30	-19.31	46.16	39.45	14.16	50.78	--	--	Peak	2	15570.00	46.70	74.00	-27.30	39.45	41.84	16.87	51.46	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10380.00</td><td>48.29</td><td>68.30</td><td>-20.01</td><td>45.46</td><td>39.45</td><td>14.16</td><td>50.78</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15570.00</td><td>47.42</td><td>74.00</td><td>-26.58</td><td>40.17</td><td>41.84</td><td>16.87</td><td>51.46</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10380.00	48.29	68.30	-20.01	45.46	39.45	14.16	50.78	--	--	Peak	2	15570.00	47.42	74.00	-26.58	40.17	41.84	16.87	51.46	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10380.00	48.99	68.30	-19.31	46.16	39.45	14.16	50.78	--	--	Peak																																																																																																																							
2	15570.00	46.70	74.00	-27.30	39.45	41.84	16.87	51.46	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10380.00	48.29	68.30	-20.01	45.46	39.45	14.16	50.78	--	--	Peak																																																																																																																							
2	15570.00	47.42	74.00	-26.58	40.17	41.84	16.87	51.46	--	--	Peak																																																																																																																							







Mode	8																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5030.02</td><td>53.38</td><td>74.00</td><td>-20.62</td><td>38.97</td><td>34.89</td><td>11.15</td><td>31.63</td><td>360</td><td>87</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5030.02	53.38	74.00	-20.62	38.97	34.89	11.15	31.63	360	87	PEAK	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>107.02</td><td>-----</td><td>-----</td><td>93.01</td><td>34.85</td><td>11.04</td><td>31.88</td><td>360</td><td>87</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	107.02	-----	-----	93.01	34.85	11.04	31.88	360	87	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5030.02	53.38	74.00	-20.62	38.97	34.89	11.15	31.63	360	87	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5230.00	107.02	-----	-----	93.01	34.85	11.04	31.88	360	87	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5042.90</td><td>43.66</td><td>54.00</td><td>-10.34</td><td>29.27</td><td>34.89</td><td>11.15</td><td>31.65</td><td>360</td><td>87</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5042.90	43.66	54.00	-10.34	29.27	34.89	11.15	31.65	360	87	AVERAGE	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>100.83</td><td>-----</td><td>-----</td><td>86.82</td><td>34.85</td><td>11.04</td><td>31.88</td><td>360</td><td>87</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	100.83	-----	-----	86.82	34.85	11.04	31.88	360	87	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5042.90	43.66	54.00	-10.34	29.27	34.89	11.15	31.65	360	87	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5230.00	100.83	-----	-----	86.82	34.85	11.04	31.88	360	87	AVERAGE																																																																							





Mode	8									
	Band Edge - R									
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz									
ANT	1									
Pol.	Horizontal					Fundamental				
Peak	Date: 2024-06-26 Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5230 5276 5322 5368 5414 5460 Frequency (MHz) 5230 5276 5322 5368 5414 5460 Limit Margin Read Ant Cable Preamp APos TPos Remark Freq Level Line (dB) Level Factor Loss Factor cm deg MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5447.01 51.55 74.00 -22.45 37.82 34.81 11.07 32.15 360 87 PEAK					Blank				
	Avg	Date: 2024-06-26 Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5230 5276 5322 5368 5414 5460 Frequency (MHz) 5230 5276 5322 5368 5414 5460 Limit Margin Read Ant Cable Preamp APos TPos Remark Freq Level Line (dB) Level Factor Loss Factor cm deg MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5456.23 43.05 54.00 -10.95 29.30 34.81 11.10 32.16 360 87 AVERAGE					Blank			

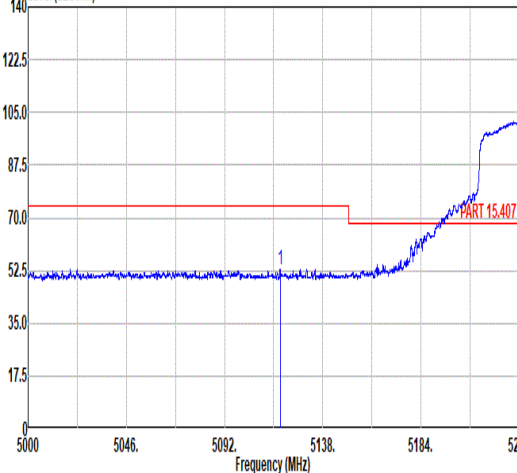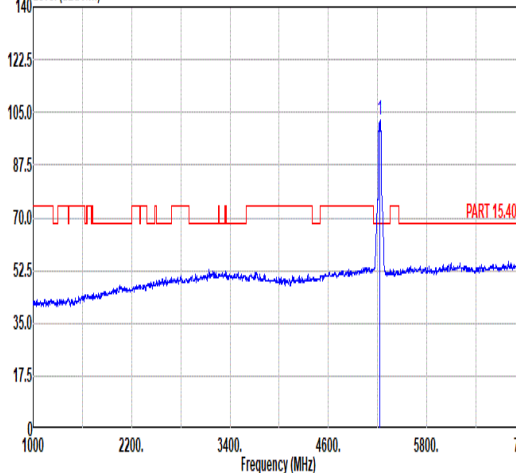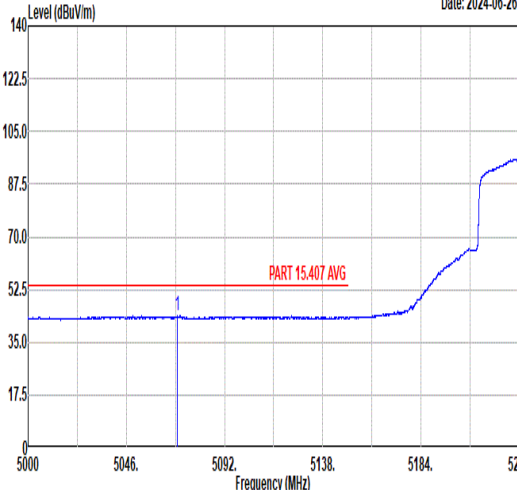
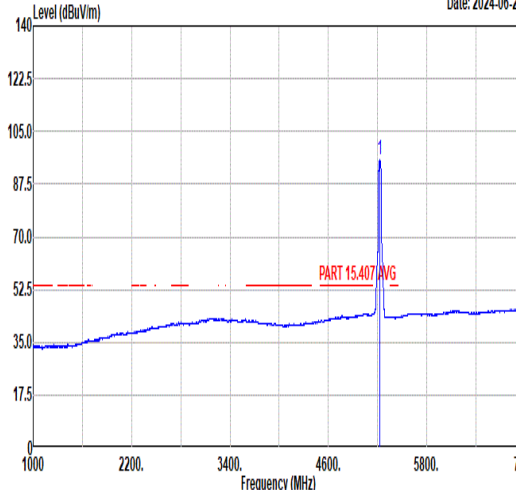


Mode	8																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5118.13</td><td>52.95</td><td>74.00</td><td>-21.05</td><td>38.71</td><td>34.88</td><td>11.10</td><td>31.74</td><td>389 360 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5118.13	52.95	74.00	-21.05	38.71	34.88	11.10	31.74	389 360 PEAK	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>102.32</td><td>-----</td><td>88.32</td><td>34.85</td><td>11.03</td><td>31.88</td><td>389</td><td>360 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	102.32	-----	88.32	34.85	11.03	31.88	389	360 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5118.13	52.95	74.00	-21.05	38.71	34.88	11.10	31.74	389 360 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5230.00	102.32	-----	88.32	34.85	11.03	31.88	389	360 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5069.81</td><td>43.82</td><td>54.00</td><td>-10.18</td><td>29.48</td><td>34.89</td><td>11.13</td><td>31.68</td><td>389 360 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5069.81	43.82	54.00	-10.18	29.48	34.89	11.13	31.68	389 360 AVERAGE	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>95.67</td><td>-----</td><td>81.66</td><td>34.85</td><td>11.04</td><td>31.88</td><td>389</td><td>360 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	95.67	-----	81.66	34.85	11.04	31.88	389	360 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5069.81	43.82	54.00	-10.18	29.48	34.89	11.13	31.68	389 360 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5230.00	95.67	-----	81.66	34.85	11.04	31.88	389	360 AVERAGE																																																																									



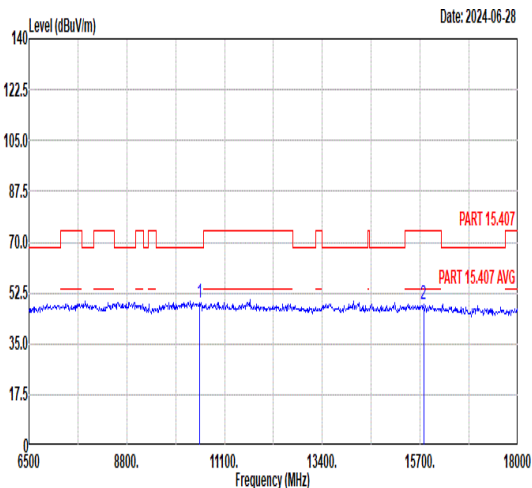
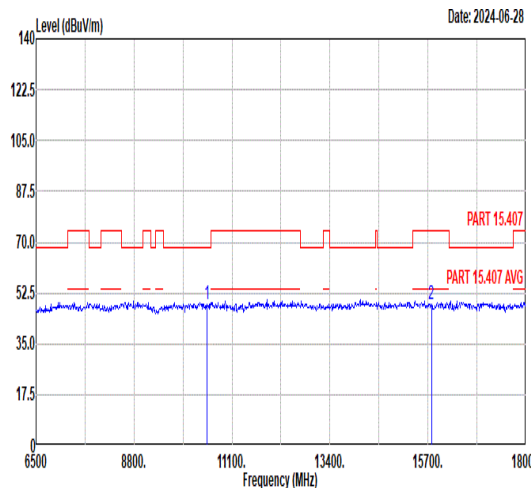


Mode	9																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>49.29</td><td>68.30</td><td>-19.01</td><td>46.34</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>48.66</td><td>74.00</td><td>-25.34</td><td>41.28</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	49.29	68.30	-19.01	46.34	39.50	14.25	50.80	--	--	Peak	2	15780.00	48.66	74.00	-25.34	41.28	41.97	17.04	51.63	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>48.35</td><td>68.30</td><td>-19.95</td><td>45.40</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>48.87</td><td>74.00</td><td>-25.13</td><td>41.49</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	48.35	68.30	-19.95	45.40	39.50	14.25	50.80	--	--	Peak	2	15780.00	48.87	74.00	-25.13	41.49	41.97	17.04	51.63	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	49.29	68.30	-19.01	46.34	39.50	14.25	50.80	--	--	Peak																																																																																																																							
2	15780.00	48.66	74.00	-25.34	41.28	41.97	17.04	51.63	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	48.35	68.30	-19.95	45.40	39.50	14.25	50.80	--	--	Peak																																																																																																																							
2	15780.00	48.87	74.00	-25.13	41.49	41.97	17.04	51.63	--	--	Peak																																																																																																																							

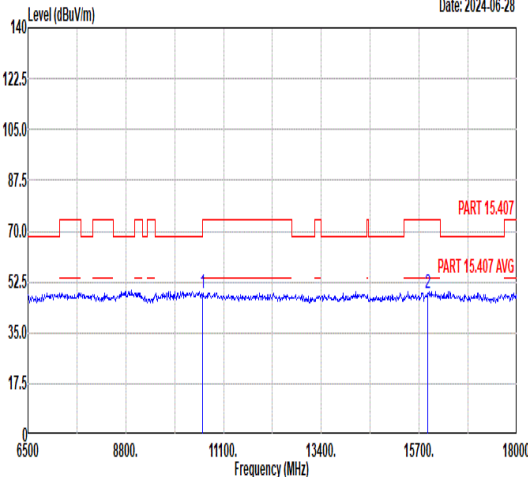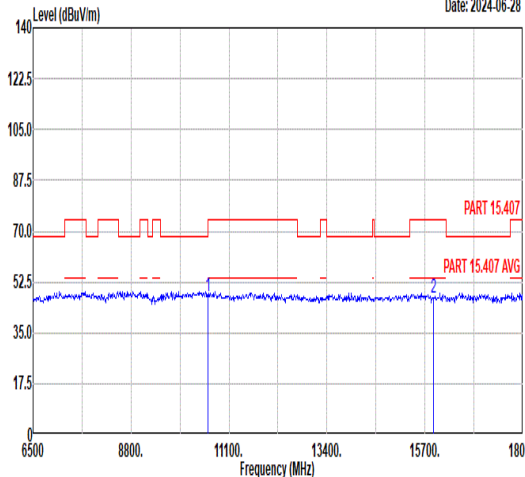

Mode	10																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10600.00</td><td>48.56</td><td>74.00</td><td>-25.44</td><td>45.58</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>48.40</td><td>74.00</td><td>-25.60</td><td>40.94</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10600.00	48.56	74.00	-25.44	45.58	39.48	14.30	50.80	--	--	Peak	2	15900.00	48.40	74.00	-25.60	40.94	42.04	17.14	51.72	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10600.00</td><td>47.54</td><td>74.00</td><td>-26.46</td><td>44.56</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>47.05</td><td>74.00</td><td>-26.95</td><td>39.59</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10600.00	47.54	74.00	-26.46	44.56	39.48	14.30	50.80	--	--	Peak	2	15900.00	47.05	74.00	-26.95	39.59	42.04	17.14	51.72	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10600.00	48.56	74.00	-25.44	45.58	39.48	14.30	50.80	--	--	Peak																																																																																																																							
2	15900.00	48.40	74.00	-25.60	40.94	42.04	17.14	51.72	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10600.00	47.54	74.00	-26.46	44.56	39.48	14.30	50.80	--	--	Peak																																																																																																																							
2	15900.00	47.05	74.00	-26.95	39.59	42.04	17.14	51.72	--	--	Peak																																																																																																																							

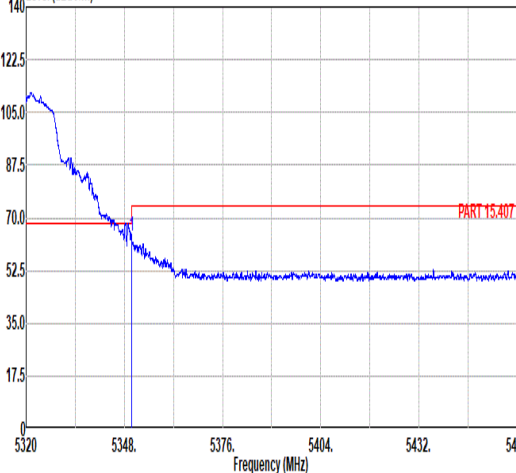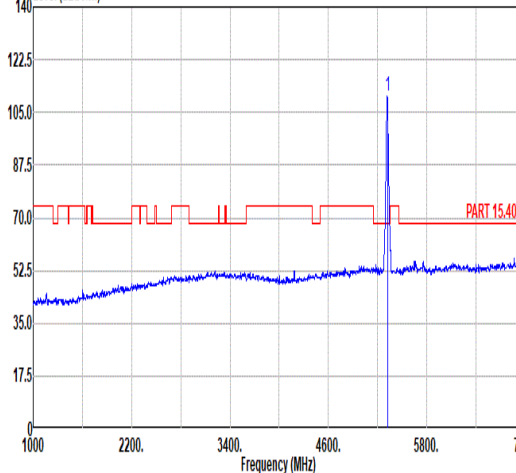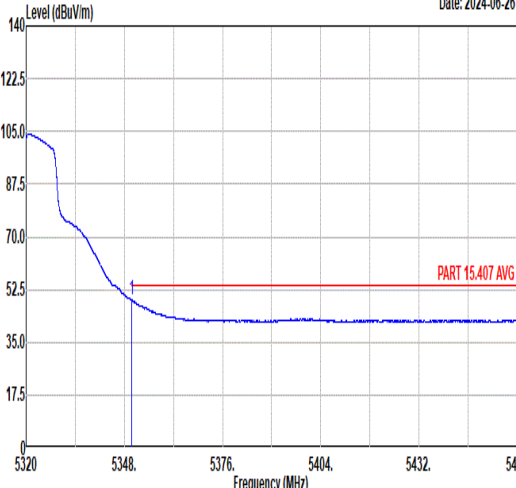
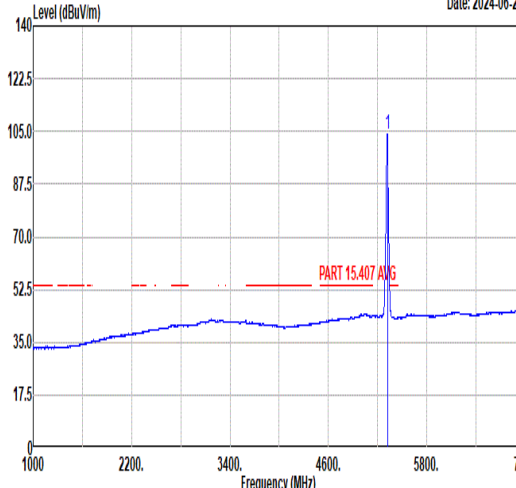


Mode	11																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-06-26  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.00</td><td>63.98</td><td>74.00</td><td>-10.02</td><td>50.24</td><td>34.83</td><td>10.94</td><td>32.03</td><td>383 66 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.00	63.98	74.00	-10.02	50.24	34.83	10.94	32.03	383 66 PEAK	Level (dBuV/m) Date: 2024-06-26  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>110.32</td><td>-----</td><td>96.49</td><td>34.84</td><td>10.97</td><td>31.98</td><td>383</td><td>66 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	110.32	-----	96.49	34.84	10.97	31.98	383	66 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5350.00	63.98	74.00	-10.02	50.24	34.83	10.94	32.03	383 66 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5320.00	110.32	-----	96.49	34.84	10.97	31.98	383	66 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-06-26  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.00</td><td>49.16</td><td>54.00</td><td>-4.84</td><td>35.42</td><td>34.83</td><td>10.94</td><td>32.03</td><td>383 66 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.00	49.16	54.00	-4.84	35.42	34.83	10.94	32.03	383 66 AVERAGE	Level (dBuV/m) Date: 2024-06-26  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>104.28</td><td>-----</td><td>90.46</td><td>34.84</td><td>10.97</td><td>31.99</td><td>383</td><td>66 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	104.28	-----	90.46	34.84	10.97	31.99	383	66 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5350.00	49.16	54.00	-4.84	35.42	34.83	10.94	32.03	383 66 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5320.00	104.28	-----	90.46	34.84	10.97	31.99	383	66 AVERAGE																																																																									





Mode	11	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak		

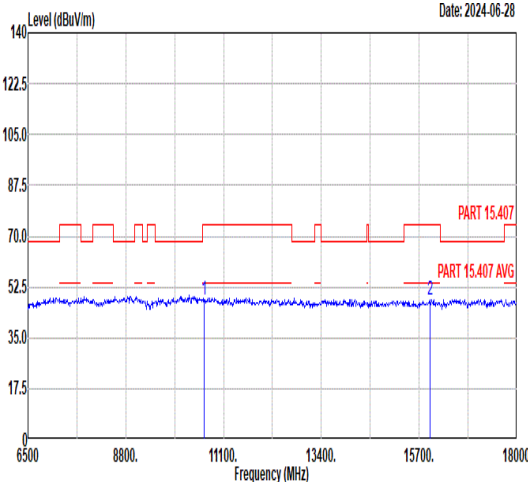
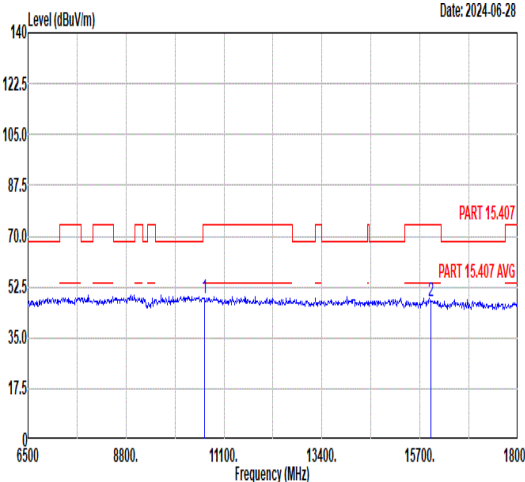


Mode	11																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10640.00</td><td>47.99</td><td>74.00</td><td>-26.01</td><td>45.00</td><td>39.47</td><td>14.32</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>40.38</td><td>42.08</td><td>17.19</td><td>51.77</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10640.00	47.99	74.00	-26.01	45.00	39.47	14.32	50.80	--	--	Peak	2	15960.00	47.88	74.00	-26.12	40.38	42.08	17.19	51.77	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10640.00</td><td>48.76</td><td>74.00</td><td>-25.24</td><td>45.77</td><td>39.47</td><td>14.32</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.35</td><td>74.00</td><td>-26.65</td><td>39.85</td><td>42.08</td><td>17.19</td><td>51.77</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10640.00	48.76	74.00	-25.24	45.77	39.47	14.32	50.80	--	--	Peak	2	15960.00	47.35	74.00	-26.65	39.85	42.08	17.19	51.77	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10640.00	47.99	74.00	-26.01	45.00	39.47	14.32	50.80	--	--	Peak																																																																																																																							
2	15960.00	47.88	74.00	-26.12	40.38	42.08	17.19	51.77	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10640.00	48.76	74.00	-25.24	45.77	39.47	14.32	50.80	--	--	Peak																																																																																																																							
2	15960.00	47.35	74.00	-26.65	39.85	42.08	17.19	51.77	--	--	Peak																																																																																																																							



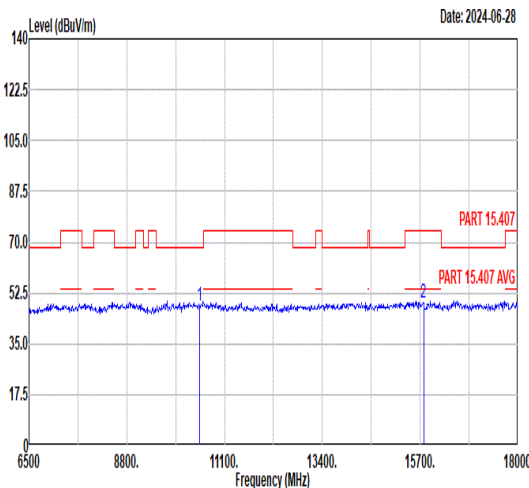
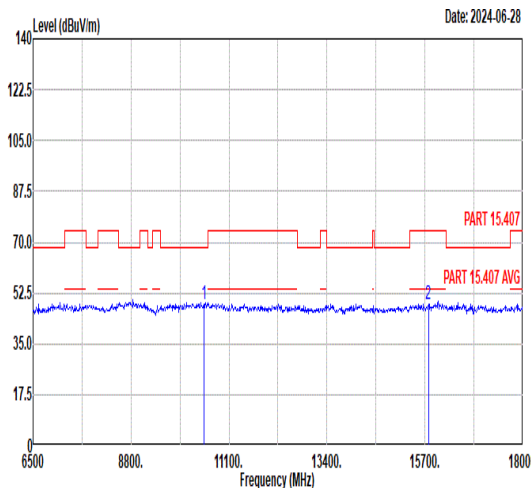


Mode	12																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10520.00</td><td>48.16</td><td>68.30</td><td>-20.14</td><td>45.21</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>49.02</td><td>74.00</td><td>-24.98</td><td>41.64</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10520.00	48.16	68.30	-20.14	45.21	39.50	14.25	50.80	--	--	Peak	2	15780.00	49.02	74.00	-24.98	41.64	41.97	17.04	51.63	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10520.00</td><td>48.76</td><td>68.30</td><td>-19.54</td><td>45.81</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>48.85</td><td>74.00</td><td>-25.15</td><td>41.47</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10520.00	48.76	68.30	-19.54	45.81	39.50	14.25	50.80	--	--	Peak	2	15780.00	48.85	74.00	-25.15	41.47	41.97	17.04	51.63	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	10520.00	48.16	68.30	-20.14	45.21	39.50	14.25	50.80	--	--	Peak																																																																																																																							
2	15780.00	49.02	74.00	-24.98	41.64	41.97	17.04	51.63	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	10520.00	48.76	68.30	-19.54	45.81	39.50	14.25	50.80	--	--	Peak																																																																																																																							
2	15780.00	48.85	74.00	-25.15	41.47	41.97	17.04	51.63	--	--	Peak																																																																																																																							



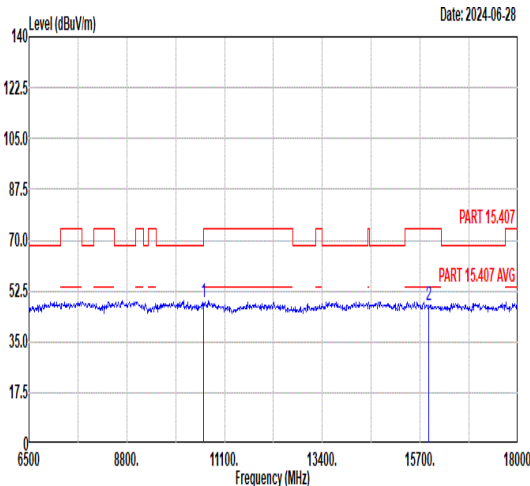
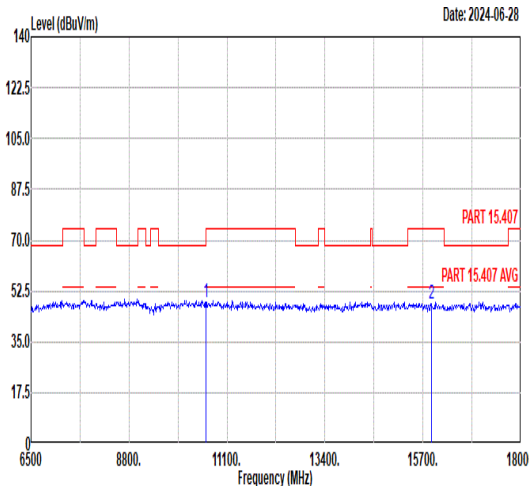


Mode	13																																																																																																													
	Harmonic																																																																																																													
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal						Vertical																																																																																																							
Peak Avg																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10600.00</td><td>48.61</td><td>74.00</td><td>-25.39</td><td>45.63</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 15900.00</td><td>47.76</td><td>74.00</td><td>-26.24</td><td>40.30</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10600.00	48.61	74.00	-25.39	45.63	39.48	14.30	50.80	--	--	Peak	2 15900.00	47.76	74.00	-26.24	40.30	42.04	17.14	51.72	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10600.00</td><td>48.45</td><td>74.00</td><td>-25.55</td><td>45.47</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 15900.00</td><td>47.87</td><td>74.00</td><td>-26.13</td><td>40.41</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10600.00	48.45	74.00	-25.55	45.47	39.48	14.30	50.80	--	--	Peak	2 15900.00	47.87	74.00	-26.13	40.41	42.04	17.14	51.72	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 10600.00	48.61	74.00	-25.39	45.63	39.48	14.30	50.80	--	--	Peak																																																																																																				
2 15900.00	47.76	74.00	-26.24	40.30	42.04	17.14	51.72	--	--	Peak																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1 10600.00	48.45	74.00	-25.55	45.47	39.48	14.30	50.80	--	--	Peak																																																																																																				
2 15900.00	47.87	74.00	-26.13	40.41	42.04	17.14	51.72	--	--	Peak																																																																																																				

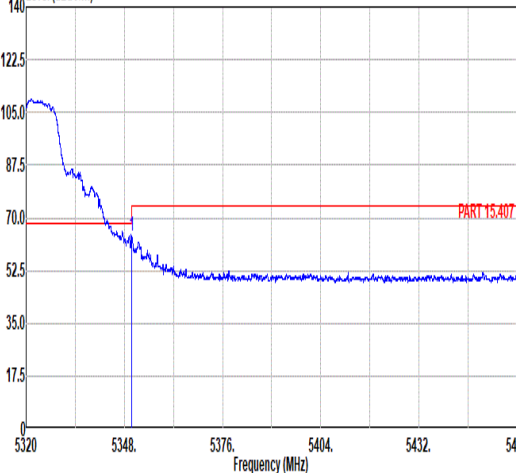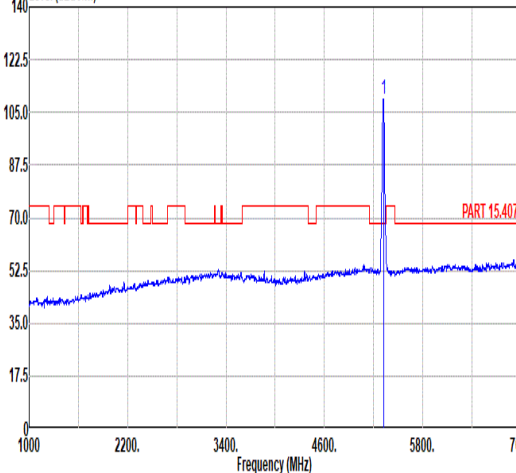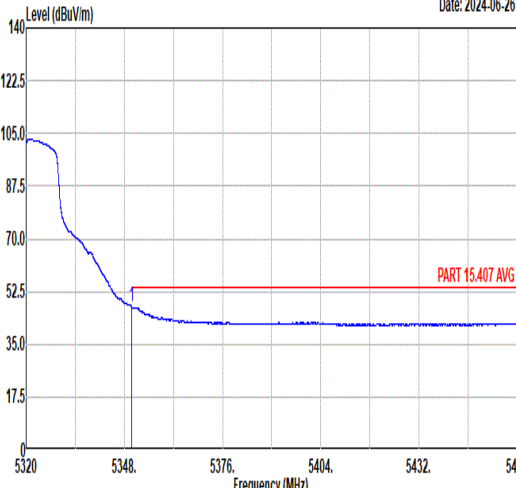
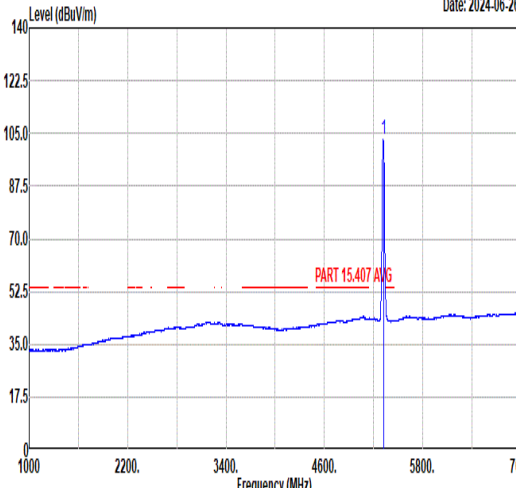


Mode	14																																																																																																																																																																				
	Band Edge																																																																																																																																																																				
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																																																																																				
ANT	1																																																																																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																																																																																			
Peak	Level (dBuV/m) Date: 2024-06-26  532053485376540454325460 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.00</td><td>63.97</td><td>74.00</td><td>-10.03</td><td>50.23</td><td>34.83</td><td>10.94</td><td>32.03</td><td>400</td><td>68 PEAK</td></tr></table> Level (dBuV/m) Date: 2024-06-26  100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>109.37</td><td>-----</td><td>95.57</td><td>34.84</td><td>10.96</td><td>32.00</td><td>400</td><td>68 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.00	63.97	74.00	-10.03	50.23	34.83	10.94	32.03	400	68 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	109.37	-----	95.57	34.84	10.96	32.00	400	68 PEAK	Avg	Level (dBuV/m) Date: 2024-06-26  532053485376540454325460 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.00</td><td>47.63</td><td>54.00</td><td>-6.37</td><td>33.89</td><td>34.83</td><td>10.94</td><td>32.03</td><td>400</td><td>68 AVERAGE</td></tr></table> Level (dBuV/m) Date: 2024-06-26  100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>102.79</td><td>-----</td><td>88.97</td><td>34.84</td><td>10.97</td><td>31.99</td><td>400</td><td>68 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.00	47.63	54.00	-6.37	33.89	34.83	10.94	32.03	400	68 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	102.79	-----	88.97	34.84	10.97	31.99	400	68 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																												
1	5350.00	63.97	74.00	-10.03	50.23	34.83	10.94	32.03	400	68 PEAK																																																																																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																												
1	5320.00	109.37	-----	95.57	34.84	10.96	32.00	400	68 PEAK																																																																																																																																																												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																												
1	5350.00	47.63	54.00	-6.37	33.89	34.83	10.94	32.03	400	68 AVERAGE																																																																																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																												
1	5320.00	102.79	-----	88.97	34.84	10.97	31.99	400	68 AVERAGE																																																																																																																																																												

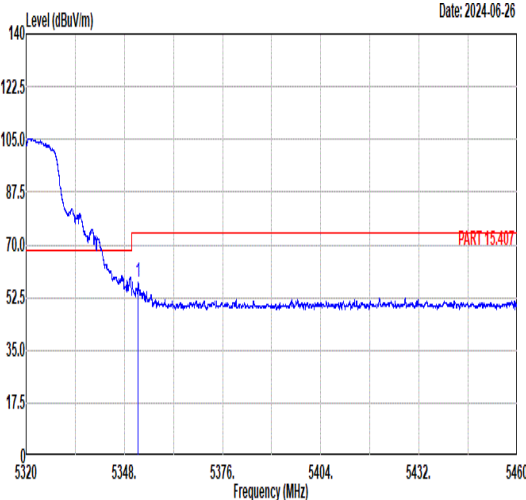
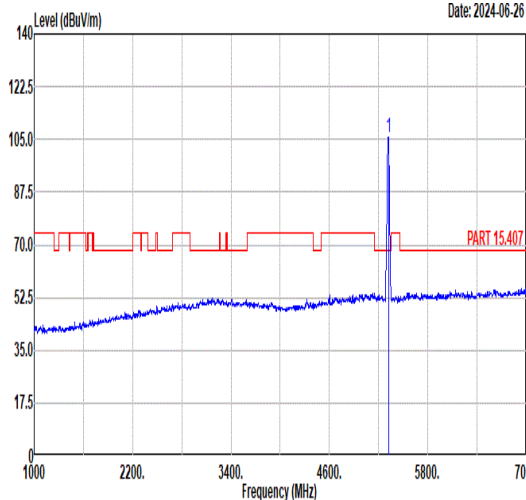
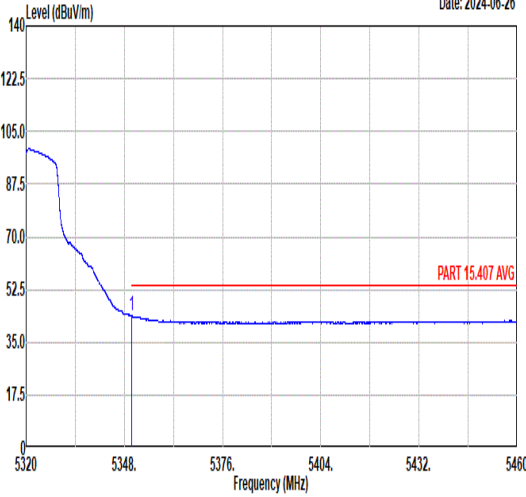
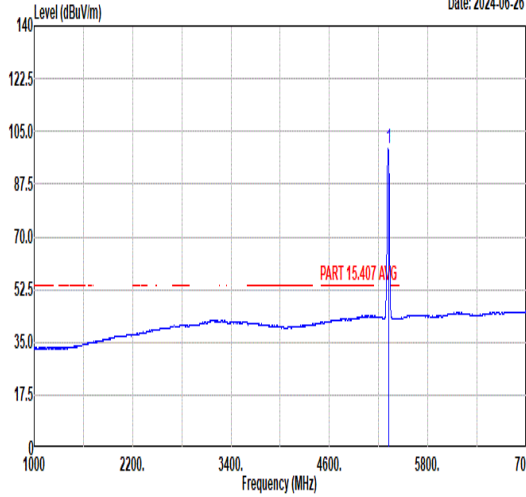


Mode	14																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	 Date: 2024-06-26 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5351.85</td><td>57.42</td><td>74.00</td><td>-16.58</td><td>43.68</td><td>34.83</td><td>10.94</td><td>32.03</td><td>397</td><td>360</td><td>PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5351.85	57.42	74.00	-16.58	43.68	34.83	10.94	32.03	397	360	PEAK	 Date: 2024-06-26 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>105.61</td><td>-----</td><td>-----</td><td>91.79</td><td>34.84</td><td>10.97</td><td>31.99</td><td>397</td><td>360</td><td>PEAK</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	105.61	-----	-----	91.79	34.84	10.97	31.99	397	360	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5351.85	57.42	74.00	-16.58	43.68	34.83	10.94	32.03	397	360	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	105.61	-----	-----	91.79	34.84	10.97	31.99	397	360	PEAK																																																																															
Avg	 Date: 2024-06-26 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.17</td><td>43.70</td><td>54.00</td><td>-10.30</td><td>29.96</td><td>34.83</td><td>10.94</td><td>32.03</td><td>397</td><td>360</td><td>AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.17	43.70	54.00	-10.30	29.96	34.83	10.94	32.03	397	360	AVERAGE	 Date: 2024-06-26 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>99.18</td><td>-----</td><td>-----</td><td>85.36</td><td>34.84</td><td>10.97</td><td>31.99</td><td>397</td><td>360</td><td>AVERAGE</td></tr></tbody></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	99.18	-----	-----	85.36	34.84	10.97	31.99	397	360	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5350.17	43.70	54.00	-10.30	29.96	34.83	10.94	32.03	397	360	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	99.18	-----	-----	85.36	34.84	10.97	31.99	397	360	AVERAGE																																																																															

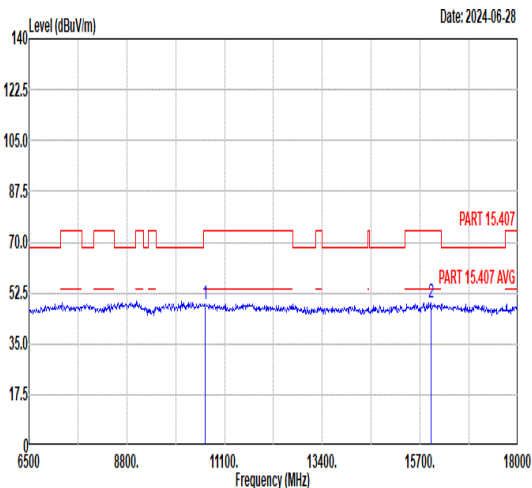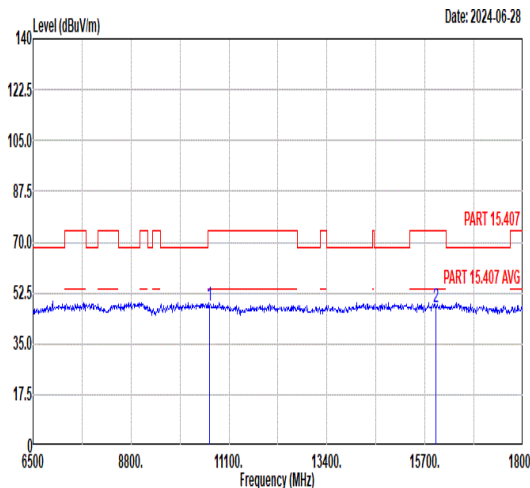

Mode	14																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10640.00</td><td>48.35</td><td>74.00</td><td>-25.65</td><td>45.36</td><td>39.47</td><td>14.32</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>49.21</td><td>74.00</td><td>-24.79</td><td>41.71</td><td>42.08</td><td>17.19</td><td>51.77</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10640.00	48.35	74.00	-25.65	45.36	39.47	14.32	50.80	--	--	Peak	2	15960.00	49.21	74.00	-24.79	41.71	42.08	17.19	51.77	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10640.00</td><td>48.23</td><td>74.00</td><td>-25.77</td><td>45.24</td><td>39.47</td><td>14.32</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>47.43</td><td>74.00</td><td>-26.57</td><td>39.93</td><td>42.08</td><td>17.19</td><td>51.77</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10640.00	48.23	74.00	-25.77	45.24	39.47	14.32	50.80	--	--	Peak	2	15960.00	47.43	74.00	-26.57	39.93	42.08	17.19	51.77	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10640.00	48.35	74.00	-25.65	45.36	39.47	14.32	50.80	--	--	Peak																																																																																																																							
2	15960.00	49.21	74.00	-24.79	41.71	42.08	17.19	51.77	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10640.00	48.23	74.00	-25.77	45.24	39.47	14.32	50.80	--	--	Peak																																																																																																																							
2	15960.00	47.43	74.00	-26.57	39.93	42.08	17.19	51.77	--	--	Peak																																																																																																																							

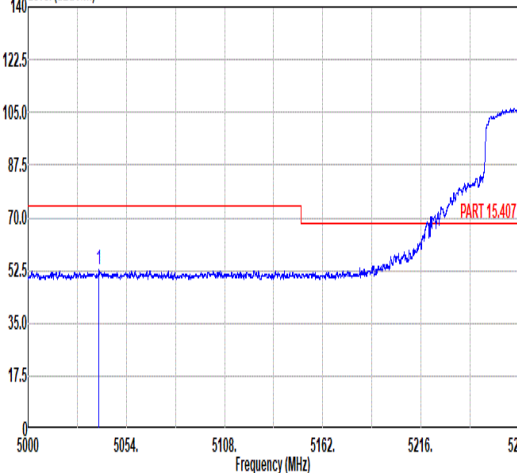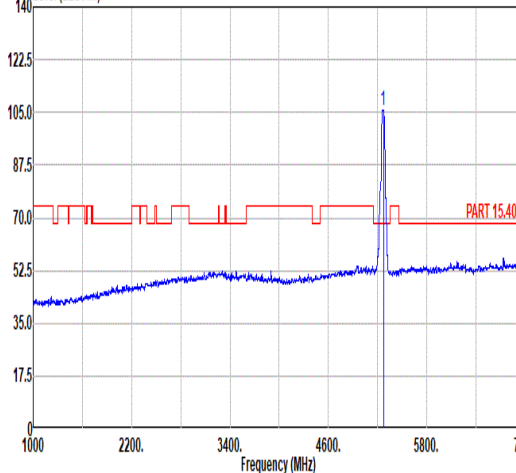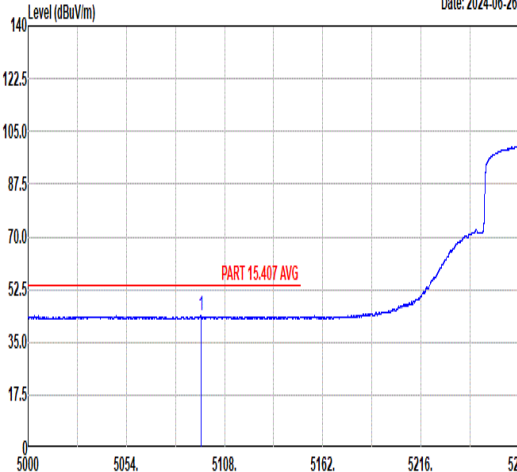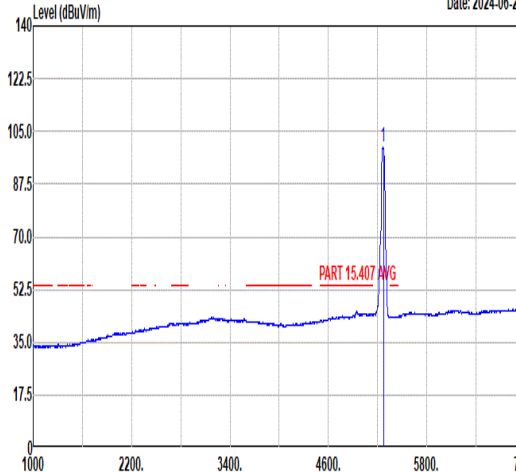

Mode	15																																																																																	
	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5039.02</td><td>52.67</td><td>74.00</td><td>-21.33</td><td>38.27</td><td>34.89</td><td>11.15</td><td>31.64</td><td>356 86 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5039.02	52.67	74.00	-21.33	38.27	34.89	11.15	31.64	356 86 PEAK	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>105.86</td><td>-----</td><td>-----</td><td>91.96</td><td>34.84</td><td>11.00</td><td>31.94</td><td>356 86 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	105.86	-----	-----	91.96	34.84	11.00	31.94	356 86 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5039.02	52.67	74.00	-21.33	38.27	34.89	11.15	31.64	356 86 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5270.00	105.86	-----	-----	91.96	34.84	11.00	31.94	356 86 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5094.93</td><td>43.85</td><td>54.00</td><td>-10.15</td><td>29.56</td><td>34.88</td><td>11.12</td><td>31.71</td><td>356 86 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5094.93	43.85	54.00	-10.15	29.56	34.88	11.12	31.71	356 86 AVERAGE	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>99.62</td><td>-----</td><td>-----</td><td>85.68</td><td>34.85</td><td>11.01</td><td>31.92</td><td>356 86 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	99.62	-----	-----	85.68	34.85	11.01	31.92	356 86 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5094.93	43.85	54.00	-10.15	29.56	34.88	11.12	31.71	356 86 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5270.00	99.62	-----	-----	85.68	34.85	11.01	31.92	356 86 AVERAGE																																																																									



Mode	15																																																	
	Band Edge - R																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																	
ANT	1																																																	
Pol.	Horizontal					Fundamental																																												
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5395.69</td><td>51.82</td><td>74.00</td><td>-22.18</td><td>38.18</td><td>34.82</td><td>10.91</td><td>32.09</td><td>356</td><td>86</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5395.69	51.82	74.00	-22.18	38.18	34.82	10.91	32.09	356	86	PEAK	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																									
1	5395.69	51.82	74.00	-22.18	38.18	34.82	10.91	32.09	356	86	PEAK																																							
Avg	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.83</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>29.10</td><td>34.81</td><td>11.11</td><td>32.16</td><td>356</td><td>86</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5457.83	42.86	54.00	-11.14	29.10	34.81	11.11	32.16	356	86	AVERAGE	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																									
1	5457.83	42.86	54.00	-11.14	29.10	34.81	11.11	32.16	356	86	AVERAGE																																							



Mode	15	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2024-06-26 <	



Mode	15																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5392.47</td><td>51.95</td><td>74.00</td><td>-22.05</td><td>38.30</td><td>34.82</td><td>10.91</td><td>32.08</td><td>382</td><td>360</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5392.47	51.95	74.00	-22.05	38.30	34.82	10.91	32.08	382	360	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5392.47	51.95	74.00	-22.05	38.30	34.82	10.91	32.08	382	360	PEAK																															
Avg	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5360.73</td><td>43.08</td><td>54.00</td><td>-10.92</td><td>29.35</td><td>34.83</td><td>10.94</td><td>32.04</td><td>382</td><td>360</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5360.73	43.08	54.00	-10.92	29.35	34.83	10.94	32.04	382	360	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5360.73	43.08	54.00	-10.92	29.35	34.83	10.94	32.04	382	360	AVERAGE																															







Mode	16																																																																																	
	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5067.77</td><td>52.91</td><td>74.00</td><td>-21.09</td><td>38.57</td><td>34.89</td><td>11.13</td><td>31.68</td><td>343</td><td>73</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5067.77	52.91	74.00	-21.09	38.57	34.89	11.13	31.68	343	73	PEAK	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>103.96</td><td>-----</td><td>-----</td><td>90.11</td><td>34.84</td><td>10.98</td><td>31.97</td><td>343</td><td>73</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5310.00	103.96	-----	-----	90.11	34.84	10.98	31.97	343	73	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5067.77	52.91	74.00	-21.09	38.57	34.89	11.13	31.68	343	73	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5310.00	103.96	-----	-----	90.11	34.84	10.98	31.97	343	73	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5064.02</td><td>43.95</td><td>54.00</td><td>-10.05</td><td>29.60</td><td>34.89</td><td>11.13</td><td>31.67</td><td>343</td><td>73</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5064.02	43.95	54.00	-10.05	29.60	34.89	11.13	31.67	343	73	AVERAGE	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>97.84</td><td>-----</td><td>-----</td><td>83.99</td><td>34.84</td><td>10.98</td><td>31.97</td><td>343</td><td>73</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5310.00	97.84	-----	-----	83.99	34.84	10.98	31.97	343	73	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5064.02	43.95	54.00	-10.05	29.60	34.89	11.13	31.67	343	73	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5310.00	97.84	-----	-----	83.99	34.84	10.98	31.97	343	73	AVERAGE																																																																							





Mode	16																																										
	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																										
ANT	1																																										
Pol.	Horizontal	Fundamental																																									
Peak	Level (dBuV/m) Date: 2024-06-26 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.13</td><td>60.52</td><td>74.00</td><td>-13.48</td><td>46.78</td><td>34.83</td><td>10.94</td><td>32.03</td><td>343</td><td>73 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.13	60.52	74.00	-13.48	46.78	34.83	10.94	32.03	343	73 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5350.13	60.52	74.00	-13.48	46.78	34.83	10.94	32.03	343	73 PEAK																																	
Avg	Level (dBuV/m) Date: 2024-06-26 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.43</td><td>50.50</td><td>54.00</td><td>-3.50</td><td>36.76</td><td>34.83</td><td>10.94</td><td>32.03</td><td>343</td><td>73 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.43	50.50	54.00	-3.50	36.76	34.83	10.94	32.03	343	73 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5350.43	50.50	54.00	-3.50	36.76	34.83	10.94	32.03	343	73 AVERAGE																																	

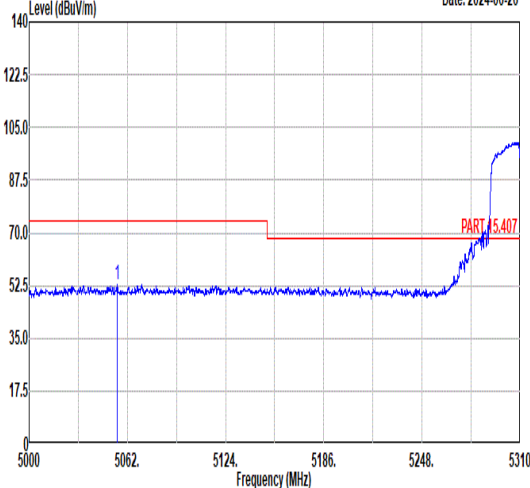
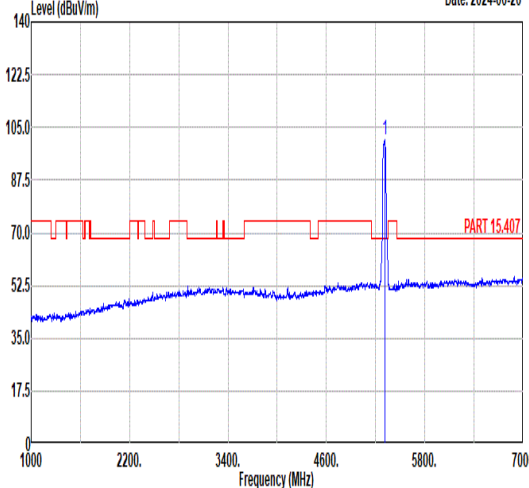
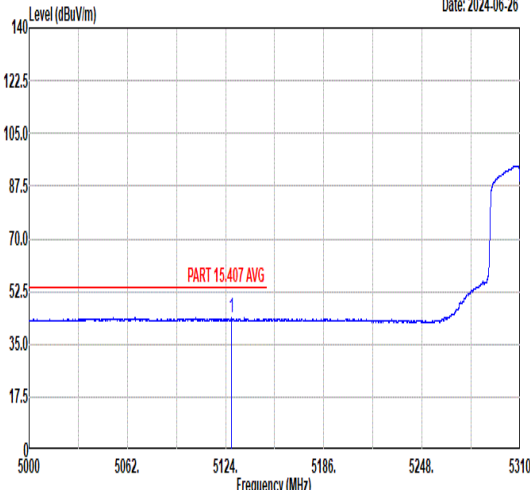
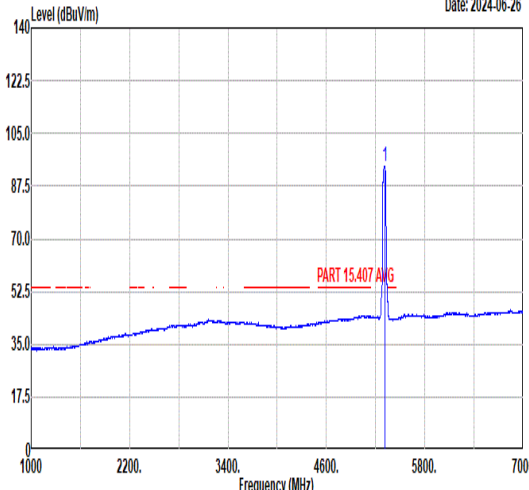


Mode	16																																																																																	
	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-06-26  500050625124518652485310 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5055.65</td><td>52.97</td><td>74.00</td><td>-21.03</td><td>38.60</td><td>34.89</td><td>11.14</td><td>31.66</td><td>397 358 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5055.65	52.97	74.00	-21.03	38.60	34.89	11.14	31.66	397 358 PEAK	Level (dBuV/m) Date: 2024-06-26  100022003400460058007000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>100.90</td><td>-----</td><td>87.07</td><td>34.84</td><td>10.97</td><td>31.98</td><td>397</td><td>358 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	100.90	-----	87.07	34.84	10.97	31.98	397	358 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5055.65	52.97	74.00	-21.03	38.60	34.89	11.14	31.66	397 358 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5310.00	100.90	-----	87.07	34.84	10.97	31.98	397	358 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-06-26  500050625124518652485310 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5127.60</td><td>43.81</td><td>54.00</td><td>-10.19</td><td>29.59</td><td>34.87</td><td>11.10</td><td>31.75</td><td>397 358 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5127.60	43.81	54.00	-10.19	29.59	34.87	11.10	31.75	397 358 AVERAGE	Level (dBuV/m) Date: 2024-06-26  100022003400460058007000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5310.00</td><td>94.14</td><td>-----</td><td>80.29</td><td>34.84</td><td>10.98</td><td>31.97</td><td>397</td><td>358 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	94.14	-----	80.29	34.84	10.98	31.97	397	358 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5127.60	43.81	54.00	-10.19	29.59	34.87	11.10	31.75	397 358 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5310.00	94.14	-----	80.29	34.84	10.98	31.97	397	358 AVERAGE																																																																									

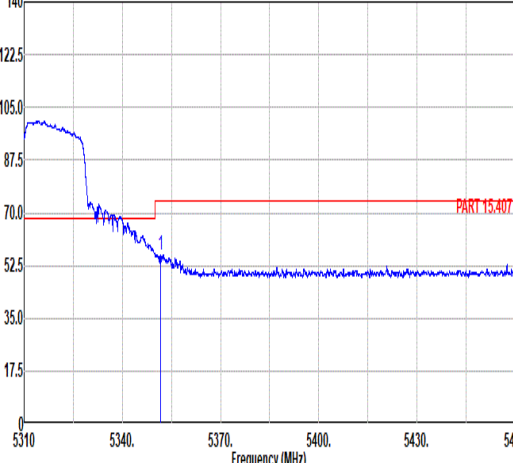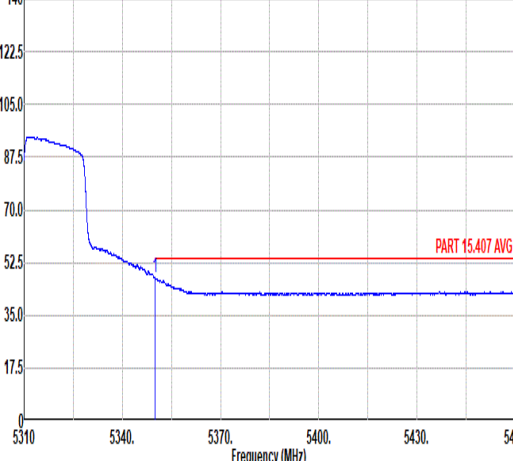

Mode	16																																																	
	Band Edge - R																																																	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																	
ANT	1																																																	
Pol.	Vertical					Fundamental																																												
Peak	Level (dBuV/m) Date: 2024-06-26  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.63</td><td>56.25</td><td>74.00</td><td>-17.75</td><td>42.51</td><td>34.83</td><td>10.94</td><td>32.03</td><td>397</td><td>358</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5351.63	56.25	74.00	-17.75	42.51	34.83	10.94	32.03	397	358	PEAK	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																									
1	5351.63	56.25	74.00	-17.75	42.51	34.83	10.94	32.03	397	358	PEAK																																							
Avg	Level (dBuV/m) Date: 2024-06-26  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.01</td><td>47.29</td><td>54.00</td><td>-6.71</td><td>33.55</td><td>34.83</td><td>10.94</td><td>32.03</td><td>397</td><td>358</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.01	47.29	54.00	-6.71	33.55	34.83	10.94	32.03	397	358	AVERAGE	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																									
1	5350.01	47.29	54.00	-6.71	33.55	34.83	10.94	32.03	397	358	AVERAGE																																							

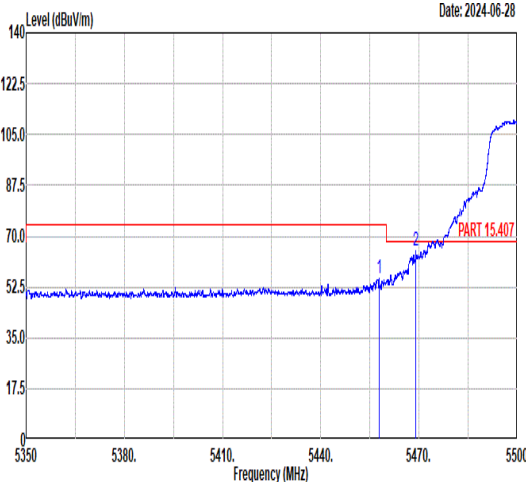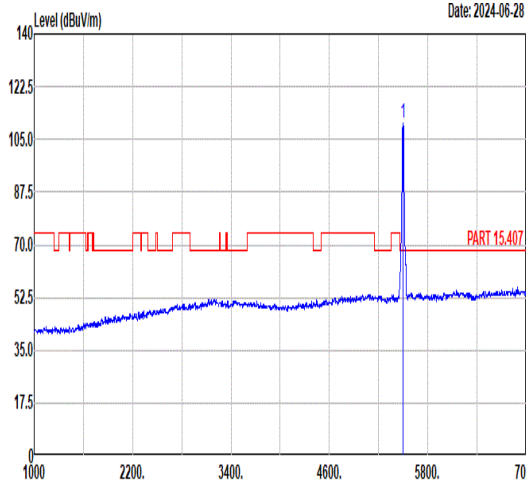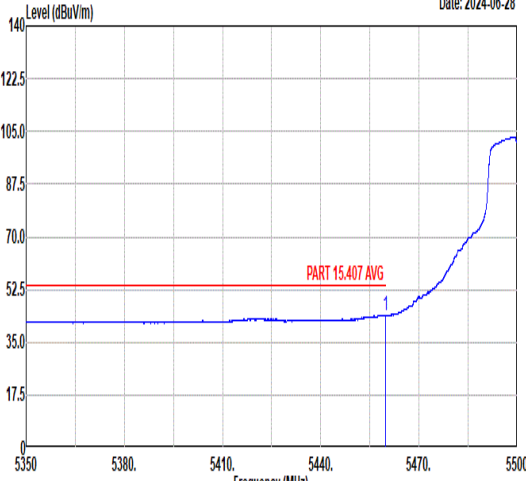
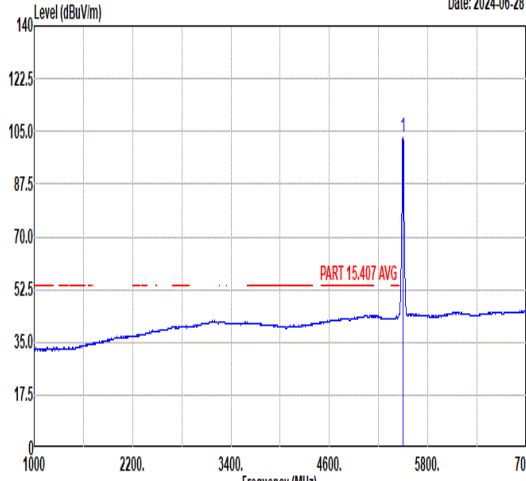


Mode	17																																																																																																		
	Band Edge																																																																																																		
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal					Fundamental																																																																																													
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5457.79</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>41.62</td><td>34.81</td><td>11.11</td><td>32.16</td><td>379 74 PEAK</td></tr><tr><td>2</td><td>5469.04</td><td>64.92</td><td>68.30</td><td>-3.38</td><td>51.13</td><td>34.81</td><td>11.16</td><td>32.18</td><td>379 74 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5457.79	55.38	74.00	-18.62	41.62	34.81	11.11	32.16	379 74 PEAK	2	5469.04	64.92	68.30	-3.38	51.13	34.81	11.16	32.18	379 74 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>110.27</td><td>-----</td><td>96.41</td><td>34.80</td><td>11.27</td><td>32.21</td><td>379</td><td>74 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	110.27	-----	96.41	34.80	11.27	32.21	379
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5457.79	55.38	74.00	-18.62	41.62	34.81	11.11	32.16	379 74 PEAK																																																																																										
2	5469.04	64.92	68.30	-3.38	51.13	34.81	11.16	32.18	379 74 PEAK																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	110.27	-----	96.41	34.80	11.27	32.21	379	74 PEAK																																																																																										
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.89</td><td>44.10</td><td>54.00</td><td>-9.90</td><td>30.34</td><td>34.81</td><td>11.12</td><td>32.17</td><td>379 74 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.89	44.10	54.00	-9.90	30.34	34.81	11.12	32.17	379 74 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>102.89</td><td>-----</td><td>89.03</td><td>34.80</td><td>11.27</td><td>32.21</td><td>379</td><td>74 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.89	-----	89.03	34.80	11.27	32.21	379	74 AVERAGE									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.89	44.10	54.00	-9.90	30.34	34.81	11.12	32.17	379 74 AVERAGE																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	102.89	-----	89.03	34.80	11.27	32.21	379	74 AVERAGE																																																																																										





Mode	17																																																			
	Band Edge																																																			
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																			
ANT	1																																																			
Pol.	Vertical	Fundamental																																																		
Peak	Level (dBuV/m) Date: 2024-06-28 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5410.68</td><td>51.99</td><td>74.00</td><td>-22.01</td><td>38.35</td><td>34.82</td><td>10.92</td><td>32.10</td><td>387</td><td>360 PEAK</td></tr><tr><td>2 5469.18</td><td>59.05</td><td>68.30</td><td>-9.25</td><td>45.26</td><td>34.81</td><td>11.16</td><td>32.18</td><td>387</td><td>360 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5410.68	51.99	74.00	-22.01	38.35	34.82	10.92	32.10	387	360 PEAK	2 5469.18	59.05	68.30	-9.25	45.26	34.81	11.16	32.18	387	360 PEAK	Level (dBuV/m) Date: 2024-06-28 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5500.00</td><td>104.59</td><td>-----</td><td>-----</td><td>90.73</td><td>34.80</td><td>11.27</td><td>32.21</td><td>387</td><td>360 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5500.00	104.59	-----	-----	90.73	34.80	11.27	32.21	387	360 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																										
1 5410.68	51.99	74.00	-22.01	38.35	34.82	10.92	32.10	387	360 PEAK																																											
2 5469.18	59.05	68.30	-9.25	45.26	34.81	11.16	32.18	387	360 PEAK																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5500.00	104.59	-----	-----	90.73	34.80	11.27	32.21	387	360 PEAK																																											
Avg	Level (dBuV/m) Date: 2024-06-28 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5458.84</td><td>42.54</td><td>54.00</td><td>-11.46</td><td>28.77</td><td>34.81</td><td>11.12</td><td>32.16</td><td>387</td><td>360 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5458.84	42.54	54.00	-11.46	28.77	34.81	11.12	32.16	387	360 AVERAGE	Level (dBuV/m) Date: 2024-06-28 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5500.00</td><td>97.96</td><td>-----</td><td>-----</td><td>84.10</td><td>34.80</td><td>11.27</td><td>32.21</td><td>387</td><td>360 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5500.00	97.96	-----	-----	84.10	34.80	11.27	32.21	387	360 AVERAGE										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5458.84	42.54	54.00	-11.46	28.77	34.81	11.12	32.16	387	360 AVERAGE																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5500.00	97.96	-----	-----	84.10	34.80	11.27	32.21	387	360 AVERAGE																																											


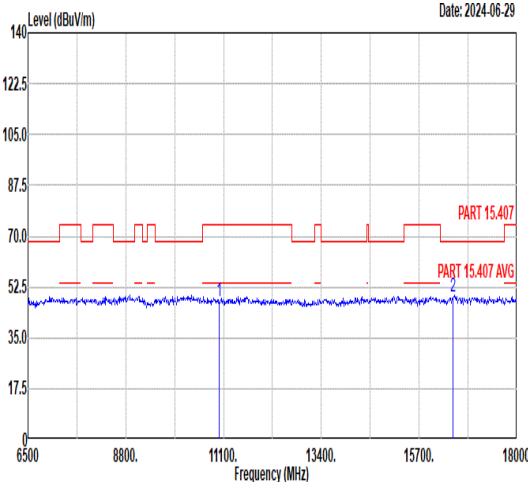
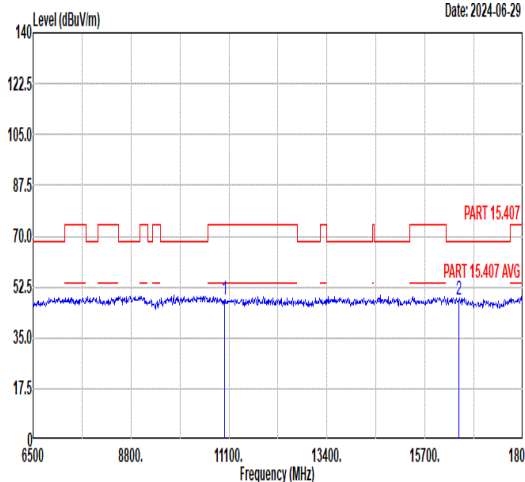


Mode	17																																																																																																								
	Harmonic																																																																																																								
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																								
ANT	1																																																																																																								
Pol.	Horizontal						Vertical																																																																																																		
Peak Avg																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11000.00</td><td>47.41</td><td>74.00</td><td>-26.59</td><td>44.27</td><td>39.40</td><td>14.54</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 16500.00</td><td>49.18</td><td>68.30</td><td>-19.12</td><td>41.22</td><td>42.40</td><td>17.36</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 11000.00	47.41	74.00	-26.59	44.27	39.40	14.54	50.80	--	--	Peak	2 16500.00	49.18	68.30	-19.12	41.22	42.40	17.36	51.80	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11000.00</td><td>47.91</td><td>74.00</td><td>-26.09</td><td>44.77</td><td>39.40</td><td>14.54</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 16500.00</td><td>48.06</td><td>68.30</td><td>-20.24</td><td>40.10</td><td>42.40</td><td>17.36</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 11000.00	47.91	74.00	-26.09	44.77	39.40	14.54	50.80	--	--	Peak	2 16500.00	48.06	68.30	-20.24	40.10	42.40	17.36	51.80	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1 11000.00	47.41	74.00	-26.59	44.27	39.40	14.54	50.80	--	--	Peak																																																																																															
2 16500.00	49.18	68.30	-19.12	41.22	42.40	17.36	51.80	--	--	Peak																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1 11000.00	47.91	74.00	-26.09	44.77	39.40	14.54	50.80	--	--	Peak																																																																																															
2 16500.00	48.06	68.30	-20.24	40.10	42.40	17.36	51.80	--	--	Peak																																																																																															

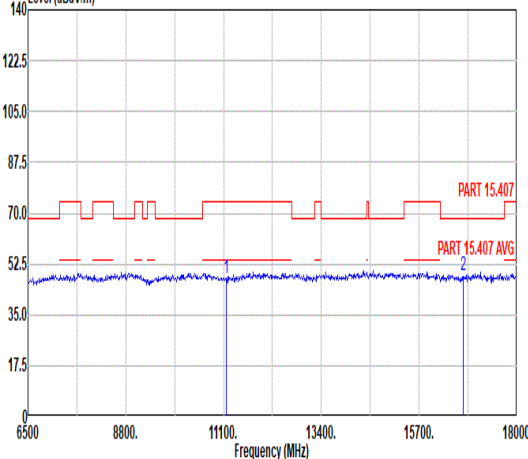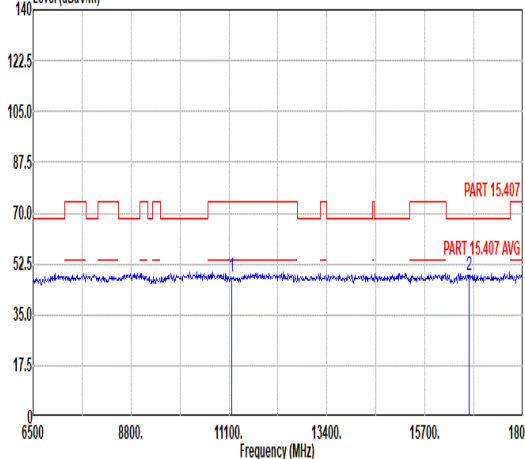

Mode	18																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg	Level (dBuV/m) Date: 2024-06-29 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>44.41</td><td>39.53</td><td>14.64</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.55</td><td>68.30</td><td>-19.75</td><td>40.42</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	47.81	74.00	-26.19	44.41	39.53	14.64	50.77	--	--	Peak	2	16740.00	48.55	68.30	-19.75	40.42	42.45	17.43	51.75	--	--	Peak	Level (dBuV/m) Date: 2024-06-29 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>44.48</td><td>39.53</td><td>14.64</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.54</td><td>68.30</td><td>-19.76</td><td>40.41</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	47.88	74.00	-26.12	44.48	39.53	14.64	50.77	--	--	Peak	2	16740.00	48.54	68.30	-19.76	40.41	42.45	17.43	51.75	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	11160.00	47.81	74.00	-26.19	44.41	39.53	14.64	50.77	--	--	Peak																																																																																																																						
2	16740.00	48.55	68.30	-19.75	40.42	42.45	17.43	51.75	--	--	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	11160.00	47.88	74.00	-26.12	44.48	39.53	14.64	50.77	--	--	Peak																																																																																																																						
2	16740.00	48.54	68.30	-19.76	40.41	42.45	17.43	51.75	--	--	Peak																																																																																																																						

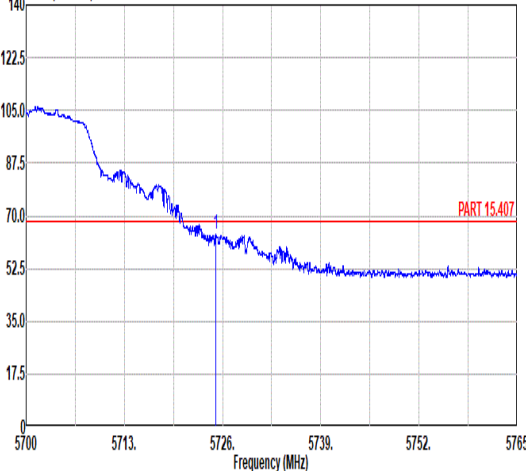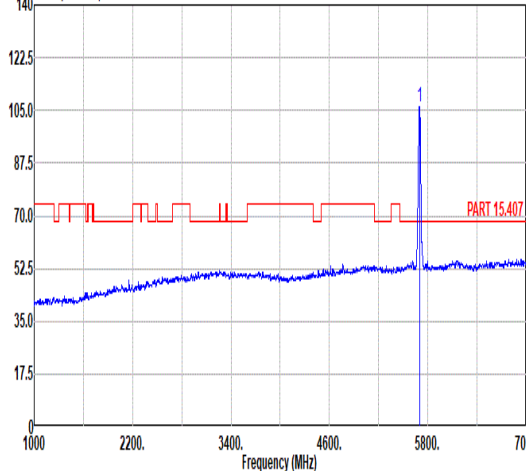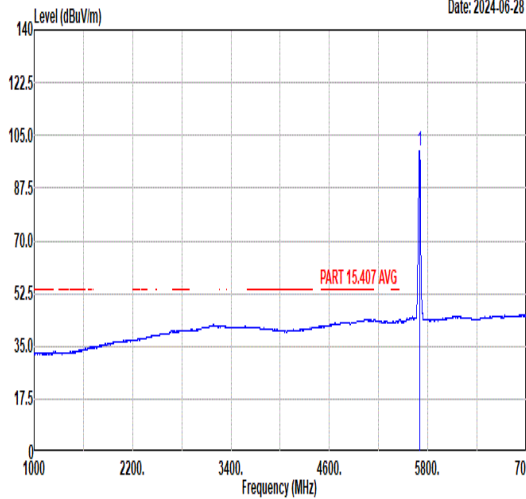

Mode	19																																																																																			
	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-06-28  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5725.12</td><td>63.93</td><td>68.30</td><td>-4.37</td><td>49.55</td><td>35.12</td><td>11.65</td><td>32.39</td><td>383</td><td>73 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5725.12	63.93	68.30	-4.37	49.55	35.12	11.65	32.39	383	73 PEAK	Level (dBuV/m) Date: 2024-06-28  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>106.43</td><td>-----</td><td>-----</td><td>92.06</td><td>35.08</td><td>11.66</td><td>32.37</td><td>383</td><td>73 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	106.43	-----	-----	92.06	35.08	11.66	32.37	383	73 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5725.12	63.93	68.30	-4.37	49.55	35.12	11.65	32.39	383	73 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	106.43	-----	-----	92.06	35.08	11.66	32.37	383	73 PEAK																																																																										
Avg	Blank	Level (dBuV/m) Date: 2024-06-28  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>99.94</td><td>-----</td><td>-----</td><td>85.56</td><td>35.07</td><td>11.67</td><td>32.36</td><td>383</td><td>73 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	99.94	-----	-----	85.56	35.07	11.67	32.36	383	73 AVERAGE																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	99.94	-----	-----	85.56	35.07	11.67	32.36	383	73 AVERAGE																																																																										







Mode	19	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2024-06-28 15726.16 59.93 68.30 -8.37 45.55 35.12 11.65 32.39 346 360 PEAK	Level (dBuV/m) Date: 2024-06-28 1 5700.00 103.26 ----- 88.89 35.08 11.66 32.37 346 360 PEAK
Avg	Blank	Level (dBuV/m) Date: 2024-06-28 1 5700.00 96.32 ----- 81.95 35.08 11.66 32.37 346 360 AVERAGE







Mode	19																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11400.00</td><td>47.83</td><td>74.00</td><td>-26.17</td><td>44.05</td><td>39.72</td><td>14.78</td></tr><tr><td>2</td><td>17100.00</td><td>49.22</td><td>68.30</td><td>-19.08</td><td>41.03</td><td>42.46</td><td>17.53</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	47.83	74.00	-26.17	44.05	39.72	14.78	2	17100.00	49.22	68.30	-19.08	41.03	42.46	17.53	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11400.00</td><td>48.42</td><td>74.00</td><td>-25.58</td><td>44.64</td><td>39.72</td><td>14.78</td></tr><tr><td>2</td><td>17100.00</td><td>48.32</td><td>68.30</td><td>-19.98</td><td>40.13</td><td>42.46</td><td>17.53</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	48.42	74.00	-25.58	44.64	39.72	14.78	2	17100.00	48.32	68.30	-19.98	40.13	42.46	17.53
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11400.00	47.83	74.00	-26.17	44.05	39.72	14.78																																																																																									
2	17100.00	49.22	68.30	-19.08	41.03	42.46	17.53																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11400.00	48.42	74.00	-25.58	44.64	39.72	14.78																																																																																									
2	17100.00	48.32	68.30	-19.98	40.13	42.46	17.53																																																																																									

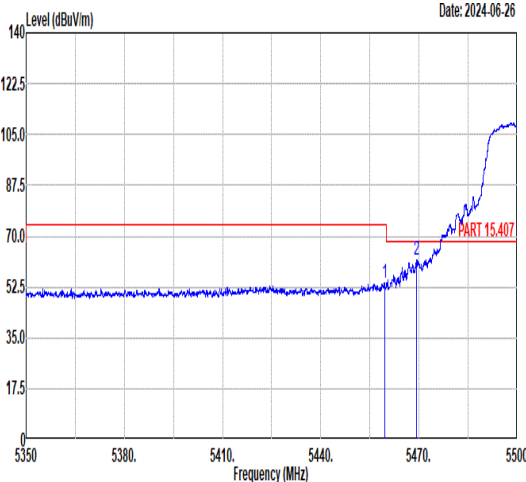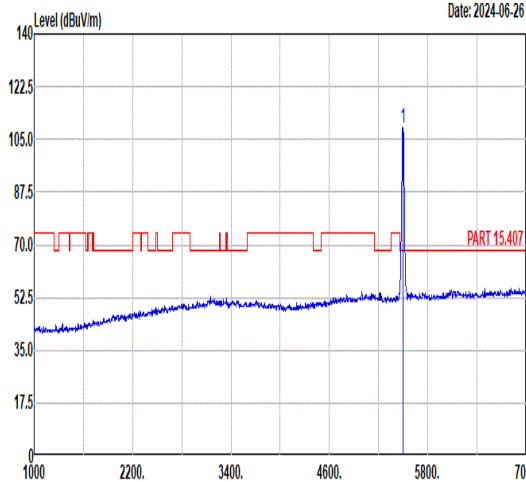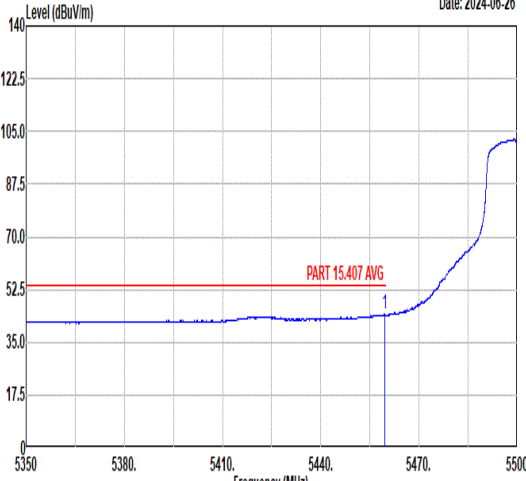
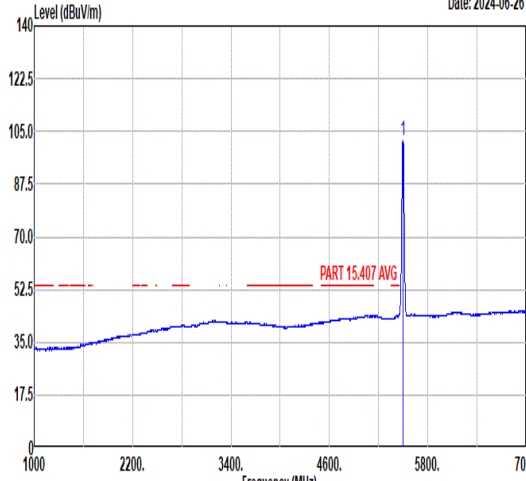


Mode	20																																																																																																					
	Band Edge																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal					Fundamental																																																																																																
Peak																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.43</td><td>53.91</td><td>74.00</td><td>-20.09</td><td>40.14</td><td>34.81</td><td>11.12</td><td>32.16</td><td>382</td><td>72 PEAK</td></tr><tr><td>2</td><td>5469.34</td><td>61.91</td><td>68.30</td><td>-6.39</td><td>48.12</td><td>34.81</td><td>11.16</td><td>32.18</td><td>382</td><td>72 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.43	53.91	74.00	-20.09	40.14	34.81	11.12	32.16	382	72 PEAK	2	5469.34	61.91	68.30	-6.39	48.12	34.81	11.16	32.18	382	72 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>108.66</td><td>-----</td><td>-----</td><td>94.80</td><td>34.80</td><td>11.27</td><td>32.21</td><td>382</td><td>72 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	108.66	-----	-----	94.80	34.80	11.27	32.21	382
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5459.43	53.91	74.00	-20.09	40.14	34.81	11.12	32.16	382	72 PEAK																																																																																												
2	5469.34	61.91	68.30	-6.39	48.12	34.81	11.16	32.18	382	72 PEAK																																																																																												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5500.00	108.66	-----	-----	94.80	34.80	11.27	32.21	382	72 PEAK																																																																																												
Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.43</td><td>44.19</td><td>54.00</td><td>-9.81</td><td>30.42</td><td>34.81</td><td>11.12</td><td>32.16</td><td>382</td><td>72 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.43	44.19	54.00	-9.81	30.42	34.81	11.12	32.16	382	72 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>102.17</td><td>-----</td><td>-----</td><td>88.31</td><td>34.80</td><td>11.27</td><td>32.21</td><td>382</td><td>72 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.17	-----	-----	88.31	34.80	11.27	32.21	382	72 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5459.43	44.19	54.00	-9.81	30.42	34.81	11.12	32.16	382	72 AVERAGE																																																																																												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5500.00	102.17	-----	-----	88.31	34.80	11.27	32.21	382	72 AVERAGE																																																																																												

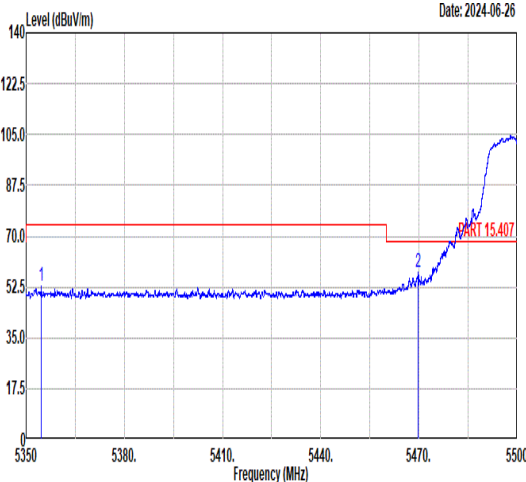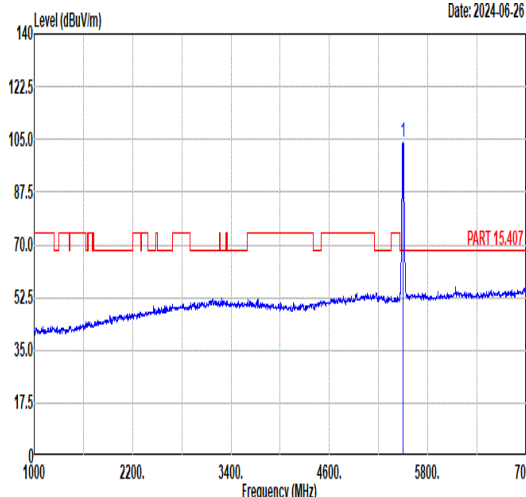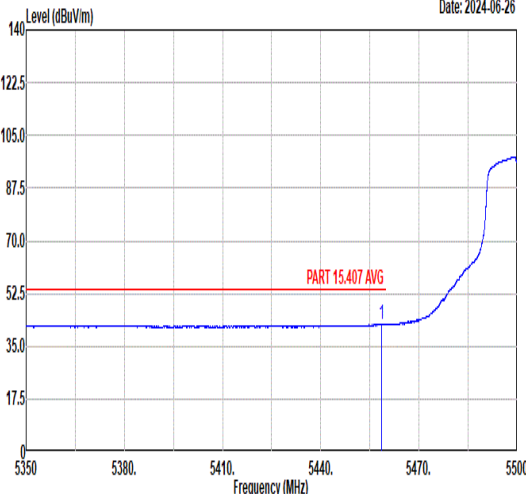
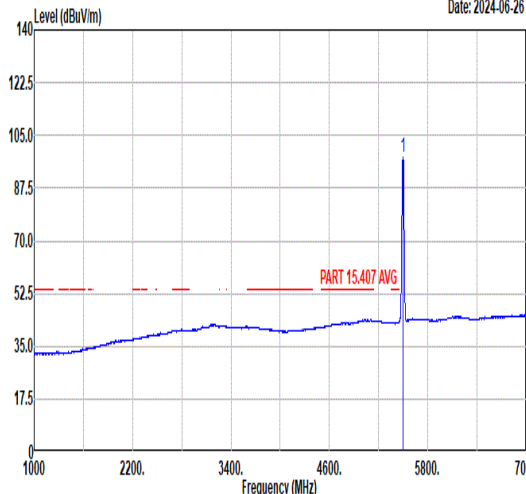


Mode	20																																																																																																									
	Band Edge																																																																																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Vertical					Fundamental																																																																																																				
Peak																																																																																																										
	<table><tr><th colspan="2"></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5354.59</td><td>52.64</td><td>74.00</td><td>-21.36</td><td>38.90</td><td>34.83</td><td>10.94</td><td>32.03</td><td>390</td><td>0 PEAK</td></tr><tr><td>2</td><td>5469.79</td><td>57.77</td><td>68.30</td><td>-10.53</td><td>43.98</td><td>34.81</td><td>11.16</td><td>32.18</td><td>390</td><td>0 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5354.59	52.64	74.00	-21.36	38.90	34.83	10.94	32.03	390	0 PEAK	2	5469.79	57.77	68.30	-10.53	43.98	34.81	11.16	32.18	390	0 PEAK	<table><tr><th colspan="2"></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5500.00</td><td>104.16</td><td>-----</td><td>90.30</td><td>34.80</td><td>11.27</td><td>32.21</td><td>390</td><td>0</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5500.00	104.16	-----	90.30	34.80	11.27	32.21	390	0
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5354.59	52.64	74.00	-21.36	38.90	34.83	10.94	32.03	390	0 PEAK																																																																																																
2	5469.79	57.77	68.30	-10.53	43.98	34.81	11.16	32.18	390	0 PEAK																																																																																																
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5500.00	104.16	-----	90.30	34.80	11.27	32.21	390	0	PEAK																																																																																																
Avg																																																																																																										
	<table><tr><th colspan="2"></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5458.54</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>28.60</td><td>34.81</td><td>11.11</td><td>32.16</td><td>390</td><td>0 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5458.54	42.36	54.00	-11.64	28.60	34.81	11.11	32.16	390	0 AVERAGE	<table><tr><th colspan="2"></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5500.00</td><td>97.51</td><td>-----</td><td>83.65</td><td>34.80</td><td>11.27</td><td>32.21</td><td>390</td><td>0</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5500.00	97.51	-----	83.65	34.80	11.27	32.21	390	0	AVERAGE										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5458.54	42.36	54.00	-11.64	28.60	34.81	11.11	32.16	390	0 AVERAGE																																																																																																
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5500.00	97.51	-----	83.65	34.80	11.27	32.21	390	0	AVERAGE																																																																																																

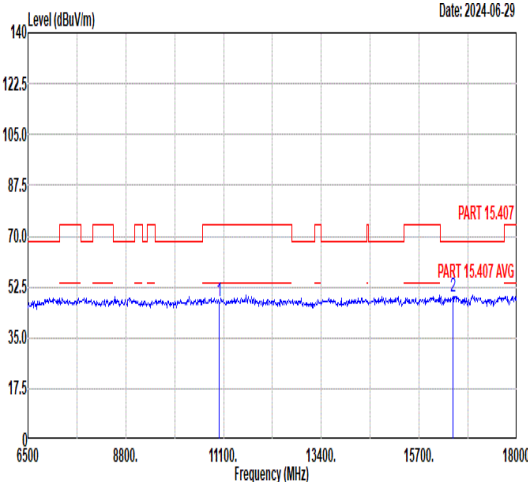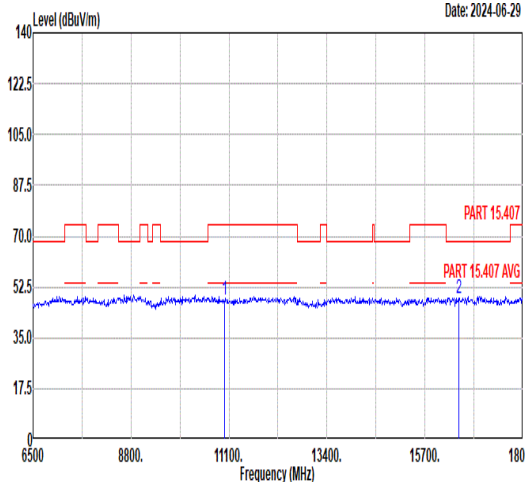

Mode	20																																																																																																					
	Harmonic																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11000.00</td><td>47.77</td><td>74.00</td><td>-26.23</td><td>44.63</td><td>39.40</td><td>14.54</td><td>50.80 -- -- Peak</td></tr><tr><td>2</td><td>16500.00</td><td>49.10</td><td>68.30</td><td>-19.20</td><td>41.14</td><td>42.40</td><td>17.36</td><td>51.80 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11000.00	47.77	74.00	-26.23	44.63	39.40	14.54	50.80 -- -- Peak	2	16500.00	49.10	68.30	-19.20	41.14	42.40	17.36	51.80 -- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11000.00</td><td>47.97</td><td>74.00</td><td>-26.03</td><td>44.83</td><td>39.40</td><td>14.54</td><td>50.80 -- -- Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.72</td><td>68.30</td><td>-19.58</td><td>40.76</td><td>42.40</td><td>17.36</td><td>51.80 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11000.00	47.97	74.00	-26.03	44.83	39.40	14.54	50.80 -- -- Peak	2	16500.00	48.72	68.30	-19.58	40.76	42.40	17.36	51.80 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11000.00	47.77	74.00	-26.23	44.63	39.40	14.54	50.80 -- -- Peak																																																																																														
2	16500.00	49.10	68.30	-19.20	41.14	42.40	17.36	51.80 -- -- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11000.00	47.97	74.00	-26.03	44.83	39.40	14.54	50.80 -- -- Peak																																																																																														
2	16500.00	48.72	68.30	-19.58	40.76	42.40	17.36	51.80 -- -- Peak																																																																																														


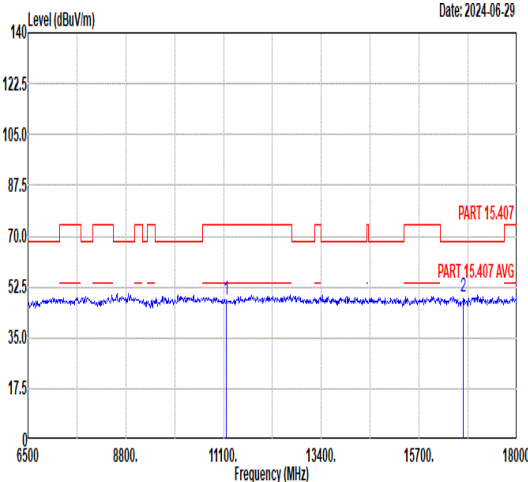
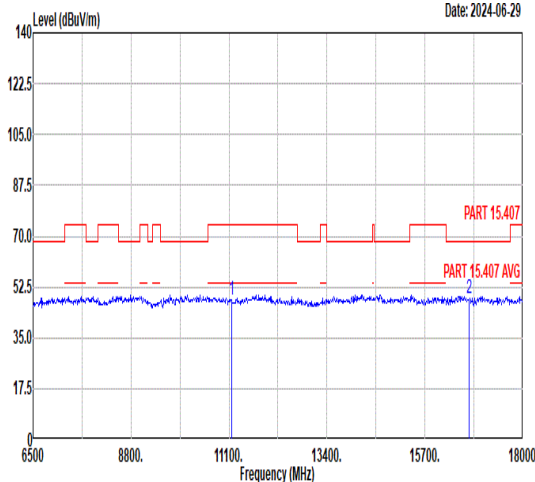


Mode	21																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																																							
ANT	1																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>48.19</td><td>74.00</td><td>-25.81</td><td>44.79</td><td>39.53</td><td>14.64</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.92</td><td>68.30</td><td>-19.38</td><td>40.79</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	48.19	74.00	-25.81	44.79	39.53	14.64	50.77	--	--	Peak	2	16740.00	48.92	68.30	-19.38	40.79	42.45	17.43	51.75	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>48.10</td><td>74.00</td><td>-25.90</td><td>44.70</td><td>39.53</td><td>14.64</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.44</td><td>68.30</td><td>-19.86</td><td>40.31</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	48.10	74.00	-25.90	44.70	39.53	14.64	50.77	--	--	Peak	2	16740.00	48.44	68.30	-19.86	40.31	42.45	17.43	51.75	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11160.00	48.19	74.00	-25.81	44.79	39.53	14.64	50.77	--	--	Peak																																																																																																													
2	16740.00	48.92	68.30	-19.38	40.79	42.45	17.43	51.75	--	--	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11160.00	48.10	74.00	-25.90	44.70	39.53	14.64	50.77	--	--	Peak																																																																																																													
2	16740.00	48.44	68.30	-19.86	40.31	42.45	17.43	51.75	--	--	Peak																																																																																																													



Mode	22																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5729.81</td><td>62.96</td><td>68.30</td><td>-5.34</td><td>48.58</td><td>35.12</td><td>11.65</td><td>32.39</td><td>382 75 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1 5729.81	62.96	68.30	-5.34	48.58	35.12	11.65	32.39	382 75 PEAK	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5700.00</td><td>106.35</td><td>-----</td><td>-----</td><td>91.98</td><td>35.08</td><td>11.66</td><td>32.37</td><td>382 75 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1 5700.00	106.35	-----	-----	91.98	35.08	11.66	32.37	382 75 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																		
1 5729.81	62.96	68.30	-5.34	48.58	35.12	11.65	32.39	382 75 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																		
1 5700.00	106.35	-----	-----	91.98	35.08	11.66	32.37	382 75 PEAK																																																																		
Avg	Blank	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5700.00</td><td>100.04</td><td>-----</td><td>-----</td><td>85.66</td><td>35.07</td><td>11.67</td><td>32.36</td><td>382 75 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1 5700.00	100.04	-----	-----	85.66	35.07	11.67	32.36	382 75 AVERAGE																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																		
1 5700.00	100.04	-----	-----	85.66	35.07	11.67	32.36	382 75 AVERAGE																																																																		

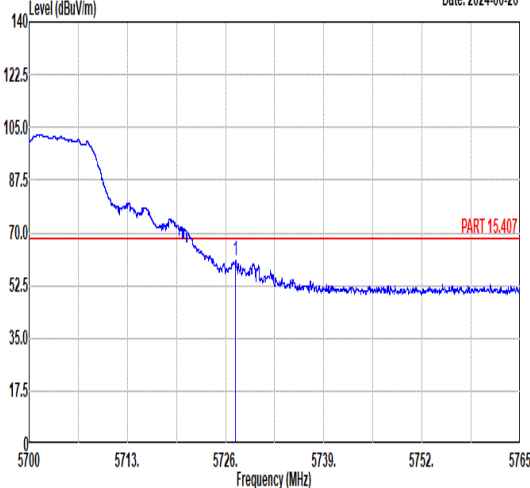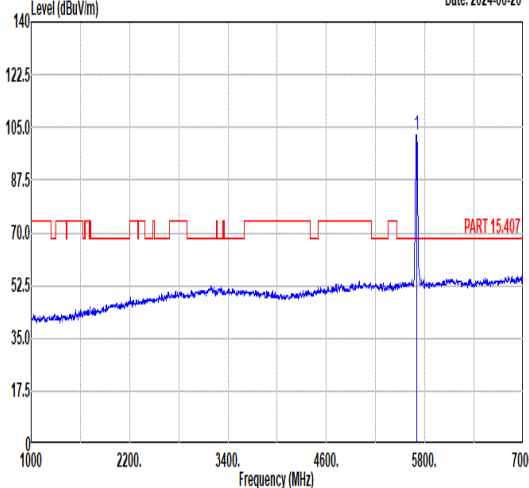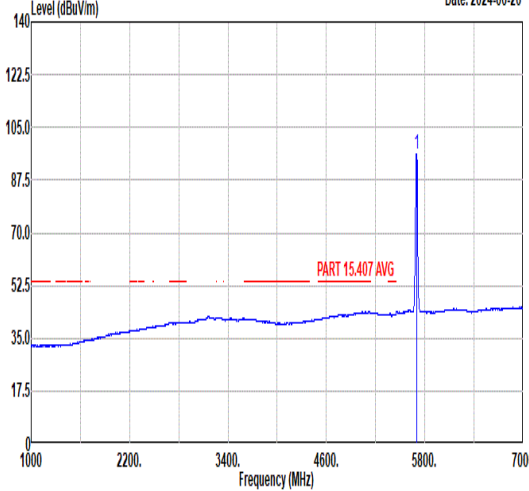

Mode	22																																																																																															
	Band Edge																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																															
ANT	1																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5727.33</td><td>60.65</td><td>68.30</td><td>-7.65</td><td>46.27</td><td>35.12</td><td>11.65</td><td>32.39</td><td>368</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5727.33	60.65	68.30	-7.65	46.27	35.12	11.65	32.39	368	0	PEAK	Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>102.36</td><td>-----</td><td>-----</td><td>87.98</td><td>35.07</td><td>11.67</td><td>32.36</td><td>368</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	102.36	-----	-----	87.98	35.07	11.67	32.36	368	0	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5727.33	60.65	68.30	-7.65	46.27	35.12	11.65	32.39	368	0	PEAK																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5700.00	102.36	-----	-----	87.98	35.07	11.67	32.36	368	0	PEAK																																																																																					
Avg	Blank						Level (dBuV/m) Date: 2024-06-26  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>96.06</td><td>-----</td><td>-----</td><td>81.68</td><td>35.07</td><td>11.67</td><td>32.36</td><td>368</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	96.06	-----	-----	81.68	35.07	11.67	32.36	368	0	AVERAGE																																										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5700.00	96.06	-----	-----	81.68	35.07	11.67	32.36	368	0	AVERAGE																																																																																					



Mode	22																																																																																																					
	Harmonic																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>47.56</td><td>74.00</td><td>-26.44</td><td>43.78</td><td>39.72</td><td>14.78</td><td>50.72 -- -- Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.87</td><td>68.30</td><td>-19.43</td><td>40.68</td><td>42.46</td><td>17.53</td><td>51.80 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11400.00	47.56	74.00	-26.44	43.78	39.72	14.78	50.72 -- -- Peak	2	17100.00	48.87	68.30	-19.43	40.68	42.46	17.53	51.80 -- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>47.68</td><td>74.00</td><td>-26.32</td><td>43.90</td><td>39.72</td><td>14.78</td><td>50.72 -- -- Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.62</td><td>68.30</td><td>-19.68</td><td>40.43</td><td>42.46</td><td>17.53</td><td>51.80 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11400.00	47.68	74.00	-26.32	43.90	39.72	14.78	50.72 -- -- Peak	2	17100.00	48.62	68.30	-19.68	40.43	42.46	17.53	51.80 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11400.00	47.56	74.00	-26.44	43.78	39.72	14.78	50.72 -- -- Peak																																																																																														
2	17100.00	48.87	68.30	-19.43	40.68	42.46	17.53	51.80 -- -- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11400.00	47.68	74.00	-26.32	43.90	39.72	14.78	50.72 -- -- Peak																																																																																														
2	17100.00	48.62	68.30	-19.68	40.43	42.46	17.53	51.80 -- -- Peak																																																																																														



Mode	23																																																																																											
	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.22</td><td>56.87</td><td>74.00</td><td>-17.13</td><td>43.10</td><td>34.81</td><td>11.12</td><td>32.16</td><td>380 71 PEAK</td></tr><tr><td>2</td><td>5469.30</td><td>64.18</td><td>68.30</td><td>-4.12</td><td>50.39</td><td>34.81</td><td>11.16</td><td>32.18</td><td>380 71 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.22	56.87	74.00	-17.13	43.10	34.81	11.12	32.16	380 71 PEAK	2	5469.30	64.18	68.30	-4.12	50.39	34.81	11.16	32.18	380 71 PEAK	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>103.11</td><td>-----</td><td>-----</td><td>89.21</td><td>34.81</td><td>11.30</td><td>32.21</td><td>380 71 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	103.11	-----	-----	89.21	34.81	11.30	32.21	380 71 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.22	56.87	74.00	-17.13	43.10	34.81	11.12	32.16	380 71 PEAK																																																																																			
2	5469.30	64.18	68.30	-4.12	50.39	34.81	11.16	32.18	380 71 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5510.00	103.11	-----	-----	89.21	34.81	11.30	32.21	380 71 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.52</td><td>46.15</td><td>54.00</td><td>-7.85</td><td>32.38</td><td>34.81</td><td>11.12</td><td>32.16</td><td>380 71 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.52	46.15	54.00	-7.85	32.38	34.81	11.12	32.16	380 71 AVERAGE	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>96.77</td><td>-----</td><td>-----</td><td>82.87</td><td>34.81</td><td>11.30</td><td>32.21</td><td>380 71 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	96.77	-----	-----	82.87	34.81	11.30	32.21	380 71 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.52	46.15	54.00	-7.85	32.38	34.81	11.12	32.16	380 71 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5510.00	96.77	-----	-----	82.87	34.81	11.30	32.21	380 71 AVERAGE																																																																																			



Mode	23																																																																																																								
	Band Edge - L																																																																																																								
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																								
ANT	1																																																																																																								
Pol.	Vertical					Fundamental																																																																																																			
Peak	Date: 2024-06-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5412.80</td><td>52.17</td><td>74.00</td><td>-21.83</td><td>38.54</td><td>34.82</td><td>10.92</td><td>32.11</td><td>386</td><td>0° PEAK</td></tr><tr><td>2</td><td>5469.46</td><td>56.26</td><td>68.30</td><td>-12.04</td><td>42.47</td><td>34.81</td><td>11.16</td><td>32.18</td><td>386</td><td>0° PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5412.80	52.17	74.00	-21.83	38.54	34.82	10.92	32.11	386	0° PEAK	2	5469.46	56.26	68.30	-12.04	42.47	34.81	11.16	32.18	386	0° PEAK	Date: 2024-06-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>99.96</td><td>-----</td><td>-----</td><td>86.05</td><td>34.81</td><td>11.32</td><td>32.22</td><td>386</td><td>0° PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5510.00	99.96	-----	-----	86.05	34.81	11.32	32.22	386	0° PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5412.80	52.17	74.00	-21.83	38.54	34.82	10.92	32.11	386	0° PEAK																																																																																															
2	5469.46	56.26	68.30	-12.04	42.47	34.81	11.16	32.18	386	0° PEAK																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5510.00	99.96	-----	-----	86.05	34.81	11.32	32.22	386	0° PEAK																																																																																															
Avg	Date: 2024-06-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.68</td><td>42.83</td><td>54.00</td><td>-11.17</td><td>29.06</td><td>34.81</td><td>11.12</td><td>32.16</td><td>386</td><td>0° AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5459.68	42.83	54.00	-11.17	29.06	34.81	11.12	32.16	386	0° AVERAGE	Date: 2024-06-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>93.28</td><td>-----</td><td>-----</td><td>79.38</td><td>34.81</td><td>11.30</td><td>32.21</td><td>386</td><td>0° AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5510.00	93.28	-----	-----	79.38	34.81	11.30	32.21	386	0° AVERAGE											
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5459.68	42.83	54.00	-11.17	29.06	34.81	11.12	32.16	386	0° AVERAGE																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5510.00	93.28	-----	-----	79.38	34.81	11.30	32.21	386	0° AVERAGE																																																																																															



Mode	23																																																									
	Band Edge - R																																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																									
ANT	1																																																									
Pol.	Vertical	Fundamental																																																								
Peak	Date: 2024-06-26 Level (dBuV/m) Frequency (MHz) PART 15.407 1 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5749.57</td><td>52.55</td><td>68.30</td><td>-15.75</td><td>38.17</td><td>35.15</td><td>11.64</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>32.41</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>386</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5749.57	52.55	68.30	-15.75	38.17	35.15	11.64								32.41								386								0 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																																			
1	5749.57	52.55	68.30	-15.75	38.17	35.15	11.64																																																			
							32.41																																																			
							386																																																			
							0 PEAK																																																			







Mode	24																																																																																																				
	Harmonic																																																																																																				
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
Peak Avg	Level (dBuV/m) Date: 2024-07-02 Frequency (MHz)						Level (dBuV/m) Date: 2024-07-02 Frequency (MHz)																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 11100.00</td><td>47.05</td><td>74.00</td><td>-26.95</td><td>43.75</td><td>39.48</td><td>14.60</td><td>50.78</td><td>-- -- Peak</td></tr><tr><td>2 16650.00</td><td>46.68</td><td>68.30</td><td>-21.62</td><td>38.61</td><td>42.43</td><td>17.41</td><td>51.77</td><td>-- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 11100.00	47.05	74.00	-26.95	43.75	39.48	14.60	50.78	-- -- Peak	2 16650.00	46.68	68.30	-21.62	38.61	42.43	17.41	51.77	-- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 11100.00</td><td>47.09</td><td>74.00</td><td>-26.91</td><td>43.79</td><td>39.48</td><td>14.60</td><td>50.78</td><td>-- -- Peak</td></tr><tr><td>2 16650.00</td><td>47.19</td><td>68.30</td><td>-21.11</td><td>39.12</td><td>42.43</td><td>17.41</td><td>51.77</td><td>-- -- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 11100.00	47.09	74.00	-26.91	43.79	39.48	14.60	50.78	-- -- Peak	2 16650.00	47.19	68.30	-21.11	39.12	42.43	17.41	51.77	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1 11100.00	47.05	74.00	-26.95	43.75	39.48	14.60	50.78	-- -- Peak																																																																																													
2 16650.00	46.68	68.30	-21.62	38.61	42.43	17.41	51.77	-- -- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1 11100.00	47.09	74.00	-26.91	43.79	39.48	14.60	50.78	-- -- Peak																																																																																													
2 16650.00	47.19	68.30	-21.11	39.12	42.43	17.41	51.77	-- -- Peak																																																																																													



Mode	25																																																			
	Band Edge - L																																																			
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																			
ANT	1																																																			
Pol.	Horizontal	Fundamental																																																		
Peak	Level (dBuV/m) Date: 2024-06-26 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5426.00</td><td>52.42</td><td>74.00</td><td>-21.58</td><td>38.75</td><td>34.81</td><td>10.98</td><td>32.12</td><td>386</td><td>76 PEAK</td></tr><tr><td>2 5466.96</td><td>51.78</td><td>68.30</td><td>-16.52</td><td>37.99</td><td>34.81</td><td>11.15</td><td>32.17</td><td>386</td><td>76 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5426.00	52.42	74.00	-21.58	38.75	34.81	10.98	32.12	386	76 PEAK	2 5466.96	51.78	68.30	-16.52	37.99	34.81	11.15	32.17	386	76 PEAK	Level (dBuV/m) Date: 2024-06-26 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5670.00</td><td>105.24</td><td>-----</td><td>90.86</td><td>35.04</td><td>11.68</td><td>32.34</td><td>386</td><td>76</td><td>PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5670.00	105.24	-----	90.86	35.04	11.68	32.34	386	76	PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																										
1 5426.00	52.42	74.00	-21.58	38.75	34.81	10.98	32.12	386	76 PEAK																																											
2 5466.96	51.78	68.30	-16.52	37.99	34.81	11.15	32.17	386	76 PEAK																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5670.00	105.24	-----	90.86	35.04	11.68	32.34	386	76	PEAK																																											
Avg	Level (dBuV/m) Date: 2024-06-26 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5425.68</td><td>44.29</td><td>54.00</td><td>-9.71</td><td>30.62</td><td>34.81</td><td>10.98</td><td>32.12</td><td>386</td><td>76 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5425.68	44.29	54.00	-9.71	30.62	34.81	10.98	32.12	386	76 AVERAGE	Level (dBuV/m) Date: 2024-06-26 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5670.00</td><td>98.78</td><td>-----</td><td>84.40</td><td>35.04</td><td>11.68</td><td>32.34</td><td>386</td><td>76</td><td>AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5670.00	98.78	-----	84.40	35.04	11.68	32.34	386	76	AVERAGE										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5425.68	44.29	54.00	-9.71	30.62	34.81	10.98	32.12	386	76 AVERAGE																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																											
1 5670.00	98.78	-----	84.40	35.04	11.68	32.34	386	76	AVERAGE																																											

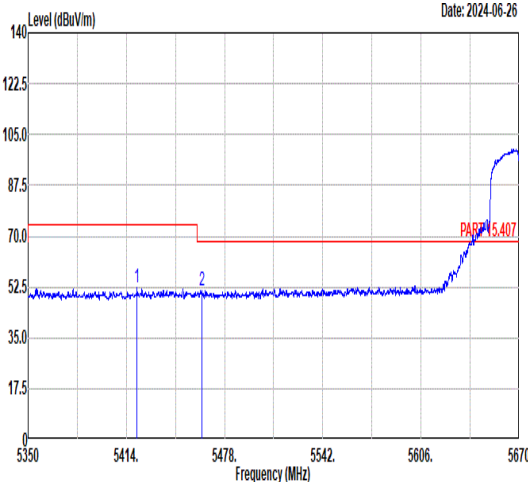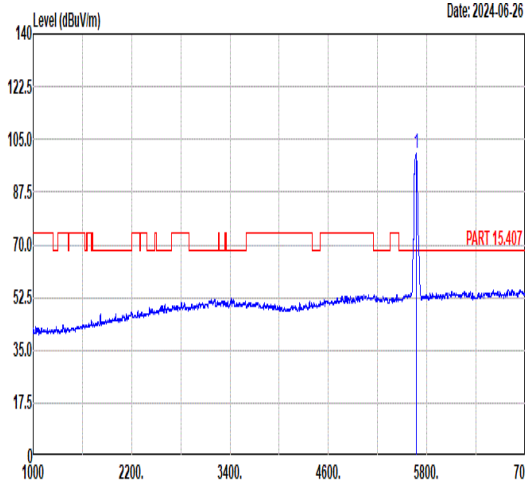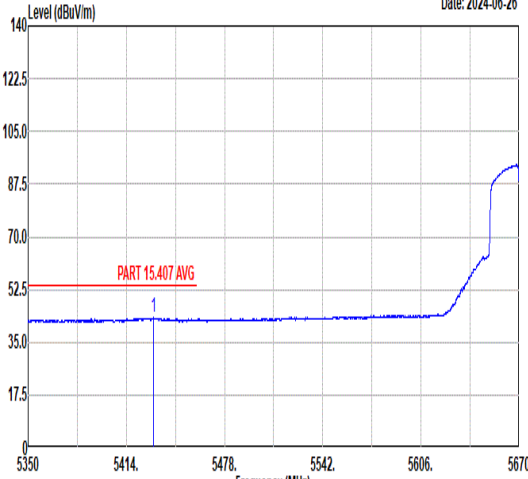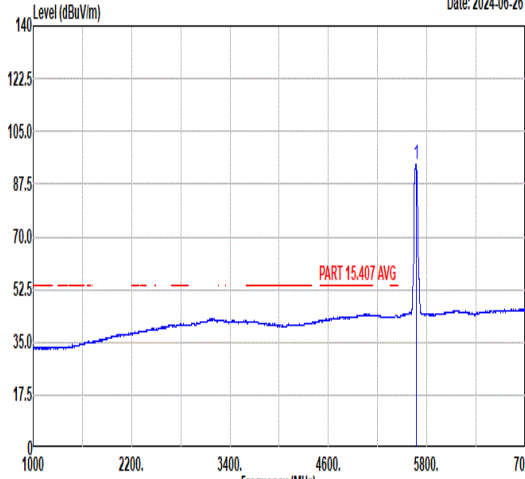

Mode	25																																																																																																					
	Band Edge - L																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Vertical					Fundamental																																																																																																
Peak	 Date: 2024-06-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5420.88</td><td>52.14</td><td>74.00</td><td>-21.86</td><td>38.48</td><td>34.82</td><td>10.96</td><td>32.12</td><td>376</td><td>0° PEAK</td></tr><tr><td>2</td><td>5463.15</td><td>51.32</td><td>68.30</td><td>-16.98</td><td>37.55</td><td>34.81</td><td>11.13</td><td>32.17</td><td>376</td><td>0° PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5420.88	52.14	74.00	-21.86	38.48	34.82	10.96	32.12	376	0° PEAK	2	5463.15	51.32	68.30	-16.98	37.55	34.81	11.13	32.17	376	0° PEAK	 Date: 2024-06-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>100.27</td><td>-----</td><td>85.89</td><td>35.04</td><td>11.68</td><td>32.34</td><td>376</td><td>0° PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	100.27	-----	85.89	35.04	11.68	32.34	376	0° PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5420.88	52.14	74.00	-21.86	38.48	34.82	10.96	32.12	376	0° PEAK																																																																																												
2	5463.15	51.32	68.30	-16.98	37.55	34.81	11.13	32.17	376	0° PEAK																																																																																												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5670.00	100.27	-----	85.89	35.04	11.68	32.34	376	0° PEAK																																																																																													
Avg	 Date: 2024-06-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5431.76</td><td>43.10</td><td>54.00</td><td>-10.90</td><td>29.42</td><td>34.81</td><td>11.00</td><td>32.13</td><td>376</td><td>0° AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5431.76	43.10	54.00	-10.90	29.42	34.81	11.00	32.13	376	0° AVERAGE	 Date: 2024-06-26 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>93.85</td><td>-----</td><td>79.48</td><td>35.03</td><td>11.68</td><td>32.34</td><td>376</td><td>0° AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	93.85	-----	79.48	35.03	11.68	32.34	376	0° AVERAGE											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5431.76	43.10	54.00	-10.90	29.42	34.81	11.00	32.13	376	0° AVERAGE																																																																																												
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5670.00	93.85	-----	79.48	35.03	11.68	32.34	376	0° AVERAGE																																																																																													



Mode	26																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																																
Peak	Date: 2024-06-28 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5608.93</td><td>53.98</td><td>68.30</td><td>-14.32</td><td>39.61</td><td>34.95</td><td>11.71</td><td>32.29</td><td>400</td><td>276</td><td>PEAK</td></tr><tr><td>2</td><td>5650.01</td><td>50.95</td><td>68.31</td><td>-17.36</td><td>36.58</td><td>35.01</td><td>11.69</td><td>32.33</td><td>400</td><td>276</td><td>PEAK</td></tr><tr><td>3</td><td>5719.70</td><td>65.88</td><td>110.72</td><td>-44.84</td><td>51.49</td><td>35.11</td><td>11.66</td><td>32.38</td><td>400</td><td>276</td><td>PEAK</td></tr><tr><td>4</td><td>5720.00</td><td>65.83</td><td>110.80</td><td>-44.97</td><td>51.44</td><td>35.11</td><td>11.66</td><td>32.38</td><td>400</td><td>276</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5608.93	53.98	68.30	-14.32	39.61	34.95	11.71	32.29	400	276	PEAK	2	5650.01	50.95	68.31	-17.36	36.58	35.01	11.69	32.33	400	276	PEAK	3	5719.70	65.88	110.72	-44.84	51.49	35.11	11.66	32.38	400	276	PEAK	4	5720.00	65.83	110.80	-44.97	51.44	35.11	11.66	32.38	400	276	PEAK	Date: 2024-06-28 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>106.78</td><td>-----</td><td>-----</td><td>92.40</td><td>35.14</td><td>11.64</td><td>32.40</td><td>400</td><td>276</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5745.00	106.78	-----	-----	92.40	35.14	11.64	32.40	400	276	PEAK
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5608.93	53.98	68.30	-14.32	39.61	34.95	11.71	32.29	400	276	PEAK																																																																																																												
2	5650.01	50.95	68.31	-17.36	36.58	35.01	11.69	32.33	400	276	PEAK																																																																																																												
3	5719.70	65.88	110.72	-44.84	51.49	35.11	11.66	32.38	400	276	PEAK																																																																																																												
4	5720.00	65.83	110.80	-44.97	51.44	35.11	11.66	32.38	400	276	PEAK																																																																																																												
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5745.00	106.78	-----	-----	92.40	35.14	11.64	32.40	400	276	PEAK																																																																																																												
Avg	Blank						Date: 2024-06-28 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>99.62</td><td>-----</td><td>-----</td><td>85.24</td><td>35.14</td><td>11.64</td><td>32.40</td><td>400</td><td>276</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5745.00	99.62	-----	-----	85.24	35.14	11.64	32.40	400	276	AVERAGE																																																																								
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5745.00	99.62	-----	-----	85.24	35.14	11.64	32.40	400	276	AVERAGE																																																																																																												



Mode	26																																																																																																																				
	Band Edge																																																																																																																				
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																				
ANT	1																																																																																																																				
Pol.	Vertical	Fundamental																																																																																																																			
Peak	Level (dBuV/m) Date: 2024-06-28 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5639.01</td><td>54.29</td><td>68.30</td><td>-14.01</td><td>39.93</td><td>34.99</td><td>11.69</td><td>32.32</td><td>362</td><td>0° PEAK</td></tr><tr><td>2</td><td>5650.03</td><td>52.18</td><td>68.32</td><td>-16.14</td><td>37.81</td><td>35.01</td><td>11.69</td><td>32.33</td><td>362</td><td>0° PEAK</td></tr><tr><td>3</td><td>5719.77</td><td>63.49</td><td>110.74</td><td>-47.25</td><td>49.10</td><td>35.11</td><td>11.66</td><td>32.38</td><td>362</td><td>0° PEAK</td></tr><tr><td>4</td><td>5720.21</td><td>63.34</td><td>111.27</td><td>-47.93</td><td>48.95</td><td>35.11</td><td>11.66</td><td>32.38</td><td>362</td><td>0° PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5639.01	54.29	68.30	-14.01	39.93	34.99	11.69	32.32	362	0° PEAK	2	5650.03	52.18	68.32	-16.14	37.81	35.01	11.69	32.33	362	0° PEAK	3	5719.77	63.49	110.74	-47.25	49.10	35.11	11.66	32.38	362	0° PEAK	4	5720.21	63.34	111.27	-47.93	48.95	35.11	11.66	32.38	362	0° PEAK	Level (dBuV/m) Date: 2024-06-28 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>103.69</td><td>-----</td><td>-----</td><td>89.31</td><td>35.14</td><td>11.64</td><td>32.40</td><td>362</td><td>0° PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	103.69	-----	-----	89.31	35.14	11.64	32.40	362	0° PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5639.01	54.29	68.30	-14.01	39.93	34.99	11.69	32.32	362	0° PEAK																																																																																																											
2	5650.03	52.18	68.32	-16.14	37.81	35.01	11.69	32.33	362	0° PEAK																																																																																																											
3	5719.77	63.49	110.74	-47.25	49.10	35.11	11.66	32.38	362	0° PEAK																																																																																																											
4	5720.21	63.34	111.27	-47.93	48.95	35.11	11.66	32.38	362	0° PEAK																																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5745.00	103.69	-----	-----	89.31	35.14	11.64	32.40	362	0° PEAK																																																																																																											
Avg	Blank	Level (dBuV/m) Date: 2024-06-28 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>96.82</td><td>-----</td><td>-----</td><td>82.44</td><td>35.14</td><td>11.64</td><td>32.40</td><td>362</td><td>0° AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	96.82	-----	-----	82.44	35.14	11.64	32.40	362	0° AVERAGE																																																																										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5745.00	96.82	-----	-----	82.44	35.14	11.64	32.40	362	0° AVERAGE																																																																																																											



Mode	26																																																																																															
	Harmonic																																																																																															
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2024-06-29 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11490.00</td><td>48.79</td><td>74.00</td><td>-25.21</td><td>44.87</td><td>39.79</td><td>14.83</td></tr><tr><td>2</td><td>17235.00</td><td>49.01</td><td>68.30</td><td>-19.29</td><td>40.96</td><td>42.41</td><td>17.57</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11490.00	48.79	74.00	-25.21	44.87	39.79	14.83	2	17235.00	49.01	68.30	-19.29	40.96	42.41	17.57	Level (dBuV/m) Date: 2024-06-29 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11490.00</td><td>48.22</td><td>74.00</td><td>-25.78</td><td>44.30</td><td>39.79</td><td>14.83</td></tr><tr><td>2</td><td>17235.00</td><td>48.59</td><td>68.30</td><td>-19.71</td><td>40.54</td><td>42.41</td><td>17.57</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11490.00	48.22	74.00	-25.78	44.30	39.79	14.83	2	17235.00	48.59	68.30	-19.71	40.54	42.41	17.57
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																								
1	11490.00	48.79	74.00	-25.21	44.87	39.79	14.83																																																																																									
2	17235.00	49.01	68.30	-19.29	40.96	42.41	17.57																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11490.00	48.22	74.00	-25.78	44.30	39.79	14.83																																																																																									
2	17235.00	48.59	68.30	-19.71	40.54	42.41	17.57																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11490.00</td><td>48.79</td><td>74.00</td><td>-25.21</td><td>44.87</td><td>39.79</td><td>14.83</td></tr><tr><td>2</td><td>17235.00</td><td>49.01</td><td>68.30</td><td>-19.29</td><td>40.96</td><td>42.41</td><td>17.57</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11490.00	48.79	74.00	-25.21	44.87	39.79	14.83	2	17235.00	49.01	68.30	-19.29	40.96	42.41	17.57	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11490.00</td><td>48.22</td><td>74.00</td><td>-25.78</td><td>44.30</td><td>39.79</td><td>14.83</td></tr><tr><td>2</td><td>17235.00</td><td>48.59</td><td>68.30</td><td>-19.71</td><td>40.54</td><td>42.41</td><td>17.57</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11490.00	48.22	74.00	-25.78	44.30	39.79	14.83	2	17235.00	48.59	68.30	-19.71	40.54	42.41	17.57
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11490.00	48.79	74.00	-25.21	44.87	39.79	14.83																																																																																									
2	17235.00	49.01	68.30	-19.29	40.96	42.41	17.57																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11490.00	48.22	74.00	-25.78	44.30	39.79	14.83																																																																																									
2	17235.00	48.59	68.30	-19.71	40.54	42.41	17.57																																																																																									







Mode	27																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-06-29 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11570.00</td><td>49.26</td><td>74.00</td><td>-24.74</td><td>45.18</td><td>39.86</td><td>14.88</td><td>50.66</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>48.46</td><td>68.30</td><td>-19.84</td><td>40.55</td><td>42.36</td><td>17.60</td><td>52.05</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11570.00	49.26	74.00	-24.74	45.18	39.86	14.88	50.66	--	--	Peak	2	17355.00	48.46	68.30	-19.84	40.55	42.36	17.60	52.05	--	--	Peak	Level (dBuV/m) Date: 2024-06-29 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11570.00</td><td>48.24</td><td>74.00</td><td>-25.76</td><td>44.16</td><td>39.86</td><td>14.88</td><td>50.66</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>47.74</td><td>68.30</td><td>-20.56</td><td>39.83</td><td>42.36</td><td>17.60</td><td>52.05</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11570.00	48.24	74.00	-25.76	44.16	39.86	14.88	50.66	--	--	Peak	2	17355.00	47.74	68.30	-20.56	39.83	42.36	17.60	52.05	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11570.00	49.26	74.00	-24.74	45.18	39.86	14.88	50.66	--	--	Peak																																																																																																																							
2	17355.00	48.46	68.30	-19.84	40.55	42.36	17.60	52.05	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11570.00	48.24	74.00	-25.76	44.16	39.86	14.88	50.66	--	--	Peak																																																																																																																							
2	17355.00	47.74	68.30	-20.56	39.83	42.36	17.60	52.05	--	--	Peak																																																																																																																							



Mode	28																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																							
ANT	1																																																																																																																							
Pol.	Horizontal					Fundamental																																																																																																																		
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5854.19</td><td>67.95</td><td>112.65</td><td>-44.70</td><td>53.62</td><td>35.30</td><td>11.52</td><td>32.49</td><td>103</td><td>63 PEAK</td></tr><tr><td>2 5855.19</td><td>63.29</td><td>110.75</td><td>-47.46</td><td>48.96</td><td>35.30</td><td>11.52</td><td>32.49</td><td>103</td><td>63 PEAK</td></tr><tr><td>3 5924.83</td><td>52.18</td><td>68.33</td><td>-16.15</td><td>37.93</td><td>35.39</td><td>11.40</td><td>32.54</td><td>103</td><td>63 PEAK</td></tr><tr><td>4 5930.69</td><td>52.68</td><td>68.30</td><td>-15.62</td><td>38.44</td><td>35.40</td><td>11.39</td><td>32.55</td><td>103</td><td>63 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5854.19	67.95	112.65	-44.70	53.62	35.30	11.52	32.49	103	63 PEAK	2 5855.19	63.29	110.75	-47.46	48.96	35.30	11.52	32.49	103	63 PEAK	3 5924.83	52.18	68.33	-16.15	37.93	35.39	11.40	32.54	103	63 PEAK	4 5930.69	52.68	68.30	-15.62	38.44	35.40	11.39	32.55	103	63 PEAK	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5825.00</td><td>107.37</td><td>-----</td><td>-----</td><td>93.00</td><td>35.25</td><td>11.58</td><td>32.46</td><td>103</td><td>63 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5825.00	107.37	-----	-----	93.00	35.25	11.58	32.46	103	63 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5854.19	67.95	112.65	-44.70	53.62	35.30	11.52	32.49	103	63 PEAK																																																																																																															
2 5855.19	63.29	110.75	-47.46	48.96	35.30	11.52	32.49	103	63 PEAK																																																																																																															
3 5924.83	52.18	68.33	-16.15	37.93	35.39	11.40	32.54	103	63 PEAK																																																																																																															
4 5930.69	52.68	68.30	-15.62	38.44	35.40	11.39	32.55	103	63 PEAK																																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5825.00	107.37	-----	-----	93.00	35.25	11.58	32.46	103	63 PEAK																																																																																																															
Avg	Blank					Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5825.00</td><td>100.67</td><td>-----</td><td>-----</td><td>86.30</td><td>35.25</td><td>11.58</td><td>32.46</td><td>103</td><td>63 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5825.00	100.67	-----	-----	86.30	35.25	11.58	32.46	103	63 AVERAGE																																																																						
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5825.00	100.67	-----	-----	86.30	35.25	11.58	32.46	103	63 AVERAGE																																																																																																															

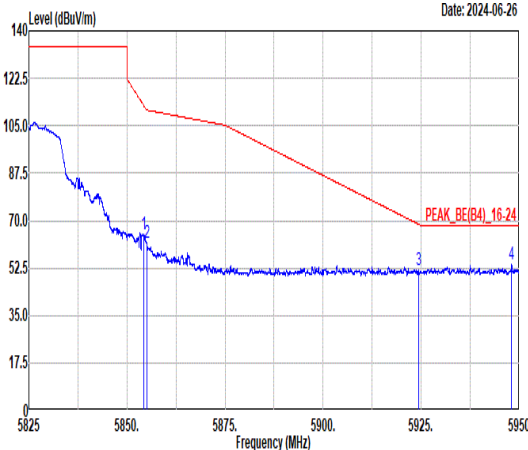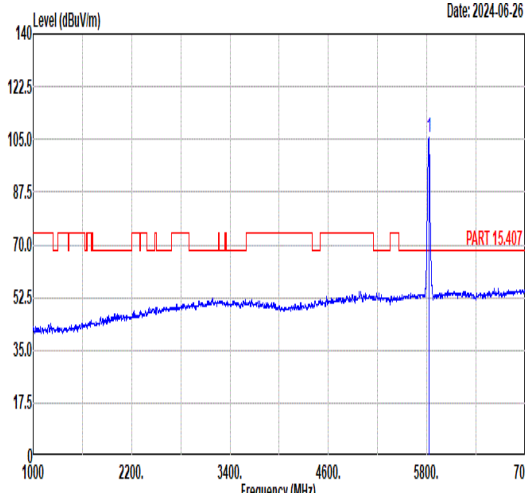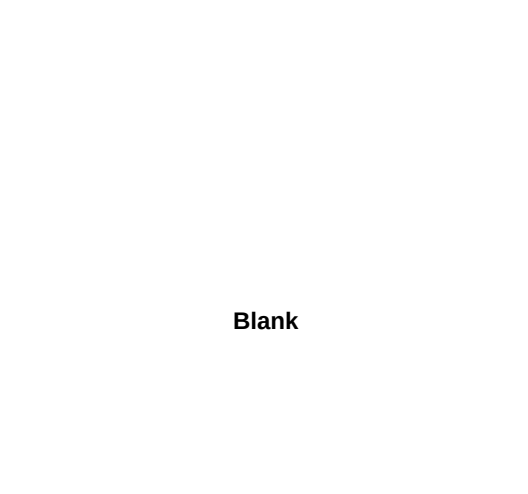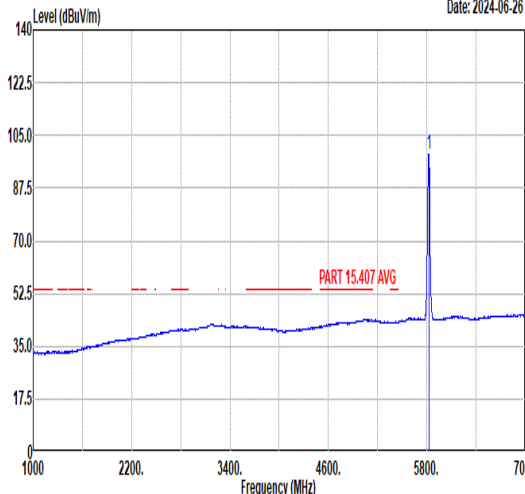

Mode	28																																																																																																																										
	Band Edge																																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																										
ANT	1																																																																																																																										
Pol.	Vertical					Fundamental																																																																																																																					
Peak																																																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.33</td><td>65.13</td><td>112.34</td><td>-47.21</td><td>50.80</td><td>35.30</td><td>11.52</td><td>32.49</td><td>376</td><td>1 PEAK</td></tr><tr><td>2</td><td>5855.00</td><td>61.86</td><td>110.80</td><td>-48.94</td><td>47.53</td><td>35.30</td><td>11.52</td><td>32.49</td><td>376</td><td>1 PEAK</td></tr><tr><td>3</td><td>5924.33</td><td>52.03</td><td>68.70</td><td>-16.67</td><td>37.78</td><td>35.39</td><td>11.40</td><td>32.54</td><td>376</td><td>1 PEAK</td></tr><tr><td>4</td><td>5948.08</td><td>53.75</td><td>68.30</td><td>-14.55</td><td>39.52</td><td>35.43</td><td>11.36</td><td>32.56</td><td>376</td><td>1 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5854.33	65.13	112.34	-47.21	50.80	35.30	11.52	32.49	376	1 PEAK	2	5855.00	61.86	110.80	-48.94	47.53	35.30	11.52	32.49	376	1 PEAK	3	5924.33	52.03	68.70	-16.67	37.78	35.39	11.40	32.54	376	1 PEAK	4	5948.08	53.75	68.30	-14.55	39.52	35.43	11.36	32.56	376	1 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>105.46</td><td>-----</td><td>91.10</td><td>35.26</td><td>11.57</td><td>32.47</td><td>376</td><td>1 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5825.00	105.46	-----	91.10	35.26	11.57	32.47	376
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5854.33	65.13	112.34	-47.21	50.80	35.30	11.52	32.49	376	1 PEAK																																																																																																																	
2	5855.00	61.86	110.80	-48.94	47.53	35.30	11.52	32.49	376	1 PEAK																																																																																																																	
3	5924.33	52.03	68.70	-16.67	37.78	35.39	11.40	32.54	376	1 PEAK																																																																																																																	
4	5948.08	53.75	68.30	-14.55	39.52	35.43	11.36	32.56	376	1 PEAK																																																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	105.46	-----	91.10	35.26	11.57	32.47	376	1 PEAK																																																																																																																		
Avg																																																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>98.85</td><td>-----</td><td>84.48</td><td>35.25</td><td>11.58</td><td>32.46</td><td>376</td><td>1 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5825.00	98.85	-----	84.48	35.25	11.58	32.46	376	1 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>98.85</td><td>-----</td><td>84.48</td><td>35.25</td><td>11.58</td><td>32.46</td><td>376</td><td>1 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5825.00	98.85	-----	84.48	35.25	11.58	32.46	376	1 AVERAGE																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	98.85	-----	84.48	35.25	11.58	32.46	376	1 AVERAGE																																																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5825.00	98.85	-----	84.48	35.25	11.58	32.46	376	1 AVERAGE																																																																																																																		



Mode	28																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2024-06-29 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11650.00</td><td>48.85</td><td>74.00</td><td>-25.15</td><td>44.61</td><td>39.92</td><td>14.93</td><td>50.61</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17475.00</td><td>48.72</td><td>68.30</td><td>-19.58</td><td>40.95</td><td>42.31</td><td>17.63</td><td>52.17</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11650.00	48.85	74.00	-25.15	44.61	39.92	14.93	50.61	--	--	Peak	2	17475.00	48.72	68.30	-19.58	40.95	42.31	17.63	52.17	--	--	Peak	Level (dBuV/m) Date: 2024-06-29 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11650.00</td><td>49.16</td><td>74.00</td><td>-24.84</td><td>44.92</td><td>39.92</td><td>14.93</td><td>50.61</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17475.00</td><td>48.25</td><td>68.30</td><td>-20.05</td><td>40.48</td><td>42.31</td><td>17.63</td><td>52.17</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11650.00	49.16	74.00	-24.84	44.92	39.92	14.93	50.61	--	--	Peak	2	17475.00	48.25	68.30	-20.05	40.48	42.31	17.63	52.17	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	11650.00	48.85	74.00	-25.15	44.61	39.92	14.93	50.61	--	--	Peak																																																																																																																							
2	17475.00	48.72	68.30	-19.58	40.95	42.31	17.63	52.17	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	11650.00	49.16	74.00	-24.84	44.92	39.92	14.93	50.61	--	--	Peak																																																																																																																							
2	17475.00	48.25	68.30	-20.05	40.48	42.31	17.63	52.17	--	--	Peak																																																																																																																							





Mode	29																																																																																																																				
	Band Edge																																																																																																																				
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																				
ANT	1																																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																																			
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5611.53</td><td>53.38</td><td>68.30</td><td>-14.92</td><td>39.01</td><td>34.96</td><td>11.71</td><td>32.30</td><td>356</td><td>84 PEAK</td></tr><tr><td>2</td><td>5650.11</td><td>52.07</td><td>68.38</td><td>-16.31</td><td>37.70</td><td>35.01</td><td>11.69</td><td>32.33</td><td>356</td><td>84 PEAK</td></tr><tr><td>3</td><td>5719.12</td><td>63.03</td><td>110.55</td><td>-47.52</td><td>48.64</td><td>35.11</td><td>11.66</td><td>32.38</td><td>356</td><td>84 PEAK</td></tr><tr><td>4</td><td>5722.03</td><td>70.33</td><td>115.43</td><td>-45.10</td><td>55.95</td><td>35.11</td><td>11.65</td><td>32.38</td><td>356</td><td>84 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5611.53	53.38	68.30	-14.92	39.01	34.96	11.71	32.30	356	84 PEAK	2	5650.11	52.07	68.38	-16.31	37.70	35.01	11.69	32.33	356	84 PEAK	3	5719.12	63.03	110.55	-47.52	48.64	35.11	11.66	32.38	356	84 PEAK	4	5722.03	70.33	115.43	-45.10	55.95	35.11	11.65	32.38	356	84 PEAK	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>105.28</td><td>-----</td><td>90.90</td><td>35.14</td><td>11.64</td><td>32.40</td><td>356</td><td>84</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	105.28	-----	90.90	35.14	11.64	32.40	356	84	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5611.53	53.38	68.30	-14.92	39.01	34.96	11.71	32.30	356	84 PEAK																																																																																																											
2	5650.11	52.07	68.38	-16.31	37.70	35.01	11.69	32.33	356	84 PEAK																																																																																																											
3	5719.12	63.03	110.55	-47.52	48.64	35.11	11.66	32.38	356	84 PEAK																																																																																																											
4	5722.03	70.33	115.43	-45.10	55.95	35.11	11.65	32.38	356	84 PEAK																																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5745.00	105.28	-----	90.90	35.14	11.64	32.40	356	84	PEAK																																																																																																											
Avg	Blank	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5745.00</td><td>98.93</td><td>-----</td><td>84.55</td><td>35.14</td><td>11.64</td><td>32.40</td><td>356</td><td>84</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	98.93	-----	84.55	35.14	11.64	32.40	356	84	AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5745.00	98.93	-----	84.55	35.14	11.64	32.40	356	84	AVERAGE																																																																																																											





Mode	29									
	Band Edge									
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz									
ANT	1									
Pol.	Vertical					Fundamental				
Peak	Level (dBuV/m) Date: 2024-06-26									

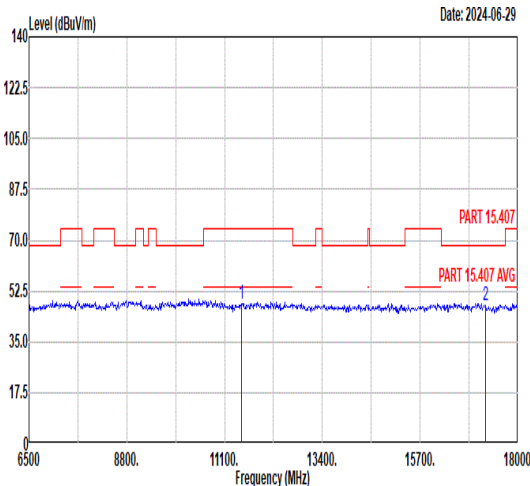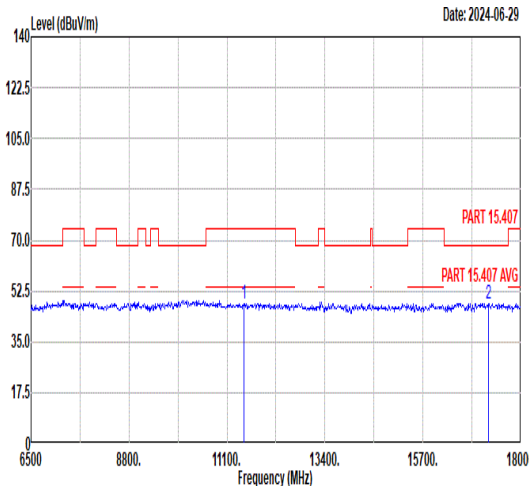

Mode	29																																																																																																																				
	Harmonic																																																																																																																				
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																				
ANT	1																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																														
Peak Avg																																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>11490.00</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>43.96</td><td>39.79</td><td>14.83</td><td>50.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17235.00</td><td>47.78</td><td>68.30</td><td>-20.52</td><td>39.73</td><td>42.41</td><td>17.57</td><td>51.93</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	47.88	74.00	-26.12	43.96	39.79	14.83	50.70	--	--	Peak	2	17235.00	47.78	68.30	-20.52	39.73	42.41	17.57	51.93	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>11490.00</td><td>48.06</td><td>74.00</td><td>-25.94</td><td>44.14</td><td>39.79</td><td>14.83</td><td>50.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17235.00</td><td>48.18</td><td>68.30</td><td>-20.12</td><td>40.13</td><td>42.41</td><td>17.57</td><td>51.93</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11490.00	48.06	74.00	-25.94	44.14	39.79	14.83	50.70	--	--	Peak	2	17235.00	48.18	68.30	-20.12	40.13	42.41	17.57	51.93	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	11490.00	47.88	74.00	-26.12	43.96	39.79	14.83	50.70	--	--	Peak																																																																																																										
2	17235.00	47.78	68.30	-20.52	39.73	42.41	17.57	51.93	--	--	Peak																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	11490.00	48.06	74.00	-25.94	44.14	39.79	14.83	50.70	--	--	Peak																																																																																																										
2	17235.00	48.18	68.30	-20.12	40.13	42.41	17.57	51.93	--	--	Peak																																																																																																										

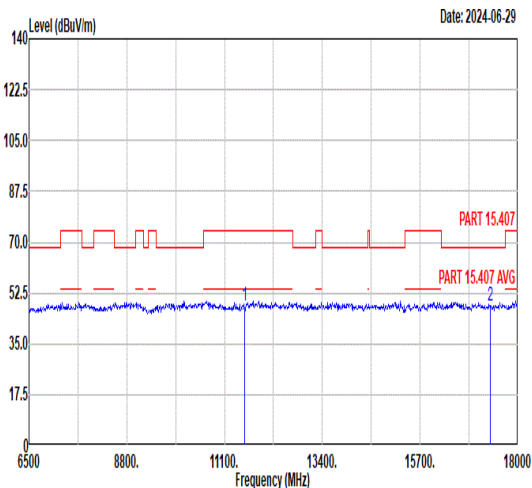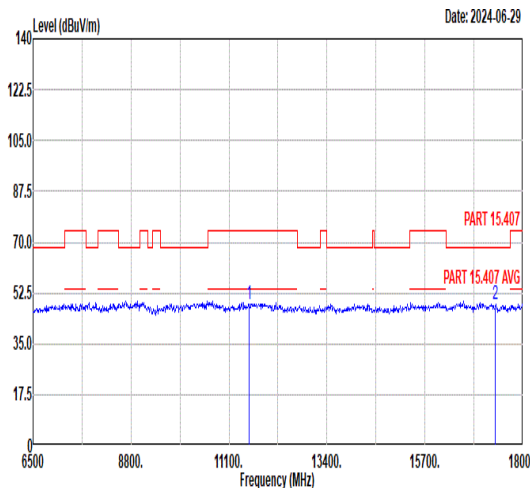

Mode	30																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11570.00</td><td>48.25</td><td>74.00</td><td>-25.75</td><td>44.17</td><td>39.86</td><td>14.88</td><td>50.66</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>48.01</td><td>68.30</td><td>-20.29</td><td>40.10</td><td>42.36</td><td>17.60</td><td>52.05</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11570.00	48.25	74.00	-25.75	44.17	39.86	14.88	50.66	--	--	Peak	2	17355.00	48.01	68.30	-20.29	40.10	42.36	17.60	52.05	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11570.00</td><td>48.63</td><td>74.00</td><td>-25.37</td><td>44.55</td><td>39.86</td><td>14.88</td><td>50.66</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17355.00</td><td>48.34</td><td>68.30</td><td>-19.96</td><td>40.43</td><td>42.36</td><td>17.60</td><td>52.05</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11570.00	48.63	74.00	-25.37	44.55	39.86	14.88	50.66	--	--	Peak	2	17355.00	48.34	68.30	-19.96	40.43	42.36	17.60	52.05	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11570.00	48.25	74.00	-25.75	44.17	39.86	14.88	50.66	--	--	Peak																																																																																																																							
2	17355.00	48.01	68.30	-20.29	40.10	42.36	17.60	52.05	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11570.00	48.63	74.00	-25.37	44.55	39.86	14.88	50.66	--	--	Peak																																																																																																																							
2	17355.00	48.34	68.30	-19.96	40.43	42.36	17.60	52.05	--	--	Peak																																																																																																																							





Mode	31																																																																																																															
	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5854.69</td><td>58.74</td><td>111.51</td><td>-52.77</td><td>44.41</td><td>35.30</td><td>11.52</td><td>32.49</td><td>104</td><td>30 PEAK</td></tr><tr><td>2 5855.44</td><td>60.57</td><td>110.68</td><td>-50.11</td><td>46.24</td><td>35.30</td><td>11.52</td><td>32.49</td><td>104</td><td>30 PEAK</td></tr><tr><td>3 5924.69</td><td>52.03</td><td>68.43</td><td>-16.40</td><td>37.78</td><td>35.39</td><td>11.40</td><td>32.54</td><td>104</td><td>30 PEAK</td></tr><tr><td>4 5933.08</td><td>52.19</td><td>68.30</td><td>-16.11</td><td>37.94</td><td>35.41</td><td>11.39</td><td>32.55</td><td>104</td><td>30 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5854.69	58.74	111.51	-52.77	44.41	35.30	11.52	32.49	104	30 PEAK	2 5855.44	60.57	110.68	-50.11	46.24	35.30	11.52	32.49	104	30 PEAK	3 5924.69	52.03	68.43	-16.40	37.78	35.39	11.40	32.54	104	30 PEAK	4 5933.08	52.19	68.30	-16.11	37.94	35.41	11.39	32.55	104	30 PEAK	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5825.00</td><td>104.94</td><td>-----</td><td>-----</td><td>90.57</td><td>35.25</td><td>11.58</td><td>32.46</td><td>104</td><td>30 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5825.00	104.94	-----	-----	90.57	35.25	11.58	32.46	104	30 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5854.69	58.74	111.51	-52.77	44.41	35.30	11.52	32.49	104	30 PEAK																																																																																																							
2 5855.44	60.57	110.68	-50.11	46.24	35.30	11.52	32.49	104	30 PEAK																																																																																																							
3 5924.69	52.03	68.43	-16.40	37.78	35.39	11.40	32.54	104	30 PEAK																																																																																																							
4 5933.08	52.19	68.30	-16.11	37.94	35.41	11.39	32.55	104	30 PEAK																																																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5825.00	104.94	-----	-----	90.57	35.25	11.58	32.46	104	30 PEAK																																																																																																							
Avg	Blank	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5825.00</td><td>98.48</td><td>-----</td><td>-----</td><td>84.11</td><td>35.25</td><td>11.58</td><td>32.46</td><td>104</td><td>30 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5825.00	98.48	-----	-----	84.11	35.25	11.58	32.46	104	30 AVERAGE																																																																						
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5825.00	98.48	-----	-----	84.11	35.25	11.58	32.46	104	30 AVERAGE																																																																																																							



Mode	31																																																																																															
	Band Edge																																																																																															
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																															
ANT	1																																																																																															
Pol.	Vertical	Fundamental																																																																																														
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>5854.94</td><td>61.60</td><td>110.94</td><td>-49.34</td><td>47.27</td><td>35.30</td><td>11.52</td><td>32.49</td><td>376</td><td>0 PEAK</td></tr><tr><td>2</td><td>5855.00</td><td>59.93</td><td>110.80</td><td>-50.87</td><td>45.60</td><td>35.30</td><td>11.52</td><td>32.49</td><td>376</td><td>0 PEAK</td></tr><tr><td>3</td><td>5923.43</td><td>52.92</td><td>69.36</td><td>-16.44</td><td>38.66</td><td>35.39</td><td>11.41</td><td>32.54</td><td>376</td><td>0 PEAK</td></tr><tr><td>4</td><td>5931.19</td><td>53.31</td><td>68.30</td><td>-14.99</td><td>39.07</td><td>35.40</td><td>11.39</td><td>32.55</td><td>376</td><td>0 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				1	5854.94	61.60	110.94	-49.34	47.27	35.30	11.52	32.49	376	0 PEAK	2	5855.00	59.93	110.80	-50.87	45.60	35.30	11.52	32.49	376	0 PEAK	3	5923.43	52.92	69.36	-16.44	38.66	35.39	11.41	32.54	376	0 PEAK	4	5931.19	53.31	68.30	-14.99	39.07	35.40	11.39	32.55	376	0 PEAK	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>104.09</td><td>-----</td><td>89.72</td><td>35.25</td><td>11.58</td><td>32.46</td><td>376</td><td>0 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				1	5825.00	104.09	-----	89.72	35.25	11.58	32.46	376	0 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																										
1	5854.94	61.60	110.94	-49.34	47.27	35.30	11.52	32.49	376	0 PEAK																																																																																						
2	5855.00	59.93	110.80	-50.87	45.60	35.30	11.52	32.49	376	0 PEAK																																																																																						
3	5923.43	52.92	69.36	-16.44	38.66	35.39	11.41	32.54	376	0 PEAK																																																																																						
4	5931.19	53.31	68.30	-14.99	39.07	35.40	11.39	32.55	376	0 PEAK																																																																																						
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																										
1	5825.00	104.09	-----	89.72	35.25	11.58	32.46	376	0 PEAK																																																																																							
Avg	Blank	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>97.87</td><td>-----</td><td>83.50</td><td>35.25</td><td>11.58</td><td>32.46</td><td>376</td><td>0 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				1	5825.00	97.87	-----	83.50	35.25	11.58	32.46	376	0 AVERAGE																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																										
1	5825.00	97.87	-----	83.50	35.25	11.58	32.46	376	0 AVERAGE																																																																																							

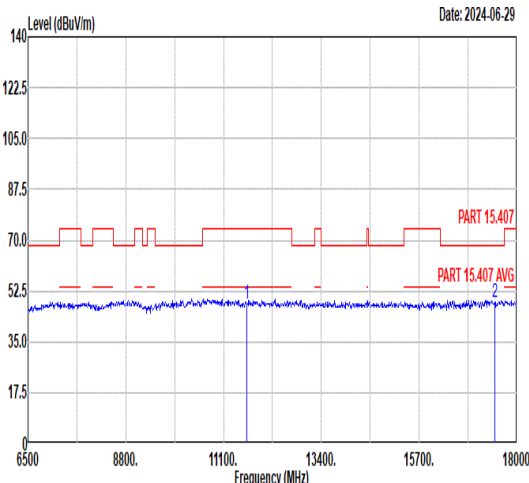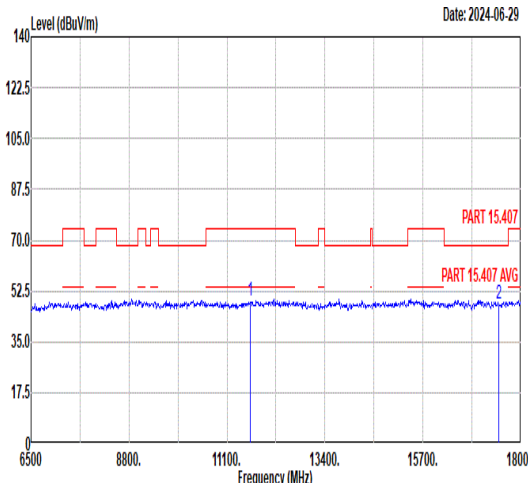

Mode	31																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11650.00</td><td>48.32</td><td>74.00</td><td>-25.68</td><td>44.08</td><td>39.92</td><td>14.93</td><td>50.61</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17475.00</td><td>48.83</td><td>68.30</td><td>-19.47</td><td>41.06</td><td>42.31</td><td>17.63</td><td>52.17</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11650.00	48.32	74.00	-25.68	44.08	39.92	14.93	50.61	--	--	Peak	2	17475.00	48.83	68.30	-19.47	41.06	42.31	17.63	52.17	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11650.00</td><td>49.01</td><td>74.00</td><td>-24.99</td><td>44.77</td><td>39.92</td><td>14.93</td><td>50.61</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17475.00</td><td>48.12</td><td>68.30</td><td>-20.18</td><td>40.35</td><td>42.31</td><td>17.63</td><td>52.17</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11650.00	49.01	74.00	-24.99	44.77	39.92	14.93	50.61	--	--	Peak	2	17475.00	48.12	68.30	-20.18	40.35	42.31	17.63	52.17	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11650.00	48.32	74.00	-25.68	44.08	39.92	14.93	50.61	--	--	Peak																																																																																																																							
2	17475.00	48.83	68.30	-19.47	41.06	42.31	17.63	52.17	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11650.00	49.01	74.00	-24.99	44.77	39.92	14.93	50.61	--	--	Peak																																																																																																																							
2	17475.00	48.12	68.30	-20.18	40.35	42.31	17.63	52.17	--	--	Peak																																																																																																																							



Mode	32																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5628.61</td><td>53.29</td><td>68.30</td><td>-15.01</td><td>38.92</td><td>34.98</td><td>11.70</td><td>32.31</td><td>104 30 PEAK</td></tr><tr><td>2</td><td>5650.45</td><td>51.62</td><td>68.64</td><td>-17.02</td><td>37.25</td><td>35.01</td><td>11.69</td><td>32.33</td><td>104 30 PEAK</td></tr><tr><td>3</td><td>5718.98</td><td>74.38</td><td>110.51</td><td>-36.13</td><td>59.99</td><td>35.11</td><td>11.66</td><td>32.38</td><td>104 30 PEAK</td></tr><tr><td>4</td><td>5720.68</td><td>74.18</td><td>112.36</td><td>-38.18</td><td>59.79</td><td>35.11</td><td>11.66</td><td>32.38</td><td>104 30 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5628.61	53.29	68.30	-15.01	38.92	34.98	11.70	32.31	104 30 PEAK	2	5650.45	51.62	68.64	-17.02	37.25	35.01	11.69	32.33	104 30 PEAK	3	5718.98	74.38	110.51	-36.13	59.99	35.11	11.66	32.38	104 30 PEAK	4	5720.68	74.18	112.36	-38.18	59.79	35.11	11.66	32.38	104 30 PEAK	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>103.71</td><td>-----</td><td>89.32</td><td>35.16</td><td>11.64</td><td>32.41</td><td>104</td><td>30 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	103.71	-----	89.32	35.16	11.64	32.41	104	30 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5628.61	53.29	68.30	-15.01	38.92	34.98	11.70	32.31	104 30 PEAK																																																																																																							
2	5650.45	51.62	68.64	-17.02	37.25	35.01	11.69	32.33	104 30 PEAK																																																																																																							
3	5718.98	74.38	110.51	-36.13	59.99	35.11	11.66	32.38	104 30 PEAK																																																																																																							
4	5720.68	74.18	112.36	-38.18	59.79	35.11	11.66	32.38	104 30 PEAK																																																																																																							
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5755.00	103.71	-----	89.32	35.16	11.64	32.41	104	30 PEAK																																																																																																							
Avg	Blank	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>96.28</td><td>-----</td><td>81.89</td><td>35.15</td><td>11.64</td><td>32.40</td><td>104</td><td>30 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	96.28	-----	81.89	35.15	11.64	32.40	104	30 AVERAGE																																																																						
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5755.00	96.28	-----	81.89	35.15	11.64	32.40	104	30 AVERAGE																																																																																																							



Mode	32																																																																																		
	Band Edge - R																																																																																		
	U-NII-3_ 5.725-5.85_ 802.11n HT40_ CH151_ 5755MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal						Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2024-06-26 Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5855.00</td><td>51.02</td><td>110.81</td><td>-59.79</td><td>36.69</td><td>35.30</td><td>11.52</td><td>32.49</td><td>104</td><td>30</td><td>PEAK</td></tr><tr><td>2</td><td>5873.66</td><td>50.95</td><td>105.58</td><td>-54.63</td><td>36.64</td><td>35.32</td><td>11.49</td><td>32.50</td><td>104</td><td>30</td><td>PEAK</td></tr><tr><td>3</td><td>5923.99</td><td>51.68</td><td>68.95</td><td>-17.27</td><td>37.42</td><td>35.39</td><td>11.41</td><td>32.54</td><td>104</td><td>30</td><td>PEAK</td></tr><tr><td>4</td><td>5947.78</td><td>52.36</td><td>68.30</td><td>-15.94</td><td>38.13</td><td>35.43</td><td>11.36</td><td>32.56</td><td>104</td><td>30</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg		1	5855.00	51.02	110.81	-59.79	36.69	35.30	11.52	32.49	104	30	PEAK	2	5873.66	50.95	105.58	-54.63	36.64	35.32	11.49	32.50	104	30	PEAK	3	5923.99	51.68	68.95	-17.27	37.42	35.39	11.41	32.54	104	30	PEAK	4	5947.78	52.36	68.30	-15.94	38.13	35.43	11.36	32.56	104	30	PEAK	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	Level	Factor	Loss	Factor	cm	deg																																																																									
1	5855.00	51.02	110.81	-59.79	36.69	35.30	11.52	32.49	104	30	PEAK																																																																								
2	5873.66	50.95	105.58	-54.63	36.64	35.32	11.49	32.50	104	30	PEAK																																																																								
3	5923.99	51.68	68.95	-17.27	37.42	35.39	11.41	32.54	104	30	PEAK																																																																								
4	5947.78	52.36	68.30	-15.94	38.13	35.43	11.36	32.56	104	30	PEAK																																																																								

