

	    CERTIFICATE 2518.08 MS ISO/IEC 17025 TESTING SAMMNO. 0825																																		
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia.	FCC / ISED TEST REPORT Report Revision : Rev.D																																		
<table><tr><td>Date/s Tested</td><td>: 26-December-2019 - 15-January-2020</td></tr><tr><td>Report Issue Date</td><td>: 5-February-2020</td></tr><tr><td>Manufacturer</td><td>: Motorola Solutions Malaysia SDN BHD</td></tr><tr><td>Manufacturer Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>Requestor</td><td>: TANG, GARY</td></tr><tr><td>Product Type</td><td>: Mobile</td></tr><tr><td>Product Version (PMN)</td><td>: APX6500</td></tr><tr><td>Model Number (HVIN)</td><td>: M25QSS9PW1BN</td></tr><tr><td>Frequency Band</td><td>: 380-470MHz</td></tr><tr><td>Firmware Version (FVIN)</td><td>: D20.75.46</td></tr><tr><td>Low / Max RF Output Power</td><td>: 1 Watts / 48 Watts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>ISED Registrations</td><td>: MY0001</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr></table>  The equipment was tested accordance to the requirement listed below: <table><tr><td>(LMR)</td><td></td></tr><tr><td>FCC 47 CFR Part 2/ 22 / 24 / 74 / 80 / 90</td><td>PASS</td></tr><tr><td>ISED RSS- Gen Issue 5 / 119 Issue 12 / 182 Issue 5</td><td></td></tr></table>		Date/s Tested	: 26-December-2019 - 15-January-2020	Report Issue Date	: 5-February-2020	Manufacturer	: Motorola Solutions Malaysia SDN BHD	Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Requestor	: TANG, GARY	Product Type	: Mobile	Product Version (PMN)	: APX6500	Model Number (HVIN)	: M25QSS9PW1BN	Frequency Band	: 380-470MHz	Firmware Version (FVIN)	: D20.75.46	Low / Max RF Output Power	: 1 Watts / 48 Watts	Applicant Name	: Motorola Solutions Inc	ISED Registrations	: MY0001	FCC Registrations	: 461337	(LMR)		FCC 47 CFR Part 2/ 22 / 24 / 74 / 80 / 90	PASS	ISED RSS- Gen Issue 5 / 119 Issue 12 / 182 Issue 5	
Date/s Tested	: 26-December-2019 - 15-January-2020																																		
Report Issue Date	: 5-February-2020																																		
Manufacturer	: Motorola Solutions Malaysia SDN BHD																																		
Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																		
Requestor	: TANG, GARY																																		
Product Type	: Mobile																																		
Product Version (PMN)	: APX6500																																		
Model Number (HVIN)	: M25QSS9PW1BN																																		
Frequency Band	: 380-470MHz																																		
Firmware Version (FVIN)	: D20.75.46																																		
Low / Max RF Output Power	: 1 Watts / 48 Watts																																		
Applicant Name	: Motorola Solutions Inc																																		
ISED Registrations	: MY0001																																		
FCC Registrations	: 461337																																		
(LMR)																																			
FCC 47 CFR Part 2/ 22 / 24 / 74 / 80 / 90	PASS																																		
ISED RSS- Gen Issue 5 / 119 Issue 12 / 182 Issue 5																																			
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																																			
Prepared By:  LIM KHAY KWANG Test Personnel	Approved By:  VINCENT FOONG CHUEN KIT Deputy Technical Manager																																		

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty	6
4.0 Equipment List.....	6
5.0 Test Condition.....	9
5.1. Transmitter Test Conditions	9
6.0 Transmitter Test Parameters	10
6.1. RF Output Power	10
6.1.1. Test Setup.....	10
6.1.2. Test Result	10
6.2. Frequency Stability	11
6.2.1. Test Setup.....	11
6.2.2. Test Result	12
6.2.3. Test Limit.....	13
6.3. Audio Frequency Response	14
6.3.1. Test Setup.....	14
6.3.2. Test Result	15
6.3.3. Test Limit.....	16
6.4. Audio Low Pass Filter Response	17
6.4.1. Test Setup.....	17
6.4.2. Test Result	18
6.4.3. Test Limit.....	19
6.5. Modulation Limiting	20
6.5.1. Test Setup.....	20
6.5.2. Test Result	21
6.5.3. Test Limit.....	22
6.6. Occupied Bandwidth.....	23
6.6.1. Test Setup (Analog)	23
6.6.2. Test Result (Analog).....	24
6.6.3. Test Setup (Digital).....	30
6.6.4. Test Result (Digital).....	31
6.6.5. Test Limit.....	38
6.7. Band Edge Conducted Spurious Emission (Part 22)	39
6.7.1. Test Setup (Analog)	39
6.7.2. Test Result (Analog).....	40
6.7.3. Test Setup (Digital).....	41
6.7.4. Test Result (Digital).....	42
6.7.5. Test Limit.....	43
6.8. Transient Frequency Behavior.....	44
6.8.1. Test Setup.....	44
6.8.2. Test Result	45
6.8.3. Test Limit.....	47

6.9.	Adjacent Channel Power.....	48
6.9.1.	Test Setup (Analog).....	48
6.9.2.	Test Result(Analog).....	48
6.9.3.	Test Setup (Digital).....	49
6.9.4.	Test Result (Digital).....	49
6.9.5.	Test limit.....	50
6.10.	Conducted Spurious Emission	52
6.10.1.	Test Setup.....	52
6.10.2.	Test Result (Analog).....	53
6.10.3.	Test Result (Digital).....	65
6.10.4.	Test Limit.....	89
6.11.	Radiated Spurious Emission	90
6.11.1.	Test Setup.....	90
6.11.1.	Test Result (Analog).....	91
6.11.2.	Test Result (Digital).....	103
6.11.3.	Test Limit.....	129
6.12.	Effective Radiated Power (ERP)	130
6.12.1.	Test Setup.....	130
6.12.2.	Test Result	131
6.12.3.	Test Limit.....	131
6.13.	GNSS (EIRP for 1559 - 1610MHz).....	132
6.13.1.	Test Setup.....	132
6.13.2.	Test Result	132
6.13.3.	Test Limit.....	133

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	17-January-2020	Khay Kwang
Rev. B	Added ERP data	11-April-2020	Vincent Foong
Rev. C	Added Carson's rule	21-April-2020	Vincent Foong
Rev. D	Removed FXD/E emission designators	5-May-2020	Vincent Foong

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, C4FM , Phase II

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
Water Resistant Microphone	MOTOROLA	HMN1089C-C2
13 Watt Speaker (Motorcycle) - Non EPP Compliant	MOTOROLA	HSN6003C-CF1
MOBILE PWR CABLE 20 FT, 10 AWG, 20A	MOTOROLA	13921-HKN4192B-1
CABLE, DATA, USB, 1-1/2M, XTL5000	MOTOROLA	3466-HKN6163C-3
O7 Control Head (English)	MOTOROLA	PMHN4194C-C6

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.4-2014

ANSI C63.26-2015

No modifications were done to the UUT to facilitate the tests in this report.

Deviation from standard

Not applicable as no deviation from standard test method

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remark	Serial number tested
2.1046,90.541(700MHz), 22.565,74.461,74.534, 80.215	RSS-119	RF Power Output	Pass	-	471TVZ0891
2.1055, 90.213, 22.355	RSS-119	Frequency Stability	Pass	-	471TVZ0891
2.1047,74.463,80.213	RSS-119	Audio Frequency Response	Pass	-	471TVZ0891
2.1047,74.463,80.213	RSS-119	Audio Low Pass Filter Response	Pass	-	471TVZ0891
2.1047,74.463,80.213	RSS-119	Modulation limiting	Pass	-	471TVZ0891
2.1049,90.210, 22.359,74.462(c), 80.211(c),90.210	RSS-119 RSS-182	Occupied Bandwidth	Pass	20K0F1E-12.4103kHz 16K0F3E-15.1755kHz 11K0F3E-10.0930kHz 8K10F1D-8.0603kHz 8K10F1E-7.2688kHz 8K10F1W-8.0930kHz	471TVZ0891
22.359(a),(b)	RSS-119	Band Edge Conducted Spurious Emission	Pass	16K0F3E-14.974kHz 8K10F1D-8.017kHz	471TVZ0891
90.214	RSS-119	Transient Frequency Behavior	Pass	-	471TVZ0891
-	-	Adjacent Channel Power	NA	-	NA
2.1051, 22.359, 74.462, 90.210	RSS-119	Conducted Spurious Emissions	Pass	No spur detected (noise floor)	471TVZ0891
2.1051, 22.359, 74.462, 90.210	RSS-119	Radiated Spurious Emission	Pass	Highest spur Level- -40.33dBm	471TVZ0920, 471TVZ0888, 471TVZ0910
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA	-	NA
-	-	Effective Radiated Power (ERP)	NA	-	NA

NA → Not Applicable

3.0 Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	4.03
	200MHz ~ 1000MHz	4.03
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.03
	18GHz ~ 25GHz	4.03

4.0 Equipment List

FCC Analog ATE#1: (SW version: 2.4.5 & FCC_Frequency Stability 1.0.3 rev.)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
Audio Analyzer	8903B	3729A17612	15-Nov-17	15-Nov-20
SIGNAL GENERATOR	2042	203002/747	22-Jan-19	22-Jan-20
MODULATION ANALYZER	8901B	3538A5696	4-Apr-19	4-Apr-20
DSA	36570A	MY42506790	4-Apr-19	4-Apr-20
POWER SENSOR	E9301B	MY41502652	31-Jul-19	31-Jul-20
POWER METER	E4416A	GB41293747	19-Nov-18	19-Nov-20
POWER SUPPLY	6623A	2916A01562	31-Mar-19	31-Mar-20
CHAMBER	SH-641	92009188	29-Mar-19	29-Mar-20
N to N RF Cable # 1	M17/128-RG400	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to BNC RF Cable # 7	RG 58	NA	NA	NA
N to SMA RF Cable # 1	RG 58	NA	NA	NA
N to SMA RF Cable # 2	RG 58	NA	NA	NA
N to SMA RF Cable # 3	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-34-LIM	NA	NA	NA

FCC Transient ATE #1: (SW version: FCC Transient ATE_R1.1.2)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
POWER SUPPLY	6031A	2430A00146	5-Apr-19	5-Apr-20
POWER SENSOR	E4412A	MY41498918	31-Jul-19	31-Jul-20
POWER METER	E4416A	GB41293866	26-Feb-19	26-Feb-21
ATTENUATORS/SWITCH DRIVER	11713A	2508A10141	CNR	CNR
STEP ATTENUATOR/11dB	8494G	MY42143870	17-May-19	17-May-20
STEP ATTENUATOR/110dB	8496G	MY42143622	17-May-19	17-May-20
OSCILLOSCOPE	MSO8104A	MY45002372	17-Jun-19	17-Jun-20
AUDIO ANALYZER	8903B	3011A08952	5-Jul-19	5-Jul-20
AUDIO ANALYZER	8903B	3729A17409	4-Jul-19	4-Jul-20
MODULATION ANALYZER	8901B	3226A04052	3-Apr-19	3-Apr-20
SIGNAL GENERATOR	8657B	3427U06025	5-Apr-19	5-Apr-20
SPECTRUM ANALYZER	E4440A	MY48250517	11-Sep-19	11-Sep-21
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	M17/128-RG400	NA	NA	NA
N to N RF Cable # 3	M17/128-RG400	NA	NA	NA
N to N RF Cable # 4	M17/128-RG400	NA	NA	NA
N to N RF Cable # 5	M17/128-RG400	NA	NA	NA
N to N RF Cable # 6	M17/128-RG400	NA	NA	NA
N to N RF Cable # 7	M17/128-RG400	NA	NA	NA
N to N RF Cable # 8	M17/128-RG400	NA	NA	NA
N to N RF Cable # 9	M17/128-RG400	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 10dB	49-10-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR

CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE_rev 1.23.02)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
PSA Series Spectrum Analyzer	E4445A	MY46181732	12-Mar-19	12-Mar-21
POWER SUPPLY	6032A	2723A02219	2-Jul-19	2-Jul-20
HIGH PASS FILTER SWITCH BOX	-	CS001	6-Jul-19	6-Jul-20
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	SF126/11N/11N	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

Radiated Emission: EMC Chamber 1

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	720	21-Mar-19	21-Mar-21
DRG HORN FREQ.	SAS-571	1143	14-Feb-19	14-Feb-21
POWER SUPPLY	6032A	MY41001736	25-May-19	25-May-20
SIGNAL GENERATOR	SMB 100A	181117	8-Nov-18	8-Nov-21
EMI TEST RECEIVER	ESW44	101750	24-Jul-19	24-Jul-20
EMI TEST RECEIVER	ESIB26	100017	19-Jul-19	19-Jul-20
5m Semi-anechoic Chamber	S800-HX	J2308	Not Required	Not Required
BILOG ANTENNA	CBL6112D	30991	5-Aug-19	5-Aug-20
BILOG ANTENNA	CBL6112B	2964	16-Feb-18	16-Feb-20
DATA LOGGER	SDL500	A.016800	19-Mar-19	18-Mar-20
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONING TOWER	TLT2	NA	Not Required	Not Required
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	23-Jun-19	23-Jun-20
18 - 40GHz PREAMPLIFIER	Miteq Hi Gain Sucoflex	001	Not Required	Not Required
PREAMPLIFIER	PAM-0118	269	24-May-19	24-May-20
LOOP ANTENNA	6502	00208416	5-Sep-19	5-Sep-20
Test Software	EMC_FCC_IC_Bluetooth_RE_Test			
Version	EMC_FCC_RE_v1.6.1			

CNR → Calibration Not Required

5.0 Test Condition

5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By	Environmental conditions
RF Output Power	Low & Max	Analog	380.0125,406.2,450.65, 459.125,467.775	Khay Kwang	25.1°C, 54.3%RH
Frequency Stability	Max	Analog	467.775	Khay Kwang	25.1°C, 54.3%RH, 60.3°C, 50%RH, -30.1°C, 50%RH
Audio Frequency Response (12.5kHz / 25kHz)	Max	Analog	467.775	Khay Kwang	25.1°C, 54.3%RH
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	Analog	467.775	Khay Kwang	25.1°C, 54.3%RH
Modulation limiting (12.5kHz / 25kHz)	Max	Analog	467.775	Khay Kwang	25.1°C, 54.3%RH, 60.3°C, 50%RH, -30.1°C, 50%RH
Occupied Bandwidth (12.5kHz / 25kHz)	Max	Analog, C4FM, Phase II	406.2,450.65,467.775, 459.125	Khay Kwang	25.1°C, 54.3%RH
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Max	Analog, C4FM, Phase II	459.025,459.65	Khay Kwang	25.1°C, 54.3%RH
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max	Analog	467.775	Khay Kwang	25.1°C, 54.3%RH
Adjacent Channel Power (700MHz Band) (12.5kHz)	Max	Analog	NA	NA	25.1°C, 54.3%RH
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Low / Max	Analog, C4FM, Phase II	380.0125,406.2,450.025, 459.125,467.775, 469.9875	Khay Kwang	25.1°C, 54.3%RH
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	Analog, C4FM, Phase II	380.0125,406.2,450.025, 459.125,467.775, 469.9875	Nazrin&Azil	23.1°C, 70%RH
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	Analog	NA	NA	NA
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	Analog	NA	NA	NA

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

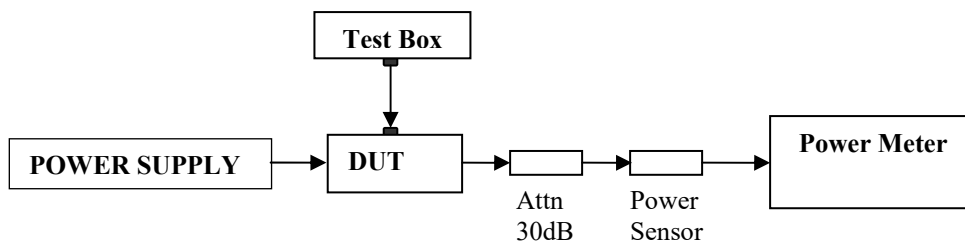


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C				
Voltage (V)	13.6V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	Remarks
380.0125	0.948	1.92	46	8.22	
406.2000	0.955	1.83	45.8	7.59	
450.0250	0.927	1.83	46.2	8.34	
459.0250	0.926	1.83	46	8.31	
459.1250	0.925	1.83	46	8.31	
459.6500	0.929	1.83	45.9	8.28	
467.775	0.930	1.83	46.1	8.22	Part 80 Max Conducted Power equivalent to low power measurement
469.9875	0.928	1.83	45.8	8.22	

6.2. Frequency Stability

6.2.1. Test Setup

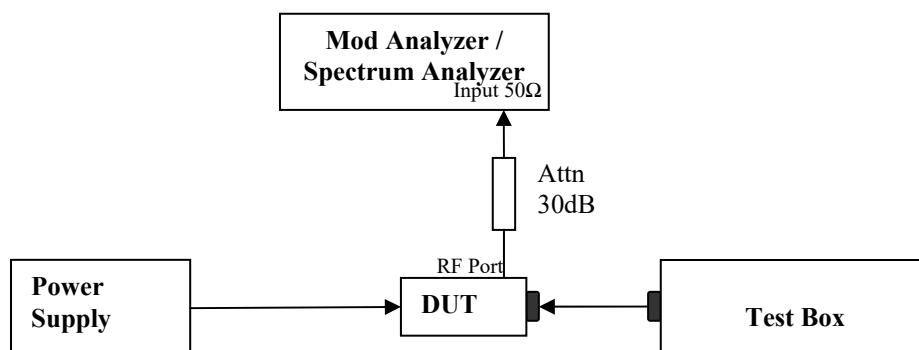


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions:
 - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
 - Supply Voltage:
 - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
 - Portable: The frequency of the transmitter was measured from nominal $\pm x$ % as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:


$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$

Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result

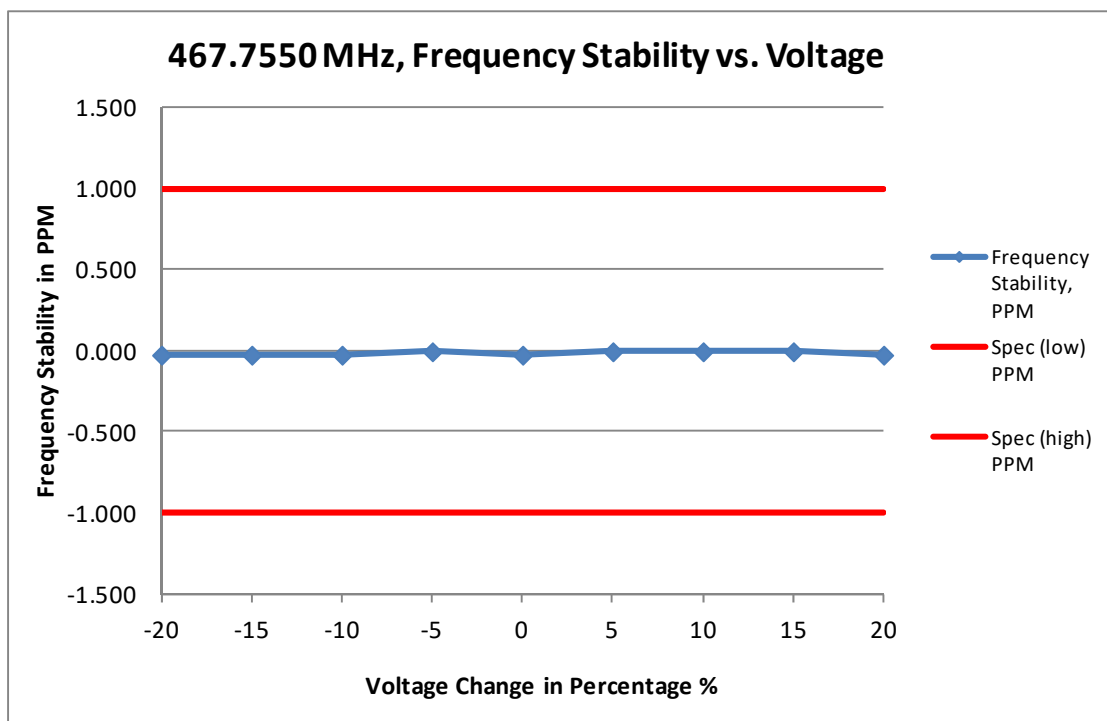

Frequency / Channel Spacing	467.7550 MHz / 12.5 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	6.000	467.754990	-0.021	-1.000	1.000
-15	6.375	467.754990	-0.021	-1.000	1.000
-10	6.750	467.754990	-0.021	-1.000	1.000
-5	7.125	467.755000	0.000	-1.000	1.000
0	7.500	467.754990	-0.021	-1.000	1.000
5	7.875	467.755000	0.000	-1.000	1.000
10	8.250	467.755000	0.000	-1.000	1.000
15	8.625	467.755000	0.000	-1.000	1.000
20	9.000	467.754990	-0.021	-1.000	1.000

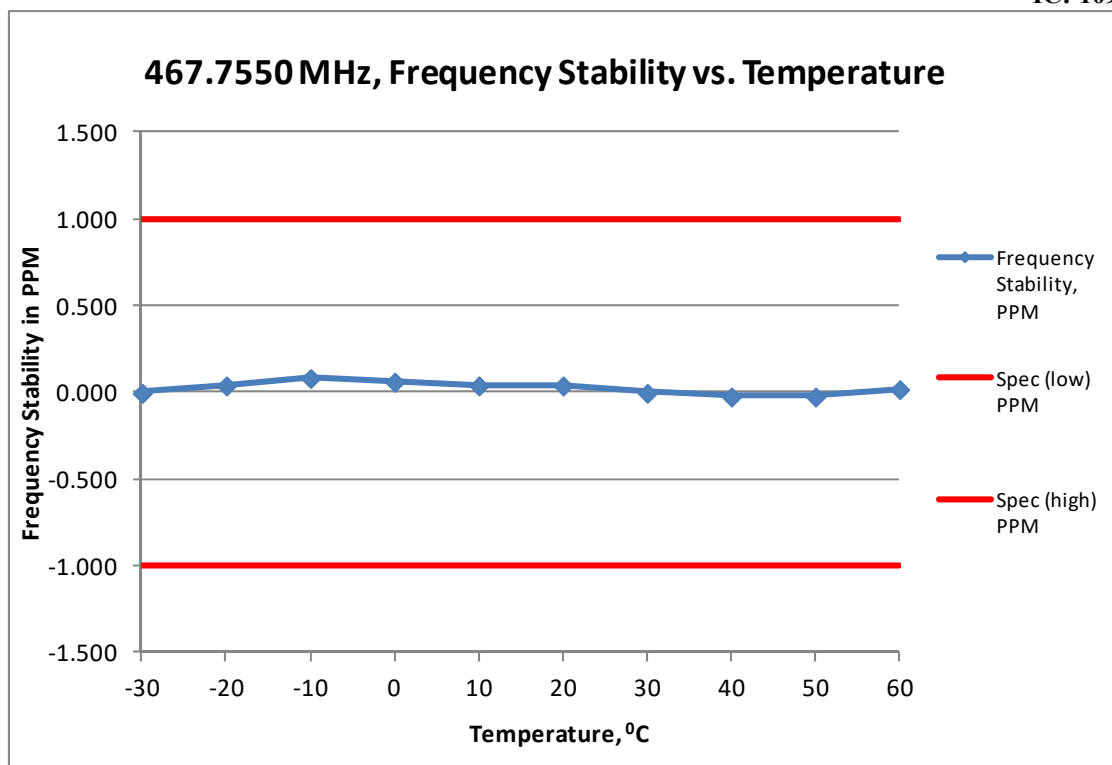


Frequency / Channel Spacing	467.7550 MHz / 12.5 kHz			
Voltage, V	13.6			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	467.755000	0.000	-1.000	1.000
-20	467.755020	0.043	-1.000	1.000
-10	467.755040	0.086	-1.000	1.000
0	467.755030	0.064	-1.000	1.000
10	467.755020	0.043	-1.000	1.000
20	467.755020	0.043	-1.000	1.000
30	467.755000	0.000	-1.000	1.000
40	467.754990	-0.021	-1.000	1.000
50	467.754990	-0.021	-1.000	1.000
60	467.755010	0.021	-1.000	1.000

6.2.3. Test Limit

As per manufacturer declared spec +/- 1ppm

6.3. Audio Frequency Response



6.3.1. Test Setup

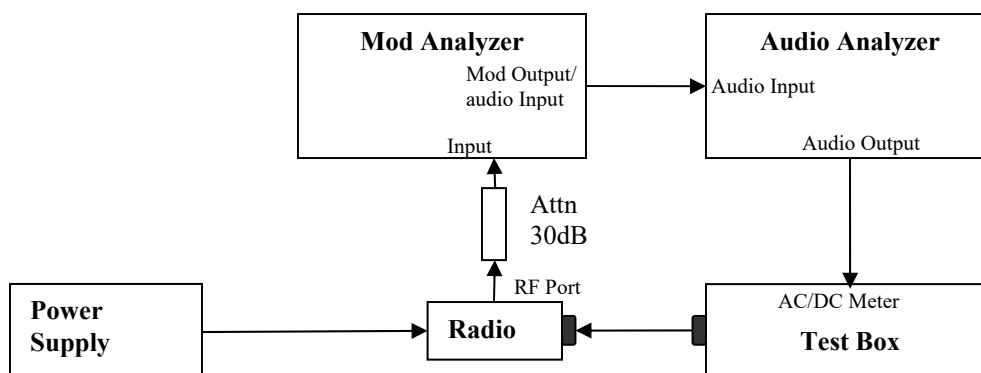


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.

6.3.2. Test Result

Not for FCC Review

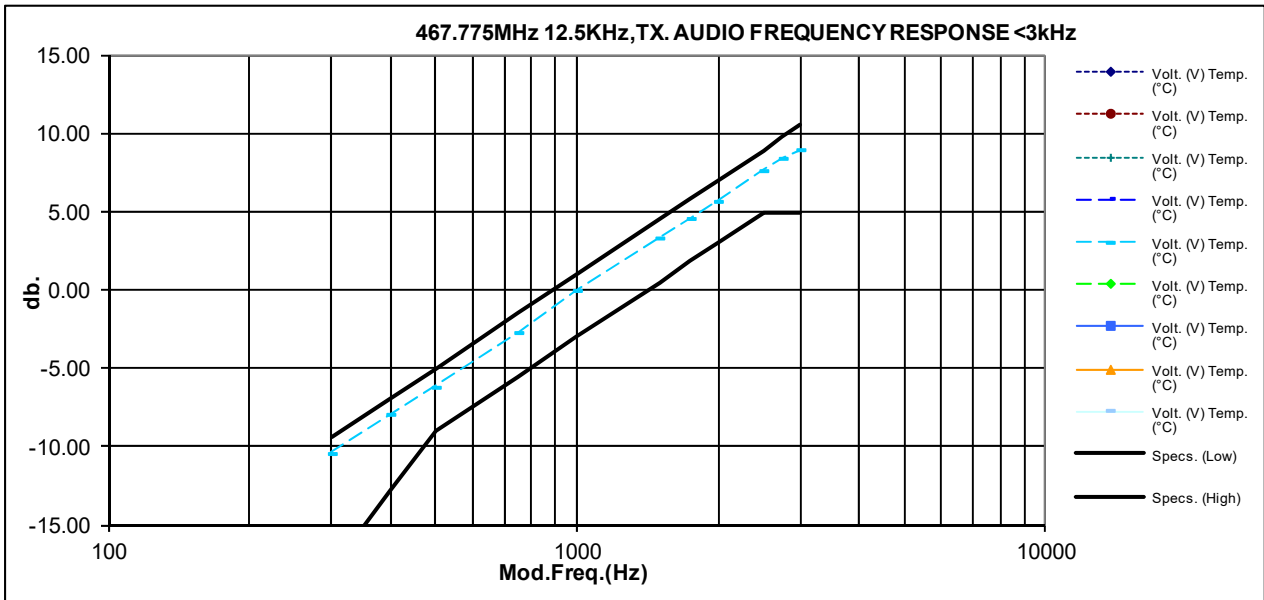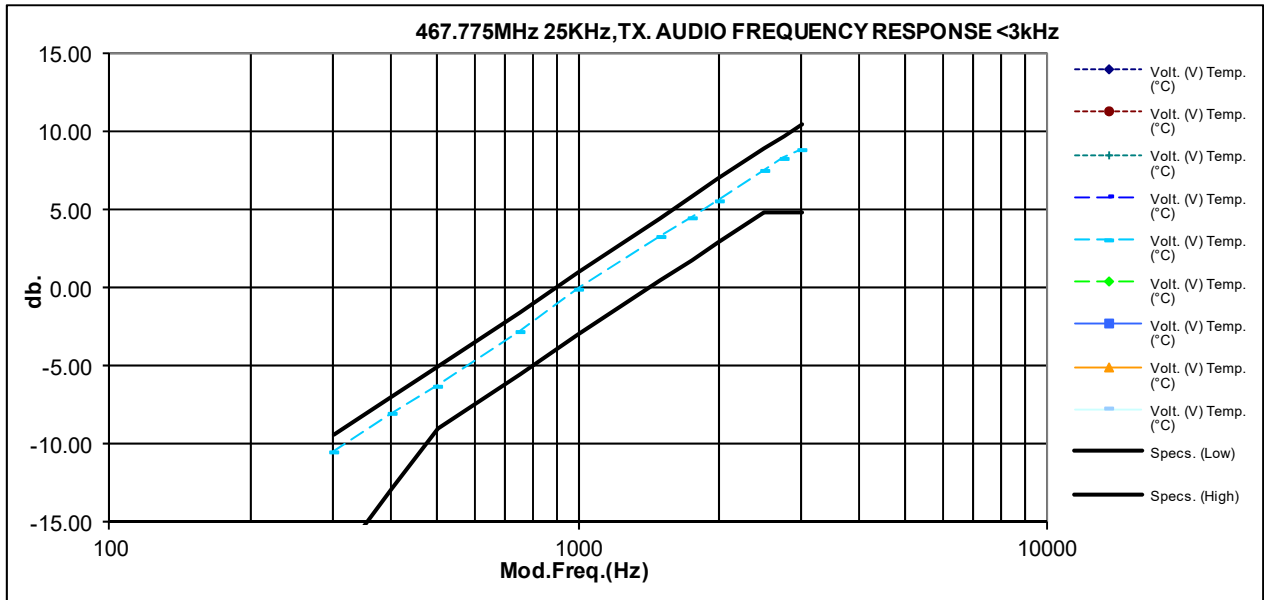

6.3.3. Test Limit

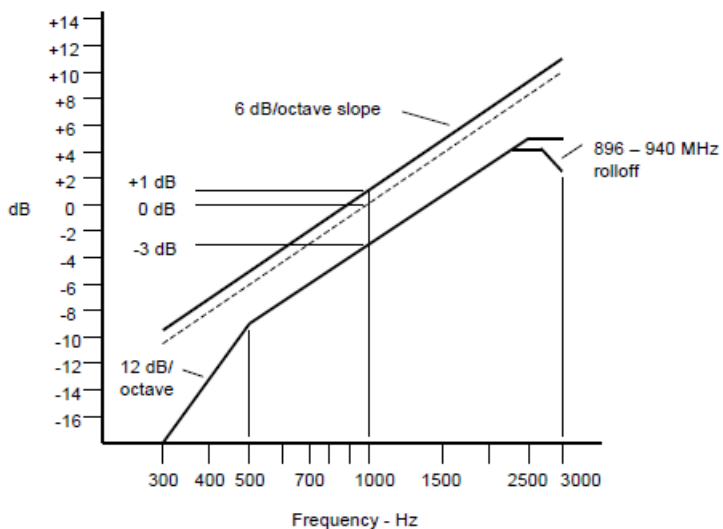


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.

6.4. Audio Low Pass Filter Response



6.4.1. Test Setup

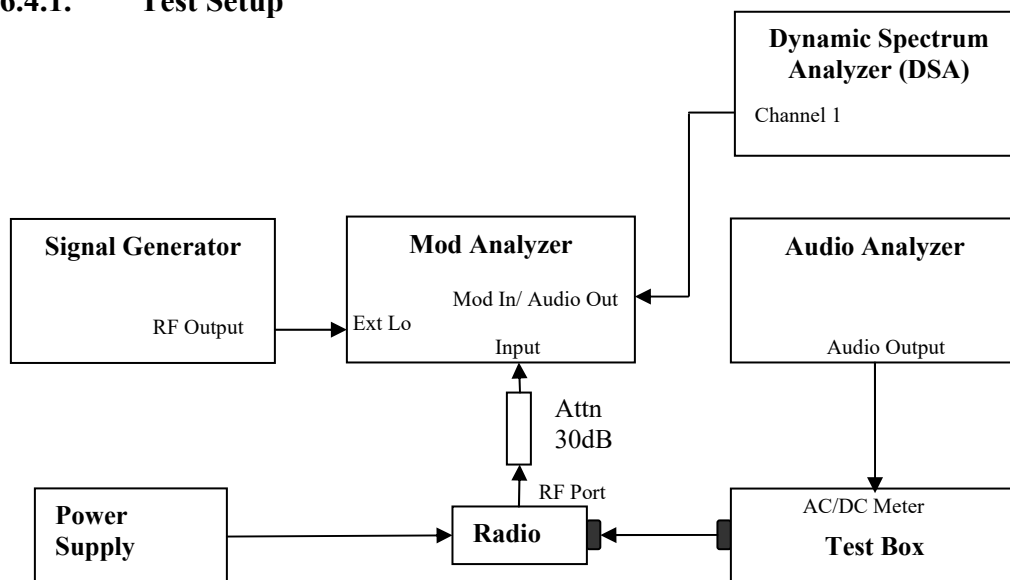


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to $F_c + 1.5$ MHz, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.

6.4.2. Test Result

Not for FCC Review

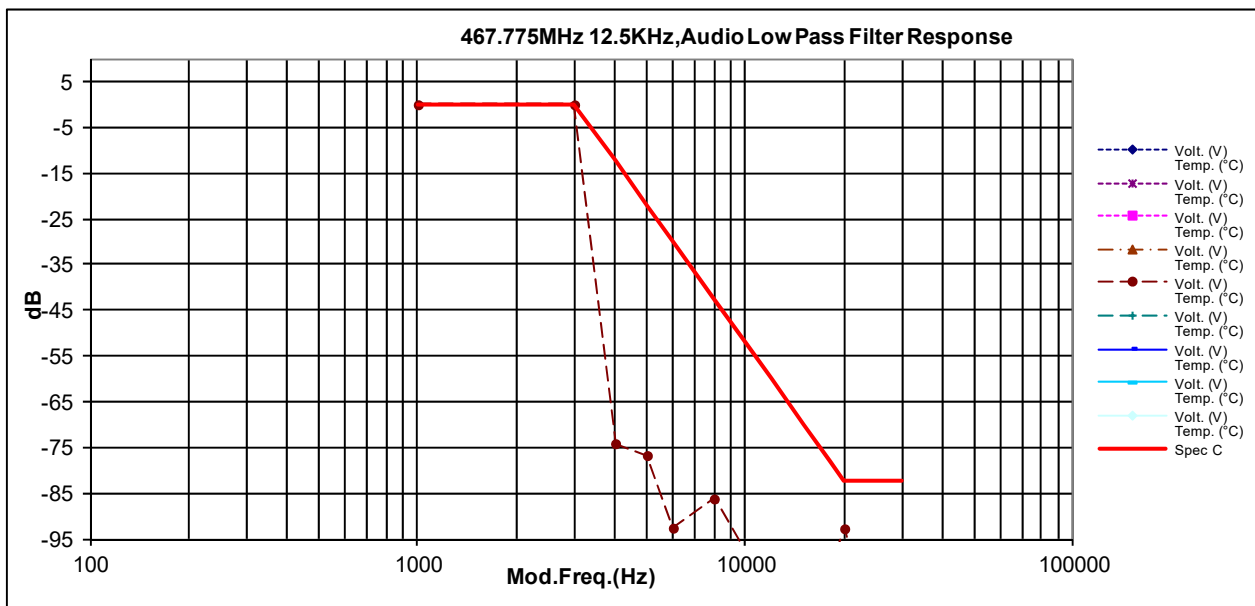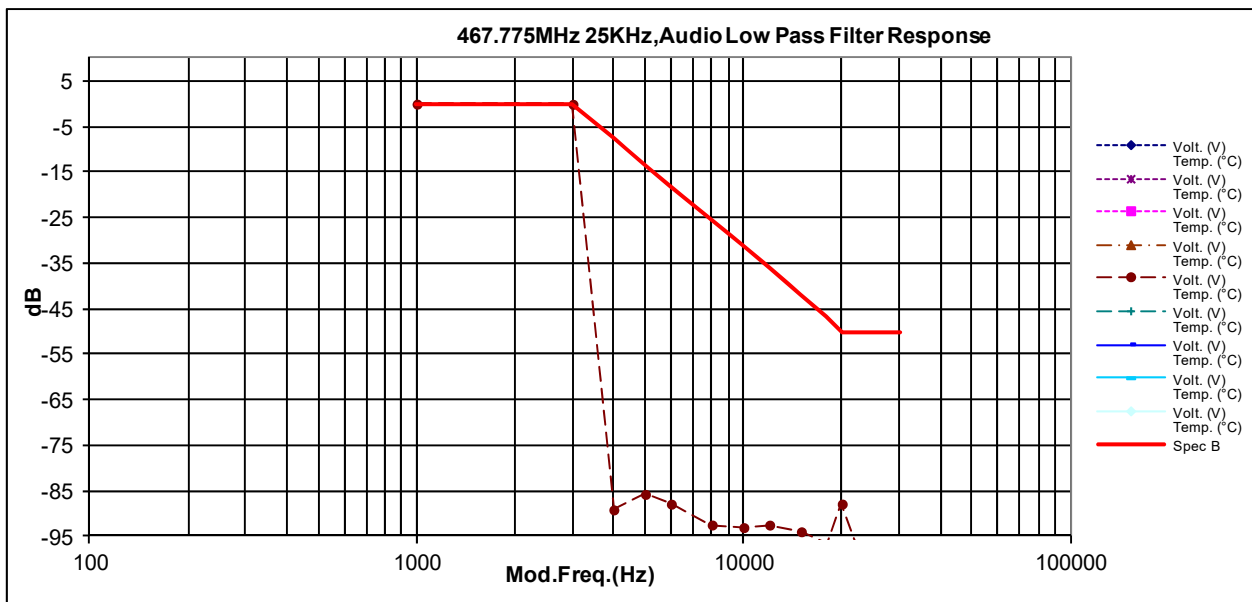

6.4.3. Test Limit

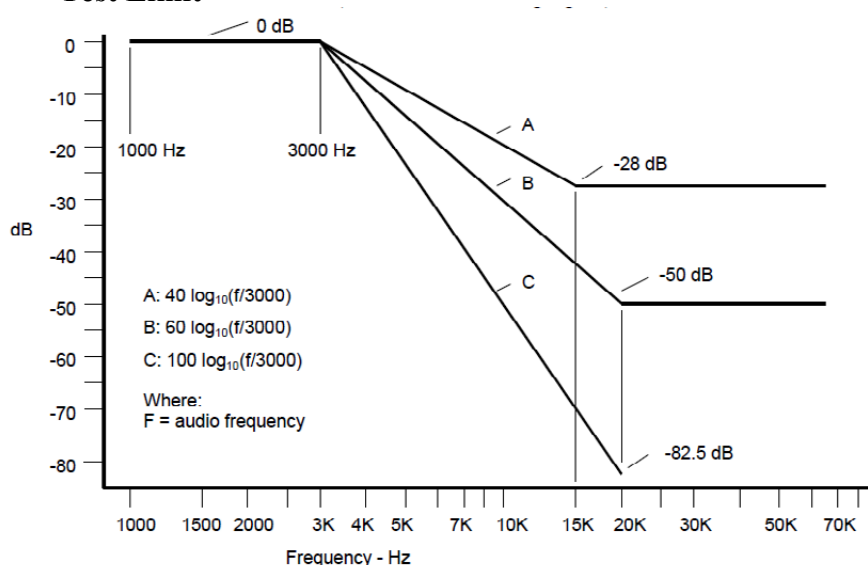

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $40 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: $60 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $100 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

6.5. Modulation Limiting

6.5.1. Test Setup

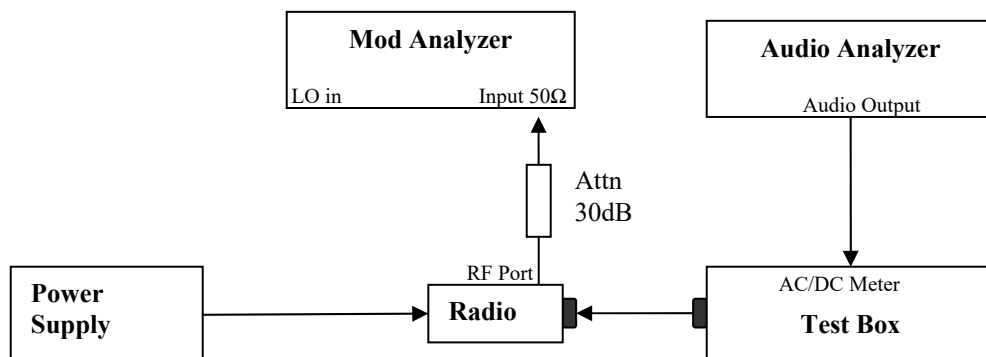


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.


6.5.2. Test Result

Not for FCC Review

467.7750MHz, 25.0kHz Modulation Limiting

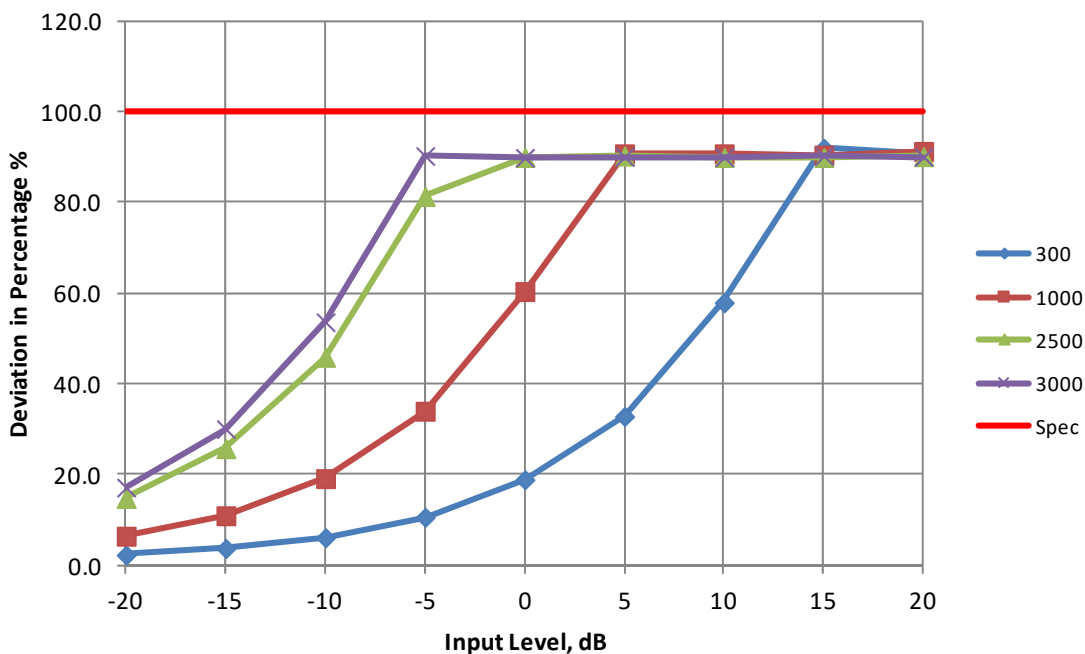

467.7550MHz, 12.5kHz Modulation Limiting

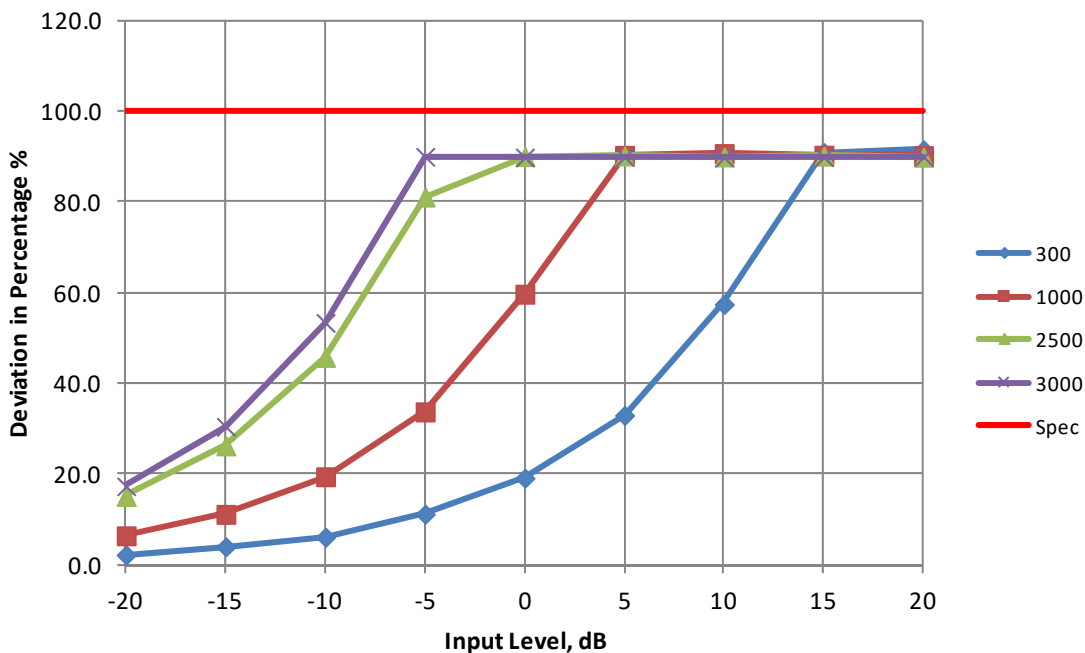


6.5.3. Test Limit

Modulation Limiting shall not exceed 100 percent.

6.6. Occupied Bandwidth

6.6.1. Test Setup (Analog)

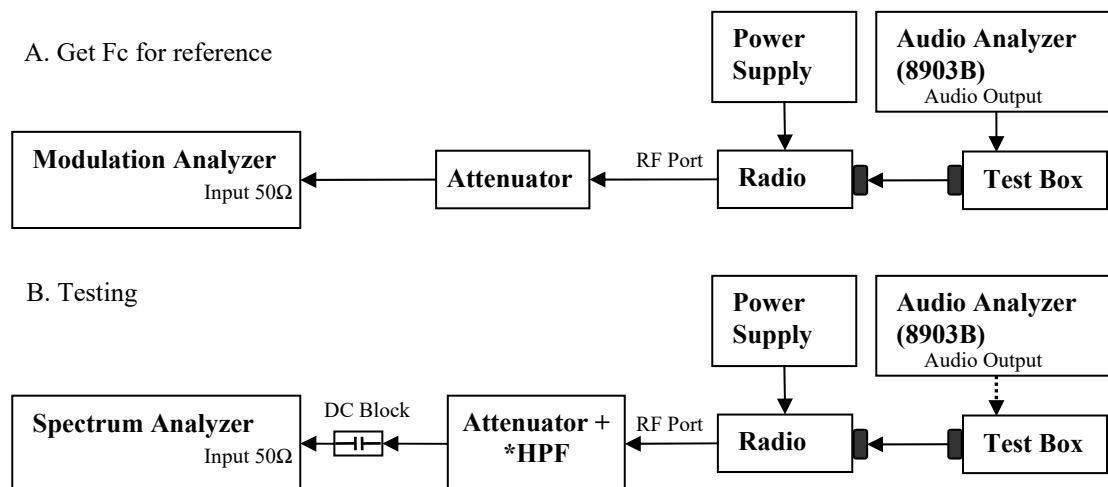

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

* Only HPF added for Mask 80.211 measurement with attenuator.

6.6.2. Test Result (Analog)

Standard Audio Modulation (12.5 kHz Channelization, Analog Voice):

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \Rightarrow 11K0$$

F3E portion of the designator indicates voice.

Therefore, the entire designator for 12.5 kHz channelization analog voice is 11K0F3E.

Standard Audio Modulation (25 kHz Channelization, Analog Voice):

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3 kHz with a 5 kHz deviation.

$$BW = 2(M+D) = 2*(3 \text{ kHz} + 5 \text{ kHz}) = 16 \text{ kHz} \Rightarrow 16K0$$

F3E portion of the designator indicates voice.

Therefore, the entire designator for 25 kHz channelization analog voice is 16K0F3E

Digital Modulation (20 kHz Channelization, Digital Voice with encryption):


Emission Designator 20K0F1E

In this case, the maximum modulating frequency is 6 kHz with a 4 kHz deviation.


$$BW = 2(M+D) = 2*(6 \text{ kHz} + 4 \text{ kHz}) = 20 \text{ kHz} \Rightarrow 20K0$$



F1E portion of the designator indicates digital voice.



Therefore, the entire designator for 20 kHz channelization analog voice is 20K0F1E.


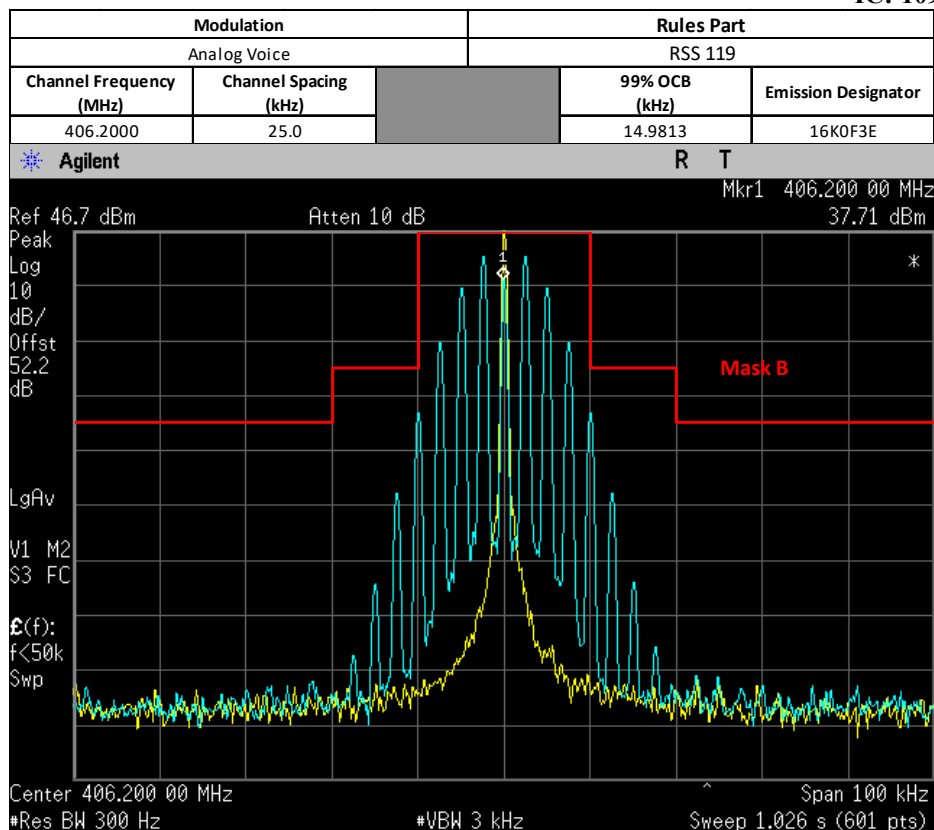



Not for FCC Review

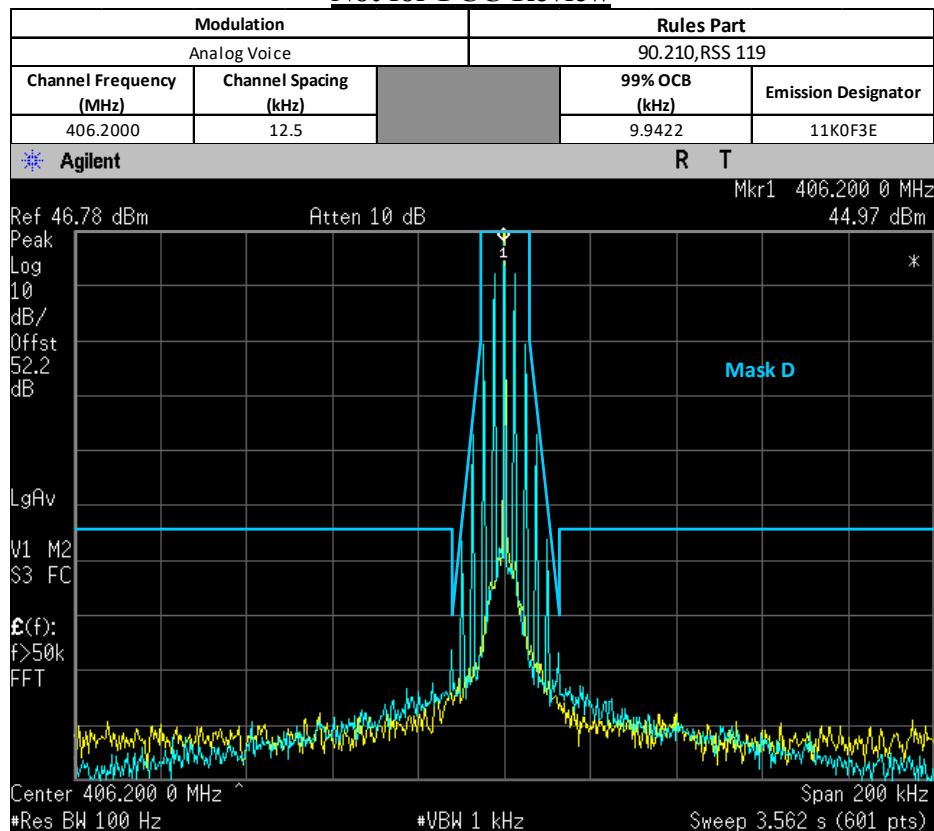

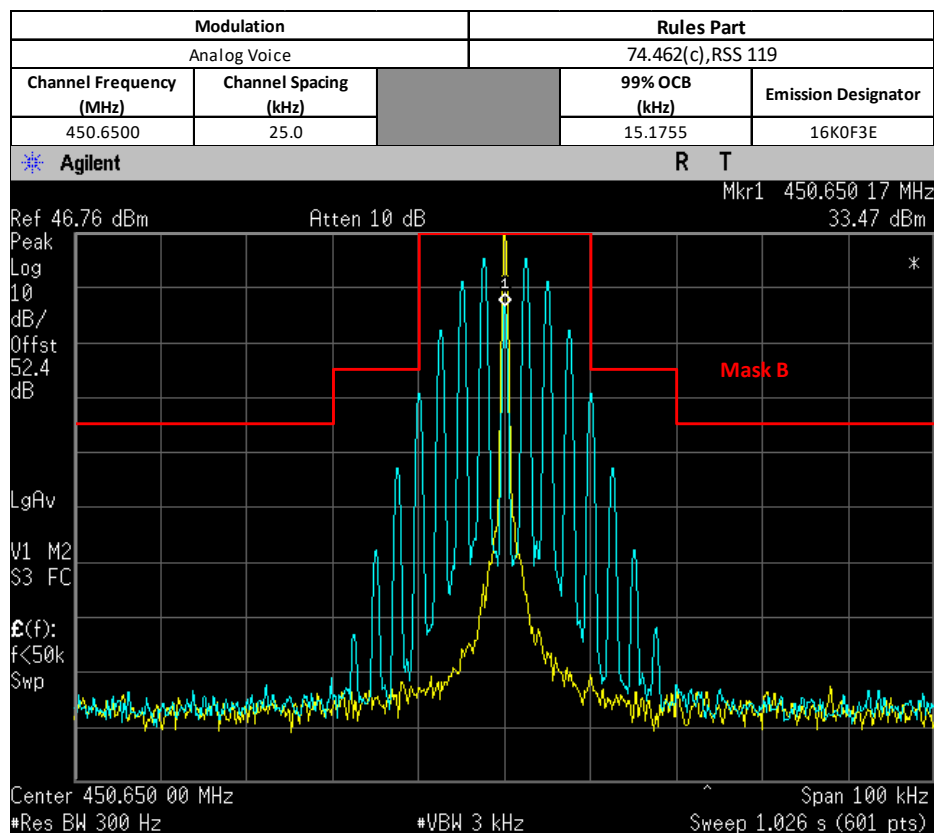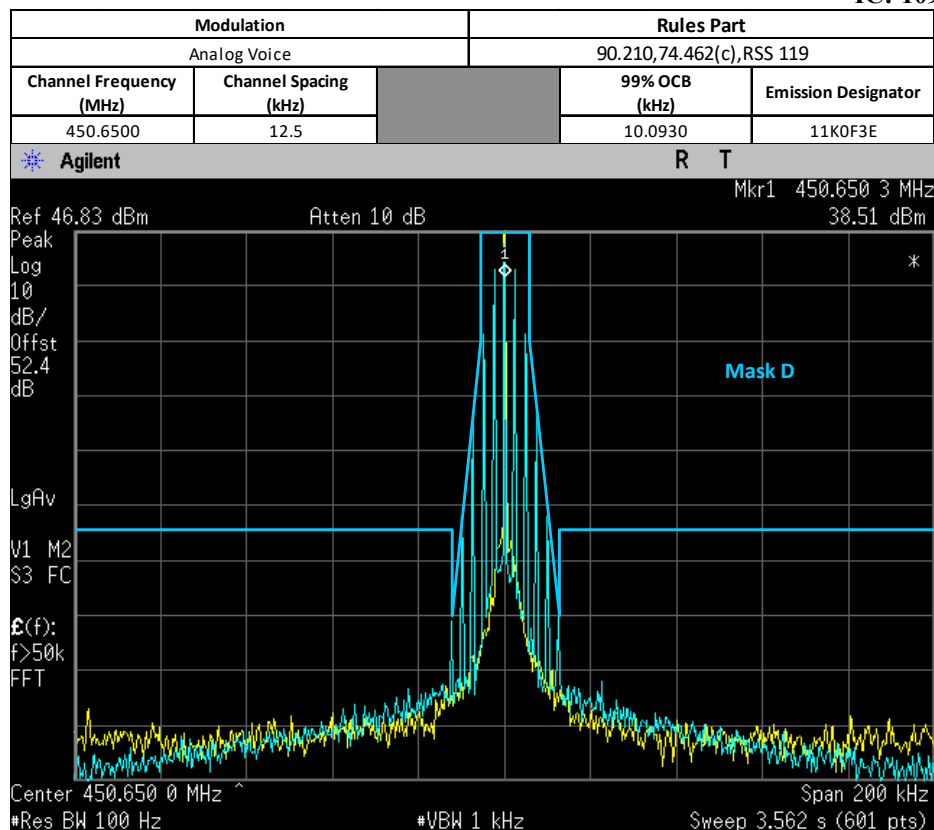


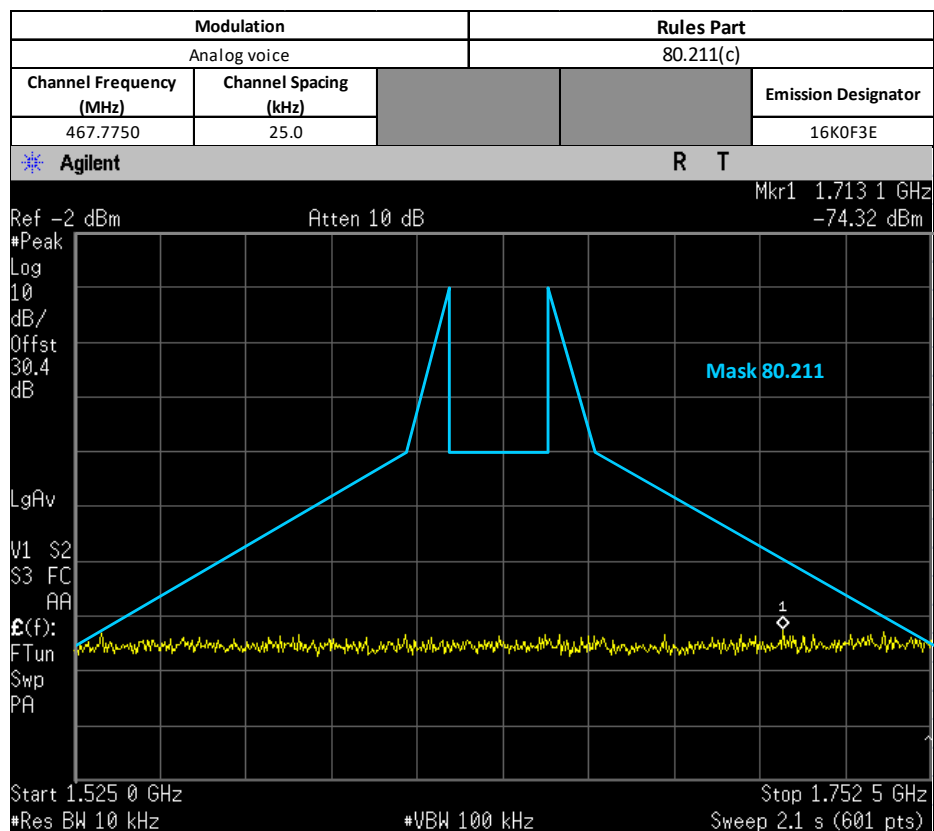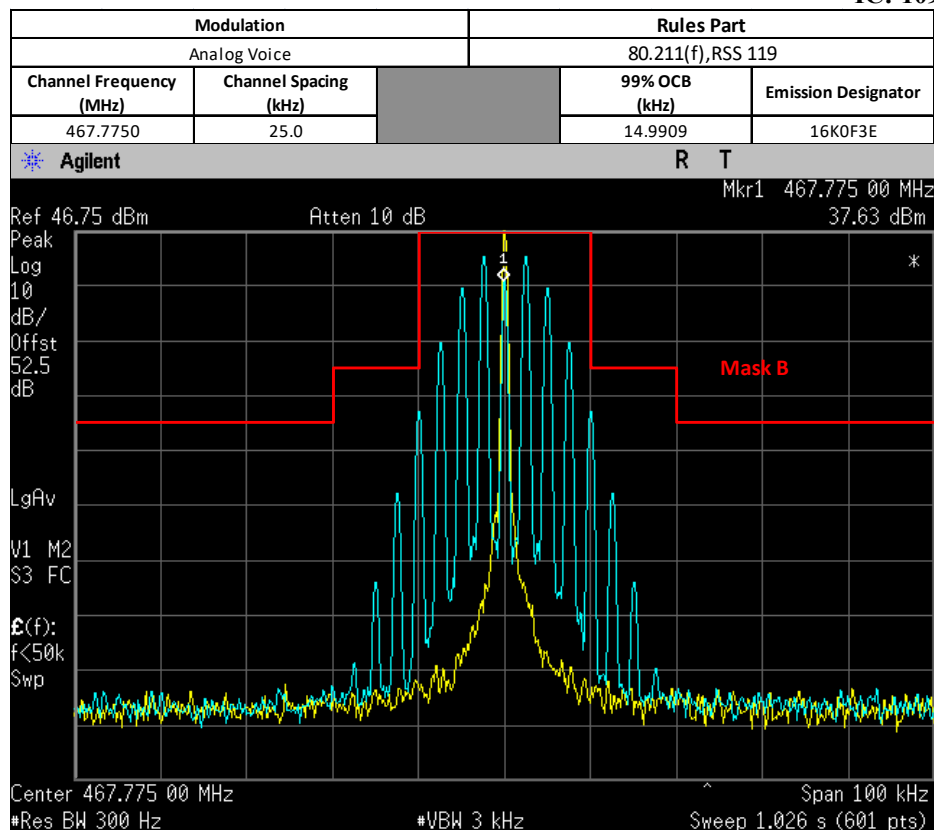

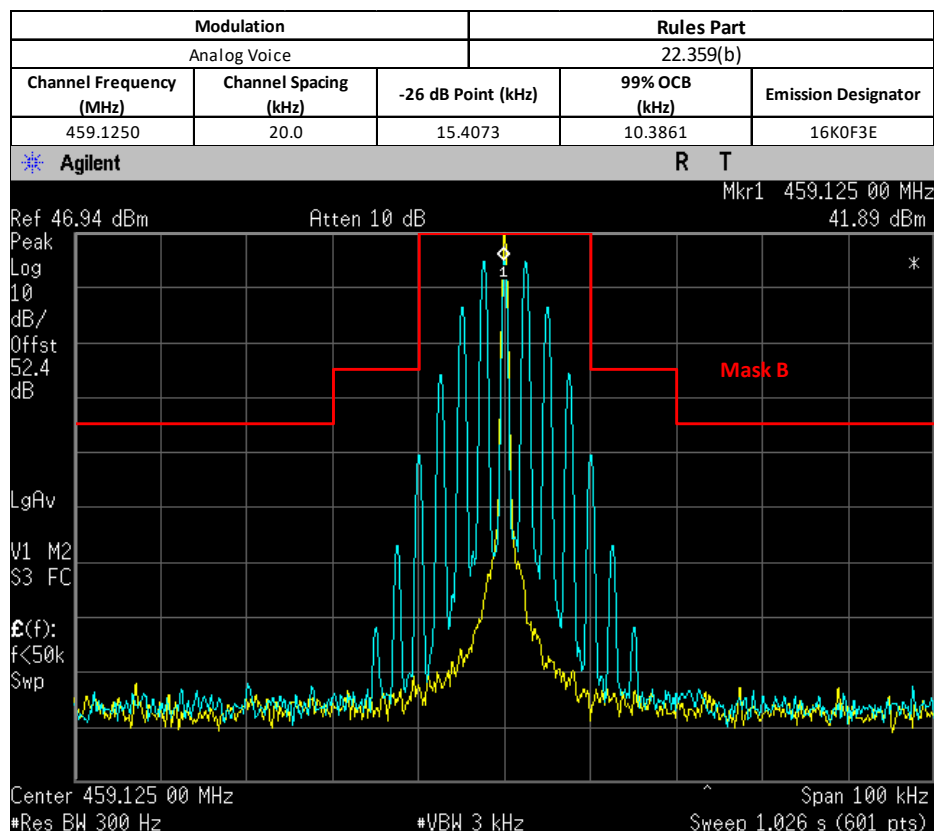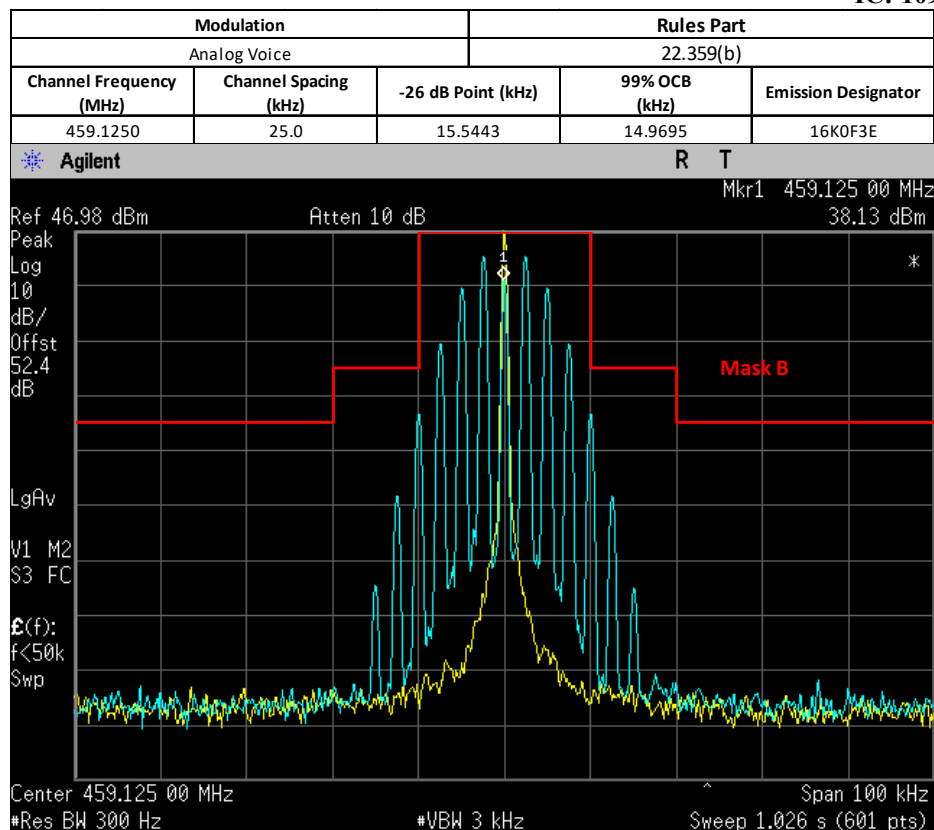

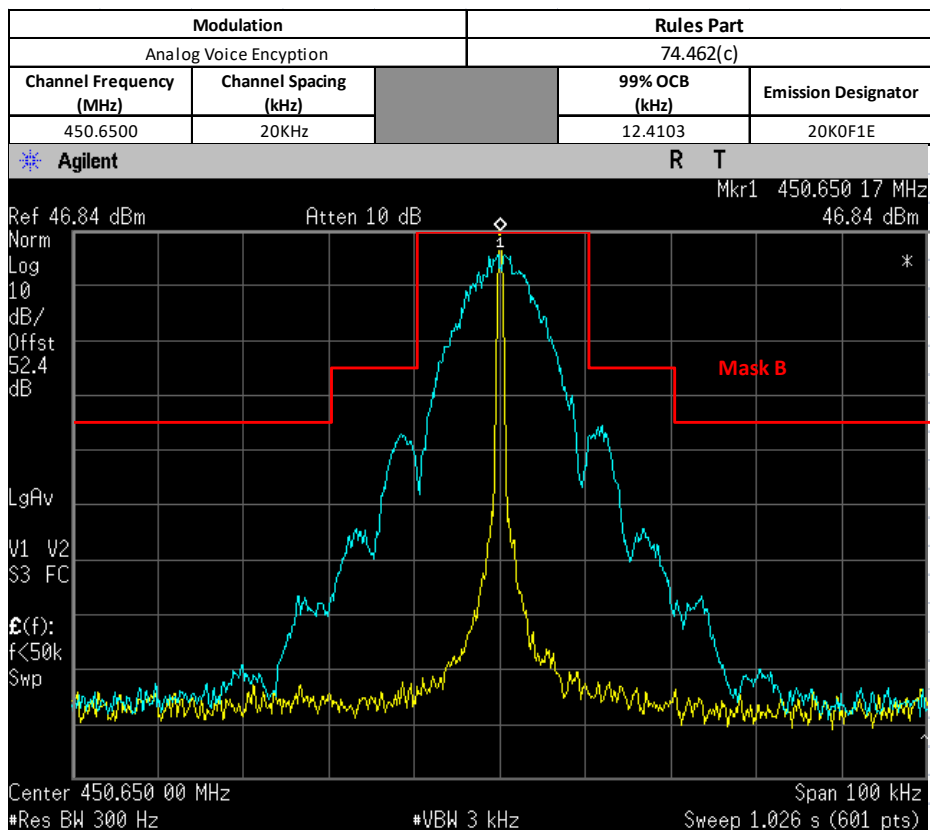

6.6.3. Test Setup (Digital)

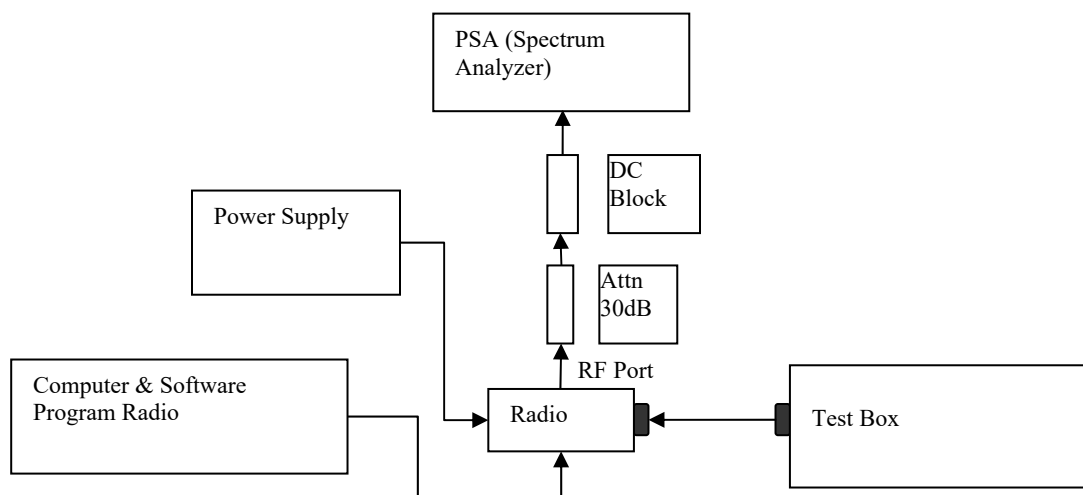

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.6.4. Test Result (Digital)

Digital (12.5 kHz Channelization, Digital Data):

Emission Designator 8K10F1D

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1D portion of the designator indicates digital data.

Therefore, the entire designator for 12.5 kHz channelization digital data is 8K10F1D.

Digital (12.5 kHz Channelization, Digital Voice):

Emission Designator 8K10F1E

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1E portion of the designator indicates digital voice.

Therefore, the entire designator for 12.5 kHz channelization digital voice is 8K10F1E.



Digital (12.5 kHz Channelization, Digital TDMA):



Emission Designator 8K10F1W



The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).



F1W portion of the designator indicates digital TDMA.



Therefore, the entire designator for 12.5 kHz channelization digital TDMA is 8K10F1W.

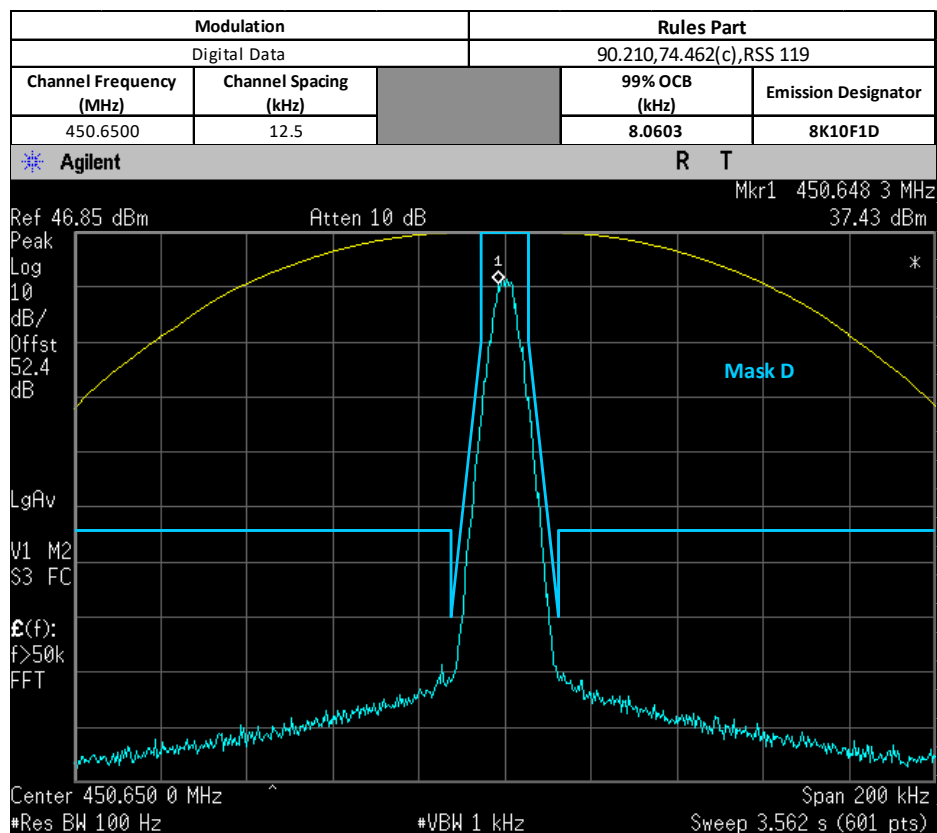
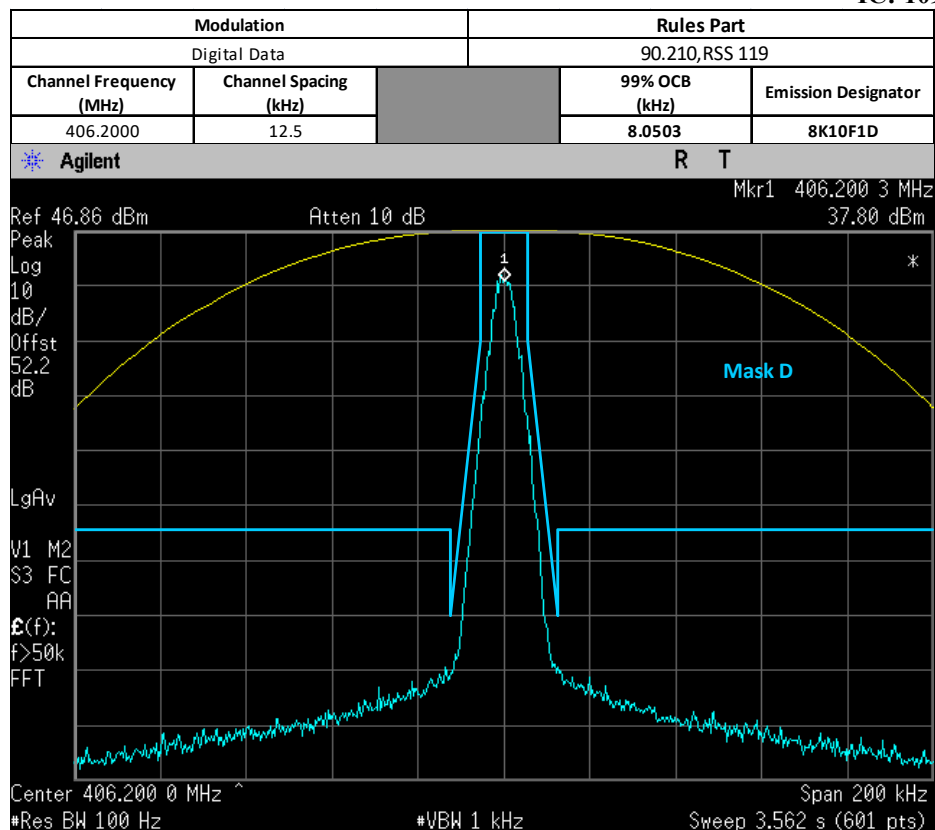


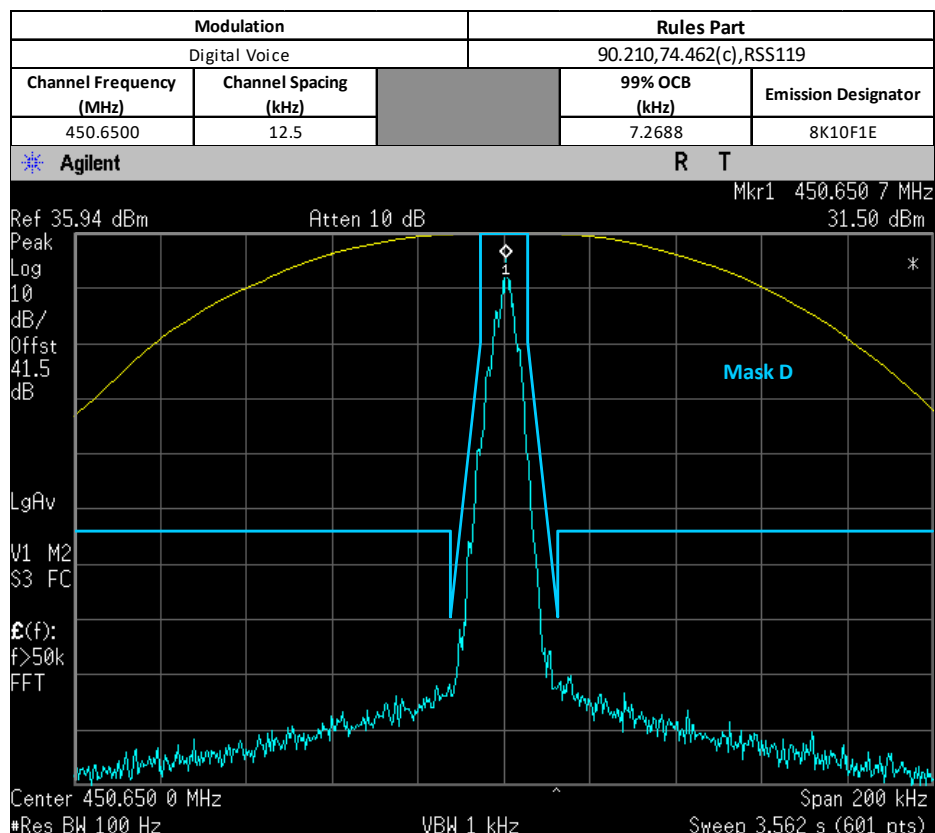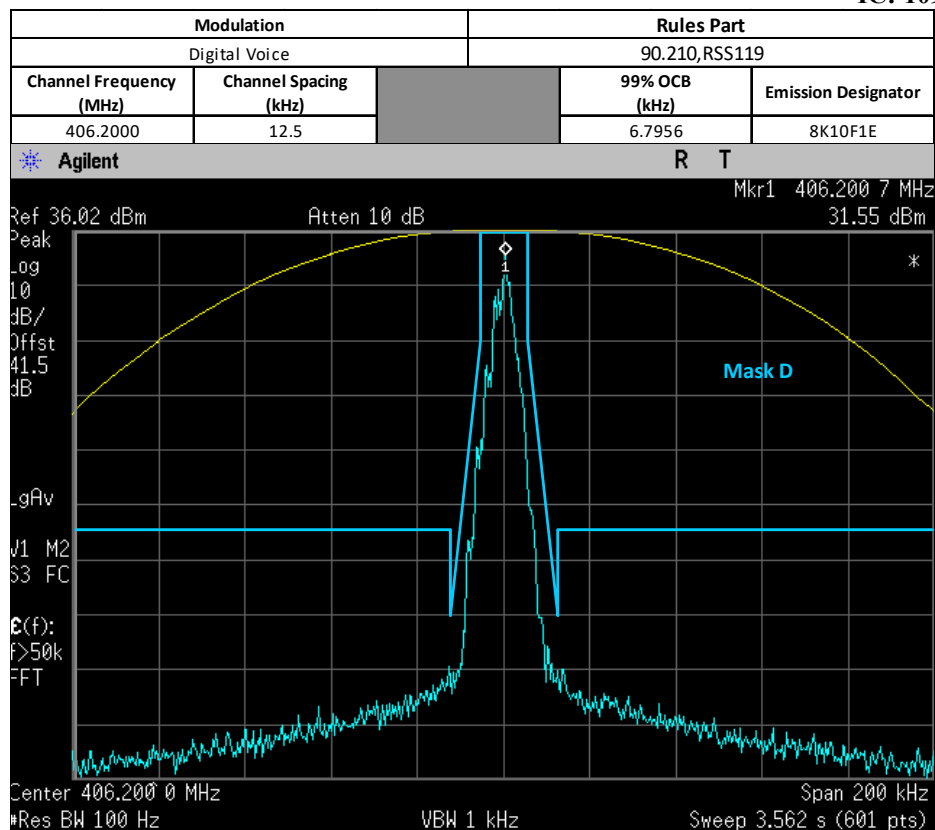

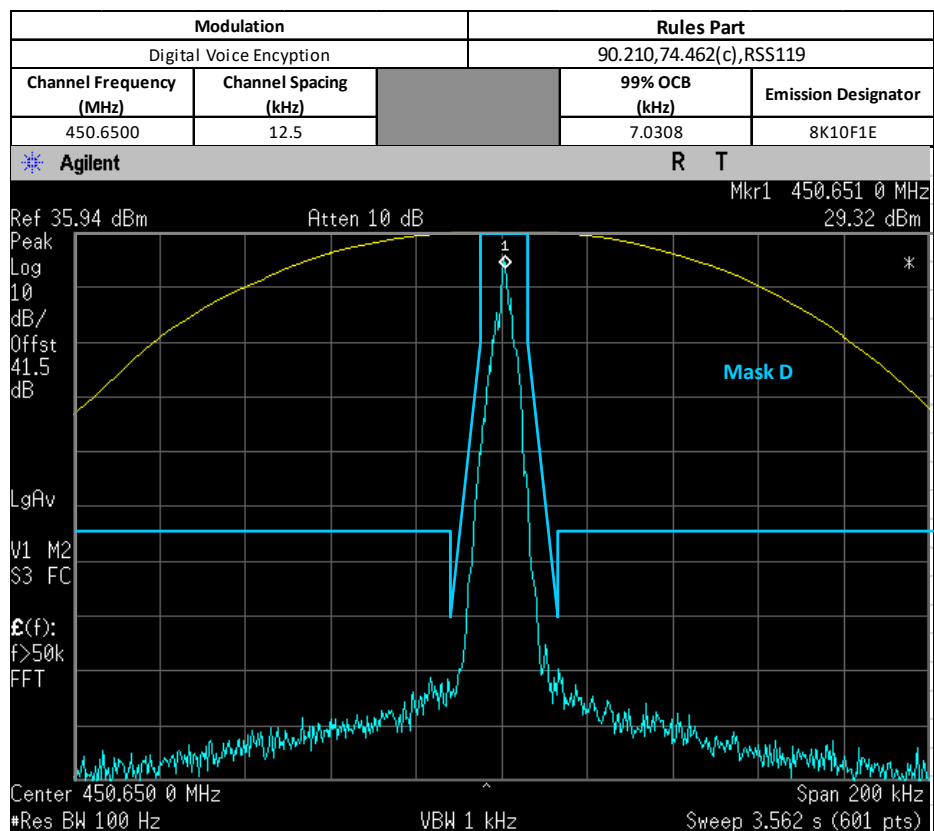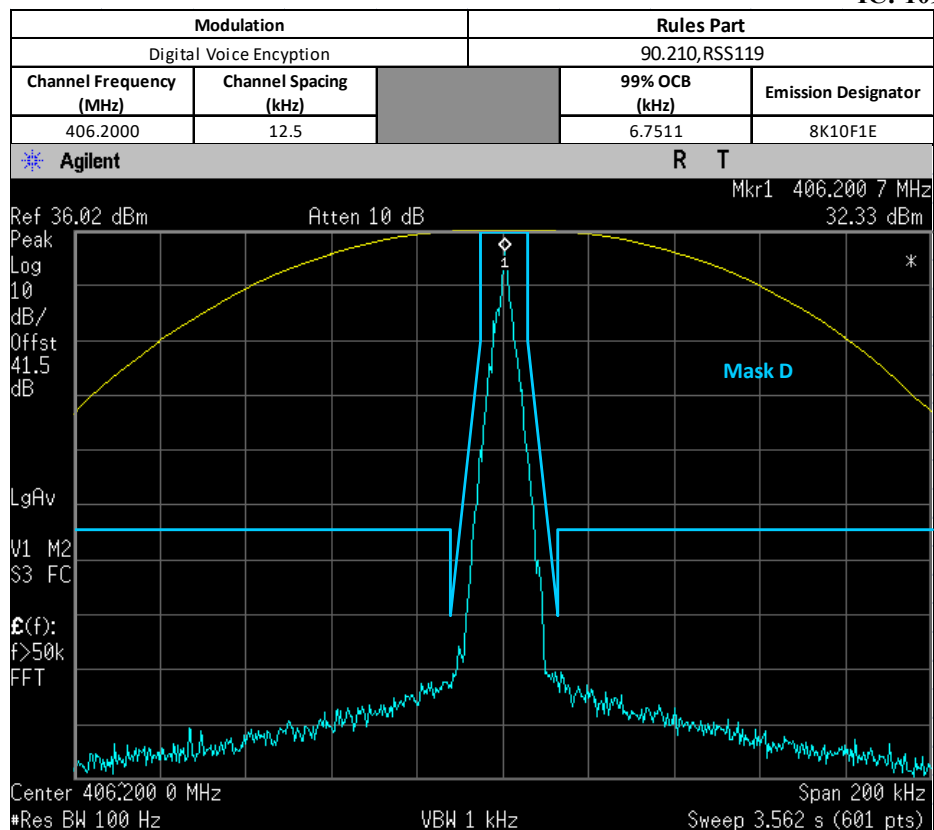

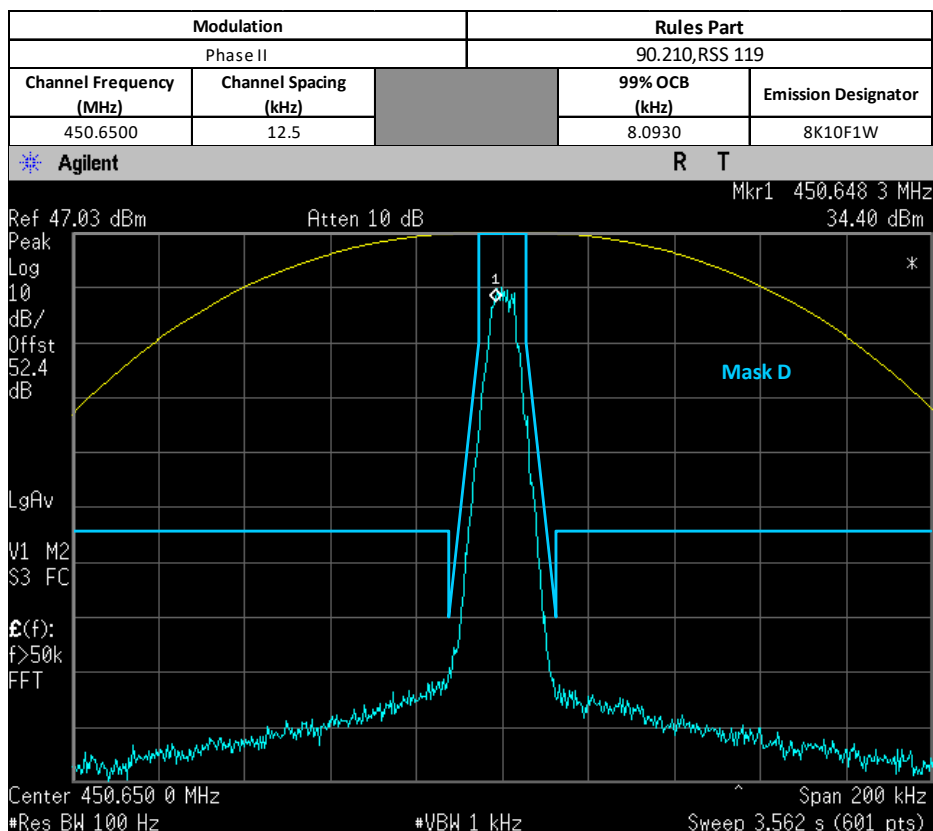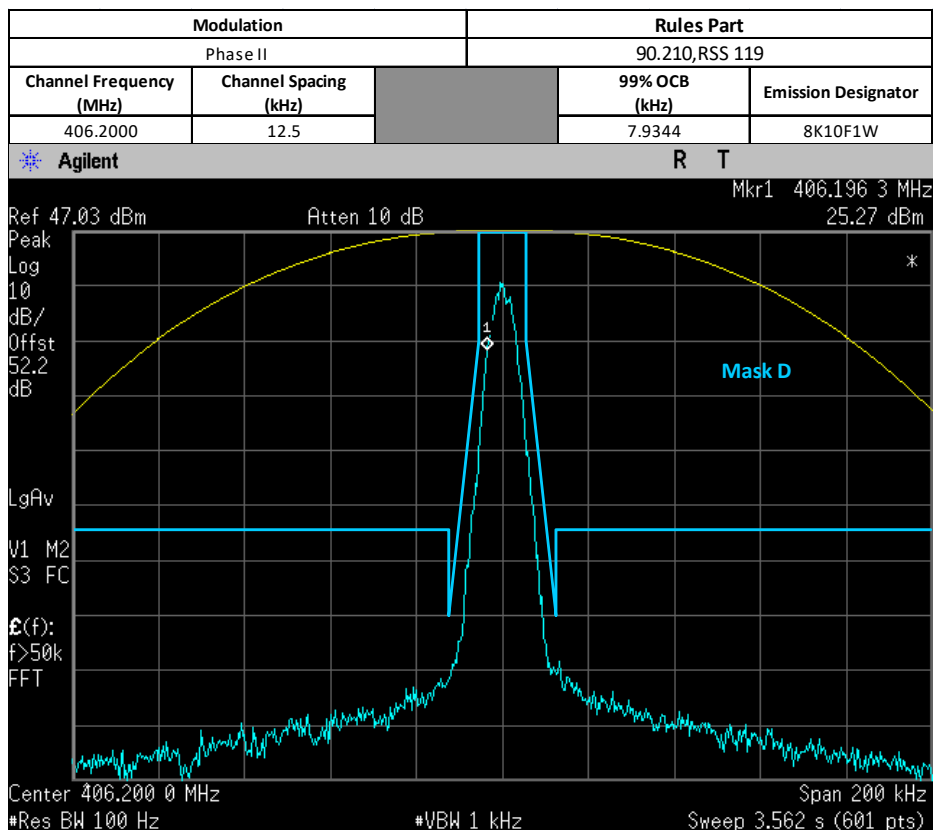

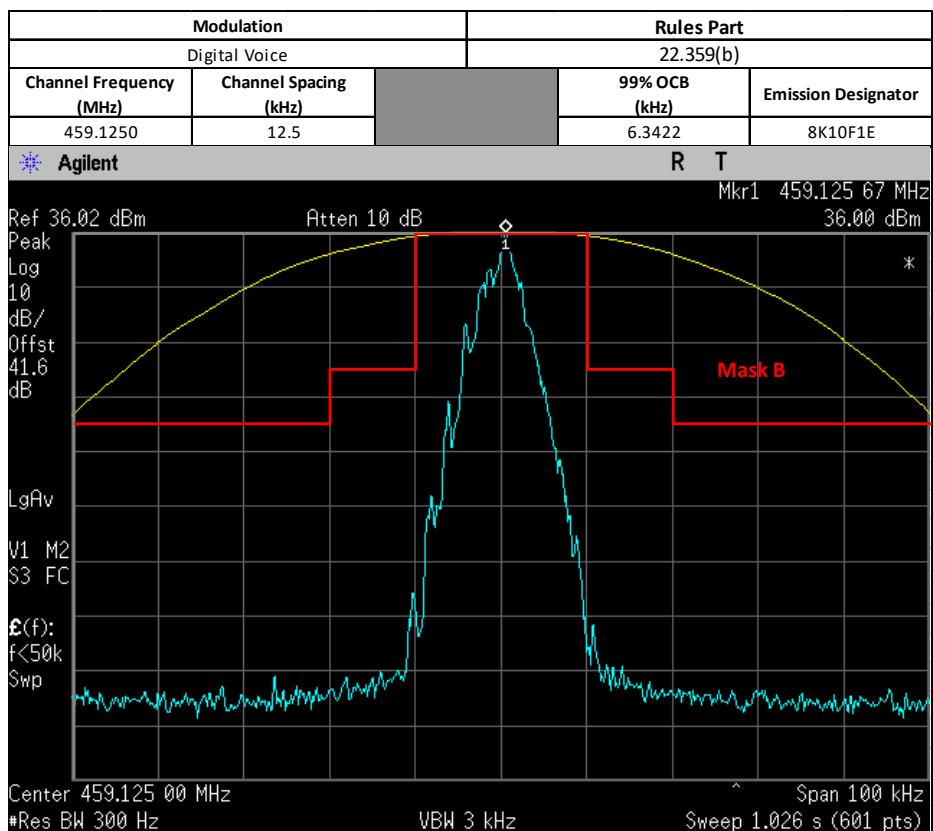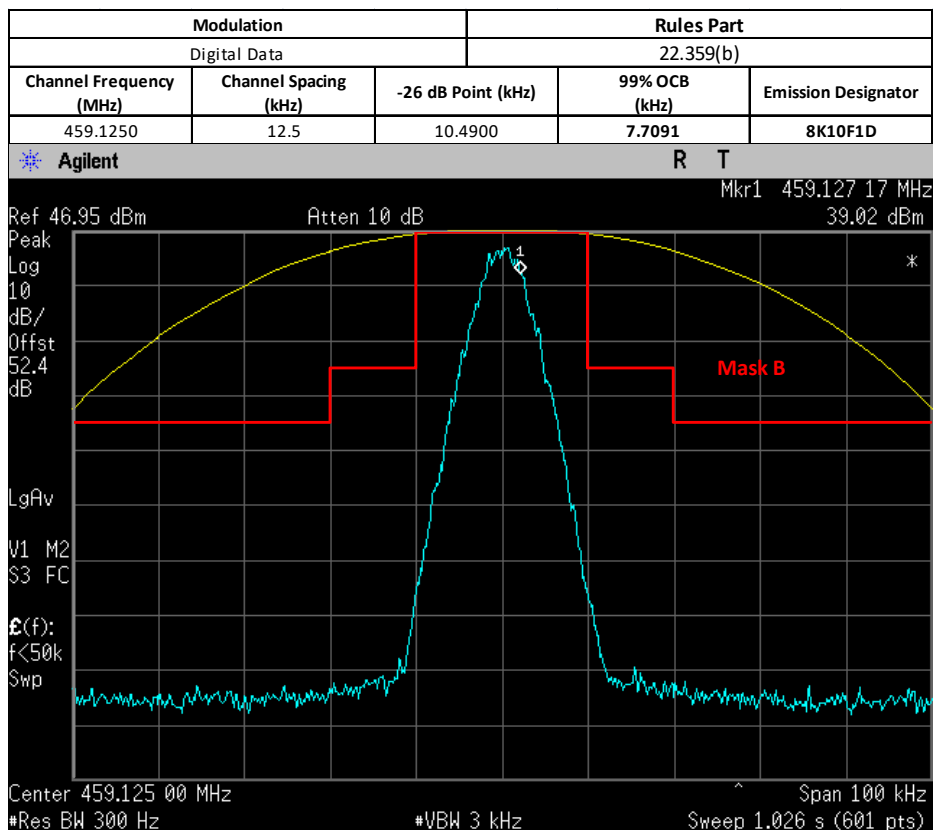

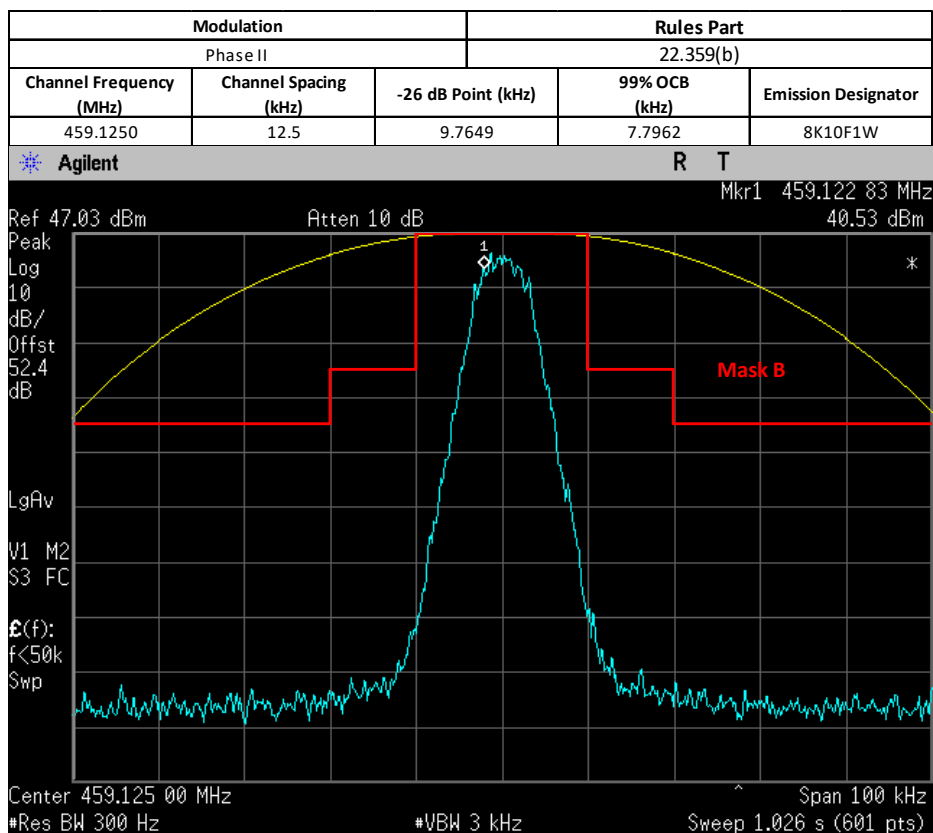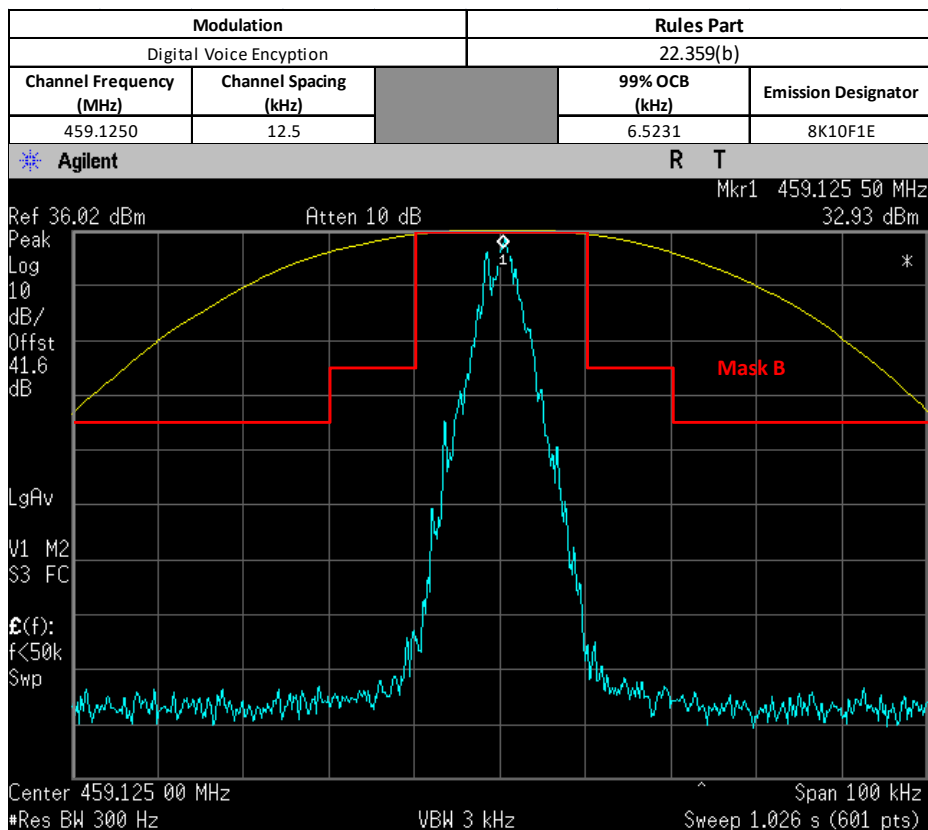


6.6.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.


6.7. Band Edge Conducted Spurious Emission (Part 22)

6.7.1. Test Setup (Analog)

A. Get Fc for reference

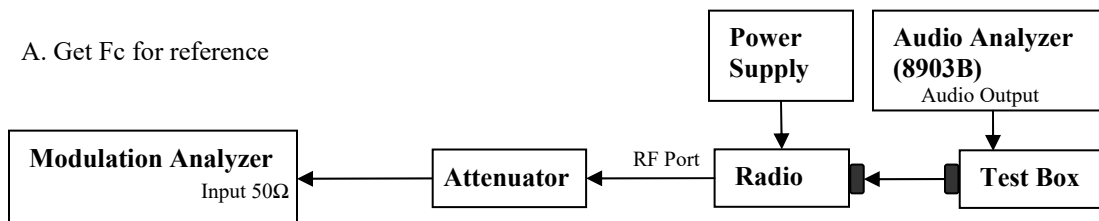

B. Testing

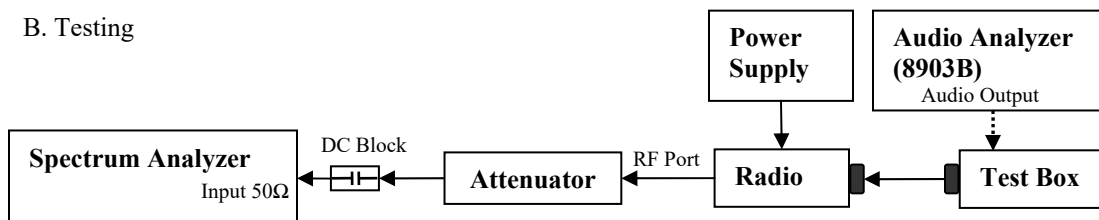


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth.
- 7) Transmit the DUT and record the occupied Bandwidth frequencies.
- 8) Preset the spectrum analyzer for band edge measurement.
- 9) The band edges of lowest and highest channels were measured.
- 10) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 11) Save the screen shot as modulated signal.
- 12) Remove the audio tone from audio analyzer to capture unmodulated signal.

*Note:


- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

6.7.2. Test Result (Analog)


Max Power

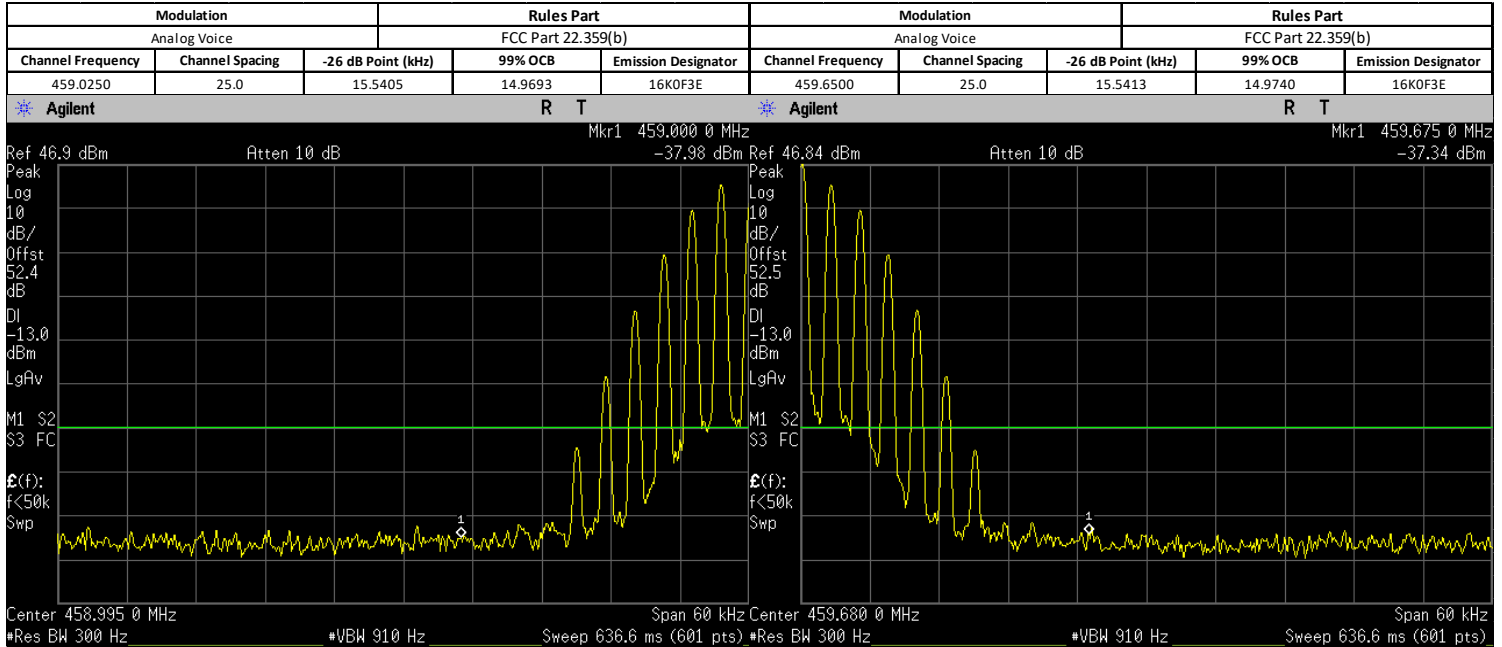

Low Power

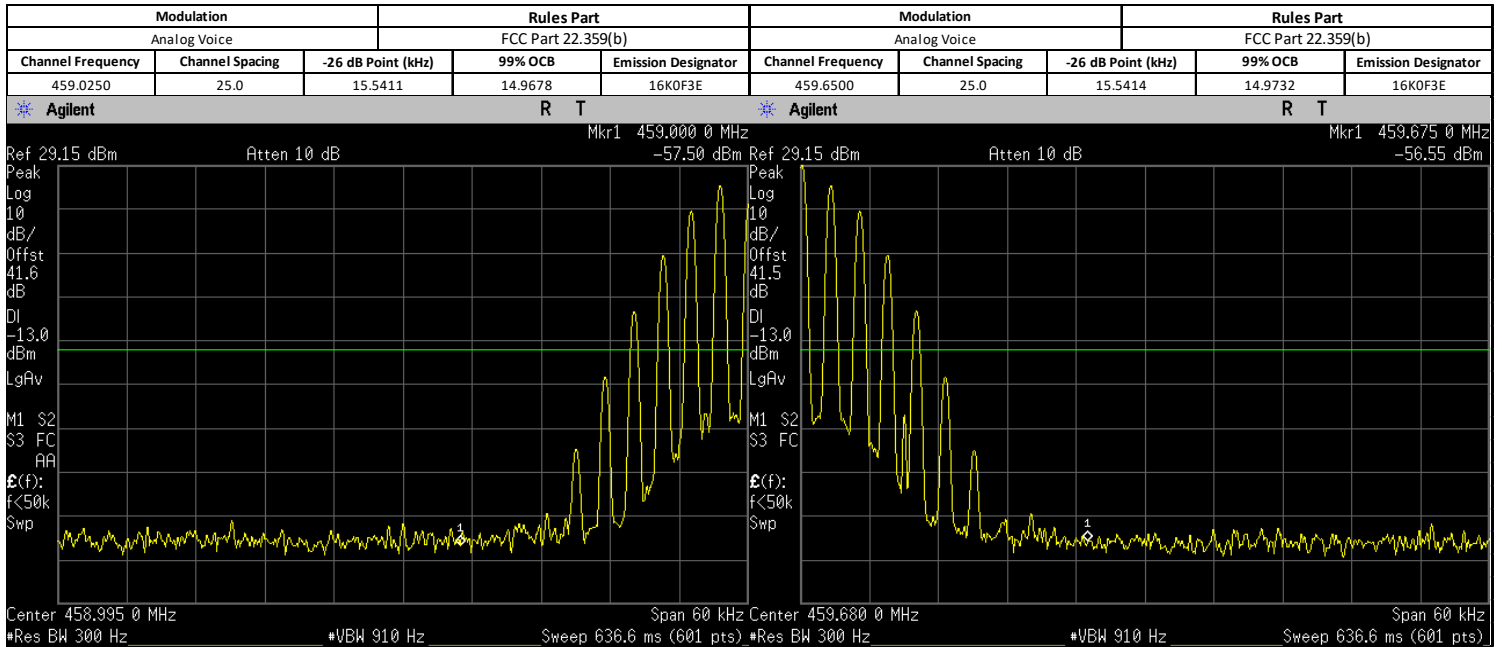

6.7.3. Test Setup (Digital)

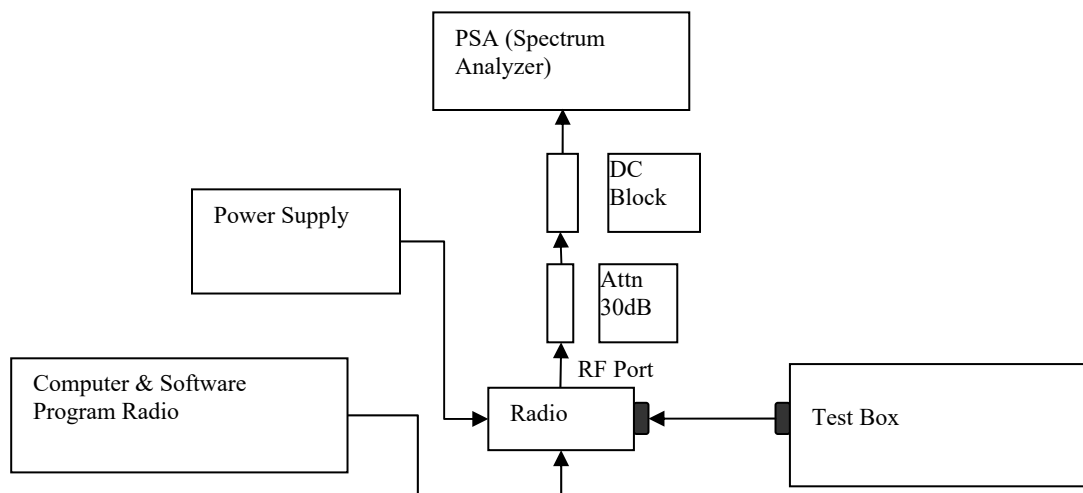


- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.

*Note:


- All digital modulation modes utilize the same high deviation test pattern, and they are therefore identical. Hence, only one plot per digital modulation scheme is shown

6.7.4. Test Result (Digital)

Max Power

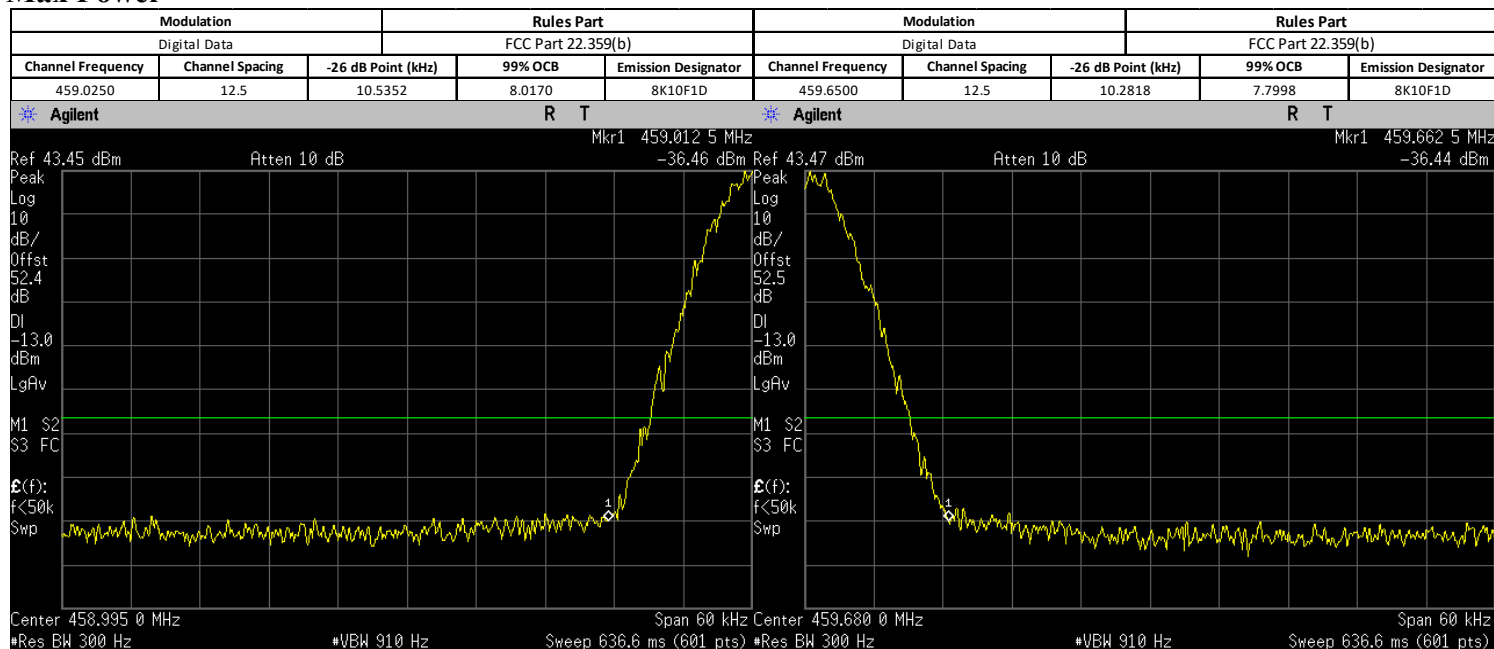

Low Power

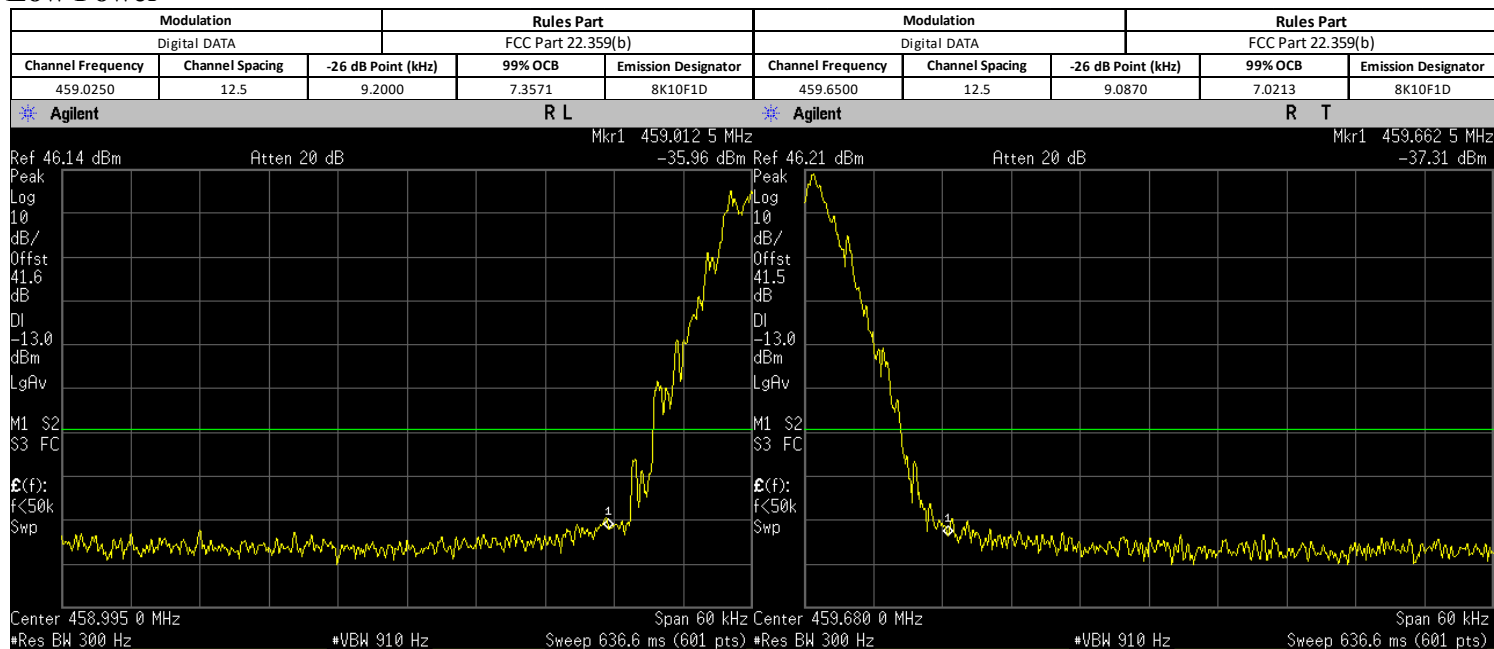


6.7.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.



6.8. Transient Frequency Behavior


6.8.1. Test Setup

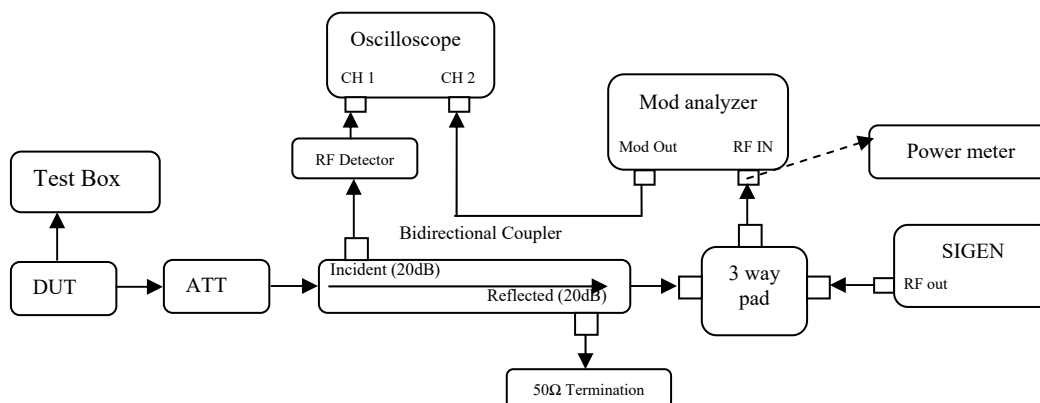


- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Siggen with the assigned center frequency, internal 1 kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
Analog 12.5 kHz Channel Spacing = 12.5 kHz
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when DUT is keying up.
- 6) Note the power level on power meter and dekey the DUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.8.2. Test Result

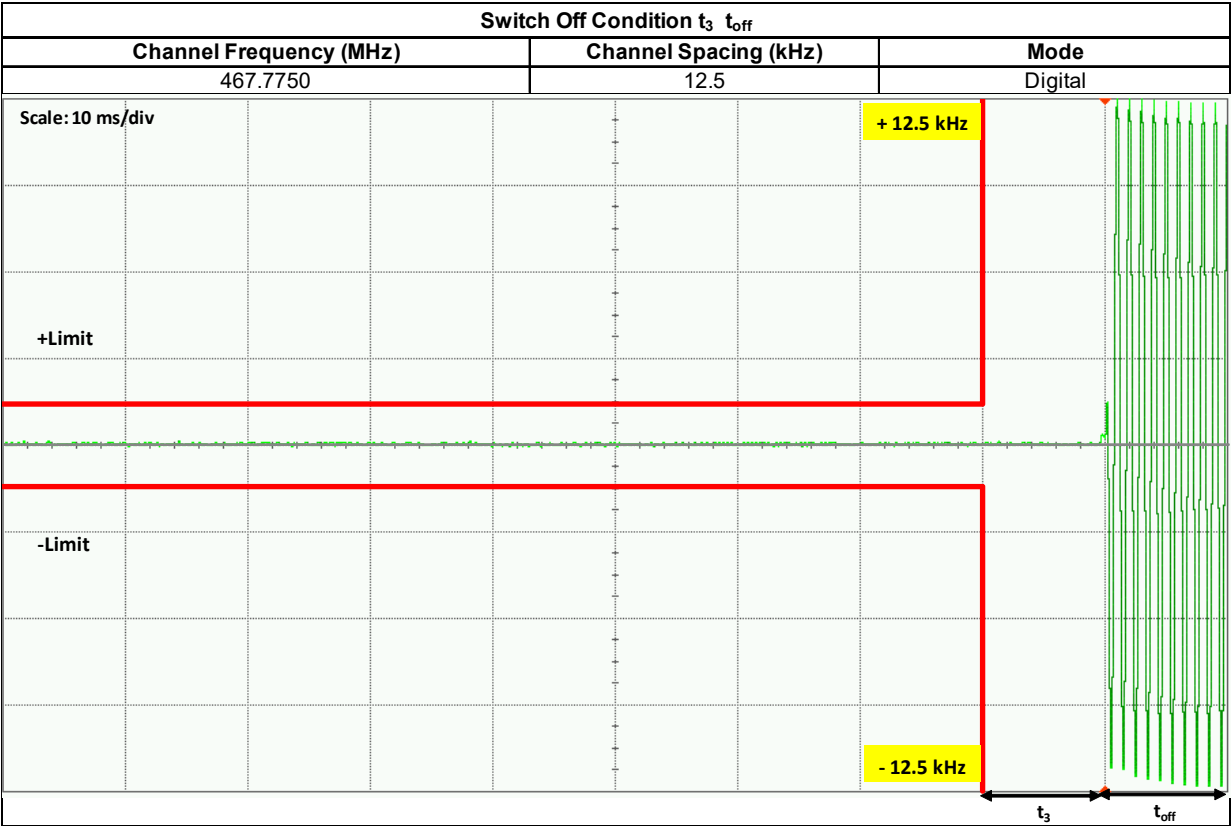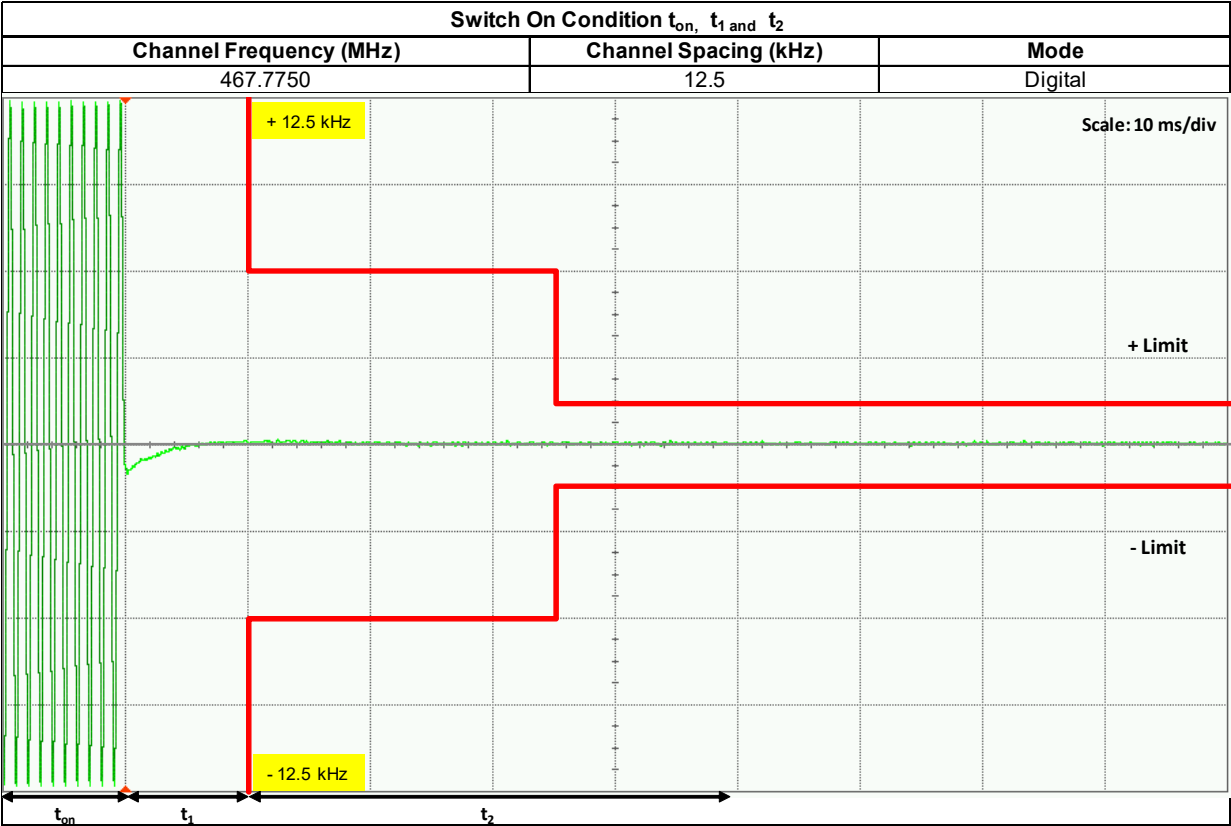

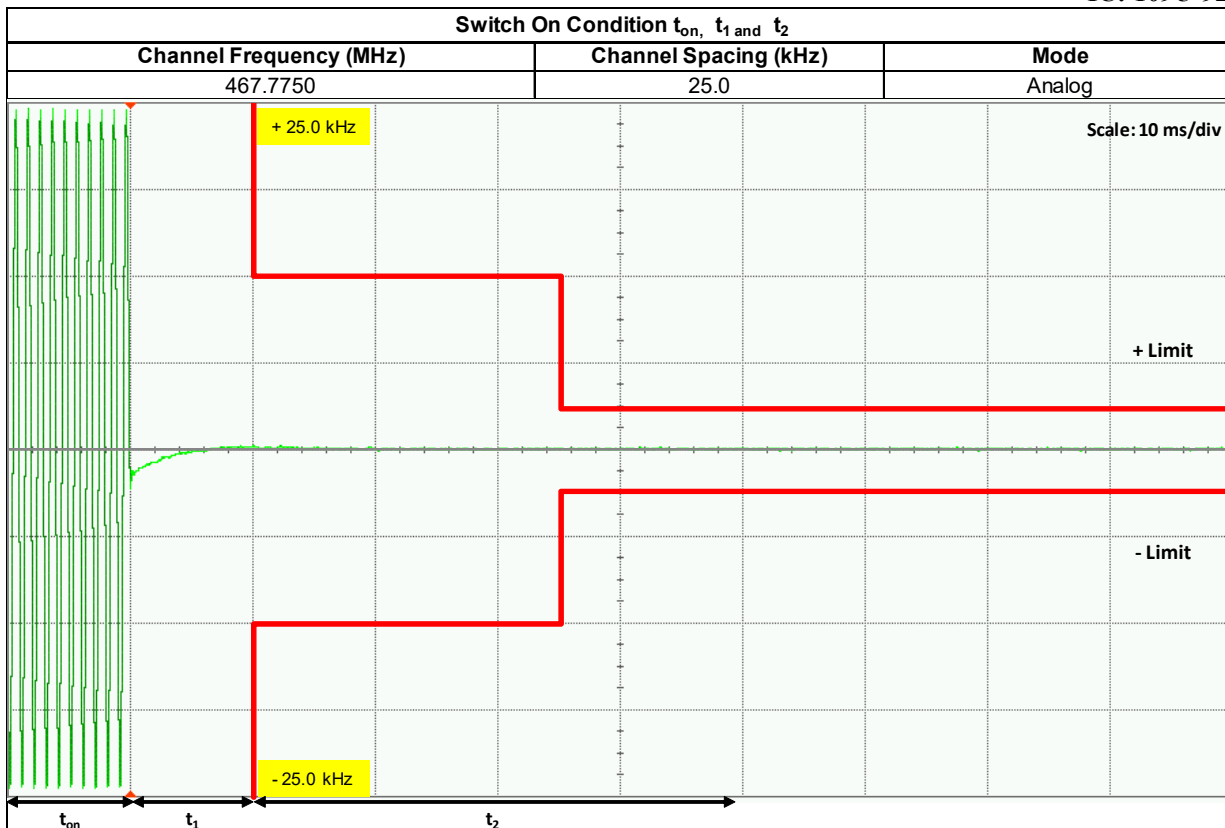

Not for FCC Review

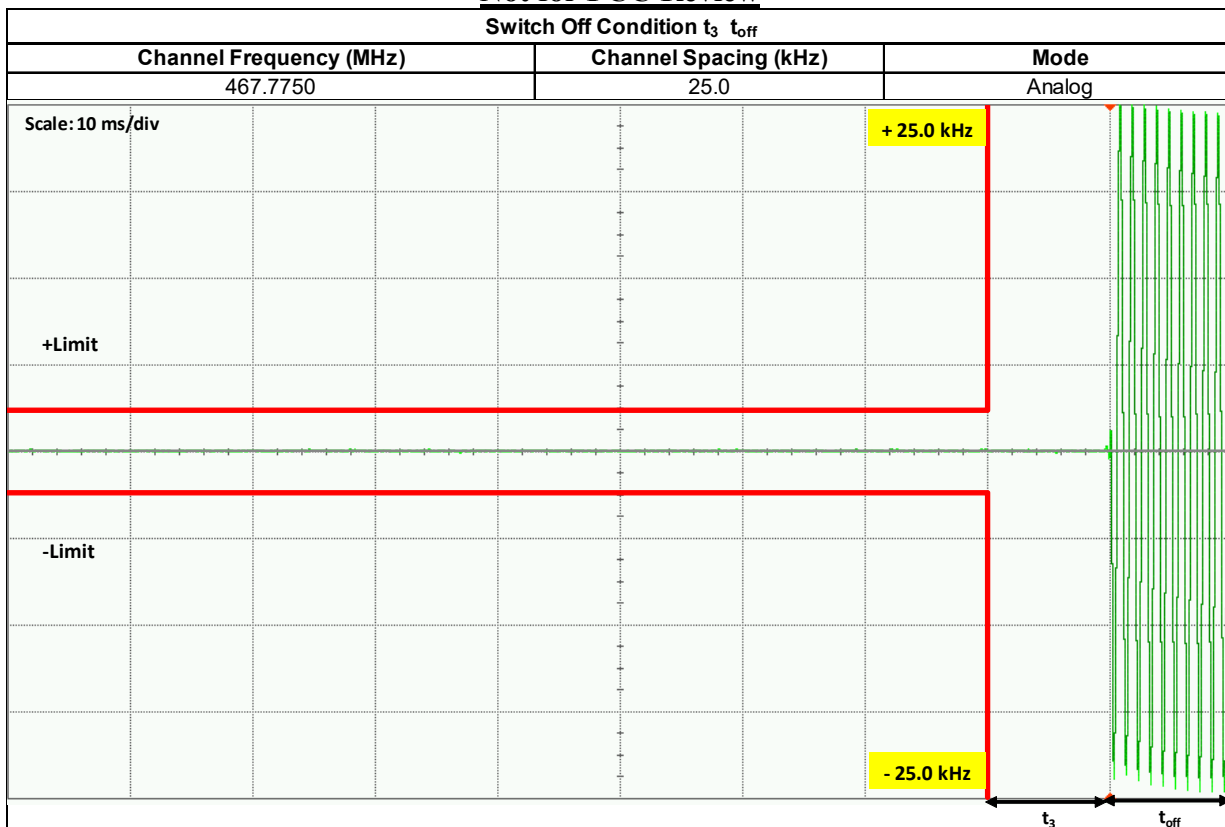

Not for FCC Review

6.8.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.9. Adjacent Channel Power


6.9.1. Test Setup (Analog)

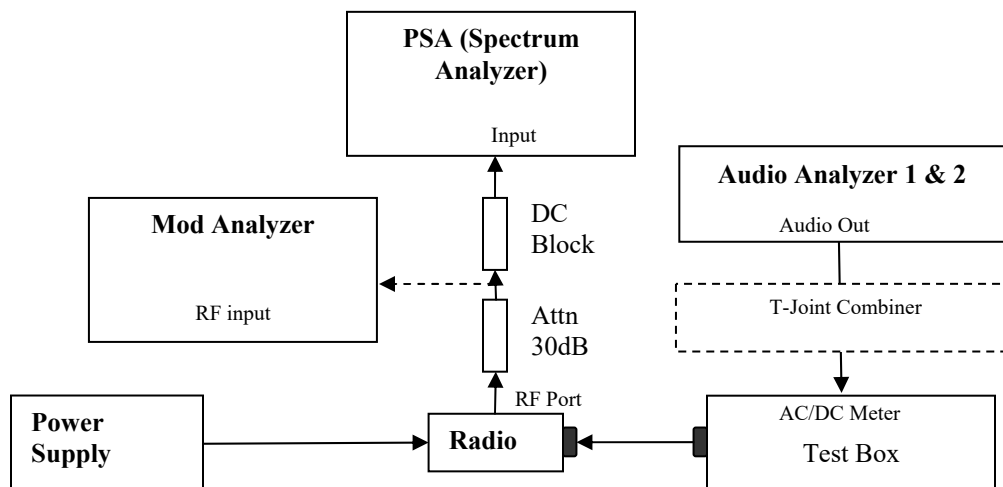

- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.2. Test Result(Analog) NA → Not Applicable

6.9.3. Test Setup (Digital)

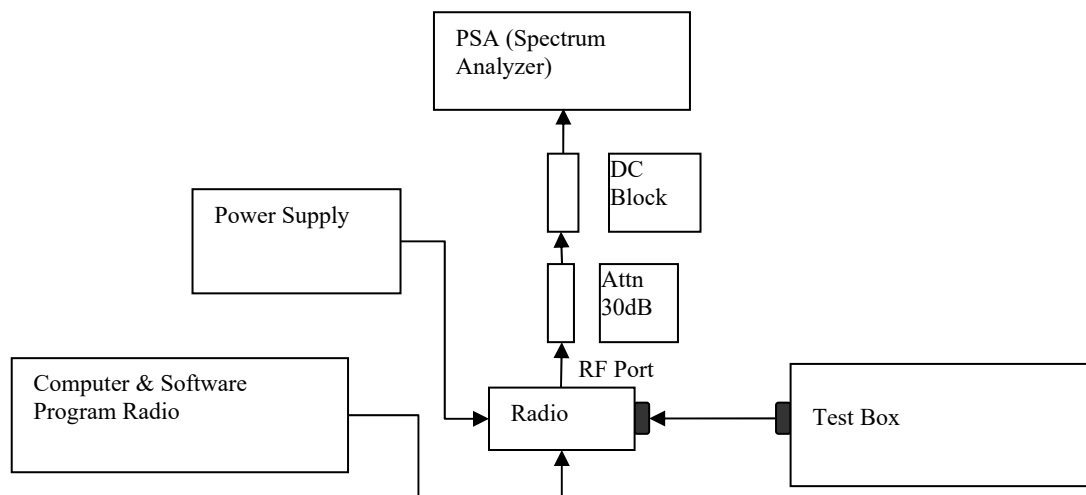

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.4. Test Result (Digital)

NA → Not Applicable

6.9.5. Test limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

6.10. Conducted Spurious Emission

6.10.1. Test Setup

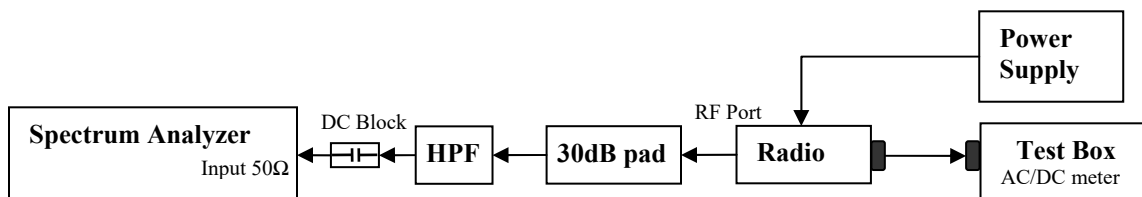


- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - a. 9 KHz to $F_c - \text{Test Bandwidth}$
 - b. $F_c + \text{Test Bandwidth}$ to $2F_c - 5\text{MHz}$.
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.

6.10.2. Test Result (Analog)

Analog: 380.0125 MHz, 25.0kHz Channel Spacing, Max Power


Not for FCC Review

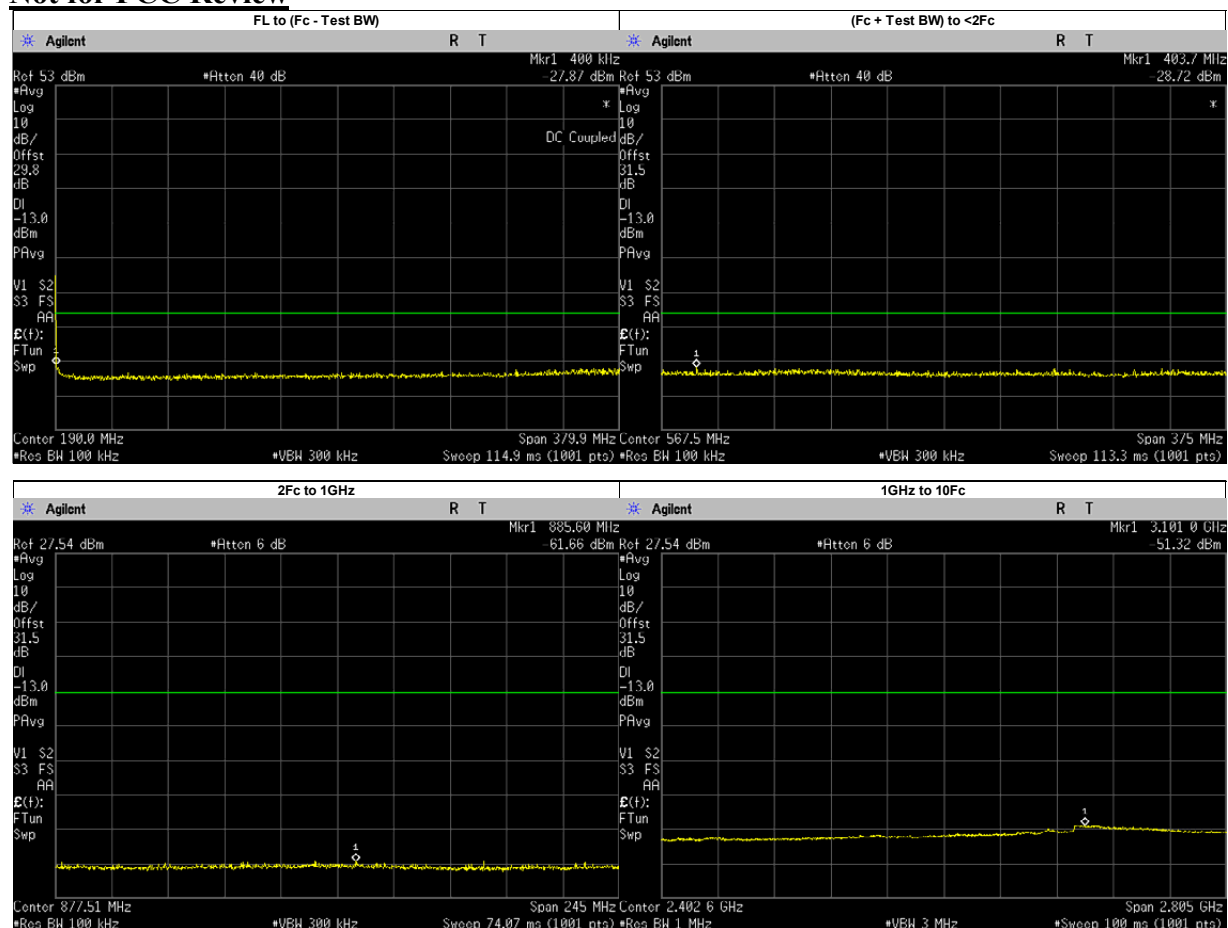

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	372.7379	-27.3907	-13	PASS
(Fc + Test BW) to <2Fc	403.6904	-28.7200	-13	PASS
2Fc to 1GHz	885.5967	-61.6600	-13	PASS
	760.0250	-63.5894	-13	PASS
1GHz to 10Fc	3101.0390	-51.3200	-13	PASS
	1140.0370	-55.4560	-13	PASS
	1520.0500	-55.4692	-13	PASS
	1900.0620	-55.0526	-13	PASS
	2280.0750	-54.7791	-13	PASS
	2660.0880	-53.9949	-13	PASS
	3040.1000	-52.9423	-13	PASS
	3420.1130	-52.4060	-13	PASS
	3800.1250	-53.3166	-13	PASS


Analog: 380.0125 MHz, 25.0kHz Channel Spacing, Low Power

Not for FCC Review

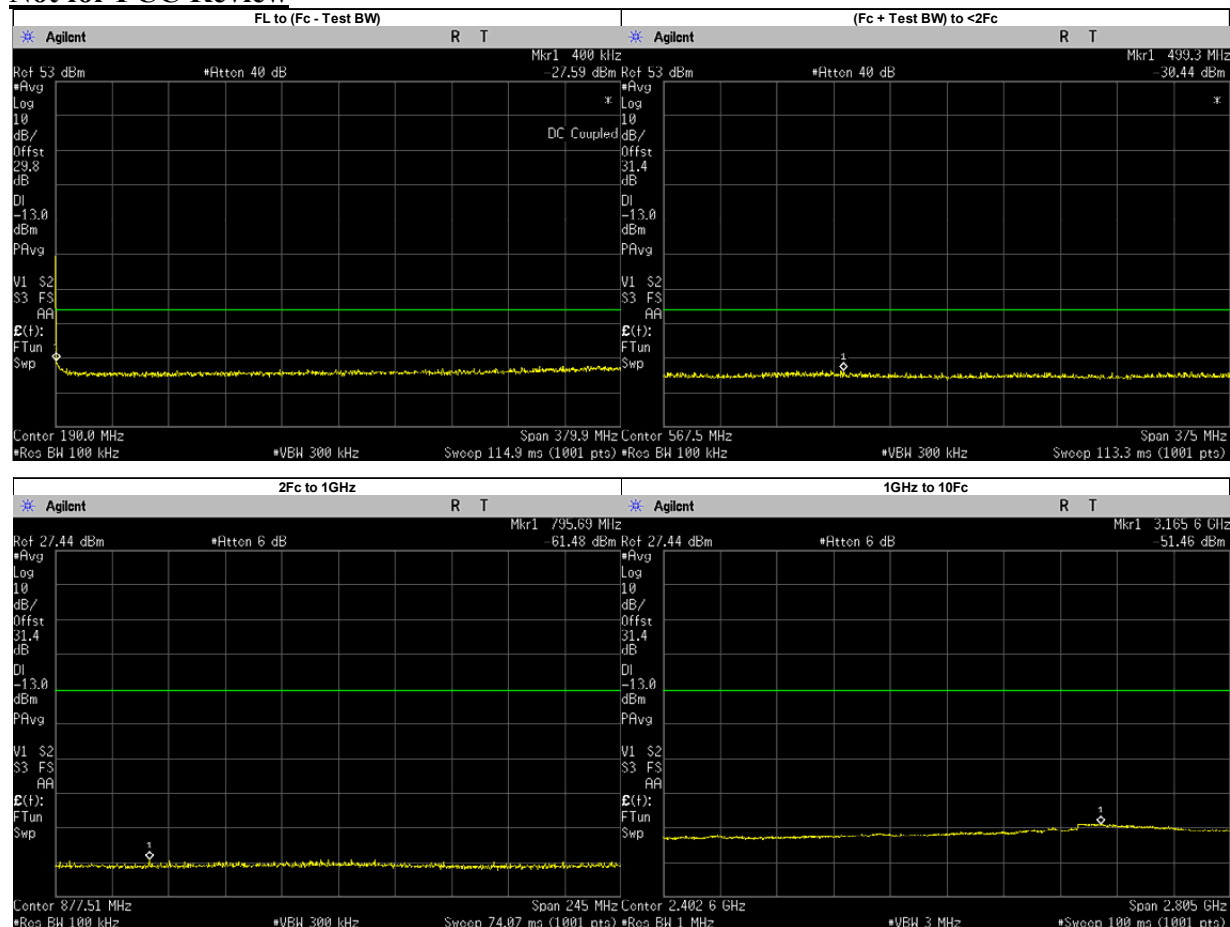


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.3889	-27.6628	-13	PASS
(Fc + Test BW) to <2Fc	499.3044	-30.4400	-13	PASS
2Fc to 1GHz	795.6908	-61.4800	-13	PASS
	760.0250	-63.4633	-13	PASS
1GHz to 10Fc	3165.5570	-51.4600	-13	PASS
	1140.0370	-55.3837	-13	PASS
	1520.0500	-55.4173	-13	PASS
	1900.0620	-55.0780	-13	PASS
	2280.0750	-54.9130	-13	PASS
	2660.0880	-53.9482	-13	PASS
	3040.1000	-53.0420	-13	PASS
	3420.1130	-52.3126	-13	PASS
	3800.1250	-53.3979	-13	PASS

Analog: 406.2 MHz, 25.0kHz Channel Spacing, Max Power
Not for FCC Review

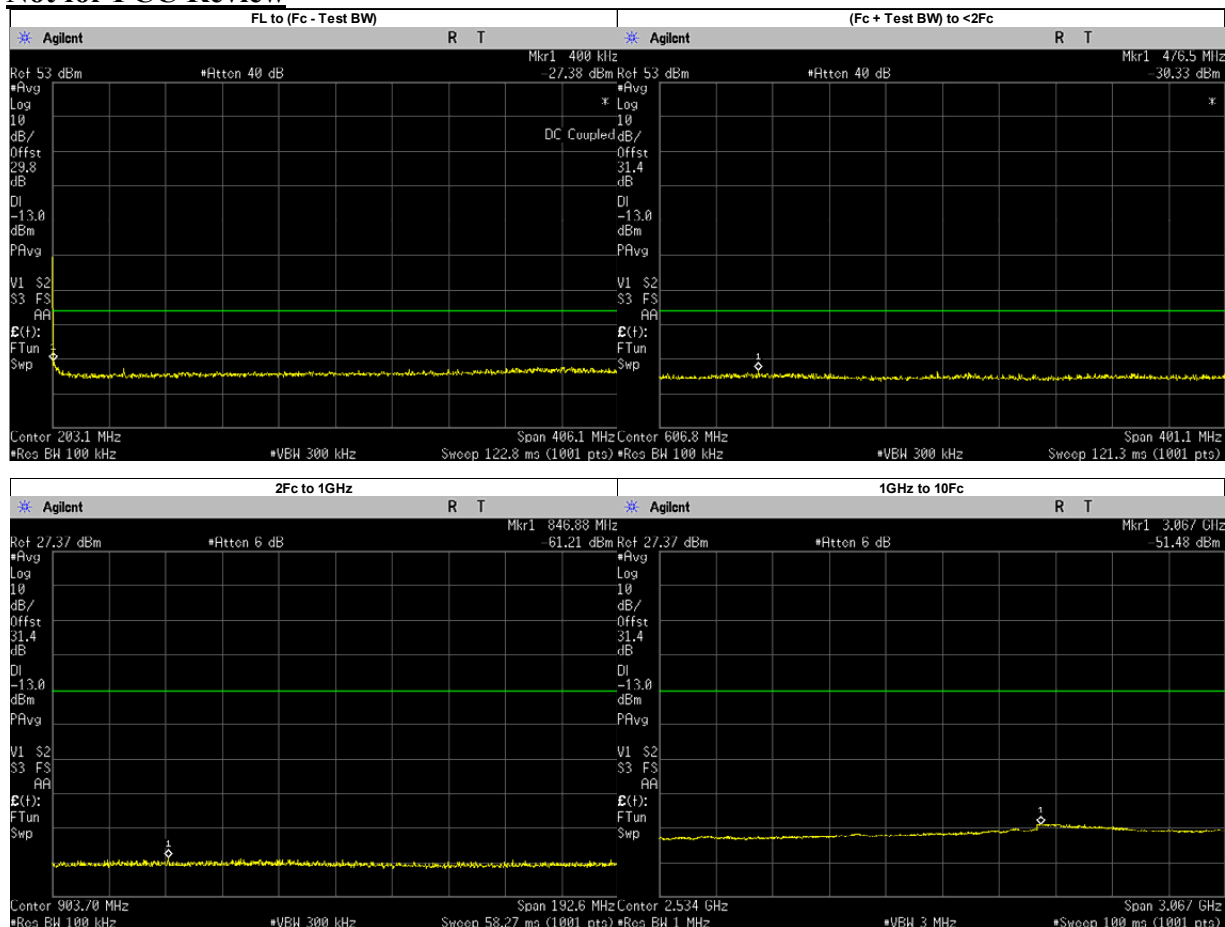


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.4151	-27.4775	-13	PASS
(Fc + Test BW) to <2Fc	476.4559	-30.3300	-13	PASS
2Fc to 1GHz	846.8830	-61.2100	-13	PASS
	812.4000	-63.7535	-13	PASS
1GHz to 10Fc	3067.1580	-51.4800	-13	PASS
	1218.6000	-55.3311	-13	PASS
	1624.8000	-55.5500	-13	PASS
	2031.0000	-54.7770	-13	PASS
	2437.2000	-54.4851	-13	PASS
	2843.4000	-53.7798	-13	PASS
	3249.6000	-52.3663	-13	PASS
	3655.8000	-53.4021	-13	PASS
	4062.0000	-53.2223	-13	PASS

Analog: 406.2 MHz, 25.0kHz Channel Spacing, Low Power
Not for FCC Review

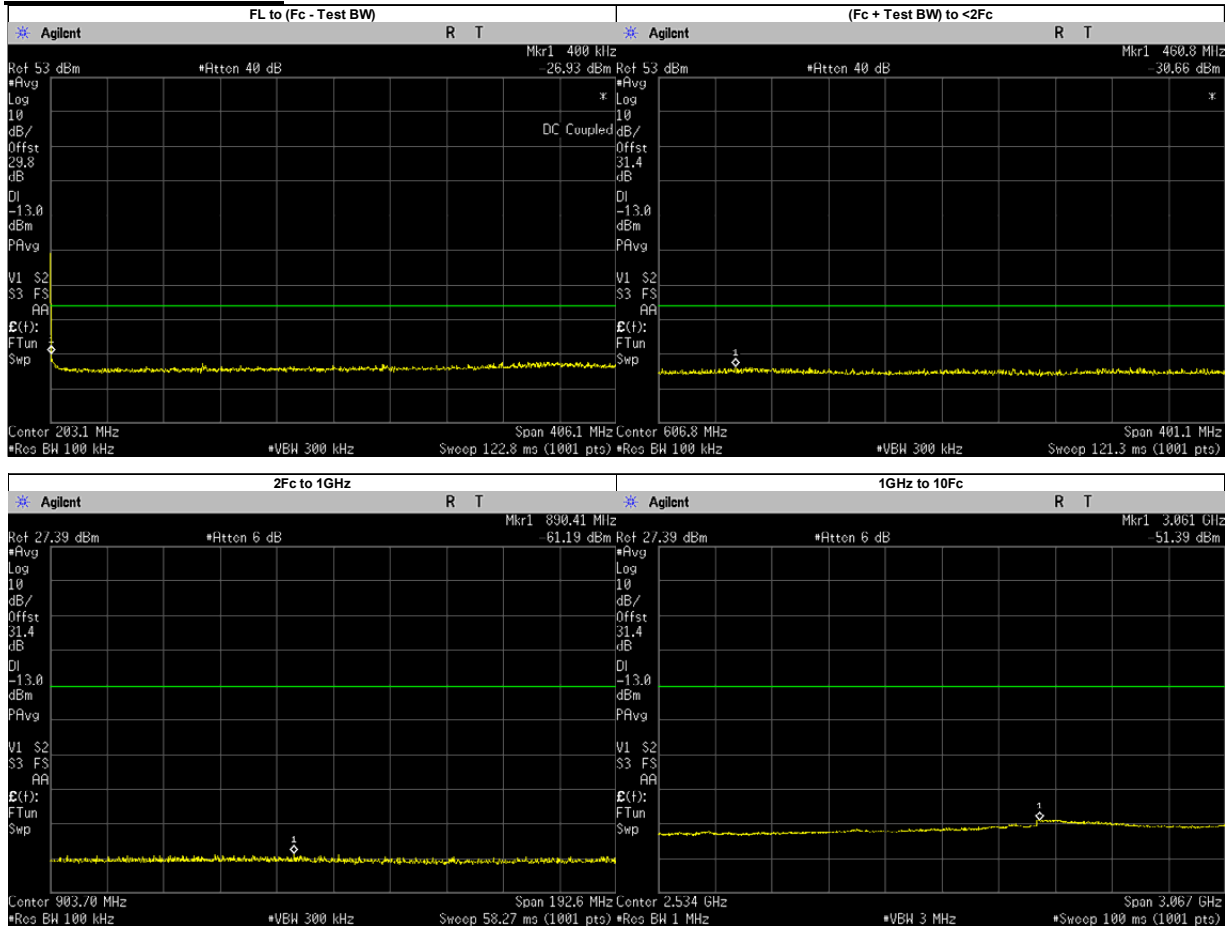


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.4151	-27.0147	-13	PASS
(Fc + Test BW) to <2Fc	460.8113	-30.6600	-13	PASS
2Fc to 1GHz	890.4106	-61.1900	-13	PASS
	812.4000	-63.7581	-13	PASS
1GHz to 10Fc	3061.0240	-51.3900	-13	PASS
	1218.6000	-55.4985	-13	PASS
	1624.8000	-55.3516	-13	PASS
	2031.0000	-54.8235	-13	PASS
	2437.2000	-54.4040	-13	PASS
	2843.4000	-53.7764	-13	PASS
	3249.6000	-52.1515	-13	PASS
	3655.8000	-53.3896	-13	PASS
	4062.0000	-52.9916	-13	PASS

Analog: 450.025 MHz, 25.0kHz Channel Spacing, Max Power
FCC Part 74, RSS 119

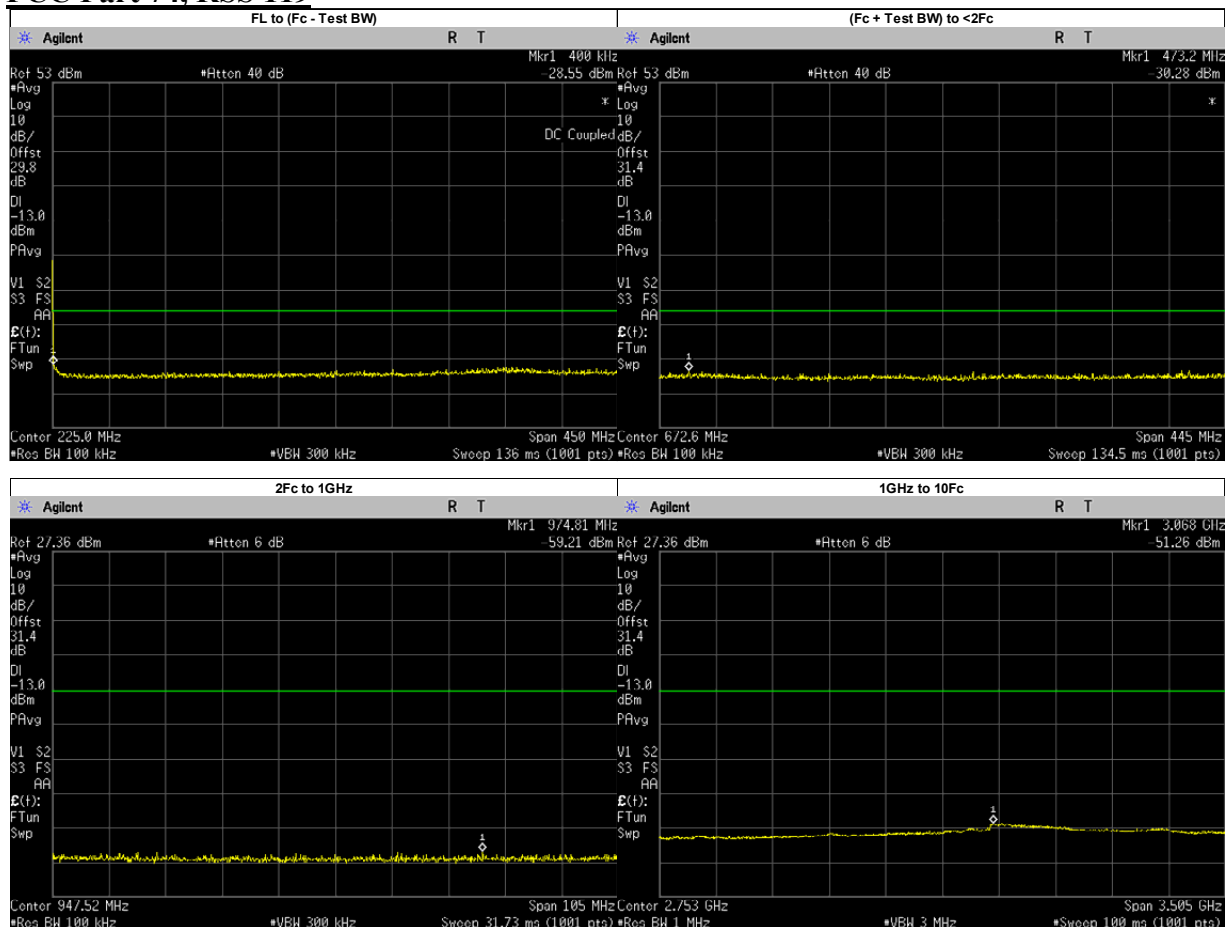


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	365.3759	-27.7685	-13	PASS
(Fc + Test BW) to <2Fc	473.2201	-30.2800	-13	PASS
2Fc to 1GHz	974.8120	-59.2100	-13	PASS
	900.0500	-61.6663	-13	PASS
1GHz to 10Fc	3068.0970	-51.2600	-13	PASS
	1350.0750	-55.4651	-13	PASS
	1800.1000	-55.0351	-13	PASS
	2250.1250	-54.7590	-13	PASS
	2700.1500	-53.9628	-13	PASS
	3150.1750	-51.6112	-13	PASS
	3600.2000	-53.2641	-13	PASS
	4050.2250	-53.0435	-13	PASS
	4500.2500	-53.9510	-13	PASS

Analog: 450.025 MHz, 25.0kHz Channel Spacing, Low Power
FCC Part 74, RSS 119

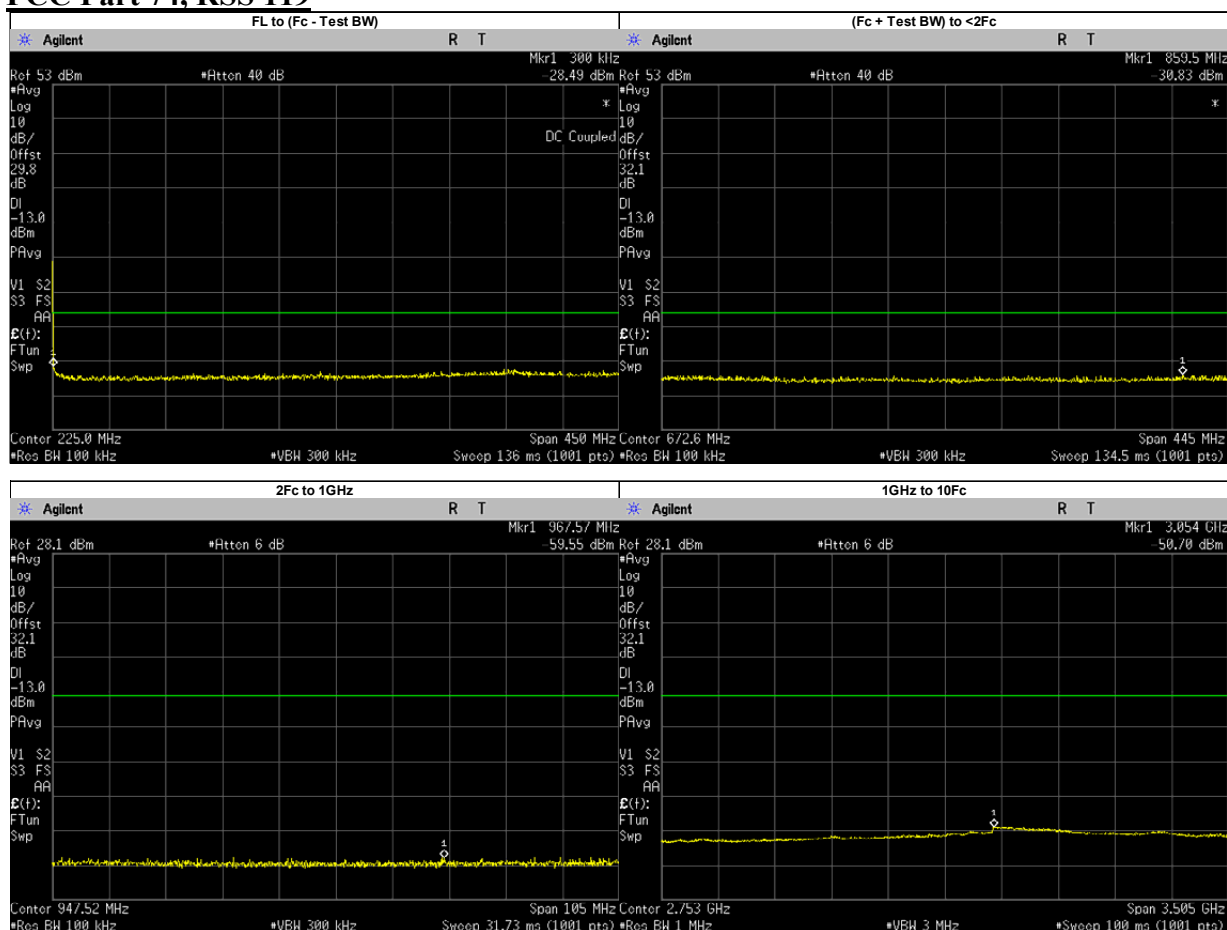


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	361.7762	-27.8589	-13	PASS
(Fc + Test BW) to <2Fc	859.4525	-30.8300	-13	PASS
2Fc to 1GHz	967.5705	-59.5500	-13	PASS
	900.0500	-61.1532	-13	PASS
1GHz to 10Fc	3054.0770	-50.7000	-13	PASS
	1350.0750	-54.7370	-13	PASS
	1800.1000	-54.4818	-13	PASS
	2250.1250	-54.1029	-13	PASS
	2700.1500	-53.4549	-13	PASS
	3150.1750	-51.1410	-13	PASS
	3600.2000	-52.2823	-13	PASS
	4050.2250	-52.3973	-13	PASS
	4500.2500	-53.5931	-13	PASS

Analog: 459.125 MHz, 25.0kHz Channel Spacing, Max Power
FCC Part 22, RSS 119

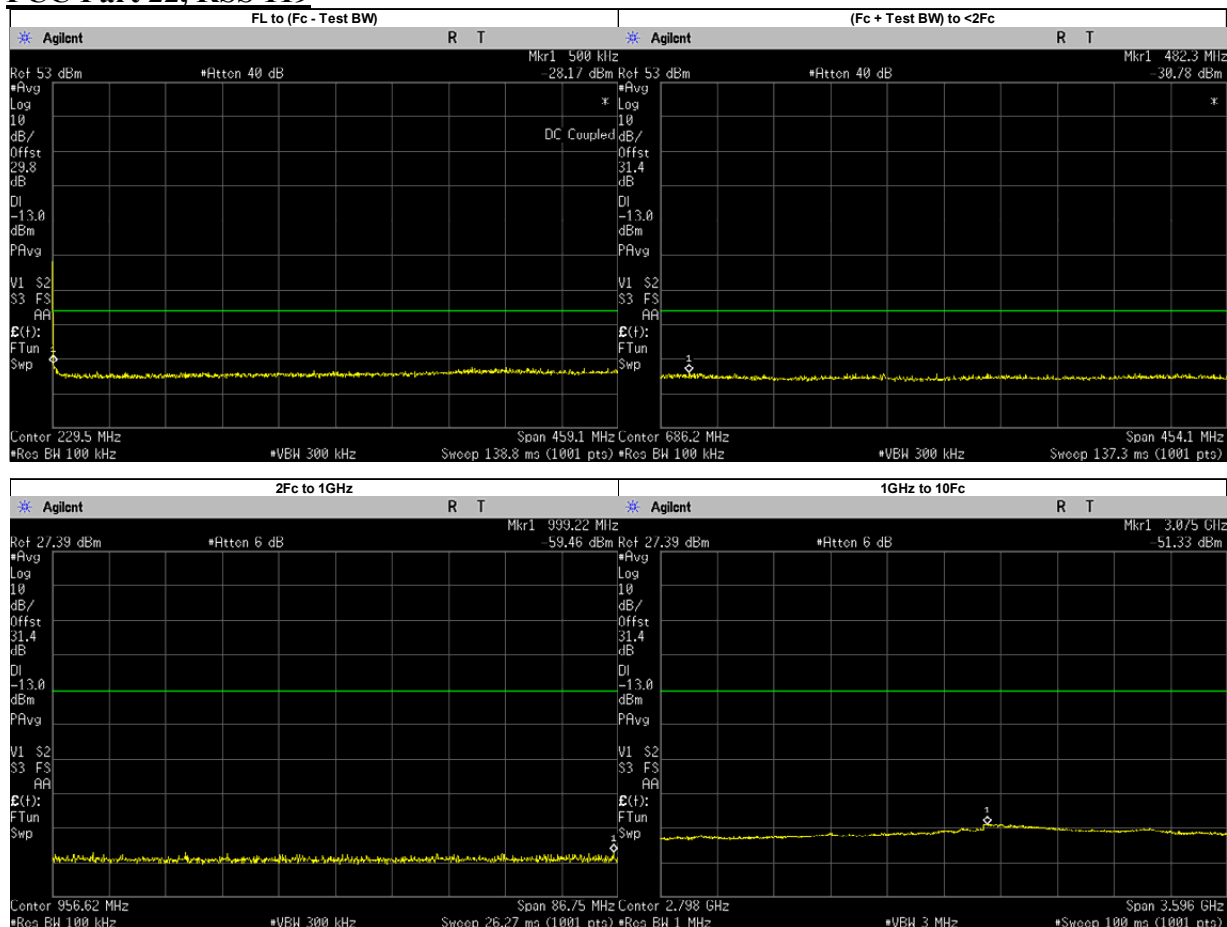


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	395.7180	-28.0781	-13	PASS
(Fc + Test BW) to <2Fc	482.3393	-30.7800	-13	PASS
2Fc to 1GHz	999.2192	-59.4600	-13	PASS
	918.2500	-61.4923	-13	PASS
1GHz to 10Fc	3075.0360	-51.3400	-13	PASS
	1377.3750	-55.5860	-13	PASS
	1836.5000	-55.0301	-13	PASS
	2295.6250	-54.8851	-13	PASS
	2754.7500	-54.1657	-13	PASS
	3213.8750	-51.8659	-13	PASS
	3673.0000	-53.4235	-13	PASS
	4132.1250	-53.2739	-13	PASS
	4591.2500	-54.3560	-13	PASS

Analog: 459.125 MHz, 25.0kHz Channel Spacing, Low Power
FCC Part 22, RSS 119

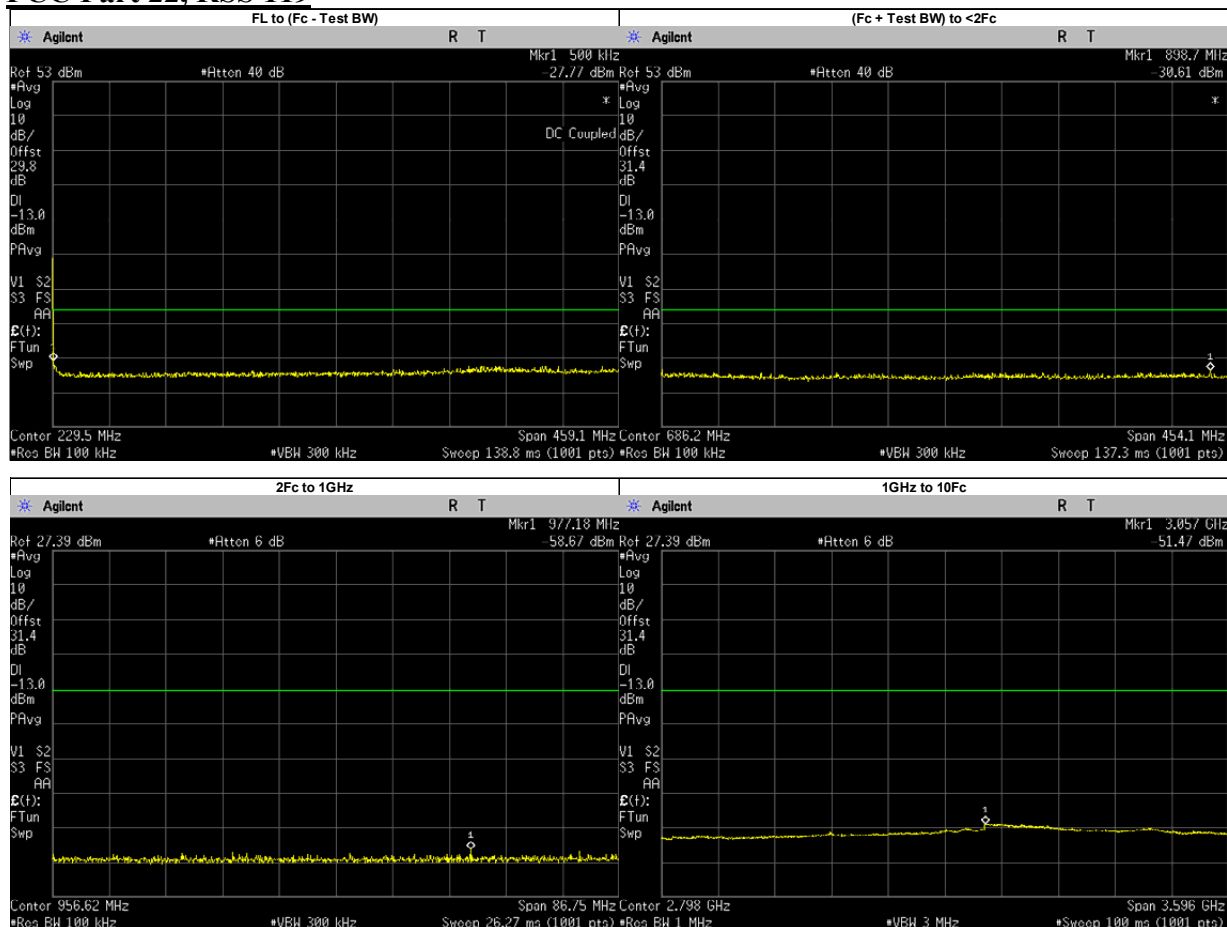


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.4681	-27.8592	-13	PASS
(Fc + Test BW) to <2Fc	898.7198	-30.6100	-13	PASS
2Fc to 1GHz	977.1848	-58.6700	-13	PASS
	918.2500	-62.0853	-13	PASS
1GHz to 10Fc	3057.0550	-51.4700	-13	PASS
	1377.3750	-55.3830	-13	PASS
	1836.5000	-55.3373	-13	PASS
	2295.6250	-54.5915	-13	PASS
	2754.7500	-54.1540	-13	PASS
	3213.8750	-51.9544	-13	PASS
	3673.0000	-53.3158	-13	PASS
	4132.1250	-53.1042	-13	PASS
	4591.2500	-54.2816	-13	PASS

**Analog: 467.775 MHz, 25.0kHz Channel Spacing, Max Power
FCC Part 80, RSS 119**

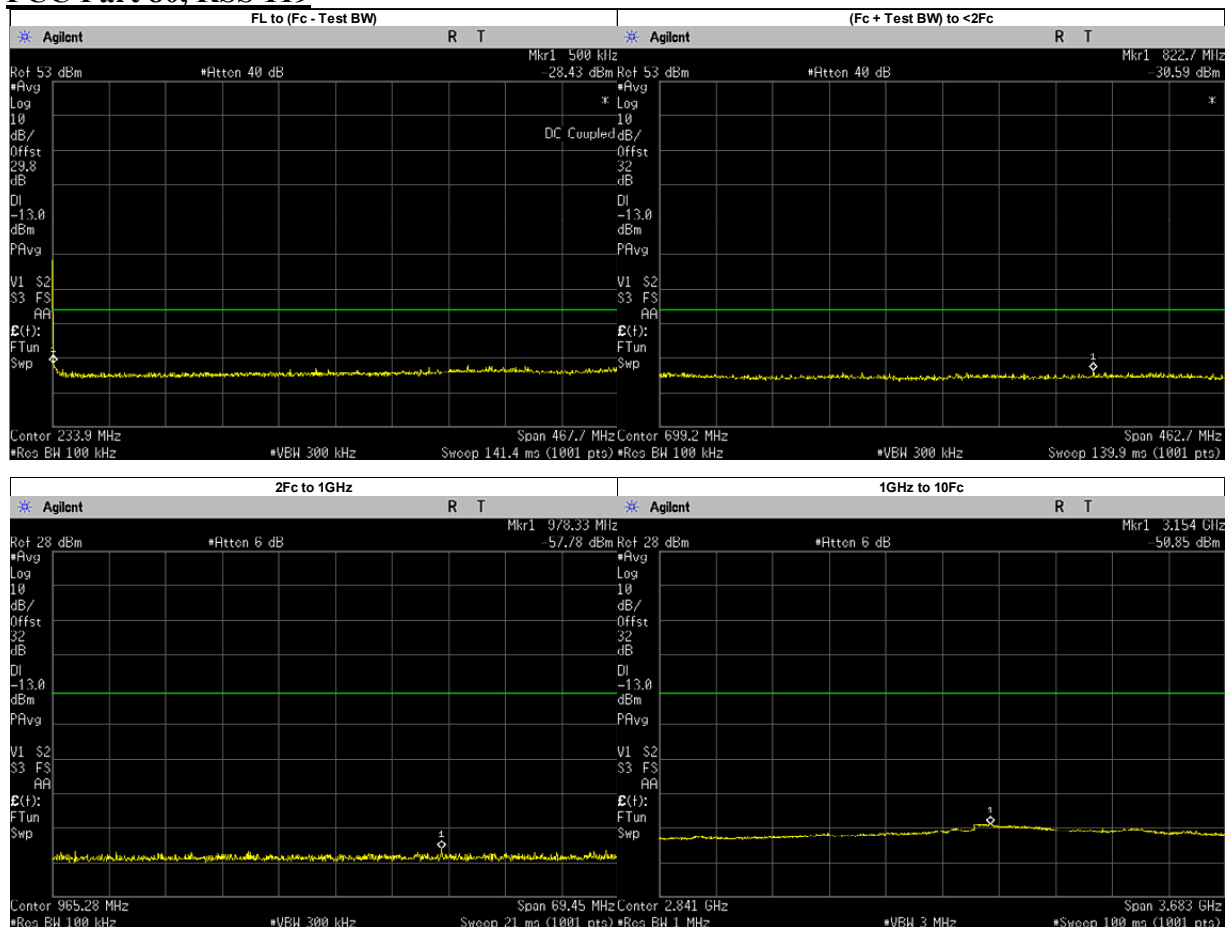


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	343.3076	-27.6770	-13	PASS
(Fc + Test BW) to <2Fc	822.7367	-30.5900	-13	PASS
2Fc to 1GHz	978.3316	-57.7800	-13	PASS
	935.5500	-60.2238	-13	PASS
1GHz to 10Fc	3154.4090	-50.8400	-13	PASS
	1403.3250	-55.0044	-13	PASS
	1871.1000	-54.5793	-13	PASS
	2338.8750	-54.0408	-13	PASS
	2806.6500	-52.9537	-13	PASS
	3274.4250	-51.5587	-13	PASS
	3742.2000	-52.9423	-13	PASS
	4209.9750	-53.1099	-13	PASS
	4677.7500	-53.7793	-13	PASS

Analog: 467.775 MHz, 25.0kHz Channel Spacing, Low Power
FCC Part 80, RSS 119

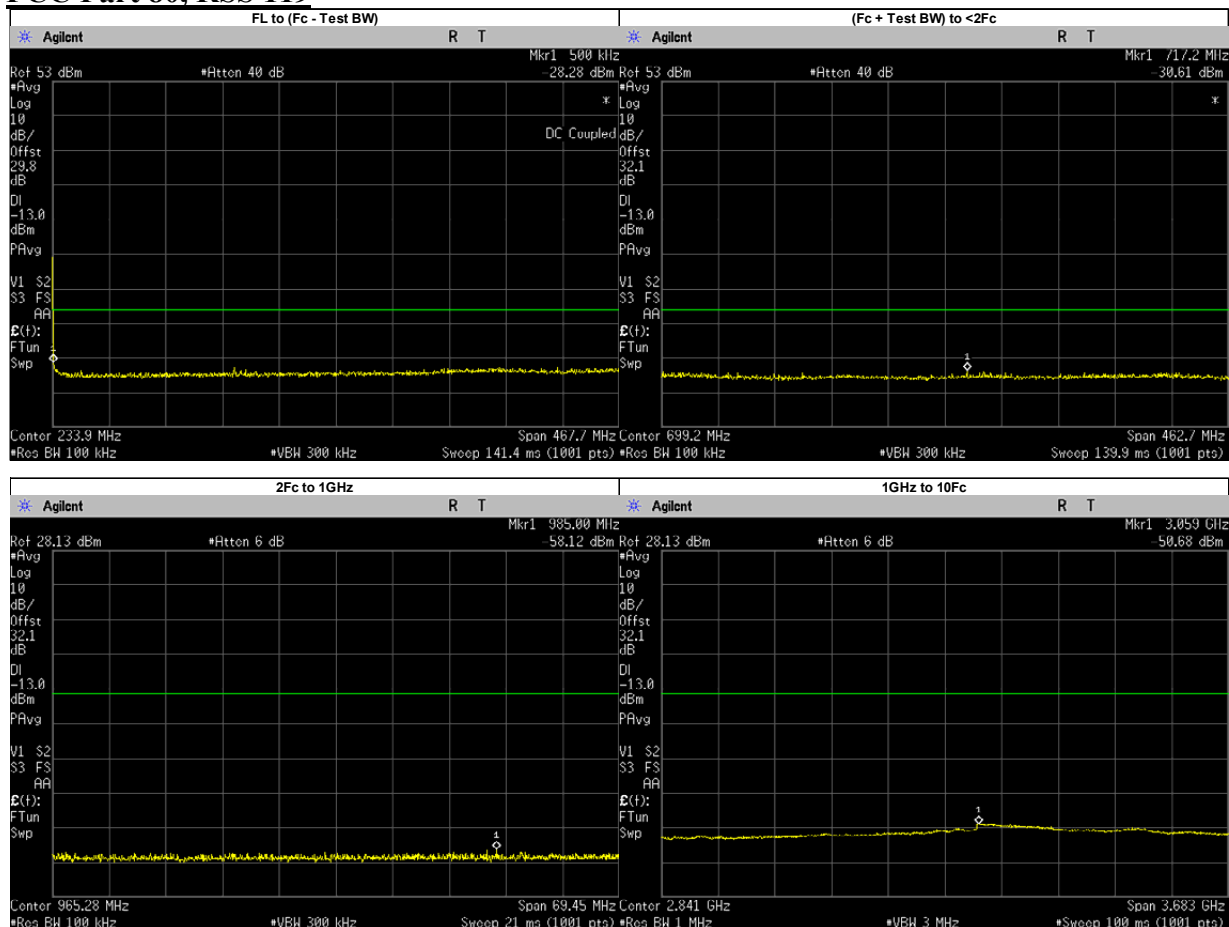


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	368.5638	-28.1357	-13	PASS
(Fc + Test BW) to <2Fc	717.2369	-30.6100	-13	PASS
2Fc to 1GHz	984.9988	-58.1200	-13	PASS
	935.5500	-61.0503	-13	PASS
1GHz to 10Fc	3058.6570	-50.6800	-13	PASS
	1403.3250	-54.6798	-13	PASS
	1871.1000	-54.2855	-13	PASS
	2338.8750	-54.0314	-13	PASS
	2806.6500	-52.6290	-13	PASS
	3274.4250	-51.5550	-13	PASS
	3742.2000	-52.5514	-13	PASS
	4209.9750	-52.9824	-13	PASS
	4677.7500	-53.5907	-13	PASS

Analog: 469.9875 MHz, 25.0kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

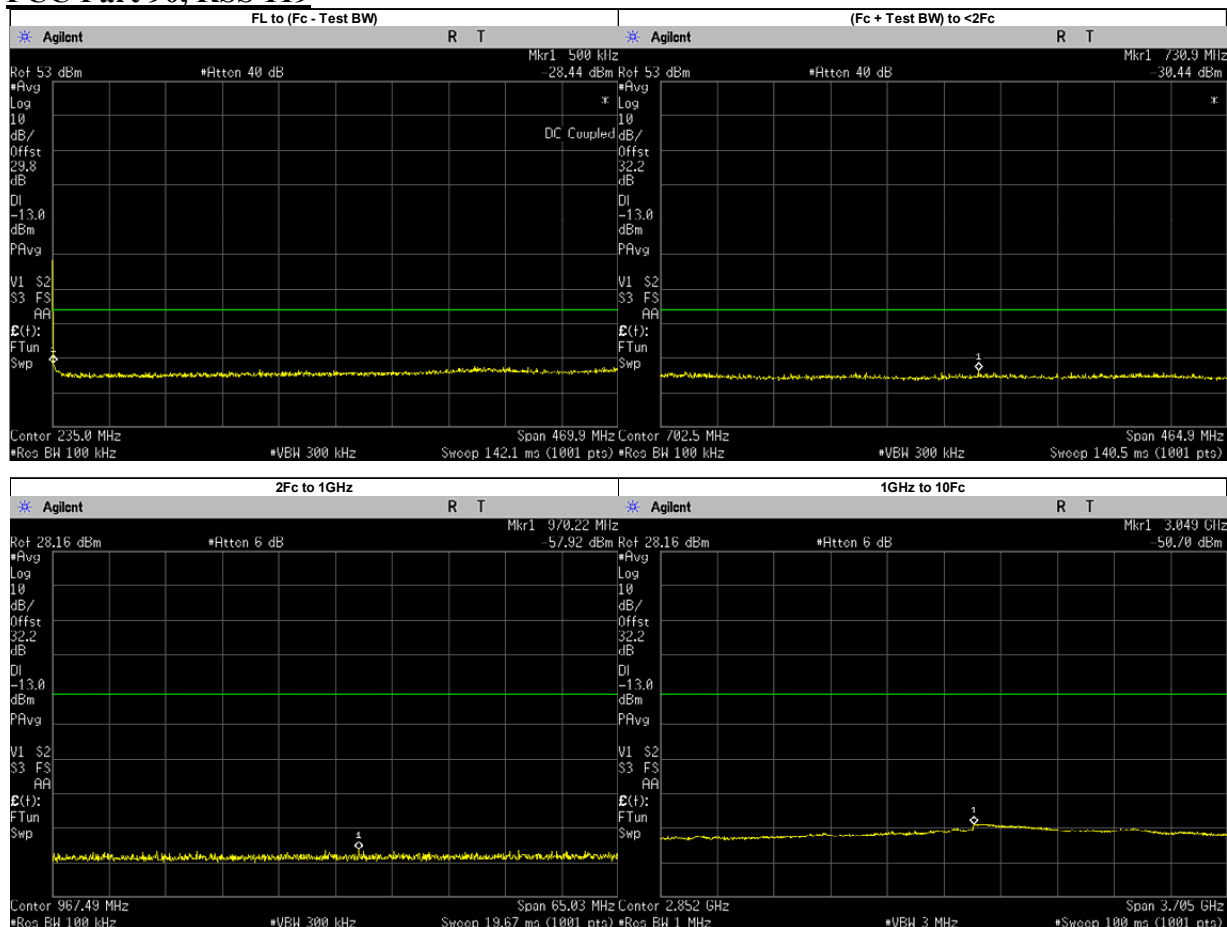

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	394.7432	-28.0401	-13	PASS
(Fc + Test BW) to <2Fc	730.8704	-30.4400	-13	PASS
2Fc to 1GHz	970.2186	-57.9200	-13	PASS
	939.9750	-59.4322	-13	PASS
1GHz to 10Fc	3048.7960	-50.7000	-13	PASS
	1409.9630	-54.7173	-13	PASS
	1879.9500	-54.2757	-13	PASS
	2349.9370	-53.8526	-13	PASS
	2819.9250	-52.7096	-13	PASS
	3289.9120	-51.5714	-13	PASS
	3759.9000	-52.5181	-13	PASS
	4229.8870	-52.8054	-13	PASS
	4699.8750	-53.7713	-13	PASS

Analog: 469.9875 MHz, 25.0kHz Channel Spacing, Low Power
FCC Part 90, RSS 119

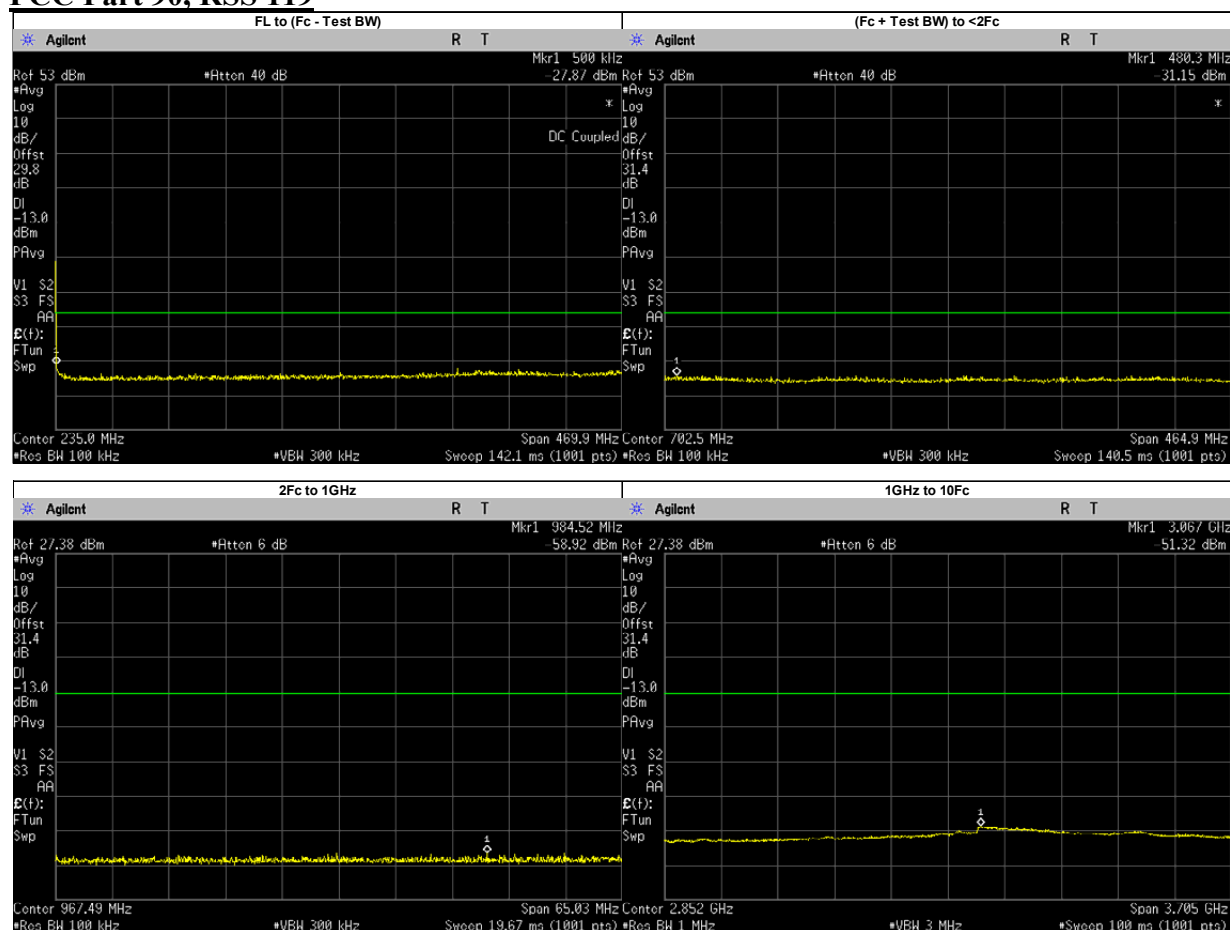


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.4789	-27.9428	-13	PASS
(Fc + Test BW) to <2Fc	480.2728	-31.1500	-13	PASS
2Fc to 1GHz	984.5240	-58.9200	-13	PASS
	939.9750	-60.9355	-13	PASS
1GHz to 10Fc	3067.3200	-51.3200	-13	PASS
	1879.9500	-55.1502	-13	PASS
	2349.9370	-54.4269	-13	PASS
	2819.9250	-53.4728	-13	PASS
	3289.9120	-52.2588	-13	PASS
	3759.9000	-53.4014	-13	PASS
	4229.8870	-53.8848	-13	PASS
	4699.8750	-54.3851	-13	PASS

6.10.3. Test Result (Digital)


Digital : 380.0125 MHz, 12.5kHz Channel Spacing, Max Power

Not for FCC Review

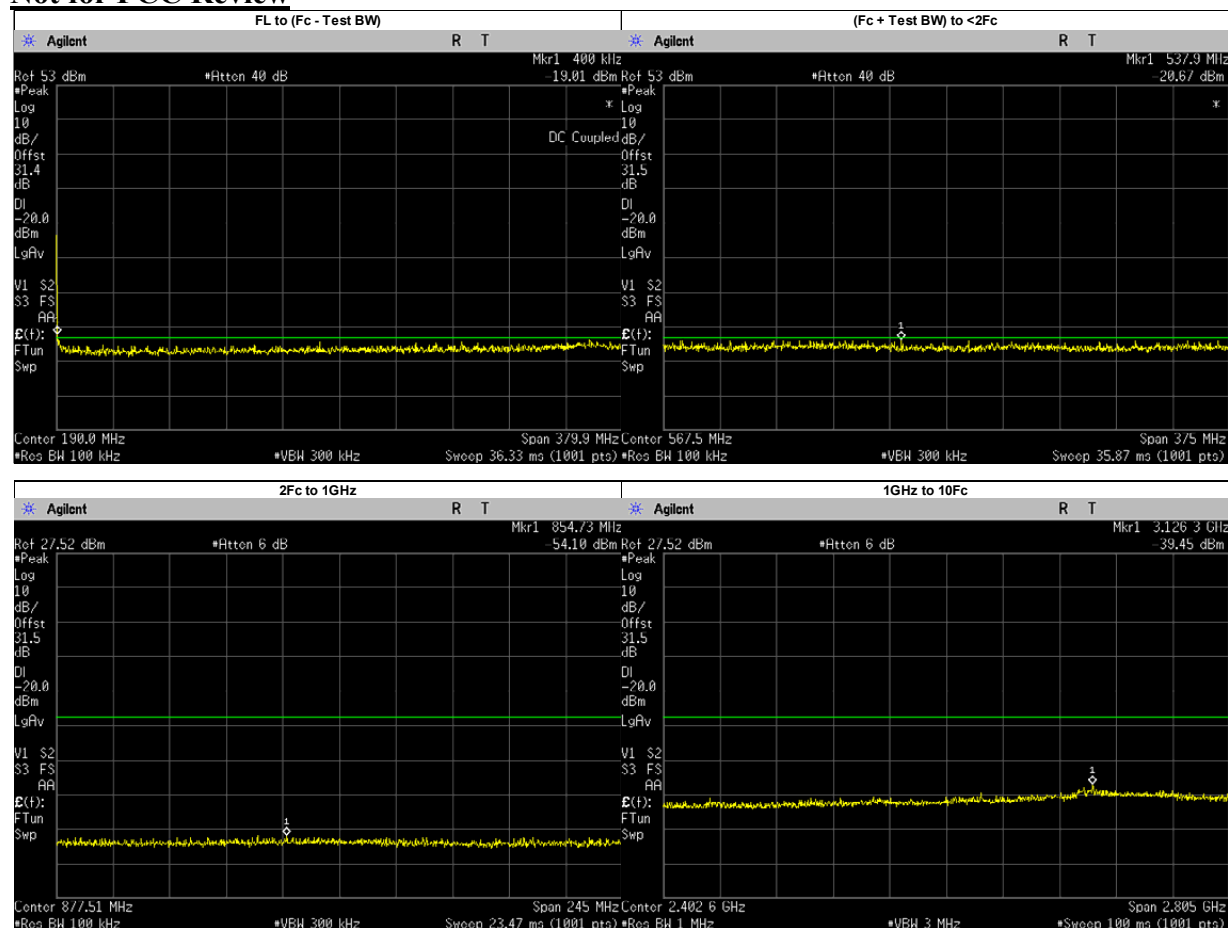


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.3889	-20.7330	-20	PASS
(Fc + Test BW) to <2Fc	537.9250	-20.6700	-20	PASS
2Fc to 1GHz	854.7298	-54.1000	-20	PASS
	760.0250	-56.2204	-20	PASS
1GHz to 10Fc	1140.0370	-46.0566	-20	PASS
	1520.0500	-45.4279	-20	PASS
	1900.0620	-44.8013	-20	PASS
	2280.0750	-44.6757	-20	PASS
	2660.0880	-43.9113	-20	PASS
	3040.1000	-43.0733	-20	PASS
	3420.1130	-42.4819	-20	PASS
	3800.1250	-43.8055	-20	PASS
	3126.2850	-39.4500	-20	PASS

Digital : 380.0125 MHz, 12.5kHz Channel Spacing, Low Power
Not for FCC Review

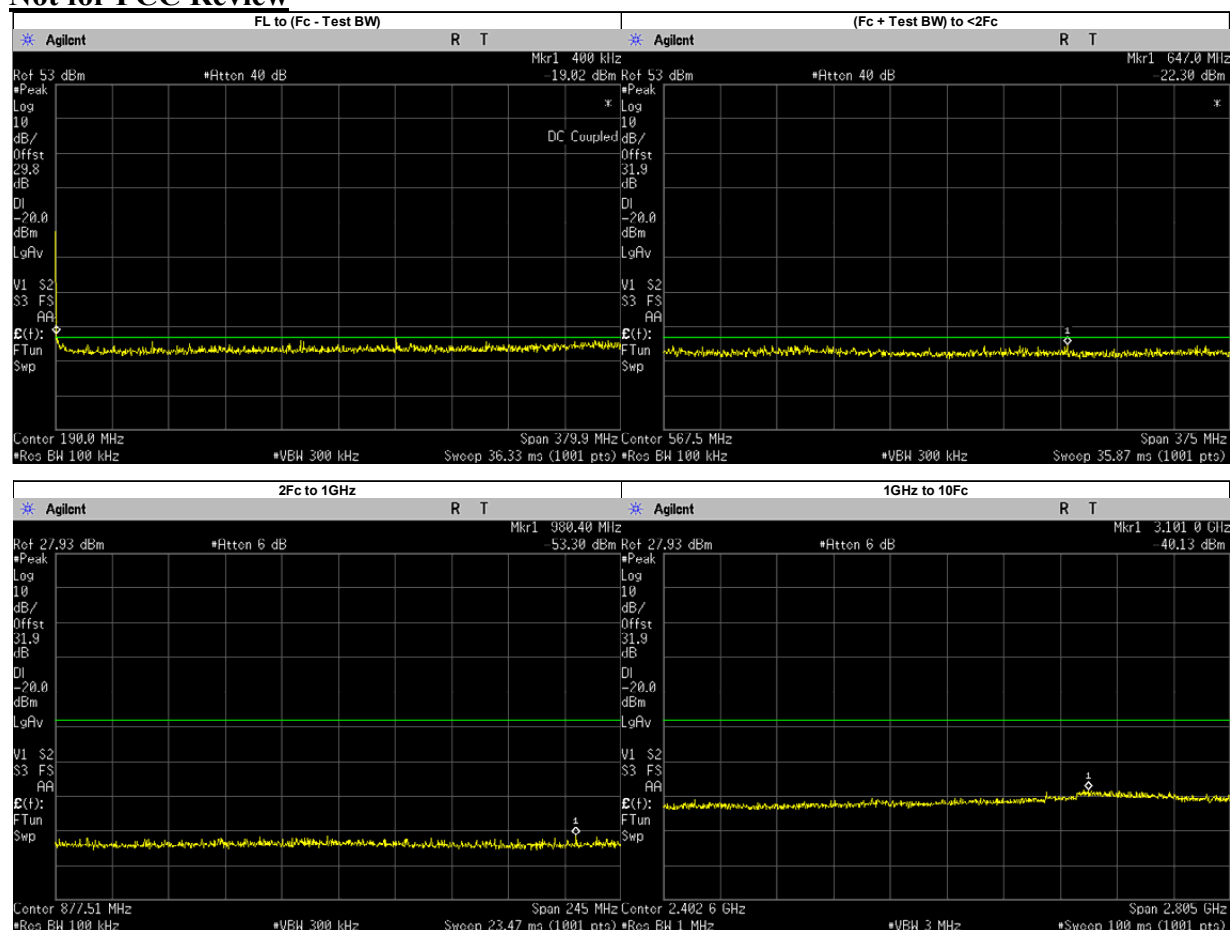


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	164.5264	-24.4877	-20	PASS
(Fc + Test BW) to <2Fc	647.0374	-22.3000	-20	PASS
2Fc to 1GHz	980.4020	-53.3000	-20	PASS
	760.0250	-56.0822	-20	PASS
1GHz to 10Fc	3101.0390	-40.1300	-20	PASS
	1140.0370	-44.8268	-20	PASS
	1520.0500	-45.3039	-20	PASS
	1900.0620	-44.4725	-20	PASS
	2280.0750	-44.1972	-20	PASS
	2660.0880	-43.9723	-20	PASS
	3040.1000	-42.9569	-20	PASS
	3420.1130	-41.6632	-20	PASS
	3800.1250	-43.0497	-20	PASS

Digital : 406.2 MHz, 12.5kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

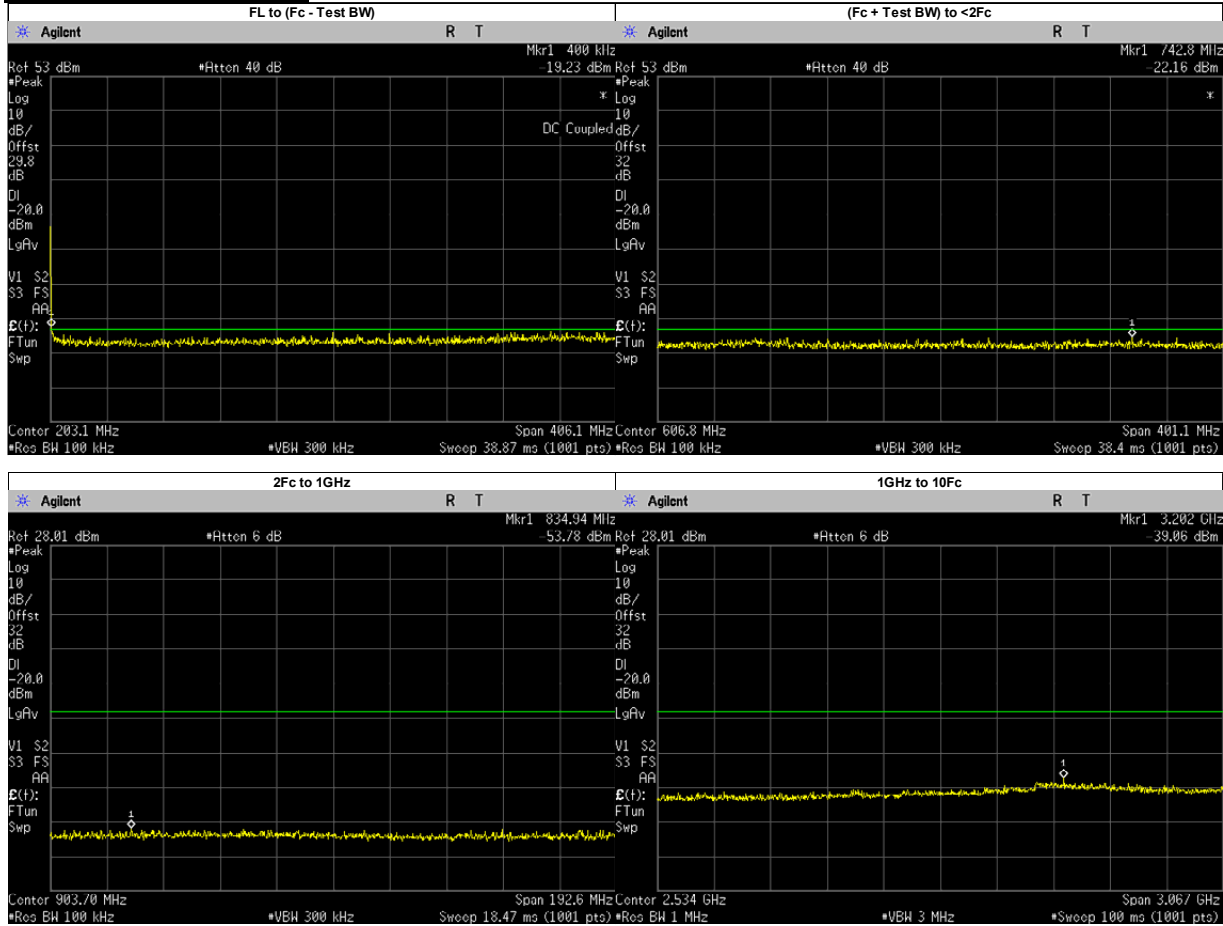


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.6335	-20.8180	-20	PASS
(Fc + Test BW) to <2Fc	742.8158	-22.1600	-20	PASS
2Fc to 1GHz	834.9418	-53.7800	-20	PASS
	812.4000	-54.4439	-20	PASS
1GHz to 10Fc	1218.6000	-44.8700	-20	PASS
	1624.8000	-44.1568	-20	PASS
	2031.0000	-44.4037	-20	PASS
	2437.2000	-43.9878	-20	PASS
	2843.4000	-43.3961	-20	PASS
	3249.6000	-42.0579	-20	PASS
	3655.8000	-42.2746	-20	PASS
	4062.0000	-42.1982	-20	PASS
	3202.1060	-39.0600	-20	PASS

Digital : 406.2 MHz, 12.5kHz Channel Spacing, Low Power
FCC Part 90, RSS 119

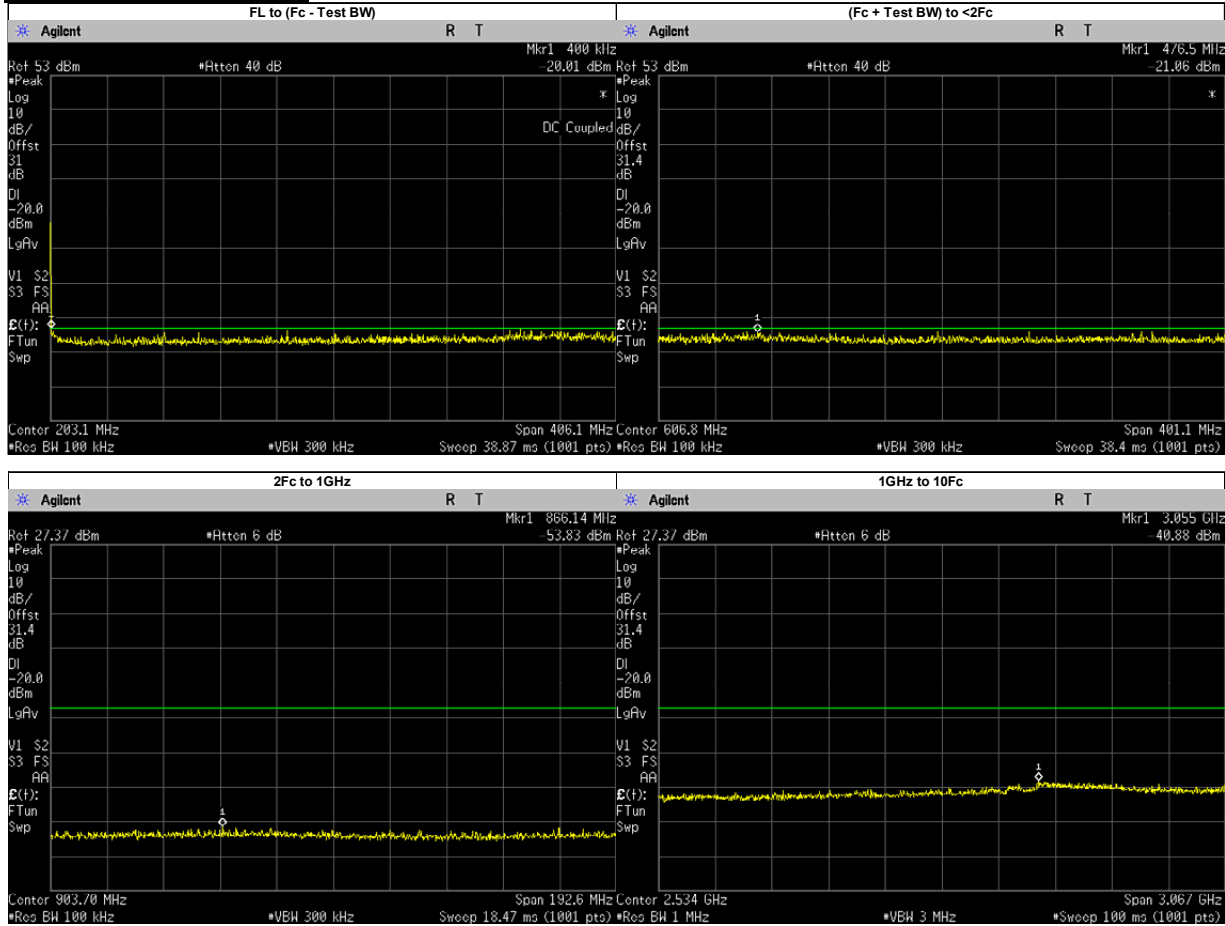


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	344.4118	-20.5777	-20	PASS
(Fc + Test BW) to <2Fc	476.4559	-21.0600	-20	PASS
2Fc to 1GHz	866.1430	-53.8300	-20	PASS
	812.4000	-56.3854	-20	PASS
1GHz to 10Fc	3054.8900	-40.8800	-20	PASS
	1218.6000	-45.7256	-20	PASS
	1624.8000	-45.7895	-20	PASS
	2031.0000	-44.4591	-20	PASS
	2437.2000	-44.5565	-20	PASS
	2843.4000	-43.5245	-20	PASS
	3249.6000	-42.7040	-20	PASS
	3655.8000	-43.1274	-20	PASS
	4062.0000	-42.4204	-20	PASS

Digital : 450.025 MHz, 12.5kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

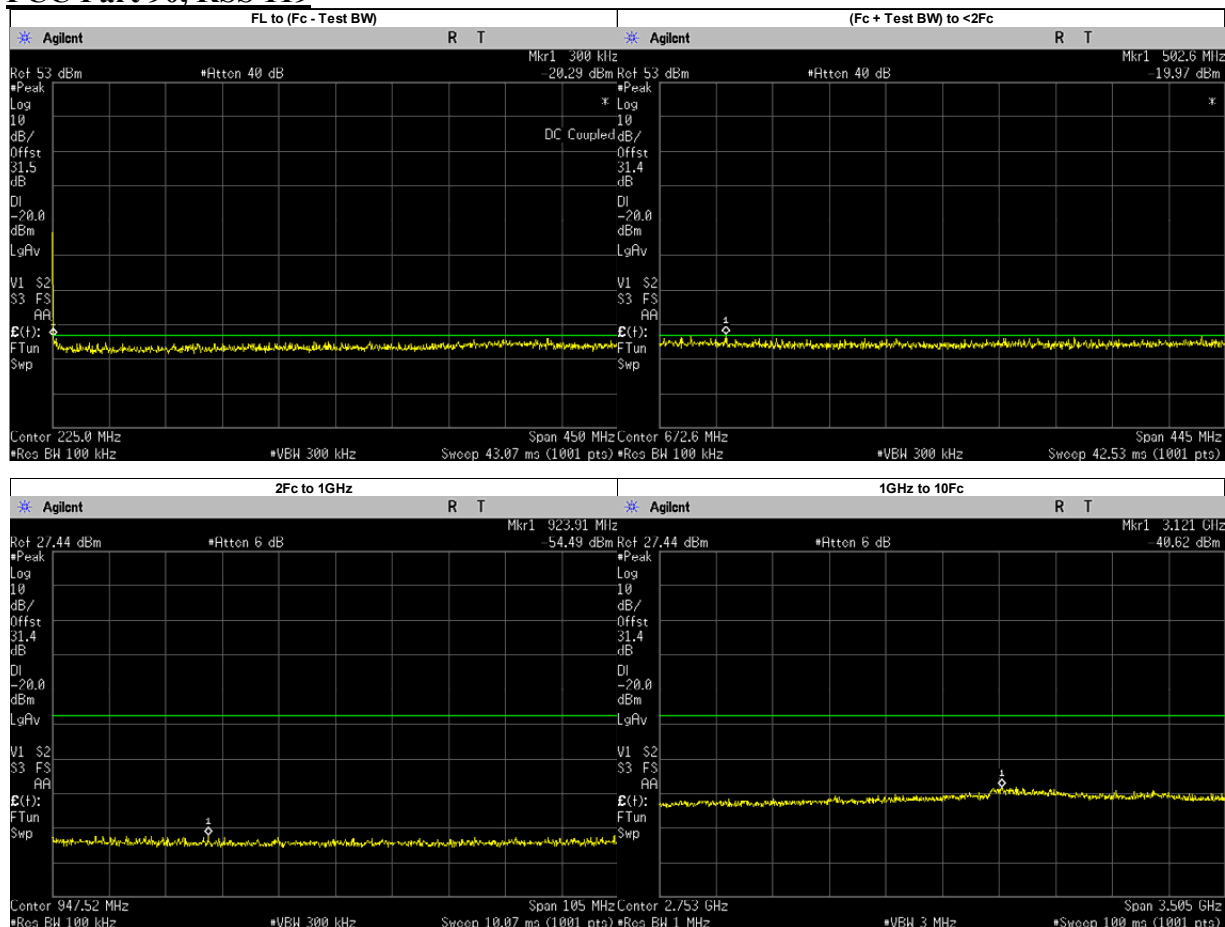


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	393.2733	-20.9976	-20	PASS
(Fc + Test BW) to <2Fc	502.5880	-19.9700	-20	PASS
2Fc to 1GHz	923.9112	-54.4900	-20	PASS
	900.0500	-56.0537	-20	PASS
1GHz to 10Fc	3120.6760	-40.6200	-20	PASS
	1350.0750	-45.8504	-20	PASS
	1800.1000	-45.5618	-20	PASS
	2250.1250	-44.9888	-20	PASS
	2700.1500	-44.8632	-20	PASS
	3150.1750	-41.6894	-20	PASS
	3600.2000	-42.9348	-20	PASS
	4050.2250	-42.4663	-20	PASS
	4500.2500	-44.4938	-20	PASS

Digital : 450.025 MHz, 12.5kHz Channel Spacing, Low Power
FCC Part 90, RSS 119

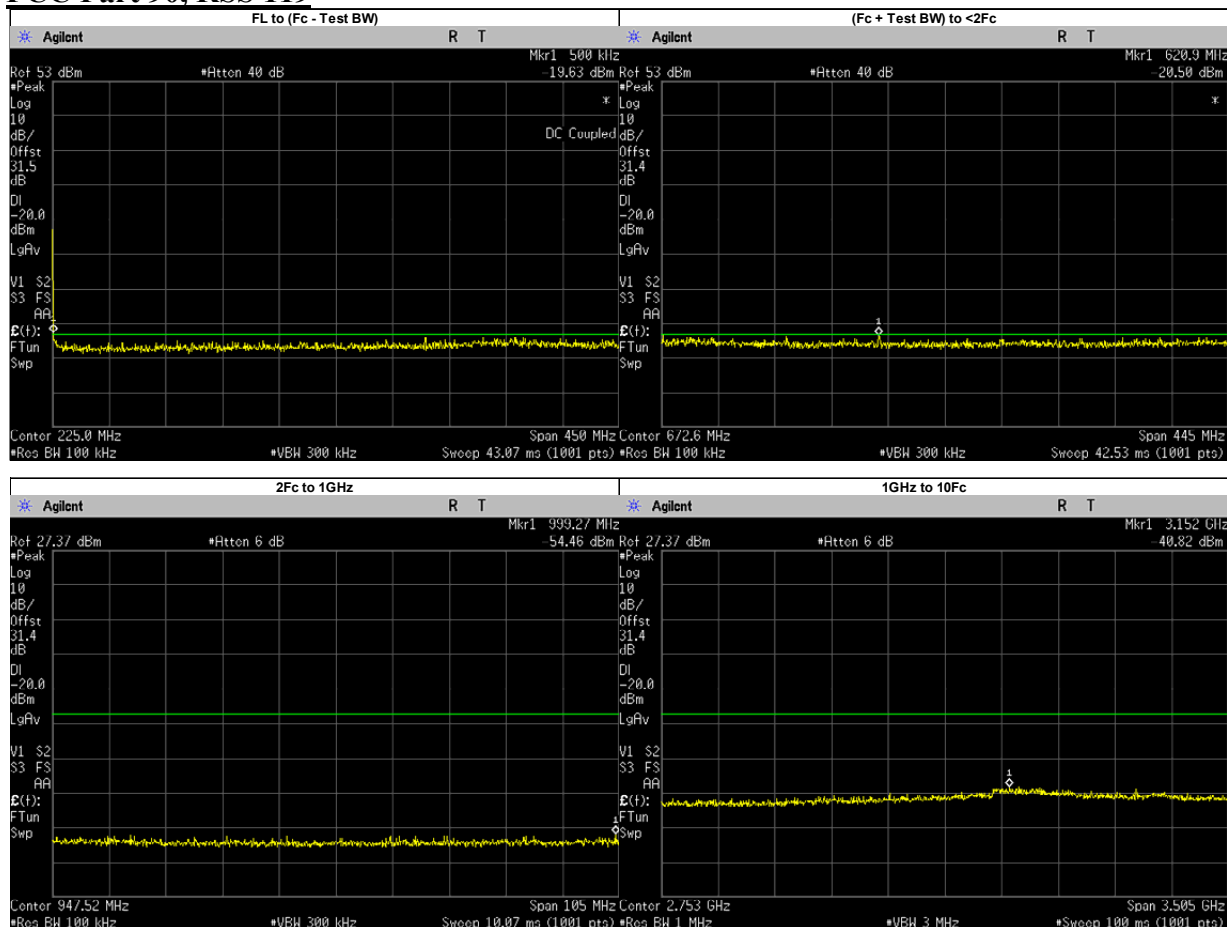


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	367.6257	-21.0351	-20	PASS
(Fc + Test BW) to <2Fc	620.9496	-20.5000	-20	PASS
2Fc to 1GHz	999.2654	-54.4600	-20	PASS
	900.0500	-56.5160	-20	PASS
1GHz to 10Fc	3152.2240	-40.8200	-20	PASS
	1350.0750	-45.9931	-20	PASS
	1800.1000	-45.1245	-20	PASS
	2250.1250	-44.1747	-20	PASS
	2700.1500	-44.4805	-20	PASS
	3150.1750	-41.3862	-20	PASS
	3600.2000	-43.4253	-20	PASS
	4050.2250	-43.3776	-20	PASS
	4500.2500	-44.2702	-20	PASS

Digital : 459.125 MHz, 12.5kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

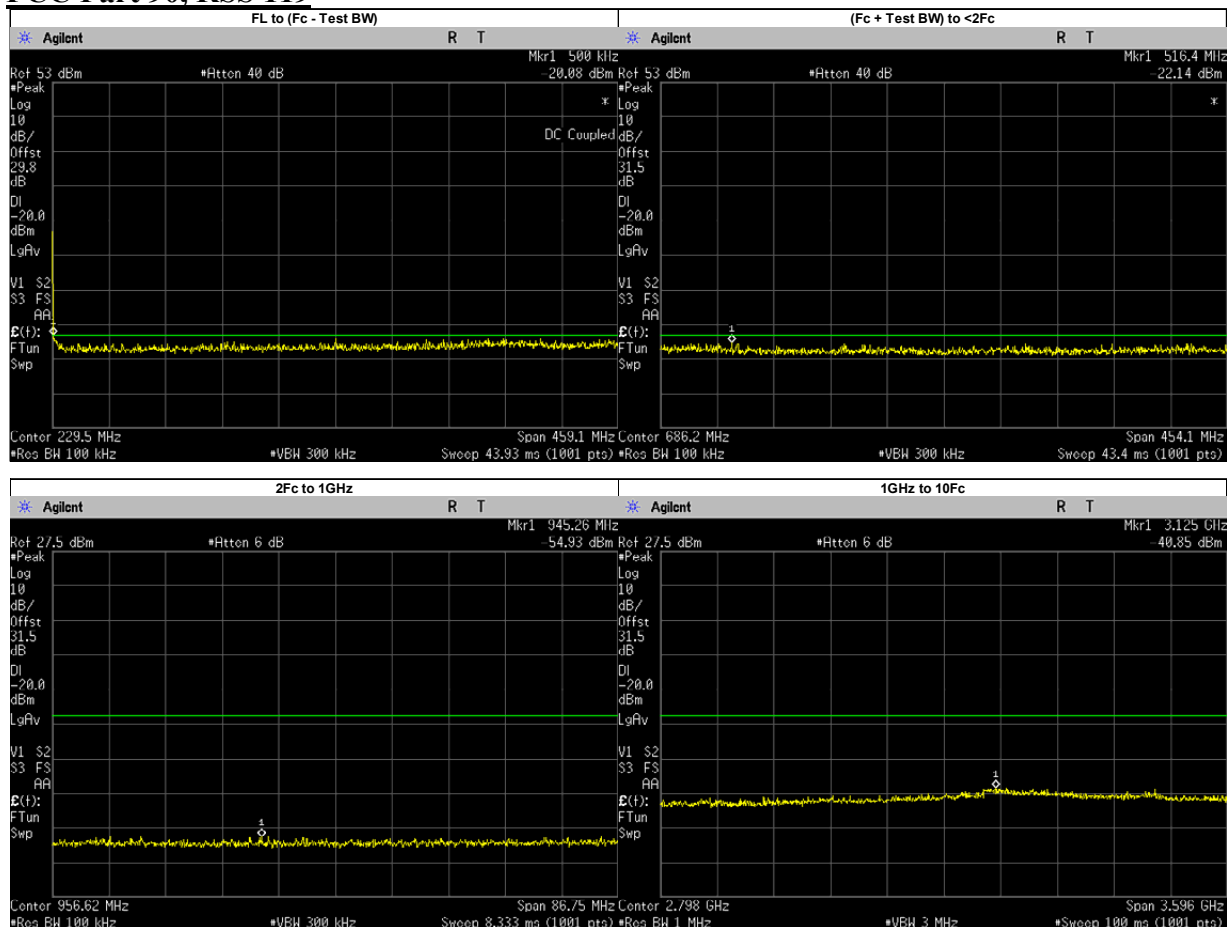


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	229.9977	-20.1352	-20	PASS
(Fc + Test BW) to <2Fc	516.3944	-22.1400	-20	PASS
2Fc to 1GHz	945.2608	-54.9300	-20	PASS
	918.2500	-56.9228	-20	PASS
1GHz to 10Fc	3125.3840	-40.8500	-20	PASS
	1377.3750	-45.3457	-20	PASS
	1836.5000	-45.2699	-20	PASS
	2295.6250	-44.5780	-20	PASS
	2754.7500	-43.7011	-20	PASS
	3213.8750	-42.4052	-20	PASS
	3673.0000	-43.6391	-20	PASS
	4132.1250	-43.2677	-20	PASS
	4591.2500	-44.0163	-20	PASS

Digital : 459.125 MHz, 12.5kHz Channel Spacing, Low Power
FCC Part 90, RSS 119

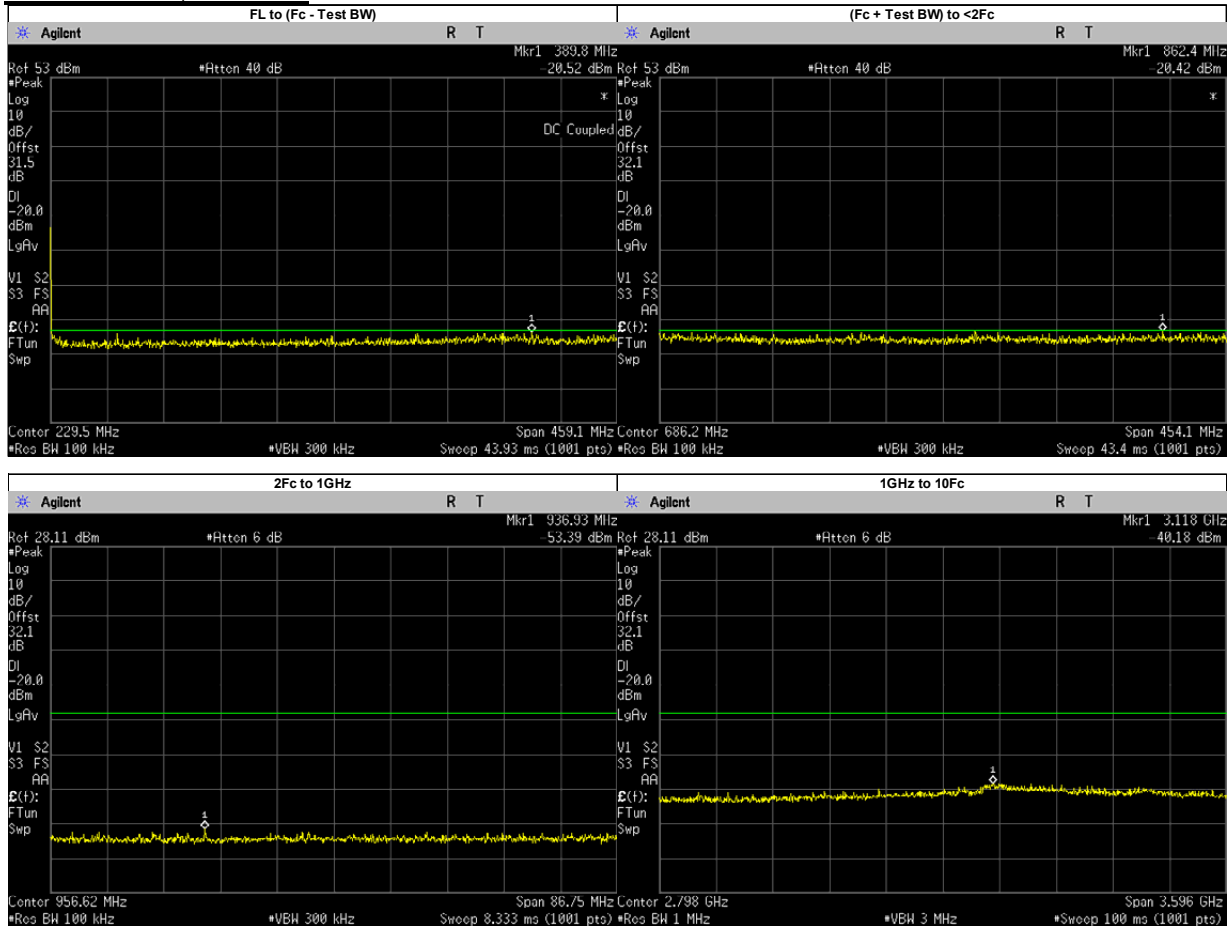


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	389.7503	-20.7178	-20	PASS
(Fc + Test BW) to <2Fc	862.3944	-20.4200	-20	PASS
2Fc to 1GHz	936.9328	-53.3900	-20	PASS
	918.2500	-55.1972	-20	PASS
1GHz to 10Fc	3118.1910	-40.1800	-20	PASS
	1377.3750	-44.6142	-20	PASS
	1836.5000	-44.0890	-20	PASS
	2295.6250	-43.4039	-20	PASS
	2754.7500	-43.7559	-20	PASS
	3213.8750	-41.3256	-20	PASS
	3673.0000	-42.3731	-20	PASS
	4132.1250	-42.4043	-20	PASS
	4591.2500	-43.8732	-20	PASS

Digital : 467.775 MHz, 12.5kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

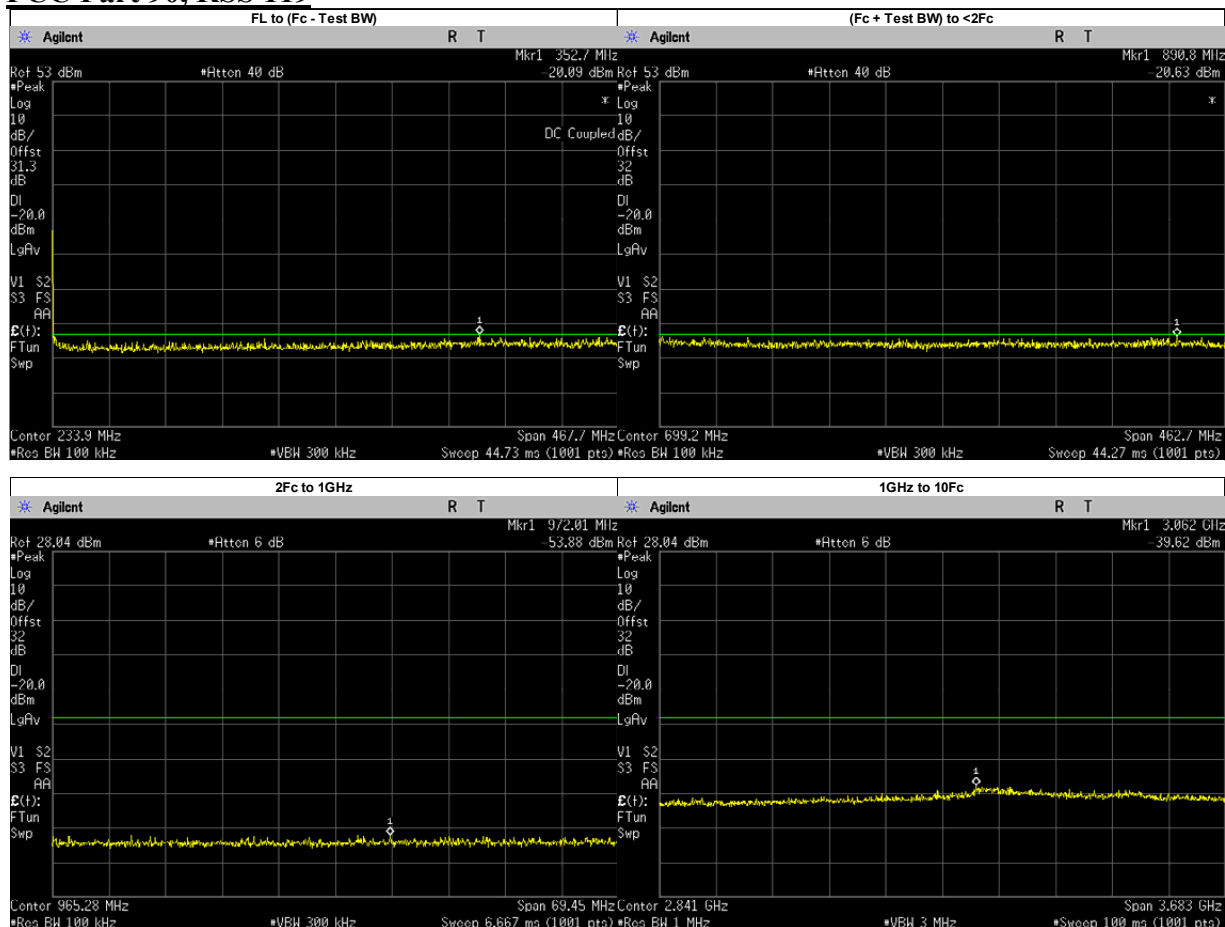


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	352.6617	-20.2656	-20	PASS
(Fc + Test BW) to <2Fc	890.7562	-20.6300	-20	PASS
2Fc to 1GHz	972.0117	-53.8800	-20	PASS
	935.5500	-56.3988	-20	PASS
	1403.3250	-44.9899	-20	PASS
	1871.1000	-44.5158	-20	PASS
	2338.8750	-43.5224	-20	PASS
	2806.6500	-42.5466	-20	PASS
	3274.4250	-40.9904	-20	PASS
	3742.2000	-42.0116	-20	PASS
	4209.9750	-42.6419	-20	PASS
	4677.7500	-43.5773	-20	PASS
	3062.3400	-39.6200	-20	PASS

Digital : 467.775 MHz, 12.5kHz Channel Spacing, Low Power
FCC Part 90, RSS 119

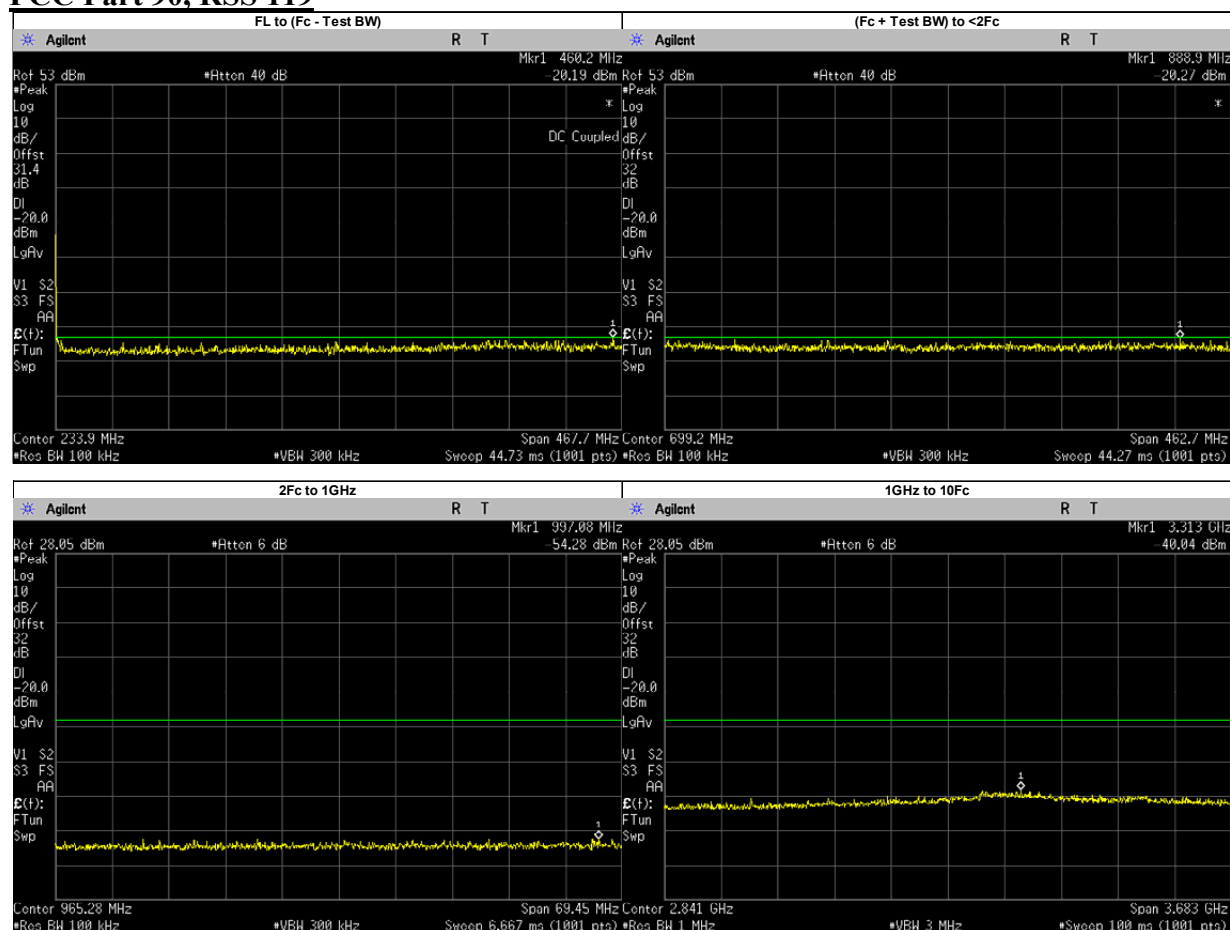


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	460.2349	-20.4197	-20	PASS
(Fc + Test BW) to <2Fc	888.9054	-20.2700	-20	PASS
2Fc to 1GHz	997.0831	-54.2800	-20	PASS
	935.5500	-56.1312	-20	PASS
1GHz to 10Fc	3312.7670	-40.0400	-20	PASS
	1403.3250	-44.2629	-20	PASS
	1871.1000	-44.7374	-20	PASS
	2338.8750	-43.7692	-20	PASS
	2806.6500	-42.9633	-20	PASS
	3274.4250	-41.9342	-20	PASS
	3742.2000	-43.1892	-20	PASS
	4209.9750	-43.5528	-20	PASS
	4677.7500	-43.7366	-20	PASS

Digital : 469.9875 MHz, 12.5kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

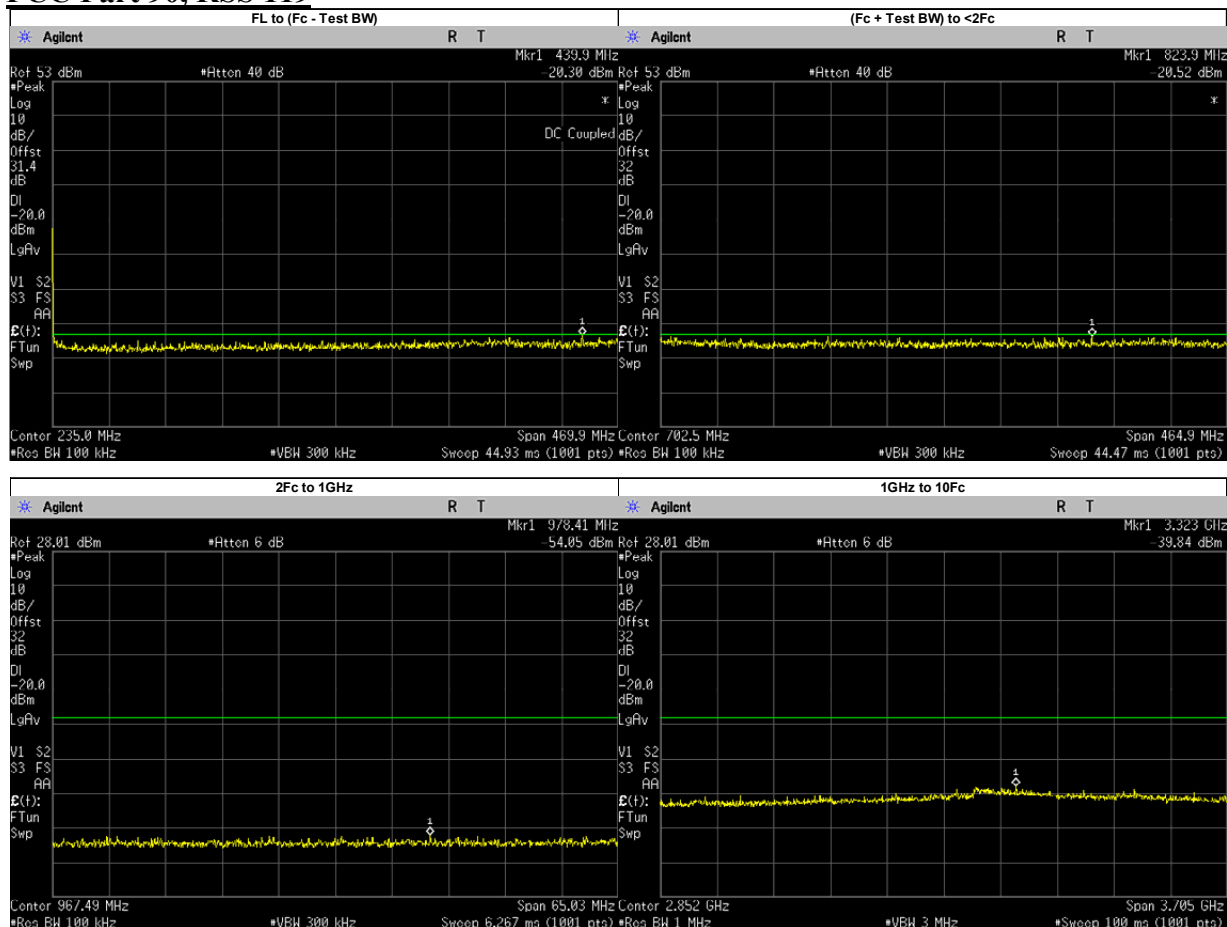

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	439.8557	-20.5104	-20	PASS
(Fc + Test BW) to <2Fc	823.8566	-20.5200	-20	PASS
2Fc to 1GHz	978.4117	-54.0500	-20	PASS
	939.9750	-56.5332	-20	PASS
1GHz to 10Fc	1409.9630	-44.7508	-20	PASS
	1879.9500	-45.0598	-20	PASS
	2349.9370	-43.6253	-20	PASS
	2819.9250	-42.8912	-20	PASS
	3289.9120	-41.9080	-20	PASS
	3759.9000	-42.9783	-20	PASS
	4229.8870	-43.5135	-20	PASS
	4699.8750	-44.3911	-20	PASS
	3322.9570	-39.8400	-20	PASS


Digital : 469.9875 MHz, 12.5kHz Channel Spacing, Low Power
FCC Part 90, RSS 119

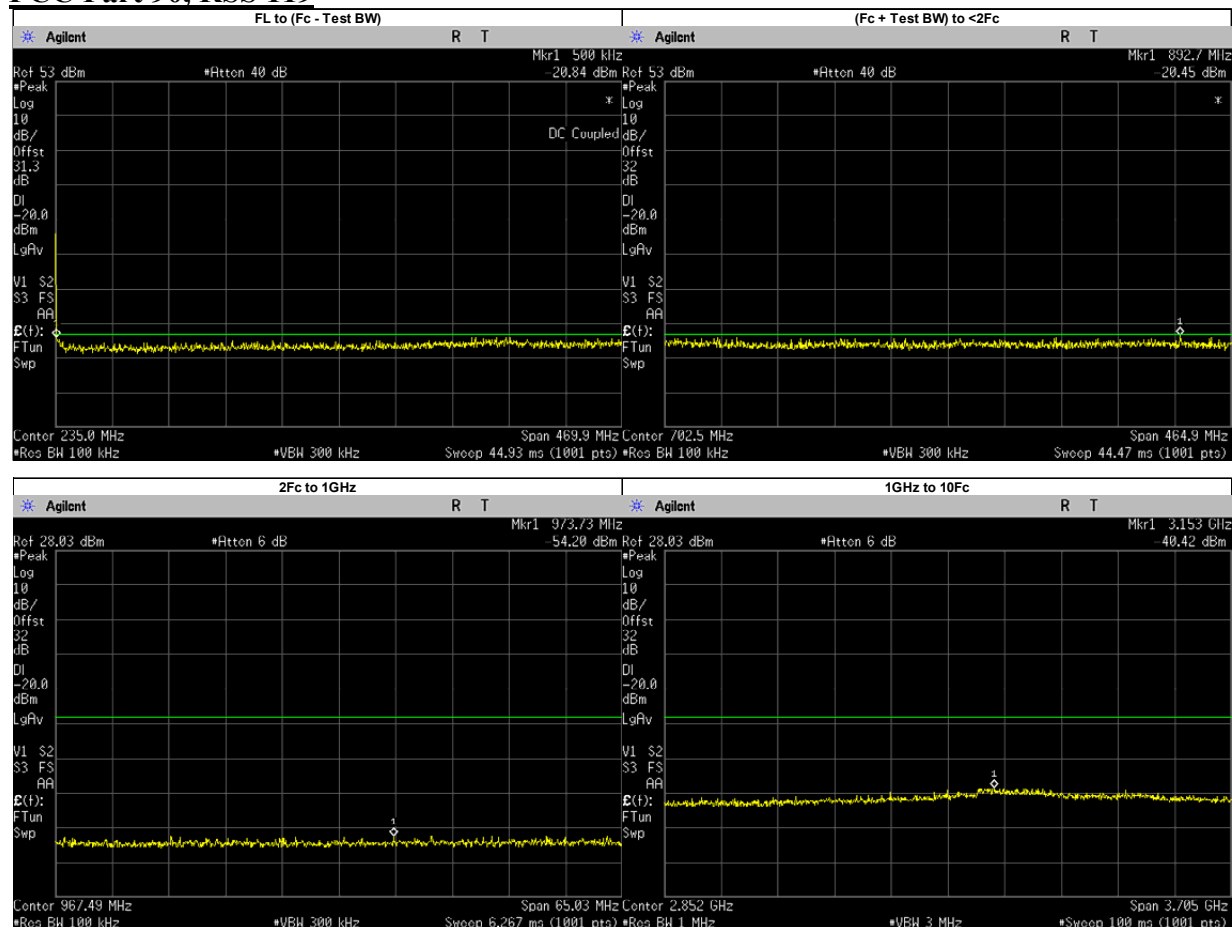

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	348.2210	-21.0536	-20	PASS
(Fc + Test BW) to <2Fc	892.6663	-20.4500	-20	PASS
2Fc to 1GHz	973.7299	-54.2000	-20	PASS
	939.9750	-56.8172	-20	PASS
1GHz to 10Fc	3152.5320	-40.4200	-20	PASS
	1409.9630	-45.3193	-20	PASS
	1879.9500	-44.4012	-20	PASS
	2349.9370	-44.3548	-20	PASS
	2819.9250	-42.6245	-20	PASS
	3289.9120	-41.5191	-20	PASS
	3759.9000	-43.1520	-20	PASS
	4229.8870	-43.0148	-20	PASS
	4699.8750	-43.7498	-20	PASS

Phase II : 380.0125 MHz, 12.5kHz Channel Spacing, Max Power


Not for FCC Review

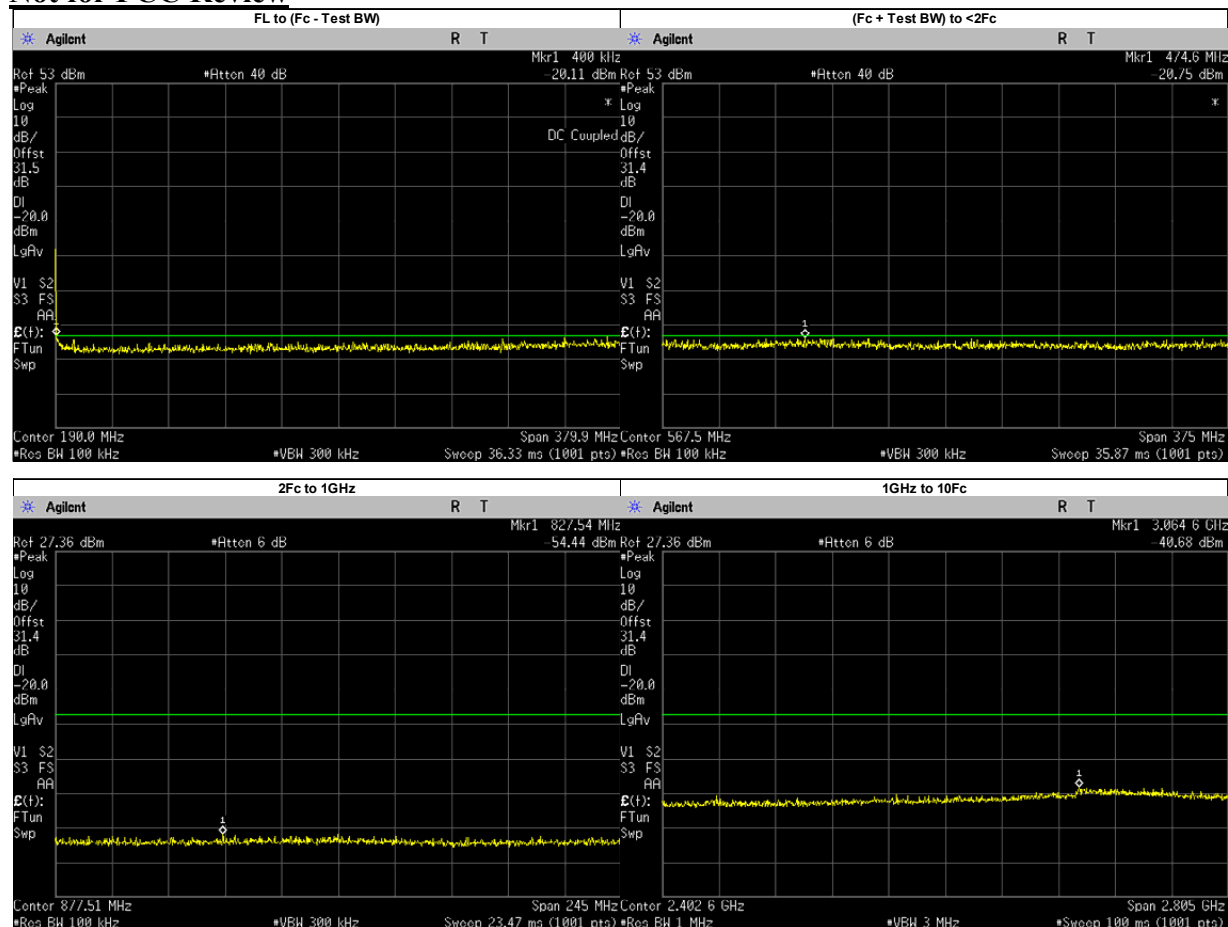

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	370.4582	-20.5196	-20	PASS
(Fc + Test BW) to <2Fc	474.5573	-20.7500	-20	PASS
2Fc to 1GHz	827.5376	-54.4400	-20	PASS
	760.0250	-57.0825	-20	PASS
1GHz to 10Fc	3064.5720	-40.6800	-20	PASS
	1140.0370	-45.9049	-20	PASS
	1520.0500	-45.3768	-20	PASS
	1900.0620	-45.0709	-20	PASS
	2280.0750	-44.6704	-20	PASS
	2660.0880	-44.0902	-20	PASS
	3040.1000	-43.2051	-20	PASS
	3420.1130	-42.2932	-20	PASS
	3800.1250	-43.5963	-20	PASS


Phase II : 380.0125 MHz, 12.5kHz Channel Spacing, Low Power

Not for FCC Review

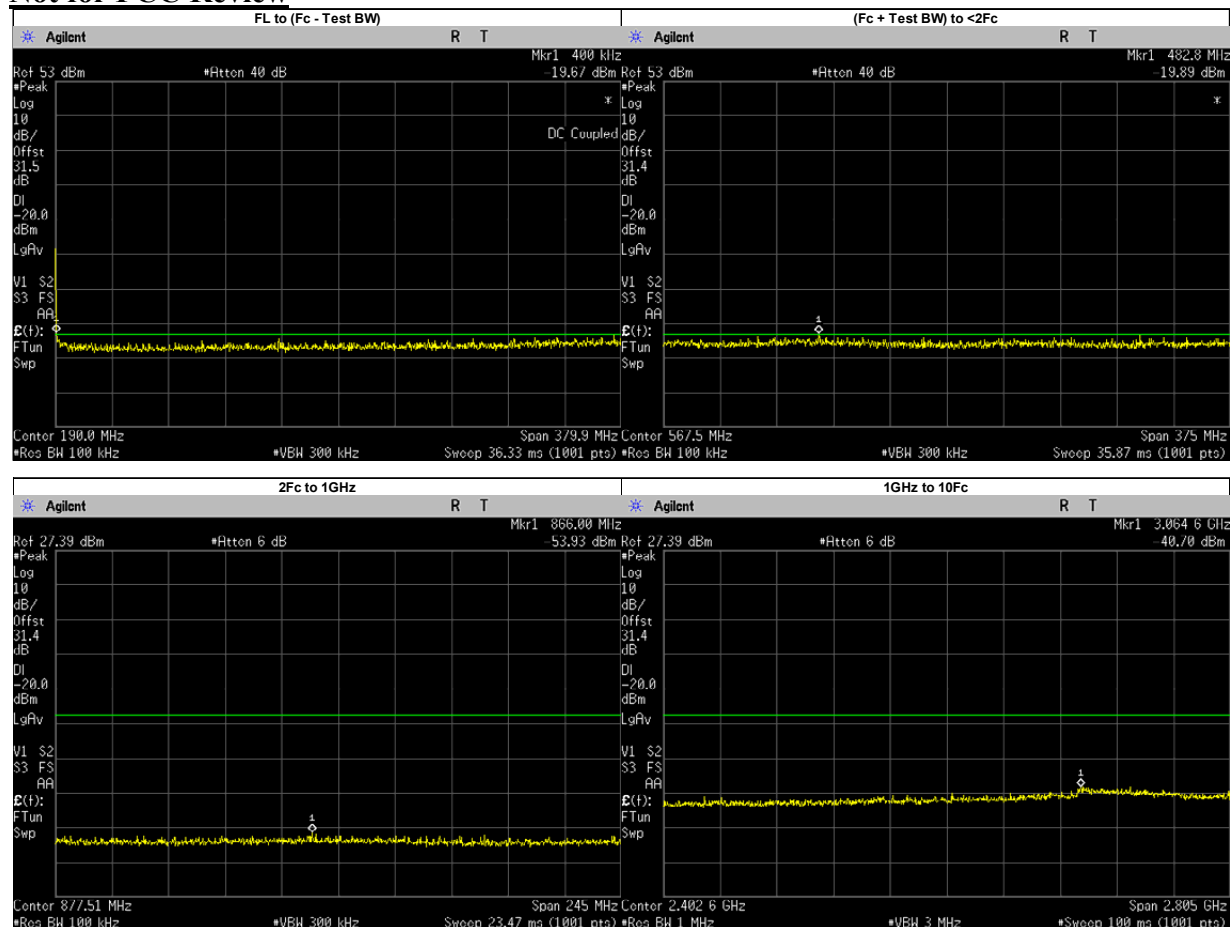


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	375.0176	-20.5403	-20	PASS
(Fc + Test BW) to <2Fc	482.8063	-19.8900	-20	PASS
2Fc to 1GHz	865.9987	-53.9300	-20	PASS
	760.0250	-56.3286	-20	PASS
1GHz to 10Fc	3064.5720	-40.7000	-20	PASS
	1140.0370	-45.3454	-20	PASS
	1520.0500	-45.3280	-20	PASS
	1900.0620	-45.0356	-20	PASS
	2280.0750	-44.3067	-20	PASS
	2660.0880	-44.1813	-20	PASS
	3040.1000	-43.4887	-20	PASS
	3420.1130	-42.3531	-20	PASS
	3800.1250	-43.2280	-20	PASS

Phase II: 406.2 MHz, 12.5kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

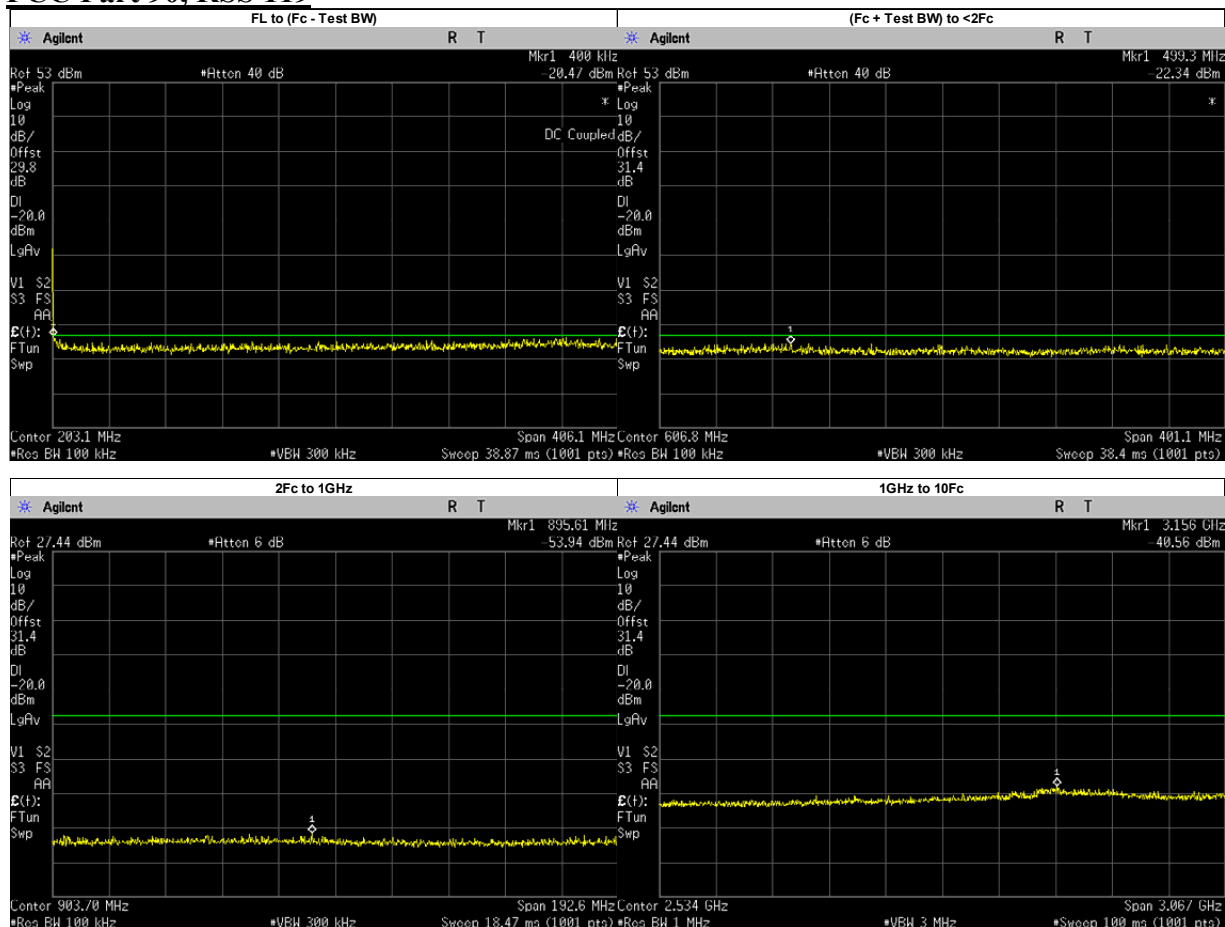


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	0.4151	-20.5419	-20	PASS
(Fc + Test BW) to <2Fc	499.3211	-22.3400	-20	PASS
2Fc to 1GHz	895.6108	-53.9400	-20	PASS
	812.4000	-56.4542	-20	PASS
1GHz to 10Fc	3156.1010	-40.5600	-20	PASS
	1218.6000	-45.5807	-20	PASS
	1624.8000	-45.7115	-20	PASS
	2031.0000	-44.7175	-20	PASS
	2437.2000	-44.6747	-20	PASS
	2843.4000	-43.9235	-20	PASS
	3249.6000	-42.6067	-20	PASS
	3655.8000	-44.1065	-20	PASS
	4062.0000	-43.5339	-20	PASS

Phase II : 406.2 MHz, 12.5kHz Channel Spacing, Low Power
FCC Part 90, RSS 119

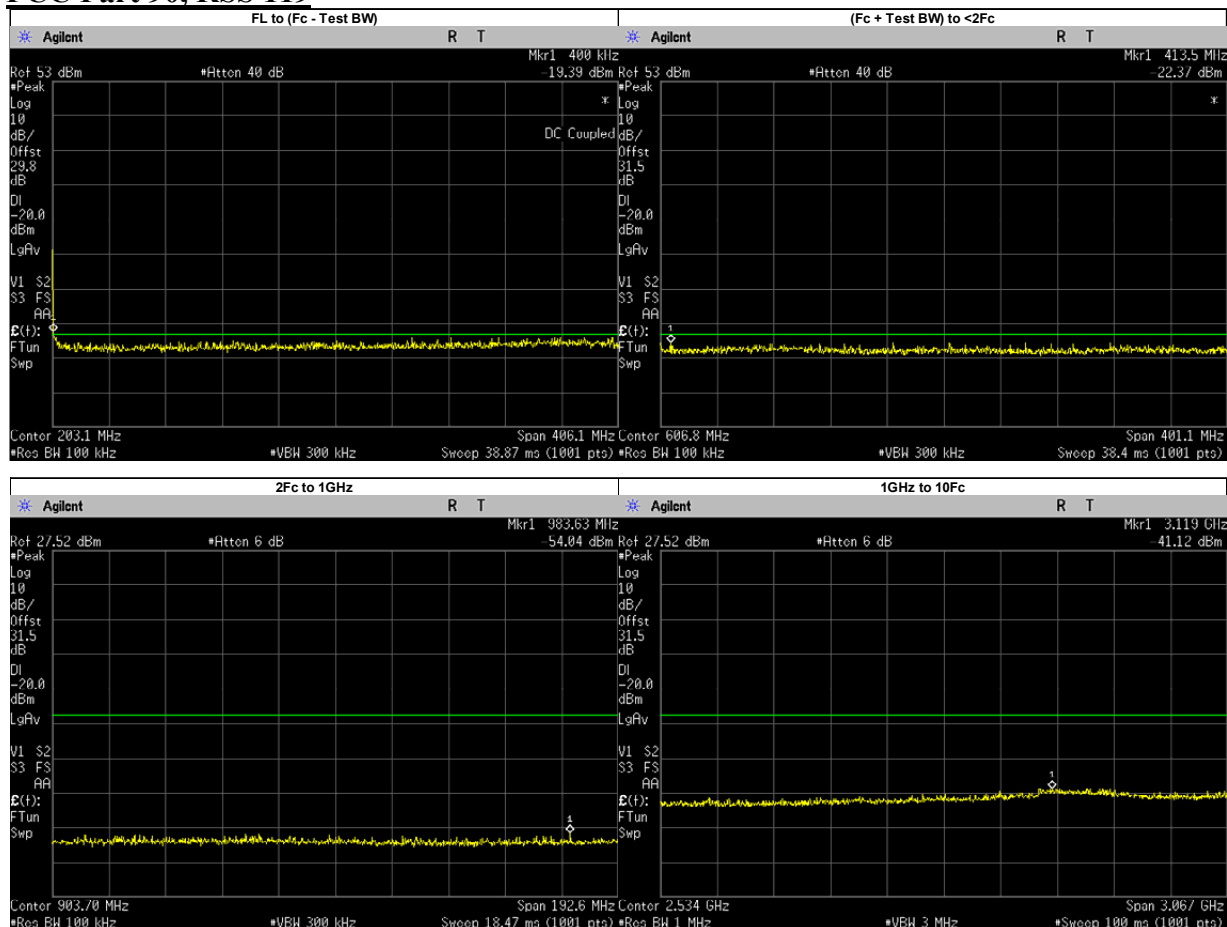


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	2.8519	-21.0041	-20	PASS
(Fc + Test BW) to <2Fc	413.4762	-22.3700	-20	PASS
2Fc to 1GHz	983.6290	-54.0400	-20	PASS
	812.4000	-57.3154	-20	PASS
1GHz to 10Fc	3119.2970	-41.1200	-20	PASS
	1218.6000	-45.5530	-20	PASS
	1624.8000	-45.3697	-20	PASS
	2031.0000	-44.7216	-20	PASS
	2437.2000	-44.5670	-20	PASS
	2843.4000	-43.4946	-20	PASS
	3249.6000	-42.2975	-20	PASS
	3655.8000	-44.1235	-20	PASS
	4062.0000	-43.0805	-20	PASS

Phase II: 450.025 MHz, 12.5kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

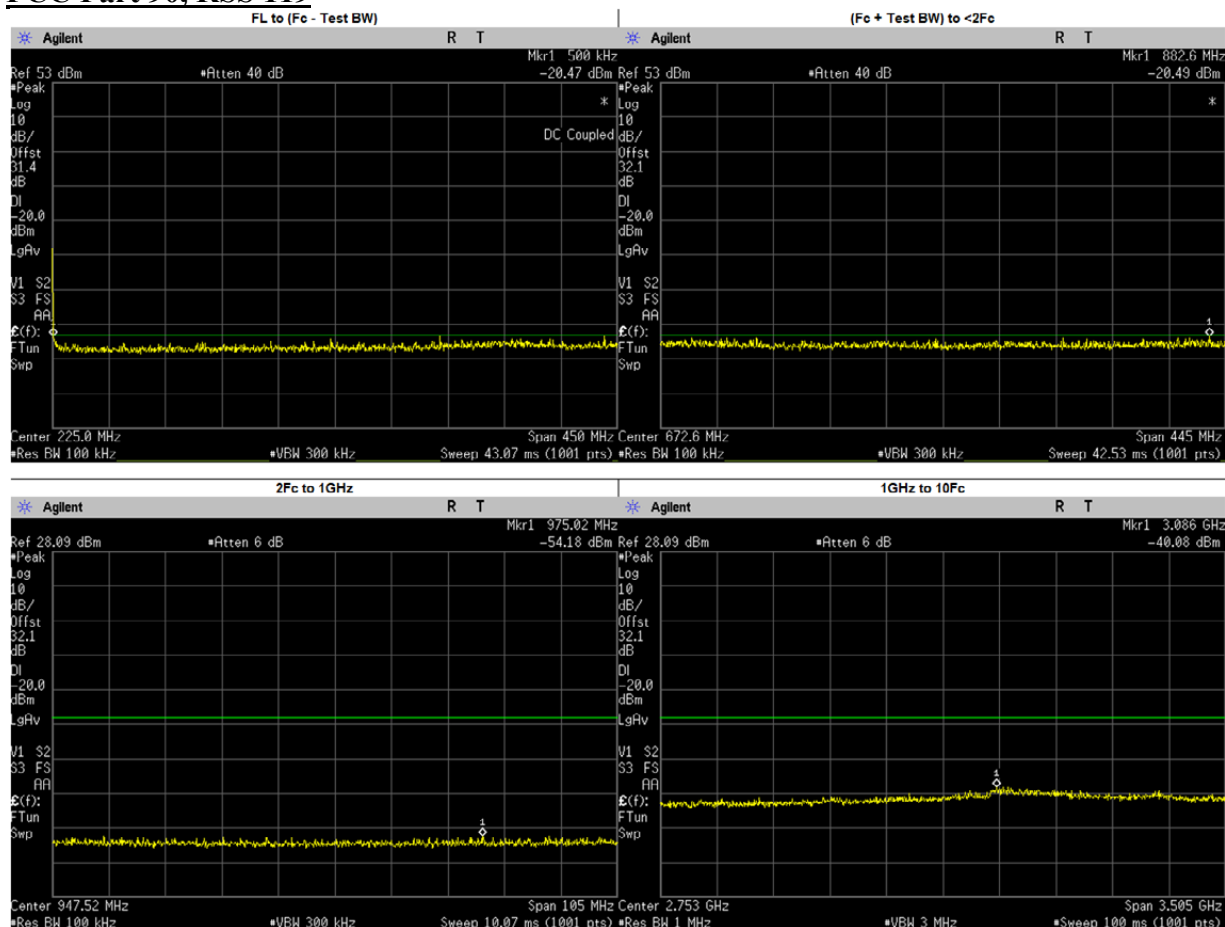


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	439.6191	-20.4512	-20	PASS
(Fc + Test BW) to <2Fc	882.5909	-20.4900	-20	PASS
2Fc to 1GHz	975.0219	-54.1800	-20	PASS
	900.0500	-56.3735	-20	PASS
1GHz to 10Fc	3085.6240	-40.0800	-20	PASS
	1350.0750	-45.3856	-20	PASS
	1800.1000	-44.9487	-20	PASS
	2250.1250	-44.1752	-20	PASS
	2700.1500	-43.3563	-20	PASS
	3150.1750	-41.5235	-20	PASS
	3600.2000	-43.3141	-20	PASS
	4050.2250	-42.8264	-20	PASS
	4500.2500	-43.5355	-20	PASS

Phase II : 450.025 MHz, 12.5kHz Channel Spacing, Low Power
FCC Part 90, RSS 119

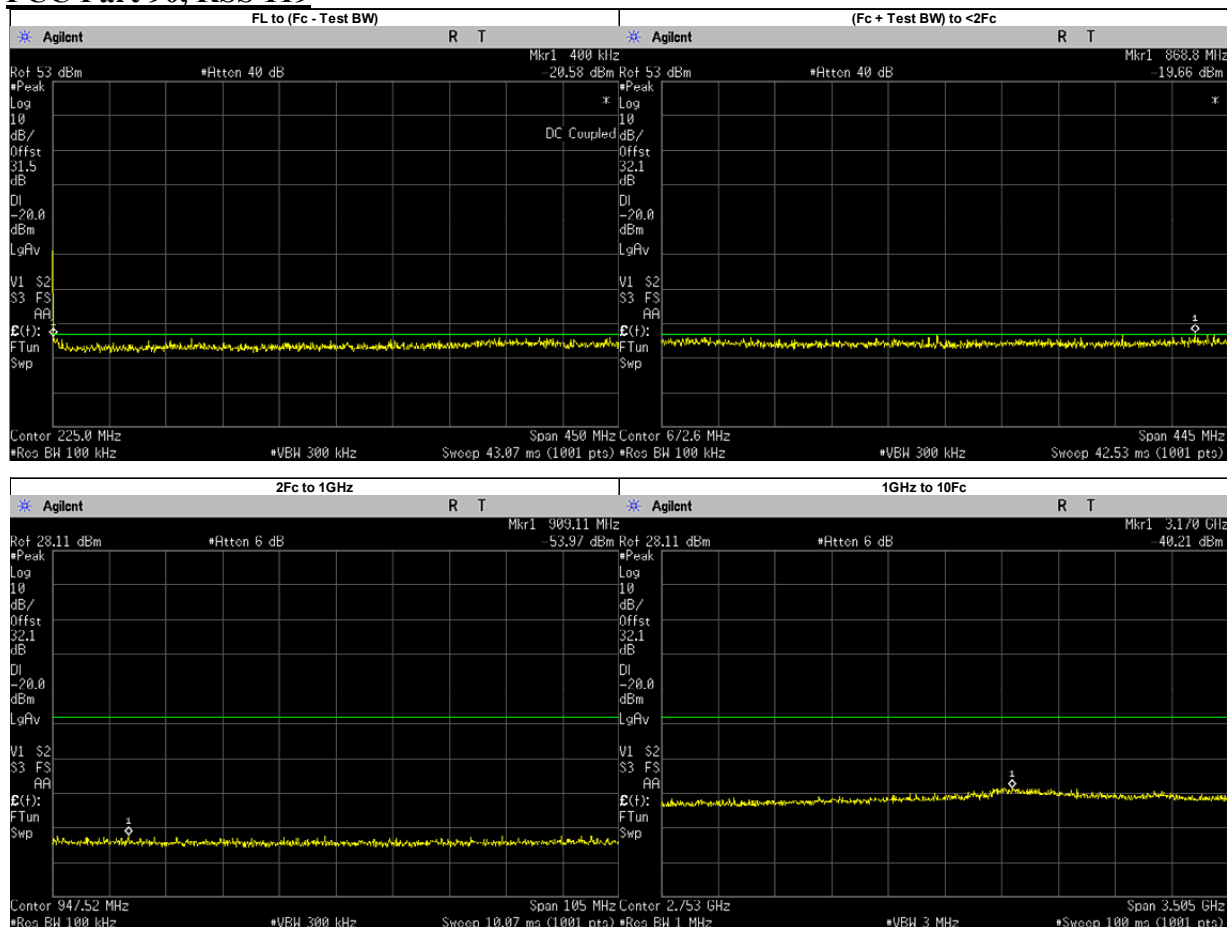


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	386.5240	-21.3779	-20	PASS
(Fc + Test BW) to <2Fc	868.7969	-19.6600	-20	PASS
2Fc to 1GHz	909.1133	-53.9700	-20	PASS
	900.0500	-56.0821	-20	PASS
1GHz to 10Fc	3169.7500	-40.2100	-20	PASS
	1350.0750	-45.1492	-20	PASS
	1800.1000	-44.6381	-20	PASS
	2250.1250	-44.0570	-20	PASS
	2700.1500	-43.7656	-20	PASS
	3150.1750	-41.1541	-20	PASS
	3600.2000	-42.5892	-20	PASS
	4050.2250	-42.4515	-20	PASS
	4500.2500	-43.7497	-20	PASS

Phase II : 459.125 MHz, 12.5kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

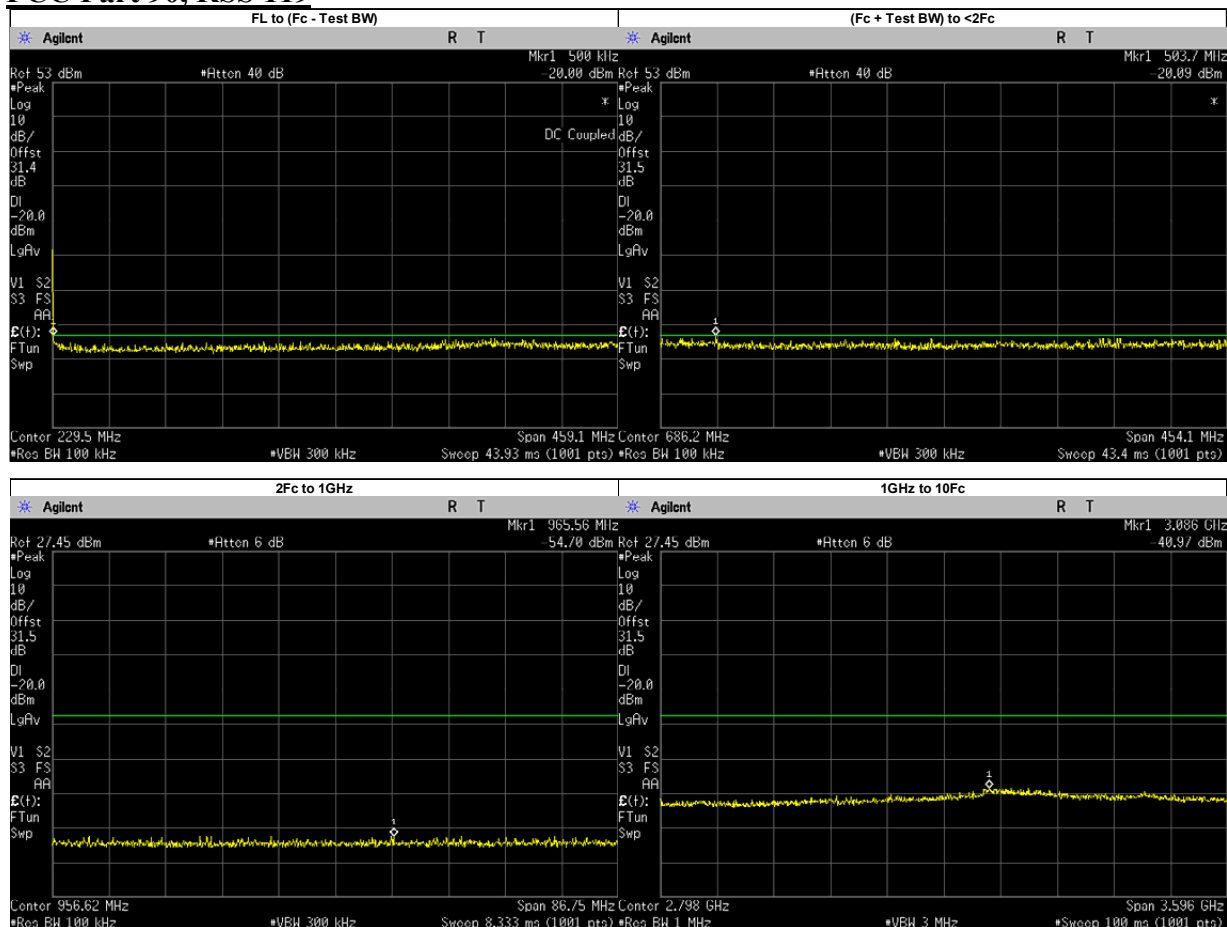


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	358.5342	-20.9598	-20	PASS
(Fc + Test BW) to <2Fc	503.6805	-20.0900	-20	PASS
2Fc to 1GHz	965.5602	-54.7000	-20	PASS
	918.2500	-56.7804	-20	PASS
1GHz to 10Fc	3085.8250	-40.9700	-20	PASS
	1377.3750	-45.9716	-20	PASS
	1836.5000	-45.2715	-20	PASS
	2295.6250	-44.7655	-20	PASS
	2754.7500	-43.7326	-20	PASS
	3213.8750	-42.0343	-20	PASS
	3673.0000	-43.0630	-20	PASS
	4132.1250	-43.6601	-20	PASS
	4591.2500	-44.5707	-20	PASS

Phase II : 459.125 MHz, 12.5kHz Channel Spacing, Low Power
FCC Part 90, RSS 119

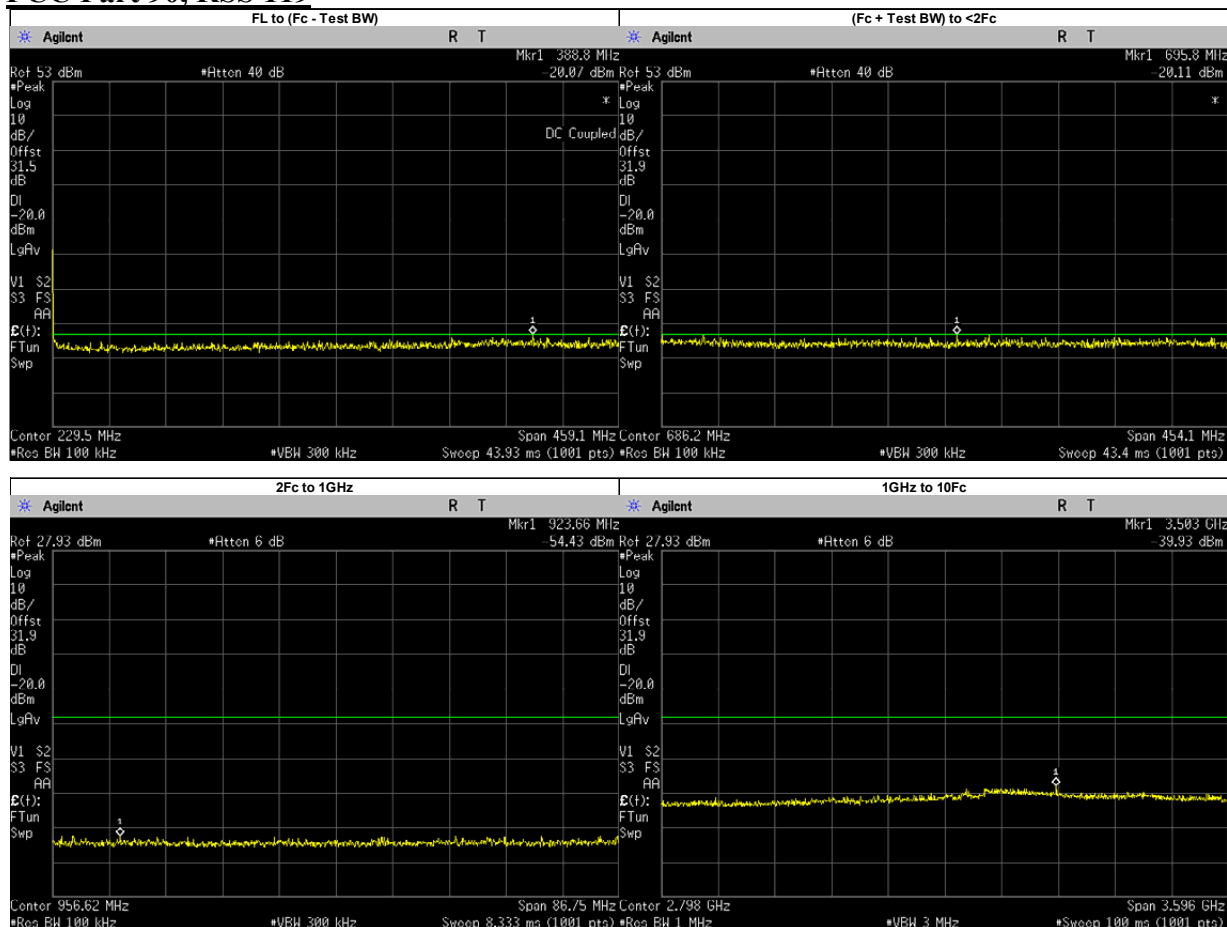


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	388.8321	-20.2616	-20	PASS
(Fc + Test BW) to <2Fc	695.7513	-20.1100	-20	PASS
2Fc to 1GHz	923.6600	-54.4300	-20	PASS
	918.2500	-55.4739	-20	PASS
1GHz to 10Fc	1377.3750	-45.1319	-20	PASS
	1836.5000	-45.3234	-20	PASS
	2295.6250	-44.5521	-20	PASS
	2754.7500	-43.4928	-20	PASS
	3213.8750	-41.8496	-20	PASS
	3673.0000	-43.1007	-20	PASS
	4132.1250	-42.7410	-20	PASS
	4591.2500	-44.2408	-20	PASS
	3502.9900	-39.9300	-20	PASS

Phase II: 467.775 MHz, 12.5kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

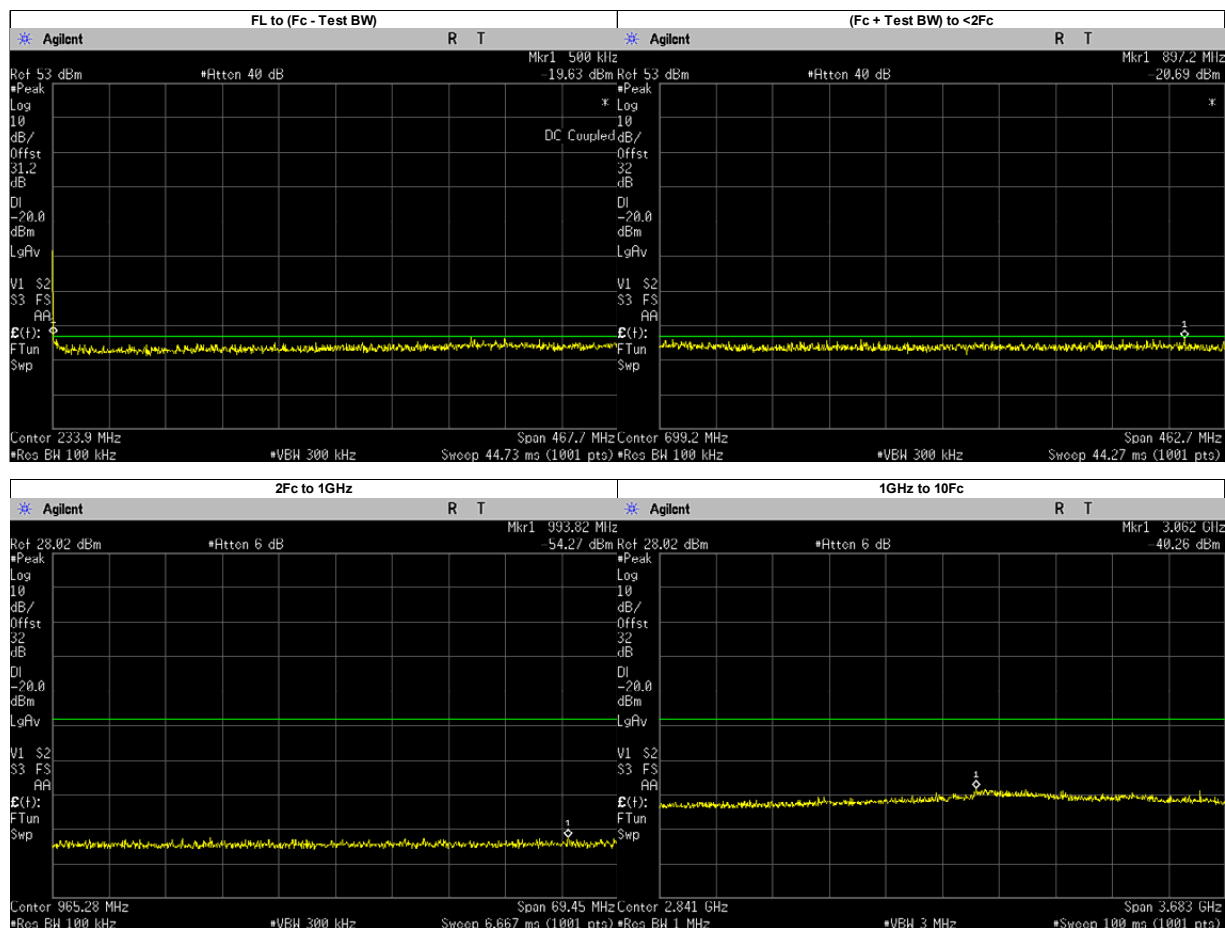


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	346.1138	-20.2679	-20	PASS
(Fc + Test BW) to <2Fc	897.2343	-20.6900	-20	PASS
2Fc to 1GHz	993.8189	-54.2700	-20	PASS
	935.5500	-56.9746	-20	PASS
1GHz to 10Fc	3062.3400	-40.2600	-20	PASS
	1403.3250	-45.6688	-20	PASS
	1871.1000	-45.0888	-20	PASS
	2338.8750	-44.5686	-20	PASS
	2806.6500	-43.7017	-20	PASS
	3274.4250	-42.2735	-20	PASS
	3742.2000	-42.7127	-20	PASS
	4209.9750	-42.9217	-20	PASS
	4677.7500	-44.0861	-20	PASS

Phase II: 467.775 MHz, 12.5kHz Channel Spacing, Low Power
FCC Part 90, RSS 119

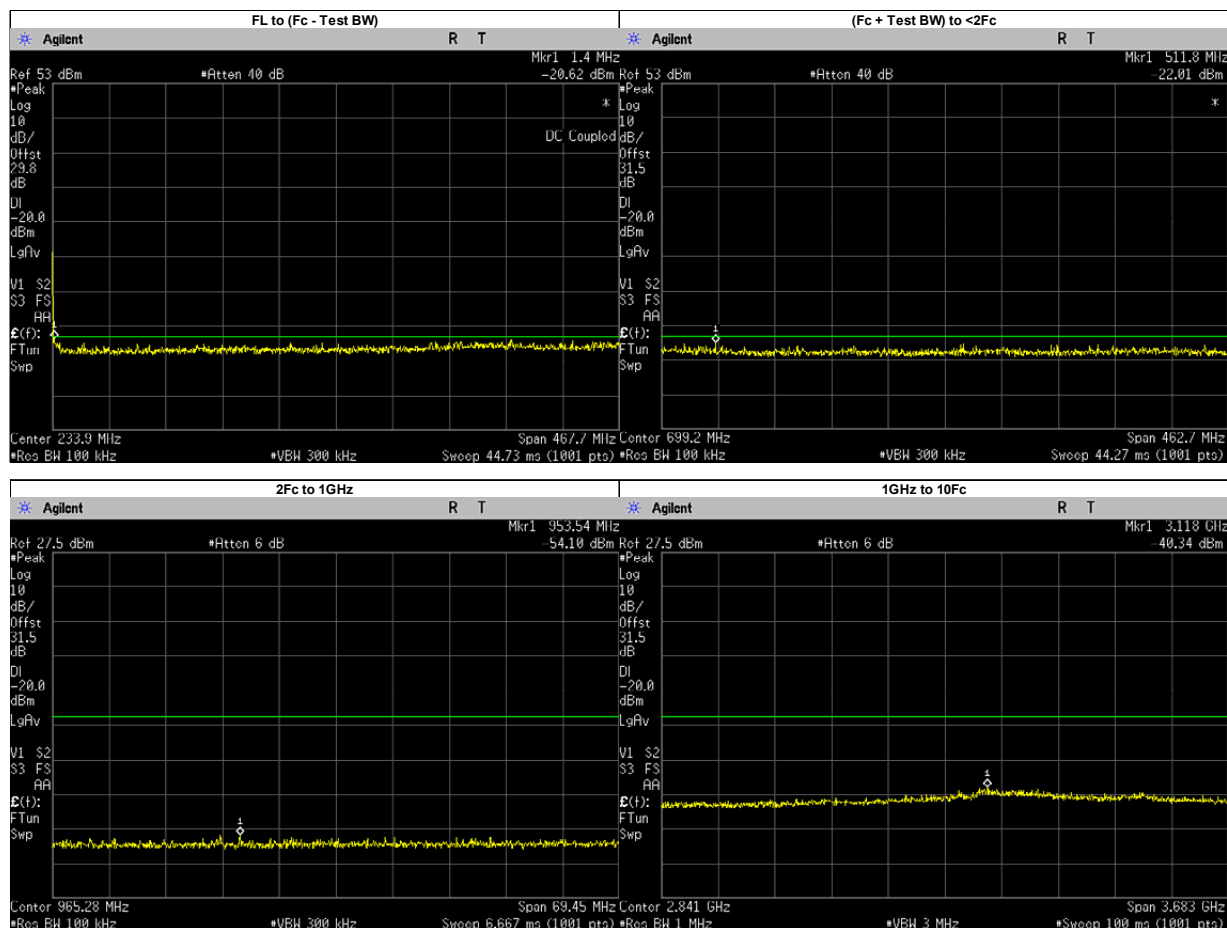


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.4121	-20.6752	-20	PASS
(Fc + Test BW) to <2Fc	511.7900	-22.0100	-20	PASS
2Fc to 1GHz	953.5380	-54.1000	-20	PASS
	935.5500	-56.4645	-20	PASS
1GHz to 10Fc	3117.5810	-40.3400	-20	PASS
	1403.3250	-45.4847	-20	PASS
	1871.1000	-44.7834	-20	PASS
	2338.8750	-44.8365	-20	PASS
	2806.6500	-43.7138	-20	PASS
	3274.4250	-41.5692	-20	PASS
	3742.2000	-43.3283	-20	PASS
	4209.9750	-43.8242	-20	PASS
	4677.7500	-44.5820	-20	PASS

Phase II : 469.9875 MHz, 12.5kHz Channel Spacing, Max Power
FCC Part 90, RSS 119

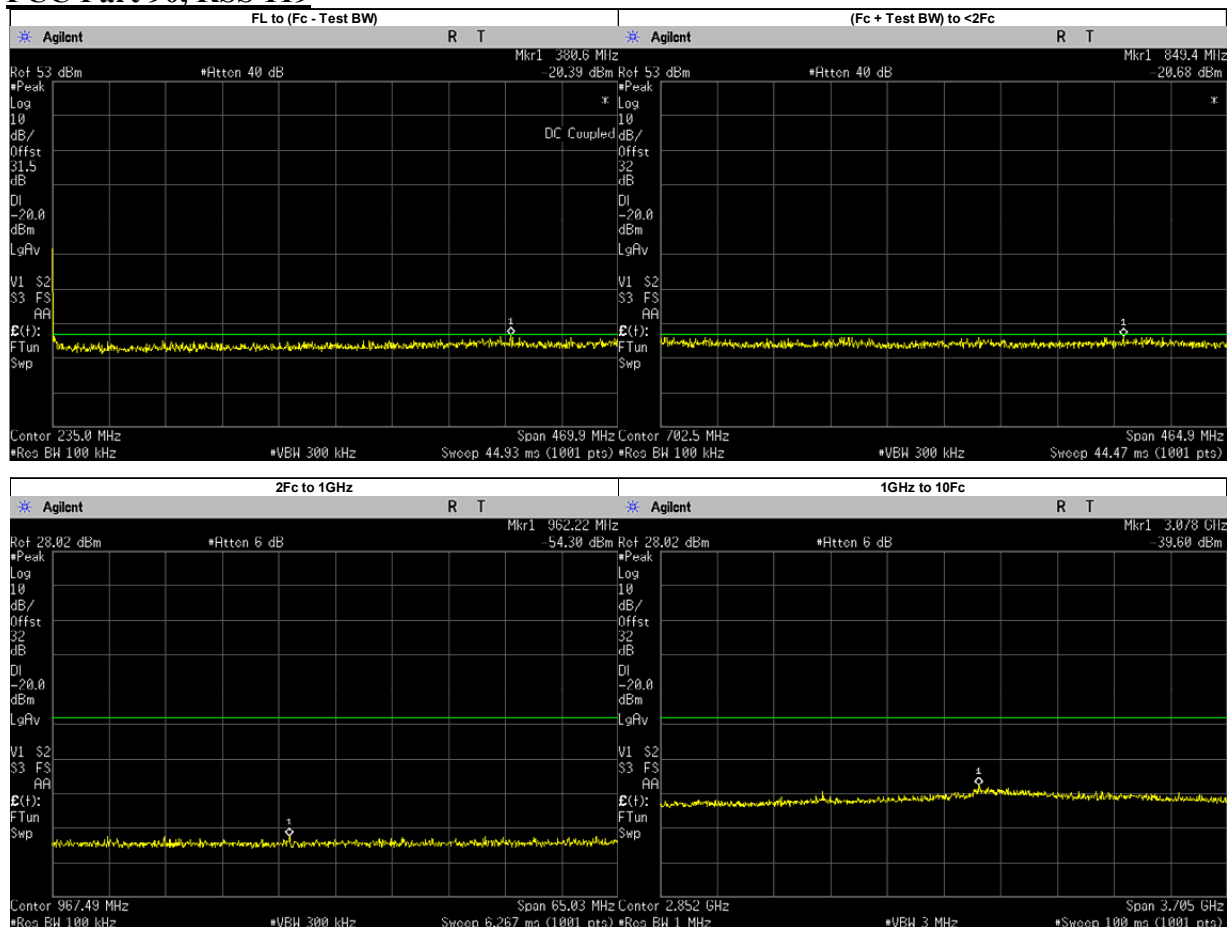

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	380.6456	-20.5507	-20	PASS
(Fc + Test BW) to <2Fc	849.4278	-20.6800	-20	PASS
2Fc to 1GHz	962.2205	-54.3000	-20	PASS
	939.9750	-56.5291	-20	PASS
1GHz to 10Fc	1409.9630	-45.2931	-20	PASS
	1879.9500	-44.4921	-20	PASS
	2349.9370	-44.3112	-20	PASS
	2819.9250	-42.7791	-20	PASS
	3289.9120	-42.3801	-20	PASS
	3759.9000	-42.3678	-20	PASS
	4229.8870	-43.2712	-20	PASS
	4699.8750	-44.4149	-20	PASS
	3078.4350	-50.3239	-20	PASS

Phase II : 469.9875 MHz, 12.5kHz Channel Spacing, Low Power
FCC Part 90, RSS 119

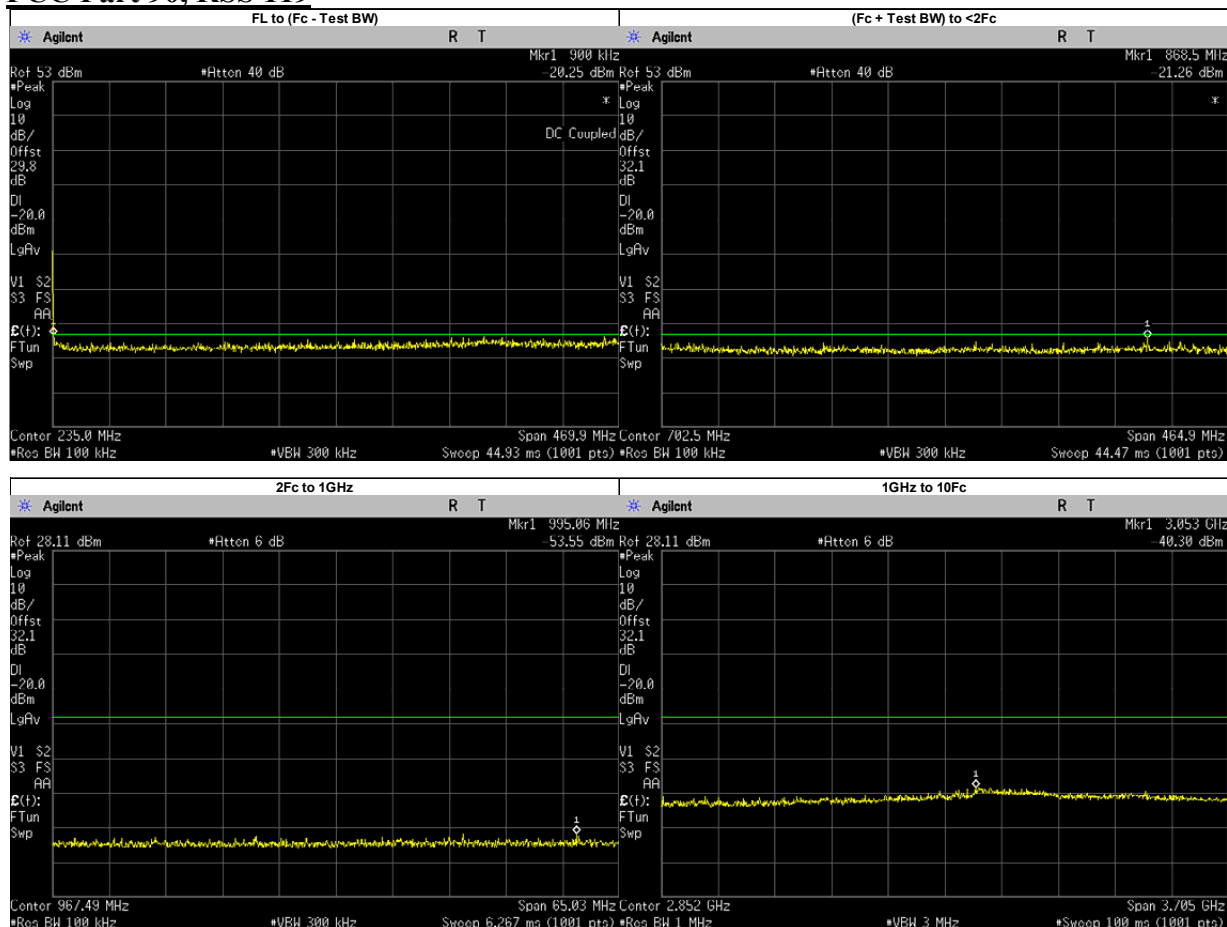

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	330.8339	-20.2553	-20	PASS
(Fc + Test BW) to <2Fc	868.4899	-21.2600	-20	PASS
2Fc to 1GHz	995.0581	-53.5500	-20	PASS
	939.9750	-56.3741	-20	PASS
1GHz to 10Fc	3052.5010	-40.3000	-20	PASS
	1409.9630	-44.9962	-20	PASS
	1879.9500	-44.1902	-20	PASS
	2349.9370	-43.8286	-20	PASS
	2819.9250	-41.5726	-20	PASS
	3289.9120	-41.6920	-20	PASS
	3759.9000	-42.5059	-20	PASS
	4229.8870	-43.6027	-20	PASS
	4699.8750	-43.5060	-20	PASS

6.10.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.11. Radiated Spurious Emission

6.11.1. Test Setup

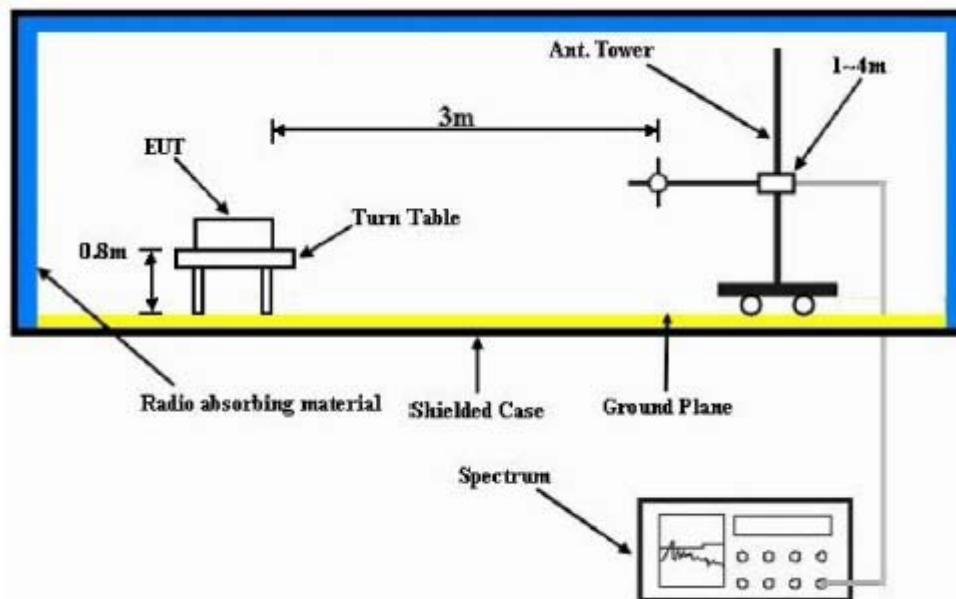

- 1) The Resolution Bandwidth for scanning Radiated Emission below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector mode is positive peak.
- 2) In the semi- anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for frequencies < 1GHz) or 1.5m (for frequencies > 1GHz) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

6.11.2. Test Result (Analog)

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


380.012500 MHz

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
760.0250	-13.0000	-87.7309 **	-86.8236 **
1140.0375	-13.0000	-61.5734 **	-61.7190 **
1520.0500	-13.0000	-61.2073 **	-60.1098 **
1900.0625	-13.0000	-59.0922 **	-57.7015 **
2280.0750	-13.0000	-56.3488 **	-56.6983 **
2660.0875	-13.0000	-55.0066 **	-55.2858 **
3040.1000	-13.0000	-53.6279 **	-52.8529 **
3420.1125	-13.0000	-52.6781 **	-53.3971 **
3800.1250	-13.0000	-51.3041 **	-52.4974 **

RADIATED SPURIOUS EMISSIONS

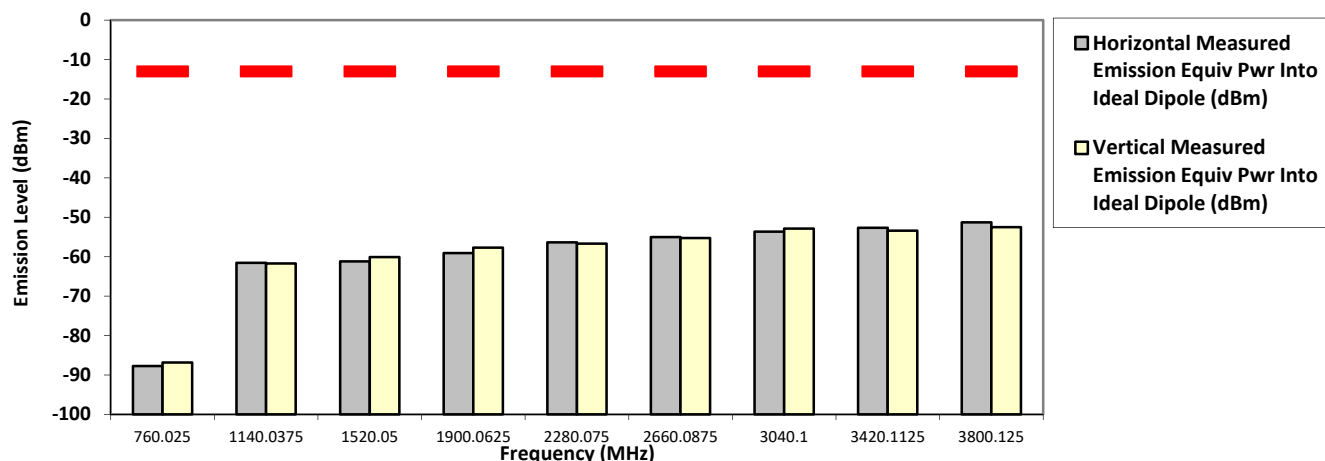

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


380.012500 MHz

25 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
760.0250	-13.0000	-86.6580 **	-87.6829 **
1140.0375	-13.0000	-60.8791 **	-60.5281 **
1520.0500	-13.0000	-61.0710 **	-60.1398 **
1900.0625	-13.0000	-57.9186 **	-58.9535 **
2280.0750	-13.0000	-56.7589 **	-56.5115 **
2660.0875	-13.0000	-54.9145 **	-54.6531 **
3040.1000	-13.0000	-53.2074 **	-52.8153 **
3420.1125	-13.0000	-52.0082 **	-52.2178 **
3800.1250	-13.0000	-52.4633 **	-51.7146 **

RADIATED SPURIOUS EMISSIONS

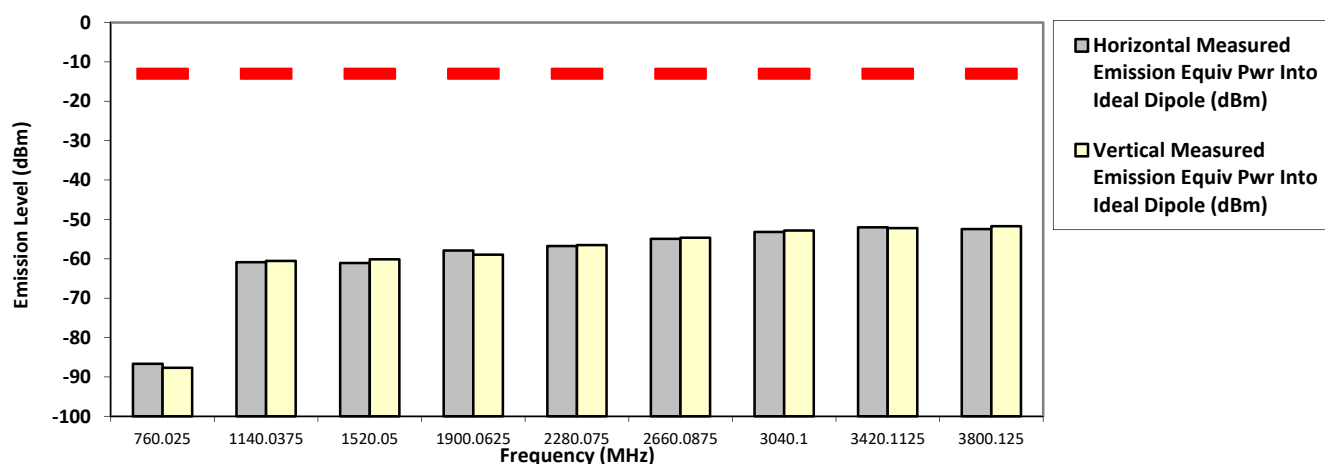

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
 3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


406.200000 MHz

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-13.0000	-85.3160 **	-87.0929 **
1218.6000	-13.0000	-61.8339 **	-61.6062 **
1624.8000	-13.0000	-60.4598 **	-59.5197 **
2031.0000	-13.0000	-56.5043 **	-56.1459 **
2437.2000	-13.0000	-54.4943 **	-54.6117 **
2843.4000	-13.0000	-54.5399 **	-54.7914 **
3249.6000	-13.0000	-52.4455 **	-53.4540 **
3655.8000	-13.0000	-52.3082 **	-53.0778 **
4062.0000	-13.0000	-48.8563 **	-51.0243 **

RADIATED SPURIOUS EMISSIONS

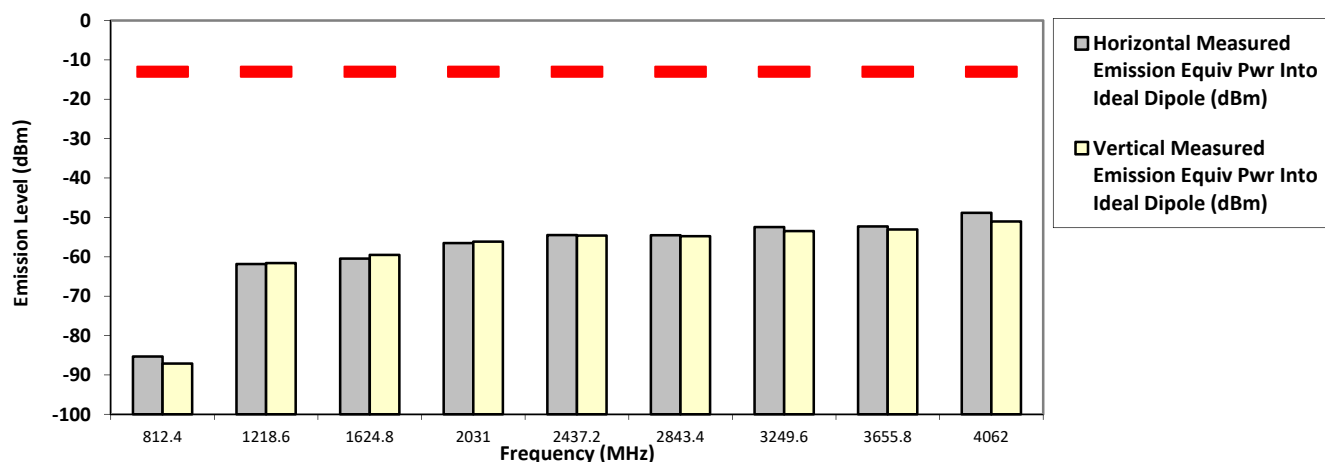

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


406.200000 MHz

25 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-13.0000	-87.8487 **	-87.0279 **
1218.6000	-13.0000	-44.0700 *	-40.8000 *
1624.8000	-13.0000	-59.9281 **	-59.1579 **
2031.0000	-13.0000	-55.8848 **	-55.3875 **
2437.2000	-13.0000	-54.3808 **	-55.5363 **
2843.4000	-13.0000	-54.3113 **	-54.0961 **
3249.6000	-13.0000	-51.8231 **	-52.7863 **
3655.8000	-13.0000	-52.6805 **	-52.3363 **
4062.0000	-13.0000	-50.8896 **	-50.7514 **

RADIATED SPURIOUS EMISSIONS

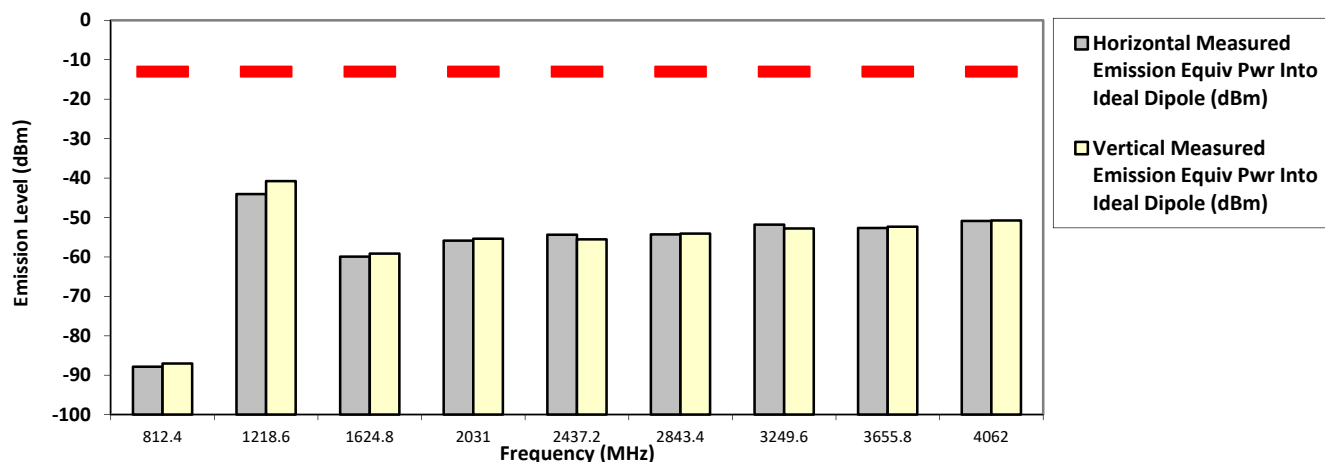

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


450.025000 MHz

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-13.0000	-86.5557 **	-87.0301 **
1350.0750	-13.0000	-61.8285 **	-61.4323 **
1800.1000	-13.0000	-59.1483 **	-60.1012 **
2250.1250	-13.0000	-57.0050 **	-57.0935 **
2700.1500	-13.0000	-54.4811 **	-53.9959 **
3150.1750	-13.0000	-52.8006 **	-53.2768 **
3600.2000	-13.0000	-52.9356 **	-52.5893 **
4050.2250	-13.0000	-51.4699 **	-50.9763 **
4500.2500	-13.0000	-51.1444 **	-50.6204 **

RADIATED SPURIOUS EMISSIONS

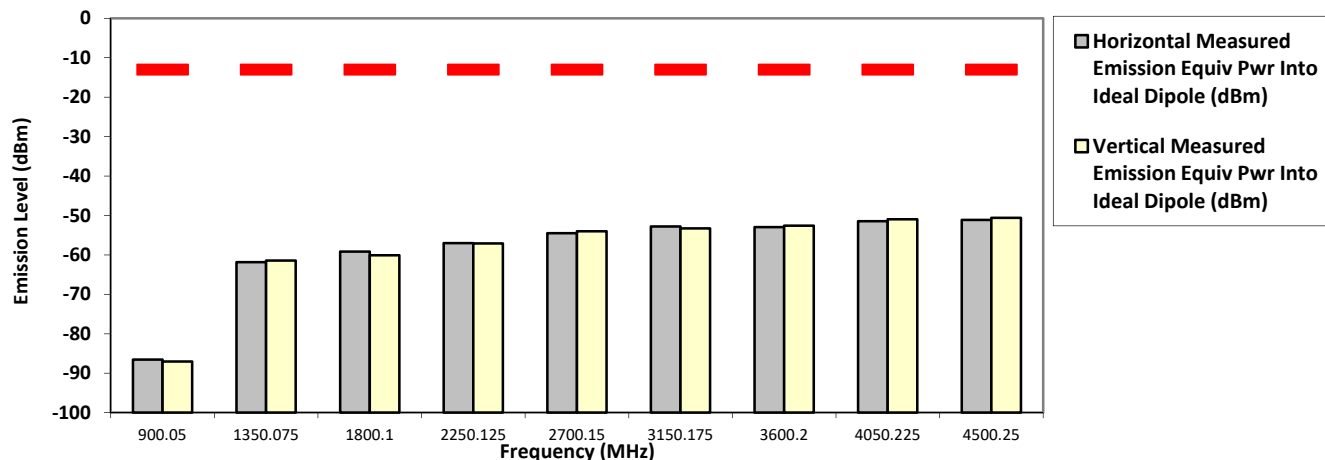

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


450.025000 MHz

25 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-13.0000	-87.8711 **	-87.0994 **
1350.0750	-13.0000	-59.7339 **	-59.1594 **
1800.1000	-13.0000	-58.6252 **	-59.5026 **
2250.1250	-13.0000	-57.0387 **	-57.2850 **
2700.1500	-13.0000	-54.8129 **	-55.7138 **
3150.1750	-13.0000	-52.1105 **	-51.4859 **
3600.2000	-13.0000	-52.8380 **	-51.1798 **
4050.2250	-13.0000	-50.7692 **	-51.8173 **
4500.2500	-13.0000	-51.5920 **	-50.3607 **

RADIATED SPURIOUS EMISSIONS

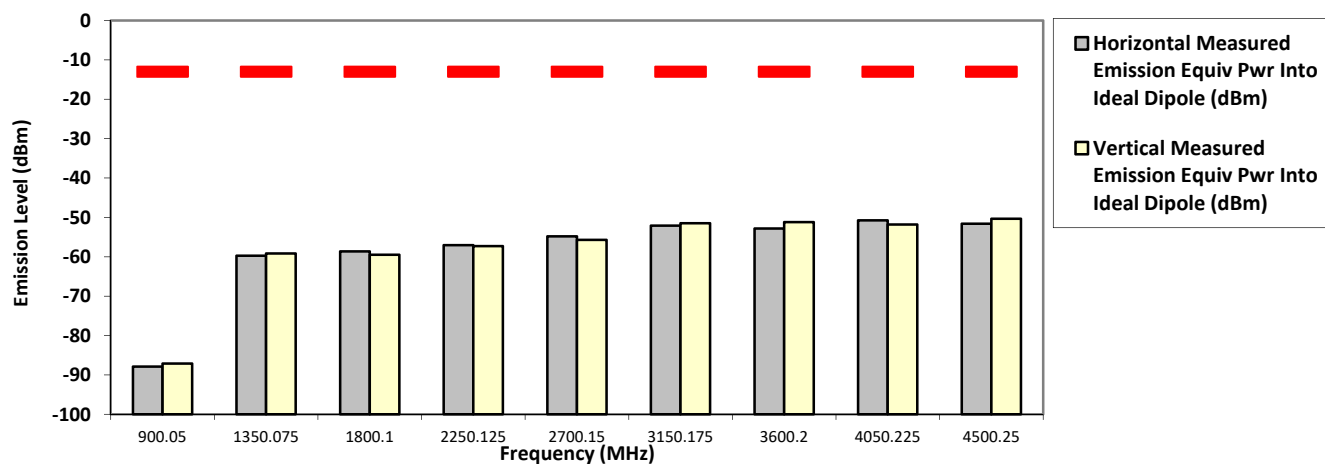

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


459.125000 MHz

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-13.0000	-87.1850 **	-86.4453 **
1377.3750	-13.0000	-58.4177 **	-60.2765 **
1836.5000	-13.0000	-59.1725 **	-60.2624 **
2295.6250	-13.0000	-55.9429 **	-57.6707 **
2754.7500	-13.0000	-55.2708 **	-54.1548 **
3213.8750	-13.0000	-51.5916 **	-52.9898 **
3673.0000	-13.0000	-52.8268 **	-52.7380 **
4132.1250	-13.0000	-51.8826 **	-50.9118 **
4591.2500	-13.0000	-50.9980 **	-50.3116 **

RADIATED SPURIOUS EMISSIONS

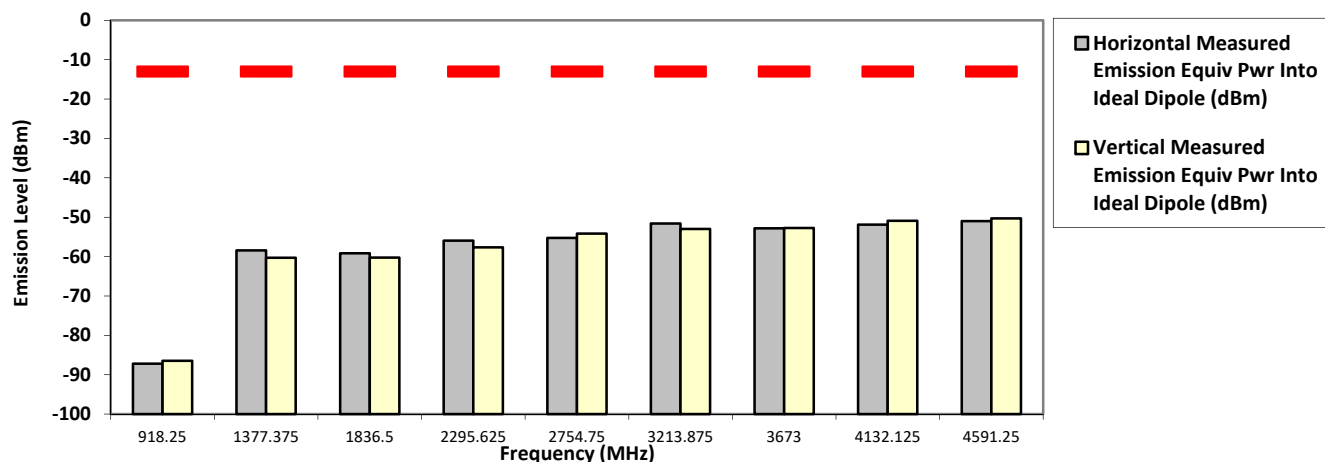

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


459.125000 MHz

25 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-13.0000	-87.2598 **	-84.8892 **
1377.3750	-13.0000	-59.5786 **	-59.3942 **
1836.5000	-13.0000	-59.6766 **	-58.0711 **
2295.6250	-13.0000	-56.9633 **	-56.5932 **
2754.7500	-13.0000	-55.2732 **	-54.8908 **
3213.8750	-13.0000	-52.8519 **	-52.6855 **
3673.0000	-13.0000	-52.2188 **	-53.5490 **
4132.1250	-13.0000	-51.2366 **	-51.0044 **
4591.2500	-13.0000	-50.6955 **	-50.7754 **

RADIATED SPURIOUS EMISSIONS

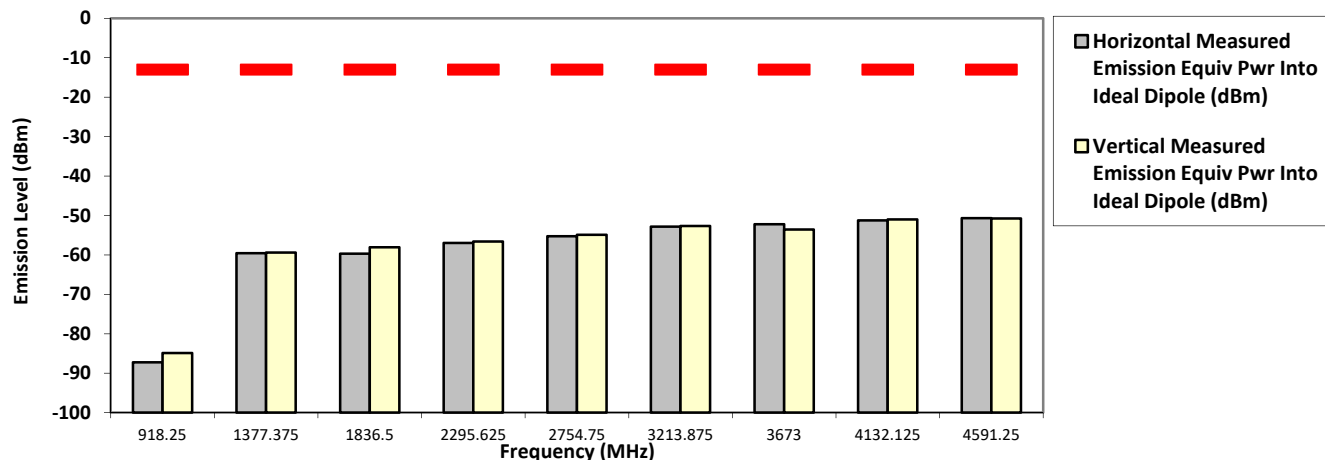

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


467.775000 MHz

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-86.2443 **	-85.4722 **
1403.3250	-13.0000	-60.9873 **	-60.7422 **
1871.1000	-13.0000	-56.8811 **	-57.9010 **
2338.8750	-13.0000	-56.0424 **	-54.4456 **
2806.6500	-13.0000	-54.7837 **	-56.0665 **
3274.4250	-13.0000	-52.0605 **	-52.6797 **
3742.2000	-13.0000	-53.5451 **	-53.4006 **
4209.9750	-13.0000	-50.1922 **	-50.5953 **
4677.7500	-13.0000	-49.7552 **	-50.0953 **

RADIATED SPURIOUS EMISSIONS

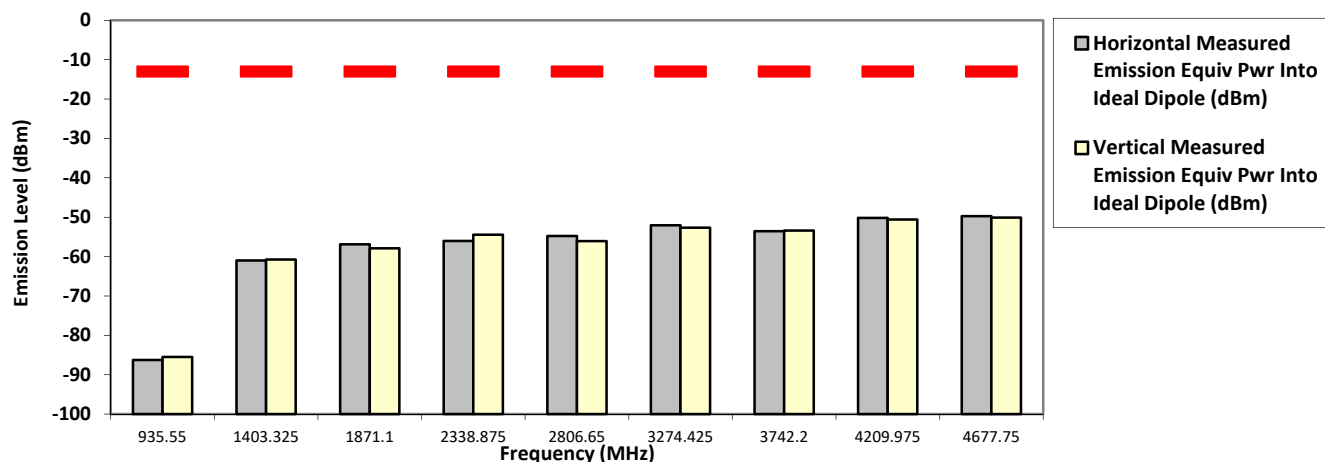

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


467.775000 MHz

25 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-13.0000	-86.8147 **	-85.8908 **
1403.3250	-13.0000	-60.2281 **	-59.6774 **
1871.1000	-13.0000	-59.2164 **	-58.1044 **
2338.8750	-13.0000	-55.6207 **	-56.6894 **
2806.6500	-13.0000	-53.9508 **	-53.9759 **
3274.4250	-13.0000	-52.0504 **	-53.1746 **
3742.2000	-13.0000	-52.0242 **	-52.7031 **
4209.9750	-13.0000	-50.5661 **	-50.6146 **
4677.7500	-13.0000	-48.3992 **	-49.0509 **

RADIATED SPURIOUS EMISSIONS

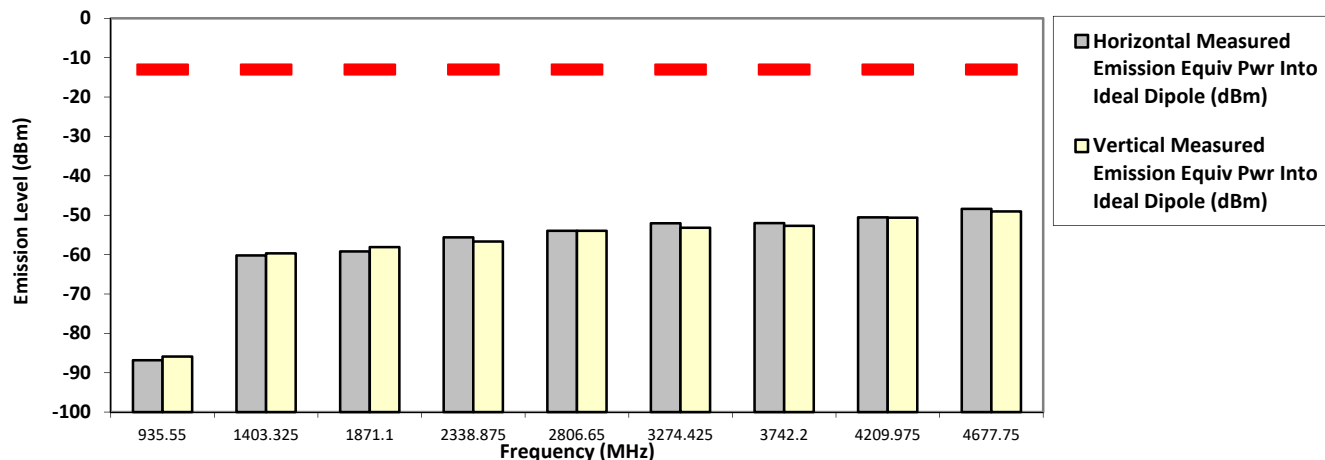

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


469.987500 MHz

25 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
939.9750	-13.0000	-86.6324 **	-86.8602 **
1409.9625	-13.0000	-60.8088 **	-60.8636 **
1879.9500	-13.0000	-59.3671 **	-58.5523 **
2349.9375	-13.0000	-55.9891 **	-55.1371 **
2819.9250	-13.0000	-55.2686 **	-54.3030 **
3289.9125	-13.0000	-53.1318 **	-52.4971 **
3759.9000	-13.0000	-52.1884 **	-53.1087 **
4229.8875	-13.0000	-51.0824 **	-49.2854 **
4699.8750	-13.0000	-49.3817 **	-49.6239 **

RADIATED SPURIOUS EMISSIONS

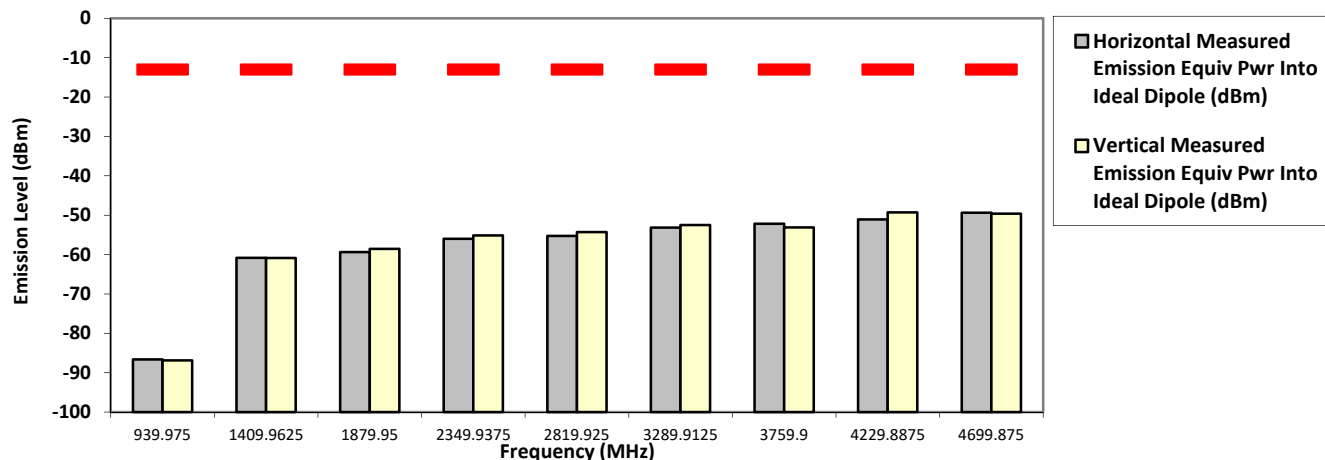

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX Analog


469.987500 MHz

25 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
939.9750	-13.0000	-86.8460 **	-85.7701 **
1409.9625	-13.0000	-60.5592 **	-61.1801 **
1879.9500	-13.0000	-59.1529 **	-59.1389 **
2349.9375	-13.0000	-55.0988 **	-54.8797 **
2819.9250	-13.0000	-54.7729 **	-54.8497 **
3289.9125	-13.0000	-52.7863 **	-52.4819 **
3759.9000	-13.0000	-53.4210 **	-51.6178 **
4229.8875	-13.0000	-51.6087 **	-51.5684 **
4699.8750	-13.0000	-49.3678 **	-48.7380 **

RADIATED SPURIOUS EMISSIONS

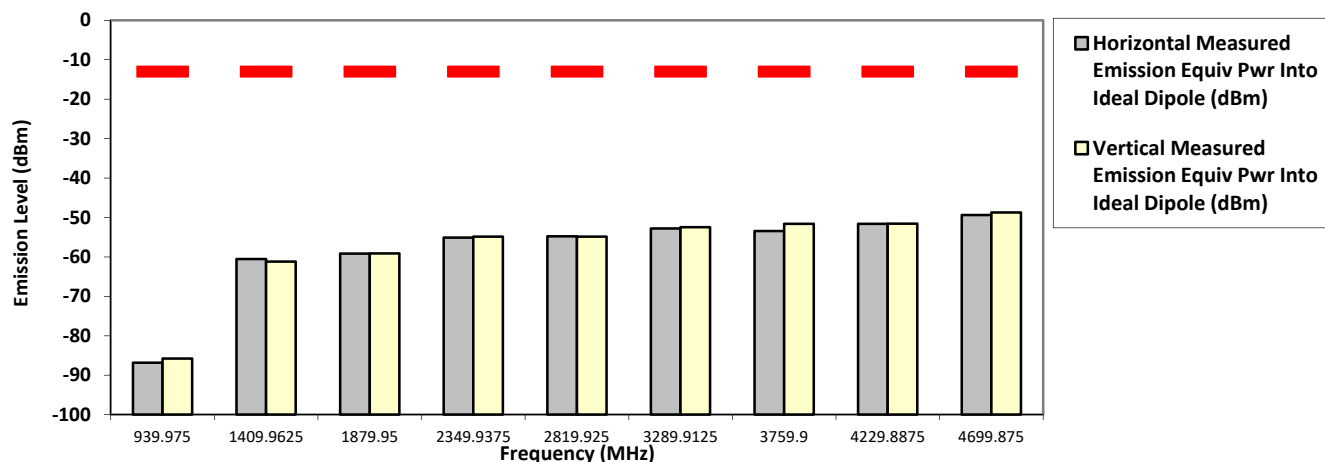

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported

Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

6.11.3. Test Result (Digital)

Model Number: M25QSS9PW1BN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
 3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


380.012500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
760.0250	-20.0000	-87.3293 **	-88.1542 **
1140.0375	-20.0000	-61.9269 **	-61.8018 **
1520.0500	-20.0000	-61.6867 **	-60.4108 **
1900.0625	-20.0000	-57.9029 **	-58.0182 **
2280.0750	-20.0000	-56.7349 **	-56.6887 **
2660.0875	-20.0000	-55.4627 **	-54.1274 **
3040.1000	-20.0000	-53.6610 **	-53.3920 **
3420.1125	-20.0000	-52.6411 **	-53.0398 **
3800.1250	-20.0000	-52.6156 **	-52.6459 **

RADIATED SPURIOUS EMISSIONS

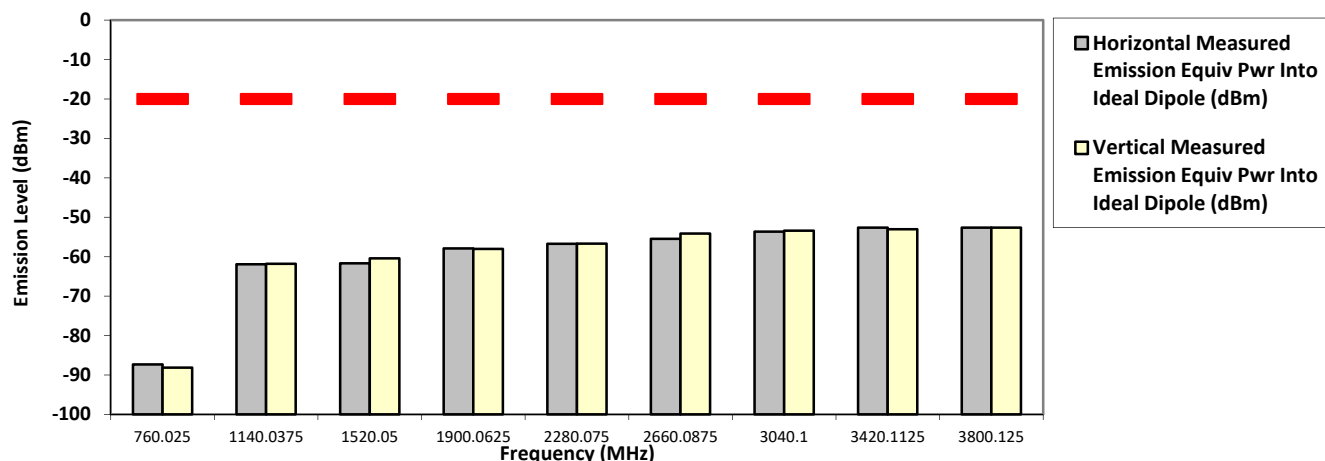

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


380.012500 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
760.0250	-20.0000	-86.7354 **	-87.8819 **
1140.0375	-20.0000	-62.1566 **	-61.5377 **
1520.0500	-20.0000	-61.5491 **	-61.1520 **
1900.0625	-20.0000	-57.0621 **	-57.9100 **
2280.0750	-20.0000	-57.5461 **	-56.8932 **
2660.0875	-20.0000	-55.2982 **	-55.1513 **
3040.1000	-20.0000	-51.8861 **	-53.6031 **
3420.1125	-20.0000	-52.0471 **	-52.5684 **
3800.1250	-20.0000	-51.9135 **	-52.5459 **

RADIATED SPURIOUS EMISSIONS

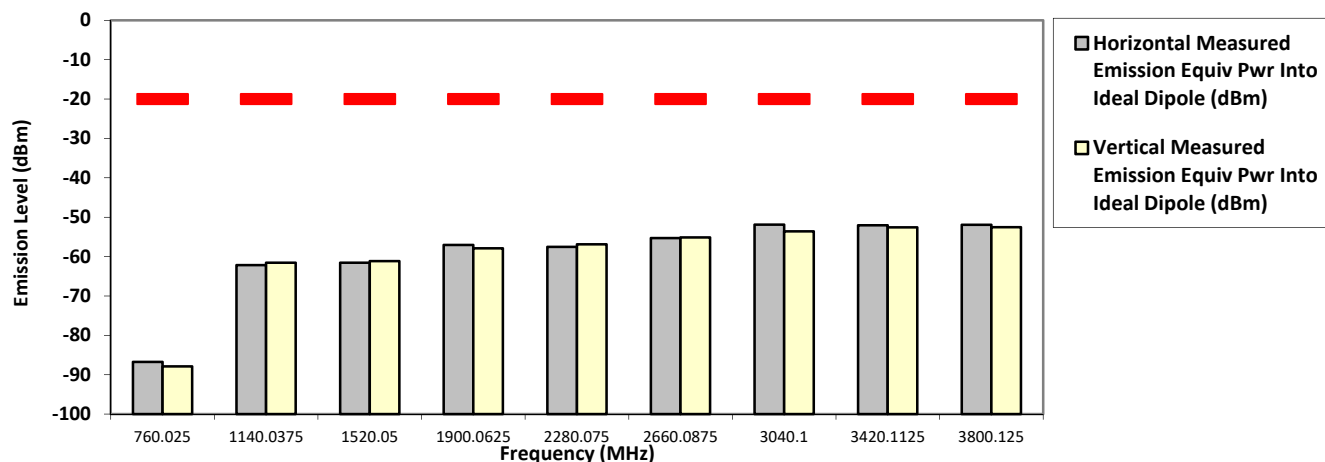

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


406.200000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-86.9003 **	-85.6233 **
1218.6000	-20.0000	-62.4273 **	-62.2377 **
1624.8000	-20.0000	-60.2136 **	-59.3694 **
2031.0000	-20.0000	-57.3229 **	-56.3841 **
2437.2000	-20.0000	-55.4152 **	-55.2958 **
2843.4000	-20.0000	-54.5417 **	-53.3877 **
3249.6000	-20.0000	-51.2022 **	-52.4349 **
3655.8000	-20.0000	-52.1029 **	-51.9576 **
4062.0000	-20.0000	-49.5501 **	-50.4615 **

RADIATED SPURIOUS EMISSIONS

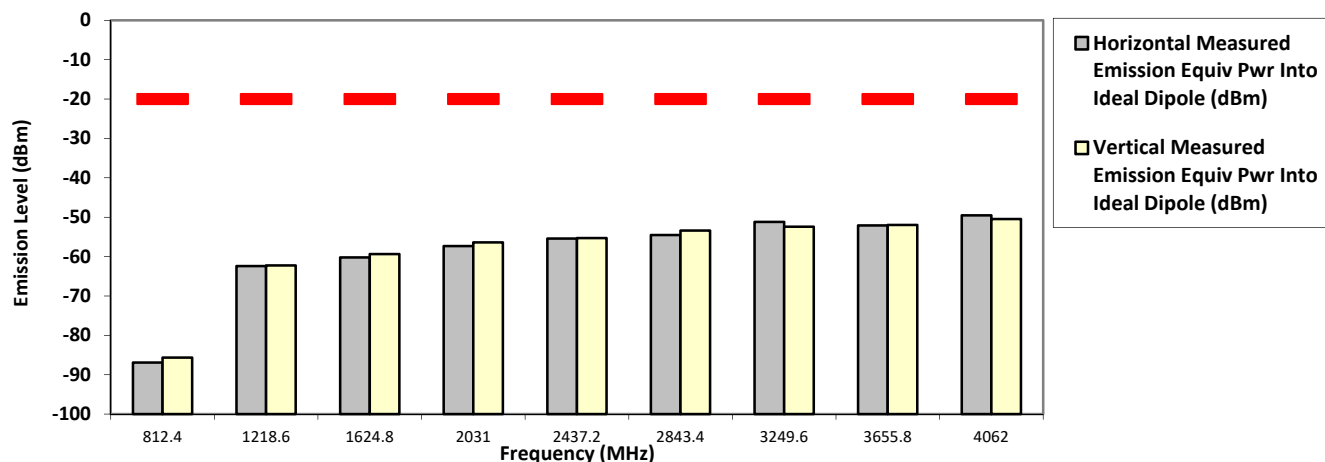

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


406.200000 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-87.5674 **	-87.3880 **
1218.6000	-20.0000	-43.2800 *	-48.1800 *
1624.8000	-20.0000	-59.2528 **	-58.7902 **
2031.0000	-20.0000	-56.5427 **	-57.3356 **
2437.2000	-20.0000	-55.7736 **	-55.4246 **
2843.4000	-20.0000	-52.8408 **	-54.8113 **
3249.6000	-20.0000	-52.4332 **	-52.5755 **
3655.8000	-20.0000	-53.1026 **	-51.4514 **
4062.0000	-20.0000	-51.4141 **	-50.0813 **

RADIATED SPURIOUS EMISSIONS

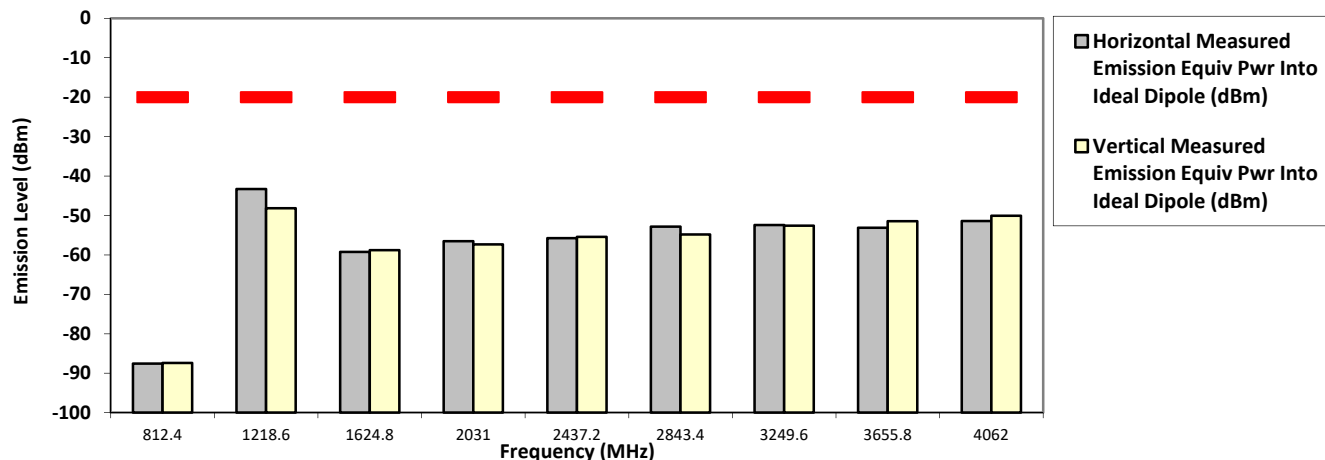

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


450.025000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-87.6412 **	-85.0788 **
1350.0750	-20.0000	-61.3603 **	-61.1848 **
1800.1000	-20.0000	-59.2627 **	-59.4748 **
2250.1250	-20.0000	-57.1080 **	-57.9043 **
2700.1500	-20.0000	-55.7318 **	-56.1055 **
3150.1750	-20.0000	-52.9837 **	-52.5187 **
3600.2000	-20.0000	-53.3633 **	-53.2750 **
4050.2250	-20.0000	-51.5236 **	-51.6478 **
4500.2500	-20.0000	-50.8938 **	-50.6871 **

RADIATED SPURIOUS EMISSIONS

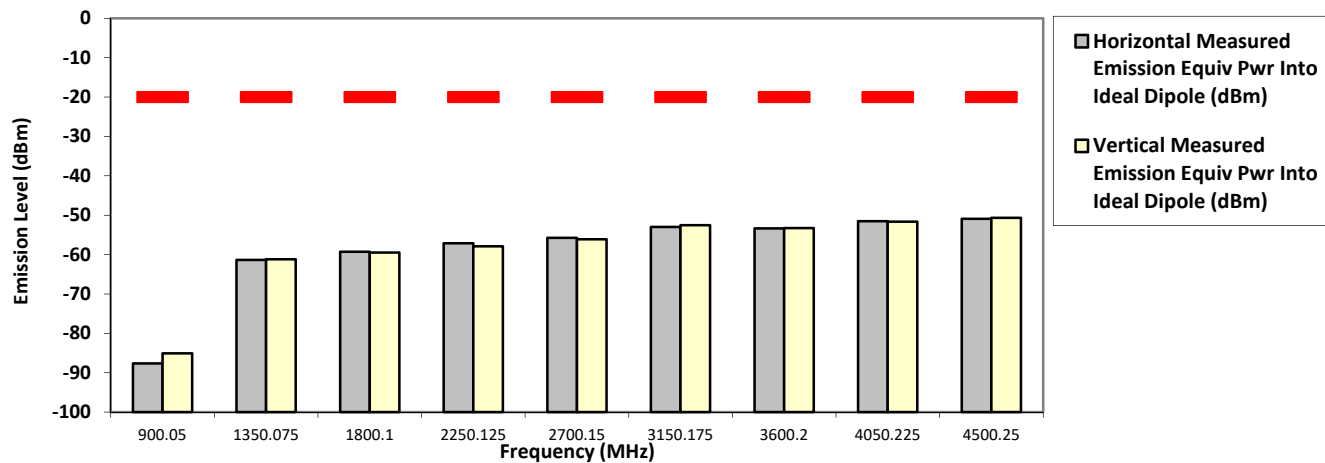

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


450.025000 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-87.1212 **	-88.0634 **
1350.0750	-20.0000	-52.1800 *	-45.0700 *
1800.1000	-20.0000	-59.5939 **	-57.9754 **
2250.1250	-20.0000	-57.7717 **	-57.2475 **
2700.1500	-20.0000	-55.6334 **	-53.5542 **
3150.1750	-20.0000	-52.5127 **	-51.7885 **
3600.2000	-20.0000	-53.2282 **	-53.3752 **
4050.2250	-20.0000	-51.4881 **	-50.6540 **
4500.2500	-20.0000	-51.0538 **	-51.0234 **

RADIATED SPURIOUS EMISSIONS

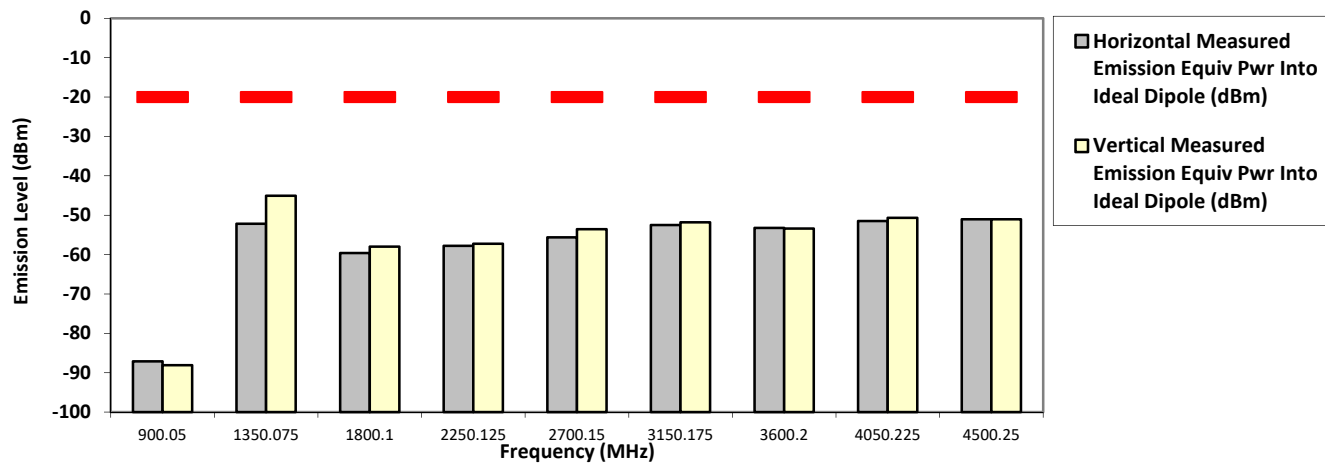

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


459.125000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-86.7138 **	-86.5948 **
1377.3750	-20.0000	-60.0274 **	-61.7795 **
1836.5000	-20.0000	-59.8098 **	-59.2134 **
2295.6250	-20.0000	-57.1221 **	-56.4074 **
2754.7500	-20.0000	-54.4429 **	-55.1759 **
3213.8750	-20.0000	-52.0954 **	-51.0907 **
3673.0000	-20.0000	-52.8307 **	-52.0963 **
4132.1250	-20.0000	-51.2187 **	-50.1402 **
4591.2500	-20.0000	-50.4795 **	-50.0433 **

RADIATED SPURIOUS EMISSIONS

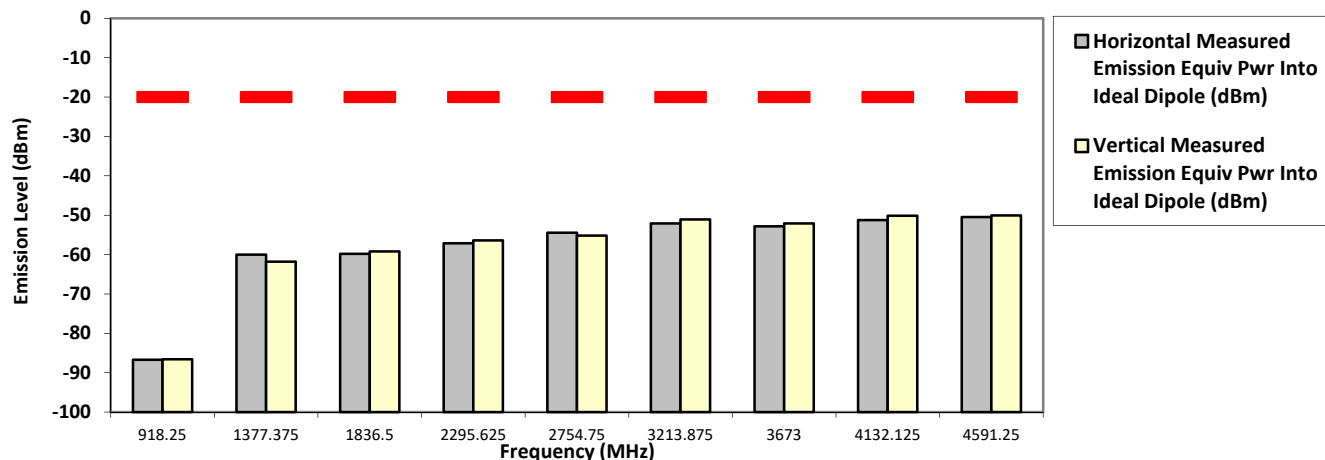

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


459.125000 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-86.5601 **	-87.5893 **
1377.3750	-20.0000	-46.1200 *	-47.5700 *
1836.5000	-20.0000	-59.8743 **	-60.0213 **
2295.6250	-20.0000	-56.8532 **	-57.4117 **
2754.7500	-20.0000	-55.3648 **	-55.3437 **
3213.8750	-20.0000	-51.8129 **	-52.4457 **
3673.0000	-20.0000	-51.6469 **	-52.7691 **
4132.1250	-20.0000	-51.3950 **	-49.9145 **
4591.2500	-20.0000	-49.3855 **	-50.2647 **

RADIATED SPURIOUS EMISSIONS

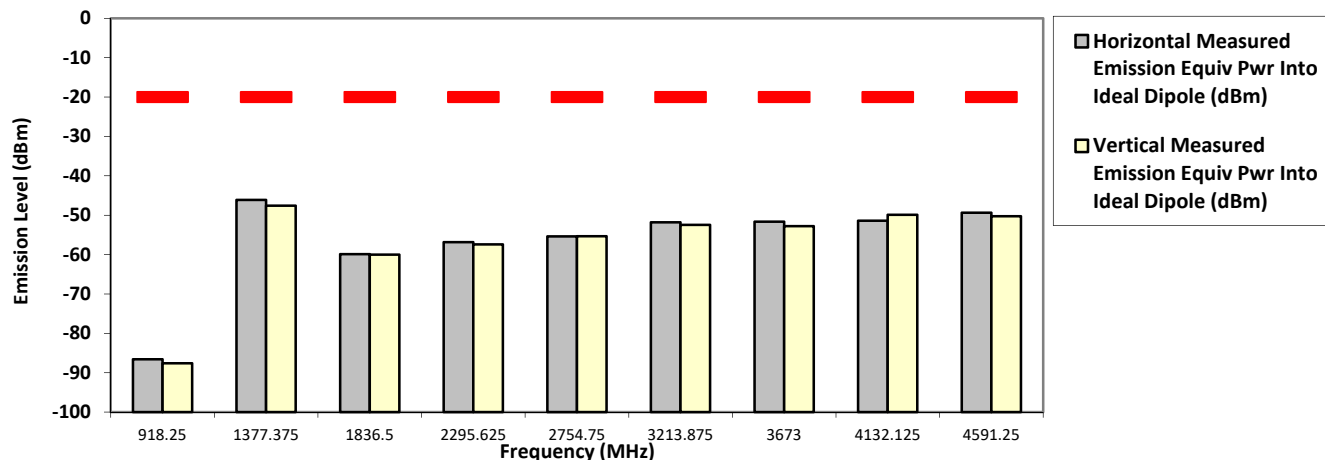

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


467.775000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-86.2639 **	-86.7684 **
1403.3250	-20.0000	-61.4990 **	-59.8766 **
1871.1000	-20.0000	-58.5495 **	-58.5277 **
2338.8750	-20.0000	-56.0847 **	-56.8712 **
2806.6500	-20.0000	-54.9950 **	-53.6362 **
3274.4250	-20.0000	-52.8052 **	-52.3898 **
3742.2000	-20.0000	-52.7853 **	-52.7539 **
4209.9750	-20.0000	-51.7157 **	-48.9832 **
4677.7500	-20.0000	-48.6967 **	-49.8737 **

RADIATED SPURIOUS EMISSIONS

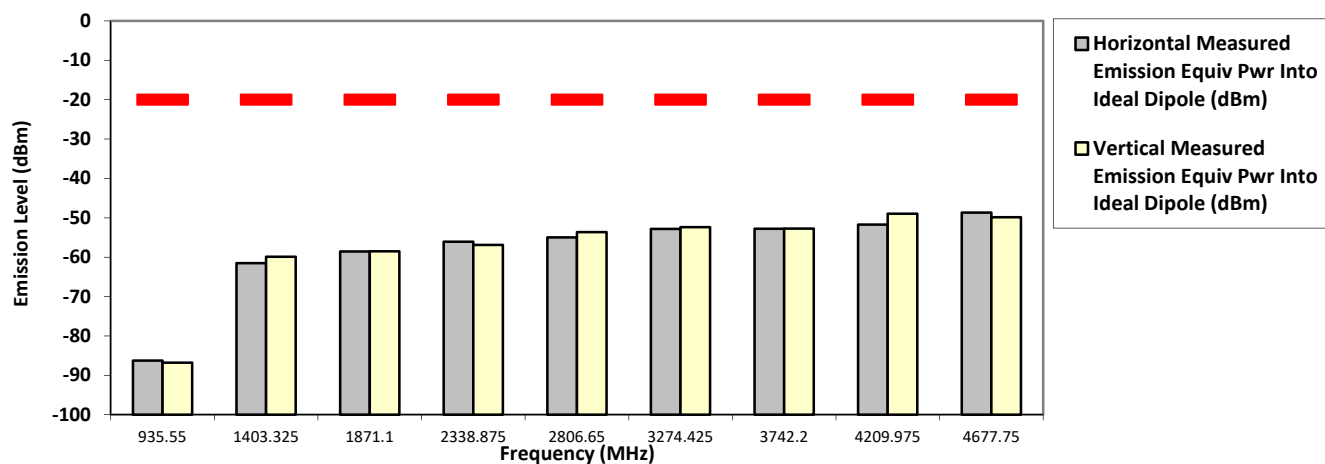

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


467.775000 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-85.4295 **	-85.9473 **
1403.3250	-20.0000	-49.5200 *	-40.3300 *
1871.1000	-20.0000	-58.9884 **	-58.6989 **
2338.8750	-20.0000	-56.5401 **	-57.1002 **
2806.6500	-20.0000	-54.3048 **	-54.0699 **
3274.4250	-20.0000	-52.7897 **	-52.3034 **
3742.2000	-20.0000	-53.5267 **	-52.5264 **
4209.9750	-20.0000	-50.6403 **	-50.7871 **
4677.7500	-20.0000	-49.3887 **	-50.6445 **

RADIATED SPURIOUS EMISSIONS

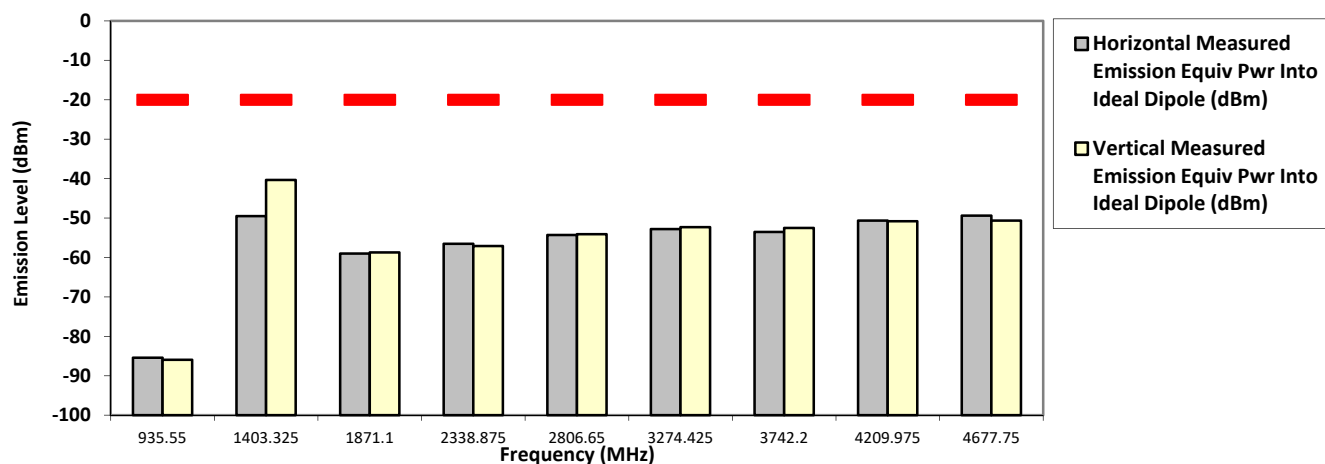

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


469.987500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
939.9750	-20.0000	-86.9295 **	-86.7750 **
1409.9625	-20.0000	-60.8366 **	-61.2290 **
1879.9500	-20.0000	-58.4930 **	-58.9501 **
2349.9375	-20.0000	-55.8103 **	-56.1251 **
2819.9250	-20.0000	-54.8446 **	-54.8255 **
3289.9125	-20.0000	-51.9876 **	-52.8354 **
3759.9000	-20.0000	-52.1174 **	-52.7060 **
4229.8875	-20.0000	-51.4334 **	-51.8182 **
4699.8750	-20.0000	-48.1005 **	-49.2179 **

RADIATED SPURIOUS EMISSIONS

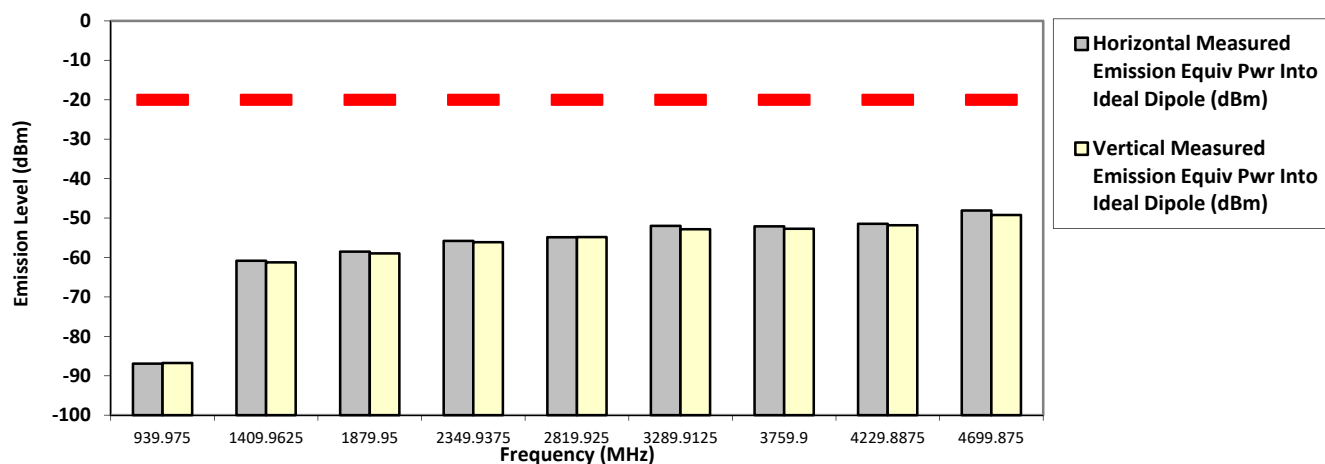

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital C4FM


469.987500 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
939.9750	-20.0000	-86.4921 **	-86.8127 **
1409.9625	-20.0000	-47.6300 *	-47.9700 *
1879.9500	-20.0000	-58.5488 **	-57.7411 **
2349.9375	-20.0000	-56.6888 **	-56.1810 **
2819.9250	-20.0000	-54.5014 **	-55.5003 **
3289.9125	-20.0000	-51.6011 **	-52.2797 **
3759.9000	-20.0000	-51.7099 **	-53.3869 **
4229.8875	-20.0000	-51.4124 **	-51.9086 **
4699.8750	-20.0000	-48.9750 **	-49.3655 **

RADIATED SPURIOUS EMISSIONS

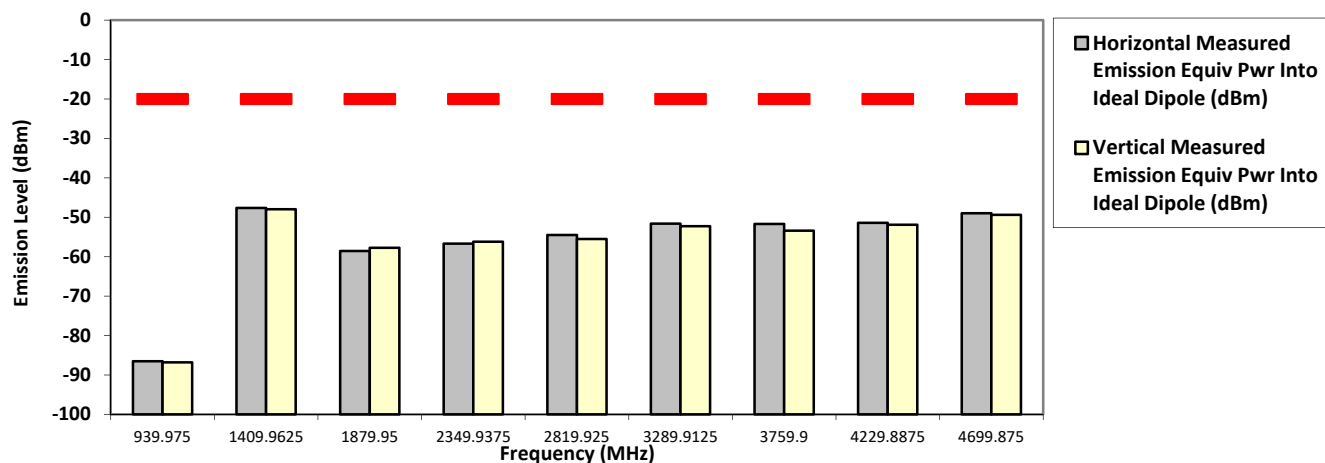

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: M25QSS9PW1BN S/N: 471TVZ0888 SR:18807-EMC-00039
Battery Part No: NA Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, 3466-HKN6187B-4, HKN6164B-C2, PMHN4194C-C5, PMUN1057B-C3, PMUN1083A-C5
Test Mode: TX APCO Digital C4FM
467.775000 MHz 12.5 kHz 48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-86.4455 **	-85.9863 **
1403.3250	-20.0000	-53.8000 *	-56.5800 *
1871.1000	-20.0000	-58.4890 **	-58.8044 **
2338.8750	-20.0000	-54.5909 **	-54.9913 **
2806.6500	-20.0000	-53.8117 **	-54.1755 **
3274.4250	-20.0000	-51.9179 **	-51.6225 **
3742.2000	-20.0000	-51.3370 **	-52.8077 **
4209.9750	-20.0000	-51.7655 **	-51.4870 **
4677.7500	-20.0000	-49.4785 **	-49.6579 **

RADIATED SPURIOUS EMISSIONS

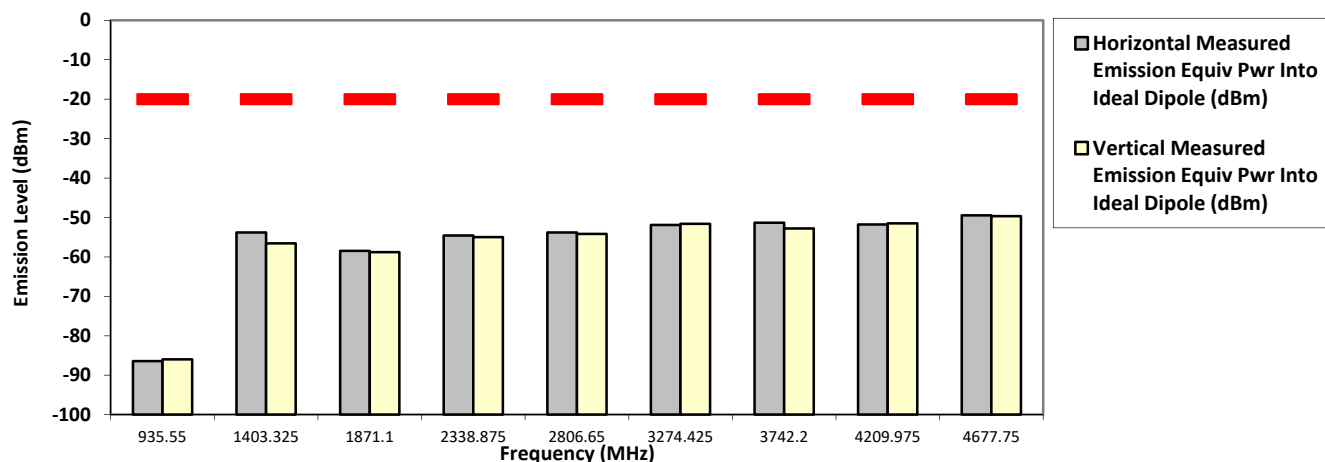

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Qawiman Tue, Jan 07, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 22.9 Hum(%RH): 70.1

System MU: 4.03 dB


Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

SAC Transmitter Radiated Emission:
Model Number: M25QSS9PW1BN S/N: 471TVZ0910 SR:18807-EMC-00040
Battery Part No: NA Accy Part No: HMN1089C-C2, HSN6003C-CF1, HKN6032A-CF1, 3466-HKN6163C-3,
3075217A02-C1, PHCN4000E-CF3, PHLN1002A-CF2, PMUN1083A-CF4
Test Mode: TX APCO Digital C4FM
467.775000 MHz 12.5 kHz 48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-87.5925 **	-86.8496 **
1403.3250	-20.0000	-59.6308 **	-60.3535 **
1871.1000	-20.0000	-59.2346 **	-60.9620 **
2338.8750	-20.0000	-56.5690 **	-57.1386 **
2806.6500	-20.0000	-54.7594 **	-54.4297 **
3274.4250	-20.0000	-52.3485 **	-52.9314 **
3742.2000	-20.0000	-52.5774 **	-52.6289 **
4209.9750	-20.0000	-51.6624 **	-50.4995 **
4677.7500	-20.0000	-49.5203 **	-49.5635 **

RADIATED SPURIOUS EMISSIONS

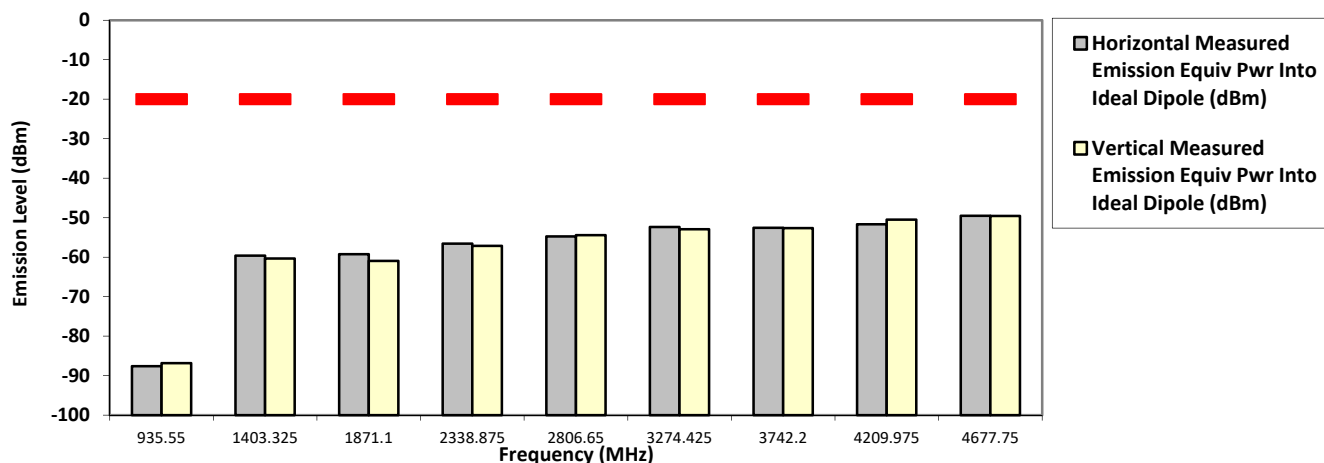

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Qawiman&Azil Wed, Jan 15, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 22.9 Hum(%RH): 70.1

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


380.012500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
760.0250	-20.0000	-87.1904 **	-87.3813 **
1140.0375	-20.0000	-61.4296 **	-62.8691 **
1520.0500	-20.0000	-60.2857 **	-61.3778 **
1900.0625	-20.0000	-56.8026 **	-58.5747 **
2280.0750	-20.0000	-57.0342 **	-56.0277 **
2660.0875	-20.0000	-53.5901 **	-54.5719 **
3040.1000	-20.0000	-53.0776 **	-53.4395 **
3420.1125	-20.0000	-52.6789 **	-52.6110 **
3800.1250	-20.0000	-52.6105 **	-52.7637 **

RADIATED SPURIOUS EMISSIONS

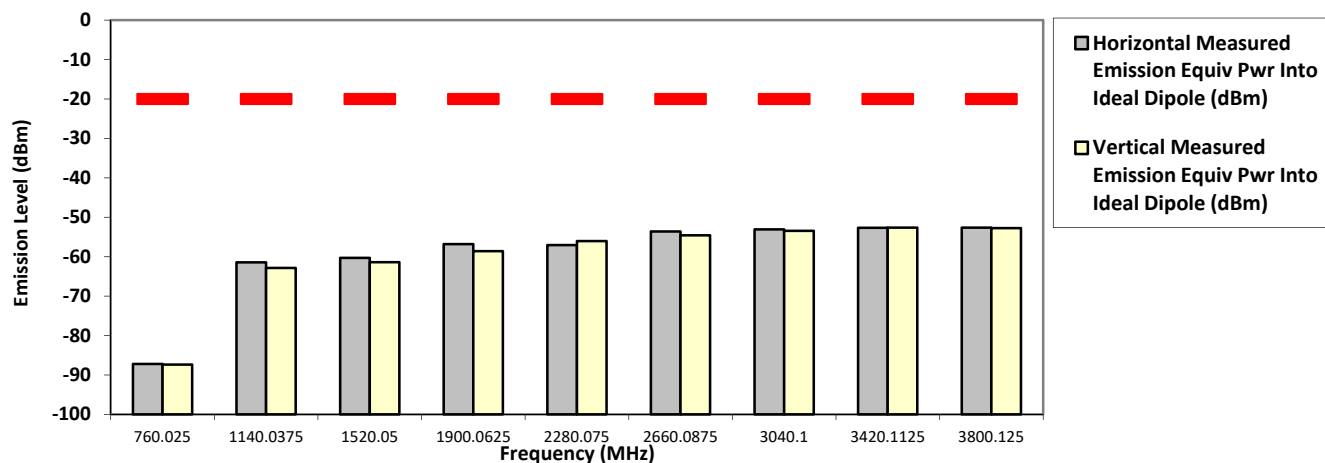

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


380.012500 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
760.0250	-20.0000	-87.0178 **	-88.2017 **
1140.0375	-20.0000	-60.5660 **	-62.6598 **
1520.0500	-20.0000	-61.3339 **	-60.6390 **
1900.0625	-20.0000	-58.4538 **	-58.4991 **
2280.0750	-20.0000	-57.1051 **	-57.5419 **
2660.0875	-20.0000	-55.3205 **	-55.4436 **
3040.1000	-20.0000	-53.3377 **	-53.8222 **
3420.1125	-20.0000	-52.9284 **	-52.8628 **
3800.1250	-20.0000	-52.9569 **	-52.6603 **

RADIATED SPURIOUS EMISSIONS

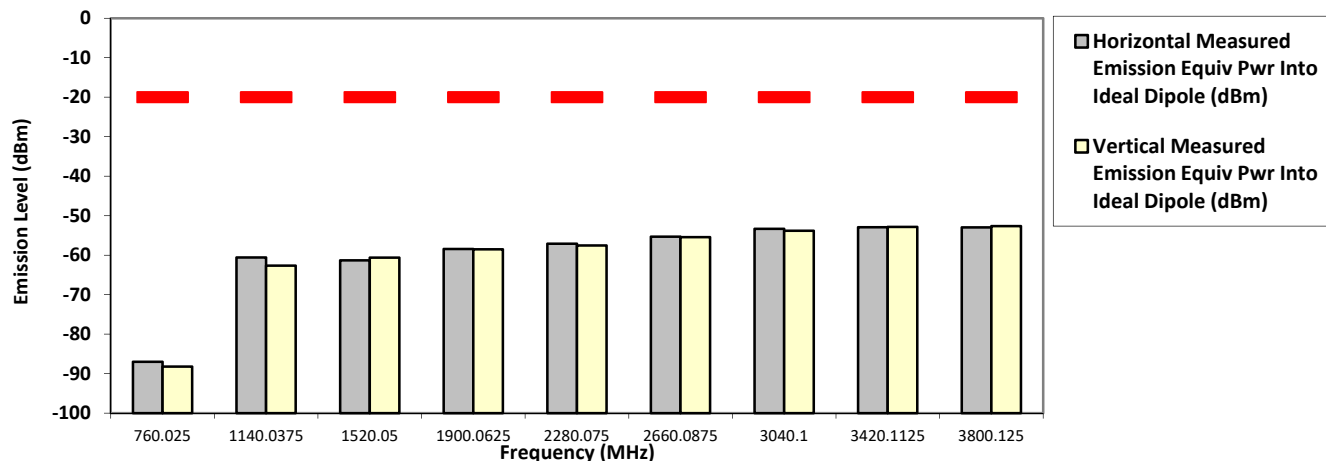

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


406.200000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-87.0459 **	-87.8290 **
1218.6000	-20.0000	-61.8734 **	-61.2257 **
1624.8000	-20.0000	-59.4207 **	-59.7430 **
2031.0000	-20.0000	-57.1543 **	-57.2541 **
2437.2000	-20.0000	-56.6560 **	-55.1181 **
2843.4000	-20.0000	-55.4616 **	-54.8596 **
3249.6000	-20.0000	-52.7815 **	-52.2280 **
3655.8000	-20.0000	-52.3017 **	-52.2249 **
4062.0000	-20.0000	-51.0750 **	-51.8864 **

RADIATED SPURIOUS EMISSIONS

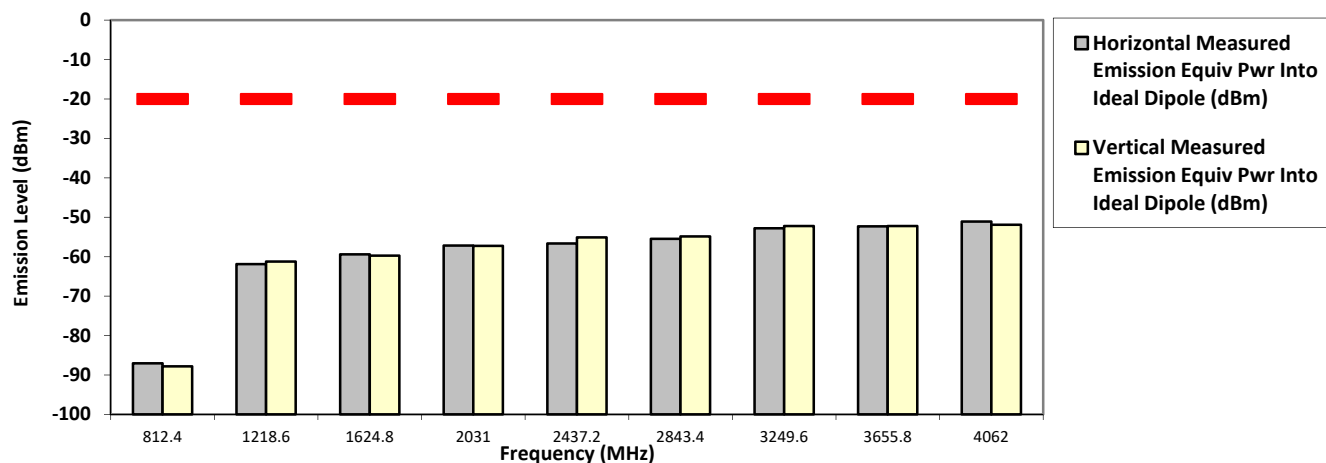

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil
Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:	Passed Results	Marginal Results	Failed Results
----------	----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


406.200000 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
812.4000	-20.0000	-87.9700 **	-86.0143 **
1218.6000	-20.0000	-47.1900 *	-45.8500 *
1624.8000	-20.0000	-60.2740 **	-59.2430 **
2031.0000	-20.0000	-56.7881 **	-56.9825 **
2437.2000	-20.0000	-55.6648 **	-55.9521 **
2843.4000	-20.0000	-54.6254 **	-54.4033 **
3249.6000	-20.0000	-52.0799 **	-52.6545 **
3655.8000	-20.0000	-52.6635 **	-53.2329 **
4062.0000	-20.0000	-50.8240 **	-50.8666 **

RADIATED SPURIOUS EMISSIONS

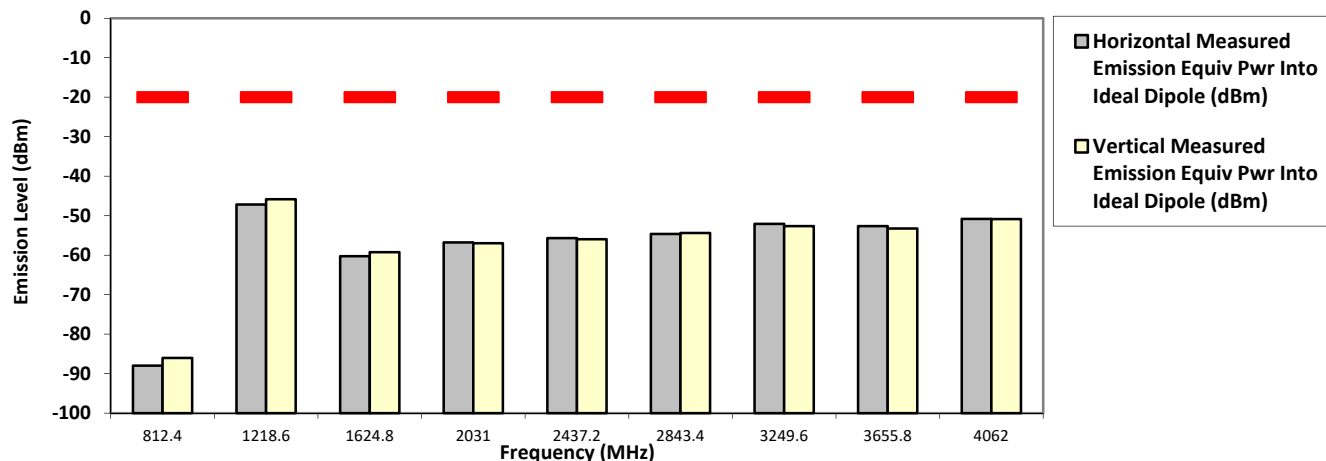

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


450.025000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-86.7405 **	-87.5790 **
1350.0750	-20.0000	-61.0752 **	-60.8341 **
1800.1000	-20.0000	-59.6645 **	-59.2582 **
2250.1250	-20.0000	-56.5537 **	-56.8355 **
2700.1500	-20.0000	-55.4528 **	-55.5133 **
3150.1750	-20.0000	-52.0417 **	-52.6436 **
3600.2000	-20.0000	-52.9801 **	-52.2651 **
4050.2250	-20.0000	-50.6517 **	-51.6359 **
4500.2500	-20.0000	-50.9138 **	-51.0562 **

RADIATED SPURIOUS EMISSIONS

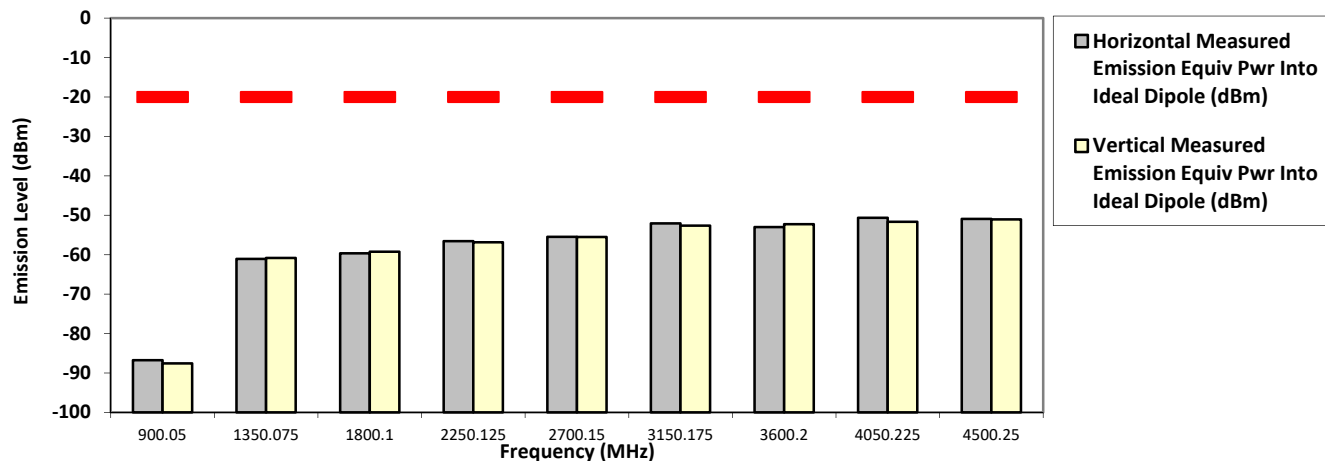

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


450.025000 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
900.0500	-20.0000	-87.4637 **	-86.5946 **
1350.0750	-20.0000	-52.2800 *	-40.8200 *
1800.1000	-20.0000	-60.0437 **	-59.4406 **
2250.1250	-20.0000	-56.7028 **	-56.4124 **
2700.1500	-20.0000	-54.5438 **	-54.2972 **
3150.1750	-20.0000	-52.7249 **	-53.2151 **
3600.2000	-20.0000	-52.7486 **	-52.2977 **
4050.2250	-20.0000	-51.3390 **	-51.7635 **
4500.2500	-20.0000	-51.2247 **	-50.4017 **

RADIATED SPURIOUS EMISSIONS

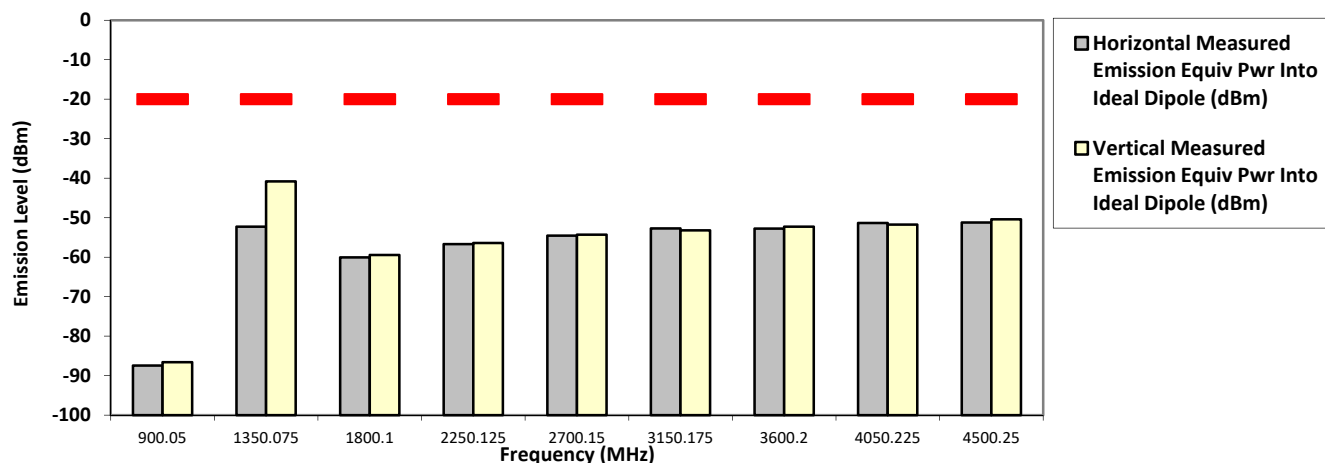

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


459.125000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-87.6201 **	-86.3916 **
1377.3750	-20.0000	-60.9289 **	-59.0169 **
1836.5000	-20.0000	-59.7098 **	-59.5990 **
2295.6250	-20.0000	-56.4741 **	-56.7336 **
2754.7500	-20.0000	-54.2333 **	-55.3534 **
3213.8750	-20.0000	-53.1490 **	-52.0714 **
3673.0000	-20.0000	-53.3353 **	-52.4278 **
4132.1250	-20.0000	-51.0052 **	-51.3952 **
4591.2500	-20.0000	-50.9868 **	-50.7807 **

RADIATED SPURIOUS EMISSIONS

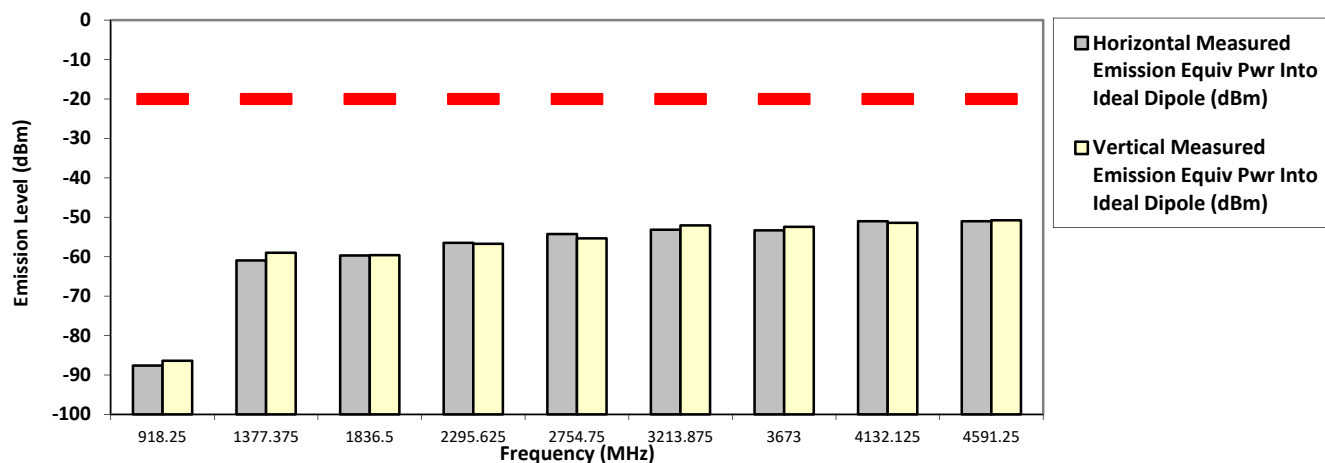

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


459.125000 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
918.2500	-20.0000	-87.7710 **	-87.3055 **
1377.3750	-20.0000	-59.7408 **	-58.4147 **
1836.5000	-20.0000	-59.2263 **	-59.6255 **
2295.6250	-20.0000	-56.7932 **	-56.8160 **
2754.7500	-20.0000	-53.7148 **	-55.8564 **
3213.8750	-20.0000	-52.8290 **	-53.0323 **
3673.0000	-20.0000	-52.2128 **	-53.1863 **
4132.1250	-20.0000	-50.3058 **	-50.6269 **
4591.2500	-20.0000	-49.8800 **	-49.8328 **

RADIATED SPURIOUS EMISSIONS

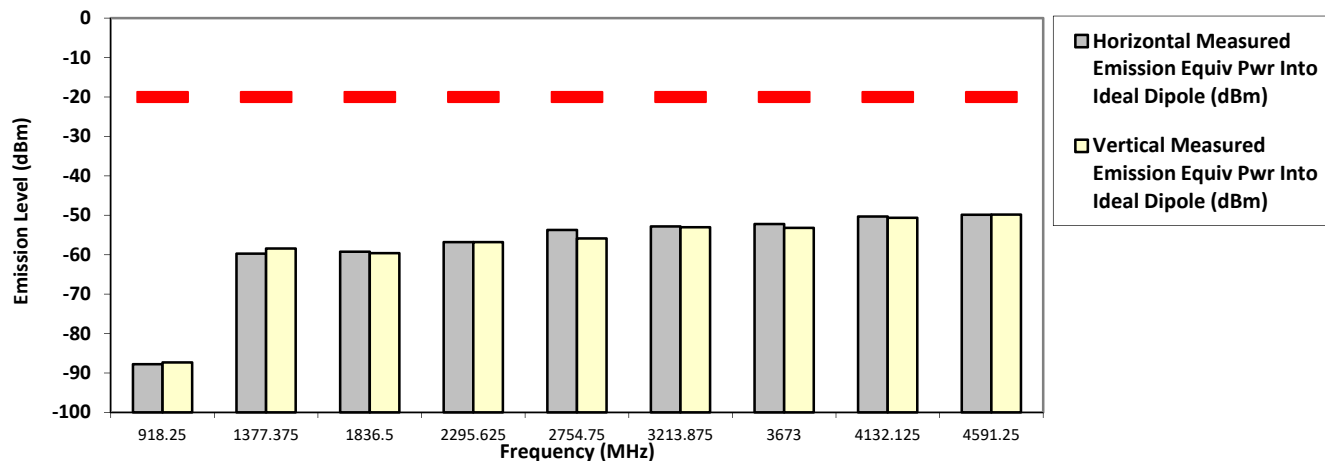

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


467.775000 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-86.2280 **	-85.9023 **
1403.3250	-20.0000	-61.4403 **	-62.0680 **
1871.1000	-20.0000	-58.2250 **	-59.2644 **
2338.8750	-20.0000	-56.5377 **	-55.9722 **
2806.6500	-20.0000	-54.0979 **	-54.1460 **
3274.4250	-20.0000	-52.5800 **	-52.5916 **
3742.2000	-20.0000	-53.3652 **	-51.8642 **
4209.9750	-20.0000	-50.8099 **	-50.9576 **
4677.7500	-20.0000	-48.4368 **	-49.4087 **

RADIATED SPURIOUS EMISSIONS

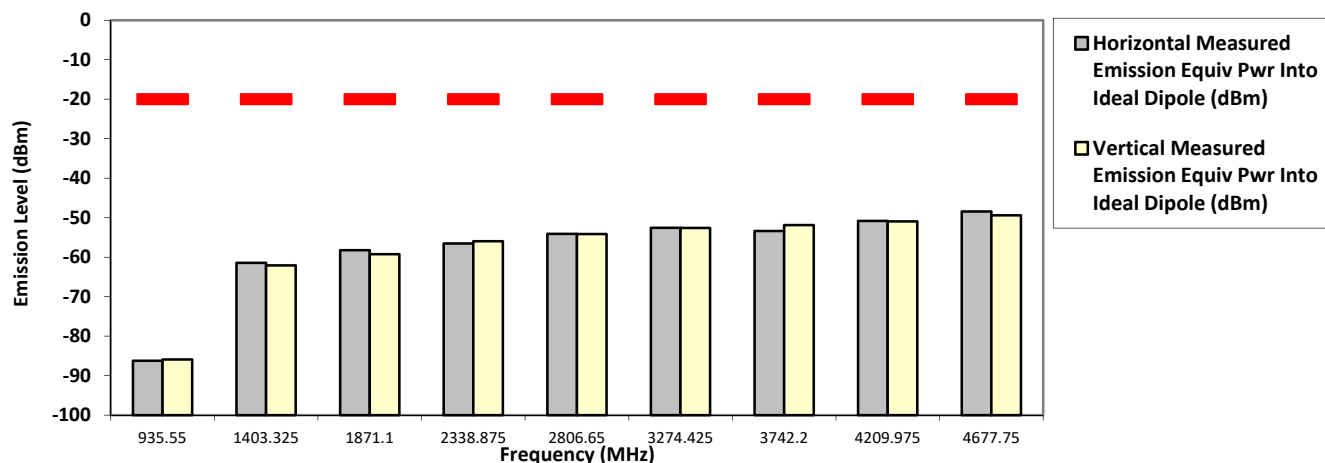

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


467.775000 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
935.5500	-20.0000	-87.3830 **	-86.2519 **
1403.3250	-20.0000	-60.4770 **	-60.6279 **
1871.1000	-20.0000	-57.5640 **	-58.4423 **
2338.8750	-20.0000	-55.8015 **	-56.8867 **
2806.6500	-20.0000	-54.7199 **	-54.1647 **
3274.4250	-20.0000	-51.3799 **	-52.6519 **
3742.2000	-20.0000	-53.3304 **	-52.4887 **
4209.9750	-20.0000	-50.7089 **	-50.0635 **
4677.7500	-20.0000	-48.8138 **	-49.1131 **

RADIATED SPURIOUS EMISSIONS

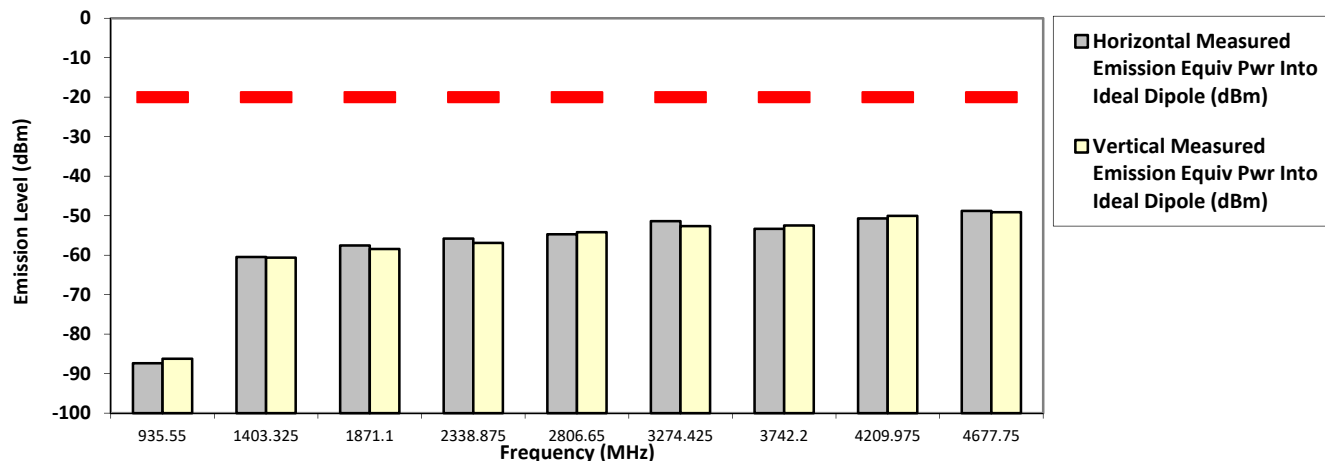

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


469.987500 MHz

12.5 kHz

1.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
939.9750	-20.0000	-85.1046 **	-86.1018 **
1409.9625	-20.0000	-60.9429 **	-60.8240 **
1879.9500	-20.0000	-58.2441 **	-59.0442 **
2349.9375	-20.0000	-56.6051 **	-56.0536 **
2819.9250	-20.0000	-54.5761 **	-54.2008 **
3289.9125	-20.0000	-51.5770 **	-52.3064 **
3759.9000	-20.0000	-52.4713 **	-52.0310 **
4229.8875	-20.0000	-50.9664 **	-50.6608 **
4699.8750	-20.0000	-50.2251 **	-48.7841 **

RADIATED SPURIOUS EMISSIONS

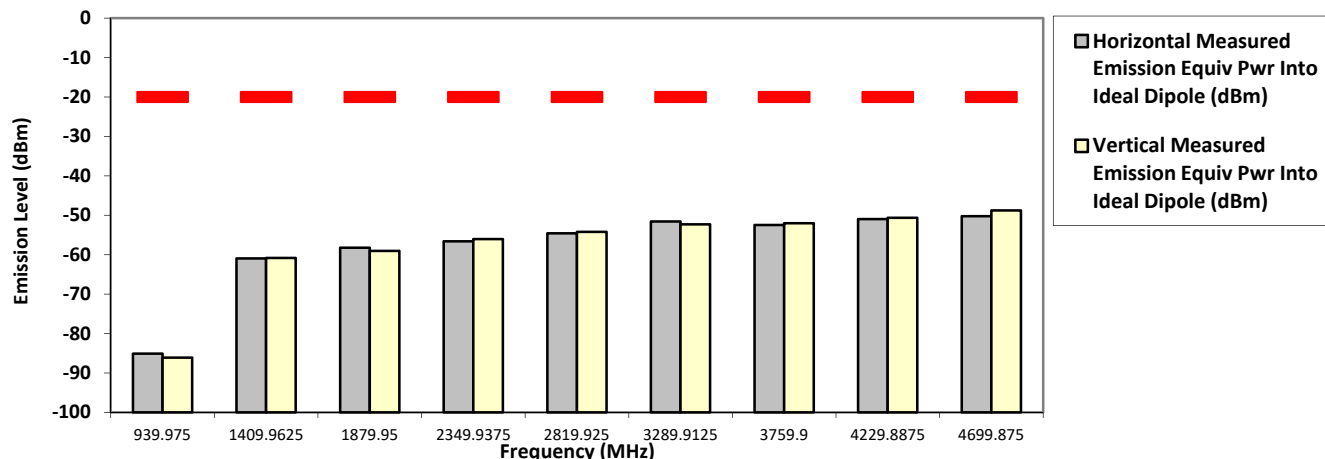

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: M25QSS9PW1BN
Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 471TVZ0920

SR:18807-EMC-00024

Accy Part No: HMN1089C-C2, HSN6003C-CF1, 13921-HKN4192B-1,
3466-HKN6163C-3, PMHN4194C-C6

Test Mode: TX APCO Digital Phase II


469.987500 MHz

12.5 kHz

48.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
939.9750	-20.0000	-84.4882 **	-83.7932 **
1409.9625	-20.0000	-61.1193 **	-58.8962 **
1879.9500	-20.0000	-58.8938 **	-58.9069 **
2349.9375	-20.0000	-55.3033 **	-54.3671 **
2819.9250	-20.0000	-54.1875 **	-55.0891 **
3289.9125	-20.0000	-51.7030 **	-51.5319 **
3759.9000	-20.0000	-51.9597 **	-51.8906 **
4229.8875	-20.0000	-51.6493 **	-51.1456 **
4699.8750	-20.0000	-49.9380 **	-48.6451 **

RADIATED SPURIOUS EMISSIONS

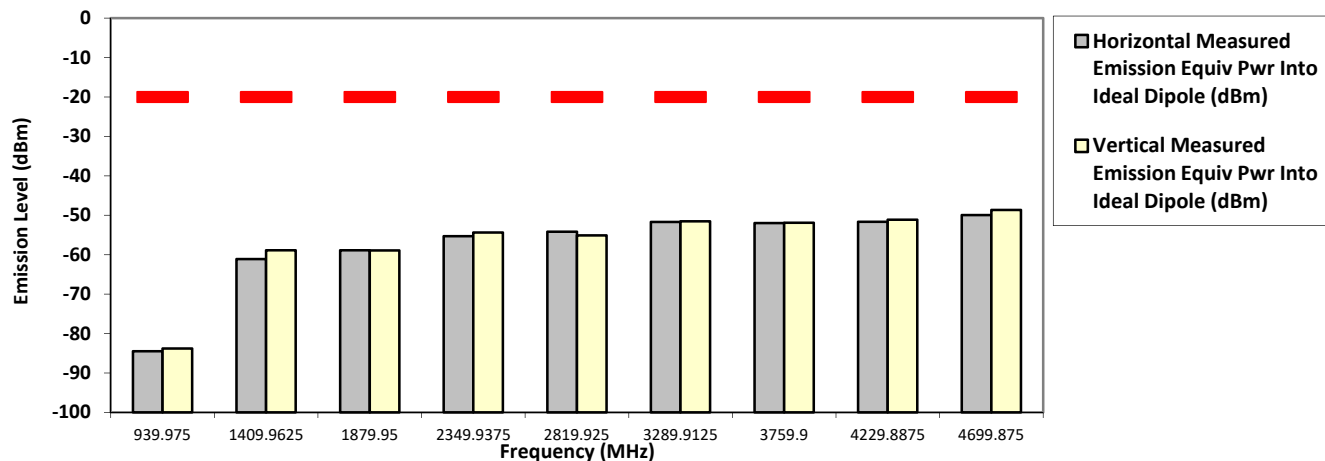

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.

Motorola Penang EMC Lab - Test Performed by: Nazrin&Azil

Fri, Dec 27, 2019

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
Temp(Deg): 23.1 Hum(%RH): 70.0

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

6.11.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.12. Effective Radiated Power (ERP)

6.12.1. Test Setup

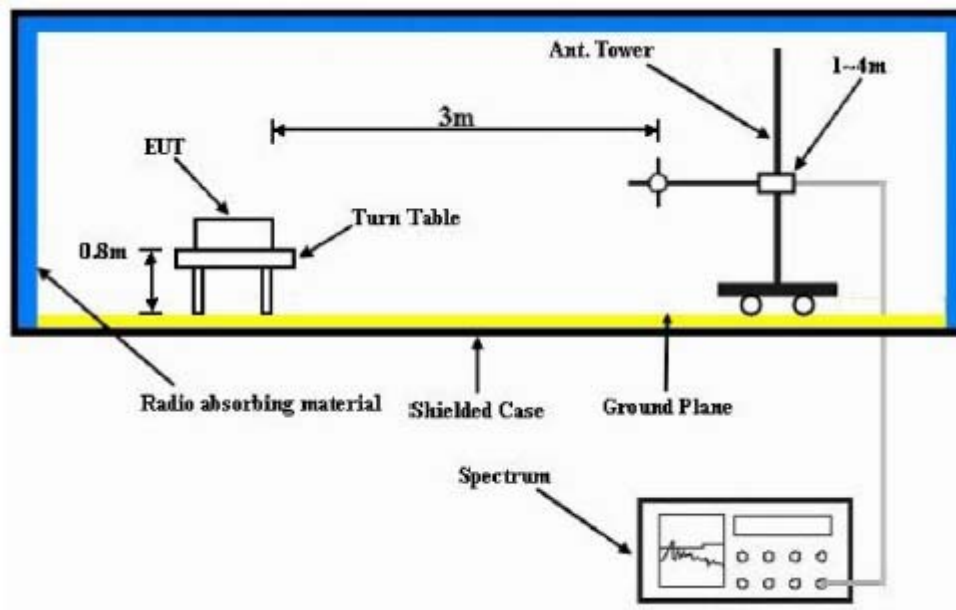

- 1) The Resolution Bandwidth for Equivalent Radiated Power (ERP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

6.12.2. Test Result

Max measured conducted power for part 80 = 0.93W (29.68dBm)

Mismatch loss at antenna = 0.08dB

Loss of 17ft cable, connector and NMO mount = 1.9dB

Gain of antenna = 7.15dBi (5dBd)

Max ERP with antenna = Max Conducted Power + antenna gain (dBd) - losses

= 29.68dBm + 5dB - 1.98dB


= 32.7dBm = 1.86W

6.12.3. Test Limit

Per FCC 80.215(e)(3), UHF on board stations are limited to 4W conducted power and 2W ERP.

6.13. GNSS (EIRP for 1559 - 1610MHz)

6.13.1. Test Setup

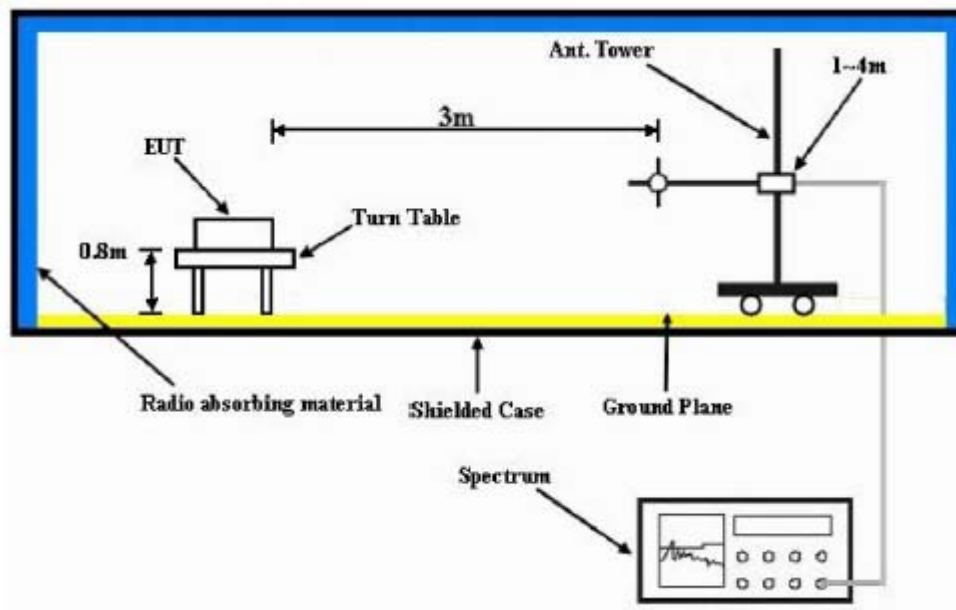

- 4) The Resolution Bandwidth for Equivalent Isotropically Radiated Power (EIRP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 5) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 6) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 7) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.13.2. Test Result

NA → Not Applicable

6.13.3. Test Limit

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

~ End of Report ~