



FCC RADIO TEST REPORT

Applicant : Ubiquiti Inc.

Address : 685 Third Avenue, New York, New York 10017,
USA

Equipment : UniFi Protect G4 Instant

Model No. : UVC-G4-INS

Trade Name : UBIQUITI

FCC ID : SWX-UVCG4INS

I HEREBY CERTIFY THAT :

The sample was received on Aug. 09, 2021 and the testing was completed on Oct. 05, 2021 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software	8
2.4 Description of Test System.....	9
2.5 General Information of Test.....	10
2.6 Measurement Uncertainty	11
3. Test Equipment and Ancillaries Used for Tests	12
4. Antenna Requirements.....	14
4.1 Antenna Construction and Directional Gain.....	14
5. Test of AC Power Line Conducted Emission	15
5.1 Test Limit	15
5.2 Test Procedures	15
5.3 Typical Test Setup	16
5.4 Test Result and Data.....	17
5.5 Test Photographs	19
6. Test of Radiated Spurious Emission.....	20
6.1 Test Limit	20
6.2 Test Procedures	21
6.3 Typical Test Setup	22
6.4 Test Result and Data (9KHz ~ 30MHz)	23
6.5 Test Result and Data (30MHz ~ 1GHz).....	23
6.6 Test Result and Data (1GHz ~ 25GHz).....	25
6.7 Restricted Bands of Operation	49
6.8 Test Photographs (30MHz ~ 1GHz)	50
6.9 Test Photographs (1GHz ~ 25GHz)	51
7. Test of Conducted Spurious Emission	53
7.1 Test Limit	53
7.2 Test Procedure	53
7.3 Test Setup Layout	53
7.4 Test Result and Data.....	53
8. On Time, Duty Cycle and Measurement methods	62
8.1 Test Limit	62
8.2 Test Procedure	62
8.3 Test Setup Layout	62
8.4 Test Result and Data.....	62
9. 6dB Bandwidth Measurement Data	64
9.1 Test Limit	64
9.2 Test Procedures	64
9.3 Test Setup Layout	64



9.4	Test Result and Data.....	65
10.	Maximum Average Output Power.....	68
10.1	Test Limit	68
10.2	Test Procedures	68
10.3	Test Setup Layout	68
10.4	Test Result and Data.....	69
11.	Power Spectral Density	70
11.1	Test Limit	70
11.2	Test Procedures	70
11.3	Test Setup Layout	70
11.4	Test Result and Data.....	71
12.	Radio Frequency Exposure	74
12.1	Applicable Standards	74
12.2	EUT Specification	74
12.3	Test Results.....	75
12.4	Calculation.....	75
12.5	Maximum Permissible Exposure.....	76



History of this test report

Report No.	Issue Date	Description
21080115-TRFCC01	Oct. 06, 2021	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Maximum Average Output Power	PASS
15.247(e)	. Power Spectral Density	PASS
2.1091	. Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(21080115-TEFV01).



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment

Frequency Range	BT / BLE: 2400-2483.5MHz 802.11b/g/n: 2400-2483.5MHz 802.11a/n/ac: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK 802.11b: CCK, DQPSK, DBPSK 802.11g/n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps, GFSK: 2Mbps WLAN: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20/40 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	Internal Antenna
Antenna Gain	For BT/BLE: 2402-2480MHz ANT A: 2.00dBi For WLAN 2.4G: 2412-2462MHz ANT A: 2.00dBi For WLAN 5G: 5150-5850MHz ANT A: 4.60dBi
USB TYPE-C Cable	Brand: Nienyi Model: 325-00691
Adapter	Brand: UBIQUITI Model: NY-PW0B3-05002000

Note:

1. WLAN and BT can simultaneously transmission.
2. EUT supports DFS Client Mode, without radar detection.
3. EUT support indoor / outdoor function.
4. For more details, please refer to the User's manual of the EUT.



2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20(2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

802.11n HT40(2422MHz~2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
*03	2422	*09	2452
04	2427	---	---
05	2432	---	---
*06	2437	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- The complete test system included Remote workstation and EUT for RF test. The Remote workstation included Notebook.
- An executive program, "wl command" under Windows OS system was executed to transmit and receive data via WLAN.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	Normal Mode, Form System(120V/60 Hz)
2	Normal Mode, Form System(240V/60 Hz)
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiation Emissions ((9KHz ~30MHz & 30MHz ~ 1GHz))	
Test Mode	Operating Description
1	Normal Mode, Form System(120V/60 Hz)
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps) , Form System(120V/60 Hz)
2	802.11g (6Mbps) , Form System(120V/60 Hz)
3	802.11n HT20 (6.5Mbps) , Form System(120V/60 Hz)
4	802.11n HT40 (13.5Mbps) , Form System(120V/60 Hz)
caused "Test Mode 1~4" generated the worst case, they were reported as the final data.	

Modulation Type	TX CONFIGURATION
802.11b	1TX
802.11g	1TX
802.11n HT20	1TX
802.11n HT40	1TX

**2.4 Description of Test System**

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
Test Fixture	Ubiquiti	N/A	N/A	N/A
USB Cable	N/A	N/A	1m / NS	N/A
USB Cable	N/A	N/A	1m / NS	N/A



2.5 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1079, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2021/10/3~2021/10/05	24°C / 55%	Dian Chen
Radiated Emissions	3M03-NK	2021/10/02~2021/10/03	23~26°C / 43~45%	Nick Guan
AC Power Line Conducted Emission	CON01-NK	2021/10/04	23°C / 57%	Dian Chen



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.63dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.6dB
Radiated Spurious Emission(1GHz~25GHz)	±6.6dB
Conducted Spurious Emission	±1.8dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±1.2%
Power Spectral Density	±1.8dB
Duty Cycle	±1.2%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M03-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Sunol	JB1	A051717	2021/06/03	2022/06/02
Active Loop Antenna	EMCO	6507	40855	2021/06/10	2022/06/09
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-02203	2021/03/16	2022/03/15
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2021/06/30	2022/06/29
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2021/08/06	2022/08/05
Preamplifier	EM Electronics corp.	EM330	60820	2021/04/19	2022/04/18
Preamplifier	EM Electronics corp.	EM01G18G	60831	2021/06/25	2022/06/24
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2020/11/06	2021/11/05
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2021/04/19	2022/04/18
Cable-1m(30M-1G)	HUBER SUHNER	RG-214	00419M	2021/06/29	2022/06/28
Cable-1.5m(30M-1G)	HUBER SUHNER	RG-214	00420M	2021/06/29	2022/06/28
Cable-9m(30M-1G)	HUBER SUHNER	RG-214	00430M	2021/06/29	2022/06/28
Cable-6m(9k~300M)	NA	CFD300-NL	NA	2021/03/15	2022/03/14
Cable-1.5m(1G-26.5G)	EMEC	EM104-SMSM-1.5M	EM104-SMSM-1.5M	2021/06/29	2022/06/28
Cable-9m(1G-26.5G)	EMEC	EM104-SMSM-9M	EM104-SMSM-9M	2021/06/29	2022/06/28
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2021/07/14	2022/07/13
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2021/04/19	2022/04/18
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2020/12/25	2021/12/24
Attenuator	KEYSIGHT	8491B	MY39250703	2021/04/09	2022/04/08
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2021/08/27	2022/08/26
Power Meter	Anritsu	ML2495A	1224005	2021/04/14	2022/04/13
Power Sensor	Anritsu	MA2411B	1207295	2021/04/14	2022/04/13



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	101402	2021/03/12	2022/03/11
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-568	2021/06/02	2022/06/01
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101934	2021/03/10	2022/03/09
Cable-6m(9k~300M)	NA	CFD300-NL	NA	2021/03/15	2022/03/14
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Antenna Requirements

4.1 Antenna Construction and Directional Gain

Antenna Type	Internal Antenna
Antenna Gain	2412-2462MHz: 2.00dBi

2412-2462MHz

For Power directional gain= G_{ant} = 2.00 dBi

For PSD directional gain = G_{ant} = 2.00 dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

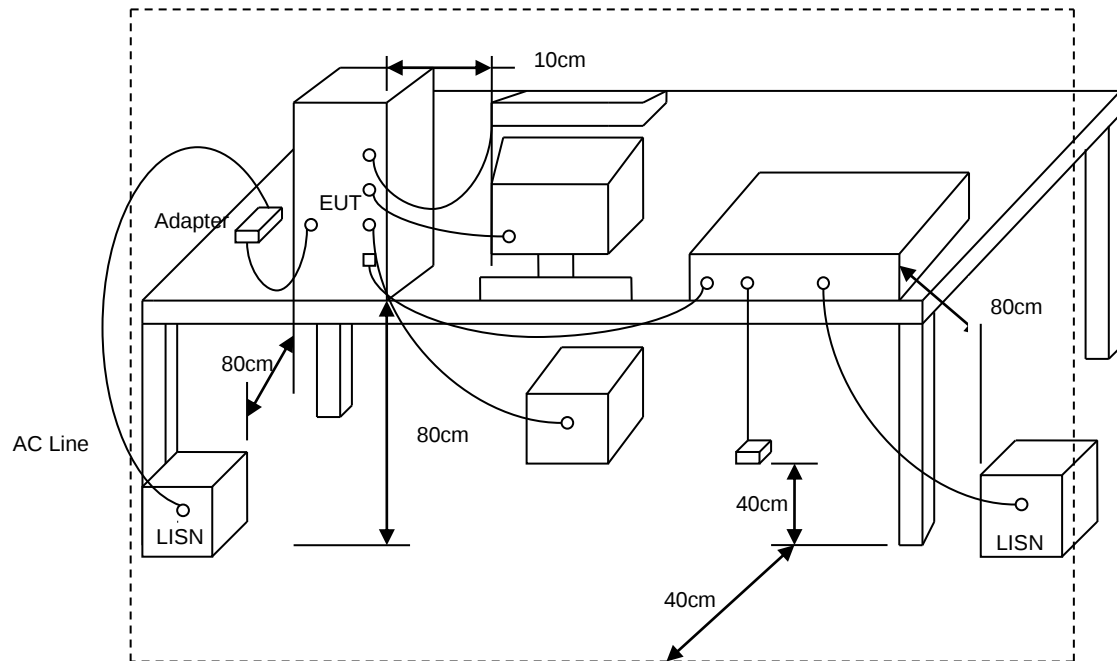



5.4 Test Result and Data

Power	: AC 240V / 60Hz	Pol/Phase	: LINE
Test Mode	: Mode 2		

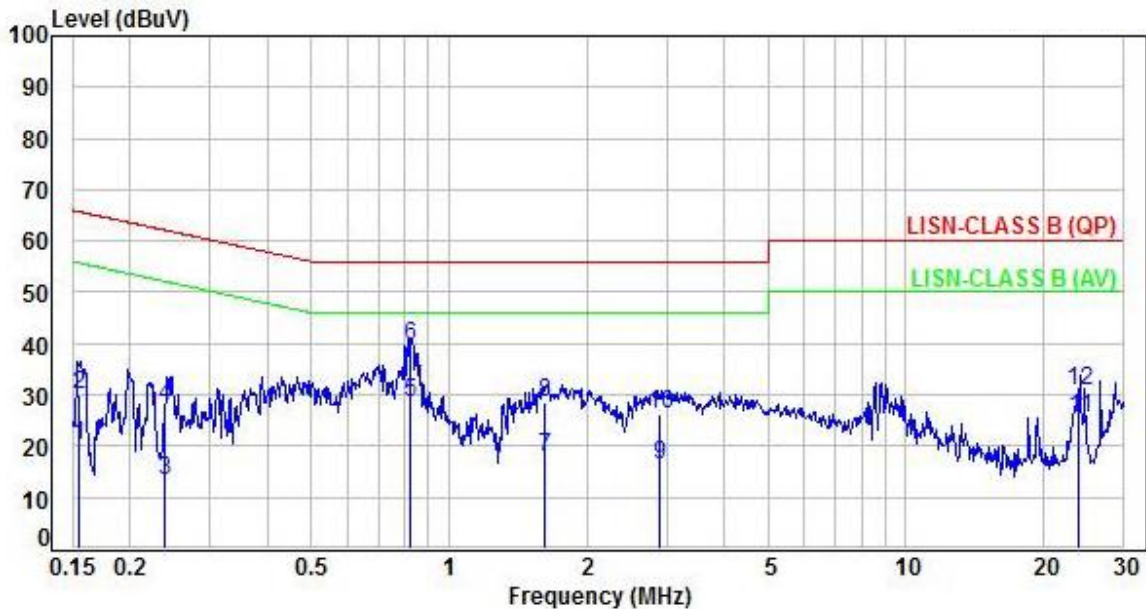

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.97	10.21	20.18	55.77	-35.59	Average	P
2	0.15	9.97	20.22	30.19	65.77	-35.58	QP	P
3	0.24	9.97	3.22	13.19	52.12	-38.93	Average	P
4	0.24	9.97	17.97	27.94	62.12	-34.18	QP	P
5	0.82	10.03	18.63	28.66	46.00	-17.34	Average	P
6	0.82	10.03	29.44	39.47	56.00	-16.53	QP	P
7	1.61	10.09	7.89	17.98	46.00	-28.02	Average	P
8	1.61	10.09	18.58	28.67	56.00	-27.33	QP	P
9	2.88	10.16	6.32	16.48	46.00	-29.52	Average	P
10	2.88	10.16	16.01	26.17	56.00	-29.83	QP	P
11	24.00	10.85	14.53	25.38	50.00	-24.62	Average	P
12	24.00	10.85	19.86	30.71	60.00	-29.29	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC 240V / 60Hz	Pol/Phase	: NEUTRAL
Test Mode	: Mode 2		

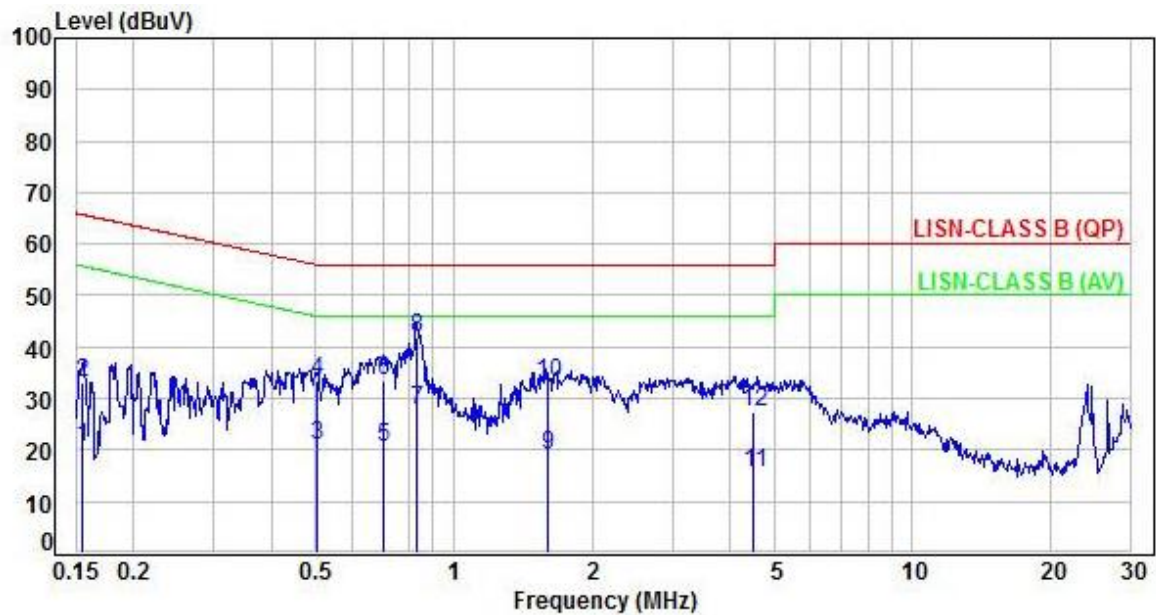

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.97	10.58	20.55	55.76	-35.21	Average	P
2	0.15	9.97	23.04	33.01	65.76	-32.75	QP	P
3	0.51	9.98	10.81	20.79	46.00	-25.21	Average	P
4	0.51	9.98	23.33	33.31	56.00	-22.69	QP	P
5	0.70	10.01	10.55	20.56	46.00	-25.44	Average	P
6	0.70	10.01	23.26	33.27	56.00	-22.73	QP	P
7	0.83	10.02	17.61	27.63	46.00	-18.37	Average	P
8	0.83	10.02	31.96	41.98	56.00	-14.02	QP	P
9	1.61	10.07	9.05	19.12	46.00	-26.88	Average	P
10	1.61	10.07	22.88	32.95	56.00	-23.05	QP	P
11	4.52	10.19	5.30	15.49	46.00	-30.51	Average	P
12	4.52	10.19	17.17	27.36	56.00	-28.64	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(Y -AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup


Below 30MHz test setup

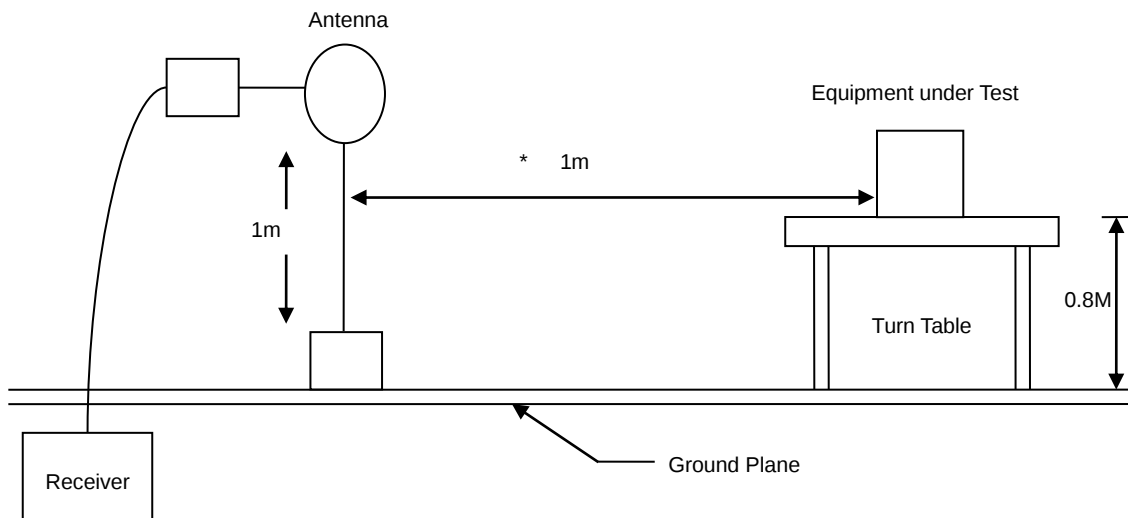

30MHz- 1GHz Test Setup

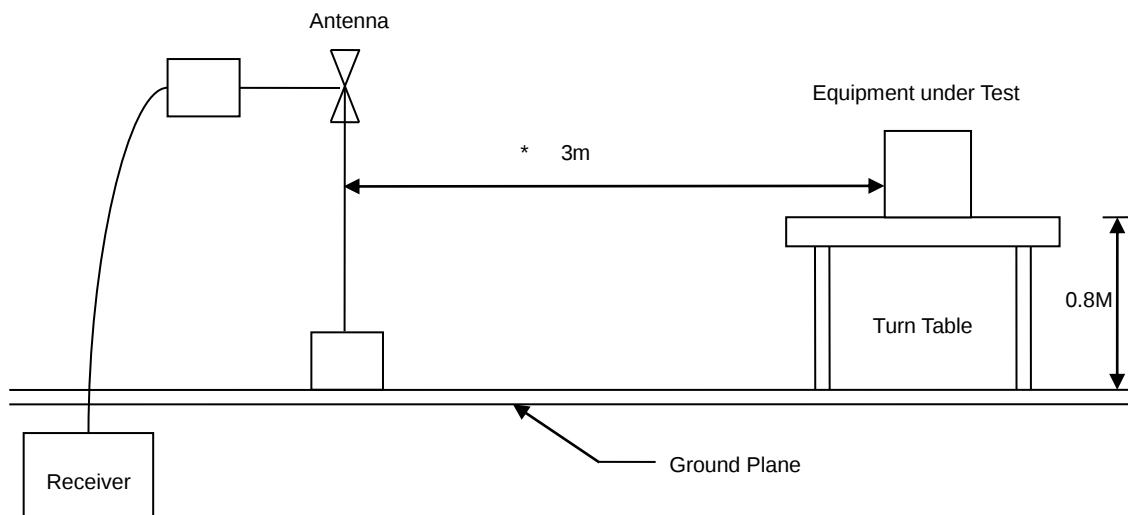

Above 1GHz Test Setup

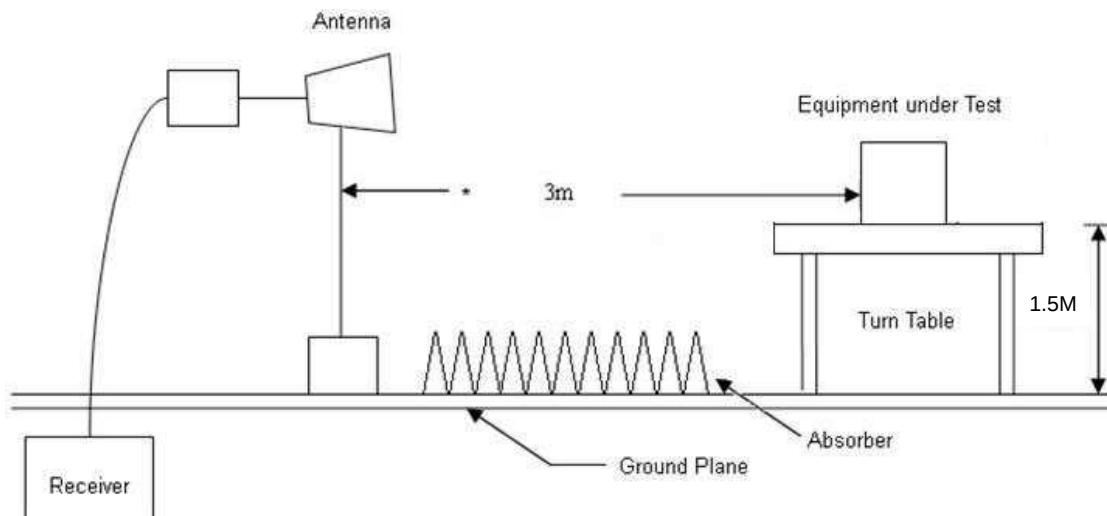




6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1		

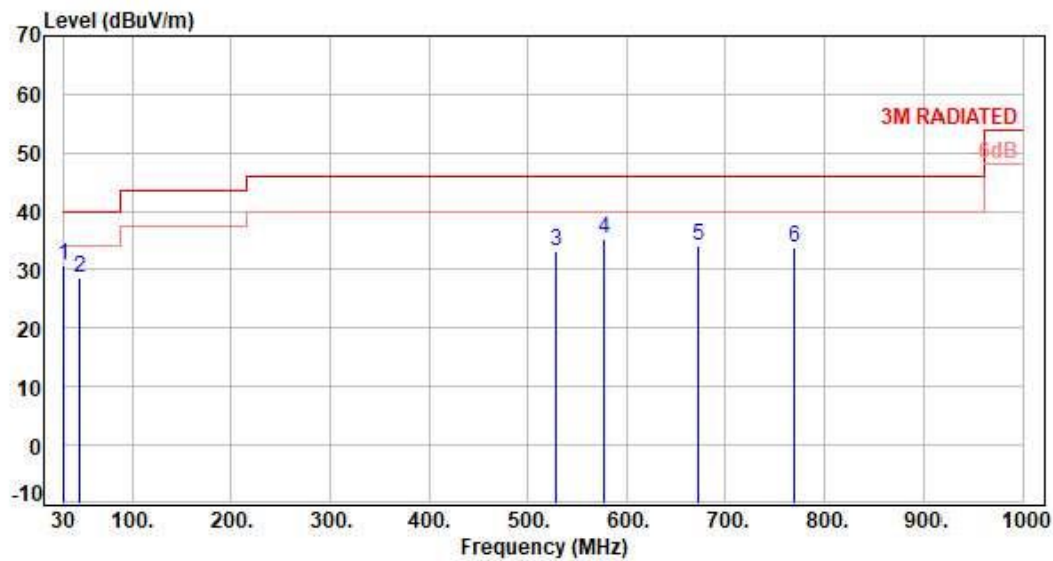

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-3.32	34.19	30.87	40.00	-9.13	Peak	400	360	P
2	47.46	-15.63	44.15	28.52	40.00	-11.48	Peak	400	360	P
3	528.58	-4.86	37.92	33.06	46.00	-12.94	Peak	400	360	P
4	577.08	-3.88	39.12	35.24	46.00	-10.76	Peak	400	360	P
5	672.14	-2.69	36.80	34.11	46.00	-11.89	Peak	400	360	P
6	769.14	-0.93	34.75	33.82	46.00	-12.18	Peak	400	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1		:

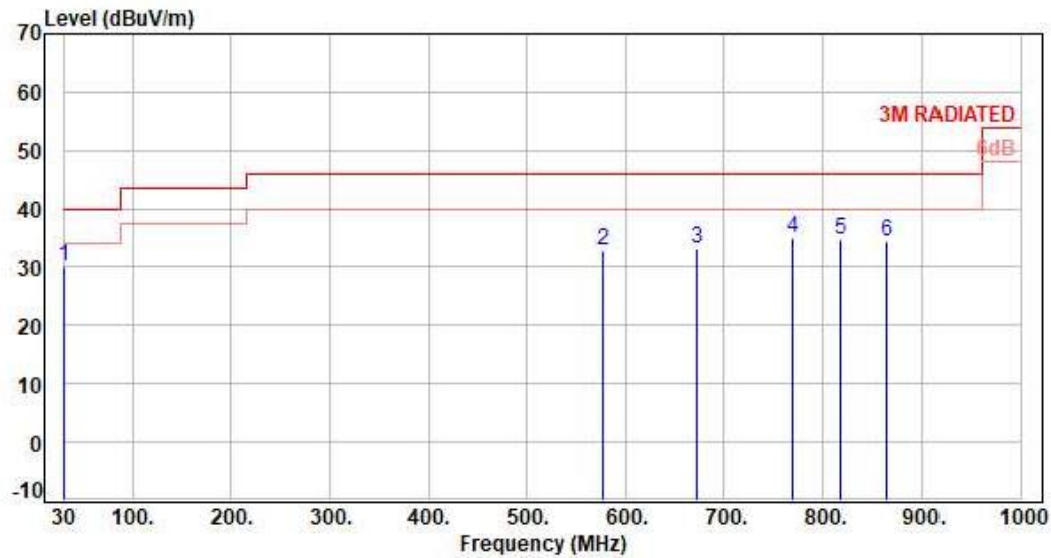

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-3.32	33.42	30.10	40.00	-9.90	Peak	400	360	P
2	577.08	-3.88	36.66	32.78	46.00	-13.22	Peak	400	360	P
3	672.14	-2.69	35.79	33.10	46.00	-12.90	Peak	400	360	P
4	769.14	-0.93	36.00	35.07	46.00	-10.93	Peak	400	360	P
5	817.64	-0.33	35.02	34.69	46.00	-11.31	Peak	400	360	P
6	864.20	-0.08	34.58	34.50	46.00	-11.50	Peak	400	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH01		:

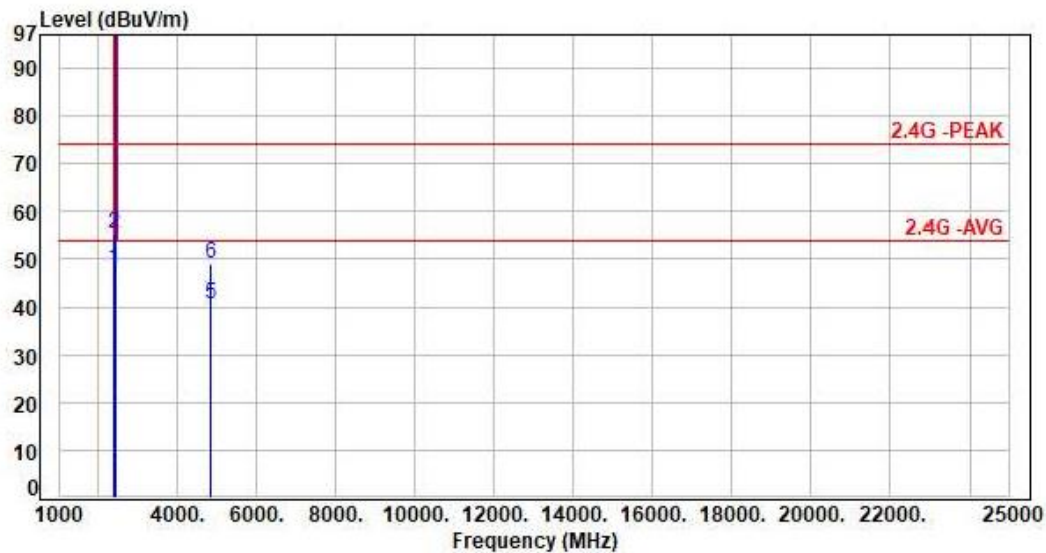

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	62.12	47.93	54.00	-6.07	Average	369	202	P
2	2390.00	-14.19	69.67	55.48	74.00	-18.52	Peak	369	202	P
3	2412.00	-14.21	111.35	97.14	200.00	-102.86	Average	369	202	P
4	2412.00	-14.21	115.21	101.00	200.00	-99.00	Peak	369	202	P
5	4824.00	-8.30	48.88	40.58	54.00	-13.42	Average	100	74	P
6	4824.00	-8.30	57.22	48.92	74.00	-25.08	Peak	100	74	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH01		:

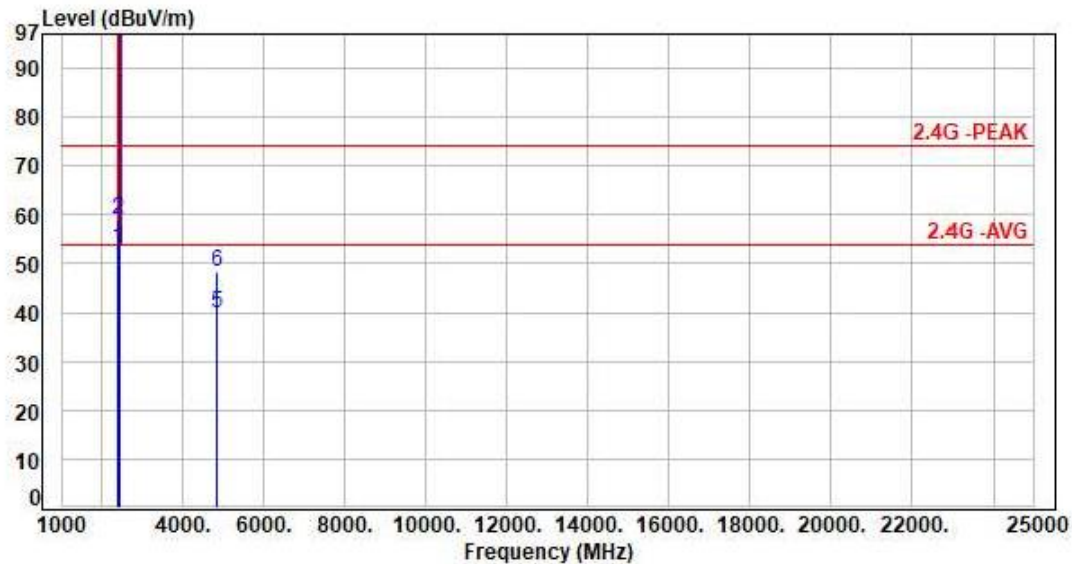

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	67.36	53.17	54.00	-0.83	Average	275	112	P
2	2390.00	-14.19	73.23	59.04	74.00	-14.96	Peak	275	112	P
3	2412.00	-14.21	118.86	104.65	200.00	-95.35	Average	275	112	P
4	2412.00	-14.21	122.19	107.98	200.00	-92.02	Peak	275	112	P
5	4824.00	-8.30	48.27	39.97	54.00	-14.03	Average	100	54	P
6	4824.00	-8.30	56.65	48.35	74.00	-25.65	Peak	100	54	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH06		:

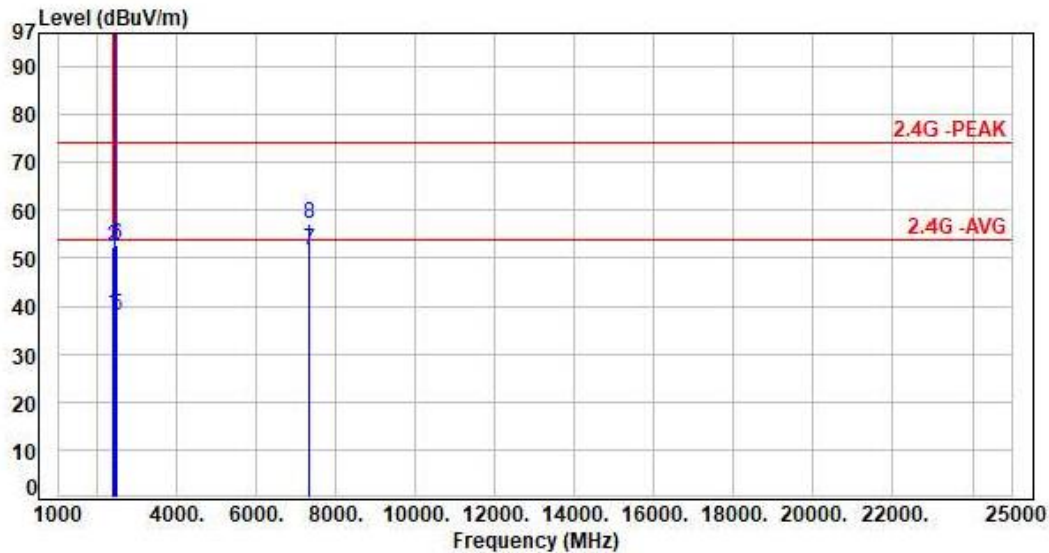

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	52.53	38.34	54.00	-15.66	Average	374	183	P
2	2390.00	-14.19	66.62	52.43	74.00	-21.57	Peak	374	183	P
3	2437.00	-14.18	112.22	98.04	200.00	-101.96	Average	374	183	P
4	2437.00	-14.18	115.92	101.74	200.00	-98.26	Peak	374	183	P
5	2483.50	-14.12	52.16	38.04	54.00	-15.96	Average	374	183	P
6	2483.50	-14.12	66.87	52.75	74.00	-21.25	Peak	374	183	P
7	7311.00	-0.76	52.29	51.53	54.00	-2.47	Average	118	335	P
8	7311.00	-0.76	57.87	57.11	74.00	-16.89	Peak	118	335	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH06		:

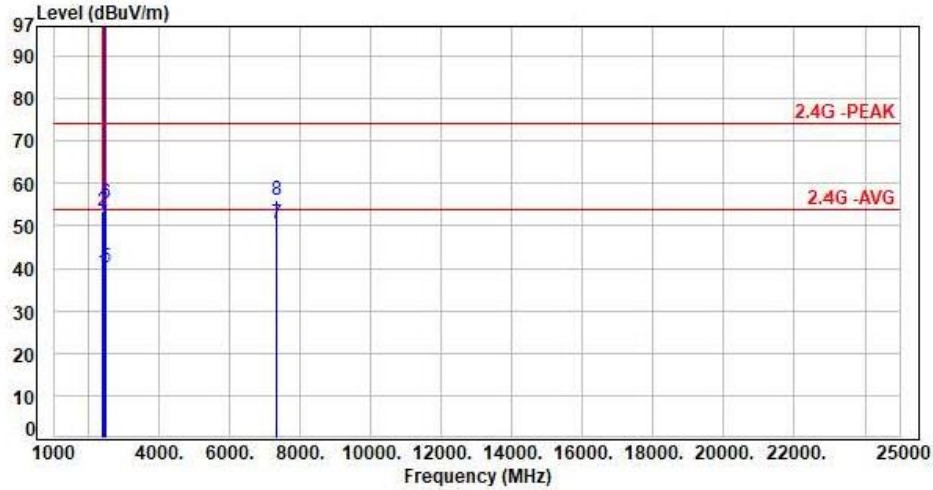

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	53.30	39.11	54.00	-14.89	Average	285	124	P
2	2390.00	-14.19	67.64	53.45	74.00	-20.55	Peak	285	124	P
3	2437.00	-14.18	119.55	105.37	200.00	-94.63	Average	285	124	P
4	2437.00	-14.18	123.22	109.04	200.00	-90.96	Peak	285	124	P
5	2483.50	-14.12	54.18	40.06	54.00	-13.94	Average	285	124	P
6	2483.50	-14.12	69.40	55.28	74.00	-18.72	Peak	285	124	P
7	7311.00	-0.76	51.15	50.39	54.00	-3.61	Average	205	289	P
8	7311.00	-0.76	56.88	56.12	74.00	-17.88	Peak	205	289	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH11		:	

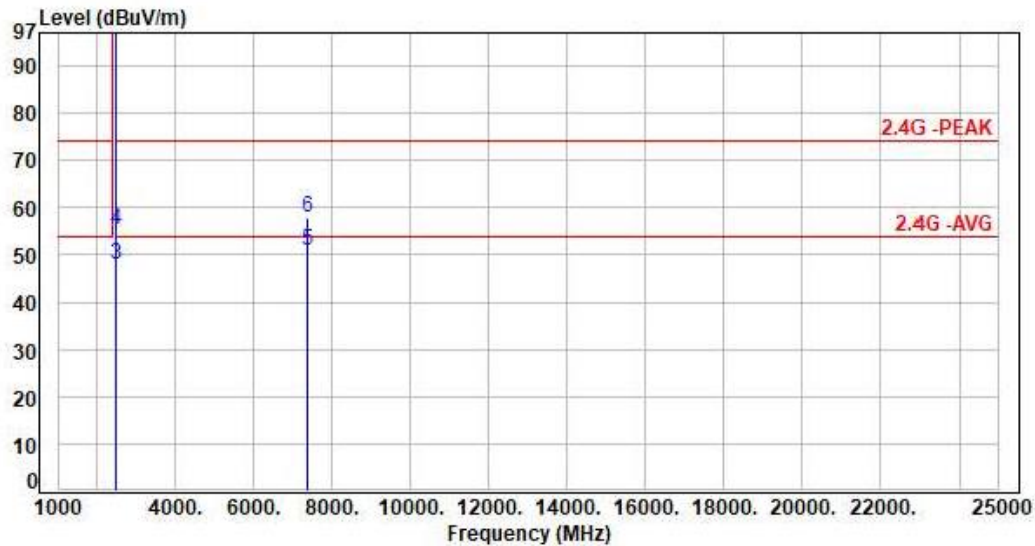

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-14.15	111.44	97.29	200.00	-102.71	Average	364	218	P
2	2462.00	-14.15	115.47	101.32	200.00	-98.68	Peak	364	218	P
3	2483.50	-14.12	62.24	48.12	54.00	-5.88	Average	364	218	P
4	2483.50	-14.12	69.37	55.25	74.00	-18.75	Peak	364	218	P
5	7386.00	-0.74	51.57	50.83	54.00	-3.17	Average	100	52	P
6	7386.00	-0.74	58.66	57.92	74.00	-16.08	Peak	100	52	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH11		:

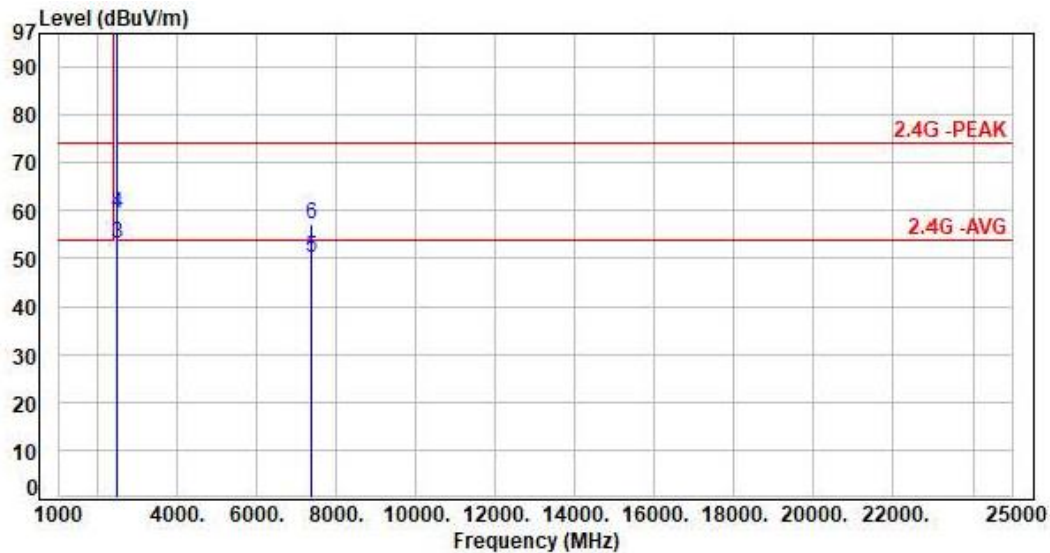

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-14.15	118.67	104.52	200.00	-95.48	Average	255	104	P
2	2462.00	-14.15	122.59	108.44	200.00	-91.56	Peak	255	104	P
3	2483.50	-14.12	67.19	53.07	54.00	-0.93	Average	255	104	P
4	2483.50	-14.12	73.45	59.33	74.00	-14.67	Peak	255	104	P
5	7386.00	-0.74	50.89	50.15	54.00	-3.85	Average	199	162	P
6	7386.00	-0.74	57.88	57.14	74.00	-16.86	Peak	199	162	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH01		:

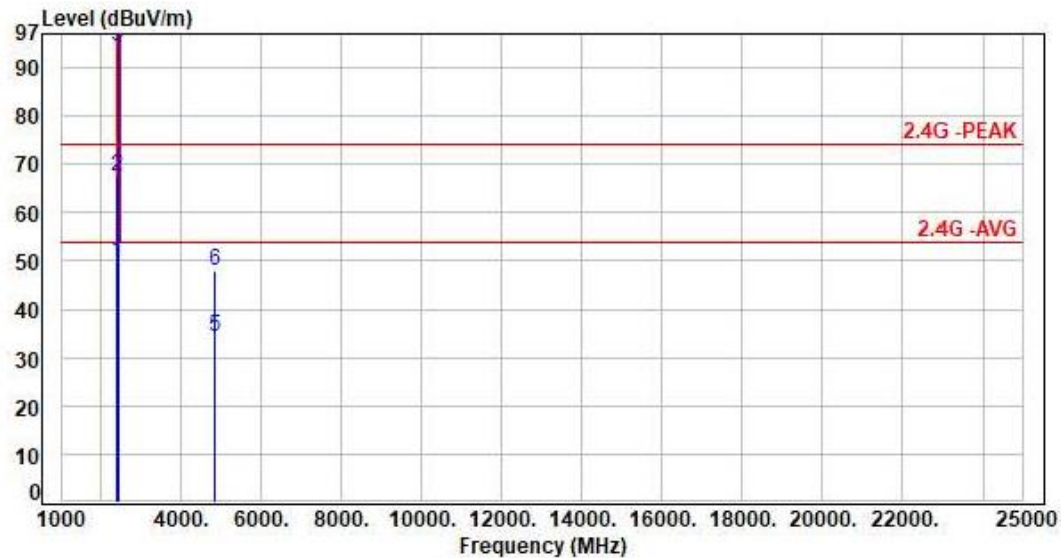

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	63.80	49.61	54.00	-4.39	Average	362	198	P
2	2390.00	-14.19	81.64	67.45	74.00	-6.55	Peak	362	198	P
3	2412.00	-14.21	108.70	94.49	200.00	-105.51	Average	362	198	P
4	2412.00	-14.21	112.90	98.69	200.00	-101.31	Peak	362	198	P
5	4824.00	-8.30	42.49	34.19	54.00	-19.81	Average	100	88	P
6	4824.00	-8.30	56.21	47.91	74.00	-26.09	Peak	100	88	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH01		:

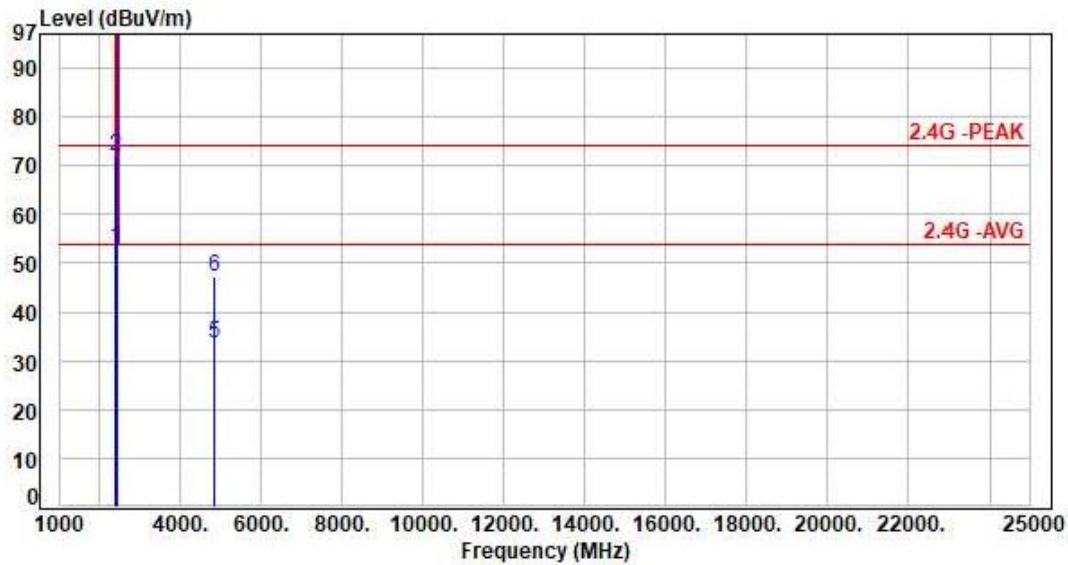

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	67.38	53.19	54.00	-0.81	Average	262	128	P
2	2390.00	-14.19	86.11	71.92	74.00	-2.08	Peak	262	128	P
3	2412.00	-14.21	116.74	102.53	200.00	-97.47	Average	262	128	P
4	2412.00	-14.21	119.92	105.71	200.00	-94.29	Peak	262	128	P
5	4824.00	-8.30	41.97	33.67	54.00	-20.33	Average	100	57	P
6	4824.00	-8.30	55.42	47.12	74.00	-26.88	Peak	100	57	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH06		:

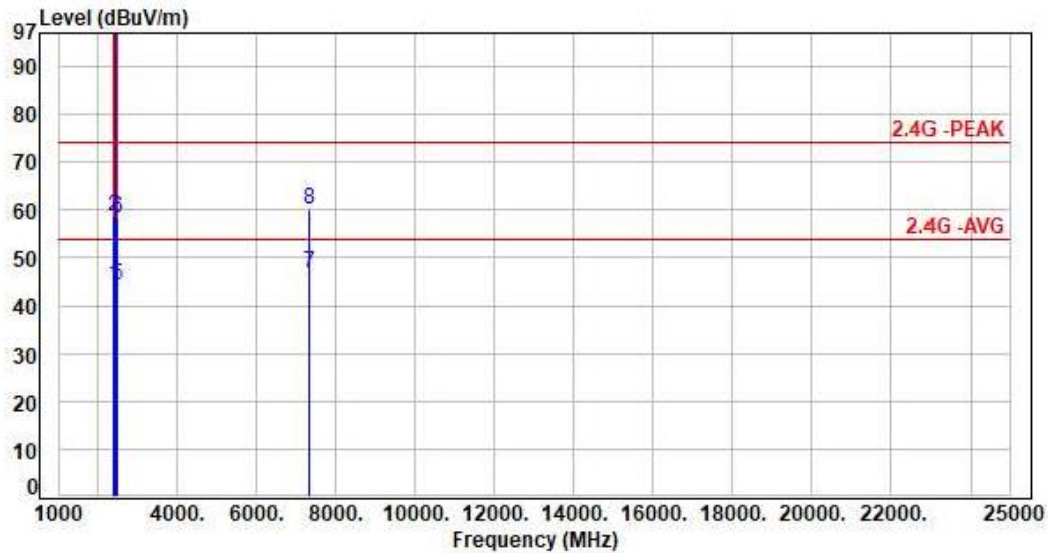

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	58.47	44.28	54.00	-9.72	Average	374	225	P
2	2390.00	-14.19	72.88	58.69	74.00	-15.31	Peak	374	225	P
3	2437.00	-14.18	113.05	98.87	200.00	-101.13	Average	374	225	P
4	2437.00	-14.18	116.89	102.71	200.00	-97.29	Peak	374	225	P
5	2483.50	-14.12	58.27	44.15	54.00	-9.85	Average	374	225	P
6	2483.50	-14.12	72.31	58.19	74.00	-15.81	Peak	374	225	P
7	7311.00	-0.76	47.58	46.82	54.00	-7.18	Average	100	48	P
8	7311.00	-0.76	61.03	60.27	74.00	-13.73	Peak	100	48	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH06		:

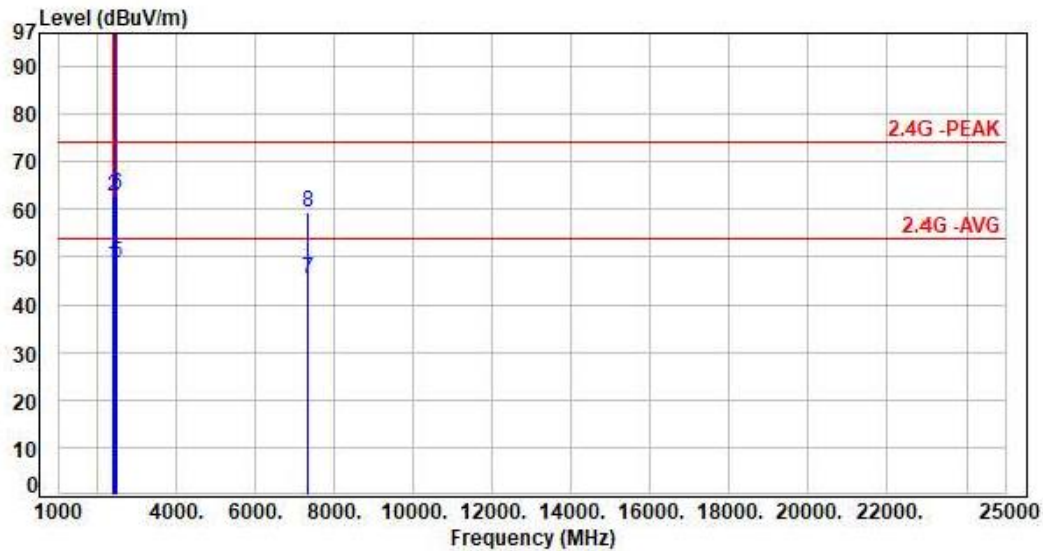

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	62.56	48.37	54.00	-5.63	Average	225	124	P
2	2390.00	-14.19	76.96	62.77	74.00	-11.23	Peak	225	124	P
3	2437.00	-14.18	121.40	107.22	200.00	-92.78	Average	225	124	P
4	2437.00	-14.18	124.72	110.54	200.00	-89.46	Peak	225	124	P
5	2483.50	-14.12	62.77	48.65	54.00	-5.35	Average	225	124	P
6	2483.50	-14.12	77.29	63.17	74.00	-10.83	Peak	225	124	P
7	7311.00	-0.76	46.21	45.45	54.00	-8.55	Average	192	148	P
8	7311.00	-0.76	60.16	59.40	74.00	-14.60	Peak	192	148	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH11		:

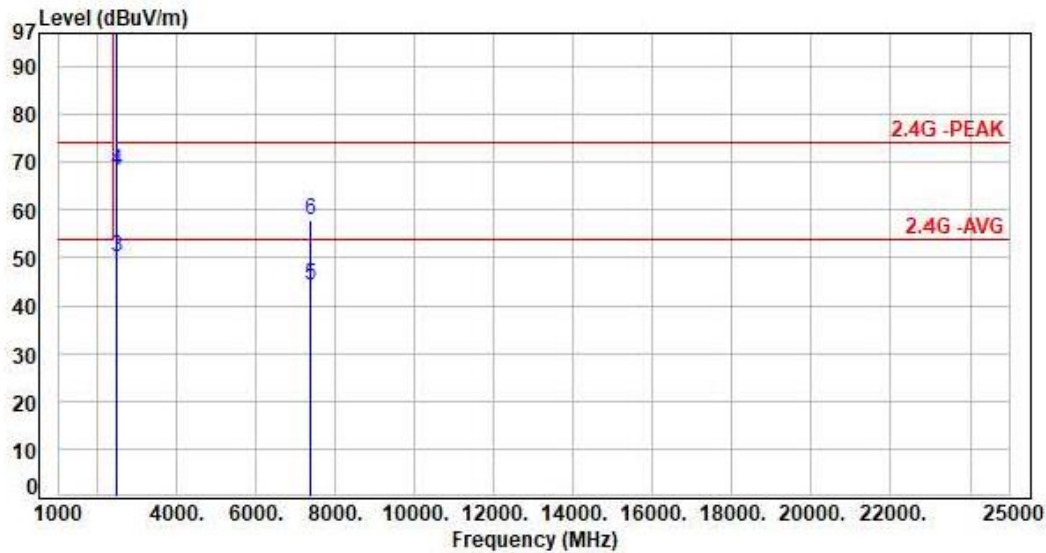

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-14.15	110.60	96.45	200.00	-103.55	Average	388	235	P
2	2462.00	-14.15	114.35	100.20	200.00	-99.80	Peak	388	235	P
3	2483.50	-14.12	64.29	50.17	54.00	-3.83	Average	388	235	P
4	2483.50	-14.12	82.37	68.25	74.00	-5.75	Peak	388	235	P
5	7386.00	-0.74	44.89	44.15	54.00	-9.85	Average	100	55	P
6	7386.00	-0.74	58.58	57.84	74.00	-16.16	Peak	100	55	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH11		:

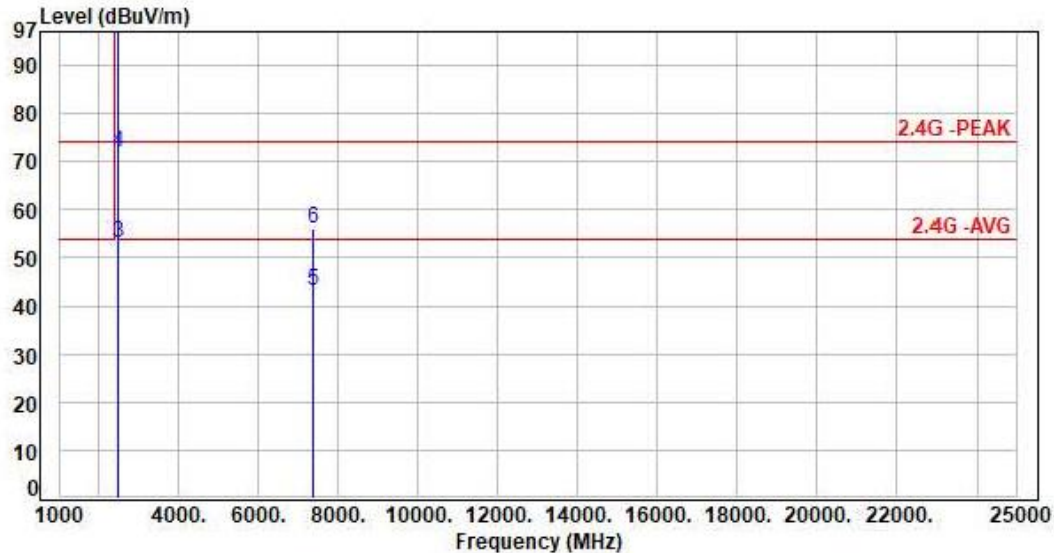

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-14.15	119.19	105.04	200.00	-94.96	Average	224	137	P
2	2462.00	-14.15	122.49	108.34	200.00	-91.66	Peak	224	137	P
3	2483.50	-14.12	67.29	53.17	54.00	-0.83	Average	224	137	P
4	2483.50	-14.12	85.90	71.78	74.00	-2.22	Peak	224	137	P
5	7386.00	-0.74	43.71	42.97	54.00	-11.03	Average	188	162	P
6	7386.00	-0.74	56.96	56.22	74.00	-17.78	Peak	188	162	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH01		:

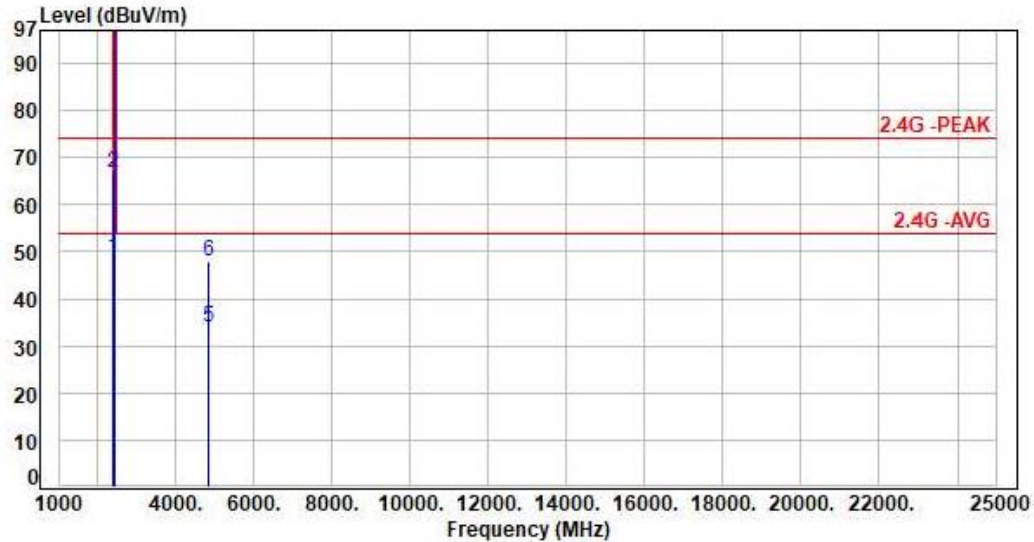

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	62.84	48.65	54.00	-5.35	Average	378	214	P
2	2390.00	-14.19	81.11	66.92	74.00	-7.08	Peak	378	214	P
3	2412.00	-14.21	110.76	96.55	200.00	-103.45	Average	378	214	P
4	2412.00	-14.21	114.12	99.91	200.00	-100.09	Peak	378	214	P
5	4824.00	-8.30	42.16	33.86	54.00	-20.14	Average	100	81	P
6	4824.00	-8.30	56.43	48.13	74.00	-25.87	Peak	100	81	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH01		:

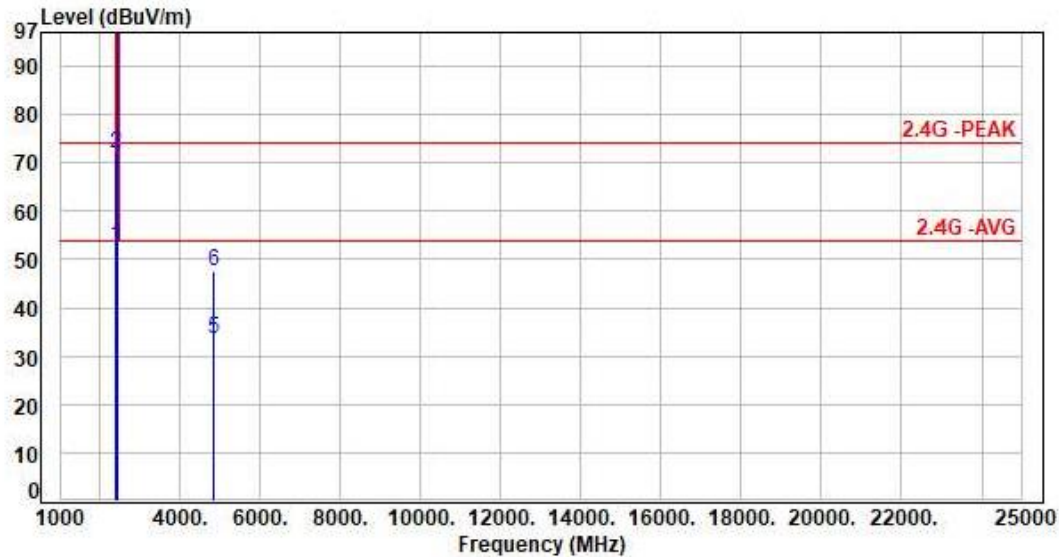

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	67.10	52.91	54.00	-1.09	Average	258	135	P
2	2390.00	-14.19	86.04	71.85	74.00	-2.15	Peak	258	135	P
3	2412.00	-14.21	118.82	104.61	200.00	-95.39	Average	258	135	P
4	2412.00	-14.21	122.50	108.29	200.00	-91.71	Peak	258	135	P
5	4824.00	-8.30	41.99	33.69	54.00	-20.31	Average	100	59	P
6	4824.00	-8.30	55.78	47.48	74.00	-26.52	Peak	100	59	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH06		:

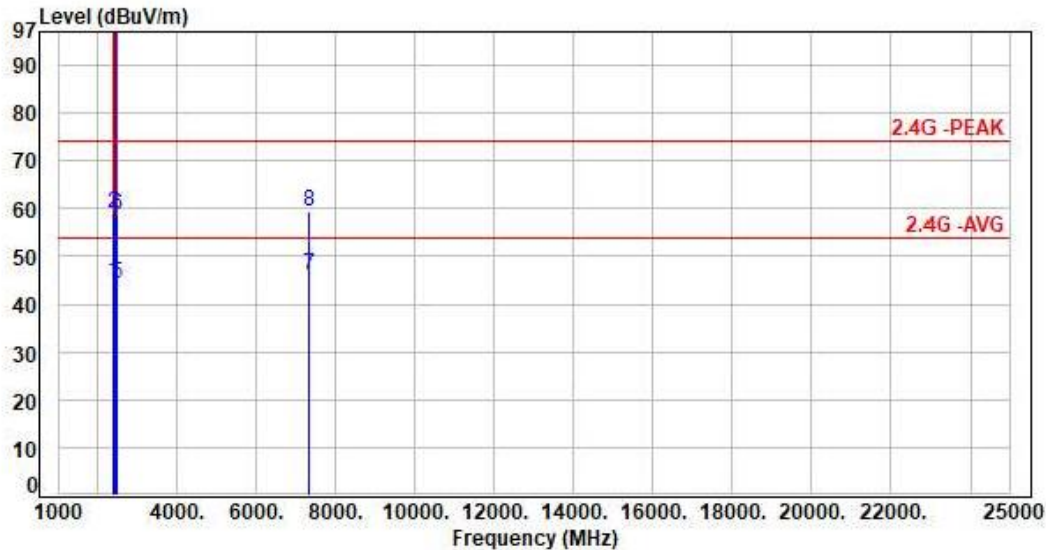

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	58.83	44.64	54.00	-9.36	Average	382	234	P
2	2390.00	-14.19	73.16	58.97	74.00	-15.03	Peak	382	234	P
3	2437.00	-14.18	114.84	100.66	200.00	-99.34	Average	382	234	P
4	2437.00	-14.18	118.68	104.50	200.00	-95.50	Peak	382	234	P
5	2483.50	-14.12	58.50	44.38	54.00	-9.62	Average	382	234	P
6	2483.50	-14.12	72.78	58.66	74.00	-15.34	Peak	382	234	P
7	7311.00	-0.76	46.88	46.12	54.00	-7.88	Average	100	57	P
8	7311.00	-0.76	60.23	59.47	74.00	-14.53	Peak	100	57	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH06		:

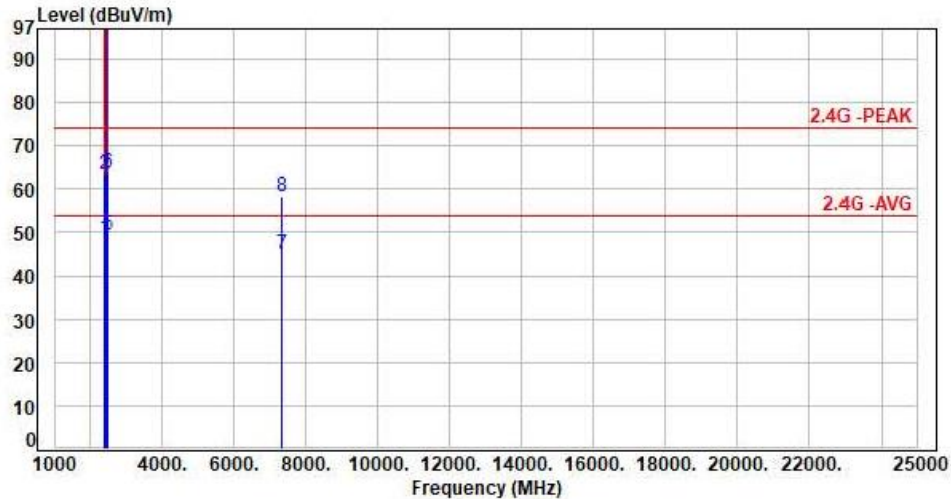

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	62.89	48.70	54.00	-5.30	Average	221	128	P
2	2390.00	-14.19	77.45	63.26	74.00	-10.74	Peak	221	128	P
3	2437.00	-14.18	122.60	108.42	200.00	-91.58	Average	221	128	P
4	2437.00	-14.18	126.53	112.35	200.00	-87.65	Peak	221	128	P
5	2483.50	-14.12	63.37	49.25	54.00	-4.75	Average	221	128	P
6	2483.50	-14.12	77.96	63.84	74.00	-10.16	Peak	221	128	P
7	7311.00	-0.76	45.86	45.10	54.00	-8.90	Average	194	133	P
8	7311.00	-0.76	59.07	58.31	74.00	-15.69	Peak	196	133	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH11		:

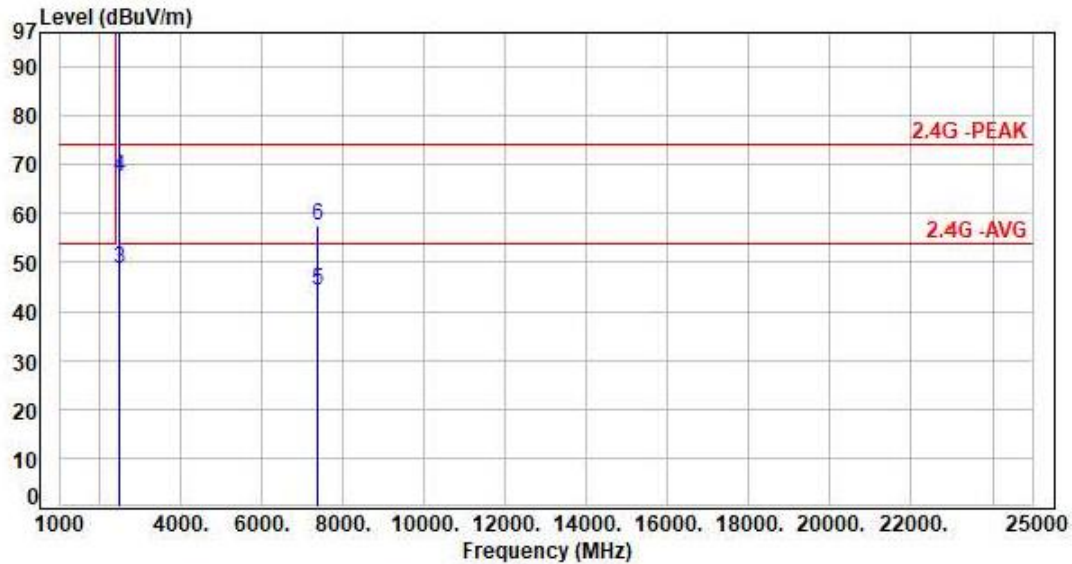

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-14.15	112.93	98.78	200.00	-101.22	Average	372	246	P
2	2462.00	-14.15	116.52	102.37	200.00	-97.63	Peak	372	246	P
3	2483.50	-14.12	62.90	48.78	54.00	-5.22	Average	372	246	P
4	2483.50	-14.12	81.57	67.45	74.00	-6.55	Peak	372	246	P
5	7386.00	-0.74	44.99	44.25	54.00	-9.75	Average	100	58	P
6	7386.00	-0.74	58.22	57.48	74.00	-16.52	Peak	100	58	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH11		:

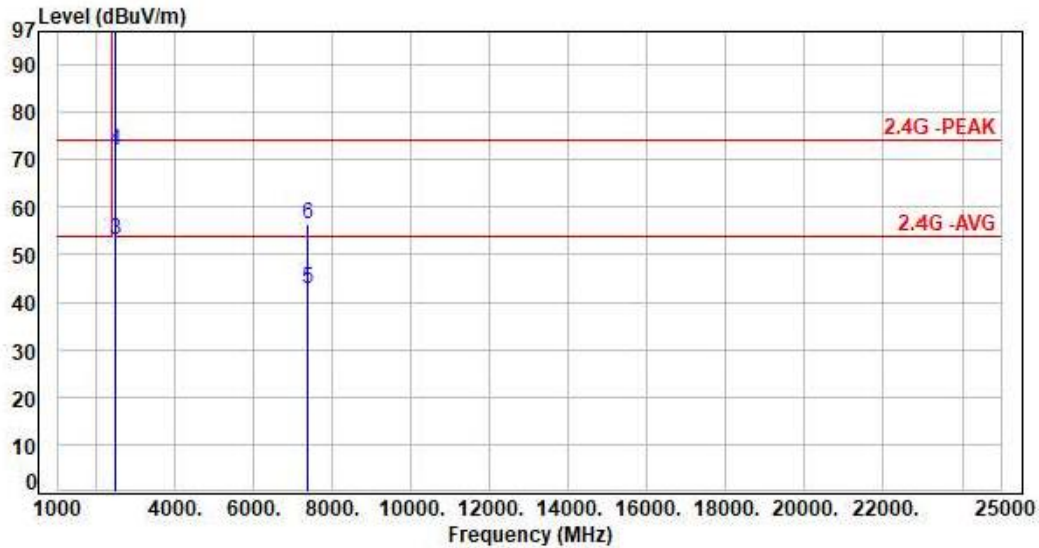

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-14.15	120.91	106.76	200.00	-93.24	Average	242	125	P
2	2462.00	-14.15	124.07	109.92	200.00	-90.08	Peak	242	125	P
3	2483.50	-14.12	67.17	53.05	54.00	-0.95	Average	242	125	P
4	2483.50	-14.12	86.06	71.94	74.00	-2.06	Peak	242	125	P
5	7386.00	-0.74	43.69	42.95	54.00	-11.05	Average	183	178	P
6	7386.00	-0.74	57.29	56.55	74.00	-17.45	Peak	183	178	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH03		:

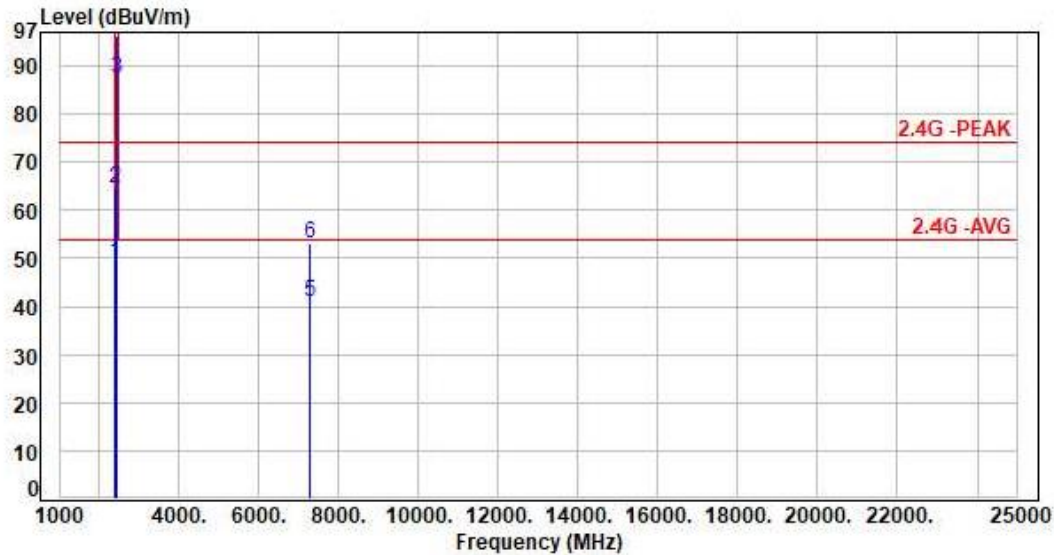

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	63.41	49.22	54.00	-4.78	Average	384	213	P
2	2390.00	-14.19	78.84	64.65	74.00	-9.35	Peak	384	213	P
3	2422.00	-14.20	101.74	87.54	200.00	-112.46	Average	384	213	P
4	2422.00	-14.20	110.33	96.13	200.00	-103.87	Peak	384	213	P
5	7266.00	-0.90	41.87	40.97	54.00	-13.03	Average	100	55	P
6	7266.00	-0.90	54.02	53.12	74.00	-20.88	Peak	100	55	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH03		:

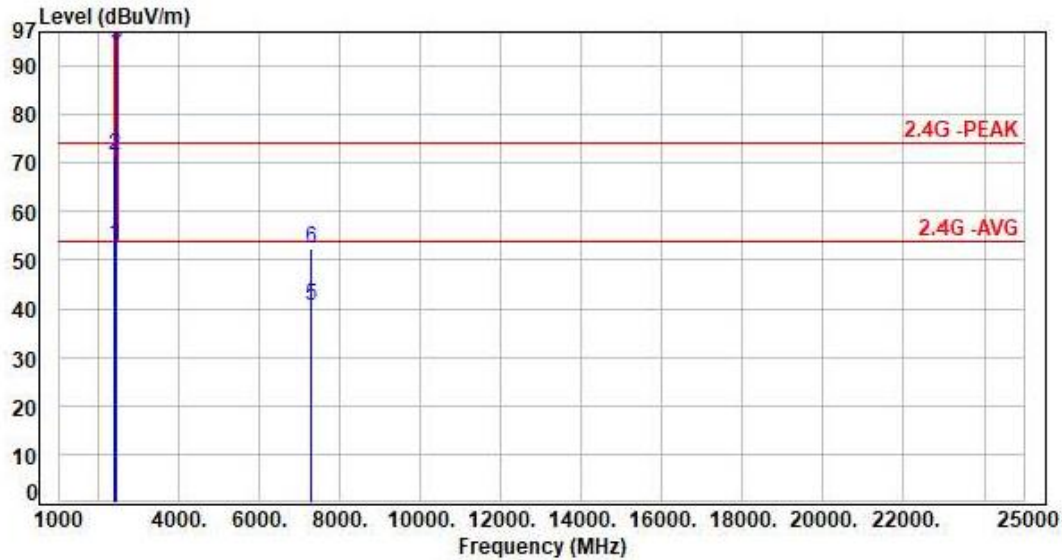

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	67.32	53.13	54.00	-0.87	Average	278	144	P
2	2390.00	-14.19	85.67	71.48	74.00	-2.52	Peak	278	144	P
3	2422.00	-14.20	108.75	94.55	200.00	-105.45	Average	278	144	P
4	2422.00	-14.20	115.52	101.32	200.00	-98.68	Peak	278	144	P
5	7266.00	-0.90	41.37	40.47	54.00	-13.53	Average	188	154	P
6	7266.00	-0.90	53.13	52.23	74.00	-21.77	Peak	188	154	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH06		:

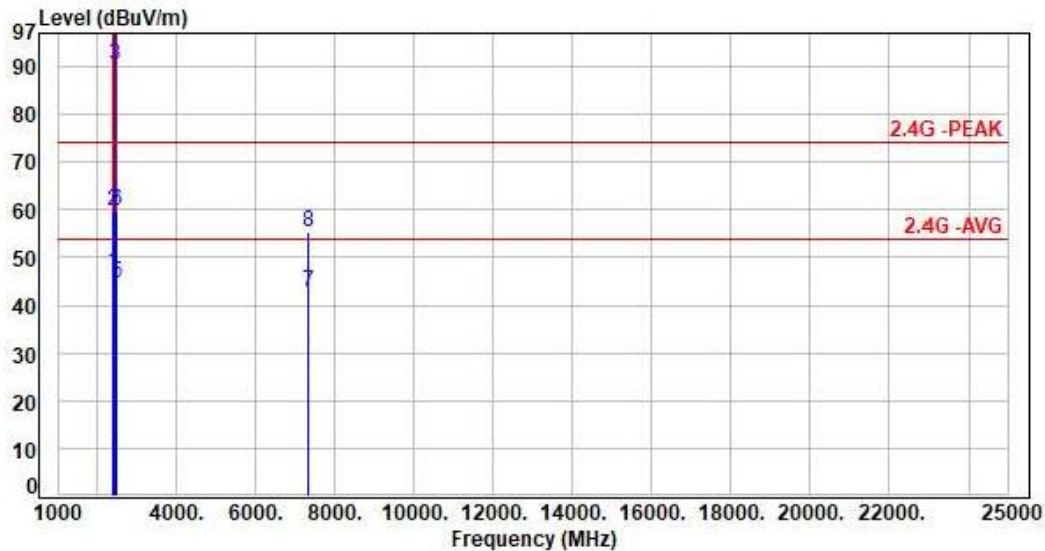

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	61.11	46.92	54.00	-7.08	Average	388	242	P
2	2390.00	-14.19	73.91	59.72	74.00	-14.28	Peak	388	242	P
3	2437.00	-14.18	104.72	90.54	200.00	-109.46	Average	388	242	P
4	2437.00	-14.18	113.00	98.82	200.00	-101.18	Peak	388	242	P
5	2483.50	-14.12	58.69	44.57	54.00	-9.43	Average	388	242	P
6	2483.50	-14.12	73.77	59.65	74.00	-14.35	Peak	388	242	P
7	7311.00	-0.76	43.44	42.68	54.00	-11.32	Average	100	51	P
8	7311.00	-0.76	56.21	55.45	74.00	-18.55	Peak	100	51	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH06		:

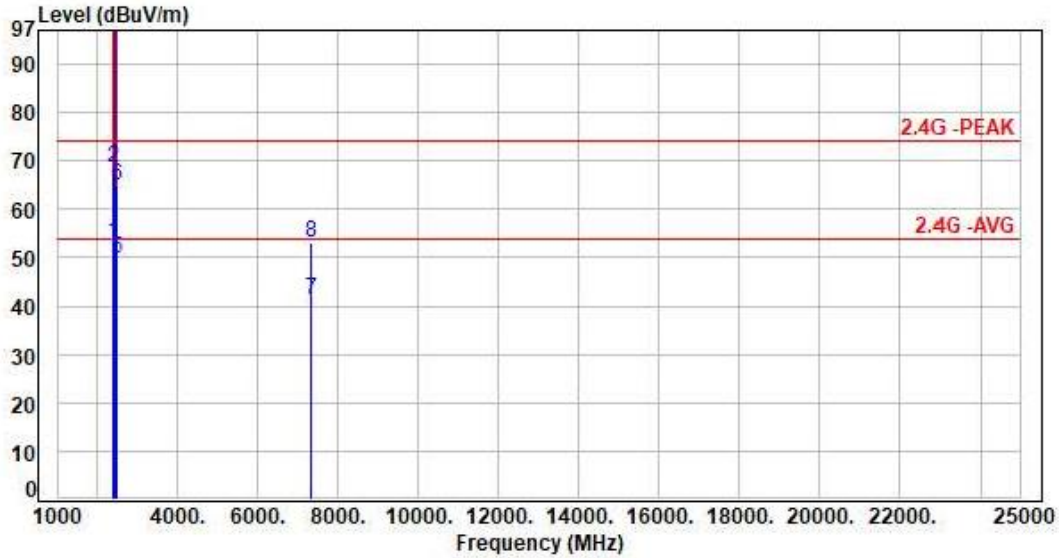

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.19	67.42	53.23	54.00	-0.77	Average	254	133	P
2	2390.00	-14.19	82.84	68.65	74.00	-5.35	Peak	254	133	P
3	2437.00	-14.18	111.57	97.39	200.00	-102.61	Average	254	133	P
4	2437.00	-14.18	117.87	103.69	200.00	-96.31	Peak	254	133	P
5	2483.50	-14.12	63.90	49.78	54.00	-4.22	Average	254	133	P
6	2483.50	-14.12	78.87	64.75	74.00	-9.25	Peak	254	133	P
7	7311.00	-0.76	42.10	41.34	54.00	-12.66	Average	192	157	P
8	7311.00	-0.76	54.01	53.25	74.00	-20.75	Peak	192	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH09		:	

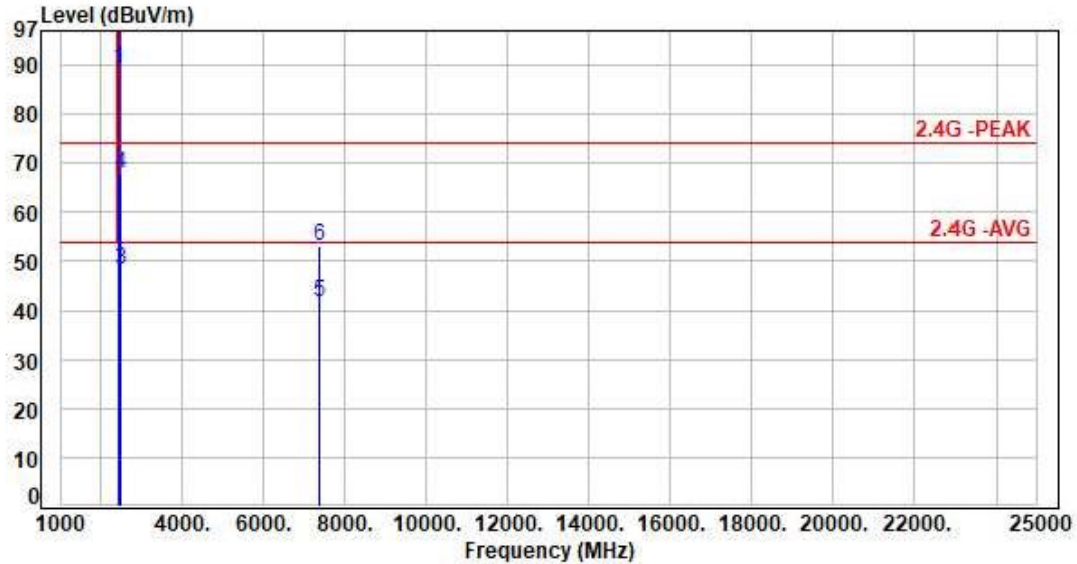

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-14.16	103.59	89.43	200.00	-110.57	Average	378	236	P
2	2452.00	-14.16	111.84	97.68	200.00	-102.32	Peak	378	236	P
3	2483.50	-14.12	62.48	48.36	54.00	-5.64	Average	378	236	P
4	2483.50	-14.12	81.94	67.82	74.00	-6.18	Peak	378	236	P
5	7356.00	-0.66	42.24	41.58	54.00	-12.42	Average	100	44	P
6	7356.00	-0.66	53.88	53.22	74.00	-20.78	Peak	100	44	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH09		:

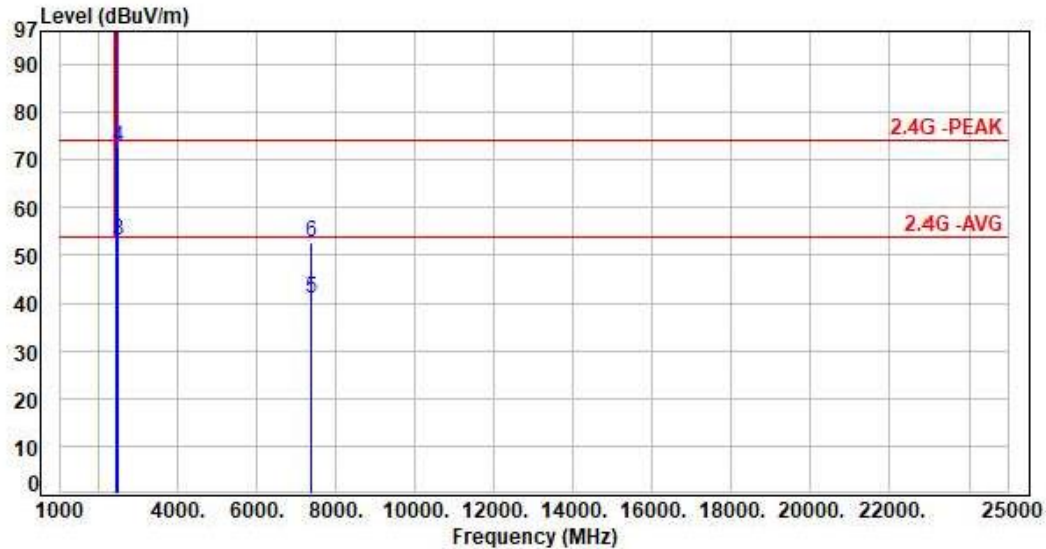

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-14.16	110.63	96.47	200.00	-103.53	Average	274	118	P
2	2452.00	-14.16	117.24	103.08	200.00	-96.92	Peak	274	118	P
3	2483.50	-14.12	67.21	53.09	54.00	-0.91	Average	274	118	P
4	2483.50	-14.12	86.87	72.75	74.00	-1.25	Peak	274	118	P
5	7356.00	-0.66	41.55	40.89	54.00	-13.11	Average	186	157	P
6	7356.00	-0.66	53.41	52.75	74.00	-21.25	Peak	186	157	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below -30dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 30dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout



7.4 Test Result and Data

Note: Test plots refers to the following pages.



Modulation Type: 802.11b, CH 01



Modulation Type: 802.11b, CH 06





Modulation Type: 802.11b, CH 11






Modulation Type: 802.11g, CH 01



Modulation Type: 802.11g, CH 06

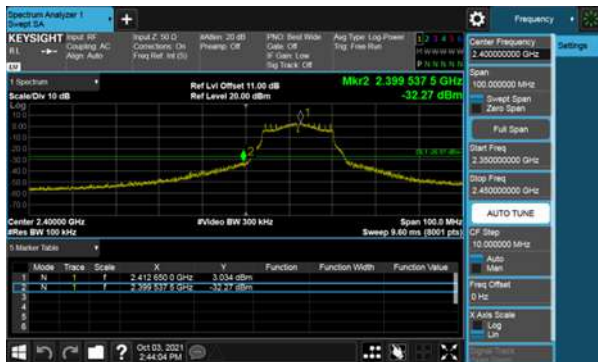



Modulation Type: 802.11g, CH 11






Modulation Type: 802.11n HT20, CH01



Modulation Type: 802.11n HT20, CH06

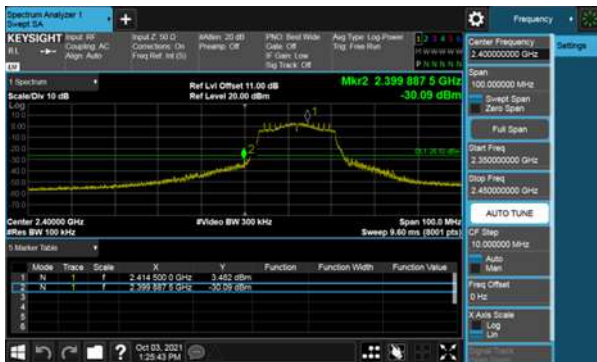



Modulation Type: 802.11n HT20, CH11






Modulation Type: 802.11n HT40, CH03



Modulation Type: 802.11n HT40, CH06

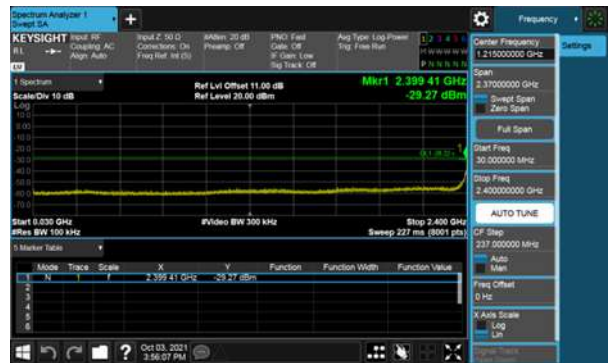



Modulation Type: 802.11n HT40, CH09





8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout



8.4 Test Result and Data

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
11b,1M	8.42	8.51	98.87%
11g,6M	1.40	1.50	93.20%
11n HT20	1.31	1.41	92.83%
11n HT40	0.65	0.75	86.26%



Modulation Type: 802.11b(1Mbps)



Modulation Type: 802.11n HT40(13.5Mbps)



Modulation Type: 802.11g(6Mbps)



Modulation Type: 802.11n HT20(6.5Mbps)





9. 6dB Bandwidth Measurement Data


9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout



**9.4 Test Result and Data**

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
			ANT A	
11b	1	2412	7.56	0.5
	6	2437	7.56	0.5
	11	2462	7.56	0.5
11g	1	2412	15.36	0.5
	6	2437	15.18	0.5
	11	2462	15.18	0.5
11n HT20	1	2412	15.18	0.5
	6	2437	15.18	0.5
	11	2462	15.15	0.5
11n HT40	3	2422	35.16	0.5
	6	2437	35.16	0.5
	9	2452	35.16	0.5





Modulation Type: 802.11n HT20
CH01



Modulation Type: 802.11n HT40
CH03



CH06



CH06



CH11



CH09





10. Maximum Average Output Power

10.1 Test Limit


The Maximum Output Power Measurement is 30dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

10.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout



**10.4 Test Result and Data**

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted(average) output power (dBm)	Total AV power (dBm)	Total AV power (mW)	Power Limit (dBm)
				ANT A			
63	11b	1	2412	18.65	18.65	73.282	30.00
64		6	2437	18.86	18.86	76.913	30.00
61		11	2462	18.03	18.03	63.533	30.00
49	11g	1	2412	14.82	14.82	30.339	30.00
67		6	2437	19.06	19.06	80.538	30.00
53		11	2462	15.96	15.96	39.446	30.00
52	11n HT20	1	2412	15.06	15.06	32.063	30.00
67		6	2437	18.73	18.73	74.645	30.00
56		11	2462	16.24	16.24	42.073	30.00
41	11n HT40	3	2422	12.08	12.08	16.144	30.00
49		6	2437	14.24	14.24	26.546	30.00
44		9	2452	12.93	12.93	19.634	30.00



11. Power Spectral Density

11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

Reference to KDB558074 DTS Meas Guidance v05r02 D01

11.3 Test Setup Layout



**11.4 Test Result and Data**

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)	Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
			ANT A				
11b	1	2412	2.05	2.05	0.00	2.05	8.00
	6	2437	2.58	2.58	0.00	2.58	8.00
	11	2462	1.34	1.34	0.00	1.34	8.00
11g	1	2412	-3.18	-3.18	0.31	-2.87	8.00
	6	2437	0.95	0.95	0.31	1.26	8.00
	11	2462	-1.83	-1.83	0.31	-1.52	8.00
11n HT20	1	2412	-3.18	-3.18	0.32	-2.86	8.00
	6	2437	0.13	0.13	0.32	0.45	8.00
	11	2462	-1.87	-1.87	0.32	-1.55	8.00
11n HT40	3	2422	-8.36	-8.36	0.64	-7.72	8.00
	6	2437	-6.29	-6.29	0.64	-5.65	8.00
	9	2452	-7.41	-7.41	0.64	-6.77	8.00



Modulation Type: 802.11b
CH01



Modulation Type: 802.11g
CH01



CH06



CH06



CH11




CH11






Modulation Type: 802.11n HT20
CH01

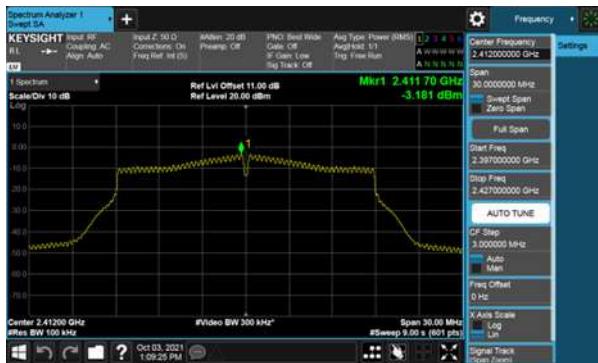


Modulation Type: 802.11n HT40
CH03

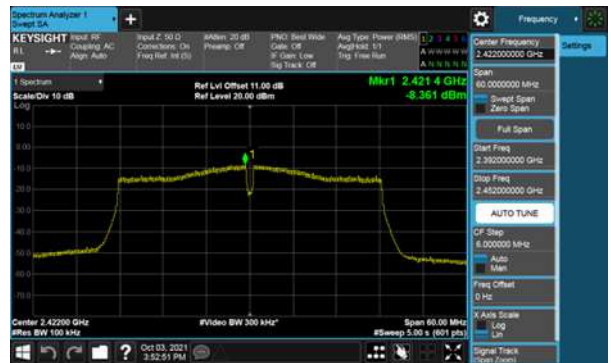


CH06



CH06

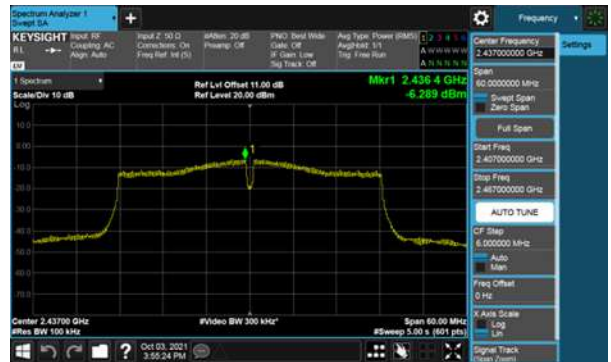

CH11

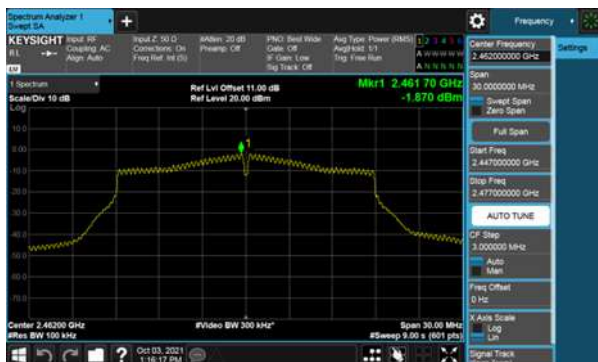

CH09

