



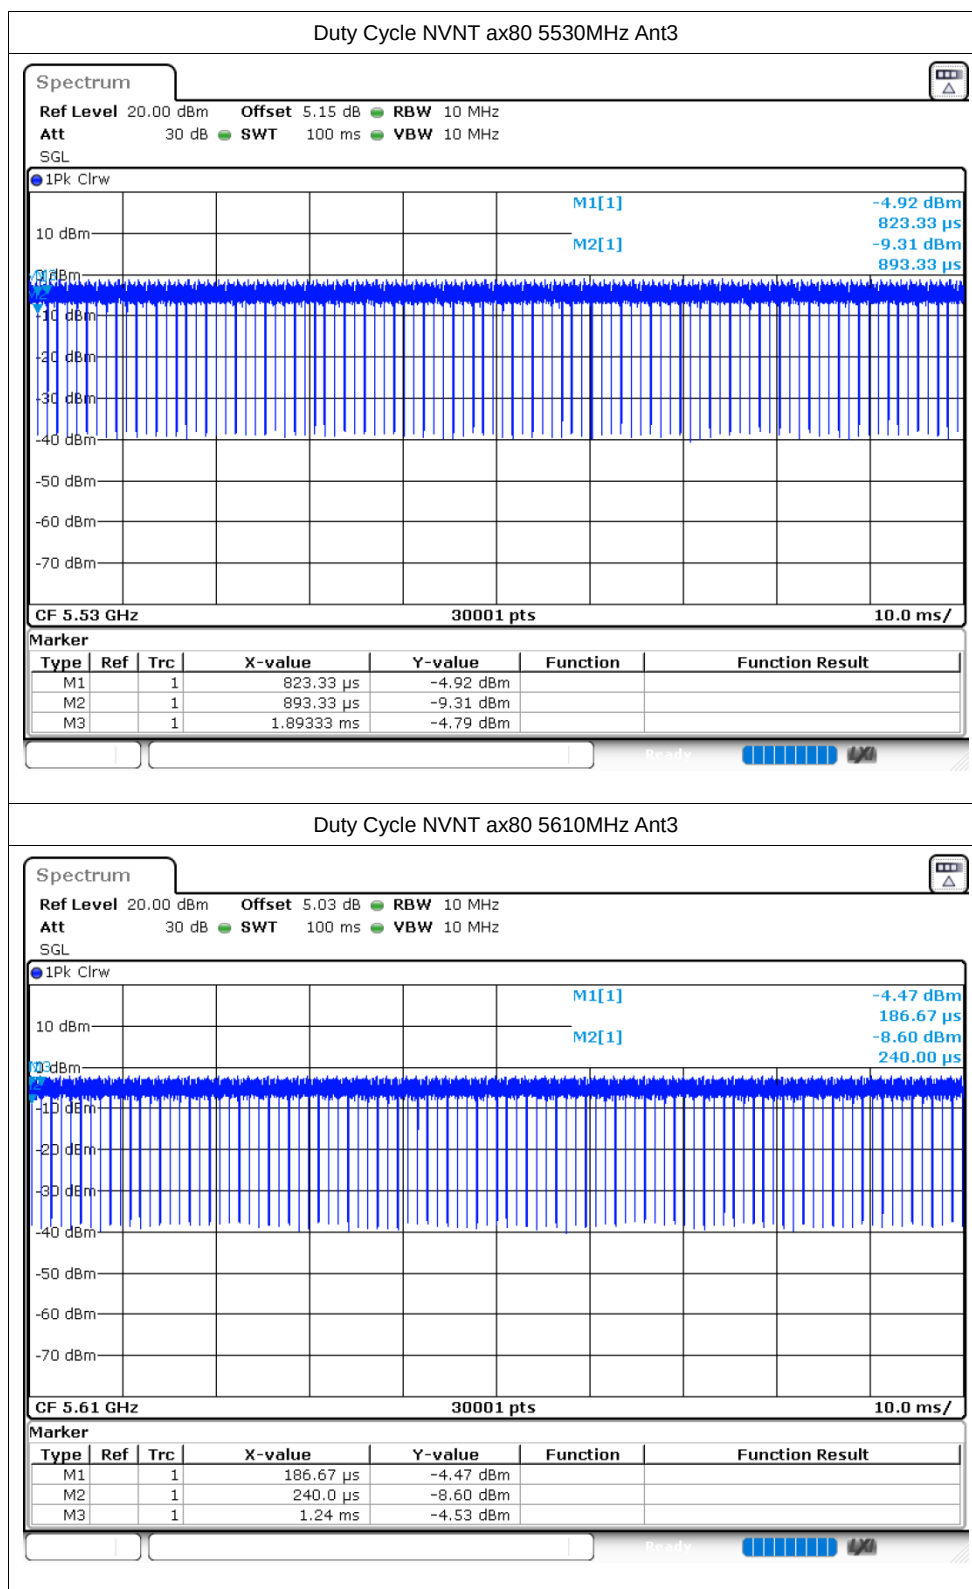

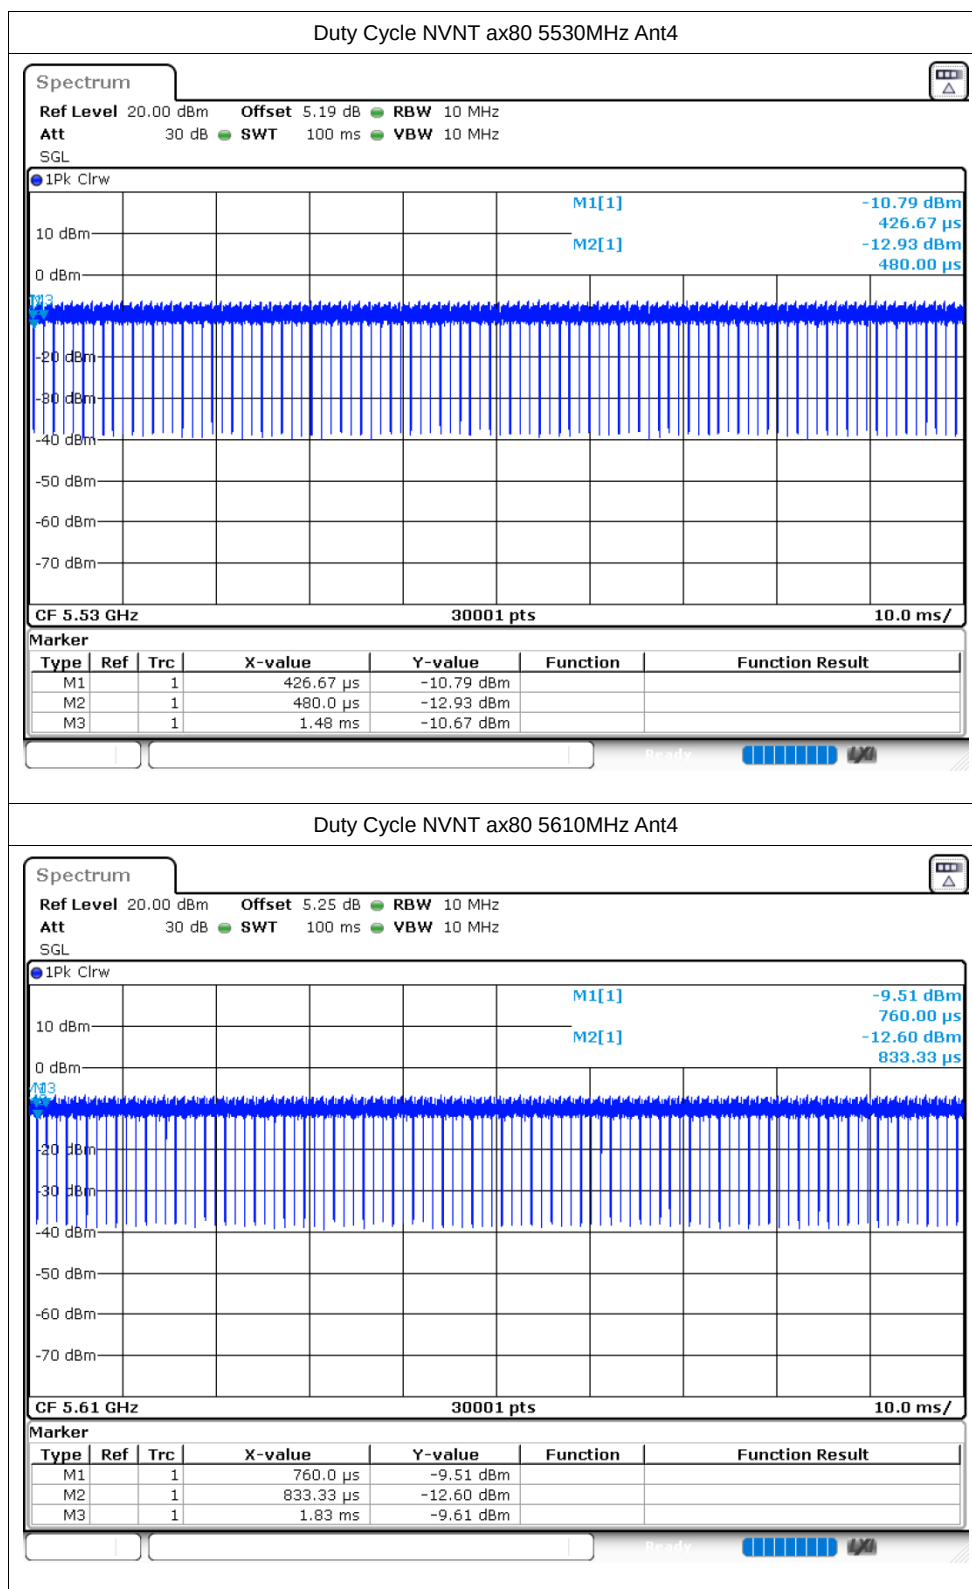


Test Graphs

Duty Cycle NVNT ac20 5500MHz Ant5

Spectrum

Ref Level 20.00 dBm Offset 9.66 dB RBW 10 MHz
Att 30 dB SWT 100 ms VBW 10 MHz
SGL

1Pk Clrw

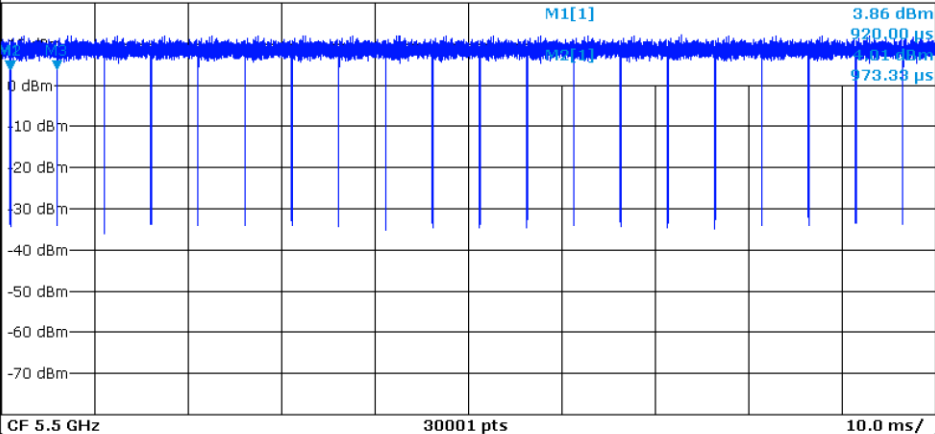

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	920.0 μ s	3.86 dBm		
M2		1	973.33 μ s	4.01 dBm		
M3		1	5.94 ms	3.87 dBm		

Duty Cycle NVNT ac20 5600MHz Ant5

Spectrum


Ref Level 20.00 dBm Offset 10.10 dB RBW 10 MHz
Att 25 dB SWT 100 ms VBW 10 MHz
SGL


1Pk Clrw

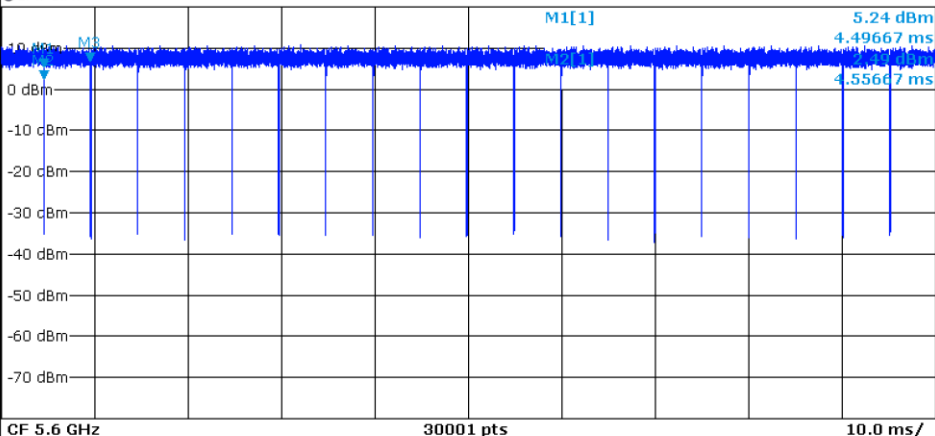



Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	4.49667 ms	5.24 dBm		
M2		1	4.55667 ms	2.49 dBm		
M3		1	9.52333 ms	6.85 dBm		

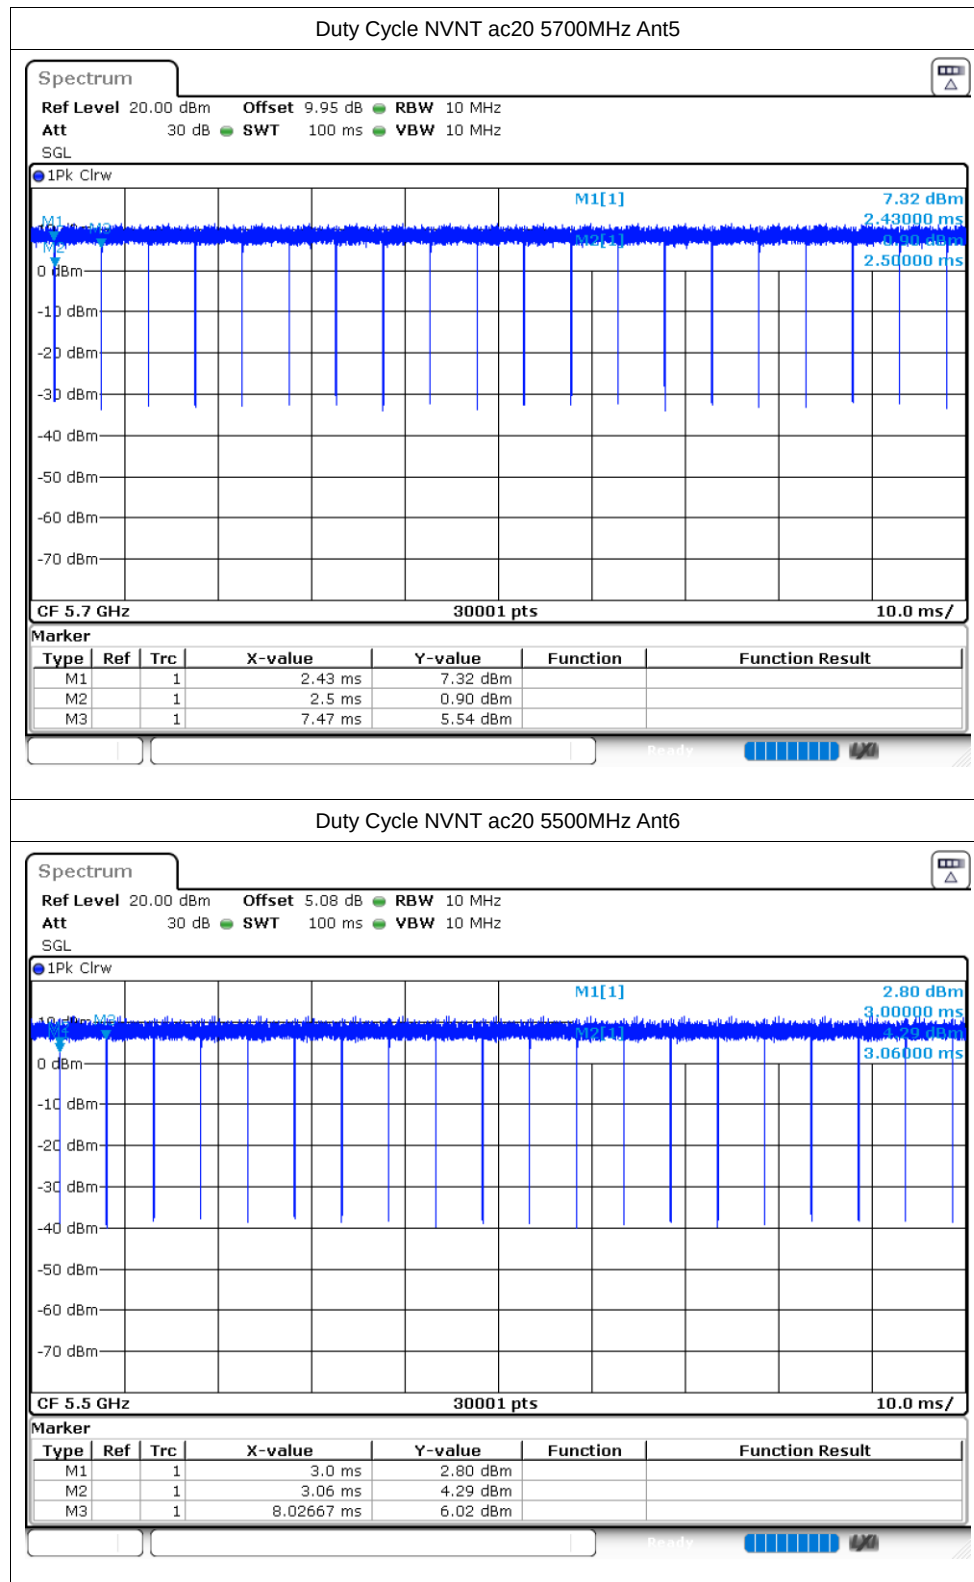


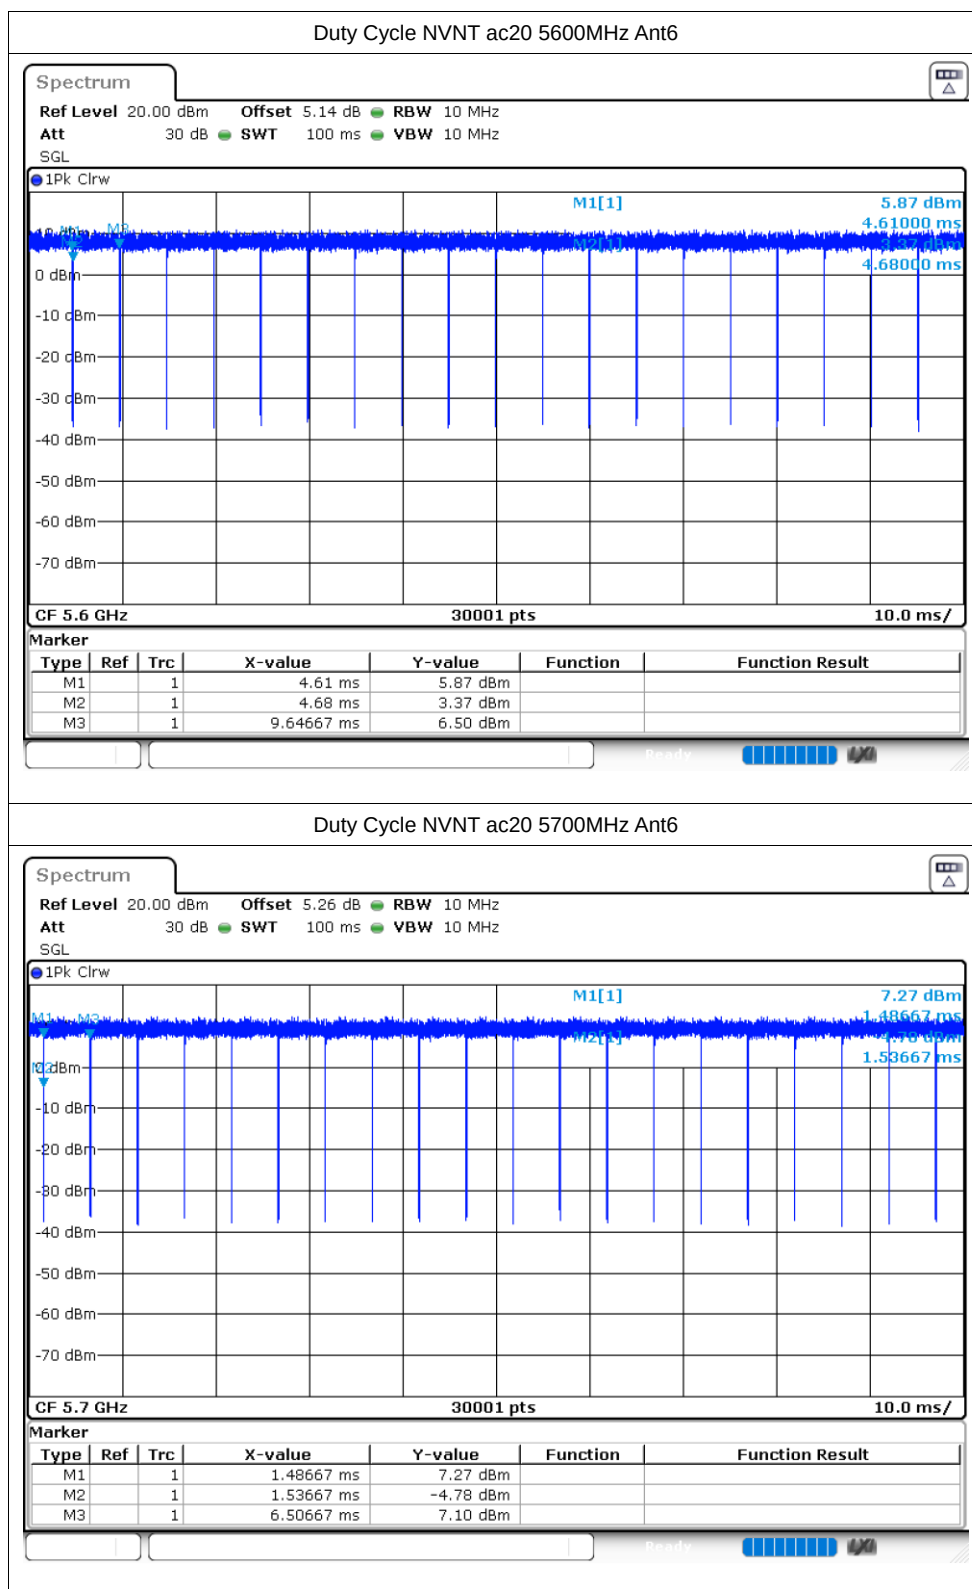


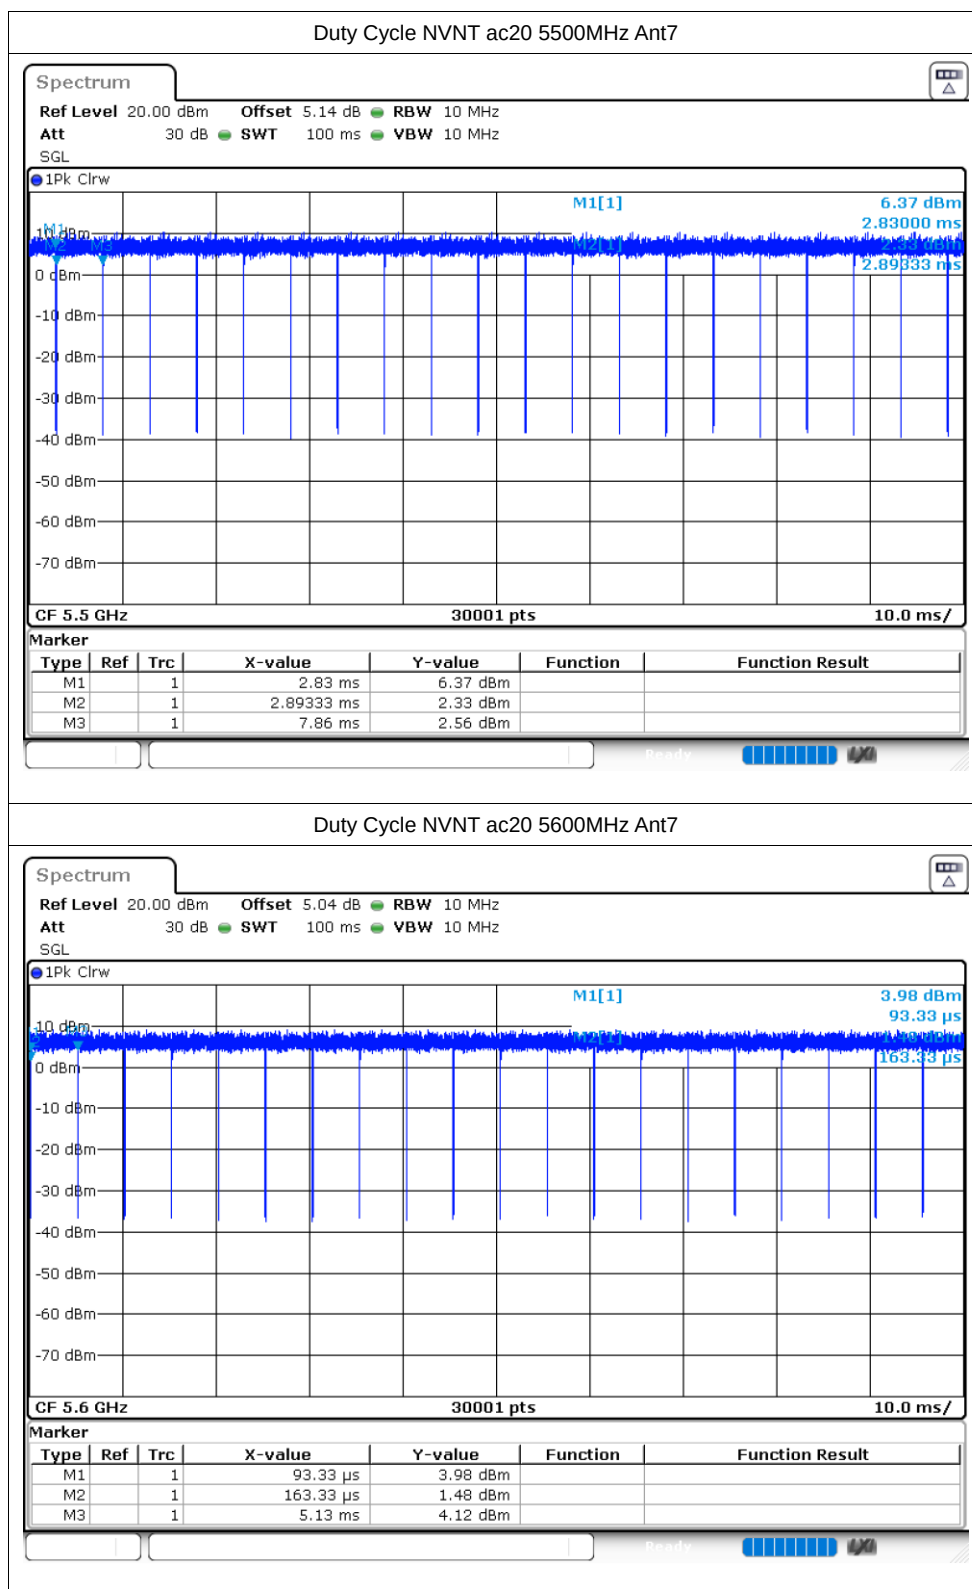


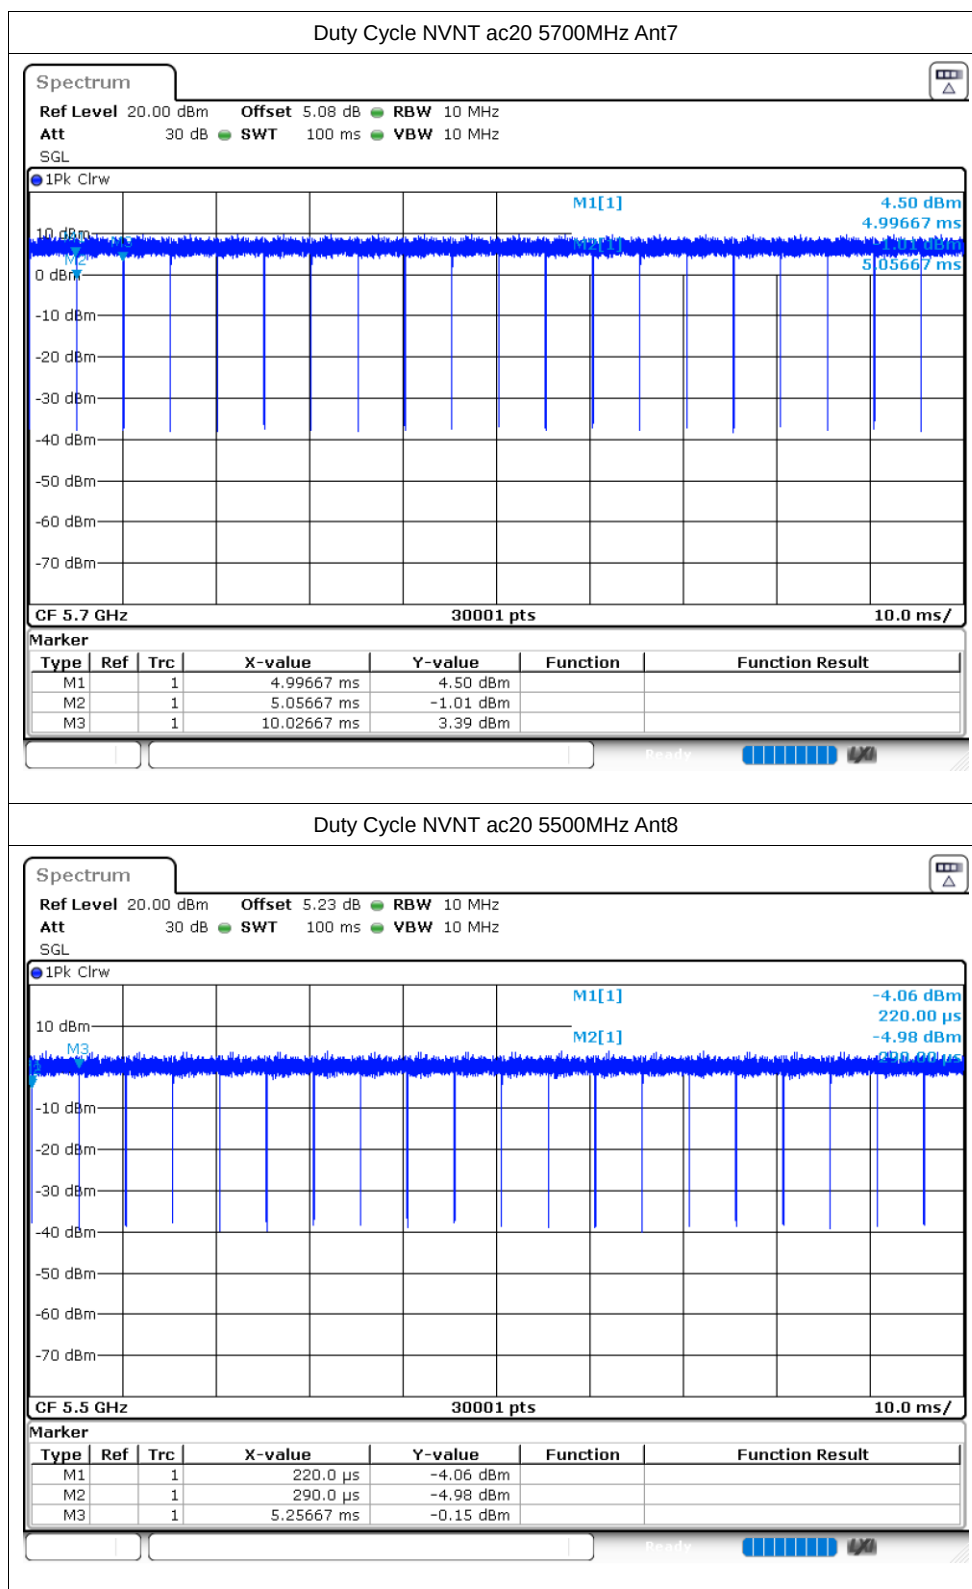


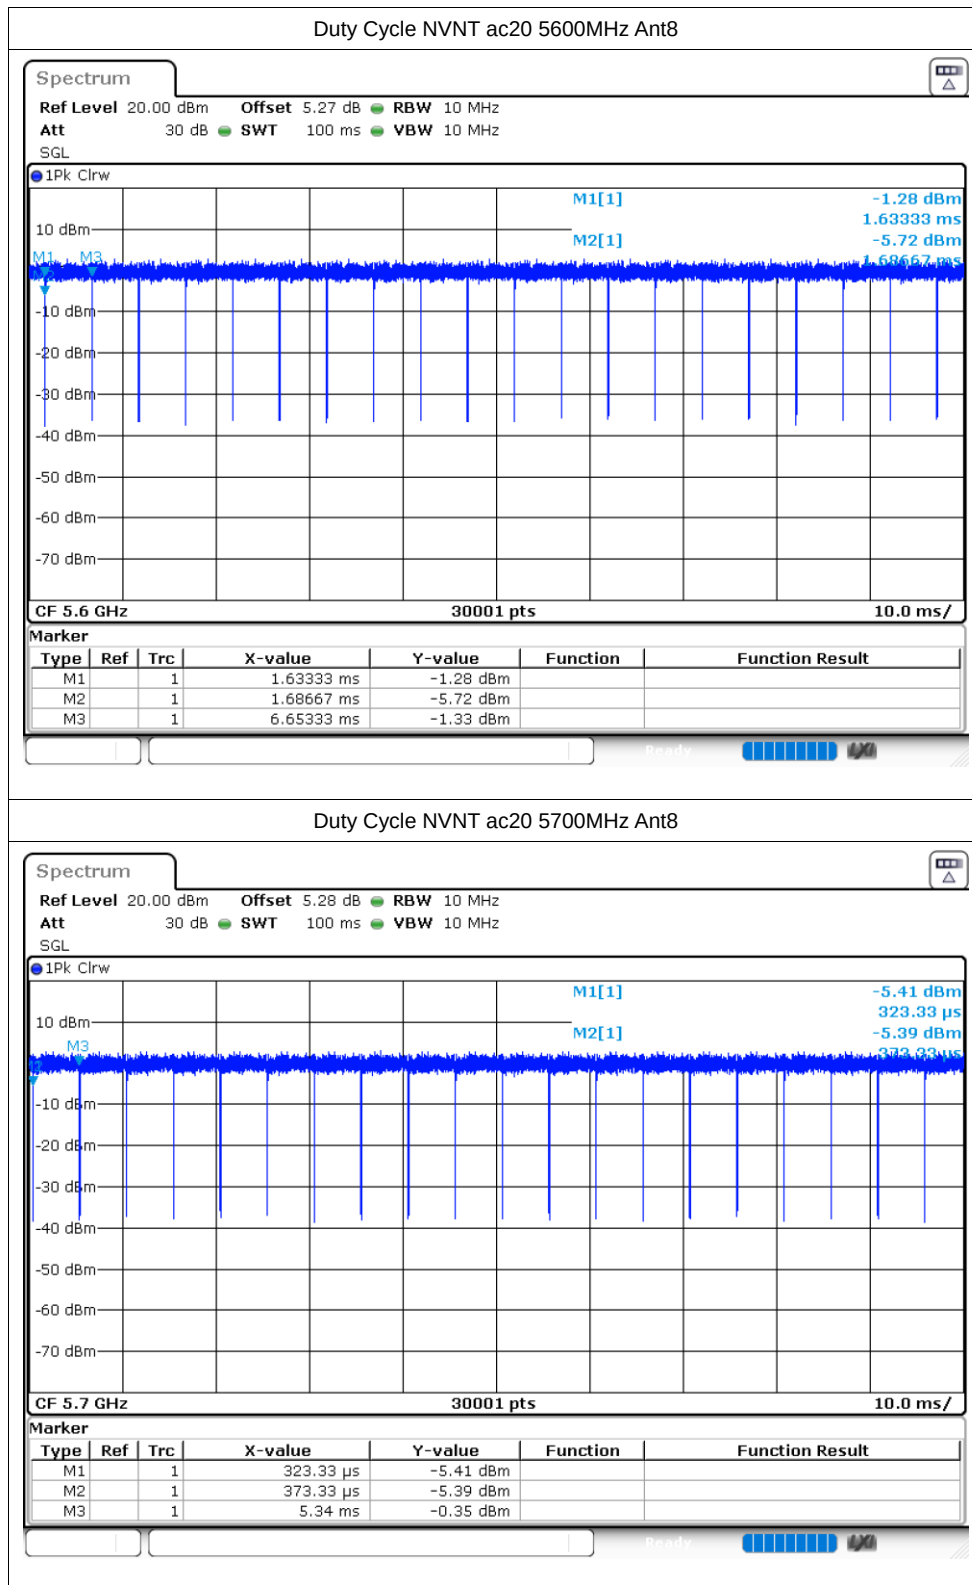


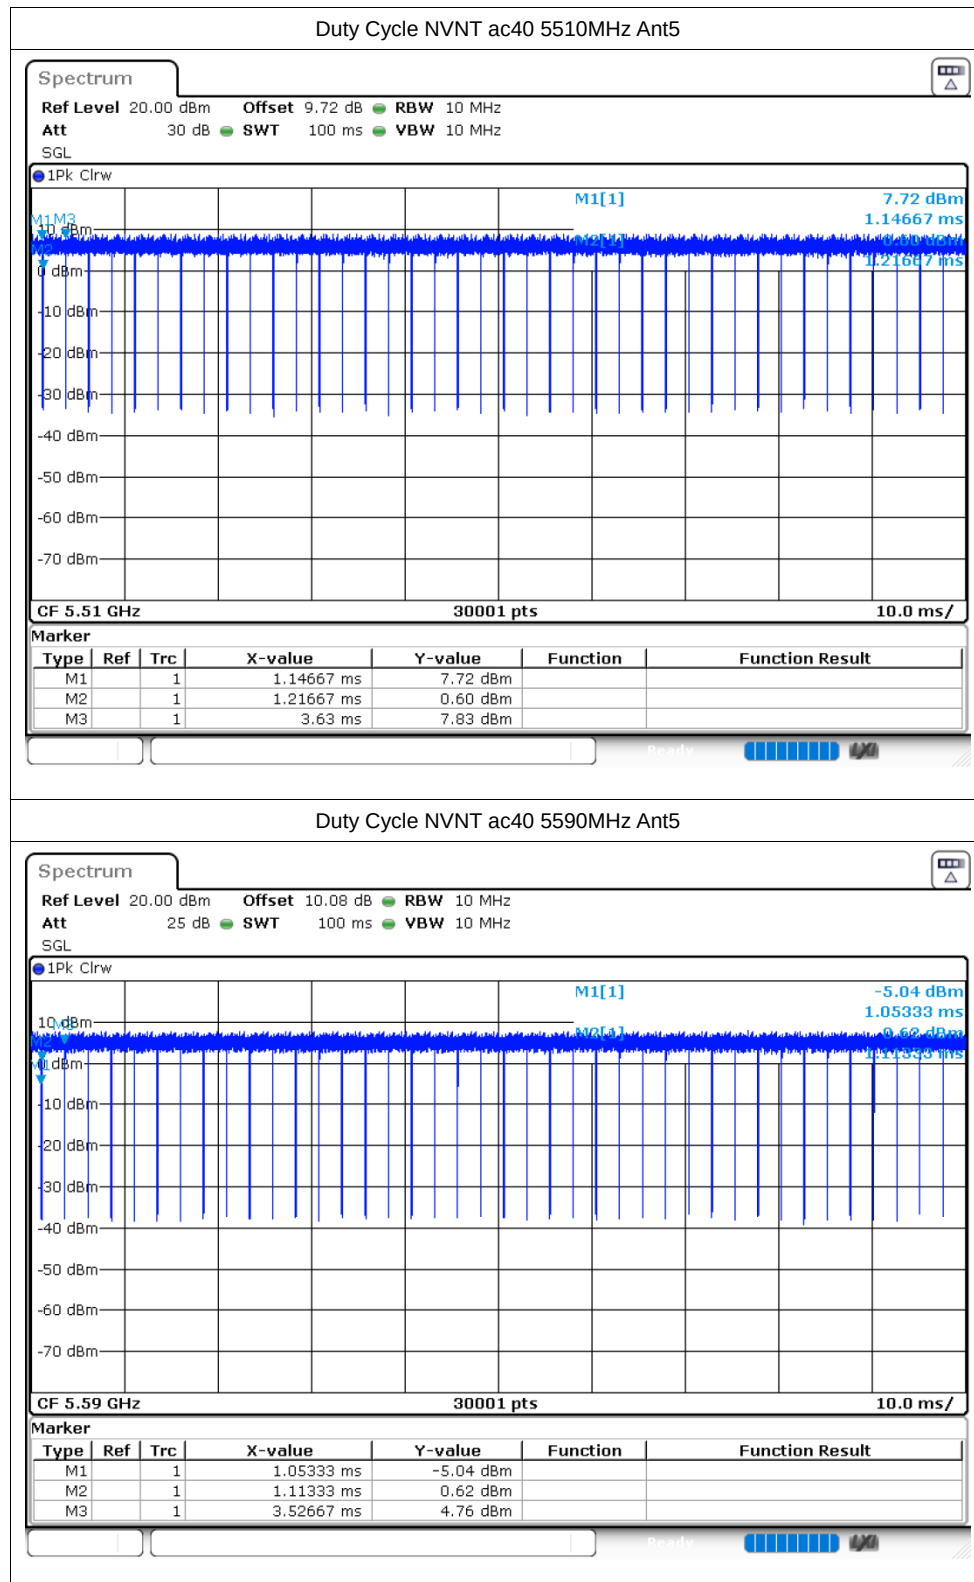


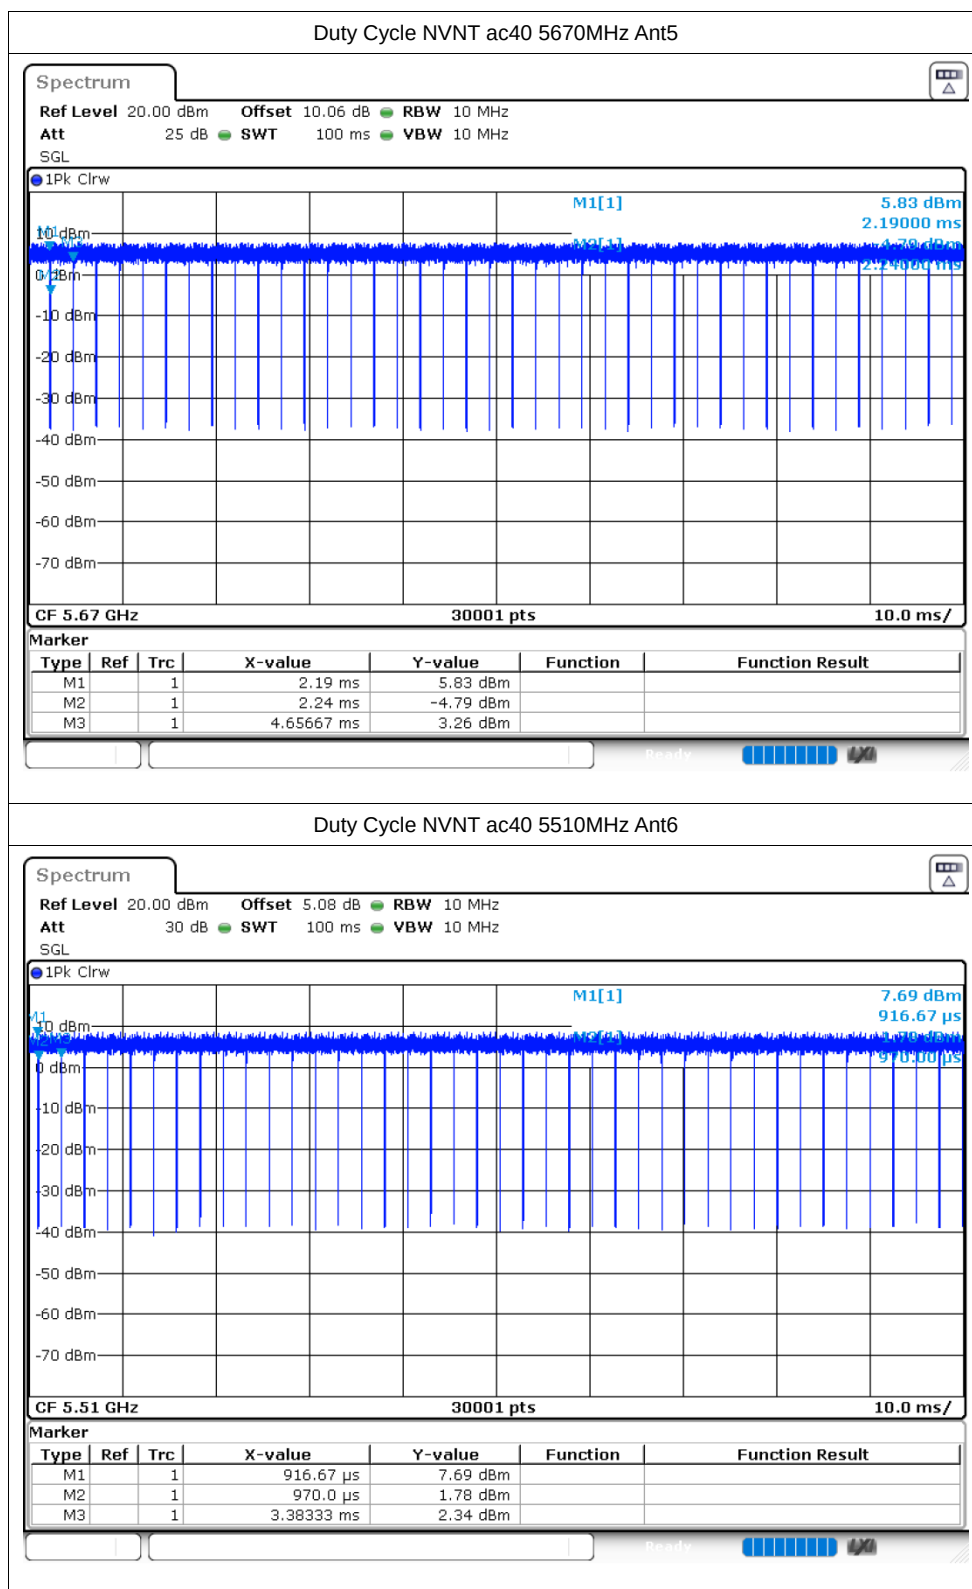


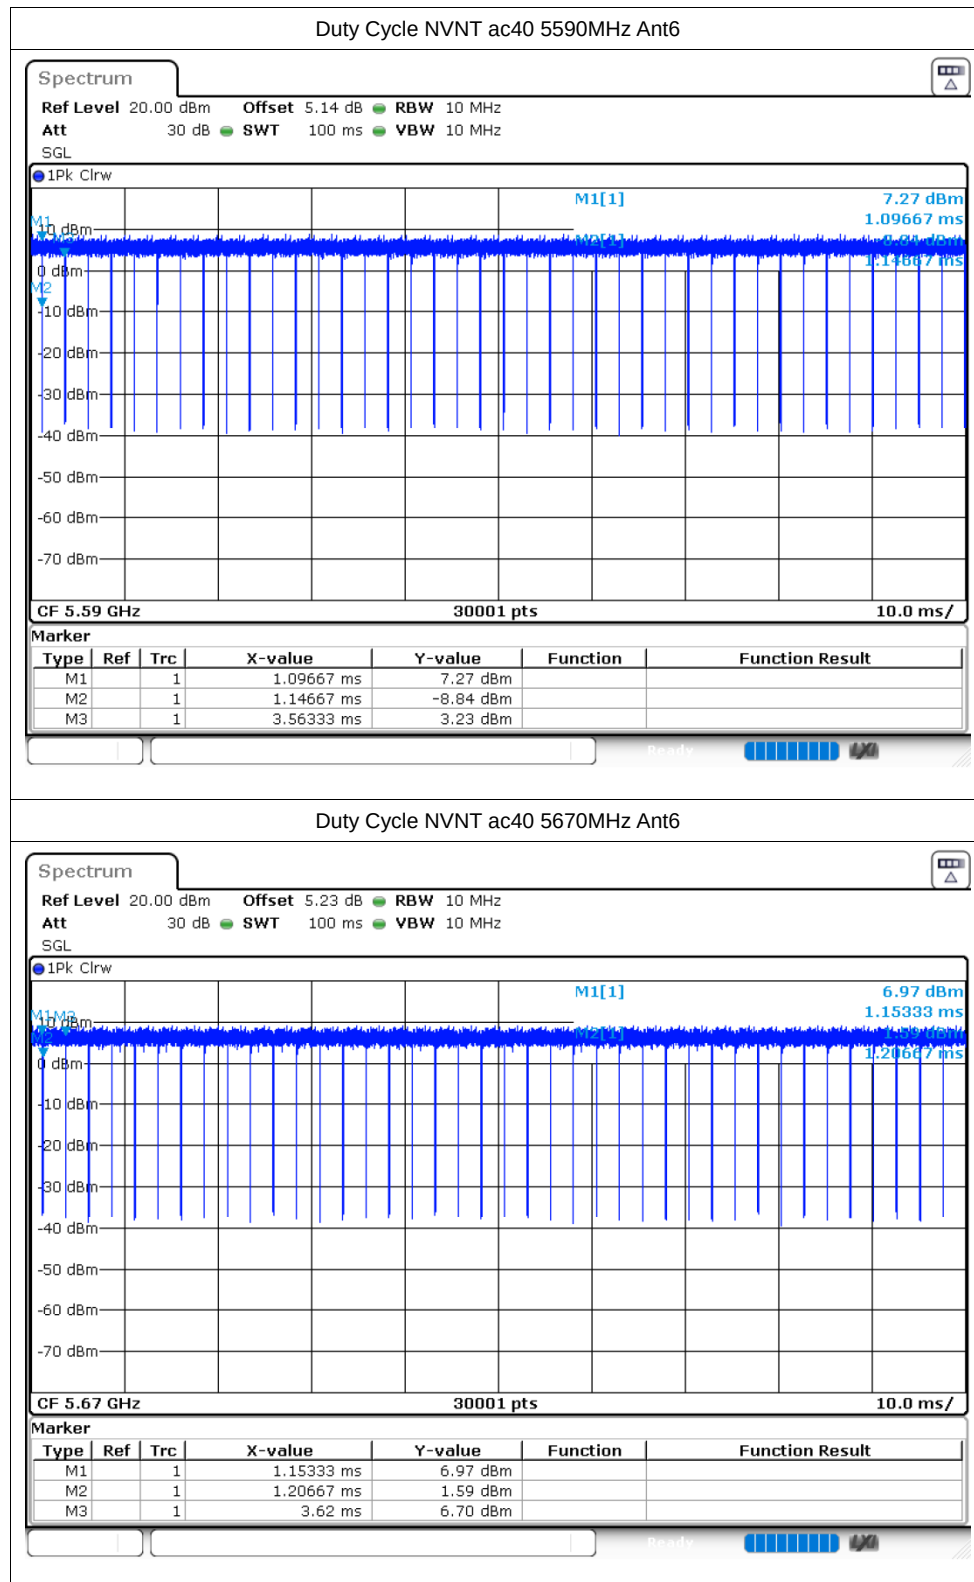


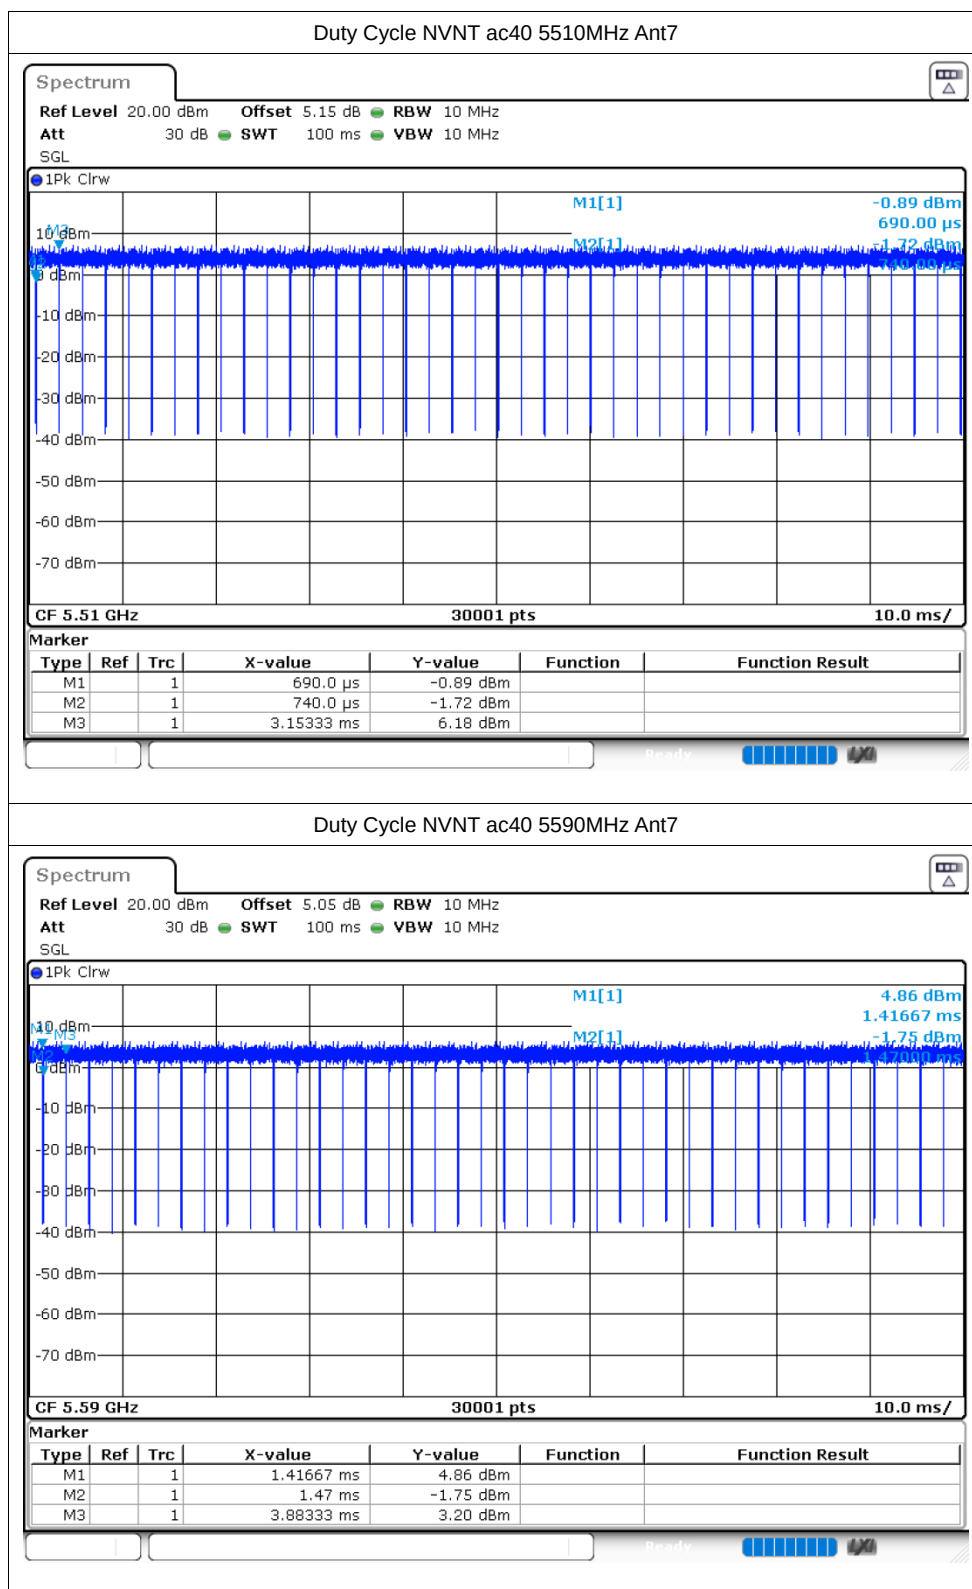


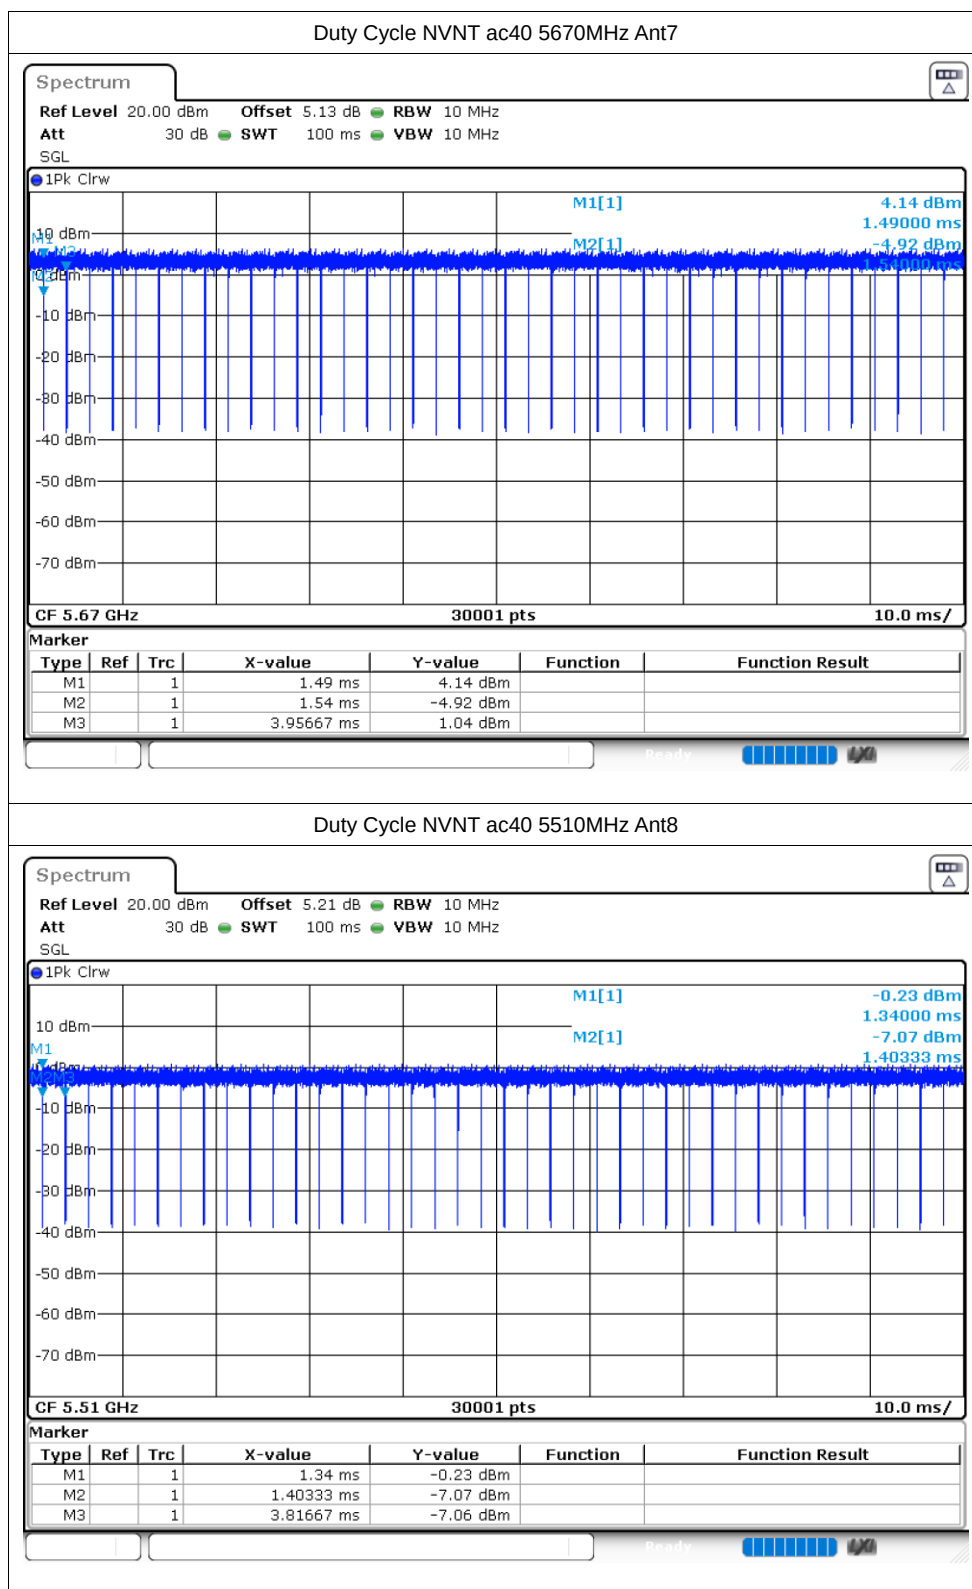


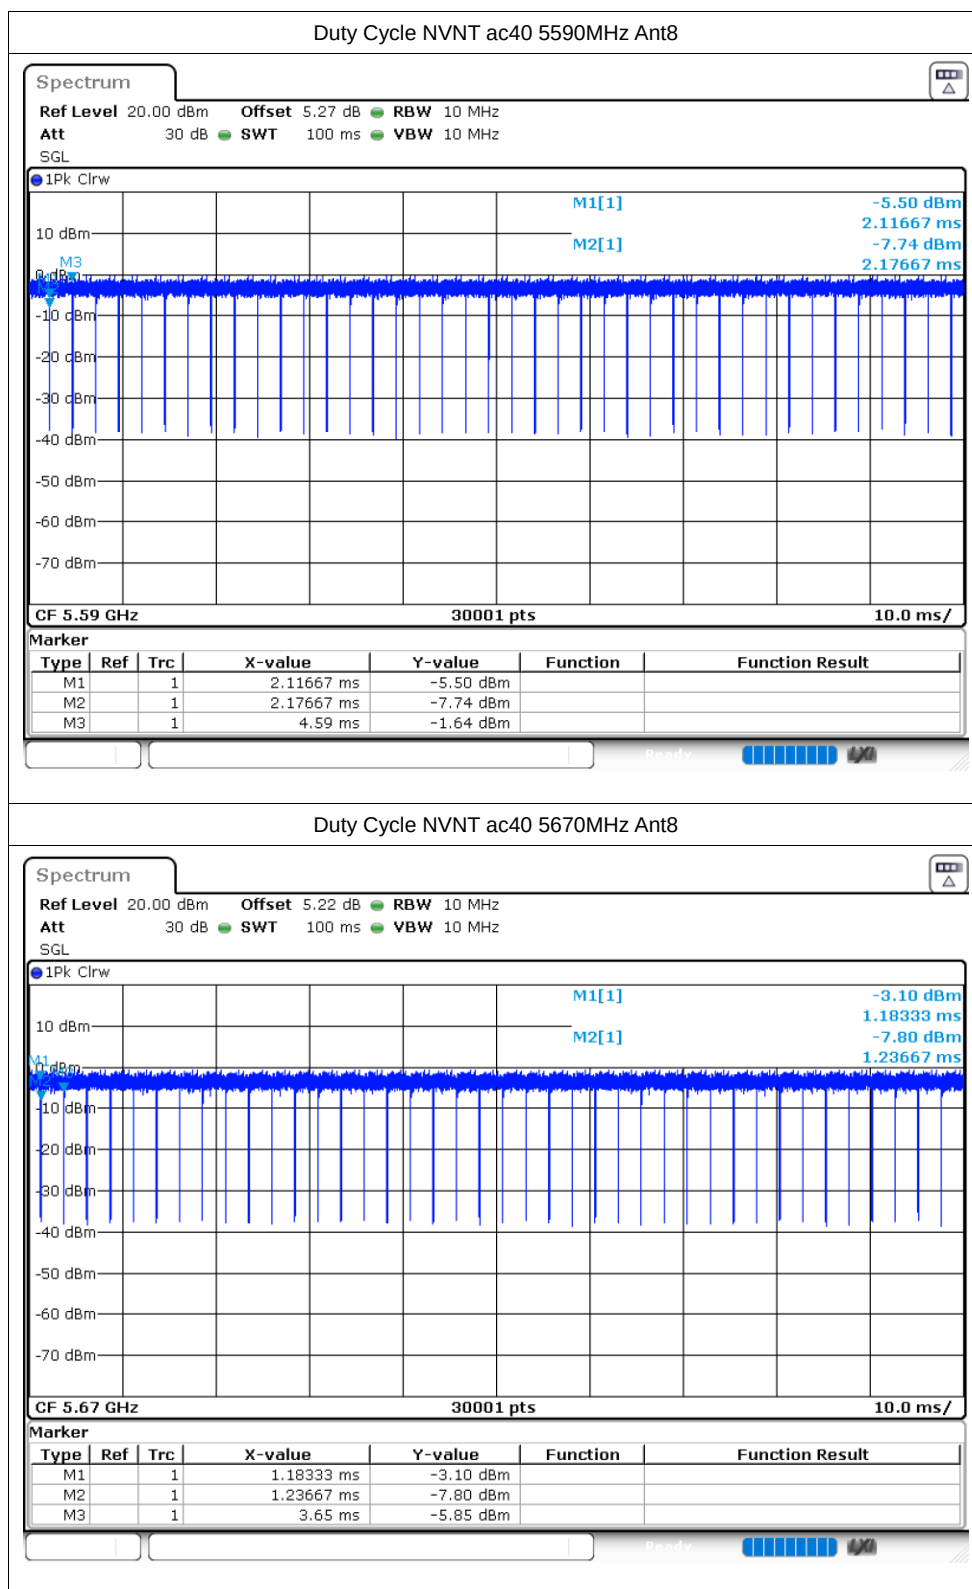


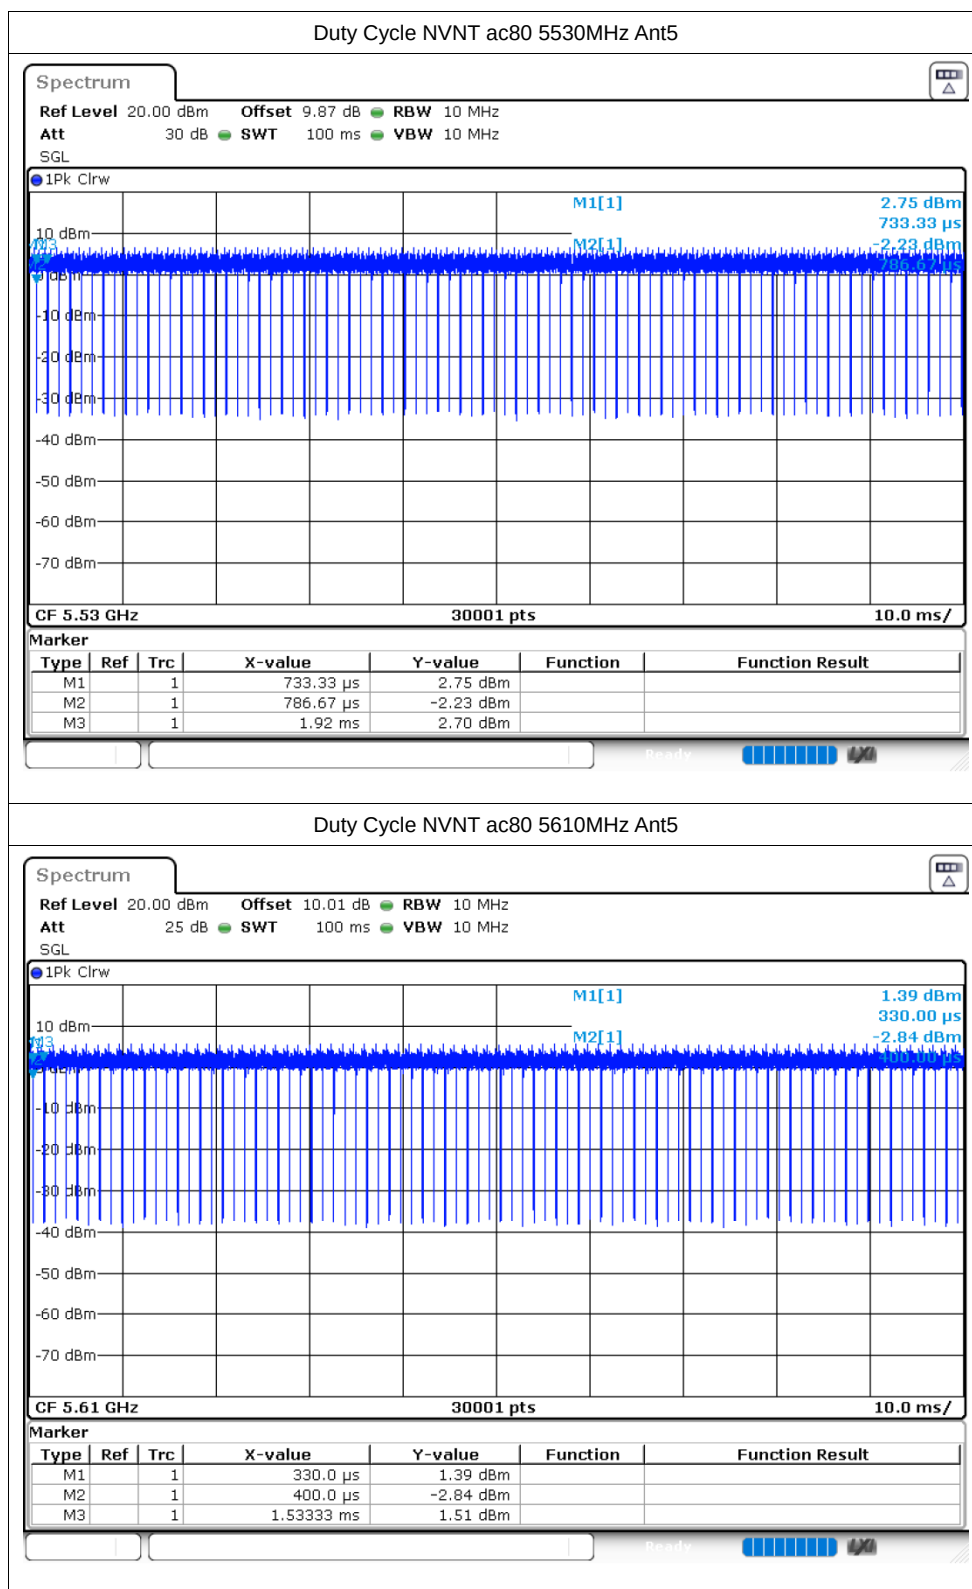


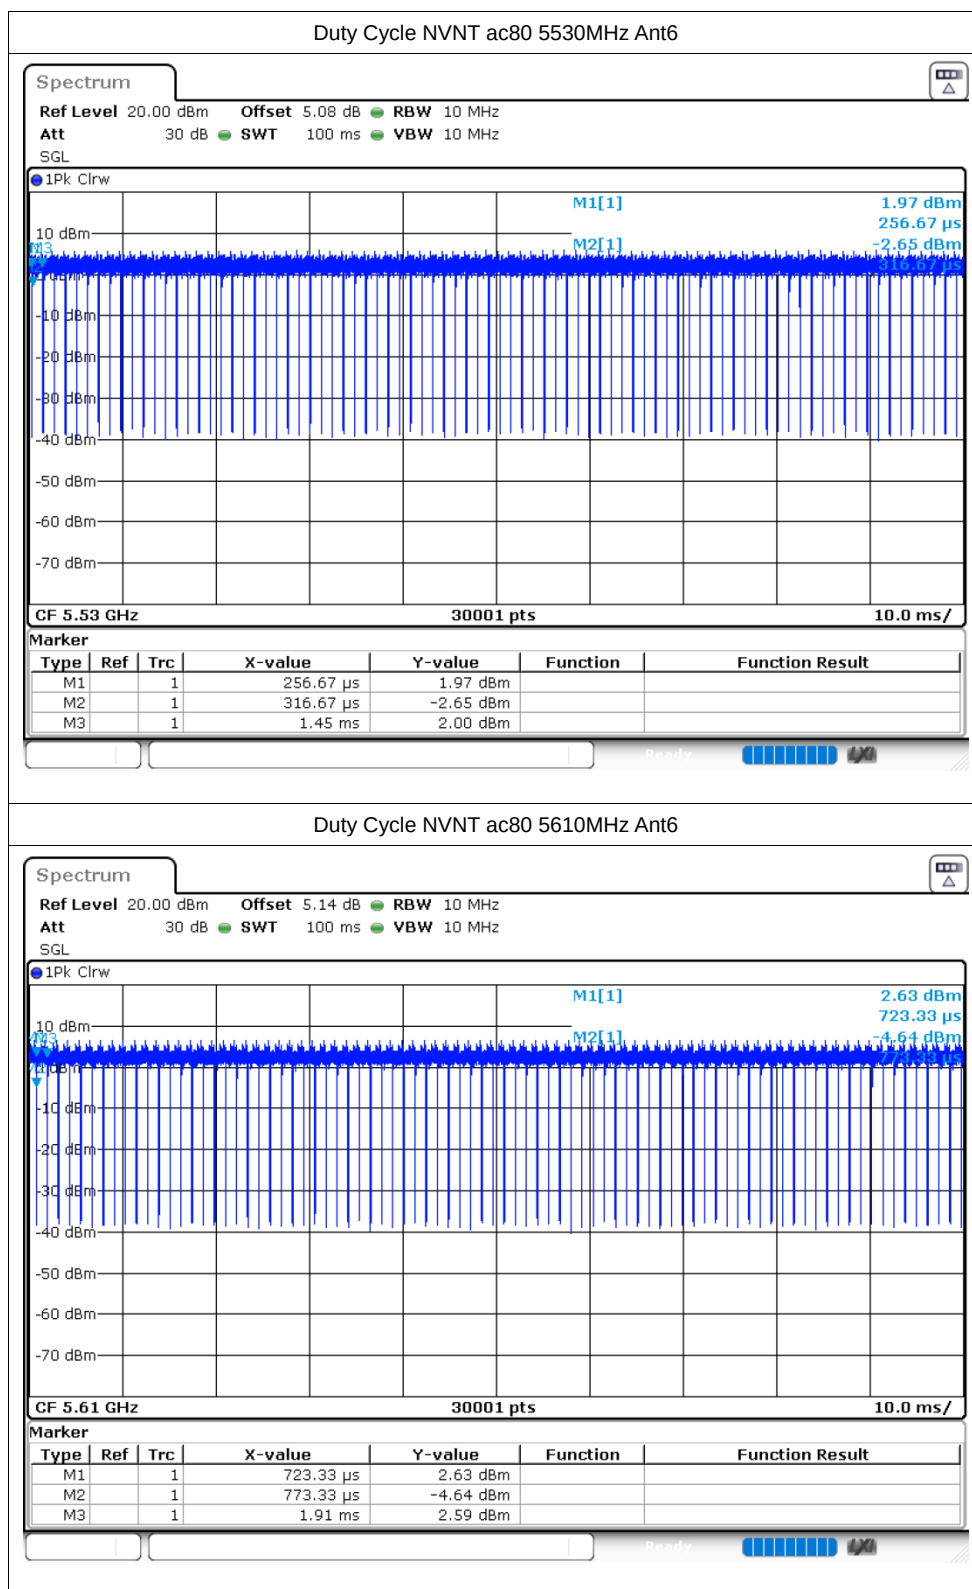


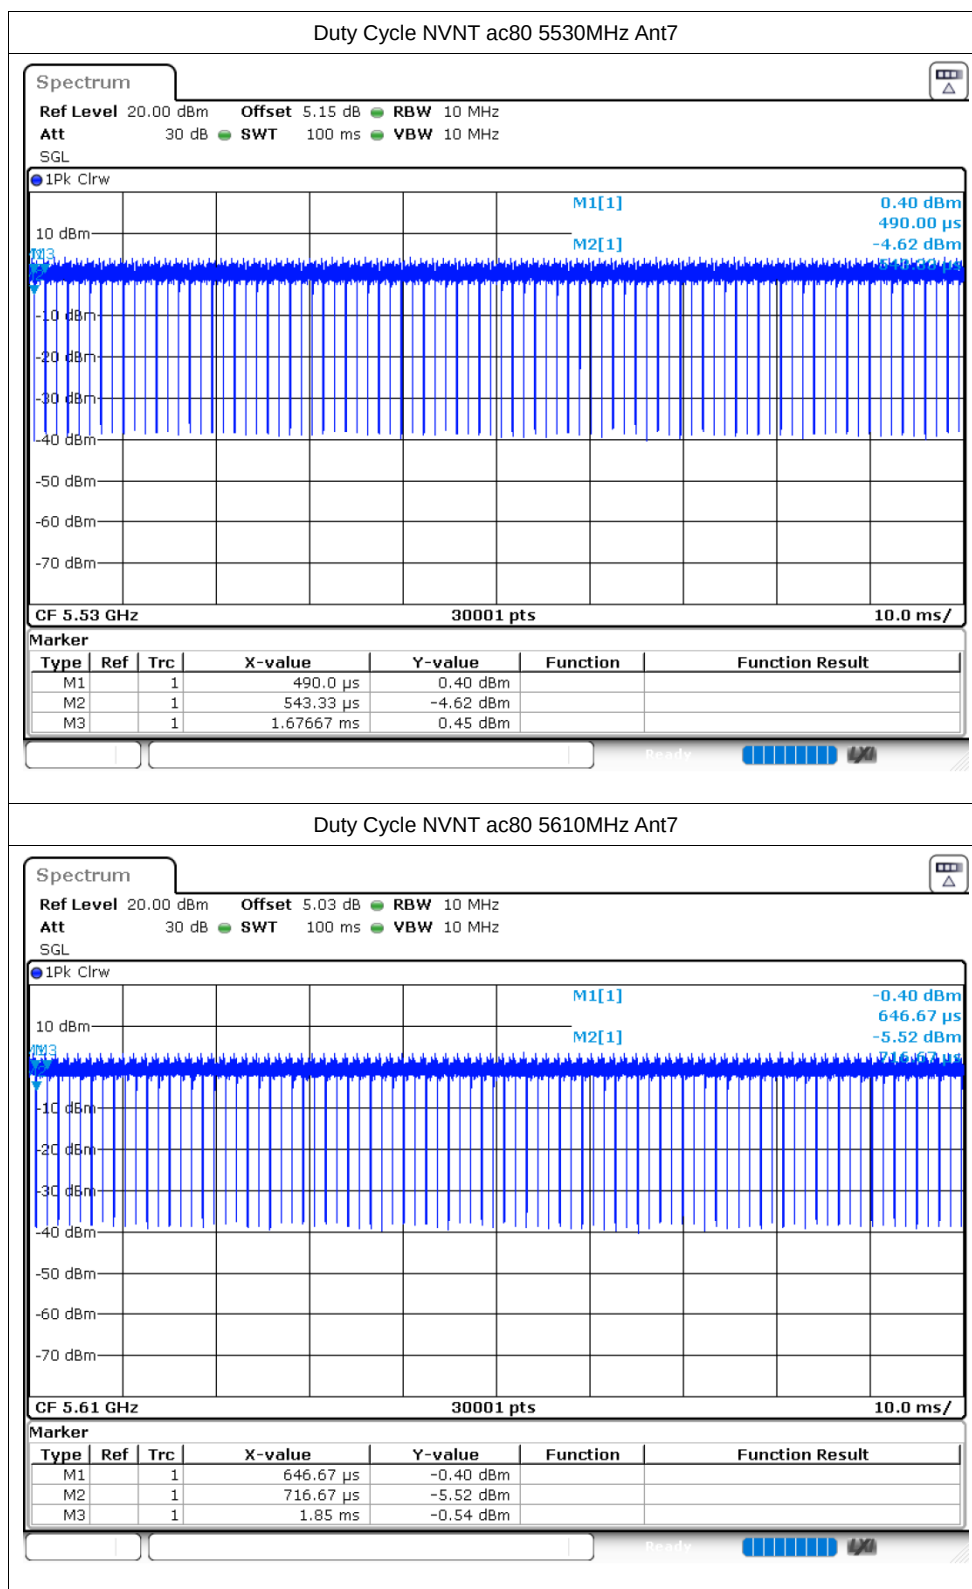


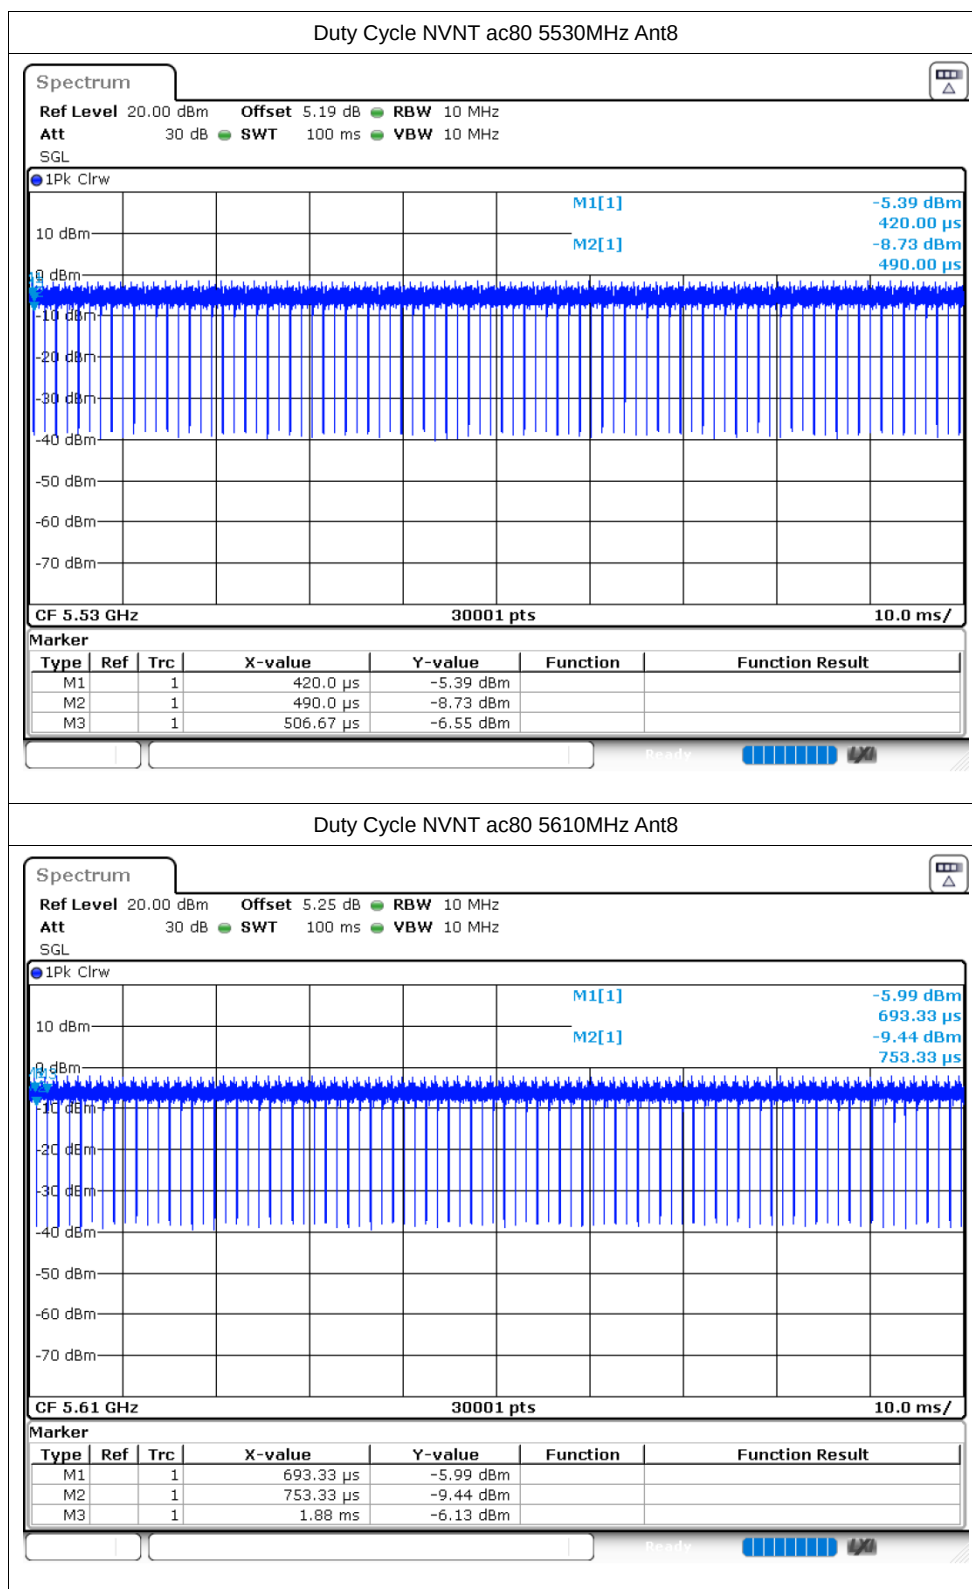


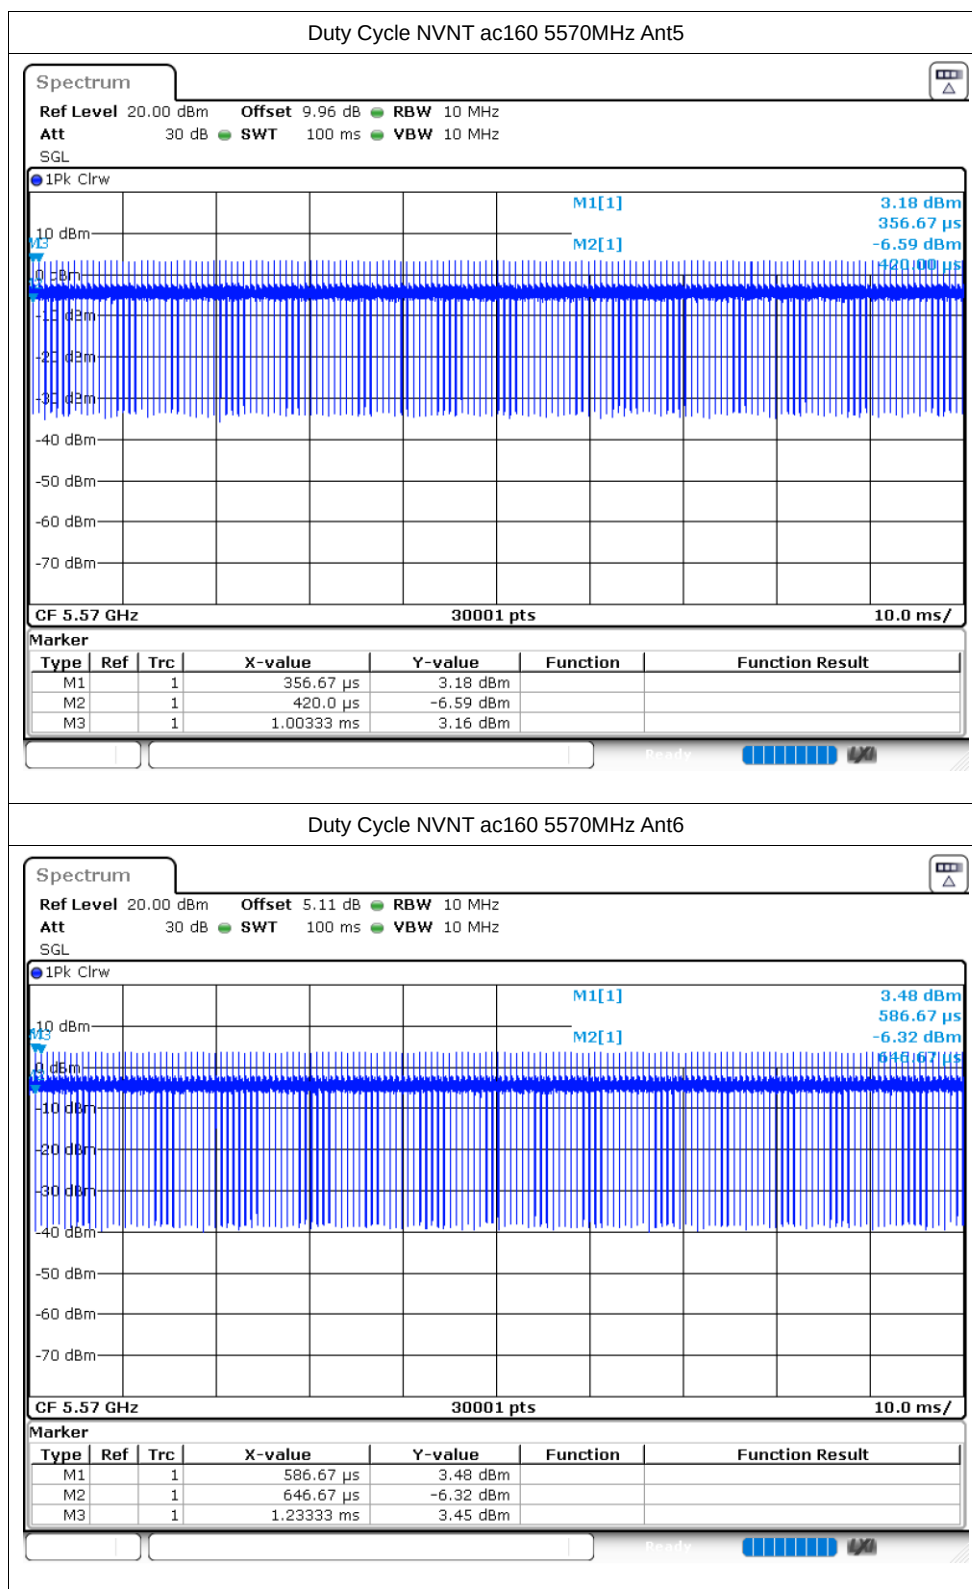


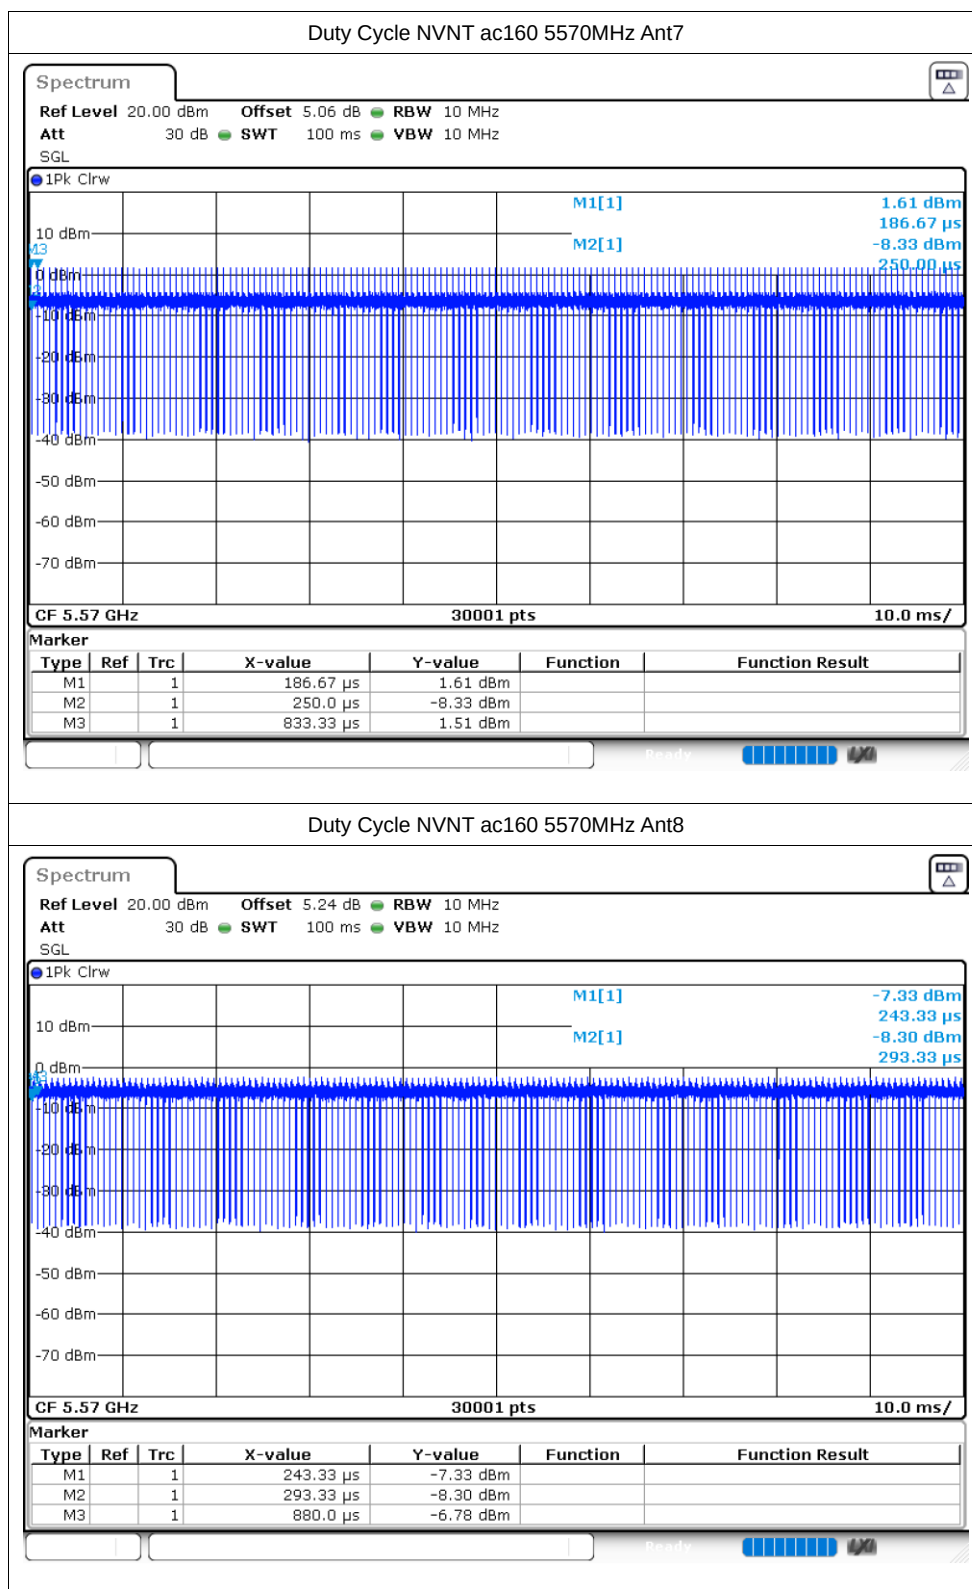


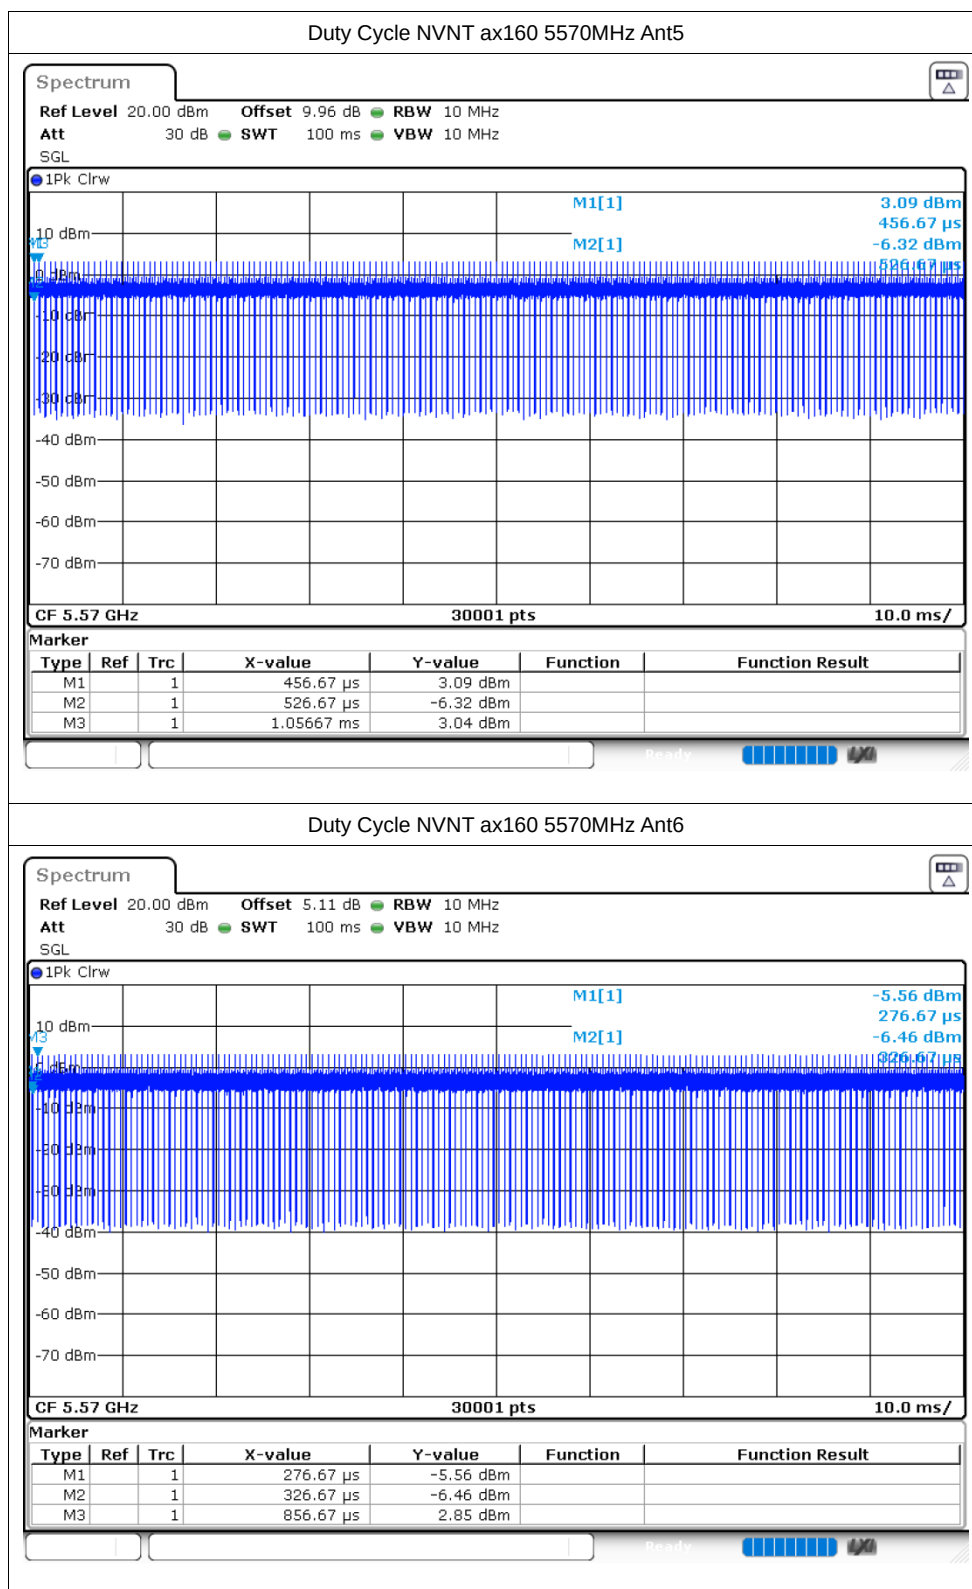


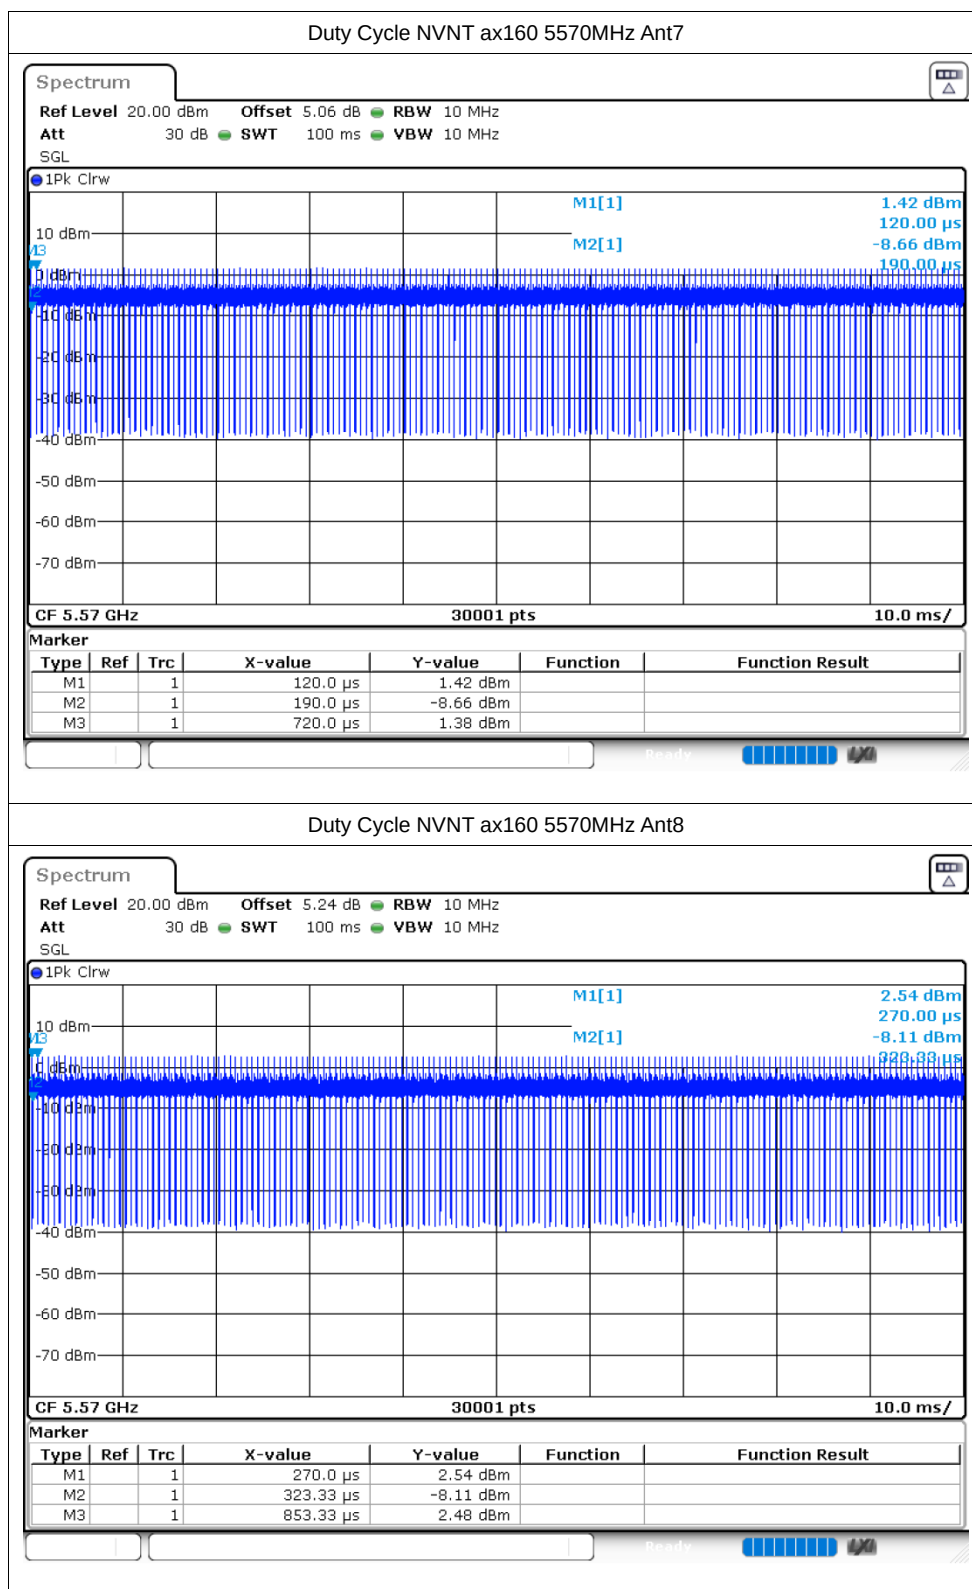


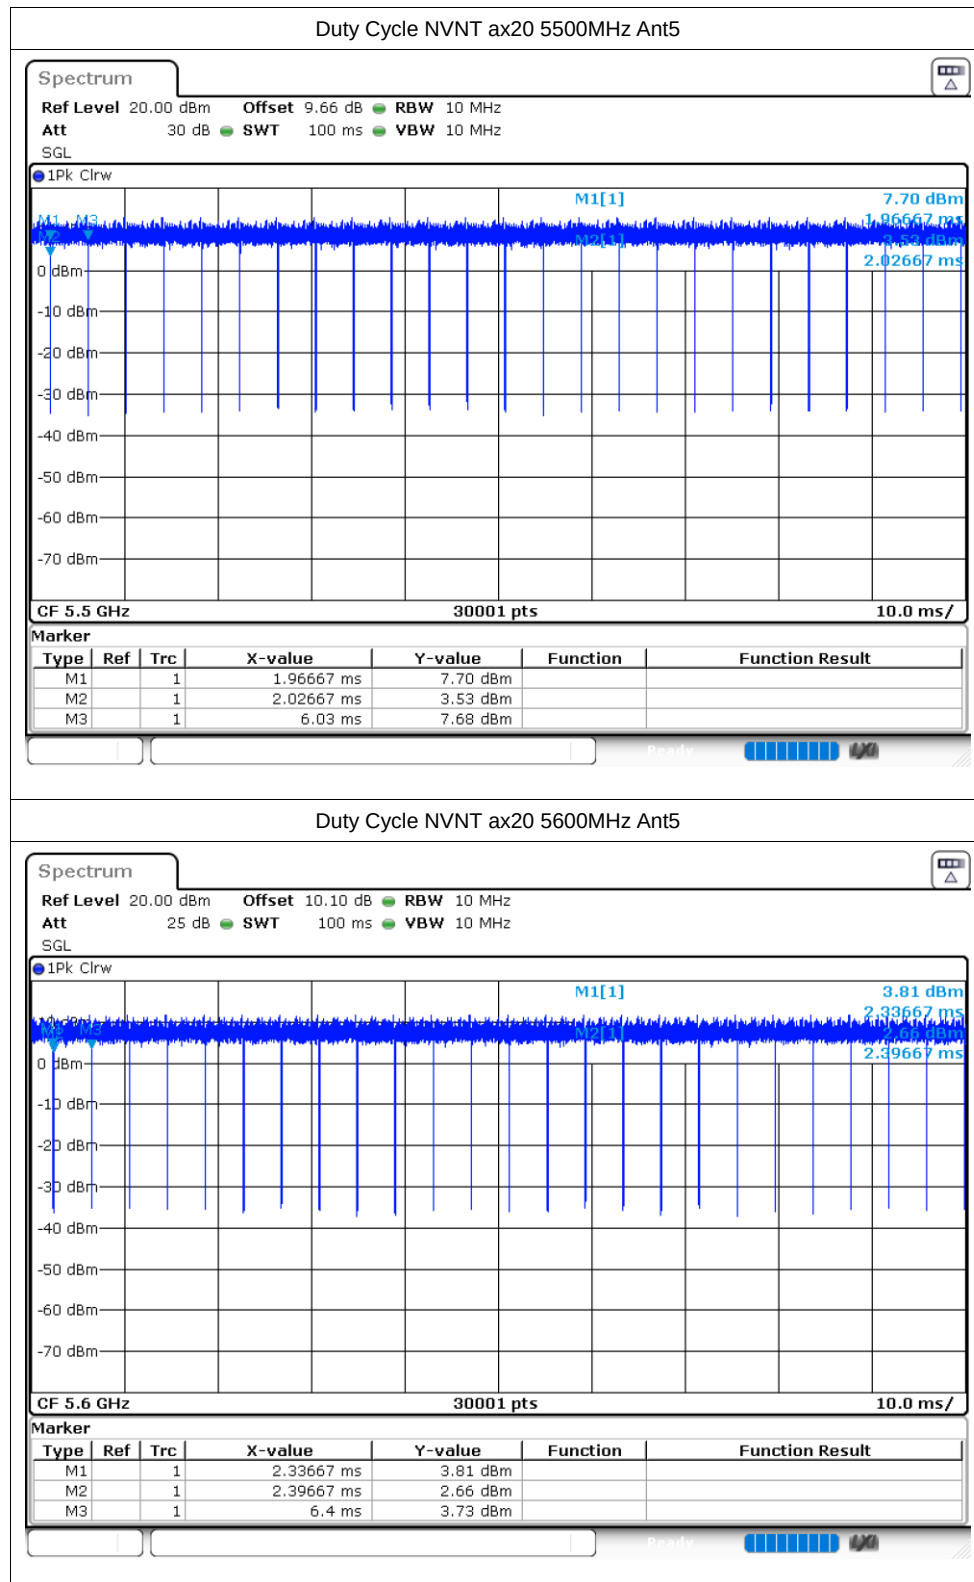


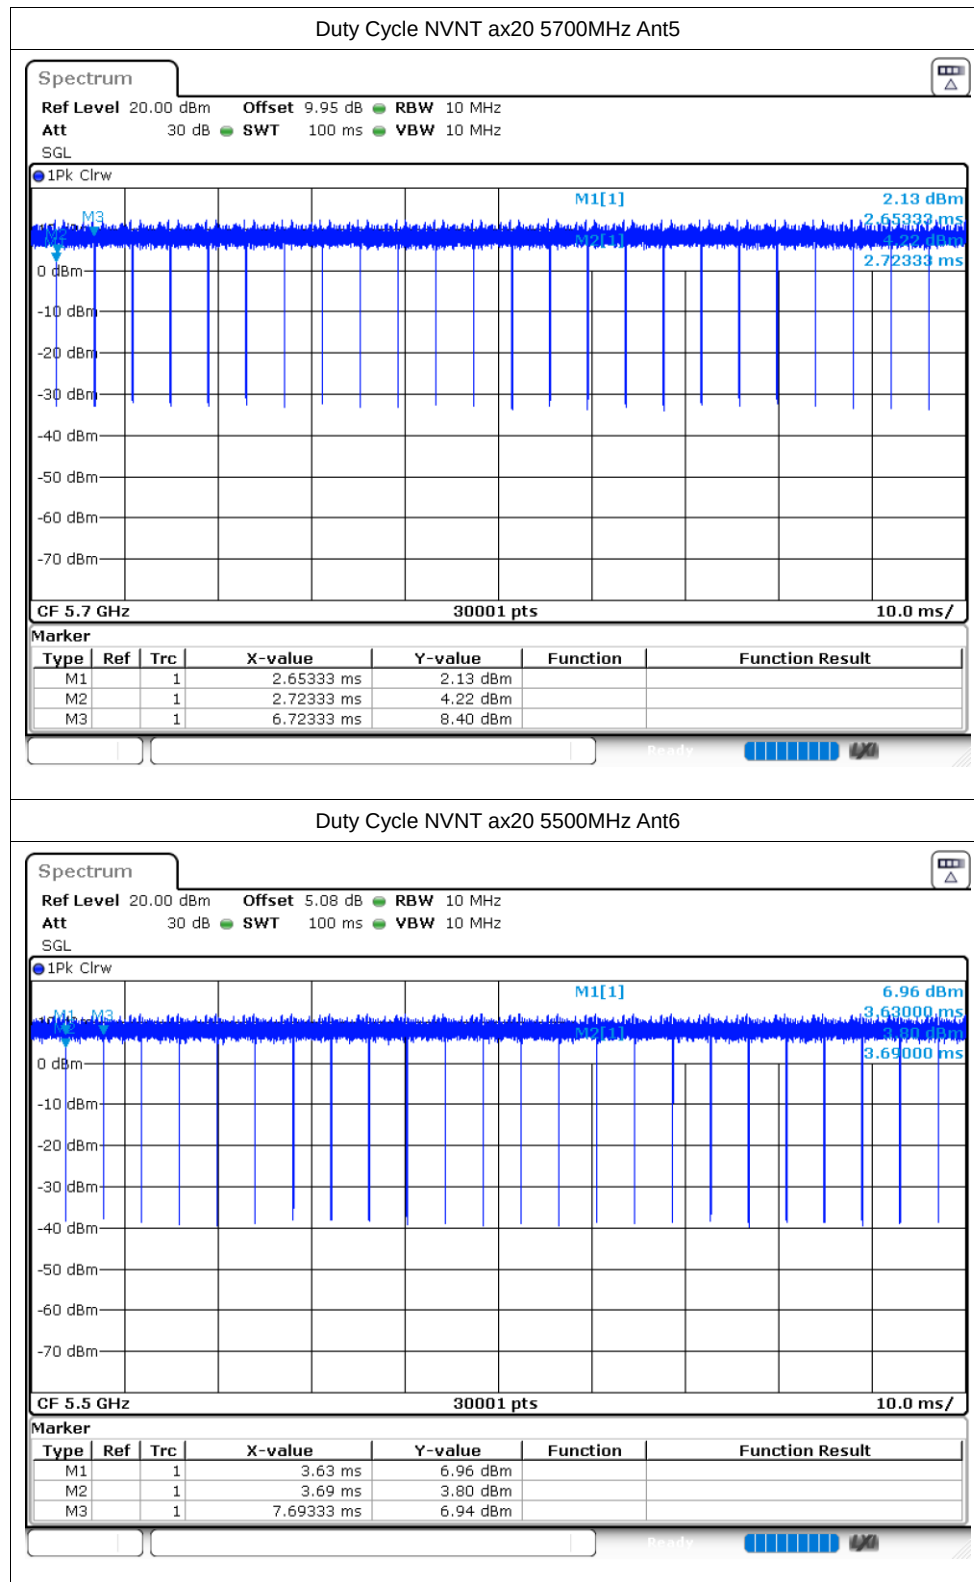


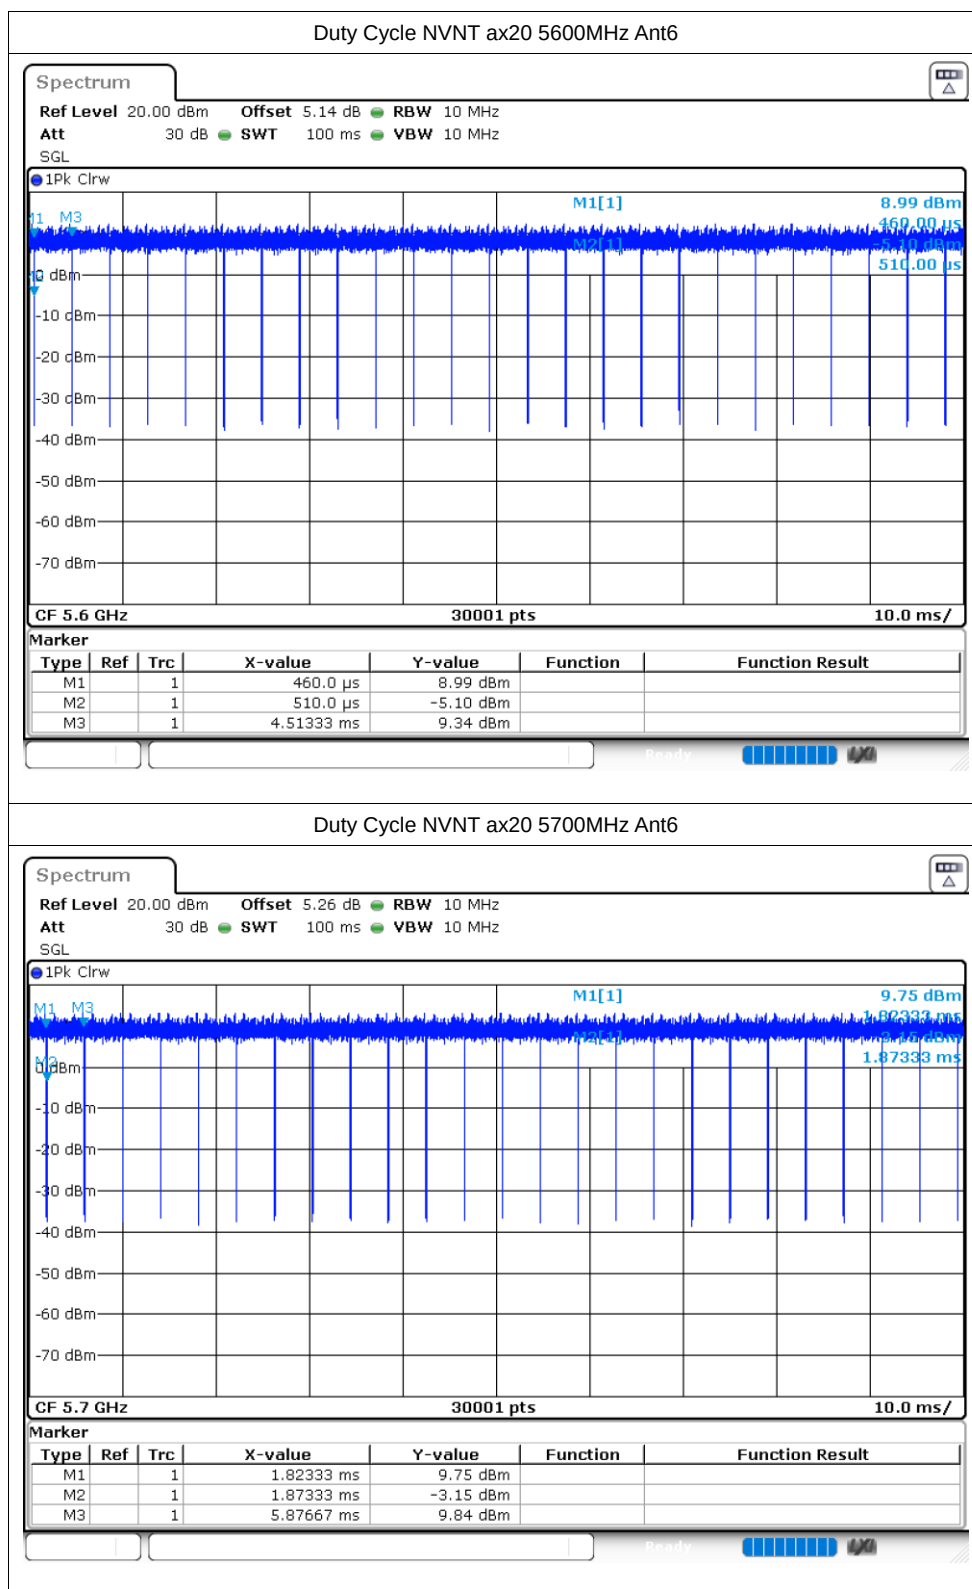


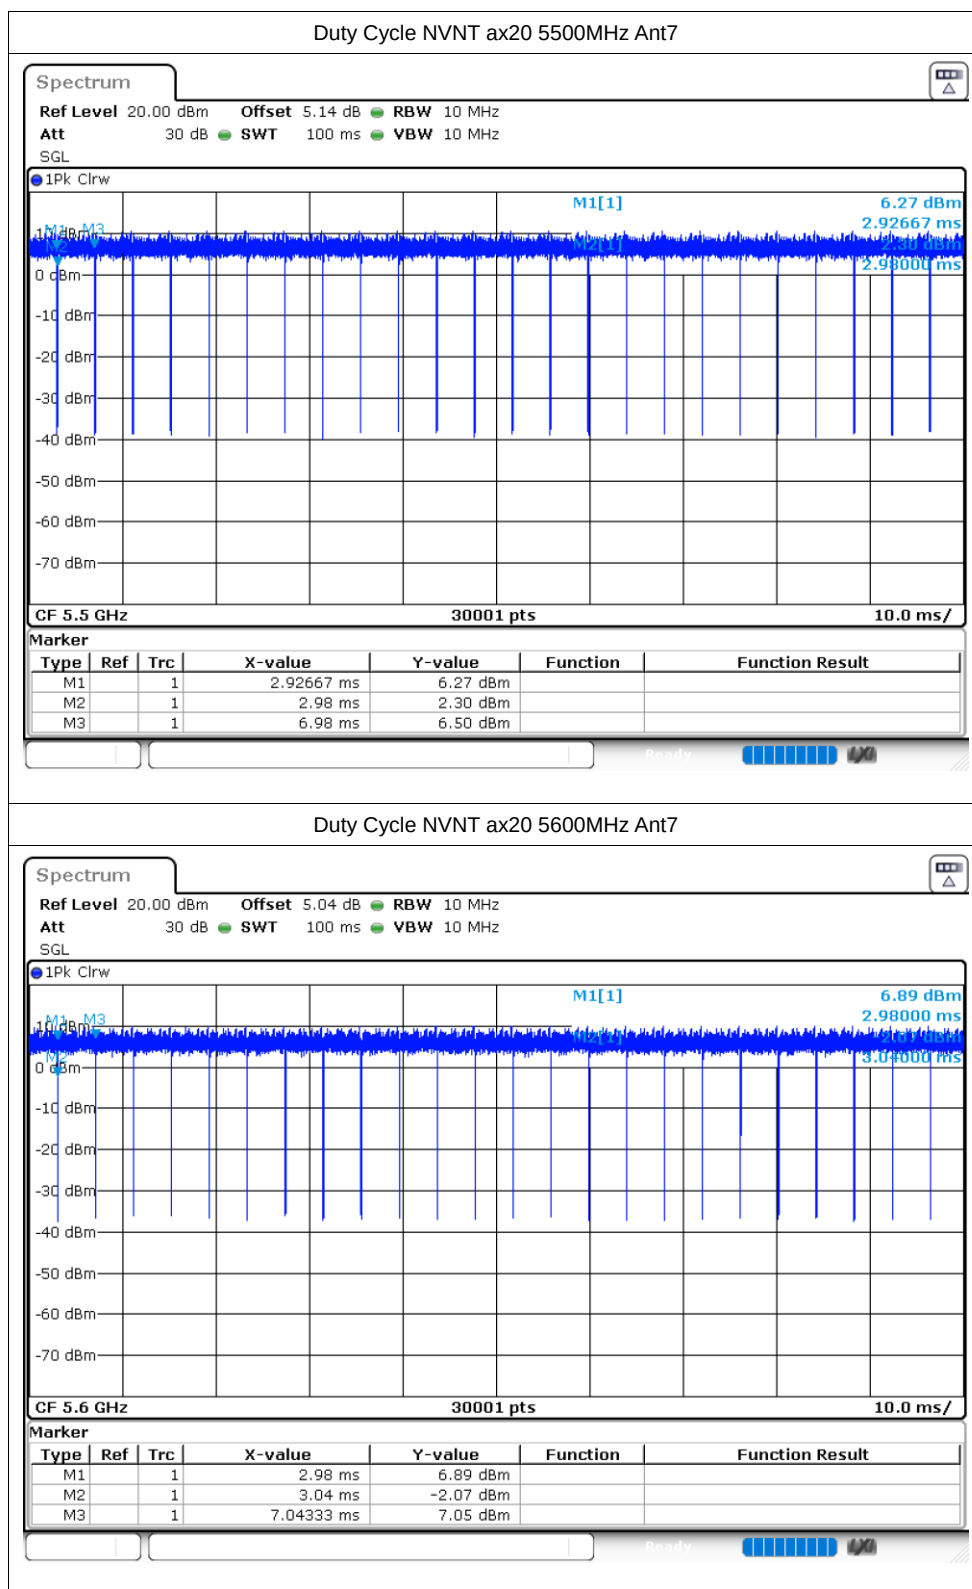


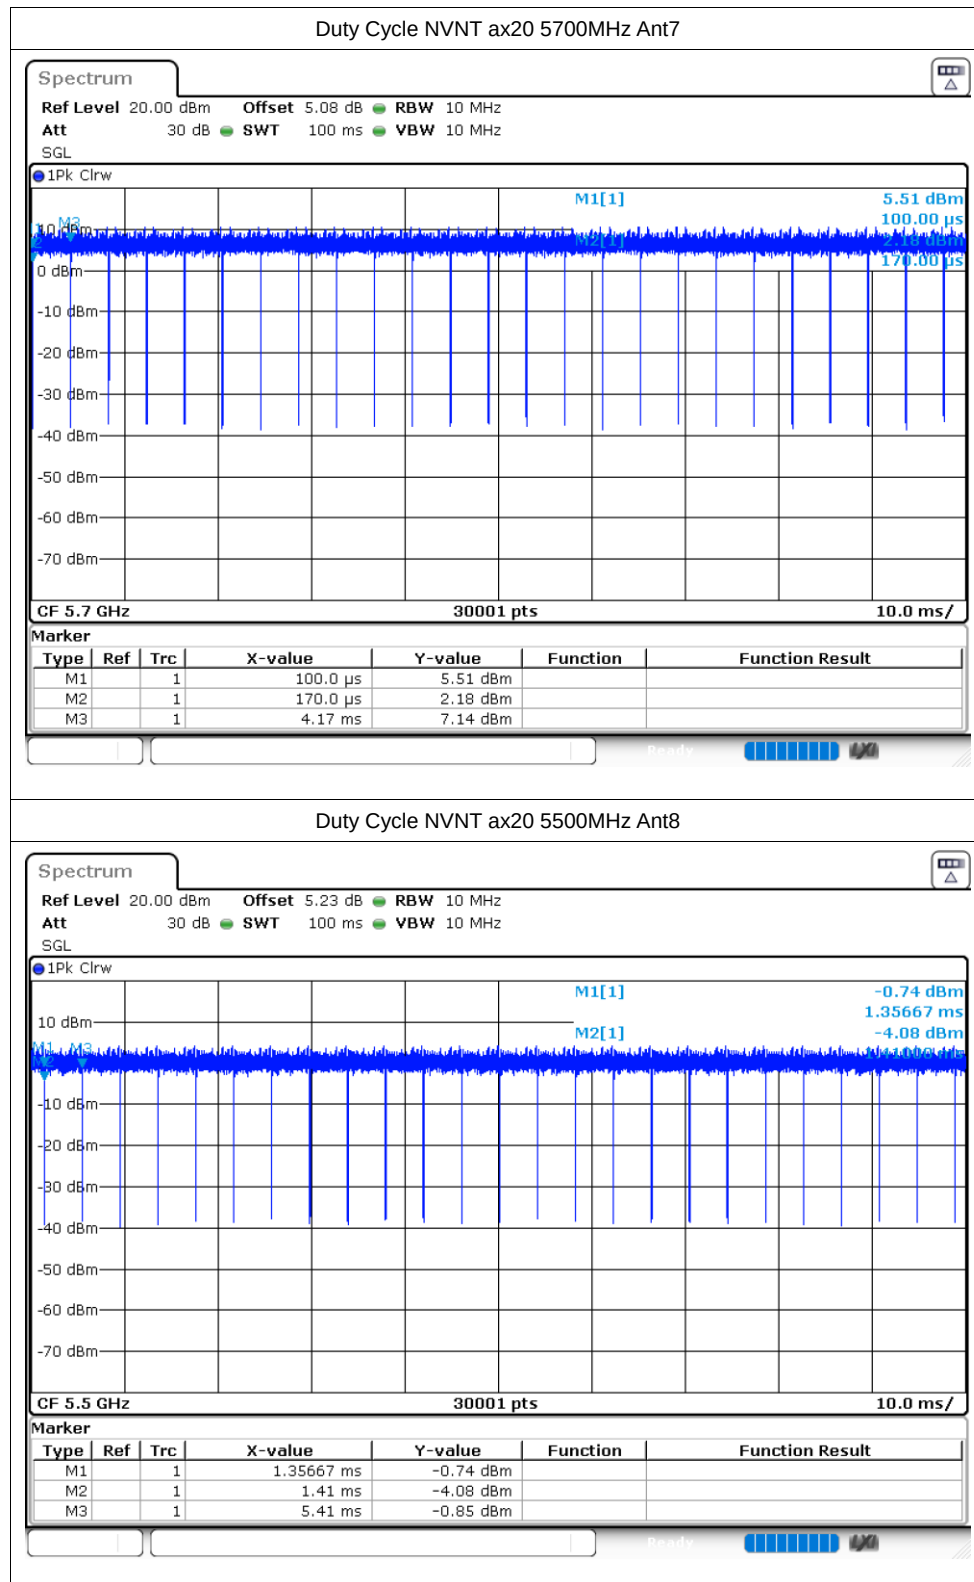


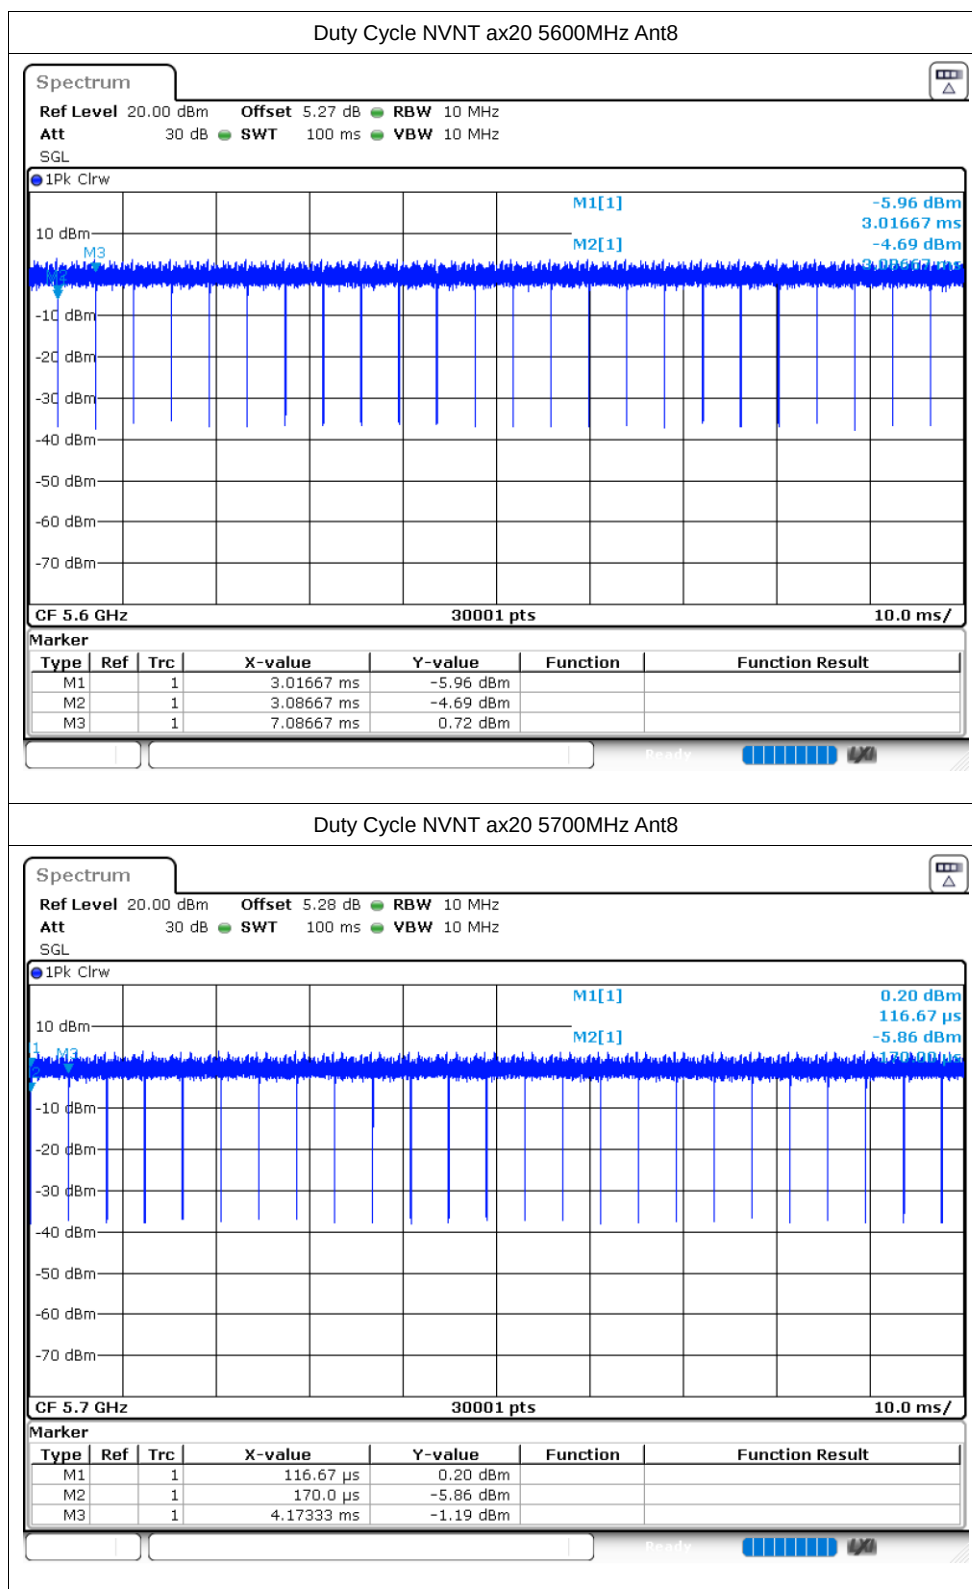

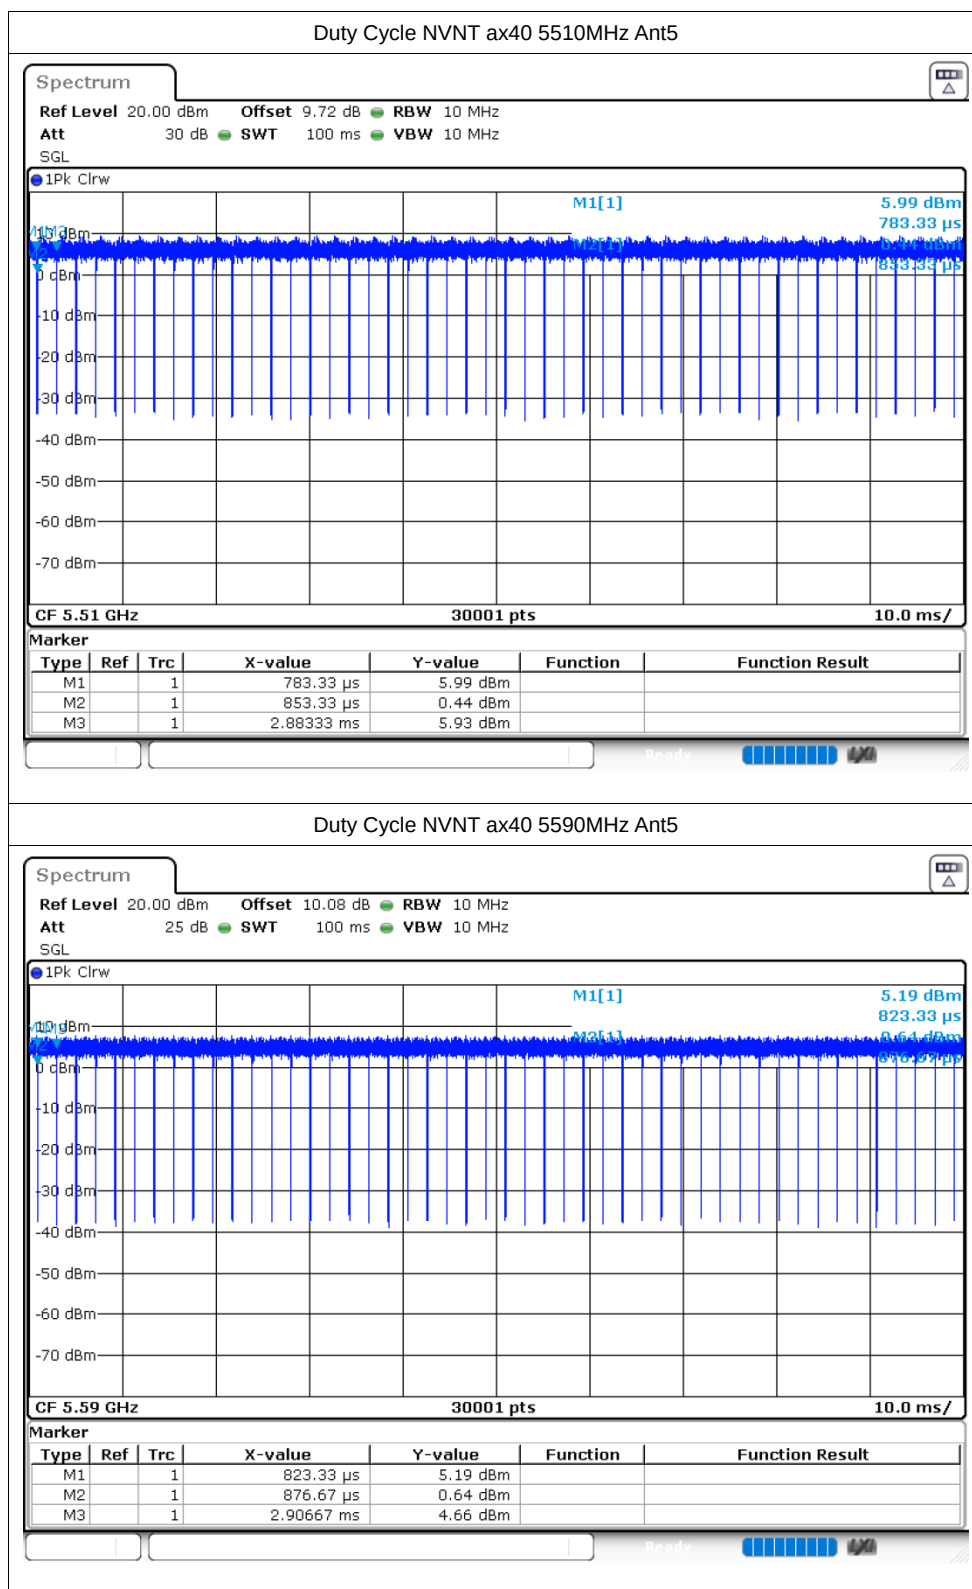


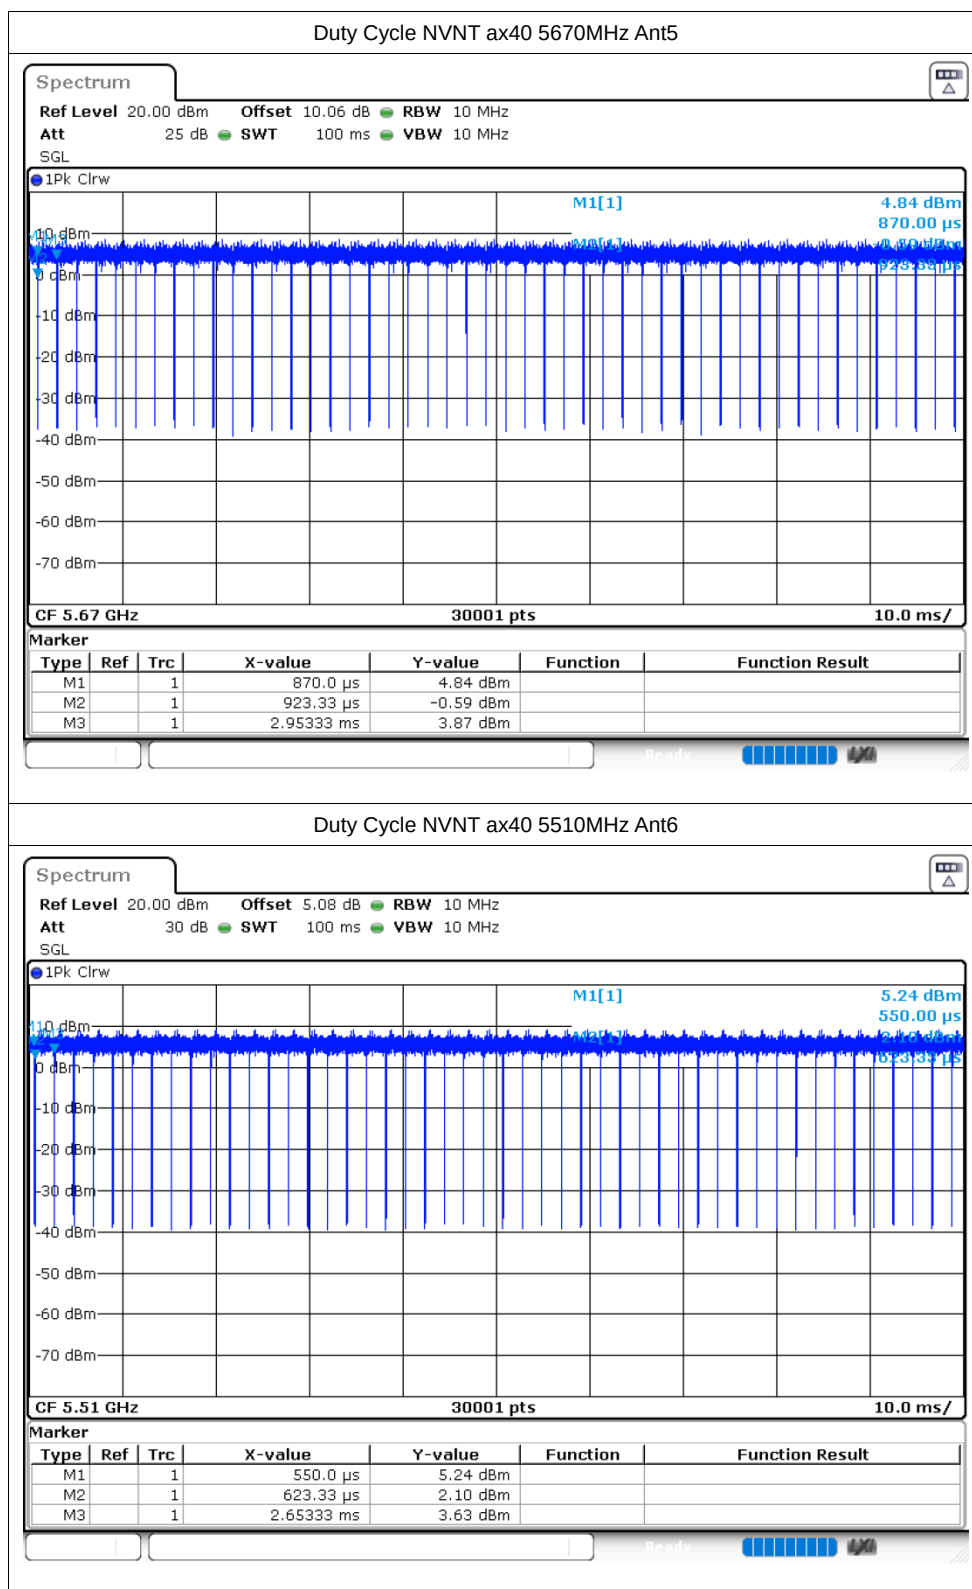

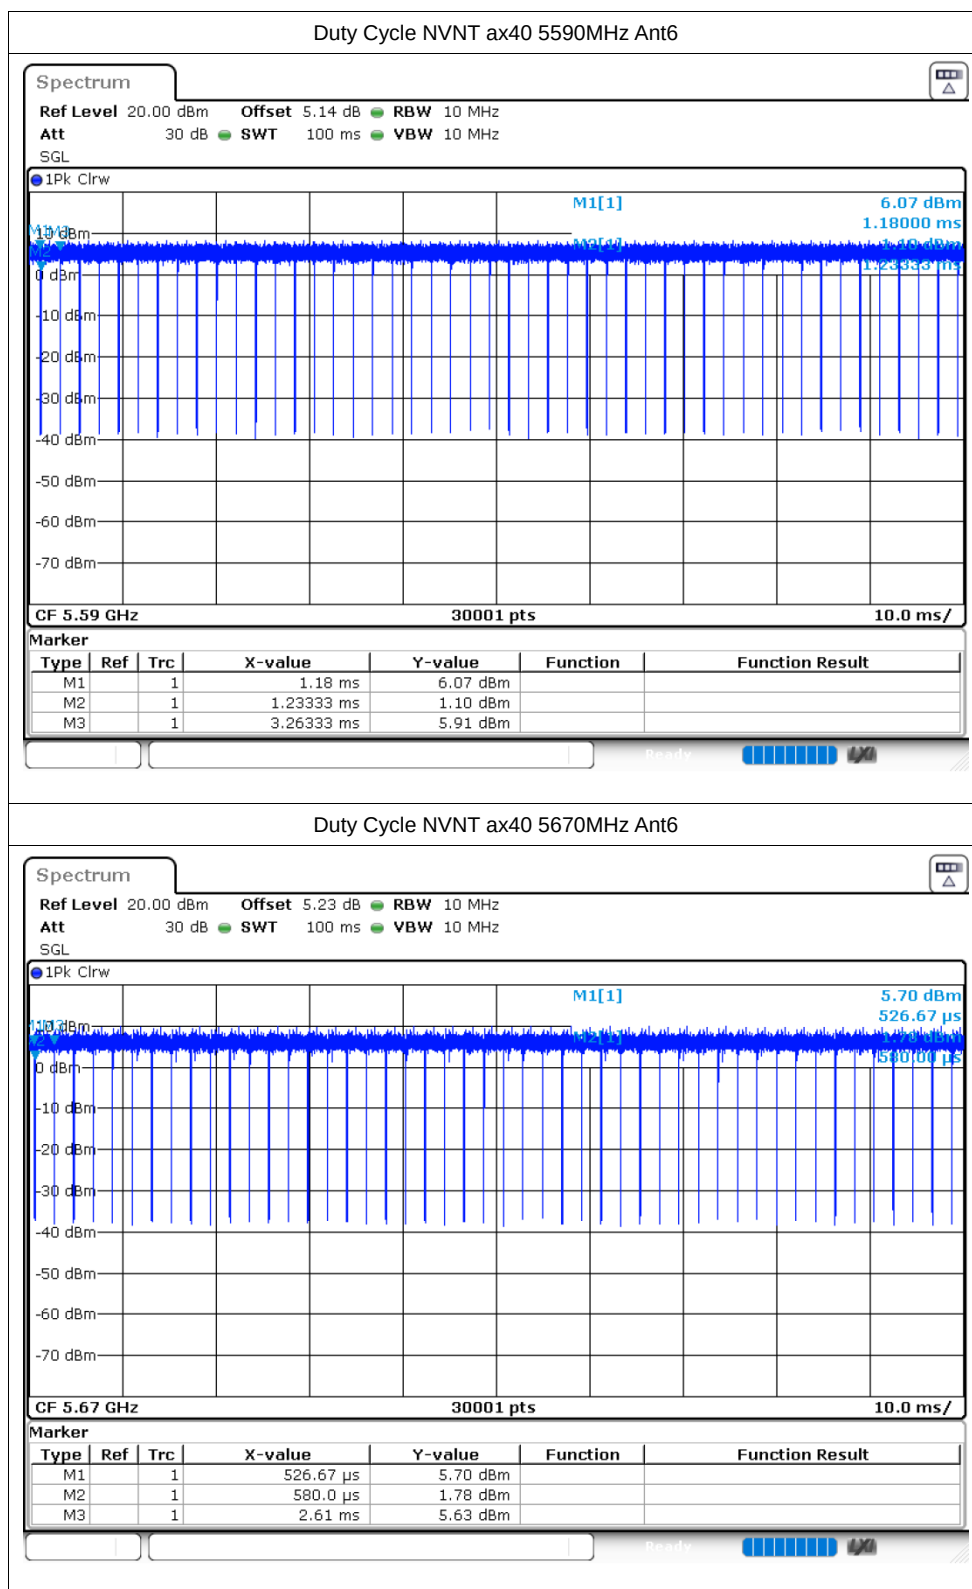


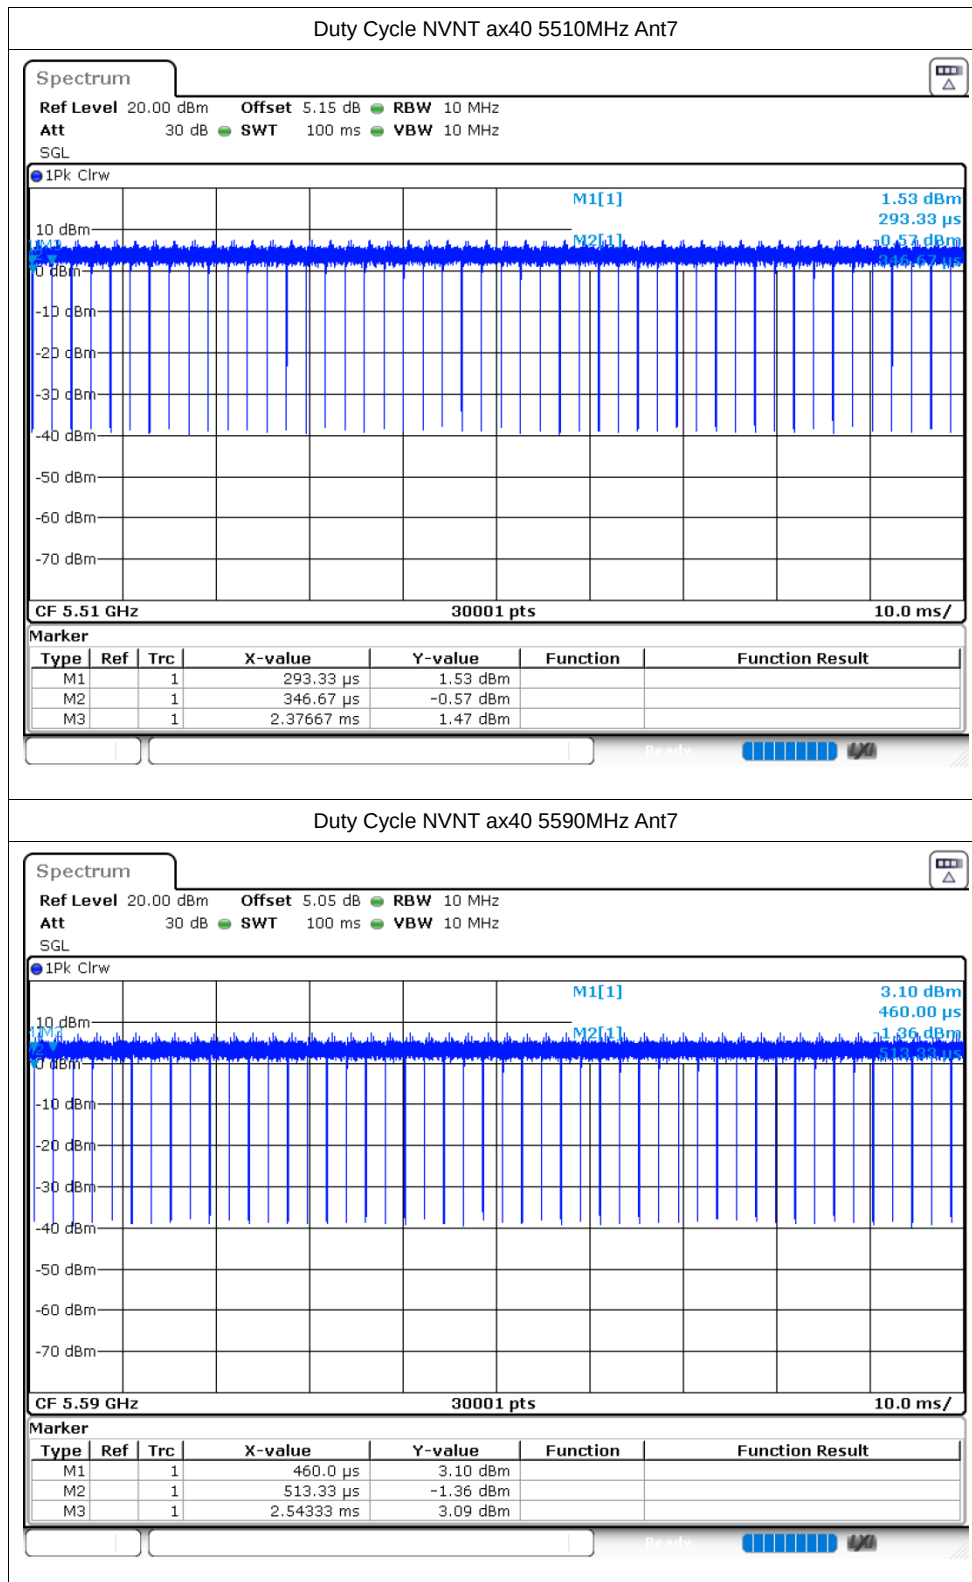



Duty Cycle NVNT ax40 5670MHz Ant7

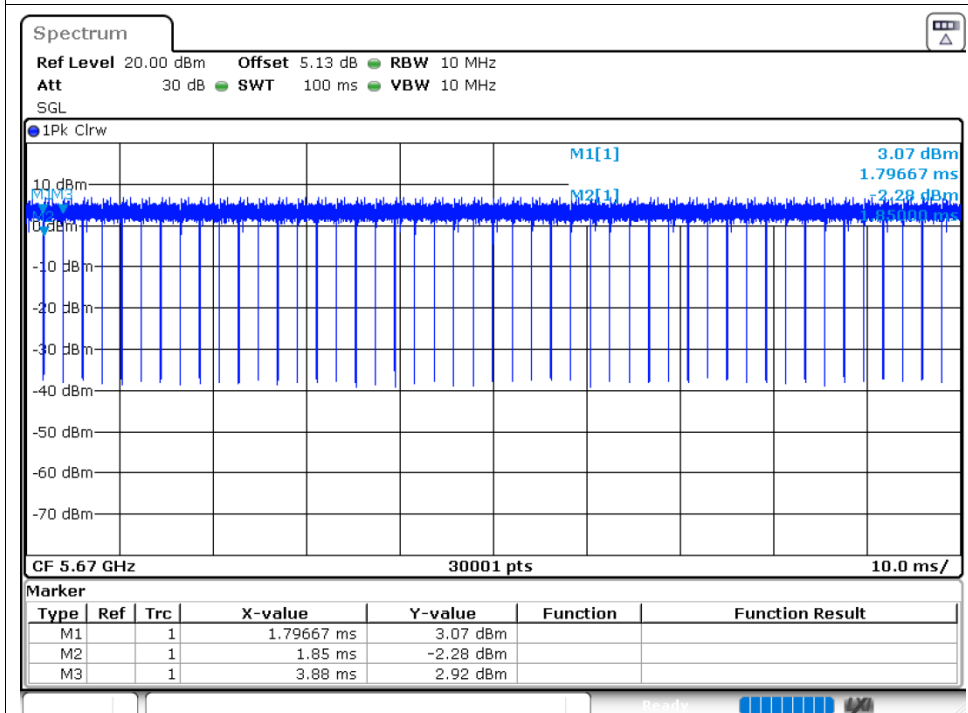



Duty Cycle NVNT ax40 5510MHz Ant8

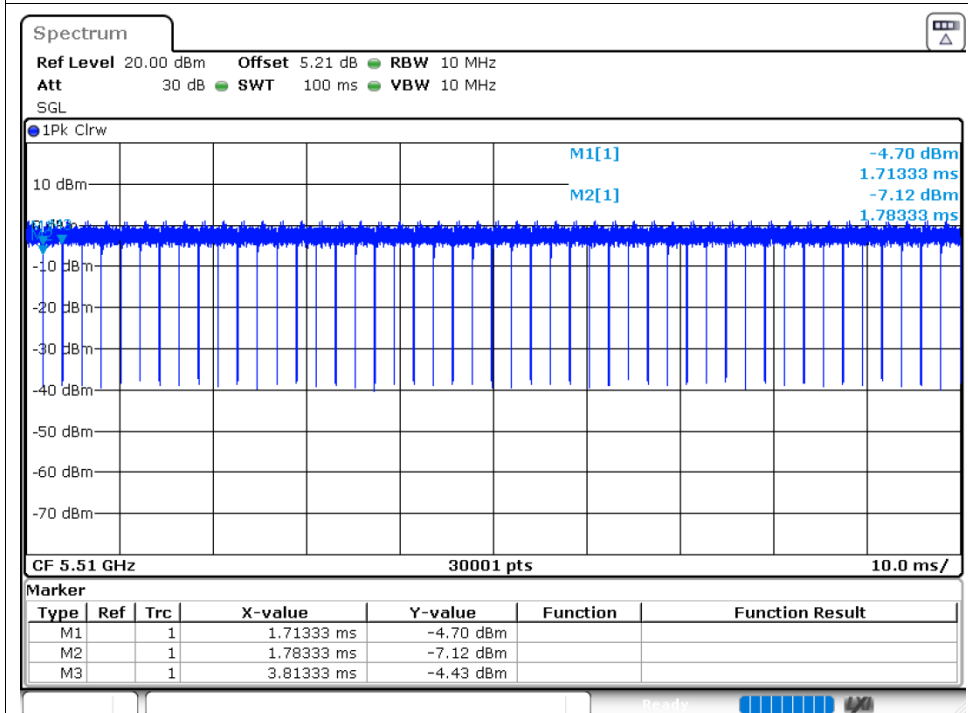


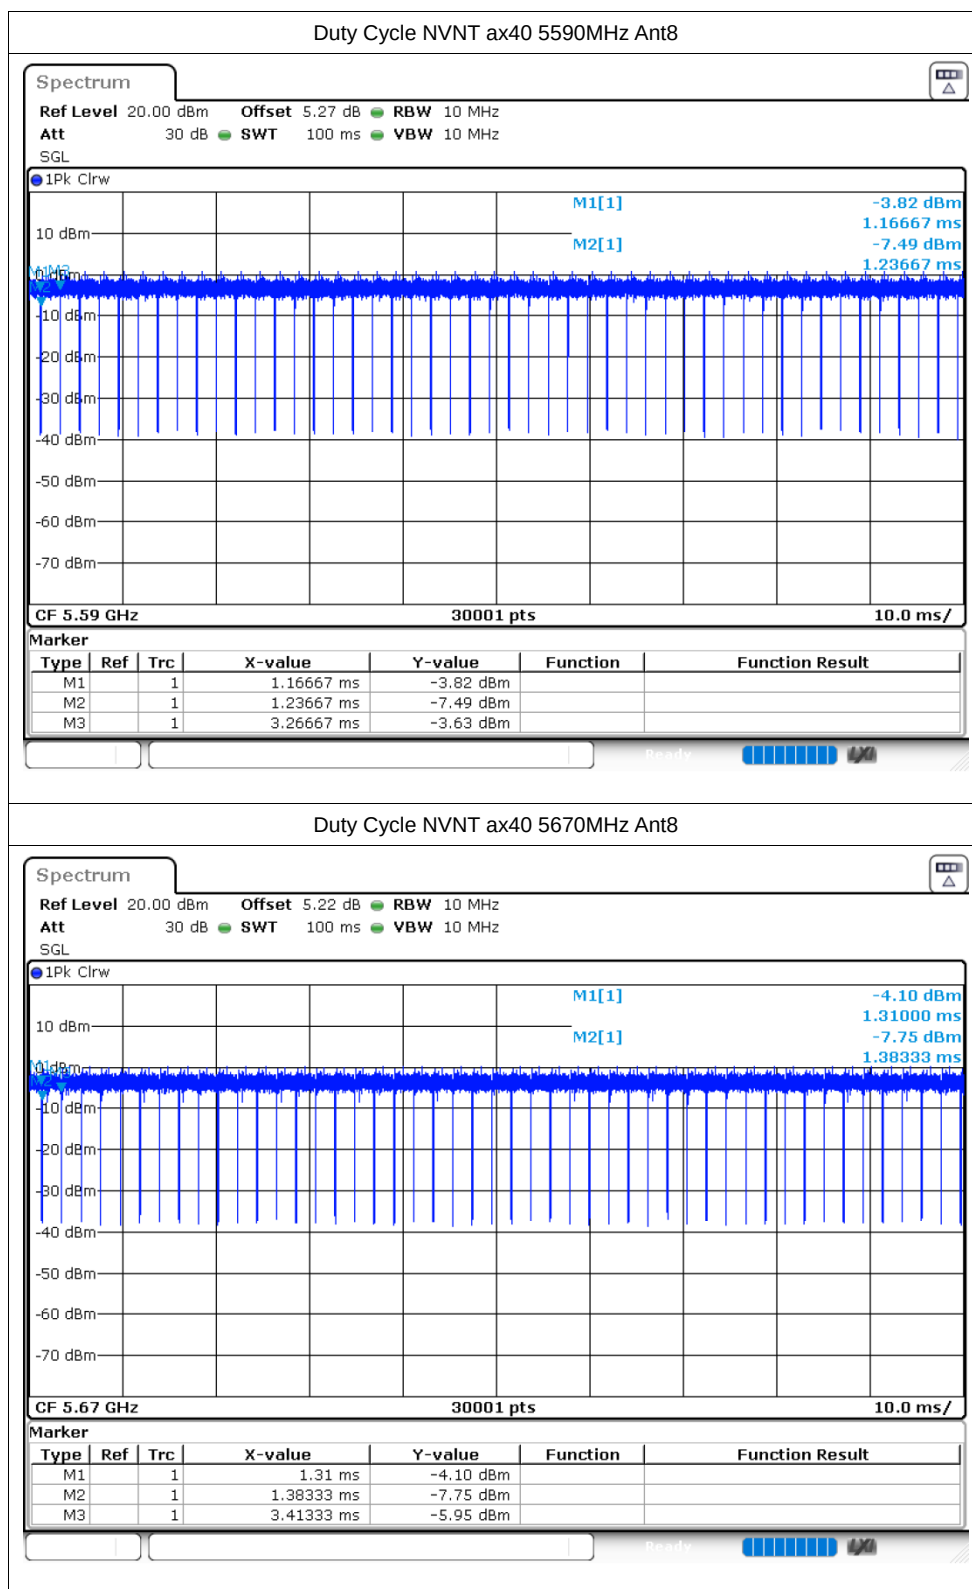

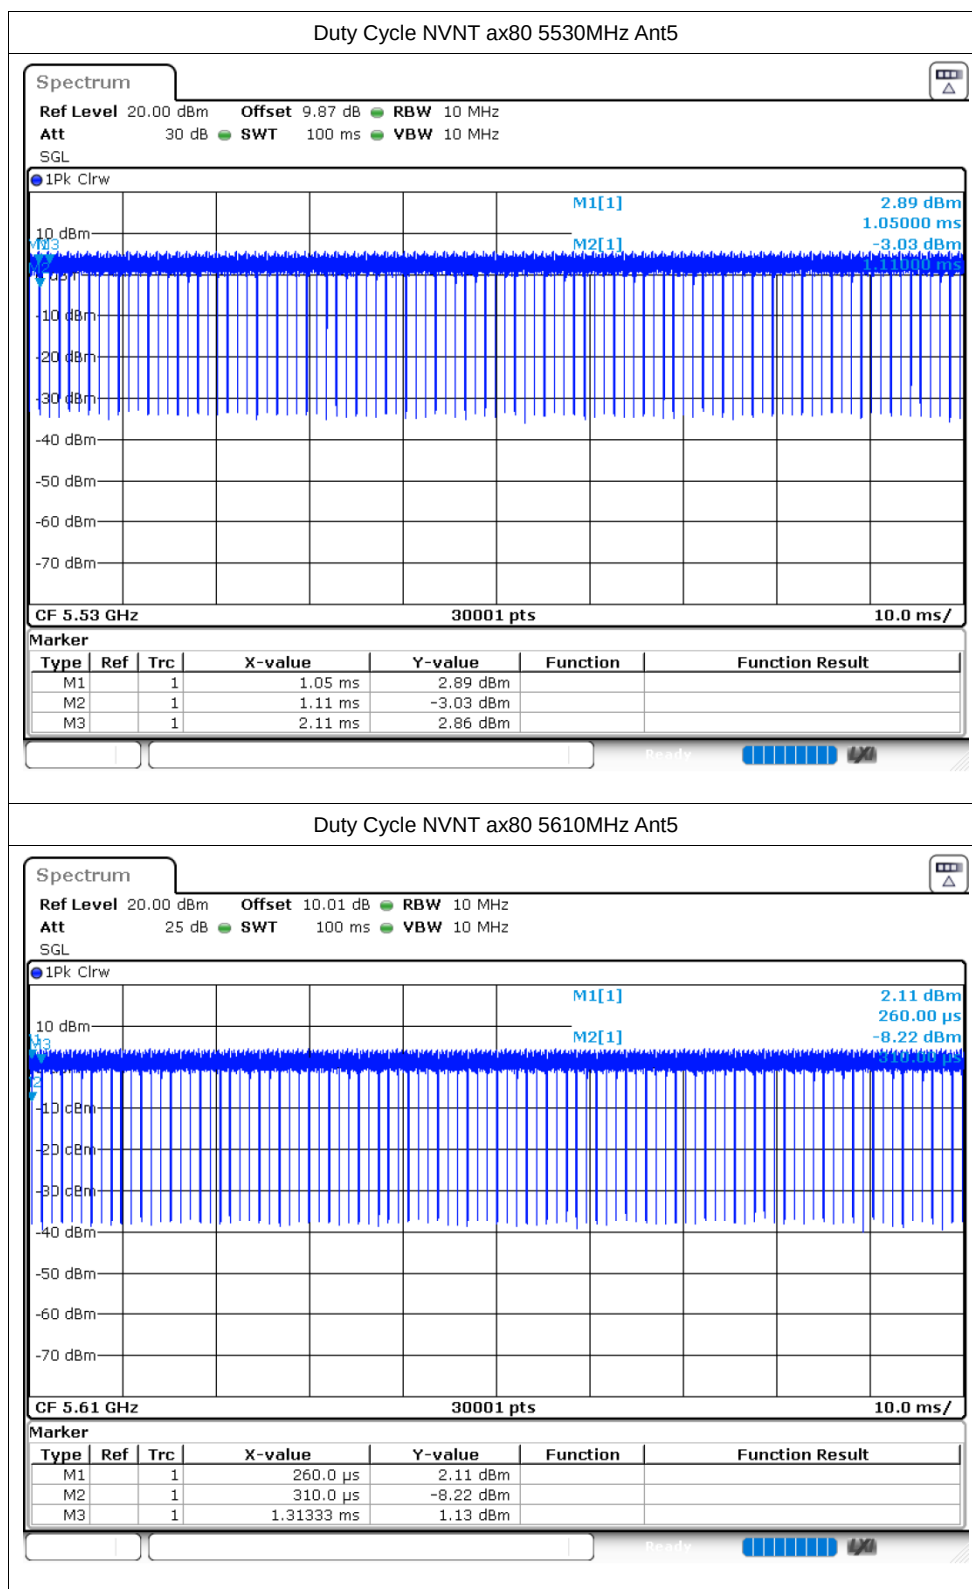

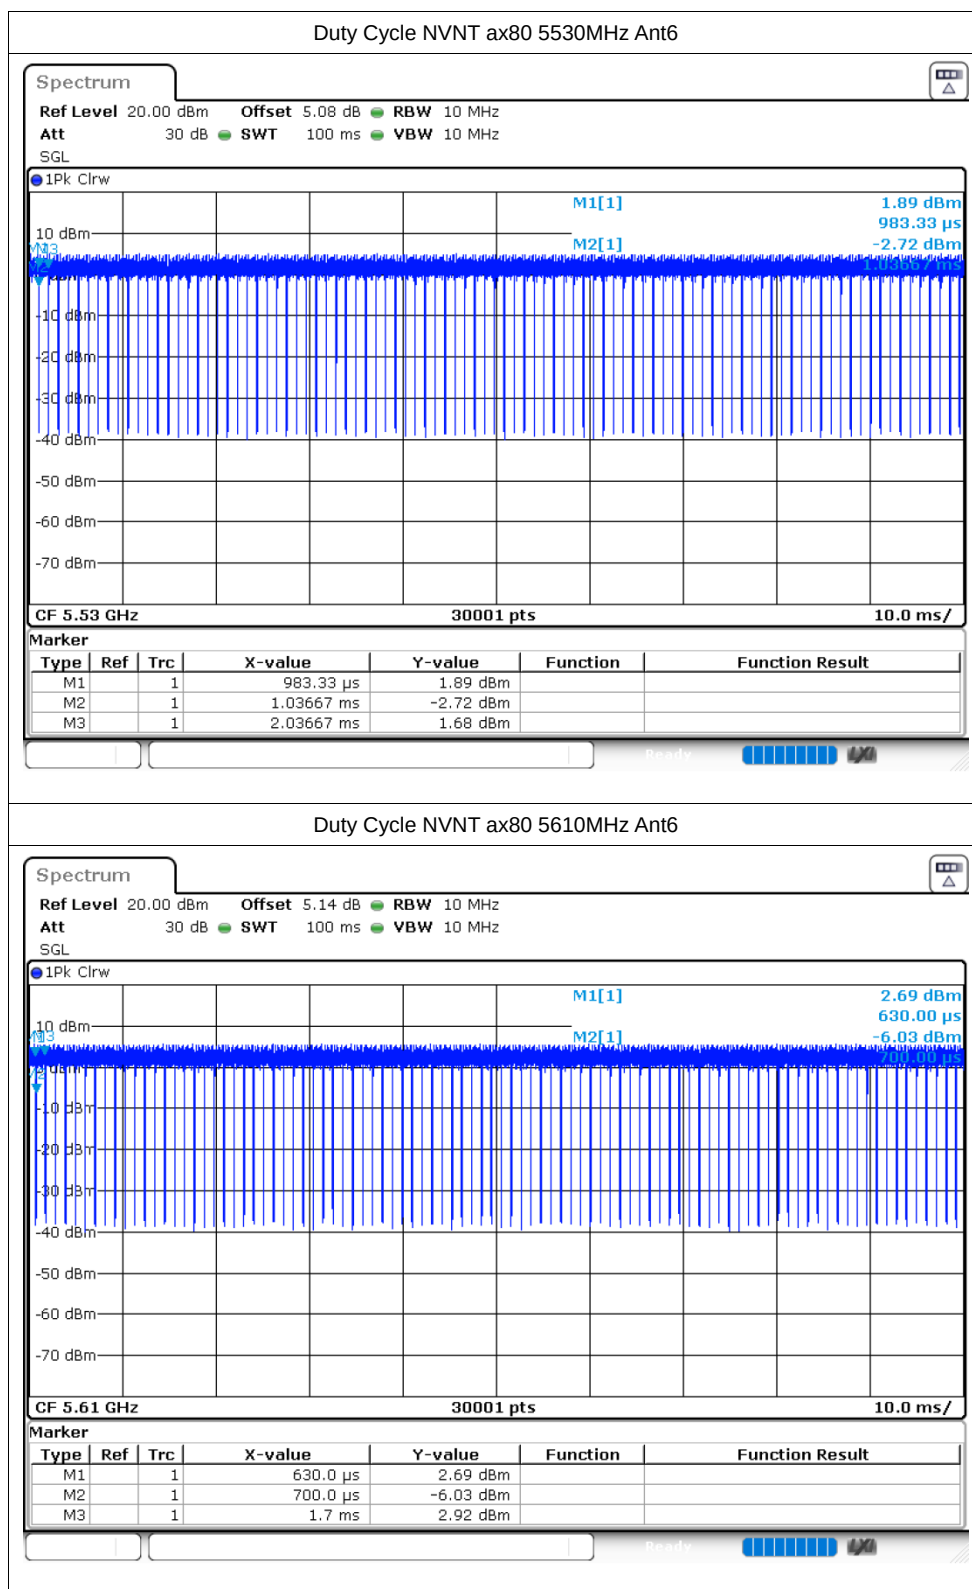

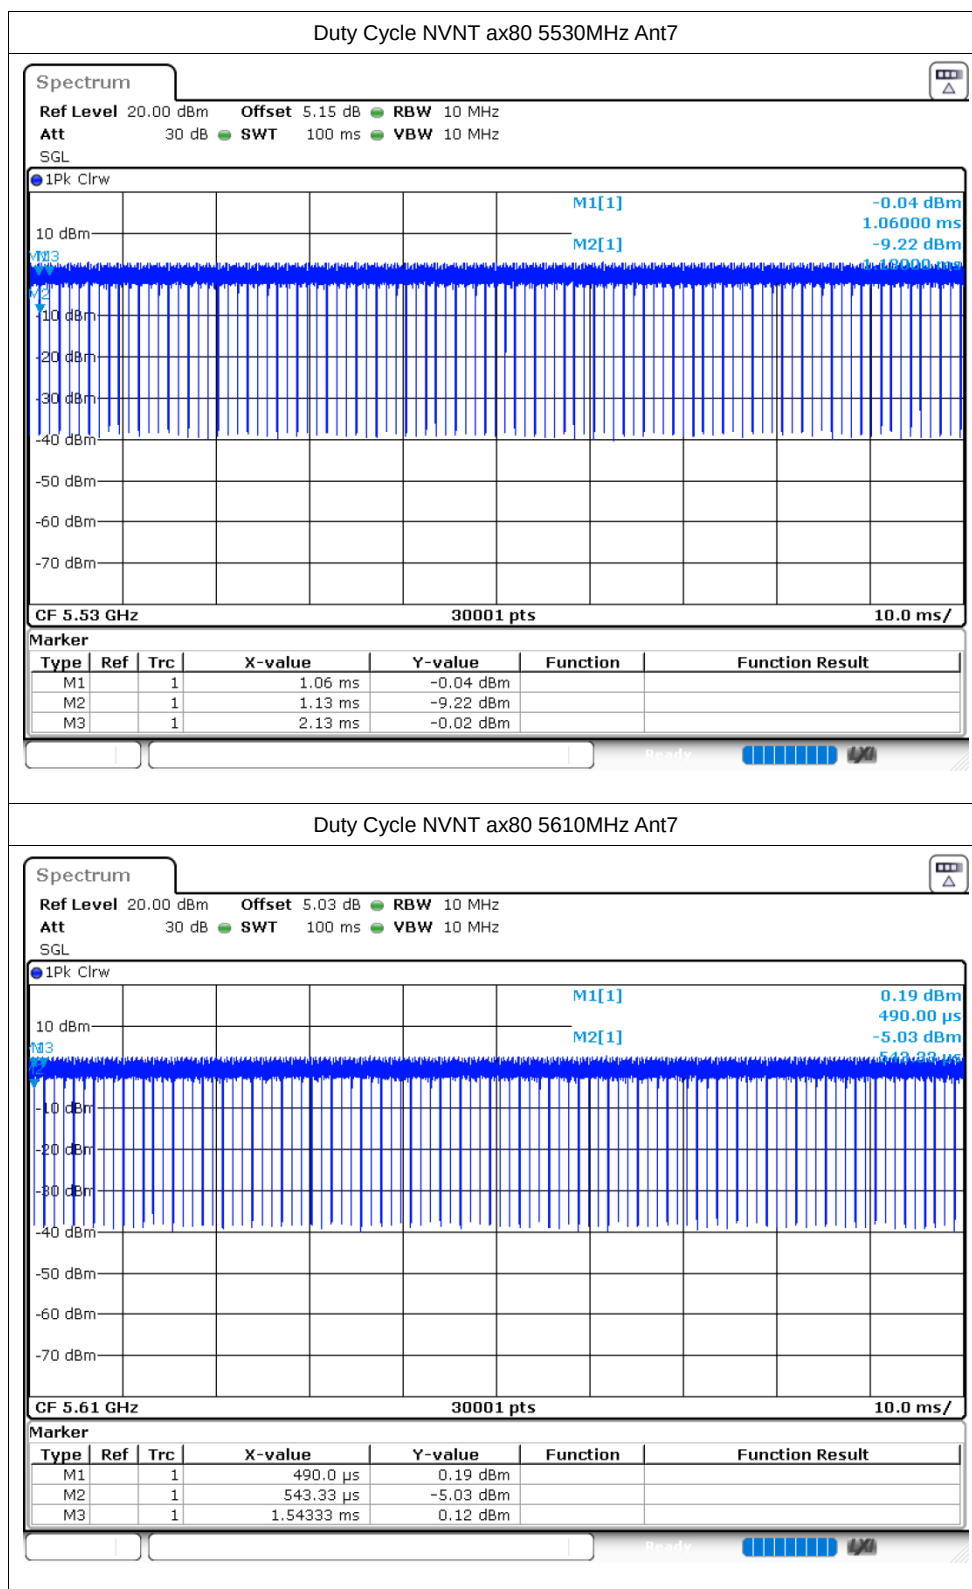

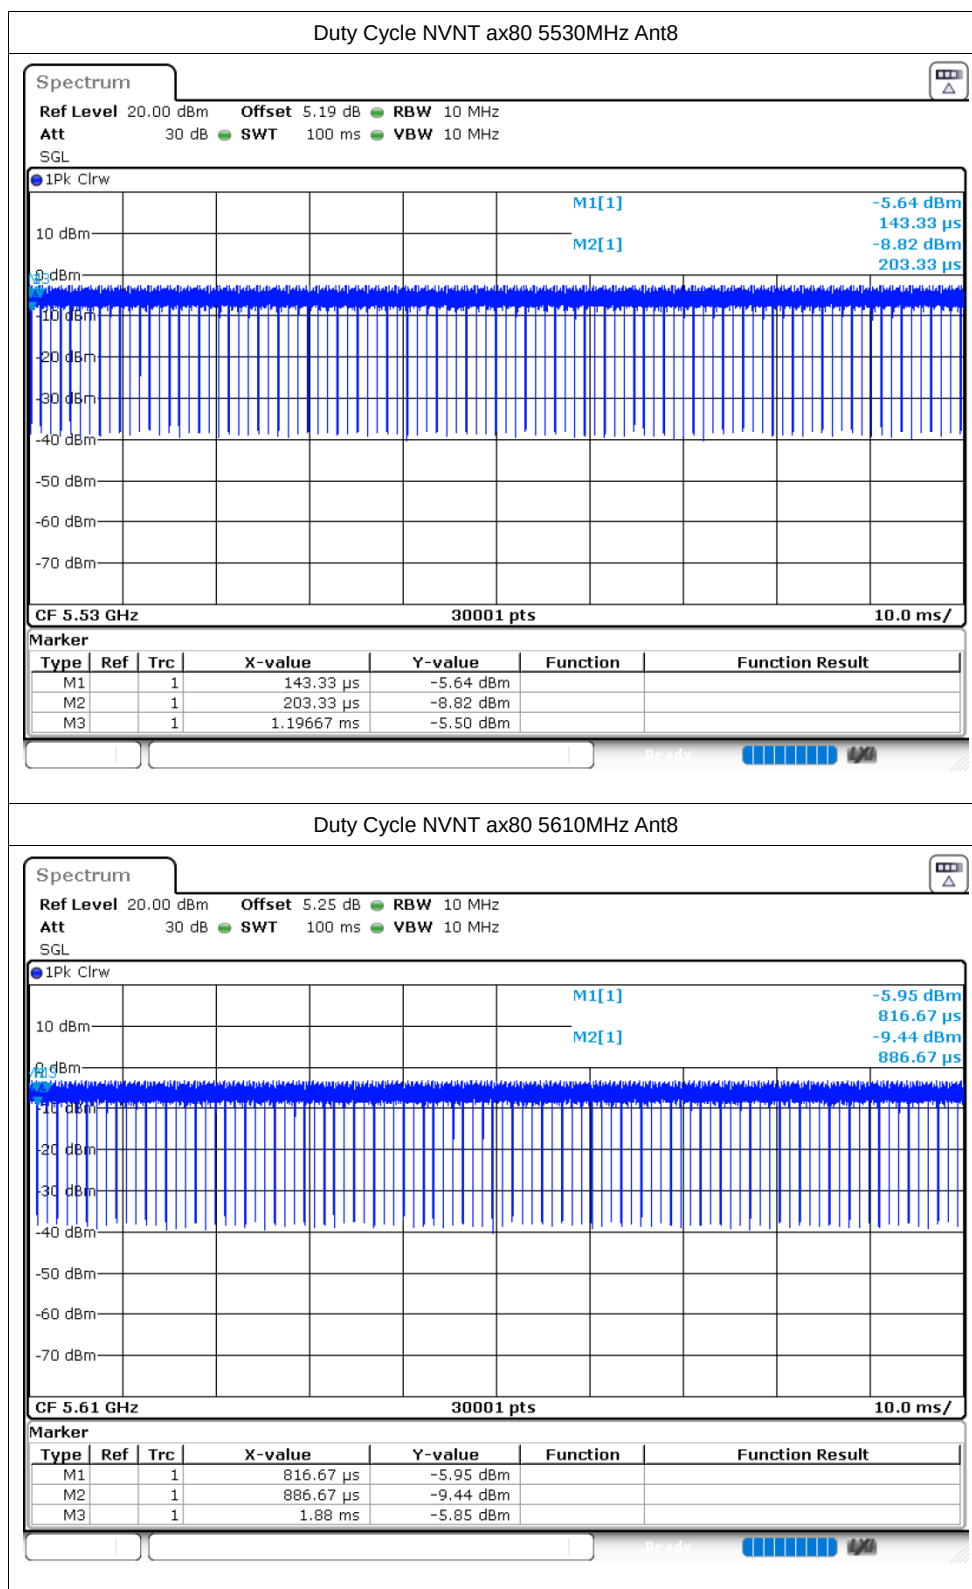

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	MIMO Power (dBm)	Limit (dBm)	Verdict
NVNT	ac20	5500	Ant1	-2.56	0.05	-2.51	9.46	12	Pass
NVNT	ac20	5500	Ant2	-0.79	0.05	-0.74			
NVNT	ac20	5500	Ant3	-2.44	0.05	-2.39			
NVNT	ac20	5500	Ant4	-8.54	0.05	-8.49			
NVNT	ac20	5500	Ant5	3.64	0.05	3.69			
NVNT	ac20	5500	Ant6	3.52	0.05	3.57			
NVNT	ac20	5500	Ant7	2.11	0.05	2.16			
NVNT	ac20	5500	Ant8	-3.41	0.05	-3.36			
NVNT	ac20	5600	Ant1	-2.68	0.05	-2.63	9.39	12	Pass
NVNT	ac20	5600	Ant2	-0.76	0.05	-0.71			
NVNT	ac20	5600	Ant3	-2.96	0.05	-2.91			
NVNT	ac20	5600	Ant4	-9.07	0.05	-9.02			
NVNT	ac20	5600	Ant5	2.85	0.05	2.9			
NVNT	ac20	5600	Ant6	4.24	0.05	4.29			
NVNT	ac20	5600	Ant7	1.96	0.05	2.01			
NVNT	ac20	5600	Ant8	-3.95	0.05	-3.9			
NVNT	ac20	5700	Ant1	-2.67	0.04	-2.63	9.72	12	Pass
NVNT	ac20	5700	Ant2	-0.57	0.05	-0.52			
NVNT	ac20	5700	Ant3	-2.64	0.05	-2.59			
NVNT	ac20	5700	Ant4	-11.01	0.05	-10.96			
NVNT	ac20	5700	Ant5	3.18	0.05	3.23			
NVNT	ac20	5700	Ant6	4.91	0.05	4.96			
NVNT	ac20	5700	Ant7	2.49	0.04	2.53			
NVNT	ac20	5700	Ant8	-5.62	0.05	-5.57			
NVNT	ac40	5510	Ant1	-2.31	0.1	-2.21	10.07	12	Pass
NVNT	ac40	5510	Ant2	-0.52	0.1	-0.42			
NVNT	ac40	5510	Ant3	-2.3	0.1	-2.2			
NVNT	ac40	5510	Ant4	-7.9	0.12	-7.78			
NVNT	ac40	5510	Ant5	3.98	0.1	4.08			
NVNT	ac40	5510	Ant6	4.48	0.1	4.58			
NVNT	ac40	5510	Ant7	2.72	0.1	2.82			
NVNT	ac40	5510	Ant8	-2.71	0.1	-2.61			
NVNT	ac40	5590	Ant1	-2.55	0.1	-2.45	9.92	12	Pass
NVNT	ac40	5590	Ant2	-0.59	0.1	-0.49			
NVNT	ac40	5590	Ant3	-2.83	0.1	-2.73			
NVNT	ac40	5590	Ant4	-8.71	0.18	-8.53			
NVNT	ac40	5590	Ant5	3.65	0.1	3.75			
NVNT	ac40	5590	Ant6	4.88	0.1	4.98			
NVNT	ac40	5590	Ant7	2.14	0.09	2.23			

NVNT	ac40	5590	Ant8	-3.17	0.1	-3.07	10.02	12	Pass
NVNT	ac40	5670	Ant1	-2.42	0.1	-2.32			
NVNT	ac40	5670	Ant2	-0.38	0.1	-0.28			
NVNT	ac40	5670	Ant3	-3.02	0.1	-2.92			
NVNT	ac40	5670	Ant4	-9.33	0.3	-9.03			
NVNT	ac40	5670	Ant5	3.67	0.1	3.77			
NVNT	ac40	5670	Ant6	5.22	0.09	5.31			
NVNT	ac40	5670	Ant7	2.08	0.09	2.17			
NVNT	ac40	5670	Ant8	-3.61	0.1	-3.51	9.63	12	Pass
NVNT	ac80	5530	Ant1	-2.29	0.21	-2.08			
NVNT	ac80	5530	Ant2	-0.7	0.21	-0.49			
NVNT	ac80	5530	Ant3	-2.94	0.21	-2.73			
NVNT	ac80	5530	Ant4	-8.99	0.21	-8.78			
NVNT	ac80	5530	Ant5	3.42	0.21	3.63			
NVNT	ac80	5530	Ant6	3.96	0.21	4.17			
NVNT	ac80	5530	Ant7	2	0.21	2.21			
NVNT	ac80	5530	Ant8	-3.86	0.24	-3.62	9.49	12	Pass
NVNT	ac80	5610	Ant1	-2.76	0.2	-2.56			
NVNT	ac80	5610	Ant2	-0.97	0.2	-0.77			
NVNT	ac80	5610	Ant3	-3.17	0.2	-2.97			
NVNT	ac80	5610	Ant4	-9.54	0.21	-9.33			
NVNT	ac80	5610	Ant5	3.07	0.21	3.28			
NVNT	ac80	5610	Ant6	4.34	0.2	4.54			
NVNT	ac80	5610	Ant7	1.58	0.21	1.79			
NVNT	ac80	5610	Ant8	-4.21	0.25	-3.96	9.72	12	Pass
NVNT	ac160	5570	Ant1	-2.69	0.39	-2.3			
NVNT	ac160	5570	Ant2	-1.32	0.4	-0.92			
NVNT	ac160	5570	Ant3	-3.31	0.4	-2.91			
NVNT	ac160	5570	Ant4	-9.53	1.07	-8.46			
NVNT	ac160	5570	Ant5	2.74	0.4	3.14			
NVNT	ac160	5570	Ant6	3.29	0.39	3.68			
NVNT	ac160	5570	Ant7	0.94	0.39	1.33			
NVNT	ac160	5570	Ant8	1.56	0.39	1.95	9.82	12	Pass
NVNT	ax160	5570	Ant1	-2.76	0.43	-2.33			
NVNT	ax160	5570	Ant2	-1.22	0.44	-0.78			
NVNT	ax160	5570	Ant3	-3.54	0.43	-3.11			
NVNT	ax160	5570	Ant4	-9.58	0.72	-8.86			
NVNT	ax160	5570	Ant5	2.9	0.44	3.34			
NVNT	ax160	5570	Ant6	3.45	0.43	3.88			
NVNT	ax160	5570	Ant7	1.14	0.43	1.57			
NVNT	ax160	5570	Ant8	1.35	0.44	1.79	9.75	12	Pass
NVNT	ax20	5500	Ant1	-2.39	0.07	-2.32			
NVNT	ax20	5500	Ant2	-0.77	0.06	-0.71			
NVNT	ax20	5500	Ant3	-2.19	0.06	-2.13			