




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-4.465	30	Pass
NVNT	BLE	2442	Ant1	-2.863	30	Pass
NVNT	BLE	2480	Ant1	-3.309	30	Pass



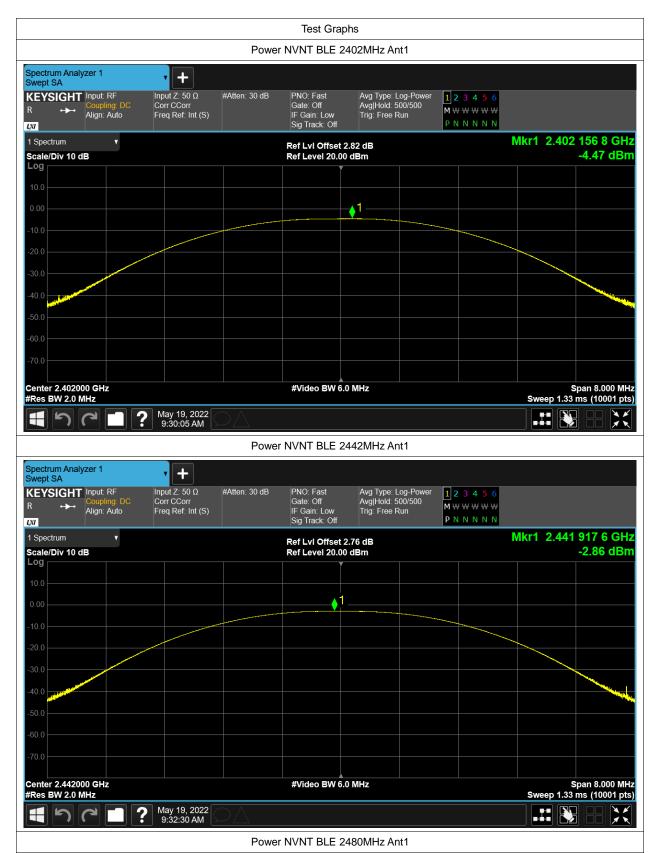










-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.663	0.5	Pass
NVNT	BLE	2442	Ant1	0.66	0.5	Pass
NVNT	BLE	2480	Ant1	0.657	0.5	Pass







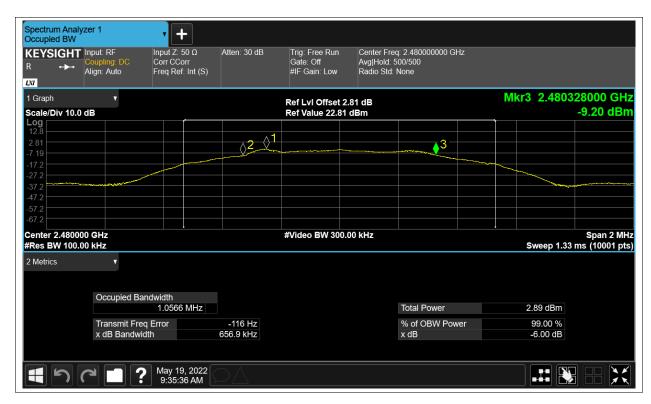





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.021314139	
NVNT	BLE	2442	Ant1	1.025124696	
NVNT	BLE	2480	Ant1	1.029591047	

Project No.: JYTSZR2205027














Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-10.916	8	Pass
NVNT	BLE	2442	Ant1	-9.235	8	Pass
NVNT	BLE	2480	Ant1	-9.717	8	Pass







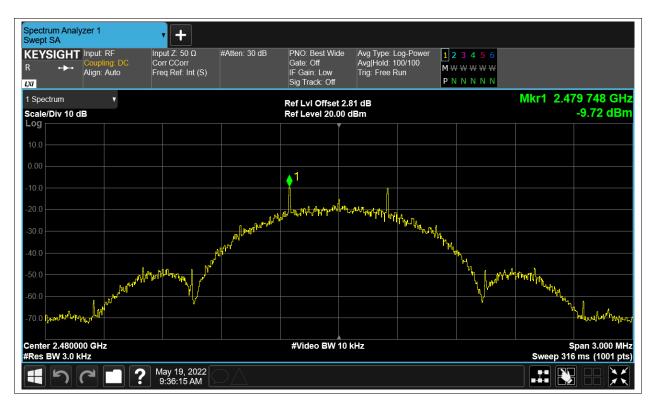







Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-50.57	-20	Pass
NVNT	BLE	2480	Ant1	-51.46	-20	Pass



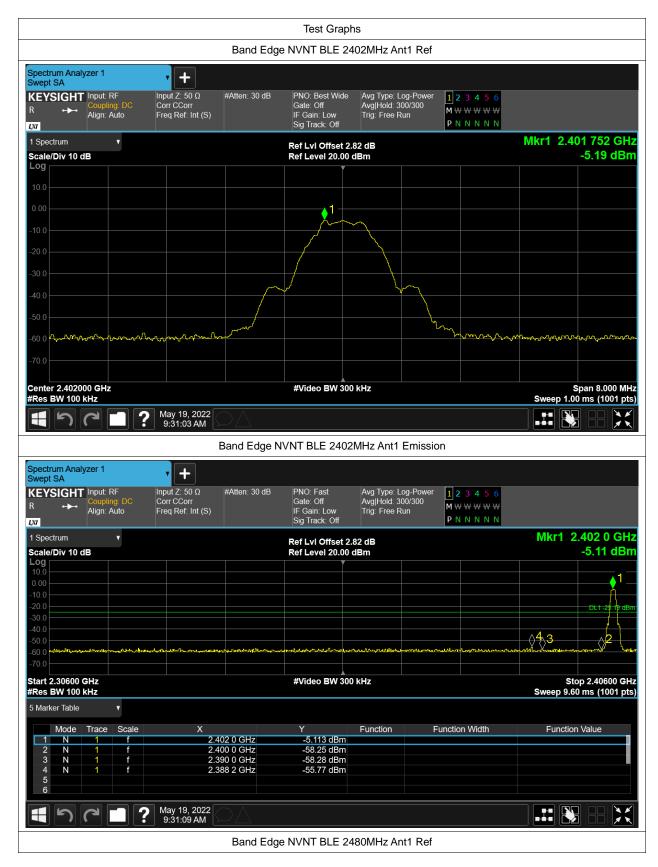



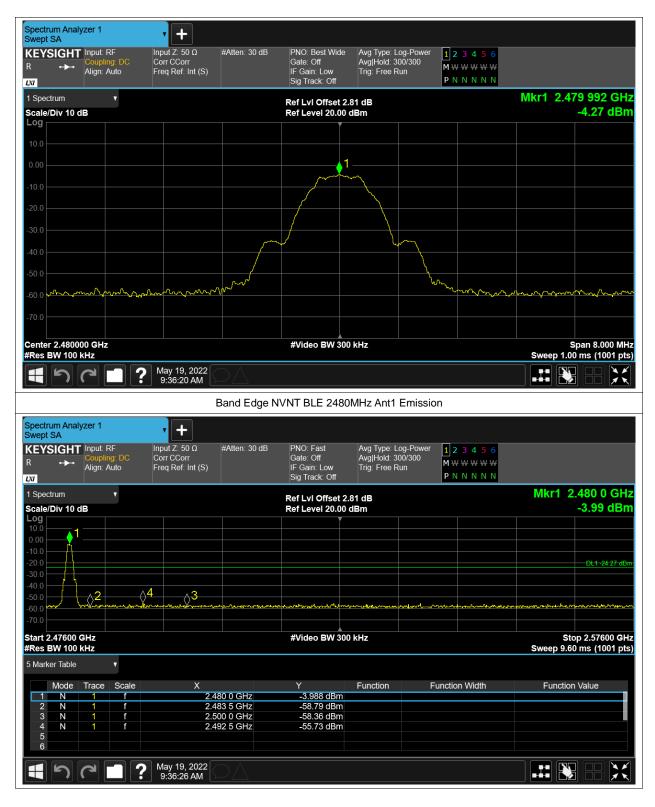





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-45.32	-20	Pass
NVNT	BLE	2442	Ant1	-47.13	-20	Pass
NVNT	BLE	2480	Ant1	-46.43	-20	Pass







