



# **TEST REPORT**

**Report Number:** 14040867-E1V2

**Applicant :** APPLE, INC.  
1 APPLE PARK WAY  
CUPERTINO, CA 95014, U.S.A

**Model :** A2649 (Parent Model, Full Test)  
A2881, A2882, A2883, A2884 (Variant Models)

**FCC ID :** BCG-E8138A (Parent Model)  
BCG-E8142A, BCG-E8143A, BCG-E8144A  
(Variant Models)

**IC :** 579C-E8138A (Parent Model)  
579C-E8142A, 579C-E8143A, 579C-E8144A  
(Variant Models)

**EUT Description :** SMARTPHONE

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C  
ISED RSS-247 ISSUE 2  
ISED RSS-GEN ISSUE 5 + A1 + A2

**Date Of Issue:**  
July 10, 2022

**Prepared by:**  
UL LLC  
47173 Benicia Street  
Fremont, CA 94538 U.S.A.  
TEL: (510) 319-4000  
FAX: (510) 661-0888



**REPORT REVISION HISTORY**

Rev.	Issue Date	Revisions	Revised By
V1	7/1/2022	Initial Issue	Francisco deAnda
V2	7/10/2022	Addressed TCB Questions on Sections 6.5, 7, 9.2, 9.6.6, 9.7.6, and 10.1.7	Tony X. Li

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>5</b>
<b>2. TEST SUMMARY .....</b>	<b>7</b>
<b>3. TEST METHODOLOGY .....</b>	<b>7</b>
<b>4. FACILITIES AND ACCREDITATION.....</b>	<b>7</b>
<b>5. DECISION RULES AND MEASUREMENT UNCERTAINTY.....</b>	<b>7</b>
5.1. METROLOGICAL TRACEABILITY .....	7
5.2. DECISION RULES .....	8
5.3. MEASUREMENT UNCERTAINTY .....	8
5.4. SAMPLE CALCULATION .....	8
<b>6. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
6.1. EUT DESCRIPTION.....	9
6.2. MAXIMUM OUTPUT POWER.....	9
6.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	10
6.4. SOFTWARE AND FIRMWARE .....	10
6.5. WORST-CASE CONFIGURATION AND MODE.....	10
6.6. DESCRIPTION OF TEST SETUP.....	12
<b>7. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>15</b>
<b>8. MEASUREMENT METHODS.....</b>	<b>16</b>
<b>9. ANTENNA PORT TEST RESULTS .....</b>	<b>17</b>
9.1. ON TIME AND DUTY CYCLE .....	17
9.2. 20 dB AND 99% BANDWIDTH.....	19
9.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION .....	20
9.2.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION .....	21
9.2.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION .....	22
9.2.4. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION .....	23
9.3. HOPPING FREQUENCY SEPARATION .....	24
9.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION .....	25
9.4. NUMBER OF HOPPING CHANNELS.....	26
9.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION .....	27
9.5. AVERAGE TIME OF OCCUPANCY.....	29
9.5.1. HIGH POWER BASIC DATA RATE GFSK MODULATION .....	30
9.6. OUTPUT POWER .....	34
9.6.1. HIGH POWER BASIC DATA RATE GFSK MODULATION .....	36
9.6.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION .....	36
9.6.3. HIGH POWER ENHANCED DATA RATE QPSK MODULATION.....	37
9.6.4. HIGH POWER ENHANCED DATA RATE TXBF QPSK MODULATION .....	37

9.6.5.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION .....	38
9.6.6.	HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION .....	38
9.6.7.	LOW POWER BASIC DATA RATE GFSK MODULATION .....	39
9.6.8.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION .....	39
9.6.9.	LOW POWER ENHANCED DATA RATE QPSK MODULATION .....	40
9.6.10.	LOW POWER ENHANCED DATA RATE TXBF QPSK MODULATION .....	40
9.6.11.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION .....	41
9.6.12.	LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION .....	41
<b>9.7.</b>	<b>AVERAGE POWER .....</b>	<b>42</b>
9.7.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION .....	43
9.7.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION .....	43
9.7.3.	HIGH POWER ENHANCED DATA RATE QPSK MODULATION .....	44
9.7.4.	HIGH POWER BASIC DATA RATE TXBF QPSK MODULATION .....	44
9.7.5.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION .....	45
9.7.6.	HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION .....	45
9.7.7.	LOW POWER BASIC DATA RATE GFSK MODULATION .....	46
9.7.8.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION .....	46
9.7.9.	LOW POWER ENHANCED DATA RATE QPSK MODULATION .....	47
9.7.10.	LOW POWER BASIC DATA RATE TXBF QPSK MODULATION .....	47
9.7.11.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION .....	48
9.7.12.	LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION .....	48
<b>9.8.</b>	<b>CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>49</b>
9.8.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION .....	50
9.8.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION .....	54
9.8.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION .....	58
9.8.4.	HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION .....	62
9.8.5.	LOW POWER BASIC DATA RATE GFSK MODULATION .....	66
9.8.6.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION .....	70
9.8.7.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION .....	74
9.8.8.	LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION .....	78
<b>10.</b>	<b>RADIATED TEST RESULTS .....</b>	<b>82</b>
<b>10.1.</b>	<b>TRANSMITTER ABOVE 1 GHz .....</b>	<b>84</b>
10.1.1.	HIGH POWER BASIC DATA RATE GFSK MODULATION .....	84
10.1.2.	HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION .....	92
10.1.3.	HIGH POWER ENHANCED DATA RATE 8PSK MODULATION .....	96
10.1.4.	HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION .....	104
10.1.5.	LOW POWER BASIC DATA RATE GFSK MODULATION .....	108
10.1.6.	LOW POWER BASIC DATA RATE TXBF GFSK MODULATION .....	116
10.1.7.	LOW POWER ENHANCED DATA RATE 8PSK MODULATION .....	120
10.1.8.	LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION .....	128
10.1.9.	GFSK TXBF HARMONICS AND SPURIOUS EMISSIONS .....	132
10.1.10.	8PSK TXBF HARMONICS AND SPURIOUS EMISSIONS .....	138
<b>10.2.</b>	<b>WORST CASE BELOW 1 GHZ .....</b>	<b>144</b>
<b>10.3.</b>	<b>WORST CASE 18-26 GHZ .....</b>	<b>146</b>
<b>11.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>148</b>
11.1.	AC Power Line With AC/DC Adapter .....	149
11.2.	AC Power Line With Laptop .....	151

**12. SETUP PHOTOS .....153****1. ATTESTATION OF TEST RESULTS**

**COMPANY NAME:** APPLE INC.  
1 APPLE PARK WAY  
CUPERTINO, CA 95014, U.S.A

**EUT DESCRIPTION:** SMARTPHONE

**MODEL:** A2649 (Parent Model)  
A2881, A2882, A2883, A2884 (Variant Models)

**BRAND:** APPLE

**FCC ID:** BCG-E8138A (Parent Model)  
BCG-E8142A, BCG-E8143A, BCG-E8144A (Variant Models)

**IC:** 579C-E8138A (Parent Model)  
579C-E8142A, 579C-E8143A, 579C-E8144A (Variant Models)

**SERIAL NUMBER:** V2V9KHF5W9

**SAMPLE RECEIPT DATE:** DECEMBER 27, 2021

**DATE TESTED:** DECEMBER 28, 2021 – JUNE 30, 2022

<b>APPLICABLE STANDARDS</b>	
<b>STANDARD</b>	<b>TEST RESULTS</b>
CFR 47 Part 15 Subpart C	Complies
ISED RSS-247 Issue 2	Complies
ISED RSS-GEN Issue 5 + A1 + A2	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For  
UL LLC By:



---

Francisco de Anda  
Staff Engineer  
Consumer Technology Division  
UL LLC.

Prepared By:



---

Tony Li  
Test Engineer  
Consumer Technology Division  
UL LLC

## 2. TEST SUMMARY

This report contains data provided by the customer which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

FCC Clause	ISED Clause	Requirement	Result	Comment
See Comment		Duty Cycle	Reporting purposes only	Per ANSI C63.10, Section 11.6.
See Comment	RSS-GEN 6.7	20dB BW/99% OBW	Reporting purposes only	ANSI C63.10 Sections 6.9.2 and 6.9.3
15.247 (a)(1)	RSS-247 (5.1) (b)	Hopping Frequency Separation	Complies	None.
15.247 (a)(1)(iii)	RSS-247 (5.1) (d)	Number of Hopping Channels	Complies	None.
15.247 (a)(1)(iii)	RSS-247 (5.1) (d)	Average Time of Occupancy	Complies	None.
15.247 (b)(1)	RSS-247 (5.4) (b)	Output Power	Complies	None.
See Comment		Average Power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (d)	RSS-247 (5.5)	Conducted Spurious Emissions	Complies	None.
15.209, 15.205	RSS-GEN 8.9, 8.10	Radiated Emissions	Complies	None.
15.207	RSS-Gen 8.8	AC Mains Conducted Emissions	Complies	None.

## 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911, RSS-GEN Issue 5 + A1 + A2, and RSS-247 Issue 2.

## 4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

Location	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
<input checked="" type="checkbox"/>	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA	US0104	22541	550739
<input checked="" type="checkbox"/>	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA	US0104	2324B	550739

## 5. DECISION RULES AND MEASUREMENT UNCERTAINTY

### 5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

## 5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

## 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Uncertainty figures are valid to a confidence level of 95%.

PARAMETER	U <sub>Lab</sub>
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5.4. SAMPLE CALCULATION

### RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)  
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

### MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.  
 $36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$

## 6. EQUIPMENT UNDER TEST

### 6.1. EUT DESCRIPTION

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and MSS. All models except reference model support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

Testing was performed on the parent model and is used to support the application for the parent and variants identified in this report based on the test plan submitted and approved via KDB inquiry by the FCC and by ISED-Canada.

The Model and FCC IDs / ISED covered by this report includes:

Parent Model: A2649, FCC ID: BCG-E8138A, IC: 579C-E8138A

Variant Models: A2881, FCC ID: BCG-E8142A, IC: 579C-E8142A  
 A2882; FCC ID: BCG-E8143A, IC: 579C-E8143A  
 A2883 & A2884, FCC ID: BCG-E8144A, IC: 579C-E8144A

### 6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Antenna	Config	Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
ANT 4	High Power	2402 - 2480	Basic GFSK	20.24	105.68
		2402 - 2480	DQPSK	18.75	74.99
		2402 - 2480	Enhanced 8PSK	19.10	81.28
	Low Power	2402 - 2480	Basic GFSK	11.18	13.12
		2402 - 2480	DQPSK	10.62	11.53
		2402 - 2480	Enhanced 8PSK	10.68	11.69
ANT 3	High Power	2402 - 2480	Basic GFSK	20.14	103.28
		2402 - 2480	DQPSK	19.15	82.22
		2402 - 2480	Enhanced 8PSK	19.17	82.60
	Low Power	2402 - 2480	Basic GFSK	11.15	13.03
		2402 - 2480	DQPSK	10.73	11.83
		2402 - 2480	Enhanced 8PSK	10.76	11.91
BF, ANT 4 + ANT 3	High Power	2402 - 2480	Basic GFSK TxBF	20.19	104.47
		2402 - 2480	DQPSK TxBF	19.05	80.35
		2402 - 2480	Enhanced 8PSK TxBF	19.20	83.18
	Low Power	2402 - 2480	Basic GFSK TxBF	14.17	26.12
		2402 - 2480	DQPSK TxBF	13.69	23.39
		2402 - 2480	Enhanced 8PSK TxBF	13.75	23.71

Note: GFSK, DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on these modes to showing compliance. For average power data please refer to section 9.7.

### 6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type, as provided by the manufacturer' are as follows:

Frequency Range (GHz)	ANT 4 (dBi)	ANT 3 (dBi)
2.4	-2.0	-0.8

### 6.4. SOFTWARE AND FIRMWARE

The EUT firmware version was 20.1.467.5699.

### 6.5. WORST-CASE CONFIGURATION AND MODE

The EUT was investigated in three orthogonal orientations X, Y and Z on ANT 4, ANT 3 and 2TX beamforming. It was determined that Y (Landscape)) was the worst-case orientation for , ANT 3, 2TX Beamforming and X (Flatbed) for ANT 4.

Radiated band edge, harmonic, and spurious emissions from 1GHz to 18GHz were performed with the EUT was set to transmit at highest power on Low/Middle/High channels.

Radiated emissions below 30MHz, below 1GHz, 18-26GHz and power line conducted emissions were performed with the EUT transmits at the channel with the highest output power as worst-case scenario. There were no emissions found below 30MHz within 20dB of the limit

For below 1GHz tests EUT was connected to AC power adapter as the worst case; and for above 1GHz, the worst-case configuration reported was tested with EUT only. For AC line conducted emission, test was investigated with AC power adapter and with laptop.

For simultaneous transmission of multiple channels in the 2.4GHz BT and 5GHz bands, No noticeable emission was found.

For radiated harmonic spurious emissions test, beamforming GFSK and 8PSK modes were set to maximum power per chain based on SISO power to cover both non-BF and BF modes to complies with radiated spurious emissions limits in the restricted bands between 1GHz and 18GHz low/mid/high channel.

For Radiated band edge, GFSK, 8PSK and TXBF modulations were all investigated on low and high power setting.

GFSK, DQPSK, 8PSK average power are all investigated, The GFSK & 8PSK power are the worst case. For average power data please refer to section 9.7.

Worst-case data rates as provided by the client were:

GFSK mode: DH5

8PSK mode: 3-DH5

Beamforming : GFSK, DH5, 8PSK, 3-DH5

There are three vendors of the Wi-Fi/Bluetooth radio modules: variant 1, 2 and 3.. The WiFi/BT radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.

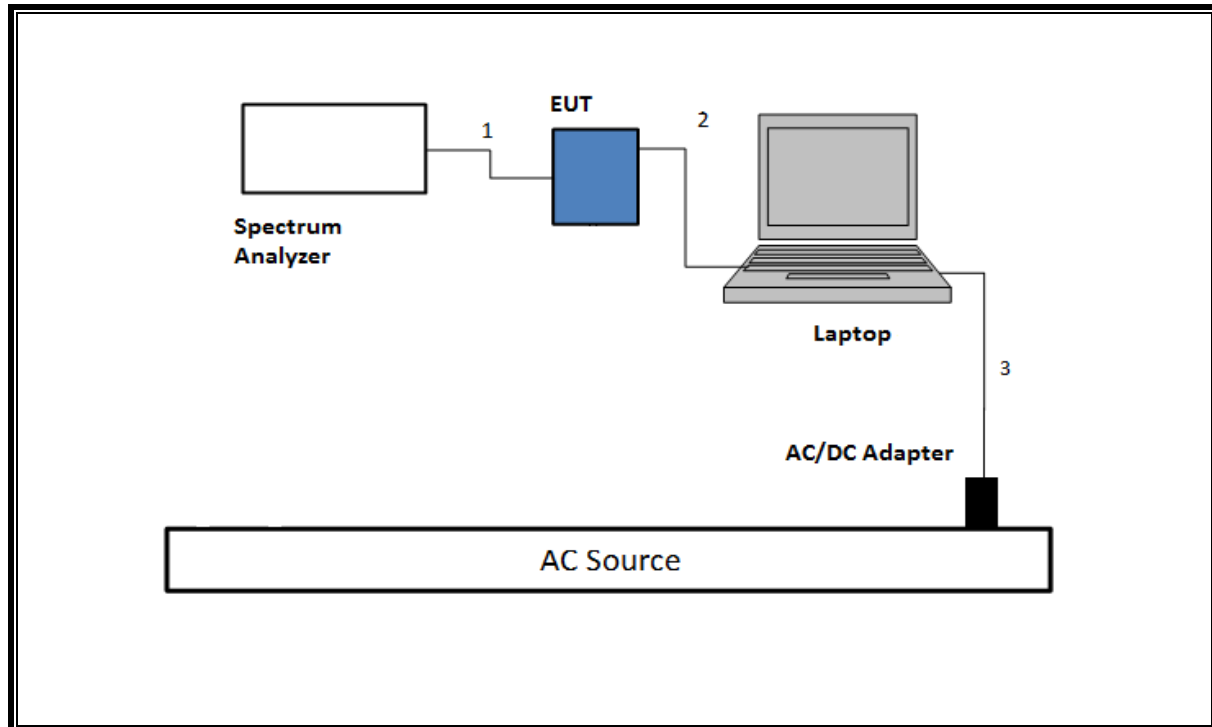
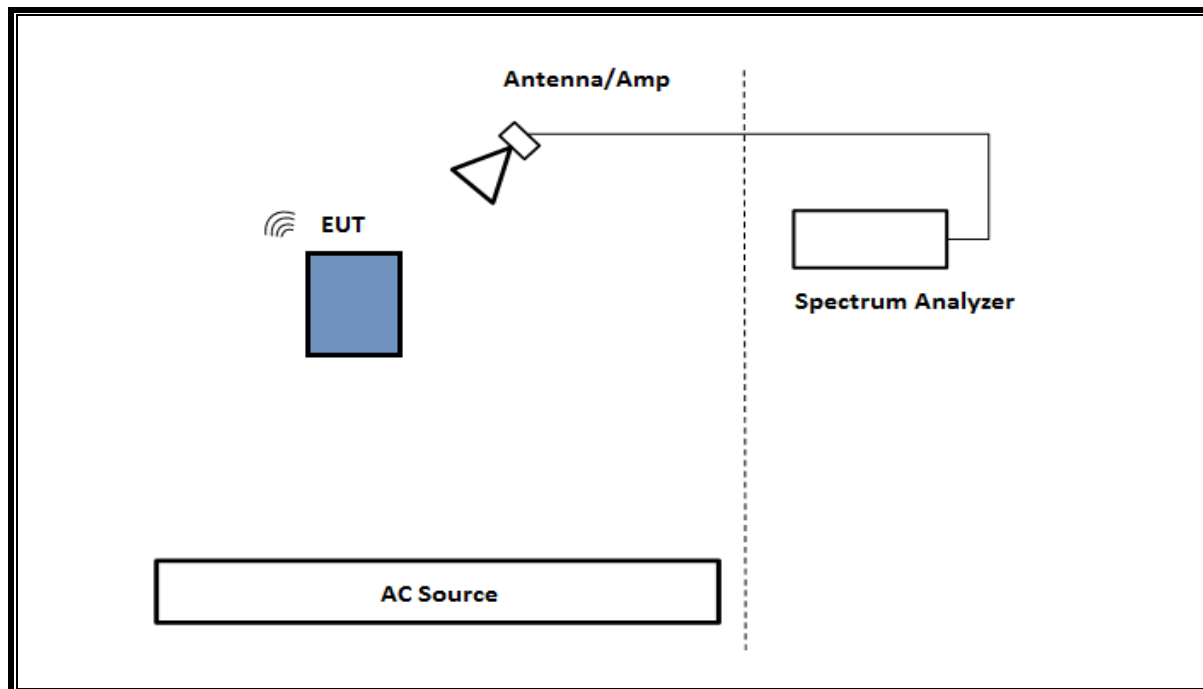
Baseline testing was performed on the three variants to determine the worst case on all conducted power and radiated emissions.



## 6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	Macbook Pro	C02VD7SAHV22		BCGA1708
Laptop AC/DC adapter		Liteon Technology	A1424	NSW25679		DoC
EUT AC/DC adapter		Apple	A1720	C3D8417A7R93KVPA8		DoC
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	SMA	Un-shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Shielded	1.0	N/A
3	AC	1	AC	Un-shielded	2	N/A
I/O CABLES (RF RADIATED AND AC LINE AC TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	AC	Un-shielded	2	N/A
2	USB	1	USB	Shielded	1	N/A

### TEST SETUP

The EUT setup is shown as below. Test software exercised the radio card.

**SETUP DIAGRAM FOR CONDUCTED TESTS****SETUP DIAGRAM FOR RADIATED TESTS Above 1 GHz**

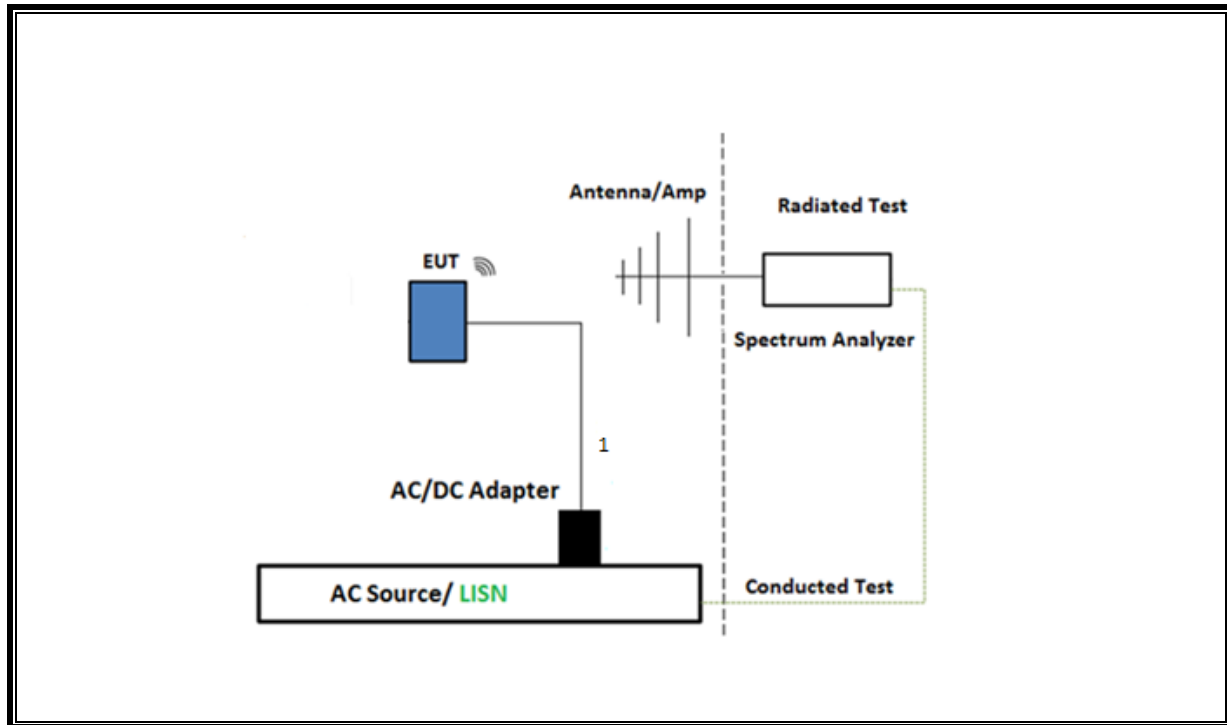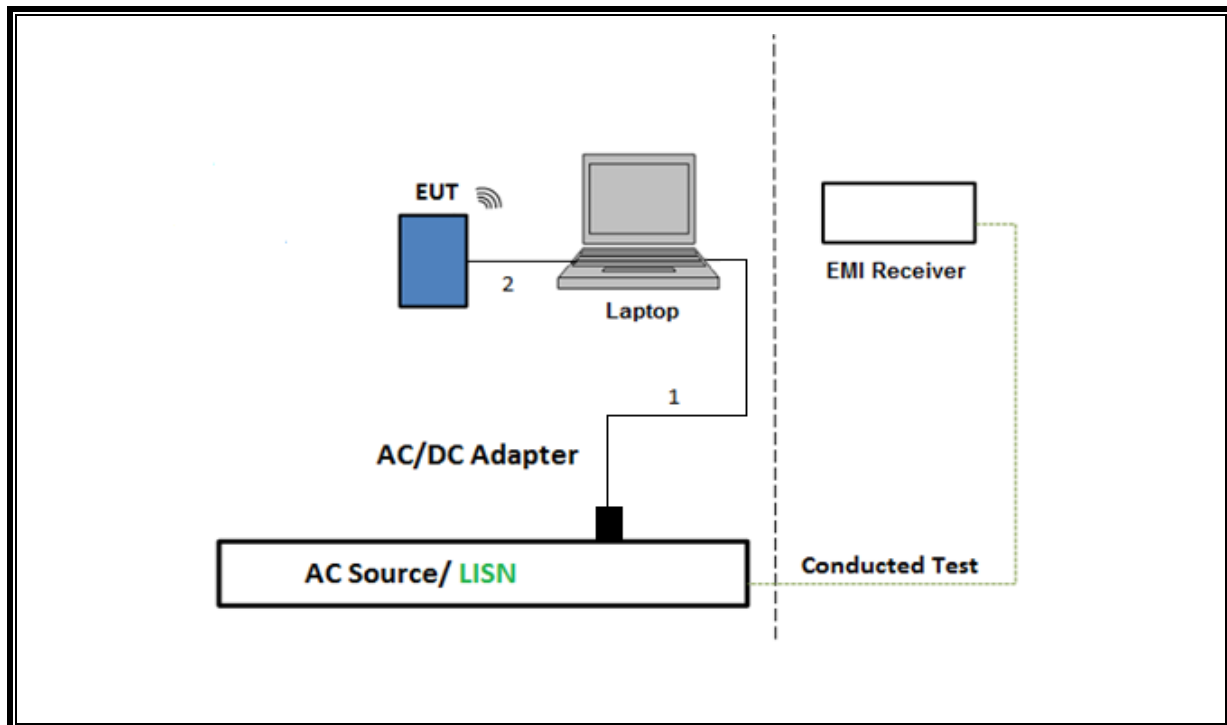**SETUP DIAGRAM FOR BELOW 1GHz and AC LINE CONDUCTED TEST****TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION**

## 7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	125188	01/30/2023	01/30/2022
Antenna, Horn 1-18GHz	ETS Lindgren	3117	200786	02/24/2023	02/24/2022
*RF Filter Box	UL-FR1	N/A	PRE0182865	03/30/2022	03/30/2021
Antenna, Horn 1-18GHz	ETS Lindgren	3117	80430	07/21/2022	07/21/2021
RF Filter Box 1-18GHz	UL-FR	NA	169334	04/15/2023	04/15/2022
RF Filter Box 1-18GHz	UL-FR1	NA	PRE0183530	11/17/2022	11/17/2021
Antenna, Horn 1-18GHz	ETS Lindgren	3117	200897	02/24/2023	02/24/2022
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	125179	02/01/2023	02/01/2022
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	79584	07/21/2022	07/21/2021
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB3	204044	01/31/2023	01/31/2022
*Antenna Horn 18 to 26.5GHz	ARA	MWH-1826/B	81139	05/25/2022	05/25/2021
RF Filter 1-18GHz	UL-FR1	SAC 6 port rf box	203957	02/12/2023	02/12/2022
*Pre-Amp 18-26GHz	Agilent Technology	8449B	T404	04/19/2022	04/19/2021
Power Meter, P-series single channel	Keysight	N1911A	T1244	01/24/2023	01/24/2022
Power Sensor	Keysight	N1921A	90389	03/02/2023	03/02/2022
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	200895	10/13/2022	10/13/2021
*Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1466	01/25/2022	01/25/2021
*Amplifier, 1 to 8GHz 35dB	Amplical	AMF-4D-01000800-30-29P	T1169	03/30/2022	03/30/2021
Antenna, Active Loop 9KHz to 30MHz	EMCO	6502	T35	10/05/2022	10/05/2021
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	125179	02/01/2023	02/01/2022
Amplifier, 1 to 18GHz, 35dB	AMPLICAL	AMP1G18-35	T1571	08/19/2022	08/19/2021

AC Line Conducted					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESR	T1436	02/21/2023	02/21/2022
Power Cable, Line Conducted Emissions	UL	PR1	T861	10/27/2022	10/27/2021
LISN for Conducted Emissions CISPR-16	FISCHER CUSTOM COMMUNICATIONS	FCC-LISN-50/250-25-2-01-480V	175765	01/26/2023	01/26/2022
UL AUTOMATION SOFTWARE					
Radiated Software	UL	UL EMC	Ver 9.5, Mar 6, 2020		
Conducted Software	UL	UL EMC	AP2021.4.1, AP2021.8.27		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, July, 2020		

\*Testing is completed before equipment expiration date.

## 8. MEASUREMENT METHODS

On Time and Duty Cycle: ANSI C63.10-2013 Section 11.6

Occupied BW (20dB): ANSI C63.10-2013 Section 6.9.2

Occupied BW (99%): ANSI C63.10-2013 Section 6.9.3

Carrier Frequency Separation: ANSI C63.10-2013 Section 7.8.2

Number of Hopping Frequencies: ANSI C63.10-2013 Section 7.8.3

Time of Occupancy (Dwell Time): ANSI C63.10-2013 Section 7.8.4

Peak Output Power: ANSI C63.10-2013 Section 7.8.5

Conducted Spurious Emissions: ANSI C63.10-2013 Section 7.8.8

Conducted Band-Edge: ANSI C63.10-2013 Section 6.10.4

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4 & 13

Radiated Spurious Emissions 30-1000MHz: ANSI C63.10-2013 Section 6.3, 6.5 & 13

Radiated Spurious Emissions above 1GHz: ANSI C63.10-2013 Section 6.3, 6.6 & 13

Radiated Band-edge: ANSI C63.10-2013 Section 6.10.5 & 13

AC Power-line conducted emissions: ANSI C63.10-2013, Section 6.2.

## 9. ANTENNA PORT TEST RESULTS

### 9.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.

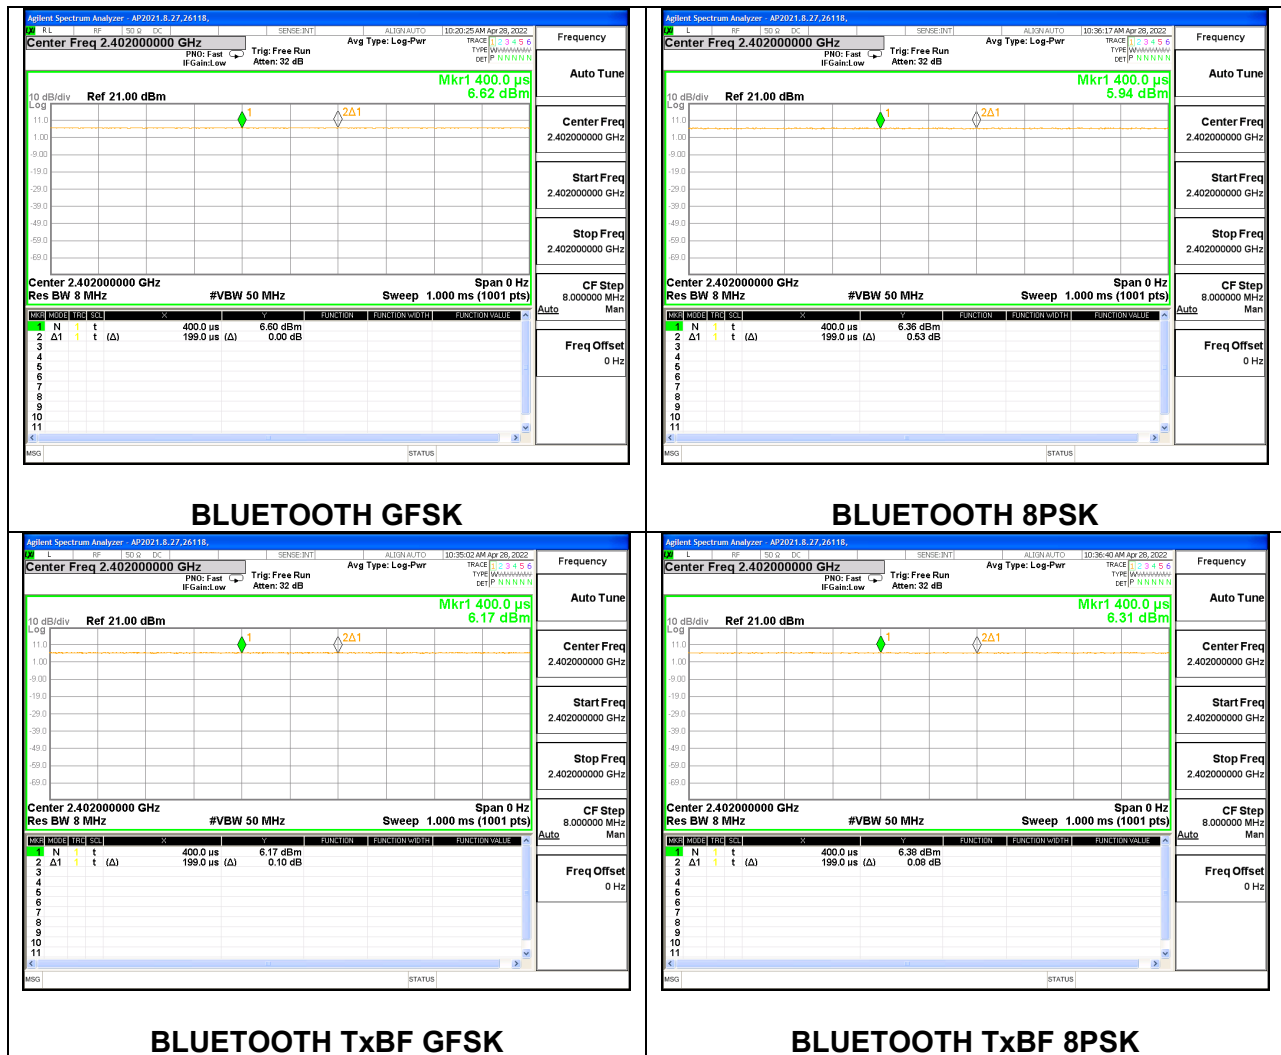
#### PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
Bluetooth GFSK	0.40	0.40	1.000	100.0%	0.00	0.010
Bluetooth 8PSK	0.40	0.40	1.000	100.0%	0.00	0.010
Bluetooth GFSK TxBF	0.40	0.40	1.000	100.0%	0.00	0.010
Bluetooth 8PSK TxBF	0.40	0.40	1.000	100.0%	0.00	0.010

## DUTY CYCLE PLOTS



## **9.2. 20 dB AND 99% BANDWIDTH**

### **LIMITS**

None; for reporting purposes only.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq 3 \times \text{RBW}$ . The sweep time is coupled.

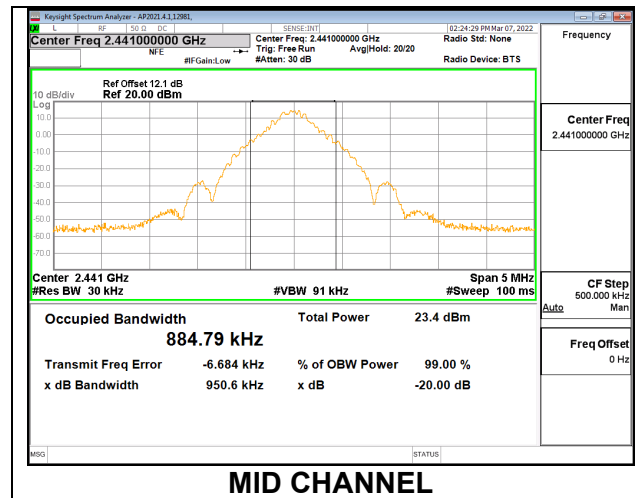
### **RESULTS**

Only High Power modes result is reported, it covers all Low Power modes. Only Mid channel plot is reported to show setting parameter complies with testing method/procedure.

## 9.2.1. HIGH POWER BASIC DATA RATE GFSK MODULATION


### ANT 4

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.954	0.887
Mid	2441	0.951	0.885
High	2480	0.952	0.881



### ANT 3

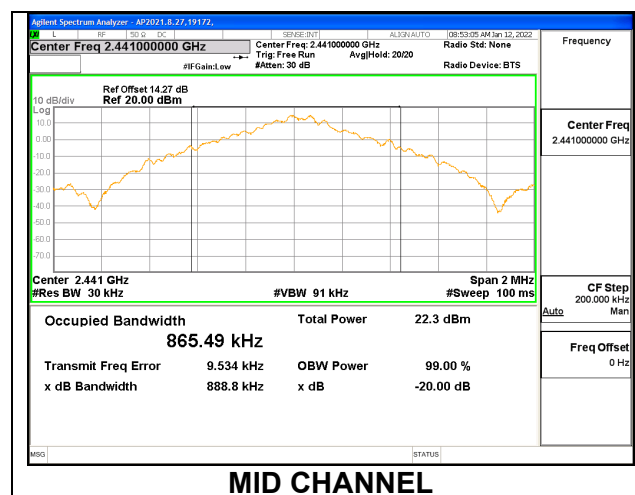
Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.889	0.865
Mid	2441	0.889	0.865
High	2480	0.888	0.866



## 9.2.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION

Note: Test procedure on beamforming mode is same as BT basic and EDR mode

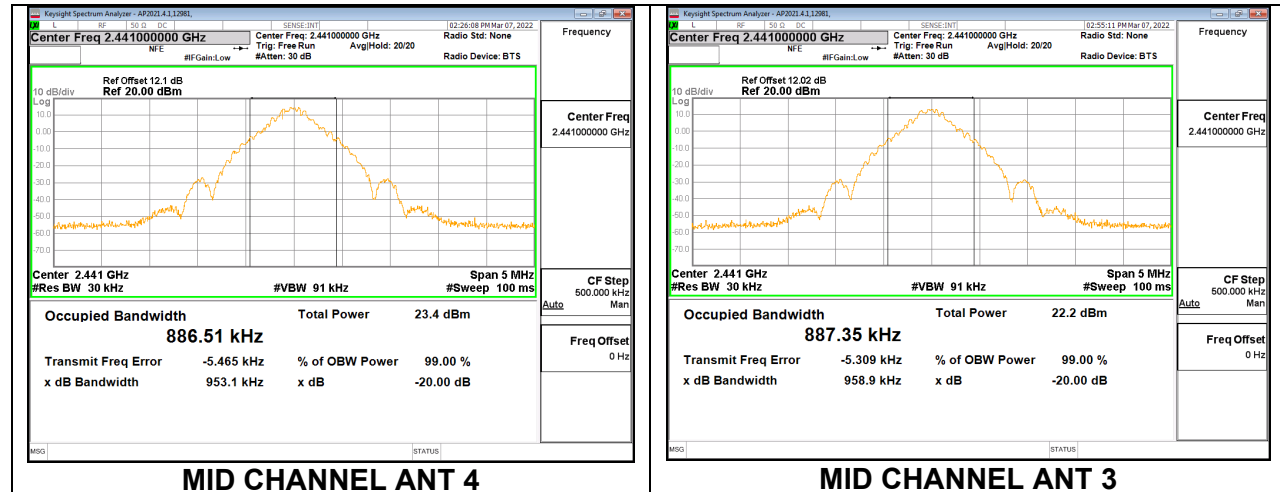
Channel	Frequency (MHz)	20dB Bandwidth ANT 4 (MHz)	20dB Bandwidth ANT 3 (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2402	0.954	0.953	0.887	0.888
Mid	2441	0.953	0.959	0.887	0.887
High	2480	0.958	0.955	0.885	0.887



### 9.2.3. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION


#### ANT 4

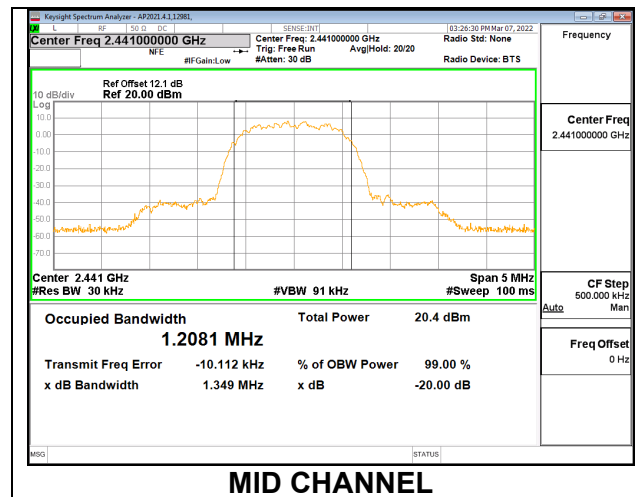Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.353	1.209
Mid	2441	1.349	1.208
High	2480	1.351	1.207



#### ANT 3

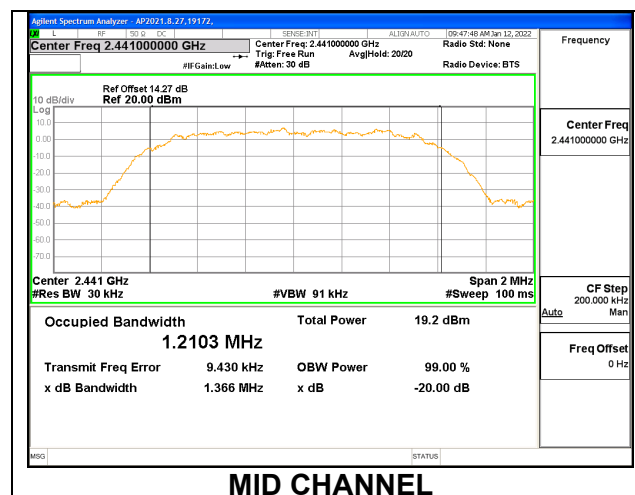
Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.208	1.362
Mid	2441	1.210	1.366
High	2480	1.209	1.366



## 9.2.4. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

Note: Test procedure on beamforming mode is same as BT basic and EDR mode

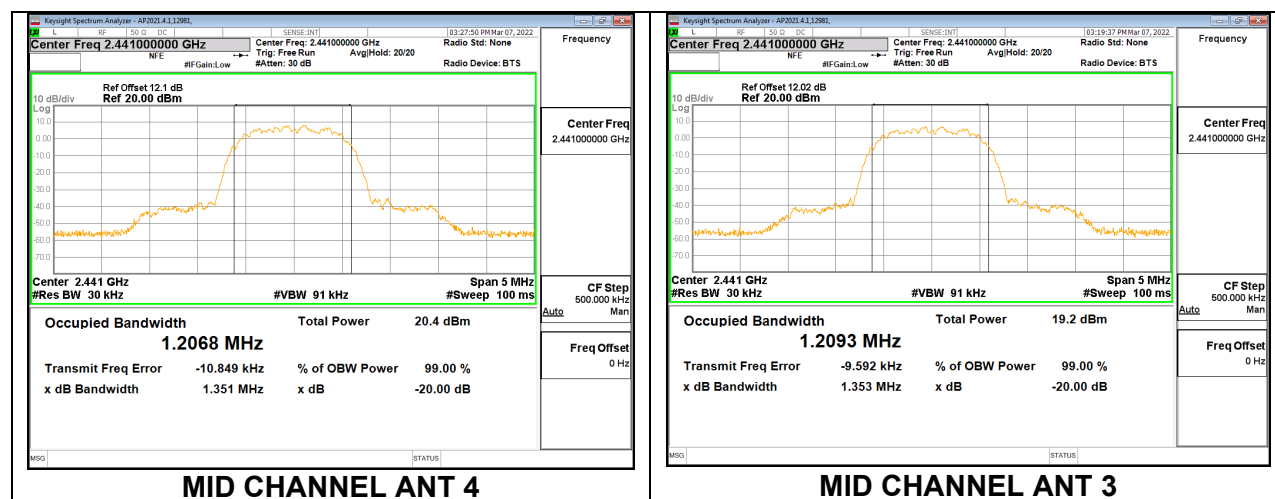Channel	Frequency (MHz)	20dB Bandwidth ANT 4 (MHz)	20dB Bandwidth ANT 3 (MHz)	99% Bandwidth ANT 4 (MHz)	99% Bandwidth ANT 3 (MHz)
Low	2402	1.353	1.352	1.209	1.206
Mid	2441	1.351	1.353	1.207	1.209
High	2480	1.351	1.353	1.208	1.206



### 9.3. HOPPING FREQUENCY SEPARATION

#### LIMITS

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

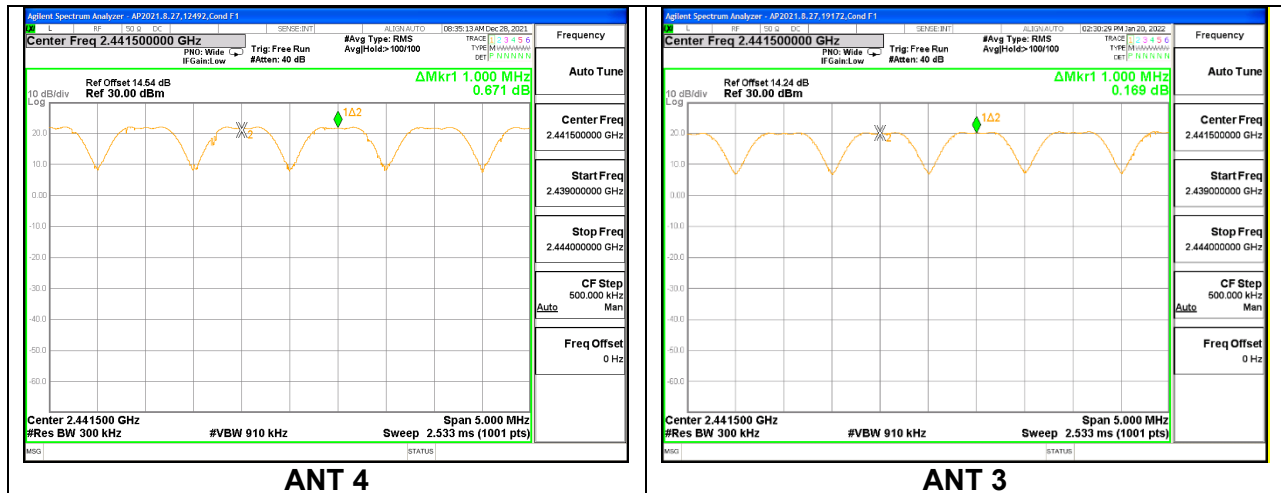
The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to  $VBW \geq 3 \times RBW$ . The sweep time is coupled.

#### RESULTS

Only High Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same channel plan.

### 9.3.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

#### HOPPING FREQUENCY SEPARATION



## 9.4. NUMBER OF HOPPING CHANNELS

### LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

### TEST PROCEDURE

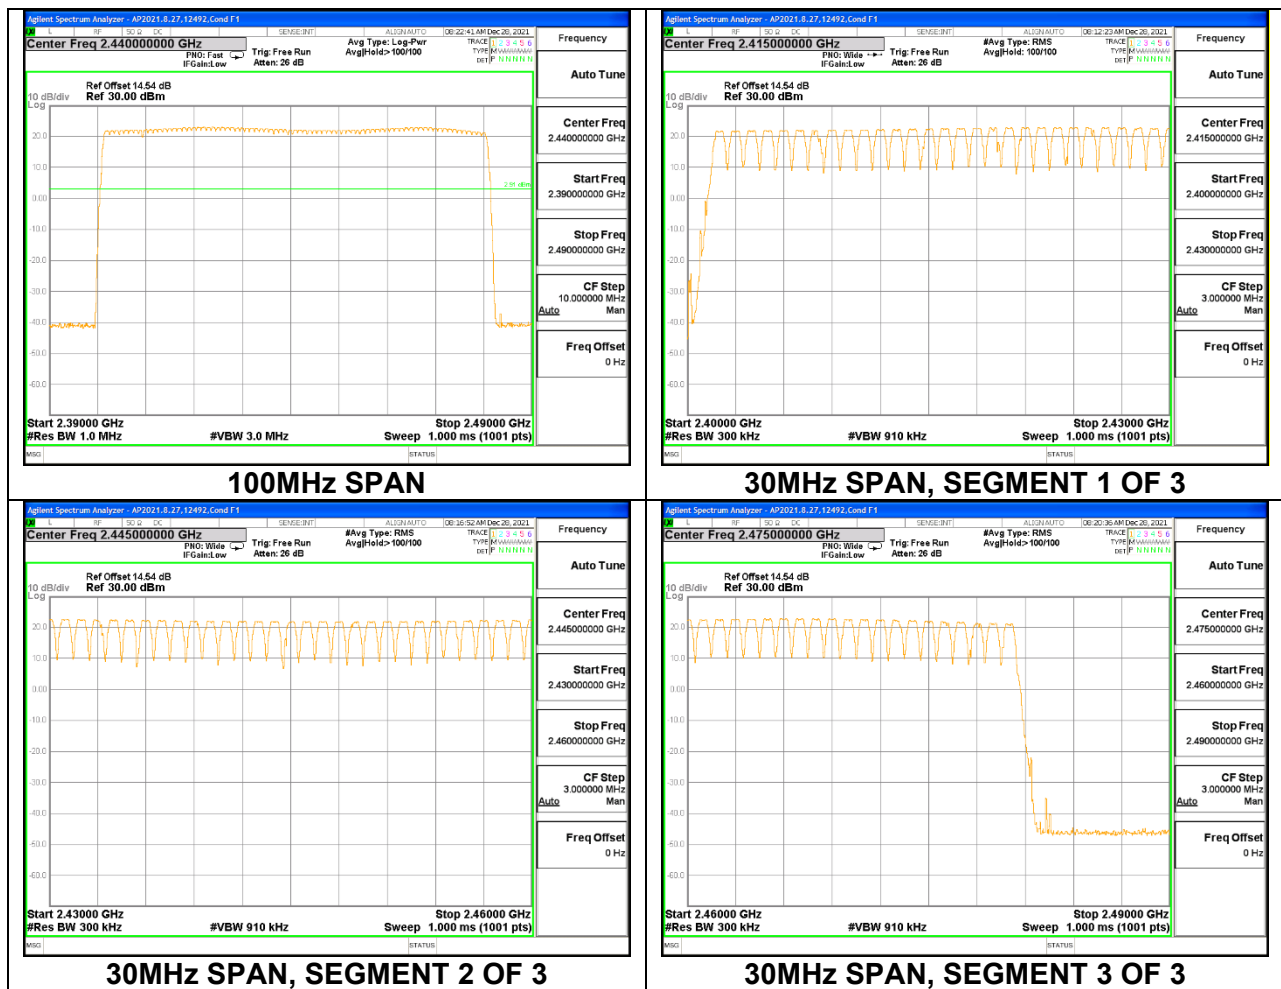
The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

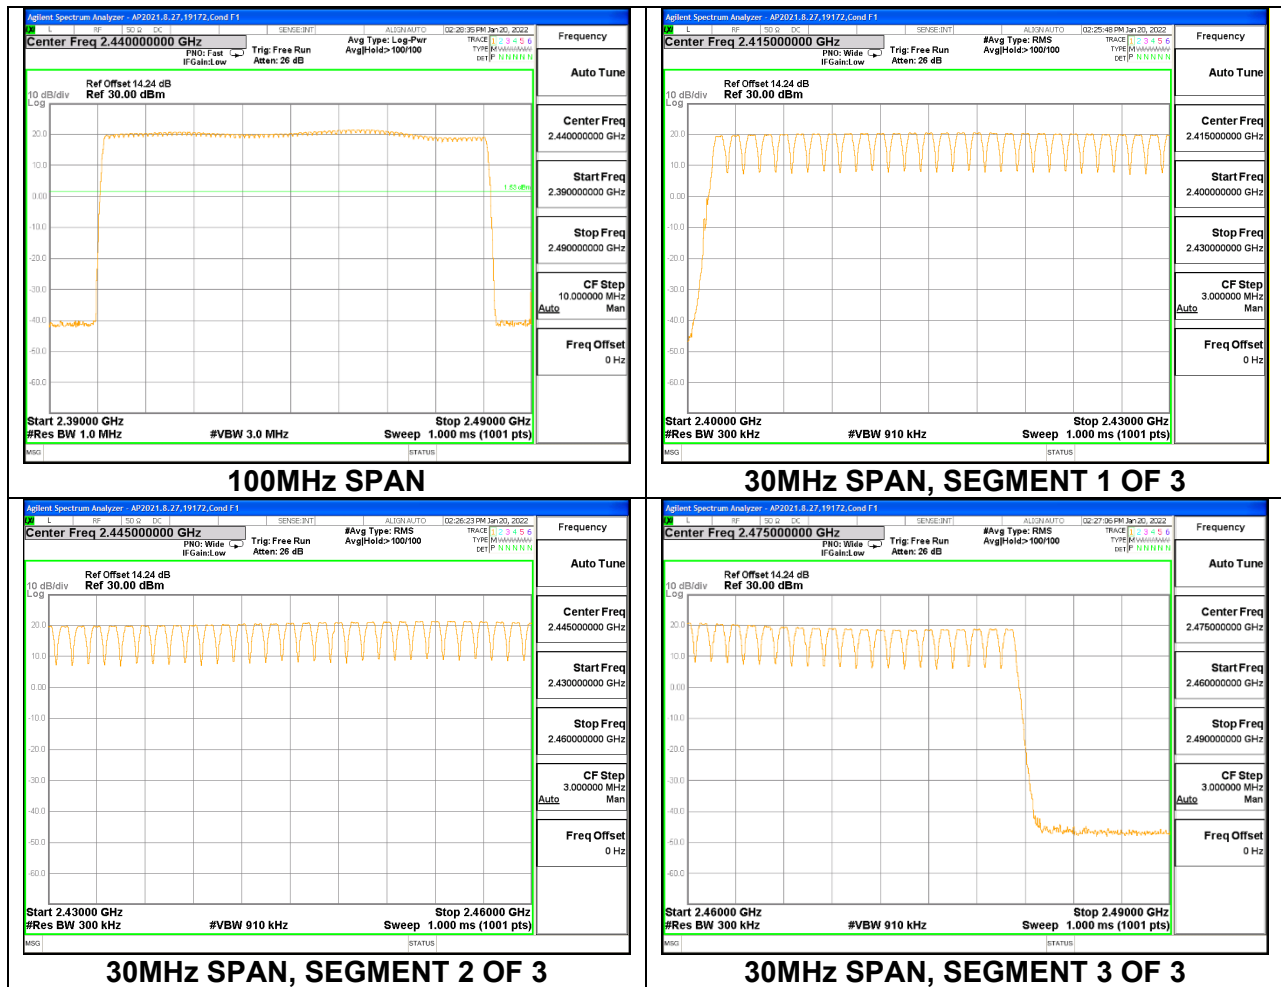
### RESULTS

Normal Mode: 79 Channels Observed. Only High Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same channel plan.

## 9.4.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

### ANT 4



**ANT 3**

## 9.5. AVERAGE TIME OF OCCUPANCY

### LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$ .

### RESULTS

Only High Power GFSK mode result is reported since EDR (QPSK/8PSK) has exact same timing.

**9.5.1. HIGH POWER BASIC DATA RATE GFSK MODULATION****ANT 4**

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.378	32	0.121	0.4	-0.279
DH3	1.632	16	0.261	0.4	-0.139
DH5	2.872	10	0.287	0.4	-0.113
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.378	8	0.030	0.4	-0.370
DH3	1.632	4	0.065	0.4	-0.335
DH5	2.872	2.5	0.072	0.4	-0.328



**ANT 3**

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.367	32	0.117	0.4	-0.283
DH3	1.620	14	0.227	0.4	-0.173
DH5	2.860	11	0.315	0.4	-0.085
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.367	8.00	0.029	0.4	-0.371
DH3	1.62	3.50	0.057	0.4	-0.343
DH5	2.860	2.75	0.079	0.4	-0.321



## 9.6. OUTPUT POWER

### LIMITS

§15.247 (b) (1)

RSS-247 (5.4) (b)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

### TEST PROCEDURE

Measurements was perform using a power meter with wideband peak power sensor.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband peak power sensor. Peak output power was read directly from the power meter.

### DIRECTIONAL ANTENNA GAIN

For 1 TX:

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

For 2 TX:

Tx chains are correlated for power due to the device supporting Beamforming. The directional gains are as follows:

	ANT 4	ANT 3	Correlated Chains
Band (GHz)	Gain (dBi)	Gain (dBi)	Directional Gain (dBi)
2.4	-2.00	-0.80	1.63

**DIRECTIONAL GAIN CALCULATION:**

ANSI C63.10-2013 section 14.4.3

Uncorrelated directional gain= $10 \cdot \text{LOG}((10^{(\text{Ant1}/10)} + 10^{(\text{Ant2}/10)})/2)$

Correlated directional Gain= $10 \cdot \text{LOG}(((10^{(\text{Ant1}/20)} + 10^{(\text{Ant2}/20)})^2)/2)$

Sample Calculation:

Ant1=-2.0, Ant2=-0.8

Uncorrelated Antenna gain= $10 \log[(10^{(-2.0/10)} + 10^{(-0.8/10)})/2] = -1.36$

Correlated Antenna gain= $10 \log[(10^{(-2.0/20)} + 10^{(-0.8/20)})^2/2] = 1.63$

**RESULTS**

**9.6.1. HIGH POWER BASIC DATA RATE GFSK MODULATION****ANT 4**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.20	21	-0.8
Middle	2441	20.24	21	-0.76
High	2480	20.19	21	-0.81

**ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	20.14	21	-0.86
Middle	2441	20.10	21	-0.9
High	2480	20.05	21	-0.95

**9.6.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION****ANT 4 + ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	17.14	17.16	20.16	21	-0.84
Middle	2441	17.12	17.15	20.15	21	-0.85
High	2480	17.17	17.18	20.19	21	-0.81

**9.6.3. HIGH POWER ENHANCED DATA RATE QPSK MODULATION****ANT 4**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.75	21	-2.25
Middle	2441	18.55	21	-2.45
High	2480	18.62	21	-2.38

**ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.10	21	-1.9
Middle	2441	18.82	21	-2.18
High	2480	19.15	21	-1.85

**9.6.4. HIGH POWER ENHANCED DATA RATE TXBF QPSK MODULATION****ANT 4 + ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	16.02	15.90	18.97	21	-2.03
Middle	2441	16.03	16.05	19.05	21	-1.95
High	2480	15.85	15.92	18.90	21	-2.10

**9.6.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION****ANT 4**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	18.90	21	-2.1
Middle	2441	19.10	21	-1.9
High	2480	18.85	21	-2.15

**ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	19.16	21	-1.84
Middle	2441	19.16	21	-1.84
High	2480	19.17	21	-1.83

**9.6.6. HIGH POWER ENHANCED DATA RATE TXBF 8PSK MODULATION****ANT 4 + ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	16.18	16.15	19.18	21	-1.82
Middle	2441	16.17	16.18	19.19	21	-1.81
High	2480	16.18	16.20	19.20	21	-1.80

**9.6.7. LOW POWER BASIC DATA RATE GFSK MODULATION****ANT 4**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.15	21	-9.85
Middle	2441	11.18	21	-9.82
High	2480	11.11	21	-9.89

**ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.15	21	-9.85
Middle	2441	11.11	21	-9.89
High	2480	11.00	21	-10

**9.6.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION****ANT 4 + ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	11.13	11.12	14.14	21	-6.86
Middle	2441	11.16	11.16	14.17	21	-6.83
High	2480	11.15	11.14	14.16	21	-6.84

**9.6.9. LOW POWER ENHANCED DATA RATE QPSK MODULATION****ANT 4**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.62	21	-10.38
Middle	2441	10.50	21	-10.5
High	2480	10.62	21	-10.38

**ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.73	21	-10.27
Middle	2441	10.63	21	-10.37
High	2480	10.61	21	-10.39

**9.6.10. LOW POWER ENHANCED DATA RATE TXBF QPSK MODULATION****ANT 4 + ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.58	10.70	13.65	21	-7.35
Middle	2441	10.67	10.68	13.69	21	-7.31
High	2480	10.59	10.60	13.61	21	-7.39

### 9.6.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

#### ANT 4

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.67	21	-10.33
Middle	2441	10.59	21	-10.41
High	2480	10.68	21	-10.32

#### ANT 3

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.76	21	-10.24
Middle	2441	10.70	21	-10.3
High	2480	10.66	21	-10.34

### 9.6.12. LOW POWER ENHANCED DATA RATE TXBF 8PSK MODULATION

#### ANT 4 + ANT 3

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Output Power ANT 4 (dBm)	Output Power ANT 3 (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	10.70	10.72	13.72	21	-7.28
Middle	2441	10.74	10.73	13.75	21	-7.25
High	2480	10.75	10.66	13.72	21	-7.28

## **9.7. AVERAGE POWER**

### **LIMITS**

None; for reporting purposes only

### **TEST PROCEDURE**

Measurements was performed using a power meter with wideband average power sensor.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

### **RESULTS**

**9.7.1. HIGH POWER BASIC DATA RATE GFSK MODULATION****ANT 4**

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.94
Middle	2441	19.95
High	2480	19.93

**ANT 3**

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	19.92
Middle	2441	19.88
High	2480	19.85

**9.7.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION****ANT 4 + ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	16.88	16.95	19.93
Middle	2441	16.91	16.94	19.94
High	2480	16.96	16.97	19.98

**9.7.3. HIGH POWER ENHANCED DATA RATE QPSK MODULATION****ANT 4**

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.40
Middle	2441	16.25
High	2480	16.31

**ANT 3**

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.40
Middle	2441	16.32
High	2480	16.44

**9.7.4. HIGH POWER BASIC DATA RATE TXBF QPSK MODULATION****ANT 4 + ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	13.42	13.25	16.35
Middle	2441	13.43	13.44	16.45
High	2480	13.20	13.30	16.26

**9.7.5. HIGH POWER ENHANCED DATA RATE 8PSK MODULATION****ANT 4**

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.30
Middle	2441	16.45
High	2480	16.35

**ANT 3**

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	16.46
Middle	2441	16.45
High	2480	16.47

**9.7.6. HIGH POWER BASIC DATA RATE TXBF 8PSK MODULATION****ANT 4 + ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	13.48	13.45	16.48
Middle	2441	13.47	13.48	16.49
High	2480	13.46	13.47	16.48

**9.7.7. LOW POWER BASIC DATA RATE GFSK MODULATION****ANT 4**

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	10.96
Middle	2441	10.97
High	2480	10.92

**ANT 3**

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	10.92
Middle	2441	10.88
High	2480	10.77

**9.7.8. LOW POWER BASIC DATA RATE TXBF GFSK MODULATION****ANT 4 + ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	10.93	10.92	13.94
Middle	2441	10.96	10.95	13.97
High	2480	10.94	10.95	13.96

**9.7.9. LOW POWER ENHANCED DATA RATE QPSK MODULATION****ANT 4**

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.34
Middle	2441	8.27
High	2480	8.32

**ANT 3**

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.44
Middle	2441	8.41
High	2480	8.40

**9.7.10. LOW POWER BASIC DATA RATE TXBF QPSK MODULATION****ANT 4 + ANT 3**

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	8.38	8.42	11.41
Middle	2441	8.40	8.40	11.41
High	2480	8.36	8.39	11.39

### 9.7.11. LOW POWER ENHANCED DATA RATE 8PSK MODULATION

#### ANT 4

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.40
Middle	2441	8.35
High	2480	8.42

#### ANT 3

Tested By:	19172
Date	5/31/2022

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.47
Middle	2441	8.46
High	2480	8.44

### 9.7.12. LOW POWER BASIC DATA RATE TXBF 8PSK MODULATION

#### ANT 4 + ANT 3

Tested By:	19172
Date:	5/31/2022

Channel	Frequency (MHz)	Average Power ANT 4 (dBm)	Average Power ANT 3 (dBm)	Total Power (dBm)
Low	2402	8.42	8.46	11.45
Middle	2441	8.45	8.45	11.46
High	2480	8.45	8.44	11.46

## 9.8. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)

RSS-247 5.5

Limit = -20 dBc

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

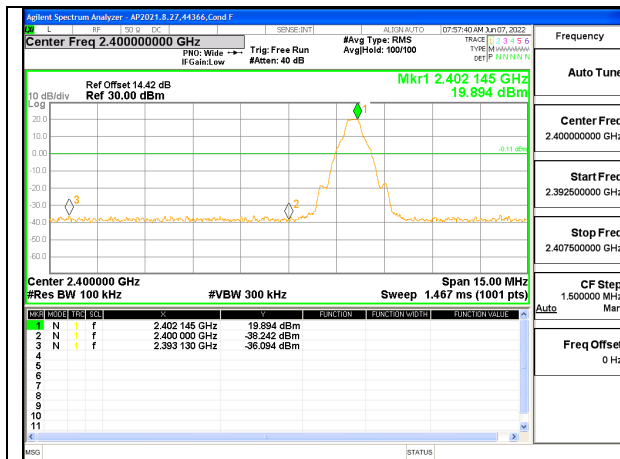
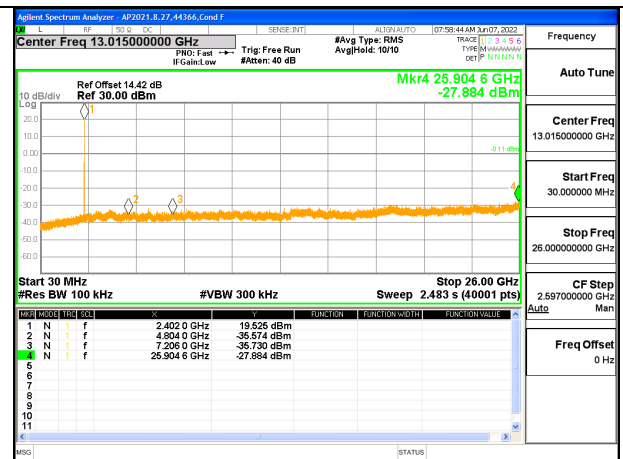
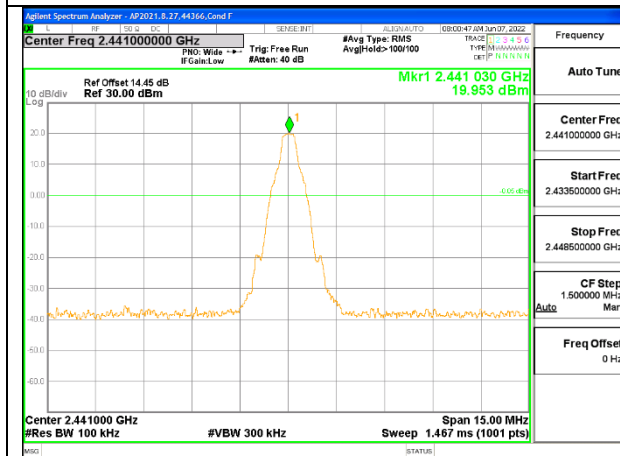
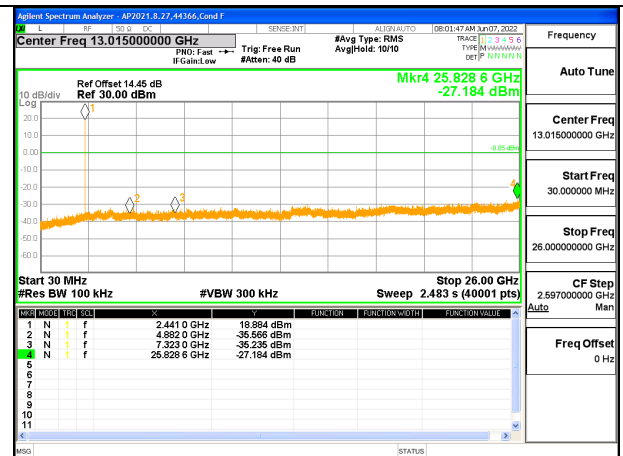
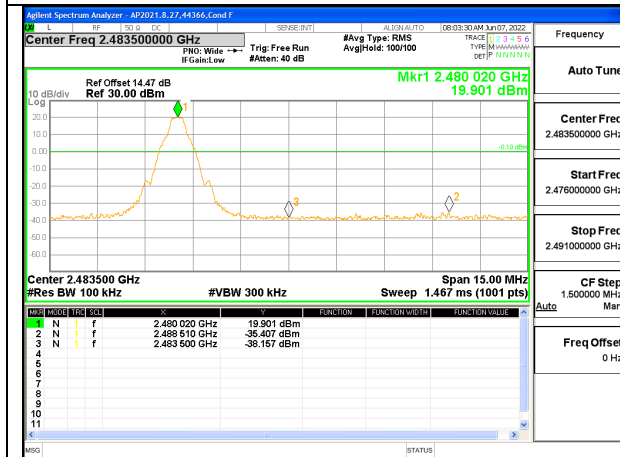
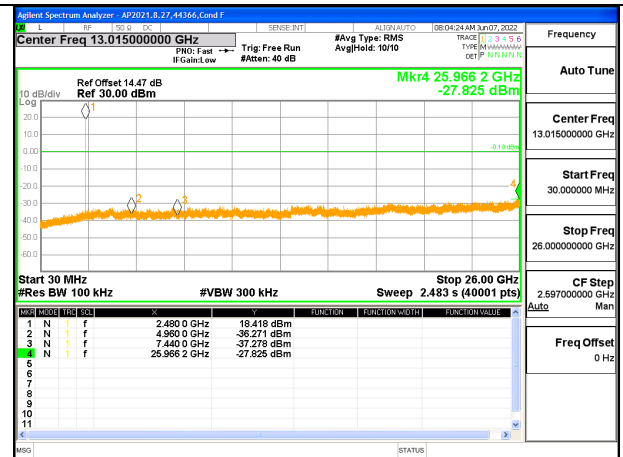
The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


Note: Test procedure on Beamforming mode is same as BT BDR and EDR mode.







### RESULTS


## 9.8.1. HIGH POWER BASIC DATA RATE GFSK MODULATION

### ANT 4 SPURIOUS EMISSIONS, NON-HOPPING

**LOW CHANNEL BANDEDGE****OUT-OF-BAND LOW CHANNEL****IN-BAND REFERENCE LEVEL****OUT-OF-BAND MID CHANNEL****HIGH CHANNEL BANDEDGE****OUT-OF-BAND HIGH CHANNEL**

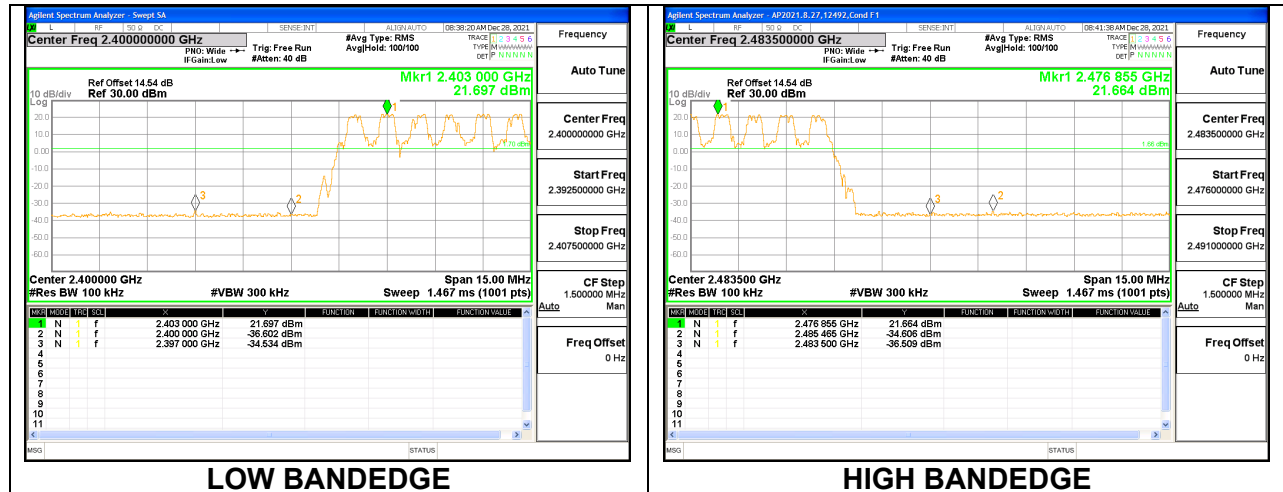**ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

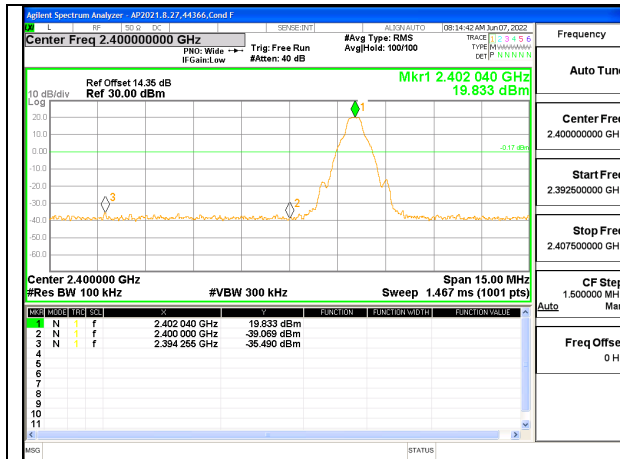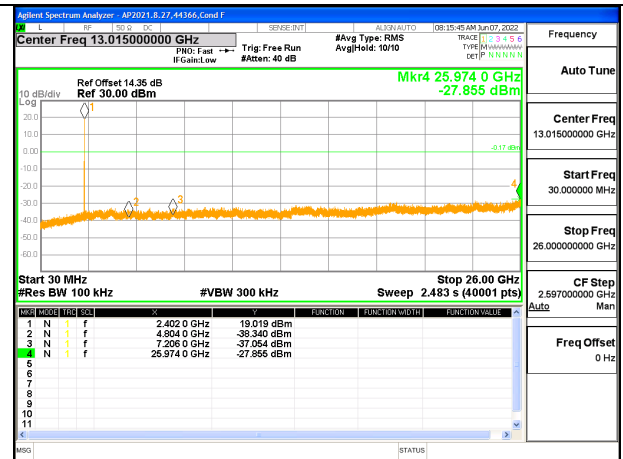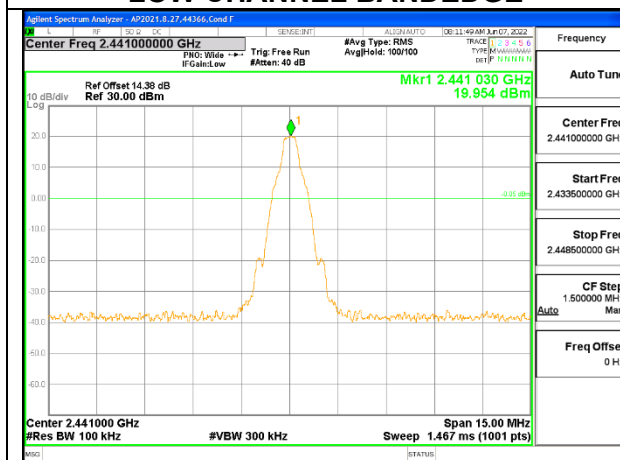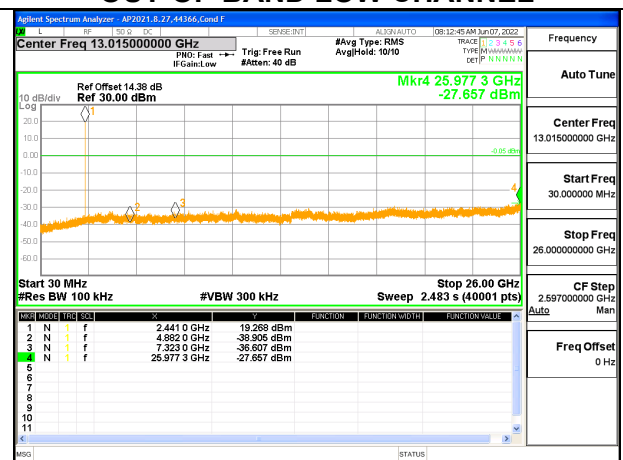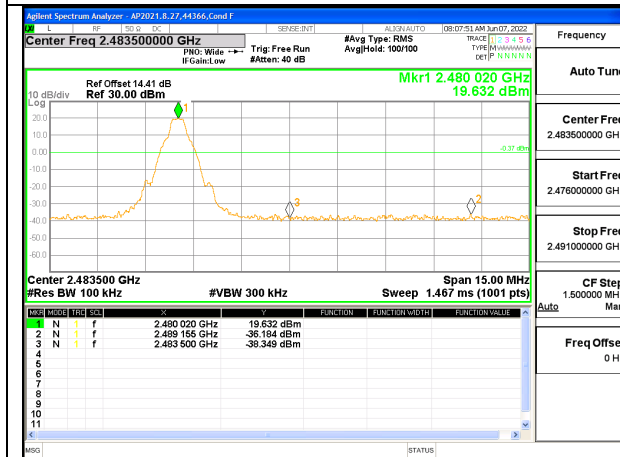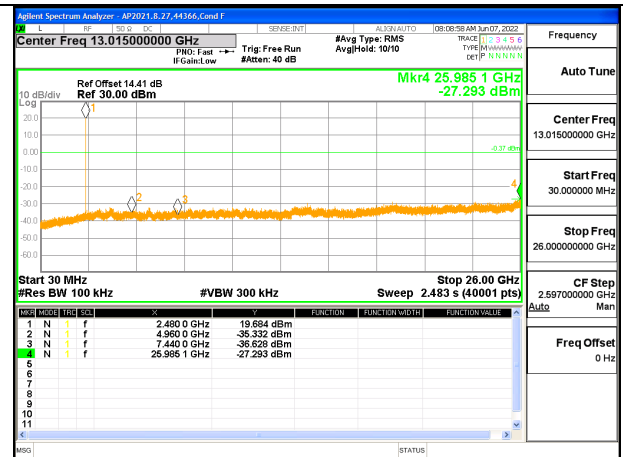
**ANT 3 SPURIOUS EMISSIONS, NON-HOPPING****LOW CHANNEL BANDEDGE****OUT-OF-BAND LOW CHANNEL****IN-BAND REFERENCE LEVEL****OUT-OF-BAND MID CHANNEL****HIGH CHANNEL BANDEDGE****OUT-OF-BAND HIGH CHANNEL**

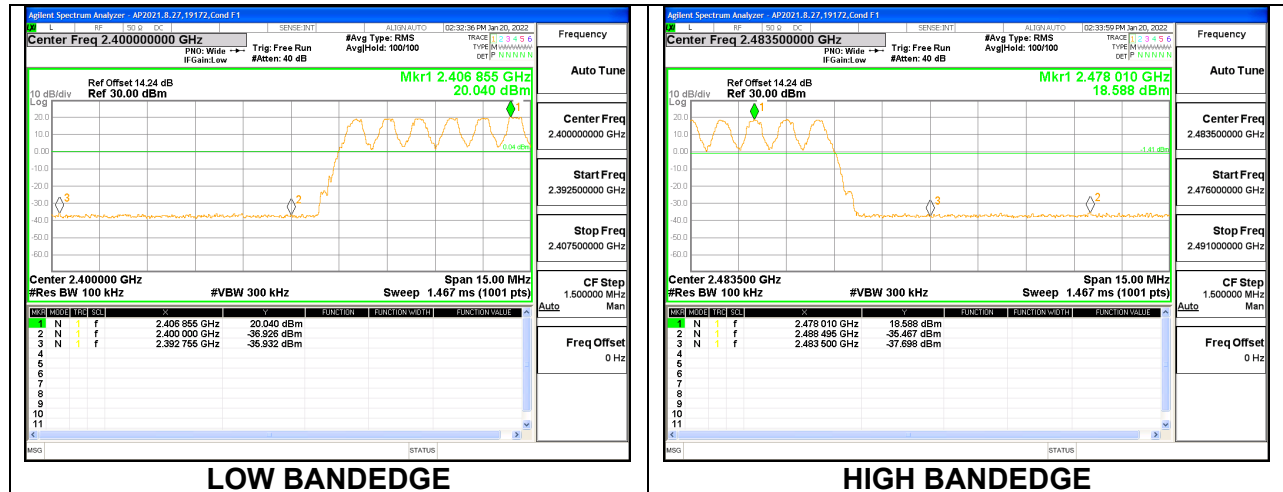
**ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**







## 9.8.2. HIGH POWER BASIC DATA RATE TXBF GFSK MODULATION

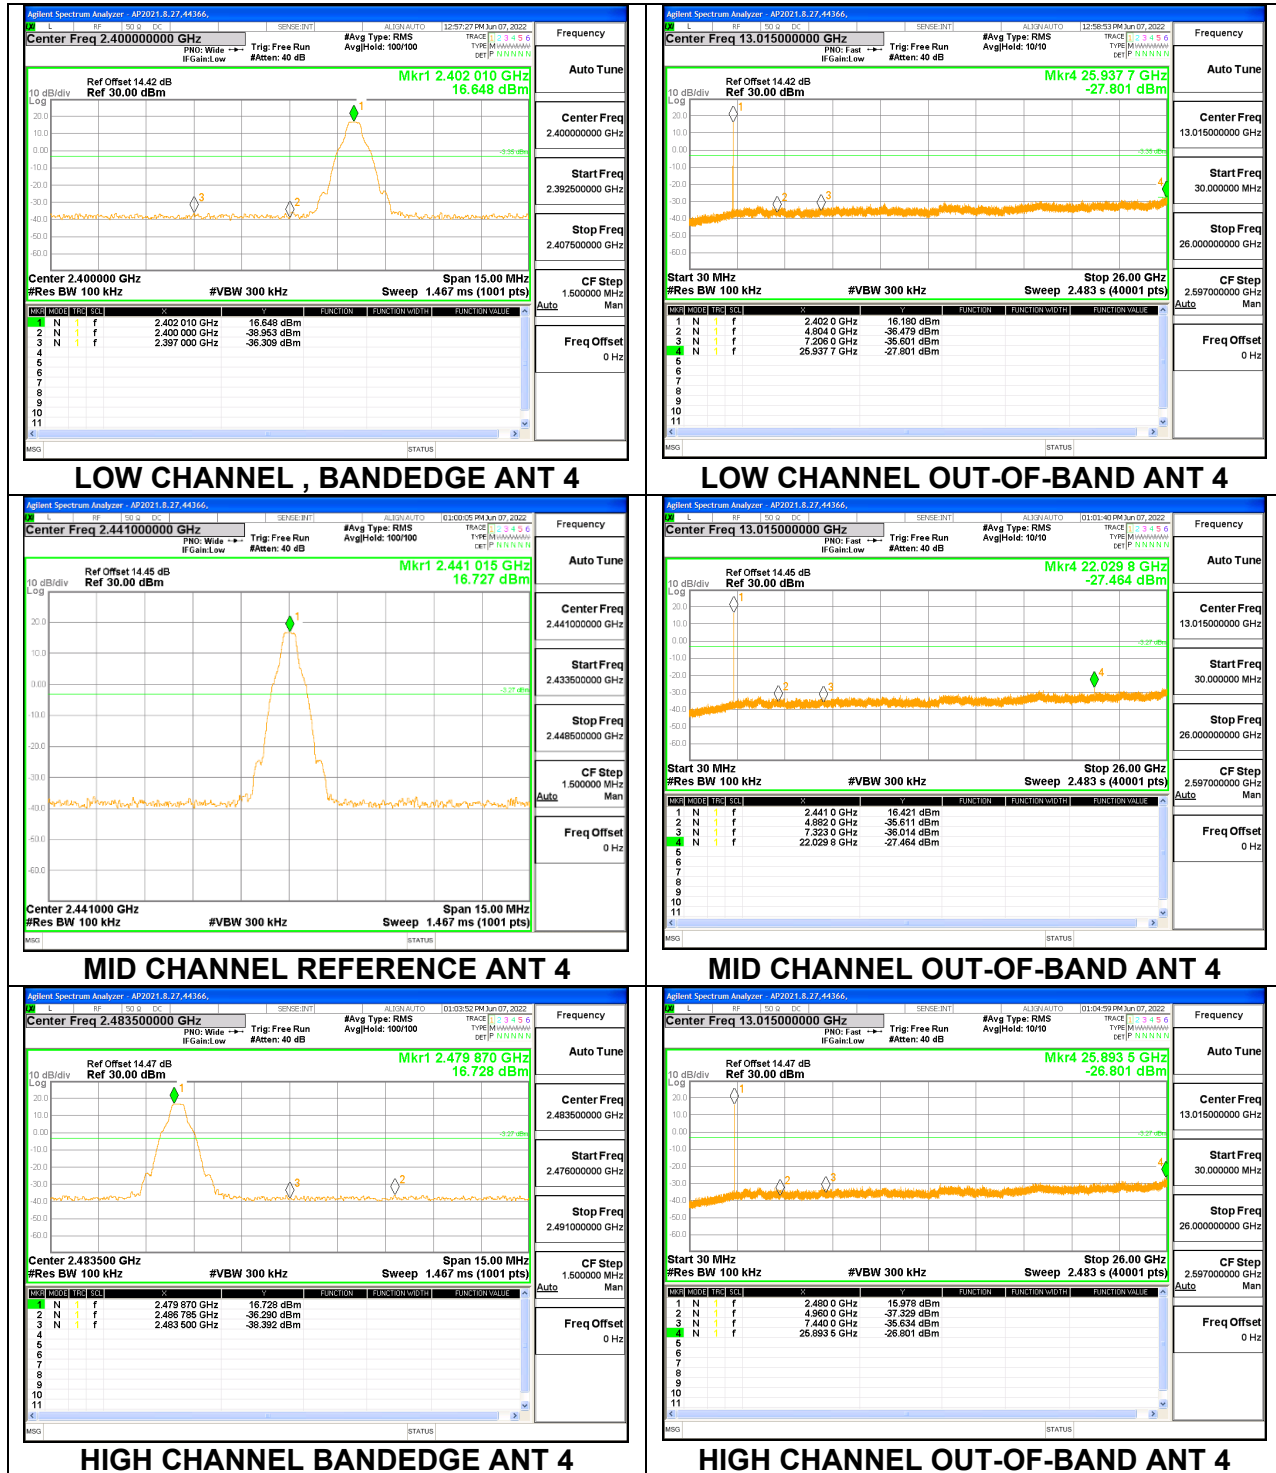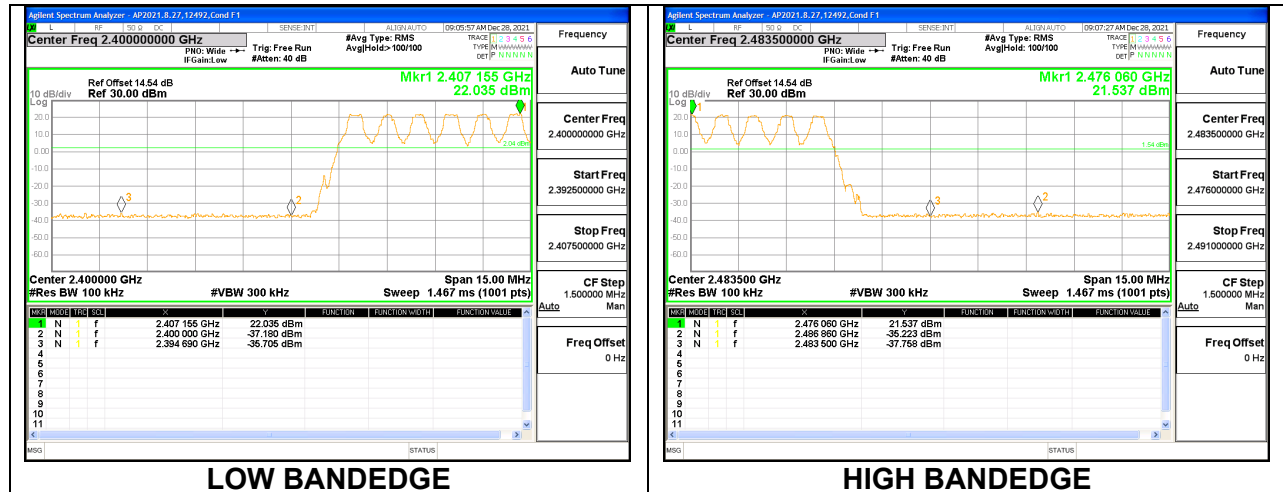Note: Test procedure on beamforming mode is same as BT basic and EDR mode

### ANT 4 SPURIOUS EMISSIONS, NON-HOPPING



**ANT 4 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

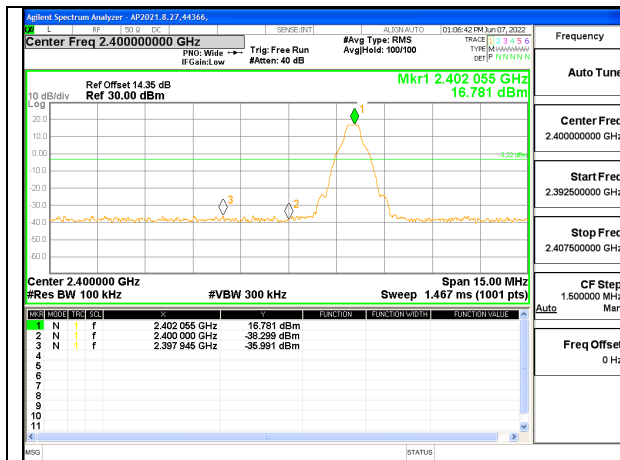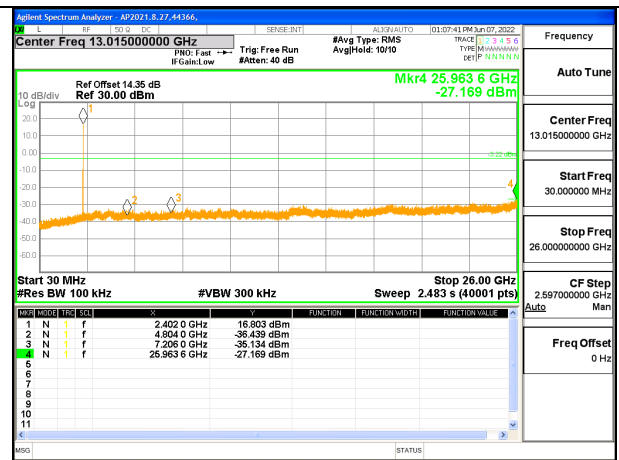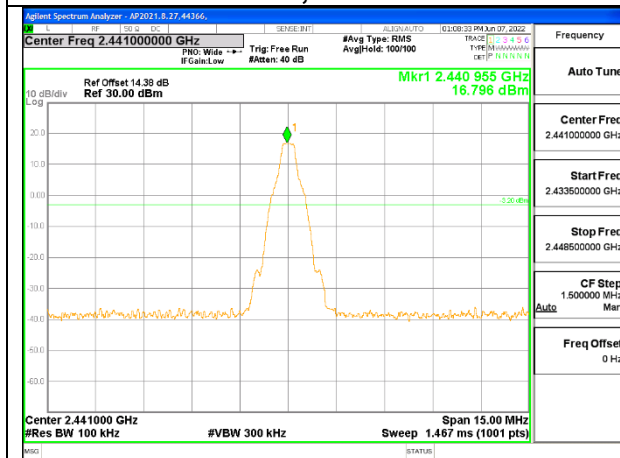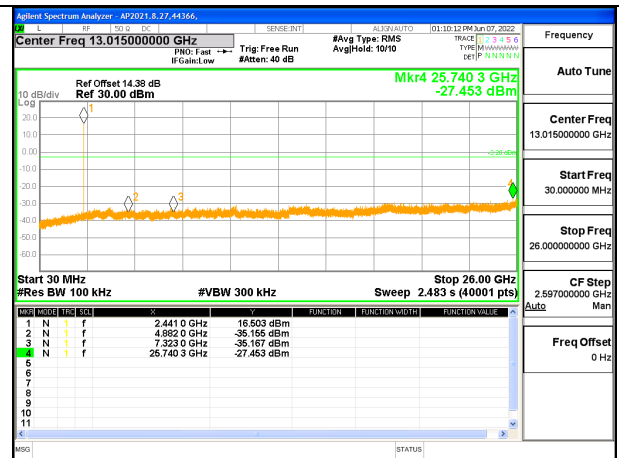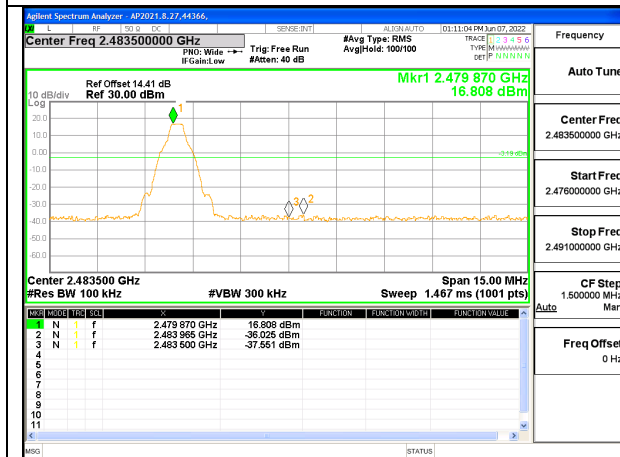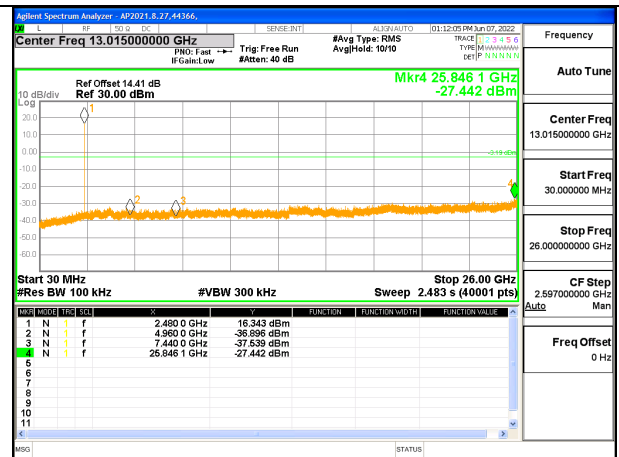**ANT 3 SPURIOUS EMISSIONS, NON-HOPPING****LOW CHANNEL , BANDEDGE ANT 3****LOW CHANNEL OUT-OF-BAND ANT 3****MID CHANNEL REFERENCE ANT 3****MID CHANNEL OUT-OF-BAND ANT 3****HIGH CHANNEL BANDEDGE ANT 3****HIGH CHANNEL OUT-OF-BAND ANT 3**

**ANT 3 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**