


尺寸：105x148mm

材质：100g书纸

工艺：双面四色印刷 折页



Wireless Backlit Keyboard and Mouse

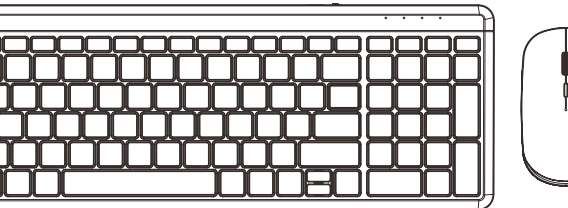


User Manual



Email: support@wisfox.com
Website: https://wisfox.com

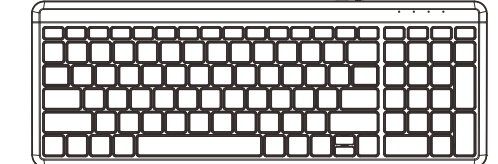Product List


Keyboard x1
Mouse x1


USB Receiver x1
User Manual x1
Type-C Charging Cable x1

Product Specification

Keyboard	
Product Size	365 x 135 x 24.5 mm
Product Weight	542 g
Connectivity	2.4G Wireless Connection, Bluetooth
Connection Distance	8-10 M
Power	1500 mAh
Working Time(without backlight)	480 Hours
Working Time(with the brightest backlight)	20 Hours
Charging Time	4.5 Hours
Backlight effect	7 backlight colors and 3 brightness levels
Power Saving	After successful pairing and regular usage, if there is no activity on the keyboard for 2 minutes, the backlight will turn off, and the keyboard will enter sleep mode.
Key Life	10 Millions Strokes


Mouse

DPI	800-1200-1600
Power	650mA
Working Time(with backlight)	35 Hours
Working Time(without backlight)	50 Hours
Charging Time	2 Hours
Connection Distance	10 M
Backlight effect	Click the backlight switch to turn on 15 different lights. Hold and press the backlight switch for 3 seconds to turn off the backlight of the mouse.
Power Saving	The mouse will enter into sleep mode after 3 minutes of inactivity, and the backlight will turn off automatically.


Compatible System: Windows/ Android/Mac OS/iOS

2.4GHz Wireless Connection Mode




Step 1: Turn on the keyboard and mouse.

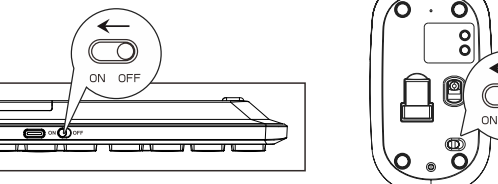

Step 2: Take out the USB Receiver and insert into your computer.

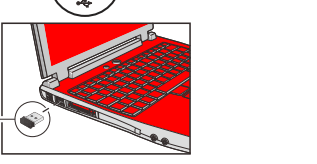

Bluetooth Connection Mode of the Mouse

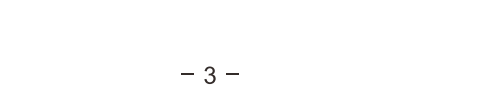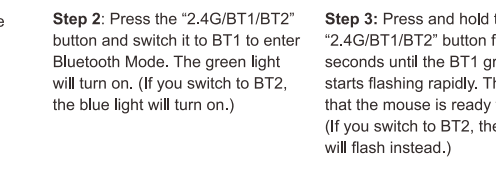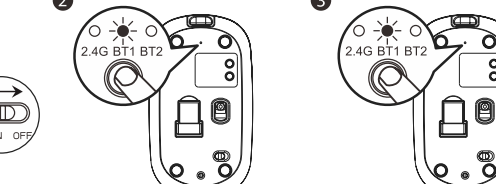

Step 1: Turn on the Mouse.
Step 2: Press the "2.4G/BT1/BT2" button and switch it to BT1 to enter Bluetooth Mode. The green light will turn on. (If you switch to BT2, the blue light will turn on.)
Step 3: Press and hold the "2.4G/BT1/BT2" button for 3-5 seconds until the BT1 green light starts flashing rapidly. This indicates that the mouse is ready for pairing. (If you switch to BT2, the blue light will flash instead.)

iPad/iPhone System

Please complete the Bluetooth mode pairing step1/2/3 before pairing.

Step 4: Turn on Bluetooth, click "BT3.0 Mouse/BT5.0 Mouse". It is recommended to choose BT 5.0 Mouse connection.

Step 5: Click Pair.

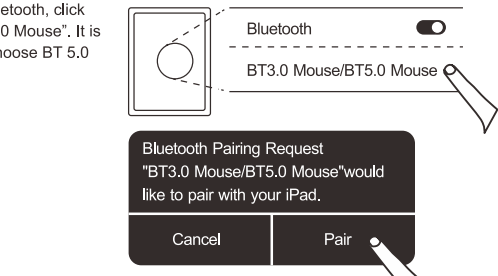


Windows 10 System

Please complete the Bluetooth mode pairing step1/2/3 before pairing.


Click "Bluetooth Device".

Click "Add or remove a Bluetooth device".

Your computer will automatically search for "BT3.0 Mouse/BT5.0 Mouse" and then click "Pair". It is recommended to choose BT 5.0 Mouse connection.

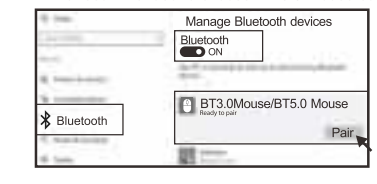

"BT3.0 Mouse/BT5.0 Mouse" is connected and you can use the mouse. Your PC is searching for and can be discovered by Bluetooth devices.

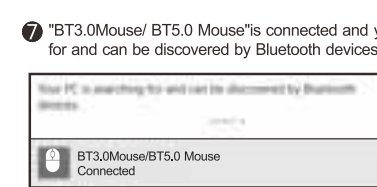


Mac OS System


Please complete the Bluetooth mode pairing step1/2/3 before pairing.

Click "System Preferences" on Mac.

Click "Bluetooth" in "System Preferences". It is recommended to choose BT 5.0 Mouse connection.

Your computer will automatically find "BT3.0 Mouse/BT5.0 Mouse", then click "Pair", and you can use it after installation.

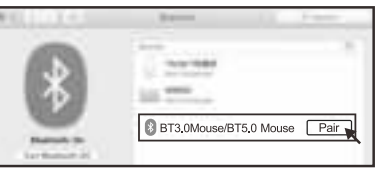

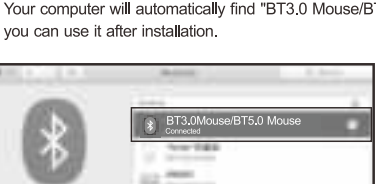



Android System

Please complete the Bluetooth mode pairing step 1/2/3 before pairing.

Click "Settings", turn on Bluetooth.

Your computer will automatically search for "BT3.0 Mouse/BT5.0 Mouse" and then click "Pair". It is recommended to choose BT 5.0 Mouse connection.

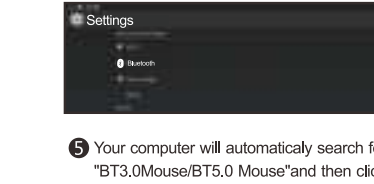

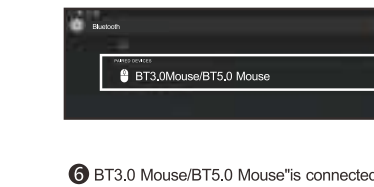

Bluetooth Connection Mode of the Keyboard

Step 1: Press the "Fn" + "Esc" to switch the keyboard to Bluetooth mode.


Step 2: Press and hold the "Fn" + "Esc". The indicator light will start flashing rapidly as it searches for Keyboard 5.0. Click on it to initiate pairing. Once the pairing is successful, the keyboard's backlight will turn on, and the LED indicator light will stop flashing.

Multimedia Description


Key Combination	Windows/Mac OS
Fn + [Mute]	Mute
Fn + [Volume-]	Volume-
Fn + [Volume+]	Volume+
Fn + [Input Method]	Inputting Method
Fn + [Lock Screen]	Lock Screen
Fn + [Backlight Mode Switch]	Backlight Mode Switch
Fn + [Adjusting the Backlight Brightness]	Adjusting the Backlight Brightness

LED Light Instruction


Keyboard

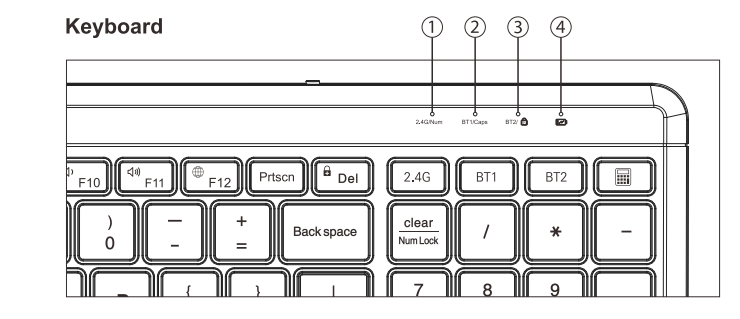

Mouse

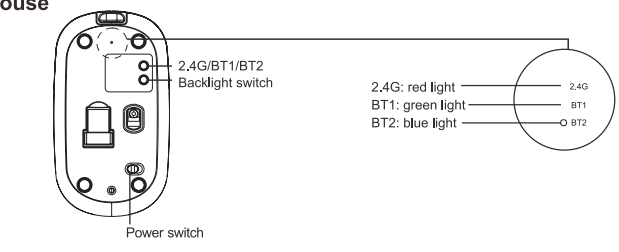

Instruction For Charging

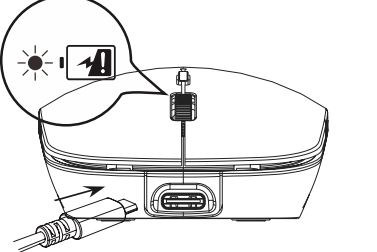

FAQ

Q1: What should I do if the keyboard gets delayed or stuck?
A1: Please check there is no 2.4GHz device (e.g. router) nearby to interfere with the connection. Please check the keyboard has been fully charged. Please check there is no full metal case that may block the signal.
Q2: What should I do if the keyboard and mouse can not be charged?
A2: Please check whether the charging port is connected. Please try to replace the charging cable. Try to change the USB port, and if the problem can not be solved, please feel free to contact us.
Q3: What should I do if the backlight stops working?
A3: Please charge for half an hour and then re-insert the USB. Please try to restart the keyboard and mouse.
Q4: Where is my USB receiver?
A4: The USB receiver is placed on top of the keyboard inside the package.

Caution

1) Please fully charge the keyboard when you first receive the product as this helps to maintain the battery life.
2) Please remove the power supply when charging is complete.
3) If the keyboard is not used for a long time, it is recommended to turn off the power switch of the keyboard.
4) Please do not expose this product to water because it may cause short-circuit and damage the product.
5) Please do not drop or hit this product because shocks may damage the components inside.
6) Please do not place this product near the extreme heat or sources of fire.

Note

The multimedia keys are for Win 8 and Win 10, for other systems, there may be no function for some combined keys. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference
(2) This device must accept any interference received, including interference that may cause undesired operation.

- 1 -

- 2 -

- 3 -

- 4 -

- 5 -

- 6 -

- 7 -

- 8 -

- 9 -

- 10 -

- 11 -

- 12 -

- 13 -