


Test Mode	Channel	Polarization	Verdict
11a	5320	Horizontal	PASS

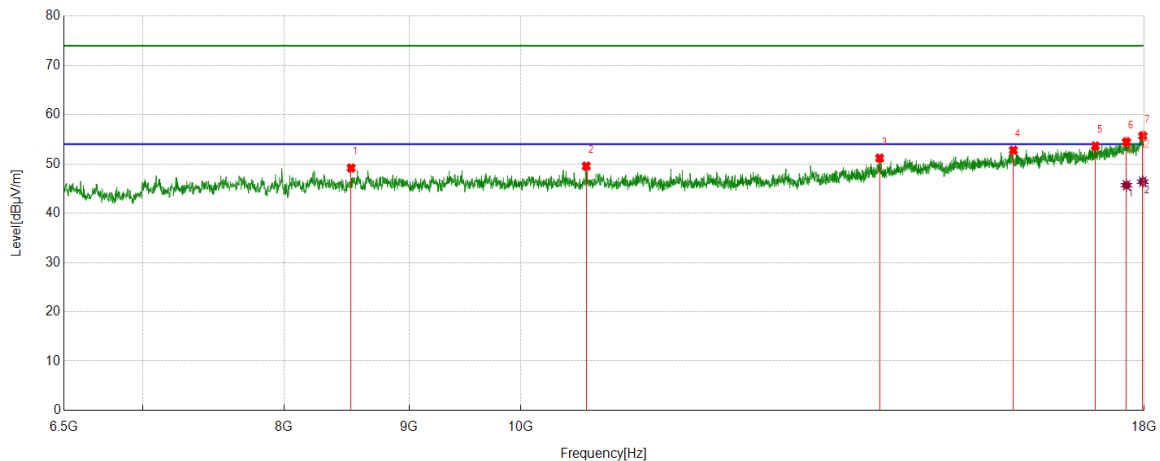

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8522.4204	42.76	6.41	49.17	74.00	-24.83	Horizontal
2	10636.8561	42.65	6.90	49.55	74.00	-24.45	Horizontal
3	14026.0877	39.27	11.91	51.18	74.00	-22.82	Horizontal
4	15910.4851	38.17	14.61	52.78	74.00	-21.22	Horizontal
5	17189.1149	37.03	16.60	53.63	74.00	-20.37	Horizontal
6	17700.9502	36.19	18.28	54.47	74.00	-19.53	Horizontal
7	17975.0792	35.97	19.73	55.70	74.00	-18.30	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17700.9502	27.40	18.28	45.68	54.00	-8.32	Horizontal
2	17975.0792	26.67	19.73	46.40	54.00	-7.60	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5320	Vertical	PASS

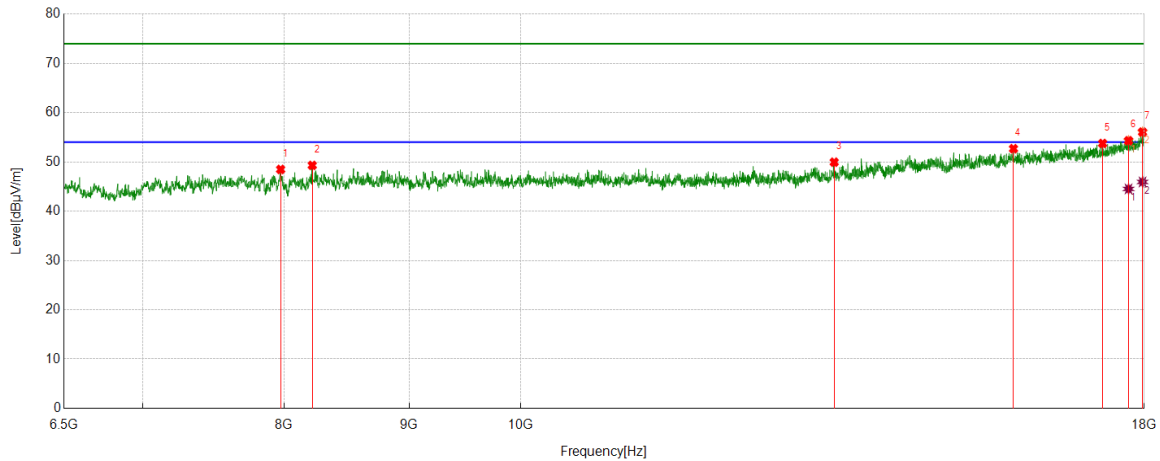

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7974.1624	43.10	5.38	48.48	74.00	-25.52	Vertical
2	8215.7026	43.28	6.02	49.30	74.00	-24.70	Vertical
3	13437.5729	39.63	10.32	49.95	74.00	-24.05	Vertical
4	15912.4021	38.11	14.57	52.68	74.00	-21.32	Vertical
5	17307.9680	36.76	16.99	53.75	74.00	-20.25	Vertical
6	17735.4559	35.78	18.53	54.31	74.00	-19.69	Vertical
7	17971.2452	36.41	19.65	56.06	74.00	-17.94	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17735.4559	25.99	18.53	44.52	54.00	-9.48	Vertical
2	17971.2452	26.29	19.65	45.94	54.00	-8.06	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5500	Horizontal	PASS

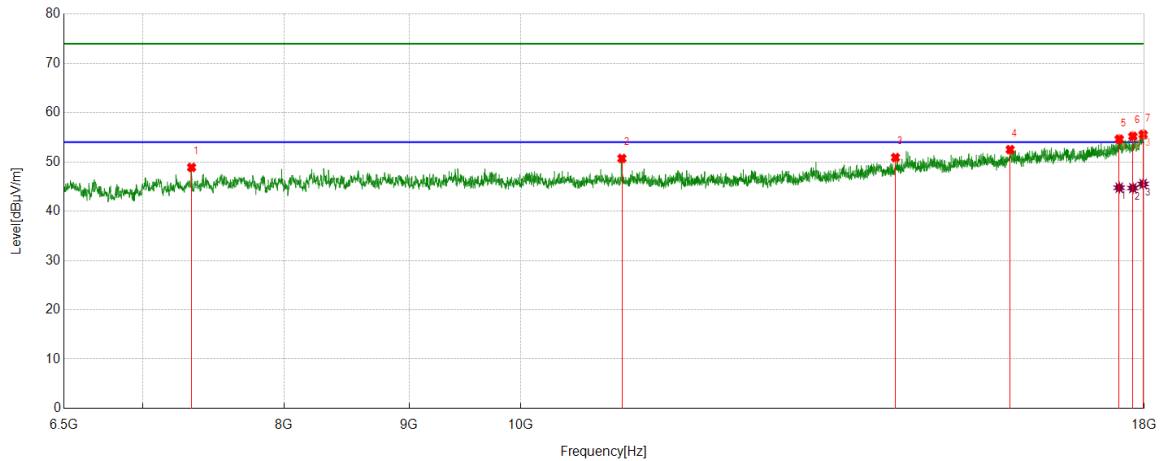

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7331.9720	45.00	3.89	48.89	74.00	-25.11	Horizontal
2	11001.0835	43.42	7.29	50.71	74.00	-23.29	Horizontal
3	14236.9562	38.92	11.97	50.89	74.00	-23.11	Horizontal
4	15862.5604	37.84	14.66	52.50	74.00	-21.50	Horizontal
5	17580.1800	36.67	17.95	54.62	74.00	-19.38	Horizontal
6	17808.3014	36.28	18.92	55.20	74.00	-18.80	Horizontal
7	17980.8301	35.76	19.81	55.57	74.00	-18.43	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17580.1800	26.82	17.95	44.77	54.00	-9.23	Horizontal
2	17808.3014	25.78	18.92	44.70	54.00	-9.30	Horizontal
3	17980.8301	25.72	19.81	45.53	54.00	-8.47	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5500	Vertical	PASS

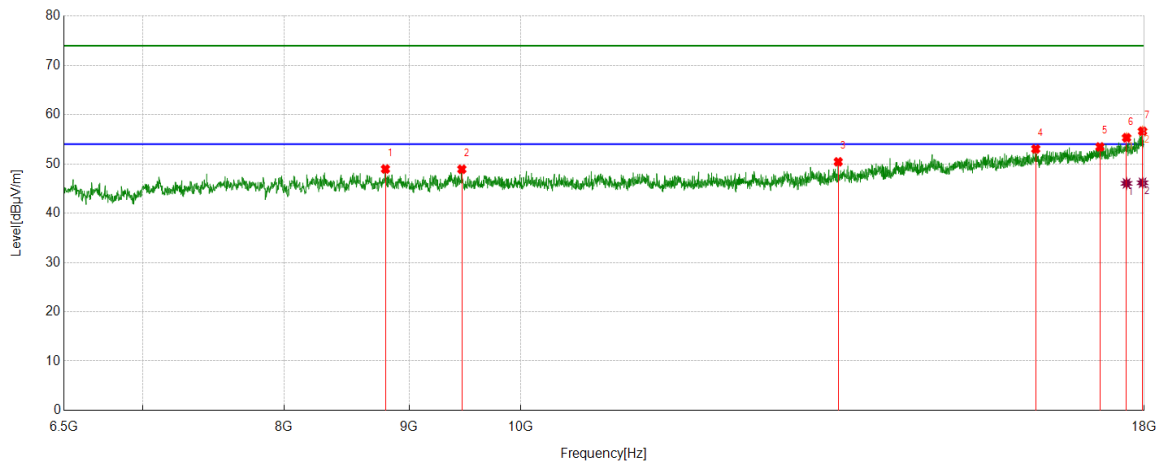

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8802.3004	42.73	6.23	48.96	74.00	-25.04	Vertical
2	9459.8266	42.37	6.55	48.92	74.00	-25.08	Vertical
3	13489.3316	39.89	10.54	50.43	74.00	-23.57	Vertical
4	16249.7916	37.60	15.43	53.03	74.00	-20.97	Vertical
5	17263.8773	36.60	16.86	53.46	74.00	-20.54	Vertical
6	17702.8671	37.02	18.30	55.32	74.00	-18.68	Vertical
7	17971.2452	37.00	19.65	56.65	74.00	-17.35	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17702.8671	27.75	18.30	46.05	54.00	-7.95	Vertical
2	17971.2452	26.52	19.65	46.17	54.00	-7.83	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5580	Horizontal	PASS

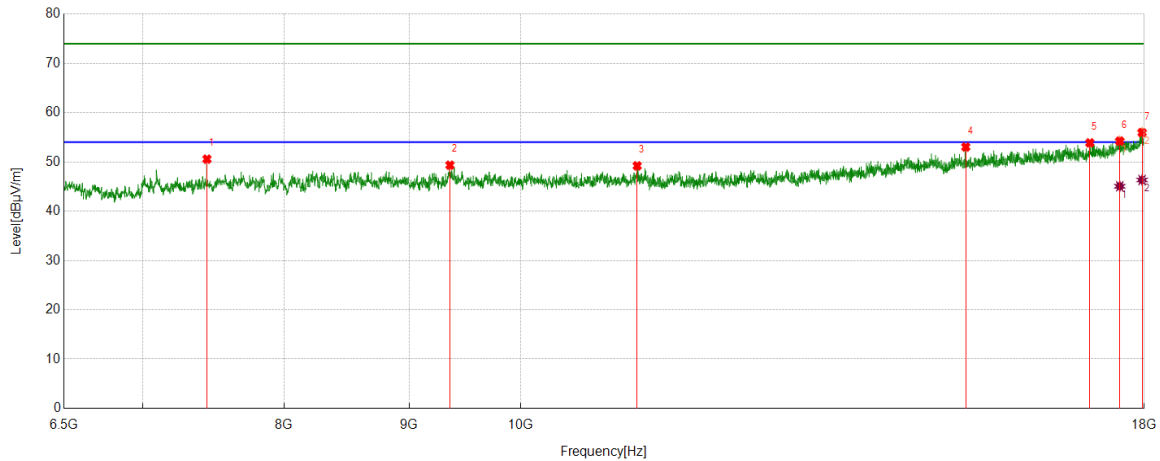

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7439.3232	46.37	4.20	50.57	74.00	-23.43	Horizontal
2	9354.3924	42.89	6.45	49.34	74.00	-24.66	Horizontal
3	11160.1934	41.99	7.21	49.20	74.00	-24.80	Horizontal
4	15212.7021	39.58	13.45	53.03	74.00	-20.97	Horizontal
5	17100.9335	37.37	16.50	53.87	74.00	-20.13	Horizontal
6	17589.7650	36.18	18.04	54.22	74.00	-19.78	Horizontal
7	17963.5773	36.34	19.63	55.97	74.00	-18.03	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17589.7650	27.02	18.04	45.06	54.00	-8.94	Horizontal
2	17963.5773	26.70	19.63	46.33	54.00	-7.67	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5580	Vertical	PASS

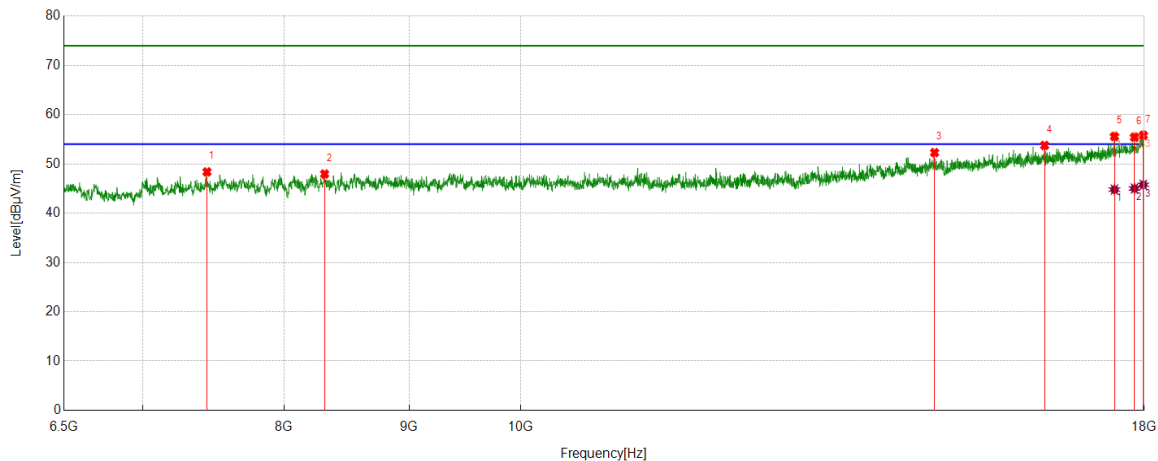

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7439.3232	44.18	4.20	48.38	74.00	-25.62	Vertical
2	8311.5519	41.69	6.27	47.96	74.00	-26.04	Vertical
3	14771.7953	39.39	12.91	52.30	74.00	-21.70	Vertical
4	16385.8976	38.73	15.02	53.75	74.00	-20.25	Vertical
5	17501.5836	37.95	17.62	55.57	74.00	-18.43	Vertical
6	17835.1392	36.33	19.10	55.43	74.00	-18.57	Vertical
7	17984.6641	36.02	19.80	55.82	74.00	-18.18	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17501.5836	27.17	17.62	44.79	54.00	-9.21	Vertical
2	17835.1392	25.91	19.10	45.01	54.00	-8.99	Vertical
3	17984.6641	25.97	19.80	45.77	54.00	-8.23	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5700	Horizontal	PASS

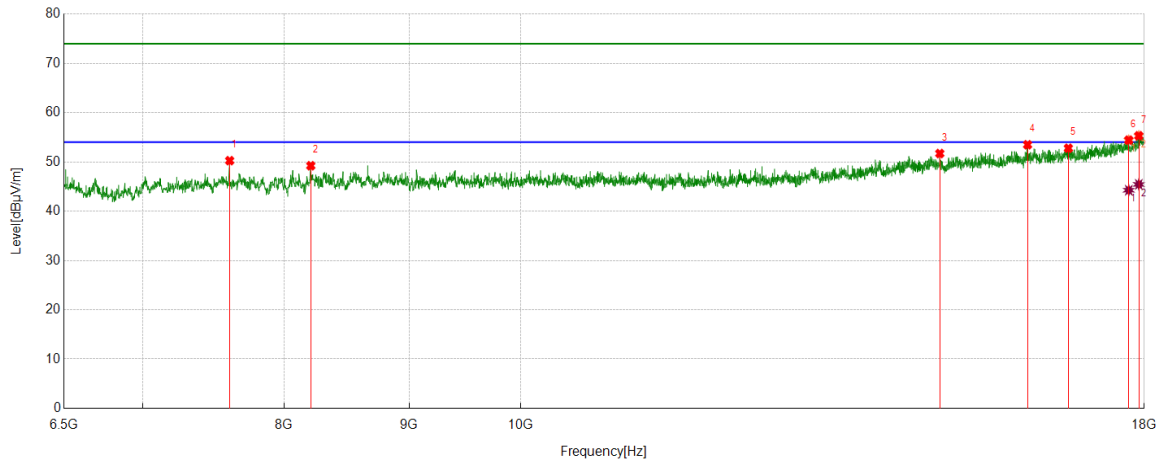

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7600.3501	45.31	4.95	50.26	74.00	-23.74	Horizontal
2	8204.2007	43.18	6.05	49.23	74.00	-24.77	Horizontal
3	14844.6408	38.85	12.86	51.71	74.00	-22.29	Horizontal
4	16125.1875	38.69	14.80	53.49	74.00	-20.51	Horizontal
5	16757.7930	36.64	16.14	52.78	74.00	-21.22	Horizontal
6	17739.2899	35.89	18.54	54.43	74.00	-19.57	Horizontal
7	17907.9847	36.08	19.23	55.31	74.00	-18.69	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17739.2899	25.72	18.54	44.26	54.00	-9.74	Horizontal
2	17907.9847	26.21	19.23	45.44	54.00	-8.56	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5700	Vertical	PASS

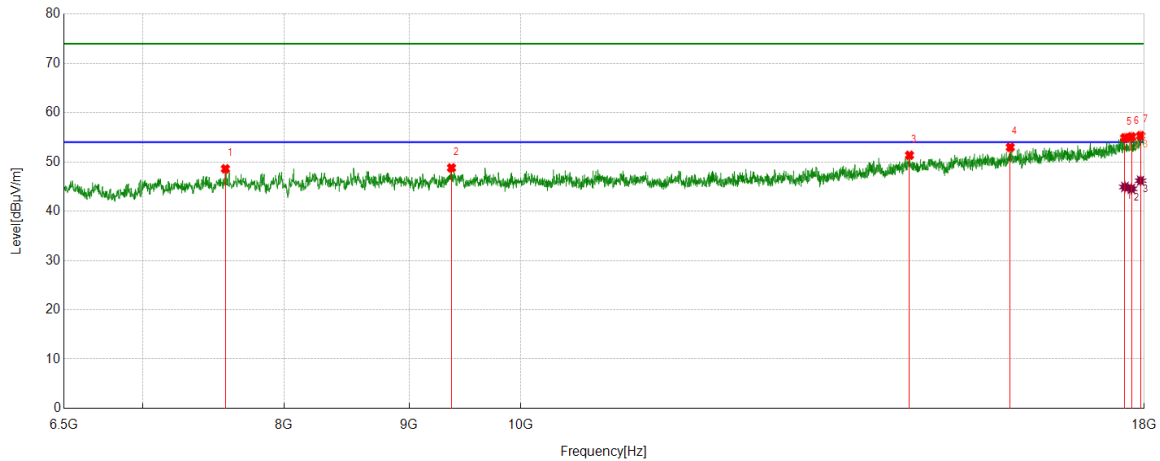

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7569.6783	43.74	4.86	48.60	74.00	-25.40	Vertical
2	9367.8113	42.31	6.49	48.80	74.00	-25.20	Vertical
3	14426.7378	38.47	12.89	51.36	74.00	-22.64	Vertical
4	15864.4774	38.31	14.66	52.97	74.00	-21.03	Vertical
5	17674.1124	36.82	18.08	54.90	74.00	-19.10	Vertical
6	17785.2976	36.36	18.74	55.10	74.00	-18.90	Vertical
7	17938.6564	35.89	19.44	55.33	74.00	-18.67	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17674.1124	26.84	18.08	44.92	54.00	-9.08	Vertical
2	17785.2976	25.81	18.74	44.55	54.00	-9.45	Vertical
3	17938.6564	26.76	19.44	46.20	54.00	-7.80	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5720	Horizontal	PASS

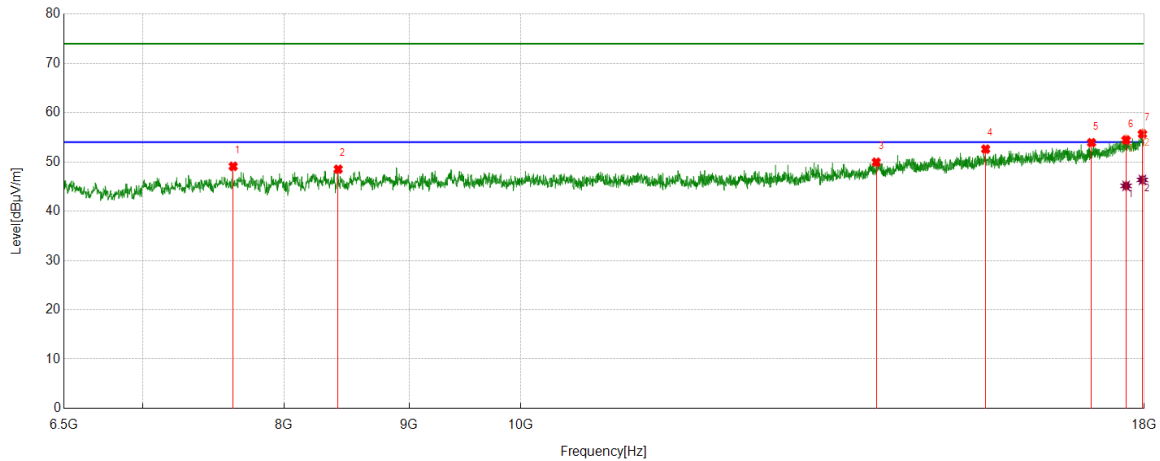

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7625.2709	43.92	5.18	49.10	74.00	-24.90	Horizontal
2	8418.9032	42.59	5.93	48.52	74.00	-25.48	Horizontal
3	13981.9970	38.33	11.62	49.95	74.00	-24.05	Horizontal
4	15500.2500	38.68	13.92	52.60	74.00	-21.40	Horizontal
5	17127.7713	37.32	16.59	53.91	74.00	-20.09	Horizontal
6	17695.1992	36.23	18.23	54.46	74.00	-19.54	Horizontal
7	17969.3282	36.05	19.63	55.68	74.00	-18.32	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17695.1992	26.91	18.23	45.14	54.00	-8.86	Horizontal
2	17969.3282	26.73	19.63	46.36	54.00	-7.64	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5720	Vertical	PASS

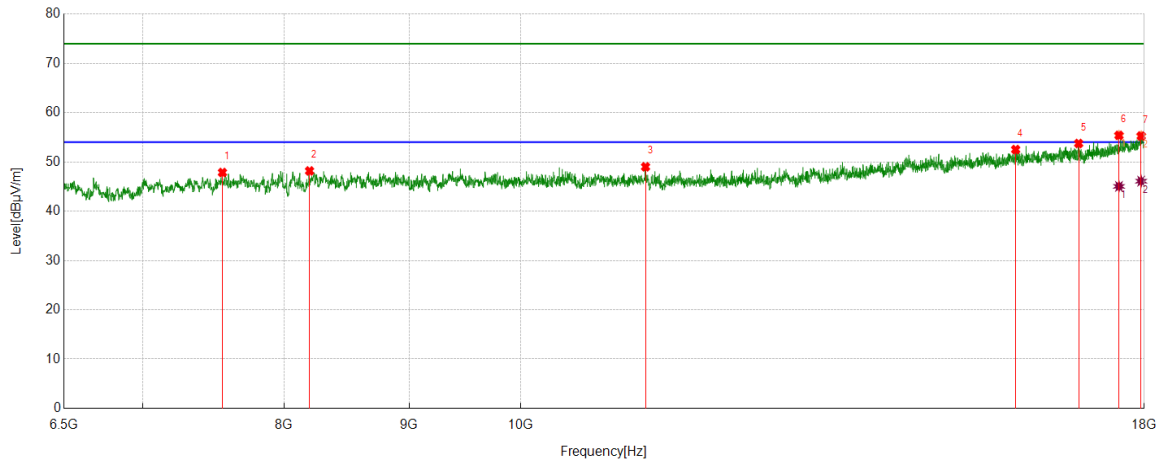

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7548.5914	43.34	4.51	47.85	74.00	-26.15	Vertical
2	8194.6158	42.03	6.14	48.17	74.00	-25.83	Vertical
3	11248.3747	41.86	7.15	49.01	74.00	-24.99	Vertical
4	15944.9908	38.03	14.48	52.51	74.00	-21.49	Vertical
5	16920.7368	37.63	16.11	53.74	74.00	-20.26	Vertical
6	17576.3461	37.46	17.93	55.39	74.00	-18.61	Vertical
7	17948.2414	35.79	19.48	55.27	74.00	-18.73	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17576.3461	27.11	17.93	45.04	54.00	-8.96	Vertical
2	17948.2414	26.62	19.48	46.10	54.00	-7.90	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5745	Horizontal	PASS

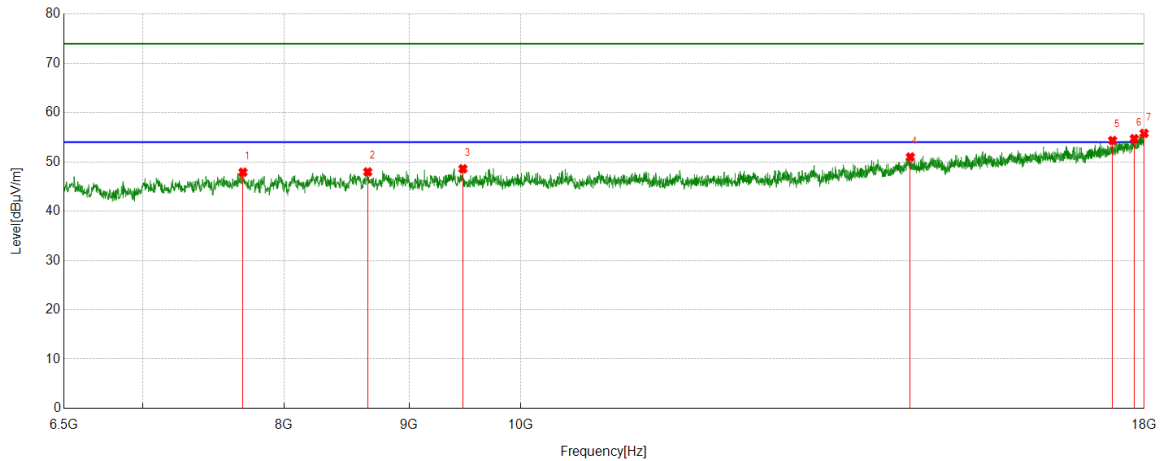

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7696.1994	42.47	5.43	47.90	74.00	-26.10	Horizontal
2	8656.6094	41.63	6.34	47.97	74.00	-26.03	Horizontal
3	9469.4116	42.16	6.45	48.61	74.00	-25.39	Horizontal
4	14438.2397	38.13	12.87	51.00	74.00	-23.00	Horizontal
5	17470.9118	36.71	17.63	54.34	74.00	-19.66	Horizontal
6	17831.3052	35.61	19.11	54.72	74.00	-19.28	Horizontal
7	17998.0830	36.05	19.75	55.80	74.00	-18.20	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17470.9118	26.79	17.63	44.42	54.00	-9.58	Horizontal
2	17831.3052	26.10	19.11	45.21	54.00	-8.79	Horizontal
3	17998.0830	26.38	19.75	46.13	54.00	-7.87	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5745	Vertical	PASS

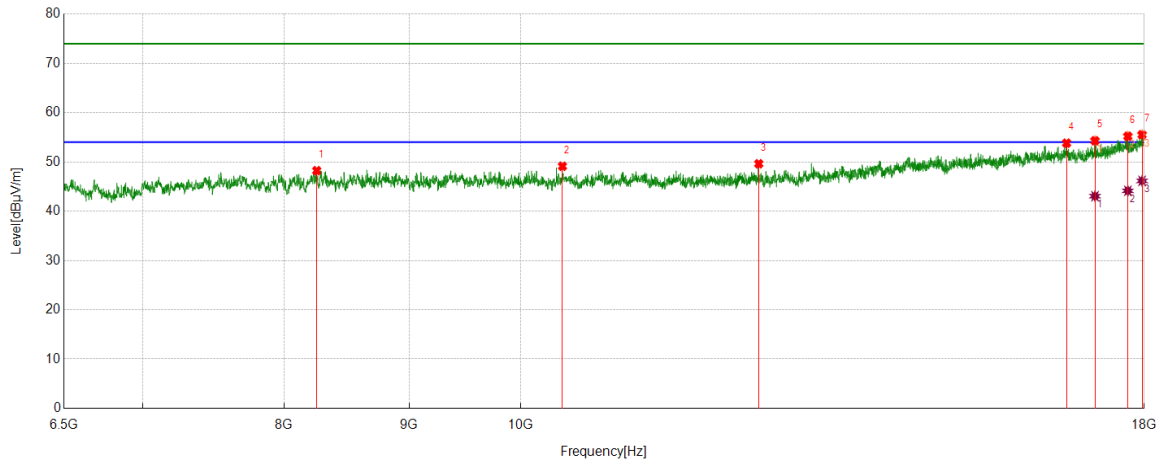

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8250.2084	41.91	6.32	48.23	74.00	-25.77	Vertical
2	10401.0668	42.40	6.72	49.12	74.00	-24.88	Vertical
3	12515.5026	41.01	8.62	49.63	74.00	-24.37	Vertical
4	16729.0382	37.64	16.17	53.81	74.00	-20.19	Vertical
5	17183.3639	37.71	16.59	54.30	74.00	-19.70	Vertical
6	17723.9540	36.71	18.50	55.21	74.00	-18.79	Vertical
7	17963.5773	35.89	19.63	55.52	74.00	-18.48	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17183.3639	26.46	16.59	43.05	54.00	-10.95	Vertical
2	17723.9540	25.64	18.50	44.14	54.00	-9.86	Vertical
3	17963.5773	26.52	19.63	46.15	54.00	-7.85	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5785	Horizontal	PASS

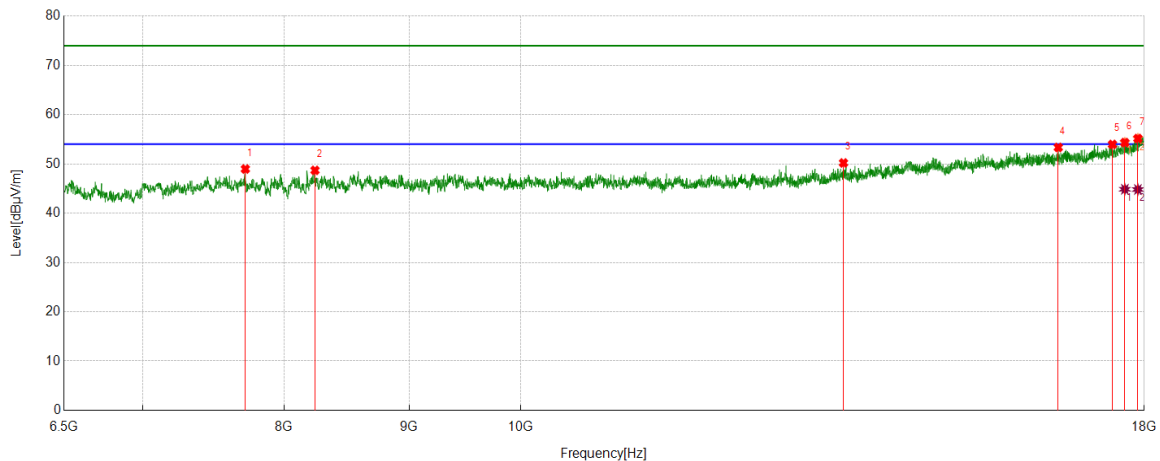

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7713.4522	43.83	5.14	48.97	74.00	-25.03	Horizontal
2	8236.7895	42.77	5.93	48.70	74.00	-25.30	Horizontal
3	13556.4261	39.34	10.86	50.20	74.00	-23.80	Horizontal
4	16598.6831	37.39	15.96	53.35	74.00	-20.65	Horizontal
5	17468.9948	36.33	17.63	53.96	74.00	-20.04	Horizontal
6	17674.1124	36.26	18.08	54.34	74.00	-19.66	Horizontal
7	17892.6488	35.88	19.28	55.16	74.00	-18.84	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17674.1124	26.78	18.08	44.86	54.00	-9.14	Horizontal
2	17892.6488	25.53	19.28	44.81	54.00	-9.19	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5785	Vertical	PASS

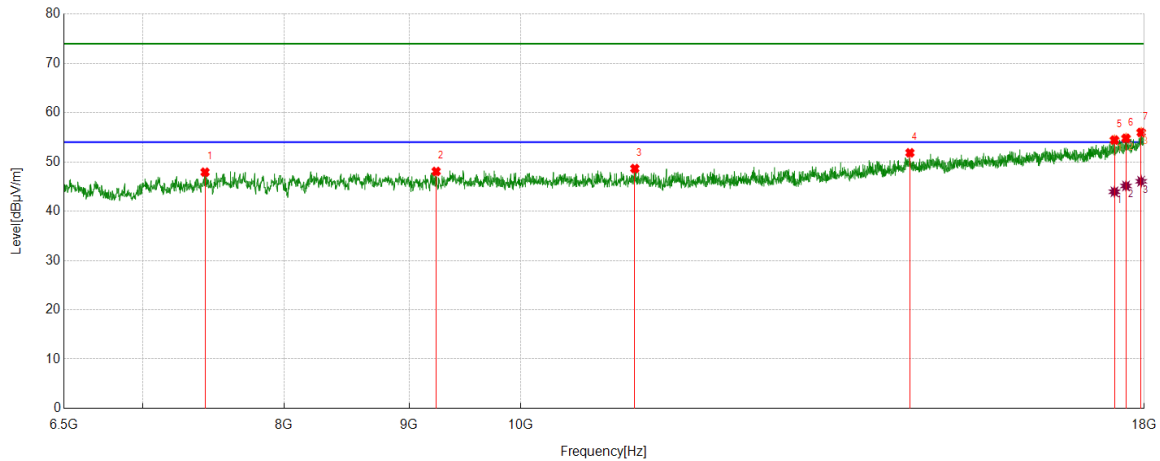

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7425.9043	43.67	4.25	47.92	74.00	-26.08	Vertical
2	9233.6223	42.01	6.06	48.07	74.00	-25.93	Vertical
3	11135.2725	41.40	7.25	48.65	74.00	-25.35	Vertical
4	14432.4887	38.98	12.87	51.85	74.00	-22.15	Vertical
5	17501.5836	36.82	17.62	54.44	74.00	-19.56	Vertical
6	17693.2822	36.59	18.21	54.80	74.00	-19.20	Vertical
7	17948.2414	36.51	19.48	55.99	74.00	-18.01	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17501.5836	26.33	17.62	43.95	54.00	-10.05	Vertical
2	17693.2822	26.91	18.21	45.12	54.00	-8.88	Vertical
3	17948.2414	26.59	19.48	46.07	54.00	-7.93	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5825	Horizontal	PASS

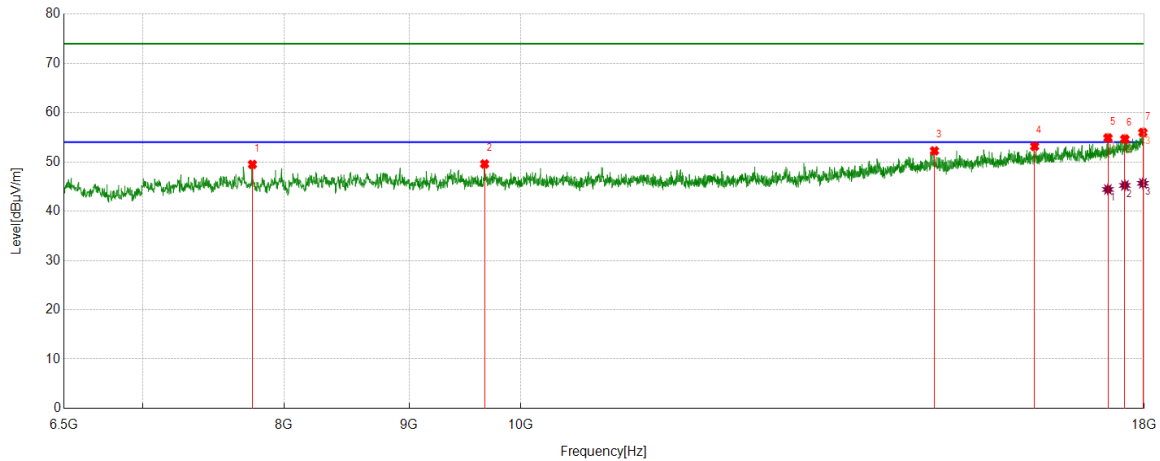

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7765.2109	44.41	5.08	49.49	74.00	-24.51	Horizontal
2	9664.9442	43.15	6.44	49.59	74.00	-24.41	Horizontal
3	14769.8783	39.32	12.93	52.25	74.00	-21.75	Horizontal
4	16232.5388	37.89	15.27	53.16	74.00	-20.84	Horizontal
5	17394.2324	37.53	17.35	54.88	74.00	-19.12	Horizontal
6	17674.1124	36.58	18.08	54.66	74.00	-19.34	Horizontal
7	17976.9962	36.23	19.75	55.98	74.00	-18.02	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17394.2324	27.07	17.35	44.42	54.00	-9.58	Horizontal
2	17674.1124	27.16	18.08	45.24	54.00	-8.76	Horizontal
3	17976.9962	25.91	19.75	45.66	54.00	-8.34	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11a	5825	Vertical	PASS

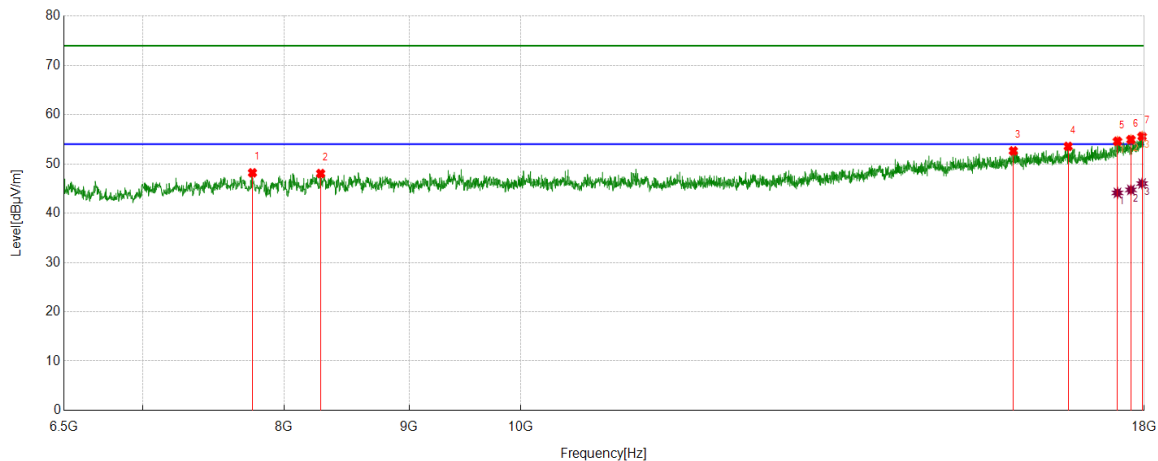

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7765.2109	43.11	5.08	48.19	74.00	-25.81	Vertical
2	8280.8801	41.64	6.41	48.05	74.00	-25.95	Vertical
3	15910.4851	38.03	14.61	52.64	74.00	-21.36	Vertical
4	16753.9590	37.30	16.26	53.56	74.00	-20.44	Vertical
5	17551.4252	36.86	17.74	54.60	74.00	-19.40	Vertical
6	17775.7126	36.20	18.73	54.93	74.00	-19.07	Vertical
7	17963.5773	35.96	19.63	55.59	74.00	-18.41	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17551.4252	26.39	17.74	44.13	54.00	-9.87	Vertical
2	17775.7126	26.01	18.73	44.74	54.00	-9.26	Vertical
3	17963.5773	26.39	19.63	46.02	54.00	-7.98	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5180	Horizontal	PASS

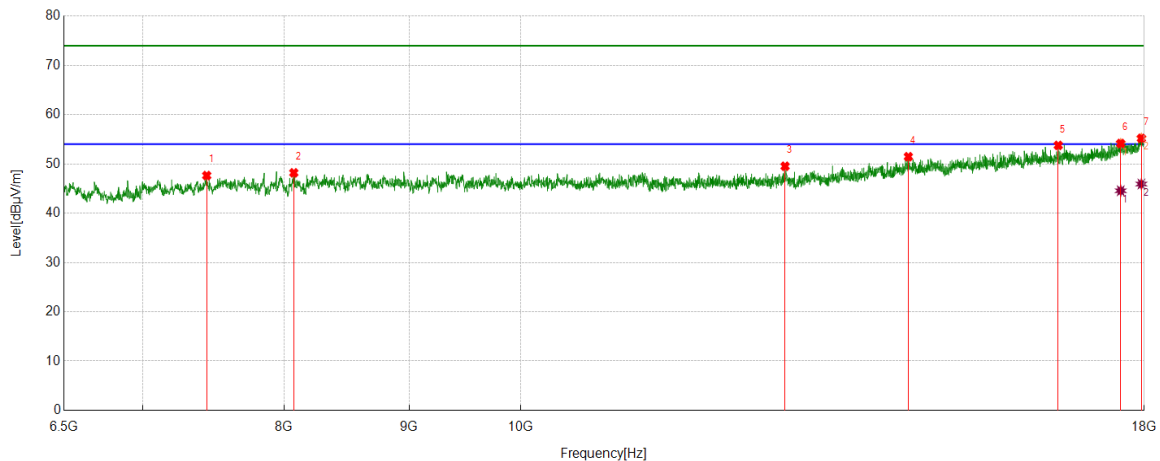

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7437.4062	43.43	4.21	47.64	74.00	-26.36	Horizontal
2	8073.8456	42.58	5.61	48.19	74.00	-25.81	Horizontal
3	12829.8883	40.47	9.06	49.53	74.00	-24.47	Horizontal
4	14411.4019	38.58	12.89	51.47	74.00	-22.53	Horizontal
5	16598.6831	37.80	15.96	53.76	74.00	-20.24	Horizontal
6	17605.1008	36.10	18.05	54.15	74.00	-19.85	Horizontal
7	17952.0753	35.68	19.52	55.20	74.00	-18.80	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17605.1008	26.51	18.05	44.56	54.00	-9.44	Horizontal
2	17952.0753	26.40	19.52	45.92	54.00	-8.08	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5180	Vertical	PASS

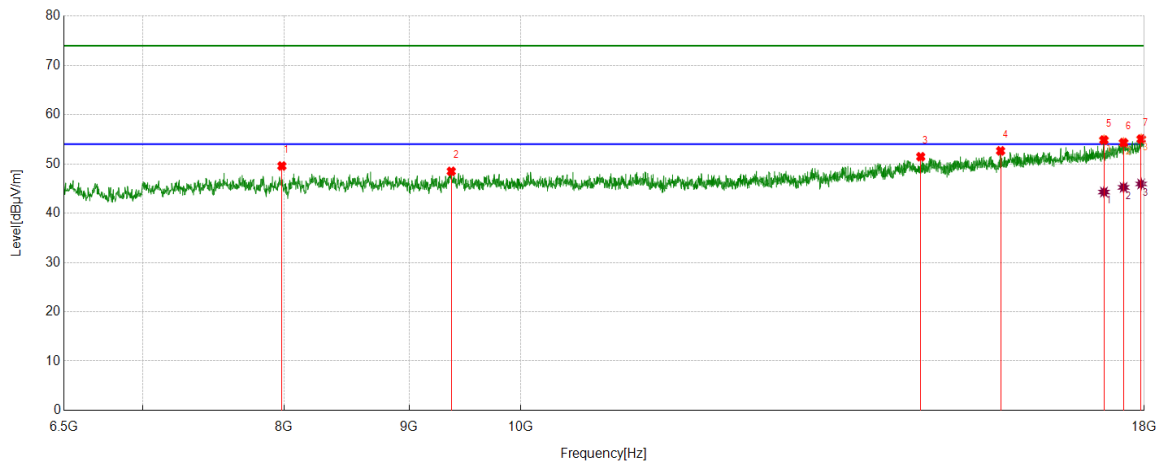

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7983.7473	44.13	5.45	49.58	74.00	-24.42	Vertical
2	9365.8943	42.03	6.47	48.50	74.00	-25.50	Vertical
3	14580.0967	38.75	12.71	51.46	74.00	-22.54	Vertical
4	15720.7035	38.61	14.04	52.65	74.00	-21.35	Vertical
5	17329.0548	37.75	17.10	54.85	74.00	-19.15	Vertical
6	17653.0255	36.28	18.04	54.32	74.00	-19.68	Vertical
7	17948.2414	35.58	19.48	55.06	74.00	-18.94	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17329.0548	27.20	17.10	44.30	54.00	-9.70	Vertical
2	17653.0255	27.20	18.04	45.24	54.00	-8.76	Vertical
3	17948.2414	26.46	19.48	45.94	54.00	-8.06	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5200	Horizontal	PASS

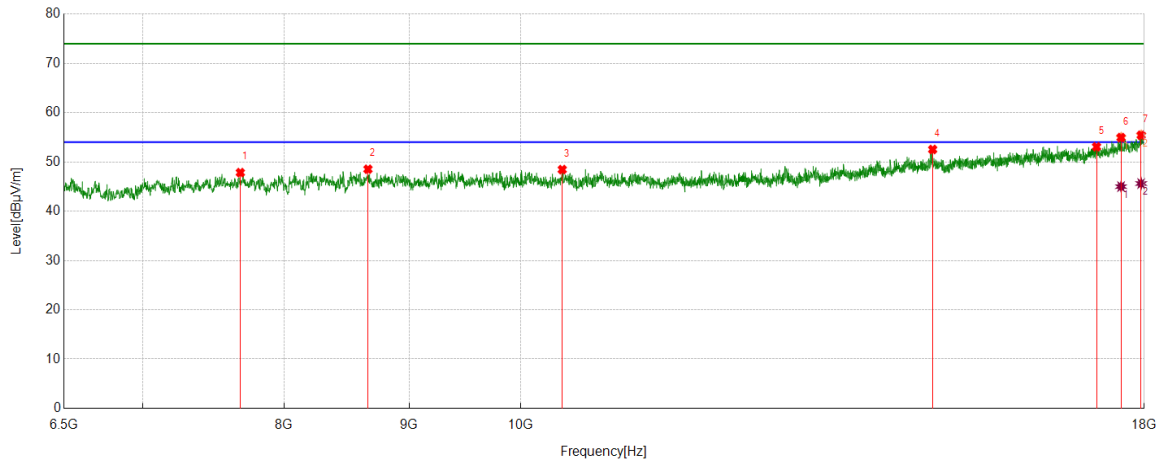

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7677.0295	42.53	5.30	47.83	74.00	-26.17	Horizontal
2	8658.5264	42.11	6.41	48.52	74.00	-25.48	Horizontal
3	10399.1499	41.73	6.72	48.45	74.00	-25.55	Horizontal
4	14744.9575	39.65	12.88	52.53	74.00	-21.47	Horizontal
5	17208.2847	36.33	16.74	53.07	74.00	-20.93	Horizontal
6	17610.8518	36.89	18.06	54.95	74.00	-19.05	Horizontal
7	17948.2414	35.95	19.48	55.43	74.00	-18.57	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17610.8518	26.93	18.06	44.99	54.00	-9.01	Horizontal
2	17948.2414	26.14	19.48	45.62	54.00	-8.38	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5200	Vertical	PASS

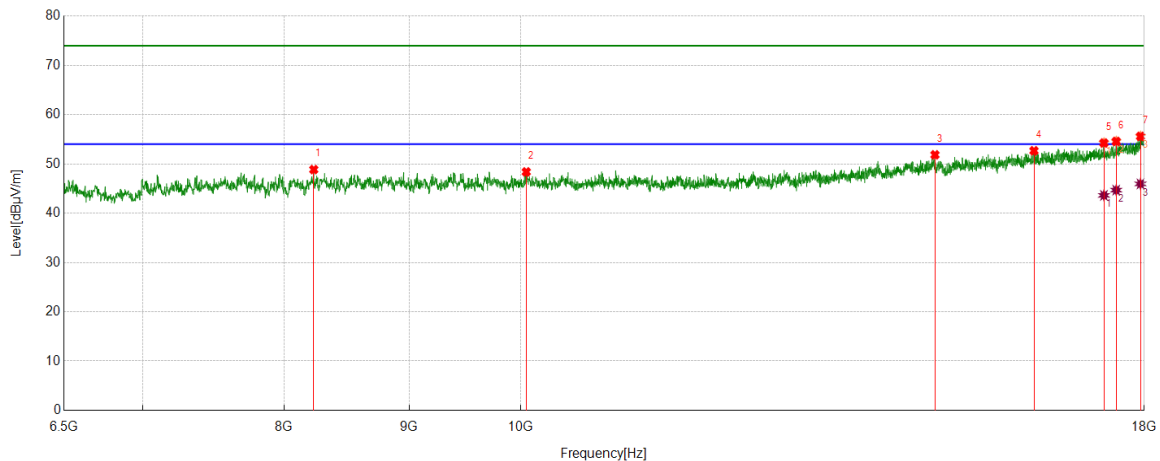

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8227.2045	42.76	6.09	48.85	74.00	-25.15	Vertical
2	10052.1754	41.75	6.63	48.38	74.00	-25.62	Vertical
3	14777.5463	38.99	12.86	51.85	74.00	-22.15	Vertical
4	16222.9538	37.24	15.43	52.67	74.00	-21.33	Vertical
5	17329.0548	37.15	17.10	54.25	74.00	-19.75	Vertical
6	17530.3384	37.00	17.57	54.57	74.00	-19.43	Vertical
7	17936.7395	36.17	19.42	55.59	74.00	-18.41	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17329.0548	26.52	17.10	43.62	54.00	-10.38	Vertical
2	17530.3384	27.11	17.57	44.68	54.00	-9.32	Vertical
3	17936.7395	26.53	19.42	45.95	54.00	-8.05	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5240	Horizontal	PASS

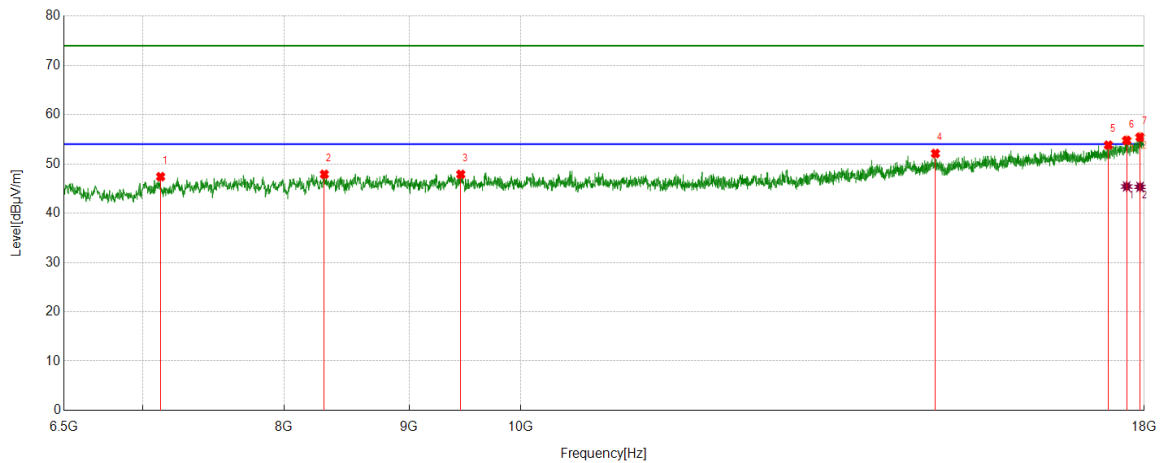

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7121.1035	43.43	3.98	47.41	74.00	-26.59	Horizontal
2	8309.6349	41.56	6.34	47.90	74.00	-26.10	Horizontal
3	9450.2417	41.28	6.60	47.88	74.00	-26.12	Horizontal
4	14783.2972	39.27	12.85	52.12	74.00	-21.88	Horizontal
5	17401.9003	36.45	17.36	53.81	74.00	-20.19	Horizontal
6	17704.7841	36.46	18.31	54.77	74.00	-19.23	Horizontal
7	17929.0715	36.06	19.37	55.43	74.00	-18.57	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17704.7841	27.11	18.31	45.42	54.00	-8.58	Horizontal
2	17929.0715	25.97	19.37	45.34	54.00	-8.66	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5240	Vertical	PASS

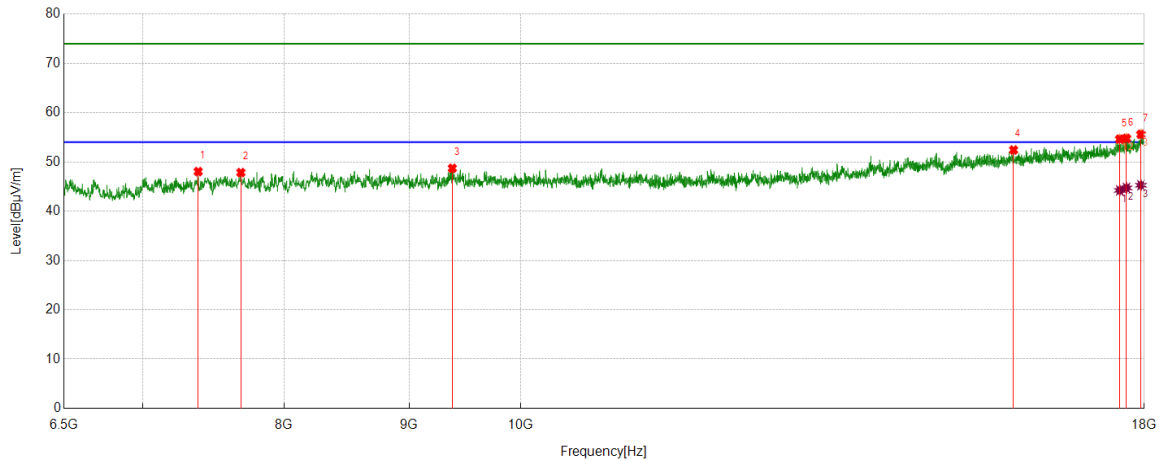

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7377.9797	43.83	4.21	48.04	74.00	-25.96	Vertical
2	7680.8635	42.52	5.32	47.84	74.00	-26.16	Vertical
3	9375.4792	42.23	6.48	48.71	74.00	-25.29	Vertical
4	15914.3191	37.88	14.54	52.42	74.00	-21.58	Vertical
5	17589.7650	36.59	18.04	54.63	74.00	-19.37	Vertical
6	17700.9502	36.50	18.28	54.78	74.00	-19.22	Vertical
7	17944.4074	36.14	19.46	55.60	74.00	-18.40	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17589.7650	26.18	18.04	44.22	54.00	-9.78	Vertical
2	17700.9502	26.45	18.28	44.73	54.00	-9.27	Vertical
3	17944.4074	25.81	19.46	45.27	54.00	-8.73	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5260	Horizontal	PASS

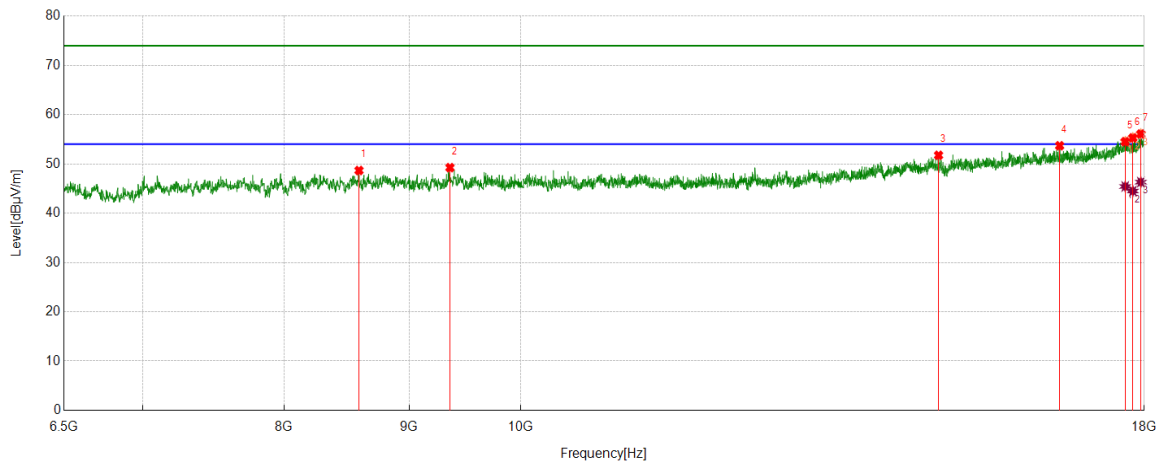

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8585.6809	42.53	6.14	48.67	74.00	-25.33	Horizontal
2	9354.3924	42.80	6.45	49.25	74.00	-24.75	Horizontal
3	14827.3879	38.86	12.89	51.75	74.00	-22.25	Horizontal
4	16619.7700	37.79	15.90	53.69	74.00	-20.31	Horizontal
5	17679.8633	36.41	18.11	54.52	74.00	-19.48	Horizontal
6	17808.3014	36.37	18.92	55.29	74.00	-18.71	Horizontal
7	17942.4904	36.62	19.46	56.08	74.00	-17.92	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17679.8633	27.31	18.11	45.42	54.00	-8.58	Horizontal
2	17808.3014	25.58	18.92	44.50	54.00	-9.50	Horizontal
3	17942.4904	26.85	19.46	46.31	54.00	-7.69	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5260	Vertical	PASS

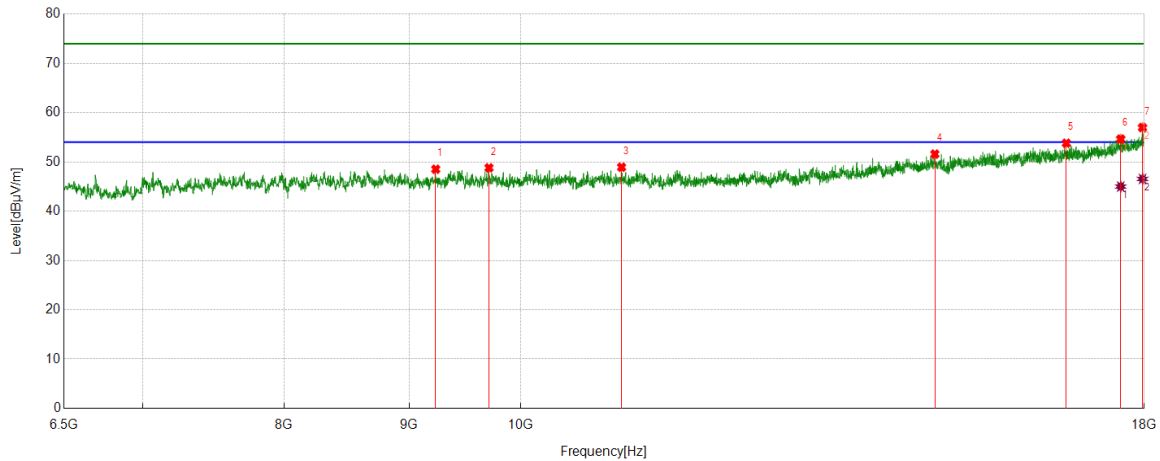

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9229.7883	42.51	6.01	48.52	74.00	-25.48	Vertical
2	9705.2009	42.21	6.59	48.80	74.00	-25.20	Vertical
3	10997.2495	41.66	7.27	48.93	74.00	-25.07	Vertical
4	14775.6293	38.71	12.88	51.59	74.00	-22.41	Vertical
5	16725.2042	37.56	16.24	53.80	74.00	-20.20	Vertical
6	17605.1008	36.60	18.05	54.65	74.00	-19.35	Vertical
7	17971.2452	37.34	19.65	56.99	74.00	-17.01	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17605.1008	26.95	18.05	45.00	54.00	-9.00	Vertical
2	17971.2452	26.90	19.65	46.55	54.00	-7.45	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5280	Horizontal	PASS

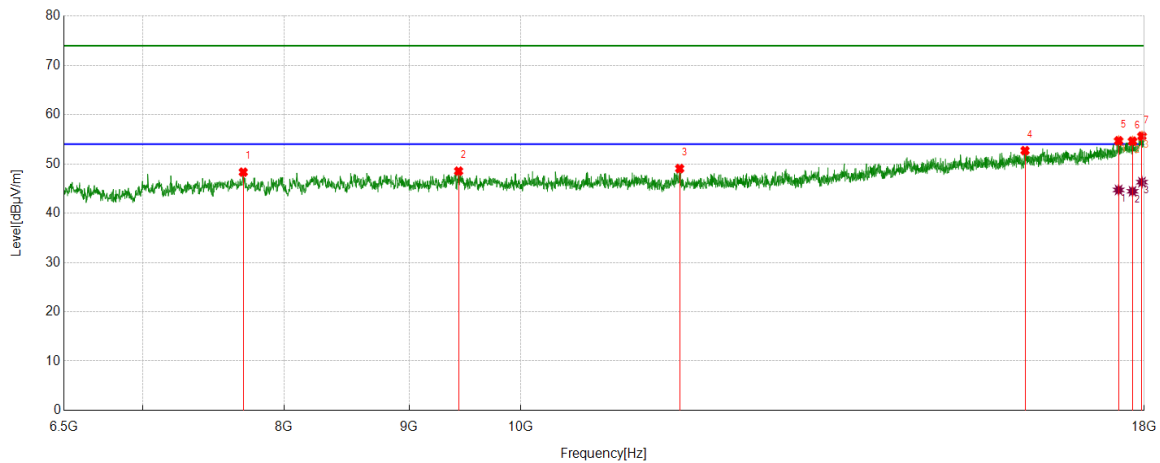

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7698.1164	42.80	5.53	48.33	74.00	-25.67	Horizontal
2	9431.0718	41.95	6.59	48.54	74.00	-25.46	Horizontal
3	11616.4361	41.50	7.56	49.06	74.00	-24.94	Horizontal
4	16086.8478	38.03	14.67	52.70	74.00	-21.30	Horizontal
5	17570.5951	36.79	17.90	54.69	74.00	-19.31	Horizontal
6	17802.5504	35.75	18.87	54.62	74.00	-19.38	Horizontal
7	17961.6603	36.01	19.63	55.64	74.00	-18.36	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17570.5951	26.82	17.90	44.72	54.00	-9.28	Horizontal
2	17802.5504	25.58	18.87	44.45	54.00	-9.55	Horizontal
3	17961.6603	26.67	19.63	46.30	54.00	-7.70	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5280	Vertical	PASS

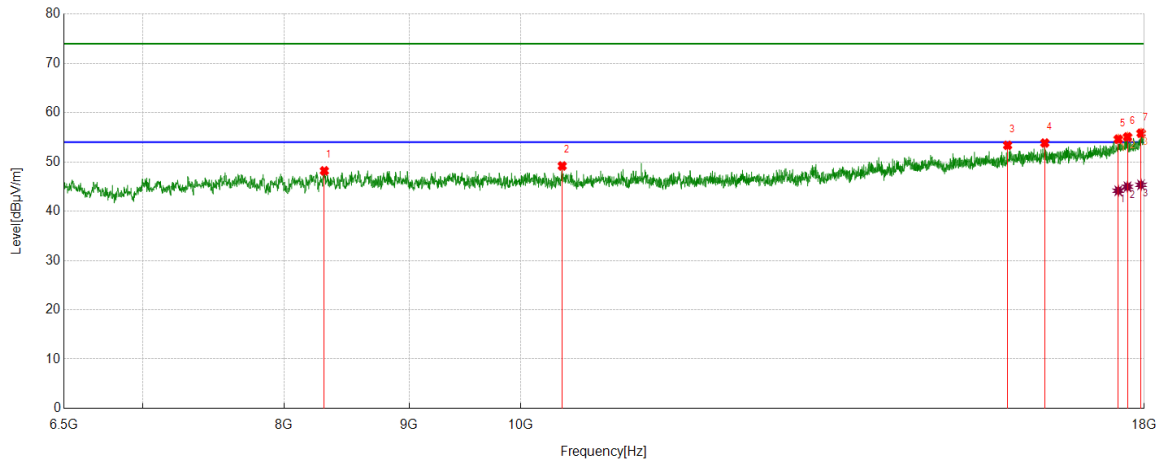

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8309.6349	41.85	6.34	48.19	74.00	-25.81	Vertical
2	10399.1499	42.46	6.72	49.18	74.00	-24.82	Vertical
3	15824.2207	38.84	14.53	53.37	74.00	-20.63	Vertical
4	16389.7316	38.86	14.98	53.84	74.00	-20.16	Vertical
5	17564.8441	36.79	17.83	54.62	74.00	-19.38	Vertical
6	17718.2030	36.61	18.46	55.07	74.00	-18.93	Vertical
7	17946.3244	36.35	19.48	55.83	74.00	-18.17	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17564.8441	26.32	17.83	44.15	54.00	-9.85	Vertical
2	17718.2030	26.50	18.46	44.96	54.00	-9.04	Vertical
3	17946.3244	25.87	19.48	45.35	54.00	-8.65	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5320	Horizontal	PASS

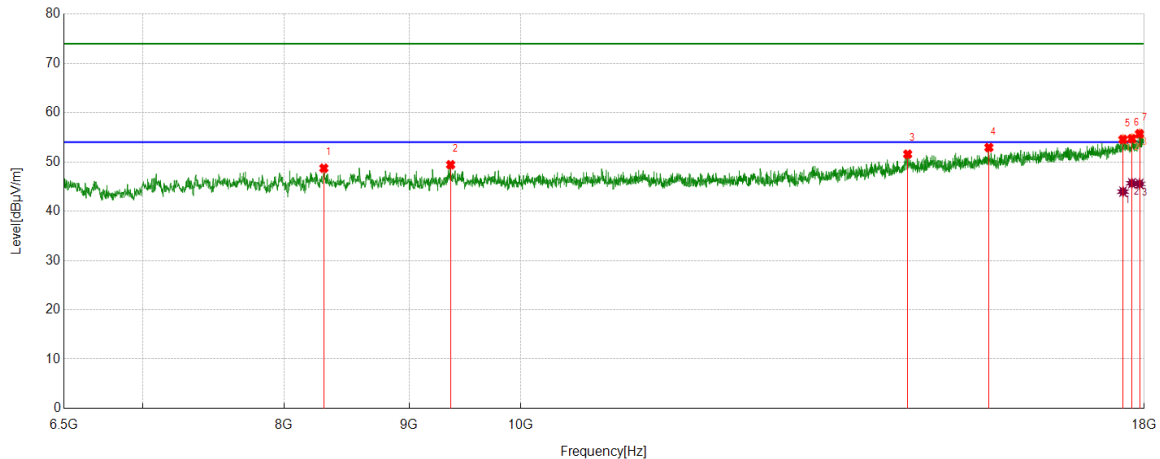

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8305.8010	42.40	6.32	48.72	74.00	-25.28	Horizontal
2	9360.1434	42.99	6.44	49.43	74.00	-24.57	Horizontal
3	14401.8170	38.81	12.76	51.57	74.00	-22.43	Horizontal
4	15548.1747	39.16	13.76	52.92	74.00	-21.08	Horizontal
5	17643.4406	36.56	18.01	54.57	74.00	-19.43	Horizontal
6	17791.0485	36.01	18.71	54.72	74.00	-19.28	Horizontal
7	17921.4036	36.36	19.36	55.72	74.00	-18.28	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17643.4406	25.96	18.01	43.97	54.00	-10.03	Horizontal
2	17791.0485	26.97	18.71	45.68	54.00	-8.32	Horizontal
3	17921.4036	26.18	19.36	45.54	54.00	-8.46	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5320	Vertical	PASS

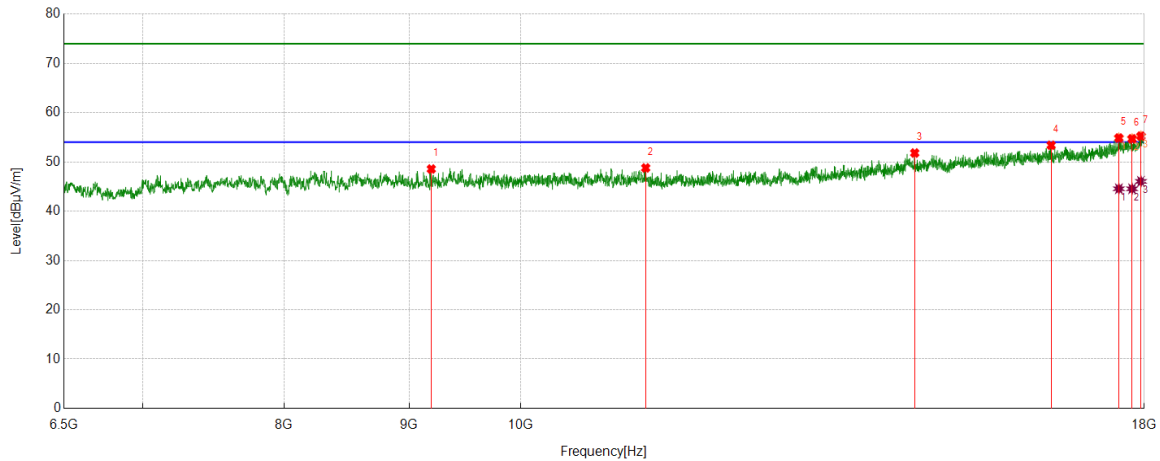

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9191.4486	42.64	5.92	48.56	74.00	-25.44	Vertical
2	11250.2917	41.65	7.13	48.78	74.00	-25.22	Vertical
3	14497.6663	38.99	12.82	51.81	74.00	-22.19	Vertical
4	16487.4979	37.48	15.90	53.38	74.00	-20.62	Vertical
5	17574.4291	36.94	17.92	54.86	74.00	-19.14	Vertical
6	17794.8825	35.92	18.77	54.69	74.00	-19.31	Vertical
7	17944.4074	35.79	19.46	55.25	74.00	-18.75	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17574.4291	26.64	17.92	44.56	54.00	-9.44	Vertical
2	17794.8825	25.78	18.77	44.55	54.00	-9.45	Vertical
3	17944.4074	26.59	19.46	46.05	54.00	-7.95	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5500	Horizontal	PASS

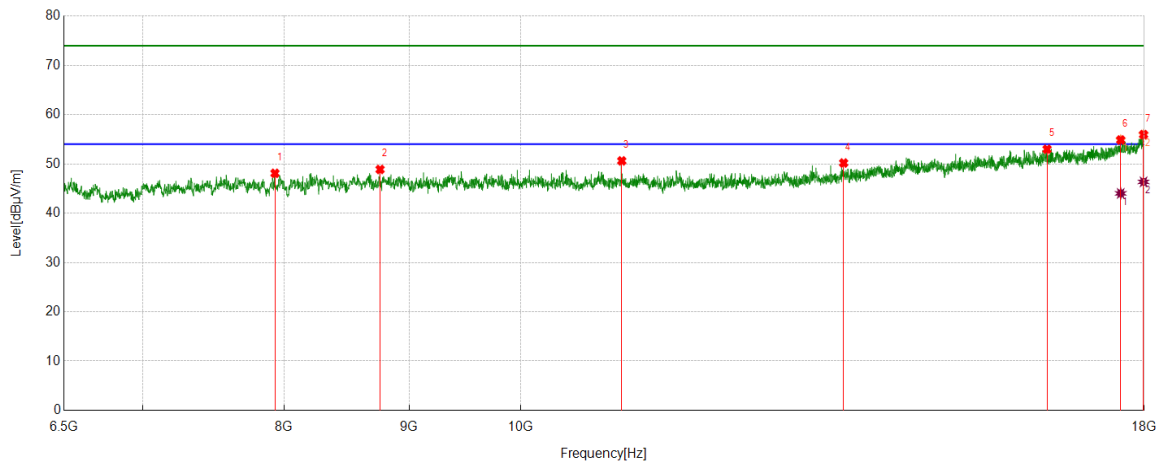

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7931.9887	42.42	5.68	48.10	74.00	-25.90	Horizontal
2	8758.2097	42.63	6.25	48.88	74.00	-25.12	Horizontal
3	10999.1665	43.34	7.28	50.62	74.00	-23.38	Horizontal
4	13558.3431	39.30	10.89	50.19	74.00	-23.81	Horizontal
5	16424.2374	37.70	15.28	52.98	74.00	-21.02	Horizontal
6	17605.1008	36.82	18.05	54.87	74.00	-19.13	Horizontal
7	17988.4981	36.15	19.81	55.96	74.00	-18.04	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17605.1008	25.97	18.05	44.02	54.00	-9.98	Horizontal
2	17988.4981	26.55	19.81	46.36	54.00	-7.64	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5500	Vertical	PASS

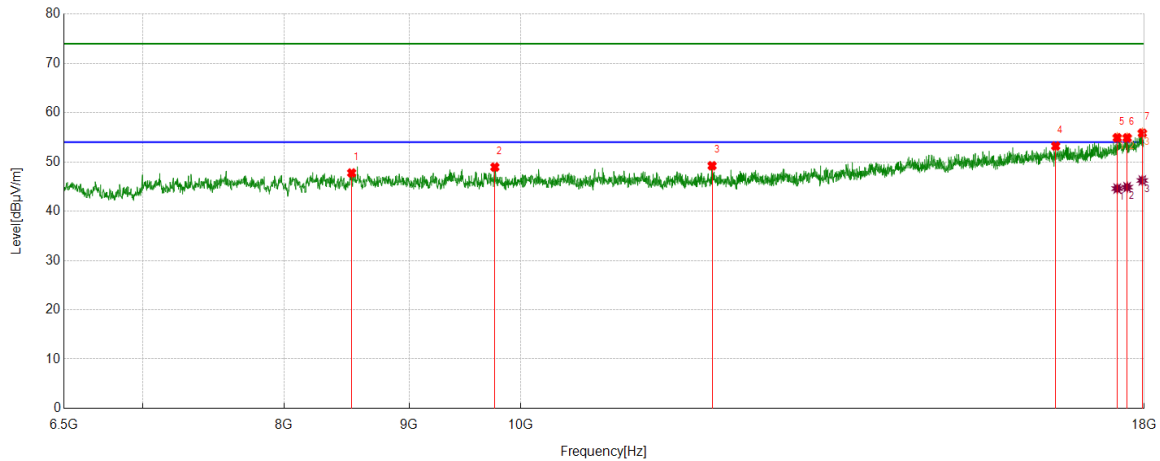

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8526.2544	41.55	6.21	47.76	74.00	-26.24	Vertical
2	9758.8765	42.44	6.51	48.95	74.00	-25.05	Vertical
3	11976.8295	41.11	8.11	49.22	74.00	-24.78	Vertical
4	16558.4264	37.34	15.88	53.22	74.00	-20.78	Vertical
5	17547.5913	37.18	17.73	54.91	74.00	-19.09	Vertical
6	17712.4521	36.51	18.38	54.89	74.00	-19.11	Vertical
7	17967.4112	36.22	19.63	55.85	74.00	-18.15	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17547.5913	26.87	17.73	44.60	54.00	-9.40	Vertical
2	17712.4521	26.50	18.38	44.88	54.00	-9.12	Vertical
3	17967.4112	26.61	19.63	46.24	54.00	-7.76	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5580	Horizontal	PASS

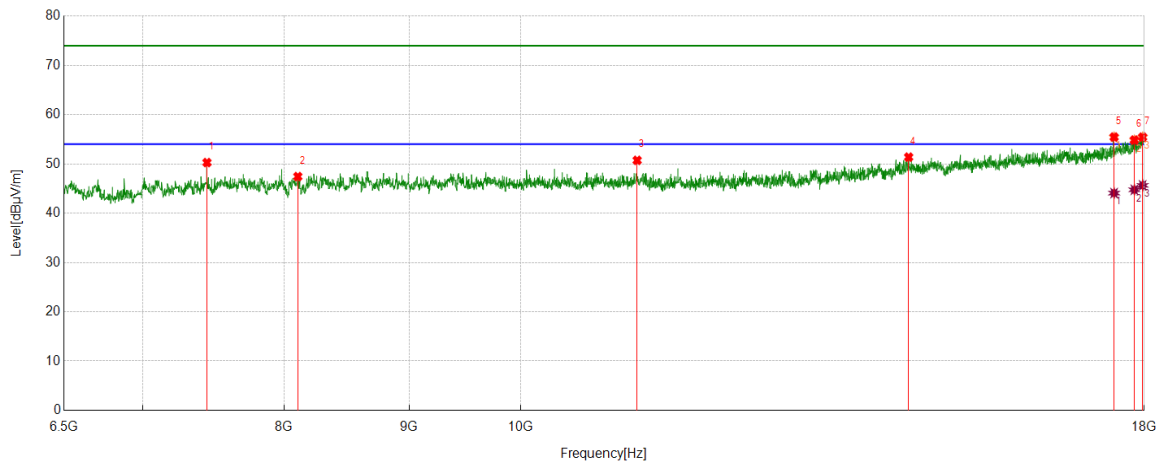

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7439.3232	46.08	4.20	50.28	74.00	-23.72	Horizontal
2	8104.5174	41.98	5.46	47.44	74.00	-26.56	Horizontal
3	11160.1934	43.52	7.21	50.73	74.00	-23.27	Horizontal
4	14415.2359	38.47	12.91	51.38	74.00	-22.62	Horizontal
5	17495.8326	37.81	17.64	55.45	74.00	-18.55	Horizontal
6	17833.2222	35.73	19.11	54.84	74.00	-19.16	Horizontal
7	17973.1622	35.75	19.69	55.44	74.00	-18.56	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17495.8326	26.44	17.64	44.08	54.00	-9.92	Horizontal
2	17833.2222	25.64	19.11	44.75	54.00	-9.25	Horizontal
3	17973.1622	25.96	19.69	45.65	54.00	-8.35	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5580	Vertical	PASS

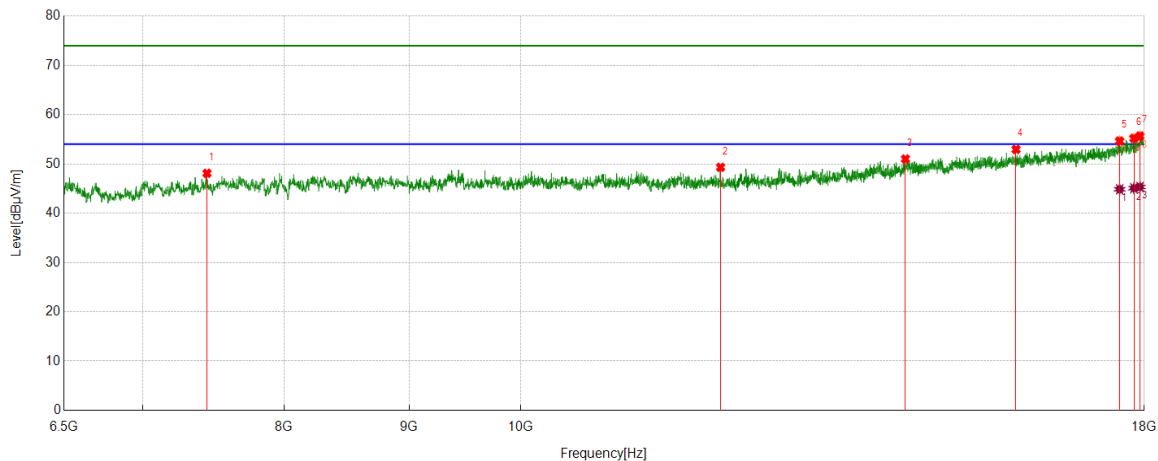

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7439.3232	43.91	4.20	48.11	74.00	-25.89	Vertical
2	12072.6788	41.08	8.24	49.32	74.00	-24.68	Vertical
3	14371.1452	38.35	12.66	51.01	74.00	-22.99	Vertical
4	15950.7418	38.49	14.45	52.94	74.00	-21.06	Vertical
5	17587.8480	36.63	18.02	54.65	74.00	-19.35	Vertical
6	17825.5543	36.18	19.03	55.21	74.00	-18.79	Vertical
7	17929.0715	36.30	19.37	55.67	74.00	-18.33	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17587.8480	26.84	18.02	44.86	54.00	-9.14	Vertical
2	17825.5543	26.05	19.03	45.08	54.00	-8.92	Vertical
3	17929.0715	25.97	19.37	45.34	54.00	-8.66	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5700	Horizontal	PASS

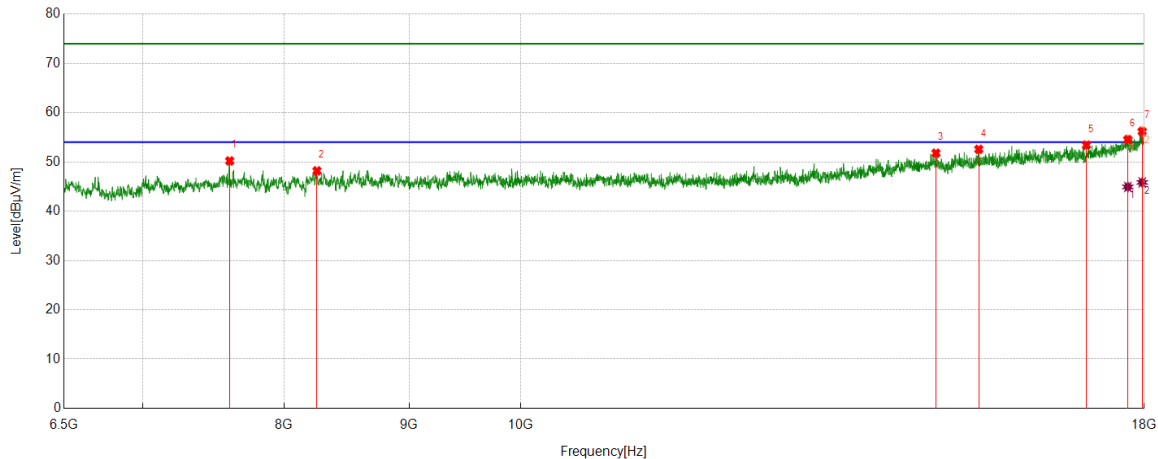

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7600.3501	45.25	4.95	50.20	74.00	-23.80	Horizontal
2	8252.1254	41.92	6.27	48.19	74.00	-25.81	Horizontal
3	14790.9652	38.91	12.87	51.78	74.00	-22.22	Horizontal
4	15400.5668	38.89	13.67	52.56	74.00	-21.44	Horizontal
5	17045.3409	37.16	16.25	53.41	74.00	-20.59	Horizontal
6	17723.9540	36.03	18.50	54.53	74.00	-19.47	Horizontal
7	17965.4942	36.57	19.63	56.20	74.00	-17.80	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17723.9540	26.43	18.50	44.93	54.00	-9.07	Horizontal
2	17965.4942	26.21	19.63	45.84	54.00	-8.16	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5700	Vertical	PASS

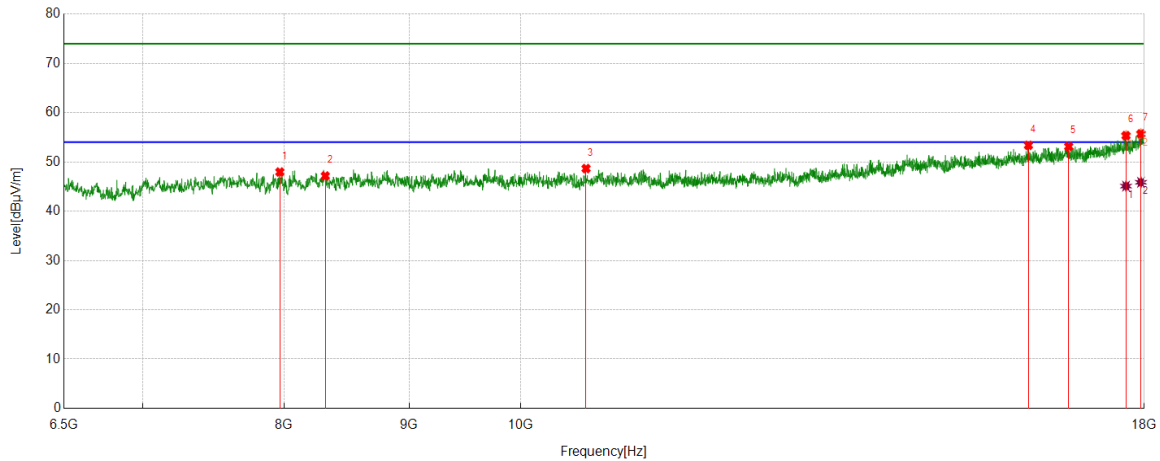

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7968.4114	42.47	5.48	47.95	74.00	-26.05	Vertical
2	8317.3029	41.14	6.01	47.15	74.00	-26.85	Vertical
3	10634.9392	41.71	6.94	48.65	74.00	-25.35	Vertical
4	16138.6064	38.35	15.02	53.37	74.00	-20.63	Vertical
5	16763.5439	37.09	16.04	53.13	74.00	-20.87	Vertical
6	17693.2822	37.13	18.21	55.34	74.00	-18.66	Vertical
7	17944.4074	36.24	19.46	55.70	74.00	-18.30	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17693.2822	26.88	18.21	45.09	54.00	-8.91	Vertical
2	17944.4074	26.40	19.46	45.86	54.00	-8.14	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5720	Horizontal	PASS

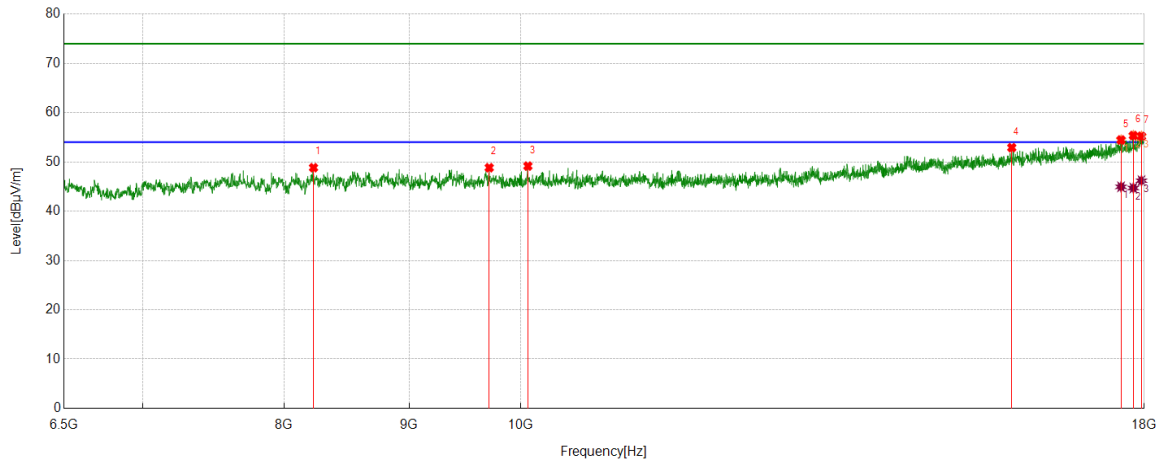

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8225.2875	42.72	6.11	48.83	74.00	-25.17	Horizontal
2	9707.1179	42.25	6.58	48.83	74.00	-25.17	Horizontal
3	10067.5113	42.60	6.56	49.16	74.00	-24.84	Horizontal
4	15887.4812	38.31	14.59	52.90	74.00	-21.10	Horizontal
5	17610.8518	36.40	18.06	54.46	74.00	-19.54	Horizontal
6	17815.9693	36.43	18.93	55.36	74.00	-18.64	Horizontal
7	17953.9923	35.67	19.54	55.21	74.00	-18.79	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17610.8518	26.89	18.06	44.95	54.00	-9.05	Horizontal
2	17815.9693	25.78	18.93	44.71	54.00	-9.29	Horizontal
3	17953.9923	26.66	19.54	46.20	54.00	-7.80	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5720	Vertical	PASS

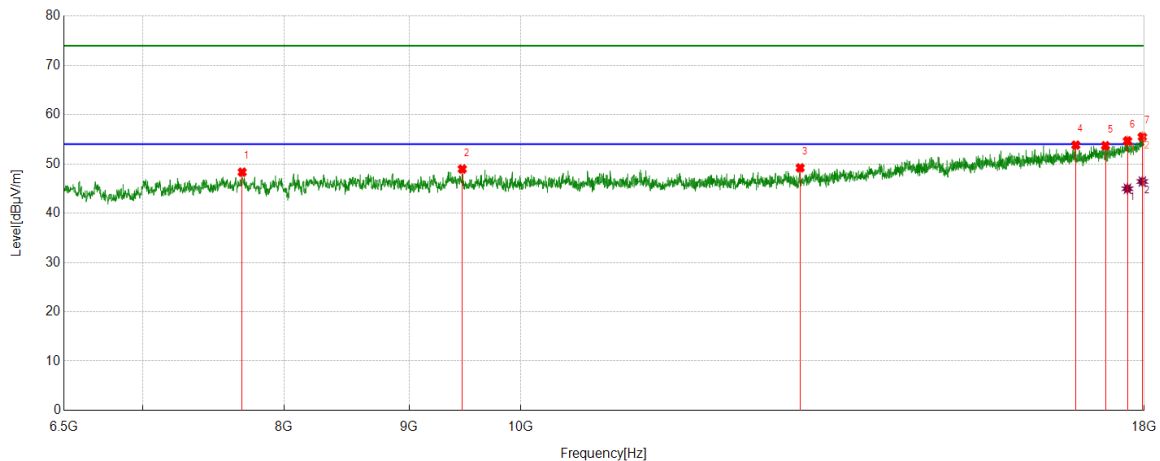

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7690.4484	43.19	5.14	48.33	74.00	-25.67	Vertical
2	9463.6606	42.44	6.52	48.96	74.00	-25.04	Vertical
3	13013.9190	39.70	9.50	49.20	74.00	-24.80	Vertical
4	16874.7291	37.74	16.08	53.82	74.00	-20.18	Vertical
5	17353.9757	36.50	17.20	53.70	74.00	-20.30	Vertical
6	17718.2030	36.22	18.46	54.68	74.00	-19.32	Vertical
7	17967.4112	35.87	19.63	55.50	74.00	-18.50	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17718.2030	26.51	18.46	44.97	54.00	-9.03	Vertical
2	17967.4112	26.80	19.63	46.43	54.00	-7.57	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5745	Horizontal	PASS

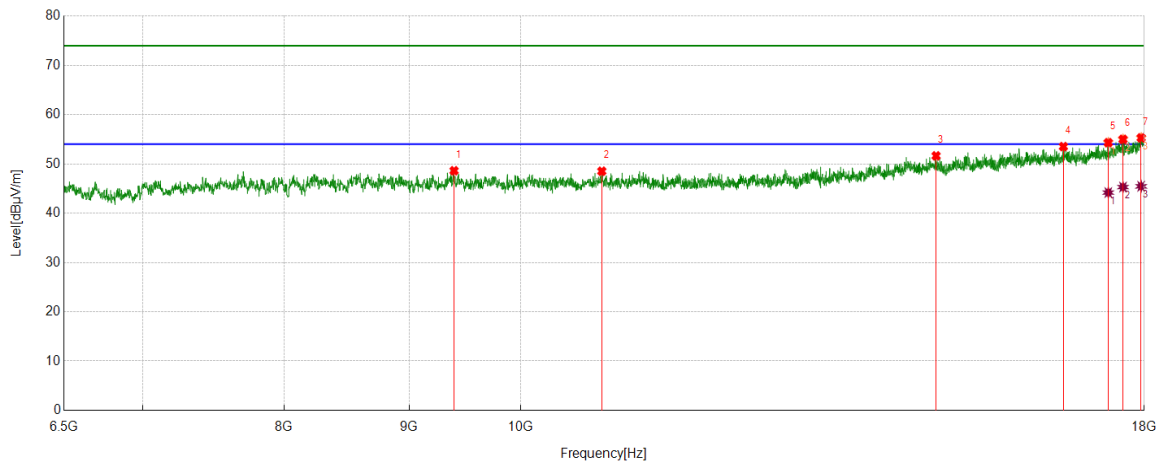

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9390.8151	42.07	6.55	48.62	74.00	-25.38	Horizontal
2	10794.0490	41.57	6.95	48.52	74.00	-25.48	Horizontal
3	14792.8821	38.78	12.86	51.64	74.00	-22.36	Horizontal
4	16679.1965	37.86	15.66	53.52	74.00	-20.48	Horizontal
5	17399.9833	36.97	17.35	54.32	74.00	-19.68	Horizontal
6	17643.4406	36.98	18.01	54.99	74.00	-19.01	Horizontal
7	17948.2414	35.82	19.48	55.30	74.00	-18.70	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17399.9833	26.84	17.35	44.19	54.00	-9.81	Horizontal
2	17643.4406	27.29	18.01	45.30	54.00	-8.70	Horizontal
3	17948.2414	25.98	19.48	45.46	54.00	-8.54	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5745	Vertical	PASS

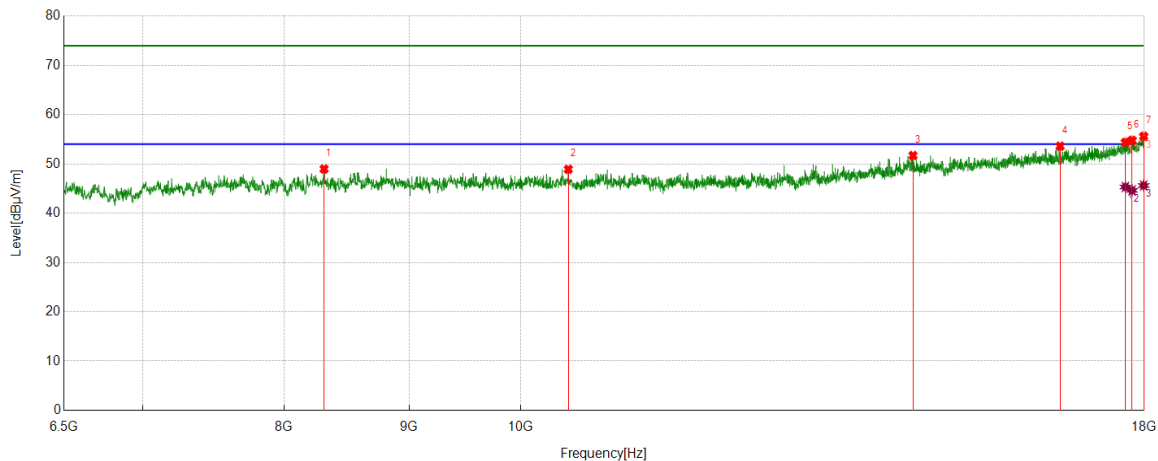

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8307.7180	42.65	6.33	48.98	74.00	-25.02	Vertical
2	10458.5764	42.20	6.71	48.91	74.00	-25.09	Vertical
3	14474.6624	38.84	12.86	51.70	74.00	-22.30	Vertical
4	16627.4379	37.77	15.83	53.60	74.00	-20.40	Vertical
5	17683.6973	36.24	18.13	54.37	74.00	-19.63	Vertical
6	17794.8825	36.01	18.77	54.78	74.00	-19.22	Vertical
7	17990.4151	35.81	19.80	55.61	74.00	-18.39	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17683.6973	27.19	18.13	45.32	54.00	-8.68	Vertical
2	17794.8825	25.86	18.77	44.63	54.00	-9.37	Vertical
3	17990.4151	25.82	19.80	45.62	54.00	-8.38	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5785	Horizontal	PASS

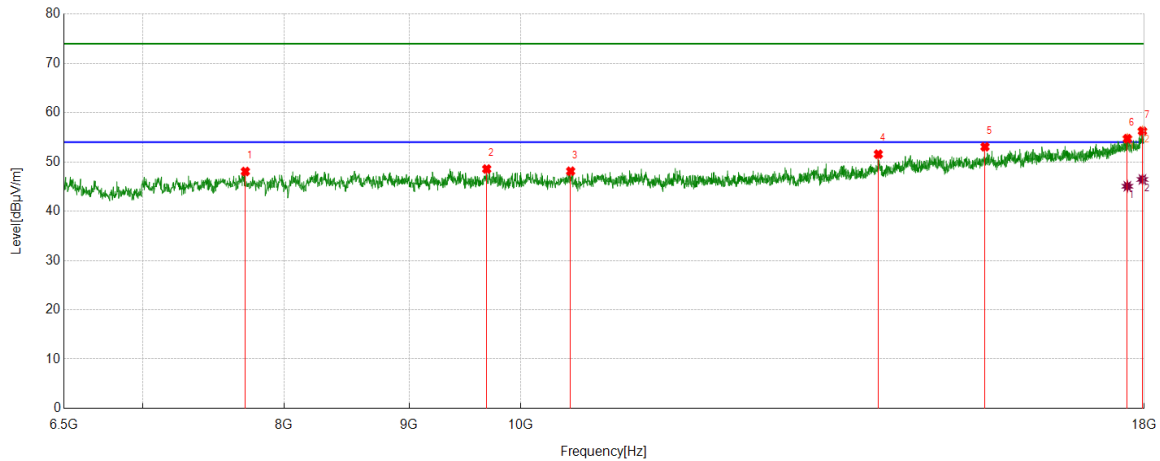

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7713.4522	42.92	5.14	48.06	74.00	-25.94	Horizontal
2	9684.1140	42.05	6.51	48.56	74.00	-25.44	Horizontal
3	10481.5803	41.31	6.81	48.12	74.00	-25.88	Horizontal
4	14008.8348	39.77	11.80	51.57	74.00	-22.43	Horizontal
5	15490.6651	39.09	13.98	53.07	74.00	-20.93	Horizontal
6	17716.2860	36.30	18.43	54.73	74.00	-19.27	Horizontal
7	17969.3282	36.63	19.63	56.26	74.00	-17.74	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17716.2860	26.63	18.43	45.06	54.00	-8.94	Horizontal
2	17969.3282	26.82	19.63	46.45	54.00	-7.55	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5785	Vertical	PASS

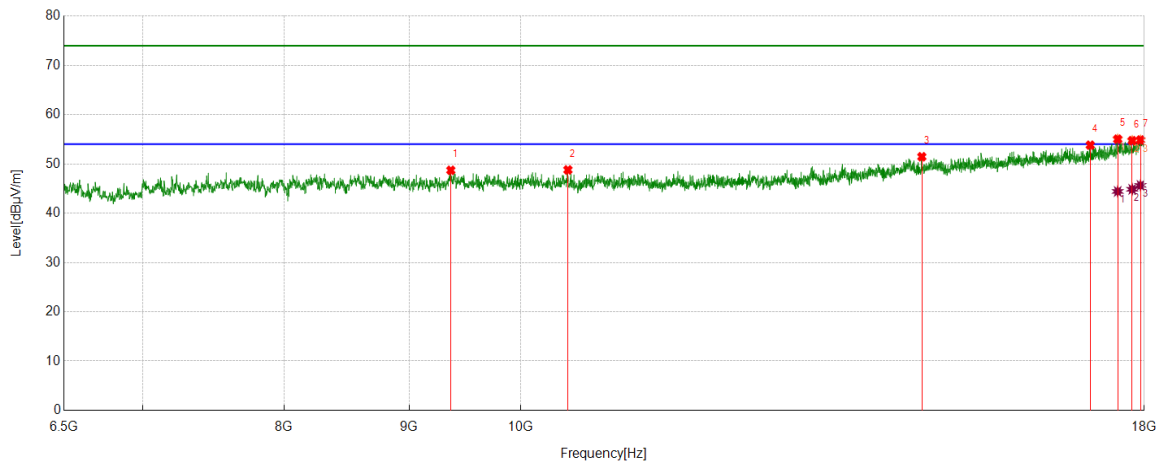

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	9362.0603	42.26	6.45	48.71	74.00	-25.29	Vertical
2	10454.7425	42.12	6.67	48.79	74.00	-25.21	Vertical
3	14595.4326	38.72	12.74	51.46	74.00	-22.54	Vertical
4	17106.6844	37.42	16.39	53.81	74.00	-20.19	Vertical
5	17555.2592	37.26	17.77	55.03	74.00	-18.97	Vertical
6	17796.7995	35.93	18.79	54.72	74.00	-19.28	Vertical
7	17936.7395	35.43	19.42	54.85	74.00	-19.15	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17555.2592	26.65	17.77	44.42	54.00	-9.58	Vertical
2	17796.7995	26.06	18.79	44.85	54.00	-9.15	Vertical
3	17936.7395	26.23	19.42	45.65	54.00	-8.35	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5825	Horizontal	PASS

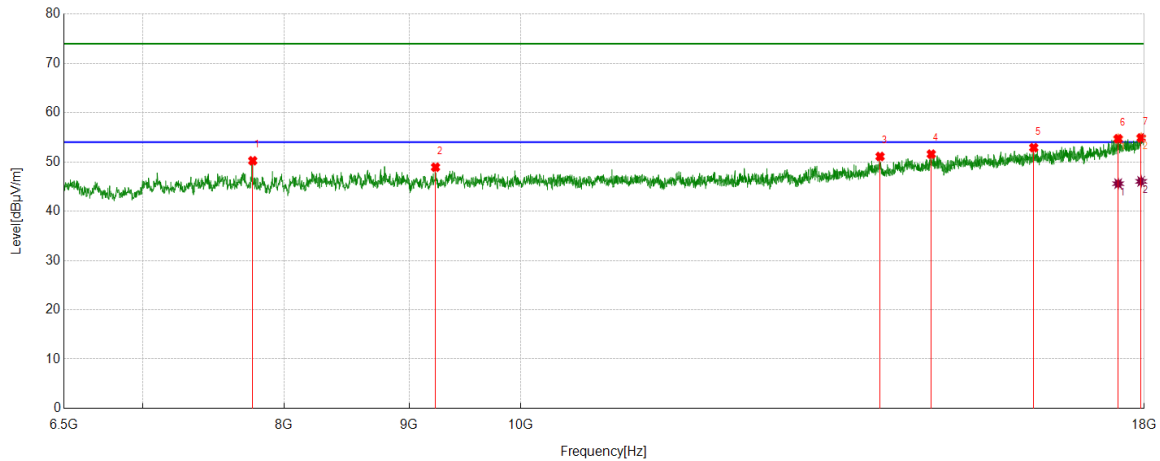

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7767.1279	45.23	5.01	50.24	74.00	-23.76	Horizontal
2	9227.8713	42.92	6.01	48.93	74.00	-25.07	Horizontal
3	14031.8386	39.15	11.95	51.10	74.00	-22.90	Horizontal
4	14725.7876	38.78	12.80	51.58	74.00	-22.42	Horizontal
5	16219.1199	37.45	15.44	52.89	74.00	-21.11	Horizontal
6	17562.9272	36.88	17.82	54.70	74.00	-19.30	Horizontal
7	17948.2414	35.40	19.48	54.88	74.00	-19.12	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17562.9272	27.77	17.82	45.59	54.00	-8.41	Horizontal
2	17948.2414	26.57	19.48	46.05	54.00	-7.95	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT20	5825	Vertical	PASS

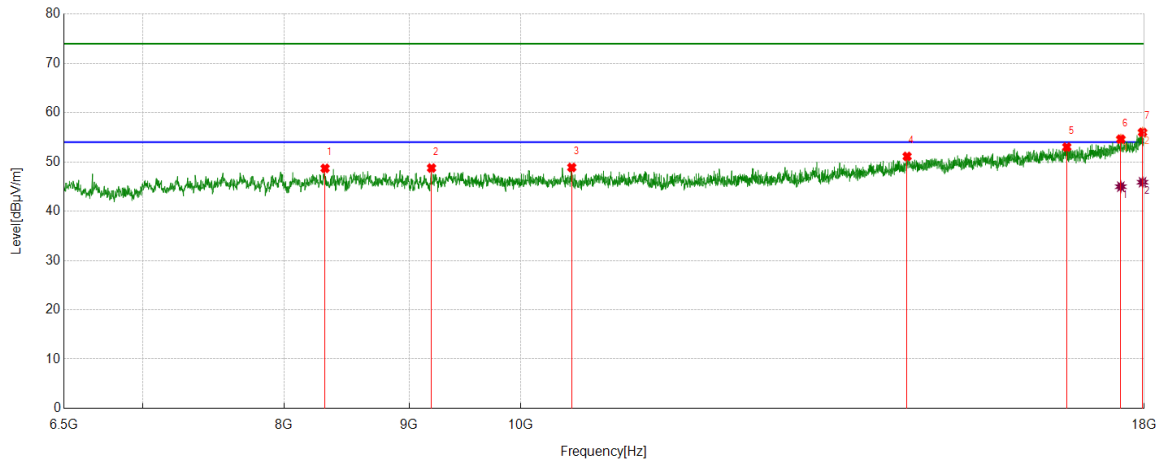

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8315.3859	42.59	6.10	48.69	74.00	-25.31	Vertical
2	9193.3656	42.81	5.95	48.76	74.00	-25.24	Vertical
3	10493.0822	42.00	6.88	48.88	74.00	-25.12	Vertical
4	14394.1490	38.35	12.77	51.12	74.00	-22.88	Vertical
5	16732.8721	36.94	16.08	53.02	74.00	-20.98	Vertical
6	17607.0178	36.57	18.05	54.62	74.00	-19.38	Vertical
7	17971.2452	36.36	19.65	56.01	74.00	-17.99	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17607.0178	26.93	18.05	44.98	54.00	-9.02	Vertical
2	17971.2452	26.23	19.65	45.88	54.00	-8.12	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5190	Horizontal	PASS

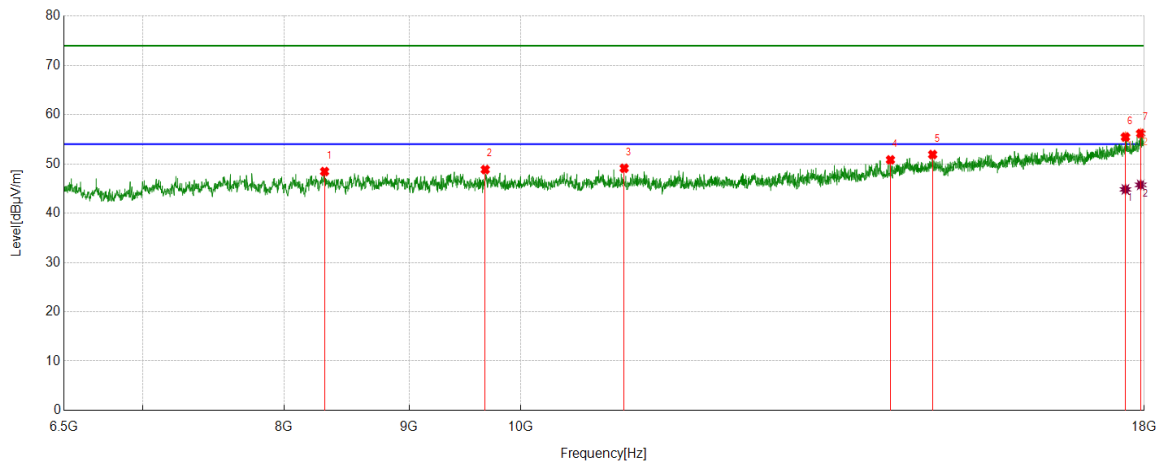

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8311.5519	42.19	6.27	48.46	74.00	-25.54	Horizontal
2	9670.6951	42.36	6.49	48.85	74.00	-25.15	Horizontal
3	11024.0873	41.90	7.22	49.12	74.00	-24.88	Horizontal
4	14169.8616	38.85	11.98	50.83	74.00	-23.17	Horizontal
5	14744.9575	39.02	12.88	51.90	74.00	-22.10	Horizontal
6	17683.6973	37.34	18.13	55.47	74.00	-18.53	Horizontal
7	17940.5734	36.74	19.45	56.19	74.00	-17.81	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17683.6973	26.70	18.13	44.83	54.00	-9.17	Horizontal
2	17940.5734	26.30	19.45	45.75	54.00	-8.25	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5190	Vertical	PASS

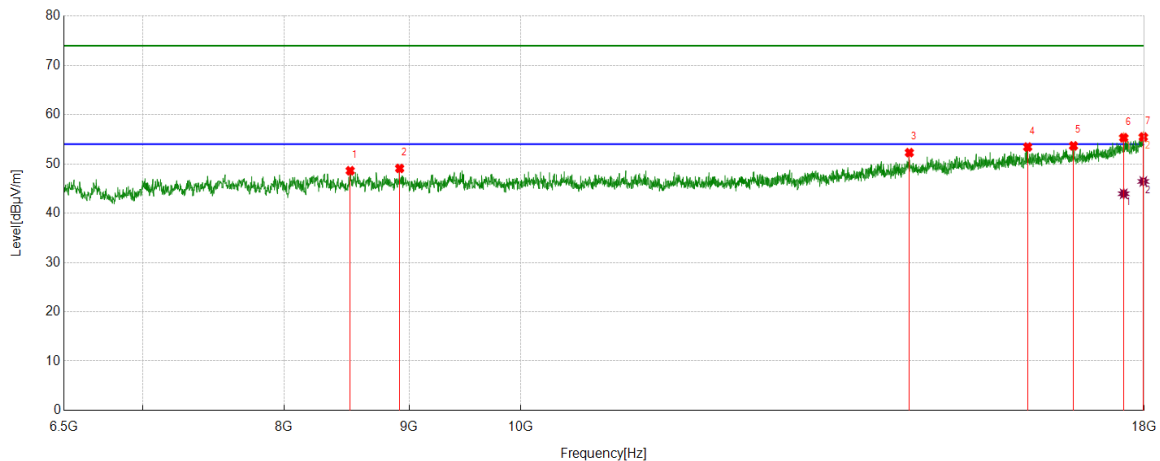

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8514.7525	42.45	6.17	48.62	74.00	-25.38	Vertical
2	8921.1535	42.85	6.24	49.09	74.00	-24.91	Vertical
3	14424.8208	39.40	12.89	52.29	74.00	-21.71	Vertical
4	16127.1045	38.66	14.77	53.43	74.00	-20.57	Vertical
5	16838.3064	37.34	16.32	53.66	74.00	-20.34	Vertical
6	17654.9425	37.28	18.04	55.32	74.00	-18.68	Vertical
7	17984.6641	35.67	19.80	55.47	74.00	-18.53	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17654.9425	25.91	18.04	43.95	54.00	-10.05	Vertical
2	17984.6641	26.65	19.80	46.45	54.00	-7.55	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5230	Horizontal	PASS

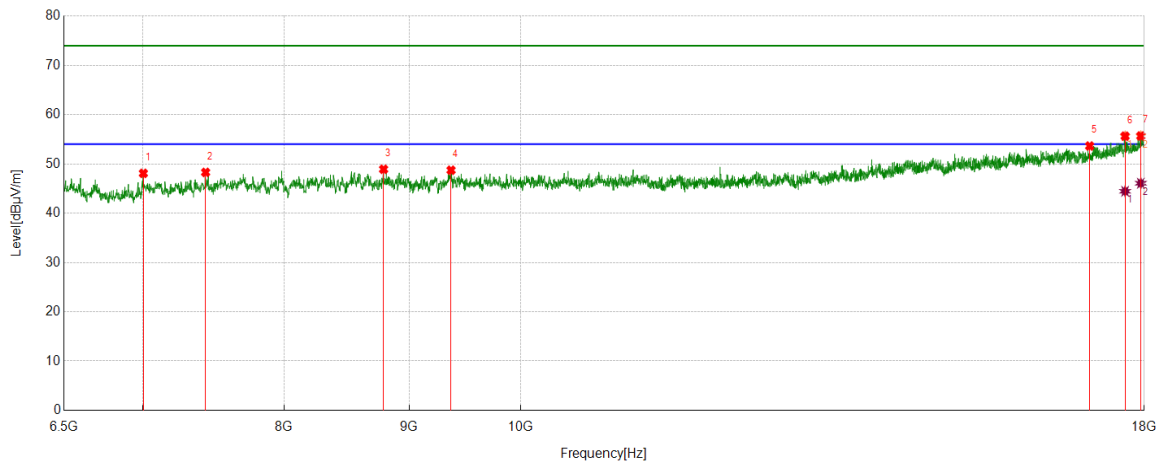

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7006.0843	44.60	3.49	48.09	74.00	-25.91	Horizontal
2	7429.7383	44.04	4.25	48.29	74.00	-25.71	Horizontal
3	8786.9645	42.71	6.21	48.92	74.00	-25.08	Horizontal
4	9363.9773	42.26	6.47	48.73	74.00	-25.27	Horizontal
5	17097.0995	37.15	16.49	53.64	74.00	-20.36	Horizontal
6	17677.9463	37.54	18.10	55.64	74.00	-18.36	Horizontal
7	17942.4904	36.22	19.46	55.68	74.00	-18.32	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17677.9463	26.35	18.10	44.45	54.00	-9.55	Horizontal
2	17942.4904	26.62	19.46	46.08	54.00	-7.92	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5230	Vertical	PASS

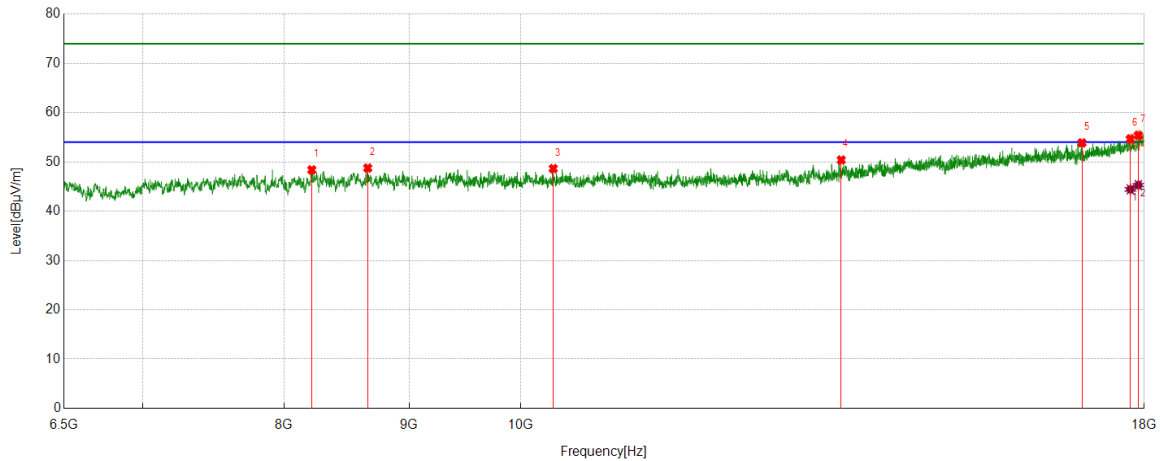

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8211.8686	42.47	5.92	48.39	74.00	-25.61	Vertical
2	8656.6094	42.42	6.34	48.76	74.00	-25.24	Vertical
3	10310.9685	41.79	6.85	48.64	74.00	-25.36	Vertical
4	13527.6713	39.46	10.93	50.39	74.00	-23.61	Vertical
5	16974.4124	37.78	16.09	53.87	74.00	-20.13	Vertical
6	17766.1277	36.07	18.59	54.66	74.00	-19.34	Vertical
7	17900.3167	36.22	19.18	55.40	74.00	-18.60	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17766.1277	25.84	18.59	44.43	54.00	-9.57	Vertical
2	17900.3167	26.12	19.18	45.30	54.00	-8.70	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5270	Horizontal	PASS

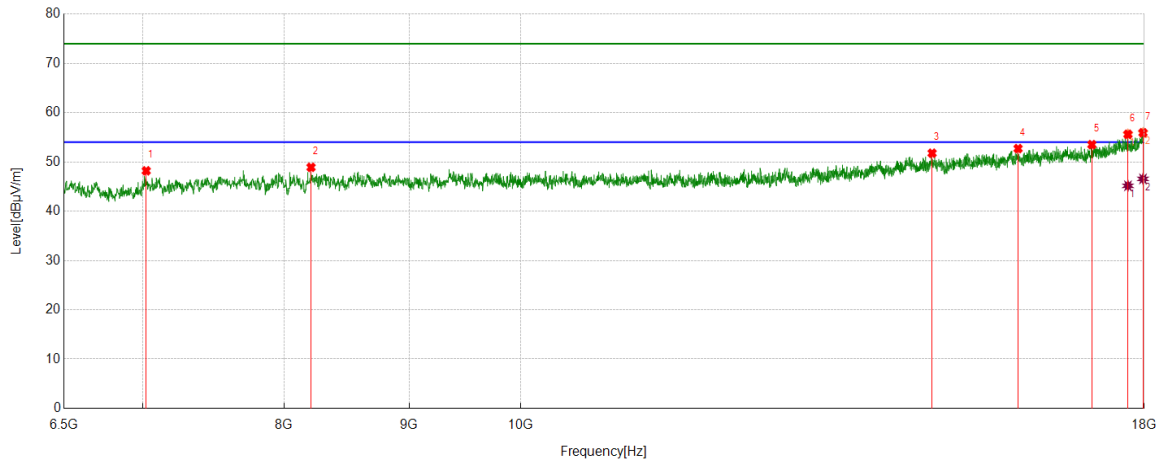

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7025.2542	44.50	3.69	48.19	74.00	-25.81	Horizontal
2	8206.1177	42.93	5.98	48.91	74.00	-25.09	Horizontal
3	14737.2895	38.90	12.87	51.77	74.00	-22.23	Horizontal
4	15981.4136	38.15	14.56	52.71	74.00	-21.29	Horizontal
5	17133.5223	36.97	16.54	53.51	74.00	-20.49	Horizontal
6	17725.8710	37.10	18.51	55.61	74.00	-18.39	Horizontal
7	17978.9132	36.13	19.79	55.92	74.00	-18.08	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17725.8710	26.65	18.51	45.16	54.00	-8.84	Horizontal
2	17978.9132	26.77	19.79	46.56	54.00	-7.44	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5270	Vertical	PASS

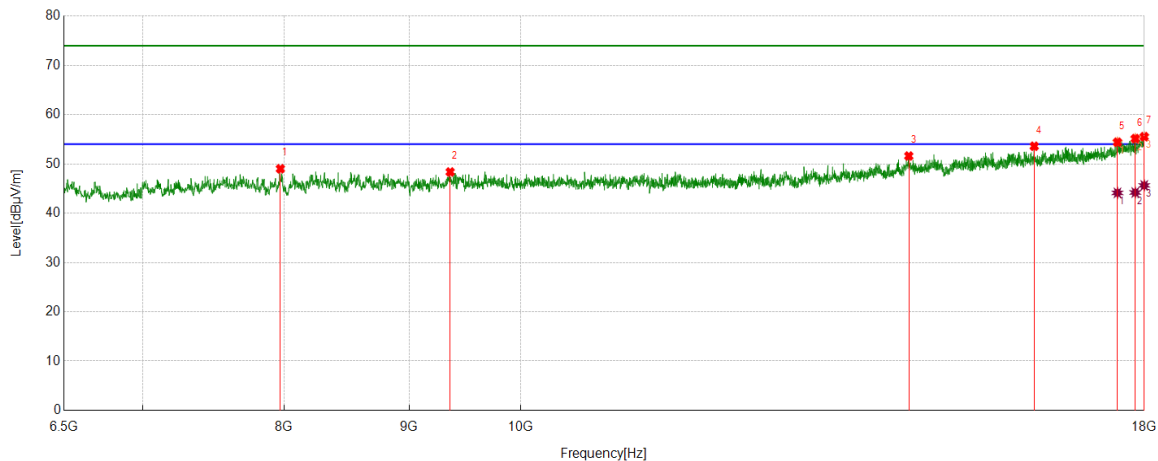

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7972.2454	43.63	5.39	49.02	74.00	-24.98	Vertical
2	9356.3094	41.93	6.44	48.37	74.00	-25.63	Vertical
3	14417.1529	38.70	12.91	51.61	74.00	-22.39	Vertical
4	16226.7878	38.22	15.37	53.59	74.00	-20.41	Vertical
5	17551.4252	36.67	17.74	54.41	74.00	-19.59	Vertical
6	17848.5581	36.00	19.14	55.14	74.00	-18.86	Vertical
7	18000.0000	35.80	19.74	55.54	74.00	-18.46	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17551.4252	26.39	17.74	44.13	54.00	-9.87	Vertical
2	17848.5581	25.06	19.14	44.20	54.00	-9.80	Vertical
3	18000.0000	25.90	19.74	45.64	54.00	-8.36	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5310	Horizontal	PASS

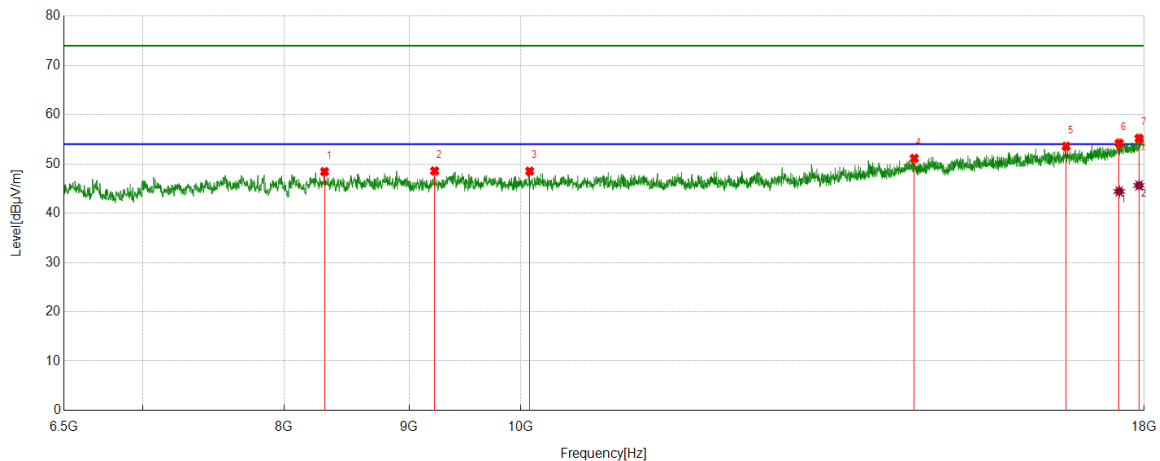

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8311.5519	42.17	6.27	48.44	74.00	-25.56	Horizontal
2	9220.2034	42.57	6.00	48.57	74.00	-25.43	Horizontal
3	10084.7641	41.91	6.62	48.53	74.00	-25.47	Horizontal
4	14491.9153	38.30	12.83	51.13	74.00	-22.87	Horizontal
5	16721.3702	37.27	16.31	53.58	74.00	-20.42	Horizontal
6	17580.1800	36.25	17.95	54.20	74.00	-19.80	Horizontal
7	17911.8186	35.92	19.27	55.19	74.00	-18.81	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17580.1800	26.48	17.95	44.43	54.00	-9.57	Horizontal
2	17911.8186	26.36	19.27	45.63	54.00	-8.37	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5310	Vertical	PASS

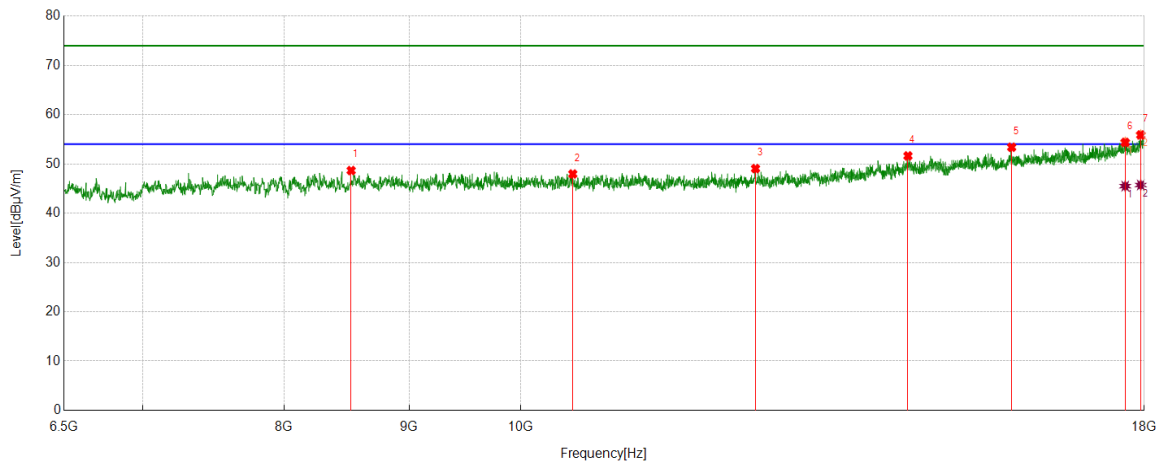

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8522.4204	42.25	6.41	48.66	74.00	-25.34	Vertical
2	10502.6671	41.17	6.79	47.96	74.00	-26.04	Vertical
3	12477.1629	40.44	8.61	49.05	74.00	-24.95	Vertical
4	14405.6509	38.81	12.82	51.63	74.00	-22.37	Vertical
5	15885.5643	38.76	14.63	53.39	74.00	-20.61	Vertical
6	17679.8633	36.26	18.11	54.37	74.00	-19.63	Vertical
7	17940.5734	36.43	19.45	55.88	74.00	-18.12	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17679.8633	27.39	18.11	45.50	54.00	-8.50	Vertical
2	17940.5734	26.27	19.45	45.72	54.00	-8.28	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5510	Horizontal	PASS

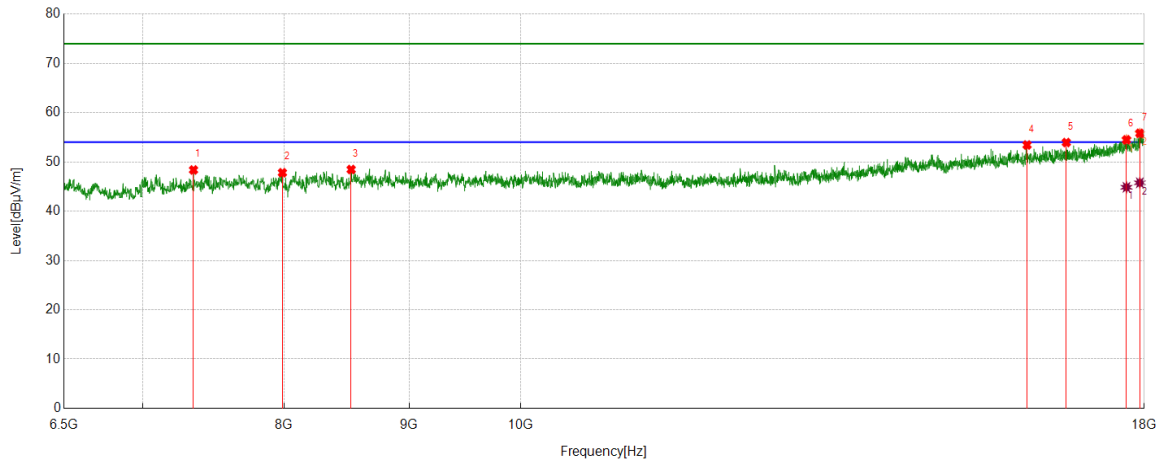

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7345.3909	44.34	4.03	48.37	74.00	-25.63	Horizontal
2	7987.5813	42.26	5.55	47.81	74.00	-26.19	Horizontal
3	8522.4204	42.05	6.41	48.46	74.00	-25.54	Horizontal
4	16117.5196	38.56	14.88	53.44	74.00	-20.56	Horizontal
5	16725.2042	37.70	16.24	53.94	74.00	-20.06	Horizontal
6	17700.9502	36.21	18.28	54.49	74.00	-19.51	Horizontal
7	17925.2375	36.44	19.37	55.81	74.00	-18.19	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17700.9502	26.58	18.28	44.86	54.00	-9.14	Horizontal
2	17925.2375	26.40	19.37	45.77	54.00	-8.23	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5510	Vertical	PASS

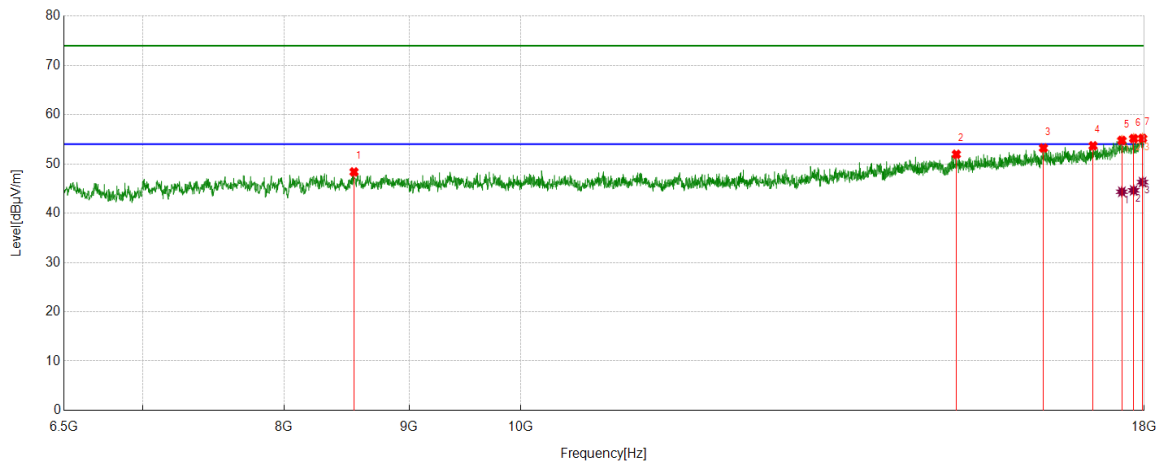

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	8545.4242	42.06	6.32	48.38	74.00	-25.62	Vertical
2	15078.5131	38.84	13.11	51.95	74.00	-22.05	Vertical
3	16368.6448	38.22	15.01	53.23	74.00	-20.77	Vertical
4	17152.6921	37.20	16.47	53.67	74.00	-20.33	Vertical
5	17624.2707	36.71	18.06	54.77	74.00	-19.23	Vertical
6	17821.7203	36.19	18.96	55.15	74.00	-18.85	Vertical
7	17971.2452	35.54	19.65	55.19	74.00	-18.81	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17624.2707	26.29	18.06	44.35	54.00	-9.65	Vertical
2	17821.7203	25.67	18.96	44.63	54.00	-9.37	Vertical
3	17971.2452	26.66	19.65	46.31	54.00	-7.69	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5550	Horizontal	PASS

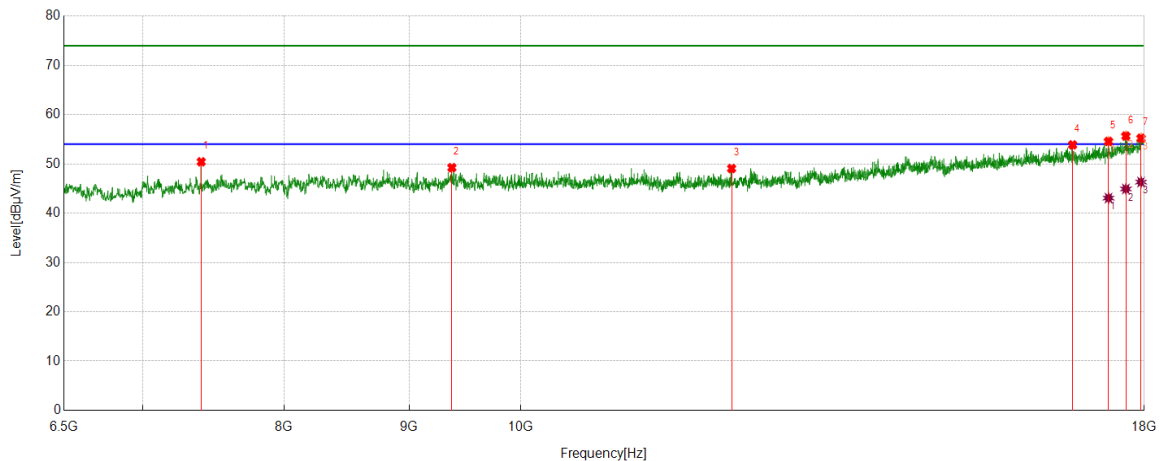

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7399.0665	46.18	4.25	50.43	74.00	-23.57	Horizontal
2	9371.6453	42.75	6.49	49.24	74.00	-24.76	Horizontal
3	12199.1999	40.63	8.44	49.07	74.00	-24.93	Horizontal
4	16824.8875	37.62	16.25	53.87	74.00	-20.13	Horizontal
5	17403.8173	37.20	17.37	54.57	74.00	-19.43	Horizontal
6	17691.3652	37.47	18.19	55.66	74.00	-18.34	Horizontal
7	17946.3244	35.74	19.48	55.22	74.00	-18.78	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17403.8173	25.70	17.37	43.07	54.00	-10.93	Horizontal
2	17691.3652	26.73	18.19	44.92	54.00	-9.08	Horizontal
3	17946.3244	26.84	19.48	46.32	54.00	-7.68	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5550	Vertical	PASS

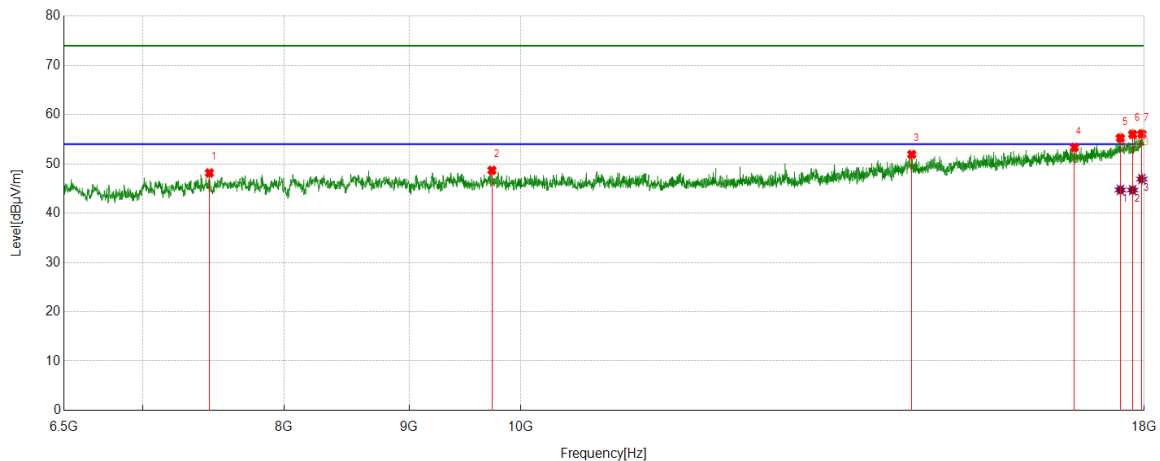

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7456.5761	43.89	4.27	48.16	74.00	-25.84	Vertical
2	9732.0387	42.14	6.56	48.70	74.00	-25.30	Vertical
3	14457.4096	39.08	12.85	51.93	74.00	-22.07	Vertical
4	16853.6423	37.15	16.20	53.35	74.00	-20.65	Vertical
5	17599.3499	37.24	18.03	55.27	74.00	-18.73	Vertical
6	17804.4674	37.14	18.88	56.02	74.00	-17.98	Vertical
7	17959.7433	36.45	19.63	56.08	74.00	-17.92	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17599.3499	26.70	18.03	44.73	54.00	-9.27	Vertical
2	17804.4674	25.82	18.88	44.70	54.00	-9.30	Vertical
3	17959.7433	27.30	19.63	46.93	54.00	-7.07	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5670	Horizontal	PASS

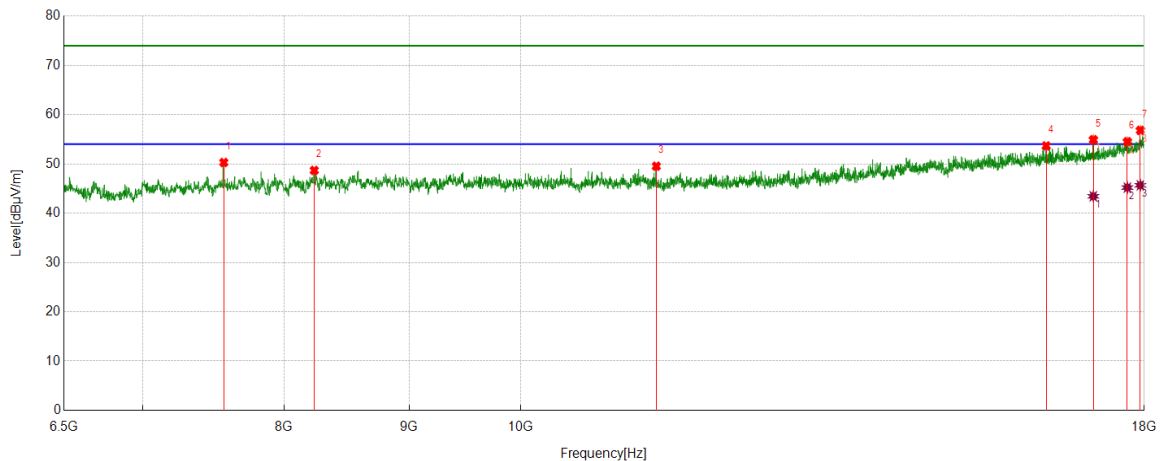

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7558.1764	45.79	4.51	50.30	74.00	-23.70	Horizontal
2	8231.0385	42.63	6.06	48.69	74.00	-25.31	Horizontal
3	11363.3939	42.28	7.26	49.54	74.00	-24.46	Horizontal
4	16410.8185	38.58	15.08	53.66	74.00	-20.34	Horizontal
5	17156.5261	38.45	16.46	54.91	74.00	-19.09	Horizontal
6	17716.2860	36.08	18.43	54.51	74.00	-19.49	Horizontal
7	17934.8225	37.41	19.40	56.81	74.00	-17.19	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17156.5261	26.97	16.46	43.43	54.00	-10.57	Horizontal
2	17716.2860	26.77	18.43	45.20	54.00	-8.80	Horizontal
3	17934.8225	26.27	19.40	45.67	54.00	-8.33	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5670	Vertical	PASS

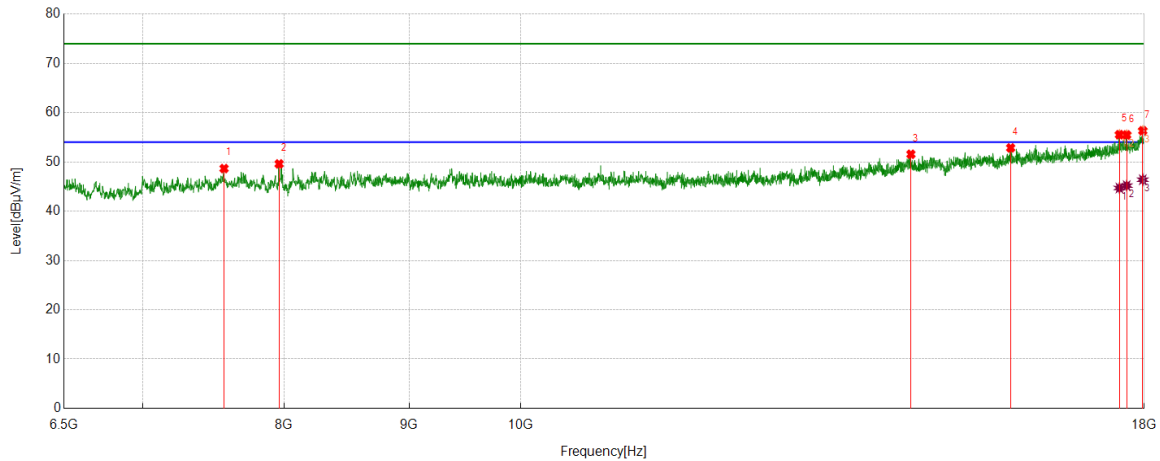

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7560.0933	44.15	4.51	48.66	74.00	-25.34	Vertical
2	7962.6604	43.81	5.79	49.60	74.00	-24.40	Vertical
3	14445.9077	38.65	12.91	51.56	74.00	-22.44	Vertical
4	15870.2284	38.17	14.68	52.85	74.00	-21.15	Vertical
5	17584.0140	37.55	17.98	55.53	74.00	-18.47	Vertical
6	17704.7841	37.17	18.31	55.48	74.00	-18.52	Vertical
7	17975.0792	36.60	19.73	56.33	74.00	-17.67	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17584.0140	26.73	17.98	44.71	54.00	-9.29	Vertical
2	17704.7841	26.88	18.31	45.19	54.00	-8.81	Vertical
3	17975.0792	26.66	19.73	46.39	54.00	-7.61	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5710	Horizontal	PASS

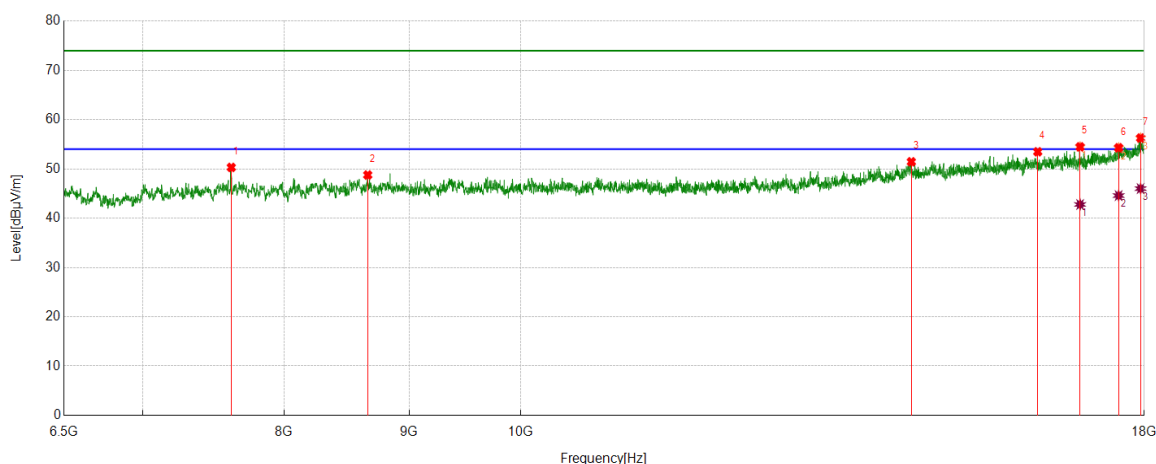

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7611.8520	45.36	4.95	50.31	74.00	-23.69	Horizontal
2	8656.6094	42.43	6.34	48.77	74.00	-25.23	Horizontal
3	14451.6586	38.54	12.91	51.45	74.00	-22.55	Horizontal
4	16280.4634	38.26	15.22	53.48	74.00	-20.52	Horizontal
5	16943.7406	38.42	16.06	54.48	74.00	-19.52	Horizontal
6	17570.5951	36.39	17.90	54.29	74.00	-19.71	Horizontal
7	17938.6564	36.83	19.44	56.27	74.00	-17.73	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	16943.7406	26.72	16.06	42.78	54.00	-11.22	Horizontal
2	17570.5951	26.69	17.90	44.59	54.00	-9.41	Horizontal
3	17938.6564	26.57	19.44	46.01	54.00	-7.99	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5710	Vertical	PASS

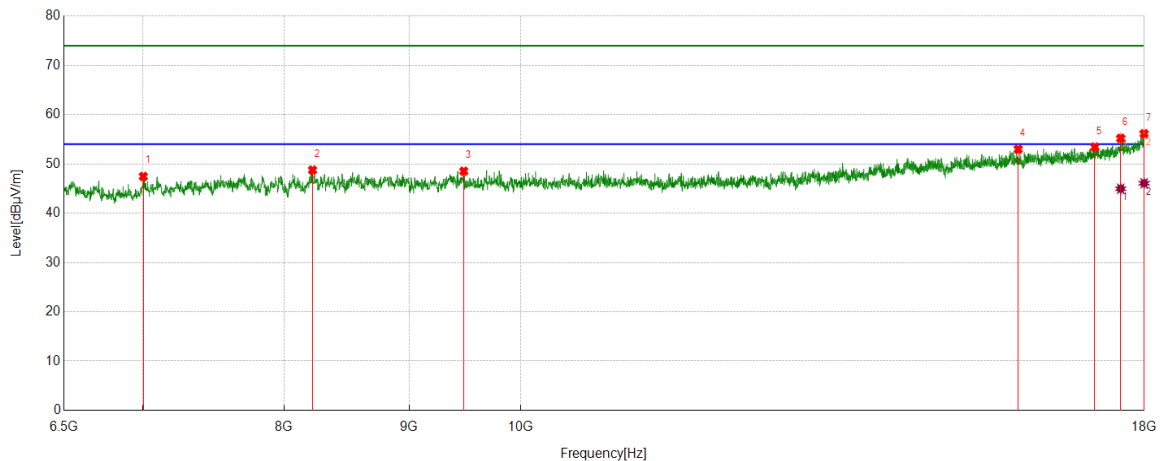

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7006.0843	43.97	3.49	47.46	74.00	-26.54	Vertical
2	8217.6196	42.68	6.08	48.76	74.00	-25.24	Vertical
3	9477.0795	42.07	6.46	48.53	74.00	-25.47	Vertical
4	15983.3306	38.43	14.55	52.98	74.00	-21.02	Vertical
5	17181.4469	36.83	16.58	53.41	74.00	-20.59	Vertical
6	17605.1008	37.15	18.05	55.20	74.00	-18.80	Vertical
7	17998.0830	36.39	19.75	56.14	74.00	-17.86	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17605.1008	26.91	18.05	44.96	54.00	-9.04	Vertical
2	17998.0830	26.33	19.75	46.08	54.00	-7.92	Vertical

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11ac VHT40	5755	Horizontal	PASS

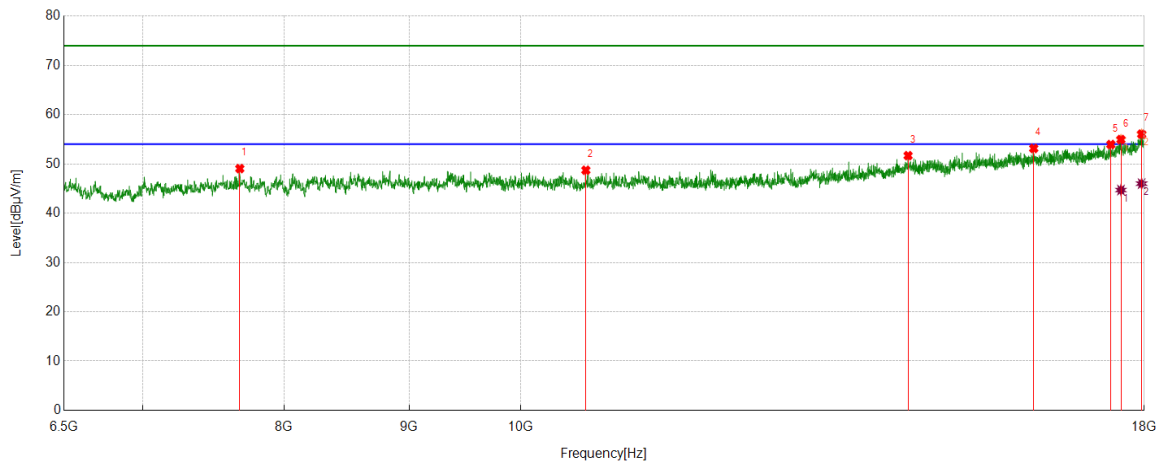

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7673.1955	43.80	5.25	49.05	74.00	-24.95	Horizontal
2	10633.0222	41.75	6.97	48.72	74.00	-25.28	Horizontal
3	14407.5679	38.83	12.85	51.68	74.00	-22.32	Horizontal
4	16219.1199	37.70	15.44	53.14	74.00	-20.86	Horizontal
5	17442.1570	36.41	17.53	53.94	74.00	-20.06	Horizontal
6	17608.9348	36.89	18.06	54.95	74.00	-19.05	Horizontal
7	17955.9093	36.47	19.58	56.05	74.00	-17.95	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17608.9348	26.64	18.06	44.70	54.00	-9.30	Horizontal
2	17955.9093	26.42	19.58	46.00	54.00	-8.00	Horizontal

Remark: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. AVG: VBW refer to section 6.2.

6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.