



FCC REPORT


(ZIGBEE)

Report No.: JYTSZ-R12-2400324G1
Applicant: Hangzhou Roombanker Technology Co., Ltd.
Address of Applicant: A#801 Wantong center, Hangzhou, China

Equipment Under Test (EUT)

Product Name: Smart Gateway
Model No.: DSGW-095, DSGW-095-1, DSGW-095-2, DSGW-095-3, DSGW-095-4, DSGW-095-X(X:1~29)
Trade Mark: Roombanker
FCC ID: 2AUXBDSGW-095
Applicable Standards: FCC CFR Title 47 Part 15C (§15.247)
Date of Sample Receipt: 25 Mar., 2024
Date of Test: 26 Mar., to 08 May, 2024
Date of Report Issued: 09 May, 2024
Test Result: PASS

Project by:

16 Jan. 12

Project Engineer
Jian Yan
Senior Engineer
Janet.wei
Manager

Date:

09 May, 2024

Reviewed by:

Date:

09 May, 2024

Approved by:

Date:

09 May, 2024

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	09 May, 2024	Original

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 GENERAL INFORMATION.....	4
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF E.U.T.....	4
4.3 TEST ENVIRONMENT AND MODE.....	5
4.4 DESCRIPTION OF SUPPORT UNITS.....	5
4.5 MEASUREMENT UNCERTAINTY.....	5
4.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD.....	5
4.7 LABORATORY FACILITY.....	6
4.8 LABORATORY LOCATION.....	6
4.9 TEST INSTRUMENTS LIST.....	7
5 MEASUREMENT SETUP AND PROCEDURE.....	9
5.1 TEST CHANNEL.....	9
5.2 TEST SETUP.....	9
5.3 TEST PROCEDURE.....	11
6 TEST RESULTS.....	12
6.1 SUMMARY.....	12
6.1.1 Clause and Data Summary.....	12
6.1.2 Test Limit.....	13
6.2 ANTENNA REQUIREMENT.....	14
6.3 AC POWER LINE CONDUCTED EMISSION.....	15
6.4 EMISSIONS IN RESTRICTED FREQUENCY BANDS.....	17
6.5 EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS.....	21

4 General Information

4.1 Client Information

Applicant:	Hangzhou Roombanker Technology Co., Ltd.
Address:	A#801 Wantong center, Hangzhou, China
Manufacturer/Factory:	Zhejiang Dusun Electron Co., Ltd.
Address:	No.640 Feng Qing St, DeQing Zhejiang China

4.2 General Description of E.U.T.

Product Name:	Smart Gateway
Model No.:	DSGW-095, DSGW-095-1, DSGW-095-2, DSGW-095-3, DSGW-095-4, DSGW-095-X(X:1~29)
Operation Frequency:	2405MHz~2480MHz (IEEE 802.15.4)
Channel numbers:	16 for (IEEE 802.15.4)
Channel separation:	5 MHz
Modulation technology: (IEEE 802.15.4)	OQPSK
Data speed(IEEE 802.15.4):	250kbps
Antenna Type:	PCB Antenna
Antenna gain:	-0.09 dBi
Power Supply:	DC 5V 3A
Test Sample Condition:	The applicant provided engineering samples for staying in continuously transmitting for testing.
Remark:	DSGW-095, DSGW-095-1, DSGW-095-2, DSGW-095-3, DSGW-095-4, DSGW-095-X(X:1~29) were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.

4.3 Test environment and mode

Operating Environment:	
Temperature:	15°C ~ 35°C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
<p>The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. Duty cycle setting during the transmission is 100% with maximum power setting for all modulations.</p>	

4.4 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
Lenovo	Laptop	ThinkPad T14 Gen 1	SL10Z47277	DoC

4.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	3.57 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	3.14 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m SAC)	4.5 dB
Radiated Emission (6GHz ~ 18GHz) (3m SAC)	4.7 dB
Radiated Emission (18GHz ~ 40GHz) (3m SAC)	5.34 dB
Radiated Emission (30MHz ~ 200MHz) (10m SAC)	4.3 dB
Radiated Emission (200MHz ~ 1000MHz) (10m SAC)	4.3 dB
Radiated Emission (30MHz ~ 1GHz) (3m FAR)	3.43 dB
Radiated Emission (1GHz ~ 6GHz) (3m FAR)	4.95 dB
Radiated Emission (6GHz ~ 18GHz) (3m FAR)	5.23 dB
Radiated Emission (18GHz ~ 40GHz) (3m FAR)	5.32 dB
<p>Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.</p>	

4.6 Additions to, deviations, or exclusions from the method

No

4.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

4.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

4.9 Test Instruments list

Radiated Emission(3m FAR):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m FAR	YUNYI	9m*6m*6m	WXJ097	06-15-2023	06-14-2028
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ097-2	07-13-2023	07-12-2024
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	07-02-2021	07-01-2024
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ097-3	07-14-2023	07-13-2024
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	12-28-2023	12-27-2024
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-28-2023	12-27-2024
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-6	12-28-2023	12-27-2024
Pre-amplifier (30MHz ~ 1GHz)	YUNYI	PAM-310N	WXJ097-5	05-14-2023	05-13-2024
Pre-amplifier (1GHz ~ 18GHz)	YUNYI	PAM-118N	WXJ097-6	05-14-2023	05-13-2024
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-27-2023	12-26-2024
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	12-27-2023	12-26-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-27-2023	12-26-2024
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ081-1	06-13-2023	06-12-2024
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-13M	WXG097-1	08-01-2023	07-31-2024
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG097-2	08-01-2023	07-31-2024
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG097-3	08-01-2023	07-31-2024
High Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Low Band Reject Filter Group	Tonscend	JS0806-F	WXJ097-4	N/A	
Test Software	Tonscend	TS+	Version: 5.0.0		

Radiated Emission(10m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
10m SAC	ETS	RFSD-100-F/A	WXJ090	04-28-2021	04-27-2026
BiConiLog Antenna	SCHWARZBECK	VULB 9168	WXJ090-1	12-28-2023	12-27-2024
BiConiLog Antenna	SCHWARZBECK	VULB 9168	WXJ090-2	12-28-2023	12-27-2024
EMI Test Receiver	R&S	ESR 3	WXJ090-3	12-27-2023	12-26-2024
EMI Test Receiver	R&S	ESR 3	WXJ090-4	12-27-2023	12-26-2024
Low Pre-amplifier	Bost	LNA 0920N	WXJ090-6	12-27-2023	12-26-2024
Low Pre-amplifier	Bost	LNA 0920N	WXJ090-7	12-27-2023	12-26-2024
Cable	Bost	JYT10M-1G-NN-10M	WXG002-7	01-17-2024	01-16-2025
Cable	Bost	JYT10M-1G-NN-10M	WXG002-8	01-17-2024	01-16-2025
Test Software	R&S	EMC32	Version: 10.50.40		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	07-05-2023	07-04-2024
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	12-27-2023	12-26-2024
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	12-27-2023	12-26-2024
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	01-17-2024	01-16-2025
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	


Test Software	AUDIX	E3	Version: 6.110919b
---------------	-------	----	--------------------

Conducted Method:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9010B	WXJ004-3	11-01-2023	10-31-2024
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	01-09-2023	01-08-2025
Power Detector Box	MWRFTEST	MW100-PSB	WXJ007-4	09-25-2023	09-24-2024
DC Power Supply	Keysight	E3642A	WXJ025-2	N/A	
RF Control Unit	MWRFTEST	MW100-RFCB	WXG006	N/A	
Test Software	MWRFTEST	MTS 8310	Version: 2.0.0.0		


5.1 Test Channel


Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2405	8	2440	16	2480

1) Conducted emission measurement:



Below 1GHz (10m SAC)

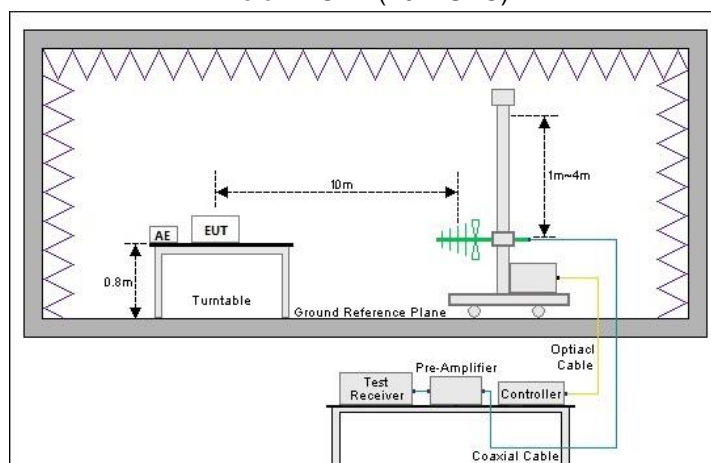

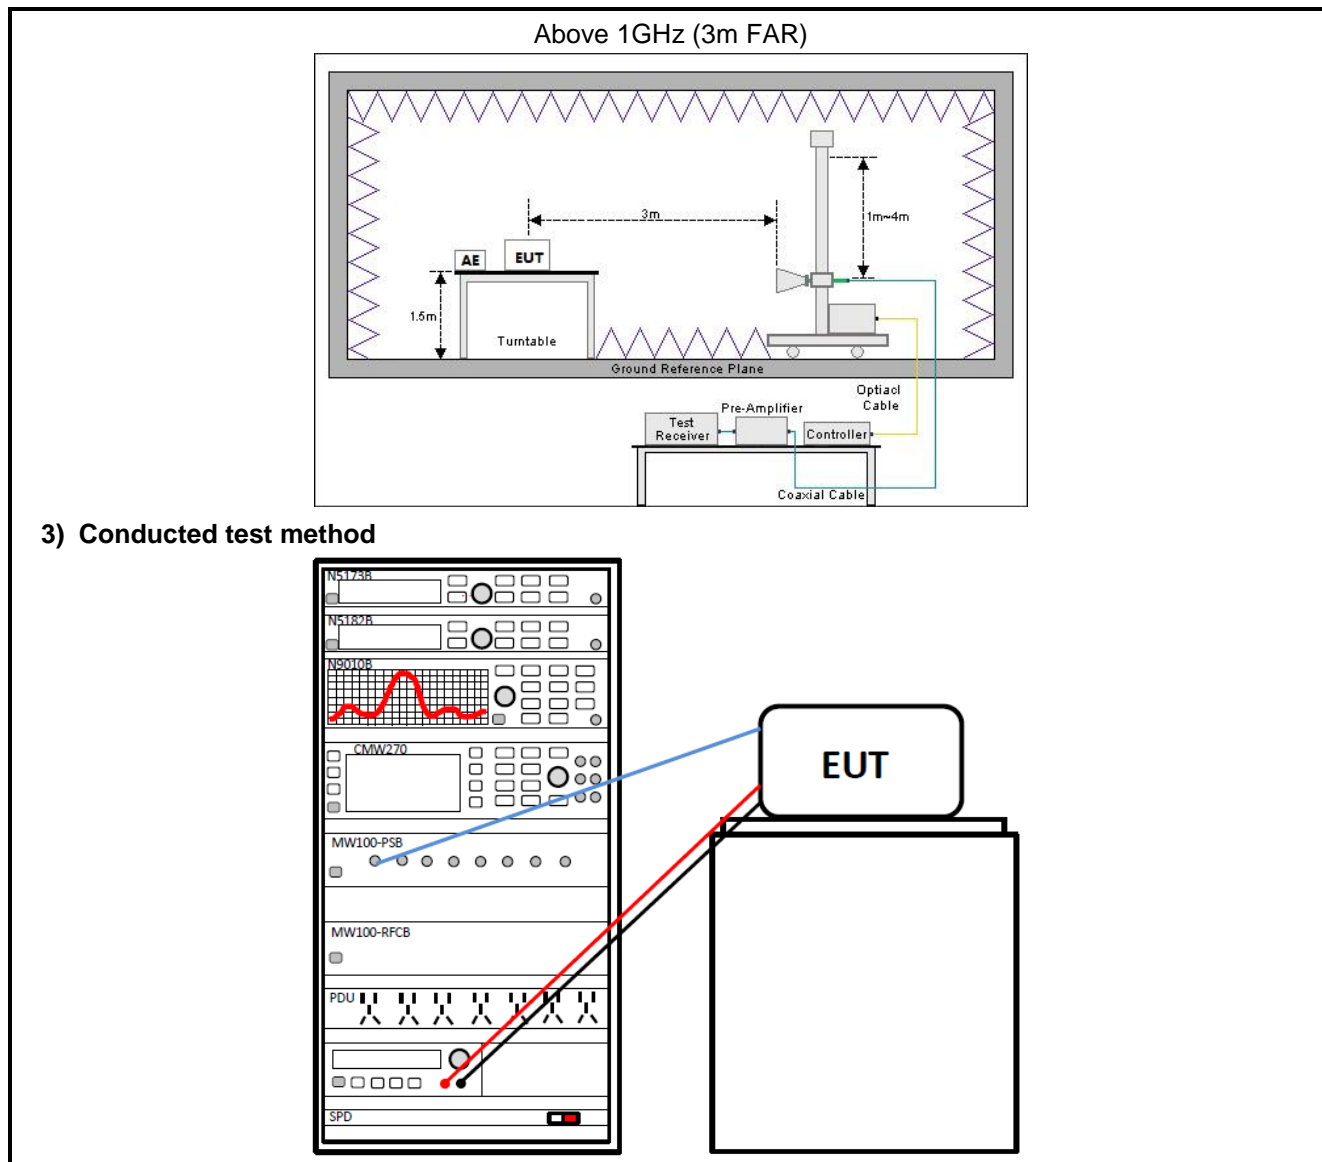

5.3 Test Procedure

Test method	Test step
Conducted emission	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Radiated emission	<p>For below 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 10 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 10 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	<ol style="list-style-type: none"> 1. The BLE antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

6 Test Results

6.1 Summary

6.1.1 Clause and Data Summary

Test items	Standard clause	Test data	Result
Antenna Requirement	15.203 15.247 (b)(4)	See Section 6.2	Pass
AC Power Line Conducted Emission	15.207	See Section 6.3	Pass
Duty Cycle	ANSI C63.10-2013	Appendix A – Zigbee	Pass
Conducted Output Power	15.247 (b)(3)	Appendix A – Zigbee	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Appendix A – Zigbee	Pass
Power Spectral Density	15.247 (e)	Appendix A – Zigbee	Pass
Band-edge Emission Conduction Spurious Emission	15.247 (d)	Appendix A – Zigbee	Pass
Emissions in Restricted Frequency Bands	15.205 15.247 (d)	See Section 6.4	Pass
Emissions in Non-restricted Frequency Bands	15.209 15.247(d)	See Section 6.5	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. The cable insertion loss used by “RF Output Power” and other conduction measurement items is 0.5dB (provided by the customer).			
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02		

6.1.2 Test Limit


Test items	Limit																																								
AC Power Line Conducted Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-Peak</th><th>Average</th></tr><tr><td>0.15 – 0.5</td><td>66 to 56 <small>Note 1</small></td><td>56 to 46 <small>Note 1</small></td></tr><tr><td>0.5 – 5</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>60</td><td>50</td></tr><tr><td colspan="3">Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.</td></tr></table>	Frequency (MHz)	Limit (dBμV)		Quasi-Peak	Average	0.15 – 0.5	66 to 56 <small>Note 1</small>	56 to 46 <small>Note 1</small>	0.5 – 5	56	46	5 – 30	60	50	Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.																									
Frequency (MHz)	Limit (dBμV)																																								
	Quasi-Peak	Average																																							
0.15 – 0.5	66 to 56 <small>Note 1</small>	56 to 46 <small>Note 1</small>																																							
0.5 – 5	56	46																																							
5 – 30	60	50																																							
Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.																																									
Conducted Output Power	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.																																								
6dB Emission Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.																																								
99% Occupied Bandwidth	N/A																																								
Power Spectral Density	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.																																								
Band-edge Emission Conduction Spurious Emission	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																																								
Emissions in Restricted Frequency Bands Emissions in Non-restricted Frequency Bands	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBμV/m)</th><th rowspan="2">Detector</th></tr><tr><th>@ 3m</th><th>@ 10m</th></tr><tr><td>30 – 88</td><td>40.0</td><td>30.0</td><td>Quasi-peak</td></tr><tr><td>88 – 216</td><td>43.5</td><td>33.5</td><td>Quasi-peak</td></tr><tr><td>216 – 960</td><td>46.0</td><td>36.0</td><td>Quasi-peak</td></tr><tr><td>960 – 1000</td><td>54.0</td><td>44.0</td><td>Quasi-peak</td></tr><tr><td colspan="4">Note: The more stringent limit applies at transition frequencies.</td></tr><tr><th rowspan="2">Frequency</th><th colspan="2">Limit (dBμV/m) @ 3m</th><th rowspan="2">Peake</th></tr><tr><th>Average</th><th></th></tr><tr><td>Above 1 GHz</td><td>54.0</td><td></td><td>74.0</td></tr><tr><td colspan="4">Note: The measurement bandwidth shall be 1 MHz or greater.</td></tr></table>	Frequency (MHz)	Limit (dBμV/m)		Detector	@ 3m	@ 10m	30 – 88	40.0	30.0	Quasi-peak	88 – 216	43.5	33.5	Quasi-peak	216 – 960	46.0	36.0	Quasi-peak	960 – 1000	54.0	44.0	Quasi-peak	Note: The more stringent limit applies at transition frequencies.				Frequency	Limit (dBμV/m) @ 3m		Peake	Average		Above 1 GHz	54.0		74.0	Note: The measurement bandwidth shall be 1 MHz or greater.			
Frequency (MHz)	Limit (dBμV/m)		Detector																																						
	@ 3m	@ 10m																																							
30 – 88	40.0	30.0	Quasi-peak																																						
88 – 216	43.5	33.5	Quasi-peak																																						
216 – 960	46.0	36.0	Quasi-peak																																						
960 – 1000	54.0	44.0	Quasi-peak																																						
Note: The more stringent limit applies at transition frequencies.																																									
Frequency	Limit (dBμV/m) @ 3m		Peake																																						
	Average																																								
Above 1 GHz	54.0		74.0																																						
Note: The measurement bandwidth shall be 1 MHz or greater.																																									

6.2 Antenna requirement

Standard requirement:	FCC Part 15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
E.U.T Antenna: The Zigbee antenna is a PCB antenna, its connector is a special connection port and which cannot replace by end-user, the best case gain of the antenna is -0.09dBi. See product internal photos for details.	

6.3 AC Power Line Conducted Emission

Product name:	Smart Gateway	Product model:	DSGW-095
Test by:	Asher	Test mode:	Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

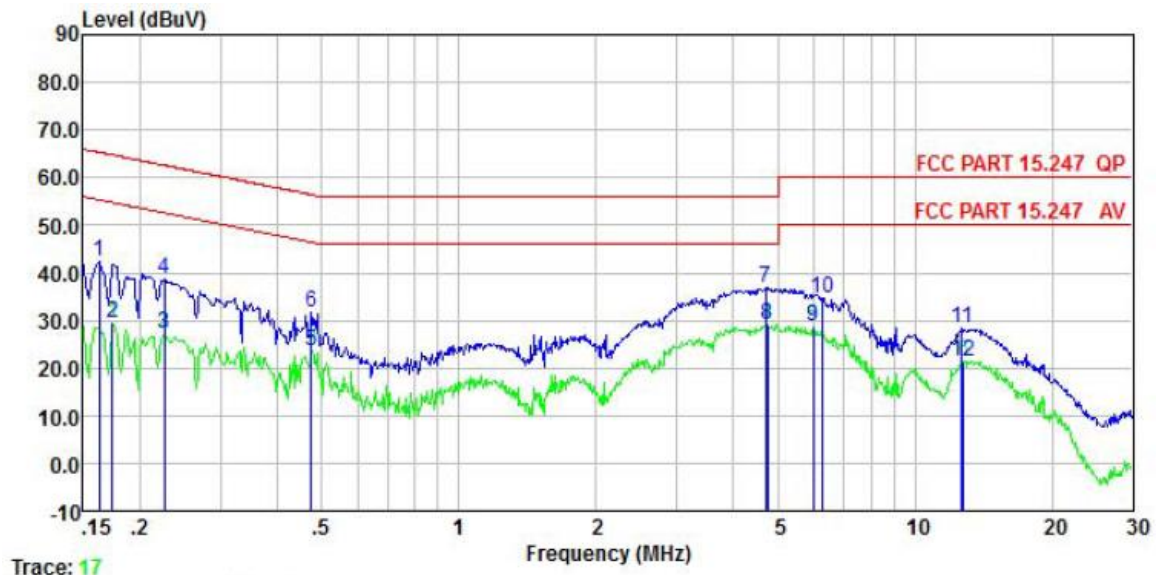


	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	32.13	0.20	0.00	9.88	0.01	42.22	65.34	-23.12	QP
2	0.174	19.55	0.20	0.00	9.88	0.01	29.64	54.77	-25.13	Average
3	0.226	17.01	0.20	0.00	9.88	0.02	27.11	52.61	-25.50	Average
4	0.226	28.44	0.20	0.00	9.88	0.02	38.54	62.61	-24.07	QP
5	0.474	13.60	0.20	0.00	9.88	0.03	23.71	46.45	-22.74	Average
6	0.474	21.56	0.20	0.00	9.88	0.03	31.67	56.45	-24.78	QP
7	4.696	26.86	0.20	0.00	9.89	0.09	37.04	56.00	-18.96	QP
8	4.746	19.00	0.20	0.00	9.89	0.09	29.18	46.00	-16.82	Average
9	5.993	18.48	0.20	0.00	9.90	0.09	28.67	50.00	-21.33	Average
10	6.285	24.56	0.20	0.00	9.90	0.09	34.75	60.00	-25.25	QP
11	12.649	18.08	0.26	0.00	9.92	0.11	28.37	60.00	-31.63	QP
12	12.784	11.20	0.26	0.00	9.92	0.11	21.49	50.00	-28.51	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level=Receiver Read level + LISN Factor + Cable Loss.

Product name:	Smart Gateway	Product model:	DSGW-095
Test by:	Asher	Test mode:	Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

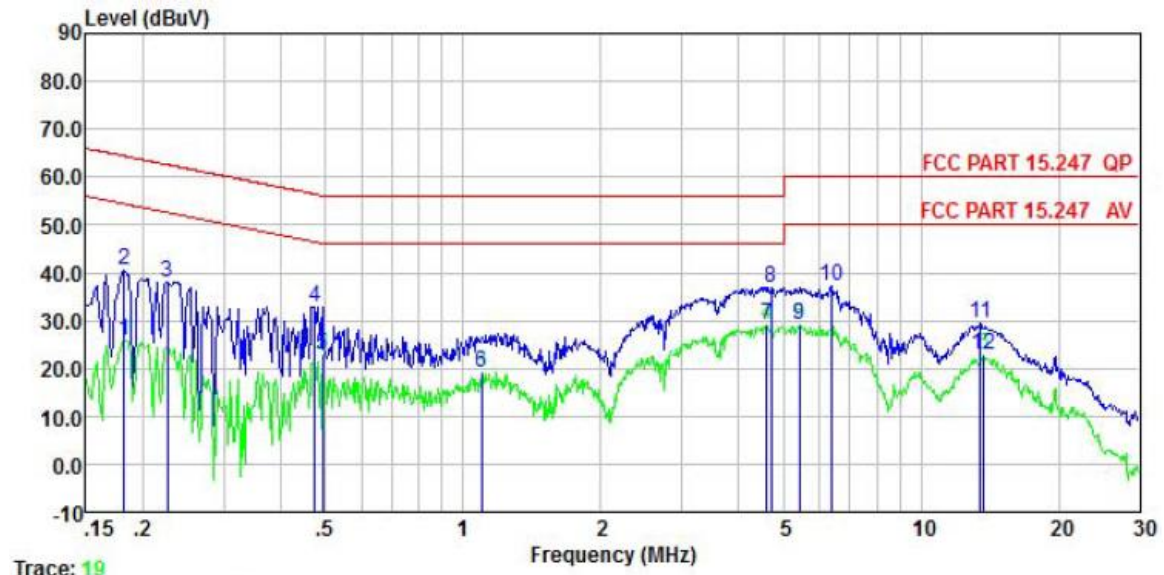


	Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.182	15.76	0.20	0.00	9.88	0.01	25.85	54.42	-28.57	Average
2	0.182	30.45	0.20	0.00	9.88	0.01	40.54	64.42	-23.88	QP
3	0.226	28.05	0.20	0.00	9.88	0.02	38.15	62.61	-24.46	QP
4	0.474	22.80	0.20	0.00	9.88	0.03	32.91	56.45	-23.54	QP
5	0.494	12.91	0.20	0.00	9.88	0.03	23.02	46.10	-23.08	Average
6	1.100	8.99	0.21	0.00	9.88	0.07	19.15	46.00	-26.85	Average
7	4.598	18.90	0.30	0.00	9.89	0.09	29.18	46.00	-16.82	Average
8	4.696	26.71	0.30	0.00	9.89	0.09	36.99	56.00	-19.01	QP
9	5.419	19.00	0.30	0.00	9.90	0.09	29.29	50.00	-20.71	Average
10	6.352	26.98	0.30	0.00	9.90	0.09	37.27	60.00	-22.73	QP
11	13.479	19.00	0.40	0.00	9.92	0.11	29.43	60.00	-30.57	QP
12	13.695	12.37	0.40	0.00	9.93	0.12	22.82	50.00	-27.18	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

6.4 Emissions in Restricted Frequency Bands

Product Name:	Smart Gateway	Product model:	DSGW-095
Test By:	Kiran	Test mode:	Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

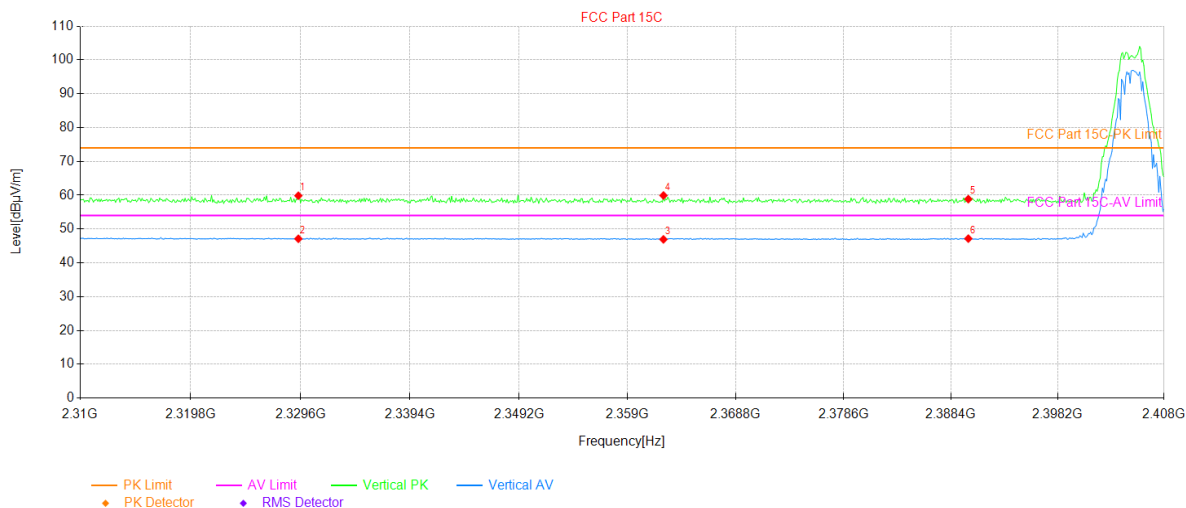


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2329.40	23.72	36.13	59.85	74.00	14.15	196	PK	PASS	Vertical
2	2329.40	10.99	36.13	47.12	54.00	6.88	72	AV	PASS	Vertical
3	2362.23	10.61	36.33	46.94	54.00	7.06	23	AV	PASS	Vertical
4	2362.23	23.59	36.33	59.92	74.00	14.08	354	PK	PASS	Vertical
5	2390.00	22.38	36.47	58.85	74.00	15.15	177	PK	PASS	Vertical
6	2390.00	10.70	36.47	47.17	54.00	6.83	42	AV	PASS	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Smart Gateway	Product model:	DSGW-095
Test By:	Kiran	Test mode:	Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

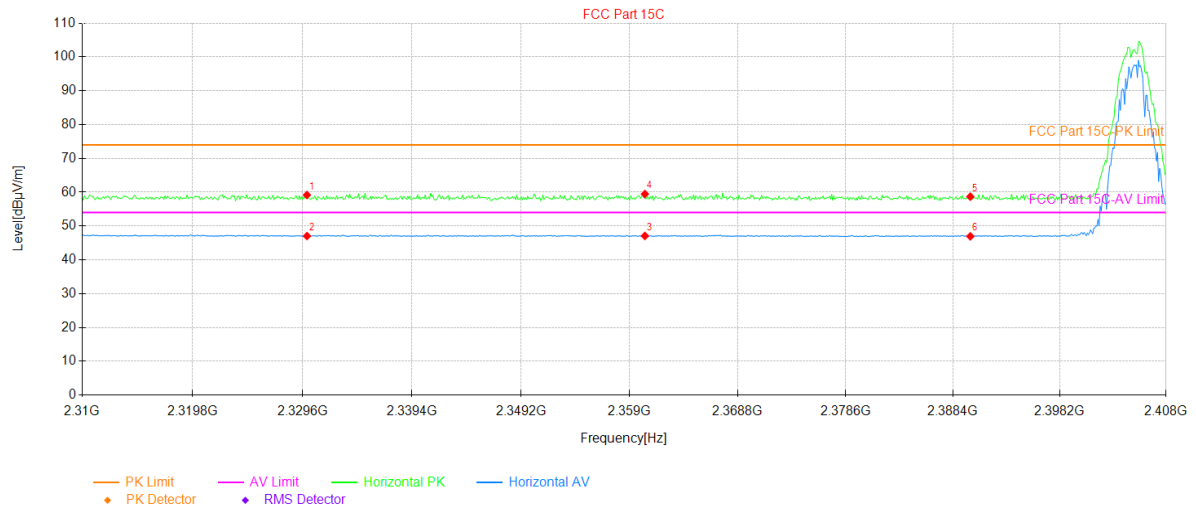


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2329.99	23.05	36.13	59.18	74.00	14.82	234	PK	PASS	Horizontal
2	2329.99	10.91	36.13	47.04	54.00	6.96	68	AV	PASS	Horizontal
3	2360.37	10.76	36.32	47.08	54.00	6.92	234	AV	PASS	Horizontal
4	2360.37	23.15	36.32	59.47	74.00	14.53	181	PK	PASS	Horizontal
5	2390.00	22.23	36.47	58.70	74.00	15.30	284	PK	PASS	Horizontal
6	2390.00	10.49	36.47	46.96	54.00	7.04	292	AV	PASS	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Smart Gateway	Product model:	DSGW-095
Test By:	Kiran	Test mode:	Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

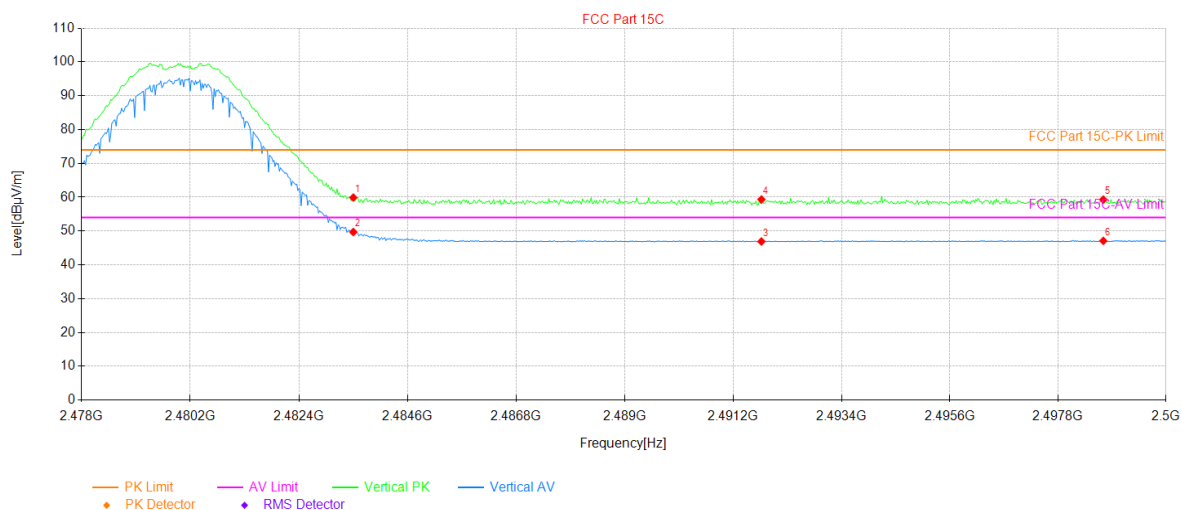


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	23.79	36.11	59.90	74.00	14.10	79	PK	PASS	Vertical
2	2483.50	13.60	36.11	49.71	54.00	4.29	68	AV	PASS	Vertical
3	2491.77	10.77	36.14	46.91	54.00	7.09	45	AV	PASS	Vertical
4	2491.77	23.20	36.14	59.34	74.00	14.66	45	PK	PASS	Vertical
5	2498.72	23.13	36.17	59.30	74.00	14.70	170	PK	PASS	Vertical
6	2498.72	10.93	36.17	47.10	54.00	6.90	88	AV	PASS	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Smart Gateway	Product model:	DSGW-095
Test By:	Kiran	Test mode:	Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

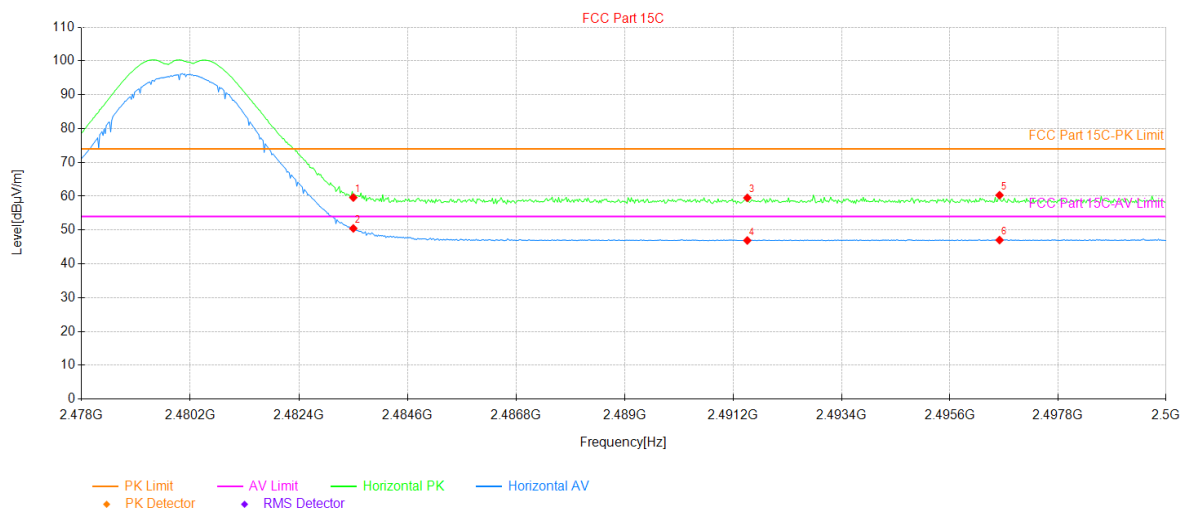

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	23.50	36.11	59.61	74.00	14.39	24	PK	PASS	Horizontal
2	2483.50	14.37	36.11	50.48	54.00	3.52	24	AV	PASS	Horizontal
3	2491.49	23.39	36.14	59.53	74.00	14.47	322	PK	PASS	Horizontal
4	2491.49	10.77	36.14	46.91	54.00	7.09	302	AV	PASS	Horizontal
5	2496.61	24.14	36.16	60.30	74.00	13.70	68	PK	PASS	Horizontal
6	2496.61	10.87	36.16	47.03	54.00	6.97	322	AV	PASS	Horizontal


Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

6.5 Emissions in Non-restricted Frequency Bands

Below 1GHz:

Product Name:	Smart Gateway	Product model:	DSGW-095
Test By:	Asher	Test mode:	Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

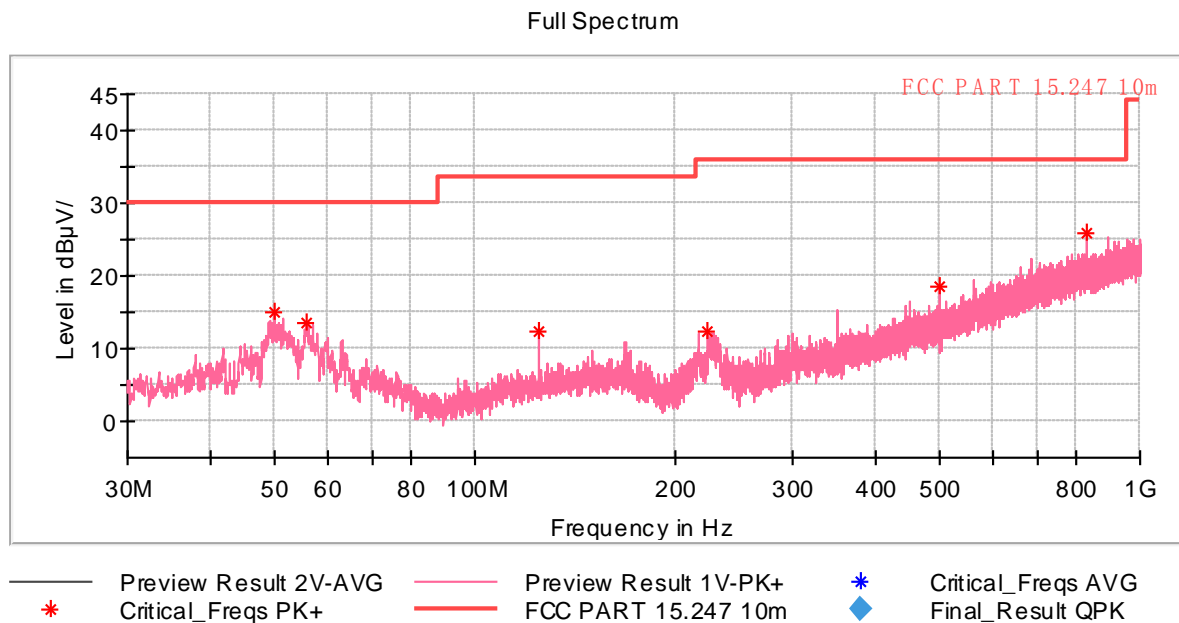


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.933500	15.11	30.00	14.89	100.0	V	124.0	-16.5
55.705000	13.57	30.00	16.43	100.0	V	238.0	-16.6
124.963000	12.43	33.50	21.07	100.0	V	357.0	-16.9
224.194000	12.24	36.00	23.76	100.0	V	246.0	-17.9
499.965000	18.58	36.00	17.42	100.0	V	4.0	-9.6
832.141500	25.87	36.00	10.13	100.0	V	350.0	-2.2

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Smart Gateway	Product model:	DSGW-095
Test By:	Asher	Test mode:	Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

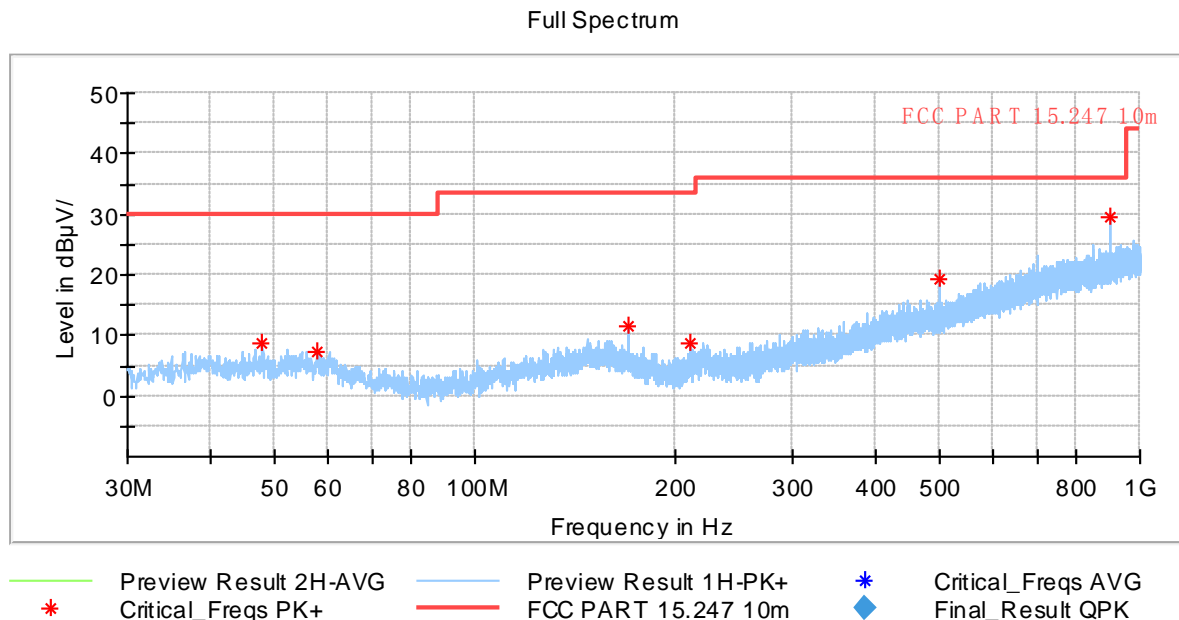

Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.751000	8.76	30.00	21.24	100.0	H	180.0	-16.5
57.742000	7.43	30.00	22.57	100.0	H	308.0	-16.8
169.777000	11.68	33.50	21.82	100.0	H	45.0	-16.0
210.226000	8.82	33.50	24.68	100.0	H	159.0	-18.5
499.965000	19.14	36.00	16.86	100.0	H	283.0	-9.6
899.993000	29.49	36.00	6.51	100.0	H	176.0	-1.3

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Above 1GHz

Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4810.00	51.49	-7.97	43.52	74.00	30.48	Vertical
4810.00	49.04	-7.97	41.07	74.00	32.93	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4810.00	42.59	-7.97	34.62	54.00	19.38	Vertical
4810.00	40.07	-7.97	32.10	54.00	21.90	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4880.00	51.00	-7.49	43.51	74.00	30.49	Vertical
4880.00	48.57	-7.49	41.08	74.00	32.92	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4880.00	42.20	-7.49	34.71	54.00	19.29	Vertical
4880.00	40.13	-7.49	32.64	54.00	21.36	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4960.00	51.85	-7.08	44.77	74.00	29.23	Vertical
4960.00	48.90	-7.08	41.82	74.00	32.18	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4960.00	43.03	-7.08	35.95	54.00	18.05	Vertical
4960.00	39.75	-7.08	32.67	54.00	21.33	Horizontal
Remark: 1. Final Level = Receiver Read level + Factor. 2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.						

-----End of report-----