

Part-0 SAR Characterization Report

Report No. : SFCDVB-WTW-P22100074

Applicant : Getac Technology Corporation.

Address : 5F., Building A, No. 209, Sec.1, Nangang Rd., Nangang Dist., Taipei City 11568,
Taiwan, R.O.C.

Product : Radio Module

FCC ID : QYLEM9190V

Brand : Getac

Model No. : EM9190

Sample Received Date : Oct. 19, 2022

Lab Address : No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location : No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City, Taiwan

CERTIFICATION: The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch—Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By :



Vera Huang / Specialist

Approved By :



Roy Wu / Senior Manager



FCC Accredited No.: TW0003

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1. Description of Equipment Under Test	4
2. SAR Measurement System	6
2.1. Definition of Specific Absorption Rate (SAR)	6
2.2. SPEAG DASY6 System	6
2.3. SAR Measurement Procedure	7
2.3.1. Area Scan and Zoom Scan Procedure	8
2.3.2. Power Drift Monitoring	9
2.3.3. Spatial Peak SAR Evaluation	9
2.3.4. SAR Averaged Methods	9
3. SAR Characterization	10
3.1. DSI (Device State Index) and SAR Determination	10
3.2. SAR Design Target	10
3.3. SAR Characterization	11
4. Equipment List	22
5. Measurement Uncertainty	23
6. Information of the Testing Laboratories	27



Part-0 SAR Characterization Report

Release Control Record

Report No.	Reason for Change	Date Issued
SFCDVB-WTW-P22100074	Initial release	Apr. 06, 2023

Part-0 SAR Characterization Report

1. Description of Equipment Under Test

EUT Type	Radio Module
FCC ID	QYLEM9190V
Brand Name	Getac
Model Name	EM9190
Tx Frequency Bands (Unit: MHz)	WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band IV : 1712.4 ~ 1752.6 WCDMA Band V : 826.4 ~ 846.6 LTE Band 2 : 1850.7 ~ 1909.3 LTE Band 4 : 1710.7 ~ 1754.3 LTE Band 5 : 824.7 ~ 848.3 LTE Band 7 : 2502.5 ~ 2567.5 LTE Band 12 : 699.7 ~ 715.3 LTE Band 13 : 779.5 ~ 784.5 LTE Band 14 : 790.5 ~ 795.5 LTE Band 17 : 706.5 ~ 713.5 LTE Band 25 : 1850.7 ~ 1914.3 LTE Band 26 : 814.7 ~ 848.3 LTE Band 38 : 2572.5 ~ 2617.5 LTE Band 41 : 2498.5 ~ 2687.5 LTE Band 42 : 3550 ~ 3600 LTE Band 48 : 3552.5 ~ 3697.5 LTE Band 66 : 1710.7 ~ 1779.3 LTE Band 71 : 665.5 ~ 695.5 5G NR n2 : 1852.5 ~ 1907.5 5G NR n5 : 826.5 ~ 846.5 5G NR n66 : 1712.5 ~ 1777.5 5G NR n71 : 665.5 ~ 695.5 5GNR-n77 : 3300 ~ 4200 5GNR-n78 : 3300 ~ 3800 WLAN : 2412 ~ 2472, 5180 ~ 5250, 5260 ~ 5320, 5500 ~ 5720, 5745 ~ 5825, 5955 ~ 6415, 6435 ~ 6545, 6555 ~ 6885, 6895 ~ 7115 Bluetooth : 2402 ~ 2480 RFID : 13.56

Note:

- The EUT is authorized for use in specific End-product. Please refer to below for more details.

Product	Brand	Model	Difference
Notebook	Getac	V110	For marketing purpose.
		V110G7	
		V110Y (Y= 10 characters, Y can be 0 to 9, A to Z, a to z, "/", "\", " ", " " or blank for marketing purpose)	

- The WLAN/BT module (Brand: Intel® Wi-Fi 6E AX211, Model: AX211NGW) was installed in the End-product.
- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

List of End-product Accessory:

Battery	Brand Name	Getac
	Model Name	BP3S1P2100-S
	Power Rating	Rating: 11.1Vdc, 2040mAh, 23Wh Typical name: 2100mAh, 24Wh
	Type	Li-ion

Part-0 SAR Characterization Report

Time-Averaging for SAR

This device is enabled with Qualcomm Smart Transmit algorithm to control and manage transmitting power in real time and to ensure that the time-averaged RF exposure from 2G/3G/LTE/5G NR WWAN is in compliance with FCC requirements. This Part-0 report shows SAR characterization of WWAN radios for 2G/3G/LTE/5G NR sub-6. The characterization is achieved by determining P_{limit} for 2G/3G/LTE/5G NR sub-6 that corresponds to the exposure design targets after accounting for all device design related uncertainties. The SAR characterization is denoted as SAR Char in this report.

The compliance test under the static transmission scenario and simultaneous transmission analysis are reported in Part-1 report. The validation of the time-averaging algorithm and compliance under the dynamic (time-varying) transmission scenario for WWAN technologies are reported in Part-2 report.

Nomenclature for Part-0 Report

Technology	Term	Description
2G/3G/LTE/5G NR	P_{limit}	Power level that corresponds to the exposure design target (SAR_design_target) after accounting for all device design related uncertainties
	P_{max}	Maximum tune up output power
	SAR_design_target	Target SAR level < FCC SAR limit after accounting for all device design related uncertainties
	SAR Char	Table containing P_{limit} for all technologies and bands

2. SAR Measurement System

2.1. Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

2.2. SPEAG DASY6 System

DASY6 system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY6 software defined. The DASY6 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

Part-0 SAR Characterization Report

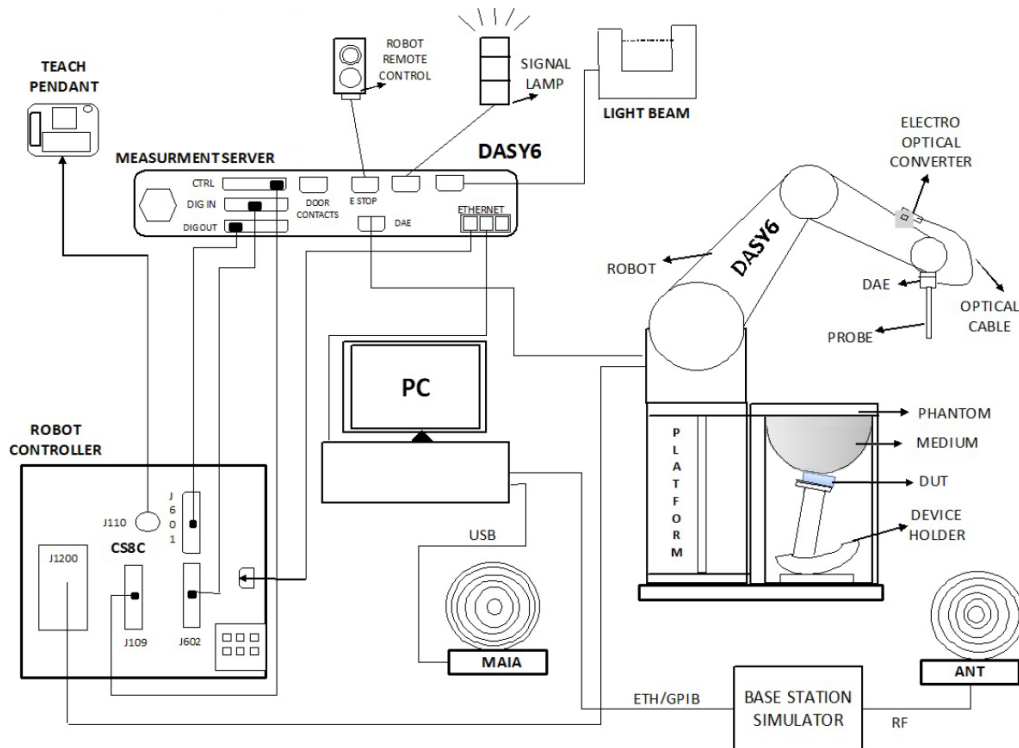


Fig-2.1 SPEAG DASY6 System Setup

2.3. SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- Make EUT to transmit maximum output power
- Measure conducted output power through RF cable
- Place the EUT in the specific position of phantom
- Perform SAR testing steps on the DASY system
- Record the SAR value

Part-0 SAR Characterization Report

2.3.1. Area Scan and Zoom Scan Procedure

First area scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an area scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, zoom scan is required. The zoom scan is performed around the highest E-field value to determine the averaged SAR-distribution.

Measure the local SAR at a test point at 1.4 mm of the inner surface of the phantom recommended by SEPAG. The area scan (two-dimensional SAR distribution) is performed cover at least an area larger than the projection of the EUT or antenna. The measurement resolution and spatial resolution for interpolation shall be chosen to allow identification of the local peak locations to within one-half of the linear dimension of the corresponding side of the zoom scan volume. Following table provides the measurement parameters required for the area scan.

Parameter	$f \leq 3 \text{ GHz}$	$3 \text{ GHz} < f \leq 6 \text{ GHz}$
Maximum distance from closest measurement point to phantom surface	5 ± 1	$\delta \ln(2)/2 \pm 0.5$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks. Additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g. 1 W/kg for 1.6 W/kg, 1 g limit; or 1.26 W/kg for 2 W/kg, 10 g limit).

The zoom scan (three-dimensional SAR distribution) is performed at the local maxima locations identified in previous area scan procedure. The zoom scan volume must be larger than the required minimum dimensions. When graded grids are used, which only applies in the direction normal to the phantom surface, the initial grid separation closest to the phantom surface and subsequent graded grid increment ratios must satisfy the required protocols. The 1-g SAR averaging volume must be fully contained within the zoom scan measurement volume boundaries; otherwise, the measurement must be repeated by shifting or expanding the zoom scan volume. The similar requirements also apply to 10-g SAR measurements. Following table provides the measurement parameters required for the zoom scan.

Parameter		$f \leq 3 \text{ GHz}$	$3 \text{ GHz} < f \leq 6 \text{ GHz}$
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz: } \leq 8 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 5 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 5 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 4 \text{ mm}$
Maximum zoom scan spatial resolution, normal to phantom surface	<i>uniform grid:</i> $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 4 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 3 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
	<i>graded grids:</i> $\Delta z_{\text{Zoom}}(1)$	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 3.0 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2.0 \text{ mm}$
	$\Delta z_{\text{Zoom}}(n>1)$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume (x, y, z)		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz: } \geq 28 \text{ mm}$ $4 - 5 \text{ GHz: } \geq 25 \text{ mm}$ $5 - 6 \text{ GHz: } \geq 22 \text{ mm}$

Part-0 SAR Characterization Report

2.3.2. Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

2.3.3. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

2.3.4. SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

3. SAR Characterization

3.1. Smart Transmit feature for RF Exposure

The FCC RF exposure limit is defined based on time- averaged RF exposure. This product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window, for SAR(transmit frequency < 6GHz). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.

3.2. SAR Design Target

The SAR_design_target is determined by ensuring that it is less than FCC SAR limit after accounting for total device designed related uncertainties specified by the manufacturer. The total uncertainties for this device is 1.0 dB. To account for total uncertainty, SAR_design_target is determined as below.

$$\text{SAR_design_target} < \text{SAR}_{\text{regulatory limit}} \times 10^{\frac{-\text{Total Uncertainty}}{10}}$$

For 1g-SAR, the SAR_{regulatory limit} is 1.2 W/kg, and the SAR_design_target is 0.95 W/kg.

3.3. SAR Characterization

The P_{limit} is calculated by linearly scaling with the measured SAR at the P_{max} to correspond to the SAR_design_target. The P_{limit} determination for each exposure scenario corresponding to SAR_design_target are show next Section.

Part-0 SAR Characterization Report

3.4. SAR Test Result For Plimit Calculations

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Ch.	Ant Status	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	SAR Design Target	Plimit	Plimit (with Duty cycle)	Minimum
	WCDMA II	RMC12.2K	Bottom of Laptop	0	9262	Ant 0	1.00	24.50	23.55	0.001	0.00	0.95	53.3	53.3	20.6
	WCDMA II	RMC12.2K	Back of Panel	25	9262	Ant 0	1.00	24.50	23.55	0.315	0.39	0.95	28.3	28.3	
	WCDMA II	RMC12.2K	Top of Panel	25	9262	Ant 0	1.00	24.50	23.55	0.3	0.37	0.95	28.6	28.6	
	WCDMA II	RMC12.2K	Rear Face	0	9262	Ant 0	1.00	24.50	23.55	0.001	0.00	0.95	53.3	53.3	
	WCDMA II	RMC12.2K	Left Side	0	9262	Ant 0	1.00	24.50	23.55	0.156	0.19	0.95	31.4	31.4	
	WCDMA II	RMC12.2K	Right Side	0	9262	Ant 0	1.00	24.50	23.55	0.001	0.00	0.95	53.3	53.3	
	WCDMA II	RMC12.2K	Top Side	0	9262	Ant 0	1.00	24.50	23.55	1.72	2.13	0.95	21	21	
	WCDMA II	RMC12.2K	Bottom Side	0	9262	Ant 0	1.00	24.50	23.55	0.001	0.00	0.95	53.3	53.3	
1	WCDMA II	RMC12.2K	Top Side	0	9400	Ant 0	1.00	24.50	23.42	1.82	2.33	0.95	20.6	20.6	
	WCDMA II	RMC12.2K	Top Side	0	9538	Ant 0	1.00	24.50	23.30	1.57	2.07	0.95	21.1	21.1	
	WCDMA II	RMC12.2K	Top Side	0	9400	Ant 0	1.00	24.50	23.42	1.81	2.32	0.95	20.6	20.6	
	WCDMA IV	RMC12.2K	Bottom of Laptop	0	1312	Ant 0	1.00	24.50	23.55	0.001	0.00	0.95	53.3	53.3	22.1
	WCDMA IV	RMC12.2K	Back of Panel	25	1312	Ant 0	1.00	24.50	23.55	0.322	0.40	0.95	28.2	28.2	
	WCDMA IV	RMC12.2K	Top of Panel	25	1312	Ant 0	1.00	24.50	23.55	0.386	0.48	0.95	27.5	27.5	
	WCDMA IV	RMC12.2K	Rear Face	0	1312	Ant 0	1.00	24.50	23.55	0.039	0.05	0.95	37.4	37.4	
	WCDMA IV	RMC12.2K	Left Side	0	1312	Ant 0	1.00	24.50	23.55	0.087	0.11	0.95	33.9	33.9	
	WCDMA IV	RMC12.2K	Right Side	0	1312	Ant 0	1.00	24.50	23.55	0.001	0.00	0.95	53.3	53.3	
2	WCDMA IV	RMC12.2K	Top Side	0	1312	Ant 0	1.00	24.50	23.55	1.33	1.65	0.95	22.1	22.1	
	WCDMA IV	RMC12.2K	Bottom Side	0	1312	Ant 0	1.00	24.50	23.55	0.001	0.00	0.95	53.3	53.3	
	WCDMA IV	RMC12.2K	Top Side	0	1413	Ant 0	1.00	24.50	23.49	0.874	1.10	0.95	23.9	23.9	
	WCDMA IV	RMC12.2K	Top Side	0	1513	Ant 0	1.00	24.50	23.50	0.742	0.93	0.95	24.6	24.6	
	WCDMA IV	RMC12.2K	Top Side	0	1312	Ant 0	1.00	24.50	23.55	1.32	1.64	0.95	22.1	22.1	
	WCDMA V	RMC12.2K	Bottom of Laptop	0	4132	Ant 0	1.00	24.50	23.44	0.001	0.00	0.95	53.2	53.2	22.4
	WCDMA V	RMC12.2K	Back of Panel	25	4132	Ant 0	1.00	24.50	23.44	0.206	0.26	0.95	30.1	30.1	
	WCDMA V	RMC12.2K	Top of Panel	25	4132	Ant 0	1.00	24.50	23.44	0.157	0.20	0.95	31.3	31.3	
	WCDMA V	RMC12.2K	Rear Face	0	4132	Ant 0	1.00	24.50	23.44	0.001	0.00	0.95	53.2	53.2	
	WCDMA V	RMC12.2K	Left Side	0	4132	Ant 0	1.00	24.50	23.44	0.001	0.00	0.95	53.2	53.2	
	WCDMA V	RMC12.2K	Right Side	0	4132	Ant 0	1.00	24.50	23.44	0.001	0.00	0.95	53.2	53.2	
	WCDMA V	RMC12.2K	Top Side	0	4132	Ant 0	1.00	24.50	23.44	1.07	1.37	0.95	22.9	22.9	
	WCDMA V	RMC12.2K	Bottom Side	0	4132	Ant 0	1.00	24.50	23.44	0.001	0.00	0.95	53.2	53.2	
	WCDMA V	RMC12.2K	Top Side	0	4182	Ant 0	1.00	24.50	23.25	1.08	1.44	0.95	22.7	22.7	
3	WCDMA V	RMC12.2K	Top Side	0	4233	Ant 0	1.00	24.50	23.05	1.1	1.54	0.95	22.4	22.4	
	WCDMA V	RMC12.2K	Top Side	0	4233	Ant 0	1.00	24.50	23.05	1.08	1.51	0.95	22.5	22.5	



Part-0 SAR Characterization Report

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Ch.	RB#	RB offset	Ant Status	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	SAR Design Target	Plimit	Plimit (with Duty cycle)	Minimum
	LTE 2	QPSK20M	Bottom of Laptop	0	18700	1	0	Ant 0	1.00	24.00	23.09	0.001	0.00	0.95	52.9	52.9	20.5
	LTE 2	QPSK20M	Back of Panel	25	18700	1	0	Ant 0	1.00	24.00	23.09	0.217	0.27	0.95	29.5	29.5	
	LTE 2	QPSK20M	Top of Panel	25	18700	1	0	Ant 0	1.00	24.00	23.09	0.237	0.29	0.95	29.1	29.1	
	LTE 2	QPSK20M	Rear Face	0	18700	1	0	Ant 0	1.00	24.00	23.09	0.001	0.00	0.95	52.9	52.9	
	LTE 2	QPSK20M	Left Side	0	18700	1	0	Ant 0	1.00	24.00	23.09	0.151	0.19	0.95	31.1	31.1	
	LTE 2	QPSK20M	Right Side	0	18700	1	0	Ant 0	1.00	24.00	23.09	0.001	0.00	0.95	52.9	52.9	
	LTE 2	QPSK20M	Top Side	0	18700	1	0	Ant 0	1.00	24.00	23.09	1.61	1.98	0.95	20.8	20.8	
	LTE 2	QPSK20M	Bottom Side	0	18700	1	0	Ant 0	1.00	24.00	23.09	0.001	0.00	0.95	52.9	52.9	
	LTE 2	QPSK20M	Bottom of Laptop	0	18700	50	0	Ant 0	1.00	23.00	22.19	0.001	0.00	0.95	52	52	
	LTE 2	QPSK20M	Back of Panel	25	18700	50	0	Ant 0	1.00	23.00	22.19	0.174	0.21	0.95	29.6	29.6	
	LTE 2	QPSK20M	Top of Panel	25	18700	50	0	Ant 0	1.00	23.00	22.19	0.192	0.23	0.95	29.1	29.1	
	LTE 2	QPSK20M	Rear Face	0	18700	50	0	Ant 0	1.00	23.00	22.19	0.001	0.00	0.95	52	52	
	LTE 2	QPSK20M	Left Side	0	18700	50	0	Ant 0	1.00	23.00	22.19	0.107	0.13	0.95	31.7	31.7	
	LTE 2	QPSK20M	Right Side	0	18700	50	0	Ant 0	1.00	23.00	22.19	0.001	0.00	0.95	52	52	
	LTE 2	QPSK20M	Top Side	0	18700	50	0	Ant 0	1.00	23.00	22.19	1.33	1.61	0.95	20.7	20.7	
	LTE 2	QPSK20M	Bottom Side	0	18700	50	0	Ant 0	1.00	23.00	22.19	0.001	0.00	0.95	52	52	
	LTE 2	QPSK20M	Top Side	0	18700	100	0	Ant 0	1.00	23.00	22.15	1.37	1.67	0.95	20.6	20.6	
4	LTE 2	QPSK20M	Top Side	0	18900	1	0	Ant 0	1.00	24.00	22.97	1.66	2.11	0.95	20.5	20.5	22.2
	LTE 2	QPSK20M	Top Side	0	19100	1	0	Ant 0	1.00	24.00	22.88	1.47	1.90	0.95	21	21	
	LTE 2	QPSK20M	Top Side	0	18900	50	0	Ant 0	1.00	23.00	22.13	1.29	1.57	0.95	20.8	20.8	
	LTE 2	QPSK20M	Top Side	0	19100	50	0	Ant 0	1.00	23.00	22.05	1.14	1.41	0.95	21.3	21.3	
	LTE 2	QPSK20M	Top Side	0	18900	1	0	Ant 0	1.00	24.00	22.97	1.64	2.08	0.95	20.6	20.6	
	LTE 4	QPSK20M	Bottom of Laptop	0	20175	1	0	Ant 0	1.00	24.00	23.02	0.001	0.00	0.95	52.8	52.8	
	LTE 4	QPSK20M	Back of Panel	25	20175	1	0	Ant 0	1.00	24.00	23.02	0.248	0.31	0.95	28.9	28.9	
	LTE 4	QPSK20M	Top of Panel	25	20175	1	0	Ant 0	1.00	24.00	23.02	0.313	0.39	0.95	27.8	27.8	
	LTE 4	QPSK20M	Rear Face	0	20175	1	0	Ant 0	1.00	24.00	23.02	0.001	0.00	0.95	52.8	52.8	
	LTE 4	QPSK20M	Left Side	0	20175	1	0	Ant 0	1.00	24.00	23.02	0.067	0.08	0.95	34.5	34.5	
	LTE 4	QPSK20M	Right Side	0	20175	1	0	Ant 0	1.00	24.00	23.02	0.001	0.00	0.95	52.8	52.8	
	LTE 4	QPSK20M	Top Side	0	20175	1	0	Ant 0	1.00	24.00	23.02	0.944	1.18	0.95	23	23	
	LTE 4	QPSK20M	Bottom Side	0	20175	1	0	Ant 0	1.00	24.00	23.02	0.001	0.00	0.95	52.8	52.8	
	LTE 4	QPSK20M	Bottom of Laptop	0	20175	50	0	Ant 0	1.00	23.00	22.05	0.001	0.00	0.95	51.8	51.8	
	LTE 4	QPSK20M	Back of Panel	25	20175	50	0	Ant 0	1.00	23.00	22.05	0.195	0.24	0.95	28.9	28.9	
	LTE 4	QPSK20M	Top of Panel	25	20175	50	0	Ant 0	1.00	23.00	22.05	0.241	0.30	0.95	28	28	
	LTE 4	QPSK20M	Rear Face	0	20175	50	0	Ant 0	1.00	23.00	22.05	0.001	0.00	0.95	51.8	51.8	
	LTE 4	QPSK20M	Left Side	0	20175	50	0	Ant 0	1.00	23.00	22.05	0.056	0.07	0.95	34.3	34.3	
	LTE 4	QPSK20M	Right Side	0	20175	50	0	Ant 0	1.00	23.00	22.05	0.001	0.00	0.95	51.8	51.8	
	LTE 4	QPSK20M	Top Side	0	20175	50	0	Ant 0	1.00	23.00	22.05	0.712	0.88	0.95	23.3	23.3	
	LTE 4	QPSK20M	Bottom Side	0	20175	50	0	Ant 0	1.00	23.00	22.05	0.001	0.00	0.95	51.8	51.8	
	LTE 4	QPSK20M	Top Side	0	20175	100	0	Ant 0	1.00	23.00	21.87	0.7	0.91	0.95	23.2	23.2	
5	LTE 4	QPSK20M	Top Side	0	20050	1	0	Ant 0	1.00	24.00	22.85	1.01	1.31	0.95	22.6	22.6	22.6
	LTE 4	QPSK20M	Top Side	0	20300	1	0	Ant 0	1.00	24.00	22.97	0.695	0.88	0.95	24.3	24.3	
	LTE 4	QPSK20M	Top Side	0	20050	50	0	Ant 0	1.00	23.00	21.95	0.895	1.14	0.95	22.2	22.2	
	LTE 4	QPSK20M	Top Side	0	20300	50	0	Ant 0	1.00	23.00	21.96	0.641	0.81	0.95	23.7	23.7	
	LTE 4	QPSK20M	Top Side	0	20050	1	0	Ant 0	1.00	24.00	22.85	0.996	1.29	0.95	22.6	22.6	
	LTE 5	QPSK10M	Bottom of Laptop	0	20450	1	0	Ant 0	1.00	24.00	23.19	0.001	0.00	0.95	53	53	
	LTE 5	QPSK10M	Back of Panel	25	20450	1	0	Ant 0	1.00	24.00	23.19	0.169	0.20	0.95	30.7	30.7	
	LTE 5	QPSK10M	Top of Panel	25	20450	1	0	Ant 0	1.00	24.00	23.19	0.103	0.12	0.95	32.8	32.8	
	LTE 5	QPSK10M	Rear Face	0	20450	1	0	Ant 0	1.00	24.00	23.19	0.001	0.00	0.95	53	53	
	LTE 5	QPSK10M	Left Side	0	20450	1	0	Ant 0	1.00	24.00	23.19	0.001	0.00	0.95	53	53	
	LTE 5	QPSK10M	Right Side	0	20450	1	0	Ant 0	1.00	24.00	23.19	0.001	0.00	0.95	53	53	
	LTE 5	QPSK10M	Top Side	0	20450	1	0	Ant 0	1.00	24.00	23.19	1.01	1.22	0.95	22.9	22.9	
	LTE 5	QPSK10M	Bottom Side	0	20450	1	0	Ant 0	1.00	24.00	23.19	0.001	0.00	0.95	53	53	
	LTE 5	QPSK10M	Bottom of Laptop	0	20450	25	0	Ant 0	1.00	23.00	22.11	0.001	0.00	0.95	51.9	51.9	
	LTE 5	QPSK10M	Back of Panel	25	20450	25	0	Ant 0	1.00	23.00	22.11	0.136	0.17	0.95	30.6	30.6	
	LTE 5	QPSK10M	Top of Panel	25	20450	25	0	Ant 0	1.00	23.00	22.11	0.084	0.10	0.95	32.6	32.6	
	LTE 5	QPSK10M	Rear Face	0	20450	25	0	Ant 0	1.00	23.00	22.11	0.001	0.00	0.95	51.9	51.9	
	LTE 5	QPSK10M	Left Side	0	20450	25	0	Ant 0	1.00	23.00	22.11	0.001	0.00	0.95	51.9	51.9	
	LTE 5	QPSK10M	Right Side	0	20450	25	0	Ant 0	1.00	23.00	22.11	0.001	0.00	0.95	51.9	51.9	
	LTE 5	QPSK10M	Top Side	0	20450	25	0	Ant 0	1.00	23.00	22.11	0.823	1.01	0.95	22.7	22.7	
	LTE 5	QPSK10M	Bottom Side	0	20450	25	0	Ant 0	1.00	23.00	22.11	0.001	0.00	0.95	51.9	51.9	
	LTE 5	QPSK10M	Top Side	0	20450	50	0	Ant 0	1.00	23.00	21.94	0.819	1.05	0.95	22.6	22.6	
6	LTE 5	QPSK10M	Top Side	0	20525	1	0	Ant 0	1.00	24.00	22.99	1.03	1.30	0.95	22.6	22.6	22.7
	LTE 5	QPSK10M	Top Side	0	20600	1	0	Ant 0	1.00	24.00	22.87	0.986	1.28	0.95	22.7	22.7	
	LTE 5	QPSK10M	Top Side	0	20525	25	0	Ant 0	1.00	23.00	22.04	0.82	1.03	0.95	22.7	22.7	
	LTE 5	QPSK10M	Top Side	0	20600	25	0	Ant 0	1.00	23.00	22.02	0.814	1.02	0.95	22.7	22.7	
	LTE 5	QPSK10M	Top Side	0	20525	1	0	Ant 0	1.00	24.00	22.99	1.01	1.27	0.95	22.7	22.7	

Part-0 SAR Characterization Report

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Ch.	RB#	RB offset	Ant Status	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	SAR Design Target	Plimit	Plimit (with Duty cycle)	Minimum
	LTE 7	QPSK20M	Bottom of Laptop	0	21100	1	0	Ant 0	1.00	24.80	23.49	0.001	0.00	0.95	53.3	53.3	21
	LTE 7	QPSK20M	Back of Panel	25	21100	1	0	Ant 0	1.00	24.80	23.49	0.14	0.19	0.95	31.8	31.8	
	LTE 7	QPSK20M	Top of Panel	25	21100	1	0	Ant 0	1.00	24.80	23.49	0.25	0.34	0.95	29.3	29.3	
	LTE 7	QPSK20M	Rear Face	0	21100	1	0	Ant 0	1.00	24.80	23.49	0.001	0.00	0.95	53.3	53.3	
	LTE 7	QPSK20M	Left Side	0	21100	1	0	Ant 0	1.00	24.80	23.49	0.001	0.00	0.95	53.3	53.3	
	LTE 7	QPSK20M	Right Side	0	21100	1	0	Ant 0	1.00	24.80	23.49	0.001	0.00	0.95	53.3	53.3	
	LTE 7	QPSK20M	Top Side	0	21100	1	0	Ant 0	1.00	24.80	23.49	1.46	1.97	0.95	21.6	21.6	
	LTE 7	QPSK20M	Bottom Side	0	21100	1	0	Ant 0	1.00	24.80	23.49	0.001	0.00	0.95	53.3	53.3	
	LTE 7	QPSK20M	Bottom of Laptop	0	21100	50	0	Ant 0	1.00	23.80	22.46	0.001	0.00	0.95	52.2	52.2	
	LTE 7	QPSK20M	Back of Panel	25	21100	50	0	Ant 0	1.00	23.80	22.46	0.11	0.15	0.95	31.8	31.8	
	LTE 7	QPSK20M	Top of Panel	25	21100	50	0	Ant 0	1.00	23.80	22.46	0.199	0.27	0.95	29.2	29.2	
	LTE 7	QPSK20M	Rear Face	0	21100	50	0	Ant 0	1.00	23.80	22.46	0.001	0.00	0.95	52.2	52.2	
	LTE 7	QPSK20M	Left Side	0	21100	50	0	Ant 0	1.00	23.80	22.46	0.001	0.00	0.95	52.2	52.2	
	LTE 7	QPSK20M	Right Side	0	21100	50	0	Ant 0	1.00	23.80	22.46	0.001	0.00	0.95	52.2	52.2	
	LTE 7	QPSK20M	Top Side	0	21100	50	0	Ant 0	1.00	23.80	22.46	1.17	1.59	0.95	21.6	21.6	
	LTE 7	QPSK20M	Bottom Side	0	21100	50	0	Ant 0	1.00	23.80	22.46	0.001	0.00	0.95	52.2	52.2	
	LTE 7	QPSK20M	Top Side	0	21100	100	0	Ant 0	1.00	23.80	22.37	1.16	1.61	0.95	21.5	21.5	
7	LTE 7	QPSK20M	Top Side	0	20850	1	0	Ant 0	1.00	24.80	23.40	1.67	2.30	0.95	21	21	23.4
	LTE 7	QPSK20M	Top Side	0	21350	1	0	Ant 0	1.00	24.80	23.46	1.53	2.08	0.95	21.4	21.4	
	LTE 7	QPSK20M	Top Side	0	20850	50	0	Ant 0	1.00	23.80	22.42	1.28	1.75	0.95	21.1	21.1	
	LTE 7	QPSK20M	Top Side	0	21350	50	0	Ant 0	1.00	23.80	22.42	1.27	1.74	0.95	21.2	21.2	
	LTE 7	QPSK20M	Top Side	0	20850	1	0	Ant 0	1.00	24.80	23.40	1.63	2.25	0.95	21.1	21.1	
	LTE 12	QPSK10M	Bottom of Laptop	0	23095	1	0	Ant 0	1.00	24.00	22.93	0.001	0.00	0.95	52.7	52.7	
	LTE 12	QPSK10M	Back of Panel	25	23095	1	0	Ant 0	1.00	24.00	22.93	0.143	0.18	0.95	31.2	31.2	
	LTE 12	QPSK10M	Top of Panel	25	23095	1	0	Ant 0	1.00	24.00	22.93	0.099	0.13	0.95	32.8	32.8	
	LTE 12	QPSK10M	Rear Face	0	23095	1	0	Ant 0	1.00	24.00	22.93	0.001	0.00	0.95	52.7	52.7	
	LTE 12	QPSK10M	Left Side	0	23095	1	0	Ant 0	1.00	24.00	22.93	0.001	0.00	0.95	52.7	52.7	
	LTE 12	QPSK10M	Right Side	0	23095	1	0	Ant 0	1.00	24.00	22.93	0.001	0.00	0.95	52.7	52.7	
8	LTE 12	QPSK10M	Top Side	0	23095	1	0	Ant 0	1.00	24.00	22.93	0.853	1.09	0.95	23.4	23.4	
	LTE 12	QPSK10M	Bottom Side	0	23095	1	0	Ant 0	1.00	24.00	22.93	0.001	0.00	0.95	52.7	52.7	
	LTE 12	QPSK10M	Bottom of Laptop	0	23095	25	0	Ant 0	1.00	23.00	21.98	0.001	0.00	0.95	51.8	51.8	
	LTE 12	QPSK10M	Back of Panel	25	23095	25	0	Ant 0	1.00	23.00	21.98	0.122	0.15	0.95	30.9	30.9	
	LTE 12	QPSK10M	Top of Panel	25	23095	25	0	Ant 0	1.00	23.00	21.98	0.085	0.11	0.95	32.5	32.5	
	LTE 12	QPSK10M	Rear Face	0	23095	25	0	Ant 0	1.00	23.00	21.98	0.001	0.00	0.95	51.8	51.8	
	LTE 12	QPSK10M	Left Side	0	23095	25	0	Ant 0	1.00	23.00	21.98	0.001	0.00	0.95	51.8	51.8	
	LTE 12	QPSK10M	Right Side	0	23095	25	0	Ant 0	1.00	23.00	21.98	0.001	0.00	0.95	51.8	51.8	
	LTE 12	QPSK10M	Top Side	0	23095	25	0	Ant 0	1.00	23.00	21.98	0.615	0.77	0.95	23.9	23.9	
	LTE 12	QPSK10M	Bottom Side	0	23095	25	0	Ant 0	1.00	23.00	21.98	0.001	0.00	0.95	51.8	51.8	
	LTE 12	QPSK10M	Top Side	0	23095	50	0	Ant 0	1.00	23.00	21.91	0.606	0.78	0.95	23.9	23.9	
	LTE 12	QPSK10M	Top Side	0	23060	1	0	Ant 0	1.00	24.00	22.91	0.814	1.05	0.95	23.6	23.6	
	LTE 12	QPSK10M	Top Side	0	23130	1	0	Ant 0	1.00	24.00	22.89	0.83	1.07	0.95	23.5	23.5	
	LTE 12	QPSK10M	Top Side	0	23095	1	0	Ant 0	1.00	24.00	22.93	0.846	1.08	0.95	23.4	23.4	
	LTE 13	QPSK10M	Bottom of Laptop	0	23230	1	0	Ant 0	1.00	24.00	22.87	0.001	0.00	0.95	52.6	52.6	24.5
	LTE 13	QPSK10M	Back of Panel	25	23230	1	0	Ant 0	1.00	24.00	22.87	0.138	0.18	0.95	31.2	31.2	
	LTE 13	QPSK10M	Top of Panel	25	23230	1	0	Ant 0	1.00	24.00	22.87	0.094	0.12	0.95	32.9	32.9	
	LTE 13	QPSK10M	Rear Face	0	23230	1	0	Ant 0	1.00	24.00	22.87	0.001	0.00	0.95	52.6	52.6	
	LTE 13	QPSK10M	Left Side	0	23230	1	0	Ant 0	1.00	24.00	22.87	0.001	0.00	0.95	52.6	52.6	
	LTE 13	QPSK10M	Right Side	0	23230	1	0	Ant 0	1.00	24.00	22.87	0.001	0.00	0.95	52.6	52.6	
9	LTE 13	QPSK10M	Top Side	0	23230	1	0	Ant 0	1.00	24.00	22.87	0.594	0.77	0.95	24.9	24.9	
	LTE 13	QPSK10M	Bottom Side	0	23230	1	0	Ant 0	1.00	24.00	22.87	0.001	0.00	0.95	52.6	52.6	
	LTE 13	QPSK10M	Bottom of Laptop	0	23230	25	0	Ant 0	1.00	23.00	21.74	0.001	0.00	0.95	51.5	51.5	
	LTE 13	QPSK10M	Back of Panel	25	23230	25	0	Ant 0	1.00	23.00	21.74	0.122	0.16	0.95	30.7	30.7	
	LTE 13	QPSK10M	Top of Panel	25	23230	25	0	Ant 0	1.00	23.00	21.74	0.081	0.11	0.95	32.4	32.4	
	LTE 13	QPSK10M	Rear Face	0	23230	25	0	Ant 0	1.00	23.00	21.74	0.001	0.00	0.95	51.5	51.5	
	LTE 13	QPSK10M	Left Side	0	23230	25	0	Ant 0	1.00	23.00	21.74	0.001	0.00	0.95	51.5	51.5	
	LTE 13	QPSK10M	Right Side	0	23230	25	0	Ant 0	1.00	23.00	21.74	0.001	0.00	0.95	51.5	51.5	
	LTE 13	QPSK10M	Top Side	0	23230	25	0	Ant 0	1.00	23.00	21.74	0.499	0.67	0.95	24.5	24.5	
	LTE 13	QPSK10M	Bottom Side	0	23230	25	0	Ant 0	1.00	23.00	21.74	0.001	0.00	0.95	51.5	51.5	

Part-0 SAR Characterization Report

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Ch.	RB#	RB offset	Ant Status	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	SAR Design Target	Plimit	Plimit (with Duty cycle)	Minimum
	LTE 14	QPSK10M	Bottom of Laptop	0	23330	1	0	Ant 0	1.00	24.00	22.78	0.001	0.00	0.95	52.6	52.6	24.4
	LTE 14	QPSK10M	Back of Panel	25	23330	1	0	Ant 0	1.00	24.00	22.78	0.146	0.19	0.95	30.9	30.9	
	LTE 14	QPSK10M	Top of Panel	25	23330	1	0	Ant 0	1.00	24.00	22.78	0.114	0.15	0.95	32	32	
	LTE 14	QPSK10M	Rear Face	0	23330	1	0	Ant 0	1.00	24.00	22.78	0.001	0.00	0.95	52.6	52.6	
	LTE 14	QPSK10M	Left Side	0	23330	1	0	Ant 0	1.00	24.00	22.78	0.001	0.00	0.95	52.6	52.6	
	LTE 14	QPSK10M	Right Side	0	23330	1	0	Ant 0	1.00	24.00	22.78	0.001	0.00	0.95	52.6	52.6	
10	LTE 14	QPSK10M	Top Side	0	23330	1	0	Ant 0	1.00	24.00	22.78	0.638	0.84	0.95	24.5	24.5	
	LTE 14	QPSK10M	Bottom Side	0	23330	1	0	Ant 0	1.00	24.00	22.78	0.001	0.00	0.95	52.6	52.6	
	LTE 14	QPSK10M	Bottom of Laptop	0	23330	25	0	Ant 0	1.00	23.00	21.63	0.001	0.00	0.95	51.4	51.4	
	LTE 14	QPSK10M	Back of Panel	25	23330	25	0	Ant 0	1.00	23.00	21.63	0.114	0.16	0.95	30.8	30.8	
	LTE 14	QPSK10M	Top of Panel	25	23330	25	0	Ant 0	1.00	23.00	21.63	0.093	0.13	0.95	31.7	31.7	
	LTE 14	QPSK10M	Rear Face	0	23330	25	0	Ant 0	1.00	23.00	21.63	0.001	0.00	0.95	51.4	51.4	
	LTE 14	QPSK10M	Left Side	0	23330	25	0	Ant 0	1.00	23.00	21.63	0.001	0.00	0.95	51.4	51.4	
	LTE 14	QPSK10M	Right Side	0	23330	25	0	Ant 0	1.00	23.00	21.63	0.001	0.00	0.95	51.4	51.4	
	LTE 14	QPSK10M	Top Side	0	23330	25	0	Ant 0	1.00	23.00	21.63	0.495	0.68	0.95	24.5	24.5	
	LTE 14	QPSK10M	Bottom Side	0	23330	25	0	Ant 0	1.00	23.00	21.63	0.001	0.00	0.95	51.4	51.4	
	LTE 14	QPSK10M	Top Side	0	23330	50	0	Ant 0	1.00	23.00	21.49	0.482	0.68	0.95	24.4	24.4	
	LTE 17	QPSK10M	Bottom of Laptop	0	23790	1	0	Ant 0	1.00	24.00	23.01	0.001	0.00	0.95	52.8	52.8	23.5
	LTE 17	QPSK10M	Back of Panel	25	23790	1	0	Ant 0	1.00	24.00	23.01	0.15	0.19	0.95	31	31	
	LTE 17	QPSK10M	Top of Panel	25	23790	1	0	Ant 0	1.00	24.00	23.01	0.108	0.14	0.95	32.5	32.5	
	LTE 17	QPSK10M	Rear Face	0	23790	1	0	Ant 0	1.00	24.00	23.01	0.001	0.00	0.95	52.8	52.8	
	LTE 17	QPSK10M	Left Side	0	23790	1	0	Ant 0	1.00	24.00	23.01	0.001	0.00	0.95	52.8	52.8	
	LTE 17	QPSK10M	Right Side	0	23790	1	0	Ant 0	1.00	24.00	23.01	0.001	0.00	0.95	52.8	52.8	
	LTE 17	QPSK10M	Top Side	0	23790	1	0	Ant 0	1.00	24.00	23.01	0.824	1.04	0.95	23.6	23.6	
	LTE 17	QPSK10M	Bottom Side	0	23790	1	0	Ant 0	1.00	24.00	23.01	0.001	0.00	0.95	52.8	52.8	
	LTE 17	QPSK10M	Bottom of Laptop	0	23790	25	0	Ant 0	1.00	23.00	21.97	0.001	0.00	0.95	51.7	51.7	
	LTE 17	QPSK10M	Back of Panel	25	23790	25	0	Ant 0	1.00	23.00	21.97	0.122	0.15	0.95	30.9	30.9	
	LTE 17	QPSK10M	Top of Panel	25	23790	25	0	Ant 0	1.00	23.00	21.97	0.079	0.10	0.95	32.8	32.8	
	LTE 17	QPSK10M	Rear Face	0	23790	25	0	Ant 0	1.00	23.00	21.97	0.001	0.00	0.95	51.7	51.7	
	LTE 17	QPSK10M	Left Side	0	23790	25	0	Ant 0	1.00	23.00	21.97	0.001	0.00	0.95	51.7	51.7	
	LTE 17	QPSK10M	Right Side	0	23790	25	0	Ant 0	1.00	23.00	21.97	0.001	0.00	0.95	51.7	51.7	
	LTE 17	QPSK10M	Top Side	0	23790	25	0	Ant 0	1.00	23.00	21.97	0.621	0.79	0.95	23.8	23.8	
	LTE 17	QPSK10M	Bottom Side	0	23790	25	0	Ant 0	1.00	23.00	21.97	0.001	0.00	0.95	51.7	51.7	
	LTE 17	QPSK10M	Top Side	0	23790	50	0	Ant 0	1.00	23.00	21.91	0.614	0.79	0.95	23.8	23.8	
	LTE 17	QPSK10M	Top Side	0	23780	1	0	Ant 0	1.00	24.00	22.87	0.811	1.05	0.95	23.6	23.6	20.3
11	LTE 17	QPSK10M	Top Side	0	23800	1	0	Ant 0	1.00	24.00	22.92	0.831	1.06	0.95	23.5	23.5	
	LTE 17	QPSK10M	Top Side	0	23800	1	0	Ant 0	1.00	24.00	22.92	0.816	1.04	0.95	23.6	23.6	20.3
	LTE 25	QPSK20M	Bottom of Laptop	0	26140	1	0	Ant 0	1.00	24.00	22.91	0.001	0.00	0.95	52.7	52.7	
	LTE 25	QPSK20M	Back of Panel	25	26140	1	0	Ant 0	1.00	24.00	22.91	0.204	0.26	0.95	29.6	29.6	
	LTE 25	QPSK20M	Top of Panel	25	26140	1	0	Ant 0	1.00	24.00	22.91	0.229	0.30	0.95	29.1	29.1	
	LTE 25	QPSK20M	Rear Face	0	26140	1	0	Ant 0	1.00	24.00	22.91	0.001	0.00	0.95	52.7	52.7	
	LTE 25	QPSK20M	Left Side	0	26140	1	0	Ant 0	1.00	24.00	22.91	0.105	0.14	0.95	32.5	32.5	
	LTE 25	QPSK20M	Right Side	0	26140	1	0	Ant 0	1.00	24.00	22.91	0.001	0.00	0.95	52.7	52.7	
12	LTE 25	QPSK20M	Top Side	0	26140	1	0	Ant 0	1.00	24.00	22.91	1.67	2.15	0.95	20.5	20.5	
	LTE 25	QPSK20M	Bottom Side	0	26140	1	0	Ant 0	1.00	24.00	22.91	0.001	0.00	0.95	52.7	52.7	
	LTE 25	QPSK20M	Bottom of Laptop	0	26140	50	0	Ant 0	1.00	23.00	21.88	0.001	0.00	0.95	51.7	51.7	
	LTE 25	QPSK20M	Back of Panel	25	26140	50	0	Ant 0	1.00	23.00	21.88	0.179	0.23	0.95	29.1	29.1	
	LTE 25	QPSK20M	Top of Panel	25	26140	50	0	Ant 0	1.00	23.00	21.88	0.206	0.27	0.95	28.5	28.5	
	LTE 25	QPSK20M	Rear Face	0	26140	50	0	Ant 0	1.00	23.00	21.88	0.001	0.00	0.95	51.7	51.7	
	LTE 25	QPSK20M	Left Side	0	26140	50	0	Ant 0	1.00	23.00	21.88	0.083	0.11	0.95	32.5	32.5	
	LTE 25	QPSK20M	Right Side	0	26140	50	0	Ant 0	1.00	23.00	21.88	0.001	0.00	0.95	51.7	51.7	
	LTE 25	QPSK20M	Top Side	0	26140	50	0	Ant 0	1.00	23.00	21.88	1.35	1.74	0.95	20.4	20.4	
	LTE 25	QPSK20M	Bottom Side	0	26140	50	0	Ant 0	1.00	23.00	21.88	0.001	0.00	0.95	51.7	51.7	
	LTE 25	QPSK20M	Top Side	0	26140	100	0	Ant 0	1.00	23.00	21.79	1.33	1.76	0.95	20.3	20.3	
	LTE 25	QPSK20M	Top Side	0	26365	1	0	Ant 0	1.00	24.00	22.85	1.62	2.11	0.95	20.5	20.5	
	LTE 25	QPSK20M	Top Side	0	26590	1	0	Ant 0	1.00	24.00	22.76	1.47	1.96	0.95	20.9	20.9	
	LTE 25	QPSK20M	Top Side	0	26365	50	0	Ant 0	1.00	23.00	21.84	1.31	1.72	0.95	20.4	20.4	
	LTE 25	QPSK20M	Top Side	0	26590	50	0	Ant 0	1.00	23.00	21.81	1.14	1.50	0.95	21	21	
	LTE 25	QPSK20M	Top Side	0	26140	1	0	Ant 0	1.00	24.00	22.91	1.66	2.14	0.95	20.5	20.5	



Part-0 SAR Characterization Report

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Ch.	RB#	RB offset	Ant Status	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	SAR Design Target	Plimit	Plimit (with Duty cycle)	Minimum
	LTE 26	QPSK15M	Bottom of Laptop	0	26765	1	0	Ant 0	1.00	24.00	23.04	0.001	0.00	0.95	52.8	52.8	22.9
	LTE 26	QPSK15M	Back of Panel	25	26765	1	0	Ant 0	1.00	24.00	23.04	0.121	0.15	0.95	32	32	
	LTE 26	QPSK15M	Top of Panel	25	26765	1	0	Ant 0	1.00	24.00	23.04	0.133	0.17	0.95	31.6	31.6	
	LTE 26	QPSK15M	Rear Face	0	26765	1	0	Ant 0	1.00	24.00	23.04	0.001	0.00	0.95	52.8	52.8	
	LTE 26	QPSK15M	Left Side	0	26765	1	0	Ant 0	1.00	24.00	23.04	0.001	0.00	0.95	52.8	52.8	
	LTE 26	QPSK15M	Right Side	0	26765	1	0	Ant 0	1.00	24.00	23.04	0.001	0.00	0.95	52.8	52.8	
	LTE 26	QPSK15M	Top Side	0	26765	1	0	Ant 0	1.00	24.00	23.04	0.906	1.13	0.95	23.2	23.2	
	LTE 26	QPSK15M	Bottom Side	0	26765	1	0	Ant 0	1.00	24.00	23.04	0.001	0.00	0.95	52.8	52.8	
	LTE 26	QPSK15M	Bottom of Laptop	0	26765	36	0	Ant 0	1.00	23.00	22.15	0.001	0.00	0.95	51.9	51.9	
	LTE 26	QPSK15M	Back of Panel	25	26765	36	0	Ant 0	1.00	23.00	22.15	0.097	0.12	0.95	32.1	32.1	
	LTE 26	QPSK15M	Top of Panel	25	26765	36	0	Ant 0	1.00	23.00	22.15	0.1	0.12	0.95	31.9	31.9	
	LTE 26	QPSK15M	Rear Face	0	26765	36	0	Ant 0	1.00	23.00	22.15	0.001	0.00	0.95	51.9	51.9	
	LTE 26	QPSK15M	Left Side	0	26765	36	0	Ant 0	1.00	23.00	22.15	0.001	0.00	0.95	51.9	51.9	
	LTE 26	QPSK15M	Right Side	0	26765	36	0	Ant 0	1.00	23.00	22.15	0.001	0.00	0.95	51.9	51.9	
	LTE 26	QPSK15M	Top Side	0	26765	36	0	Ant 0	1.00	23.00	22.15	0.73	0.89	0.95	23.3	23.3	
	LTE 26	QPSK15M	Bottom Side	0	26765	36	0	Ant 0	1.00	23.00	22.15	0.001	0.00	0.95	51.9	51.9	
	LTE 26	QPSK15M	Top Side	0	26765	75	0	Ant 0	1.00	23.00	22.08	0.72	0.89	0.95	23.3	23.3	
	LTE 26	QPSK15M	Top Side	0	26865	1	0	Ant 0	1.00	24.00	22.96	0.926	1.18	0.95	23.1	23.1	
13	LTE 26	QPSK15M	Top Side	0	26965	1	0	Ant 0	1.00	24.00	22.76	0.927	1.23	0.95	22.9	22.9	
	LTE 26	QPSK15M	Top Side	0	26865	36	0	Ant 0	1.00	23.00	22.09	0.755	0.93	0.95	23.1	23.1	
	LTE 26	QPSK15M	Top Side	0	26965	36	0	Ant 0	1.00	23.00	22.01	0.772	0.97	0.95	22.9	22.9	
	LTE 26	QPSK15M	Top Side	0	26965	1	0	Ant 0	1.00	24.00	22.76	0.914	1.22	0.95	22.9	22.9	
	LTE 38	QPSK20M	Bottom of Laptop	0	38000	1	0	Ant 0	1.58	24.80	23.36	0.001	0.00	0.95	51.2	49.2	14.4
	LTE 38	QPSK20M	Back of Panel	25	38000	1	0	Ant 0	1.58	24.80	23.36	0.101	0.22	0.95	31.1	29.1	
	LTE 38	QPSK20M	Top of Panel	25	38000	1	0	Ant 0	1.58	24.80	23.36	0.244	0.54	0.95	27.3	25.3	
	LTE 38	QPSK20M	Rear Face	0	38000	1	0	Ant 0	1.58	24.80	23.36	0.001	0.00	0.95	51.2	49.2	
	LTE 38	QPSK20M	Left Side	0	38000	1	0	Ant 0	1.58	24.80	23.36	0.13	0.29	0.95	30	28	
	LTE 38	QPSK20M	Right Side	0	38000	1	0	Ant 0	1.58	24.80	23.36	0.001	0.00	0.95	51.2	49.2	
	LTE 38	QPSK20M	Top Side	0	38000	1	0	Ant 0	1.58	24.80	23.36	2.39	5.25	0.95	17.4	15.4	
	LTE 38	QPSK20M	Bottom Side	0	38000	1	0	Ant 0	1.58	24.80	23.36	0.001	0.00	0.95	51.2	49.2	
	LTE 38	QPSK20M	Bottom of Laptop	0	38000	50	0	Ant 0	1.58	23.80	22.48	0.001	0.00	0.95	50.3	48.3	
	LTE 38	QPSK20M	Back of Panel	25	38000	50	0	Ant 0	1.58	23.80	22.48	0.069	0.15	0.95	31.9	29.9	
	LTE 38	QPSK20M	Top of Panel	25	38000	50	0	Ant 0	1.58	23.80	22.48	0.196	0.42	0.95	27.3	25.3	
	LTE 38	QPSK20M	Rear Face	0	38000	50	0	Ant 0	1.58	23.80	22.48	0.001	0.00	0.95	50.3	48.3	
	LTE 38	QPSK20M	Left Side	0	38000	50	0	Ant 0	1.58	23.80	22.48	0.12	0.26	0.95	29.5	27.5	
	LTE 38	QPSK20M	Right Side	0	38000	50	0	Ant 0	1.58	23.80	22.48	0.001	0.00	0.95	50.3	48.3	
	LTE 38	QPSK20M	Top Side	0	38000	50	0	Ant 0	1.58	23.80	22.48	2.11	4.53	0.95	17	15	
	LTE 38	QPSK20M	Bottom Side	0	38000	50	0	Ant 0	1.58	23.80	22.48	0.001	0.00	0.95	50.3	48.3	
	LTE 38	QPSK20M	Top Side	0	38000	100	0	Ant 0	1.58	23.80	22.42	2.07	4.48	0.95	17.1	15.1	
	LTE 38	QPSK20M	Top Side	0	37850	1	0	Ant 0	1.58	24.80	23.31	2.09	4.66	0.95	17.9	15.9	
14	LTE 38	QPSK20M	Top Side	0	38150	1	0	Ant 0	1.58	24.80	23.30	2.81	6.26	0.95	16.6	14.6	
	LTE 38	QPSK20M	Top Side	0	37850	50	0	Ant 0	1.58	23.80	22.47	1.8	3.87	0.95	17.7	15.7	
	LTE 38	QPSK20M	Top Side	0	38150	50	0	Ant 0	1.58	23.80	22.39	2.39	5.21	0.95	16.4	14.4	
	LTE 38	QPSK20M	Top Side	0	38150	1	0	Ant 0	1.58	24.80	23.30	2.79	6.22	0.95	16.6	14.6	
	LTE 38	QPSK20M	Top Side	0	PCC : 38000 SCC : 38198	PCC : 99 SCC : 0	0	Ant 0	1.58	24.80	22.81	2.01	5.02	0.95	17.6	15.6	

Part-0 SAR Characterization Report

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Ch.	RB#	RB offset	Ant Status	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	SAR Design Target	Plimit	Plimit (with Duty cycle)	Minimum
	LTE 41	QPSK20M	Bottom of Laptop	0	40620	1	0	Ant 0	1.58	24.80	23.45	0.001	0.00	0.95	51.2	49.2	14.9
	LTE 41	QPSK20M	Back of Panel	25	40620	1	0	Ant 0	1.58	24.80	23.45	0.107	0.23	0.95	30.9	28.9	
	LTE 41	QPSK20M	Top of Panel	25	40620	1	0	Ant 0	1.58	24.80	23.45	0.197	0.42	0.95	28.3	26.3	
	LTE 41	QPSK20M	Rear Face	0	40620	1	0	Ant 0	1.58	24.80	23.45	0.001	0.00	0.95	51.2	49.2	
	LTE 41	QPSK20M	Left Side	0	40620	1	0	Ant 0	1.58	24.80	23.45	0.121	0.26	0.95	30.4	28.4	
	LTE 41	QPSK20M	Right Side	0	40620	1	0	Ant 0	1.58	24.80	23.45	0.001	0.00	0.95	51.2	49.2	
	LTE 41	QPSK20M	Top Side	0	40620	1	0	Ant 0	1.58	24.80	23.45	1.6	3.44	0.95	19.2	17.2	
	LTE 41	QPSK20M	Bottom Side	0	40620	1	0	Ant 0	1.58	24.80	23.45	0.001	0.00	0.95	51.2	49.2	
	LTE 41	QPSK20M	Bottom of Laptop	0	40620	50	0	Ant 0	1.58	23.80	22.45	0.001	0.00	0.95	50.2	48.2	
	LTE 41	QPSK20M	Back of Panel	25	40620	50	0	Ant 0	1.58	23.80	22.45	0.088	0.19	0.95	30.8	28.8	
	LTE 41	QPSK20M	Top of Panel	25	40620	50	0	Ant 0	1.58	23.80	22.45	0.16	0.34	0.95	28.2	26.2	
	LTE 41	QPSK20M	Rear Face	0	40620	50	0	Ant 0	1.58	23.80	22.45	0.001	0.00	0.95	50.2	48.2	
	LTE 41	QPSK20M	Left Side	0	40620	50	0	Ant 0	1.58	23.80	22.45	0.089	0.19	0.95	30.7	28.7	
	LTE 41	QPSK20M	Right Side	0	40620	50	0	Ant 0	1.58	23.80	22.45	0.001	0.00	0.95	50.2	48.2	
	LTE 41	QPSK20M	Top Side	0	40620	50	0	Ant 0	1.58	23.80	22.45	1.35	2.90	0.95	18.9	16.9	
	LTE 41	QPSK20M	Bottom Side	0	40620	50	0	Ant 0	1.58	23.80	22.45	0.001	0.00	0.95	50.2	48.2	
	LTE 41	QPSK20M	Top Side	0	40620	100	0	Ant 0	1.58	23.80	22.37	1.42	3.12	0.95	18.6	16.6	
	LTE 41	QPSK20M	Top Side	0	39790	1	0	Ant 0	1.58	24.80	23.24	1.02	2.30	0.95	20.9	18.9	
	LTE 41	QPSK20M	Top Side	0	39750	1	0	Ant 0	1.58	24.80	23.22	1.03	2.34	0.95	20.9	18.9	
	LTE 41	QPSK20M	Top Side	0	40185	1	0	Ant 0	1.58	24.80	23.12	1.04	2.42	0.95	20.7	18.7	
15	LTE 41	QPSK20M	Top Side	0	41055	1	0	Ant 0	1.58	24.80	23.38	2.45	5.38	0.95	17.3	15.3	
	LTE 41	QPSK20M	Top Side	0	41490	1	0	Ant 0	1.58	24.80	23.18	2.01	4.60	0.95	17.9	15.9	
	LTE 41	QPSK20M	Top Side	0	39790	50	0	Ant 0	1.58	23.80	22.32	0.826	1.84	0.95	20.9	18.9	
	LTE 41	QPSK20M	Top Side	0	39750	50	0	Ant 0	1.58	23.80	22.31	0.831	1.85	0.95	20.9	18.9	
	LTE 41	QPSK20M	Top Side	0	40185	50	0	Ant 0	1.58	23.80	22.14	0.877	2.04	0.95	20.5	18.5	
	LTE 41	QPSK20M	Top Side	0	41055	50	0	Ant 0	1.58	23.80	22.38	2.1	4.61	0.95	16.9	14.9	
	LTE 41	QPSK20M	Top Side	0	41490	50	0	Ant 0	1.58	23.80	22.22	1.57	3.57	0.95	18.1	16.1	
	LTE 41	QPSK20M	Top Side	0	41055	1	0	Ant 0	1.58	24.80	23.38	2.43	5.34	0.95	17.3	15.3	
	LTE 41 PC2	QPSK20M	Top Side	0	40620	1	0	Ant 0	2.31	26.00	25.51	2.5	6.47	0.95	17.7	15.1	
	LTE 41	QPSK20M	Top Side	0	PCC : 41055 SCC : 41253	PC C : 1 SC C : 1	PCC : 99 SCC : 0	Ant 0	1.58	24.80	22.90	1.72	4.21	0.95	18.3	16.3	
	LTE 42	QPSK20M	Bottom of Laptop	0	43490	1	0	Ant 0	1.58	24.80	23.01	0.001	0.00	0.95	50.8	48.8	23.8
	LTE 42	QPSK20M	Back of Panel	25	43490	1	0	Ant 0	1.58	24.80	23.01	0.001	0.00	0.95	50.8	48.8	
	LTE 42	QPSK20M	Top of Panel	25	43490	1	0	Ant 0	1.58	24.80	23.01	0.001	0.00	0.95	50.8	48.8	
	LTE 42	QPSK20M	Rear Face	0	43490	1	0	Ant 0	1.58	24.80	23.01	0.001	0.00	0.95	50.8	48.8	
	LTE 42	QPSK20M	Left Side	0	43490	1	0	Ant 0	1.58	24.80	23.01	0.044	0.10	0.95	34.4	32.4	
	LTE 42	QPSK20M	Right Side	0	43490	1	0	Ant 0	1.58	24.80	23.01	0.001	0.00	0.95	50.8	48.8	
	LTE 42	QPSK20M	Top Side	0	43490	1	0	Ant 0	1.58	24.80	23.01	0.279	0.67	0.95	26.3	24.3	
	LTE 42	QPSK20M	Bottom Side	0	43490	1	0	Ant 0	1.58	24.80	23.01	0.001	0.00	0.95	50.8	48.8	
	LTE 42	QPSK20M	Bottom of Laptop	0	43490	50	0	Ant 0	1.58	23.80	22.12	0.001	0.00	0.95	49.9	47.9	
	LTE 42	QPSK20M	Back of Panel	25	43490	50	0	Ant 0	1.58	23.80	22.12	0.001	0.00	0.95	49.9	47.9	
	LTE 42	QPSK20M	Top of Panel	25	43490	50	0	Ant 0	1.58	23.80	22.12	0.001	0.00	0.95	49.9	47.9	
	LTE 42	QPSK20M	Rear Face	0	43490	50	0	Ant 0	1.58	23.80	22.12	0.001	0.00	0.95	49.9	47.9	
	LTE 42	QPSK20M	Left Side	0	43490	50	0	Ant 0	1.58	23.80	22.12	0.036	0.08	0.95	34.3	32.3	
	LTE 42	QPSK20M	Right Side	0	43490	50	0	Ant 0	1.58	23.80	22.12	0.001	0.00	0.95	49.9	47.9	
	LTE 42	QPSK20M	Top Side	0	43490	50	0	Ant 0	1.58	23.80	22.12	0.221	0.51	0.95	26.5	24.5	
	LTE 42	QPSK20M	Bottom Side	0	43490	50	0	Ant 0	1.58	23.80	22.12	0.001	0.00	0.95	49.9	47.9	
16	LTE 42	QPSK20M	Top Side	0	43190	1	0	Ant 0	1.58	24.80	22.86	0.306	0.75	0.95	25.8	23.8	
	LTE 42	QPSK20M	Top Side	0	43340	1	0	Ant 0	1.58	24.80	22.95	0.302	0.73	0.95	25.9	23.9	

Part-0 SAR Characterization Report

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Ch.	RB#	RB offset	Ant Status	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	SAR Design Target	Plimit	Plimit (with Duty cycle)	Minimum
	LTE 48	QPSK20M	Bottom of Laptop	0	55780	1	0	Ant 0	1.58	24.80	23.06	0.001	0.00	0.95	50.9	48.9	25.1
	LTE 48	QPSK20M	Back of Panel	25	55780	1	0	Ant 0	1.58	24.80	23.06	0.001	0.00	0.95	50.9	48.9	
	LTE 48	QPSK20M	Top of Panel	25	55780	1	0	Ant 0	1.58	24.80	23.06	0.001	0.00	0.95	50.9	48.9	
	LTE 48	QPSK20M	Rear Face	0	55780	1	0	Ant 0	1.58	24.80	23.06	0.001	0.00	0.95	50.9	48.9	
	LTE 48	QPSK20M	Left Side	0	55780	1	0	Ant 0	1.58	24.80	23.06	0.03	0.07	0.95	36.1	34.1	
	LTE 48	QPSK20M	Right Side	0	55780	1	0	Ant 0	1.58	24.80	23.06	0.001	0.00	0.95	50.9	48.9	
17	LTE 48	QPSK20M	Top Side	0	55780	1	0	Ant 0	1.58	24.80	23.06	0.239	0.56	0.95	27.1	25.1	
	LTE 48	QPSK20M	Bottom Side	0	55780	1	0	Ant 0	1.58	24.80	23.06	0.001	0.00	0.95	50.9	48.9	
	LTE 48	QPSK20M	Bottom of Laptop	0	55780	50	0	Ant 0	1.58	23.80	22.11	0.001	0.00	0.95	49.9	47.9	
	LTE 48	QPSK20M	Back of Panel	25	55780	50	0	Ant 0	1.58	23.80	22.11	0.001	0.00	0.95	49.9	47.9	
	LTE 48	QPSK20M	Top of Panel	25	55780	50	0	Ant 0	1.58	23.80	22.11	0.001	0.00	0.95	49.9	47.9	
	LTE 48	QPSK20M	Rear Face	0	55780	50	0	Ant 0	1.58	23.80	22.11	0.001	0.00	0.95	49.9	47.9	
	LTE 48	QPSK20M	Left Side	0	55780	50	0	Ant 0	1.58	23.80	22.11	0.026	0.06	0.95	35.8	33.8	
	LTE 48	QPSK20M	Right Side	0	55780	50	0	Ant 0	1.58	23.80	22.11	0.001	0.00	0.95	49.9	47.9	
	LTE 48	QPSK20M	Top Side	0	55780	50	0	Ant 0	1.58	23.80	22.11	0.171	0.40	0.95	27.6	25.6	
	LTE 48	QPSK20M	Bottom Side	0	55780	50	0	Ant 0	1.58	23.80	22.11	0.001	0.00	0.95	49.9	47.9	
	LTE 48	QPSK20M	Top Side	0	55340	1	0	Ant 0	1.58	24.80	22.92	0.217	0.53	0.95	27.3	25.3	
	LTE 48	QPSK20M	Top Side	0	56210	1	0	Ant 0	1.58	24.80	23.01	0.212	0.51	0.95	27.5	25.5	
	LTE 48	QPSK20M	Top Side	0	56640	1	0	Ant 0	1.58	24.80	22.96	0.16	0.39	0.95	28.7	26.7	
	LTE 66	QPSK20M	Bottom of Laptop	0	132572	1	0	Ant 0	1.00	24.00	23.21	0.001	0.00	0.95	53	53	22.1
	LTE 66	QPSK20M	Back of Panel	25	132572	1	0	Ant 0	1.00	24.00	23.21	0.182	0.22	0.95	30.4	30.4	
	LTE 66	QPSK20M	Top of Panel	25	132572	1	0	Ant 0	1.00	24.00	23.21	0.225	0.27	0.95	29.5	29.5	
	LTE 66	QPSK20M	Rear Face	0	132572	1	0	Ant 0	1.00	24.00	23.21	0.001	0.00	0.95	53	53	
	LTE 66	QPSK20M	Left Side	0	132572	1	0	Ant 0	1.00	24.00	23.21	0.08	0.10	0.95	34	34	
	LTE 66	QPSK20M	Right Side	0	132572	1	0	Ant 0	1.00	24.00	23.21	0.001	0.00	0.95	53	53	
	LTE 66	QPSK20M	Top Side	0	132572	1	0	Ant 0	1.00	24.00	23.21	0.738	0.89	0.95	24.3	24.3	
	LTE 66	QPSK20M	Bottom Side	0	132572	1	0	Ant 0	1.00	24.00	23.21	0.001	0.00	0.95	53	53	
	LTE 66	QPSK20M	Bottom of Laptop	0	132572	50	0	Ant 0	1.00	23.00	22.25	0.001	0.00	0.95	52	52	
	LTE 66	QPSK20M	Back of Panel	25	132572	50	0	Ant 0	1.00	23.00	22.25	0.143	0.17	0.95	30.5	30.5	
	LTE 66	QPSK20M	Top of Panel	25	132572	50	0	Ant 0	1.00	23.00	22.25	0.176	0.21	0.95	29.6	29.6	
	LTE 66	QPSK20M	Rear Face	0	132572	50	0	Ant 0	1.00	23.00	22.25	0.001	0.00	0.95	52	52	
	LTE 66	QPSK20M	Left Side	0	132572	50	0	Ant 0	1.00	23.00	22.25	0.063	0.07	0.95	34	34	
	LTE 66	QPSK20M	Right Side	0	132572	50	0	Ant 0	1.00	23.00	22.25	0.001	0.00	0.95	52	52	
	LTE 66	QPSK20M	Top Side	0	132572	50	0	Ant 0	1.00	23.00	22.25	0.621	0.74	0.95	24.1	24.1	
	LTE 66	QPSK20M	Bottom Side	0	132572	50	0	Ant 0	1.00	23.00	22.25	0.001	0.00	0.95	52	52	
	LTE 66	QPSK20M	Top Side	0	132572	100	0	Ant 0	1.00	23.00	22.15	0.277	0.34	0.95	27.5	27.5	
18	LTE 66	QPSK20M	Top Side	0	132072	1	0	Ant 0	1.00	24.00	23.15	1.21	1.48	0.95	22.1	22.1	23.9
	LTE 66	QPSK20M	Top Side	0	132322	1	0	Ant 0	1.00	24.00	23.17	0.784	0.95	0.95	24	24	
	LTE 66	QPSK20M	Top Side	0	132072	50	0	Ant 0	1.00	23.00	22.16	0.919	1.11	0.95	22.3	22.3	
	LTE 66	QPSK20M	Top Side	0	132322	50	0	Ant 0	1.00	23.00	22.22	0.59	0.71	0.95	24.3	24.3	
	LTE 66	QPSK20M	Top Side	0	132072	1	0	Ant 0	1.00	24.00	23.15	1.19	1.45	0.95	22.2	22.2	
	LTE 71	QPSK20M	Bottom of Laptop	0	133222	1	0	Ant 0	1.00	24.00	23.13	0.001	0.00	0.95	52.9	52.9	
	LTE 71	QPSK20M	Back of Panel	25	133222	1	0	Ant 0	1.00	24.00	23.13	0.153	0.19	0.95	31.1	31.1	
	LTE 71	QPSK20M	Top of Panel	25	133222	1	0	Ant 0	1.00	24.00	23.13	0.112	0.14	0.95	32.4	32.4	
	LTE 71	QPSK20M	Rear Face	0	133222	1	0	Ant 0	1.00	24.00	23.13	0.001	0.00	0.95	52.9	52.9	
	LTE 71	QPSK20M	Left Side	0	133222	1	0	Ant 0	1.00	24.00	23.13	0.001	0.00	0.95	52.9	52.9	
	LTE 71	QPSK20M	Right Side	0	133222	1	0	Ant 0	1.00	24.00	23.13	0.001	0.00	0.95	52.9	52.9	
	LTE 71	QPSK20M	Top Side	0	133222	1	0	Ant 0	1.00	24.00	23.13	0.408	0.50	0.95	26.8	26.8	
	LTE 71	QPSK20M	Bottom Side	0	133222	1	0	Ant 0	1.00	24.00	23.13	0.001	0.00	0.95	52.9	52.9	
	LTE 71	QPSK20M	Bottom of Laptop	0	133222	50	0	Ant 0	1.00	23.00	22.21	0.001	0.00	0.95	52	52	
	LTE 71	QPSK20M	Back of Panel	25	133222	50	0	Ant 0	1.00	23.00	22.21	0.127	0.15	0.95	30.9	30.9	
	LTE 71	QPSK20M	Top of Panel	25	133222	50	0	Ant 0	1.00	23.00	22.21	0.092	0.11	0.95	32.3	32.3	
	LTE 71	QPSK20M	Rear Face	0	133222	50	0	Ant 0	1.00	23.00	22.21	0.001	0.00	0.95	52	52	
	LTE 71	QPSK20M	Left Side	0	133222	50	0	Ant 0	1.00	23.00	22.21	0.001	0.00	0.95	52	52	
	LTE 71	QPSK20M	Right Side	0	133222	50	0	Ant 0	1.00	23.00	22.21	0.001	0.00	0.95	52	52	
	LTE 71	QPSK20M	Top Side	0	133222	50	0	Ant 0	1.00	23.00	22.21	0.363	0.44	0.95	26.4	26.4	
	LTE 71	QPSK20M	Bottom Side	0	133222	50	0	Ant 0	1.00	23.00	22.21	0.001	0.00	0.95	52	52	
	LTE 71	QPSK20M	Top Side	0	133222	100	0	Ant 0	1.00	23.00	22.11	0.352	0.43	0.95	26.4	26.4	
	LTE 71	QPSK20M	Top Side	0	133297	1	0	Ant 0	1.00	24.00	23.06	0.548	0.68	0.95	25.4	25.4	
19	LTE 71	QPSK20M	Top Side	0	133372	1	0	Ant 0	1.00	24.00	23.01	0.767	0.97	0.95	23.9	23.9	

Part-0 SAR Characterization Report

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Ch.	RB#	RB offset	Ant Status	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	SAR Design Target	Plimit	Plimit (with Duty cycle)	Minimum
	5GNR-n2	DFT-S QPSK20M	Bottom of Laptop	0	372000	1	1	Ant 0	1.00	24.50	23.68	0.001	0.00	0.95	53.5	53.5	21
	5GNR-n2	DFT-S QPSK20M	Back of Panel	25	372000	1	1	Ant 0	1.00	24.50	23.68	0.255	0.31	0.95	29.4	29.4	
	5GNR-n2	DFT-S QPSK20M	Top of Panel	25	372000	1	1	Ant 0	1.00	24.50	23.68	0.264	0.32	0.95	29.2	29.2	
	5GNR-n2	DFT-S QPSK20M	Rear Face	0	372000	1	1	Ant 0	1.00	24.50	23.68	0.001	0.00	0.95	53.5	53.5	
	5GNR-n2	DFT-S QPSK20M	Left Side	0	372000	1	1	Ant 0	1.00	24.50	23.68	0.13	0.16	0.95	32.3	32.3	
	5GNR-n2	DFT-S QPSK20M	Right Side	0	372000	1	1	Ant 0	1.00	24.50	23.68	0.001	0.00	0.95	53.5	53.5	
20	5GNR-n2	DFT-S QPSK20M	Top Side	0	372000	1	1	Ant 0	1.00	24.50	23.68	1.73	2.09	0.95	21.1	21.1	
	5GNR-n2	DFT-S QPSK20M	Bottom Side	0	372000	1	1	Ant 0	1.00	24.50	23.68	0.001	0.00	0.95	53.5	53.5	
	5GNR-n2	DFT-S QPSK20M	Bottom of Laptop	0	372000	50	28	Ant 0	1.00	24.50	23.47	0.001	0.00	0.95	53.2	53.2	
	5GNR-n2	DFT-S QPSK20M	Back of Panel	25	372000	50	28	Ant 0	1.00	24.50	23.47	0.231	0.29	0.95	29.6	29.6	
	5GNR-n2	DFT-S QPSK20M	Top of Panel	25	372000	50	28	Ant 0	1.00	24.50	23.47	0.251	0.32	0.95	29.3	29.3	
	5GNR-n2	DFT-S QPSK20M	Rear Face	0	372000	50	28	Ant 0	1.00	24.50	23.47	0.001	0.00	0.95	53.2	53.2	
	5GNR-n2	DFT-S QPSK20M	Left Side	0	372000	50	28	Ant 0	1.00	24.50	23.47	0.124	0.16	0.95	32.3	32.3	
	5GNR-n2	DFT-S QPSK20M	Right Side	0	372000	50	28	Ant 0	1.00	24.50	23.47	0.001	0.00	0.95	53.2	53.2	
	5GNR-n2	DFT-S QPSK20M	Top Side	0	372000	50	28	Ant 0	1.00	24.50	23.47	1.62	2.06	0.95	21.2	21.2	
	5GNR-n2	DFT-S QPSK20M	Bottom Side	0	372000	50	28	Ant 0	1.00	24.50	23.47	0.001	0.00	0.95	53.2	53.2	
	5GNR-n2	DFT-S QPSK20M	Top Side	0	372000	100	0	Ant 0	1.00	23.50	22.53	1.36	1.70	0.95	21	21	
	5GNR-n2	DFT-S QPSK20M	Top Side	0	376000	1	1	Ant 0	1.00	24.50	23.48	1.64	2.07	0.95	21.1	21.1	
	5GNR-n2	DFT-S QPSK20M	Top Side	0	380000	1	1	Ant 0	1.00	24.50	23.42	1.53	1.96	0.95	21.4	21.4	
	5GNR-n2	DFT-S QPSK20M	Top Side	0	376000	50	28	Ant 0	1.00	24.50	23.44	1.61	2.06	0.95	21.1	21.1	
	5GNR-n2	DFT-S QPSK20M	Top Side	0	380000	50	28	Ant 0	1.00	24.50	23.44	1.45	1.86	0.95	21.6	21.6	
	5GNR-n2	DFT-S QPSK20M	Top Side	0	372000	1	1	Ant 0	1.00	24.50	23.68	1.71	2.07	0.95	21.1	21.1	
	5GNR-n5	DFT-S QPSK20M	Bottom of Laptop	0	166800	1	1	Ant 0	1.00	24.50	23.26	0.001	0.00	0.95	53	53	22.9
	5GNR-n5	DFT-S QPSK20M	Back of Panel	25	166800	1	1	Ant 0	1.00	24.50	23.26	0.167	0.22	0.95	30.8	30.8	
	5GNR-n5	DFT-S QPSK20M	Top of Panel	25	166800	1	1	Ant 0	1.00	24.50	23.26	0.119	0.16	0.95	32.3	32.3	
	5GNR-n5	DFT-S QPSK20M	Rear Face	0	166800	1	1	Ant 0	1.00	24.50	23.26	0.001	0.00	0.95	53	53	
	5GNR-n5	DFT-S QPSK20M	Left Side	0	166800	1	1	Ant 0	1.00	24.50	23.26	0.001	0.00	0.95	53	53	
	5GNR-n5	DFT-S QPSK20M	Right Side	0	166800	1	1	Ant 0	1.00	24.50	23.26	0.001	0.00	0.95	53	53	
	5GNR-n5	DFT-S QPSK20M	Top Side	0	166800	1	1	Ant 0	1.00	24.50	23.26	0.829	1.10	0.95	23.9	23.9	
	5GNR-n5	DFT-S QPSK20M	Bottom Side	0	166800	1	1	Ant 0	1.00	24.50	23.26	0.001	0.00	0.95	53	53	
	5GNR-n5	DFT-S QPSK20M	Bottom of Laptop	0	166800	50	28	Ant 0	1.00	24.50	23.05	0.001	0.00	0.95	52.8	52.8	
	5GNR-n5	DFT-S QPSK20M	Back of Panel	25	166800	50	28	Ant 0	1.00	24.50	23.05	0.162	0.23	0.95	30.7	30.7	
	5GNR-n5	DFT-S QPSK20M	Top of Panel	25	166800	50	28	Ant 0	1.00	24.50	23.05	0.112	0.16	0.95	32.3	32.3	
	5GNR-n5	DFT-S QPSK20M	Rear Face	0	166800	50	28	Ant 0	1.00	24.50	23.05	0.001	0.00	0.95	52.8	52.8	
	5GNR-n5	DFT-S QPSK20M	Left Side	0	166800	50	28	Ant 0	1.00	24.50	23.05	0.001	0.00	0.95	52.8	52.8	
	5GNR-n5	DFT-S QPSK20M	Right Side	0	166800	50	28	Ant 0	1.00	24.50	23.05	0.001	0.00	0.95	52.8	52.8	
	5GNR-n5	DFT-S QPSK20M	Top Side	0	166800	50	28	Ant 0	1.00	24.50	23.05	0.792	1.11	0.95	23.8	23.8	
	5GNR-n5	DFT-S QPSK20M	Bottom Side	0	166800	50	28	Ant 0	1.00	24.50	23.05	0.001	0.00	0.95	52.8	52.8	
	5GNR-n5	DFT-S QPSK20M	Top Side	0	166800	100	0	Ant 0	1.00	23.50	22.04	0.774	1.08	0.95	22.9	22.9	
21	5GNR-n5	DFT-S QPSK20M	Top Side	0	167300	1	1	Ant 0	1.00	24.50	23.21	1	1.35	0.95	23	23	
	5GNR-n5	DFT-S QPSK20M	Top Side	0	167800	1	1	Ant 0	1.00	24.50	23.12	0.975	1.34	0.95	23	23	
	5GNR-n5	DFT-S QPSK20M	Top Side	0	167300	50	28	Ant 0	1.00	24.50	23.04	0.947	1.33	0.95	23.1	23.1	
	5GNR-n5	DFT-S QPSK20M	Top Side	0	167800	50	28	Ant 0	1.00	24.50	22.97	0.941	1.34	0.95	23	23	
	5GNR-n5	DFT-S QPSK20M	Top Side	0	167300	1	1	Ant 0	1.00	24.50	23.21	0.982	1.33	0.95	23.1	23.1	



Part-0 SAR Characterization Report

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Ch.	RB#	RB offset	Ant Status	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	SAR Design Target	Plimit	Plimit (with Duty cycle)	Minimum
	5GNR-n66	DFT-S QPSK40M	Bottom of Laptop	0	346000	1	1	Ant 0	1.00	24.50	23.69	0.001	0.00	0.95	53.5	53.5	22
	5GNR-n66	DFT-S QPSK40M	Back of Panel	25	346000	1	1	Ant 0	1.00	24.50	23.69	0.405	0.49	0.95	27.4	27.4	
	5GNR-n66	DFT-S QPSK40M	Top of Panel	25	346000	1	1	Ant 0	1.00	24.50	23.69	0.518	0.63	0.95	26.3	26.3	
	5GNR-n66	DFT-S QPSK40M	Rear Face	0	346000	1	1	Ant 0	1.00	24.50	23.69	0.062	0.08	0.95	35.5	35.5	
	5GNR-n66	DFT-S QPSK40M	Left Side	0	346000	1	1	Ant 0	1.00	24.50	23.69	0.165	0.20	0.95	31.3	31.3	
	5GNR-n66	DFT-S QPSK40M	Right Side	0	346000	1	1	Ant 0	1.00	24.50	23.69	0.001	0.00	0.95	53.5	53.5	
23	5GNR-n66	DFT-S QPSK40M	Top Side	0	346000	1	1	Ant 0	1.00	24.50	23.69	1.38	1.67	0.95	22.1	22.1	
	5GNR-n66	DFT-S QPSK40M	Bottom Side	0	346000	1	1	Ant 0	1.00	24.50	23.69	0.001	0.00	0.95	53.5	53.5	
	5GNR-n66	DFT-S QPSK40M	Bottom of Laptop	0	346000	108	54	Ant 0	1.00	24.50	23.65	0.001	0.00	0.95	53.4	53.4	
	5GNR-n66	DFT-S QPSK40M	Back of Panel	25	346000	108	54	Ant 0	1.00	24.50	23.65	0.334	0.41	0.95	28.2	28.2	
	5GNR-n66	DFT-S QPSK40M	Top of Panel	25	346000	108	54	Ant 0	1.00	24.50	23.65	0.396	0.48	0.95	27.5	27.5	
	5GNR-n66	DFT-S QPSK40M	Rear Face	0	346000	108	54	Ant 0	1.00	24.50	23.65	0.058	0.07	0.95	35.8	35.8	
	5GNR-n66	DFT-S QPSK40M	Left Side	0	346000	108	54	Ant 0	1.00	24.50	23.65	0.133	0.16	0.95	32.2	32.2	
	5GNR-n66	DFT-S QPSK40M	Right Side	0	346000	108	54	Ant 0	1.00	24.50	23.65	0.001	0.00	0.95	53.4	53.4	
	5GNR-n66	DFT-S QPSK40M	Top Side	0	346000	108	54	Ant 0	1.00	24.50	23.65	1.24	1.51	0.95	22.5	22.5	
	5GNR-n66	DFT-S QPSK40M	Bottom Side	0	346000	108	54	Ant 0	1.00	24.50	23.65	0.001	0.00	0.95	53.4	53.4	
	5GNR-n66	DFT-S QPSK40M	Top Side	0	346000	216	0	Ant 0	1.00	23.50	22.77	1.14	1.35	0.95	22	22	
	5GNR-n66	DFT-S QPSK40M	Top Side	0	349000	1	1	Ant 0	1.00	24.50	23.55	1.01	1.25	0.95	23.3	23.3	
	5GNR-n66	DFT-S QPSK40M	Top Side	0	352000	1	1	Ant 0	1.00	24.50	23.56	1.11	1.38	0.95	22.9	22.9	
	5GNR-n66	DFT-S QPSK40M	Top Side	0	349000	108	54	Ant 0	1.00	24.50	23.48	1.09	1.37	0.95	22.9	22.9	
	5GNR-n66	DFT-S QPSK40M	Top Side	0	352000	108	54	Ant 0	1.00	24.50	23.50	1.13	1.42	0.95	22.7	22.7	
	5GNR-n66	DFT-S QPSK40M	Top Side	0	346000	1	1	Ant 0	1.00	24.50	23.69	1.36	1.65	0.95	22.1	22.1	
	5GNR-n71	DFT-S QPSK20M	Bottom of Laptop	0	134600	1	1	Ant 0	1.00	24.50	23.16	0.001	0.00	0.95	52.9	52.9	23.6
	5GNR-n71	DFT-S QPSK20M	Back of Panel	25	134600	1	1	Ant 0	1.00	24.50	23.16	0.161	0.22	0.95	30.9	30.9	
	5GNR-n71	DFT-S QPSK20M	Top of Panel	25	134600	1	1	Ant 0	1.00	24.50	23.16	0.119	0.16	0.95	32.2	32.2	
	5GNR-n71	DFT-S QPSK20M	Rear Face	0	134600	1	1	Ant 0	1.00	24.50	23.16	0.001	0.00	0.95	52.9	52.9	
	5GNR-n71	DFT-S QPSK20M	Left Side	0	134600	1	1	Ant 0	1.00	24.50	23.16	0.001	0.00	0.95	52.9	52.9	
	5GNR-n71	DFT-S QPSK20M	Right Side	0	134600	1	1	Ant 0	1.00	24.50	23.16	0.001	0.00	0.95	52.9	52.9	
	5GNR-n71	DFT-S QPSK20M	Top Side	0	134600	1	1	Ant 0	1.00	24.50	23.16	0.649	0.88	0.95	24.8	24.8	
	5GNR-n71	DFT-S QPSK20M	Bottom Side	0	134600	1	1	Ant 0	1.00	24.50	23.16	0.001	0.00	0.95	52.9	52.9	
	5GNR-n71	DFT-S QPSK20M	Bottom of Laptop	0	134600	50	28	Ant 0	1.00	24.50	22.78	0.001	0.00	0.95	52.6	52.6	
	5GNR-n71	DFT-S QPSK20M	Back of Panel	25	134600	50	28	Ant 0	1.00	24.50	22.78	0.163	0.24	0.95	30.4	30.4	
	5GNR-n71	DFT-S QPSK20M	Top of Panel	25	134600	50	28	Ant 0	1.00	24.50	22.78	0.113	0.17	0.95	32	32	
	5GNR-n71	DFT-S QPSK20M	Rear Face	0	134600	50	28	Ant 0	1.00	24.50	22.78	0.001	0.00	0.95	52.6	52.6	
	5GNR-n71	DFT-S QPSK20M	Left Side	0	134600	50	28	Ant 0	1.00	24.50	22.78	0.001	0.00	0.95	52.6	52.6	
	5GNR-n71	DFT-S QPSK20M	Right Side	0	134600	50	28	Ant 0	1.00	24.50	22.78	0.001	0.00	0.95	52.6	52.6	
	5GNR-n71	DFT-S QPSK20M	Top Side	0	134600	50	28	Ant 0	1.00	24.50	22.78	0.495	0.74	0.95	25.6	25.6	
	5GNR-n71	DFT-S QPSK20M	Bottom Side	0	134600	50	28	Ant 0	1.00	24.50	22.78	0.001	0.00	0.95	52.6	52.6	
	5GNR-n71	DFT-S QPSK20M	Top Side	0	134600	100	0	Ant 0	1.00	23.50	21.83	0.415	0.61	0.95	25.4	25.4	
	5GNR-n71	DFT-S QPSK20M	Top Side	0	136100	1	1	Ant 0	1.00	24.50	23.01	0.596	0.84	0.95	25	25	
24	5GNR-n71	DFT-S QPSK20M	Top Side	0	137600	1	1	Ant 0	1.00	24.50	22.92	0.808	1.16	0.95	23.6	23.6	
	5GNR-n71	DFT-S QPSK20M	Top Side	0	137600	1	1	Ant 0	1.00	24.50	22.92	0.784	1.13	0.95	23.8	23.8	



Part-0 SAR Characterization Report

Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Ch.	RB#	RB offset	Ant Status	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	SAR Design Target	Plimit	Plimit (with Duty cycle)	Minimum
	5GNR-n77	DFT-S QPSK100M	Bottom of Laptop	0	650000	1	1	Ant 0	1.00	24.50	24.03	0.001	0.00	0.95	53.8	53.8	26.3
	5GNR-n77	DFT-S QPSK100M	Back of Panel	25	650000	1	1	Ant 0	1.00	24.50	24.03	0.074	0.08	0.95	35.1	35.1	
	5GNR-n77	DFT-S QPSK100M	Top of Panel	25	650000	1	1	Ant 0	1.00	24.50	24.03	0.112	0.12	0.95	33.3	33.3	
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	650000	1	1	Ant 0	1.00	24.50	24.03	0.001	0.00	0.95	53.8	53.8	
	5GNR-n77	DFT-S QPSK100M	Left Side	0	650000	1	1	Ant 0	1.00	24.50	24.03	0.07	0.08	0.95	35.4	35.4	
	5GNR-n77	DFT-S QPSK100M	Right Side	0	650000	1	1	Ant 0	1.00	24.50	24.03	0.001	0.00	0.95	53.8	53.8	
	5GNR-n77	DFT-S QPSK100M	Top Side	0	650000	1	1	Ant 0	1.00	24.50	24.03	0.502	0.56	0.95	26.8	26.8	
	5GNR-n77	DFT-S QPSK100M	Bottom Side	0	650000	1	1	Ant 0	1.00	24.50	24.03	0.001	0.00	0.95	53.8	53.8	
	5GNR-n77	DFT-S QPSK100M	Bottom of Laptop	0	650000	135	69	Ant 0	1.00	24.50	23.65	0.001	0.00	0.95	53.4	53.4	
	5GNR-n77	DFT-S QPSK100M	Back of Panel	25	650000	135	69	Ant 0	1.00	24.50	23.65	0.097	0.12	0.95	33.6	33.6	
	5GNR-n77	DFT-S QPSK100M	Top of Panel	25	650000	135	69	Ant 0	1.00	24.50	23.65	0.149	0.18	0.95	31.7	31.7	
	5GNR-n77	DFT-S QPSK100M	Rear Face	0	650000	135	69	Ant 0	1.00	24.50	23.65	0.001	0.00	0.95	53.4	53.4	
	5GNR-n77	DFT-S QPSK100M	Left Side	0	650000	135	69	Ant 0	1.00	24.50	23.65	0.088	0.11	0.95	34	34	
	5GNR-n77	DFT-S QPSK100M	Right Side	0	650000	135	69	Ant 0	1.00	24.50	23.65	0.001	0.00	0.95	53.4	53.4	
	5GNR-n77	DFT-S QPSK100M	Top Side	0	650000	135	69	Ant 0	1.00	24.50	23.65	0.444	0.54	0.95	27	27	
	5GNR-n77	DFT-S QPSK100M	Bottom Side	0	650000	135	69	Ant 0	1.00	24.50	23.65	0.001	0.00	0.95	53.4	53.4	
	5GNR-n77	DFT-S QPSK100M	Top Side	0	653000	1	1	Ant 0	1.00	24.50	23.65	0.406	0.50	0.95	27.3	27.3	
25	5GNR-n77	DFT-S QPSK100M	Top Side	0	656000	1	1	Ant 0	1.00	24.50	23.87	0.549	0.64	0.95	26.3	26.3	
	5GNR-n77	DFT-S QPSK100M	Top Side	0	659000	1	1	Ant 0	1.00	24.50	23.61	0.41	0.50	0.95	27.3	27.3	
	5GNR-n77	DFT-S QPSK100M	Top Side	0	662000	1	1	Ant 0	1.00	24.50	23.51	0.474	0.60	0.95	26.5	26.5	
	5GNR-n78	DFT-S QPSK100M	Bottom of Laptop	0	650000	1	1	Ant 0	1.00	24.50	24.10	0.001	0.00	0.95	53.9	53.9	30.5
	5GNR-n78	DFT-S QPSK100M	Back of Panel	25	650000	1	1	Ant 0	1.00	24.50	24.10	0.038	0.04	0.95	38.1	38.1	
	5GNR-n78	DFT-S QPSK100M	Top of Panel	25	650000	1	1	Ant 0	1.00	24.50	24.10	0.067	0.07	0.95	35.6	35.6	
	5GNR-n78	DFT-S QPSK100M	Rear Face	0	650000	1	1	Ant 0	1.00	24.50	24.10	0.001	0.00	0.95	53.9	53.9	
	5GNR-n78	DFT-S QPSK100M	Left Side	0	650000	1	1	Ant 0	1.00	24.50	24.10	0.049	0.05	0.95	37	37	
	5GNR-n78	DFT-S QPSK100M	Right Side	0	650000	1	1	Ant 0	1.00	24.50	24.10	0.001	0.00	0.95	53.9	53.9	
27	5GNR-n78	DFT-S QPSK100M	Top Side	0	650000	1	1	Ant 0	1.00	24.50	24.10	0.216	0.24	0.95	30.5	30.5	
	5GNR-n78	DFT-S QPSK100M	Bottom Side	0	650000	1	1	Ant 0	1.00	24.50	24.10	0.001	0.00	0.95	53.9	53.9	
	5GNR-n78	DFT-S QPSK100M	Bottom of Laptop	0	650000	135	69	Ant 0	1.00	24.50	23.68	0.001	0.00	0.95	53.5	53.5	
	5GNR-n78	DFT-S QPSK100M	Rear Face	0	650000	135	69	Ant 0	1.00	24.50	23.68	0.001	0.00	0.95	53.5	53.5	
	5GNR-n78	DFT-S QPSK100M	Left Side	0	650000	135	69	Ant 0	1.00	24.50	23.68	0.038	0.05	0.95	37.7	37.7	
	5GNR-n78	DFT-S QPSK100M	Right Side	0	650000	135	69	Ant 0	1.00	24.50	23.68	0.001	0.00	0.95	53.5	53.5	
	5GNR-n78	DFT-S QPSK100M	Top Side	0	650000	135	69	Ant 0	1.00	24.50	23.68	0.193	0.23	0.95	30.6	30.6	
	5GNR-n78	DFT-S QPSK100M	Bottom Side	0	650000	135	69	Ant 0	1.00	24.50	23.68	0.001	0.00	0.95	53.5	53.5	

Part-0 SAR Characterization Report

Plimit and Pmax Summary

Exposure Scenario		Tablet & Laptop	P _{max}
Averaging Volume		1g	
Test Distance (mm)		0	
WWAN Bands	Antenna	P _{limit}	
WCDMA Band II	0	20.6	23.5
WCDMA Band IV	0	22.1	23.5
WCDMA Band V	0	22.4	23.5
LTE B2	0	20.5	23.0
LTE B4	0	22.2	23.0
LTE B5	0	22.6	23.0
LTE B7	0	21.0	23.8
LTE B12	0	23.4	23.0
LTE B13	0	24.5	23.0
LTE B14	0	24.4	23.0
LTE B17	0	23.5	23.0
LTE B25	0	20.3	23.0
LTE B26	0	22.9	23.0
LTE B38	0	14.4	23.8
LTE B41 (PC3)	0	14.9	23.8
LTE B41 (PC2)	0	15.1	25.0
LTE B42	0	23.8	23.8
LTE B48	0	25.1	23.8
LTE B66	0	22.1	23.0
LTE B71	0	23.9	23.0
5G NR-2	0	21.0	23.5
5G NR-5	0	22.9	23.5
5G NR-66	0	22.0	23.5
5G NR-71	0	23.6	23.5
5G NR-77	0	26.3	23.5
5G NR-78	0	30.5	23.5

Note :

1. When $P_{max} < P_{limit}$, the DUT will operate at a power level up to P_{max} .
2. All P_{limit} EFS and maximum tune up output power P_{max} levels entered in above Table correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (e.g. LTE TDD).
3. Maximum tune up output power P_{max} is used to configure EUT during RF tune up procedure. The maximum allowed output power is equal to maximum Tune up output power + 1dB device design uncertainty.
4. The maximum time-averaged output power (dBm) for any 3G/4G/5G Sub6 WWAN technology, band, and DSI = minimum of "P_{limit} EFS" and "Maximum tune up output power P_{max} " + 1dB device uncertainty. SAR values in this report were scaled to this maximum time-averaged output power to determine compliance per KDB Publication 447498 D01v06.

Part-0 SAR Characterization Report

4. Equipment List

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D750V3	1013	Aug. 30, 2022	1 Year
System Validation Dipole	SPEAG	D835V2	4d121	Aug. 30, 2022	1 Year
System Validation Dipole	SPEAG	D1750V2	1055	Aug. 29, 2022	1 Year
System Validation Dipole	SPEAG	D1900V2	5d036	Jan. 21, 2022	1 Year
System Validation Dipole	SPEAG	D2600V2	1020	Aug. 16, 2022	1 Year
System Validation Dipole	SPEAG	D3500V2	1007	Jan. 19, 2022	1 Year
System Validation Dipole	SPEAG	D3700V2	1017	Aug. 18, 2022	1 Year
System Validation Dipole	SPEAG	D3900V2	1020	May 20, 2022	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7472	May 27, 2022	1 Year
Data Acquisition Electronics	SPEAG	DAE3	579	Jun. 01, 2022	1 Year
Universal Radio Communication Tester	Anritsu	MT8000A	6262012865	Nov. 30, 2021	1 Year
Thermometer	YFE	YF-160A	120702365	Aug. 09, 2022	1 Year
Powersource1	SPEAG	SE_UMS_160 BA	4010	Jul. 25, 2022	1 Year

Part-0 SAR Characterization Report

5. Measurement Uncertainty

Source of Uncertainty	Uncertainty (± %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (± %, 1g)	Standard Uncertainty (± %, 10g)	Vi
Measurement System								
Probe Calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Axial Isotropy	4.7	Rectangular	√3	√0.5	√0.5	1.9	1.9	∞
Hemispherical Isotropy	9.6	Rectangular	√3	√0.5	√0.5	3.9	3.9	∞
Boundary Effect	1.0	Rectangular	√3	1	1	0.6	0.6	∞
Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Detection Limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Probe Modulation Response	4.8	Rectangular	√3	1	1	2.8	2.8	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Integration Time	1.7	Rectangular	√3	1	1	1.0	1.0	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.02	Rectangular	√3	1	1	0.01	0.01	∞
Probe Positioning with Respect to Phantom	0.4	Rectangular	√3	1	1	0.2	0.2	∞
Post-processing	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Test Sample Related								
Test Sample Positioning	2.82 / 1.60	Normal	1	1	1	2.8	1.6	35
Device Holder Uncertainty	2.55 / 2.76	Normal	1	1	1	2.6	2.8	7
Power Drift of Measurement	5.0	Rectangular	√3	1	1	2.9	2.9	∞
PowerScaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty (Shape and Thickness Tolerances)	5.7	Rectangular	√3	1	1	3.3	3.3	∞
Liquid Conductivity (Temperature Uncertainty)	2.58	Rectangular	√3	0.78	0.71	1.2	1.1	∞
Liquid Conductivity (Measured)	2.95	Normal	1	0.78	0.71	2.3	2.1	61
Liquid Permittivity (Temperature Uncertainty)	1.97	Rectangular	√3	0.23	0.26	0.3	0.3	∞
Liquid Permittivity (Measured)	3.04	Normal	1	0.23	0.26	0.7	0.8	47
Combined Standard Uncertainty						± 10.9 %	± 10.7 %	
Expanded Uncertainty (K=2)						± 21.8 %	± 21.4 %	

Head SAR Uncertainty Budget for Frequency Range of 300 MHz to 3 GHz

Part-0 SAR Characterization Report

Source of Uncertainty	Uncertainty (± %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (± %, 1g)	Standard Uncertainty (± %, 10g)	Vi
Measurement System								
Probe Calibration	6.55	Normal	1	1	1	6.55	6.55	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	3.9	3.9	∞
Boundary Effect	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Detection Limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Probe Modulation Response	4.8	Rectangular	√3	1	1	2.8	2.8	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Integration Time	1.7	Rectangular	√3	1	1	1.0	1.0	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.04	Rectangular	√3	1	1	0.02	0.02	∞
Probe Positioning with Respect to Phantom	0.8	Rectangular	√3	1	1	0.5	0.5	∞
Post-processing	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.82 / 1.60	Normal	1	1	1	2.8	1.6	35
Device Holder Uncertainty	2.55 / 2.76	Normal	1	1	1	2.6	2.8	7
Power Drift of Measurement	5.0	Rectangular	√3	1	1	2.9	2.9	∞
PowerScaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty (Shape and Thickness Tolerances)	6.2	Rectangular	√3	1	1	3.6	3.6	∞
Liquid Conductivity (Temperature Uncertainty)	2.58	Rectangular	√3	0.78	0.71	1.2	1.1	∞
Liquid Conductivity (Measured)	2.95	Normal	1	0.78	0.71	2.3	2.1	61
Liquid Permittivity (Temperature Uncertainty)	1.97	Rectangular	√3	0.23	0.26	0.3	0.3	∞
Liquid Permittivity (Measured)	3.04	Normal	1	0.23	0.26	0.7	0.8	47
Combined Standard Uncertainty						± 11.6 %	± 11.3 %	
Expanded Uncertainty (K=2)						± 23.2 %	± 22.6 %	

Head SAR Uncertainty Budget for Frequency Range of 3 GHz to 6 GHz

Part-0 SAR Characterization Report

Source of Uncertainty	Uncertainty ($\pm$ %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty ($\pm$ %, 1g)	Standard Uncertainty ($\pm$ %, 10g)	Vi
Measurement System								
Probe Calibration	6.0	Normal	1	1	1	6.0	6.0	∞
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	1.9	1.9	∞
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	3.9	3.9	∞
Boundary Effect	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6	∞
Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7	∞
Detection Limits	0.25	Rectangular	$\sqrt{3}$	1	1	0.14	0.14	∞
Probe Modulation Response	4.8	Rectangular	$\sqrt{3}$	1	1	2.8	2.8	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Integration Time	1.7	Rectangular	$\sqrt{3}$	1	1	1.0	1.0	∞
RF Ambient Conditions – Noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.02	Rectangular	$\sqrt{3}$	1	1	0.01	0.01	∞
Probe Positioning with Respect to Phantom	0.4	Rectangular	$\sqrt{3}$	1	1	0.2	0.2	∞
Post-processing	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Test Sample Related								
Test Sample Positioning	3.68 / 1.73	Normal	1	1	1	3.7	1.7	29
Device Holder Uncertainty	2.55 / 2.76	Normal	1	1	1	2.6	2.8	7
Power Drift of Measurement	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
PowerScaling	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty (Shape and Thickness Tolerances)	7.2	Rectangular	$\sqrt{3}$	1	1	4.2	4.2	∞
Liquid Conductivity (Temperature Uncertainty)	2.58	Rectangular	$\sqrt{3}$	0.78	0.71	1.2	1.1	∞
Liquid Conductivity (Measured)	2.95	Normal	1	0.78	0.71	2.3	2.1	61
Liquid Permittivity (Temperature Uncertainty)	1.97	Rectangular	$\sqrt{3}$	0.23	0.26	0.3	0.3	∞
Liquid Permittivity (Measured)	3.04	Normal	1	0.23	0.26	0.7	0.8	47
Combined Standard Uncertainty						± 11.5 %	± 11.0 %	
Expanded Uncertainty (K=2)						± 23.0 %	± 22.0 %	

Body SAR Uncertainty Budget for Frequency Range of 300 MHz to 3 GHz

Part-0 SAR Characterization Report

Source of Uncertainty	Uncertainty (± %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (± %, 1g)	Standard Uncertainty (± %, 10g)	Vi
Measurement System								
Probe Calibration	6.55	Normal	1	1	1	6.55	6.55	∞
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	3.9	3.9	∞
Boundary Effect	2.0	Rectangular	√3	1	1	1.2	1.2	∞
Linearity	4.7	Rectangular	√3	1	1	2.7	2.7	∞
Detection Limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Probe Modulation Response	4.8	Rectangular	√3	1	1	2.8	2.8	∞
Readout Electronics	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Integration Time	1.7	Rectangular	√3	1	1	1.0	1.0	∞
RF Ambient Conditions – Noise	3.0	Rectangular	√3	1	1	1.7	1.7	∞
RF Ambient Conditions – Reflections	3.0	Rectangular	√3	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.04	Rectangular	√3	1	1	0.02	0.02	∞
Probe Positioning with Respect to Phantom	0.8	Rectangular	√3	1	1	0.5	0.5	∞
Post-processing	4.0	Rectangular	√3	1	1	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	3.68 / 1.73	Normal	1	1	1	3.7	1.7	29
Device Holder Uncertainty	2.55 / 2.76	Normal	1	1	1	2.6	2.8	7
Power Drift of Measurement	5.0	Rectangular	√3	1	1	2.9	2.9	∞
PowerScaling	0.0	Rectangular	√3	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty (Shape and Thickness Tolerances)	7.6	Rectangular	√3	1	1	4.4	4.4	∞
Liquid Conductivity (Temperature Uncertainty)	2.58	Rectangular	√3	0.78	0.71	1.2	1.1	∞
Liquid Conductivity (Measured)	2.95	Normal	1	0.78	0.71	2.3	2.1	61
Liquid Permittivity (Temperature Uncertainty)	1.97	Rectangular	√3	0.23	0.26	0.3	0.3	∞
Liquid Permittivity (Measured)	3.04	Normal	1	0.23	0.26	0.7	0.8	47
Combined Standard Uncertainty						± 12.1 %	± 11.6 %	
Expanded Uncertainty (K=2)						± 24.2 %	± 23.2 %	

Body SAR Uncertainty Budget for Frequency Range of 3 GHz to 6 GHz

Part-0 SAR Characterization Report

6. Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Taiwan Huaya Lab:

Add: No. 19, Huaya 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan

Tel: +886-(0)3-318-3232

Fax: +886-(0)3-211-5834

Taiwan Linkou Lab:

Add: No. 47-2, Baodoucuokeng, Linkou Dist., New Taipei City 244, Taiwan

Tel: +886-(0)2-2605-2180

Fax: +886-(0)2-2605-2943

Taiwan Hsinchu Lab1:

Add: E-2, No. 1, Lixing 1st Rd., East Dist., Hsinchu City 300, Taiwan

Tel: +886-(0)3-666-8565

Fax: +886-(0)3-666-8323

Taiwan Hsinchu Lab2:

Add: No. 49, Ln. 206, Wende Rd., Qionglin Township, Hsinchu County 307, Taiwan

Tel: +886-(0)3-512-0595

Fax: +886-(0)3-512-0568

Taiwan Xindian Lab:

Add: B2F., No. 215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan

Tel: +886-(0)2-8914-5882

Fax: +886-(0)2-8914-5840

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The road map of all our labs can be found in our web site also.

---END---