

客户名稱 CUSTOMER	:	
客户料號 CUSTOMER'S P/N	:	
料號 PART NUMBER	:	WAN3216F245H0X
規格 DESCRIPTION	:	Chip Antenna 3216 L Ant 2.45G Type 0X
版本 VERSION	:	V2.1
日期 ISSUE DATE	:	2018/07/01



	エ 程 部 R&D CENTER	
承 認 APPROVAL	確認 CHECKED	製 作 DRAWN
Ray	Nate	Kelvin



萬誠科技股份有限公司

112 台北市北投區中央南路二段 36 號 3 樓

電話: (02) 2898-2220 傳真: (02) 2898-5055


#### OneWave Electronic Co., Ltd.


2F., No.163, Sec. 1, Xi'an St., Beitou Dist., Taipei City 112, Taiwan TEL: +886 2 2898-2220 FAX: +886 2 2898-5055



# 3216 Chip antenna

### For Bluetooth / WLAN Applications

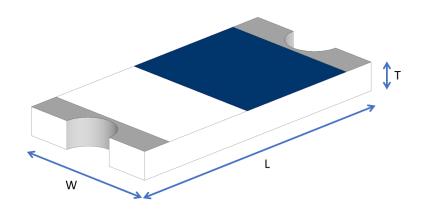



	Dimension (mm)
L	3.23 ± 0.20
W	1.66 ± 0.20
Т	0.45 ± 0.20

#### **Part Number Information**

<b>WAN</b>	<u>3216</u>	<u>F</u>	<u>245</u>	H	<u>0X</u>
Α	В	С	D	Е	F


Α	Product Series	Antenna
B	Dimension L x W	3.2X1.6mm (+-0.2mm)
С	Material	High K material
D	Working Frequency	2.4 ~ 2.5GHz
Ε	Feeding mode	PIFA & Single Feeding
F	Antenna type	X=06,07,08 / Type=06,07,08

#### **1. Electrical Specification**

Specification									
Part Number	WAN3216F245H0X								
Central Frequency	2450	MHz							
Bandwidth	120 (Min.)	MHz							
Return Loss	-6.5 (Max)	dB							
Peak Gain	1.75	dBi							
Impedance	50	Ohm							
Operating Temperature	-40~+85	°C							
Maximum Power	4	W							
Resistance to Soldering Heats	10 ( @ 260°C )	sec.							
Polarization	Linear								
Azimuth Beamwidth	Omni-directional								
Termination	Ni / Au (Leadless)								

Remark : Bandwidth & Peak Gain was measured under evaluation board of next page

#### 2. Recommended PCB Pattern Evaluation Board Dimension

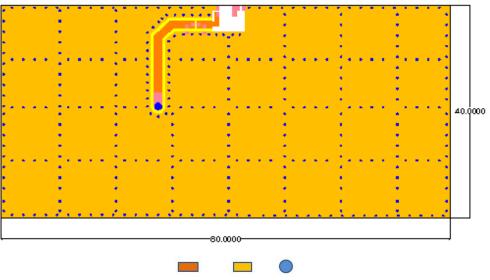


Feed Line TOP Copper VIA

#### 2<sup>nd</sup> Evaluation Board Dimension

· •	•	•	• •	• •	•	•	•	••••	•	••	•	• •	•	•				:	• •	. •	•	•	•	••••	•	•	•		•	•	۰.	
				•				•		•	••	•••	•	1		• •	•	•														
				•				•				•				•																
				•				•				•																				
				•				•				•																				
•	•	•	•	• •	•	•	•	• *	•	•	•	11	•	•	•		•	•	•	. •	•	•	•	<u> </u>	•	•	•	•	•	•	•	
				•				•				•												1								
				•				•				•																				
				•				•				1																				
				• •				• .		•		÷.,				• .				۰.				۰.				۰.				
				•				•				•				•				•				•				•			•	40.0
				•				•				•				•				•				•				•			•	
				•				•				•				•				•				•				•			•	
				•				•				•				•				•				•				•			•	
				• .				۰.				٠.				• .				• .				٠.				۰.			. •	
				•				•				•				•				•				•				•			•	
				•				•				•				•				•				•				•			•	
				•				•				•				•				•				•				•			•	
																•																
•	•	•	• •	•	•	•	•	• •	•	•	•	• •	•	•	• •	•	•	•	•	•	• •	•	•	•	• •	•	•	•	• •	•	•	


#### **Suggested Matching Circuit**


<u>重要資訊</u>: <u>匹配元件建議使用精準度±1%以下的電感、電容、電阻</u>

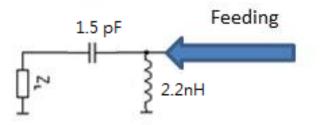


Layout Dimensions in Clearance area(Size=5.9\*5.0mm)

### <mark>onew</mark>ave

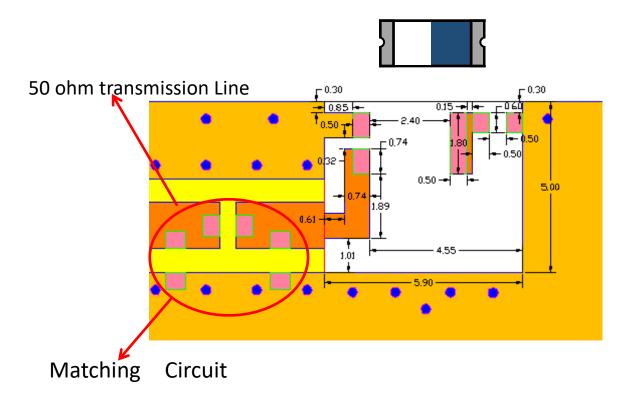


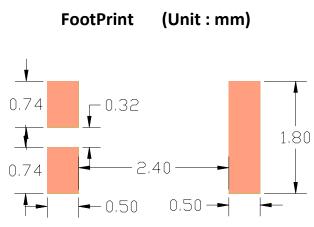


• 2<sup>nd</sup> Layout Dimensions in Clearance area(Size=8.0\*3.0mm)

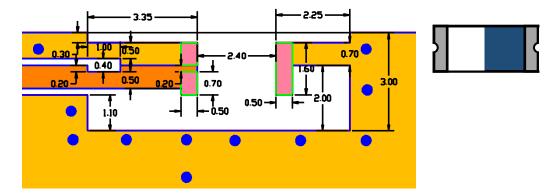


#### 3. Measurement Results Return Loss

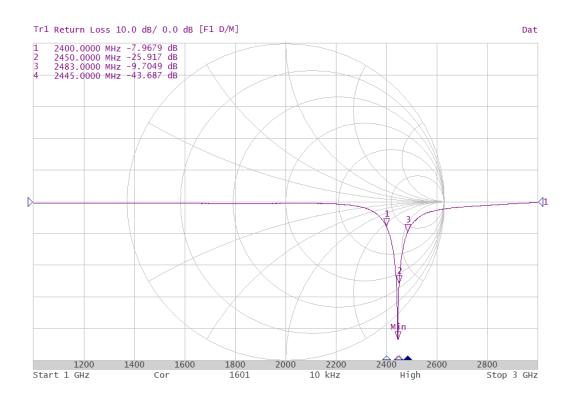

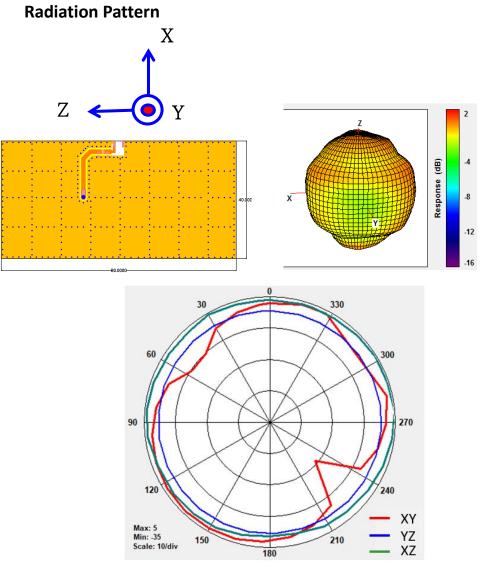

	Efficiency	Peak Gain	Directivity				
2450MHz	85.65%	2.21 dBi	2.89 dBi				

Chamber Coordinate System

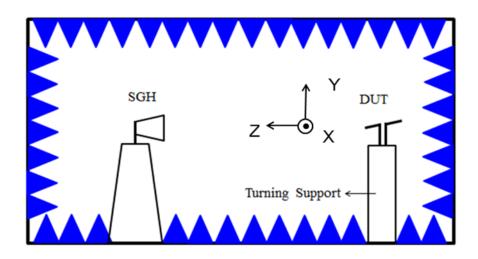




#### 4.Reliability and Test Condictions

ITEM	REQUIREMENTS	TEST CONDITION
Solderability	1. Wetting shall exceed 90% coverage	Pre-heating temperature:150°C /60sec.
Condonability	2. No visible mechanical damage	Solder temperature:230 $\pm$ 5 $^{\circ}$ C
		Duration:4±1sec.
	TEMP (°C)	Solder:Sn-Ag3.0-Cu0.5
	4±1 sec.	Flux for lead free: rosin
	230°C 4±1 sec.	
	150°C	
	60sec	
	/ 00000	
0.11.1.1		
Solder heat Resistance	<ol> <li>No visible mechanical damage</li> <li>Central Freq. change :within ± 6%</li> </ol>	Pre-heating temperature:150°C /60sec.
Recordinee		Solder temperature:260±5°C
	TEMP (°C)	Duration:10±0.5sec. Solder:Sn-Ag3.0-Cu0.5
	260°C 10±0.5 sec.	Flux for lead free: rosin
	150°C	
	60sec	
_		-
Component	1. No visible mechanical damage	The device should be reflow
Adhesion (Push test)		soldered (230 $\pm$ 5 °C for 10sec.) to a tinned
(*********		copper substrate A dynometer force gauge should be applied the side of the
		component. The device must with-ST-F
		0.5 Kg without failure of the termination
		attached to component.
Component	1. No visible mechanical damage	Insert 10cm wire into the remaining open
Adhesion		eye bend ,the ends of even wire lengths
(Pull test)		upward and wind together.
		Terminal shall not be remarkably
		damaged.
Thermal shock	1. No visible mechanical damage	+85°C=>30±3min
	2. Central Freq. change :within $\pm 6\%$	-40°C =>30±3min
		Test cycle:10 cycles
		The chip shall be stabilized at normal
	1 +85±5℃ 30±3	condition for 2~3 hours before
	2 Room Within	measuring.
	Temperature 3sec	
	3 -40±2℃ 30±3	
	4 Room Within	
	Temperature 3sec	
Resistance to	1. No visible mechanical demons	Temperature: 85±5°C
High	1. No visible mechanical damage	Duration: 1000±12hrs
Temperature	2. Central Freq. change :within ±6%	The chip shall be stabilized at normal
remperature	3. No disconnection or short circuit.	condition for 2~3 hours before
		measuring.
Resistance to	1 No visible mechanical demage	Temperature:-40±5°C
Low	1. No visible mechanical damage	Duration: 1000±12hrs
Temperature	2. Central Freq. change :within ±6%	The chip shall be stabilized at normal
· omporatoro	3. No disconnection or short circuit.	condition for 2~3 hours before
		measuring.
Humidity	1. No visible mechanical damage	Temperature: 40±2°C
. rannaity	-	Humidity: 90% to 95% RH
	2. Central Freq. change :within ±6%	Duration: 1000±12hrs
	3. No disconnection or short circuit.	The chip shall be stabilized at normal
		condition for 2~3 hours before
		measuring.
		incasunny.

### <mark>onew</mark>ave

#### **5.Soldering and Mounting**

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. The terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

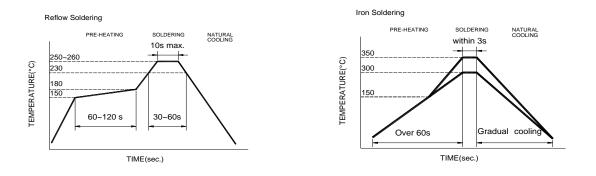


Recommended temperature profiles for re-flow soldering in Figure 1.

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.


- Preheat circuit and products to  $150^\circ$ C
- · Never contact the ceramic with the iron tip
- · Use a 20 watt soldering iron with tip diameter of 1.0mm
- 280°C tip temperature (max)
- 1.0mm tip diameter (max)
- Limit soldering time to 3 sec.


#### 6.Packaging Information

#### **Tape Specification:**

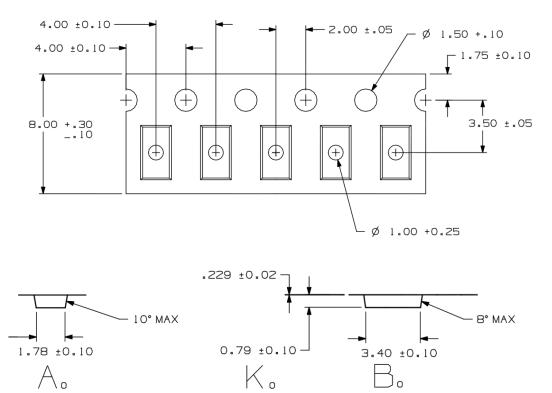

Reel Specification: (7", Ф180 mm)

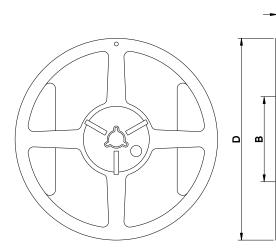



7" x 8 mm

C

Tape Width(mm)	A(mm)	B(mm)	C(mm)	D(mm)	Chip/Reel(pcs)
8	9.0±0.5	60±2	13.5±0.5	178±2	3000

#### 7. Storage and Transportation Information

#### **Storage Conditions**

To maintain the solderability of terminal electrodes:

- 1. Temperature and humidity conditions: -10~  $40^{\circ}$ C and 30~70% RH.
- 2. Recommended products should be used within 6 months from the time of delivery.
- 3. The packaging material should be kept where no chlorine or sulfur exists in the air.

#### **Transportation Conditions**

- 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- 2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
- 3. Bulk handling should ensure that abrasion and mechanical shock are minimized.