








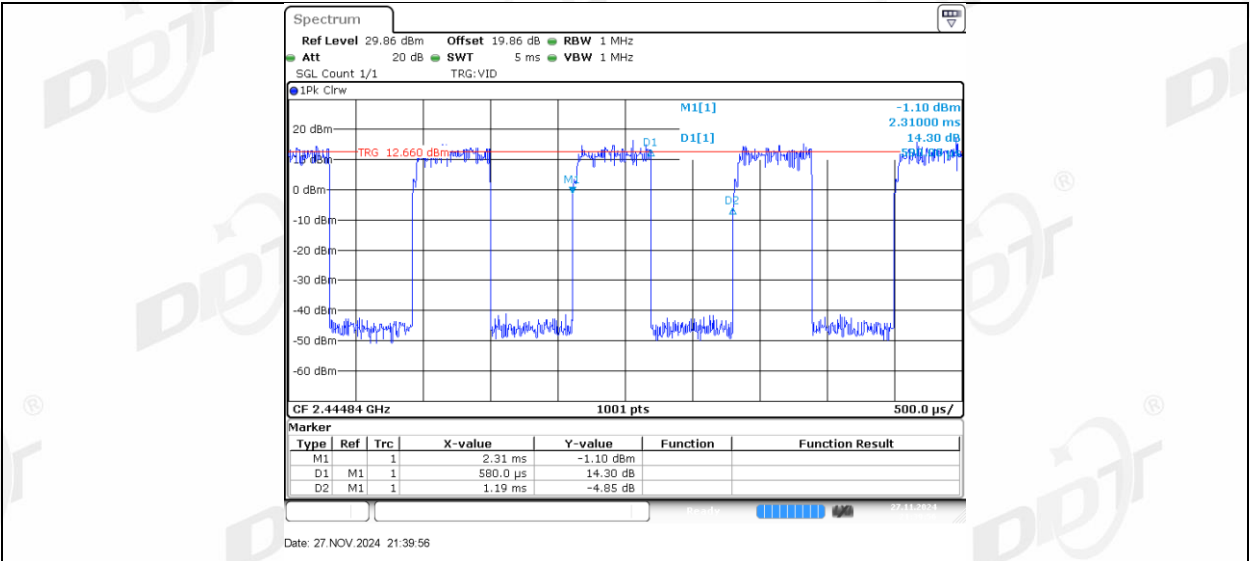

11AX20MIMO Ant1 2437_52Tone RU37

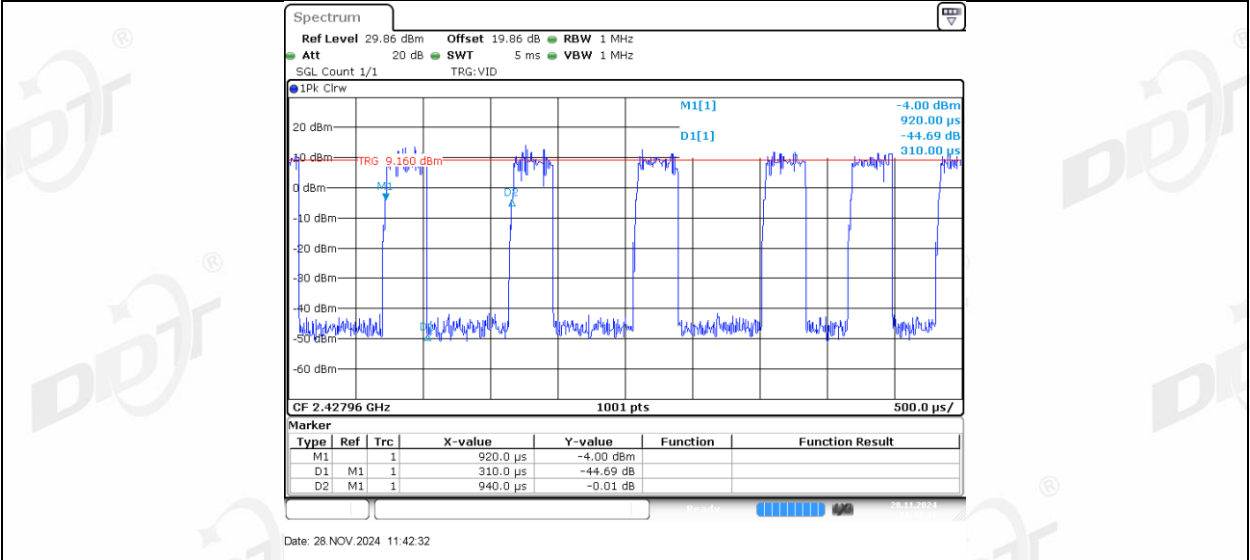

11AX20MIMO Ant1 2437_52Tone RU39

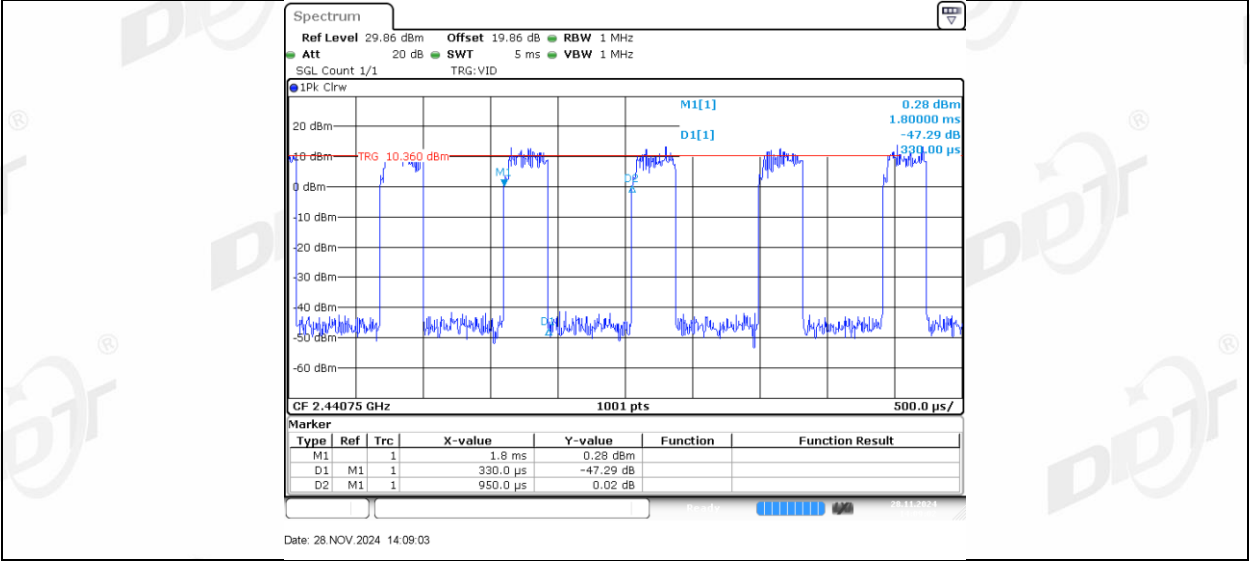

11AX20MIMO Ant1 2437_52Tone RU40
















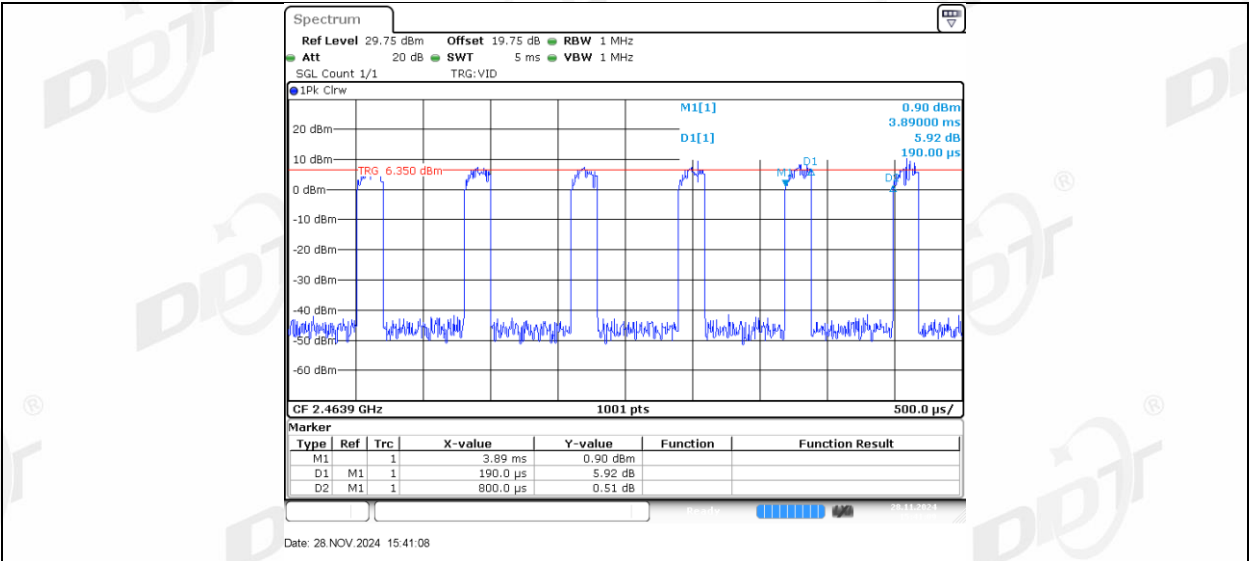

11AX20MIMO_Ant2_2462_26Tone_RU0

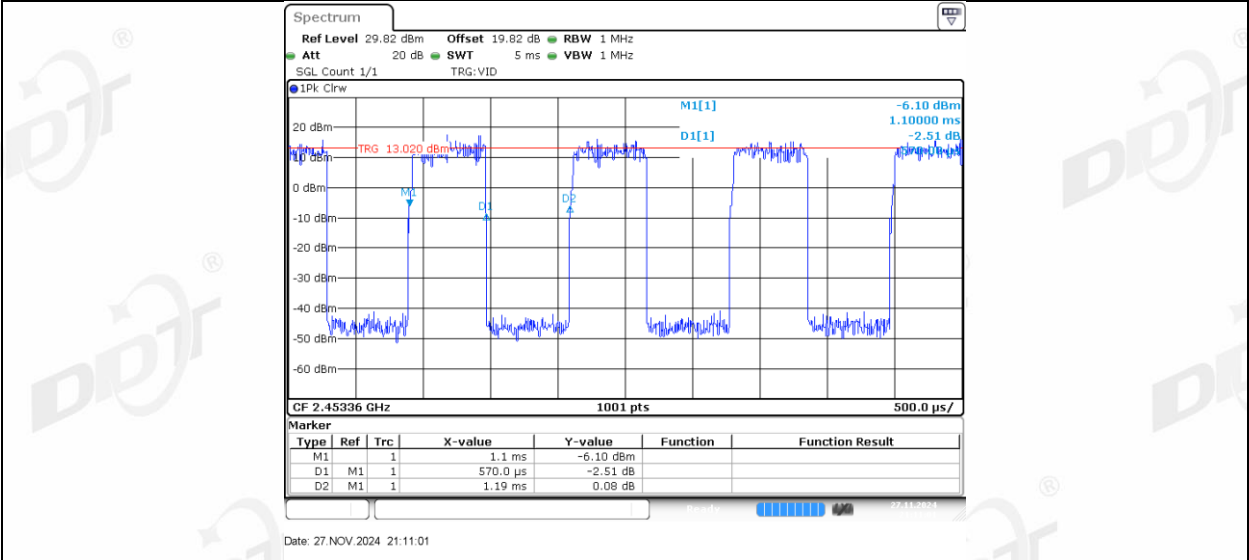


11AX20MIMO_Ant2_2462_26Tone_RU4

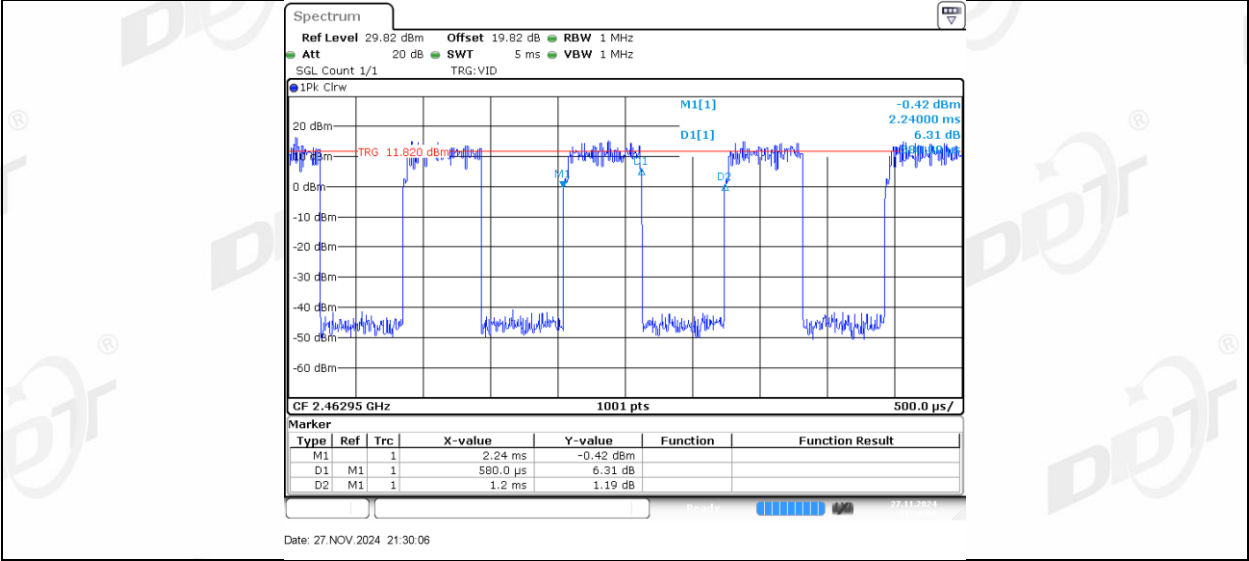


11AX20MIMO_Ant2_2462_26Tone_RU8






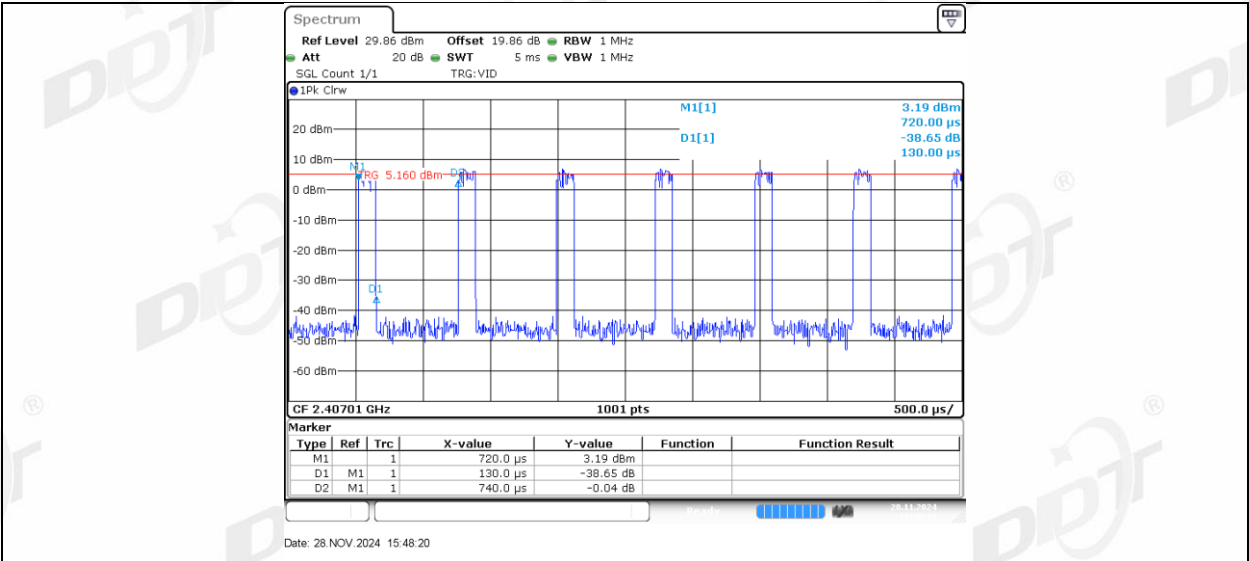

11AX40MIMO_Ant1_2422_242Tone_RU62

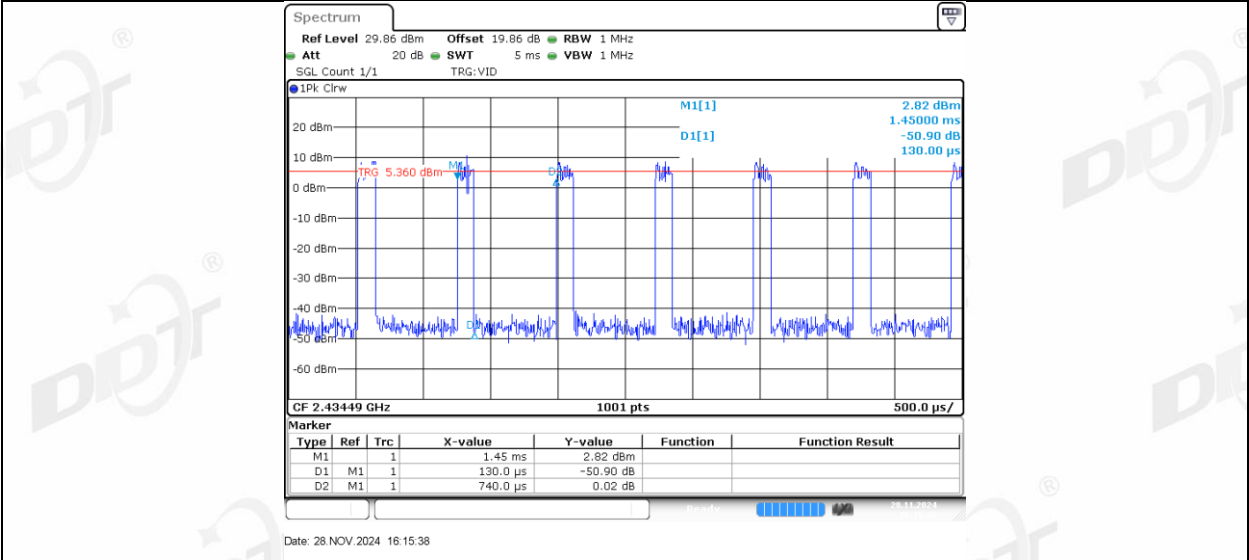


11AX40MIMO_Ant2_2422_242Tone_RU61

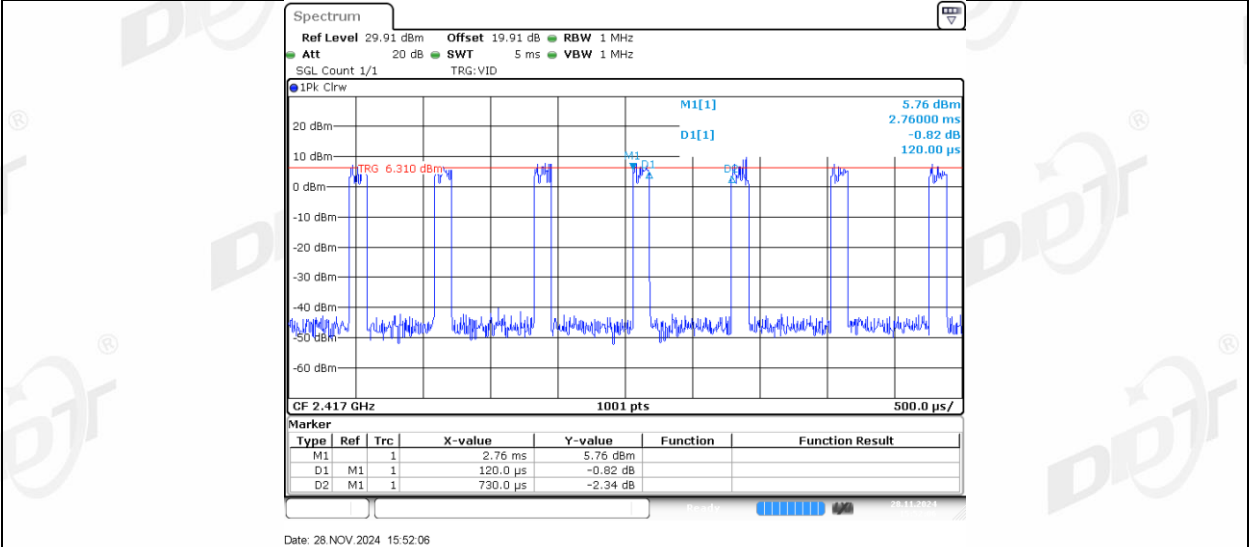


11AX40MIMO_Ant2_2422_242Tone_RU62




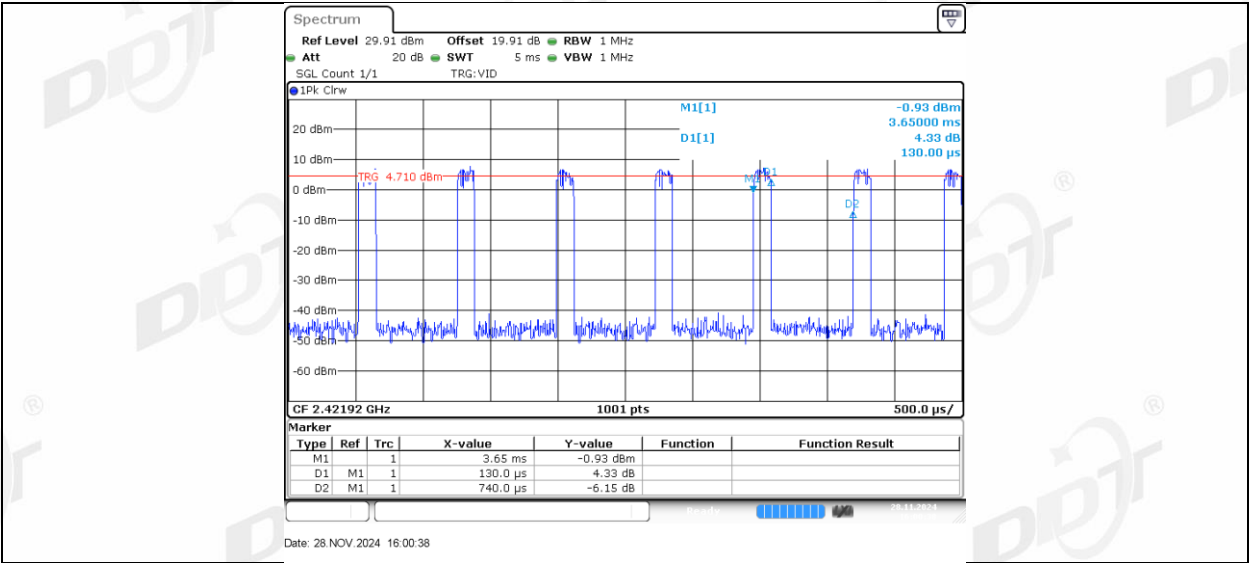


11AX40MIMO_Ant2_2437_242Tone_RU62

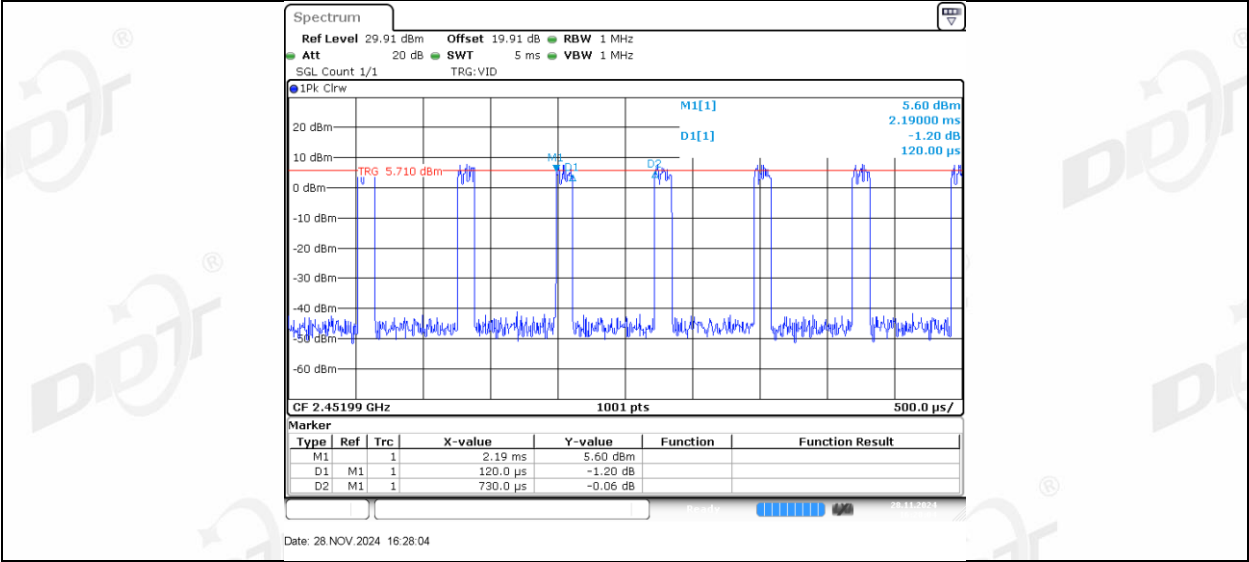


11AX40MIMO_Ant1_2452_242Tone_RU61

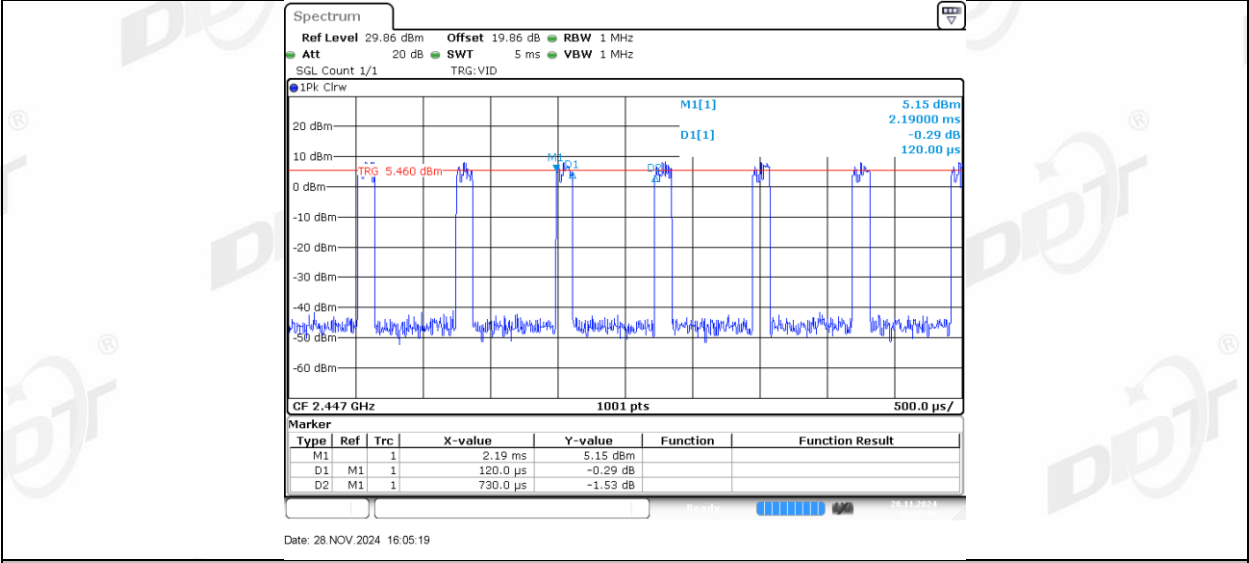


11AX40MIMO_Ant1_2452_242Tone_RU62

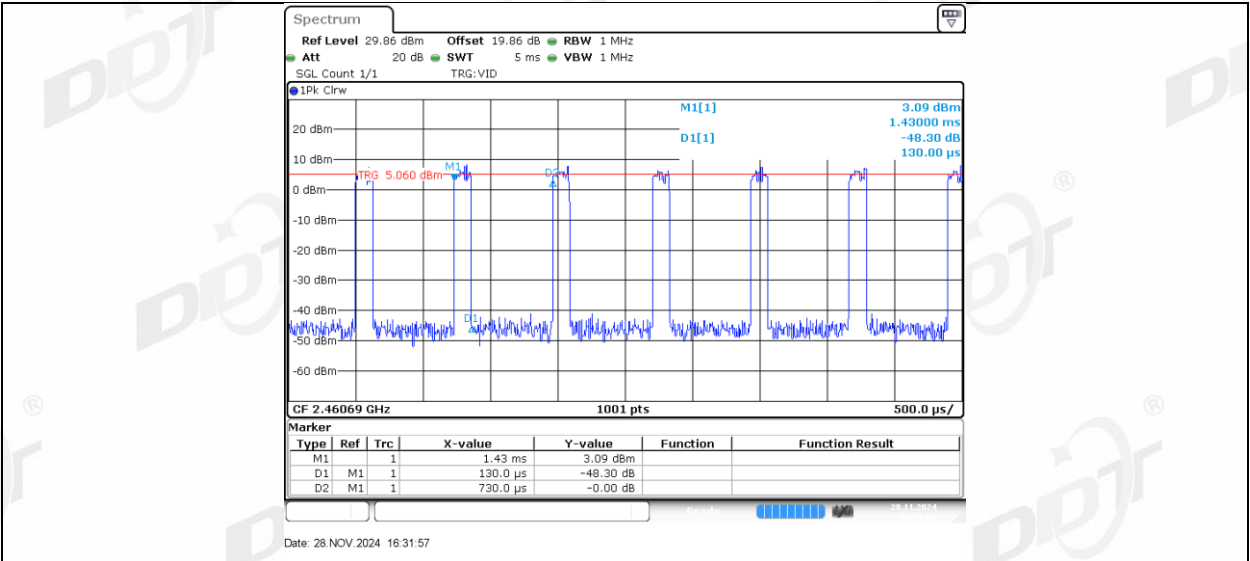

11AX40MIMO_Ant2_2452_242Tone_RU61

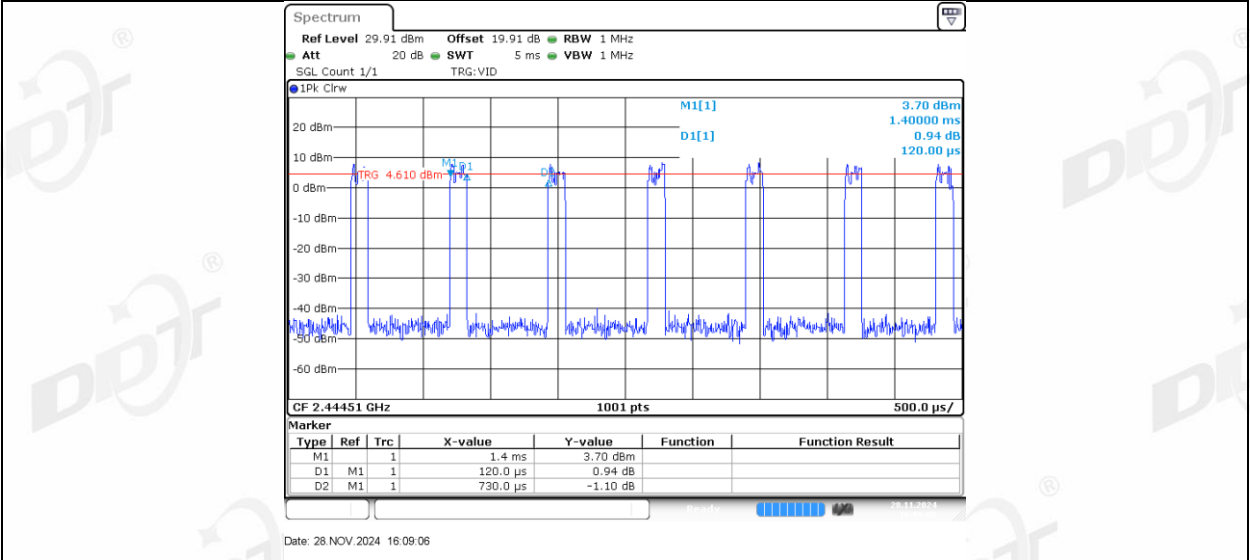

11AX40MIMO_Ant2_2452_242Tone_RU62

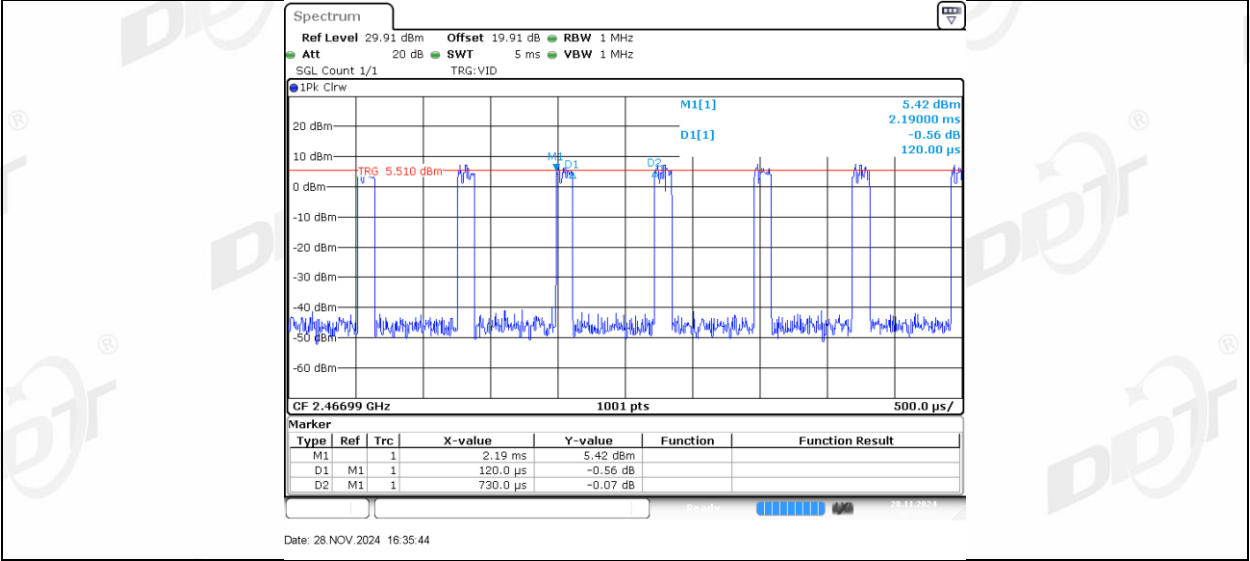

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

11.2. Result


The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


12.Radiated Emission

12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/08/25
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18

12.2. Block diagram of test setup

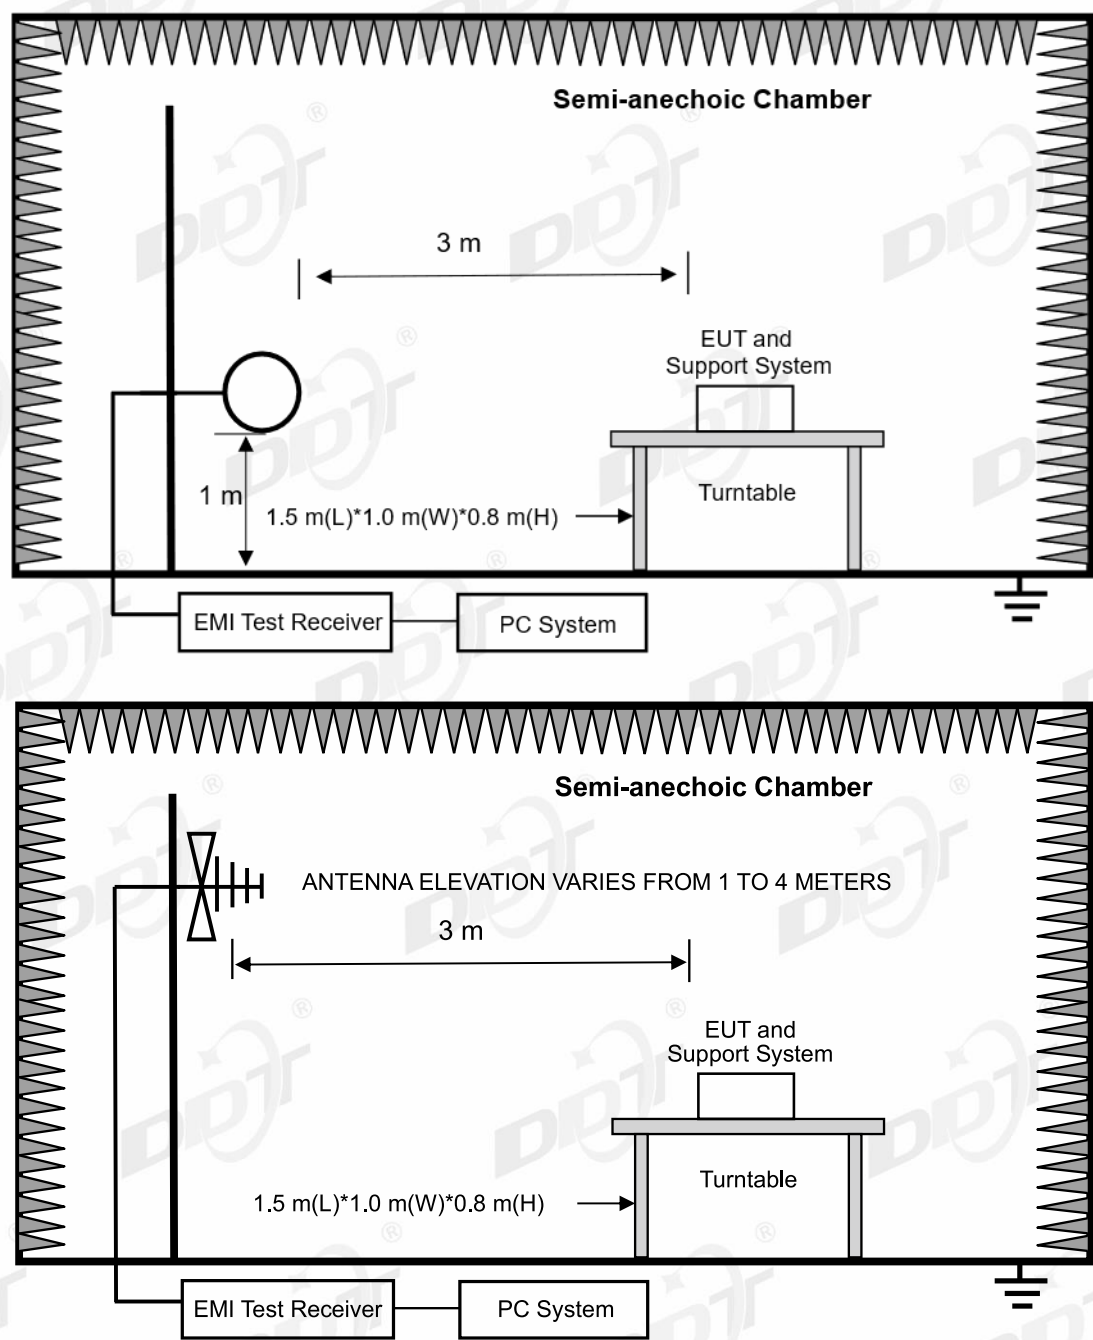

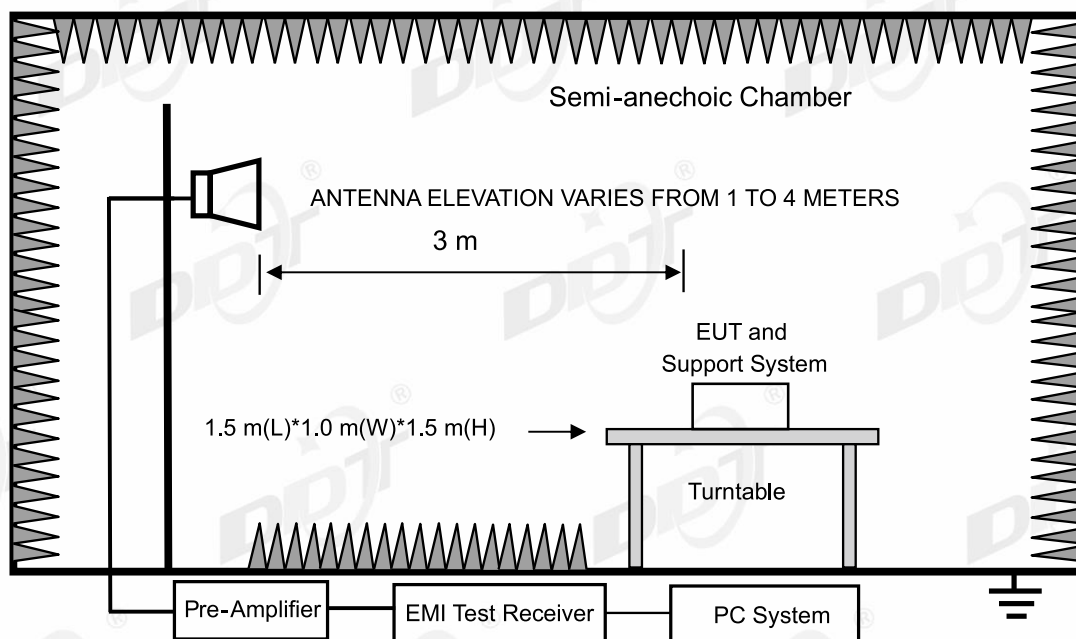

12.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dBuV/m (Peak) 54.0 dBuV/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV/m}) = \text{Limit}_{30\text{m}}(\text{dBuV/m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

12.5. Test procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

- (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

- (b) Change work frequency or channel of device if practicable.

- (c) Change modulation type of device if practicable.

- (d) Change power supply range from 85% to 115% of the rated supply voltage

- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is record and report)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with the worst mode.

(12) The worst simultaneous case and was recorded.

12.6. Test result

PASS. (See below detailed test result)

12.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-16

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\BAR 300\FCC Below 1G\20241116-075132_H

Memo:

Sample Number: S24111411-006

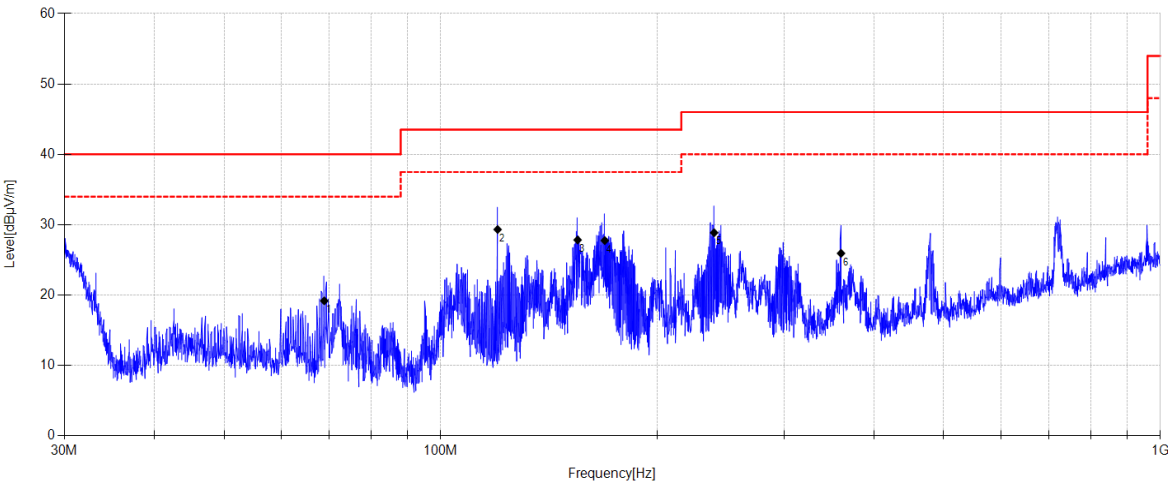

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	68.909	35.8	10.47	4.01	19.18	40.00	20.82	QP	Horizontal
2	119.991	46.11	10.00	4.33	29.32	43.50	14.18	QP	Horizontal
3	154.987	45.36	9.10	4.52	27.83	43.50	15.67	QP	Horizontal
4	169.065	45.22	9.11	4.59	27.75	43.50	15.75	QP	Horizontal
5	239.888	43.41	11.79	4.94	28.86	46.00	17.14	QP	Horizontal
6	360.016	37	14.90	5.46	25.93	46.00	20.07	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-16

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\BAR 300\FCC Below 1G\20241116-075155_V

Memo:

Sample Number: S24111411-006

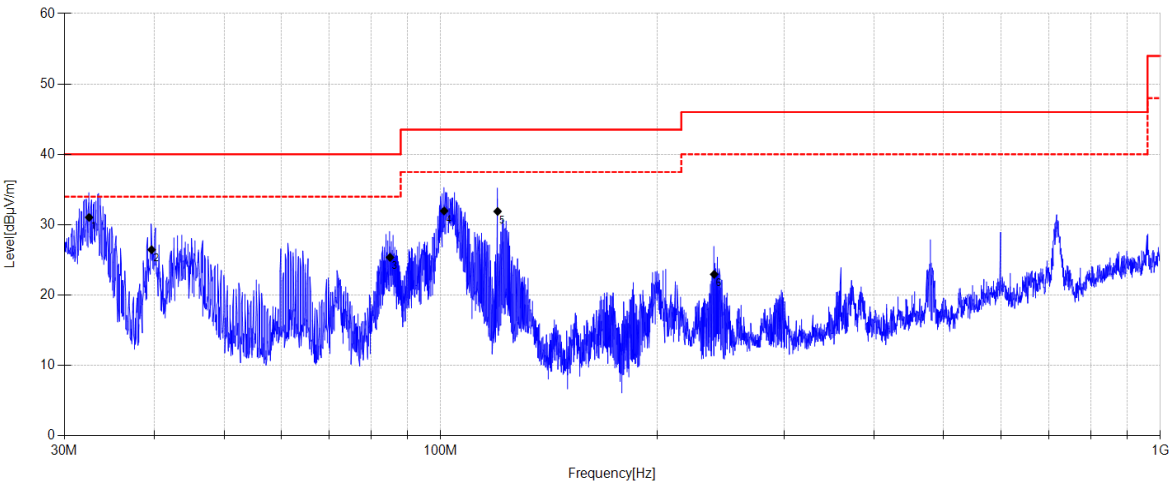

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.474	47.89	10.48	3.77	31.04	40.00	8.96	QP	Vertical
2	39.657	41.9	11.83	3.82	26.45	40.00	13.55	QP	Vertical
3	85.041	43.16	9.18	4.12	25.36	40.00	14.64	QP	Vertical
4	101.122	48.38	10.45	4.23	31.96	43.50	11.54	QP	Vertical
5	119.991	48.68	10.00	4.33	31.89	43.50	11.61	QP	Vertical
6	239.888	37.5	11.79	4.94	22.95	46.00	23.05	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

11AX20 MIMO 2412 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\FCC RE Above 1G 2.4G\44

Memo:

Sample Number: S24111411-006

Test Graph

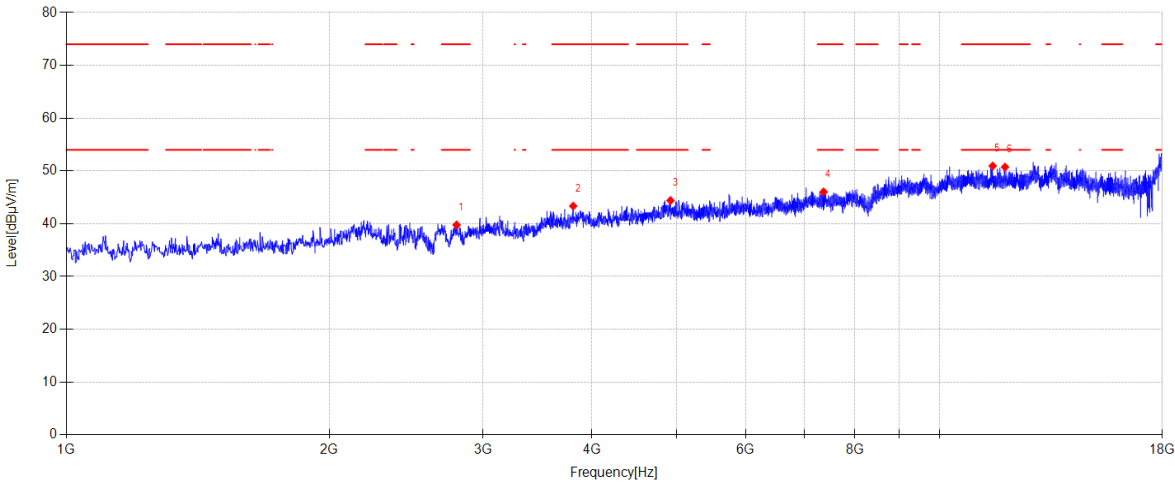

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2798.600	46.46	27.41	5.09	-39.19	39.77	74.00	34.23	PK	Horizontal
2	3806.700	47.17	30.73	5.08	-39.63	43.35	74.00	30.65	PK	Horizontal
3	4920.200	45.37	33.04	5.60	-39.61	44.40	74.00	29.60	PK	Horizontal
4	7368.200	43.30	36.76	6.64	-40.67	46.03	74.00	27.97	PK	Horizontal
5	11507.700	42.83	39.18	8.45	-39.51	50.95	74.00	23.05	PK	Horizontal
6	11888.500	43.04	38.90	8.69	-39.89	50.74	74.00	23.26	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

11AX20 MIMO 2412 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\FCC RE Above 1G 2.4G\45

Memo:

Sample Number: S24111411-006

Test Graph

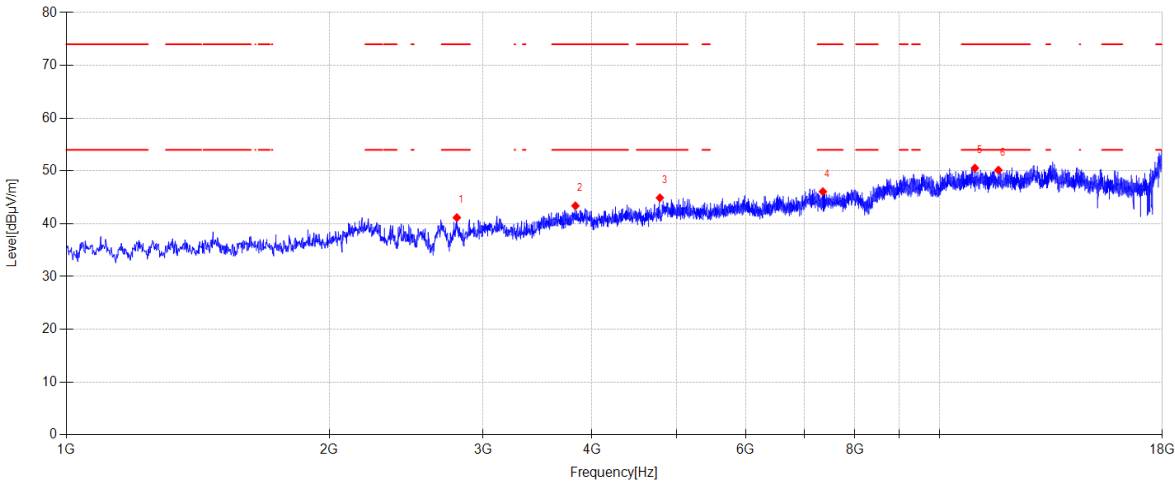

Data List										
NO .	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	2800.300	47.86	27.40	5.09	-39.19	41.16	74.00	32.84	PK	Vertical
2	3828.800	47.13	30.82	5.08	-39.64	43.39	74.00	30.61	PK	Vertical
3	4784.200	46.57	32.44	5.52	-39.62	44.91	74.00	29.09	PK	Vertical
4	7352.900	43.34	36.79	6.63	-40.68	46.08	74.00	27.92	PK	Vertical
5	10979.000	42.13	39.30	8.12	-39.01	50.54	74.00	23.46	PK	Vertical
6	11684.500	42.28	39.00	8.56	-39.68	50.16	74.00	23.84	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

11AX20 MIMO 2437 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\FCC RE Above 1G 2.4G\46

Memo:

Sample Number: S24111411-006

Test Graph

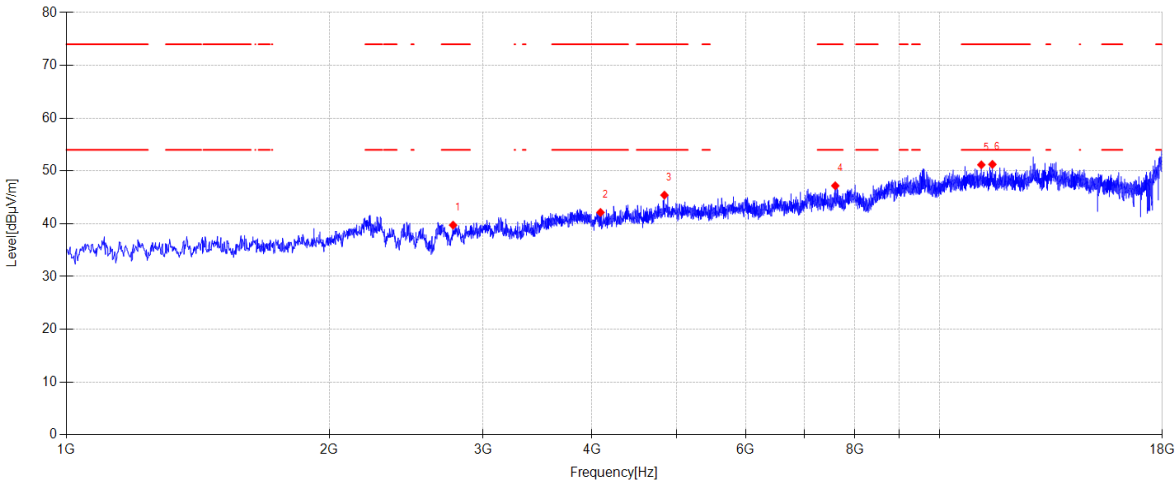

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2773.100	46.29	27.51	5.08	-39.15	39.73	74.00	34.27	PK	Horizontal
2	4090.600	45.62	31.08	5.10	-39.67	42.13	74.00	31.87	PK	Horizontal
3	4842.000	45.88	33.59	5.56	-39.61	45.42	74.00	28.58	PK	Horizontal
4	7597.700	44.39	36.50	6.76	-40.46	47.19	74.00	26.81	PK	Horizontal
5	11167.700	42.86	39.23	8.24	-39.17	51.16	74.00	22.84	PK	Horizontal
6	11499.200	43.11	39.20	8.44	-39.50	51.25	74.00	22.75	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

11AX20 MIMO 2437 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\FCC RE Above 1G 2.4G\47

Memo:

Sample Number: S24111411-006

Test Graph

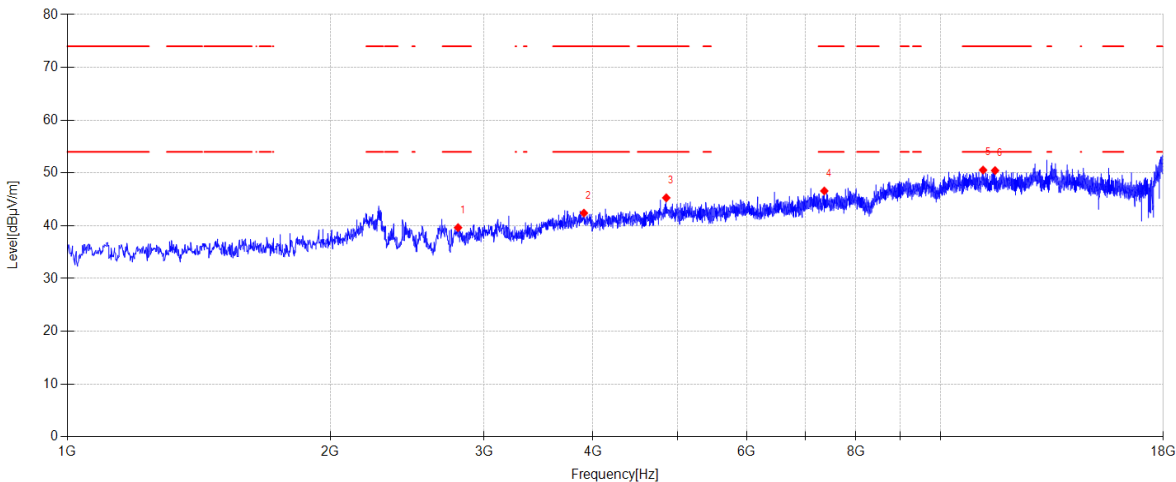

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2802.000	46.31	27.42	5.10	-39.19	39.64	74.00	34.36	PK	Vertical
2	3905.300	45.80	31.19	5.07	-39.66	42.40	74.00	31.60	PK	Vertical
3	4852.200	45.58	33.76	5.56	-39.61	45.29	74.00	28.71	PK	Vertical
4	7361.400	43.85	36.78	6.63	-40.67	46.59	74.00	27.41	PK	Vertical
5	11189.800	42.28	39.21	8.25	-39.19	50.55	74.00	23.45	PK	Vertical
6	11548.500	42.42	39.10	8.48	-39.55	50.45	74.00	23.55	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

11AX20 MIMO 2462 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\FCC RE Above 1G 2.4G\48

Memo:

Sample Number: S24111411-006

Test Graph

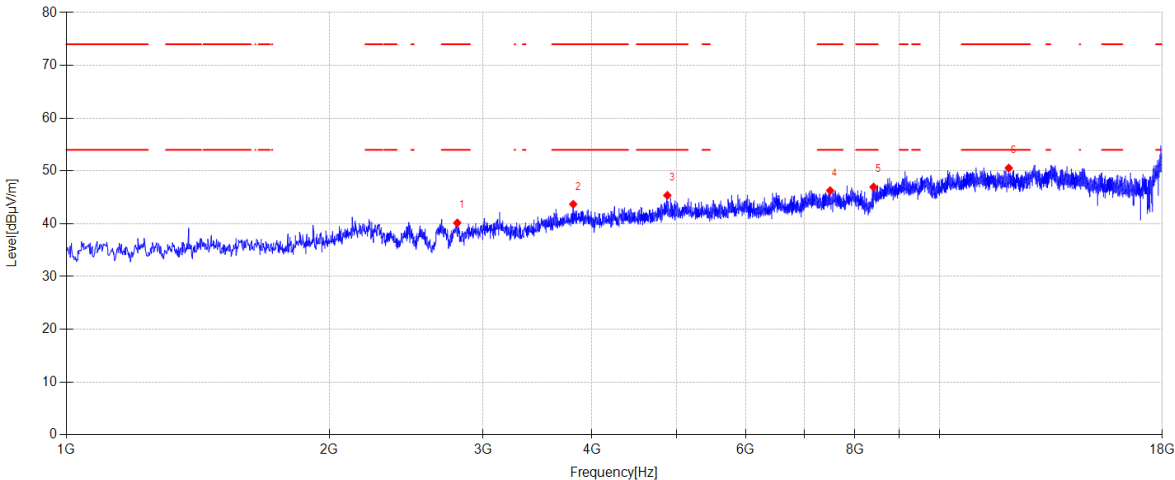

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2803.700	46.82	27.43	5.10	-39.19	40.16	74.00	33.84	PK	Horizontal
2	3806.700	47.52	30.73	5.08	-39.63	43.70	74.00	30.30	PK	Horizontal
3	4879.400	46.07	33.33	5.58	-39.61	45.37	74.00	28.63	PK	Horizontal
4	7495.700	43.61	36.51	6.70	-40.55	46.27	74.00	27.73	PK	Horizontal
5	8403.500	41.94	37.50	7.10	-39.58	46.96	74.00	27.04	PK	Horizontal
6	12005.800	42.58	39.21	8.76	-40.00	50.55	74.00	23.45	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-14

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

11AX20 MIMO 2462 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\FCC RE Above 1G 2.4G\49

Memo:

Sample Number: S24111411-006

Test Graph

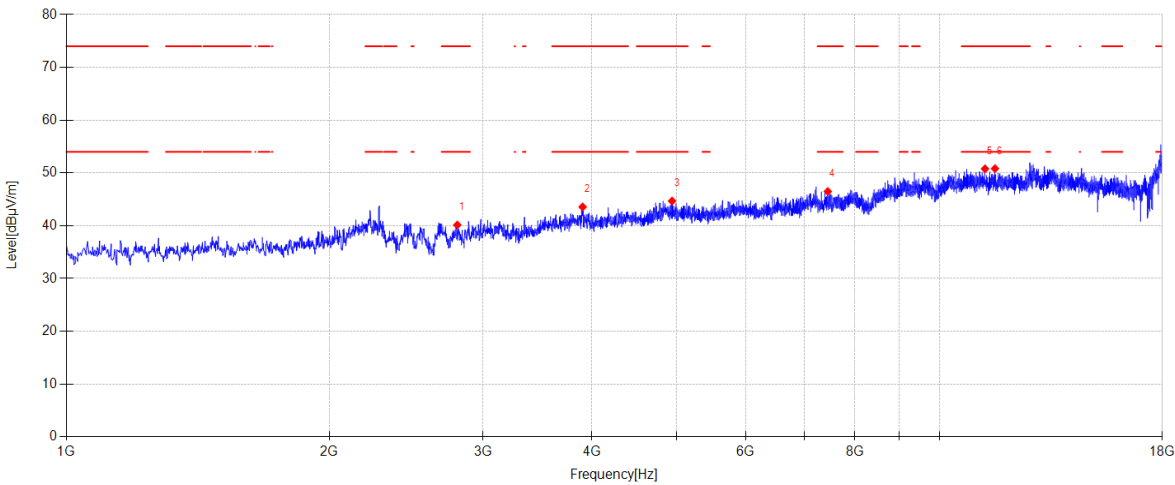

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2803.700	46.80	27.43	5.10	-39.19	40.14	74.00	33.86	PK	Vertical
2	3901.900	46.95	31.20	5.07	-39.66	43.56	74.00	30.44	PK	Vertical
3	4940.600	45.59	33.08	5.61	-39.60	44.68	74.00	29.32	PK	Vertical
4	7449.800	43.81	36.60	6.68	-40.60	46.49	74.00	27.51	PK	Vertical
5	11278.200	42.56	39.20	8.31	-39.28	50.79	74.00	23.21	PK	Vertical
6	11577.400	42.87	39.05	8.49	-39.58	50.83	74.00	23.17	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13.Band Edge Compliance

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2025/09/18
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/08/25
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31

13.2. Block diagram of test setup

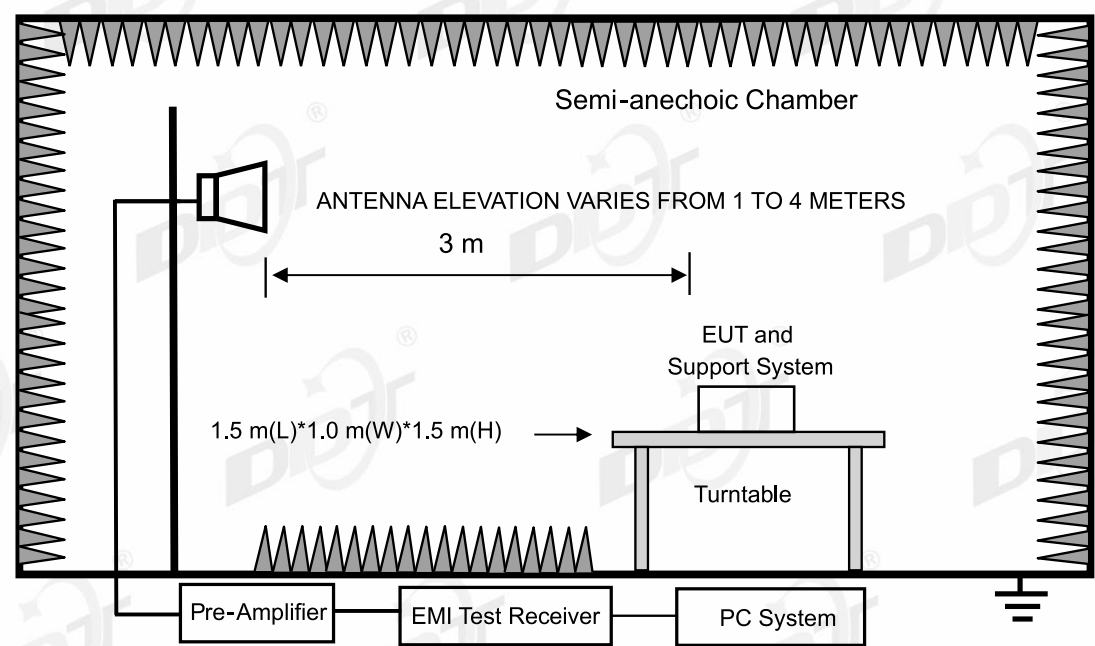

13.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

13.5. Test procedure

Same with Radiated Emission except change investigated frequency range.
Remark: All restriction band have been tested, and only the worst case is shown in report.

13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-22

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT1 11B 2412 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\23

Memo:

Sample Number: S24111411-006

Test Graph

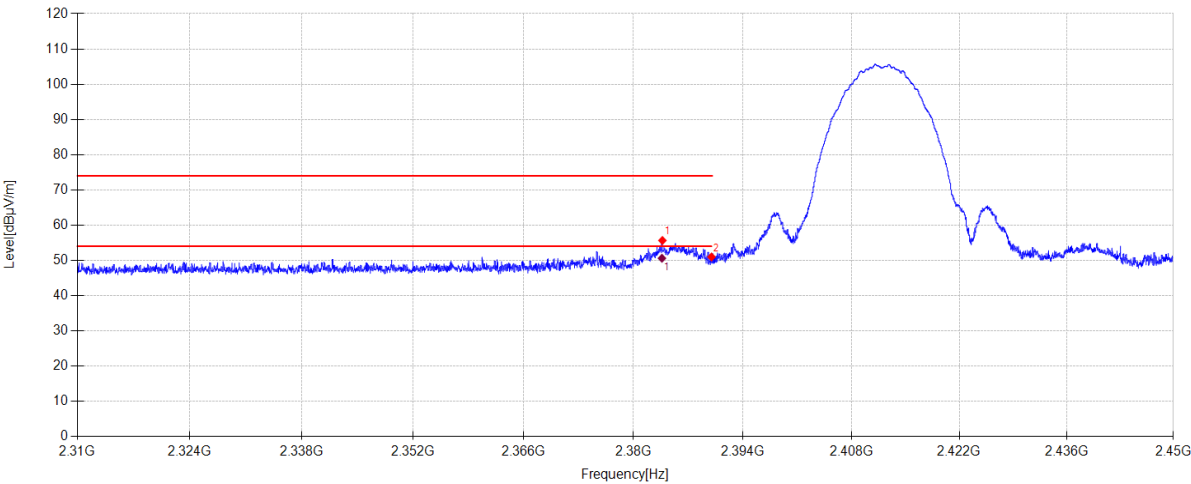

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2383.710	24.86	27.23	3.56	0.00	55.65	74.00	18.35	PK	Horizontal
2	2390.000	20.15	27.26	3.57	0.00	50.98	74.00	23.02	PK	Horizontal

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2383.650	19.82	27.23	3.56	50.61	54.00	3.39	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-22

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT1 11B 2412 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\24

Memo:

Sample Number: S24111411-006

Test Graph

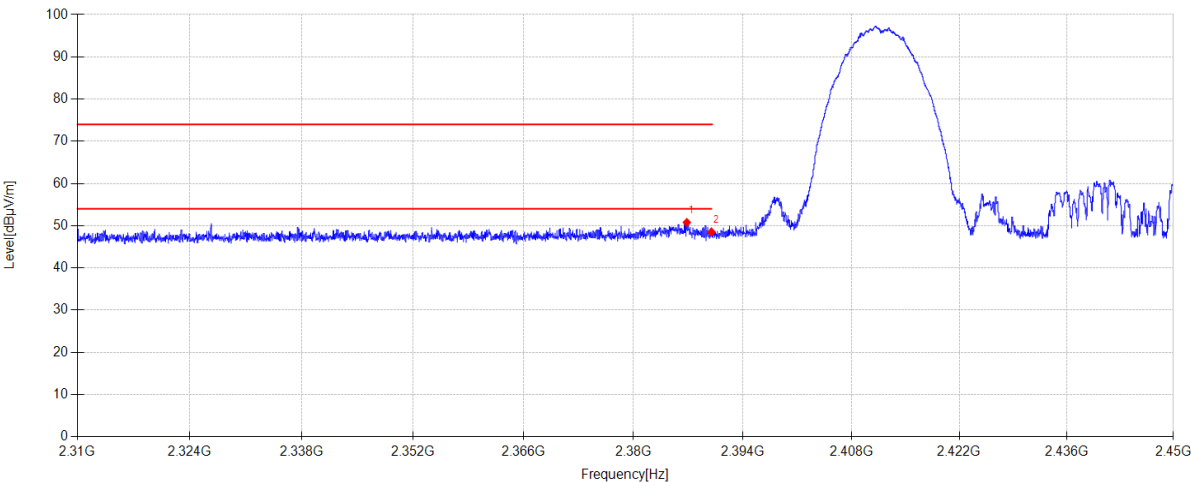

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.832	19.97	27.25	3.57	0.00	50.79	74.00	23.21	PK	Vertical
2	2390.000	17.69	27.26	3.57	0.00	48.52	74.00	25.48	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-22

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT2 11B 2412 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\25

Memo:

Sample Number: S24111411-006

Test Graph

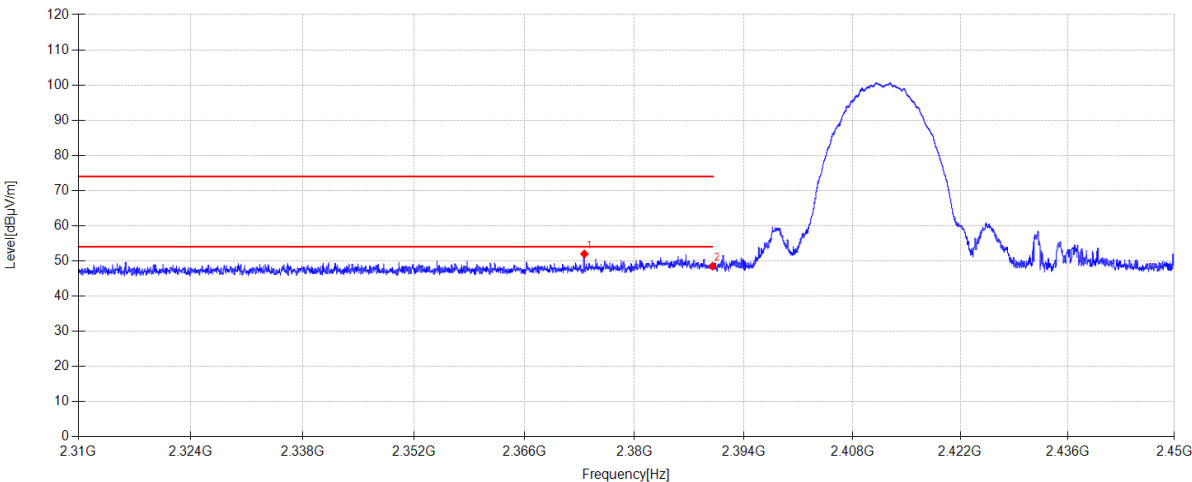

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2373.616	21.22	27.19	3.56	0.00	51.97	74.00	22.03	PK	Horizontal
2	2390.000	17.66	27.26	3.57	0.00	48.49	74.00	25.51	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-22

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT2 11B 2412 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\26

Memo:

Sample Number: S24111411-006

Test Graph

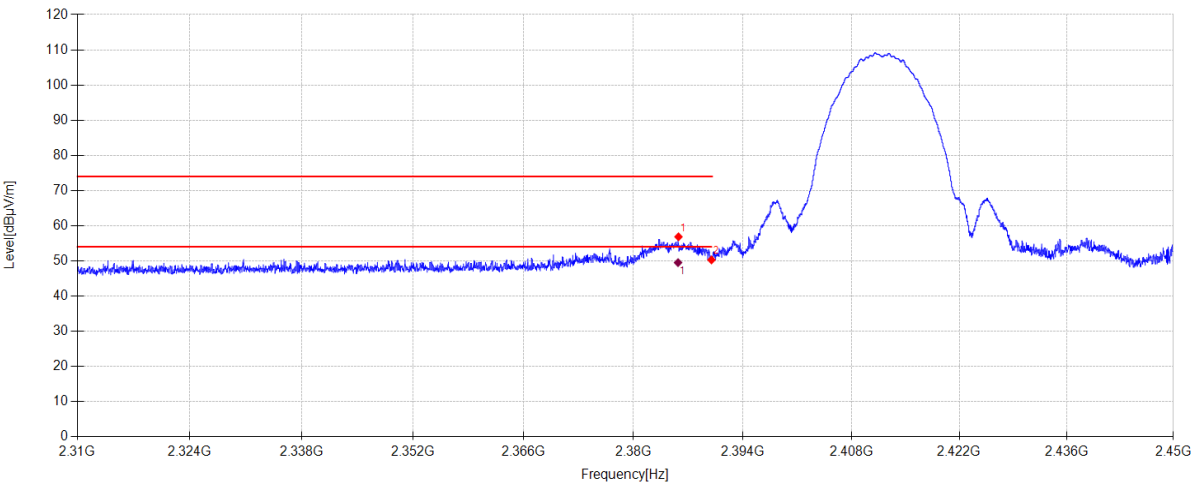

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.768	26.04	27.24	3.57	0.00	56.85	74.00	17.15	PK	Vertical
2	2390.000	19.46	27.26	3.57	0.00	50.29	74.00	23.71	PK	Vertical

Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.711	18.70	27.24	3.57	49.51	54.00	4.49	AV	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-22

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT1 11B 2462 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\27

Memo:

Sample Number: S24111411-006

Test Graph

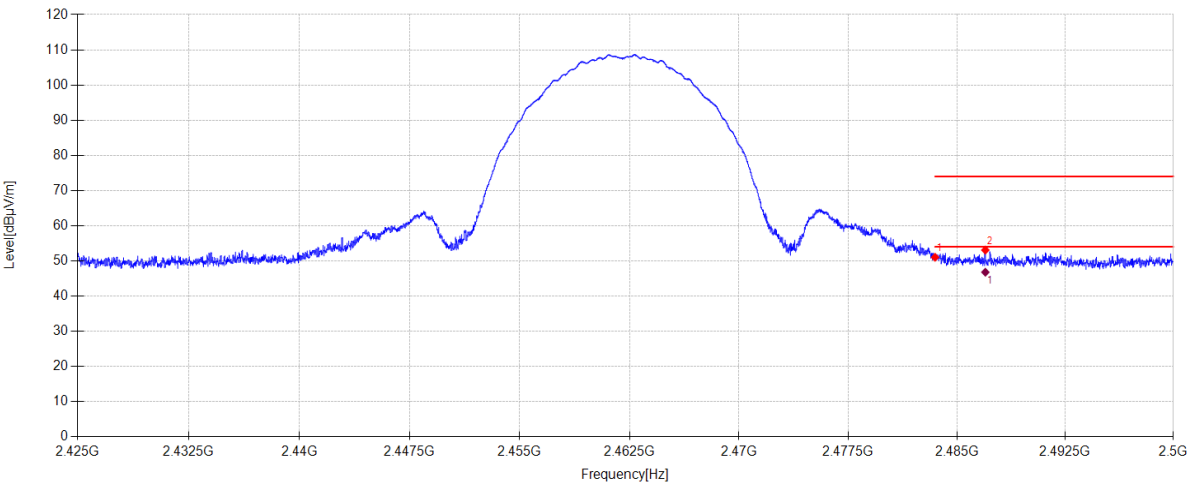

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	19.88	27.53	3.62	0.00	51.03	74.00	22.97	PK	Horizontal
2	2486.973	21.91	27.55	3.62	0.00	53.08	74.00	20.92	PK	Horizontal

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2486.973	15.62	27.55	3.62	46.79	54.00	7.21	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-22

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT1 11B 2462 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\28

Memo:

Sample Number: S24111411-006

Test Graph

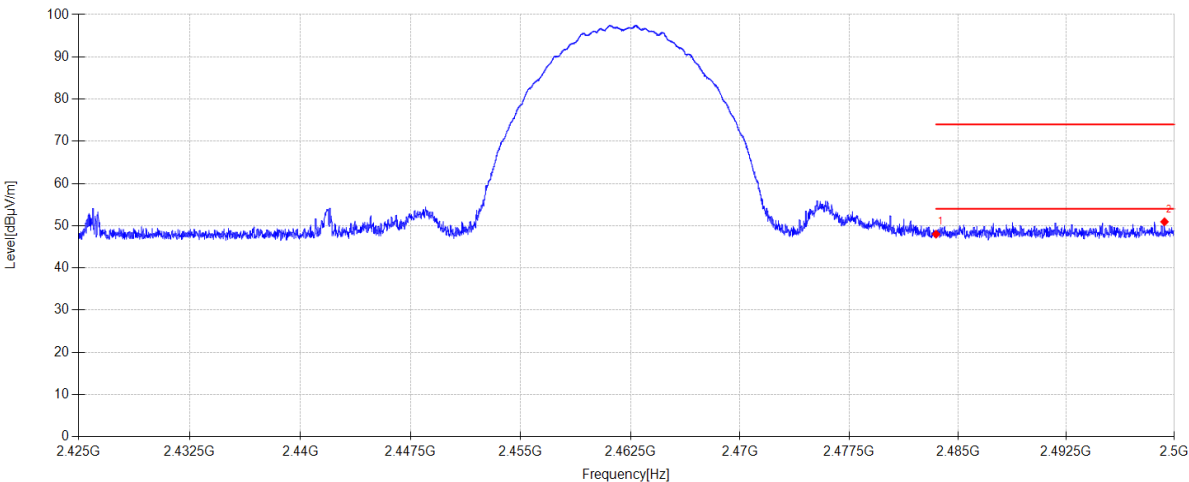

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	16.86	27.53	3.62	0.00	48.01	74.00	25.99	PK	Vertical
2	2499.318	19.70	27.60	3.63	0.00	50.93	74.00	23.07	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-22

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT2 11B 2462 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\29

Memo:

Sample Number: S24111411-006

Test Graph

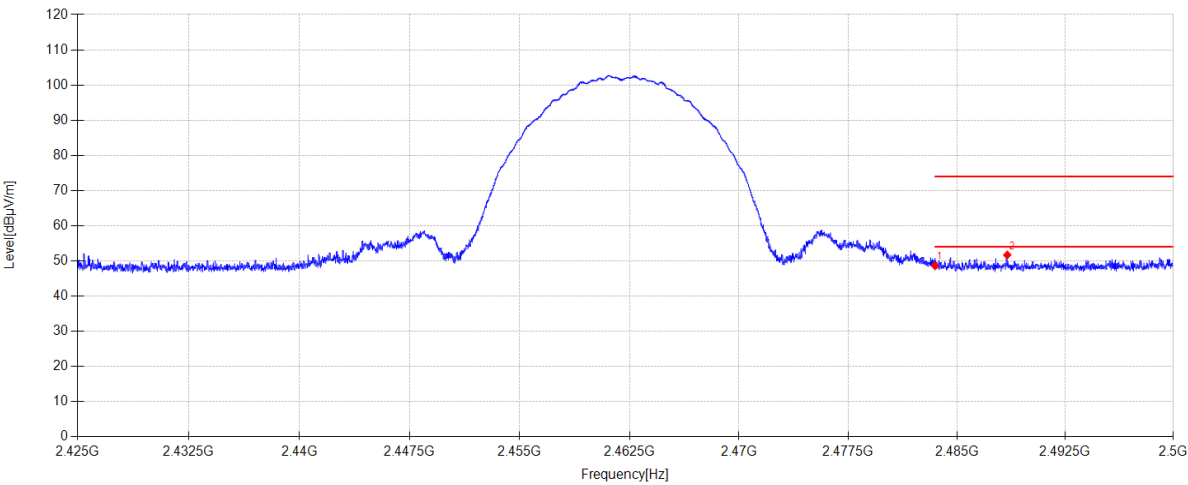

Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.47	27.53	3.62	0.00	48.62	74.00	25.38	PK	Horizontal
2	2488.488	20.52	27.55	3.62	0.00	51.69	74.00	22.31	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-11-22

Tested By:

Guoyuan Lin

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT2 11B 2462 MHz Tx mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\1122 FCC Above 1G 2.4G\30

Memo:

Sample Number: S24111411-006

Test Graph

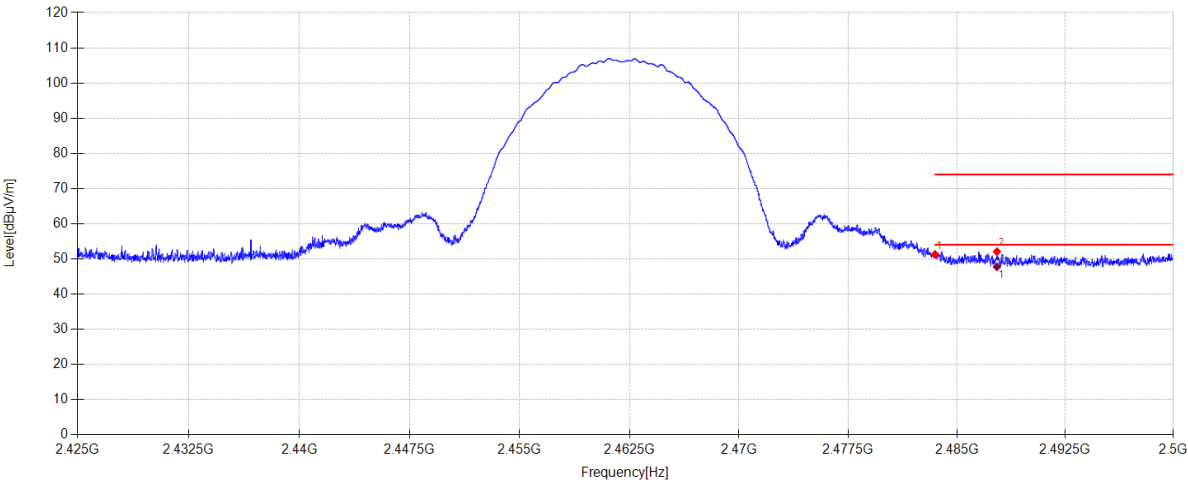

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	20.10	27.53	3.62	0.00	51.25	74.00	22.75	PK	Vertical
2	2487.775	20.91	27.55	3.62	0.00	52.08	74.00	21.92	PK	Vertical

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2487.775	16.59	27.55	3.62	47.76	54.00	6.24	AV	Vertical	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-13

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT1 11G 2412 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\19

Memo:

Sample Number: S24111411-006

Test Graph

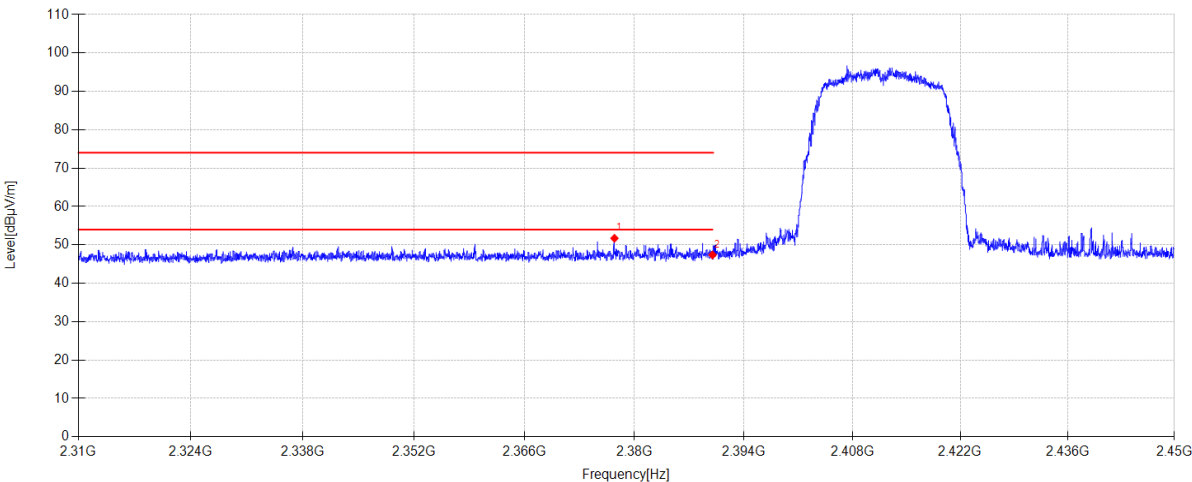

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2377.452	20.95	27.21	3.56	0.00	51.72	74.00	22.28	PK	Vertical
2	2390.000	16.57	27.26	3.57	0.00	47.40	74.00	26.60	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-13

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT1 11G 2412 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\20

Memo:

Sample Number: S24111411-006

Test Graph

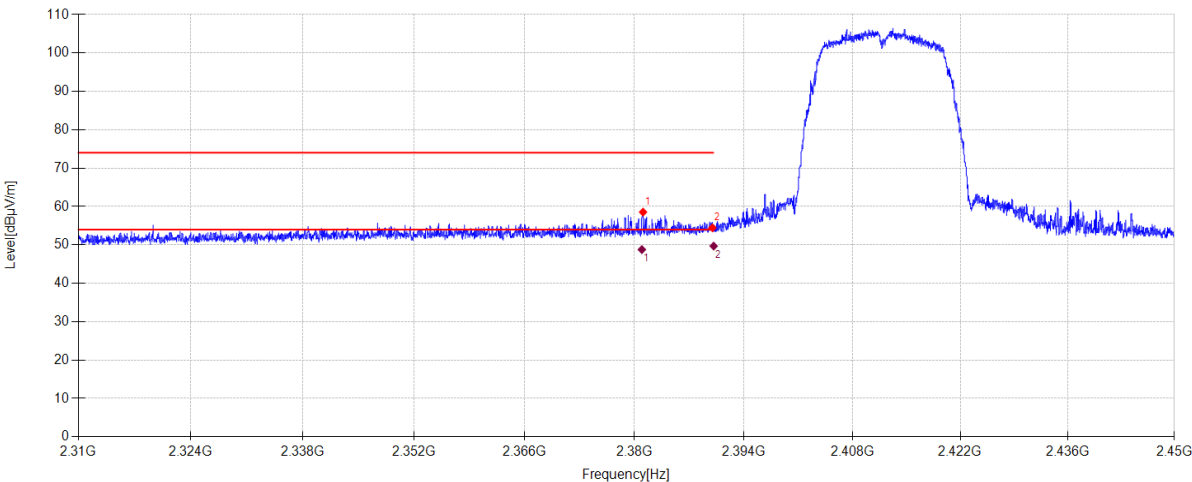

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2381.106	27.77	27.22	3.56	0.00	58.55	74.00	15.45	PK	Horizontal
2	2390.000	23.62	27.26	3.57	0.00	54.45	74.00	19.55	PK	Horizontal

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2380.957	18.00	27.22	3.56	48.78	54.00	5.22	AV	Horizontal	
2	2390.149	18.86	27.26	3.57	49.69	54	4.31	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-13

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT2 11G 2412 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\25

Memo:

Sample Number: S24111411-006

Test Graph

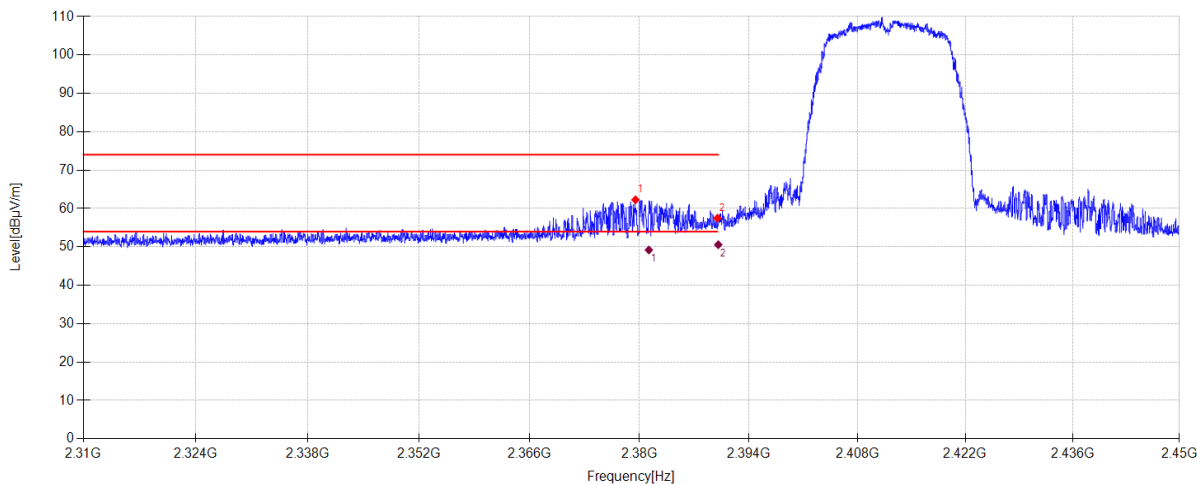

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2379.496	31.50	27.22	3.56	0.00	62.28	74.00	11.72	PK	Vertical
2	2390.000	26.66	27.26	3.57	0.00	57.49	74.00	16.51	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2381.211	18.42	27.22	3.56	49.20	54.00	4.80	AV	Vertical	
2	2390.097	19.74	27.26	3.57	50.57	54	3.43	AV	Vertical	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-13

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT2 11G 2412 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\26

Memo:

Sample Number: S24111411-006

Test Graph

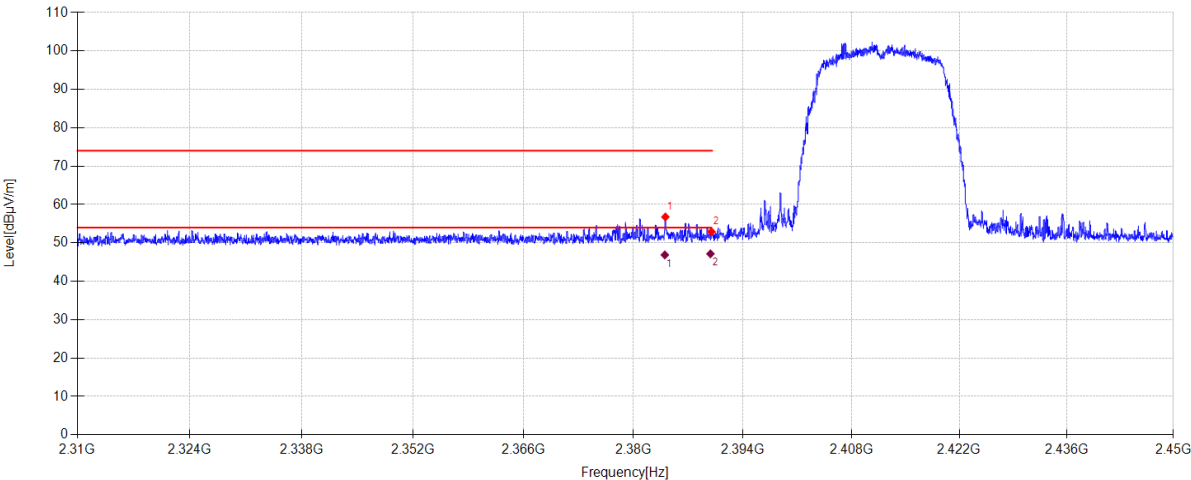

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2384.088	25.96	27.24	3.57	0.00	56.77	74.00	17.23	PK	Horizontal
2	2390.000	22.07	27.26	3.57	0.00	52.90	74.00	21.10	PK	Horizontal

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2384.014	16.06	27.24	3.57	46.87	54.00	7.13	AV	Horizontal	
2	2389.867	16.33	27.26	3.57	47.16	54.00	6.84	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-13

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT1 11G 2462 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\21

Memo:

Sample Number: S24111411-006

Test Graph

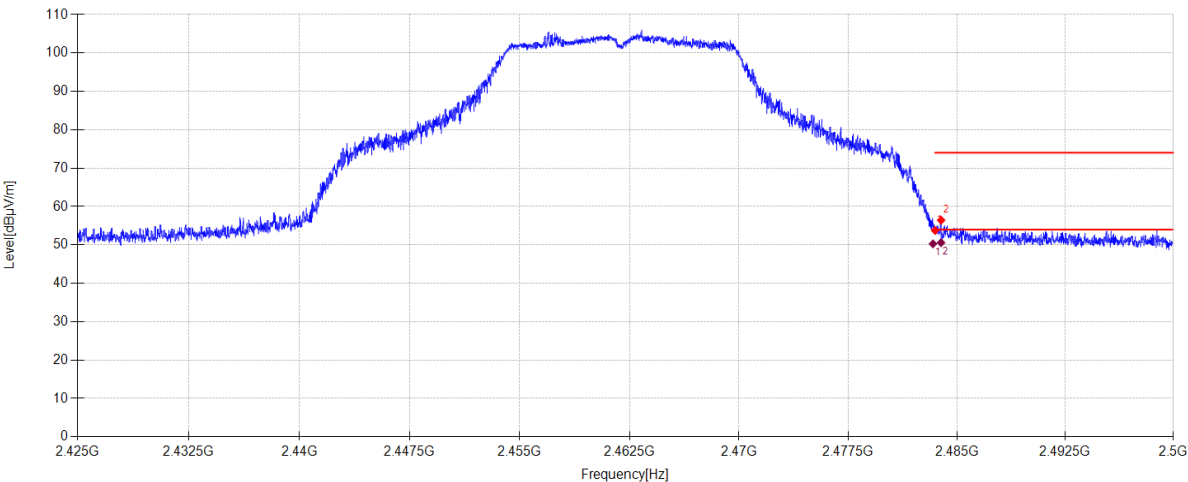

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	22.62	27.53	3.62	0.00	53.77	74.00	20.23	PK	Horizontal
2	2483.920	25.28	27.54	3.62	0.00	56.44	74.00	17.56	PK	Horizontal

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.354	19.13	27.53	3.62	50.28	54.00	3.72	AV	Horizontal	
2	2483.911	19.42	27.54	3.62	50.58	54.00	3.42	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-13

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT1 11G 2462 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\22

Memo:

Sample Number: S24111411-006

Test Graph

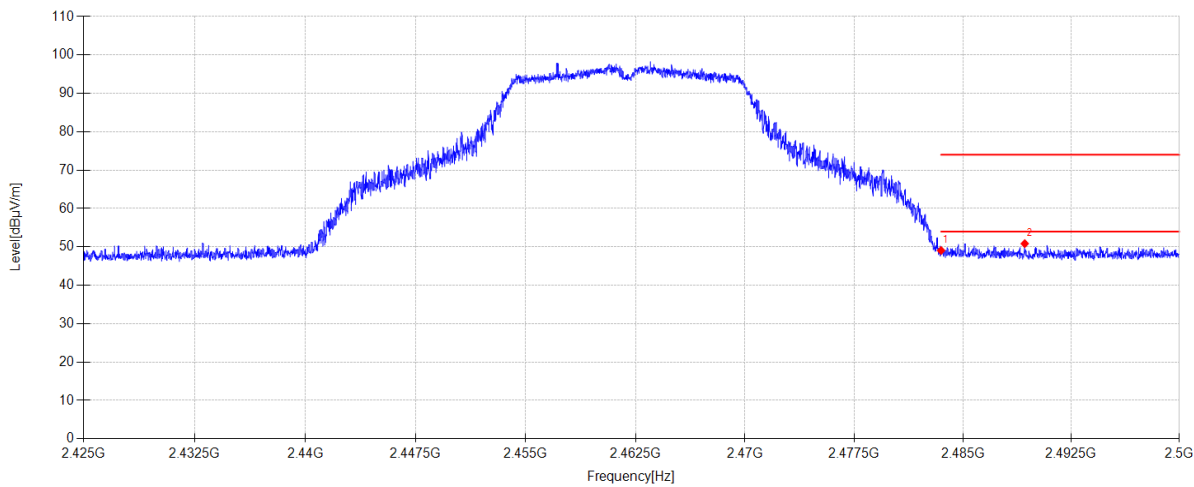

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.92	27.53	3.62	0.00	49.07	74.00	24.93	PK	Vertical
2	2489.283	19.67	27.56	3.62	0.00	50.85	74.00	23.15	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-13

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT2 11G 2462 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\23

Memo:

Sample Number: S24111411-006

Test Graph

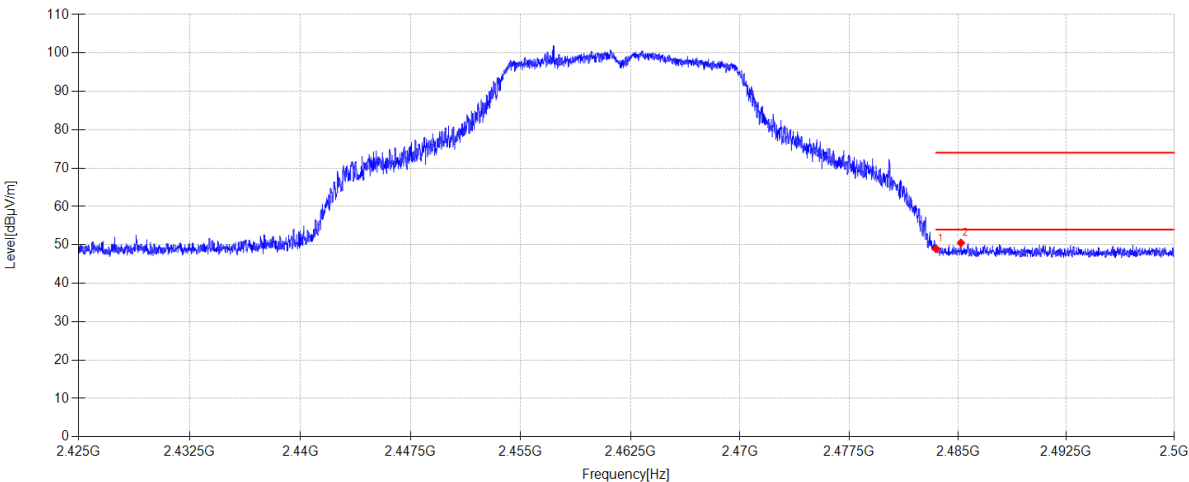

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	17.84	27.53	3.62	0.00	48.99	74.00	25.01	PK	Horizontal
2	2485.218	19.36	27.54	3.62	0.00	50.52	74.00	23.48	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-13

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

ANT2 11G 2462 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\24

Memo:

Sample Number: S24111411-006

Test Graph

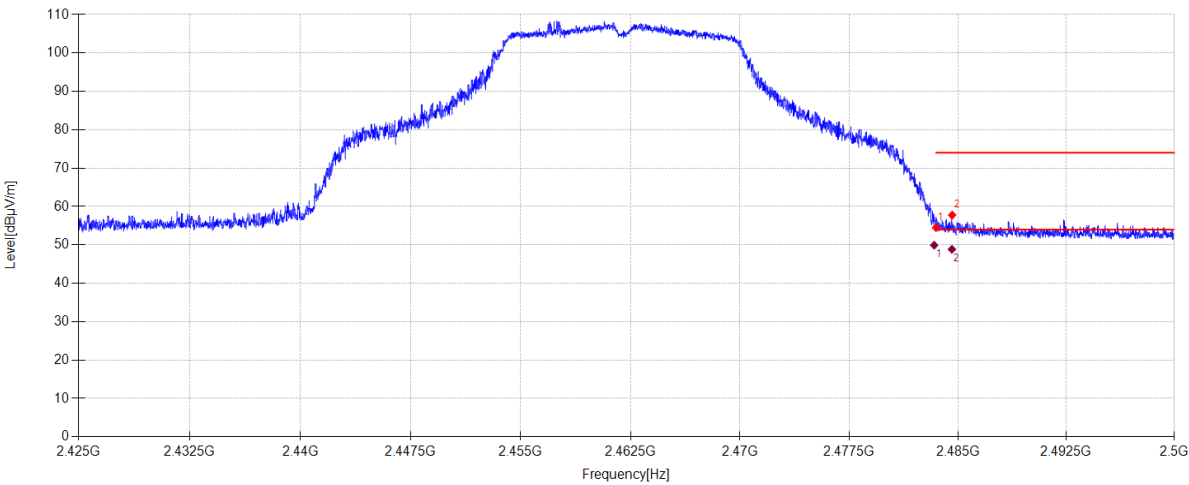

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	23.36	27.53	3.62	0.00	54.51	74.00	19.49	PK	Vertical
2	2484.610	26.61	27.54	3.62	0.00	57.77	74.00	16.23	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.370	18.77	27.53	3.62	49.92	54.00	4.08	AV	Vertical	
2	2484.597	17.69	27.54	3.62	48.85	54.00	5.15	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-10

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

11N20 MIMO 2412 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\6

Memo:

Sample Number: S24111411-006

Test Graph

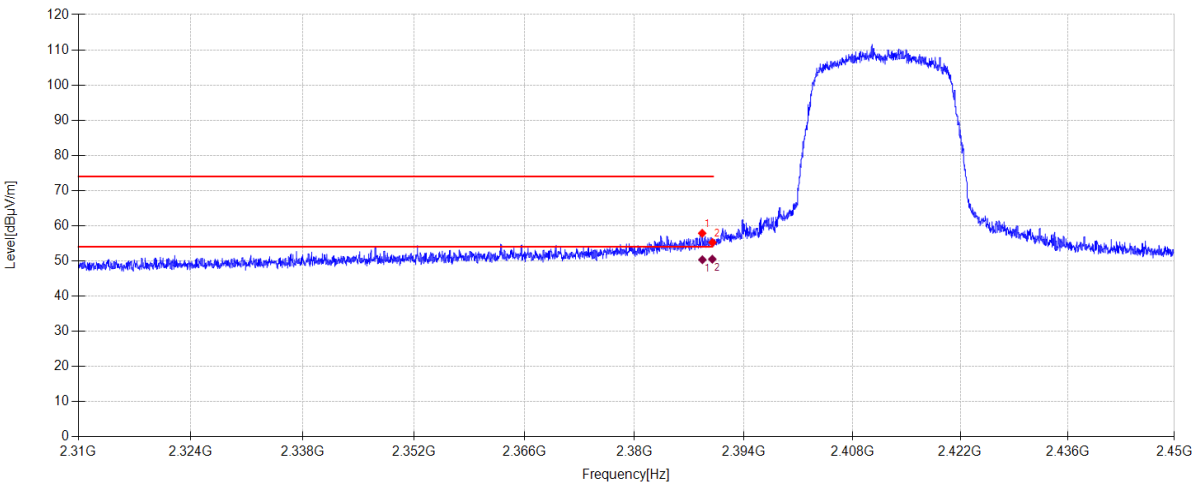

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.680	27.04	27.25	3.57	0.00	57.86	74.00	16.14	PK	Vertical
2	2390.000	24.41	27.26	3.57	0.00	55.24	74.00	18.76	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2388.703	19.51	27.25	3.57	50.33	54.00	3.67	AV	Vertical	
2	2389.972	19.66	27.26	3.57	50.49	54.00	3.51	AV	Vertical	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-10

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

11N20 MIMO 2412 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\5

Memo:

Sample Number: S24111411-006

Test Graph

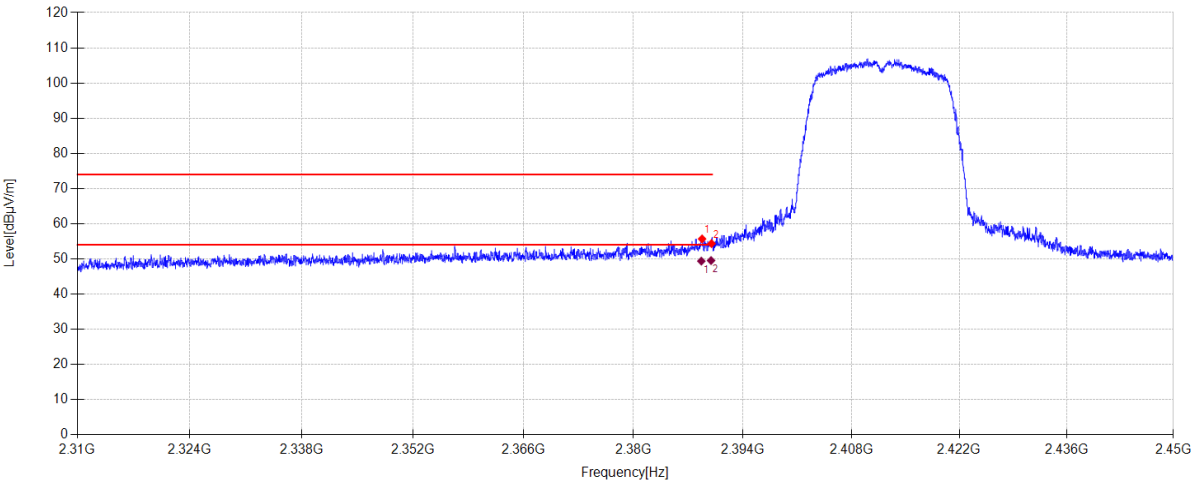

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.792	24.85	27.26	3.57	0.00	55.68	74.00	18.32	PK	Horizontal
2	2390.000	23.52	27.26	3.57	0.00	54.35	74.00	19.65	PK	Horizontal

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2388.697	18.54	27.26	3.57	49.37	54.00	4.63	AV	Horizontal	
2	2389.942	18.70	27.26	3.57	49.53	54.00	4.47	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-10

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

11N20 MIMO 2462 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\4

Memo:

Sample Number: S24111411-006

Test Graph

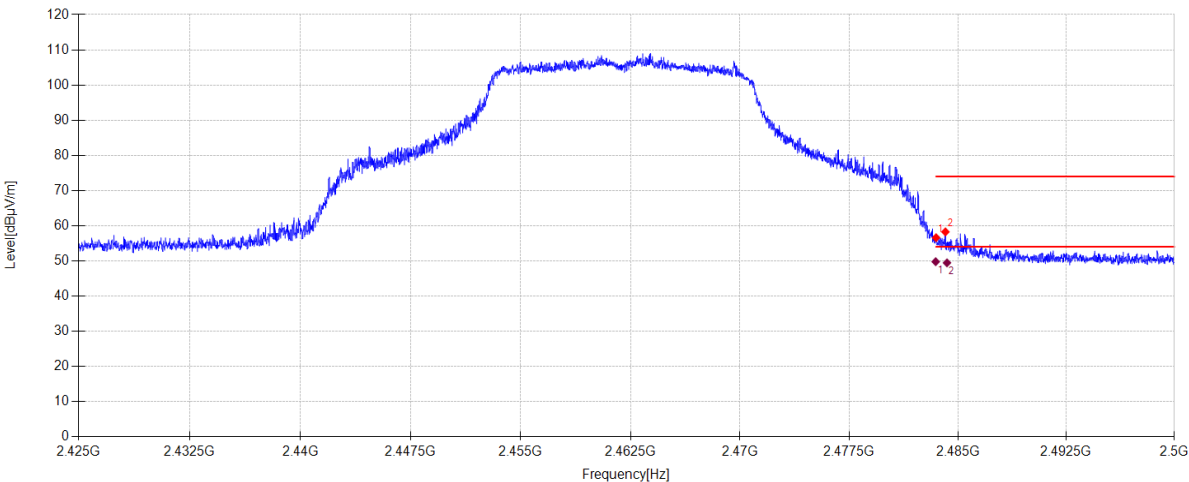

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	25.45	27.53	3.62	0.00	56.60	74.00	17.40	PK	Vertical
2	2484.145	27.09	27.54	3.62	0.00	58.25	74.00	15.75	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.473	18.63	27.53	3.62	49.78	54.00	4.22	AV	Vertical	
2	2484.255	18.29	27.54	3.62	49.45	54.00	4.55	AV	Vertical	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-10

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

11N20 MIMO 2462 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\3

Memo:

Sample Number: S24111411-006

Test Graph

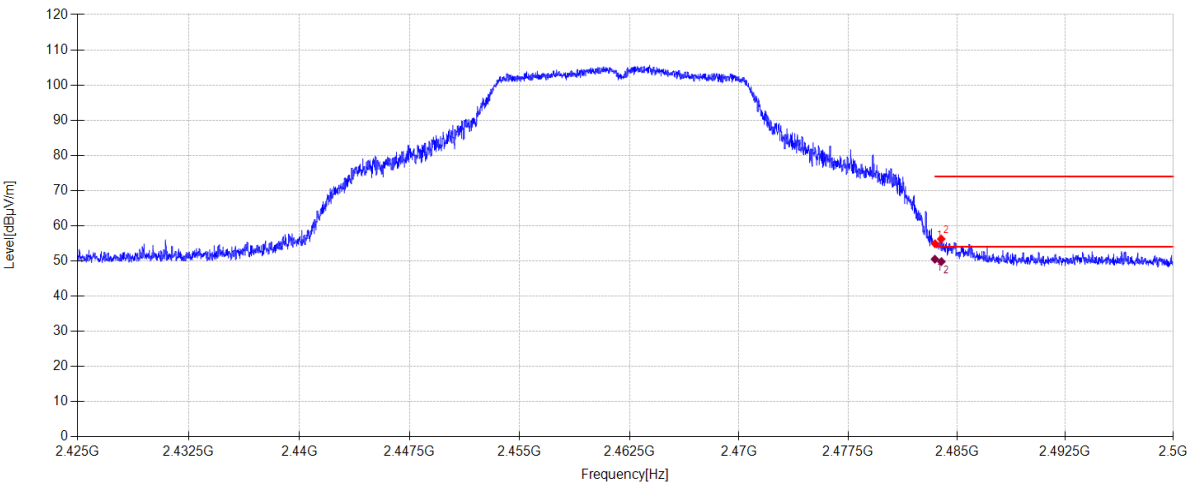

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	23.73	27.53	3.62	0.00	54.88	74.00	19.12	PK	Horizontal
2	2483.928	25.07	27.54	3.62	0.00	56.23	74.00	17.77	PK	Horizontal

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2483.489	19.33	27.53	3.62	50.48	54.00	3.52	AV	Horizontal	
2	2483.938	18.64	27.54	3.62	49.80	54.00	4.20	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-01-10

Tested By:

Lin Guoyuan

EUT:

Multi-Channel Soundbar

Model Number:

BAR 300MK2

Test Mode:

11N40 MIMO 2422 MHz TX

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\BAR 300\0110 FCC Above 1G 2.4G\8

Memo:

Sample Number: S24111411-006

Test Graph

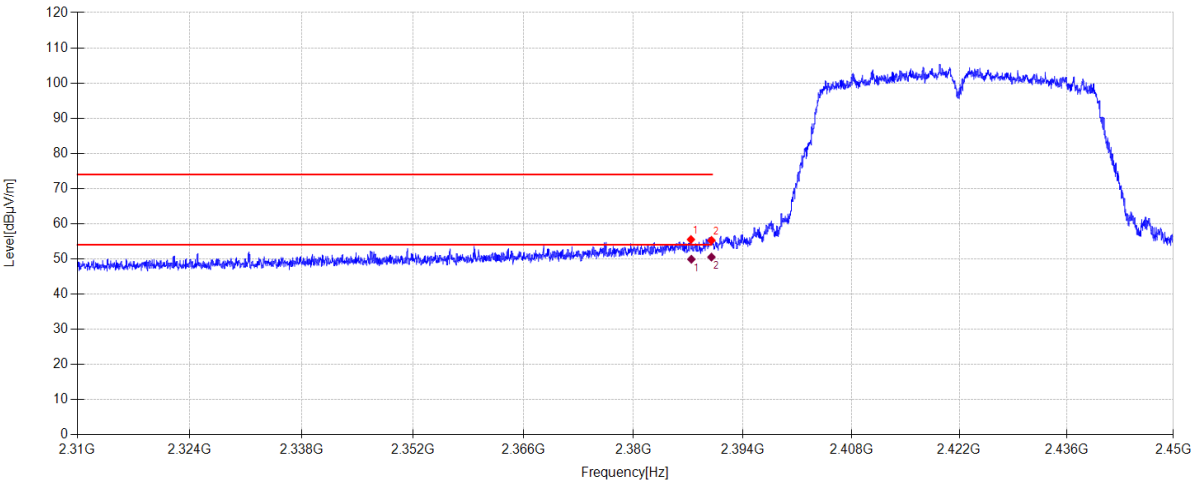

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.364	24.69	27.25	3.57	0.00	55.51	74.00	18.49	PK	Vertical
2	2390.000	24.43	27.26	3.57	0.00	55.26	74.00	18.74	PK	Vertical

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	2387.416	19.08	27.25	3.57	49.90	54.00	4.10	AV	Vertical	
2	2389.990	19.68	27.26	3.57	50.51	54.00	3.49	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.