# ENGINEERING TEST REPORT



**UHF DIGITAL TRANSCEIVER** Model No.: IC-F2100D/ DS /DT

FCC ID: AFJ400421 IC: 202D-400421

Applicant:

**ICOM** Incorporated

1-1-32, Kamiminami, Hirano-ku Osaka, Japan, 547-0003

Tested in Accordance With

**Federal Communications Commission (FCC)** 47 CFR, Parts 2, 22, 74, 80 and 90 (Subpart I) And

Industry Canada, RSS-119, Issue 12 **Land Mobile and Fixed Transmitters and Receivers** Operating in the Frequency Range 27.41-960 MHz

UltraTech's File No.: 21ICOM554\_FCC90

This Test report is Issued under the Authority of

Tri M. Luu, BASc, Vice President of Engineering UltraTech Group of Labs

Date: November 18, 2021

Report Prepared by: Santhosh Fernandez Tested by: Nimisha Desai

Issued Date: November 18, 2021 Test Dates: November 2-8, 2021

The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected. This report must not be used by the client to claim product endorsement by any agency of the US Government.

This test report shall not be reproduced, except in full, without a written approval from UltraTech.

### **UltraTech**

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4 Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com















CA0001

1309

46390-2049

AT-1945

SL2-IN-E-1119R

CA0001

### **TABLE OF CONTENTS**

<b>EXHIBI</b>	T 1.	INTRODUCTION	1
1.1.	SCOP	E	1
1.2.	RELA	TED SUBMITTAL(S)/GRANT(S)	1
1.3.		MATIVE REFERENCES	
EXHIBI'	Т 2.	PERFORMANCE ASSESSMENT	2
2.1.	CLIEN	NT INFORMATION	2
2.2.		PMENT UNDER TEST (EUT) INFORMATION	
2.3.	-	S TECHNICAL SPECIFICATIONS	
2.4.		OF EUT'S PORTS.	
2.5.		LLARY EQUIPMENT	
EXHIBI'	Т 3.	EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS	5
3.1.	CLIM	ATE TEST CONDITIONS	5
3.2.		ATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS	
EXHIBI'	Т 4	SUMMARY OF TEST RESULTS	6
4.1.		TION OF TESTS	
4.2.		ICABILITY & SUMMARY OF EMISSION TEST RESULTS	
4.3.		FICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	
4.3.1	I. L	DEVIATION OF STANDARD TEST PROCEDURES	
<b>EXHIBI</b>	Т 5.	MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	8
5.1.		PROCEDURES	
5.2.		SUREMENT UNCERTAINTIES	
5.3.		SUREMENT EQUIPMENT USED	
5.4.		NTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER	
5.5.		WER OUTPUT [§§ 2.1046, 22.565, 74.461, 80.215 & 90.205] [RSS-GEN § 4.8 & RSS-119 § 5.4]	
5.5.1		imits	
5.5.2		lethod of Measurements	
5.5.3		est Data	
		O FREQUENCY RESPONSE [§ 2.1047(A), 80.213(E) & 90.242(B)(8)]	
5.6. 5.6.1		imits	
5.6.2		lethod of Measurements	
5.6.3		est Data	
		JLATION LIMITING [§§ 2.1047 (B), 74.463, 80.213 & 90.210]	
5.7.1		imits	
		lethod of Measurements	
5.7.3		est Data	
5.8.		JPIED BANDWIDTH & EMISSION MASK [§§ 2.1049, 74.462, 80.211(F), 90.209 & 90.210] [RSS-119 §§ 5	
& 5.8]		19 § 5.5 & 5.8]	
5.8.1	_	imits	
5.8.2	2. N	lethod of Measurements	21
5.8.3	3. T	est Data	21
5.9.		ISMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [ $\S~2.1051, 2.1057,$	
		1(F)(3) & 90.210] [RSS-119 § 5.8]	
5.9.1		imits	
5.9.2		lethod of Measurements	
5.9.3	3. T	est Data	49

File #: 21ICOM554\_FCC90

5.10. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 2.1057, 22.359]	
90.210] [RSS-119, § 5.5 & 5.8]	
5.10.1. Limits	
5.10.2. Method of Measurements	
5.10.3. Test Data	
5.11. FREQUENCY STABILITY [§§ 2.1055, 22.355, 74.464, 80.209 & 90.213] [RSS-119 § 5.3]	65
5.11.1. Limits	
5.11.2. Method of Measurements	
5.11.3. Test Data	
5.12. TRANSIENT FREQUENCY BEHAVIOR [§ 90.214 & 74.462(c)] [RSS-119 § 5.9]	
5.12.1. Limits	
5.12.2. Method of Measurements	
5.12.3. Test Data	68
5.13. RECEIVER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [RSS-1	
GEN §§ 4.10 & 6]	
5.13.1. Limits	
5.13.2. Method of Measurements	
5.13.3. Test Data	
5.14. RECEIVER SPURIOUS EMISSIONS (RADIATED) [RSS-119 § 5.11, RSS-GEN §§ 4.10 & 6]	
5.14.1. Limits	
5.14.2. Method of Measurements	
5.14.3. Test Data	
5.15. RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS [ICES-003]	
5.15.2. Method of Measurements	
EXHIBIT 6. TEST SETUP AND EQUIPMENT LIST	82
6.1. CONDUCTED POWER	82
6.2. Modulation Limit	
6.3. AUDIO FREQUENCY RESPONSE	
6.4. Transient Frequency Behavior	
6.5. 99% OBW AND MASK	
6.6. Tx Conducted Emission	
6.7. RX CONDUCTED EMISSION	
6.8. TX RADIATED	
6.9. Rx Radiated	
6.10. Frequency Stability	
EXHIBIT 7. MEASUREMENT UNCERTAINTY	92
EXHIBIT 8. MEASUREMENT METHODS	
8.1. CONDUCTED POWER MEASUREMENTS	
8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD	
8.2.1. MAXIMIZING RF EMISSION LEVEL (E-FIELD)	
8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method	
8.3. FREQUENCY STABILITY	
8.4. EMISSION MASK	
8.5. SPURIOUS EMISSIONS (CONDUCTED)	
8.6. TRANSIENT FREQUENCY BEHAVIOR	99

### **EXHIBIT 1. INTRODUCTION**

### 1.1. SCOPE

Reference:	FCC Parts 2, 22, 74, 80 and 90 (Subpart I) RSS-119
Title:	Code of Federal Regulations (CFR), Title 47 Telecommunication – Parts 2, 22, 74, 80 and 90 (Subpart I) Land Mobile and Fixed Radio Transmitters and Receivers Operating in the Frequency Range 27.41-960 MHz
Purpose of Test:	To obtain FCC Certification Authorization for Radio operating in the Frequency Band 136-174 MHz and RSS-119
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with TIA/EIA Standard TIA/EIA-603-E – Land Mobile FM or PM Communications Equipment Measurement and performance Standards.

### 1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

### 1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2021	Code of Federal Regulations – Telecommunication
ANSI C63.4	2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/TIA-603-E	2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI C63.26	2015	American National Standard for Compliance Testing of Transmitters used in Licensed Radio Services
CISPR 22	2008-09 Ed 6	Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement
CISPR 16-1-1 +A1 +A2	2006 2006 2007	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods.  Part 1-2: Conducted disturbances
RSS-119, Issue 12	2015	Land Mobile and Fixed Transmitters and Receivers, 27.41-960 MHz
RSS-Gen, Issue 5	2018	General Requirements for Compliance of Radio Apparatus
ICES-003, ISSUE 7	2020	Information Technology Equipment (Including Digital Apparatus) — Limits and Methods of Measurement

### **EXHIBIT 2. PERFORMANCE ASSESSMENT**

### 2.1. CLIENT INFORMATION

APPLICANT	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Atsushi Tomiyama Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: world_support@icom.co.jp

MANUFACTURER	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Atsushi Tomiyama Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: world_support@icom.co.jp

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The applicant has supplied the following information (with the exception of the Date of Receipt).

Brand Name:	ICOM Incorporated
Product Name:	UHF DIGITAL TRANSCEIVER
Model Name or Number:	IC-F2100DT
Serial Number:	83000215
Type of Equipment:	Licensed Non-Broadcast Station Transmitter
Power Supply Requirement:	7.5 VDC nominal
Transmitting/Receiving Antenna Type:	Non-integral
Primary User Functions of EUT:	2-Way Wireless Voice & Data Communication

#### 2.3. **EUT'S TECHNICAL SPECIFICATIONS**

TRANSMITTER	
Equipment Type:	Portable
Intended Operating Environment:	Restricted to Occupational Use only
Power Supply Requirement:	7.5 VDC nominal
RF Output Power Rating:	5 Watt (High) / 1 Watt (Low)
Operating Frequency Range:	400-406 & 406.1-470 MHz
RF Output Impedance:	50 Ω
Channel Spacing:	25 kHz, 12.5 kHz, 6.25kHz
Occupied Bandwidth (99%):	10.63 kHz (for 25 kHz Analog) 5.65 kHz (for 12.5 kHz Analog) 3.69 kHz (for 6.25 kHz Digital)
Emission Designation*:	Analog:16K0F3E**, 11K0F3E, Digital: 4K00F1E, 4K00F1D

<sup>\*</sup> For an average case of commercial telephony, the Necessary Bandwidth is calculated as follows:

### For FM Voice Modulation:

Channel Spacing = 25 KHz, D = 5 KHz max, K = 1, M = 3 KHz

 $B_n = 2M + 2DK = 2(3) + 2(5)(1) = 16 \text{ KHz}$ 

Emission designation: 16K0F3E

Channel Spacing = 12.5 KHz, D = 2.5 KHz max, K = 1, M = 3 KHz

 $B_n = 2M + 2DK = 2(3) + 2(2.5)(1) = 11 KHz$ 

Emission designation: 11K0F3E

\*\*Note: The emission designation 16K0F3E with 25 KHz Channel bandwidth is only applied to the device operated in FCC Rules Part 22, 74 & 80 frequencies. The operation of 16K0F3E emission will be disabled in the firmware by the manufacturer for device that operates in FCC Rules Part 90 frequencies (Private Land Mobile) as declared by the applicant.

### 2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Terminated with
1	Speaker-Microphone Connector	1	Speaker-Microphone Jack	Speaker-Microphone
2	Antenna Connector	1	Screw type	50 Ohm Load

### 2.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1		
Description:	Speaker Microphone	
Brand Name:	Icom Inc.	
Model Name or Number:	HM-158LA	

### Page 5 FCC ID: AFJ400421

# EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C - 24°C
Humidity:	45% to 58%
Pressure:	102 kPa
Power Input Source:	7.5 VDC Nominal

### 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
Special Test Software:	N/A
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT is tested with the antenna port terminated to a 50 Ohm RF Load.

Transmitter Test Signals	
Frequency Band(s):	400-406 & 406.1- 470 MHz
Test Frequencies: (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	406.2 MHz, 450.1 MHz, 469.975 MHz
Transmitter Wanted Output Test Signals:	
Transmitter Power (measured maximum output power):	4.63 W High
Normal Test Modulation:	FM Voice/Digital
Modulating signal source:	External

### **EXHIBIT 4. SUMMARY OF TEST RESULTS**

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with ANAB File No.: AT-1945.

### 4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS

FCC/RSS Section(s)	Test Requirements	Applicability (Yes/No)
1.1307, 1.1310, 2.1091 & 2.1093 RSS-Gen, §3.4 & RSS-102	RF Exposure Limit	Yes, Refer to SAR Report
2.1046, 22.565, 74.461, 80.215 & 90.205 RSS-119 § 5.4	RF Power Output	Yes
2.1047(a), 80.213(e) & 90.242(b)(8)	Audio Frequency Response	Not applicable to new standard. However, tests are conducted under FCC's recommendation.
2.1047(b), 74.463, 80.213 & 90.210	Modulation Limiting	Yes
2.1049, 74.462, 80.211(f), 90.209 & 90.210 RSS-Gen § 6.7 RSS-119 § 5.5	Emission Limitation & Emission Mask	Yes
2.1051, 2.1057, 80.211(f)(3), & 90.210 RSS-119 § 5.8	Emission Limits - Spurious Emissions at Antenna Terminal	Yes
2.1053, 2.1057, 22.359, 80.211(f)(3), & 90.210 RSS-119 § 5.8	Emission Limits - Field Strength of Spurious Emissions	Yes
2.1055, 22.355, 74.464 80.209 & 90.213 RSS-119 § 5.3	Frequency Stability	Yes
74.462(c) & 90.214 RSS-119 § 5.9	Transient Frequency Behavior	Yes
ICES-003	Radiated Emissions from Digital Apparatus – Radiated	Yes
RSS-Gen § 8.8 ICES-003	Power Line Conducted Emissions from Digital Apparatus	N/A- battery operated.
RSS-119 § 5.11 RSS-Gen, Section 7.3	Receiver Spurious Emissions (Radiated)	Yes
RSS-119 § 5.11 RSS-Gen, Section 7.4	Receiver Spurious Emissions (Antenna Conducted)	Yes

File #: 21ICOM554\_FCC90 November 18, 2021

Page 7 FCC ID: AFJ400421

UHF TRANSCEIVER, Model No.: IC-F2100D/DT/DS, by ICOM Incorporated has also been tested and found to comply with FCC Part 15, Subpart B - Radio Receivers and Digital Devices. The engineering test report has been documented and kept on file and is available upon request.

### 4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

### 4.3.1. DEVIATION OF STANDARD TEST PROCEDURES

None

### **MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EXHIBIT 5. EMISSIONS**

#### **TEST PROCEDURES** 5.1.

This section contains test results only. Details of test methods and procedures can be found in EXHIBIT 8 of this report.

#### 5.2. **MEASUREMENT UNCERTAINTIES**

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) - Guide to the Expression of Uncertainty in Measurement. Refer to Exhibit 7 for Measurement Uncertainties.

#### 5.3. **MEASUREMENT EQUIPMENT USED**

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1.

#### 5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

The essential function of the EUT is to communicate to and from radios over RF link.

# 5.5. RF POWER OUTPUT [§§ 2.1046, 22.565, 74.461, 80.215 & 90.205] [RSS-Gen § 4.8 & RSS-119 § 5.4]

### 5.5.1. Limits

Please refer to FCC 47 CFR 90.205, 74.461, 80.215 & 22.565 for specification details. RSS-119 The output power shall be within + 1.0 dB of the manufacturer's rated power and RSS 119 Section 5.4 table 2

### 5.5.2. Method of Measurements

Refer to Section 8.1 (Conducted) of this report for measurement details

### 5.5.3. Test Data

### 5.5.4.

Frequencies	Power Rating	Measured Power
MHz	Watts	Watts
406.200	5.0	4.44
450.100	5.0	4.50
469.975	5.0	4.63
406.200	1.0	0.83
450.100	1.0	0.85
469.975	1.0	0.86
406.200	2.0	2.02
450.100	2.0	2.00
469.975	2.0	1.99

### 5.6. AUDIO FREQUENCY RESPONSE [§ 2.1047(a), 80.213(e) & 90.242(b)(8)]

### 5.6.1. Limits

§ 2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

§ 90.242(b)(8): Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 kHz Attenuation
5 –20 KHz	83log <sub>10</sub> (f/5) dB where f is in kHz
20 – 30 KHz	50dB

80.213(e) Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 kHz Attenuation
3 –20 KHz	60 log <sub>10</sub> (f/3) dB where f is in kHz
20 – 30 KHz	50dB

### 5.6.2. Method of Measurements


The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

FCC ID: AFJ400421

### 5.6.3.1. 12.5 KHz Channel Spacing, F3E

Remark: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 kHz in comparison with the recommended audio filter attenuation.

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 1 KHz (dB)	Recommended Attenuation (dB)
0.1	-37.08	-45.96	-8.9	-46.3	
0.3	-37.08	-14.49	22.6	-14.8	
0.4	-37.08	-9.31	27.8	-9.7	
0.6	-37.08	-4.29	32.8	-4.6	
0.8	-37.08	-1.44	35.6	-1.8	
1.0	-37.08	0.36	37.4	0.0	
1.5	-37.08	2.85	39.9	2.5	
2.0	-37.08	3.17	40.2	2.8	
2.5	-37.08	1.85	38.9	1.5	
3.0	-37.08	-2.02	35.1	-2.4	0
3.5	-37.08	-9.69	27.4	-10.0	-4
4.0	-37.08	-30.02	7.1	-30.4	-7
4.5	-37.08	-48.23	-11.2	-48.6	-11
5.0	-37.08	-65.00	-27.9	-65.4	-13
6.0	-37.08	-70.00	-32.9	-70.4	-18
7.0	-37.08	-70.00	-32.9	-70.4	-22
8.0	-37.08	-70.00	-32.9	-70.4	-26
9.0	-37.08	-70.00	-32.9	-70.4	-29
10.0	-37.08	-70.00	-32.9	-70.4	-31
12.0	-37.08	-70.00	-32.9	-70.4	-36
14.0	-37.08	-70.00	-32.9	-70.4	-40
16.0	-37.08	-70.00	-32.9	-70.4	-44
18.0	-37.08	-70.00	-32.9	-70.4	-47
20.0	-37.08	-70.00	-32.9	-70.4	-50
25.0	-37.08	-70.00	-32.9	-70.4	-50
30.0	-37.08	-70.00	-32.9	-70.4	-50
35.0	-37.08	-70.00	-32.9	-70.4	-50
40.0	-37.08	-70.00	-32.9	-70.4	-50
45.0	-37.08	-70.00	-32.9	-70.4	-50
50.0	-37.08	-70.00	-32.9	-70.4	-50

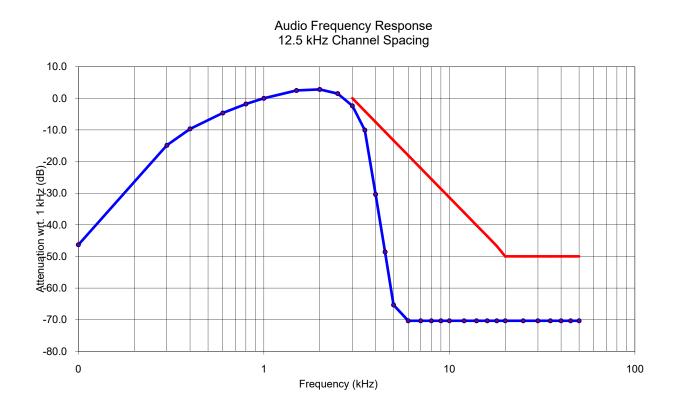


FCC ID: AFJ400421

### 5.6.3.2. 25 KHz Channel Spacing, F3E

**Note**: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 1 KHz (dB)	Recommended Attenuation (dB)
0.1	-36.48	-38.56	-2.1	-45.0	
0.3	-36.48	-8.18	28.3	-14.7	
0.4	-36.48	-3.15	33.3	-9.6	
0.6	-36.48	1.73	38.2	-4.8	
0.8	-36.48	4.55	41.0	-1.9	
1.0	-36.48	6.48	43.0	0.0	
1.5	-36.48	8.59	45.1	2.1	
2.0	-36.48	9.07	45.5	2.6	
2.5	-36.48	8.33	44.8	1.9	
3.0	-36.48	5.34	41.8	-1.1	0
3.5	-36.48	-0.91	35.6	-7.4	-4
4.0	-36.48	-18.04	18.4	-24.5	-7
4.5	-36.48	-36.14	0.3	-42.6	-11
5.0	-36.48	-65.00	-28.5	-71.5	-13
6.0	-36.48	-70.00	-33.5	-76.5	-18
7.0	-36.48	-70.00	-33.5	-76.5	-22
8.0	-36.48	-70.00	-33.5	-76.5	-26
9.0	-36.48	-70.00	-33.5	-76.5	-29
10.0	-36.48	-70.00	-33.5	-76.5	-31
12.0	-36.48	-70.00	-33.5	-76.5	-36
14.0	-36.48	-70.00	-33.5	-76.5	-40
16.0	-36.48	-70.00	-33.5	-76.5	-44
18.0	-36.48	-70.00	-33.5	-76.5	-47
20.0	-36.48	-70.00	-33.5	-76.5	-50
25.0	-36.48	-70.00	-33.5	-76.5	-50
30.0	-36.48	-70.00	-33.5	-76.5	-50
35.0	-36.48	-70.00	-33.5	-76.5	-50
40.0	-36.48	-70.00	-33.5	-76.5	-50
45.0	-36.48	-70.00	-33.5	-76.5	-50
50.0	-36.48	-70.00	-33.5	-76.5	-50

# Audio Frequency Response 25 kHz Channel Spacing

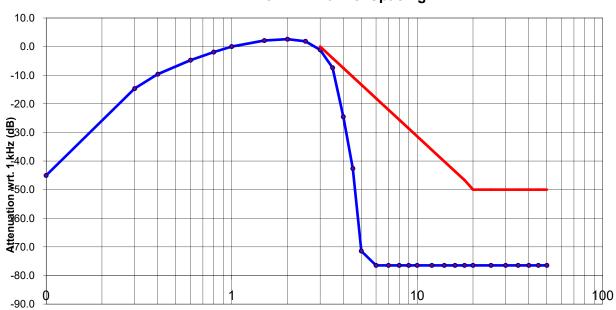

Frequency (kHz)

### 5.7. MODULATION LIMITING [§§ 2.1047 (b), 74.463, 80.213 & 90.210]

### 5.7.1. Limits

§ **2.1047(b):** Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

Recommended frequency deviation characteristics are given below:

- 1.25 kHz for 6.25 kHz Channel Spacing System
- 2.5 KHz for 12.5 kHz Channel Spacing System

### 5.7.2. Method of Measurements

**For Audio Transmitter**: The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

**For Data Transmitter with Maximum Frequency Deviation set by Factory**: The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

Page 15

FCC ID: AFJ400421

### 5.7.3. Test Data

### 5.7.3.1. Voice Modulation Limiting for 12.5 KHz Channel Spacing Operation

Test Frequency: 406.2MHz High Power

Modulating Signal Level	Peak Frequency Deviation (kHz) at the following modulating frequency:					Maximum Limit
(mVrms)	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	(kHz)
2	0.06	0.13	0.25	0.40	0.06	2.5
4	0.05	0.22	0.45	0.73	0.05	2.5
6	0.05	0.32	0.66	1.03	0.05	2.5
8	0.05	0.42	0.88	1.11	0.05	2.5
10	0.05	0.50	1.07	1.13	0.06	2.5
15	0.07	0.74	1.58	1.15	0.06	2.5
20	0.07	0.99	1.90	1.16	0.06	2.5
25	0.07	1.23	2.03	1.17	0.06	2.5
30	0.08	1.48	2.05	1.17	0.06	2.5
35	0.08	1.72	2.06	1.18	0.05	2.5
40	0.08	1.82	2.07	1.18	0.06	2.5
45	0.09	1.87	2.07	1.19	0.06	2.5
50	0.09	1.83	2.07	1.19	0.05	2.5
60	0.09	2.15	2.07	1.19	0.05	2.5
70	0.10	2.18	2.07	1.19	0.06	2.5
80	0.11	2.19	2.07	1.19	0.05	2.5
90	0.12	2.19	2.08	1.19	0.06	2.5
100	0.13	2.19	2.08	1.19	0.06	2.5

CH7 6.25KHz Digital deviation 1.554 KHz

File #: 21ICOM554\_FCC90 November 18, 2021

Page 16

FCC ID: AFJ400421

FCC ID: AFJ400421

Voice Signal Input Level	= STD MOD Level + 16 dB = 14.0mV + 16 dB = 38.92 dB(mVrms) = 88.33 mVrms	
Modulation Frequency (kHz)	Peak Deviation (kHz)	Maximum Limit (kHz)
0.1	0.13	2.5
0.2	0.64	2.5
0.4	2.19	2.5
0.6	2.20	2.5
0.8	2.20	2.5
1.0	2.10	2.5
1.2	2.14	2.5
1.4	2.12	2.5
1.6	2.12	2.5
1.8	2.14	2.5
2.0	2.16	2.5
2.5	1.85	2.5
3.0	1.18	2.5
3.5	0.52	2.5
4.0	0.09	2.5
4.5	0.06	2.5
5.0	0.05	2.5
6.0	0.05	2.5
7.0	0.05	2.5
8.0	0.05	2.5
9.0	0.05	2.5

0.05

10.0

2.5

### 5.7.3.2. Voice Modulation Limiting for 25 KHz Channel Spacing Operation

Test Frequency: 406.2MHz High Power

Modulating Signal Level		Peak Frequency Deviation (kHz) at the following modulating frequency:				
(mVrms)	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	(kHz)
2	0.06	0.24	0.46	0.86	0.06	5.0
4	0.06	0.40	0.85	1.67	0.05	5.0
6	0.06	0.59	1.26	2.41	0.05	5.0
8	0.07	0.79	1.68	2.56	0.05	5.0
10	0.07	0.95	2.05	2.63	0.05	5.0
15	0.07	1.43	3.06	2.64	0.05	5.0
20	0.08	1.91	3.64	2.70	0.05	5.0
25	0.08	2.39	4.00	2.70	0.05	5.0
30	0.09	2.85	4.05	2.71	0.06	5.0
35	0.10	3.33	4.07	2.73	0.06	5.0
40	0.10	3.53	4.08	2.77	0.06	5.0
45	0.11	3.66	4.08	2.78	0.06	5.0
50	0.12	3.60	4.10	2.78	0.06	5.0
60	0.14	4.23	4.10	2.78	0.06	5.0
70	0.16	4.29	4.13	2.79	0.06	5.0
80	0.18	4.32	4.14	2.79	0.06	5.0
90	0.19	4.32	4.14	2.79	0.06	5.0
100	0.20	4.32	4.14	2.79	0.06	5.0

FCC ID: AFJ400421

Voice Signal Input Level	= STD MOD Level + 16 dB = 15.0 mV + 16 dB = 39.52 dB(mVrms) = 94.64 mVrms	
Modulation Frequency (KHz)	Peak Deviation (KHz)	Maximum Limit (KHz)
0.1	0.21	5.0
0.2	1.32	5.0
0.4	4.32	5.0
0.6	4.30	5.0
0.8	4.33	5.0
1.0	4.14	5.0
1.2	4.13	5.0
1.4	4.08	5.0
1.6	4.07	5.0
1.8	4.13	5.0
2.0	4.20	5.0
2.5	3.88	5.0
3.0	2.75	5.0
3.5	1.36	5.0
4.0	0.23	5.0

0.07

0.05

0.05

0.05

0.06

0.06

0.06

5.0

5.0

5.0

5.0

5.0

5.0

5.0

4.5

5.0

6.0

7.0

8.0

9.0

10.0

File #: 21ICOM554\_FCC90 November 18, 2021

## 5.8. OCCUPIED BANDWIDTH & EMISSION MASK [§§ 2.1049, 74.462, 80.211(f), 90.209 & 90.210] [RSS-119 §§ 5.5 & 5.8] [RSS-119 § 5.5 & 5.8]

### 5.8.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

Frequency Range (MHz)	Maximum Authorized BW (KHz)	Channel Spacing (KHz)	Recommended Frequency Deviation (KHz)	FCC Applicable Mask
156-174, 421-512	11.25	12.5	2.5	Mask D – Voice & Data
156-174, 421-512	20	25	5.0	Mask B – Voice & Data
150-174, 421-512	6	6.25	1.25	Mask E – Voice & Data

### §80.211(f) Emission limitations

Emissions shall be attenuated below the mean output power of the transmitter as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus 10log<sub>10</sub> (mean power in watts) dB.

**RSS119** 

Table 3 - Channel Spacing, Authorized Bandwidths and Applicable Spectrum Masks

Frequency Band (MHz)	Related SRSP for Channelling Plan and e.r.p.	Channel Spacing (kHz)	Authorized Bandwidth (kHz)	Spectrum Masks with Audio Filter	Spectrum Masks Without Audio Filter
27.41-28.0 and 29.7-50.0	N/A	20	20	В	С
72-76	N/A	20	20	В	С
138-144; 148-149.9 and 150.05-174	SRSP-500	30	20	В	С
		15	11.25	D	D
		7.4	6	Е	Е
217-218 and 219-220	N/A	12.5	11.25	D or I	D or J
220-222	SRSP-512	5	4	F	F
406.1-430 and 450-470	SRSP-501	25	20	В	C (G, Note 1)
		12.5	11.25	D	D
		6.25	6	E	E

Paging transmitters in the bands 406.1-430 MHz or 450-470 MHz are to use Mask G.

FCC ID: AFJ400421

### 5.8.2. Method of Measurements

Refer to Section 8.4 of this report for measurement details.

### 5.8.3. Test Data

### 5.8.3.1. 99% Occupied Bandwidth

Frequency (MHz)	Channel Spacing (kHz)	Modulation	Measured 99% OBW at Maximum Freq. Deviation (kHz)	Maximum Authorized Bandwidth (kHz)
406.2	25.0	FM with 2.5 KHz sine wave signal	10.625	20.0
450.1	25.0	FM with 2.5 KHz sine wave signal	10.625	20.0
469.975	25.0	FM with 2.5 KHz sine wave signal	10.625	20.0
406.2	12.5	FM with 2.5 KHz sine wave signal	5.649	11.25
450.1	12.5	FM with 2.5 KHz sine wave signal	5.649	11.25
469.975	12.5	FM with 2.5 KHz sine wave signal	5.649	11.25
406.2	6.25	Digital Voice & Data	3.56	6.0
450.1	6.25	Digital Voice & Data	3.69	6.0
469.975	6.25	Digital Voice & Data	3.53	6.0

<sup>\*</sup> Not for FCC Part 90 Certification, refer to cover letter for details.


Note: 99% Occupied Bandwidth measurements were done using the built-in auto function of the analyzer.

Refer to the following test data plots for details.

### **Analog**

### 5.8.3.2. Configuration: 99% OBW, 406.2MHz, 12.5 KHz, Analog, High power


OBW: 5.649 KHz

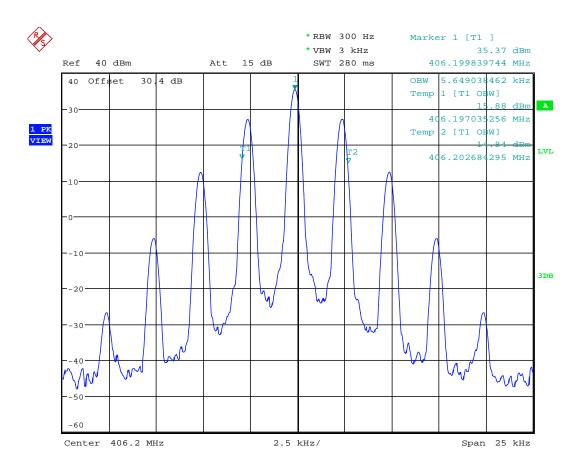

Date: 2.NOV.2021 14:09:39

### 5.8.3.3. Configuration: 99% OBW, 450.1MHz, 12.5 KHz, Analog, High power


OBW: 5.649 KHz

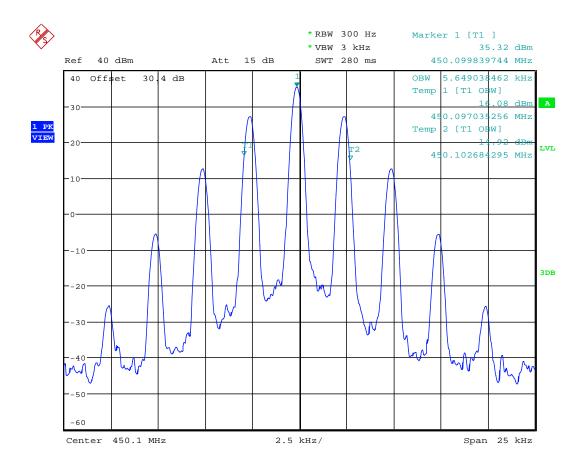

Date: 2.NOV.2021 14:10:38

### 5.8.3.4. Configuration: 99% OBW, 469.975MHz, 12.5 KHz, Analog, High power


OBW: 5.649 KHz

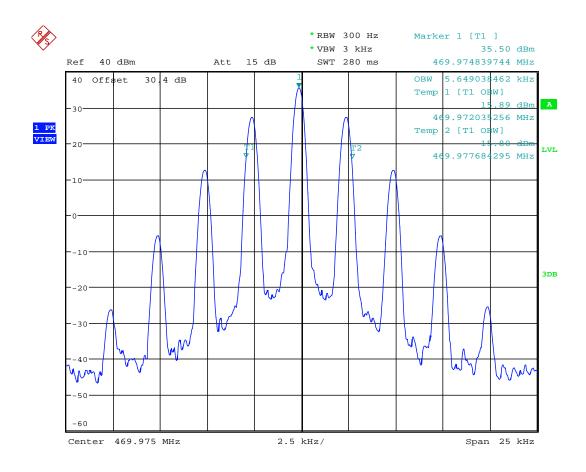

Date: 2.NOV.2021 14:11:44

### 5.8.3.5. Configuration: 99% OBW, 406.2MHz, 25 KHz, Analog, High power


OBW: 10.625 KHz

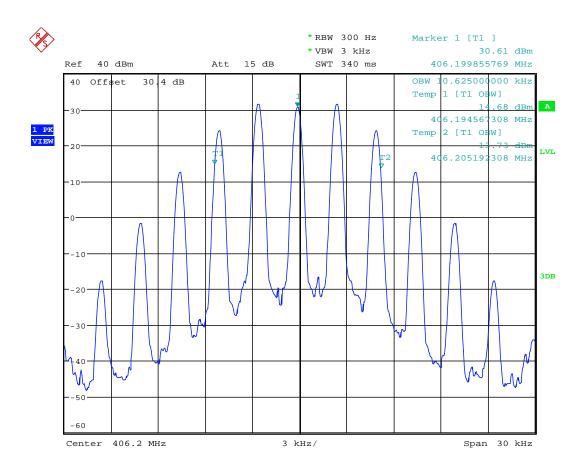

Date: 2.NOV.2021 14:15:43

### 5.8.3.6. Configuration: 99% OBW, 450.1MHz, 25 KHz, Analog, High power


OBW: 10.625 KHz

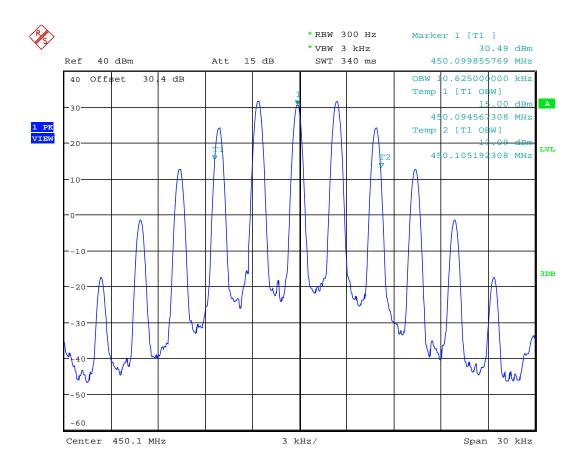

Date: 2.NOV.2021 14:17:44

### 5.8.3.7. Configuration: 99% OBW, 469.975MHz, 25 KHz, Analog, High power

OBW: 10.625 KHz

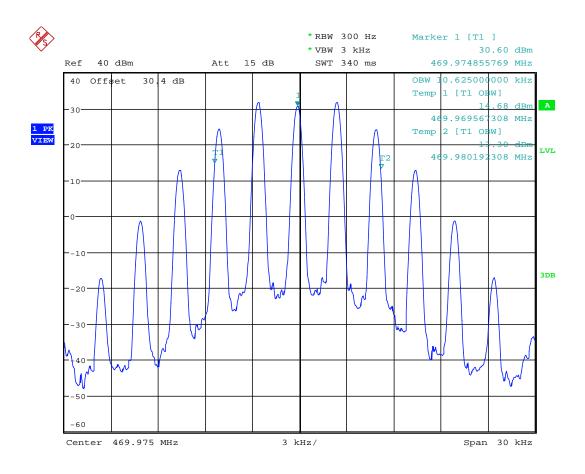


Date: 2.NOV.2021 14:18:54

### **Digital**

### 5.8.3.8. Configuration: 99% OBW, 406.2MHz, 6.25 KHz, Digital, High power


OBW: 3.557 KHz

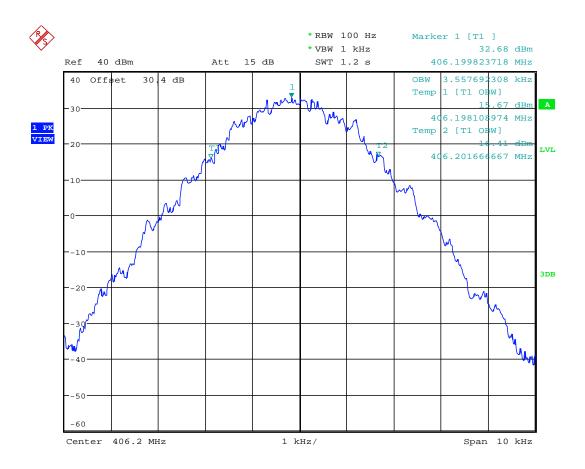

Date: 2.NOV.2021 14:22:54

### 5.8.3.9. Configuration: 99% OBW, 450.1MHz, 6.25 KHz, Digital, High power


OBW: 3.686 KHz

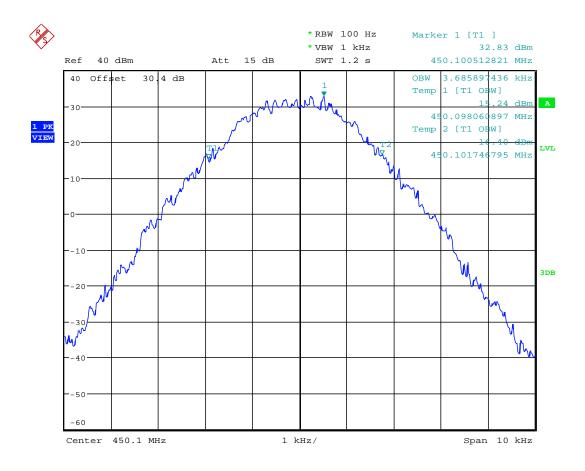

Date: 2.NOV.2021 14:25:26

### 5.8.3.10. Configuration: 99% OBW, 469.975MHz, 6.25 KHz, Digital, High power


OBW: 3.525 KHz

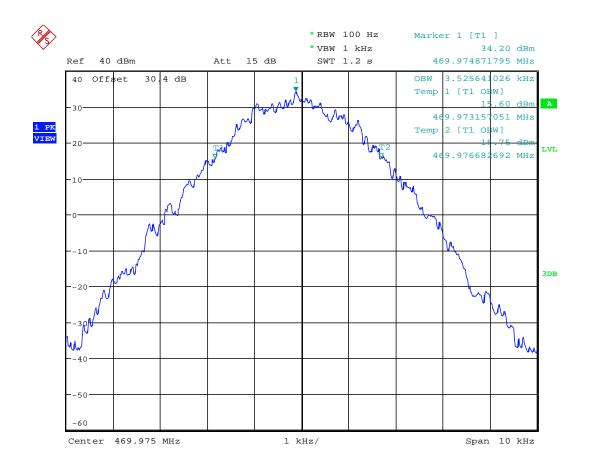

Date: 2.NOV.2021 14:27:41


### **High Power**

### 5.8.3.11. Configuration: Mask B, 406.2MHz, 25 KHz, Analog, High power

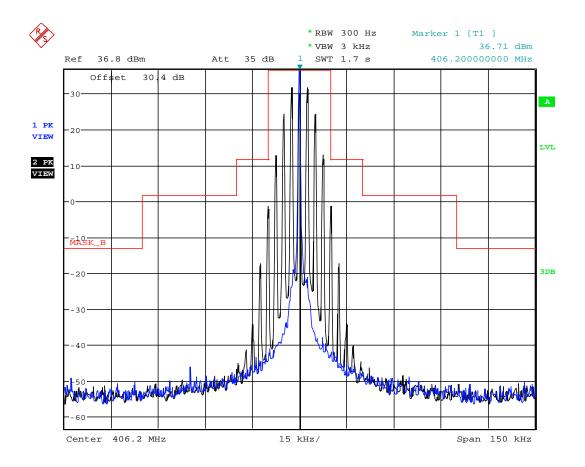


Date: 2.NOV.2021 14:36:33

### 5.8.3.12. Configuration: Mask B, 450.1MHz, 25 KHz, Analog, High power

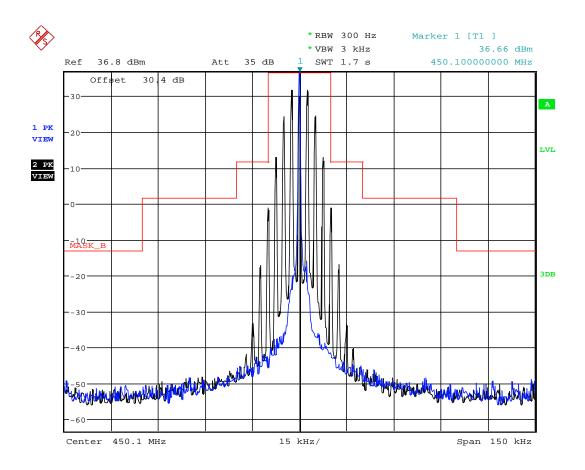

Date: 2.NOV.2021 14:39:18


### 5.8.3.13. Configuration: Mask B, 469.975MHz, 25 KHz, Analog, High power

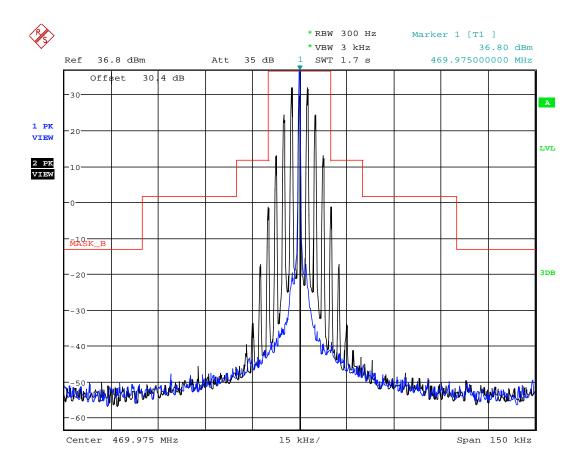

Date: 2.NOV.2021 14:41:39


#### **Low Power**

# 5.8.3.14. Configuration: Mask B, 406.2MHz, 25 KHz, Analog, Low power

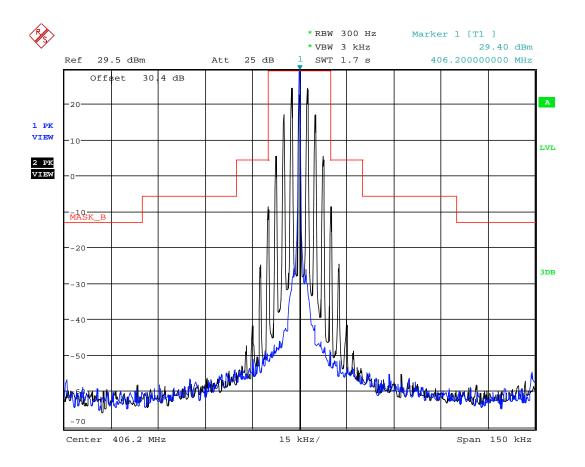


Date: 2.NOV.2021 14:44:36

# 5.8.3.15. Configuration: Mask B, 450.1MHz, 25 KHz, Analog, Low power

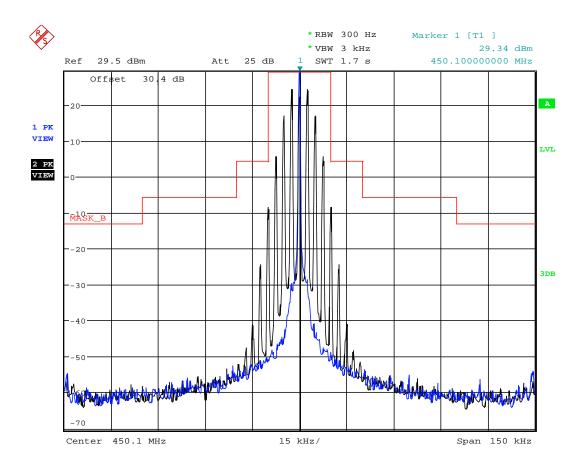

Date: 2.NOV.2021 14:46:56


# 5.8.3.16. Configuration: Mask B, 469.975MHz, 25 KHz, Analog, Low power

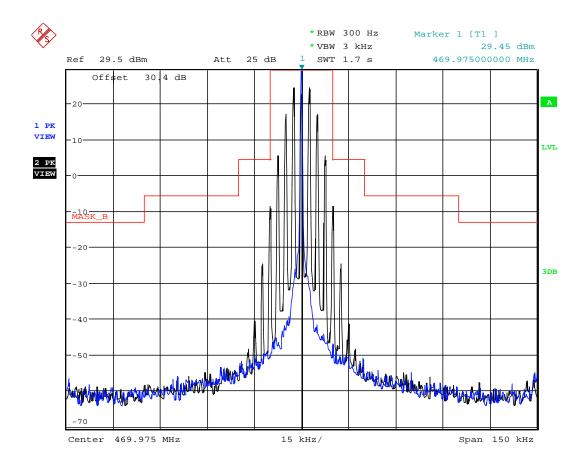

Date: 2.NOV.2021 14:49:24

# **High Power**


# 5.8.3.17. Configuration: Mask D, 406.2MHz, 12.5 KHz, Analog, High power

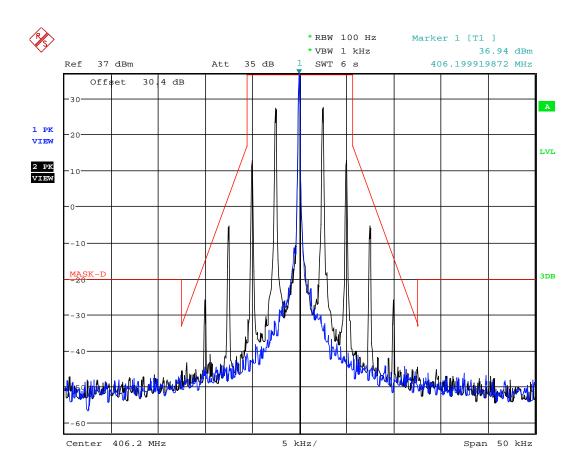

Date: 2.NOV.2021 14:55:31


FCC ID: AFJ400421

#### 5.8.3.18. Configuration: Mask D, 450.1MHz, 12.5 KHz, Analog, High power

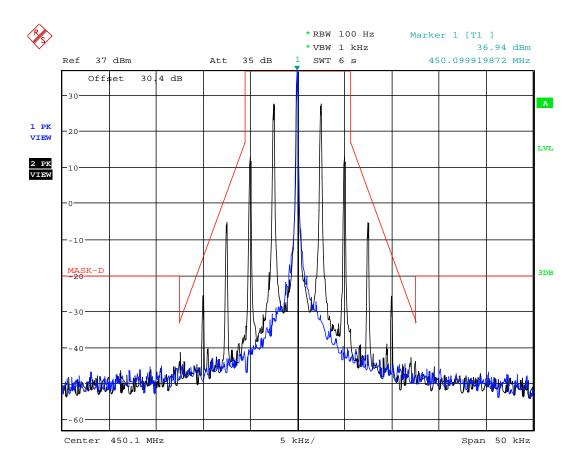


Date: 2.NOV.2021 14:58:19

# 5.8.3.19. Configuration: Mask D, 469.975MHz, 12.5 KHz, Analog, High power

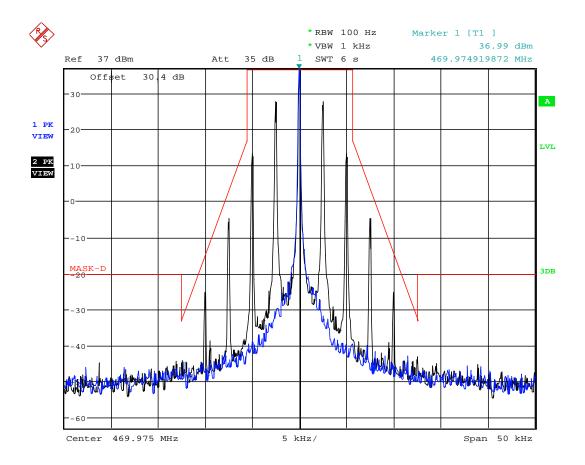

Date: 2.NOV.2021 15:00:54


#### 5.8.3.20. Configuration: Mask D, 406.2MHz, 12.5 KHz, Analog, Low power

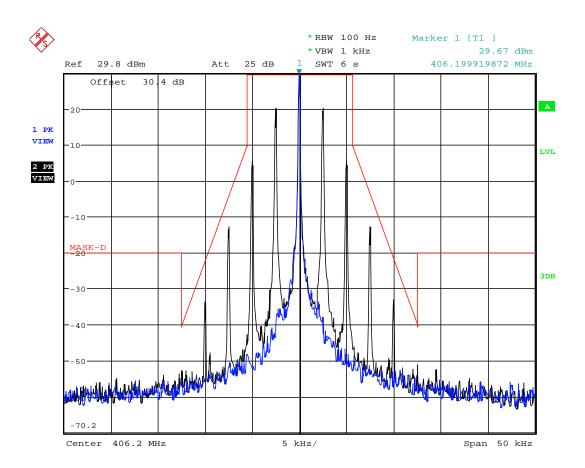

Date: 2.NOV.2021 15:05:33


Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: http://www.ultratech-labs.com

# 5.8.3.21. Configuration: Mask D, 450.1MHz, 12.5 KHz, Analog, Low power

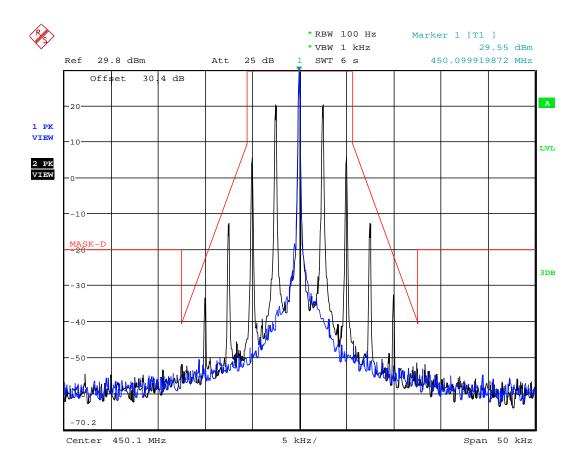


Date: 2.NOV.2021 15:08:11

# 5.8.3.22. Configuration: Mask D, 469.975MHz, 12.5 KHz, Analog, Low power

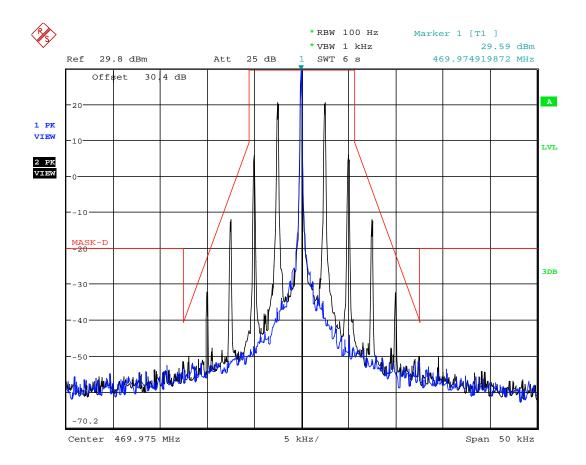


Date: 2.NOV.2021 15:10:55

# 5.8.3.23. Configuration: Mask E, 406.2MHz, 6.25 KHz, Digital, High power

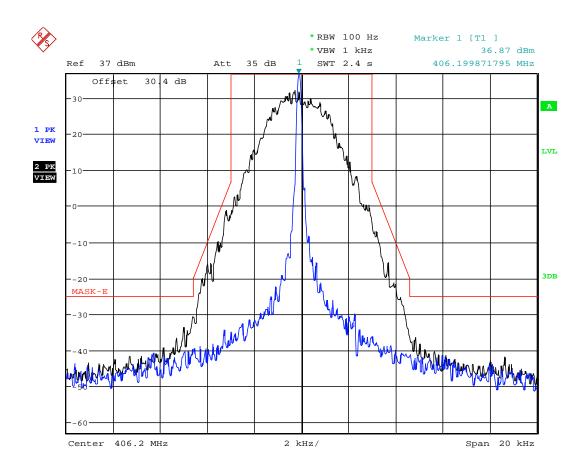


Date: 2.NOV.2021 15:23:09

# 5.8.3.24. Configuration: Mask E, 450.1MHz, 6.25 KHz, Digital, High power

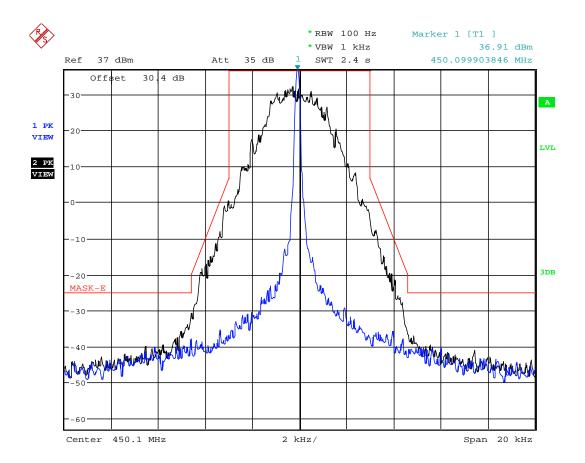

Date: 2.NOV.2021 15:26:05


#### 5.8.3.25. Configuration: Mask E, 469.975MHz, 6.25 KHz, Digital, High power

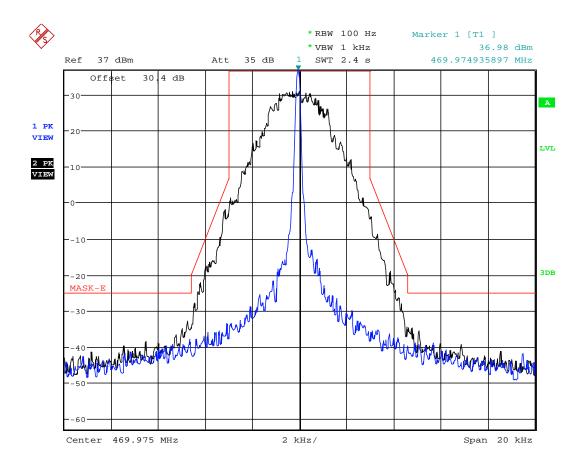

Date: 2.NOV.2021 15:28:50


FCC ID: AFJ400421

#### 5.8.3.26. Configuration: Mask E, 406.2MHz, 6.25 KHz, Digital, Low power

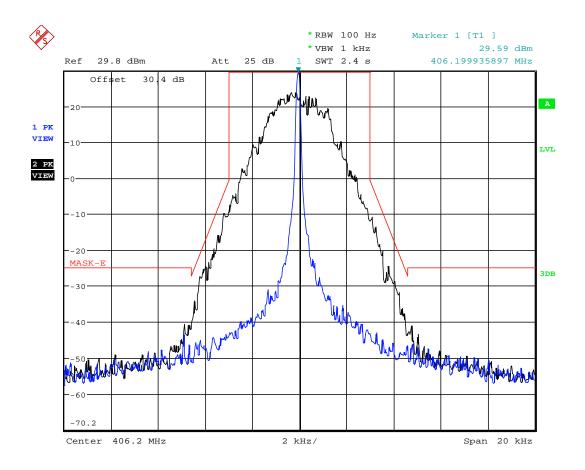


Date: 2.NOV.2021 15:31:57

#### 5.8.3.27. Configuration: Mask E, 450.1MHz, 6.25 KHz, Digital, Low power

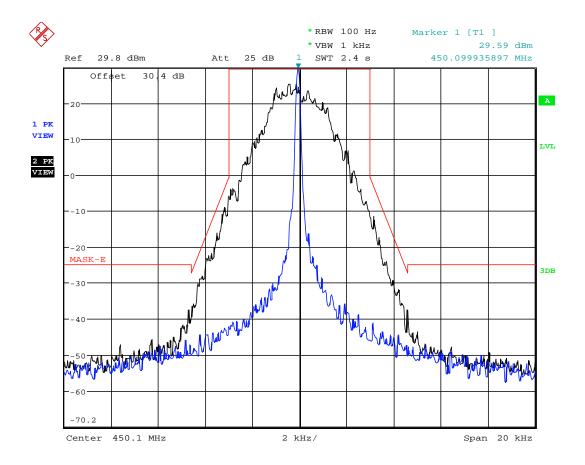

Date: 2.NOV.2021 15:34:51

# 5.8.3.28. Configuration: Mask E, 469.975MHz, 6.25 KHz, Digital, Low power

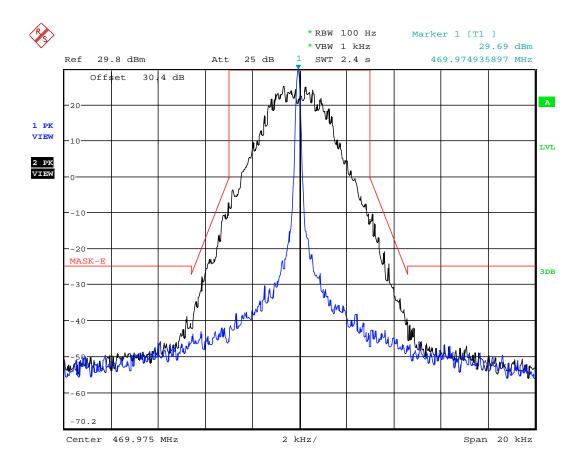

Date: 2.NOV.2021 15:37:47

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

# 5.9. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 2.1051, 2.1057, 22.359, 80.211(f)(3) & 90.210] [RSS-119 § 5.8]

#### 5.9.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)	
§ 22.359	At least 43 + 10 log (P) dB.	
§ 80.211(f)(3),	At least 43 +10log <sub>10</sub> (mean power in watts) dB	
§ 90.210(b)	At least 43 + 10 log (P) dB	
§ 90.210(d)	At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.	
§ 90.210(e)	At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.	

RSS-119, Issue 12	Frequency Range	Attenuation Limit (dBc)
Table 8		
Mask E	30 MHz or lowest radio frequency signal generated in the device to the tenth harmonic of the highest fundamental frequency.	At least 55 + 10 log (P) dB or 57 dB, whichever is the lesser attenuation.

#### 5.9.2. Method of Measurements


Refer to Section 8.5 of this report for measurement details

#### 5.9.3. Test Data


**Note**: There was no difference in spurious/harmonic emissions for different channel spacing and modulation types. Therefore, the RF spurious/harmonic emissions in this section would be performed for Digital modulation with 6.25 kHz channel spacing.

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: http://www.ultratech-labs.com


# 5.9.3.1. Configuration: Tx Conducted, 406.2MHz, 6.25 KHz, Digital, High power

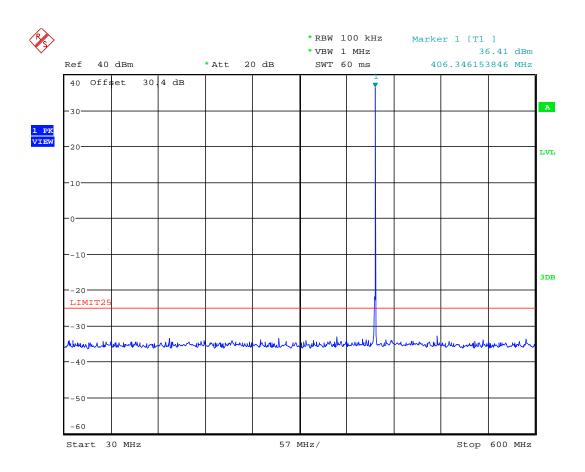

Date: 3.NOV.2021 08:23:51

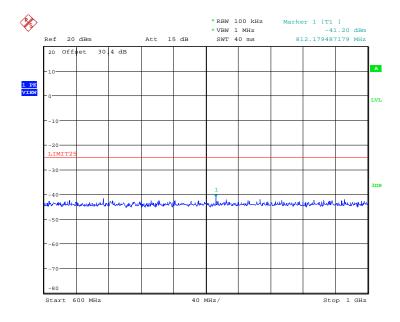


Date: 3.NOV.2021 08:48:58

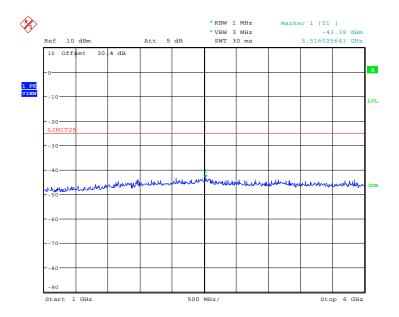


Date: 3.NOV.2021 08:56:52

File #: 21ICOM554\_FCC90


#### 5.9.3.2. Configuration: Tx Conducted, 450.1MHz, 6.25 KHz, Digital, High power

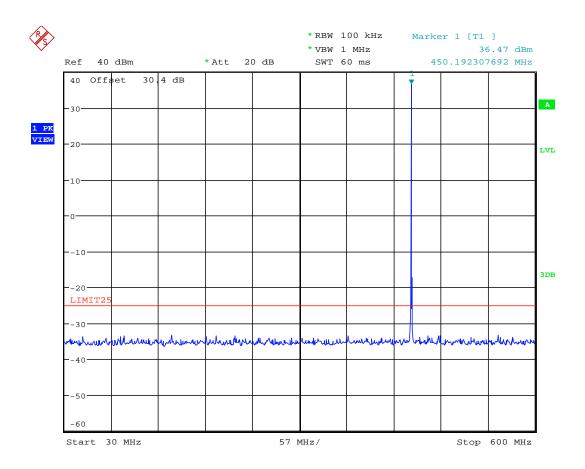

Date: 3.NOV.2021 08:30:53

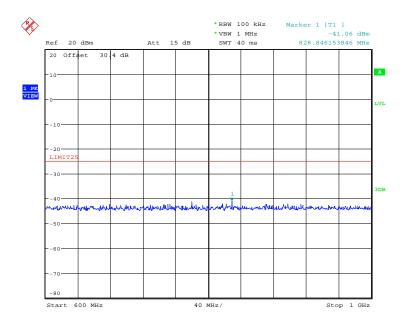

Date: 3.NOV.2021 08:51:21

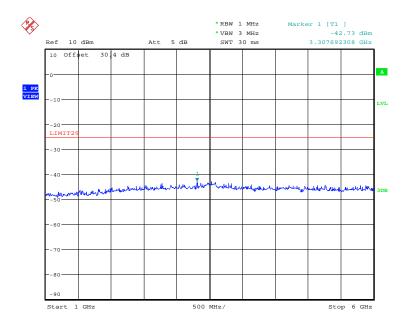


Date: 3.NOV.2021 08:57:42


File #: 21ICOM554\_FCC90

FCC ID: AFJ400421


#### 5.9.3.3. Configuration: Tx Conducted, 469.975MHz, 6.25 KHz, Digital, High power

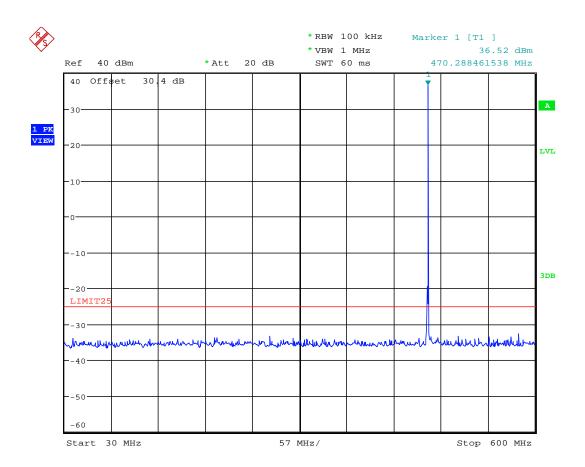

Date: 3.NOV.2021 08:34:23

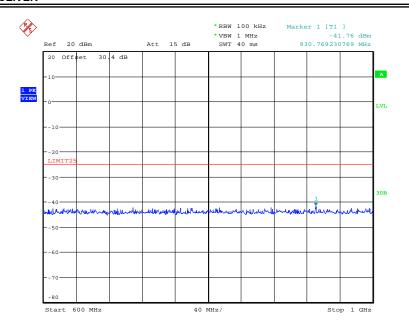


Date: 3.NOV.2021 08:54:25

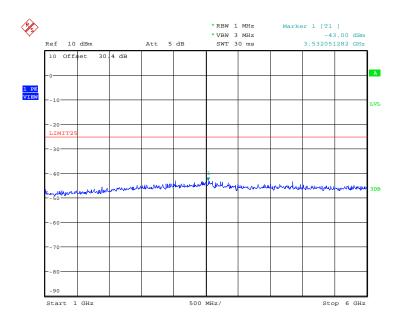


Date: 3.NOV.2021 08:58:42

#### 5.9.3.4. Configuration: Tx Conducted, 406.2MHz, 6.25 KHz, Digital, Low power

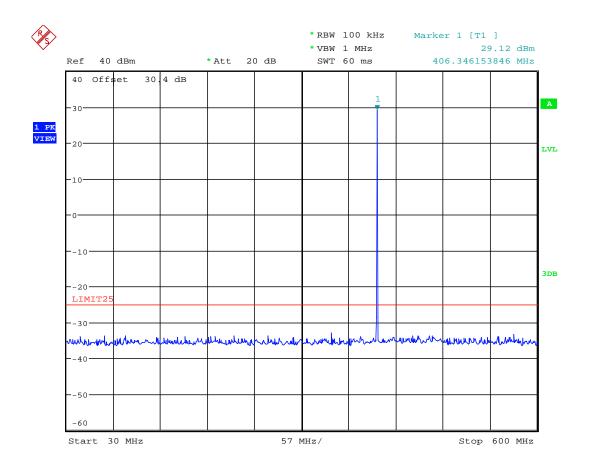


Date: 3.NOV.2021 08:25:28



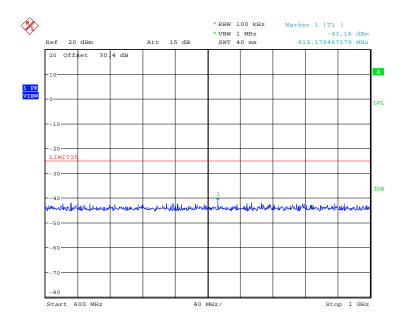


Date: 3.NOV.2021 08:46:08

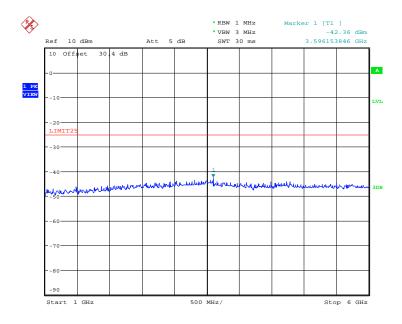


Date: 3.NOV.2021 08:59:34

FCC ID: AFJ400421


#### 5.9.3.5. Configuration: Tx Conducted, 450.1MHz, 6.25 KHz, Digital, Low power

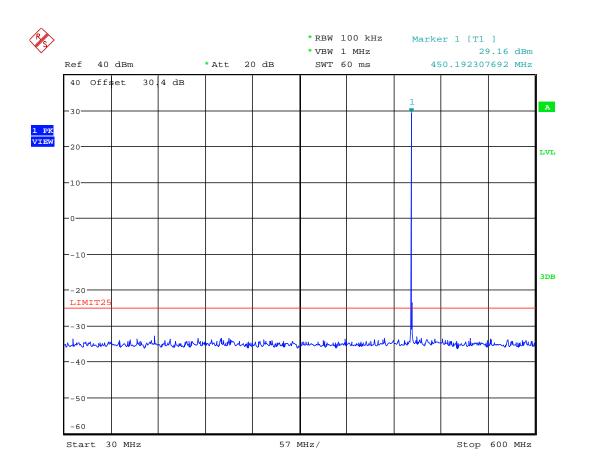

Date: 3.NOV.2021 08:33:03

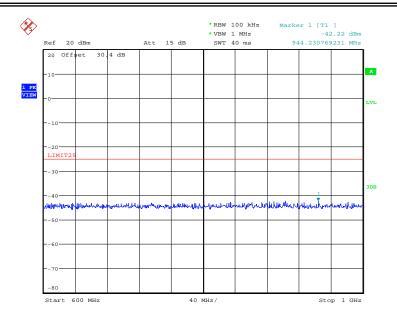


Date: 3.NOV.2021 08:53:12

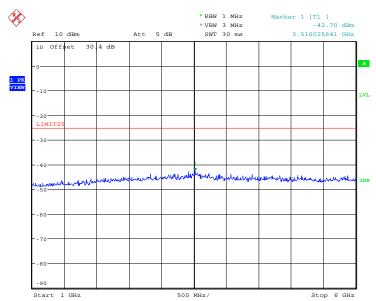


Date: 3.NOV.2021 09:00:47


#### 5.9.3.6. Configuration: Tx Conducted, 469.975MHz, 6.25 KHz, Digital, Low power

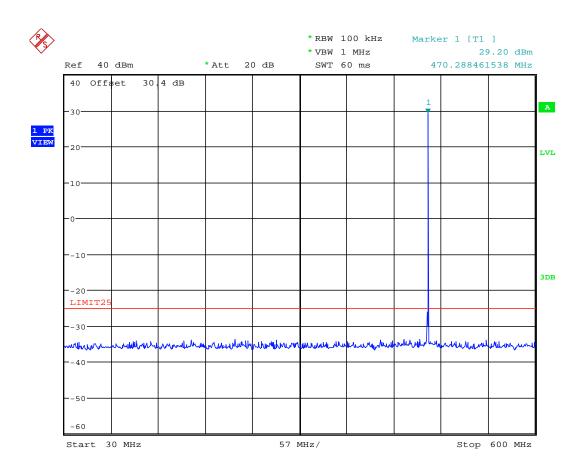

Date: 3.NOV.2021 08:35:35

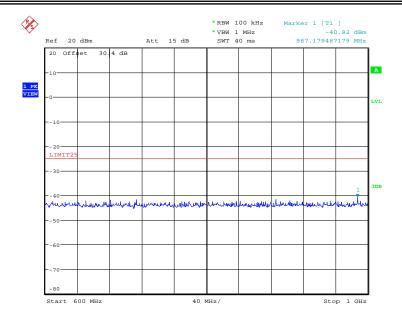

Date: 3.NOV.2021 08:55:23

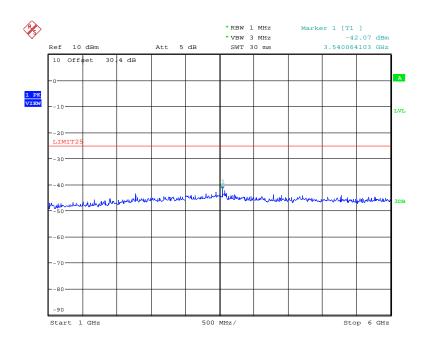

Date: 3.NOV.2021 09:01:49

# TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 2.1057, 22.359, 80.211(f)(3) & 90.210] [RSS-119, § 5.5 & 5.8]

#### 5.10.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)	
§ 22.359	At least 43 + 10 log (P) dB.	
§ 80.211(f)(3),	At least 43 +10log <sub>10</sub> (mean power in watts) dB	
§ 90.210(b)	At least 43 + 10 log (P) dB	
§ 90.210(d)	At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.	
§ 90.210(e)	At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.	

RSS-119, Issue 12	Frequency Range	Attenuation Limit (dBc)
Mask E	30 MHz or lowest radio frequency signal generated in the device to the tenth harmonic of the highest fundamental frequency.	At least 55 + 10 log (P) dB or 65 dB, whichever is the lesser attenuation.

#### 5.10.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Section 8.2 of this report.

#### 5.10.3. Test Data

#### Remarks:

- The RF spurious/harmonic emission characteristics for different channel spacing are indistinguishable. Therefore, the following radiated emissions were performed at 6.25 KHz channel spacing digital modulation, and the results were compared with the more stringent limit for the worst-case.
- The radiated emissions were performed with high power setting at 3 m distance to represents the worst-case test configuration.
- The emissions were scanned from 30 MHz to 10<sup>th</sup> harmonics; all spurious emissions that are in excess of 20dB below the specified limit shall be recorded.

5.10.3.1. **Near Lowest Frequency (406.2 MHz)** 

Power:		High				
FREQ. RANGE S	SCANNED	30 MHz to 6 GHz				
Frequency (MHz)	E-Field (dBµV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP Measured (dBm)	Limit (dBm)	Margin (dB)
3655.800	57.28	PEAK	V	-40.94	-25.00	-15.94
4062.000	58.72	PEAK	V	-39.39	-25.00	-14.39

5.10.3.2. Near Middle Frequency (450.1 MHz)

Power:		High					
FREQ. RANGE SCANNED		30 MHz to 6 GHz	30 MHz to 6 GHz				
Frequency (MHz)	E-Field (dBµV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP Measured (dBm)	Limit (dBm)	Margin (dB)	
1350.3	55.97	PEAK	Н	-43.23	-25.00	-18.23	
2250.5	51.20	PEAK	V	-44.20	-25.00	-19.20	
2250.5	52.32	PEAK	Н	-42.80	-25.00	-17.80	
2700.6	59.79	PEAK	V	-38.17	-25.00	-13.17	
3600.8	67.20	PEAK	V	-30.66	-25.00	-5.66	
3600.8	60.59	PEAK	Н	-38.46	-25.00	-13.46	
4050.9	63.90	PEAK	V	-34.47	-25.00	-9.47	
4050.9	60.71	PEAK	Н	-38.47	-25.00	-13.47	
4501.0	60.44	PEAK	V	-37.74	-25.00	-12.74	
4501.0	56.19	PEAK	Н	-42.94	-25.00	-17.94	

Page 64

FCC ID: AFJ400421

#### 5.10.3.3. Near Highest Frequency (469.975 MHz)

Power:		High						
FREQ. RANGE S	SCANNED	30 MHz to 6 GHz	30 MHz to 6 GHz					
Frequency (MHz)	E-Field (dBµV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP Measured (dBm)	Limit (dBm)	Margin (dB)		
2349.875	54.58	PEAK	Н	-42.37	-25.00	-17.37		
3289.825	58.87	PEAK	V	-40.76	-25.00	-15.76		
3289.825	59.50	PEAK	Н	-38.16	-25.00	-13.16		
3759.8	64.46	PEAK	V	-33.47	-25.00	-8.47		
3759.8	61.52	PEAK	Н	-37.07	-25.00	-12.07		
4229.775	64.35	PEAK	V	-33.93	-25.00	-8.93		
4229.775	61.63	PEAK	Н	-36.93	-25.00	-11.93		

#### 5.11. FREQUENCY STABILITY [§§ 2.1055, 22.355, 74.464, 80.209 & 90.213] [RSS-119 § 5.3]

#### 5.11.1. Limits

§ 90.213 Transmitters used must have minimum frequency stability as specified in the following table.

		Frequency Tolerance (ppm)			
Frequency Range (MHz)	Channel Bandwidth (KHz)	Fixed and Base Stations	Mobile Stations		
		Fixed and Base Stations	> 2 W	<u>&lt;</u> 2 W	
150-174 MHz	6.25	1.0	2.0	2.0	
	12.5	2.5	5.0	5.0	
	25	5.0	5.0	50.0*	
421-512 MHz	6.25	0.5	1.0	1.0	
	12.5	1.5	2.5	2.5	
	25	2.5	5.0	5.0	

- Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5 ppm.
- Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150-174 MHz band and 2.5 ppm in the 421-512 MHz band.
- § 22.355 Transmitters used must have minimum frequency stability as specified in the following table.

TABLE C-1—FREQUENCY TOLERANCE FOR TRANSMITTERS IN THE PUBLIC MOBILE SERVICES

Frequency range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
	5.0	5.0	50.0
	2.5	5.0	5.0
	1.5	2.5	2.5
	5.0	n/a	n/a
	1.5	n/a	n/a
	10.0	n/a	n/a

§ 74.464 - For operations on frequencies above 25 MHz using authorized bandwidths up to 30 kHz, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in compliance with the frequency tolerance requirements of §90.213 of this chapter. For all other operations, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in accordance with the following:

	Tolerance (percent)		
Frequency range	Base sta- t <b>i</b> on	Mobile sta- tion	
25 to 30 MHz: 3 W or less Over 3 W	.002 .002	.005 .002	
3 W or less Over 3 W	.0005 .0005 .00025	.005 .0005 .0005	

File #: 21ICOM554\_FCC90

# [RSS-119 § 5.3]

The carrier frequency shall not depart from the reference frequency in excess of the values given in Table 1.

**Table 1 - Transmitter Frequency Stability** 

	Authorized	Frequency Stability (ppm)		
Frequency Band (MHz)	Bandwidth	Bandwidth Bass (Size of	Mobile Station	
	(kHz)	Base/Fixed	>2 watts	≤ 2 watts
	30	5	5	5
138-174	15	2.5	5	5
	7.4	1	2	5
	25(Note 2)	0.5	1	1
406 1 420 and 450 470 (Note 6)	25	2.5	5	5
406.1-430 and 450-470 (Note 6)	12.5	1.5	2.5	2.5
	6.25	0.5	1	1

#### 5.11.2. Method of Measurements

Refer to Section 8.3 of this report for measurement details

#### 5.11.3. Test Data

Test Frequency:		406.2 MHz		
Full Power Level:		4.44 W		
Frequency Tolera	nce Limit:	<u>+</u> 1.0 ppm or <u>+</u> 406 Hz		
Max. Frequency T	olerance Measured:	-396 Hz or - 0.97 ppm		
Input Voltage Rat	ing:	7.5 VDC (nominal)		
		Frequency Drift (Hz)		
Ambient Temperature (°C)	Supply Voltage (Nominal) 7.5 VDC	Supply Voltage (Battery End Point) 5.6 VDC	Supply Voltage (Battery Fully Charged) 8.62 VDC	
-30	-396			
-20	-380			
-10	-321			
0	-297			
10	-257			
20	-215	-217	-209	
30	-180			
40	-121			
50	-91			

60

-75

#### TRANSIENT FREQUENCY BEHAVIOR [§ 90.214 & 74.462(c)] [RSS-119 § 5.9]

#### 5.12.1. Limits

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:

Time intervals <sup>1, 2</sup>	Maximum frequency difference <sup>3</sup>	All equipment	
		150 to 174 MHz	421 to 512MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 KHz Channels			
t <sub>1</sub> <sup>4</sup>	± 25.0 KHz	5.0 ms	10.0 ms
t <sub>2</sub>	± 12.5 KHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	± 25.0 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 KHz Channels			
t <sub>1</sub> <sup>4</sup>	± 12.5 KHz	5.0 ms	10.0 ms
t <sub>2</sub>	± 6.25 KHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	± 12.5 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 KHz Channels			
t <sub>1</sub> <sup>4</sup>	±6.25 KHz	5.0 ms	10.0 ms
$t_2$	±3.125 KHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±6.25 KHz	5.0 ms	10.0 ms

<sup>1.</sup> ton is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

- 3. Difference between the actual transmitter frequency and the assigned transmitter frequency.
- 4. If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

#### 5.12.2. Method of Measurements

Refer to Section 8.6 of this test report and ANSI/TIA/EIA-603-E, Section 2.

 $t_1$  is the time period immediately following  $t_{\text{on}}$ .

t<sub>2</sub> is the time period immediately following t<sub>1</sub>.


t<sub>3</sub> is the time period from the instant when the transmitter is turned off until t<sub>off</sub>.

toff is the instant when the 1 kHz test signal starts to rise.


<sup>2.</sup> During the time from the end of t2 to the beginning of t3, the frequency difference must not exceed the limits specified in § 90.213.

#### 5.12.3. Test Data


Plot 5.12.3.1. Transient Frequency Behavior for 6.25 kHz Channel Spacing

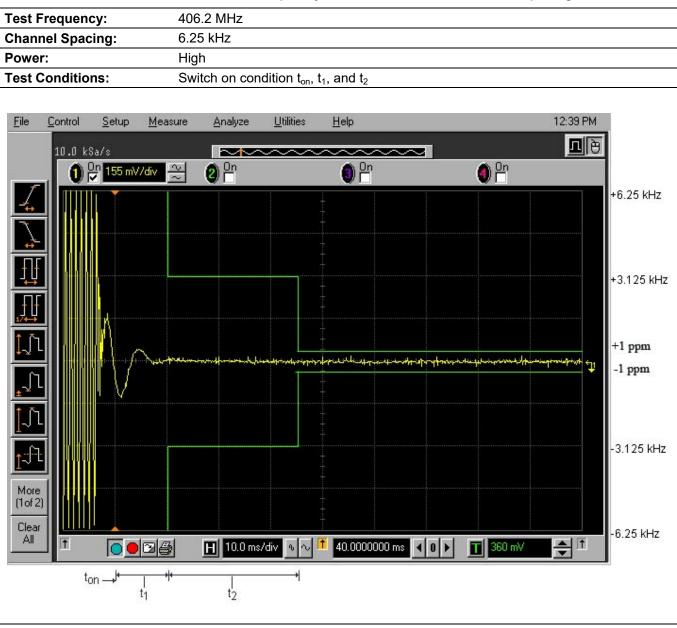


Plot 5.12.3.2. Transient Frequency Behavior for 6.25 kHz Channel Spacing

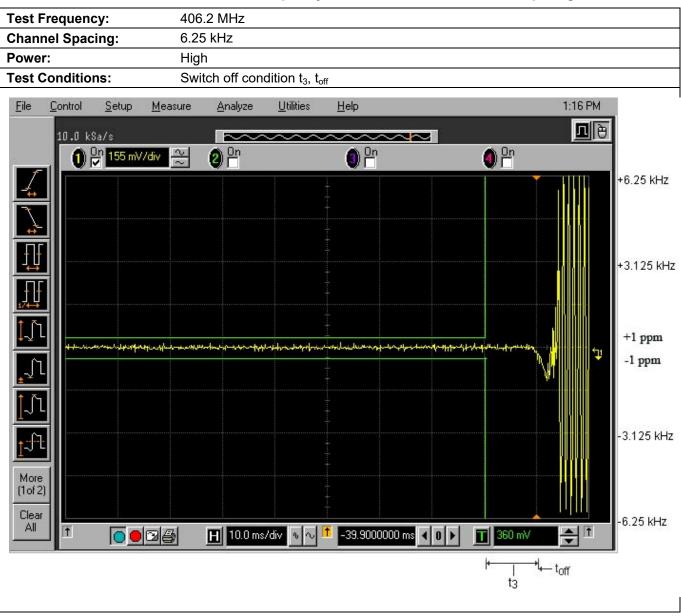


Plot 5.12.3.3. Transient Frequency Behavior for 12.5 kHz Channel Spacing

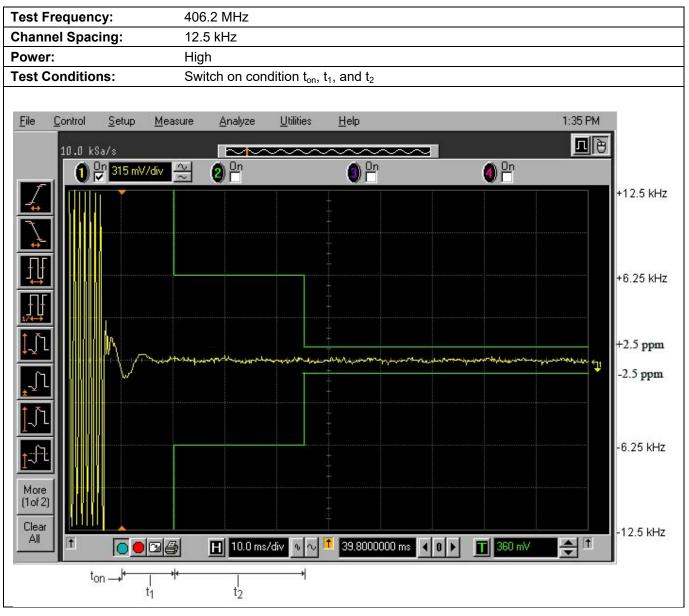


Plot 5.12.3.4. Transient Frequency Behavior for 12.5 kHz Channel Spacing

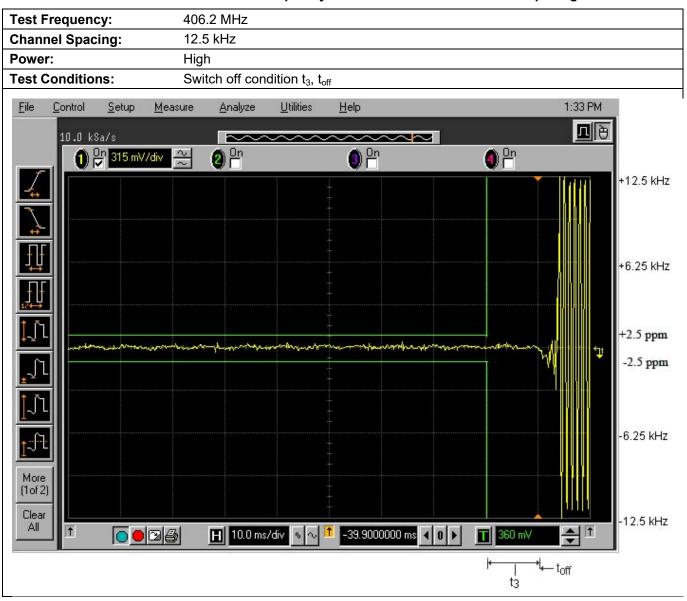

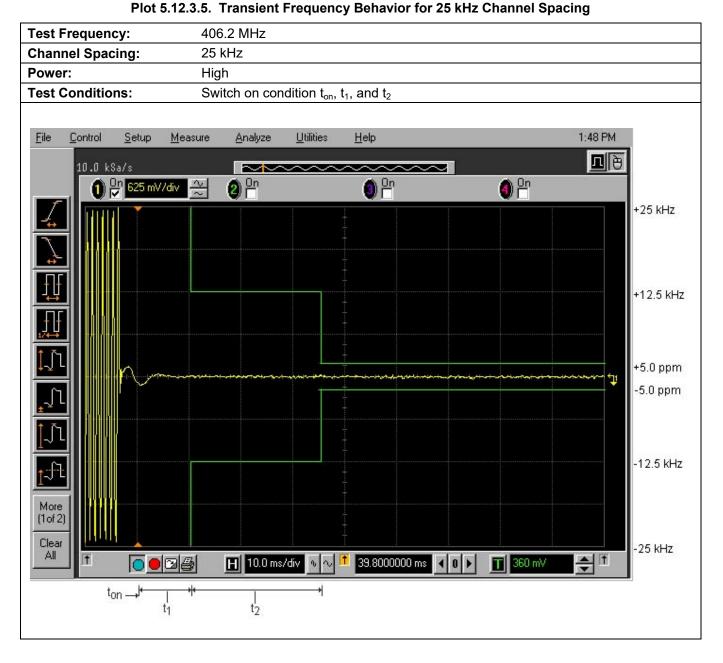

Plot 5.12.3.6. Transient Frequency Behavior for 25 kHz Channel Spacing

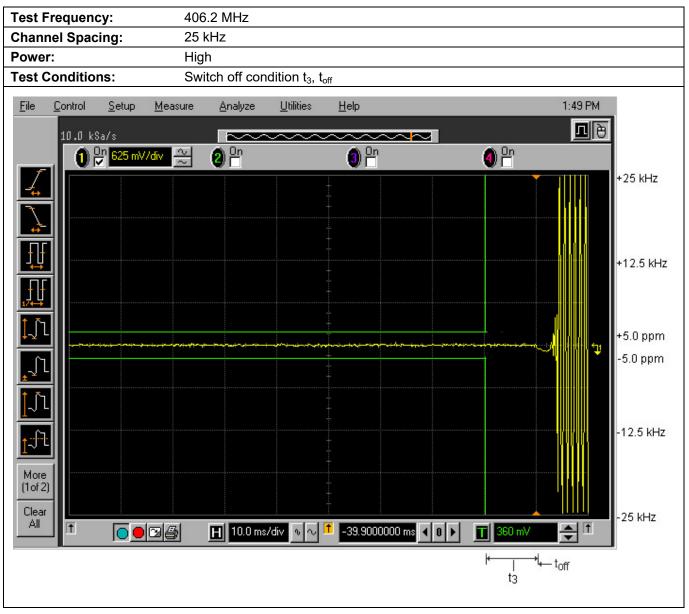

#### 5.13.1. Limits


No spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

#### 5.13.2. Method of Measurements

Refer to Industry Canada RSS-119, Issue 9 and ANSI C63.4.

#### 5.13.3. Test Data


## 5.13.3.1. Configuration: Rx Conducted, 406.2MHz

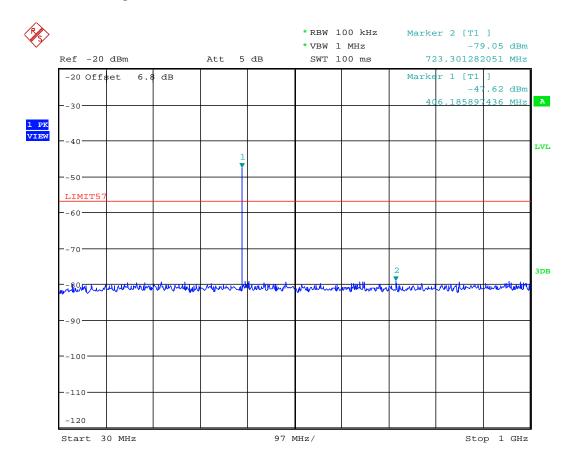

Date: 3.NOV.2021 09:18:09


Highest peak is Rx Signal input (1mV rms)

Page 74

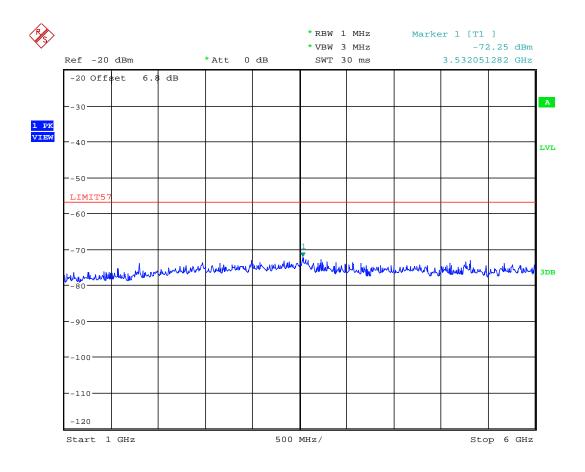


Date: 3.NOV.2021 09:29:21

#### 5.13.3.2. Configuration: Rx Conducted, 450.1MHz

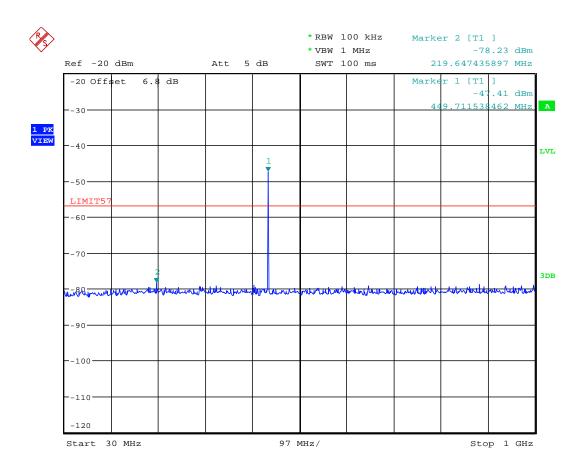


Date: 3.NOV.2021 09:19:49

Highest peak is Rx Signal input (1mV rms)

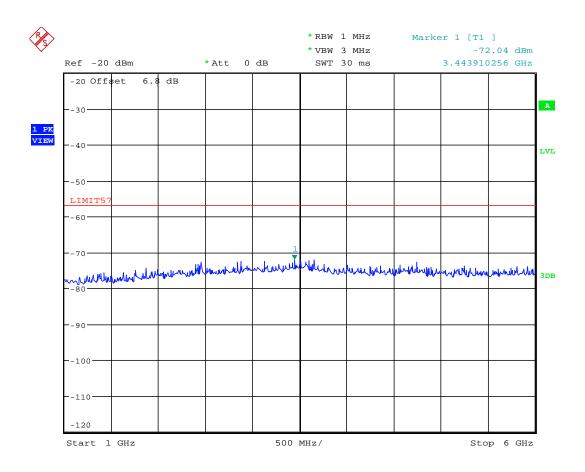


Date: 3.NOV.2021 09:27:38

#### 5.13.3.3. Configuration: Rx Conducted, 469.975MHz

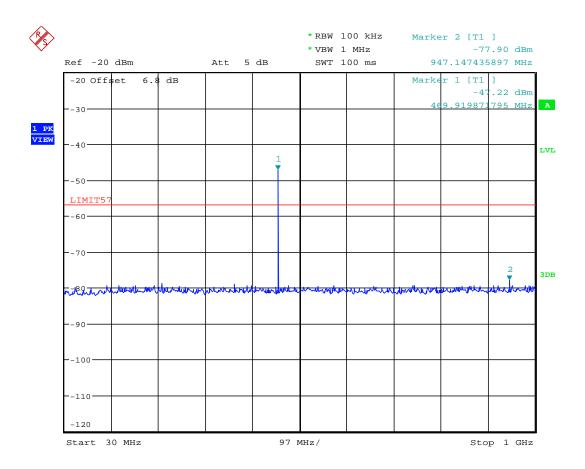

Date: 3.NOV.2021 09:21:25

Highest peak is Rx Signal input (1mV rms)

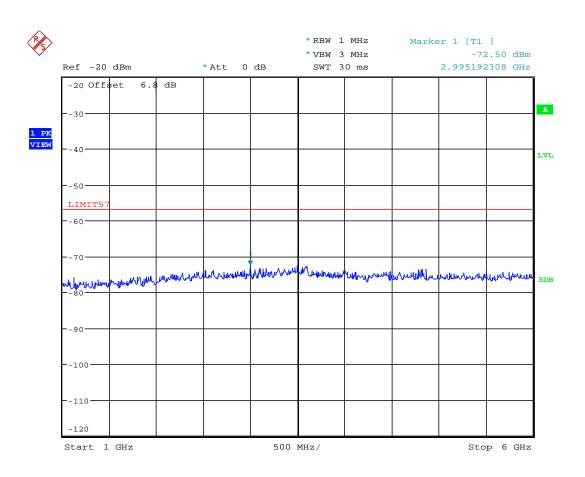

Date: 3.NOV.2021 09:26:42

# 5.14. RECEIVER SPURIOUS EMISSIONS (RADIATED) [RSS-119 § 5.11, RSS-Gen §§ 4.10 & 6]

#### 5.14.1. Limits

The equipment shall meet the limits of the following table:

Spurious Frequency (MHz)	Field Strength at 3 meters		
	(μV/m)	(dBμV/m)	
30 – 88	100	40.0	
88 – 216	150	43.5	
216 – 960	200	46.0	
Above 960	500	54.0	

#### 5.14.2. Method of Measurements

RSS-Gen and ANSI C63.4

#### 5.14.3. Test Data

The emissions were scanned from 30 MHz to 6.0 GHz at 3 Meters distance and all emissions less than 20 dB below the limits were recorded.

(IF=46.35 MHz)

Test Frequency	Peak QP/Avg (dBuV/m) QP/Avg (dBuV/m)	<b>-</b>		-	Limit	Ma	rgin (dB)	
(MHz)	(MHz)	Vertical	Horizontal	Vertical	Horizontal	(dBuV/m)	Vertical	Horizontal
406.200	359.850	-	33.70	-	-	46.02	-	-12.32
	1079.550	42.54	42.78	-	-	54	-11.46	-11.22
	1799.250	39.11	39.84	-	-	54	-14.89	-14.16
	2159.100	38.08	38.49	-	-	54	-15.92	-15.51
	2518.950	-	40.24	-	-	54	-	-13.76
450.100	403.750	32.88	38.25	-	-	46.02	-13.14	-7.77
	1211.250	40.84	43.86	-	-	54	-13.16	-10.14
	1615.000	41.16	41.58	-	-	54	-12.84	-12.42
	2422.500	43.76	48.28	-	45.95	54	-10.24	-8.05
469.975	423.625	36.76	38.20	-	-	46.02	-9.26	-7.82
	1270.875	39.85	43.52	-	-	54	-14.15	-10.48
	1694.500	41.94	42.10	-	-	54	-12.06	-11.90
	2118.125	-	38.40	-	-	54	-	-15.60
	2541.750	41.54	45.62	-	42.13	54	-12.46	-8.38
	2965.375	40.68	41.36	-	-	54	-13.32	-12.64
	3389.000	41.83	41.55	-	-	54	-12.17	-12.45

# 5.15. RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS [ICES-003]

#### 5.15.1. Limits

The equipment shall meet the limits of the following table:

Frequency of emission	Class B Limits			
(MHz)	(dBμV/m at 3 m)	(dBμV/m at 10 m)		
30 – 88	40.0	29.5		
88 – 216	43.5	33.1		
216 – 960	46.0	35.6		
Above 960	54.0	43.5		

#### 5.15.2. Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-2004 & ANSI C63.4 for method of measurements.


#### 5.15.3. Test Data

The emissions were scanned from 30 MHz to 6.0 GHz at 3m. All emissions found above than 20 dB below the permissible limits were recorded

the permissible limits were recorded								
FREQUENCY	RF LEVEL	DETECTOR USED	ANTENNA PLANE	LIMIT	MARGIN	PASS/		
(MHz)	(dBuV/m)	(PEAK/QP)	(H/V)	(dBuV/m)	(dB)	FAIL		
30	22.11	PEAK	V	40	-17.89	PASS		
30	22.1	PEAK	Н	40	-17.9	PASS		
403.07	34.1	PEAK	V	46	-11.9	PASS		
403.07	39.21	PEAK	Н	46	-6.79	PASS		
1208	39.64	PEAK	V	54	-14.36	PASS		
1208	43.04	PEAK	Н	54	-10.96	PASS		
2418	41.09	PEAK	V	54	-12.91	PASS		
2418	45.97	PEAK	Н	54	-8.03	PASS		

#### **TEST SETUP AND EQUIPMENT LIST EXHIBIT 6.**


#### 6.1. **Conducted Power**

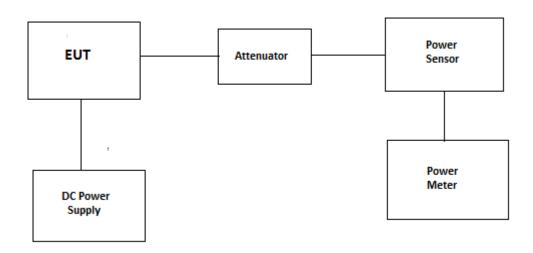

Test Date: Nov 02, 2021

1631 Date. 1107 02, 2021							
Test	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date		
Instrument							
Power Meter	HP	436A	2709A27515	100KHz-sensor dependant	17 Jul 2022		
Power Sensor	HP	8482A	2652A14099	0.1MHz-4.2GHz	11 Mar 2022		
Attenuator	Aeroflex\Weinsc hel	46-30-34	BR9127	DC-18GHz	Cal before use		
Power Supply	Tenma	72-6153	-	1-18V, DC 10A			
Multimeter	Fluke	8842A	4142055		03 Aug 2023		


## 6.2. Modulation Limit

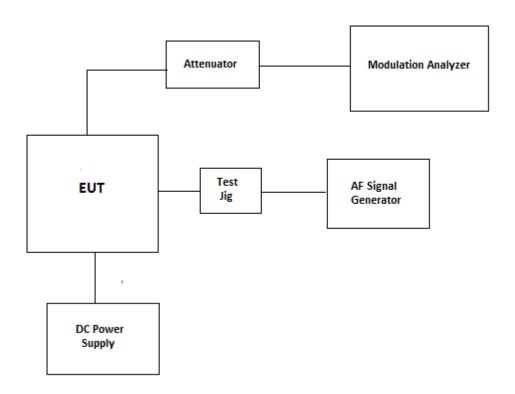

Test Date: Nov 02, 2021

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation	HP	HP-8901B	3226A04606	150KHz-1300MHz	17 Mar 2022
Analyzer					
AF Signal	HP	HP-8920B	US39064699	30MHz-1GHz	17 Mar 2022
Generator					
Digital Voltmeter	HP	3456A	2015A04523		21 Jan 2022
Attenuator	Aeroflex\Weinsc	46-30-34	BR9127	DC-18GHz	Cal before use
	hel				
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	
Multimeter	Fluke	8842A	4142055		03 Aug 2023


#### 6.3. **Audio Frequency Response**

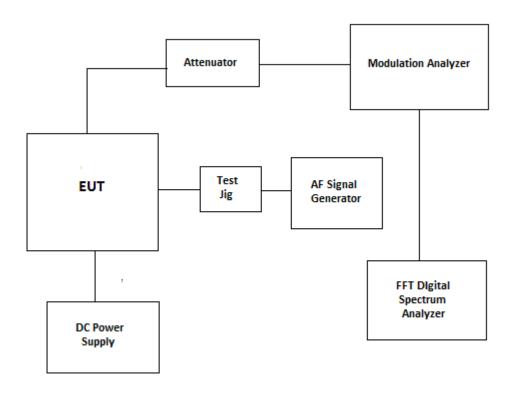

Test Date: Nov 02, 2021

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	17 Mar 2022
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	17 Mar 2022
Digital Voltmeter	HP	3456A	2015A04523		21 Jan 2022
FFT Digital Spectrum Analyzer	Advantest	R9211E	8202336	10MHz-100KHz	02 Nov 2022
Attenuator	Aeroflex\Weinsc hel	46-30-34	BR9127	DC-18GHz	Cal before use
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	
Multimeter	Fluke	8842A	4142055		03 Aug 2023


# 6.4. Transient Frequency Behavior

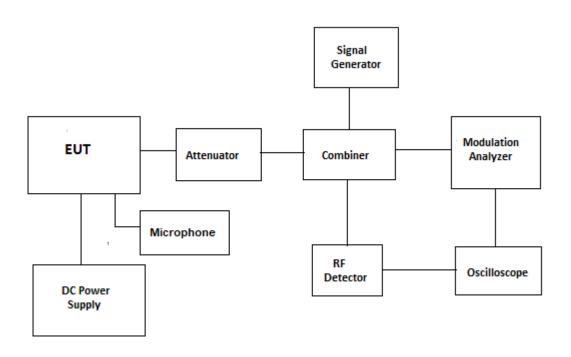

Test Date: Nov 02, 2021

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz- 1300MHz	17 Mar 2022
Signal Generator	Marconi	2024	112255/164	9KHz-2.4GHz	22 Oct 2023
Combiner	Mini-Circuit	ZFSC-3-4	15542	1MHz-1GHz	Cal on use
RF Detector	Pasternack	PE8000-50		10MHz-1GHz	Cal on use
Attenuator(20dB)	Weinschel	46-20-34	BM1347	DC-18GHz	Cal on use
Attenuator(6 dB)	Weinschel	1A	A67645	DC-12GHz	Cal on use
Oscilloscope	HP	54825N	SG40000845	DC-500MHz	14 Sep 2022
Power supply	Pyramid	PS-36KX		12-15 Vdc, 35A	
Multimeter	Fluke	8842A	4142055		03 Aug 2023


#### 6.5. 99% OBW and Mask

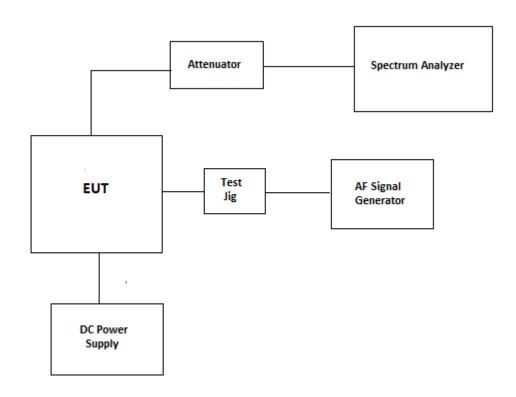

Test Date: Nov 02, 2021

1000 Duto. 1107 02, 2021							
Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date		
Spectrum	Rohde &	FSU	100398	20Hz-26.5GHz	20 Sep 2023		
Analyzer	Schwarz						
AF Signal	HP	HP-8920B	US39064699	30MHz-1GHz	17 Mar 2022		
Generator							
Digital Voltmeter	HP	3456A	2015A04523		21 Jan 2022		
Attenuator	Aeroflex\Weinsc	46-30-34	BR9127	DC-18GHz	Cal before use		
	hel						
Power Supply	Tenma	72-6153	-	1-18V, DC 10A			
Multimeter	Fluke	8842A	4142055		03 Aug 2023		


#### 6.6. Tx Conducted Emission

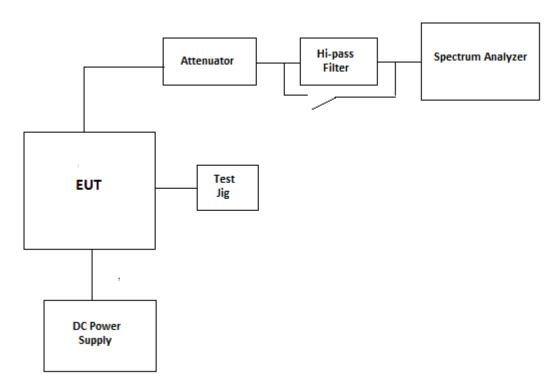

Test Date: Nov 03, 2021

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum	Rohde &	FSU	100398	20Hz-26.5GHz	20 Sep 2023
Analyzer	Schwarz				-
AF Signal	HP	HP-8920B	US39064699	30MHz-1GHz	17 Mar 2022
Generator					
Hi-pass filter	Mini-Circuit	SHP-600		Cut off 600MHz	Cal before use
Attenuator	Aeroflex\Weinsc	46-30-34	BR9127	DC-18GHz	Cal before use
	hel				
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	
Multimeter	Fluke	8842A	4142055		03 Aug 2023


#### 6.7. Rx Conducted Emission

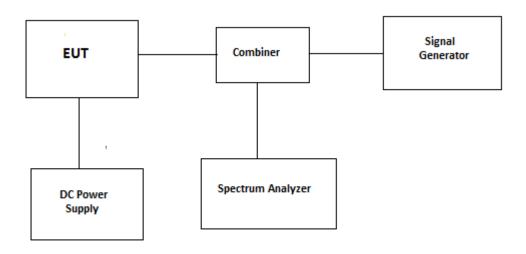

Test Date: Nov 03, 2021

Tool Batol I	103t Dutc. 1107 00, 2021							
Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date			
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023			
Signal Generator	Marconi	2024	112255/164	9KHz-2.4GHz	22 Oct 2023			
Combiner	Weinschel	1515	PS119	DC-18GHz	Cal before use			
Power Supply	Tenma	72-6153	-	1-18V, DC 10A				
Multimeter	Fluke	8842A	4142055		03 Aug 2023			


## 6.8. TX Radiated

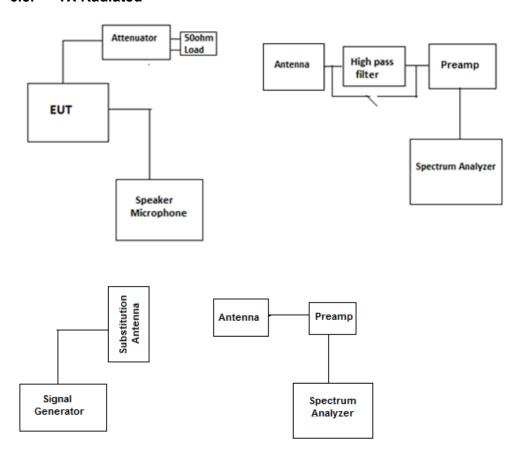

Test Date: Nov 03 & 08, 2021

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum	Rohde &	FSU	100398	20Hz-26.5GHz	20 Sep 2023
Analyzer	Schwarz				
Spectrum	Rohde &	ESU40	100037	20Hz-40GHz	01 Sep 2022
Analyzer	Schwarz				
Biconilog Antenna	EMCO	3142C	00034792	26-2000MHz	16 May 2022
Log Periodic	ETS	3148	00023845	200-2000MHz	14 Apr 2023
Antenna					
Horn Antenna	ETS	3115	5061	1-18GHz	10 Jun 2022
Horn Antenna	ETS	3115	5955	1-18GHz	12 Oct 2022
Signal Generator	Rohde	SMIQ 06ATE	100086	300KHz-6.4GHz	26 Oct 2022
-	&Schwarz				
Dipole Antenna	EMCO	3121C- DB4	434	400-1000MHz	13 Apr 2023
Preamplifier	Com-Power	PAM-118A	551016	500MHz-18GHz	15 Mar 2022
Preamplifier	Com-Power	PAM-103	18020181	1MHz-1000MHz	24 Mar 2022
Hi-pass filter	Mini-Circuit	SHP-600		Cut off 600MHz	Cal before use
Attenuator	Aeroflex\Weinsc hel	46-30-34	BR9127	DC-18GHz	Cal before use
Load(50ohm)	Mini-Circuits	KARN-50+		DC-18GHz	Cal before use


#### 6.9. Rx Radiated

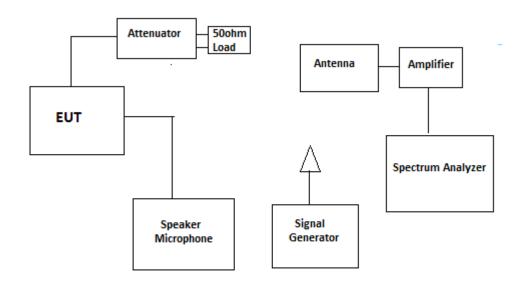

Test Date: Nov 03 & 08, 2021

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023
Spectrum Analyzer	Rohde & Schwarz	ESU40	100037	20Hz-40GHz	01 Sep 2022
Biconilog Antenna	EMCO	3142C	00034792	26-2000MHz	16 May 2022
Log Periodic Antenna	ETS	3148	00023845	200-2000MHz	14 Apr 2023
Horn Antenna	ETS	3115	5061	1-18GHz	10 Jun 2022
Horn Antenna	ETS	3115	5955	1-18GHz	12 Oct 2022
Preamplifier	Com-Power	PAM-118A	551016	500MHz-18GHz	15 Mar 2022
Preamplifier	Com-Power	PAM-103	18020181	1MHz-1000MHz	24 Mar 2022
Signal Generator	Marconi	2024	112255/164	9KHz-2.4GHz	22 Oct 2023
Attenuator(30dB)	Aeroflex\Weinsc hel	46-30-34	BR9127	DC-18GHz	Cal before use
Load(50ohm)	Mini-Circuits	KARN-50+		DC-18GHz	Cal before use

# 6.10. Frequency Stability

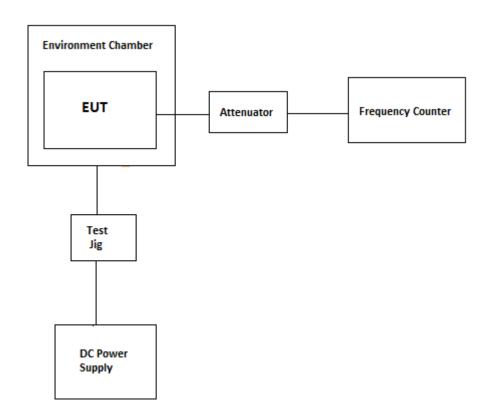

Test Date: Nov 04 & 08, 2021

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Environmental Chamber	Envirotronics	SSH32C	11994847-S- 11059	-60 to 177° C	25 Aug 2023
Frequency Counter	EIP	545A	2683	10MHz-1GHz	08 Sep 2022
Attenuator(20dB)	Aeroflex\Weinsc hel	34-20-34	BP6023	DC-18GHz	Cal before use
Attenuator(20dB)	Narda	26298	A577	DC-1GHz	Cal before use
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	
Multimeter	Fluke	8842A	4142058		01 Oct 2022

# **EXHIBIT 7. MEASUREMENT UNCERTAINTY**

Test description	Uncertainty	
Conducted Output Power		+/- 0.62 dB
Occupied bandwidth	+/-0.2Hz	
Emission Mask	Amplitude	+/- 0.63 dB
	Frequency	+/-0.2Hz
Conducted Out of Band/Spurious Emissions	+/- 0.72 dB	
Radiated Out of Band/Spurious Emissions	<30 MHz	+/-2.69dB
	30-1000 MHz	+/-4.20dB
	>1 GHz	+/-2.70dB
Frequency Stability	+/-1.2 Hz	
Transient Frequency Behavior	+/- 0.05%	
Power Line Conducted Emission	<u>+</u> 2.62dB	

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

# **EXHIBIT 8. MEASUREMENT METHODS**

#### 8.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

## Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- ➤ Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, x = Tx on / (Tx on + Tx off) with 0<x<1, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


#### Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

### EIRP = A + G + 10log(1/x)

 $\{X = 1 \text{ for continuous transmission } => 10log(1/x) = 0 dB\}$ 

Figure 1.



Page 93

#### 8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

#### 8.2.1. MAXIMIZING RF EMISSION LEVEL (E-FIELD)

- (a) The measurements were performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  $E (dB\mu V/m) = Reading (dB\mu V) + Total Correction Factor (dB/m)$ 

(f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency Resolution BW: 100 KHz Video BW: same Detector Mode: positive Average: off

Span: 3 x the signal bandwidth

- The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal was (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- Repeat for all different test signal frequencies.

Page 94

#### 8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source

100 KHz Resolution BW: Video BW: VBW > RBW Detector Mode: positive Average: off

Span: 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.
- (d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
  - DÍPOLE antenna for frequency from 30-1000 MHz or
  - HORN antenna for frequency above 1 GHz }.
- (e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
- Use one of the following antenna as a receiving antenna:
  - DIPOLE antenna for frequency from 30-1000 MHz or
  - HORN antenna for frequency above 1 GHz }
- (g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
- (h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- (i) Tune the EMI Receivers to the test frequency.
- (j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- $(\H k)$  The transmitter was rotated through 360 $^\circ$  about a vertical axis until a higher maximum signal was
- Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
- (n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

Total Correction factor in EMI Receiver # 2 = L2 - L1 + G1

Where: Actual RF Power fed into the substitution antenna port after corrected.

> P1: Power output from the signal generator P2: Power measured at attenuator A input P3: Power reading on the Average Power Meter

EIRP: EIRP after correction ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o) (p) Repeat step (d) to (o) for different test frequency

- (q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization. (r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Page 95

Figure 2


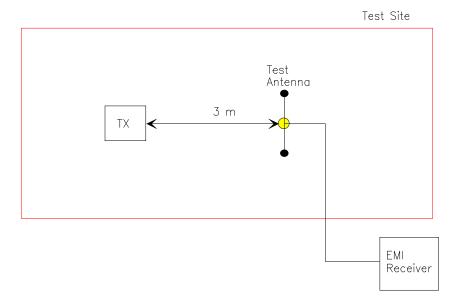


Figure 3

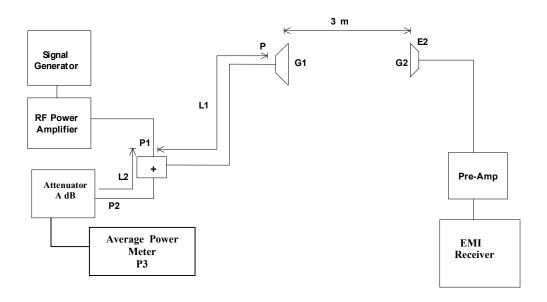

#### 8.3. FREQUENCY STABILITY

Refer to FCC @ 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
  - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
  - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
  - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

#### 8.4. EMISSION MASK

<u>Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i)</u>:- The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: <u>+</u>2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

<u>Digital Modulation Through a Data Input Port @ 2.1049(h)</u>:- Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

- (1) For 25 KHz Channel Spacing: RBW = 300 Hz
- (2) For 12.5 KHz or 6.25 KHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

## 8.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 KHz minimum, VBW > RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**FCC 47 CFR 2.1057 - Frequency spectrum to be investigated:** The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10<sup>th</sup> harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The

amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC 47 CFR 2.1051 - Spurious Emissions at Antenna Terminal: The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions, which are attenuated more than 20 dB below the permissible value, need not be specified.

Page 98

8.6.

1. Connect the transmitter under tests as shown in the above block diagram

TRANSIENT FREQUENCY BEHAVIOR

- 2. Set the signal generator to the assigned frequency and modulate with a 1 KHz tone at ±12.5 KHz deviation and its output level to be 50 dB below the transmitter rf output at the test receiver end.
- 3. Set the horizontal sweep rate on the storage scope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone from the Demodulator Output Port (DOP) of the Test Receiver. Adjust the vertical scale amplitude control of the scope to display the 1000 Hz at <u>+</u>4 divisions vertical Center at the display.
- 4. Adjust the scope so it will trigger on an increasing magnitude from the RF trigger signal of the transmitter under test when the transmitter was turned on. Set the controls to store the display.
- 5. The output at the DOP, due to the change in the ratio of the power between the signal generator input power and transmitter output power will, because of the capture effect of the test receiver, produce a change in display: For the first part of the sweep it will show the 1 KHz test signal. Then once the receiver's demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 KHz test signal is completely suppressed (including any capture time due to phasing) is considered to be t<sub>on</sub>. The trace should be maintained within the allowed divisions during the period t<sub>1</sub> and t<sub>2</sub>.
- 6. During the time from the end of t<sub>2</sub> to the beginning of t<sub>3</sub> the frequency difference should not exceed the limits set by the FCC in Part 90.214 and the outlined in the Carrier Frequency Stability sections. The allowed limit is equal to FCC frequency tolerance limits specified in FCC 90.213.
- 7. Repeat the above steps when the transmitter was turned off for measuring t<sub>3</sub>.

\*\*\*END OF REPORT\*\*\*

Page 99