
TEST REPORT FOR GSM TESTING

Report No.: SRTC2022-9004(F)-22050701(A)

Product Name: LTE USB Dongle

Product Model: MF833U1

Applicant: ZTE Corporation

Manufacturer: ZTE Corporation

Specification: FCC Part 24E, Part 22H, Part 2 (2020)

FCC ID: SRQ-MF833U

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION	2
1.1 Notes of the test report	2
1.2 Information about the testing laboratory	2
1.3 Applicant's details	2
1.4 Manufacturer's details	2
1.5 Test Environment	2
2 DESCRIPTION OF THE DEVICE UNDER TEST	3
2.1 Final Equipment Build Status	3
2.2 Support Equipment	3
3 REFERENCE SPECIFICATION	4
4 KEY TO NOTES AND RESULT CODES	4
5 RESULT SUMMARY	5
6 TEST RESULT	6
6.1 RF Power Output	6
6.2 Effective Radiated Power and Effective Isotropic Radiated Power	7
6.3 Occupied Bandwidth	8
6.4 Emission Bandwidth	9
6.5 Spurious Emissions at antenna terminal	10
6.6 Band Edges Compliance	11
6.7 Frequency Stability	12
6.8 Radiated Spurious Emissions	13
6.9 Peak-Average Ratio	15
7 MEASUREMENT UNCERTAINTIES	16
8 TEST EQUIPMENTS	17
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	18
APPENDIX B – TEST DATA OF RADIATED EMISSION	60

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Designation Number:	CN1267
Registration number:	239125

1.3 Applicant's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.4 Manufacturer's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2022-05-07
Testing Start Date:	2022-05-09
Testing End Date:	2022-06-02

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient:	25	40
Maximum Extreme:	55	---
Minimum Extreme:	-10	---

Normal Supply Voltage (V d.c.):	5.0
Maximum Extreme Supply Voltage (V d.c.):	5.2
Minimum Extreme Supply Voltage (V d.c.):	4.8

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Range:	GSM850: Tx:824~849MHz Rx:869~894MHz PCS1900: Tx:1850~1910MHz Rx:1930~1990MHz
Modulation Type:	GPRS:GMSK EDGE: GMSK/8PSK
Emission Designator:	300KGXW/300KG7W
Duplex Mode:	FDD
Duplex Spacing:	GSM850:45MHz PCS1900:80MHz
Antenna Type:	Fixed Internal Antenna
Antenna Gain:	GSM850: 0.5dBi/PCS1900: 1.0dBi ERP = EIRP(Power+Gain) – 2.15 (dB)
Power Supply:	Charger
Software Revision:	BD_MF833U1V1.0.0B01
Hardware Revision:	dveB
IMEI:	860220049274510 860220049274528

2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:N/A

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC Part2	2020	Frequency allocations and radio treaty matters; general rules and regulations
FCC Part22	2020	Public mobile services
FCC Part24	2020	Personal communications services
ANSI C63.26	2020	American national standard for compliance testing of transmitters used in licensed radio services
KDB 971168 D01	April 9, 2018	Measurement guidance for certification of licensed digital transmitters
TIA-603-E-2016	March 2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

4 KEY TO NOTES AND RESULT CODES

The following are the definition of the test result.

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
NT	Normal Temperature
NV	Nominal voltage
HV	High voltage
LV	Low voltage

5 RESULT SUMMARY

No.	Test case	FCC reference	Verdict
1	RF Power Output	2.1046	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	22.913(a)(5)/24.232(c)	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Emission Bandwidth	2.1049	Pass
5	Spurious Emissions at antenna terminals	2.1051/22.917(a)/24.238(a)	Pass
6	Band Edges Compliance	2.1051/22.917(a)/24.238(a)	Pass
7	Frequency Stability	2.1055/22.355/24.235	Pass
8	Radiated Spurious Emissions	2.1053/22.917(a)/24.238(a)	Pass
9	Peak-Average Ratio	24.232(d)	Pass


This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. Du Wei 	Issued date: 20220518

6 TEST RESULT

6.1 RF Power Output

Rule Part(s)
FCC Part 2.1046

Test Setup:

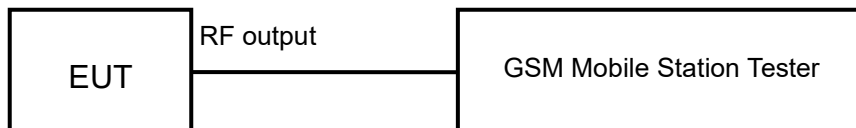

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration. The measurement will be conducted at three channels (Low, Middle and High channels)

Limits: No specific conduct power requirements in part 2.1046.

Test result:


The test results are shown in Appendix A.

6.2 Effective Radiated Power and Effective Isotropic Radiated Power

Rule Part(s)

FCC Part 22.913(a)(5)/Part 24.232(c)

Test setup:

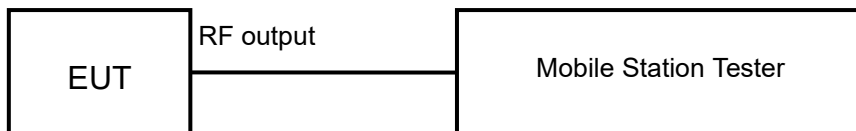

Test procedure:

KDB 971168 D01 v03r01 – Section 5.6

Test Settings

Subclause 5.2.5.5 of ANSI C63.26-2015 is applicable, along with the following provisions. For personal/portable radios utilizing an integral antenna, the factor LC is typically negligible. However, in a fixed station transmit system that utilizes a long cable run between the transmitter and the transmitting antenna, this factor can be significant. The minimum cable loss should be used in this equation.

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{ERP/EIRP} = \text{PMeas} - \text{LC} + \text{GT}$$

Where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm)

PMeas = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

Limits for GSM850:

Operation Mode	Power Step	E.R.P. (dBm)
GSM	5	≤38.45
GPRS	3	≤38.45
EDGE	6	≤38.45

Limits for PCS1900:

Operation Mode	Power Step	E.I.R.P. (dBm)
GSM	0	≤33
GPRS	3	≤33
EDGE	5	≤33


Test result:

The test results are shown in Appendix A.

6.3 Occupied Bandwidth

Rule Part(s)
Part 2.1049

Test Setup:

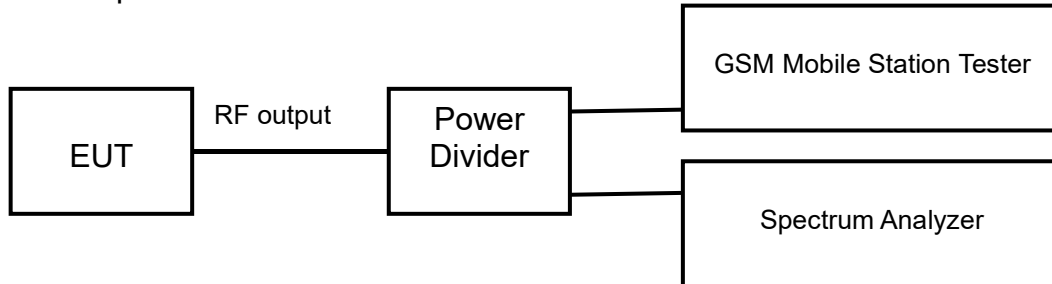

Test procedure:
KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7


Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:
The test results are shown in Appendix A.

6.4 Emission Bandwidth-

Rule Part(s)
Part 2.1049

Test Setup:

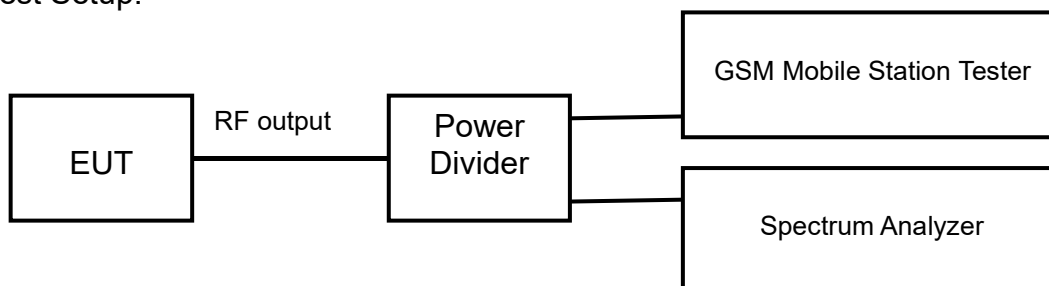

Test procedure:
KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 26dB occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the emission bandwidth observed in Step 7

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


The test results are shown in Appendix A.

6.5 Spurious Emissions at antenna terminal

Rule Part(s)

FCC Part 2.1053/22.917 (a)/ 24.238(a)

Test Setup:

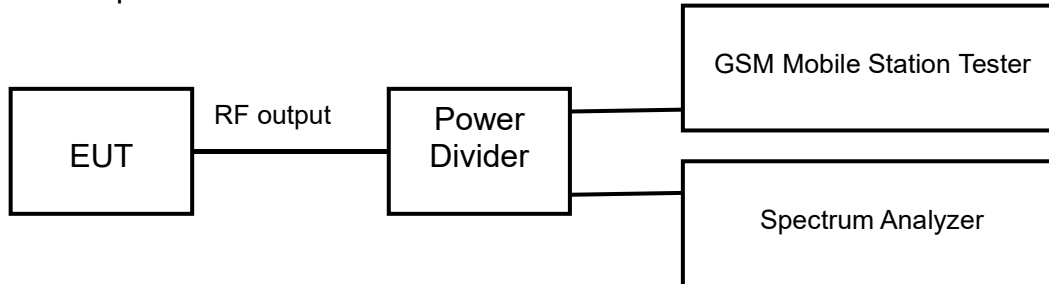

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for PCS
2. RBW=100 kHz (For below 1GHz), 1MHz (For above 1GHz)
3. VBW $\geq 3 \times$ RBW
4. Detector = RMS
5. Trace mode = trace average for continuous emissions, max hold for pulse emissions
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Limits:

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{[Watts]}})$, where P is the transmitter power in Watts.

Test result:


The test results are shown in Appendix A.

6.6 Band Edges Compliance

Rule Part (s)

FCC Part 2.1051/ 22.917(a) /Part 24.238(a)

Test Setup:

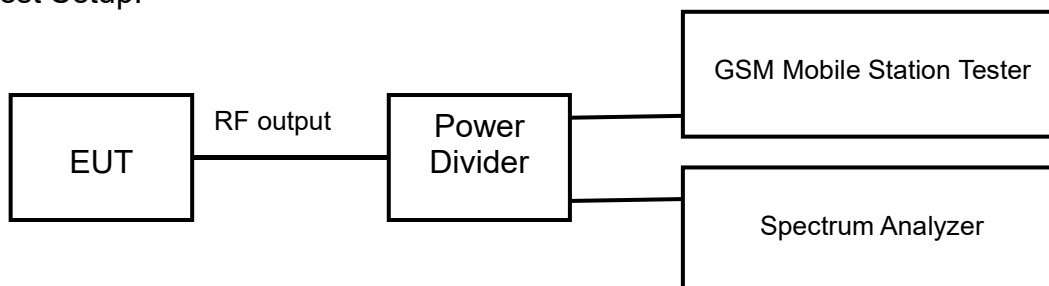

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span=2MHz
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Limit: The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P_{\text{[Watts]}})$, where P is the transmitter power in Watts.

Test result:


The test results are shown in Appendix A.

6.7 Frequency Stability

Rule Part(s)

FCC Part 2.1055/22.355 /Part 24.235

Test setup:

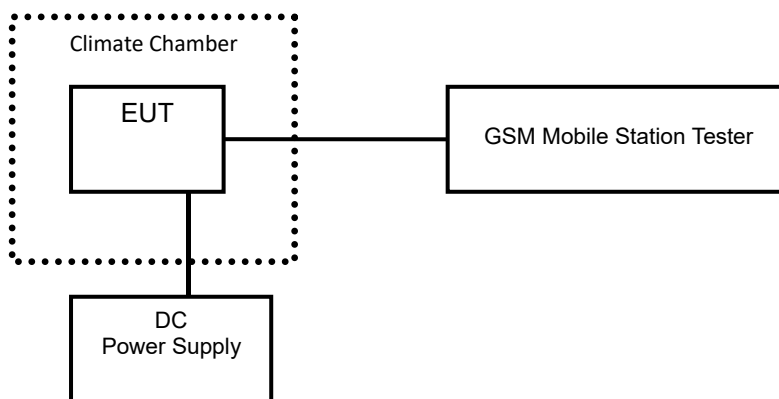

Test Procedure:

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C (The temperature range can be declared by the manufacturer). A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Limits: For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test result:


The test results are shown in Appendix A.

6.8 Radiated Spurious Emissions

Rule Part(s)

FCC Part2.1053/ 22.917(a)/Part 24.238(a)

Test Setup:

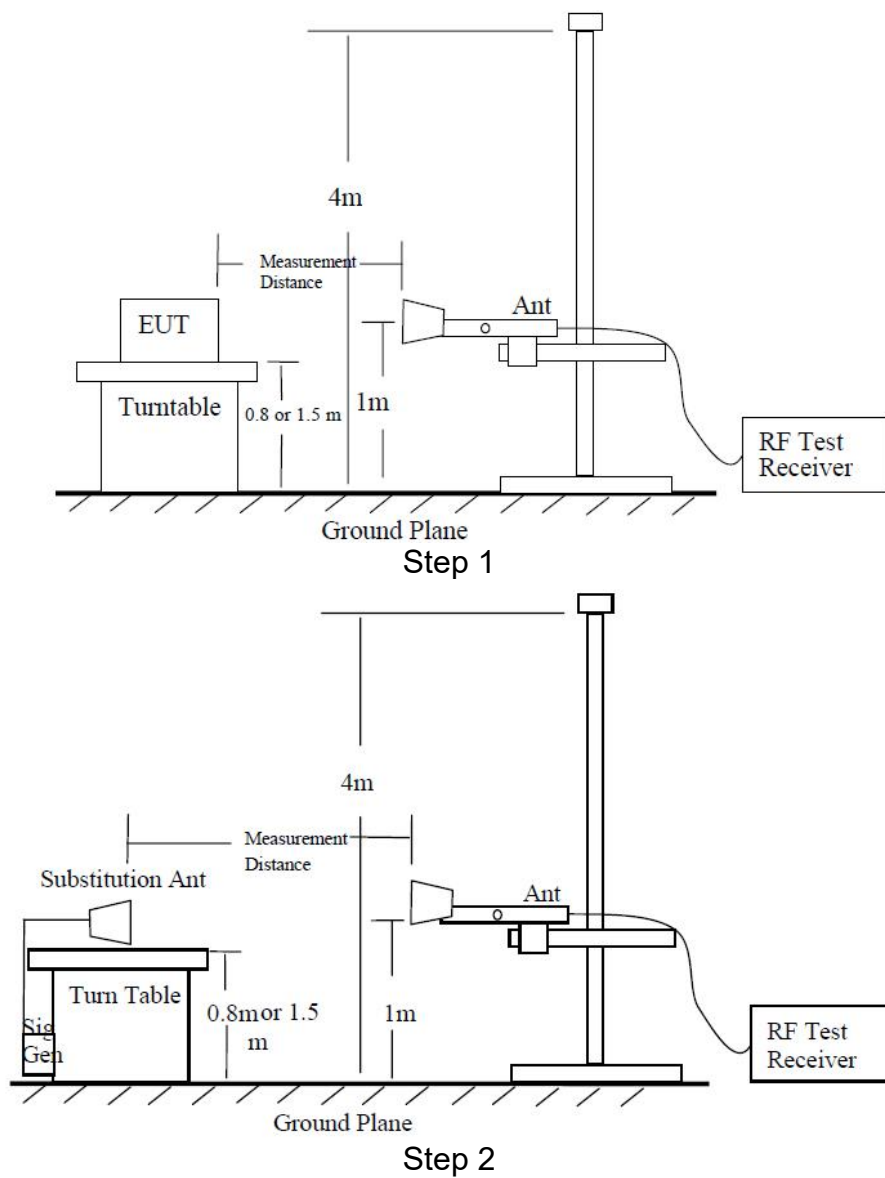

Test procedure:

The measurements procedures in TIA-603-E-2016 are used.

The spectrum was scanned from 30MHz to the 10th harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the chamber. EUT was placed on a 0.8m ($f < 1\text{GHz}$)/1.5m ($f > 1\text{GHz}$) high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna from 1m to 4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 100 kHz ($f < 1\text{GHz}$)/1MHz ($f > 1\text{GHz}$). The antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 10th harmonic of the carrier. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P_{mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna (P_{ca}) and the Substitution Antenna Gain (G_a).

Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power (EIRP)} = P_{\text{mea}} + P_{\text{ca}} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15 \text{ (dB)}$.

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

Note: We tested both horizontal and vertical polarization, but only the largest numerical polarity of the two polarities was recorded in the final report.


Test result:

The test results are shown in Appendix B.

6.9 Peak-Average Ratio

Rule Part(s)
FCC Part 24.232(d)

Test Setup:

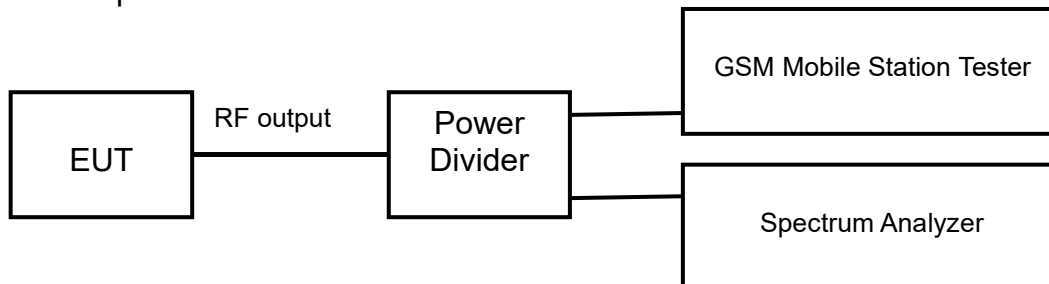

Test procedure:
KDB 971168 D01 v03r01 – Section 5.7.1

Test settings:

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Limits: the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test result:

The test results are shown in Appendix A

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
RF Power Output	0.6 dB	
Effective Radiated Power and Effective Isotropic Radiated Power	0.6 dB	
Occupied Bandwidth	3kHz	
Emission Bandwidth	3kHz	
Peak-Average Ratio	0.8dB	
Frequency Stability	48Hz	
Band Edges Compliance	1.2dB	
Spurious Emissions at antenna terminal	9kHz~2GHz	1.2dB
	2G~3.6GHz	1.4dB
	3.6G~8GHz	2.2dB
	8G~12.75GHz	2.7dB
Radiated Emission Measurement	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB

8 TEST EQUIPMENTS

No.	Name/Model	Manufacturer	S/N	Calibration Date	Calibration Due Date
1	Mobile Station Tester / MT8820C	Anritsu	6201300660	2021.06.21	2022.06.20
2	Radio Communication Station / CMW500	R&S	161702	2021.06.21	2022.06.20
3	Spectrum Analyzer / FSV40	R&S	101065	2021.06.21	2022.06.20
4	Spectrum Analyzer / N9020A	Agilent	MY48010771	2022.05.18	2023.05.17
5	Power Divider / 11667A	HP	19632	2021.06.21	2022.06.20
6	DC Power Supply / E3645A	Agilent	MY40000741	2022.04.22	2023.04.21
7	Temperature chamber / SH241	ESPEC	92013758	2021.06.21	2022.06.20
8	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	-----	-----	-----
9	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	-----	-----
10	Turn table Diameter:1m	FRANKONIA	-----	-----	-----
11	Turn table Diameter:5m	FRANKONIA	-----	-----	-----
12	Antenna master FAC(MA4.0)	MATURO	-----	-----	-----
13	Antenna master SAC(MA4.0)	MATURO	-----	-----	-----
14	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	-----	-----	-----
15	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2021.06.21	2022.06.20
16	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2021.06.21	2022.06.20
17	Ultra log antenna / HL562	R&S	100016	2021.06.21	2022.06.20
18	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2021.06.21	2022.06.20
19	EMI test receiver / ESI 40	R&S	100015	2021.06.21	2022.06.20
20	EMI test receiver / ESCS30	R&S	100029	2021.06.21	2022.06.20
21	Receive antenna / HL562	R&S	100167	2021.06.21	2022.06.20
22	AMN / ENV216	R&S	3560.6550.12	2021.06.21	2022.06.20

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

GSM850

1. RF Power Output

GSM850

GPRS Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
1850.2	512	4Down1Up	26.38
1887.6	699	4Down1Up	26.55
1924.8	885	4Down1Up	26.70
1850.2	512	3Down2Up	22.98
1887.6	699	3Down2Up	23.13
1924.8	885	3Down2Up	23.30
1850.2	512	2Down3Up	22.76
1887.6	699	2Down3Up	22.92
1924.8	885	2Down3Up	23.11
1850.2	512	1Down4Up	20.70
1887.6	699	1Down4Up	20.85
1924.8	885	1Down4Up	21.01

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
1850.2	512	4Down1Up	24.16
1887.6	699	4Down1Up	22.11
1924.8	885	4Down1Up	23.27
1850.2	512	3Down2Up	18.37
1887.6	699	3Down2Up	18.75
1924.8	885	3Down2Up	18.63
1850.2	512	2Down3Up	18.56
1887.6	699	2Down3Up	18.78
1924.8	885	2Down3Up	18.48
1850.2	512	1Down4Up	16.55
1887.6	699	1Down4Up	17.09
1924.8	885	1Down4Up	16.69

2. Occupied Bandwidth

GSM850


GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	240.77
836.6	190	241.95
848.8	251	244.07


EGPRS (8PSK) MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	240.55
836.6	190	243.76
848.8	251	241.92


GPRS MODE:

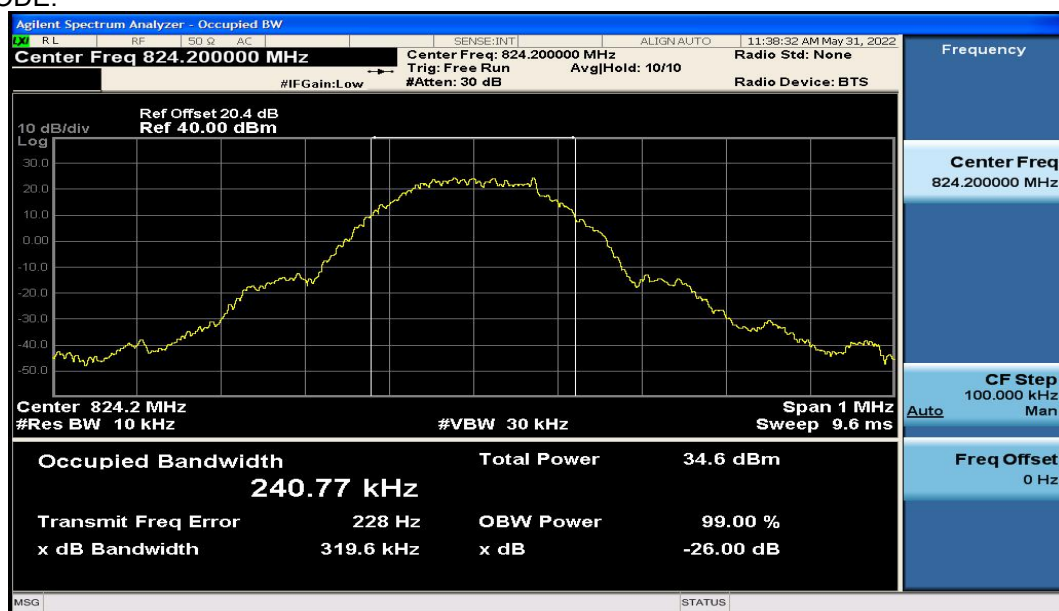

Channel 128

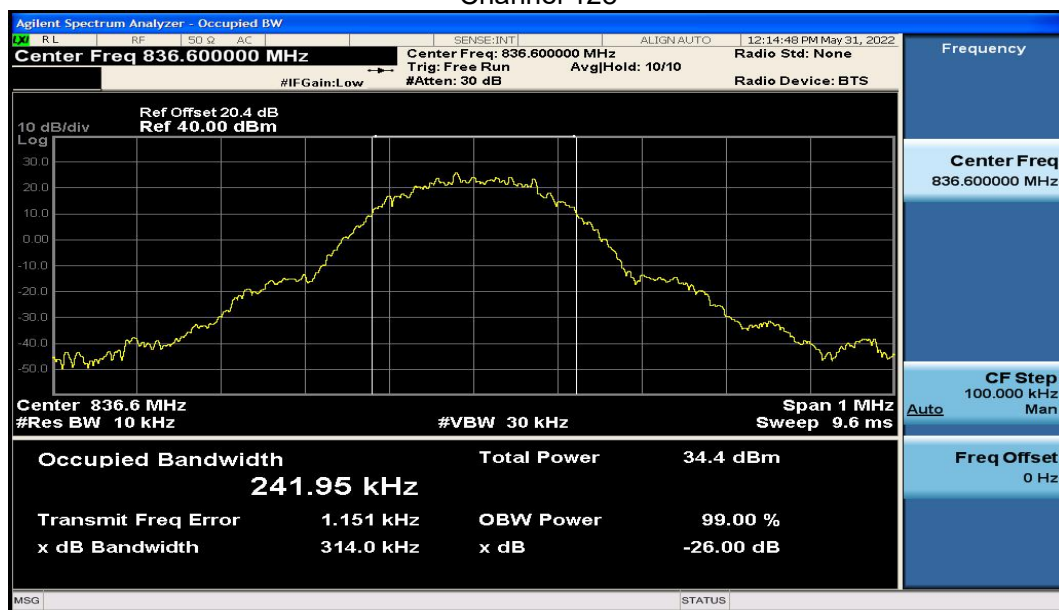


Channel 190

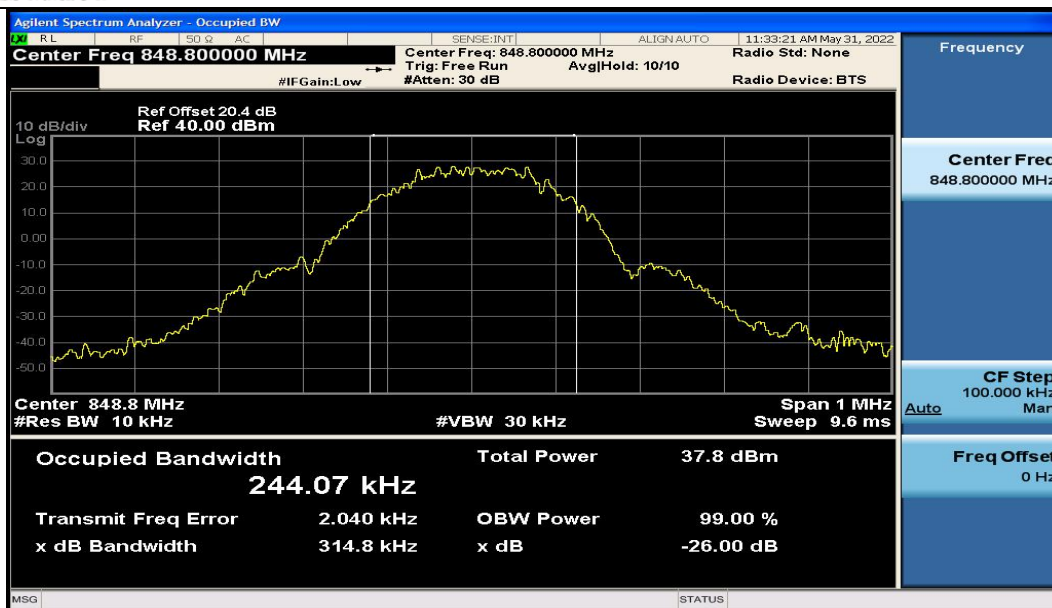


Channel 251


EGPRS (8PSK) MODE:

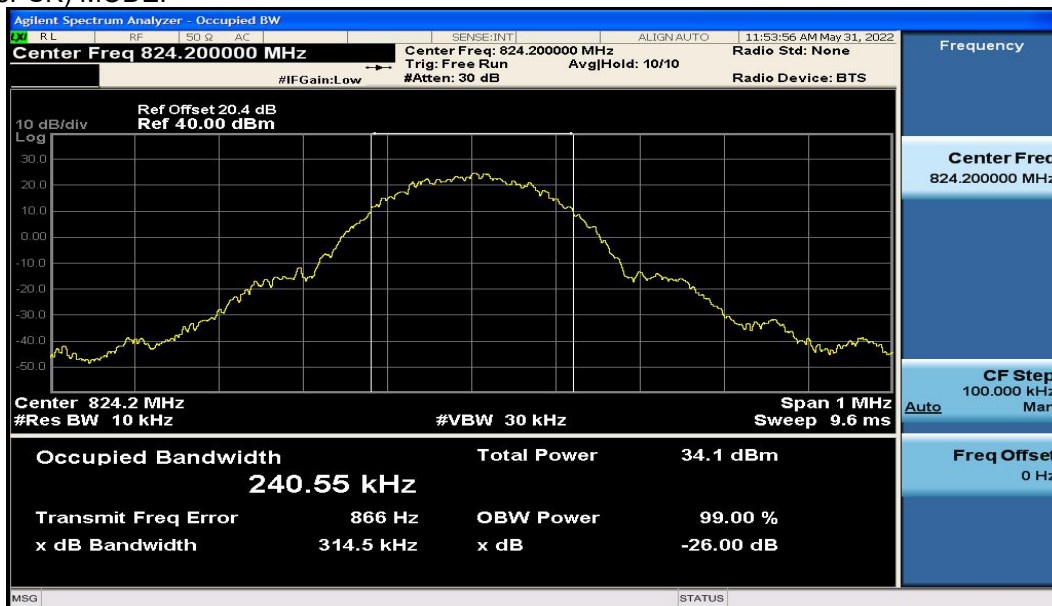

Channel 128

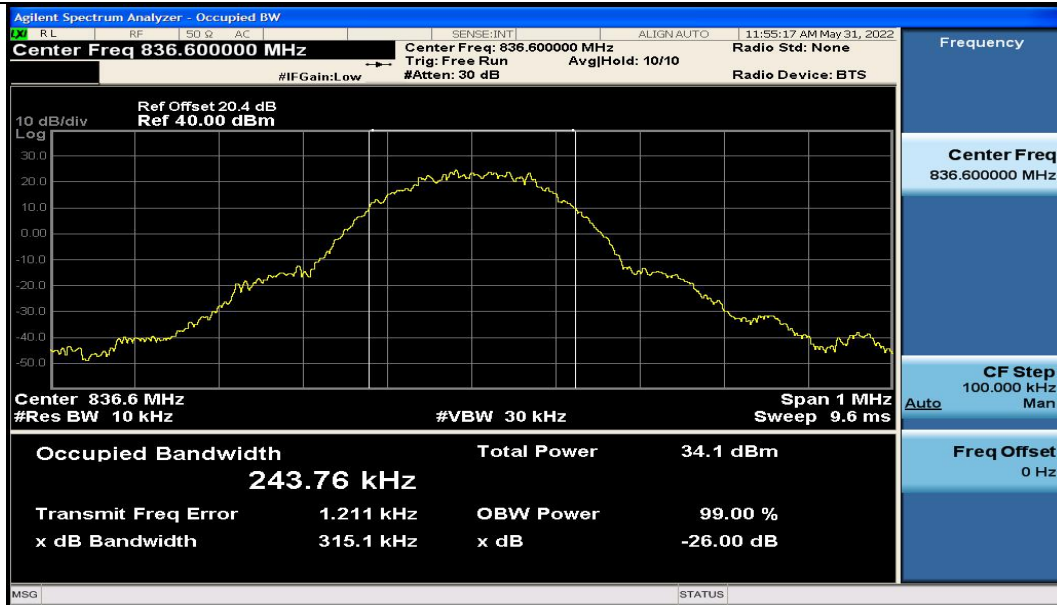

Channel 190

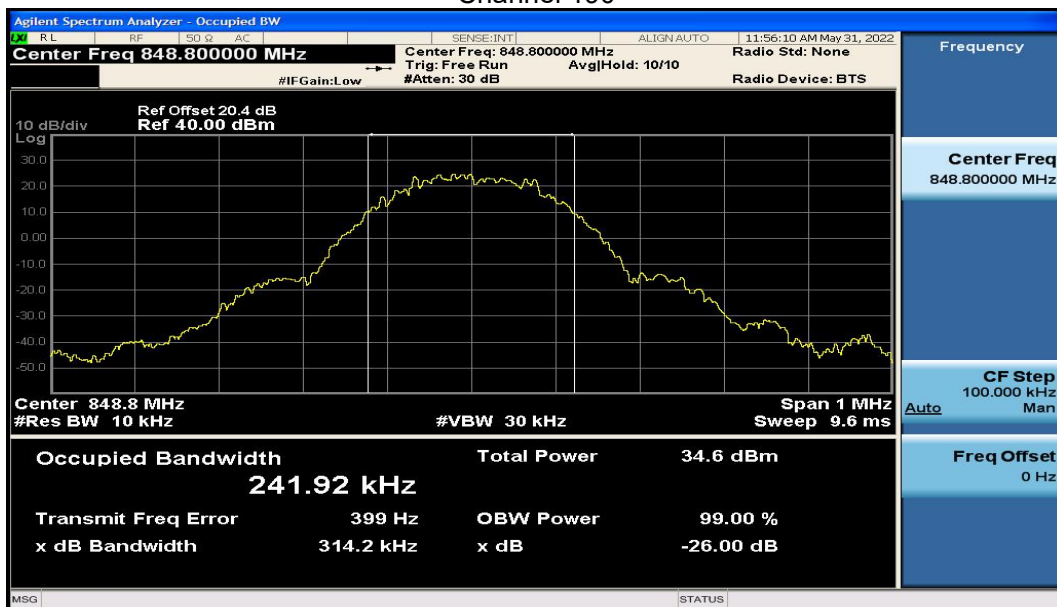

Channel 251

3. Emission Bandwidth

GSM850

GPRS MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB (kHz)
824.2	128	319.58
836.6	190	313.98
848.8	251	314.82

EGPRS (8PSK) MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power(kHz)
824.2	128	314.47
836.6	190	315.06
848.8	251	314.16

GSM850


GPRS MODE:

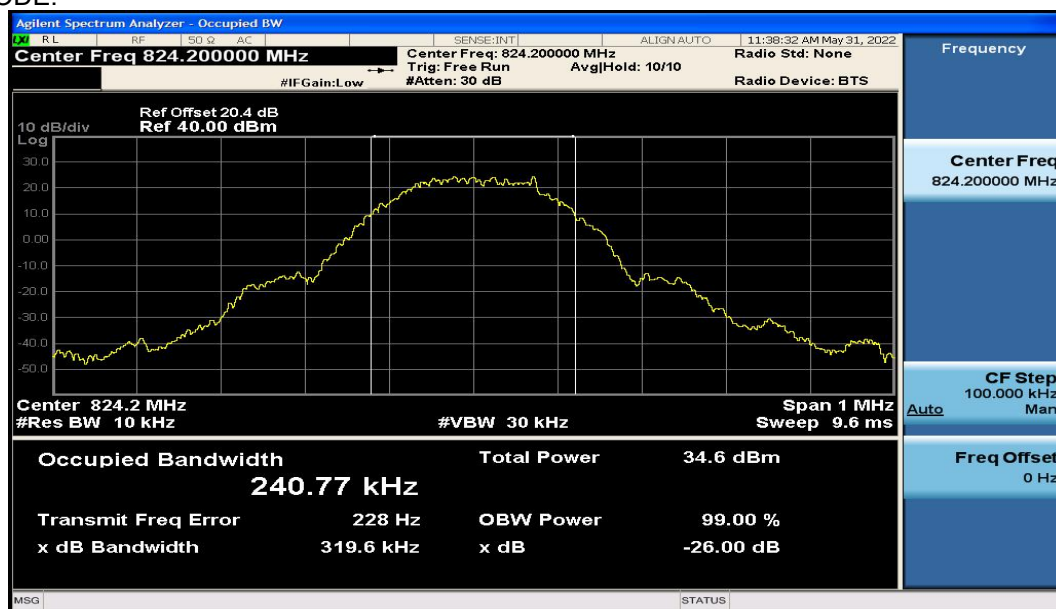

Channel 128

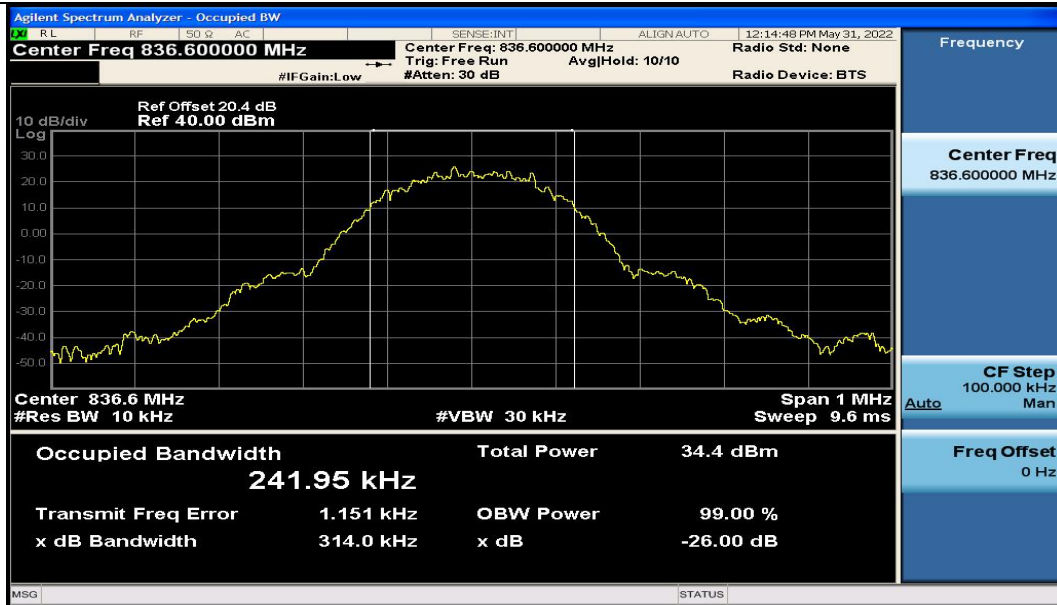


Channel 190

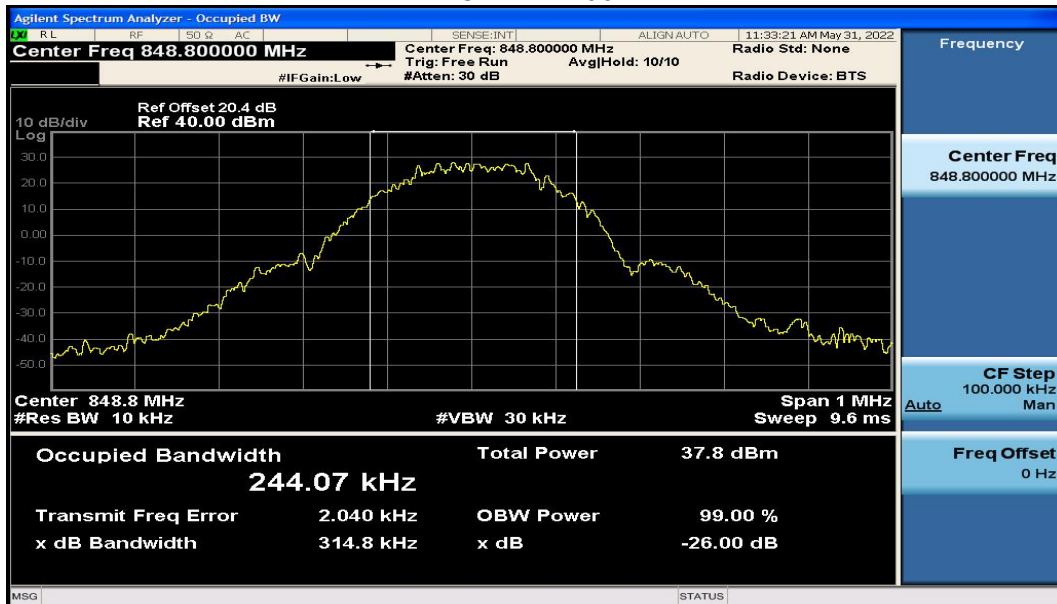


Channel 251


EGPRS (8PSK) MODE:

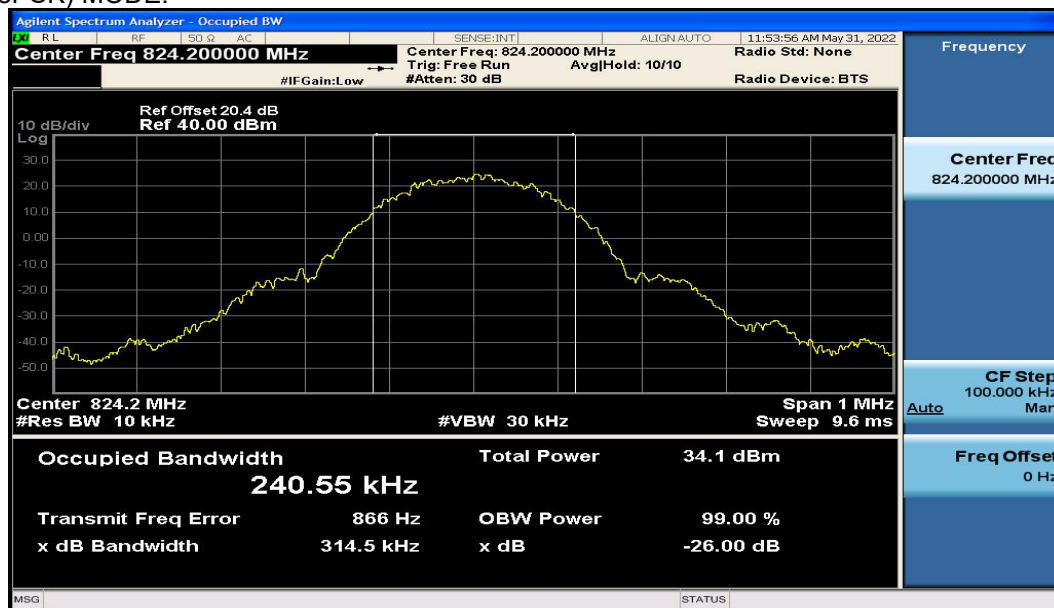

Channel 128

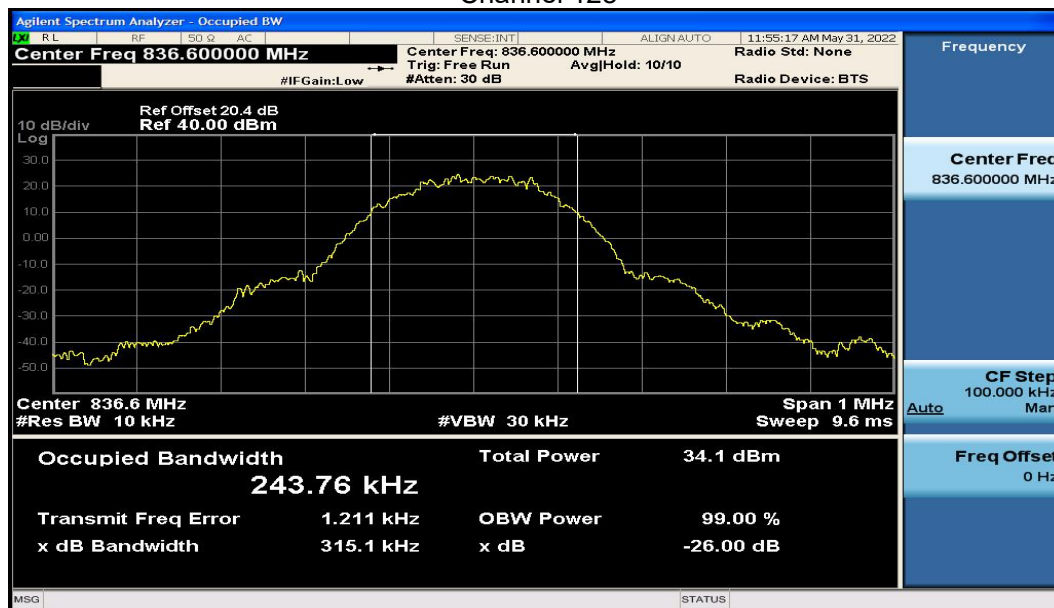


Channel 190

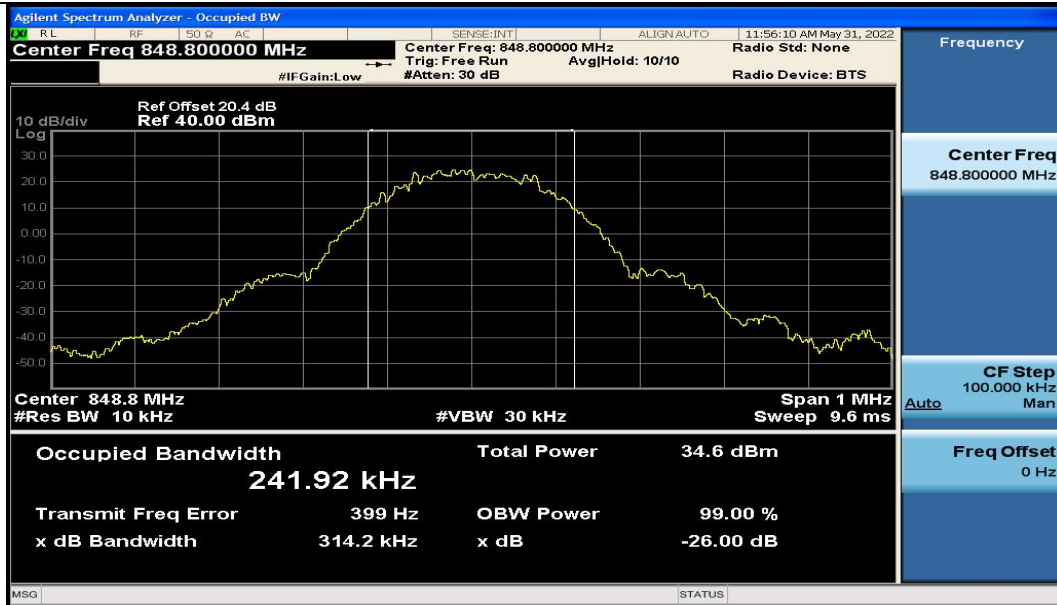


Channel 251


4. Spurious Emissions at antenna terminal GSM850 GPRS MODE:

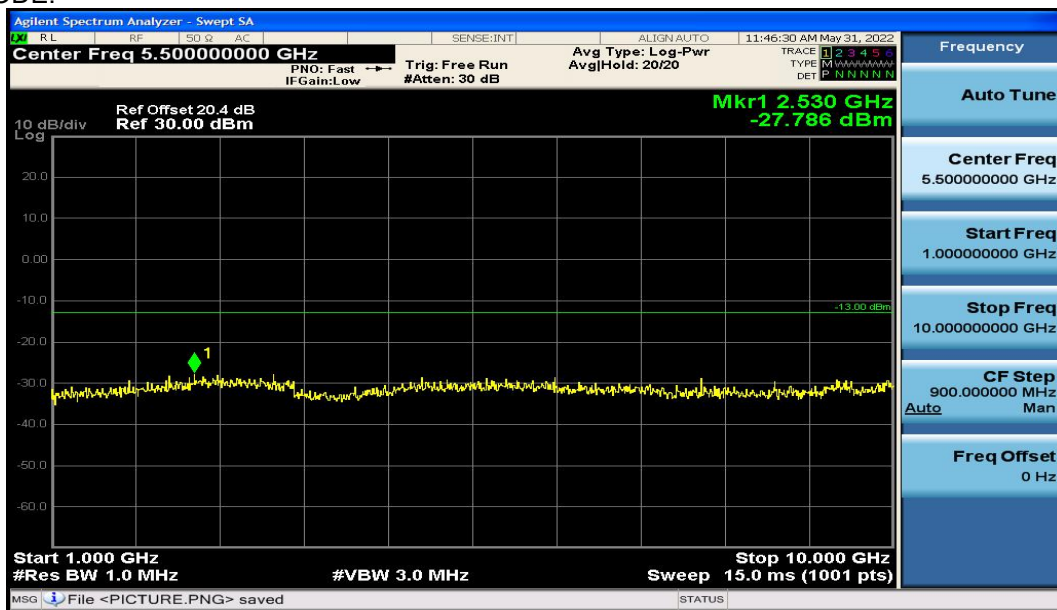


Channel 128

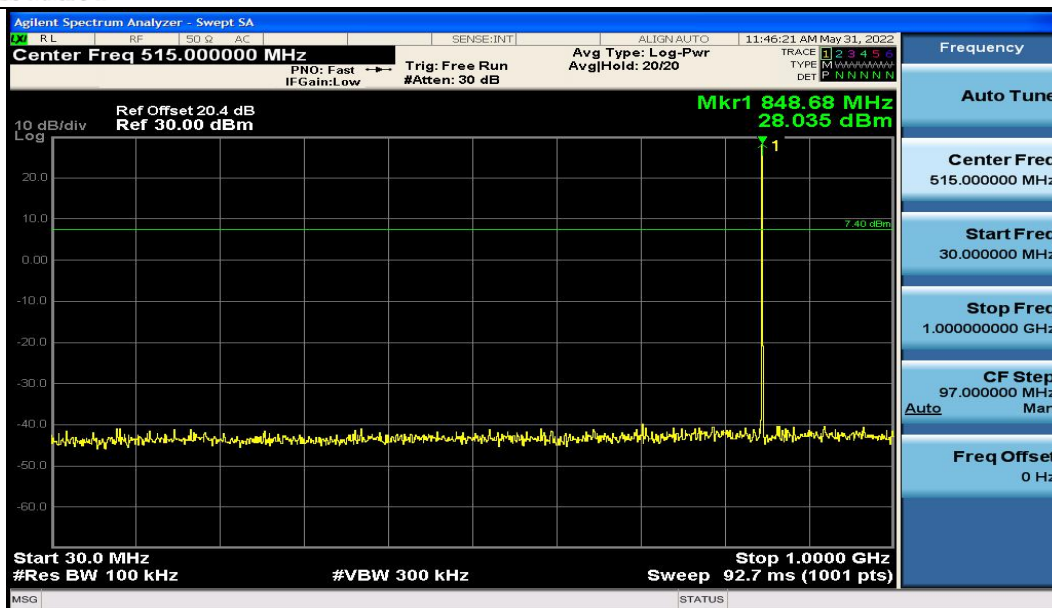


Channel 128

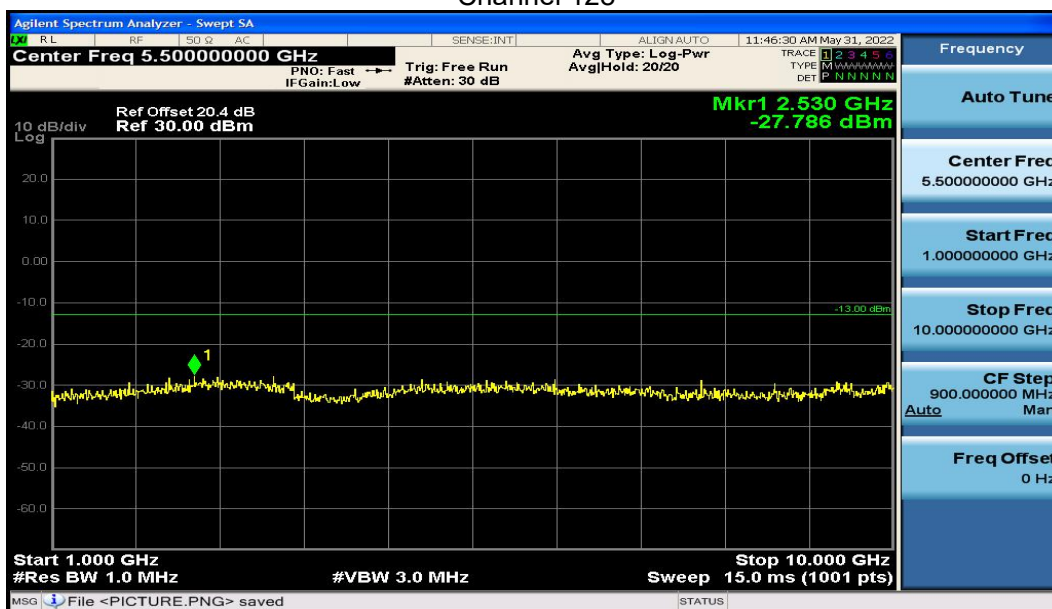


Channel 190

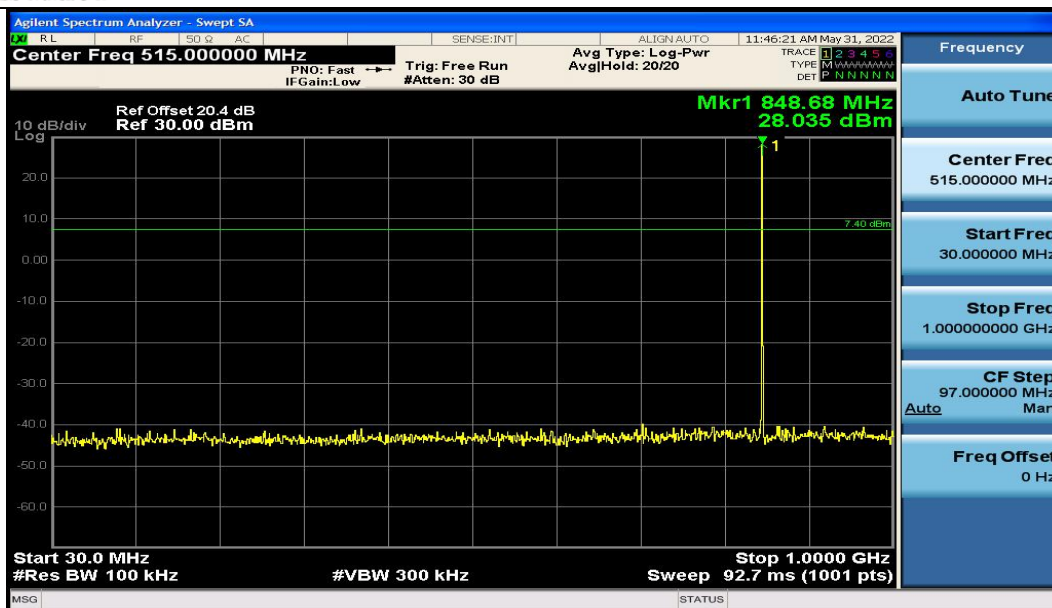

Channel 190

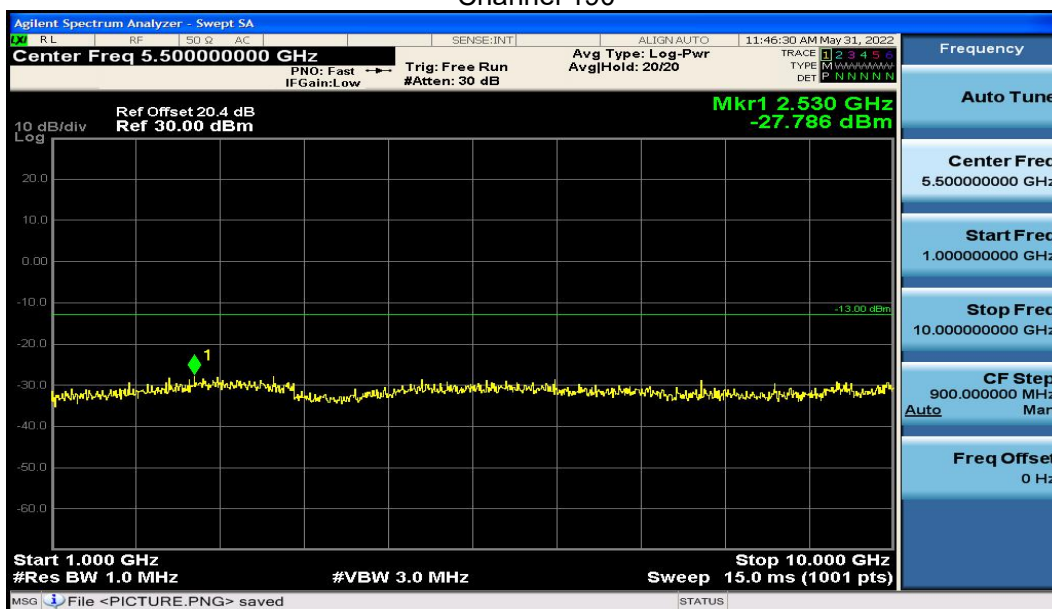


Channel 251

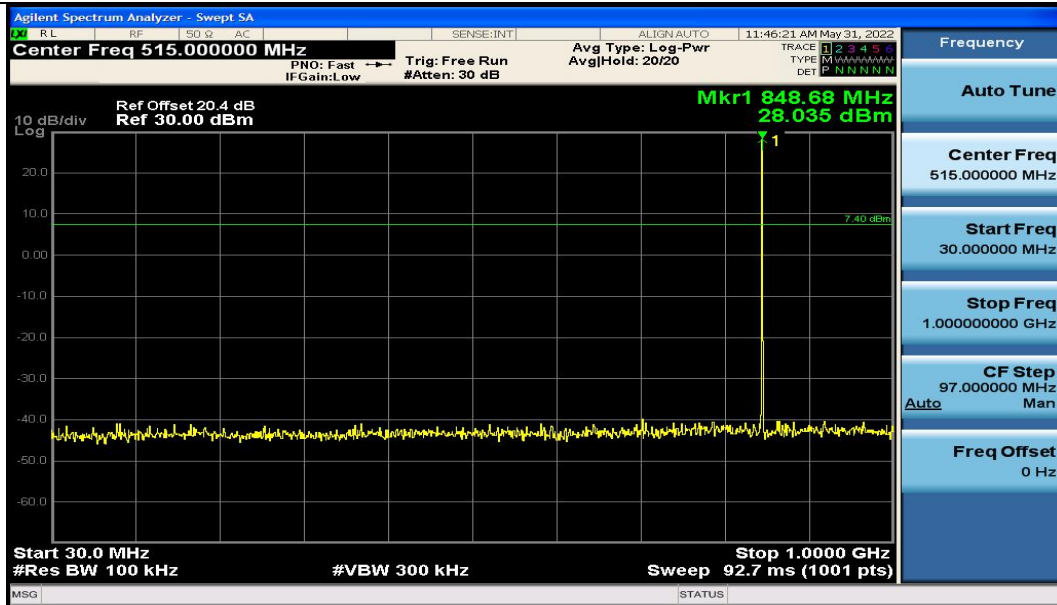


Channel 251


EGPRS (8PSK) MODE:

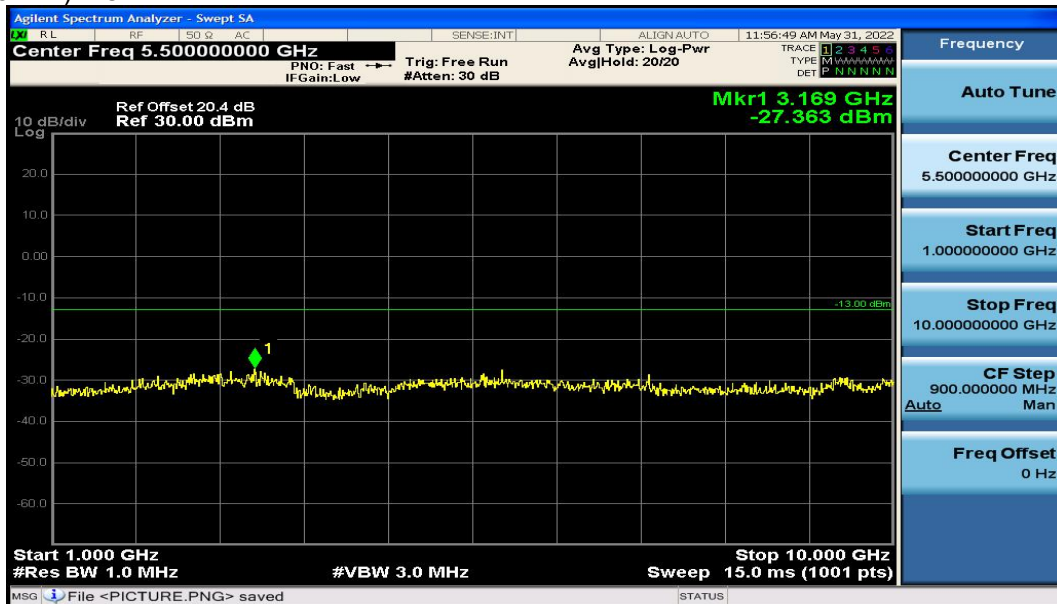


Channel 128

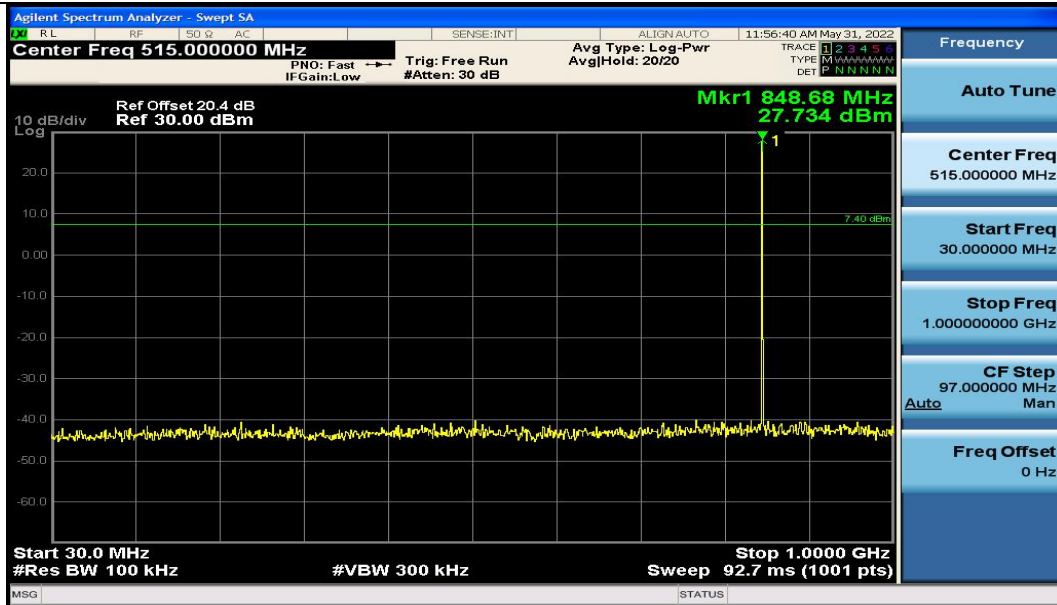


Channel 128

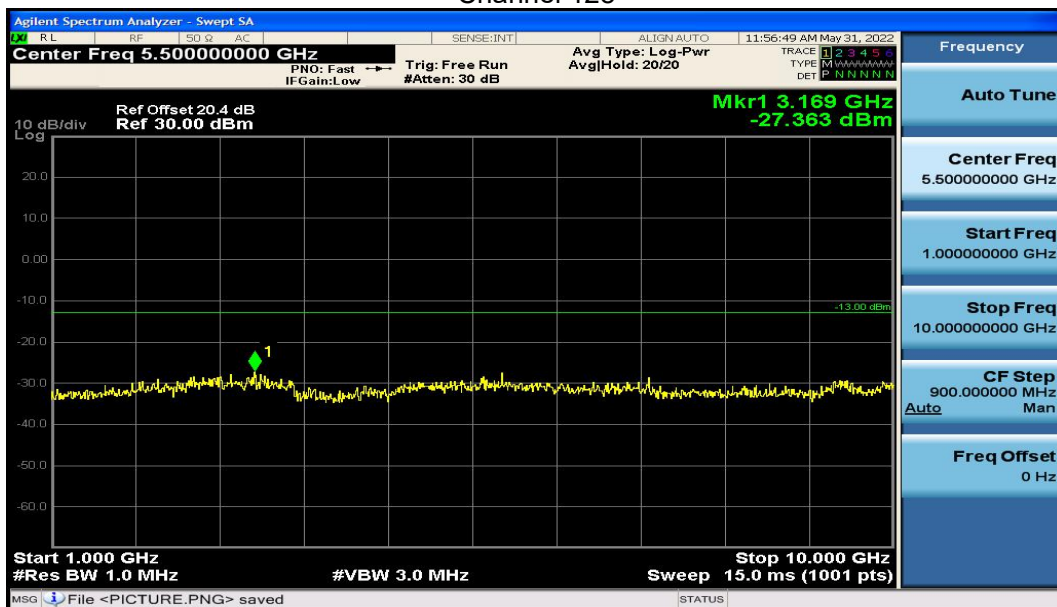


Channel 190

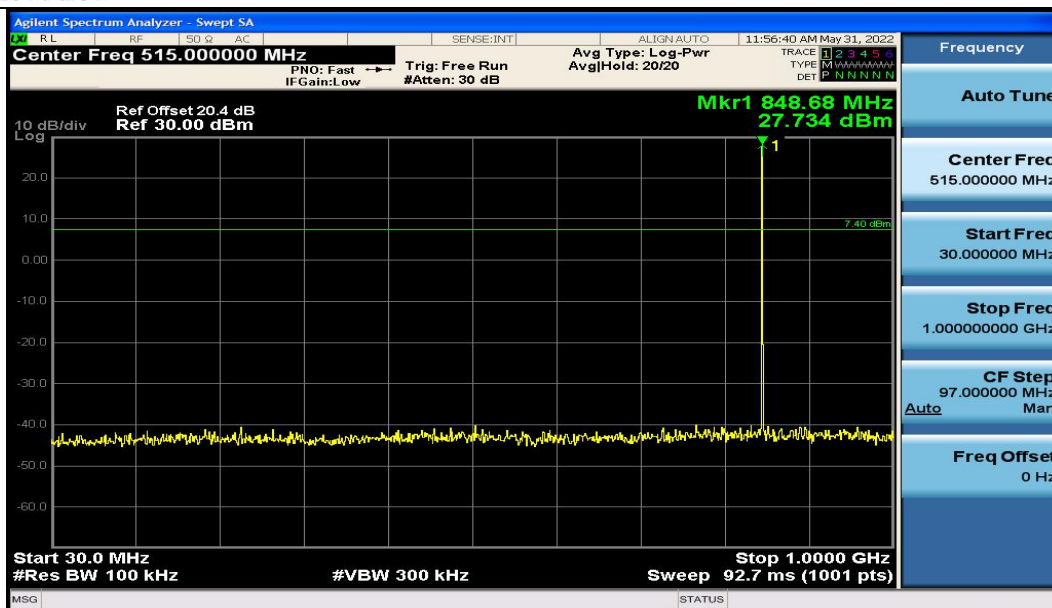

Channel 190

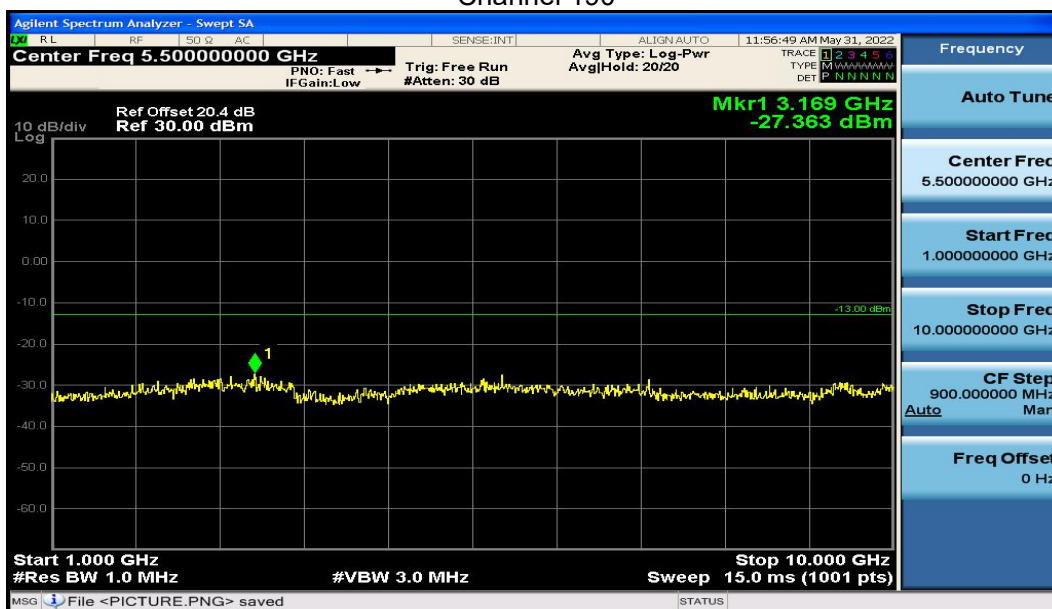

Channel 251

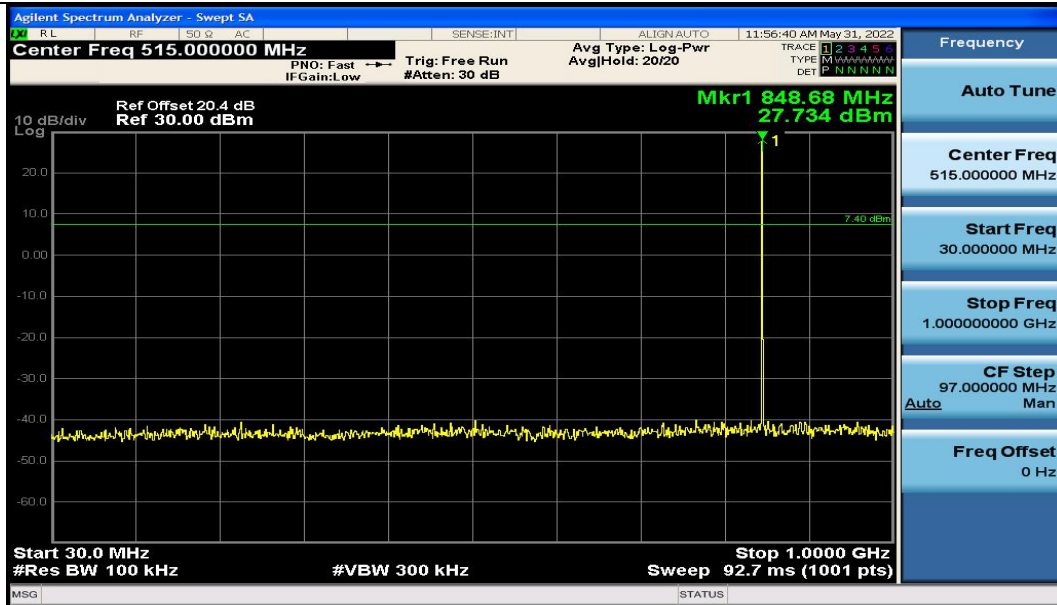


Channel 251


5. Band Edges Compliance

GSM850

GPRS MODE:

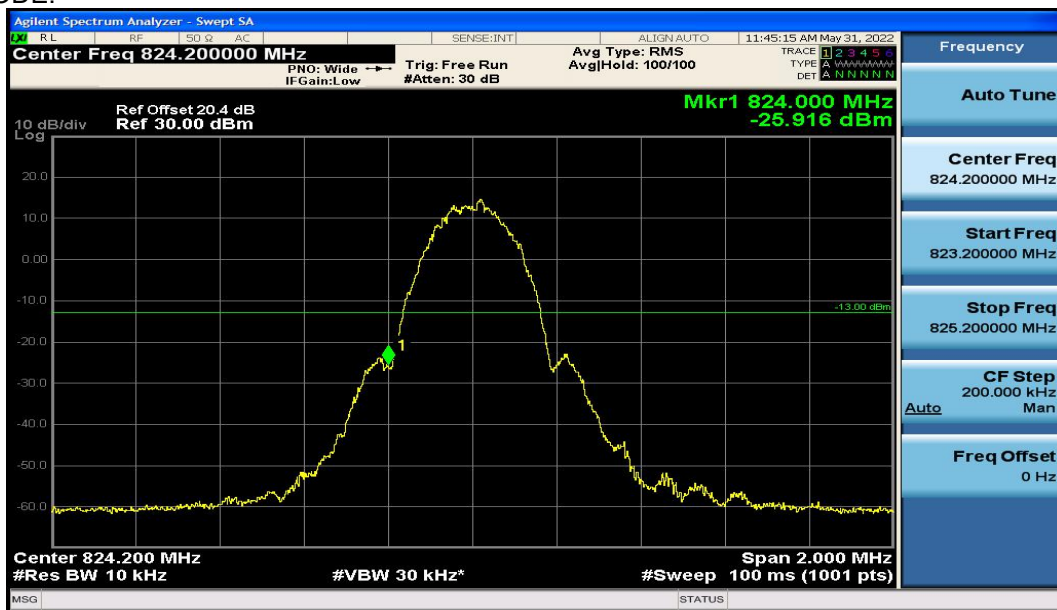


Channel 128

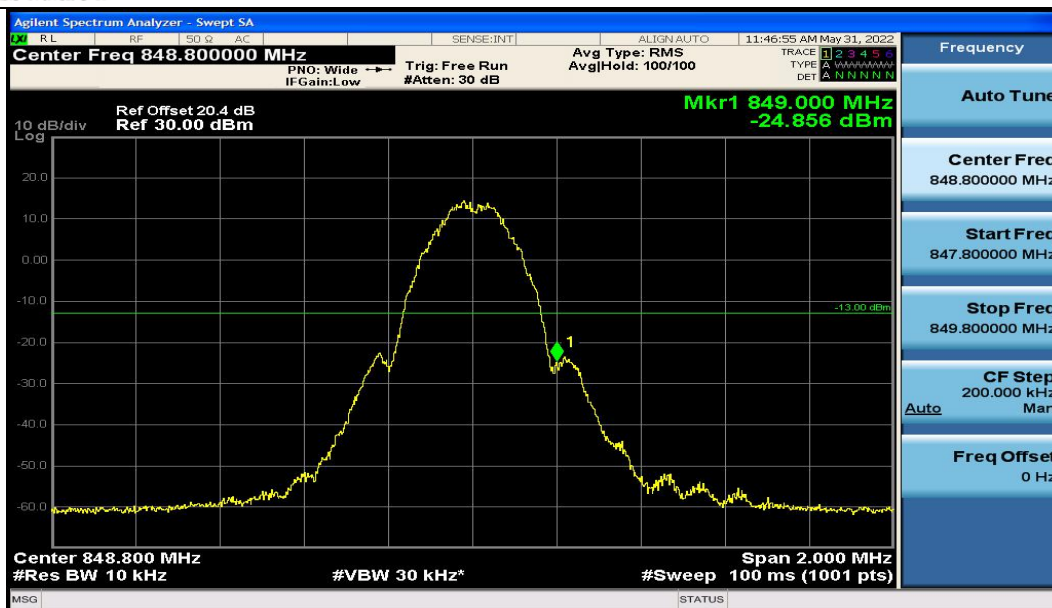


Channel 251

EGPRS (8PSK) MODE:

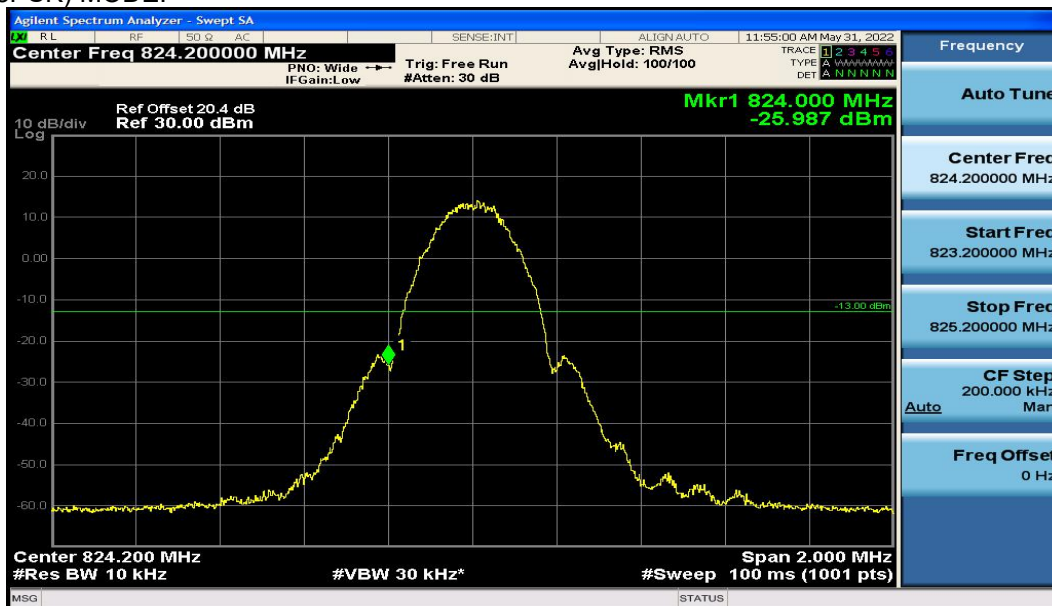

Channel 128

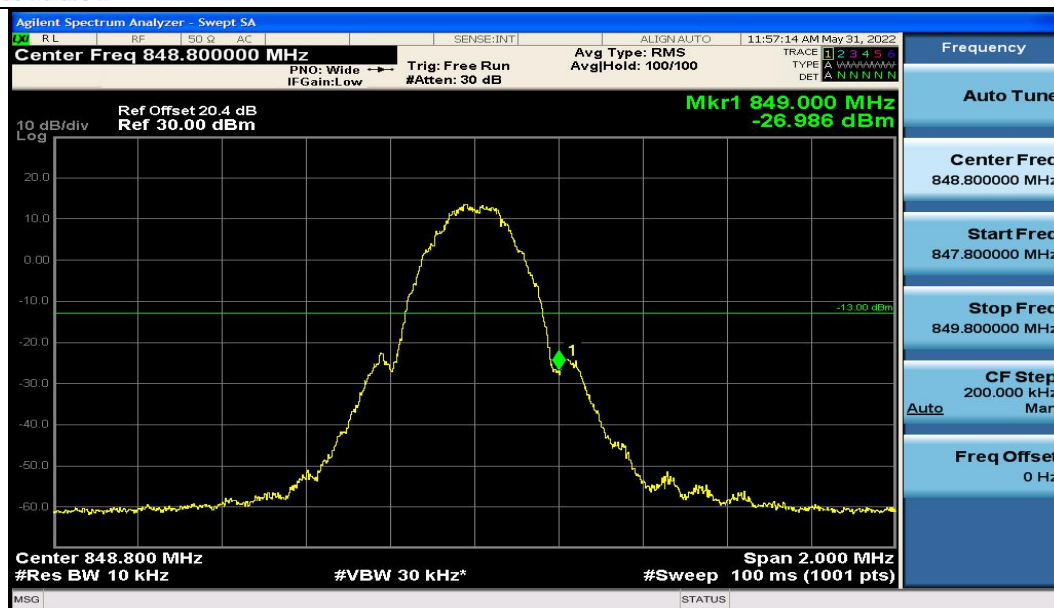

Channel 251

6. Frequency Stability

GSM850

GPRS MODE:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 128	Channel 190	Channel 251
-10	-0.008	0.009	0.006
-0	-0.007	-0.009	0.001
+10	0.001	0.002	0.008
+20	0.003	0.000	-0.002
+30	0.002	-0.004	0.004
+40	0.006	-0.004	0.009
+50	-0.003	0.003	-0.005
+55	-0.007	0.006	0.009
Voltage	Test Result (ppm)@NT		
	Channel 128	Channel 190	Channel 251
LV	0.006	-0.008	0.003
HV	-0.001	-0.003	0.001


EGPRS (8PSK) MODE

Temperature(°C)	Test Result (ppm)@NV		
	Channel 128	Channel 190	Channel 251
-10	-0.008	0.003	-0.007
-0	-0.003	0.007	-0.007
+10	-0.010	-0.006	-0.007
+20	-0.006	-0.002	0.004
+30	-0.009	-0.009	0.004
+40	0.000	0.005	-0.005
+50	-0.001	0.008	-0.002
+55	0.002	-0.006	-0.002
Voltage	Test Result (ppm)@NT		
	Channel 128	Channel 190	Channel 251
LV	0.004	-0.002	0.008
HV	-0.001	0.010	0.001


7. Peak-Average Ratio

GSM850


GPRS MODE:

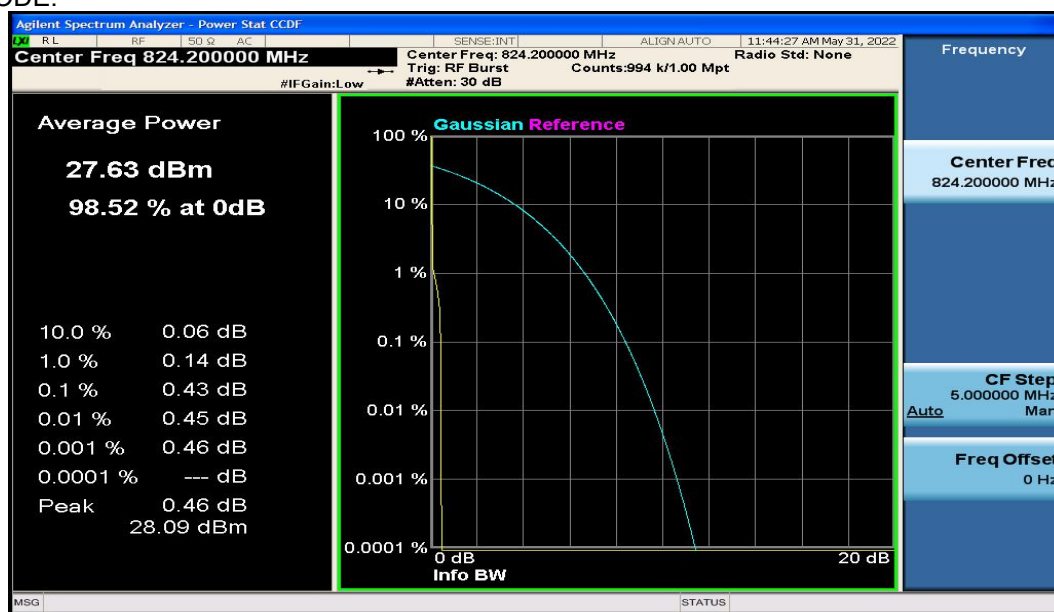

Channel 128

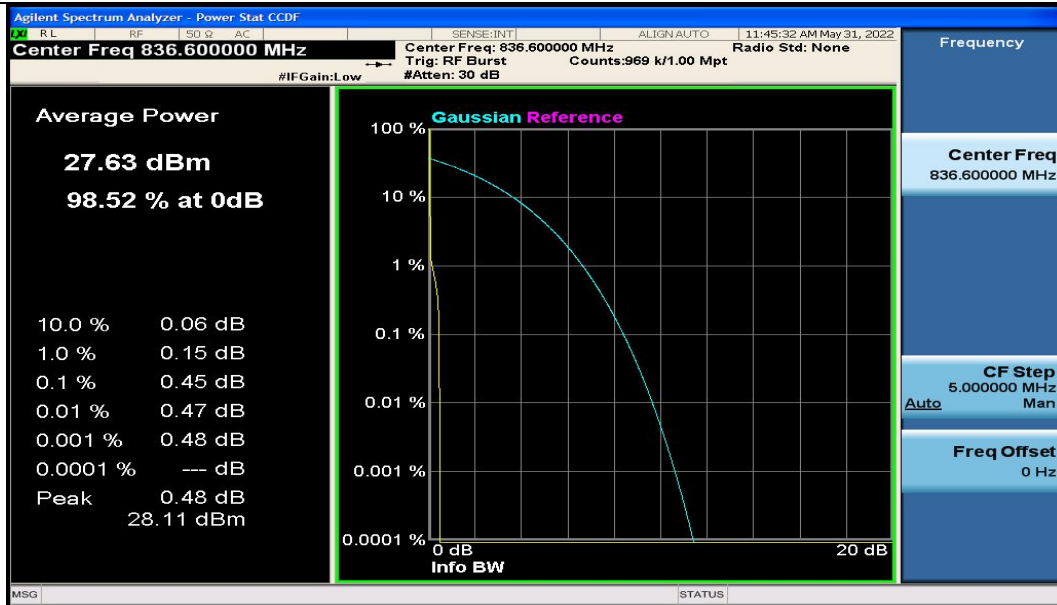


Channel 190

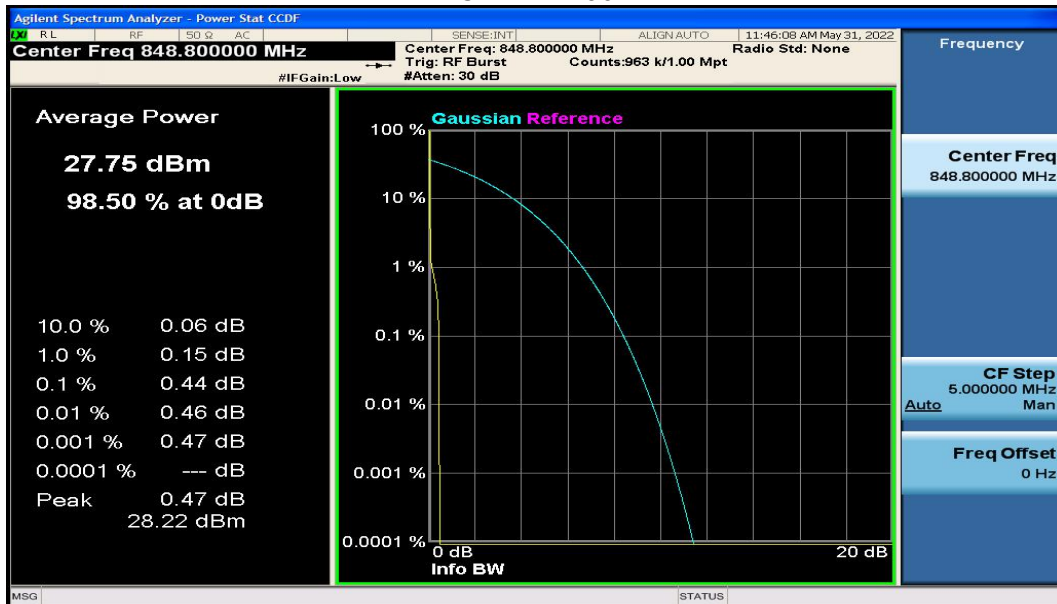


Channel 251


EGPRS (8PSK) MODE:

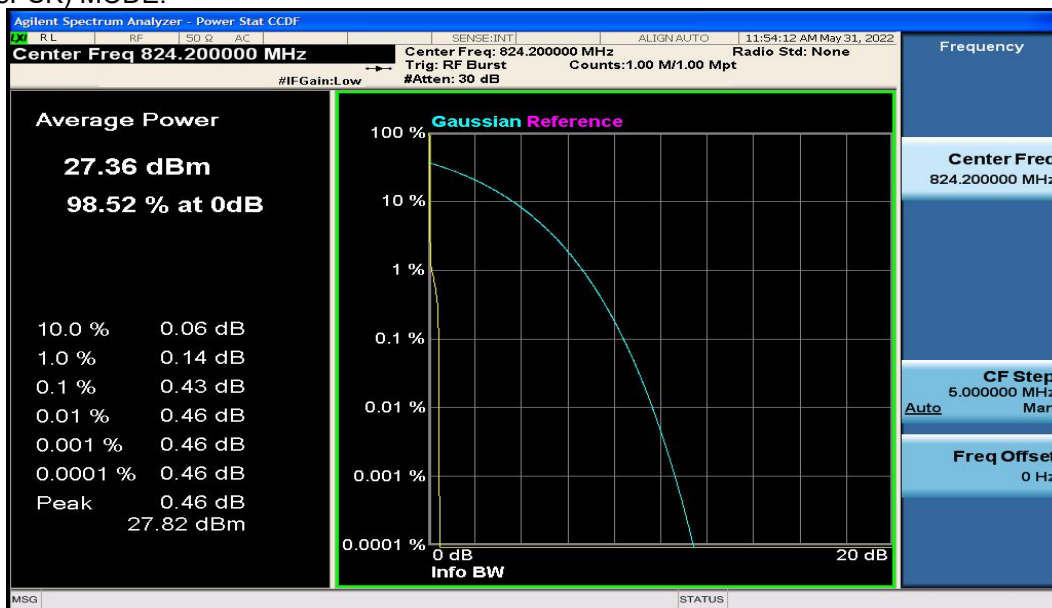

Channel 128

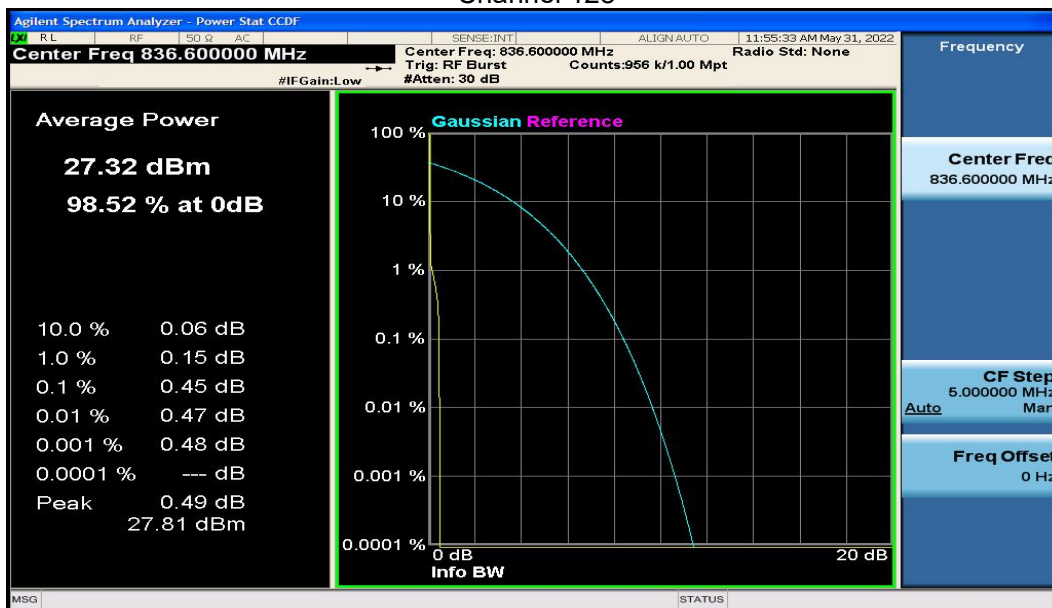

Channel 190

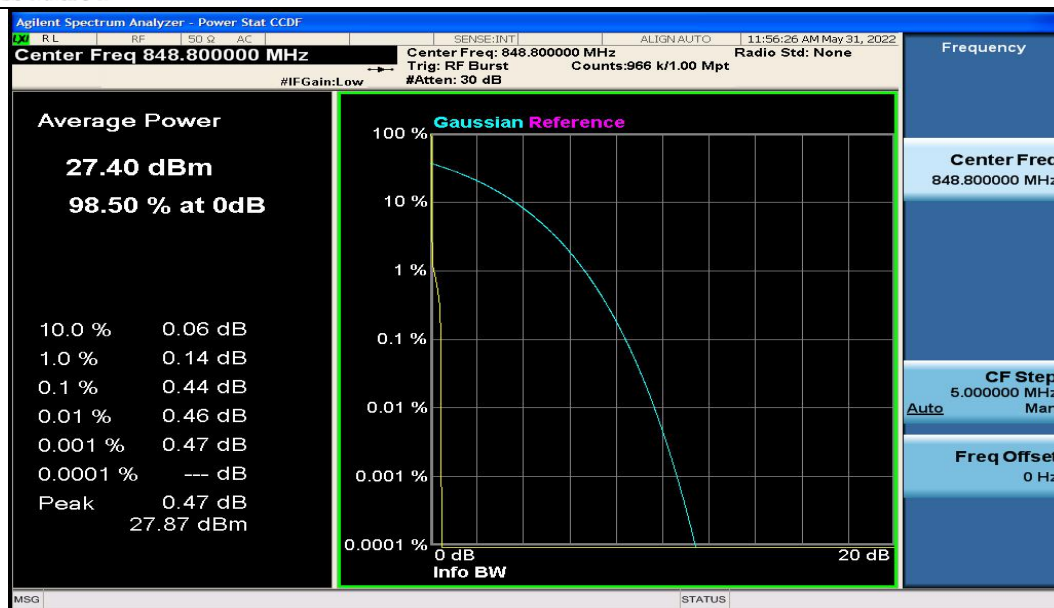

Channel 251

8. Effective Radiated Power and Effective Isotropic Radiated Power GSM850

Carrier frequency (MHz)	Channel No.	TX Mode	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP (W)
824.2	128	4Down1Up	26.38	24.73	0.297
836.6	190	4Down1Up	26.55	24.90	0.309
848.8	251	4Down1Up	26.70	25.05	0.320
824.2	128	3Down2Up	22.98	21.33	0.136
836.6	190	3Down2Up	23.13	21.48	0.141
848.8	251	3Down2Up	23.30	21.65	0.146
824.2	128	2Down3Up	22.76	21.11	0.129
836.6	190	2Down3Up	22.92	21.27	0.134
848.8	251	2Down3Up	23.11	21.46	0.140
824.2	128	1Down4Up	20.70	19.05	0.080
836.6	190	1Down4Up	20.85	19.20	0.083
848.8	251	1Down4Up	21.01	19.36	0.086

Carrier frequency (MHz)	Channel No.	TX Mode	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP (W)
824.2	128	4Down1Up	24.16	22.51	0.178
836.6	190	4Down1Up	22.11	20.46	0.111
848.8	251	4Down1Up	23.27	21.62	0.145
824.2	128	3Down2Up	18.37	16.72	0.047
836.6	190	3Down2Up	18.75	17.10	0.051
848.8	251	3Down2Up	18.63	16.98	0.050
824.2	128	2Down3Up	18.56	16.91	0.049
836.6	190	2Down3Up	18.78	17.13	0.052
848.8	251	2Down3Up	18.48	16.83	0.048
824.2	128	1Down4Up	16.55	14.90	0.031
836.6	190	1Down4Up	17.09	15.44	0.035
848.8	251	1Down4Up	16.69	15.04	0.032

PCS1900

1. RF Power Output

PCS1900

GPRS Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
1850.2	512	4Down1Up	27.87
1880	661	4Down1Up	26.90
1909.8	810	4Down1Up	27.81
1850.2	512	3Down2Up	24.92
1880	661	3Down2Up	23.66
1909.8	810	3Down2Up	24.70
1850.2	512	2Down3Up	24.12
1880	661	2Down3Up	23.43
1909.8	810	2Down3Up	24.48
1850.2	512	1Down4Up	22.18
1880	661	1Down4Up	21.36
1909.8	810	1Down4Up	22.47

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
1850.2	512	4Down1Up	22.71
1880	661	4Down1Up	23.06
1909.8	810	4Down1Up	23.08
1850.2	512	3Down2Up	20.78
1880	661	3Down2Up	20.18
1909.8	810	3Down2Up	21.42
1850.2	512	2Down3Up	19.79
1880	661	2Down3Up	20.68
1909.8	810	2Down3Up	21.36
1850.2	512	1Down4Up	18.18
1880	661	1Down4Up	18.47
1909.8	810	1Down4Up	18.76

2. Occupied Bandwidth

PCS1900

GPRS MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	240.45
1880	661	243.05
1909.8	810	243.83

EGPRS (8PSK) MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	242.33
1880	661	243.92
1909.8	810	244.74

PCS1900


GPRS MODE:

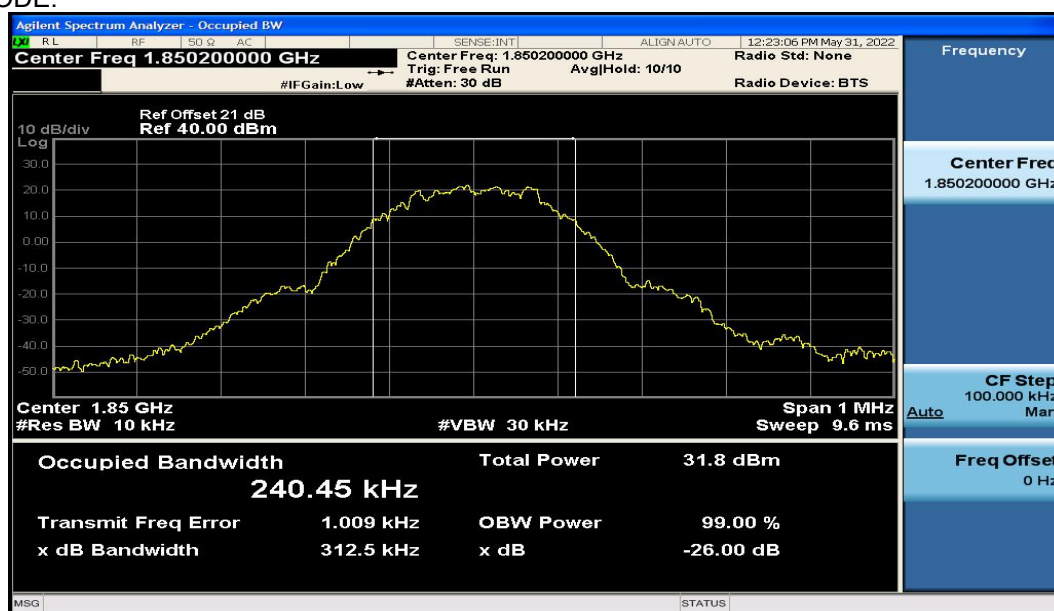

Channel 512

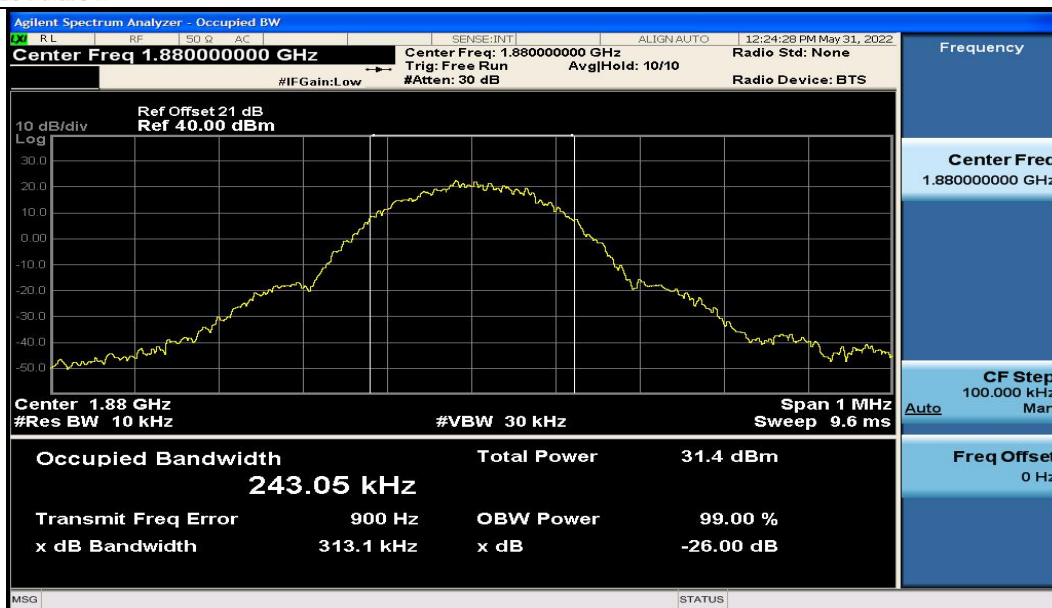


Channel 661

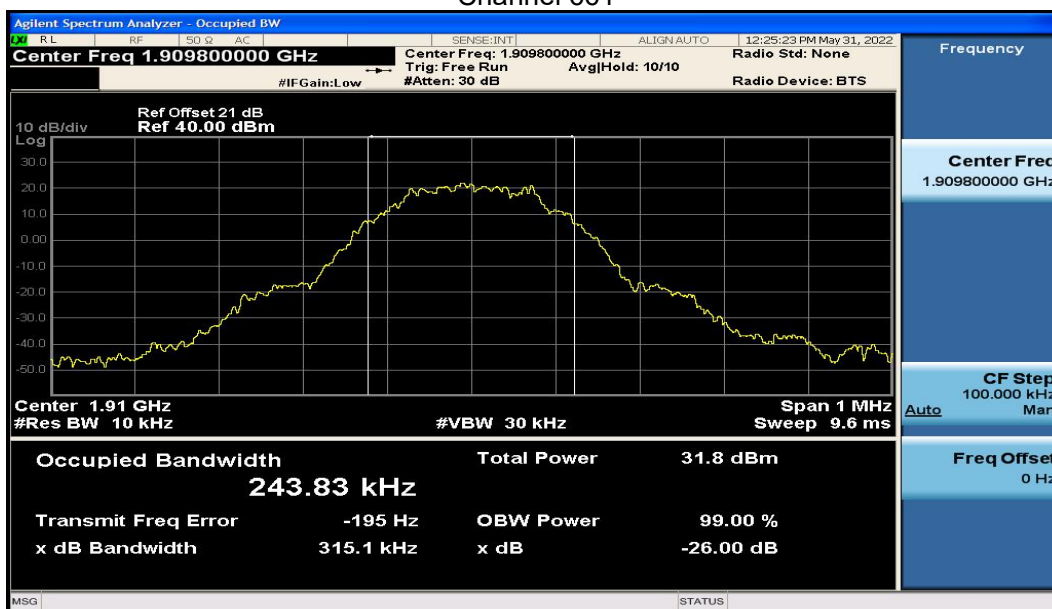


Channel 810


EGPRS (8PSK) MODE:

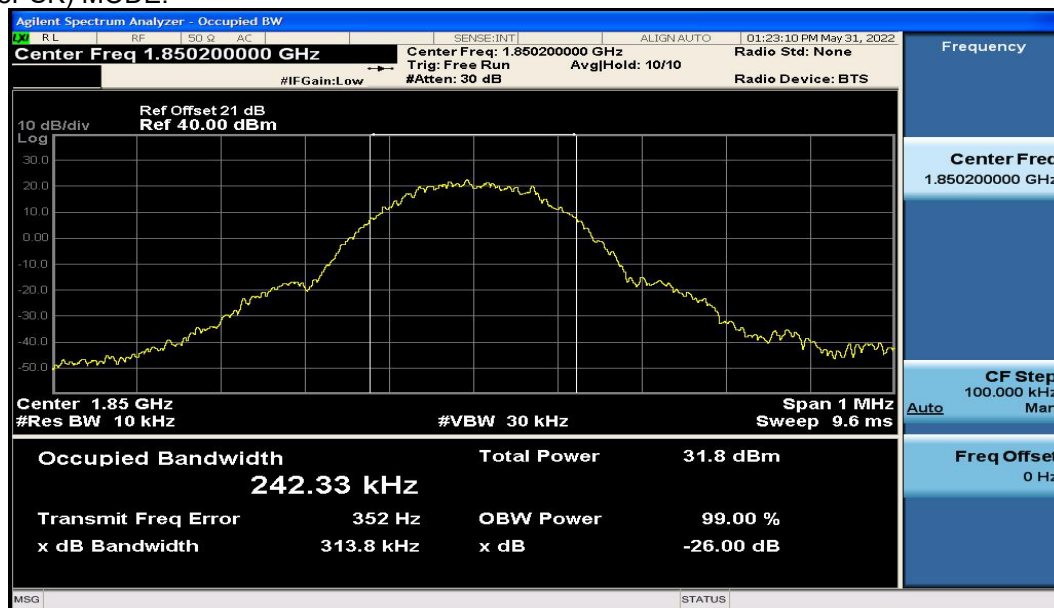

Channel 512

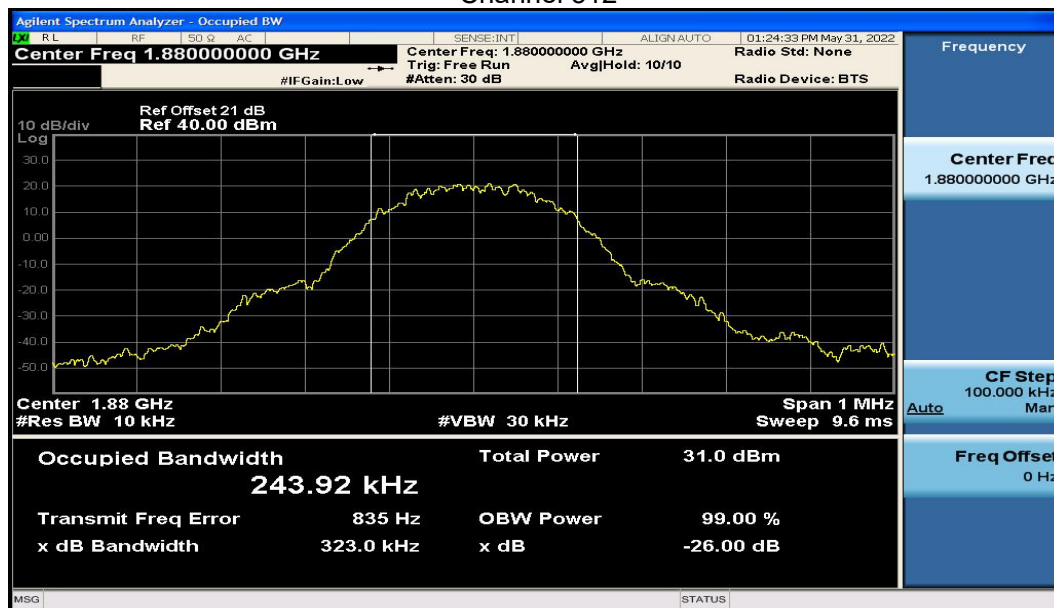

Channel 661

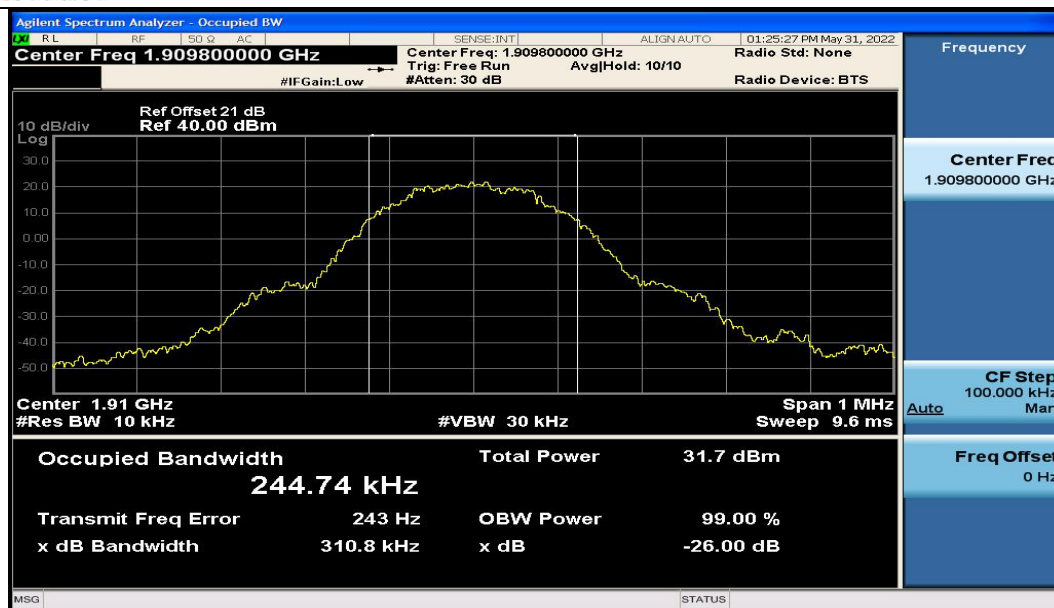

Channel 810

3. Emission Bandwidth

PCS1900:

GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB (kHz)
1850.2	512	312.48
1880	661	313.08
1909.8	810	315.05

EGPRS (8PSK) MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power(kHz)
1850.2	512	313.78
1880	661	323.02
1909.8	810	310.82

PCS1900

GPRS MODE:



Channel 512

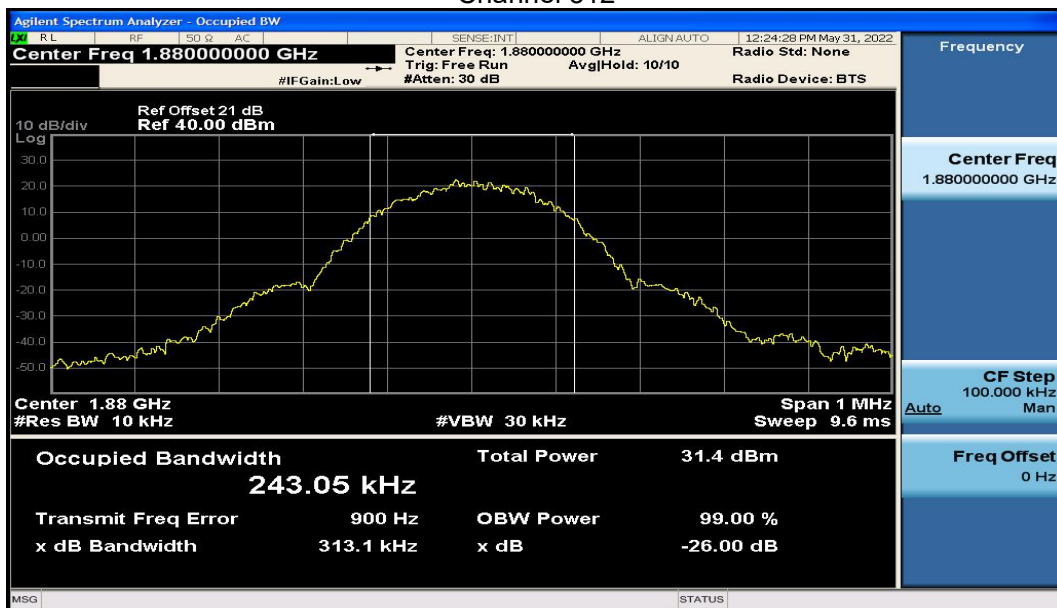


Channel 661




Channel 810


EGPRS (8PSK) MODE:

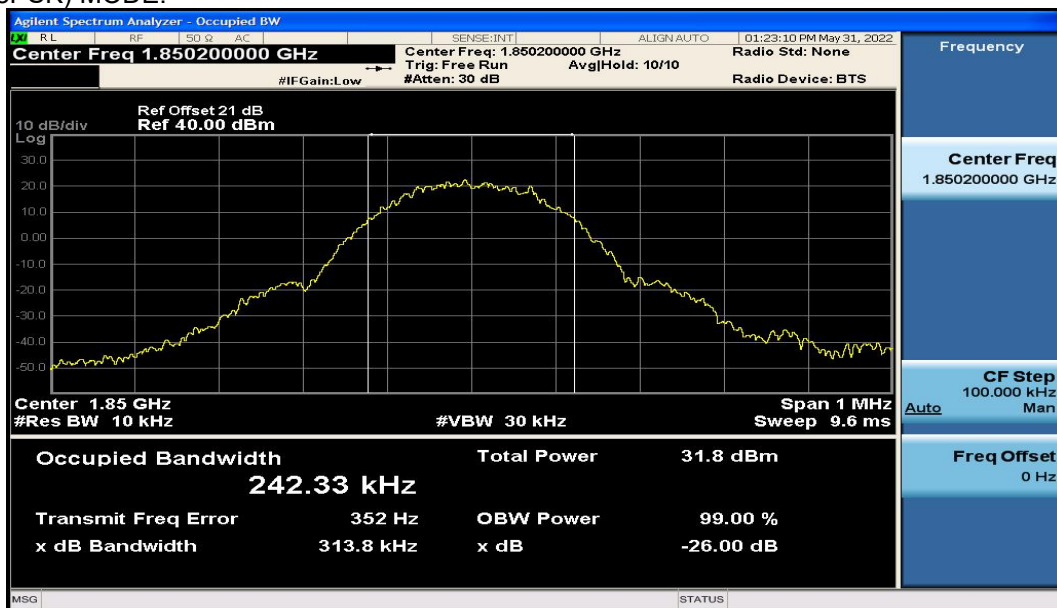

Channel 512

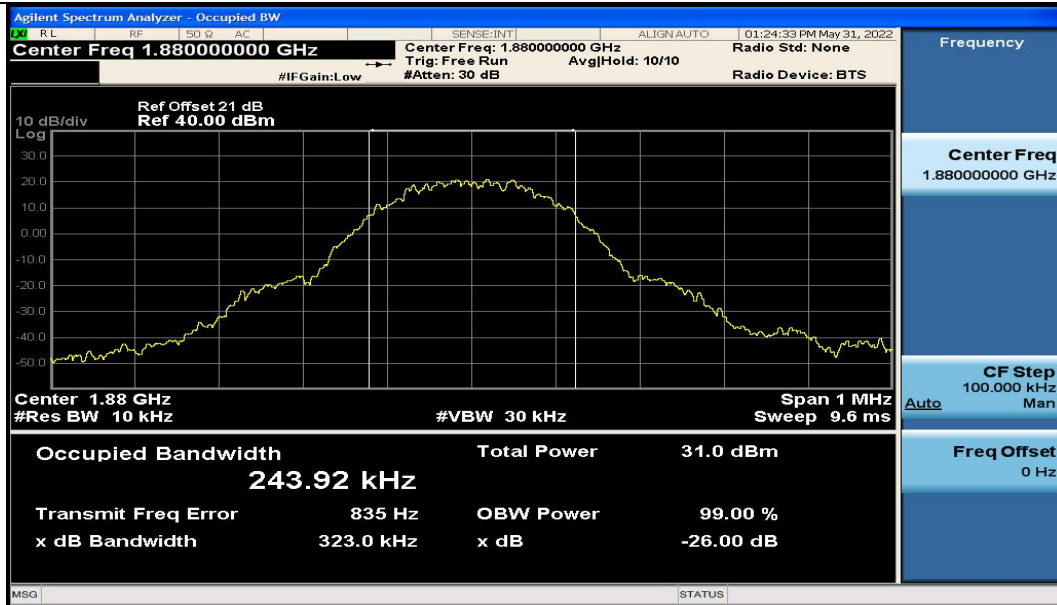


Channel 661

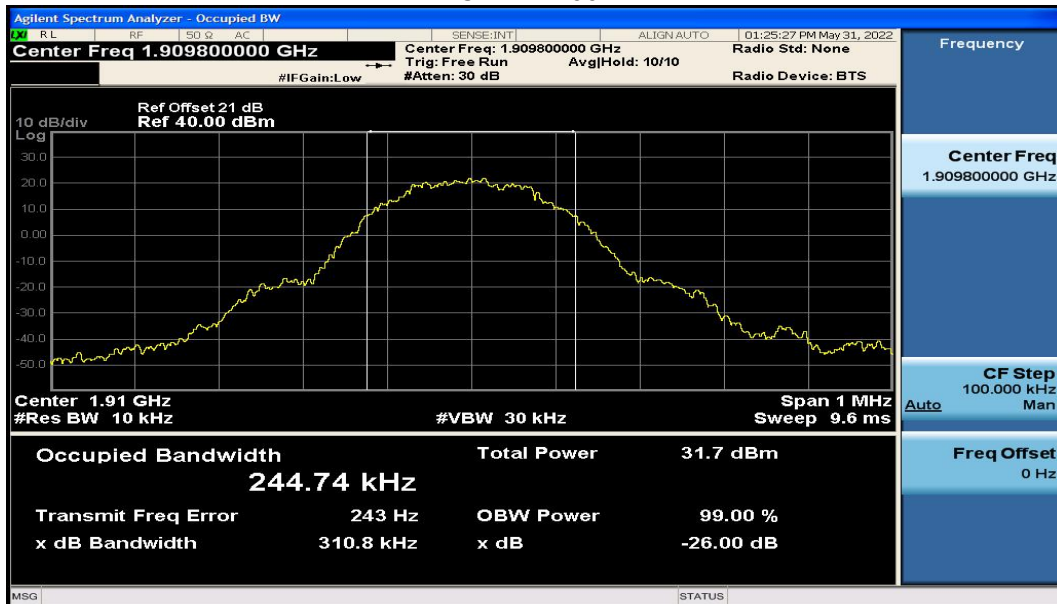


Channel 810

4. Spurious Emissions at antenna terminal
PCS1900
GPRS MODE:

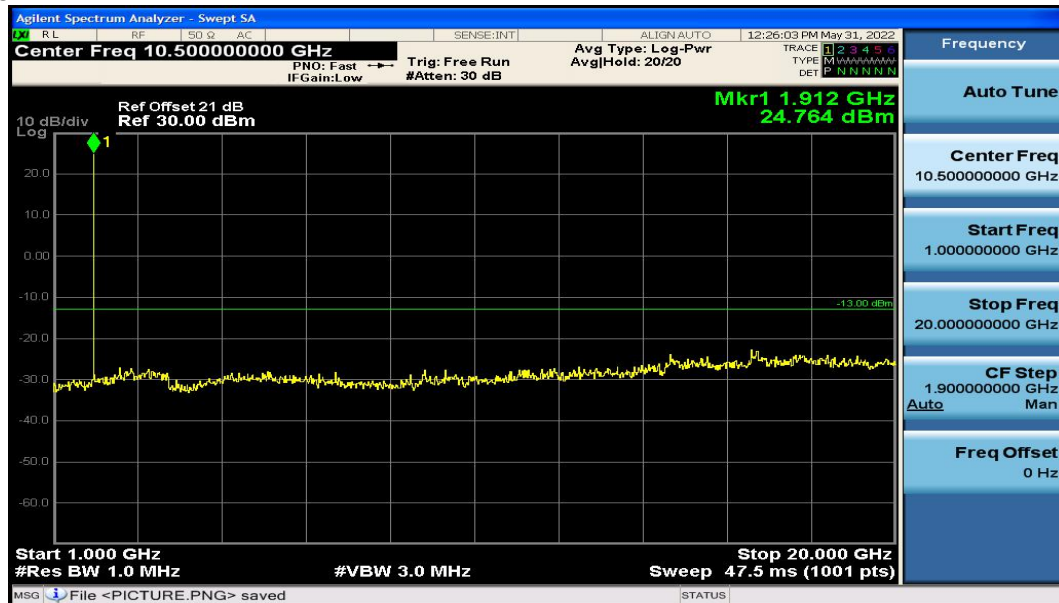


Channel 512

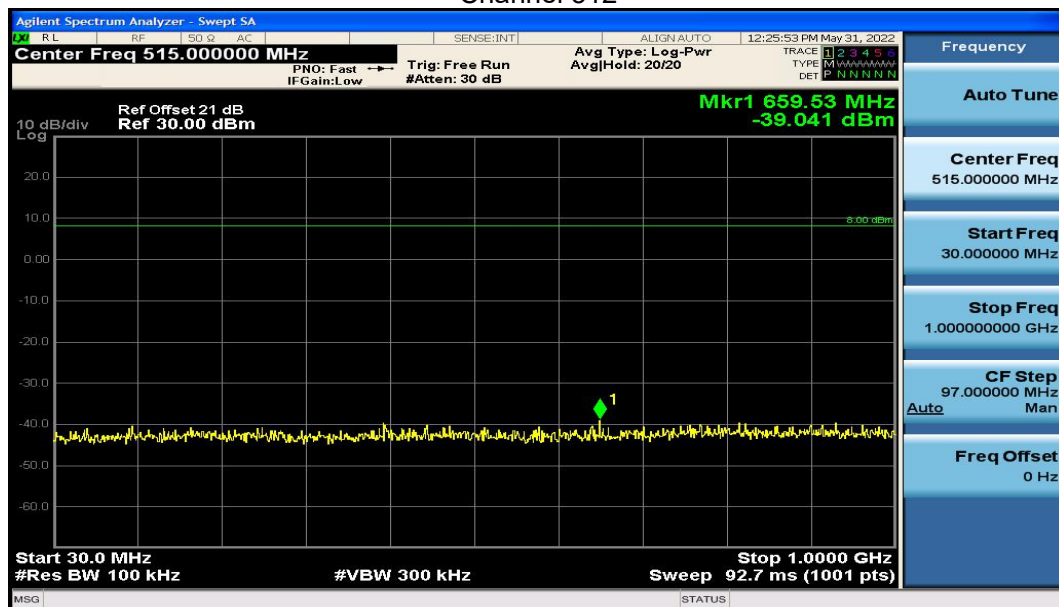

Channel 512




Channel 661

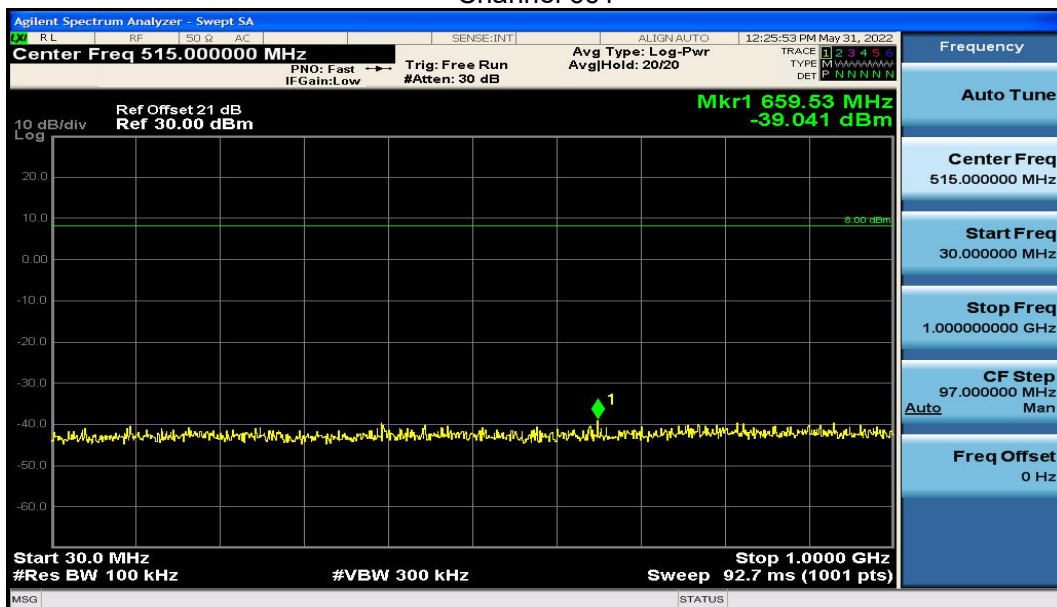

Channel 661




Channel 810

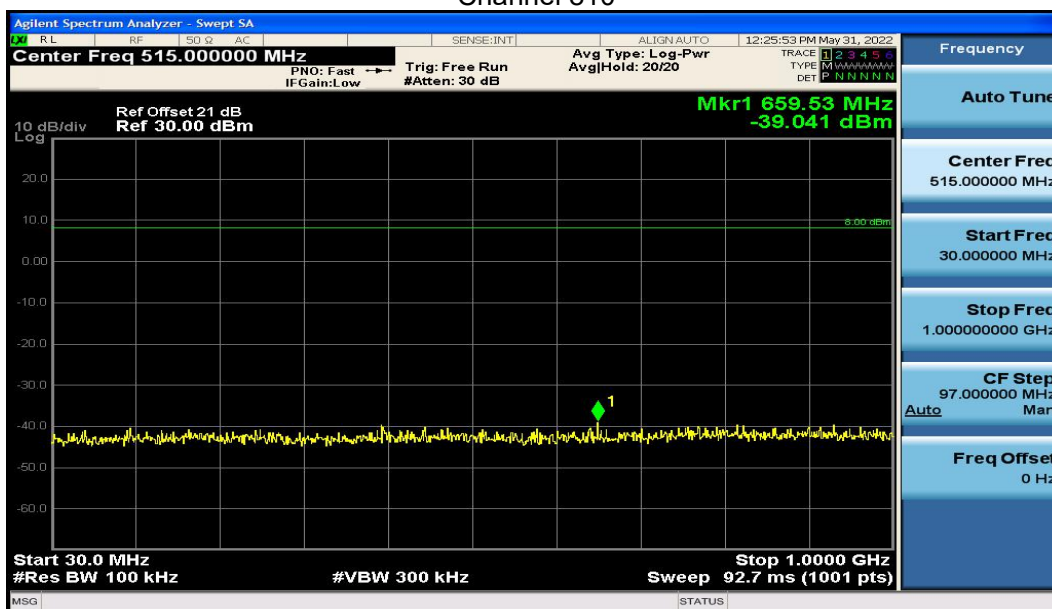


Channel 810


EGPRS (8PSK) MODE:

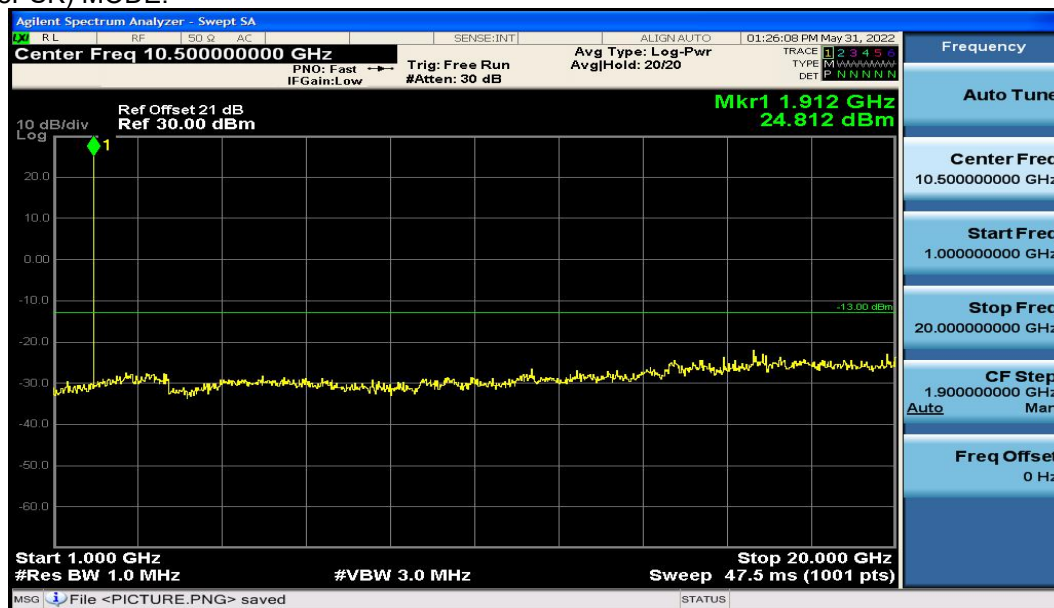


Channel 512

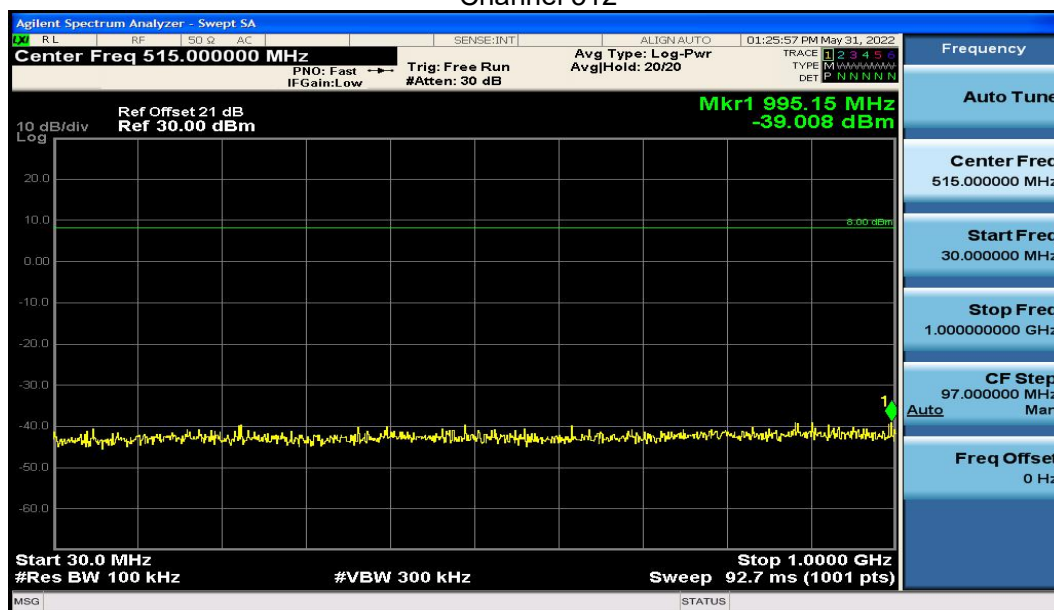


Channel 512

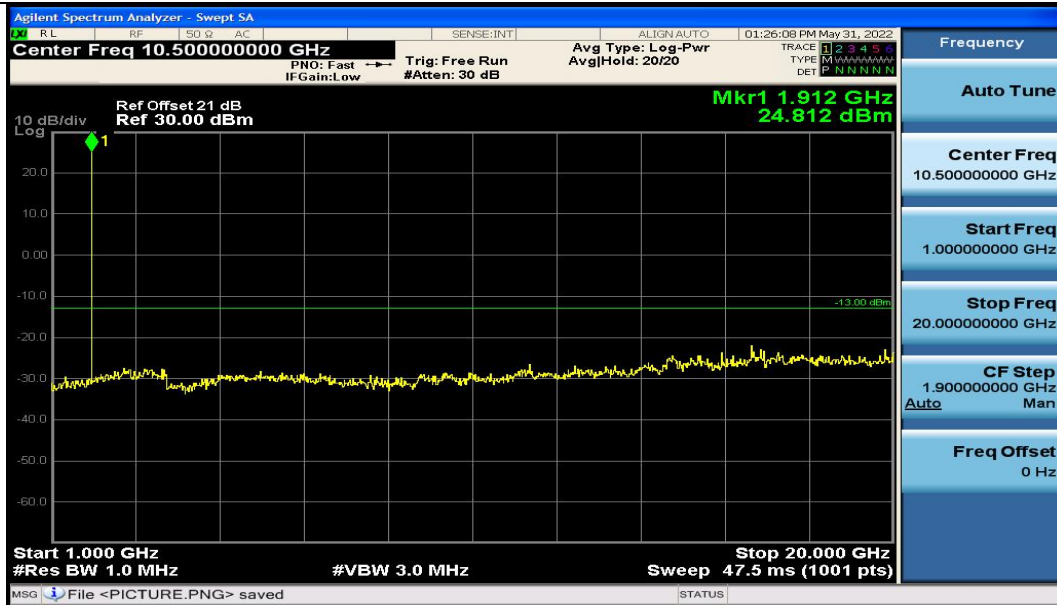


Channel 661

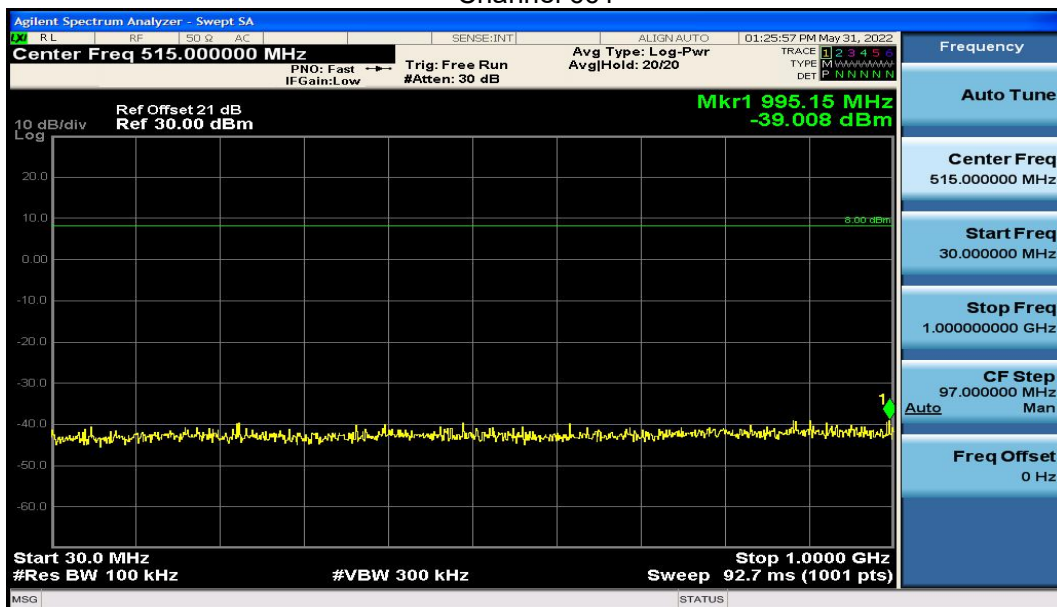

Channel 661

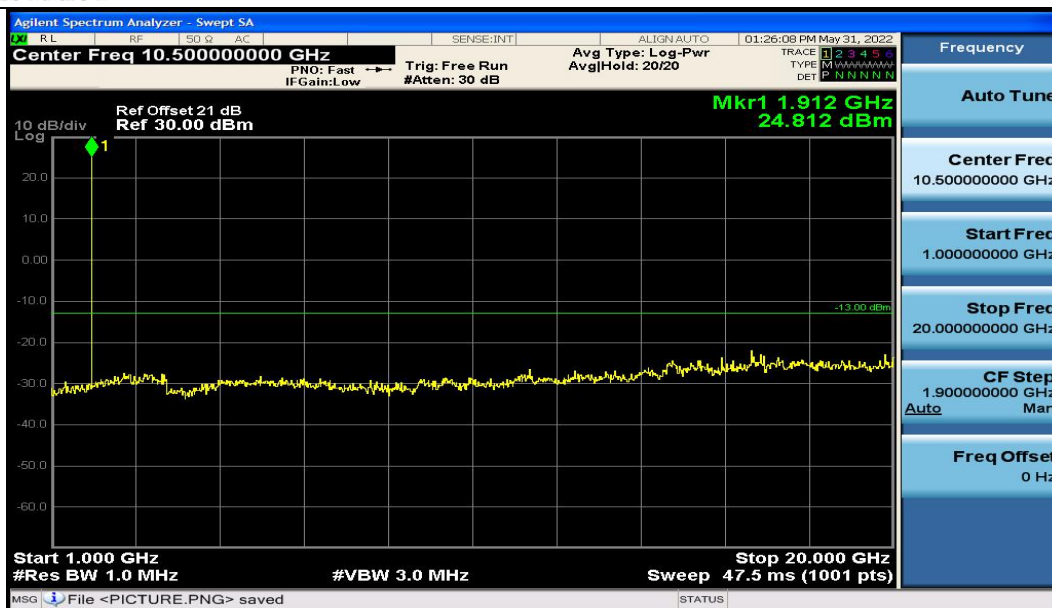


Channel 810

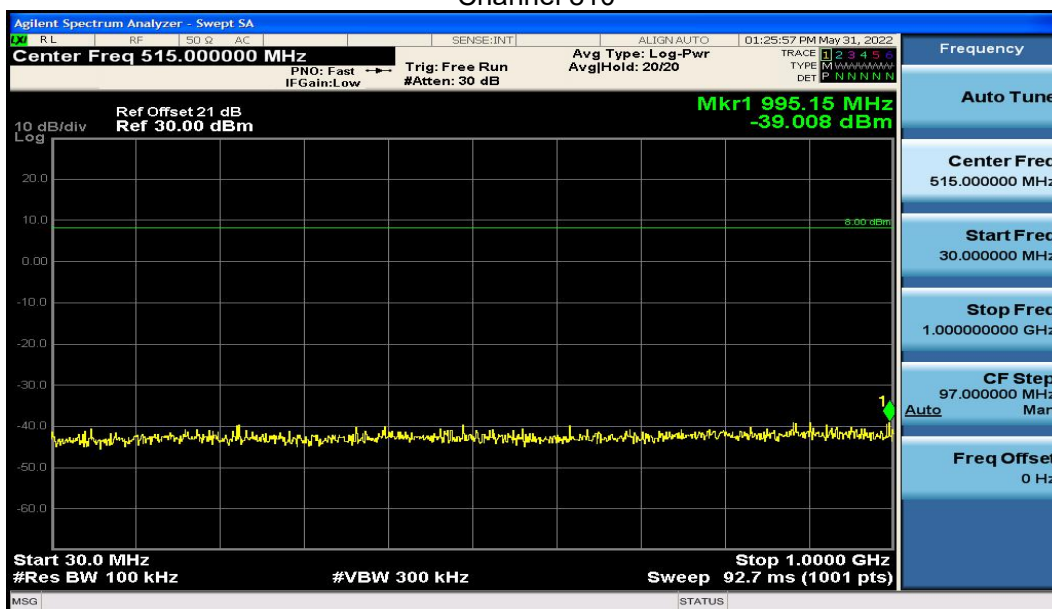


Channel 810

5. Band Edges Compliance
PCS1900
GPRS MODE:

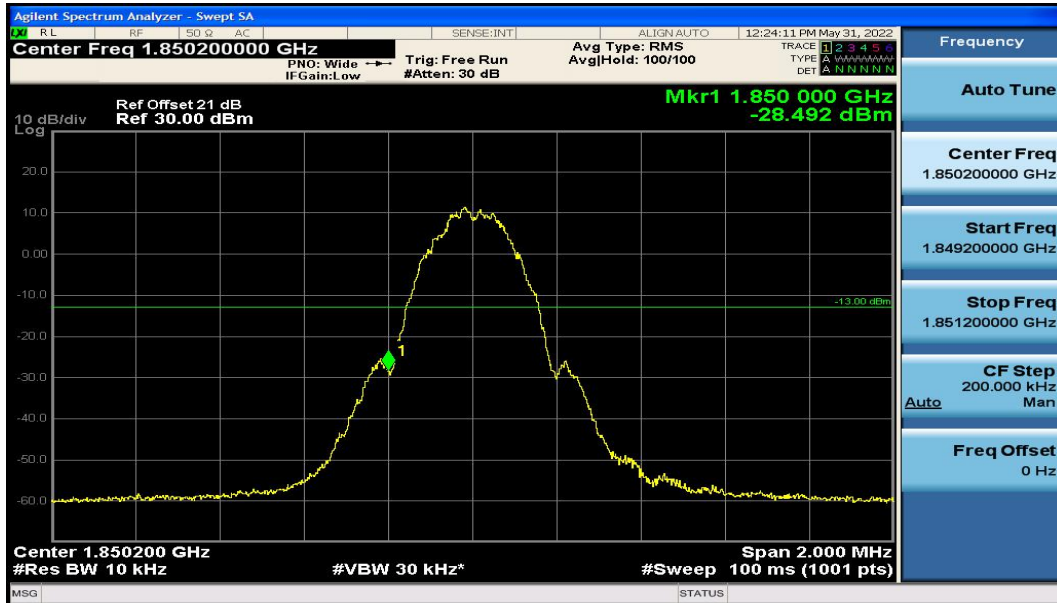


Channel 512

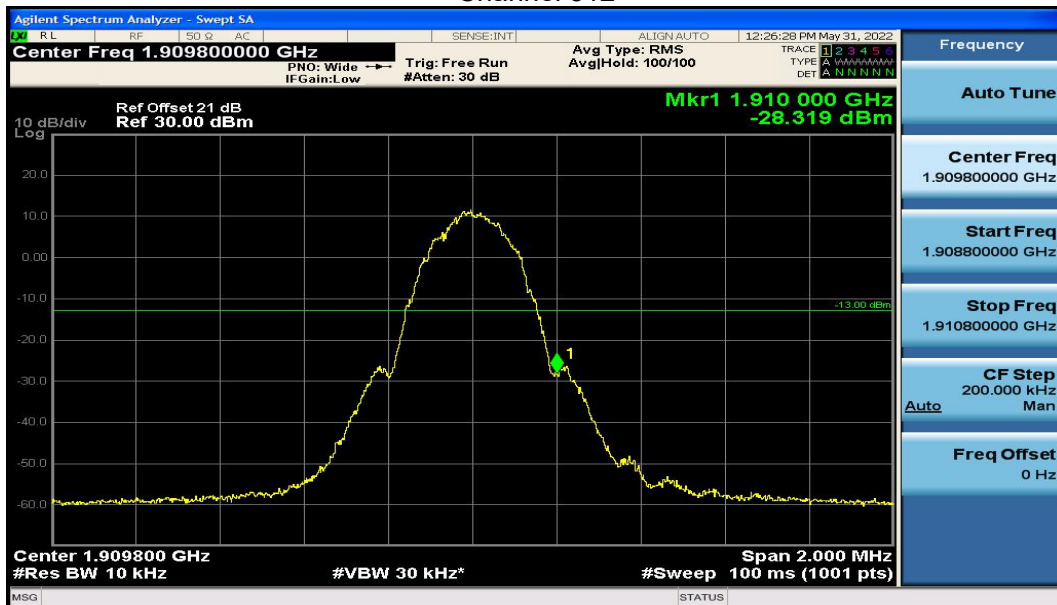


Channel 810

EGPRS (8PSK) MODE:

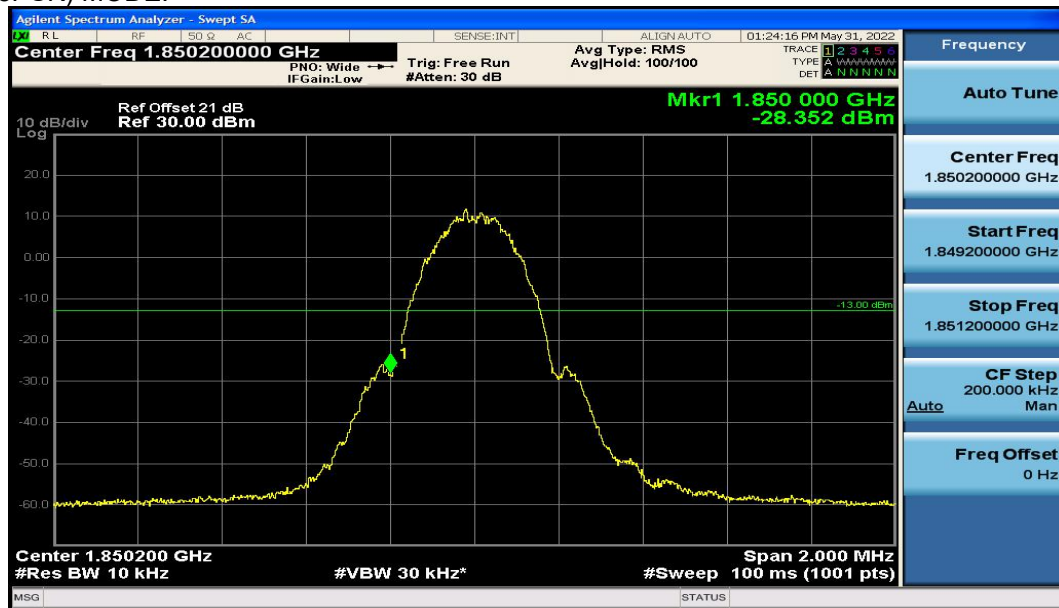

Channel 512

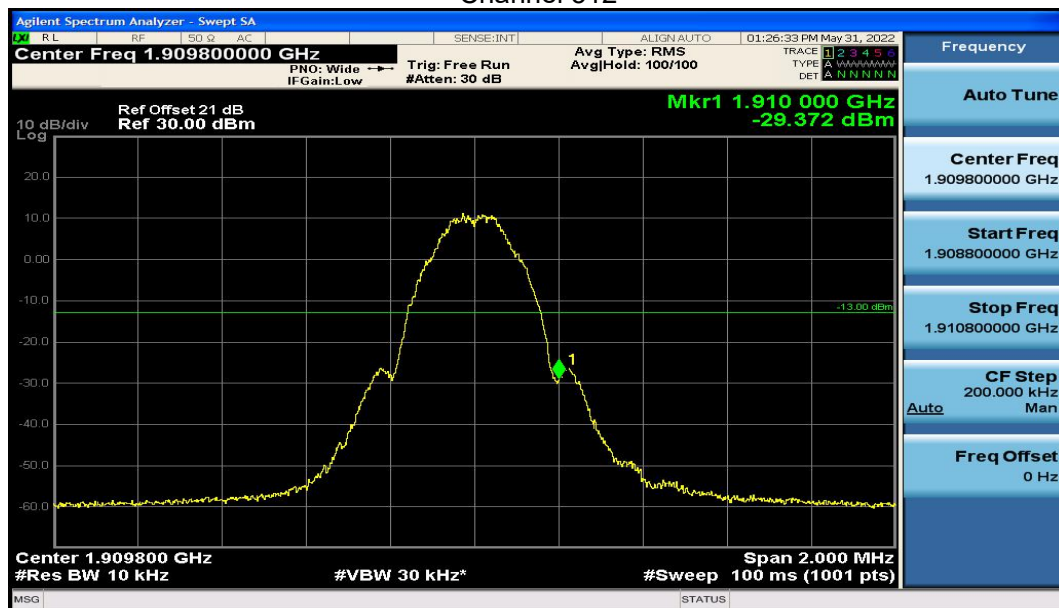

Channel 810

6. Frequency Stability

PCS1900

GPRS MODE:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 512	Channel 661	Channel 810
-10	-0.006	-0.006	0.001
0	0.004	0.005	0.001
+10	0.001	-0.007	0.004
+20	0.006	0.010	0.007
+30	0.006	-0.008	0.006
+40	0.006	-0.003	-0.005
+50	0.006	-0.009	0.003
+55	0.002	-0.008	0.004
Voltage	Test Result (ppm)@NT		
	Channel 512	Channel 661	Channel 810
LV	0.002	0.001	0.006
HV	0.003	0.000	0.001


EGPRS (8PSK) MODE:


Temperature(°C)	Test Result (ppm)@NV		
	Channel 512	Channel 661	Channel 810
-10	-0.009	-0.002	-0.001
0	-0.006	-0.009	0.008
+10	-0.003	0.008	-0.004
+20	0.001	0.004	0.000
+30	-0.002	0.004	-0.005
+40	-0.001	0.000	0.009
+50	-0.007	0.008	0.006
+55	0.007	0.005	-0.007
Voltage	Test Result (ppm)@NT		
	Channel 512	Channel 661	Channel 810
LV	-0.007	0.005	0.009
HV	-0.007	0.003	-0.010

7. Peak-Average Ratio

PCS1900


GPRS MODE:

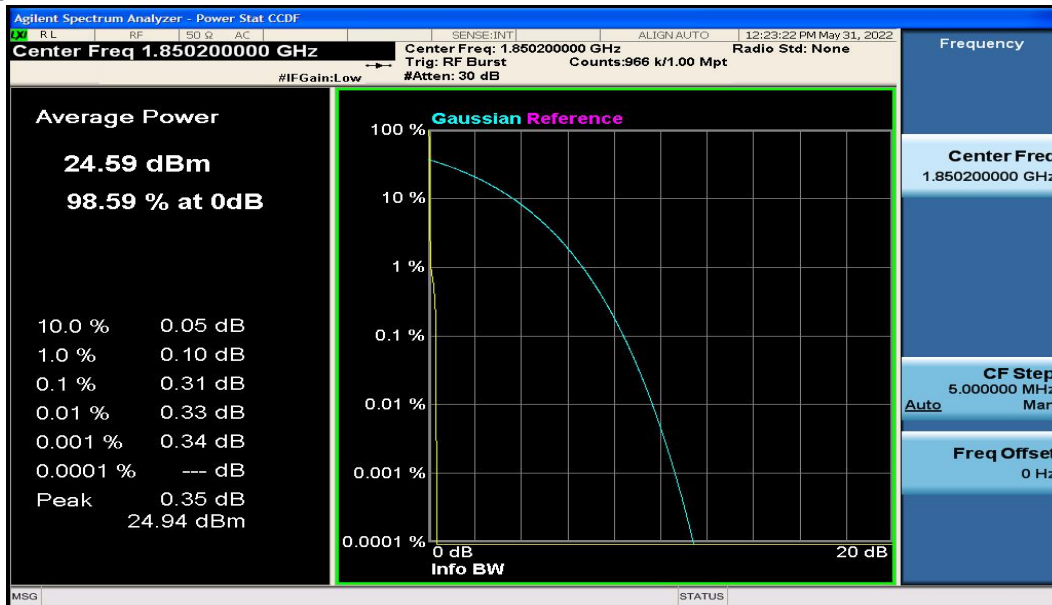

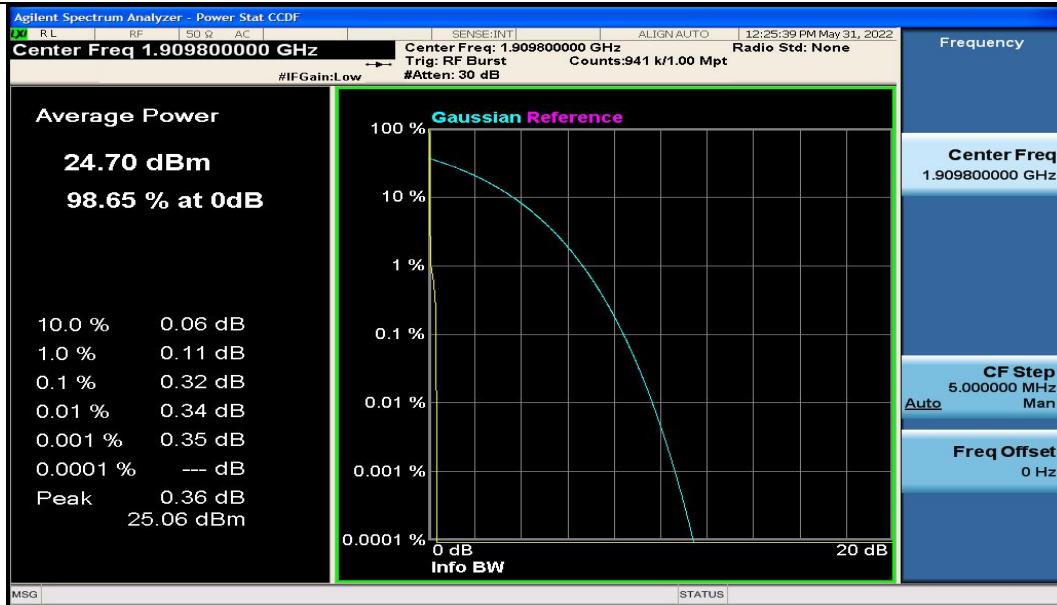


Channel 810


EGPRS (8PSK) MODE:

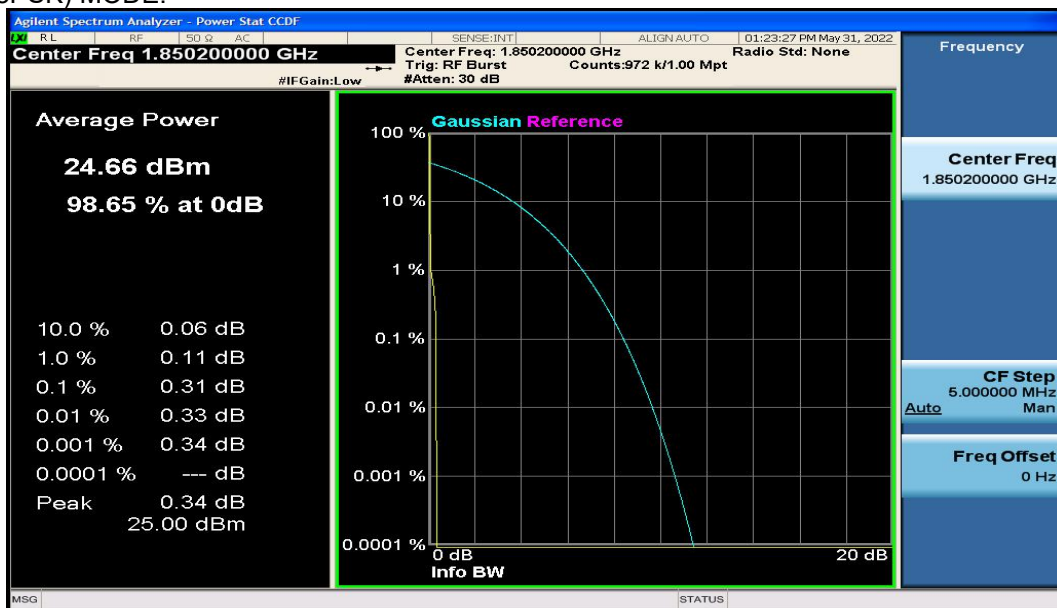

Channel 512

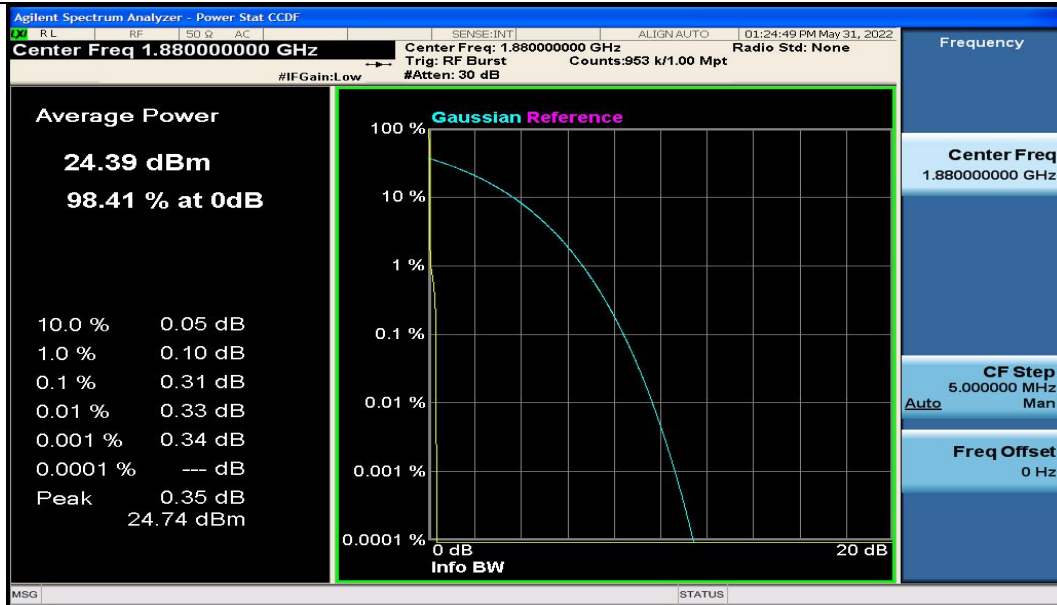

Channel 661

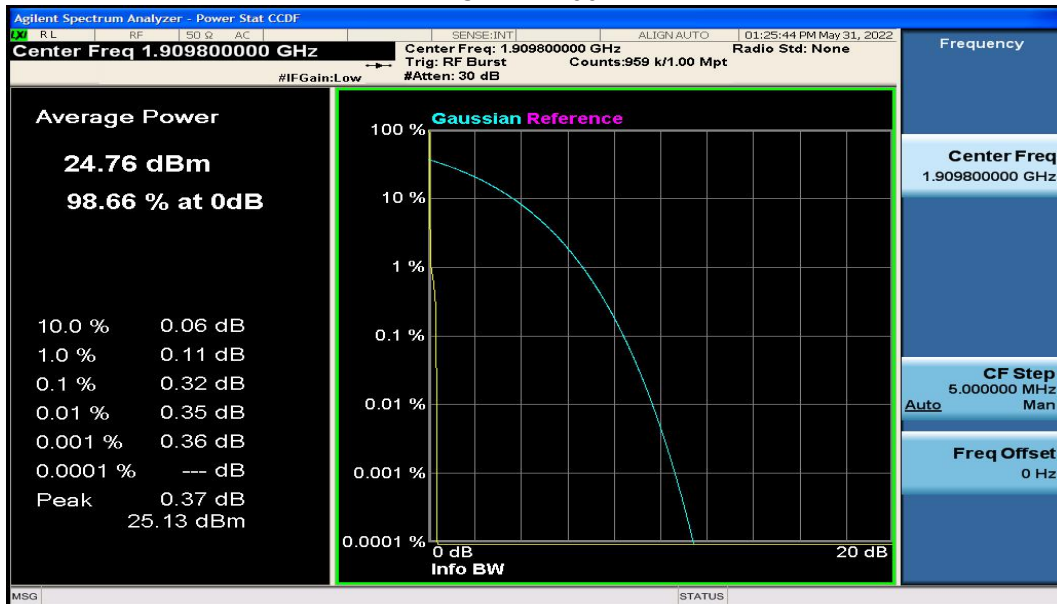

Channel 810

8. Effective Radiated Power and Effective Isotropic Radiated Power

PCS1900

GPRS Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP (W)
1850.2	512	4Down1Up	27.87	28.87	0.771
1880	661	4Down1Up	26.90	27.90	0.617
1909.8	810	4Down1Up	27.81	28.81	0.760
1850.2	512	3Down2Up	24.92	25.92	0.391
1880	661	3Down2Up	23.66	24.66	0.292
1909.8	810	3Down2Up	24.70	25.70	0.372
1850.2	512	2Down3Up	24.12	25.12	0.325
1880	661	2Down3Up	23.43	24.43	0.277
1909.8	810	2Down3Up	24.48	25.48	0.353
1850.2	512	1Down4Up	22.18	23.18	0.208
1880	661	1Down4Up	21.36	22.36	0.172
1909.8	810	1Down4Up	22.47	23.47	0.222

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP (W)
1850.2	512	4Down1Up	22.71	23.71	0.235
1880	661	4Down1Up	23.06	24.06	0.255
1909.8	810	4Down1Up	23.08	24.08	0.256
1850.2	512	3Down2Up	20.78	21.78	0.151
1880	661	3Down2Up	20.18	21.18	0.131
1909.8	810	3Down2Up	21.42	22.42	0.175
1850.2	512	2Down3Up	19.79	20.79	0.120
1880	661	2Down3Up	20.68	21.68	0.147
1909.8	810	2Down3Up	21.36	22.36	0.172
1850.2	512	1Down4Up	18.18	19.18	0.083
1880	661	1Down4Up	18.47	19.47	0.089
1909.8	810	1Down4Up	18.76	19.76	0.095

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Spurious Emissions

Note: The worst channel results are reflected in the report.

Note: The scanned graph represents the maximum of both horizontal and vertical polarizations and is not a single horizontal or vertical polarization scan.

850 Test result:

Test result:

GPRS MODE Channel 128:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1647.04	-53.33	-13	Vertical
1668.36	-50.93	-13	Vertical
2534.39	-44.73	-13	Vertical
2578.96	-44.42	-13	Vertical
8961.30	-39.55	-13	Vertical
9971.37	-35.87	-13	Vertical

EDGE (8PSK) MODE Channel 128:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1650.26	-53.15	-13	Vertical
1666.90	-50.93	-13	Vertical
2535.39	-43.92	-13	Vertical
2576.98	-44.09	-13	Vertical
8962.86	-39.91	-13	Vertical
9971.97	-36.15	-13	Vertical

GPRS MODE Channel 189:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1647.78	-52.69	-13	Vertical
1668.27	-51.21	-13	Vertical
2534.06	-43.88	-13	Vertical
2575.76	-44.64	-13	Vertical
8961.11	-39.22	-13	Vertical
9972.75	-36.56	-13	Vertical

EDGE (8PSK) MODE Channel 189:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1647.11	-53.03	-13	Vertical
1665.93	-51.75	-13	Vertical
2533.28	-44.17	-13	Vertical
2576.36	-43.87	-13	Vertical
8961.56	-39.67	-13	Vertical
9972.98	-36.05	-13	Vertical

GPRS MODE Channel 251:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1649.65	-52.57	-13	Vertical
1667.60	-51.41	-13	Vertical
2535.86	-44.10	-13	Vertical
2578.26	-44.47	-13	Vertical
8962.70	-39.19	-13	Vertical
9973.61	-36.87	-13	Vertical

EDGE (8PSK) MODE Channel 251:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1647.48	-53.19	-13	Vertical
1667.22	-51.61	-13	Vertical
2535.02	-44.71	-13	Vertical
2579.23	-44.03	-13	Vertical
8963.85	-39.64	-13	Vertical
9971.53	-35.88	-13	Vertical

1900:

Test result:

GPRS MODE Channel 512

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2460.65	-49.12	-13	Vertical
2781.07	-46.95	-13	Vertical
3728.18	-41.26	-13	Vertical
6675.54	-39.60	-13	Vertical
9962.63	-37.46	-13	Vertical
17820.84	-33.48	-13	Vertical

EDGE (8PSK) MODE Channel 512:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2458.23	-49.04	-13	Vertical
2779.99	-47.14	-13	Vertical
3725.43	-40.80	-13	Vertical
6674.97	-39.53	-13	Vertical
9961.62	-37.47	-13	Vertical
17822.02	-33.67	-13	Vertical

GPRS MODE Channel 661:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2461.11	-48.81	-13	Vertical
2778.72	-47.11	-13	Vertical
3725.05	-40.97	-13	Vertical
6675.78	-39.27	-13	Vertical
9959.62	-37.05	-13	Vertical
17822.08	-33.54	-13	Vertical

EDGE (8PSK) MODE Channel 661:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2458.88	-49.35	-13	Vertical
2778.90	-46.93	-13	Vertical
3725.71	-40.36	-13	Vertical
6676.76	-39.55	-13	Vertical
9960.39	-37.12	-13	Vertical
17819.99	-34.24	-13	Vertical

GPRS MODE Channel 810:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2458.47	-49.25	-13	Vertical
2781.36	-47.00	-13	Vertical
3726.82	-41.32	-13	Vertical
6674.93	-40.09	-13	Vertical
9961.12	-37.55	-13	Vertical
17820.49	-34.17	-13	Vertical

EDGE (8PSK) MODE Channel 810:

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2460.81	-49.24	-13	Vertical
2779.72	-46.92	-13	Vertical
3726.35	-41.16	-13	Vertical
6676.57	-39.95	-13	Vertical
9960.83	-36.96	-13	Vertical
17819.77	-34.24	-13	Vertical

---End of Test Report---