


Tx. Spurious Bluetooth LE(S=2) 2480MHz Ref




Tx. Spurious Bluetooth LE(S=2) 2480MHz Emission

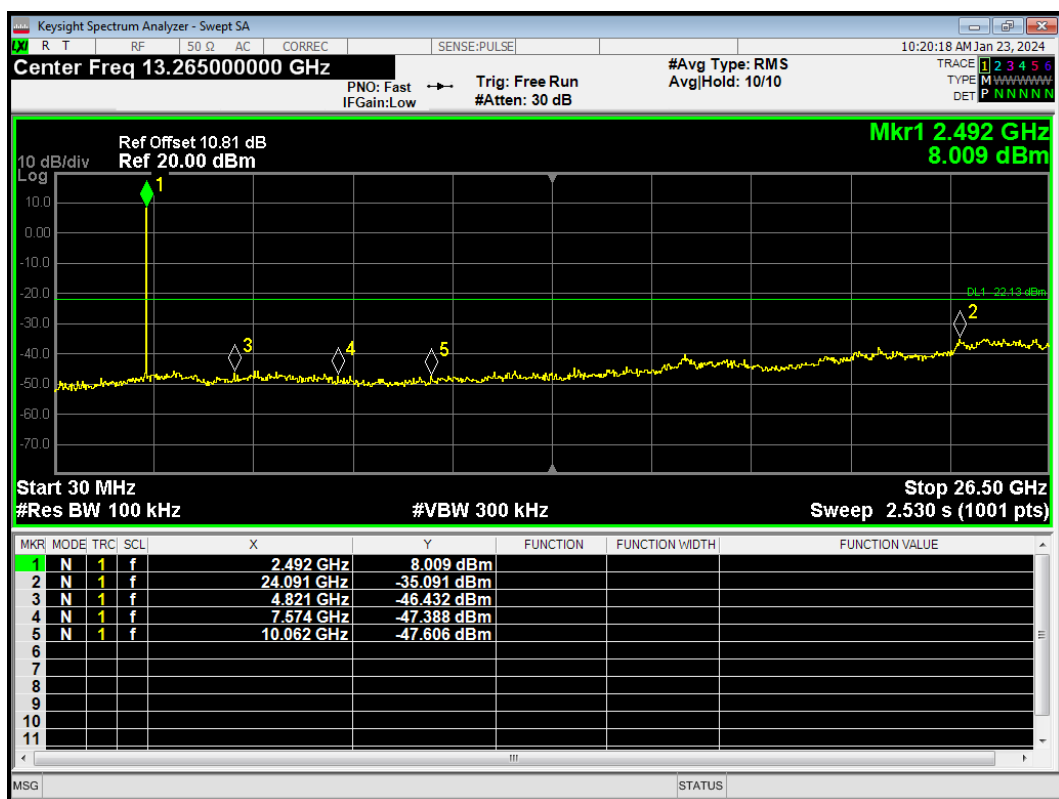


Tx. Spurious Bluetooth LE(S=8) 2402MHz Ref




Tx. Spurious Bluetooth LE(S=8) 2402MHz Emission

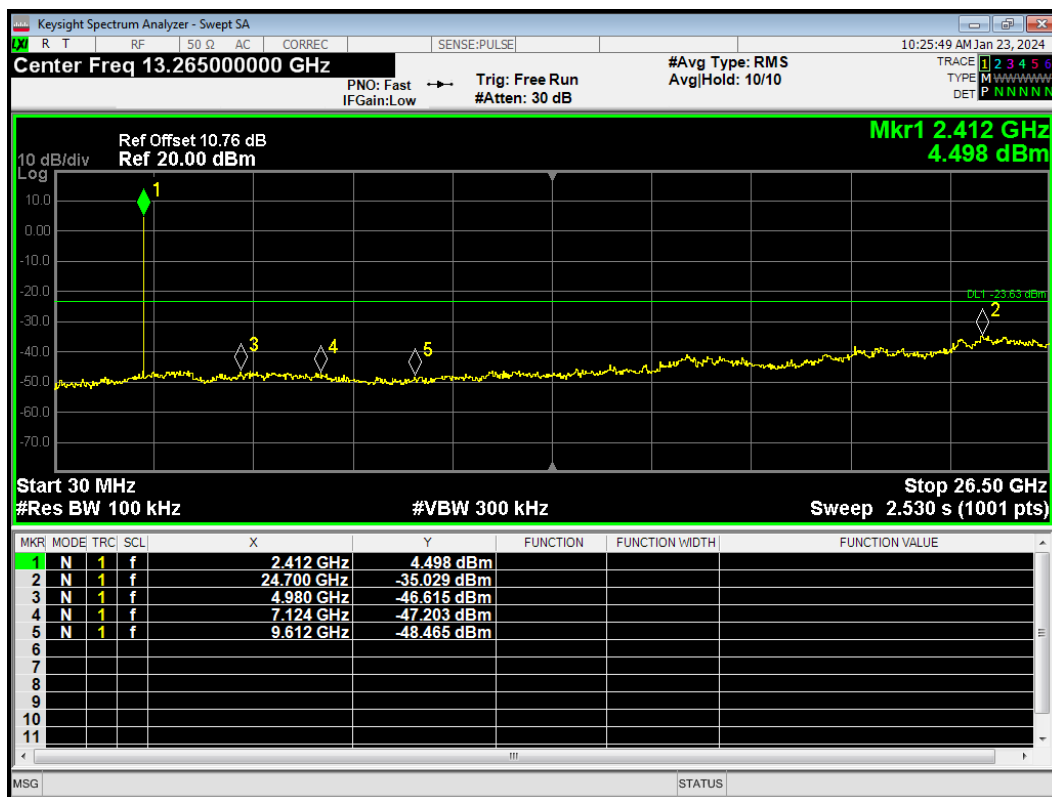


Tx. Spurious Bluetooth LE(S=8) 2440MHz Ref

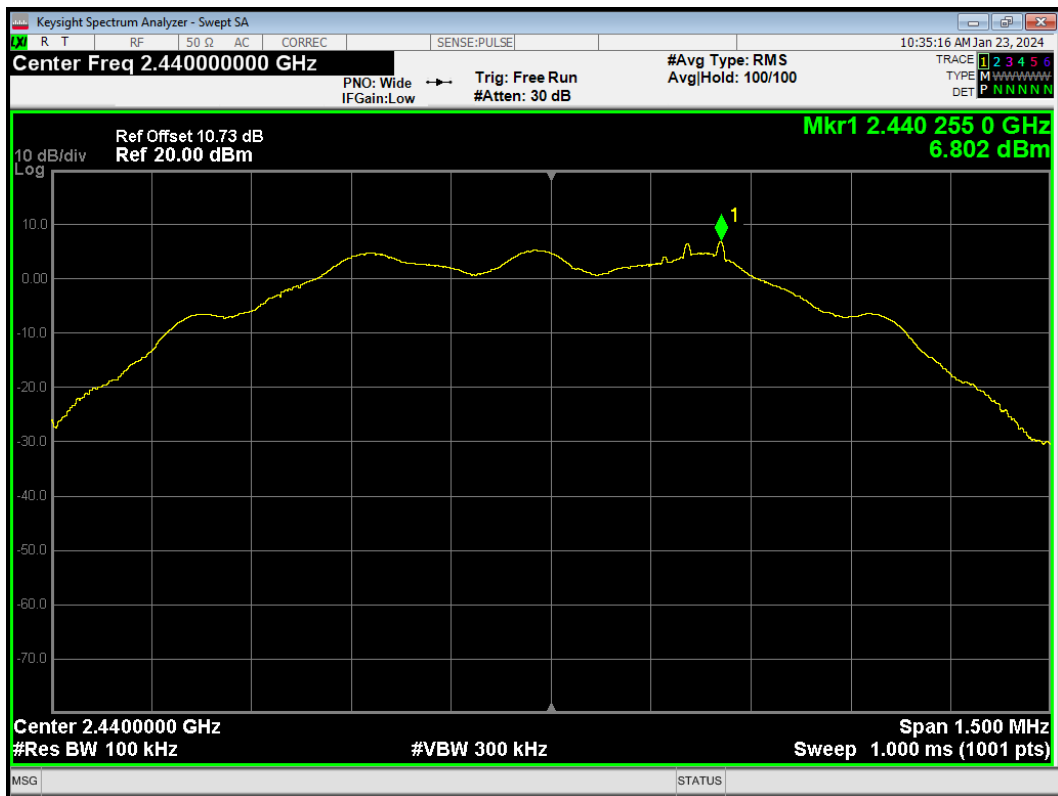


Tx. Spurious Bluetooth LE(S=8) 2440MHz Emission

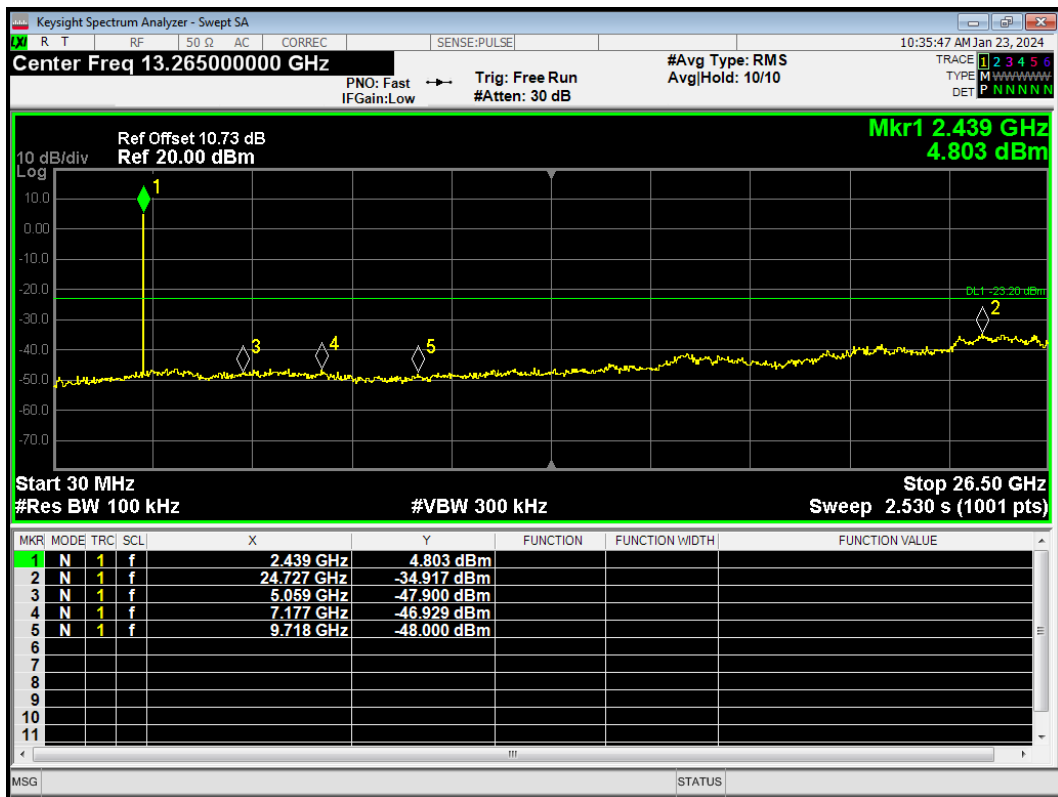

Tx. Spurious Bluetooth LE(S=8) 2480MHz Ref

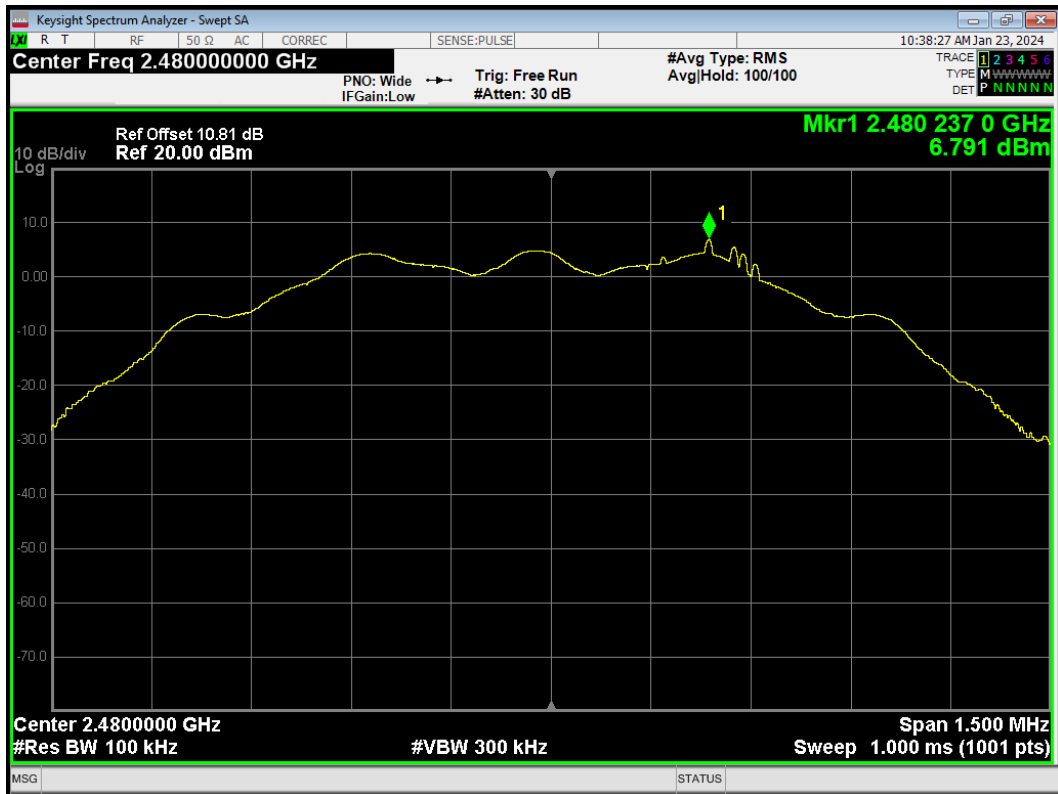

Tx. Spurious Bluetooth LE(S=8) 2480MHz Emission

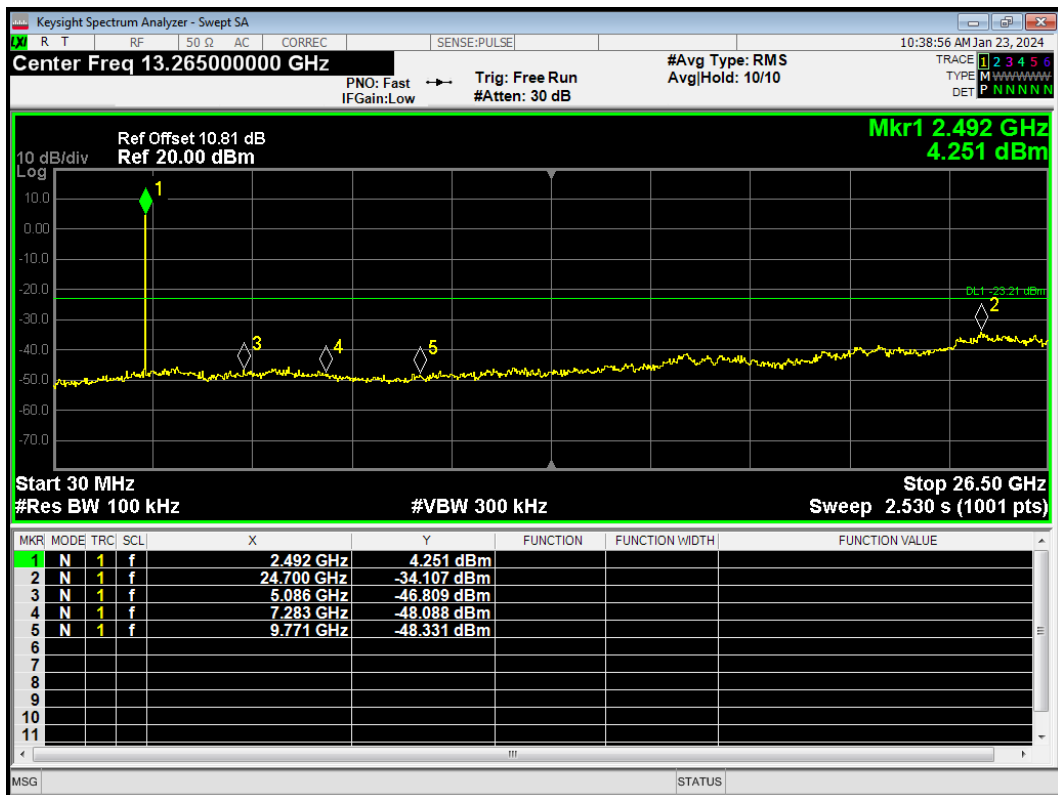

5.6. Unwanted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the 10 meters below 1GHz; 3 meters for above 1GHz between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage

averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The test is in transmitting mode.


Test Setup

9KHz~ 30MHz

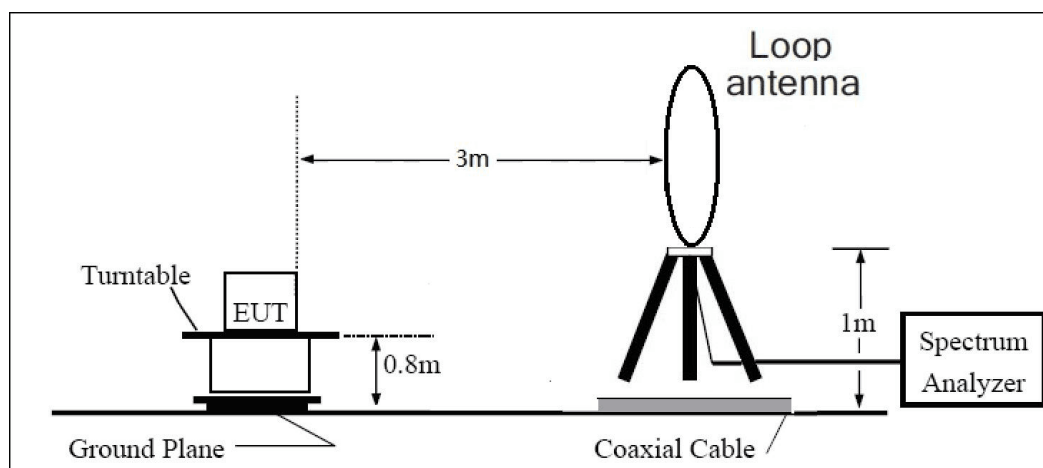


Note: Area side:2.4mX3.6m

30MHz~ 1GHz

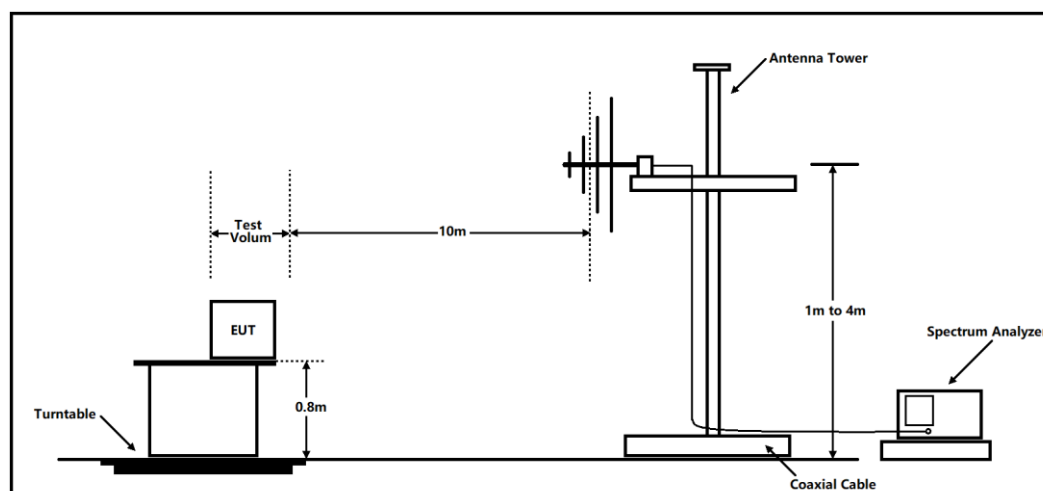

Note: Area side: 21m x 12m

Above 1GHz

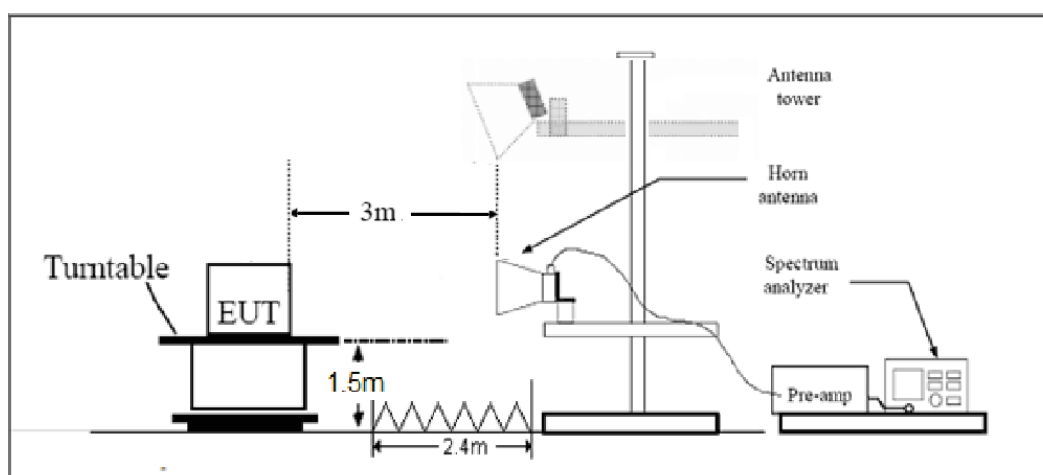

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dB μ V/m)	Measurement distance (m)
0.009–0.490	2400/F(kHz)	/	/
0.490–1.705	24000/F(kHz)	/	/
1.705–30.0	30	/	/
30-88	100	39.08	10
88-216	150	43.5	10
216-960	200	46.4	10
Above960	500	49.5	10

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dB μ V/m

Average Limit=54 dB μ V/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	3.39 dB
200MHz-1GHz	3.82 dB
1-18GHz	6.51 dB
18-26.5GHz	5.90 dB

Test Results:

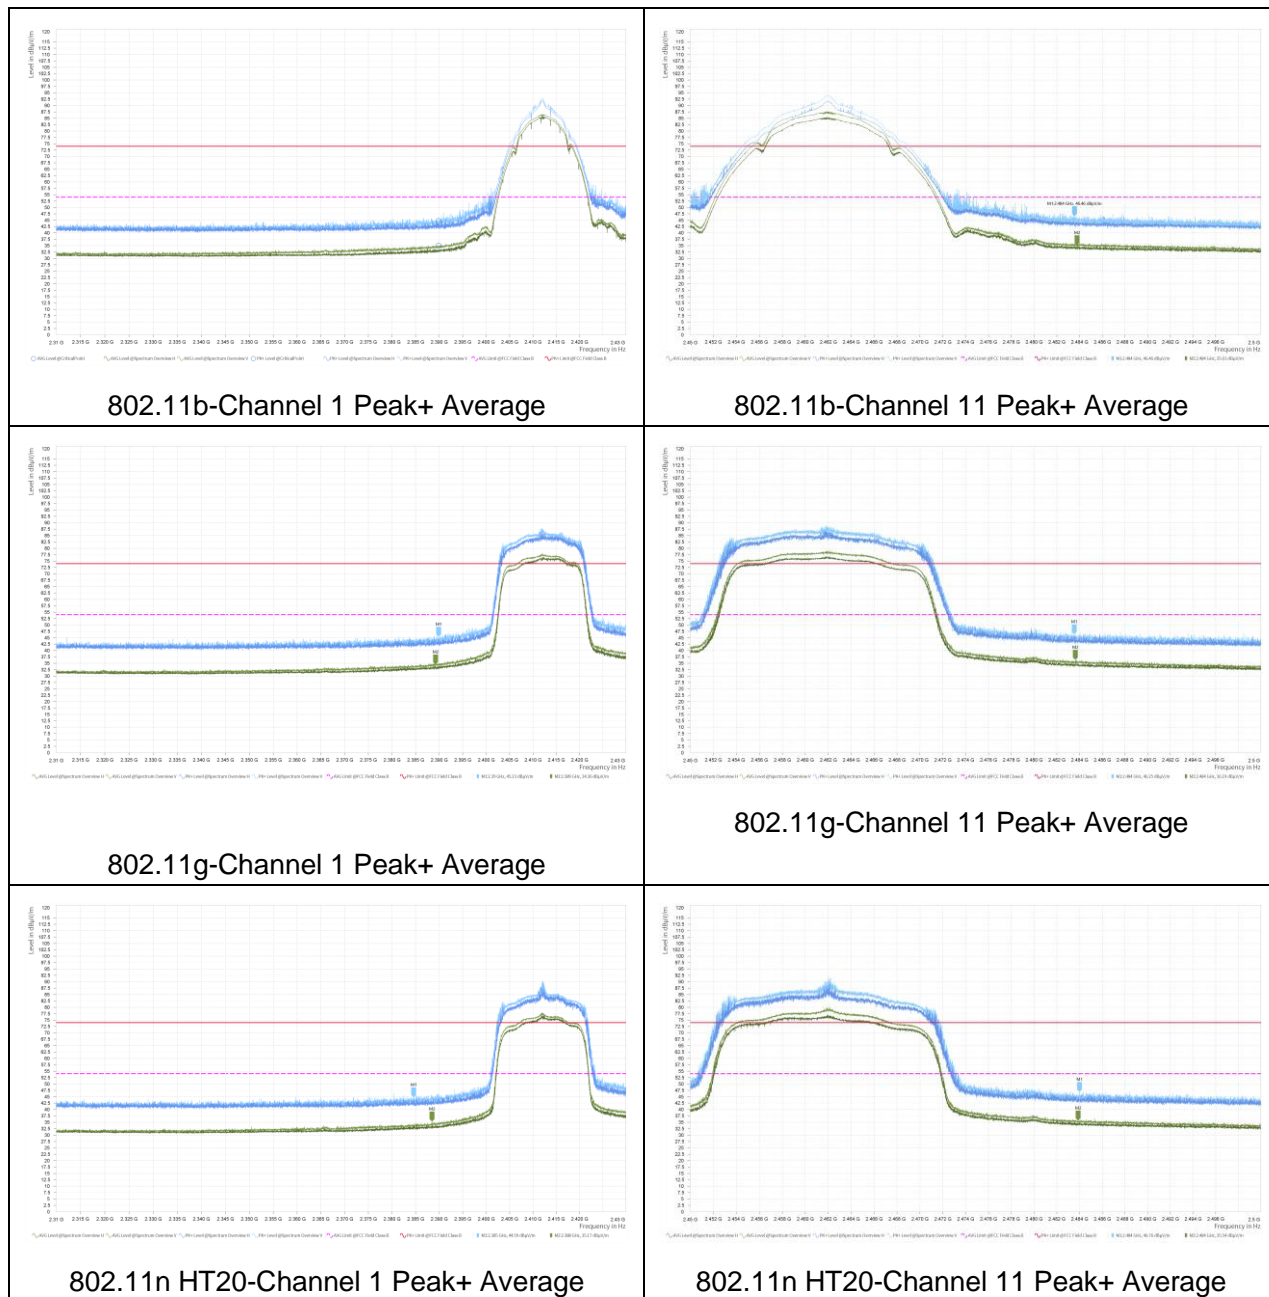

After the pretest, Bluetooth LE (S=8) was selected as the worst Mode for Bluetooth LE.

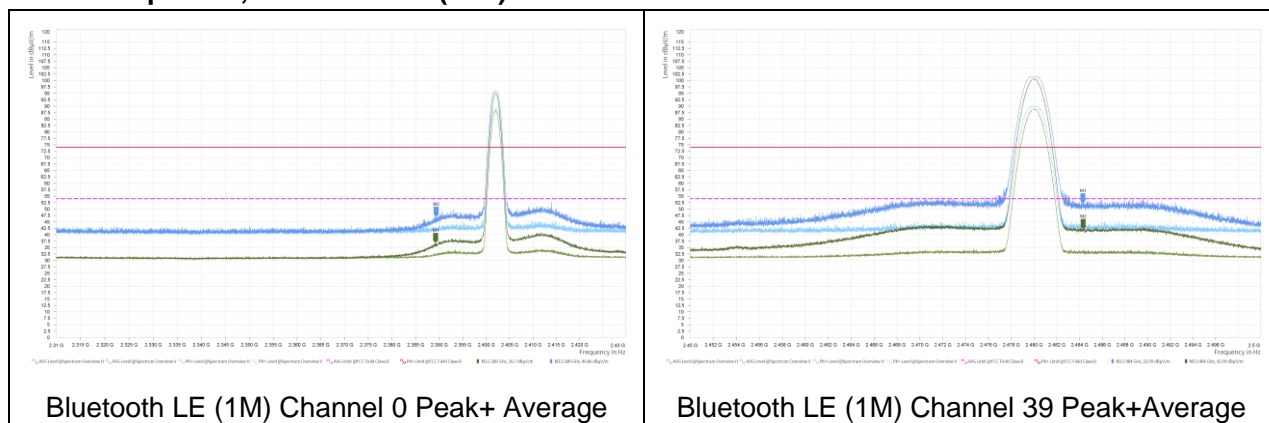

Result of RE

Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz are more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.


For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

Continuous TX mode:

Wi-Fi 2.4G

A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means ($\text{dB}\mu\text{V/m}$)

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11b, Channel 6 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

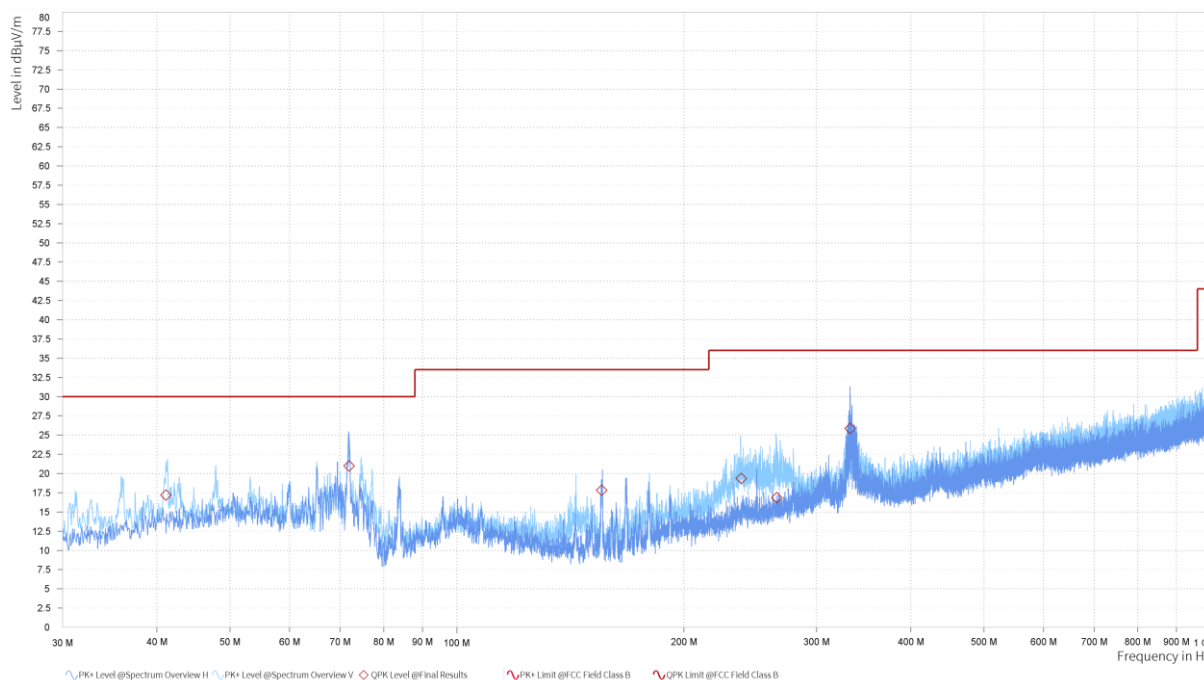


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB $\mu\text{V/m}$)	Limit (dB $\mu\text{V/m}$)	Margin (dB)	Height (m)	Polarization	Azimuth (deg)	Correct Factor (dB)
71.938	20.96	30.00	9.04	1.16	H	148.9	-12.87
155.578	17.80	33.50	15.70	2.01	H	274	-13.29
332.401	25.84	36.00	10.16	2.12	H	243.2	-6.90
41.137	17.18	30.00	12.82	1.05	V	109.7	-9.45
238.269	19.34	36.00	16.66	1.05	V	289.1	-8.70
265.663	16.83	36.00	19.17	2.25	V	308.8	-8.22


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss)

2. Margin = Limit – Quasi-Peak

802.11b CH1

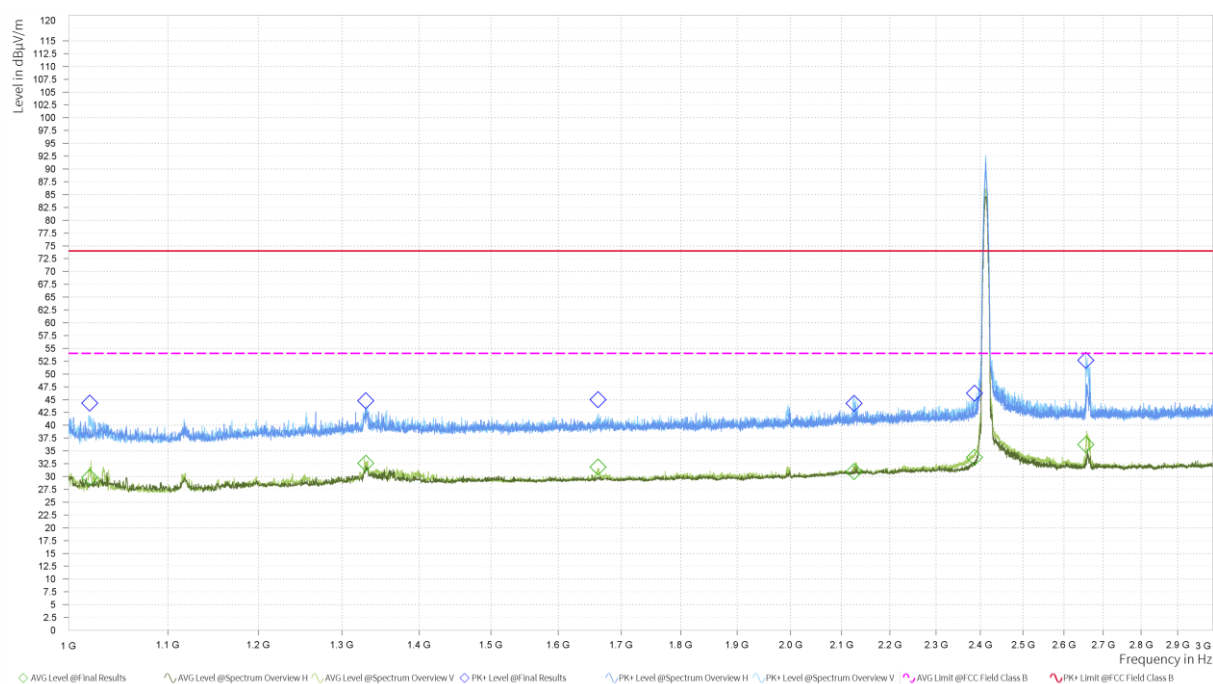

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

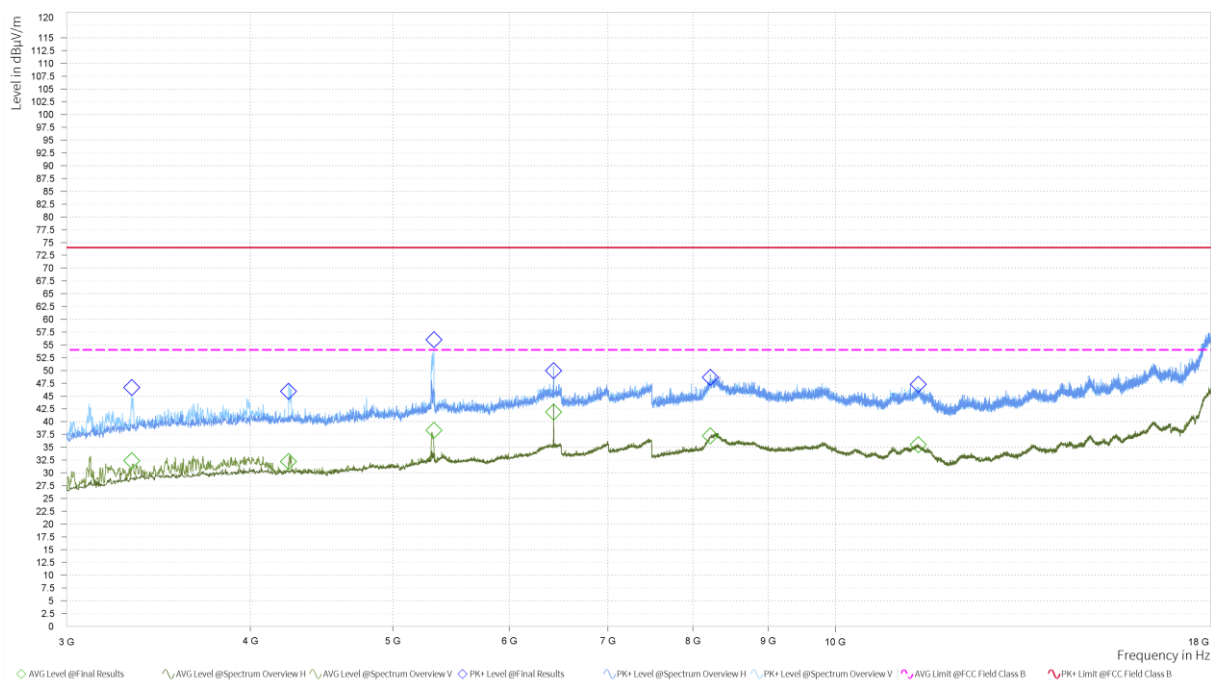


Radiates Emission from 3GHz to 18GHz


Frequency (MHz)	MaxPeak (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,020.500	44.31	74.00	29.69	29.79	54.00	24.21	1.000	2.00	V	225.5	-9.45
1,330.250	44.75	74.00	29.25	32.56	54.00	21.44	1.000	2.00	V	254	-6.81
1,662.500	44.95	74.00	29.05	31.82	54.00	22.18	1.000	2.00	V	357.1	-4.88
2,125.500	44.27	74.00	29.73	30.94	54.00	23.06	1.000	2.00	V	225.5	-2.70
2,386.250	46.21	74.00	27.79	33.70	54.00	20.30	1.000	2.00	V	176.4	-1.93
2,655.500	52.63	74.00	21.37	36.20	54.00	17.80	1.000	2.00	V	261.1	-1.46
5,332.500	56.01	74.00	17.99	38.27	54.00	15.73	1.000	1.00	V	113.7	0.78
6,431.250	49.91	74.00	24.09	41.83	54.00	12.17	1.000	1.00	H	322.2	3.09
8,220.000	48.64	74.00	25.36	37.20	54.00	16.80	1.000	2.00	H	227.7	7.07
11,383.125	47.25	74.00	26.75	35.46	54.00	18.54	1.000	2.00	V	315	5.71

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
2. Margin = Limit –MAX Peak/ Average

802.11b CH6

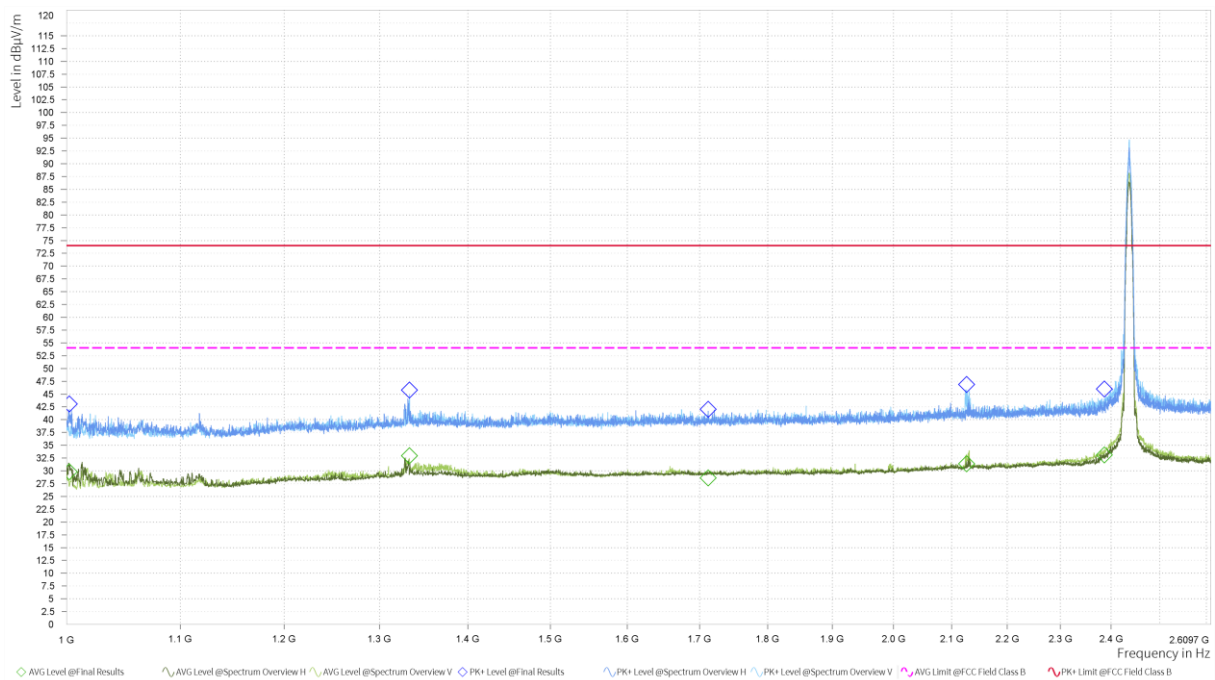

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

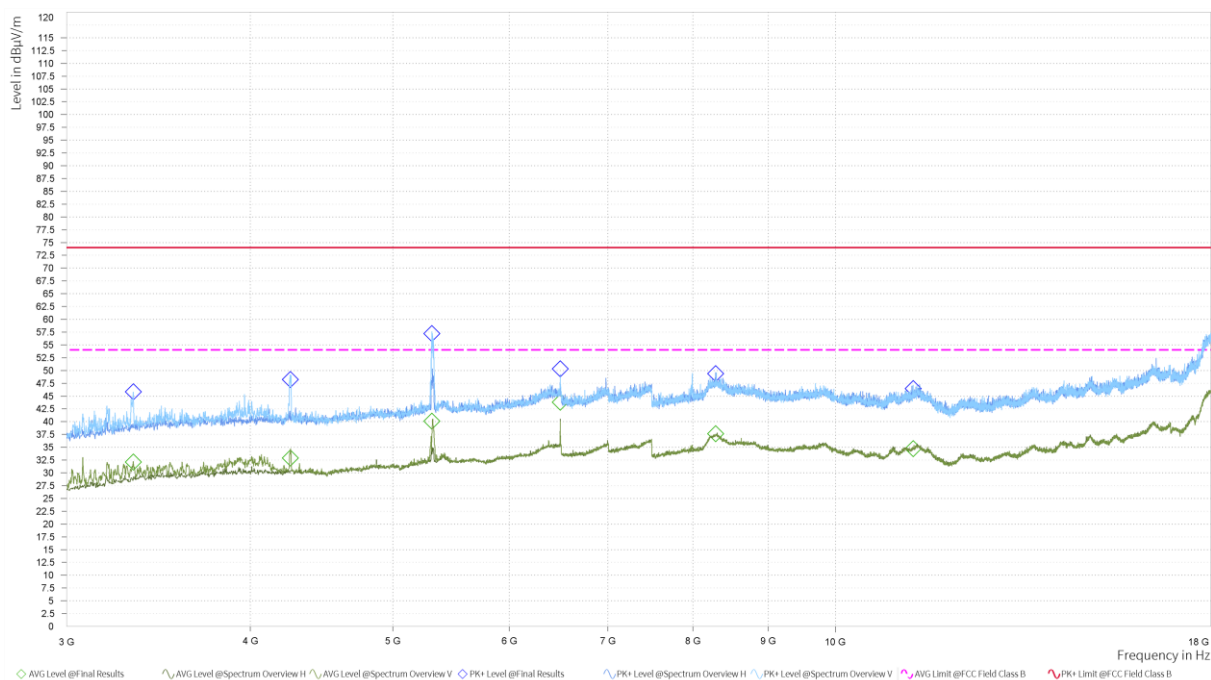


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,002.250	43.06	74.00	30.94	29.80	54.00	24.20	1.000	2.00	H	225.6	-9.56
1,333.000	45.76	74.00	28.24	32.92	54.00	21.08	1.000	1.00	V	260.2	-6.79
1,712.250	41.98	74.00	32.02	28.60	54.00	25.40	1.000	2.00	H	111.6	-4.73
2,126.250	46.87	74.00	27.13	31.35	54.00	22.65	1.000	2.00	V	360	-2.69
2,386.500	45.96	74.00	28.04	33.09	54.00	20.91	1.000	2.00	V	183.8	-1.93
2,655.250	50.38	74.00	23.62	33.95	54.00	20.05	1.000	2.00	V	119.7	-1.47
5,315.625	57.19	74.00	16.81	40.08	54.00	13.92	1.000	1.00	V	235.6	0.82
6,498.750	50.31	74.00	23.69	43.79	54.00	10.21	1.000	1.00	H	162.8	2.88
8,289.375	49.35	74.00	24.65	37.60	54.00	16.40	1.000	2.00	H	249.4	7.72
11,295.000	46.43	74.00	27.57	34.70	54.00	19.30	1.000	2.00	V	79.2	5.60


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11b CH11

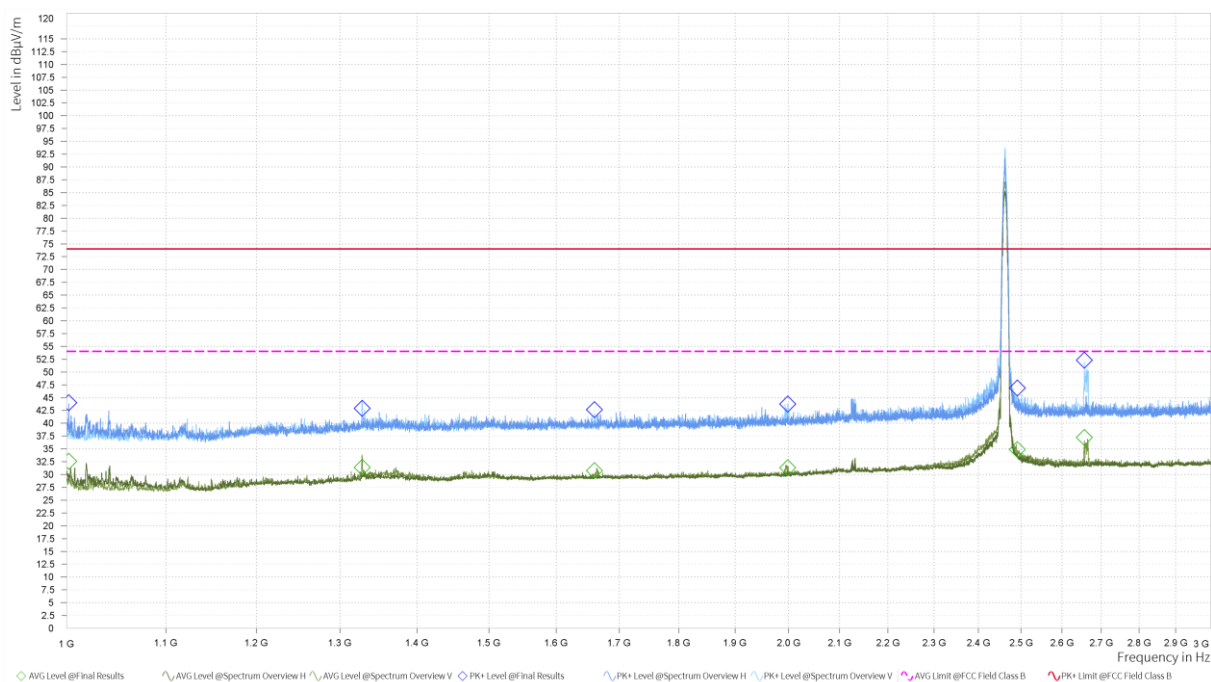

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

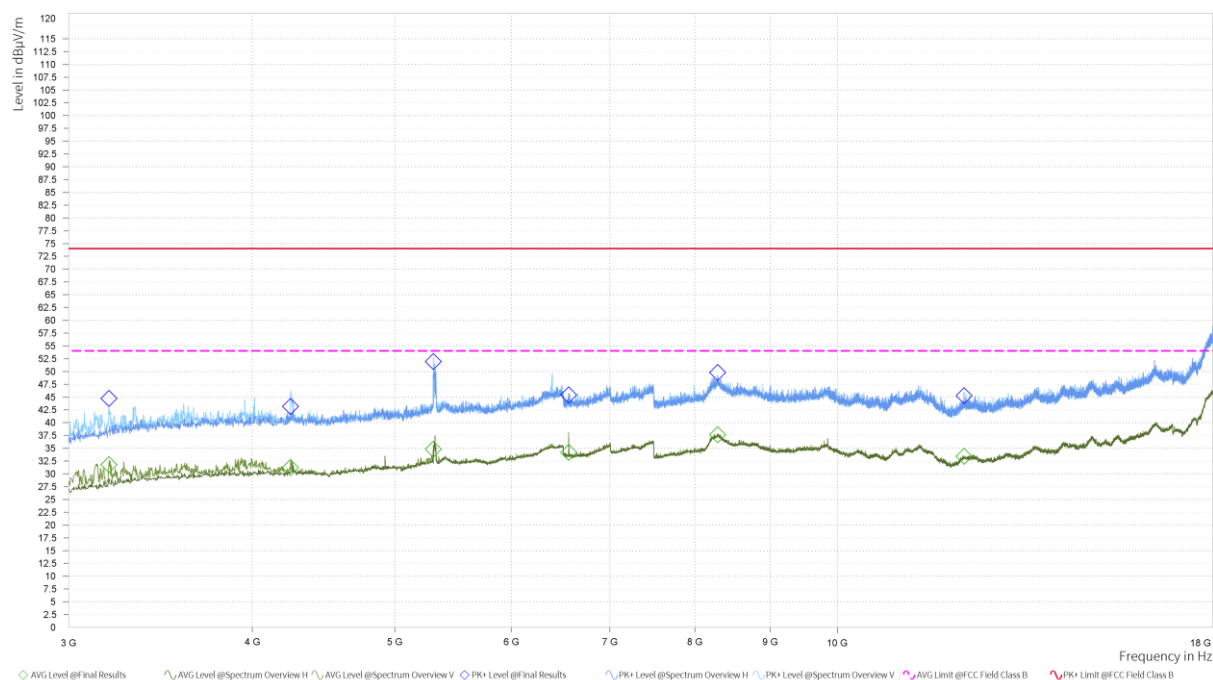


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,002.000	43.97	74.00	30.03	32.57	54.00	21.43	1.000	2.00	H	244.5	-9.56
1,328.000	42.89	74.00	31.11	31.36	54.00	22.64	1.000	2.00	V	237.7	-6.82
1,659.750	42.60	74.00	31.40	30.72	54.00	23.28	1.000	2.00	V	237.7	-4.89
1,998.250	43.74	74.00	30.26	31.29	54.00	22.71	1.000	1.00	V	6	-3.47
2,491.500	46.87	74.00	27.13	34.85	54.00	19.15	1.000	2.00	V	175.8	-1.54
2,657.000	52.28	74.00	21.72	37.22	54.00	16.78	1.000	1.00	V	107.5	-1.45
5,310.000	51.89	74.00	22.11	34.79	54.00	19.21	1.000	2.00	V	315	0.84
6,564.375	45.40	74.00	28.60	34.19	54.00	19.81	1.000	2.00	V	4.8	2.75
8,289.375	49.77	74.00	24.23	37.60	54.00	16.40	1.000	1.00	H	125.1	7.72


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11g CH1

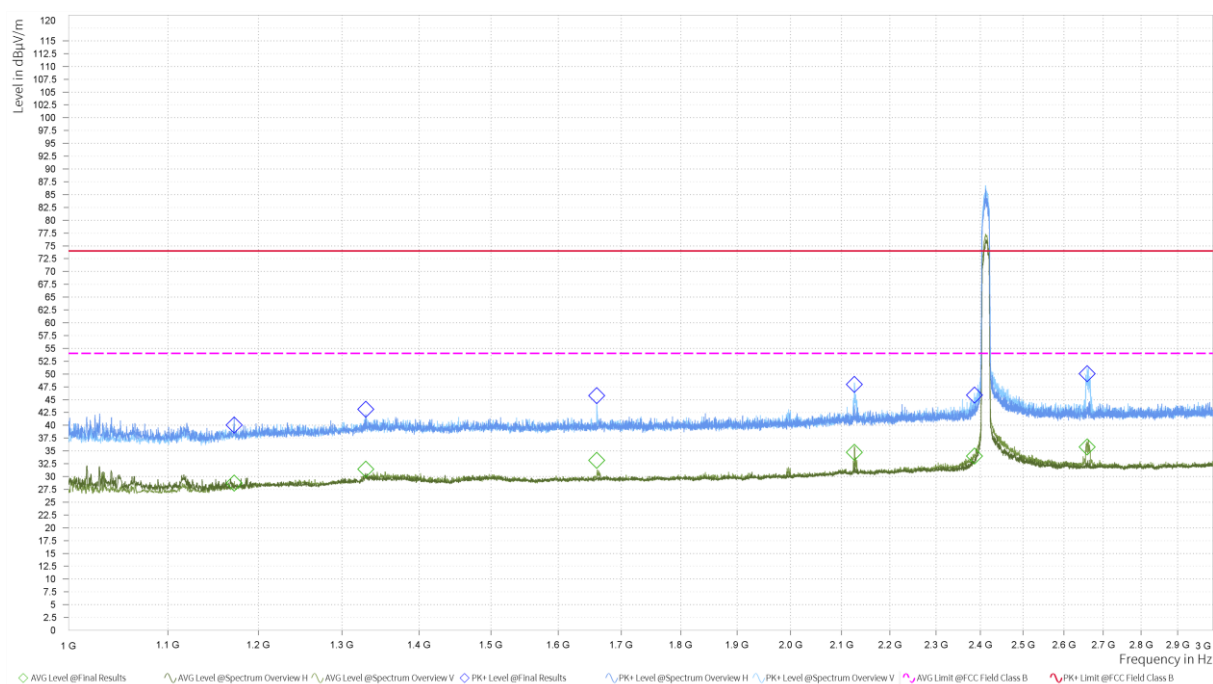

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

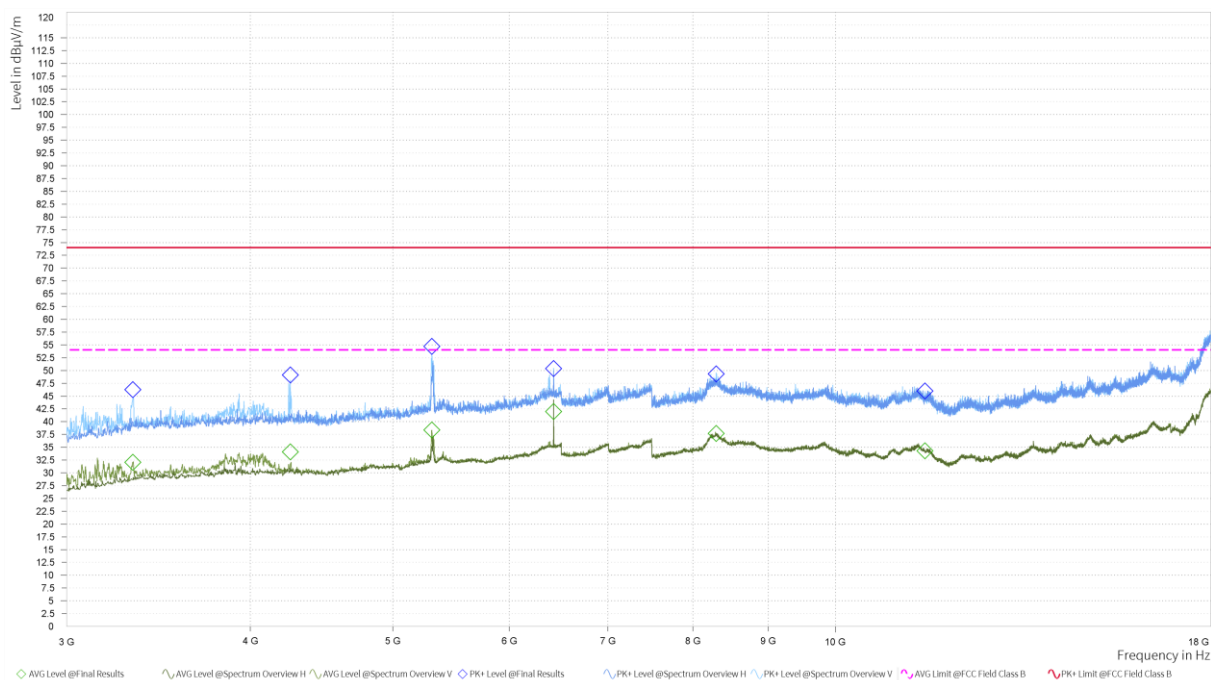


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,172.250	40.01	74.00	33.99	28.67	54.00	25.33	1.000	2.00	H	244	-8.16
1,330.250	43.11	74.00	30.89	31.43	54.00	22.57	1.000	2.00	H	285.1	-6.81
1,660.500	45.78	74.00	28.22	33.11	54.00	20.89	1.000	1.00	V	189.2	-4.89
2,126.500	47.93	74.00	26.07	34.71	54.00	19.29	1.000	1.00	V	31.4	-2.69
2,386.000	45.85	74.00	28.15	33.94	54.00	20.06	1.000	2.00	V	204.9	-1.93
2,659.000	50.01	74.00	23.99	35.75	54.00	18.25	1.000	2.00	V	211.5	-1.44
4,258.125	49.10	74.00	24.90	34.09	54.00	19.91	1.000	1.00	V	224.5	-1.56
5,315.625	54.69	74.00	19.31	38.36	54.00	15.64	1.000	1.00	V	0	0.82
6,431.250	50.32	74.00	23.68	41.93	54.00	12.07	1.000	2.00	V	283.7	3.09
8,295.000	49.33	74.00	24.67	37.65	54.00	16.35	1.000	2.00	V	343.5	7.78
11,505.000	45.97	74.00	28.03	34.28	54.00	19.72	1.000	2.00	V	238.9	5.09


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11g CH6

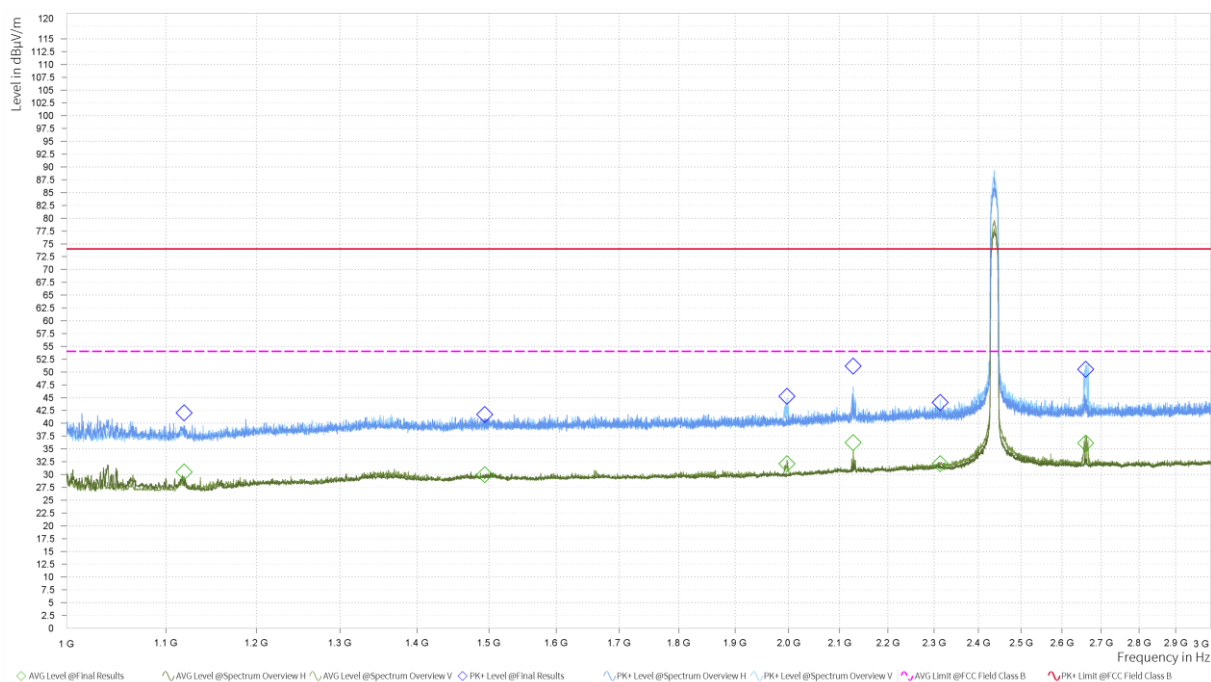

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

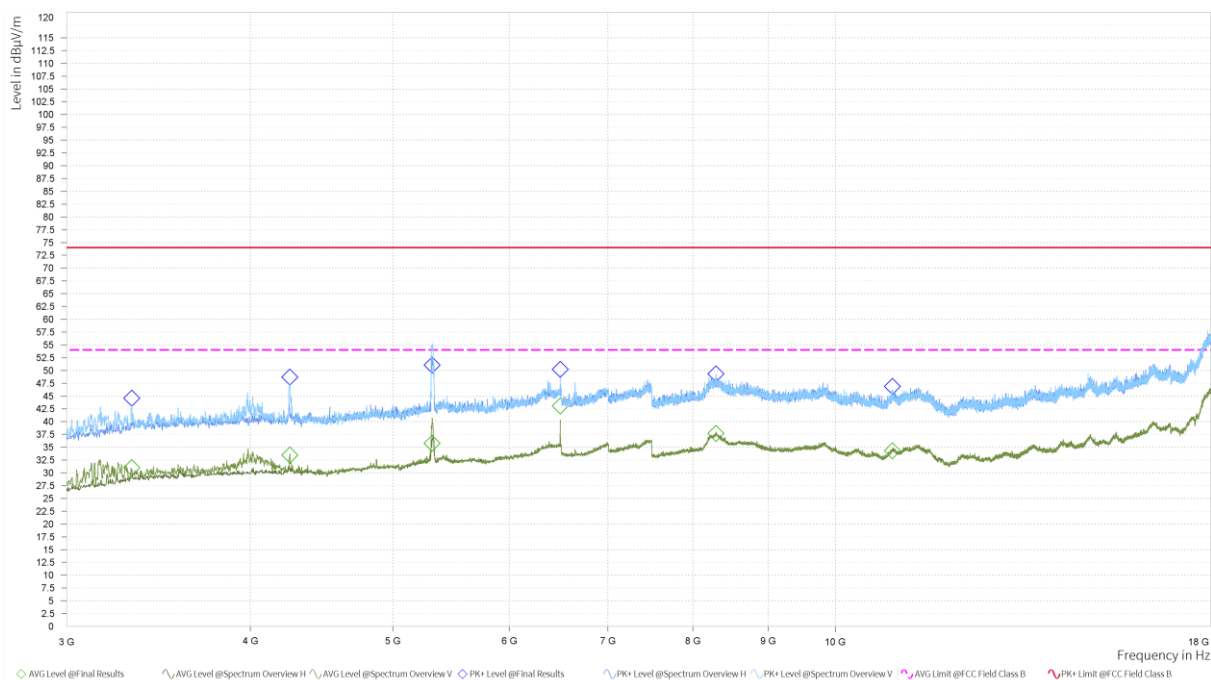


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,119.250	42.00	74.00	32.00	30.48	54.00	23.52	1.000	1.00	H	237.3	-8.78
1,493.750	41.68	74.00	32.32	29.96	54.00	24.04	1.000	1.00	H	237.3	-5.84
1,996.750	45.23	74.00	28.77	32.07	54.00	21.93	1.000	1.00	V	250.6	-3.47
2,128.000	51.14	74.00	22.86	36.23	54.00	17.77	1.000	1.00	V	24.4	-2.69
2,313.500	44.06	74.00	29.94	32.11	54.00	21.89	1.000	2.00	V	287.6	-2.08
2,660.500	50.52	74.00	23.48	36.11	54.00	17.89	1.000	2.00	V	212.6	-1.43
5,317.500	51.00	74.00	23.00	35.74	54.00	18.26	1.000	1.00	V	314.2	0.82
6,498.750	50.19	74.00	23.81	43.06	54.00	10.94	1.000	1.00	H	150.2	2.88
8,293.125	49.30	74.00	24.70	37.67	54.00	16.33	1.000	2.00	V	67.5	7.76
10,931.250	46.84	74.00	27.16	34.26	54.00	19.74	1.000	1.00	H	240.3	4.58


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11g CH11

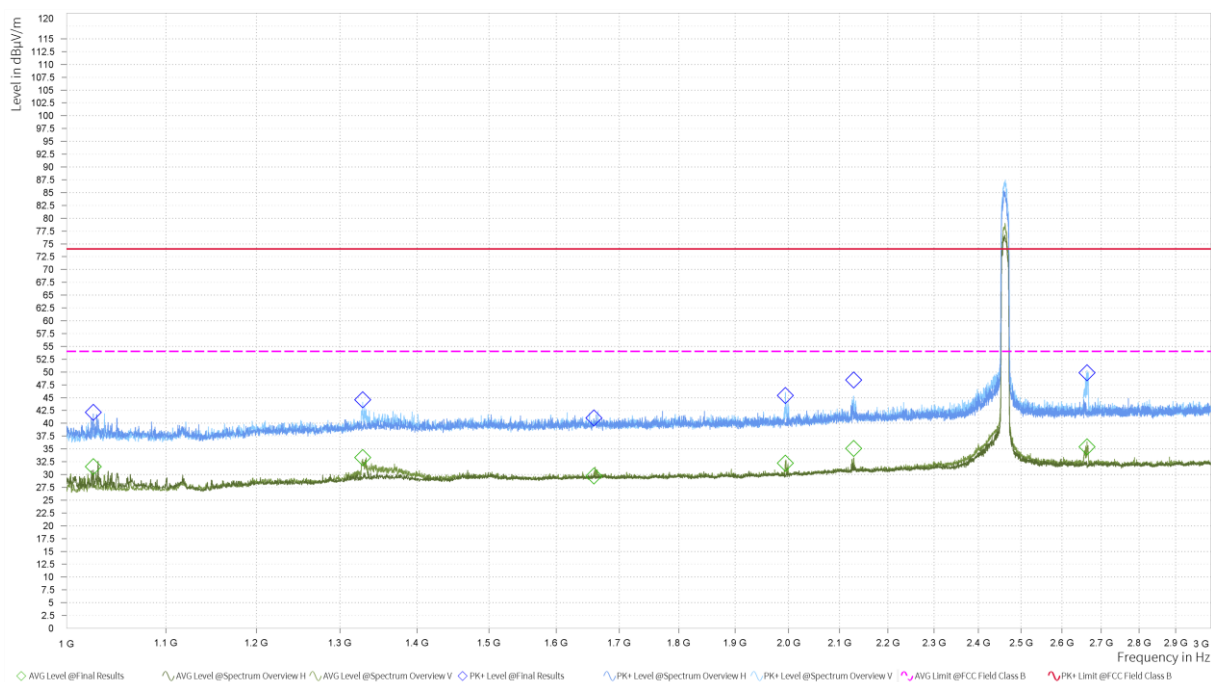

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

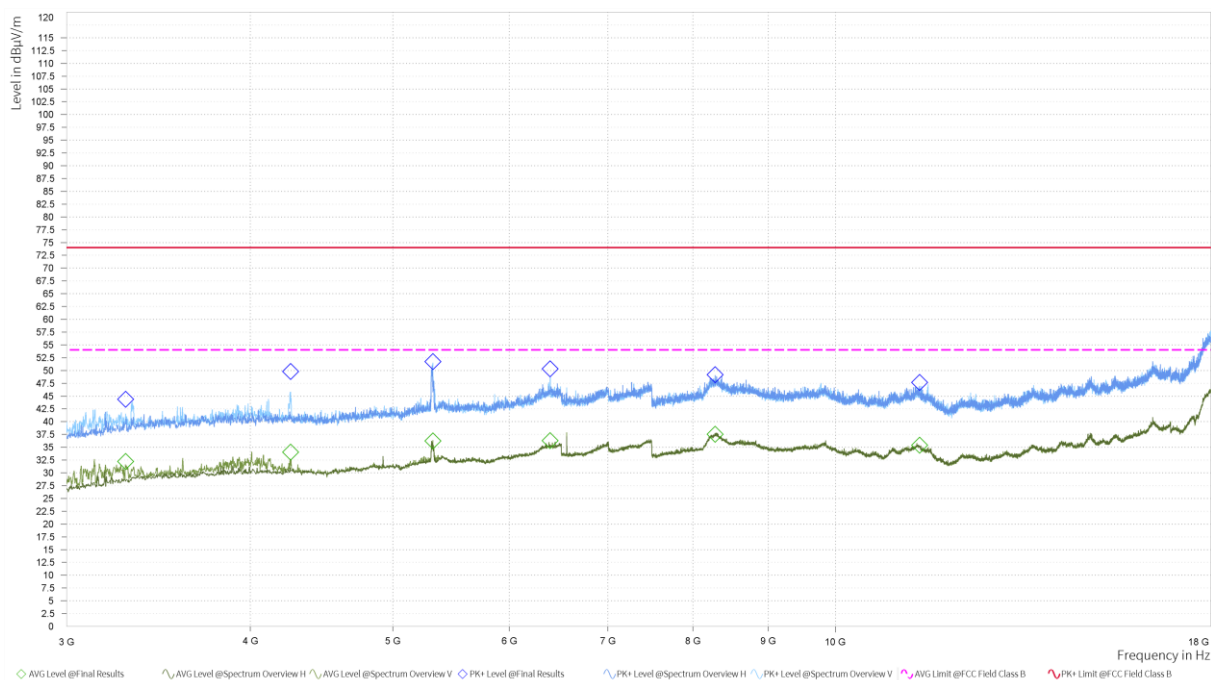


Radiates Emission from 3GHz to 18GHz


Frequency (MHz)	MaxPeak (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,026.000	42.09	74.00	31.91	31.53	54.00	22.47	1.000	2.00	H	238.2	-9.42
1,328.750	44.56	74.00	29.44	33.30	54.00	20.70	1.000	1.00	V	278.3	-6.82
1,659.000	41.01	74.00	32.99	29.69	54.00	24.31	1.000	1.00	H	102.4	-4.90
1,994.000	45.40	74.00	28.60	32.20	54.00	21.80	1.000	1.00	V	250.8	-3.48
2,128.750	48.40	74.00	25.60	35.05	54.00	18.95	1.000	1.00	V	17.5	-2.69
2,663.500	49.84	74.00	24.16	35.39	54.00	18.61	1.000	1.00	V	119.9	-1.41
5,323.125	51.70	74.00	22.30	36.22	54.00	17.78	1.000	1.00	V	45.3	0.80
6,397.500	50.30	74.00	23.70	36.29	54.00	17.71	1.000	1.00	V	188.1	3.24
8,281.875	49.14	74.00	24.86	37.50	54.00	16.50	1.000	1.00	H	187.3	7.64
11,405.625	47.62	74.00	26.38	35.36	54.00	18.64	1.000	2.00	H	173.1	5.69

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH1

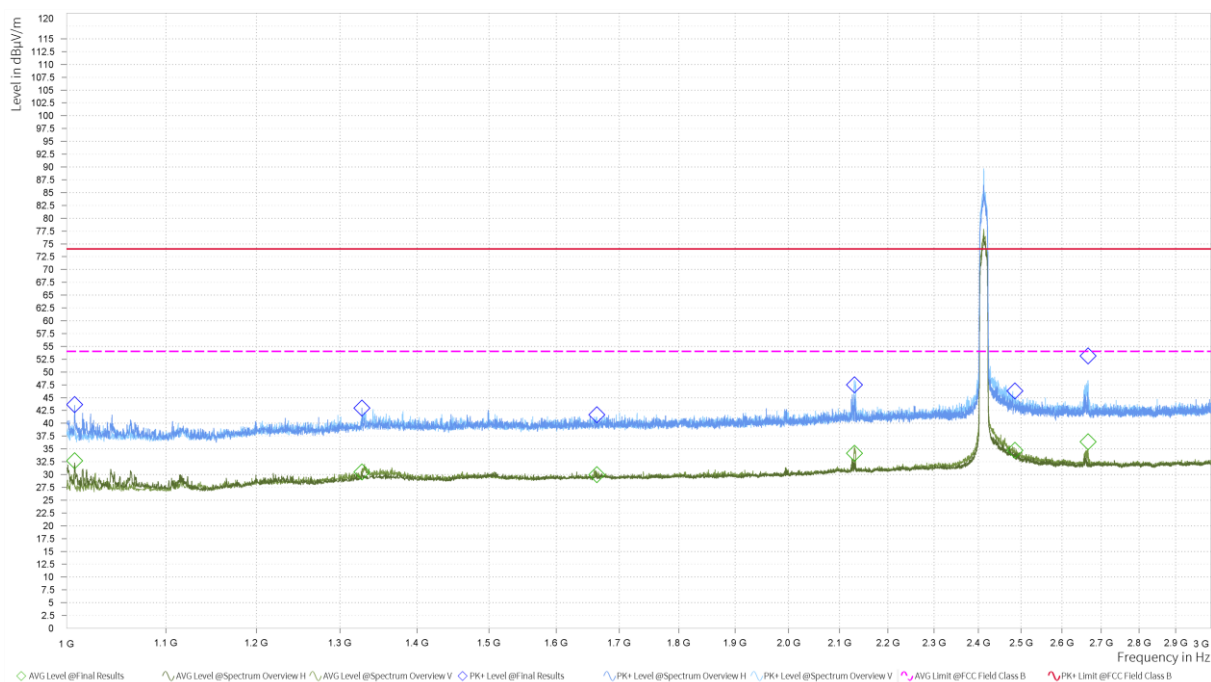

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

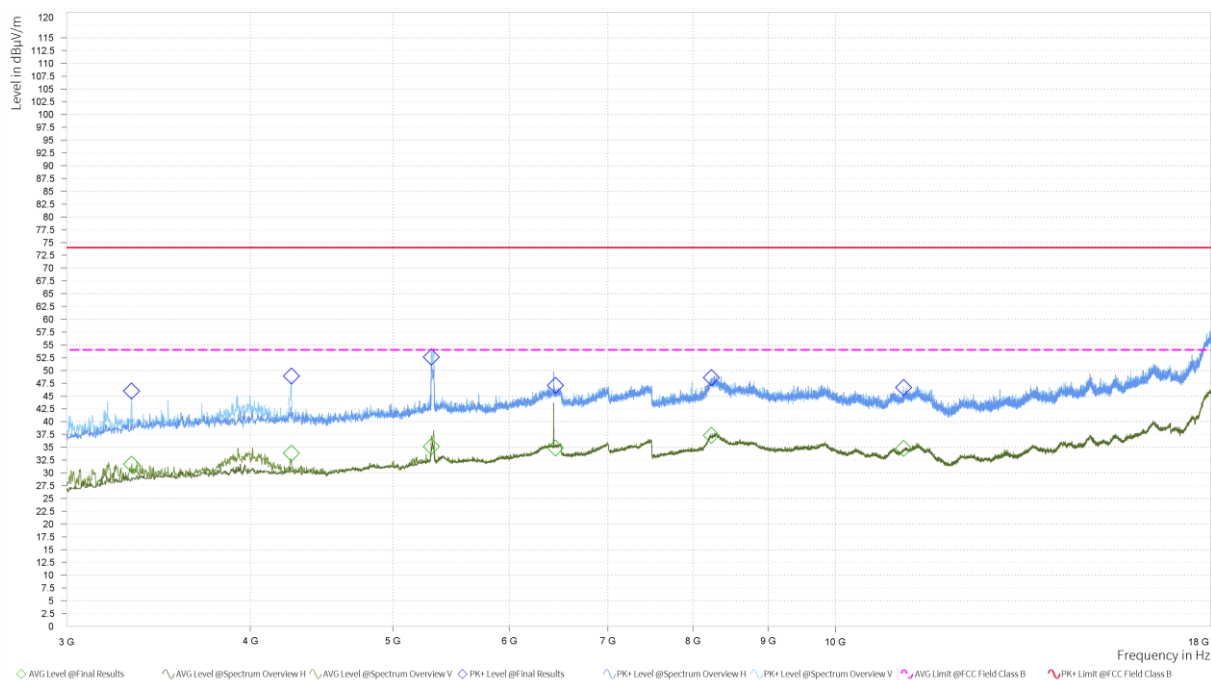


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,007.750	43.62	74.00	30.38	32.65	54.00	21.35	1.000	2.00	H	250.8	-9.52
1,327.750	42.95	74.00	31.05	30.48	54.00	23.52	1.000	2.00	H	4.3	-6.82
1,663.750	41.61	74.00	32.39	29.97	54.00	24.03	1.000	2.00	V	275.3	-4.88
2,130.500	47.50	74.00	26.50	34.10	54.00	19.90	1.000	1.00	V	34.3	-2.68
2,485.750	46.29	74.00	27.71	34.68	54.00	19.32	1.000	2.00	V	130.2	-1.57
2,666.500	53.09	74.00	20.91	36.36	54.00	17.64	1.000	2.00	V	102.3	-1.40
5,310.000	52.57	74.00	21.43	35.11	54.00	18.89	1.000	1.00	V	120	0.84
6,450.000	47.08	74.00	26.92	34.81	54.00	19.19	1.000	2.00	V	350.9	2.95
8,233.125	48.57	74.00	25.43	37.33	54.00	16.67	1.000	2.00	V	37.1	7.16
11,126.250	46.65	74.00	27.35	34.73	54.00	19.27	1.000	2.00	V	356.6	5.02


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH6

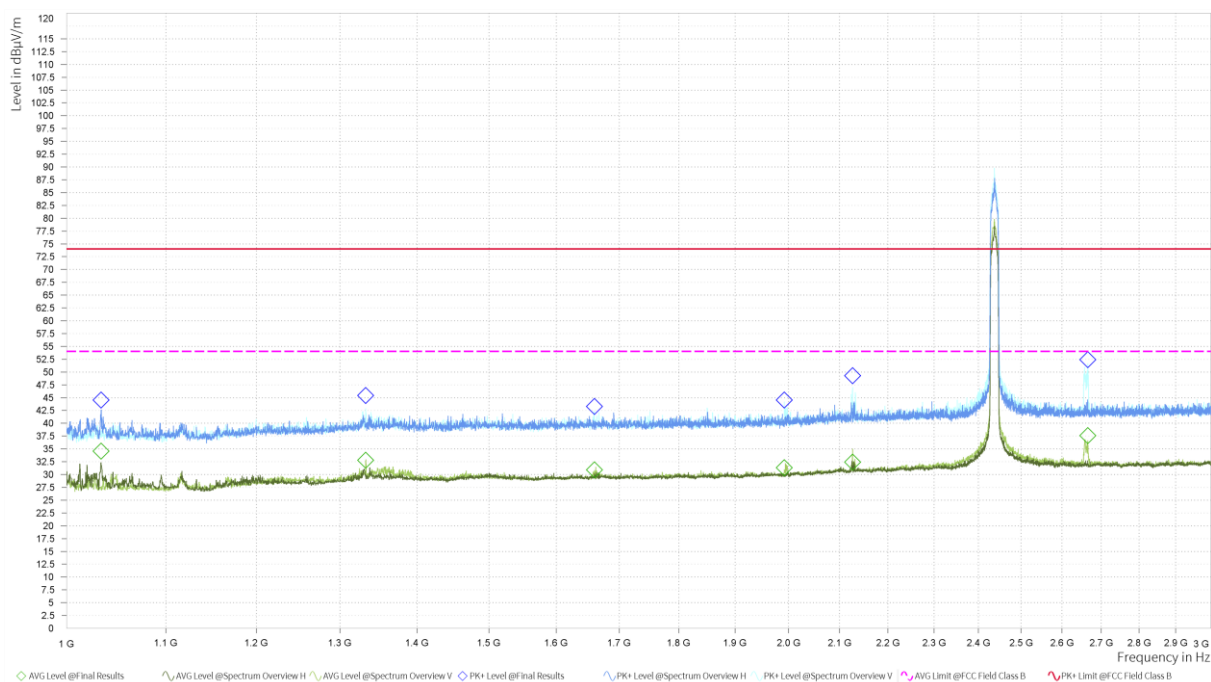

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

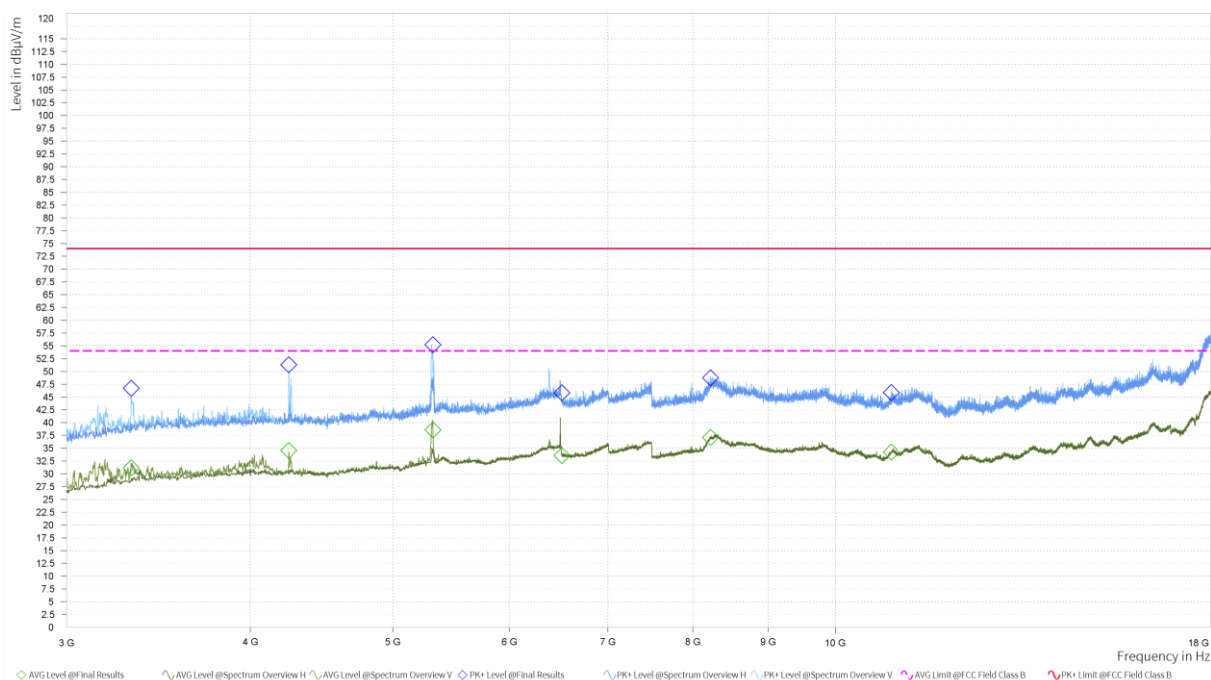


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,033.750	44.49	74.00	29.51	34.52	54.00	19.48	1.000	2.00	H	250.6	-9.37
1,332.500	45.41	74.00	28.59	32.75	54.00	21.25	1.000	1.00	V	270.5	-6.80
1,659.750	43.26	74.00	30.74	30.91	54.00	23.09	1.000	2.00	V	193.1	-4.89
1,991.750	44.52	74.00	29.48	31.28	54.00	22.72	1.000	2.00	V	234.5	-3.48
2,126.750	49.25	74.00	24.75	32.41	54.00	21.59	1.000	1.00	V	20.9	-2.69
2,665.750	52.40	74.00	21.60	37.59	54.00	16.41	1.000	2.00	V	110.7	-1.40
4,248.750	51.29	74.00	22.71	34.56	54.00	19.44	1.000	1.00	V	322.7	-1.67
5,323.125	55.22	74.00	18.78	38.53	54.00	15.47	1.000	1.00	V	248.1	0.80
8,223.750	48.74	74.00	25.26	37.09	54.00	16.91	1.000	2.00	V	29.4	7.09
10,912.500	45.87	74.00	28.13	34.23	54.00	19.77	1.000	2.00	V	328.1	4.39


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11n (HT20) CH11

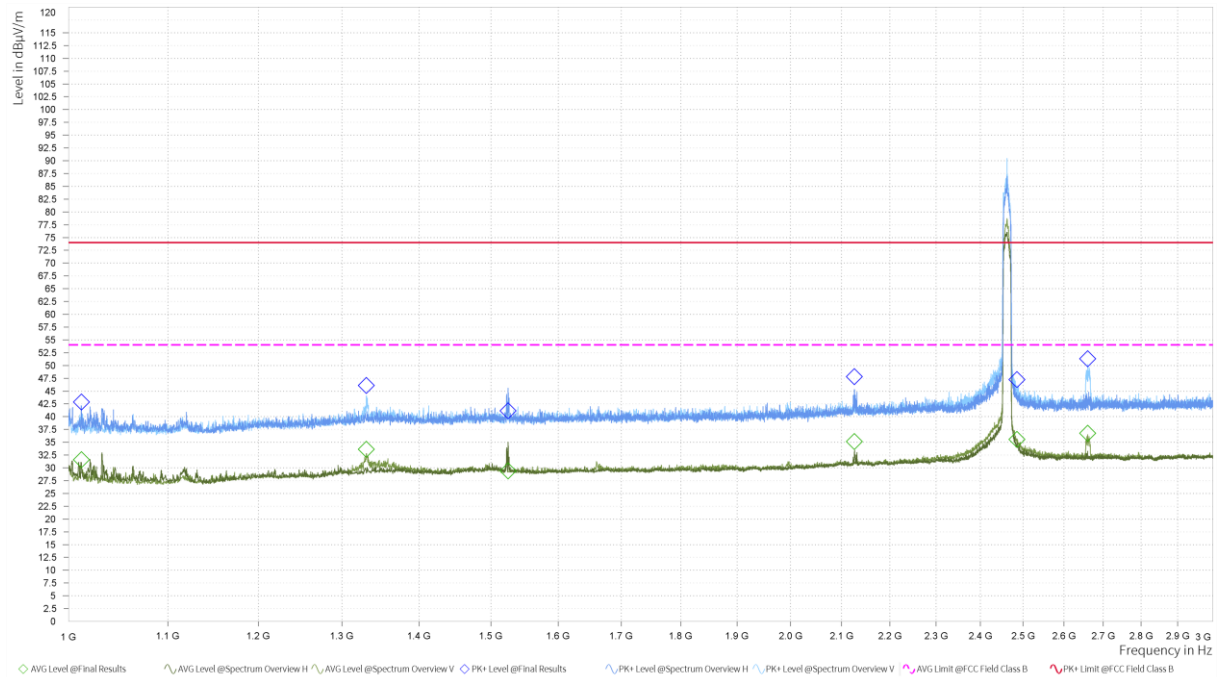

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

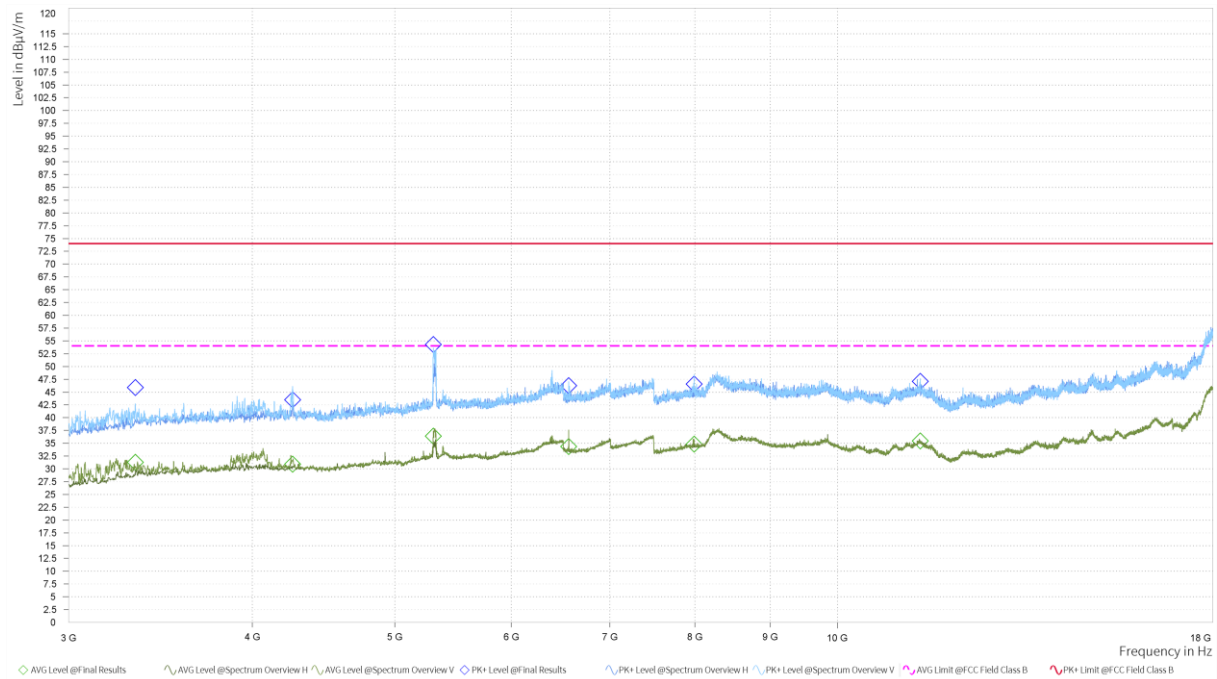


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,012.250	42.83	74.00	31.17	31.54	54.00	22.46	1.000	2.00	H	229.1	-9.50
1,331.000	46.07	74.00	27.93	33.57	54.00	20.43	1.000	1.00	V	276.9	-6.80
1,525.000	41.11	74.00	32.89	29.38	54.00	24.62	1.000	2.00	H	235.7	-5.67
2,126.500	47.79	74.00	26.21	35.10	54.00	18.90	1.000	1.00	H	338.3	-2.69
2,485.750	47.24	74.00	26.76	35.52	54.00	18.48	1.000	2.00	V	179.4	-1.57
2,660.000	51.26	74.00	22.74	36.73	54.00	17.27	1.000	1.00	V	227.8	-1.44
5,310.000	54.23	74.00	19.77	36.36	54.00	17.64	1.000	1.00	V	97.1	0.84
6,564.375	46.22	74.00	27.78	34.30	54.00	19.70	1.000	2.00	V	276.5	2.75
7,989.375	46.52	74.00	27.48	34.82	54.00	19.18	1.000	1.00	V	210.4	4.49
11,383.125	47.04	74.00	26.96	35.41	54.00	18.59	1.000	1.00	V	3	5.71

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

During the test, the Radiates Emission from 18GHz to 26.5GHz was performed in all modes with all channels, 802.11b, Channel 6 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

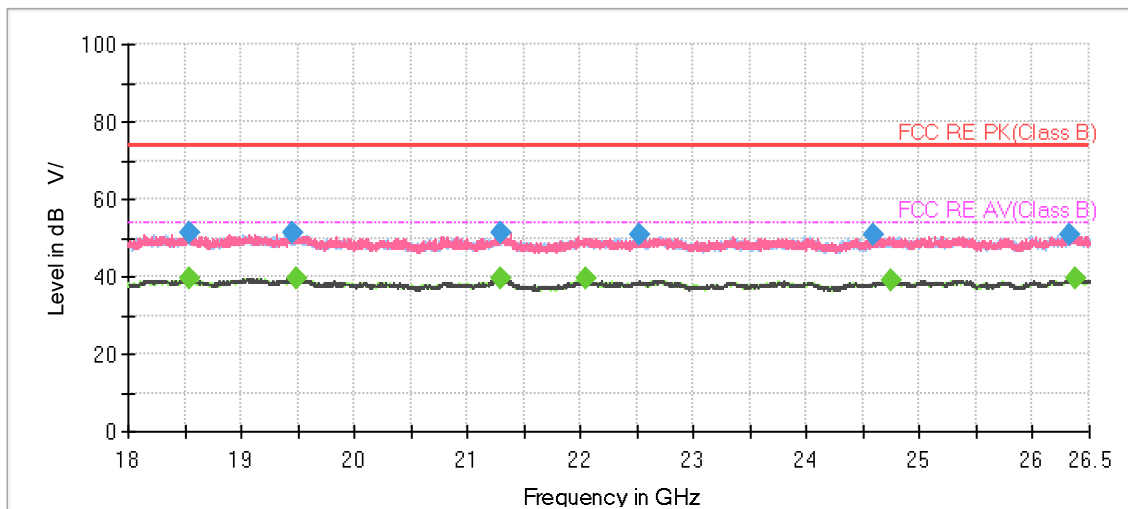

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18544.000000	51.04	---	74.00	22.96	500.0	200.0	V	178.0	-3.0
18546.125000	---	39.55	54.00	14.45	500.0	200.0	H	56.0	-3.0
19450.312500	51.43	---	74.00	22.57	500.0	200.0	V	326.0	-2.8
19489.625000	---	39.67	54.00	14.33	500.0	200.0	H	20.0	-2.7
21291.625000	51.07	---	74.00	22.93	500.0	200.0	H	150.0	-1.9
21295.875000	---	39.51	54.00	14.49	500.0	200.0	H	0.0	-1.9
22056.625000	---	39.37	54.00	14.63	500.0	200.0	H	127.0	-1.8
22517.750000	50.59	---	74.00	23.41	500.0	200.0	H	81.0	-1.8
24593.875000	50.86	---	74.00	23.14	500.0	200.0	H	81.0	-0.7
24751.125000	---	38.95	54.00	15.05	500.0	200.0	V	36.0	-0.6
26318.312500	50.69	---	74.00	23.31	500.0	100.0	V	146.0	0.4
26370.375000	---	39.45	54.00	14.55	500.0	200.0	H	0.0	0.4


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit -MAX Peak/ Average

Bluetooth LE

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, Bluetooth LE(S=8)-Channel 0 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means ($\text{dB}\mu\text{V/m}$)

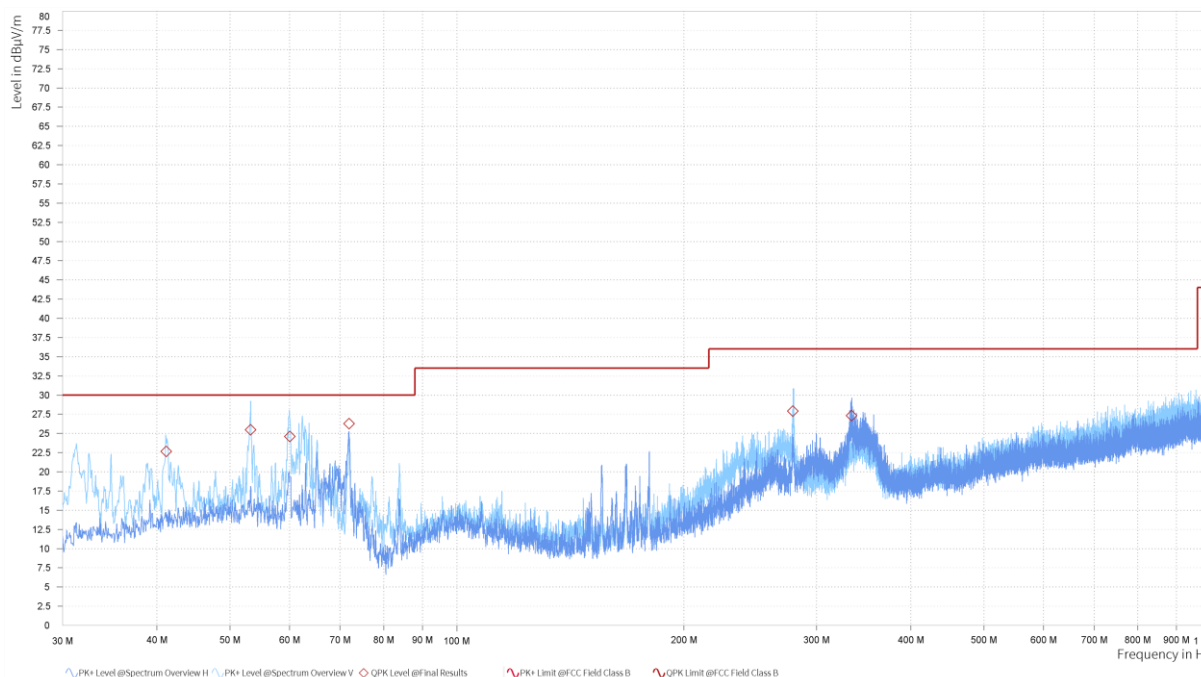


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB $\mu\text{V/m}$)	Limit (dB $\mu\text{V/m}$)	Margin (dB)	Height (m)	Polarization	Azimuth (deg)	Correct Factor (dB)
71.926	26.27	30.00	3.73	2.25	H	184.2	-12.87
333.807	27.31	36.00	8.69	1.96	H	253.6	-6.83
41.161	22.65	30.00	7.35	1.25	V	7.9	-9.44
53.280	25.46	30.00	4.54	2.25	V	0	-8.73
60.022	24.60	30.00	5.40	1.75	V	53.2	-9.52
279.002	27.91	36.00	8.09	1.05	V	4.1	-7.88


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – Quasi-Peak

Bluetooth LE-Channel 0

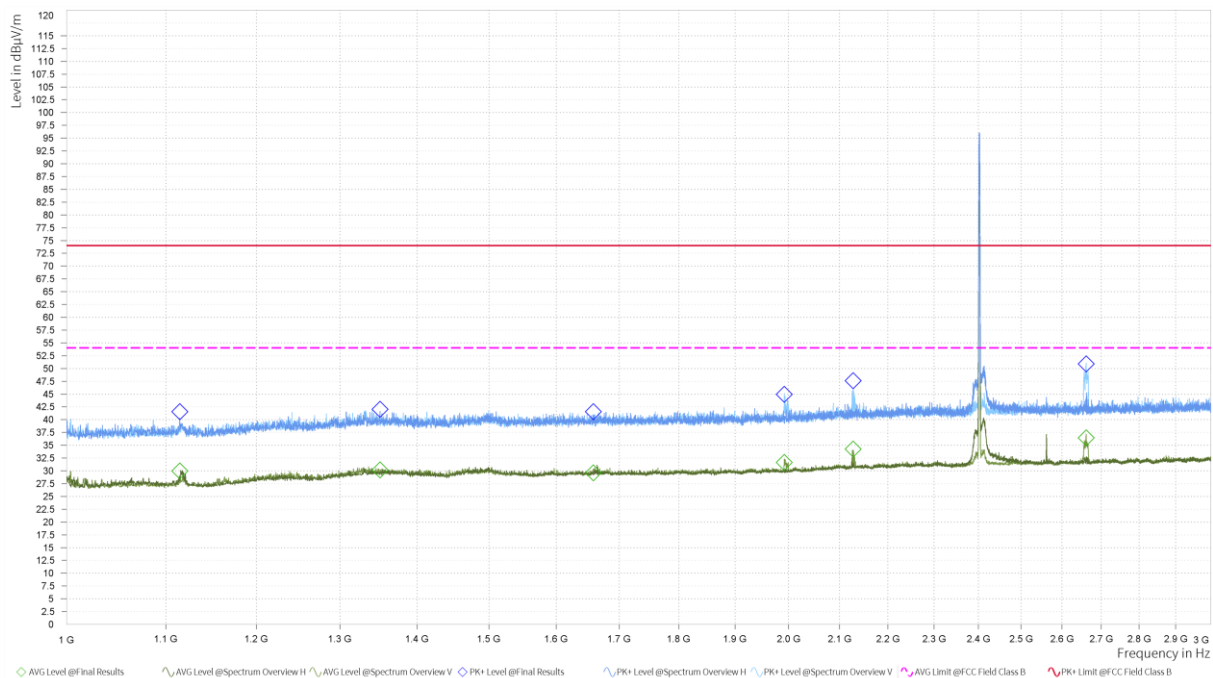

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

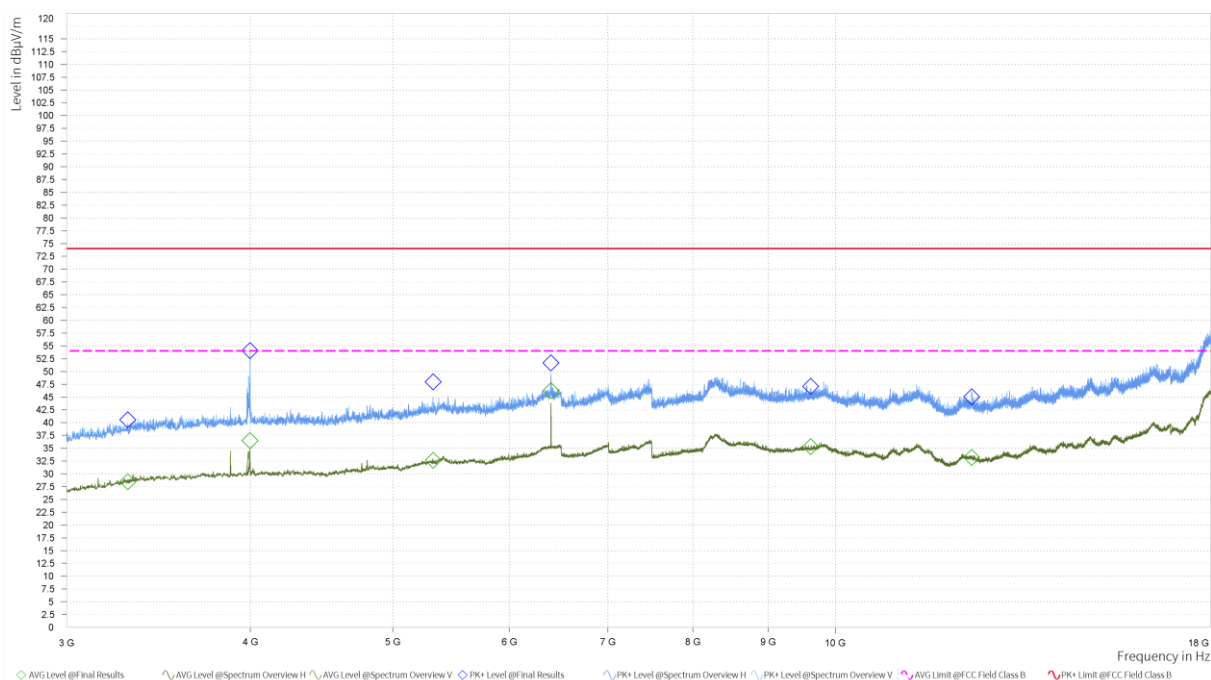


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBµV/m)	Peak Limit (dBµV/m)	Peak Margin (dB)	Average (dBµV/m)	Average Limit (dBµV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,114.750	41.52	74.00	32.48	29.96	54.00	24.04	1.000	1.00	H	251.4	-8.80
1,351.000	41.98	74.00	32.02	30.14	54.00	23.86	1.000	2.00	H	286.7	-6.70
1,658.000	41.53	74.00	32.47	29.59	54.00	24.41	1.000	1.00	H	2.7	-4.90
1,991.750	44.95	74.00	29.05	31.59	54.00	22.41	1.000	1.00	V	359.6	-3.48
2,128.000	47.58	74.00	26.42	34.23	54.00	19.77	1.000	1.00	V	28.3	-2.69
2,661.500	50.87	74.00	23.13	36.39	54.00	17.61	1.000	2.00	V	232.7	-1.43
3,997.500	54.07	74.00	19.93	36.47	54.00	17.53	1.000	1.00	V	1.9	-2.62
6,405.000	51.68	74.00	22.32	46.21	54.00	7.79	1.000	2.00	V	282.1	3.26
9,620.625	47.09	74.00	26.91	35.28	54.00	18.72	1.000	1.00	H	0	4.66


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit -MAX Peak/ Average

Bluetooth LE-Channel 19

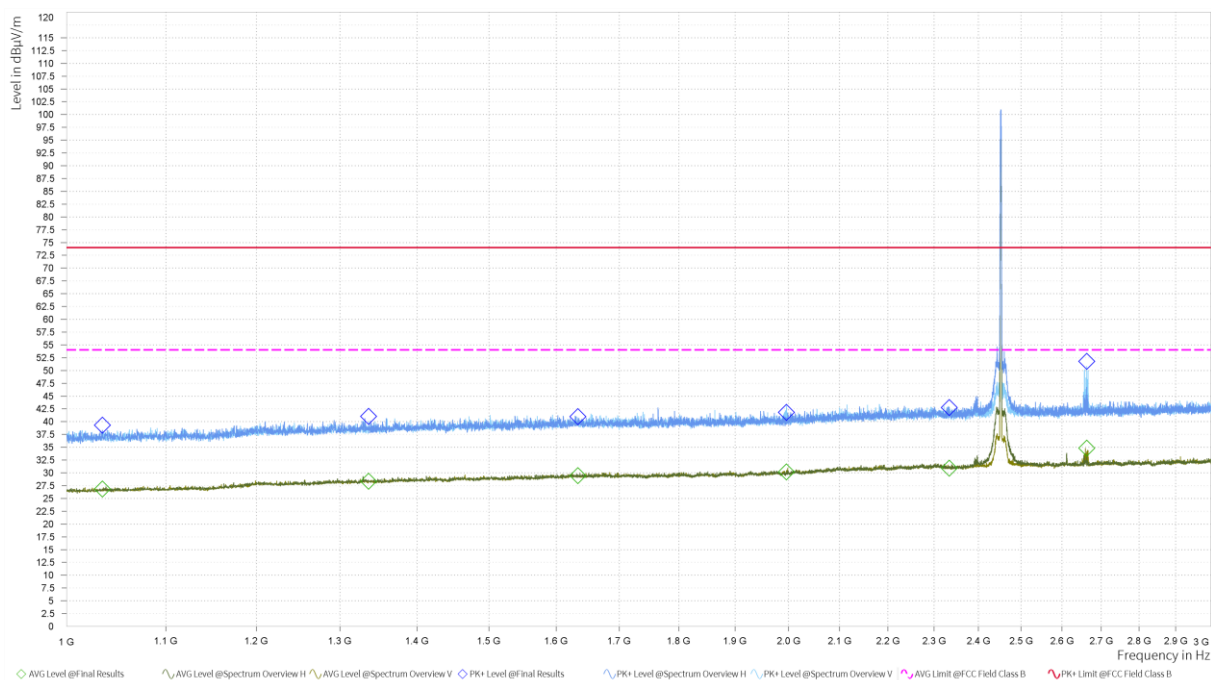

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

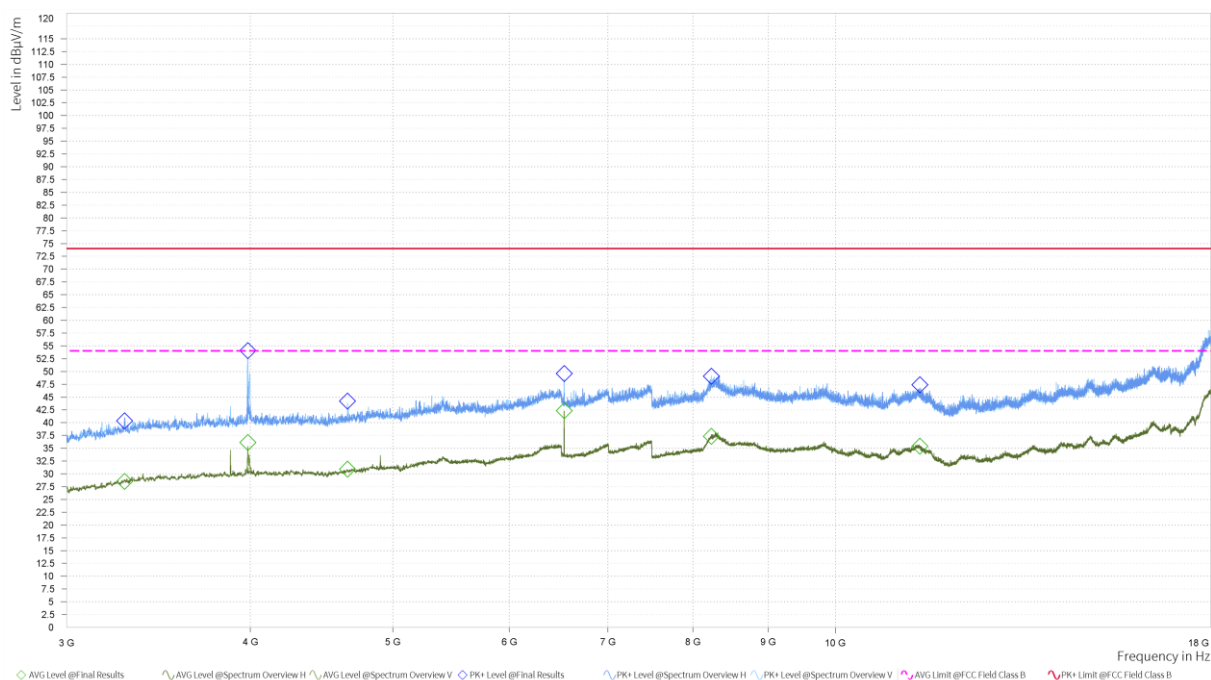


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,035.000	39.30	74.00	34.70	26.81	54.00	27.19	1.000	2.00	H	274.4	-9.36
1,336.250	41.01	74.00	32.99	28.35	54.00	25.65	1.000	2.00	V	360	-6.78
1,633.750	40.96	74.00	33.04	29.45	54.00	24.55	1.000	2.00	V	0	-5.01
1,996.000	41.79	74.00	32.21	30.18	54.00	23.82	1.000	2.00	V	21.6	-3.47
2,333.500	42.71	74.00	31.29	30.91	54.00	23.09	1.000	1.00	H	194.2	-2.16
2,662.750	51.74	74.00	22.26	34.81	54.00	19.19	1.000	1.00	V	162	-1.42
3,984.375	54.03	74.00	19.97	36.08	54.00	17.92	1.000	1.00	V	2	-2.75
6,538.125	49.56	74.00	24.44	42.30	54.00	11.70	1.000	2.00	V	360	2.80
8,233.125	49.06	74.00	24.94	37.29	54.00	16.71	1.000	2.00	V	24.4	7.16
11,411.250	47.38	74.00	26.62	35.36	54.00	18.64	1.000	1.00	H	107.2	5.65


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

Bluetooth LE-Channel 39

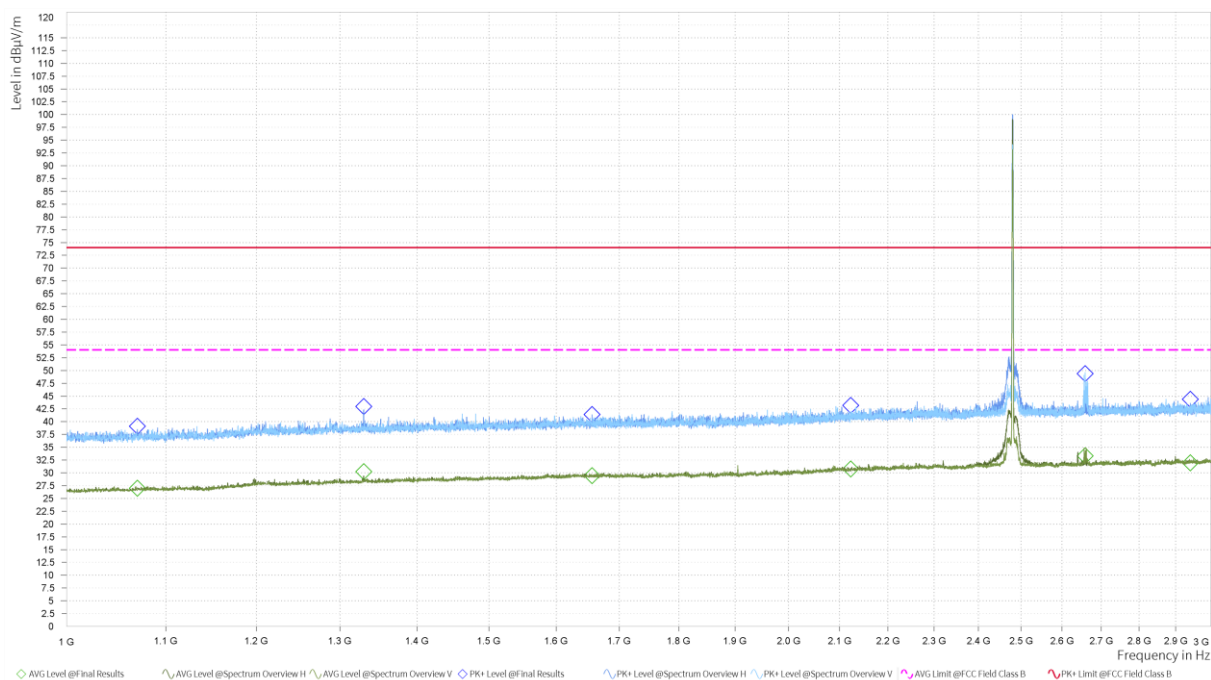

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

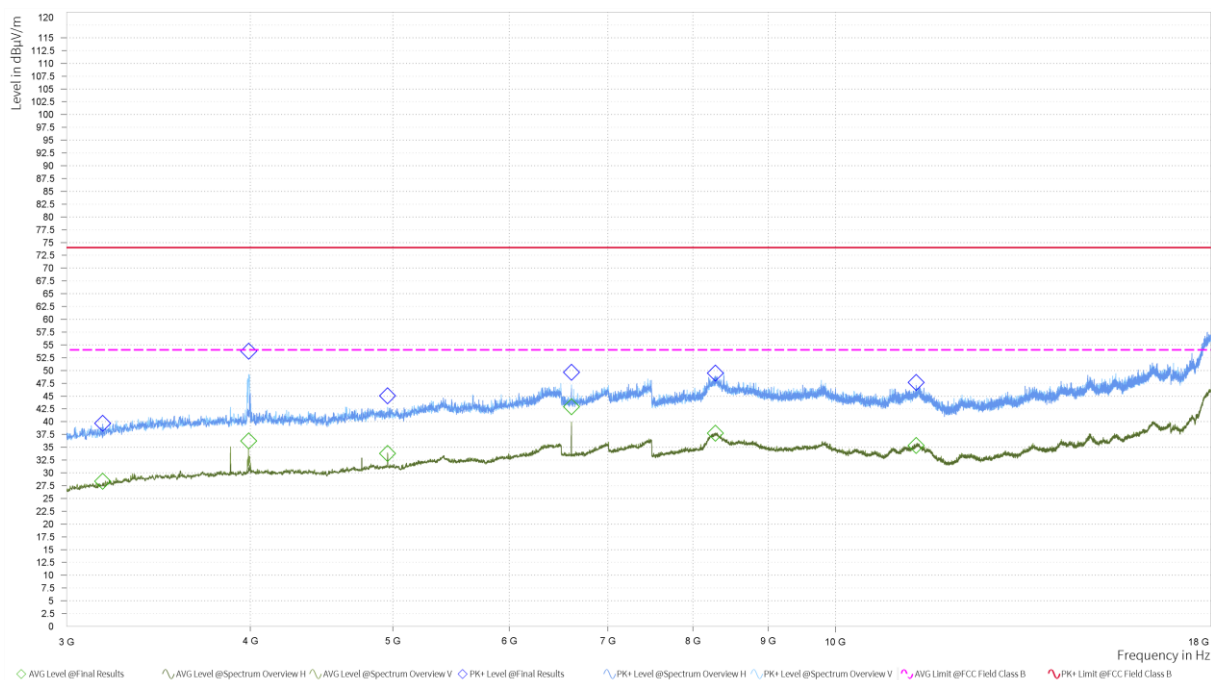


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Peak Limit (dBμV/m)	Peak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,070.250	39.10	74.00	34.90	26.97	54.00	27.03	1.000	2.00	H	163.7	-9.12
1,330.000	42.92	74.00	31.08	30.21	54.00	23.79	1.000	2.00	H	141.4	-6.81
1,656.000	41.39	74.00	32.61	29.41	54.00	24.59	1.000	2.00	H	360	-4.90
2,122.750	43.13	74.00	30.87	30.74	54.00	23.26	1.000	2.00	V	162.6	-2.70
2,659.000	49.38	74.00	24.62	33.29	54.00	20.71	1.000	1.00	V	150.2	-1.44
2,941.250	44.36	74.00	29.64	31.93	54.00	22.07	1.000	1.00	H	190.6	-0.77
3,990.000	53.76	74.00	20.24	36.23	54.00	17.77	1.000	1.00	V	2	-2.69
6,613.125	49.61	74.00	24.39	42.90	54.00	11.10	1.000	2.00	V	360	2.62
8,285.625	49.44	74.00	24.56	37.70	54.00	16.30	1.000	1.00	H	357.7	7.68
11,347.500	47.61	74.00	26.39	35.32	54.00	18.68	1.000	2.00	H	175.2	5.67

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
2. Margin = Limit –MAX Peak/ Average

During the test, the Radiates Emission from 18GHz to 26.5GHz was performed in all modes with all channels, Bluetooth LE(S=8)-Channel 0 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

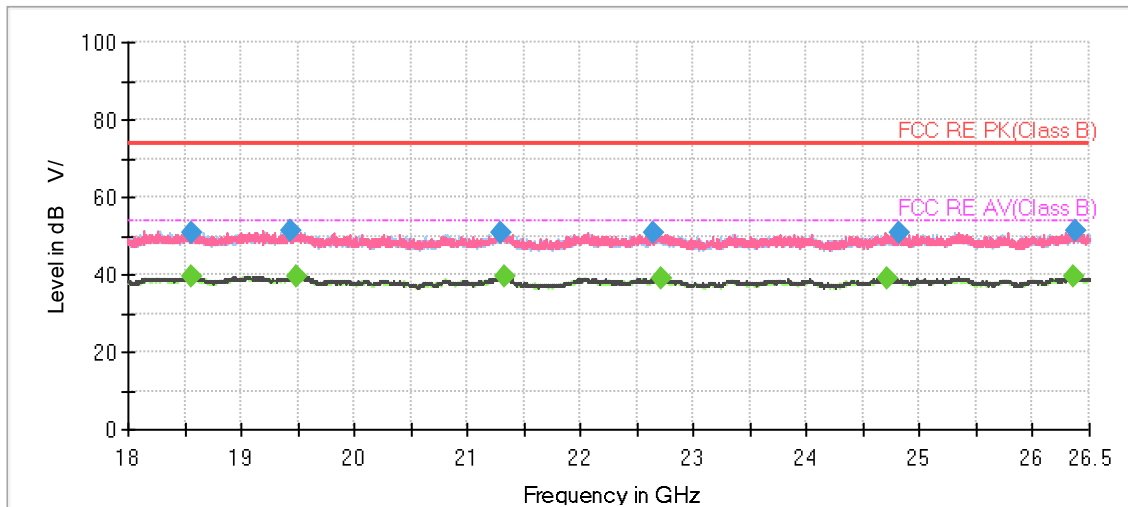

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18553.562500	50.94	---	74.00	23.06	500.0	200.0	H	344.0	-3.0
18568.437500	---	39.24	54.00	14.76	500.0	100.0	V	7.0	-3.1
19431.187500	51.44	---	74.00	22.56	500.0	200.0	H	246.0	-2.8
19497.062500	---	39.69	54.00	14.31	500.0	100.0	V	185.0	-2.7
21293.750000	50.88	---	74.00	23.12	500.0	100.0	V	154.0	-1.9
21324.562500	---	39.63	54.00	14.37	500.0	100.0	V	154.0	-1.8
22638.875000	50.83	---	74.00	23.17	500.0	100.0	H	140.0	-1.7
22706.875000	---	39.21	54.00	14.79	500.0	100.0	V	263.0	-1.7
24712.875000	---	39.05	54.00	14.95	500.0	100.0	V	137.0	-0.6
24814.875000	50.82	---	74.00	23.18	500.0	100.0	V	63.0	-0.6
26352.312500	---	39.47	54.00	14.53	500.0	100.0	H	0.0	0.4
26378.875000	51.23	---	74.00	22.77	500.0	100.0	V	149.0	0.3

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit -MAX Peak/ Average

5.7. Conducted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%


Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz.

The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

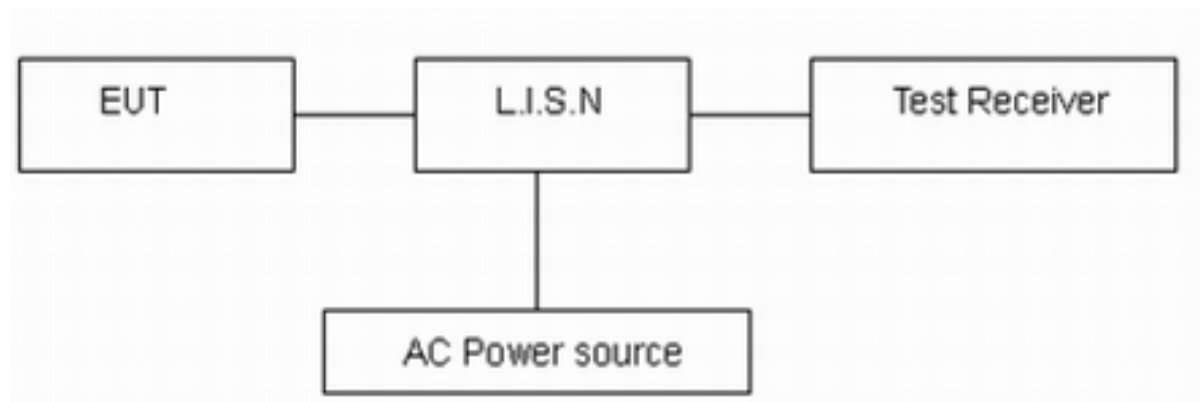

Note: AC Power source is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:

Following plots, Blue trace uses the peak detection and Green trace uses the average detection.

Wi-Fi 2.4G


During the test, the Conducted Emission was performed in all modes with all channels, 802.11b, Channel 6 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

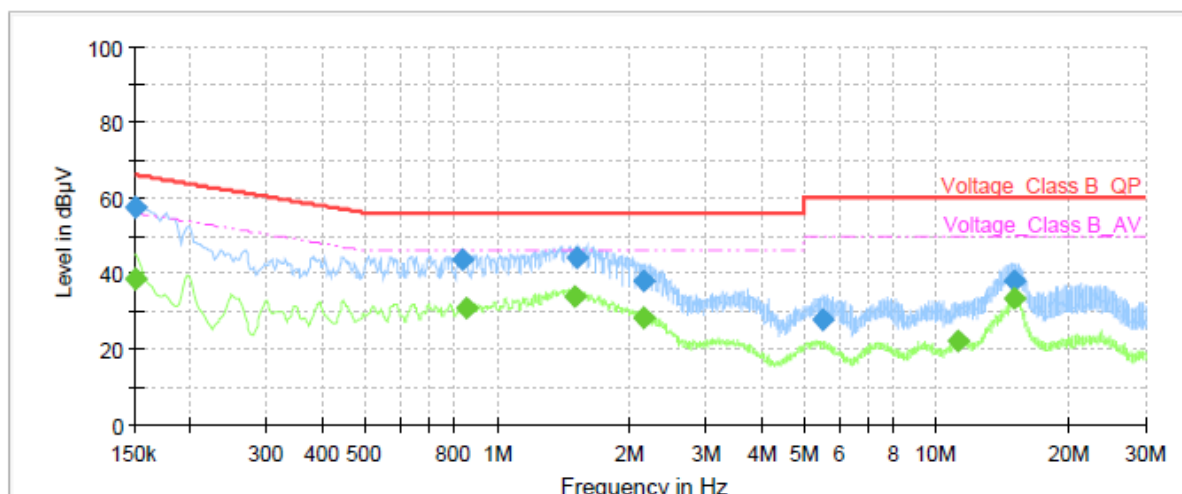

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	57.63	---	66.00	8.37	1000.0	9.000	L1	ON	21.0
0.15	---	38.28	56.00	17.72	1000.0	9.000	L1	ON	21.0
0.83	43.34	---	56.00	12.66	1000.0	9.000	L1	ON	20.4
0.85	---	31.02	46.00	14.98	1000.0	9.000	L1	ON	20.4
1.50	---	33.79	46.00	12.21	1000.0	9.000	L1	ON	19.9
1.52	44.20	---	56.00	11.80	1000.0	9.000	L1	ON	19.9
2.16	---	28.32	46.00	17.68	1000.0	9.000	L1	ON	19.7
2.16	38.13	---	56.00	17.87	1000.0	9.000	L1	ON	19.7
5.51	27.52	---	60.00	32.48	1000.0	9.000	L1	ON	19.5
11.24	---	21.97	50.00	28.03	1000.0	9.000	L1	ON	19.5
15.03	---	33.16	50.00	16.84	1000.0	9.000	L1	ON	19.6
15.09	38.07	---	60.00	21.93	1000.0	9.000	L1	ON	19.6

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

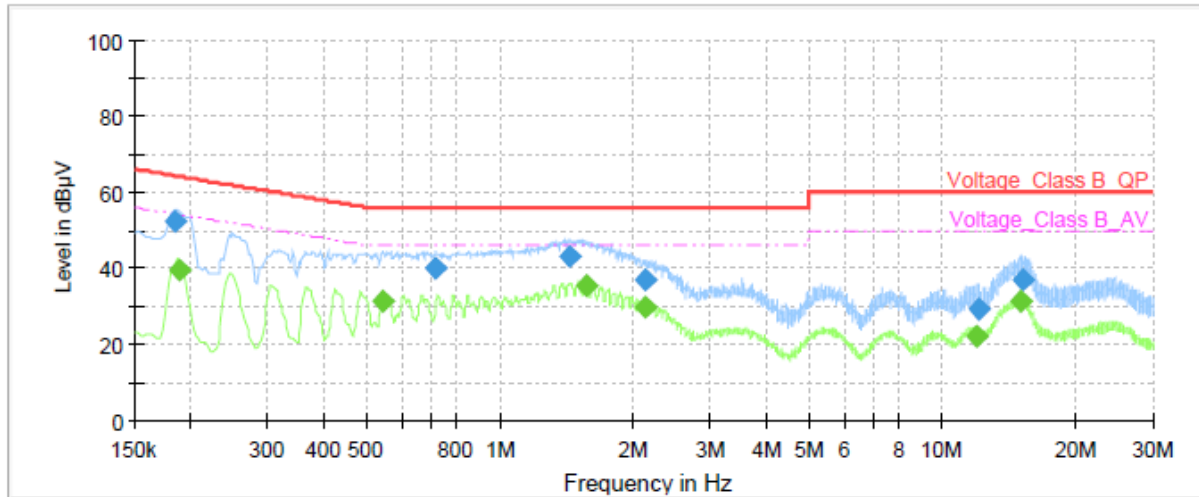


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.18	52.14	---	64.31	12.17	1000.0	9.000	N	ON	21.1
0.19	---	39.66	54.11	14.45	1000.0	9.000	N	ON	21.1
0.54	---	31.14	46.00	14.86	1000.0	9.000	N	ON	20.8
0.72	40.02	---	56.00	15.98	1000.0	9.000	N	ON	20.6
1.43	43.01	---	56.00	12.99	1000.0	9.000	N	ON	19.9
1.57	---	35.41	46.00	10.59	1000.0	9.000	N	ON	19.9
2.13	---	29.73	46.00	16.27	1000.0	9.000	N	ON	19.7
2.13	36.75	---	56.00	19.25	1000.0	9.000	N	ON	19.7
11.96	---	21.86	50.00	28.14	1000.0	9.000	N	ON	19.6
12.16	29.17	---	60.00	30.83	1000.0	9.000	N	ON	19.6
15.12	---	31.26	50.00	18.74	1000.0	9.000	N	ON	19.6
15.18	36.91	---	60.00	23.09	1000.0	9.000	N	ON	19.6

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz

Bluetooth LE


During the test, the Conducted Emission was performed in all modes with all channels, Bluetooth LE(S=8)-Channel 0 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

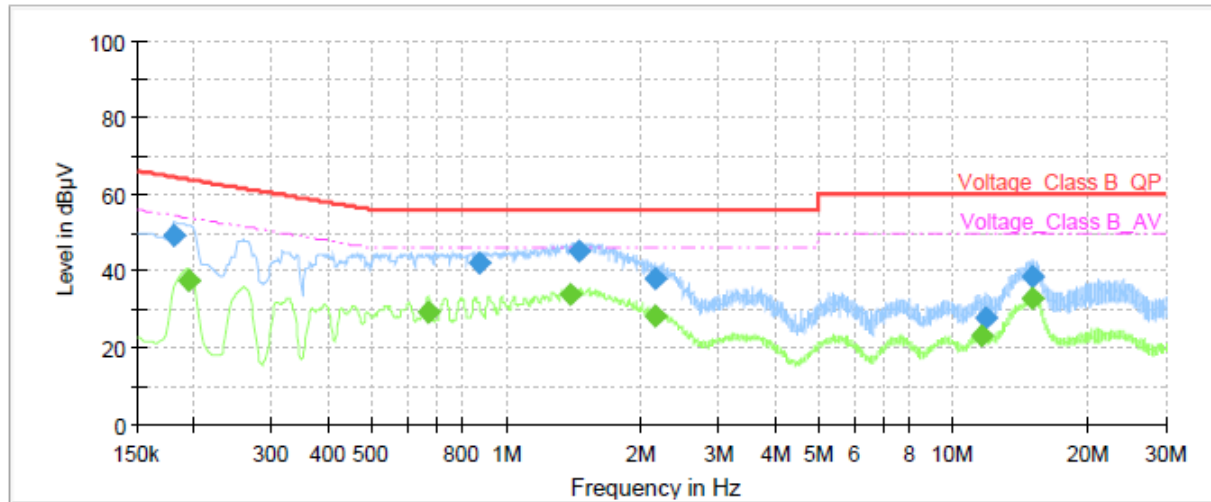

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.18	49.40	---	64.42	15.02	1000.0	9.000	L1	ON	21.1
0.20	---	37.69	53.82	16.13	1000.0	9.000	L1	ON	21.1
0.67	---	29.46	46.00	16.54	1000.0	9.000	L1	ON	20.7
0.87	42.18	---	56.00	13.82	1000.0	9.000	L1	ON	20.3
1.40	---	34.02	46.00	11.98	1000.0	9.000	L1	ON	20.0
1.45	44.95	---	56.00	11.05	1000.0	9.000	L1	ON	19.9
2.15	---	28.32	46.00	17.68	1000.0	9.000	L1	ON	19.7
2.15	38.02	---	56.00	17.98	1000.0	9.000	L1	ON	19.7
11.61	---	23.14	50.00	26.86	1000.0	9.000	L1	ON	19.6
11.83	27.52	---	60.00	32.48	1000.0	9.000	L1	ON	19.6
15.05	38.62	---	60.00	21.38	1000.0	9.000	L1	ON	19.6
15.10	---	33.07	50.00	16.93	1000.0	9.000	L1	ON	19.6

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

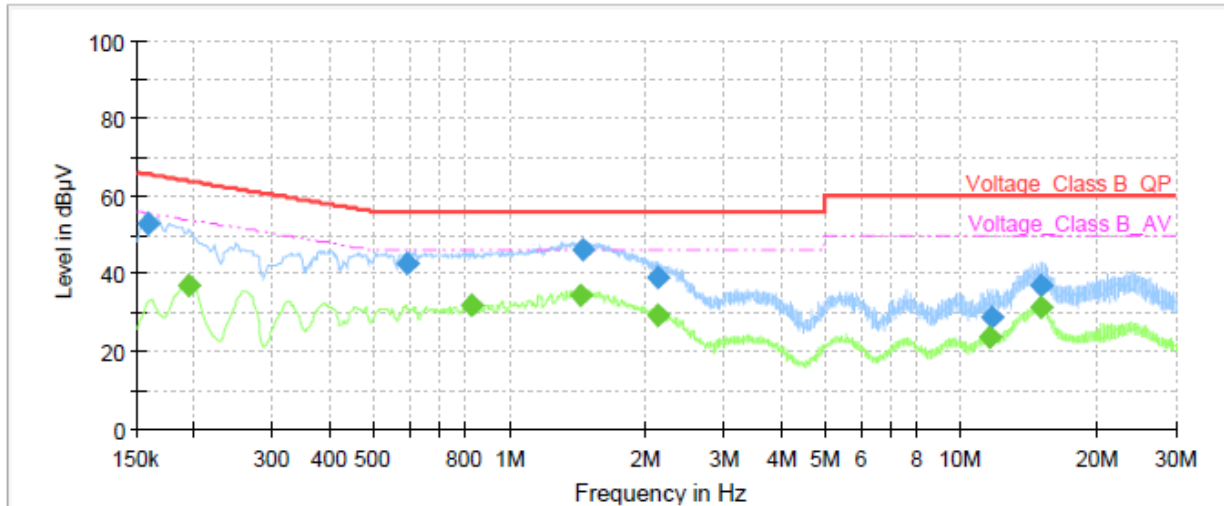

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	52.89	---	65.52	12.63	1000.0	9.000	N	ON	21.0
0.20	---	37.16	53.82	16.66	1000.0	9.000	N	ON	21.1
0.59	42.70	---	56.00	13.30	1000.0	9.000	N	ON	20.8
0.82	---	31.64	46.00	14.36	1000.0	9.000	N	ON	20.4
1.44	---	34.33	46.00	11.67	1000.0	9.000	N	ON	19.9
1.45	46.29	---	56.00	9.71	1000.0	9.000	N	ON	19.9
2.14	39.10	---	56.00	16.90	1000.0	9.000	N	ON	19.7
2.14	---	29.46	46.00	16.54	1000.0	9.000	N	ON	19.7
11.56	---	23.65	50.00	26.35	1000.0	9.000	N	ON	19.6
11.69	28.67	---	60.00	31.33	1000.0	9.000	N	ON	19.6
15.02	---	31.29	50.00	18.71	1000.0	9.000	N	ON	19.6
15.03	37.01	---	60.00	22.99	1000.0	9.000	N	ON	19.6

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Power sensor	R&S	NRP18S	101954	2023-05-12	2024-05-11
Spectrum Analyzer	KEYSIGHT	N9020A	MY51330870	2023-05-12	2024-05-11
Radiated Emission					
EMI Test Receiver	R&S	ESR	102389	2023-05-12	2024-05-11
Signal Analyzer	R&S	FSV40	101186	2023-05-12	2024-05-11
EMI Test Receiver	R&S	ESR	102720	2023-09-19	2024-09-18
EMI Test Receiver	R&S	ESR	102721	2023-09-19	2024-09-18
Signal Analyzer	R&S	FSV3044	103495	2023-09-19	2024-09-18
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
Amplifier	MicroWave	KLNA-1804 0050	220826001	2023-05-12	2024-05-11
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01614	2023-09-13	2026-09-12
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01615	2023-10-19	2026-10-18
Horn Antenna	R&S	BBHA9120 D	02728	2023-09-19	2026-09-18
Software	R&S	EMC32	9.26.01	/	/
Software	R&S	ELEKTRA	5.00.2	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2022-12-10	2024-12-09
EMI Test Receiver	R&S	ESR	101667	2023-05-12	2024-05-11
Software	R&S	EMC32	10.35.10	/	/

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

***** END OF REPORT *****