

# **THRULab & Engineering.**

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net



## **Test Report**

**Product Name:** GMRS/FRS Combination

**MODEL NO:**LXT410

**FCC ID:**MMALXT410

## **Applicant:**

**Midland Radio Corporation.**

**1120 Clay St. North Kansan City,**

**MO 64116**

**Date Receipt:**MAR/07/2005

**Date Tested:** MAR/09/2005

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

## TABLE OF CONTENTS LIST

APPLICANT: Midland Radio Corporation.

FCC ID :MMALXT410

### TEST REPORT

PAGE 1.....	GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2.....	TECHNICAL DEACRIPTION & RF POWER OUTPUT
PAGE 3.....	MOD. CHARACTERISTICS & AUDIO FREQUENCY RESPONSE GRAPH
PAGE 4.....	MODULATION LIMITING GRAPH - 300 Hz
PAGE 5.....	MODULATION LIMITING GRAPH - 1000 Hz & 2500 Hz
PAGE 6.....	AUDIO LOW PASS FILTER GRAPH
PAGE 7.....	OCCUPIED BANDWIDTH
PAGE 8.....	OCCUPIED BANDWIDTH PLOT
PAGE 9.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 10.....	UNWANTED RADIATION - GMRS
PAGE 11.....	UNWANTED RADIATION - FRS
PAGE 12.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 13.....	FREQUENCY STABILITY
PAGE 14....	LIST OF EMC TEST EQUIPMENT

### EXHIBITS CONTAINING:

EXHIBIT 1....	FCC ID LABEL SAMPLES
EXHIBIT 2....	LABEL LOCATION
EXHIBIT 3....	EXTERNAL PHOTOGRAPHS
EXHIBIT 4....	INTERNAL PHOTOGRAPHS
EXHIBIT 5....	BLOCK DIAGRAM
EXHIBIT 6....	SCHMATICS
EXHIBIT 7....	USER'S MANUAL
EXHIBIT 8....	THEORY OF OPERATION
EXHIBIT 9....	ALIGNMENT PROCEDURE
EXHIBIT 10..	PARTS LIST
EXHIBIT 11..	TEST SET UP PHOTO

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

## GENERAL INFORMATION REQUIRED FOR CERTIFICATION

2.1033 (c) (1) (2) MidLand Radio Corporation. will manufacture  
the FCCID: MMALXT410 GMRS/FRS COMBINATION TRANSCEIVER  
in quantity, for use under FCC RULES PART 95.  
MidLand Radio Corporation.  
1120 Clay St.  
North Kansas City, MO 64116

2.1033 (c) TECHNICAL DESCRIPTION

2.1033 (c) (3) Instruction book. A draft copy of the instruction  
manual is included as EXHIBIT 7.

2.1033 (c) (4) Type of Emission : 10K5F3E  
95.631  
 $B_n = 2M + 2DK$   
 $M = 3000$   
 $D = 2.25k$   
 $B_n = 2(3000) + 2(2250) = 10.5k$   
GMRS Frequency Range :20.0kHz

2.1033 (c) (5) GMRS Frequency Range:  
95.621

1. 462.5500	13. 462.7000
2. 462.5625	14. 462.7125
3. 462.5750	15. 462.7250
4. 462.5875	16. 467.5500
5. 462.6000	17. 467.5750
6. 462.6125	18. 467.6000
7. 462.6250	19. 467.6250
8. 462.6375	20. 467.6500
9. 462.6500	21. 467.6750
10. 462.6625	22. 467.7000
11. 462.6750	23. 467.7250
12. 462.6875	

## FRS Authorized Bandwidth:12.5kHz

2.1033(c)(5) FRS Frequency Range:  
95.627

1. 462.5625	8. 467.5625
2. 462.5875	9. 467.5875
3. 462.6125	10. 467.6125
4. 462.6375	11. 467.6375
5. 462.6625	12. 467.6625
6. 462.6875	13. 467.6875
7. 462.7125	14. 467.7125 MHz

2.10311c)(6)(7) RF power is measured by the substitution method as  
2.1046(a) outlined in TIA/EIA - 603. With a nominal battery  
voltage of 6V, and the transmitter properly  
adjusted the RF output measures:  
power supply : Romet batteries (1.5VDC) 4

GMRS (HIGH) - 0.832 Watts  
GMRS (LOW) - 0.302 Watts  
FRS - 0.369 Watts

APPLICANT: Midland Radio Corporation.  
FCC ID : MMALXT410  
REPORT :THRU-503005  
Pages: 1of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

2.1033(c)(6)(7) FRS Power Output shall not exceed 0.50 Watts effective

95.639 radiated power. There can be no provisions for

95.649 Increasing the power or varying the power.

2.1033(c)(8) DC Voltages and Current into Final Amplifier:  
FINAL AMPLIFIER ONLY

FOR GMRS HIGH POWER SETTING INPUT POWER: (6V)(0.430A)=2.58 Watts

FOR GMRS LOW POWER SETTING INPUT POWER: (6V)(0.270A)=1.62 Watts

FOR FRS POWER SETTING INPUT POWER: (6V)(0.265A)=1.59 Watts

2.1033(c)(9) Tune-up procedure. The tune-up procedure is included as EXHIBIT # 9.

2.1033(c)(10) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 6 of this report. The block diagrams are included as EXHIBIT 5 of this report.


2.1033(c)(11) A photograph or a drawing of the equipment identification label is included as exhibit No. 1.

2.1033(c)(12) Photographs(8"X10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, labels for controls, including any view under shields. See exhibits 3-4.

2.1033(c)(13) Digital modulation is not allowed.

2.1033(c)(14) The data required by 2.1046 through 2.1057 is submitted below.

2.1046(a) RF power output. The test procedure used was TIA/EIA-603.

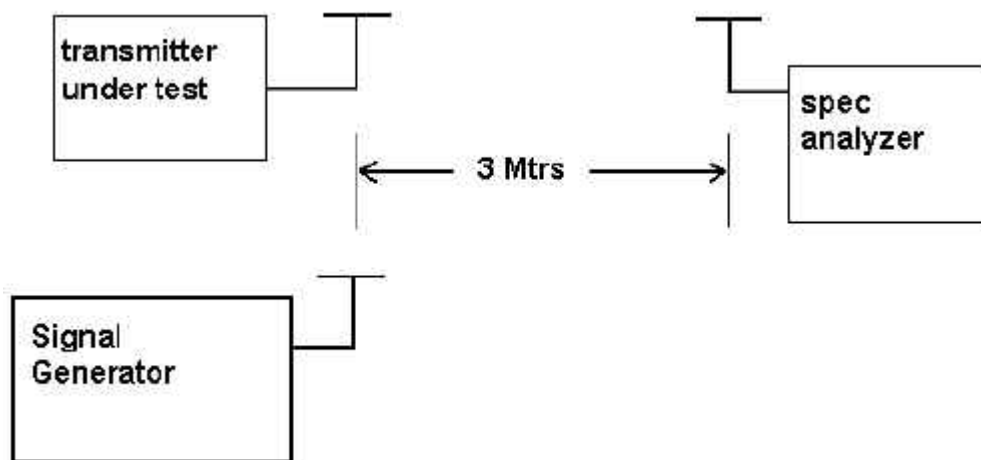

APPLICANT: Midland Radio Corporation.

FCC ID : MMALXT410

REPORT :THRU-503005

Pages: 2of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA


81221095059F81221095056 email thrukang@kornet.net

2.1047 (a) (b) Modulation characteristics :

## AUDIO FREQUENCY RESPONSE

The audio frequency response was measured in accordance with TIA/EIA Specification 603. The audio frequency response curve is shown on the next page. The audio signal was fed into a dummy microphone Circuit and into the microphone connector. The Input required to produce 30 percent modulation Level was measured. See plot below.

AUDIO FRQUENCY RESPONSE PLOT GOES HERE

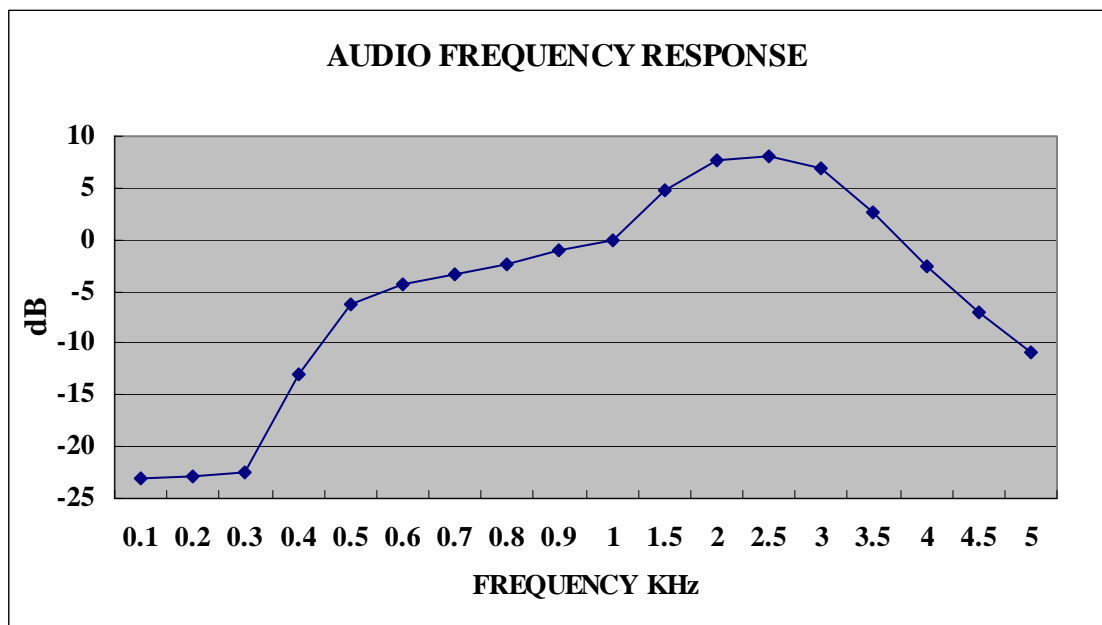

APPLICANT : Midland Radio Corporation.

FCC ID : MMALXT410

REPORT : THRU-503005

Pages: 3 of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG


YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

2.1047 (b)

Audio input versus modulation

The audio input level needed for a particular percentage of modulation was measured in accordance with TIA/EIA Specification 603. The audio input curves versus modulation are on the following pages. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz. See Pages 6 and 7 of report.

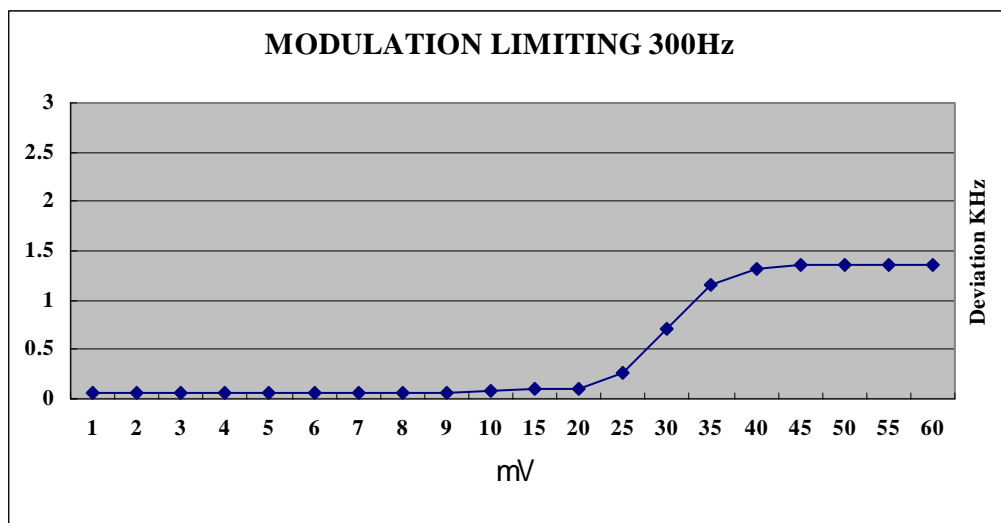

APPLICANT : Midland Radio Corporation.

FCC ID : MMALXT410

REPORT : THRU-503005



Pages: 4 of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

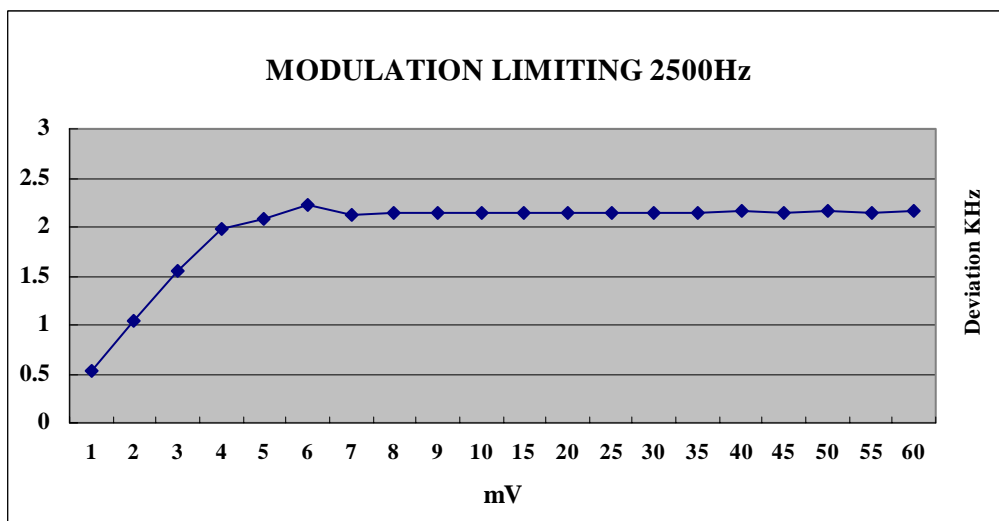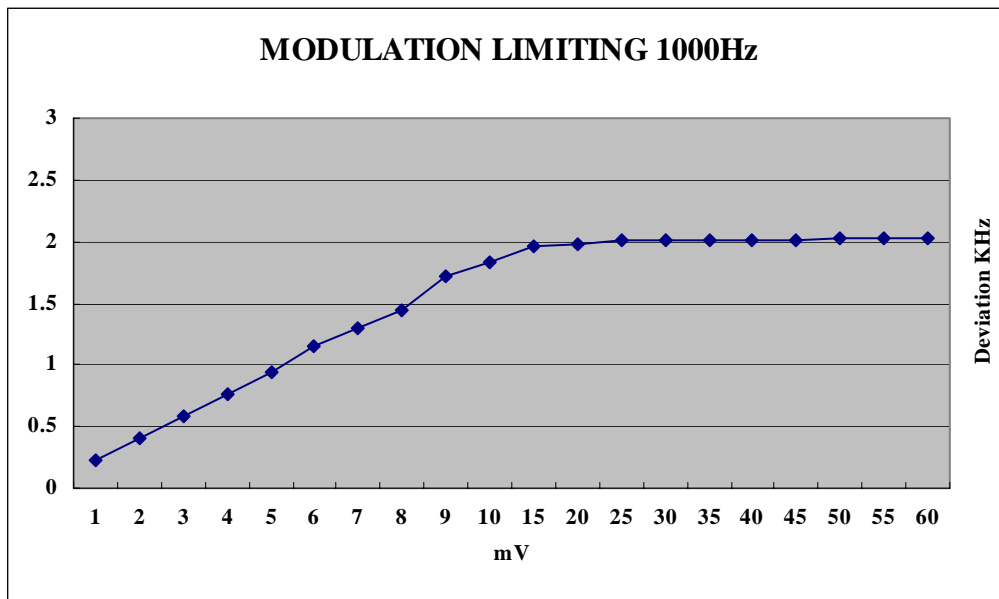

APPLICANT : Midland Radio Corporation.

FCC ID : MMALXT410

REPORT : THRU-503005

Pages: 5 of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG


YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

## AUDIO LOW PASS FILTER GRAPH

95.637

Post Limiter Filter Each GMRS transmitter, except a Mobile station transmitter with a power of 2.5Watts or less, must be equipped with an audio low pass filter. At any frequency between 3 & 20 kHz the filter must have an attenuation of  $60\log(f/3)$  greater than the attenuation at 1kHz. See below.

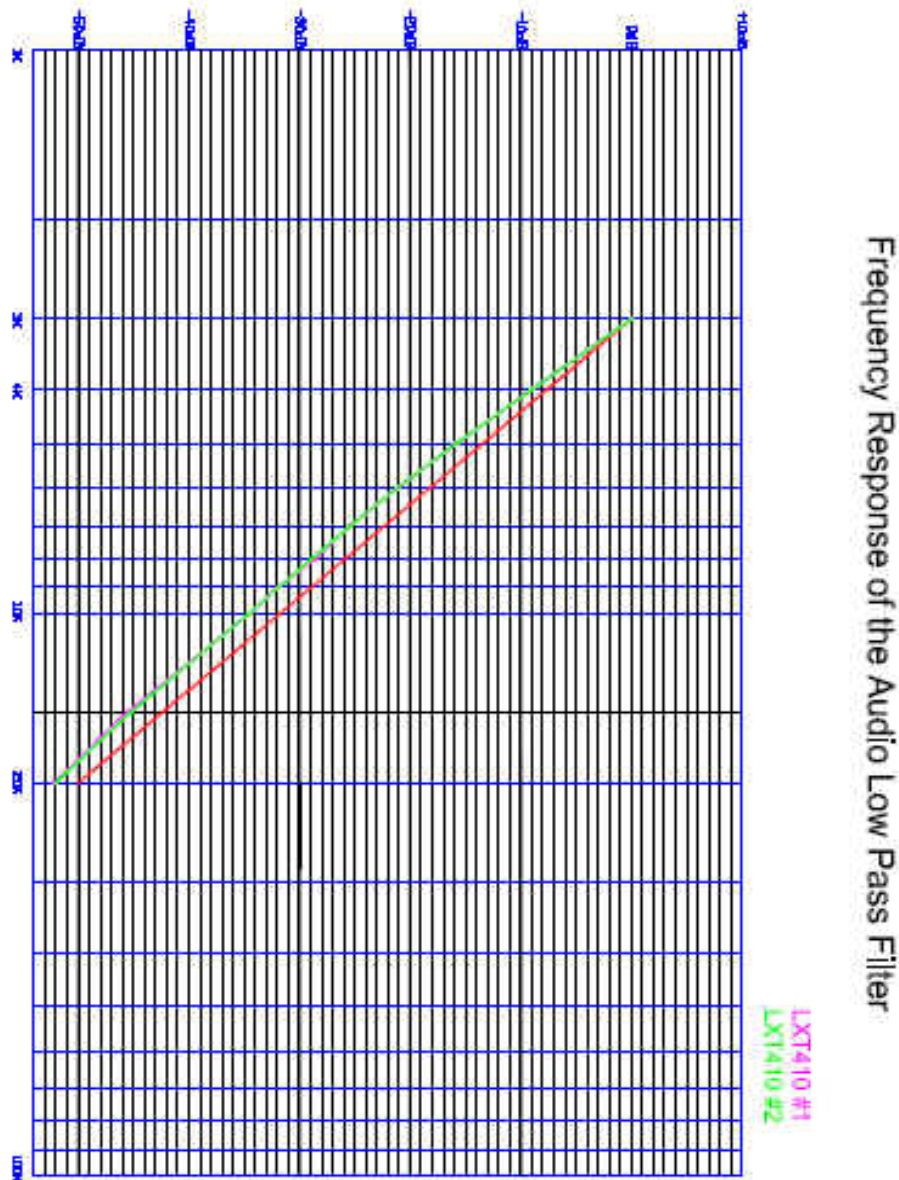

APPLICANT: Midland Radio Corporation.

FCC ID: MMALXT410

REPORT :THRU-503005

Pages: 6 of 16



# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA


81221095059F81221095056 email thrukang@kornet.net

2.1049 Occupied bandwidth :

95.635 (b) (1) (3) (7)

At least 25dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35dB on any frequency removed from the center of the authorized BW by more than 100% up to and including 250% of the authorized BW. At least  $43 + \log_{10}(TP)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%. See plots on the next 1 pages.

Occupied BW Test Equipment Setup

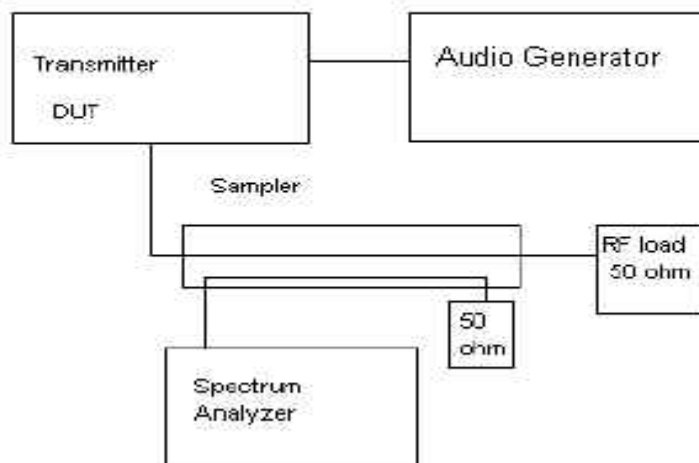

APPLICANT : Midland Radio Corporation.

FCC ID : MMALXT410

REPORT : THRU-503005

Pages: 7 of 16


# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG


YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

15ch GMRS

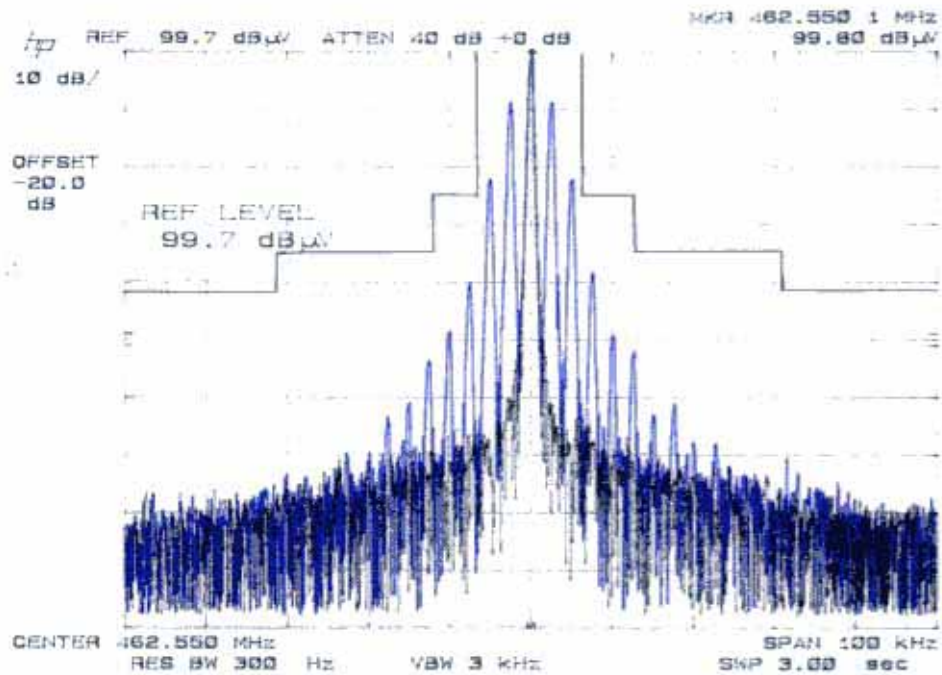

8ch FRS

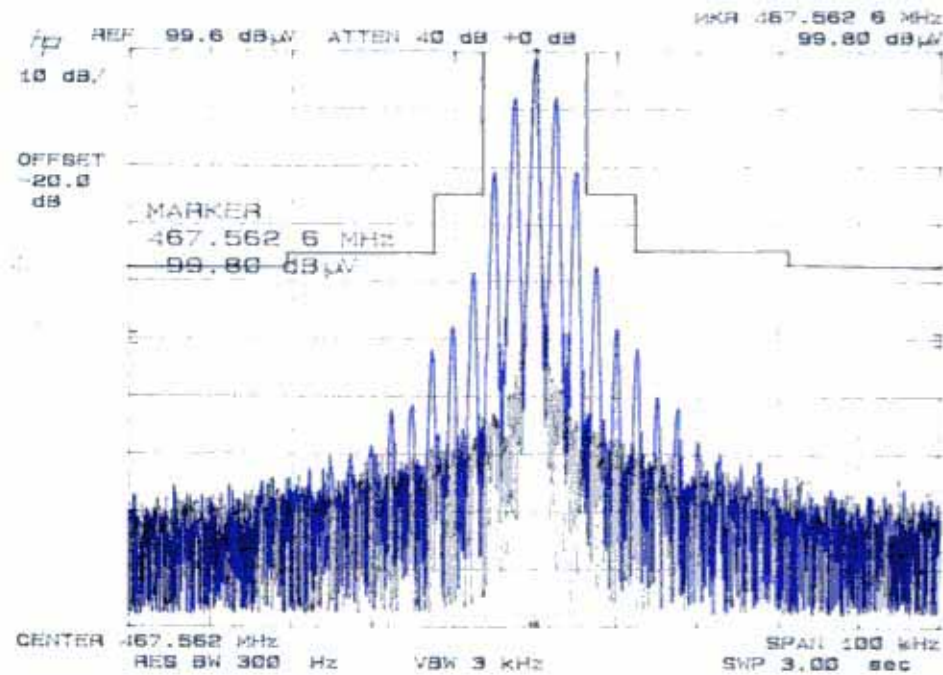

APPLICANT: Midland Radio Corporation.

FCC ID: MMALXT410

REPORT :THRU-503005

Pages: 8 of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG


YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

2.1051 Spurious emissions at antenna terminals (conducted) :

The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIS/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was the fundamental.

spurious Emission at  
antenna Terminals

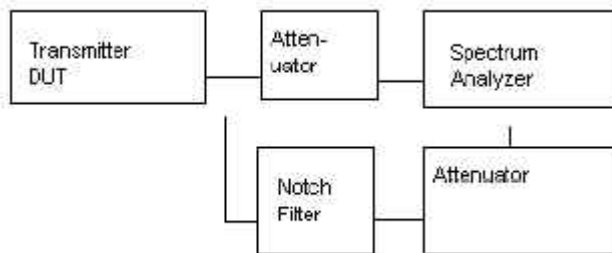

Method of Measuring Conducted Spurious Emissions

2.1051 Spurious emissions at the Antenna Terminals

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

2.1051 Not Applicable, no antenna terminal allowed.

APPLICANT: Midland Radio Corporation.

FCC ID : MMALXT410

REPORT :THRU-503005

Pages: 9of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

2.1053

UNWANTED RADIATION

95.635 (b) (7)

The tabulated Data shows the results of the radiated Field strength emissions test. The spectrum was Scanned from 30 MHz to at least the 10<sup>th</sup> harmonic of The fundamental. This test was conducted per ANSI C63.4 - 1992

**REQUIREMENTS: GMRS (HIGH):  $43 + 10\log(0.832) = 42.20107\text{dB}$**

**(LOW) :  $43 + 10\log(0.302) = 37.80107\text{dB}$**

Test Data :	GMRS-	High Power		Test Data :	GMRS -	Low Power
Emission Frequency	ATTN dBC	Margin dB		Emission Frequency	ATTN dBC	Margin dB
462.55	0.00	0.00		462.55	0.00	0.00
925.10	43.45	1.25		925.10	51.05	13.25
1387.65	53.00	10.80		1387.65	56.70	18.90
1850.20	56.77	14.57		1850.20	61.97	24.17
2312.75	53.55	11.35		2312.75	54.05	16.25
2775.30	68.87	26.67		2775.30	65.77	27.97
3237.85	68.50	26.29		3237.85	64.30	26.49
3700.40	60.76	18.56		3700.40	62.96	25.16
4162.95	64.59	22.38		4162.95	62.79	24.98
4625.50	63.01	20.81		4625.50	60.91	23.11

METHOD OF MEASUREMENT : The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of ThruLab & ENGINEERING. located at 389 JeAm-Rhi HyangNam-Myun, HwaSung-Shi, KyoungKi-Do Korea.

APPLICANT : Midland Radio Corporation.

FCC ID : MMALXT410

REPORT : THRU-503005

Pages: 10 of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

2.1053

UNWANTED RADIATION:

95.635 (b) (7)

The tabulated Data shows the results of the radiated Field strength emissions test. The spectrum was Scanned from 30 MHz to at least the 10<sup>th</sup> harmonic of The fundamental. This test was conducted per ANSI C63.4 - 1992

**REQUIREMENTS: FRS:  $43 + 10\log(0.369) = 38.67421\text{dB}$**

Test Data :	FRS	
Emission Frequency	ATTN dBc	Margin dB
467.56	0.00	0.00
935.13	53.05	14.38
1402.69	60.24	21.57
1870.25	61.34	22.66
2337.81	54.59	15.92
2805.38	64.21	25.54
3272.94	66.43	27.76
3740.50	66.01	27.34
4208.06	63.42	24.75
4675.63	62.41	23.73

METHOD OF MEASUREMENT : The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of ThruLab & ENGINEERING. located at 389 JeAm-Rhi HyangNam-Myun,HwaSung-Shi,KyoungKi-Do Korea.

APPLICANT:Midland Radio Corporation.

FCC ID : MMALXT410

REPORT :THRU-503005

Pages: 11of 16


# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

Method of Measuring Radiated Spurious Emissions

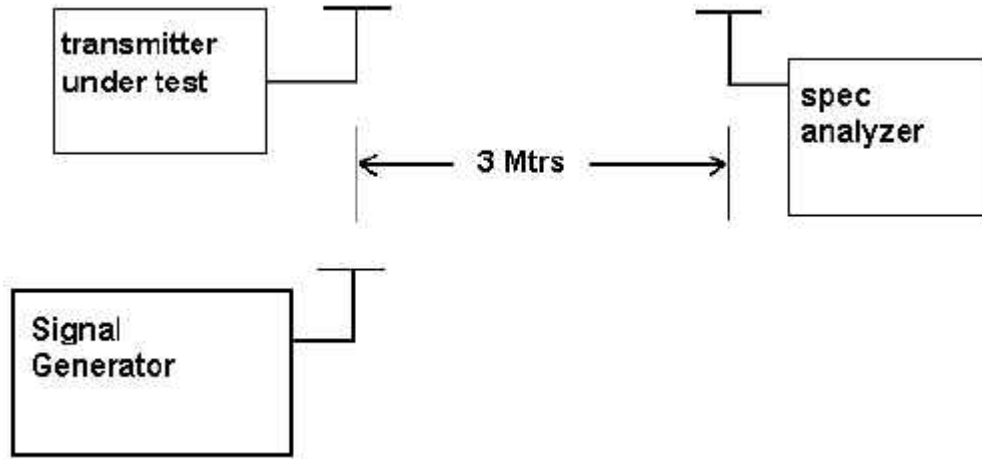

Equipment placed 80 cm above ground

on a rotatable platform.

\* Appropriate antenna raised from 1 to 4 M.

APPLICANT : Midland Radio Corporation.

FCC ID : MMALXT410

REPORT : THRU-503005

Pages: 12 of 16

# THRUlab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

2.1055 Frequency stability

95.621 (b)

Temperature and voltage tests were performed to verify that The frequency remains within the 0.0005%, 5 ppm specification limit. The test was conducted as follows : The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to - 30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Reading were also taken at the end point of the battery voltage of 6 V/dc

## MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency) : 462.5500

TEMPERATURE	FREQUENCY (MHz )	ppm	LIMIT (ppm)
REFERENCE	462.55000	0	
-30	462.54995	-0.11	5.0
-20	462.55046	0.99	2.5
-10	462.55057	1.23	2.5
0	462.55063	1.36	2.5
10	462.55048	1.04	2.5
20	462.55027	0.58	2.5
30	462.54990	-0.22	2.5
40	462.54983	-0.37	2.5
50	462.55003	0.06	2.5
END POINT OF BATTERY:3.2V	462.54993	-0.15	2.5

Note: This EUT meets the frequency stability requirement for a FRS: +/-2.5ppm over temp range of -20 degrees C to + 50 degrees C. It also meets the GMRS frequency stability requirements : +/- 5ppm over the temp range -30 degrees C to +50 degrees C.

APPLICANT : Midland Radio Corporation.

FCC ID : MMALXT410

REPORT : THRU-503005

Pages: 13 of 16

# THRULab & Engineering.

RM302,BOKJO,29-15 , CHONGPA3-DONG

YONGSAN-GU, SEOUL, KOREA

81221095059F81221095056 email thrukang@kornet.net

## EMC Equipment List

DEVICE	MODEL	MFGR	SERNO	DUE.CAL
EMI Test Receiver	ESVS 10	Rohde & Schwarz	830489/001	2005.04.07.
Spectrum Analyzer	8566B	Hewlett Packard	2311A02394	2005.04.07.
Spectrum Display	85662A	Hewlett Packard	2542A12429	2005.04.07.
Quasi-Peak Adapter	85650A	Hewlett Packard	2521A00887	2005.04.07.
RF Preselector	85685A	Hewlett Packard	2648A00504	2005.04.07.
Pre-Amplifier	8449B	Hewlett Packard	3008A00375	2005.04.07.
Pre-Amplifier	8447F	Hewlett Packard	3113A05367	2005.04.07.
Spectrum Monitor	EZM	Rohde & Schwarz	862304/007	2005.04.07.
Bico-Antenna	94455-1	Eaton	977	2005.03.17.
Log-Periodic Antenna	3146	EMCO	2051	2005.03.17.
Dipole Antenna	TDA25/1/2	Electro Metrics	176/200/200	2005.03.17.
Horn Antenna	SAS-571	A.H Systems	414	2005.03.17.
Spectrum Analyzer	R3261C	Advantest	71720189	2005.04.07.
LISN	KNW-242	Kyoritsu	8-923-2	2004.07.17.
LISN	8012-50-R-24	Solar	8379121	2004.07.17.
Loop Ant	6507	EMCO	1435	2004.10.06.
Signal Generator	SMS	Rohde & Schwarz	872165/100	2005.04.07.
Modulation Analyzer	8901B	Hewlett Packard	3438A05094	2005.04.07.
Frequency Counter	CMC251	Tektronic	CMC-251TW52489	2005.04.07.
ModulationAnalyzer	HP 8901B	Hewlett Packard	-	2005.07.05
Audio Generatior	Ken AG203	Kenwood	-	2005.07.05
AC Volt Meter	Ldr LMV-182	Leader	-	2005.07.05

APPLICANT : Midland Radio Corporation.

FCC ID : MMALXT410

REPORT : THRU - 503005

Pages: 14 of 16