



Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: DT50

Test Model: HPPAP22

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Ling Zhu





A.1 -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.95	N/A	Pass
NVNT	1-DH5	2441	Ant1	0.949	N/A	Pass
NVNT	1-DH5	2480	Ant1	0.959	N/A	Pass
NVNT	2-DH5	2402	Ant1	1.292	N/A	Pass
NVNT	2-DH5	2441	Ant1	1.306	N/A	Pass
NVNT	2-DH5	2480	Ant1	1.317	N/A	Pass
NVNT	3-DH5	2402	Ant1	1.295	N/A	Pass
NVNT	3-DH5	2441	Ant1	1.312	N/A	Pass
NVNT	3-DH5	2480	Ant1	1.304	N/A	Pass





Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1




-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1






-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

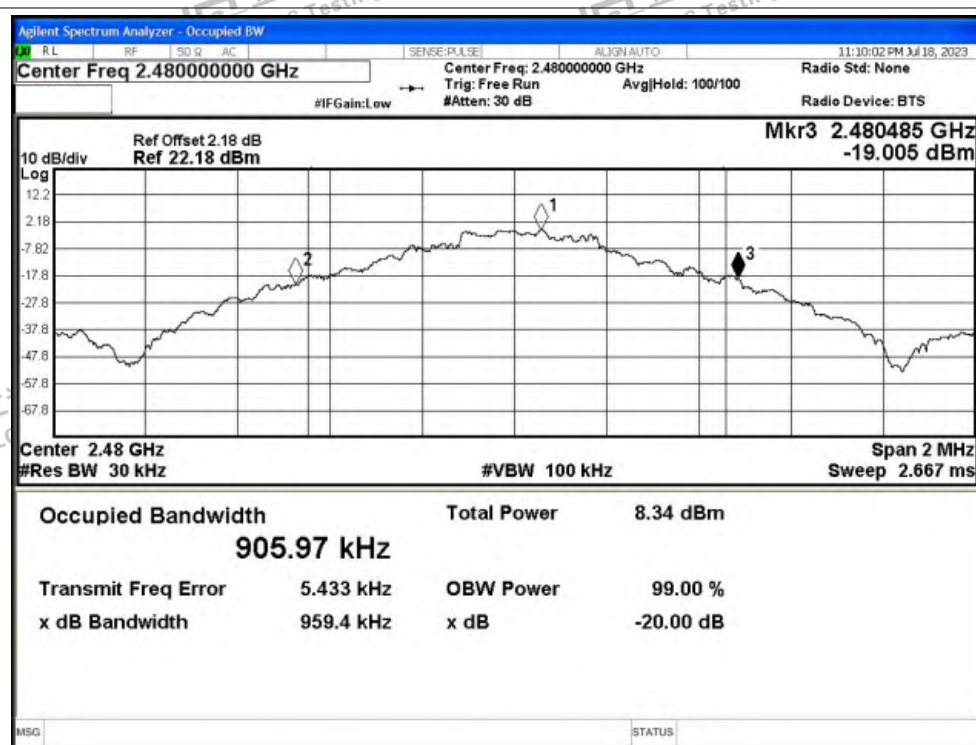


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

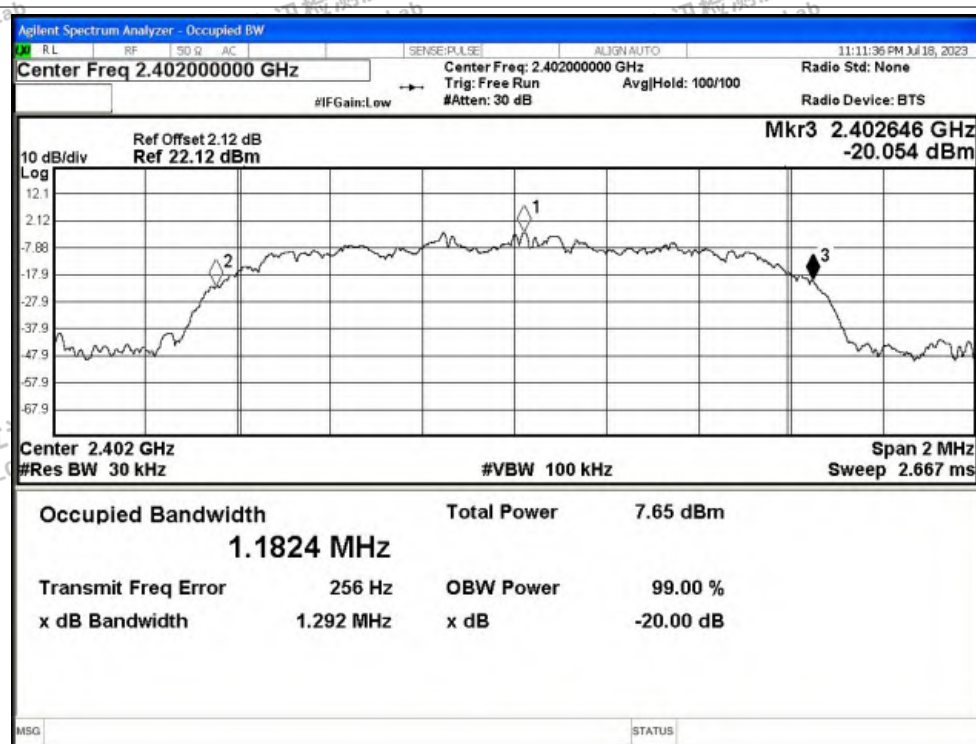




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

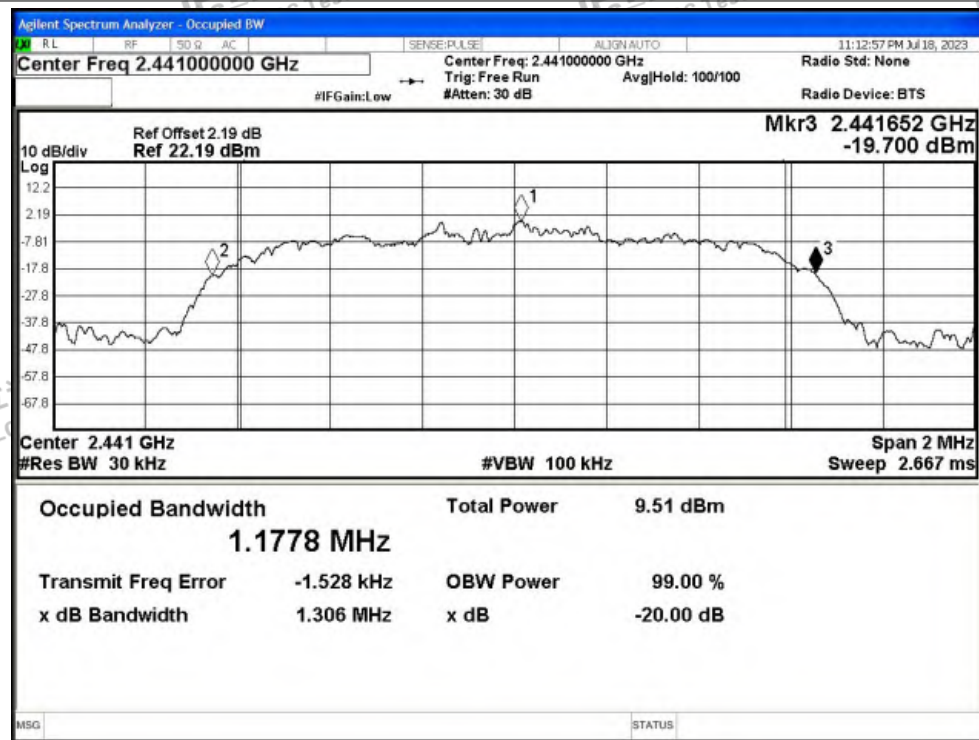


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

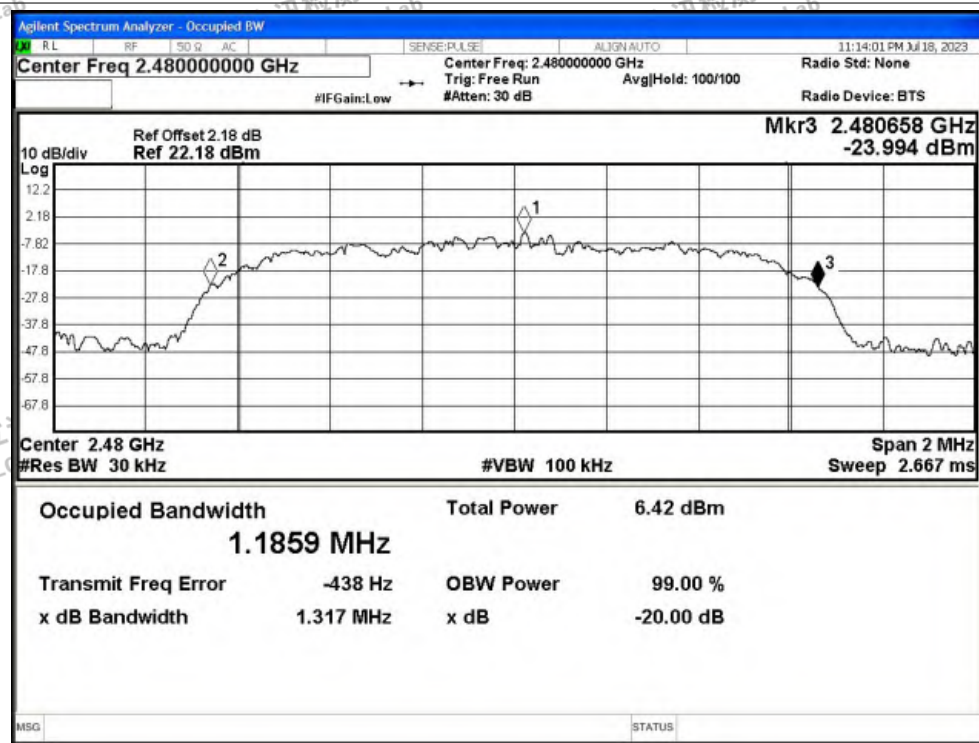





-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

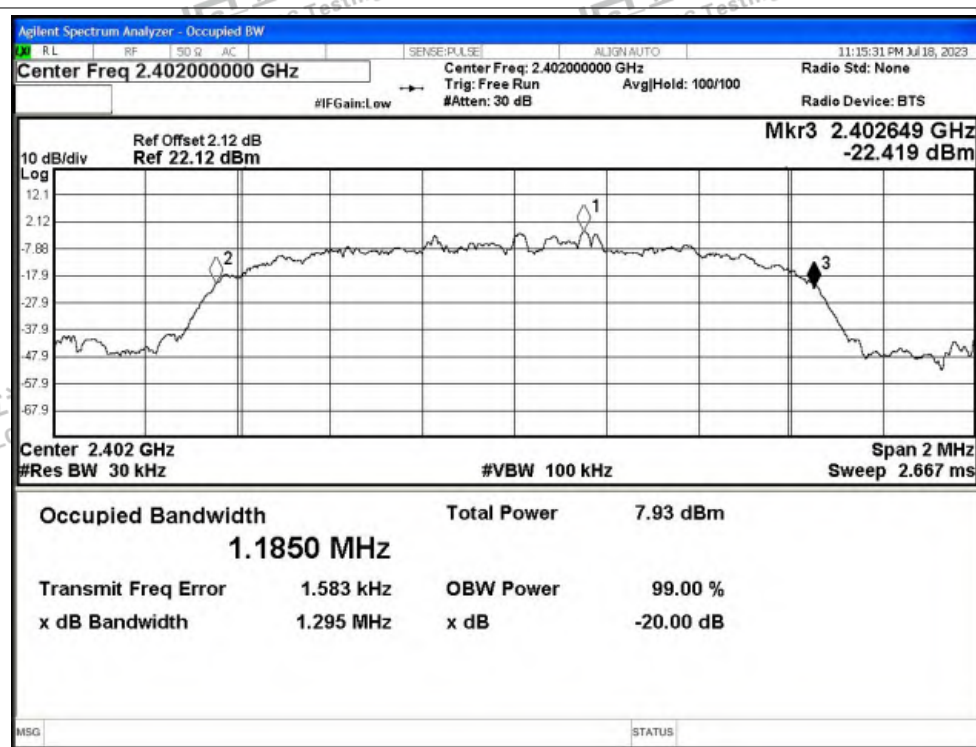

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

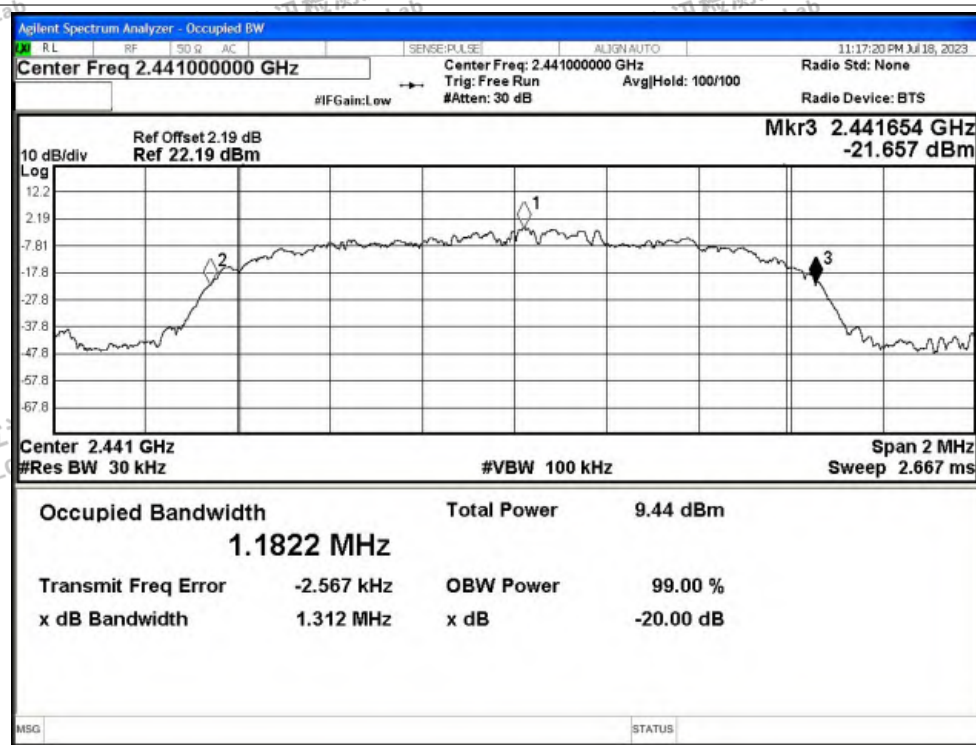

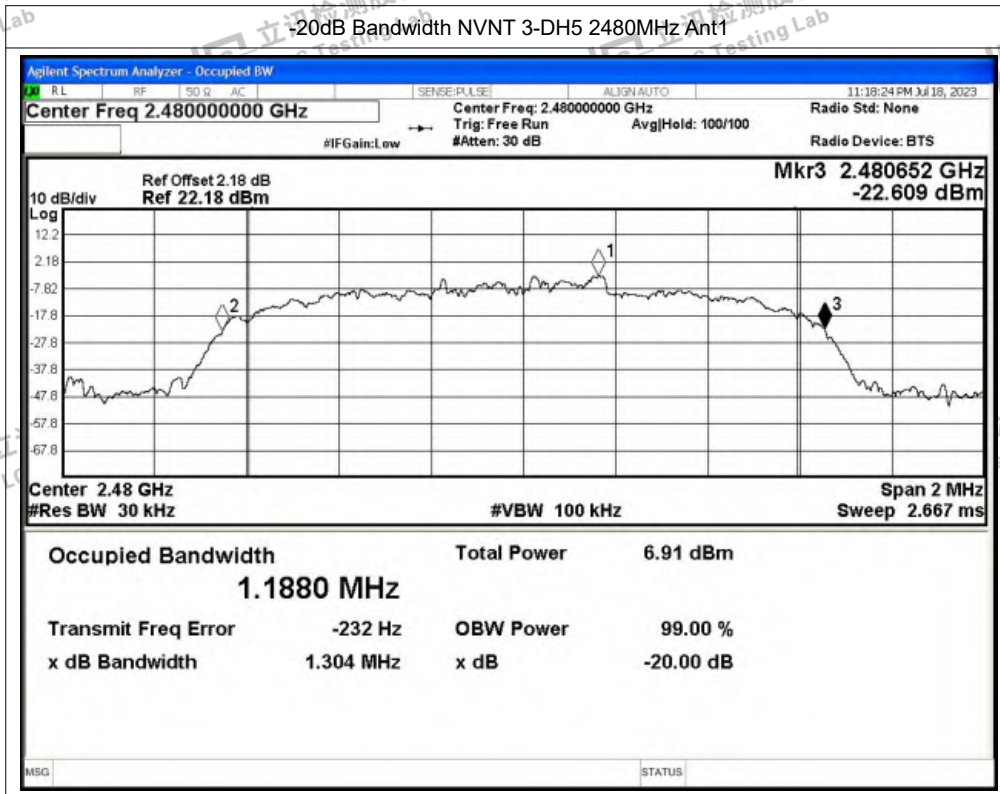



A.2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	3.37	21	Pass
NVNT	1-DH5	2441	Ant1	4.82	21	Pass
NVNT	1-DH5	2480	Ant1	2.15	21	Pass
NVNT	2-DH5	2402	Ant1	3.10	21	Pass
NVNT	2-DH5	2441	Ant1	4.59	21	Pass
NVNT	2-DH5	2480	Ant1	1.93	21	Pass
NVNT	3-DH5	2402	Ant1	3.26	21	Pass
NVNT	3-DH5	2441	Ant1	4.74	21	Pass
NVNT	3-DH5	2480	Ant1	2.06	21	Pass






Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

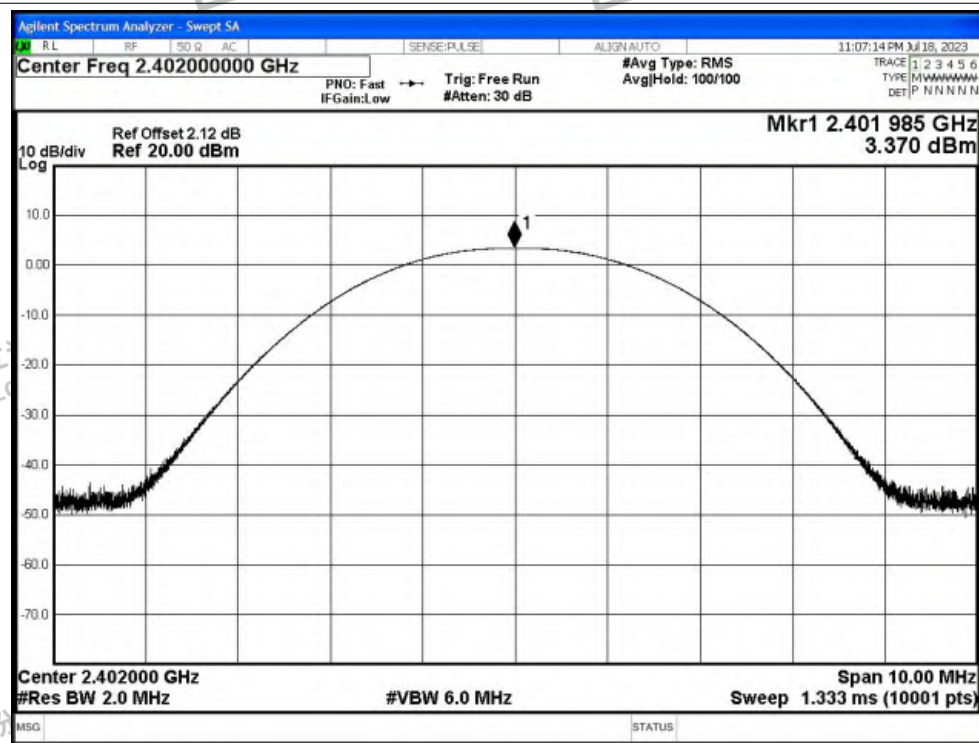

Power NVNT 1-DH5 2441MHz Ant1

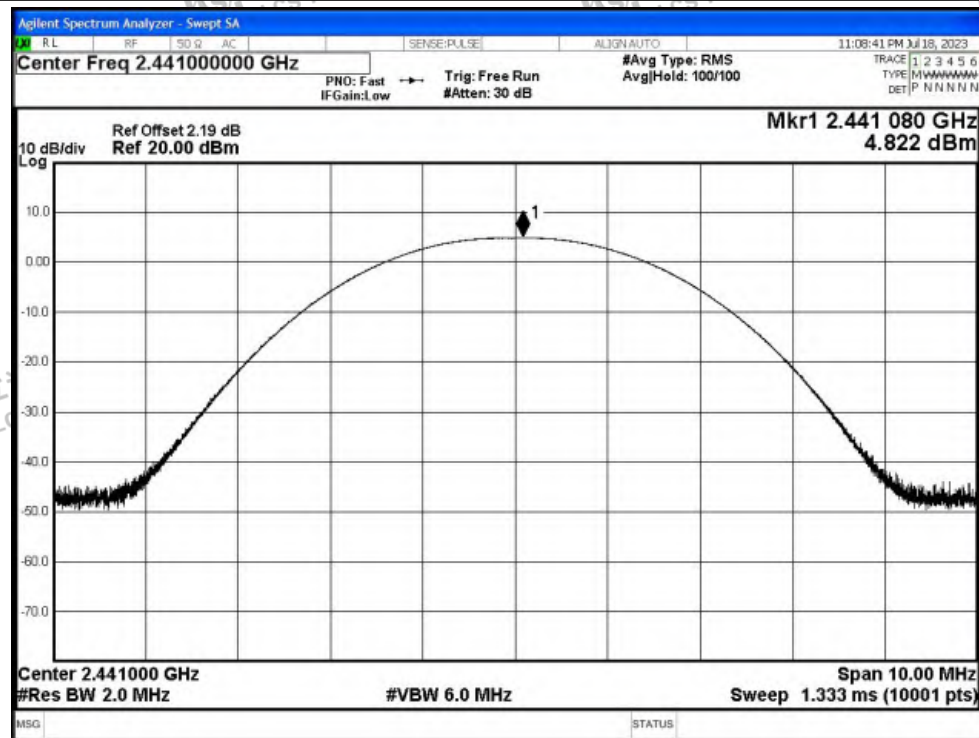

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Power NVNT 1-DH5 2480MHz Ant1

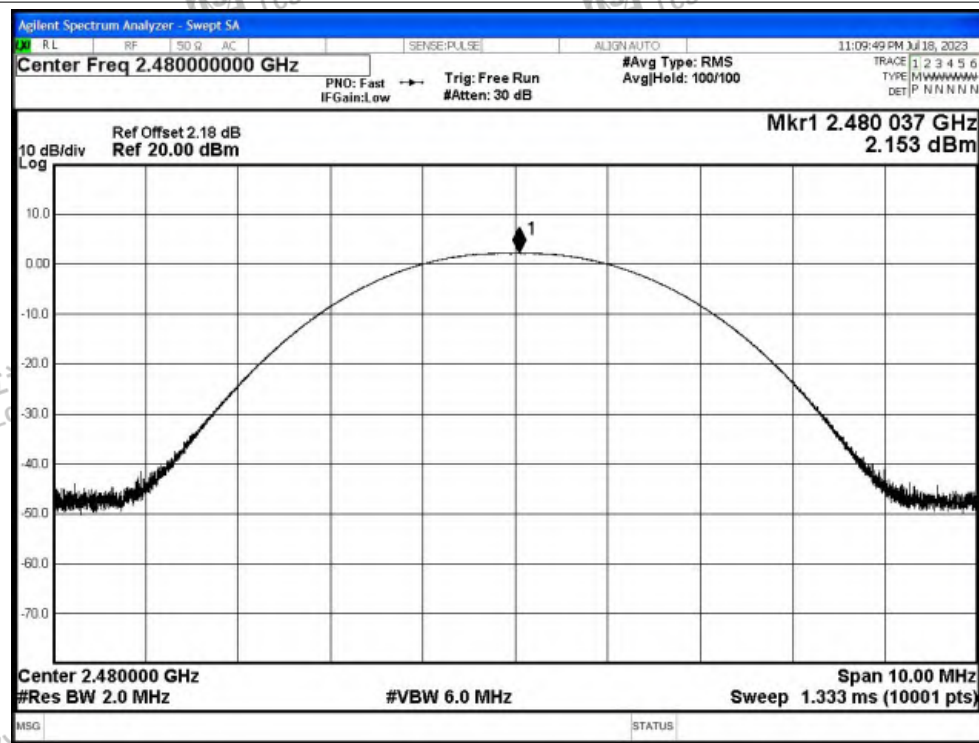


Power NVNT 2-DH5 2402MHz Ant1

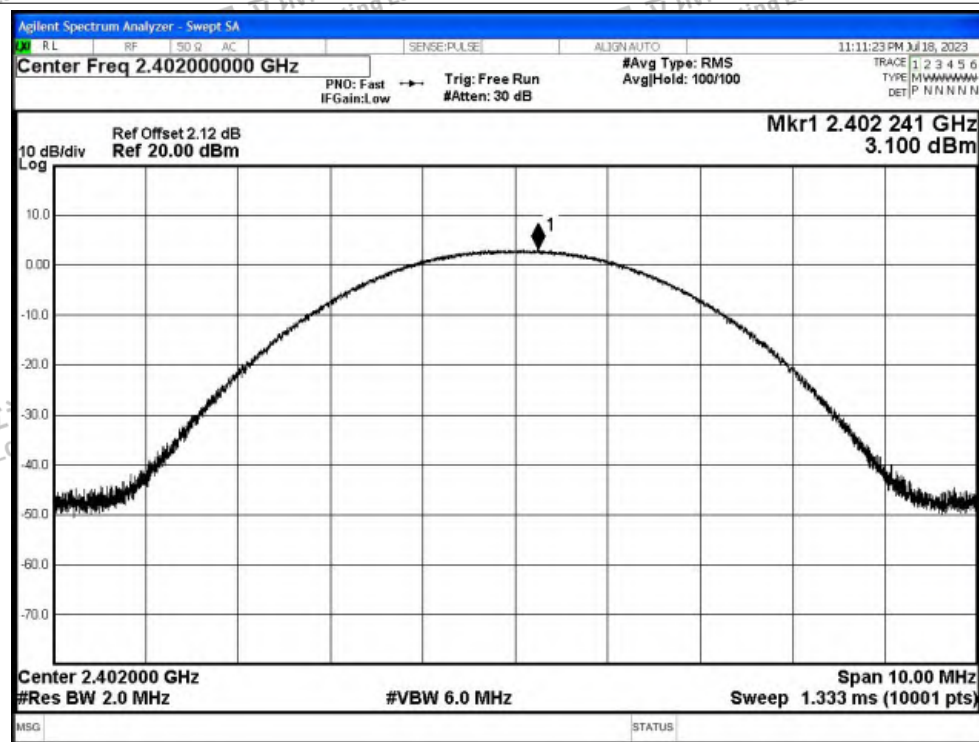




Power NVNT 2-DH5 2441MHz Ant1

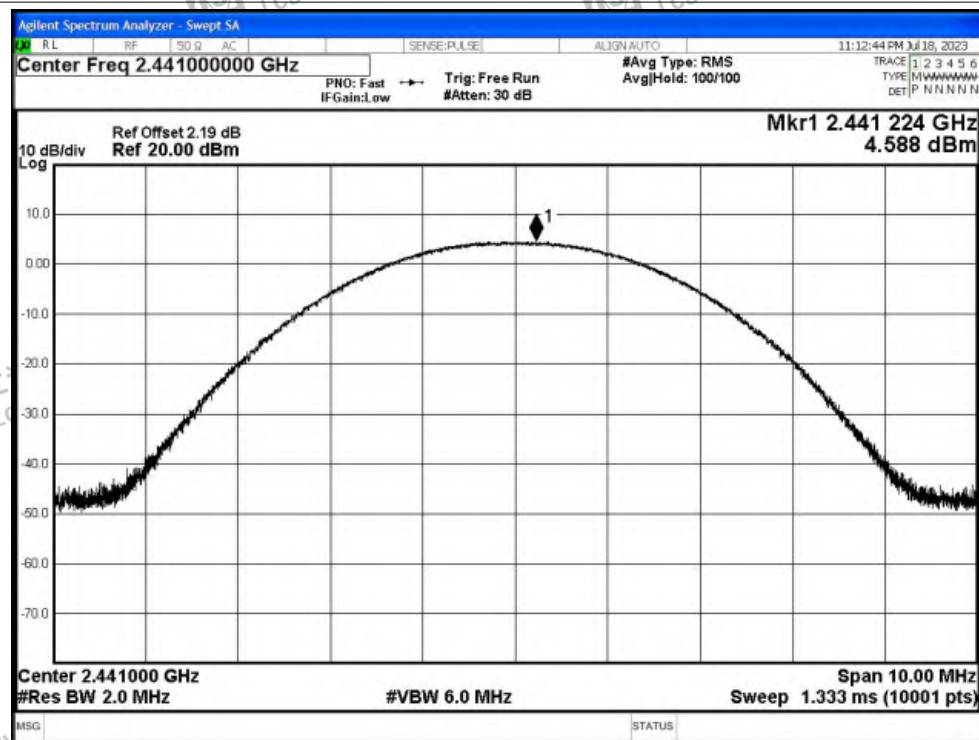


Power NVNT 2-DH5 2480MHz Ant1

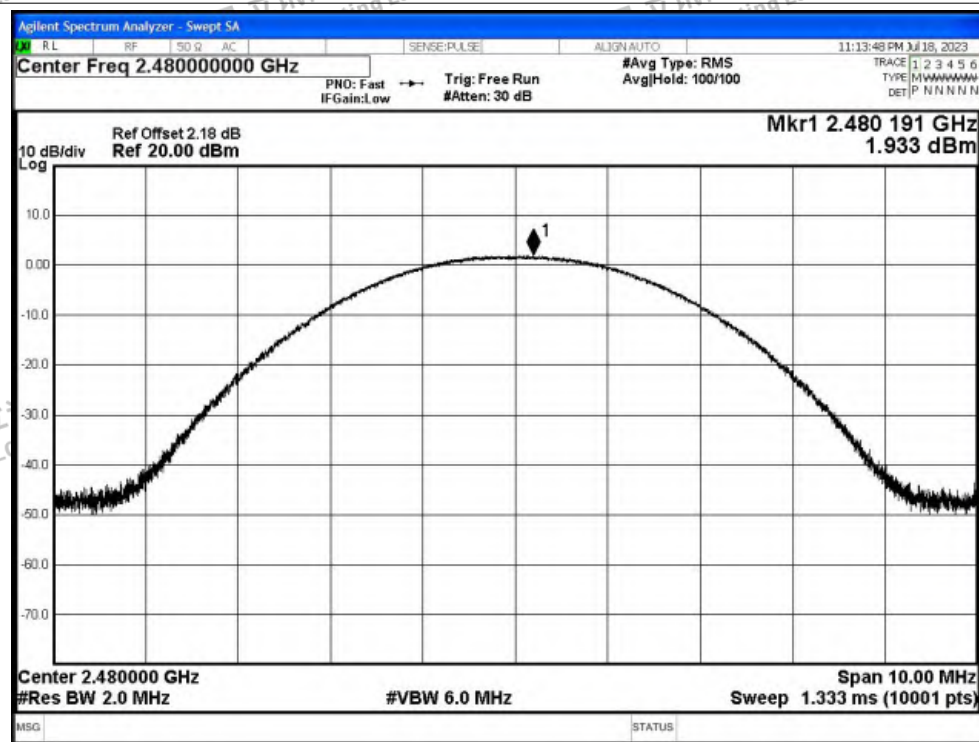




Power NVNT 3-DH5 2402MHz Ant1

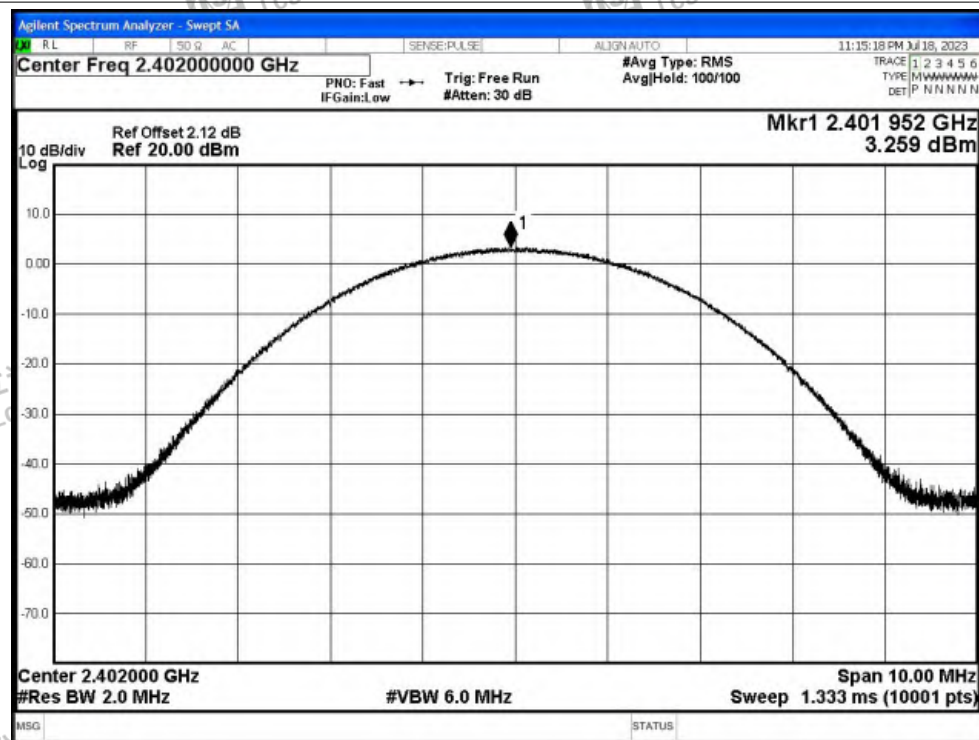


Power NVNT 3-DH5 2441MHz Ant1

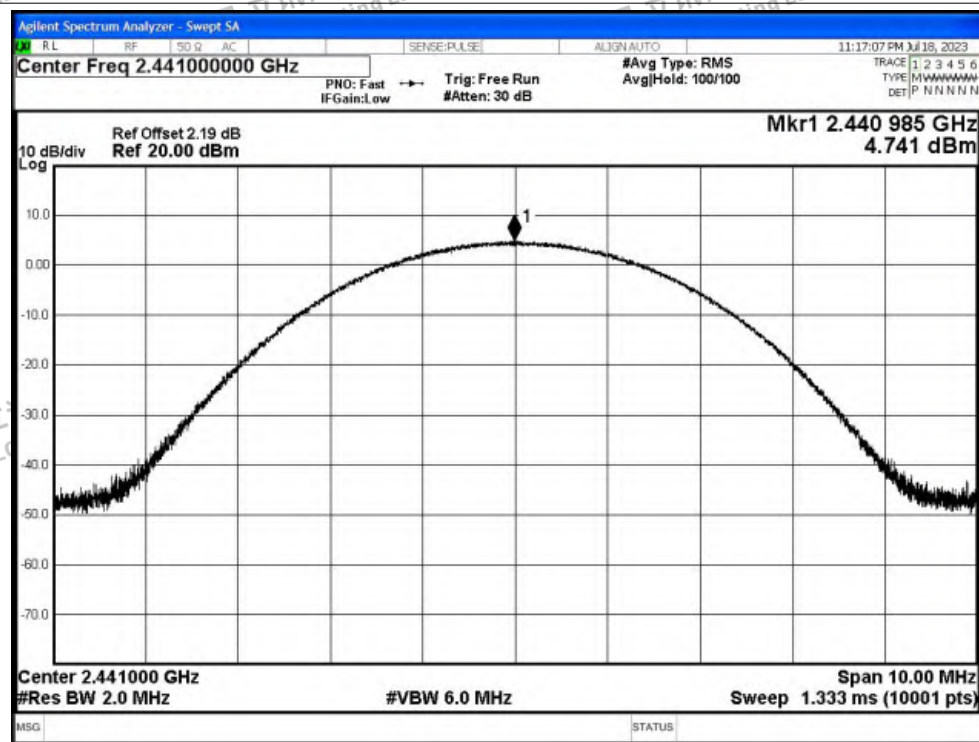



Power NVNT 3-DH5 2480MHz Ant1

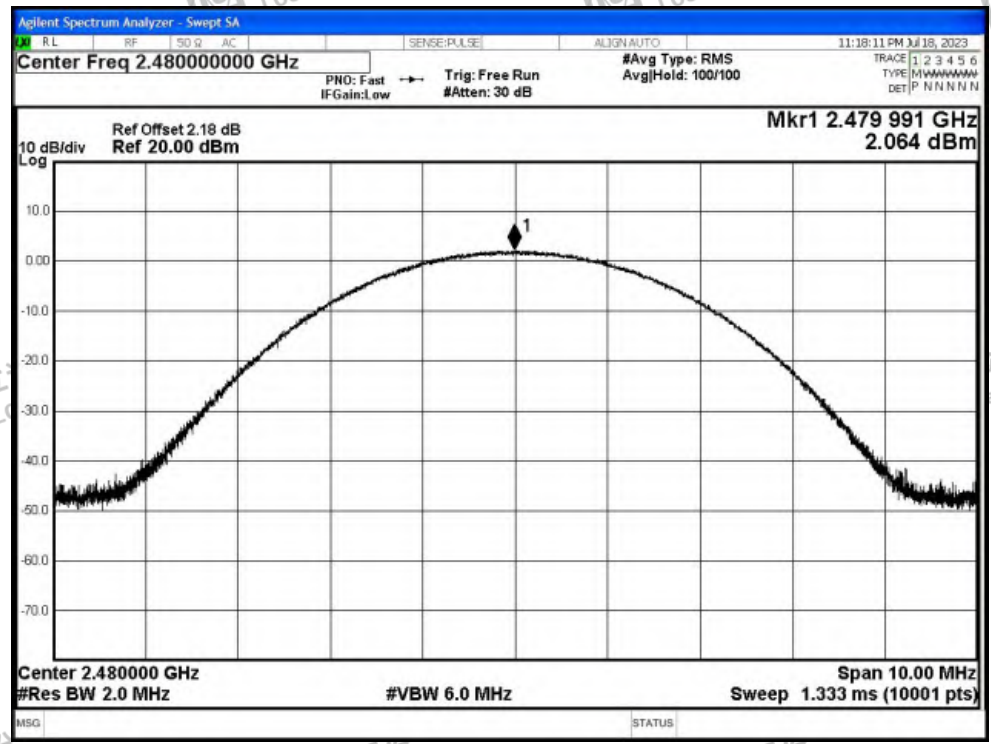



A.3 Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.018	2403.01	0.992	0.639	Pass
NVNT	2-DH5	Ant1	2401.834	2403.016	1.182	0.878	Pass
NVNT	3-DH5	Ant1	2402.172	2403.158	0.986	0.875	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

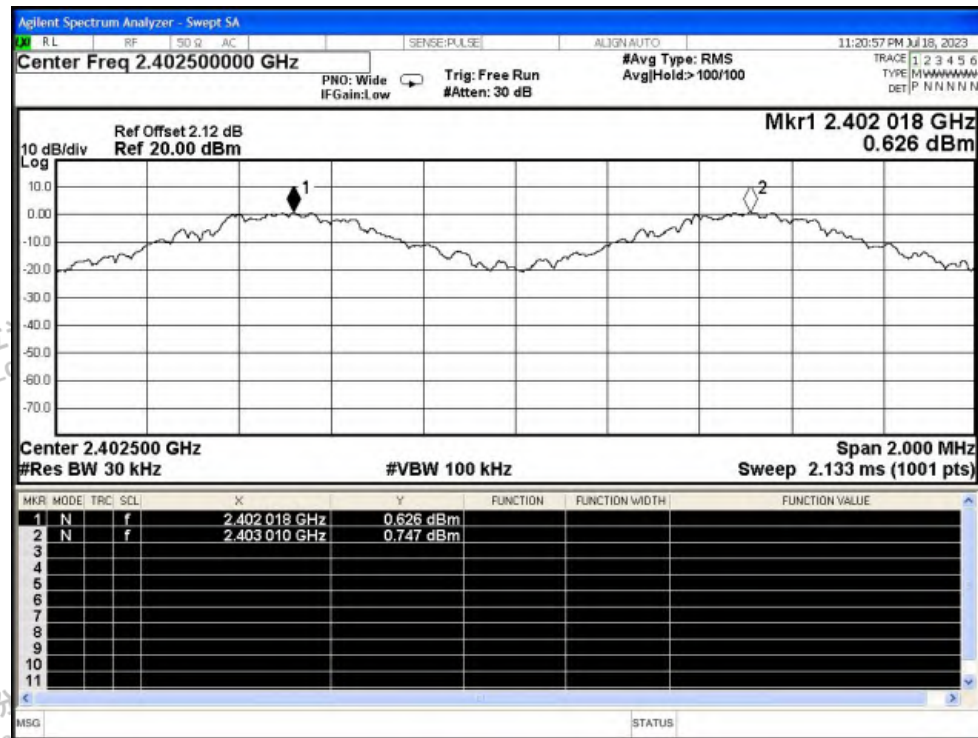


CFS NVNT 2-DH5 2402MHz Ant1

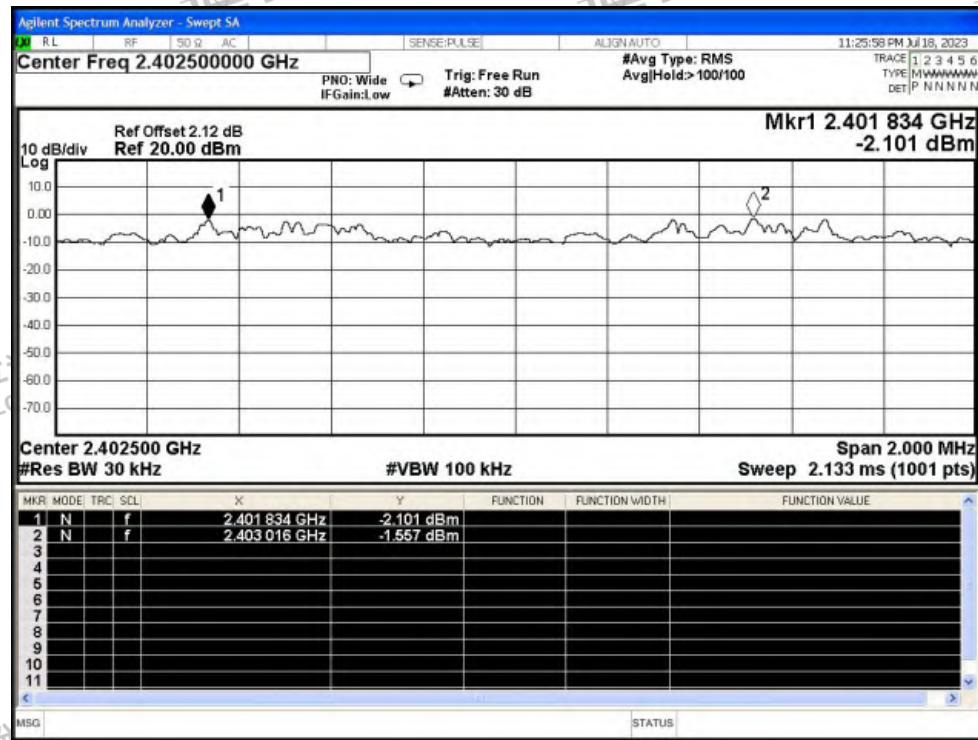



CFS NVNT 3-DH5 2402MHz Ant1

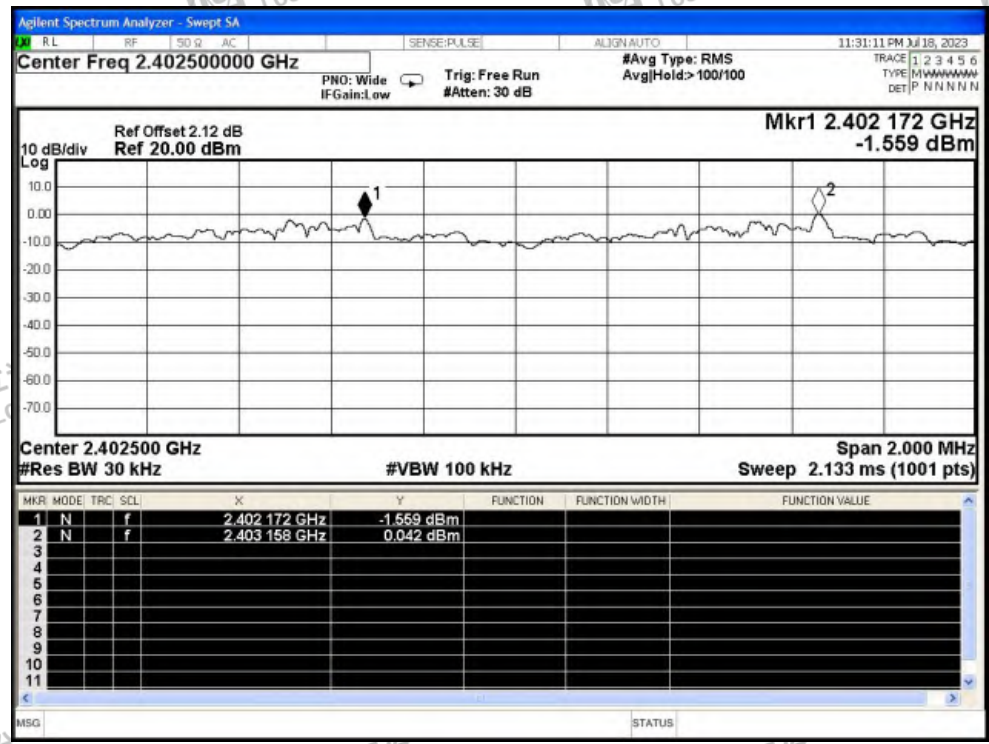



A.4 Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.881	276.576	96	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.885	337.545	117	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.887	334.892	116	31600	400	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

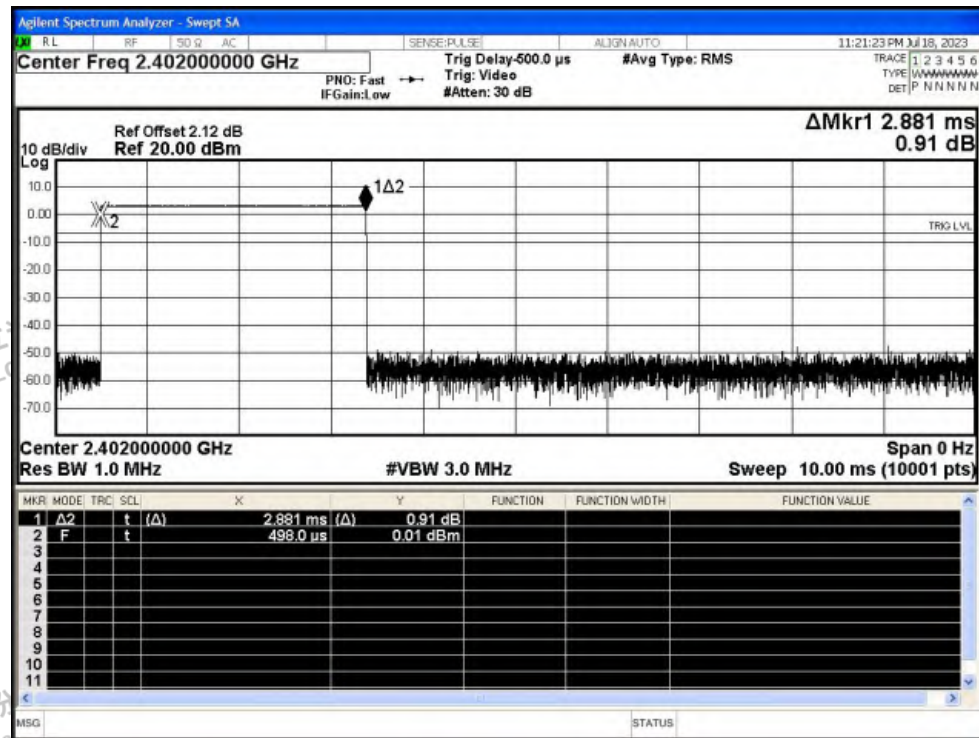


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

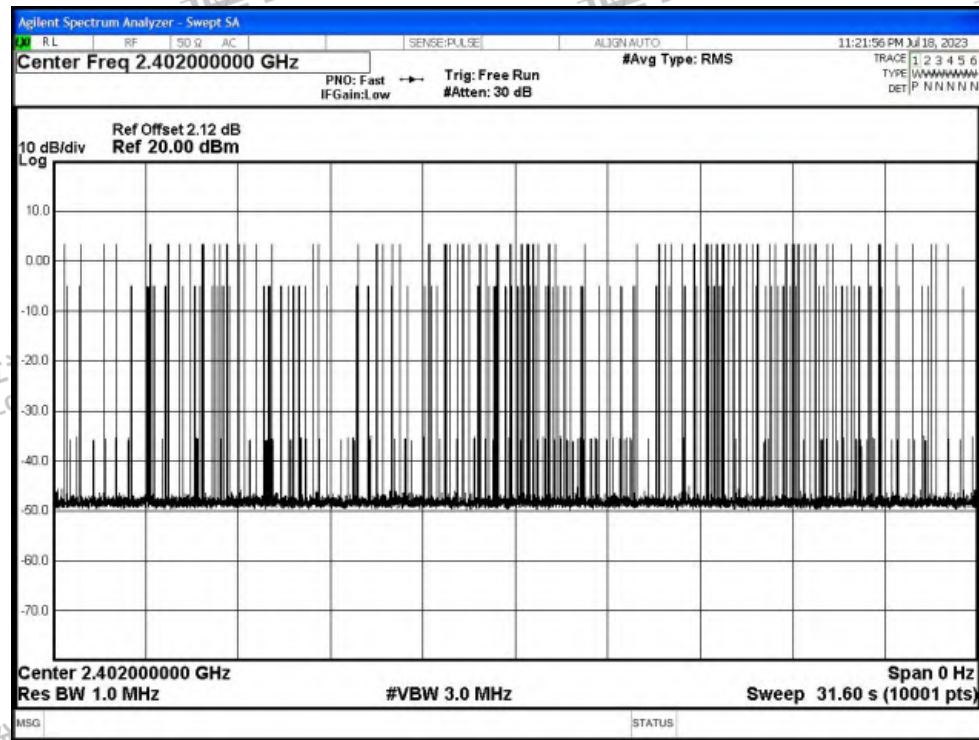


Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

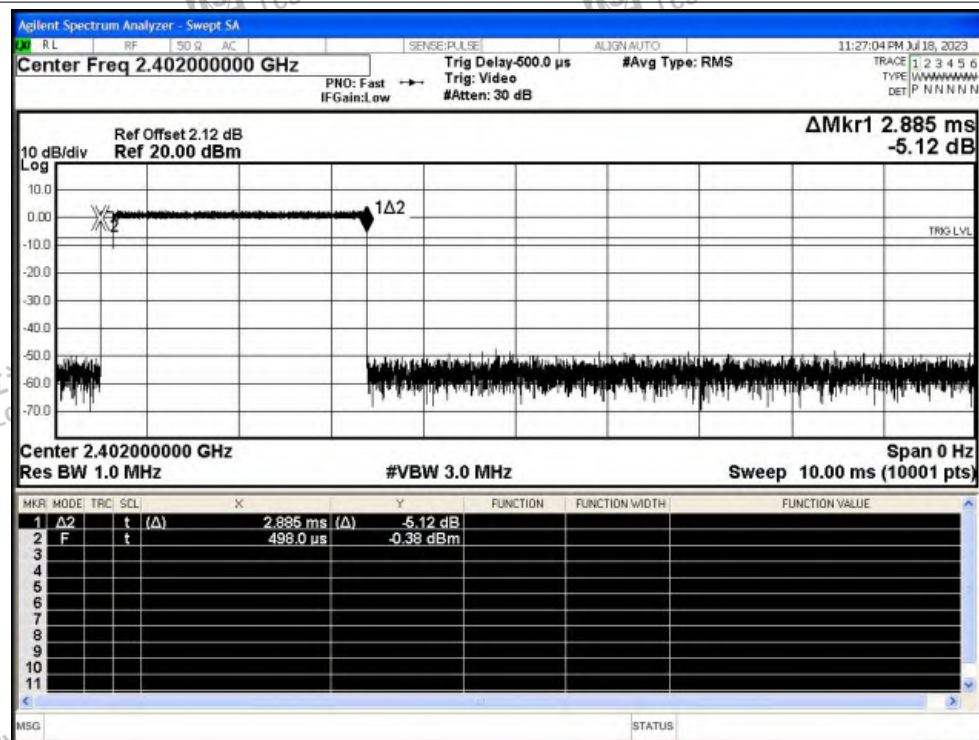


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

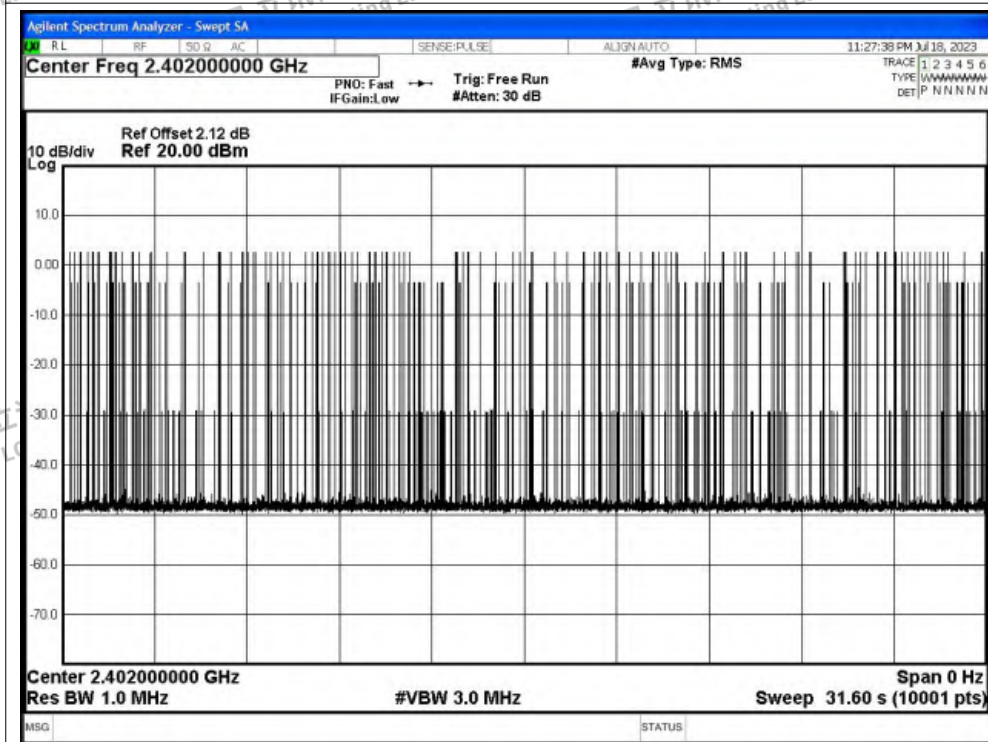




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

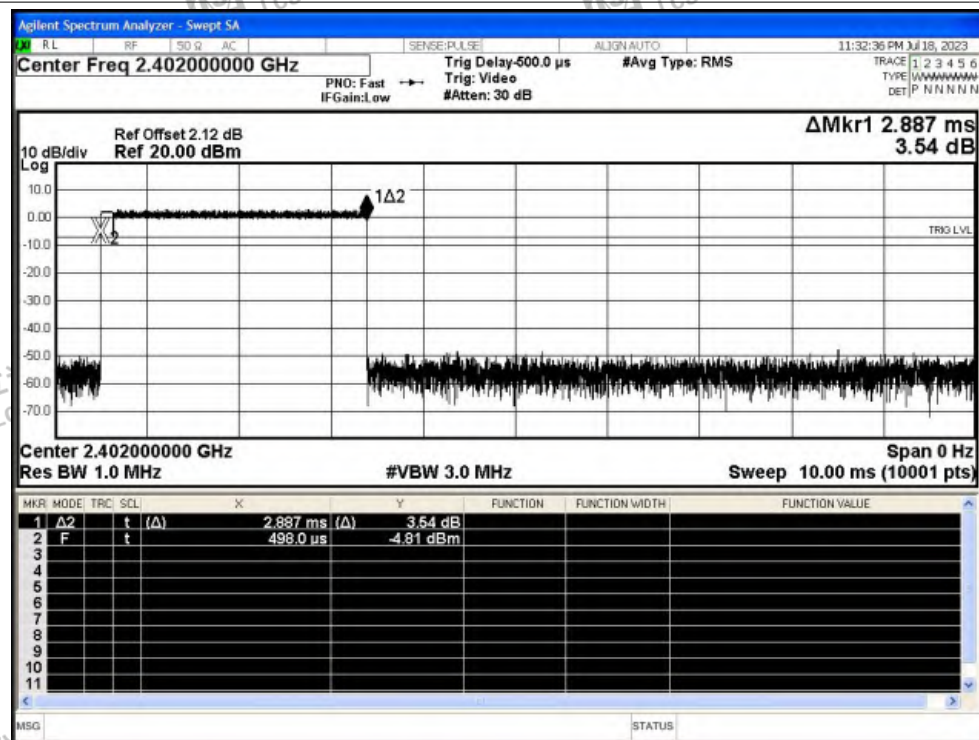

Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

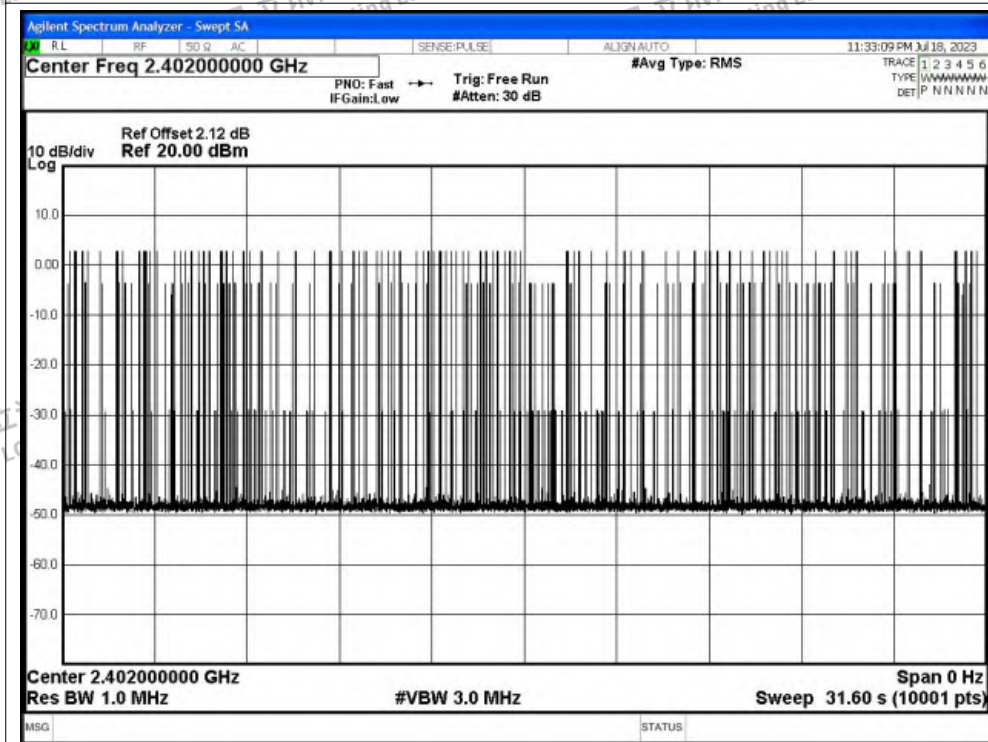



A.5 Number of Hopping Channel

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

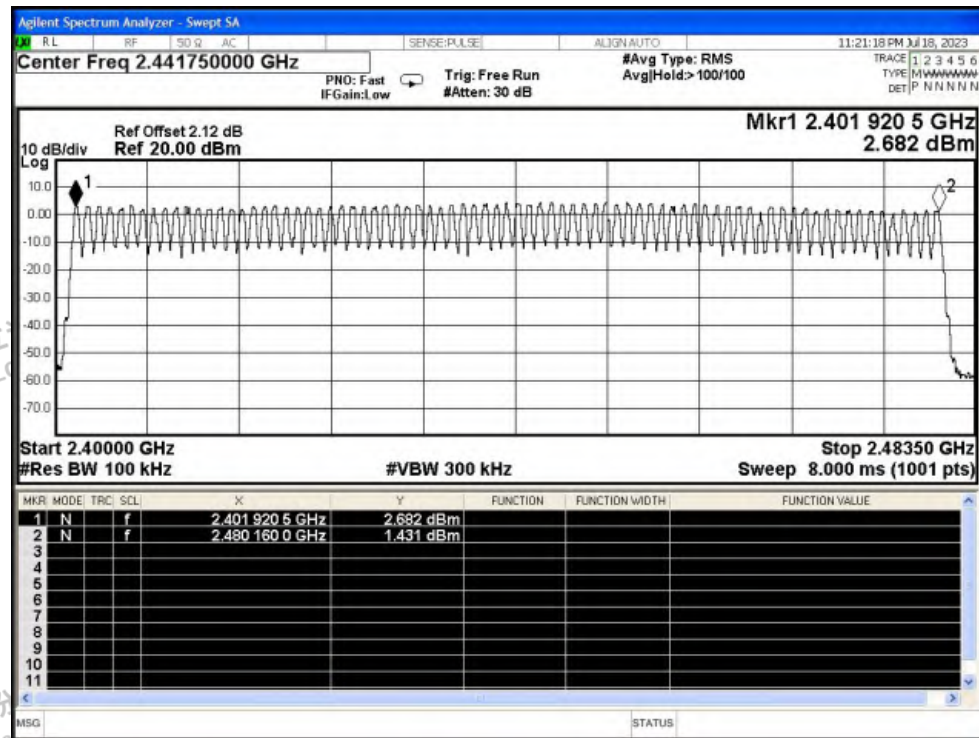


Hopping No. NVNT 2-DH5 2402MHz Ant1

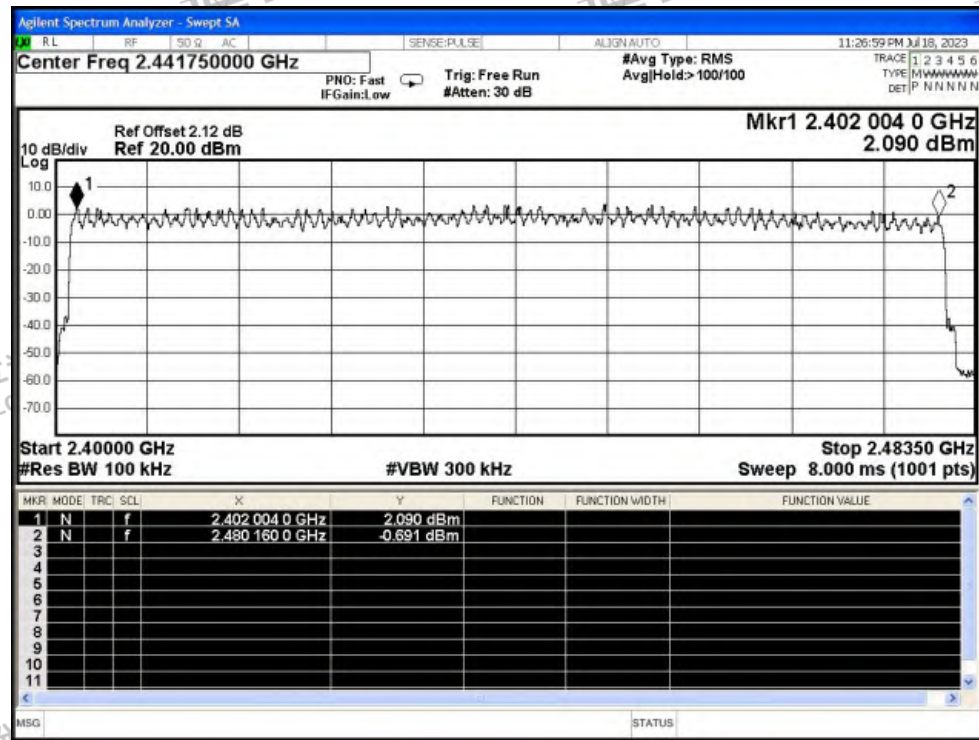



Hopping No. NVNT 3-DH5 2402MHz Ant1

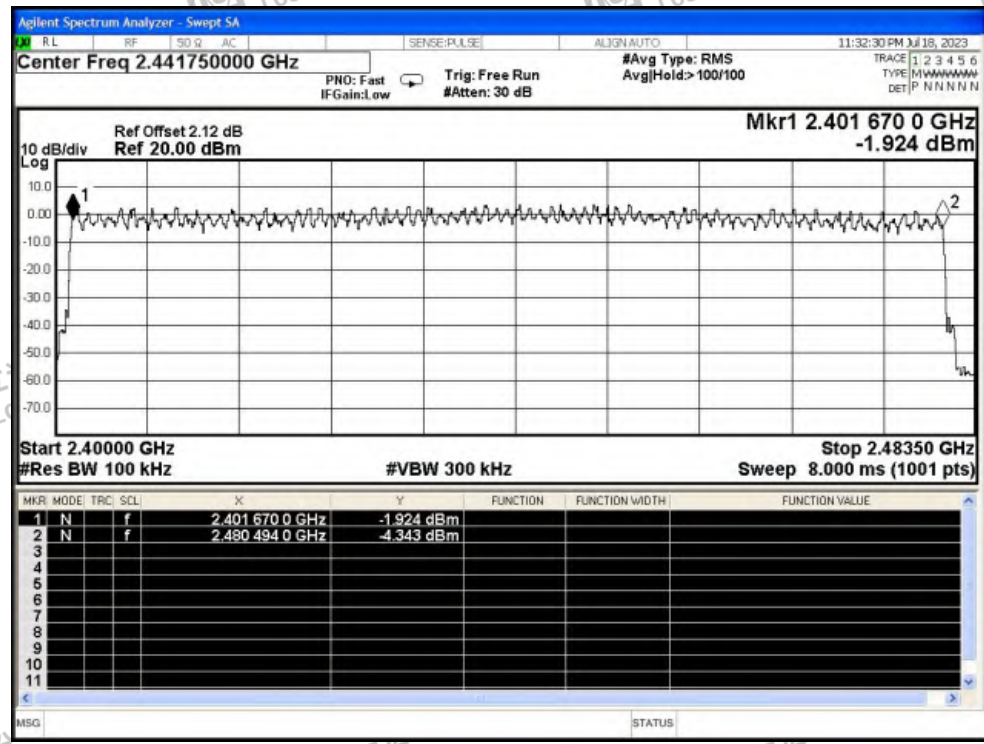

Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



A.6 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-58.72	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-58.17	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-54.65	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-57.59	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-56.16	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-58.02	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

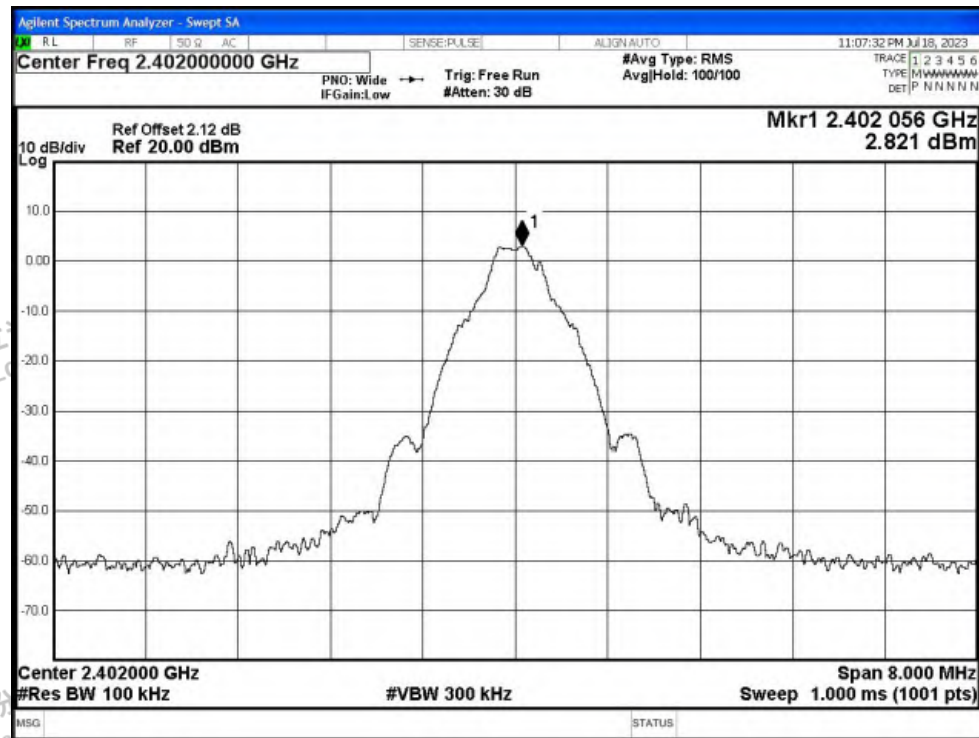


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

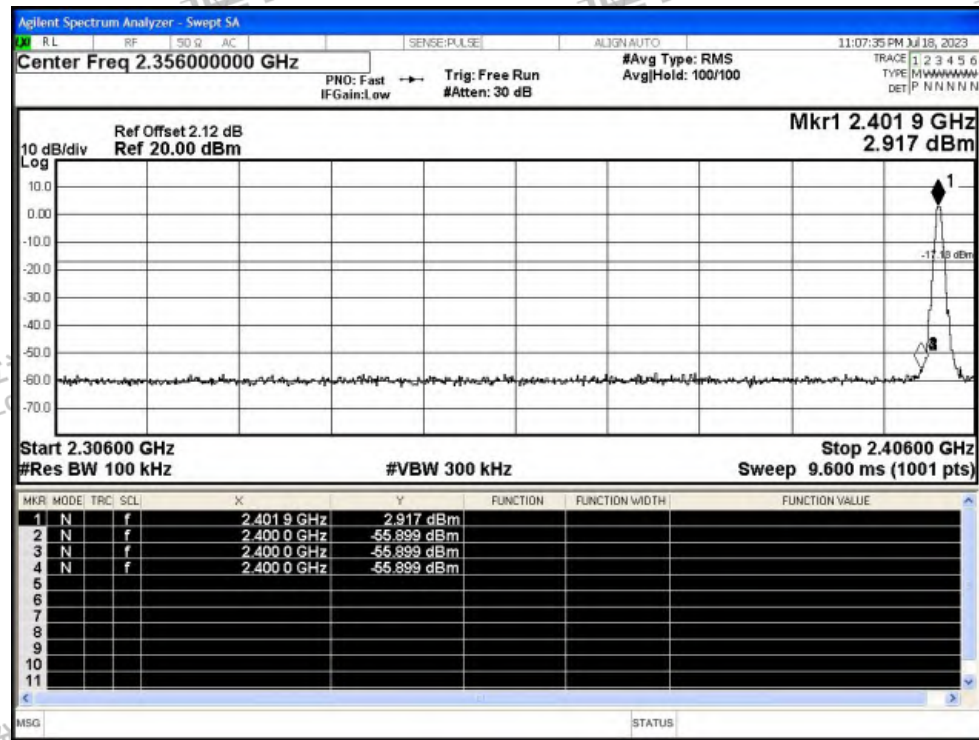




Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

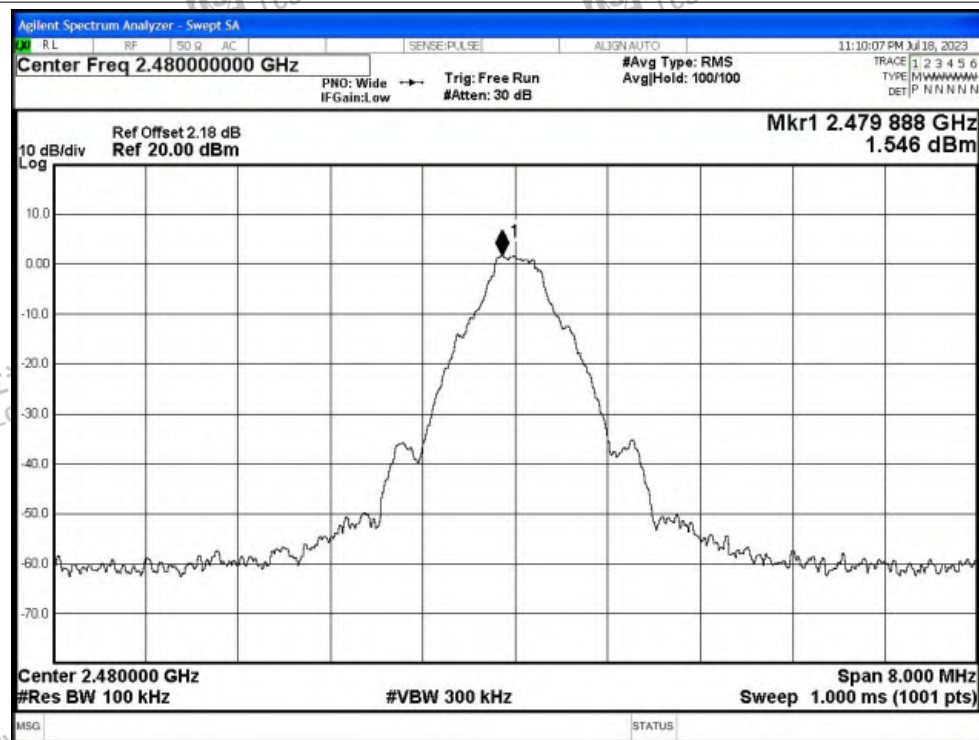


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

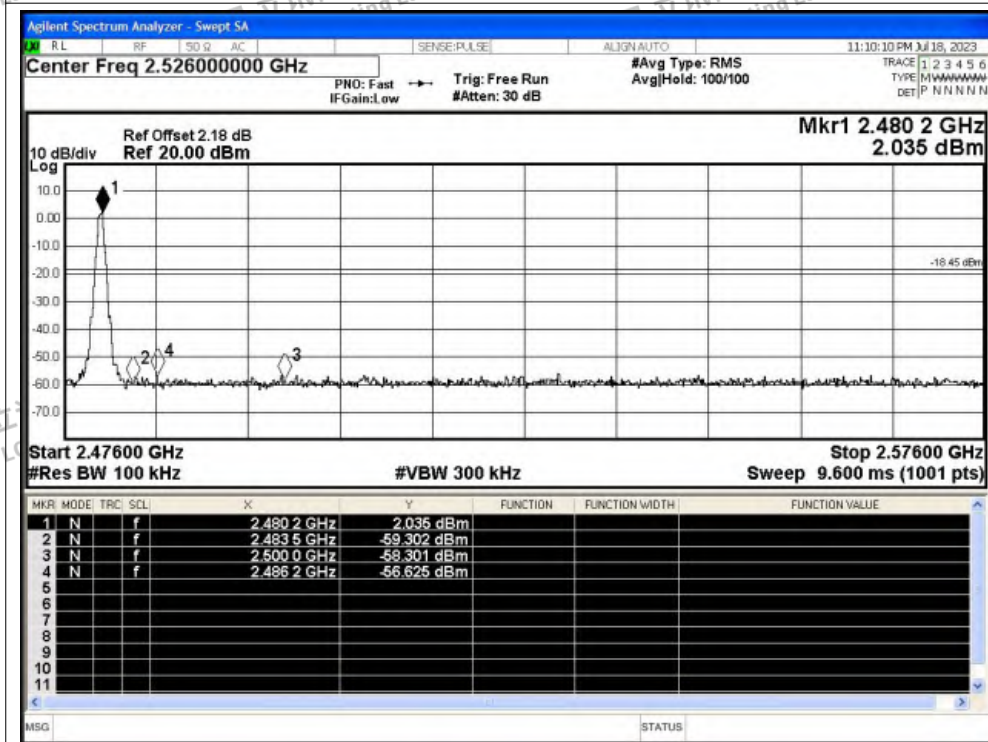




Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

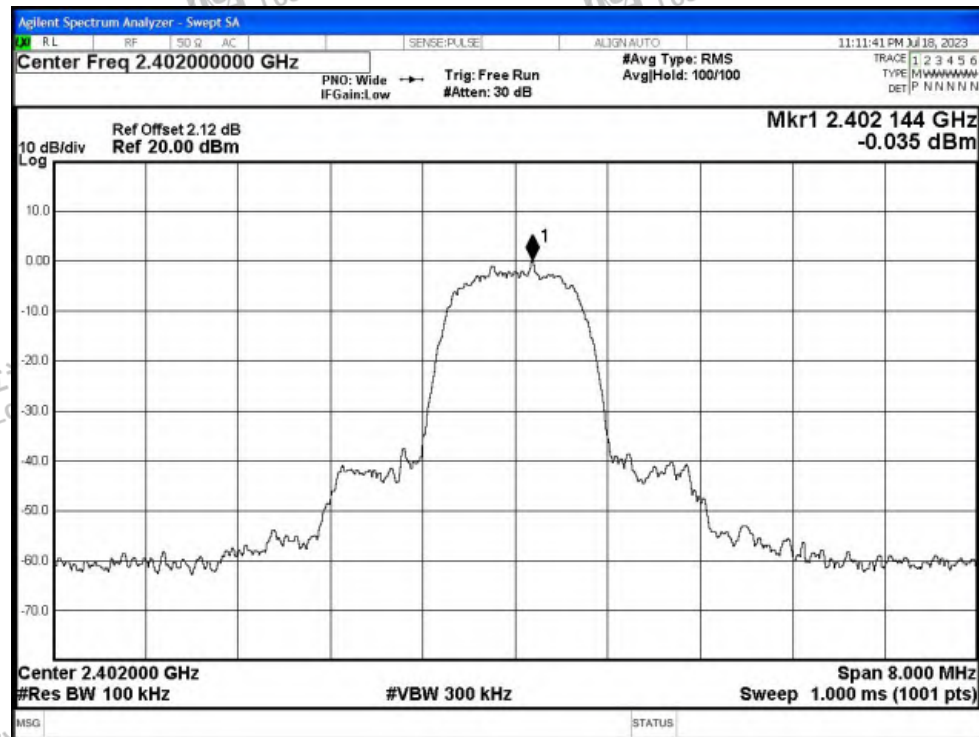


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

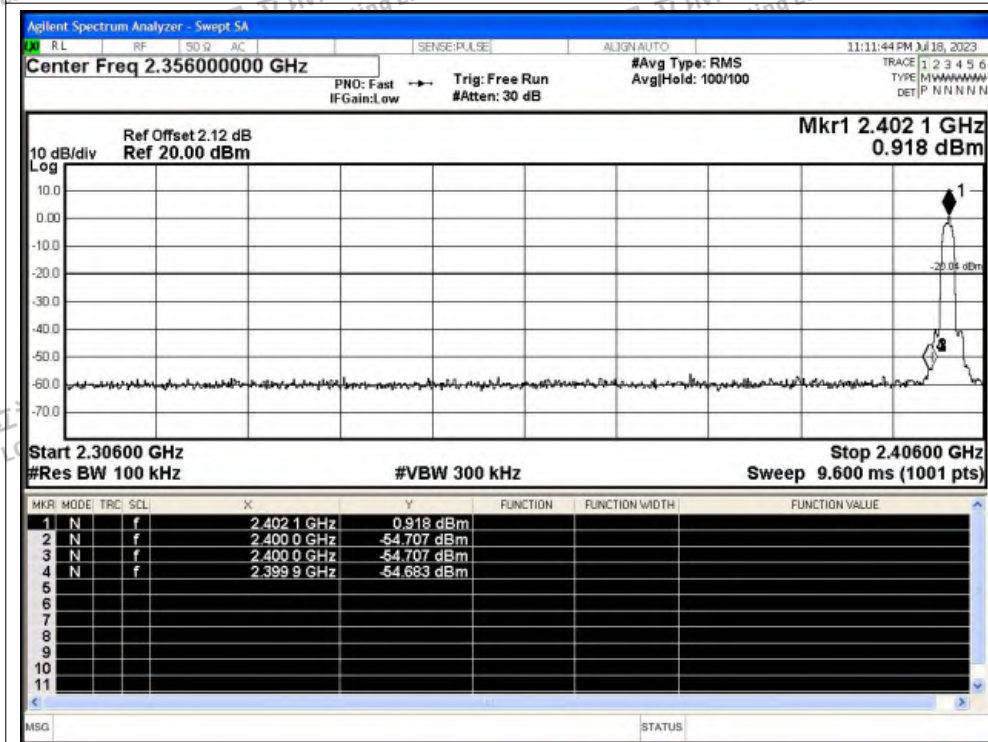




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

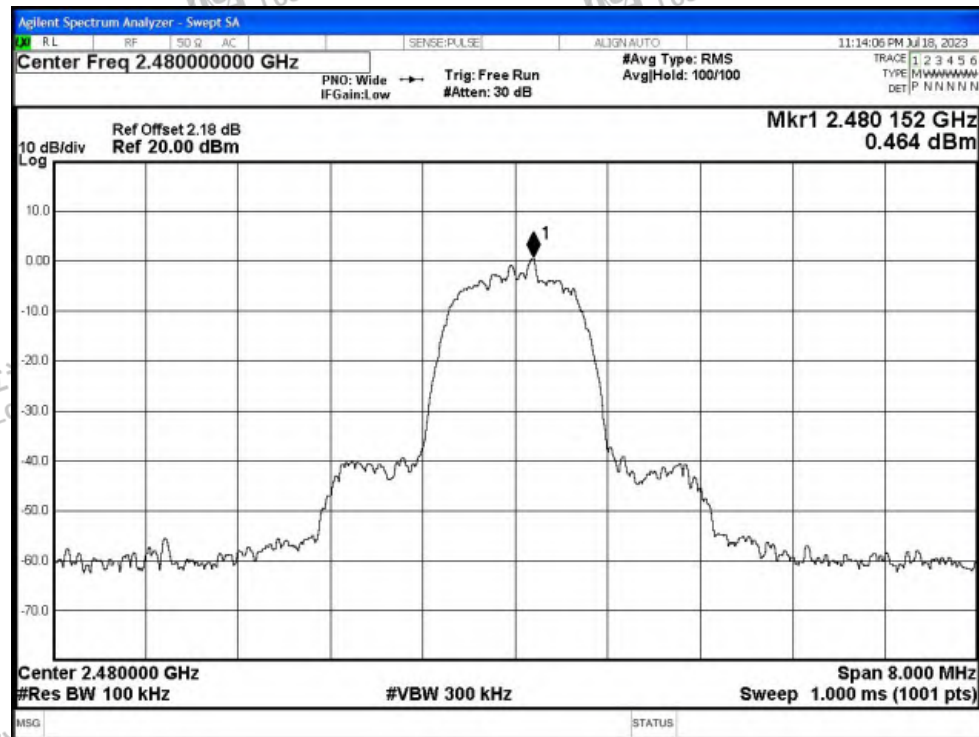

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

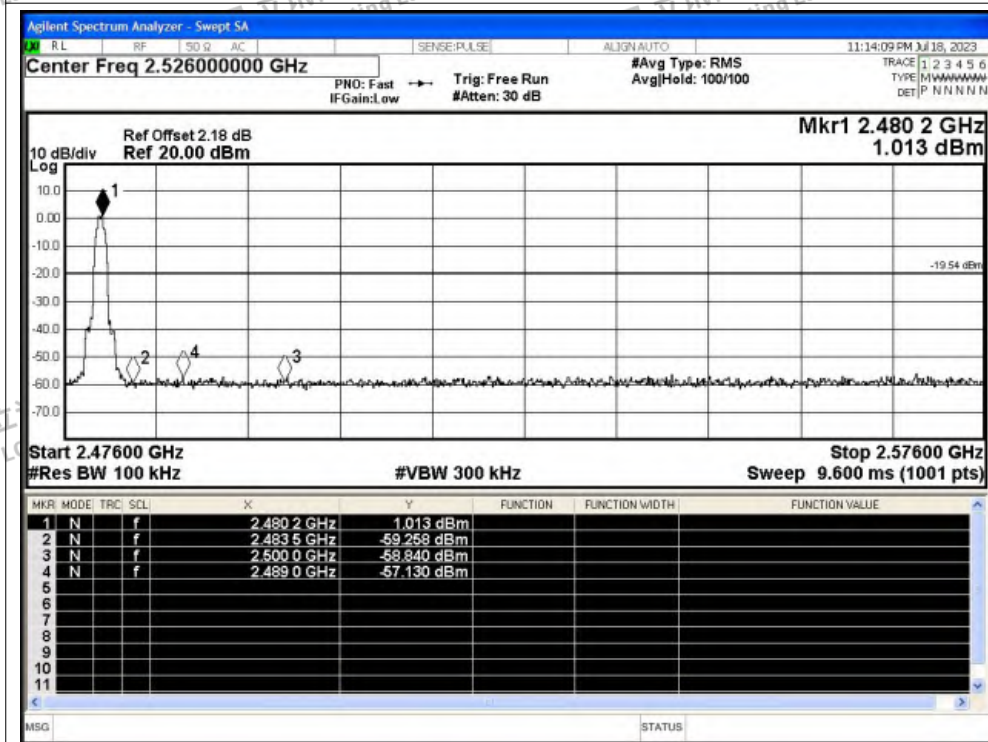




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

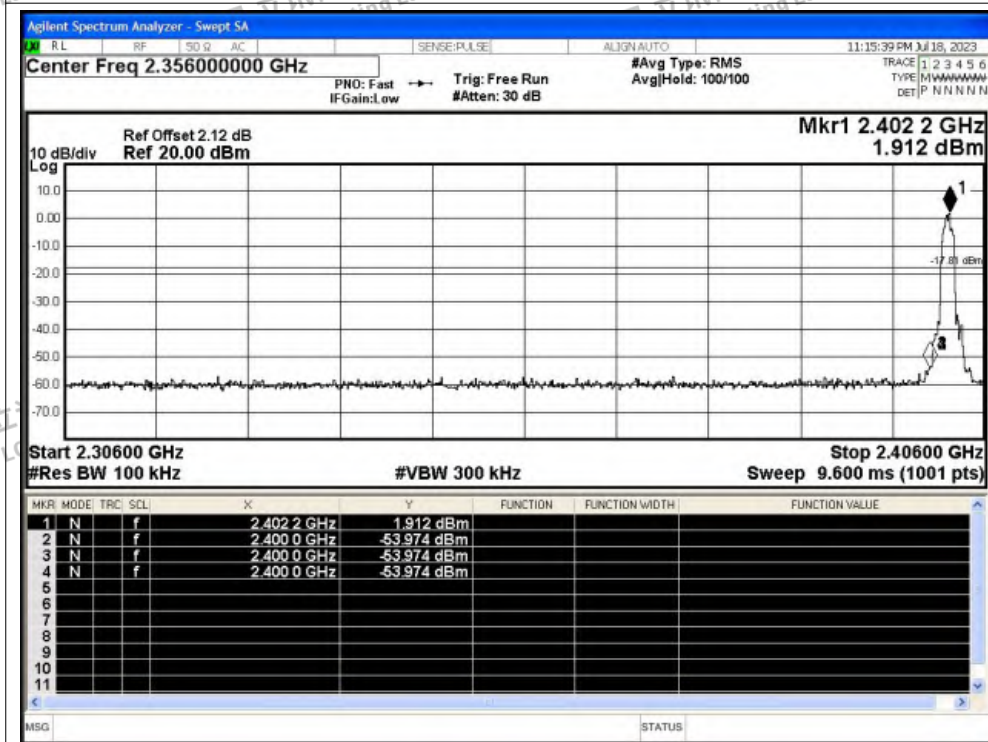




Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

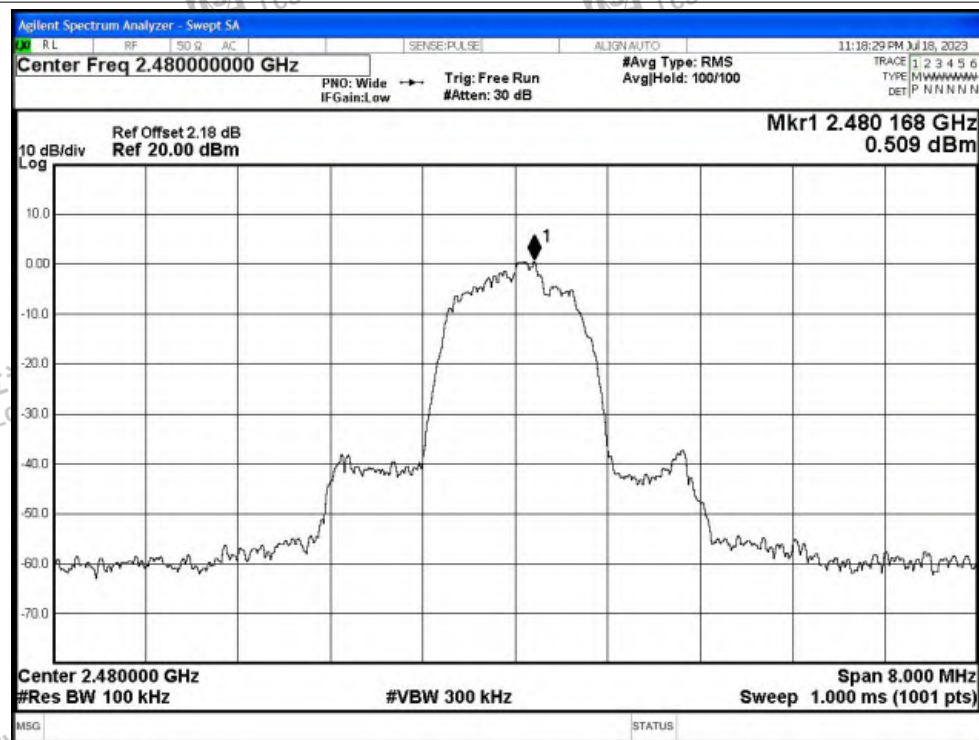

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

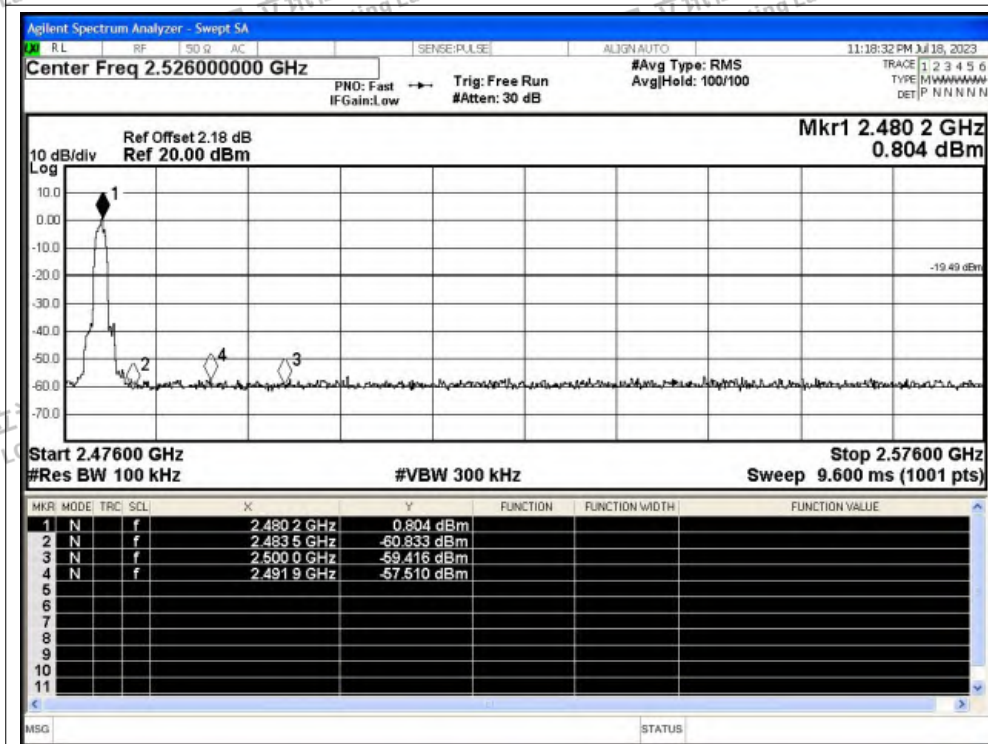

**(Hopping)**

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-59.5	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-57.7	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-58.06	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-54.94	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-58.35	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-57.22	-20	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

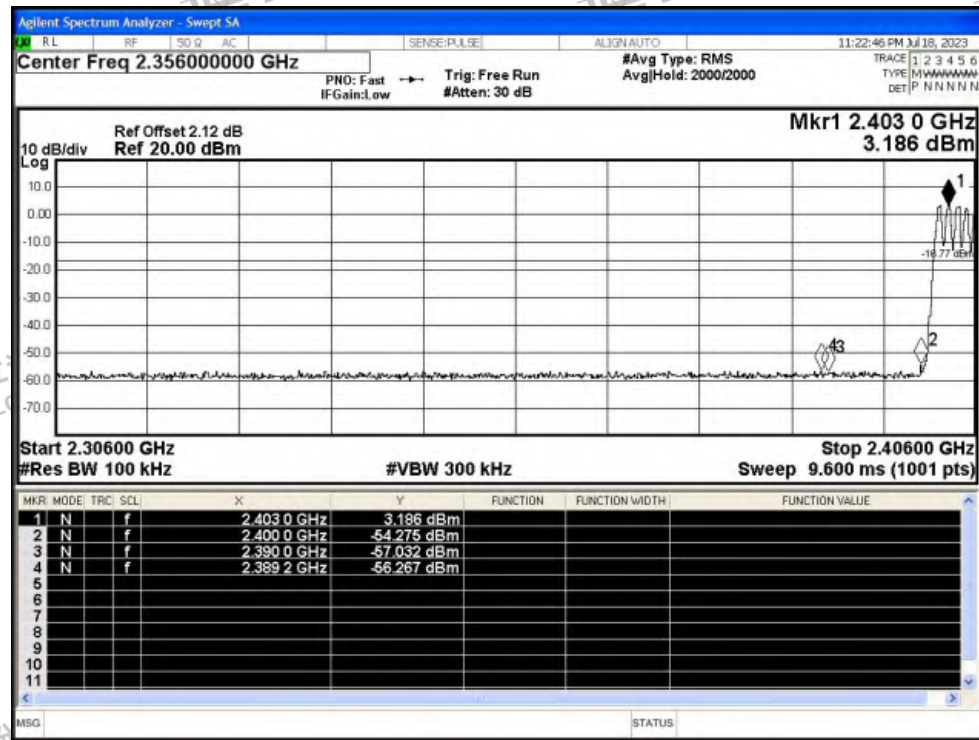




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

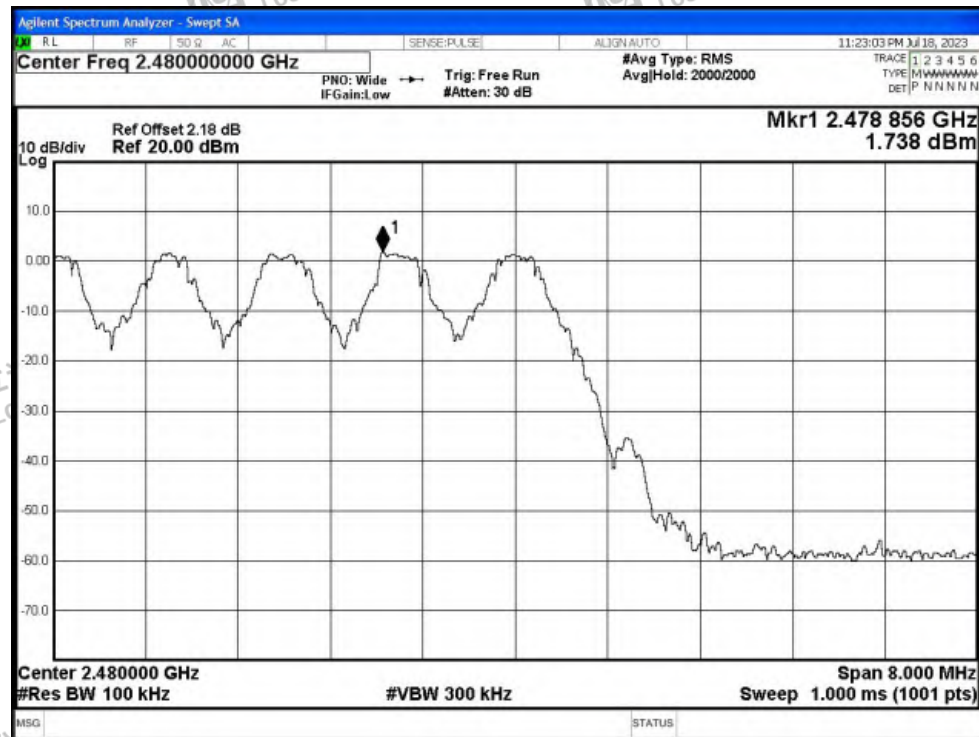

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

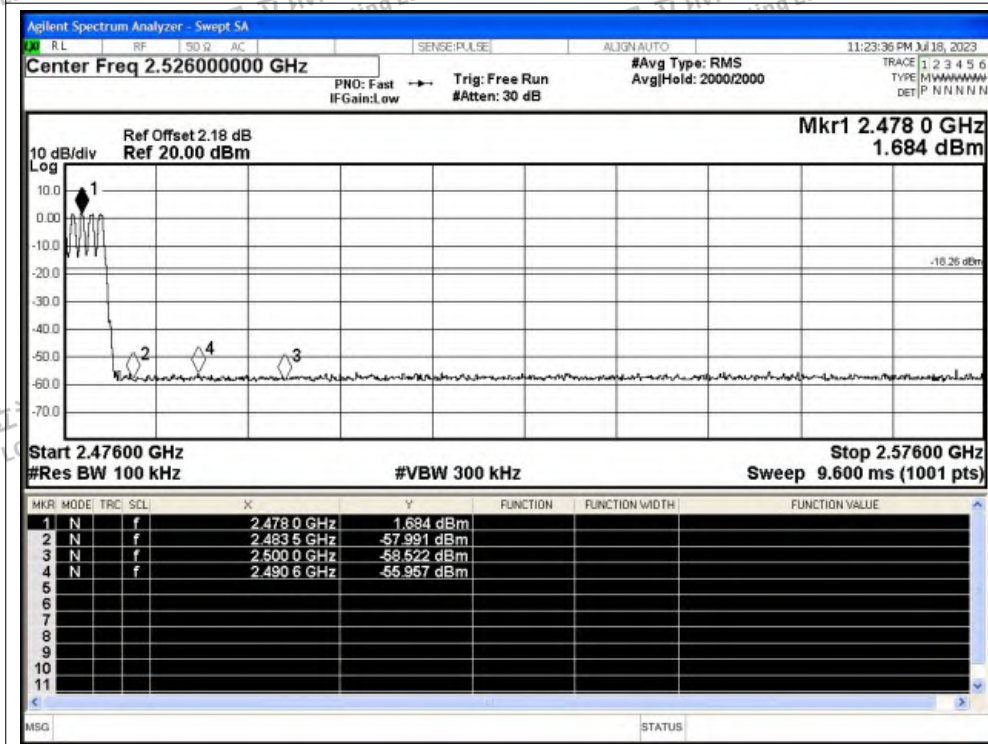




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

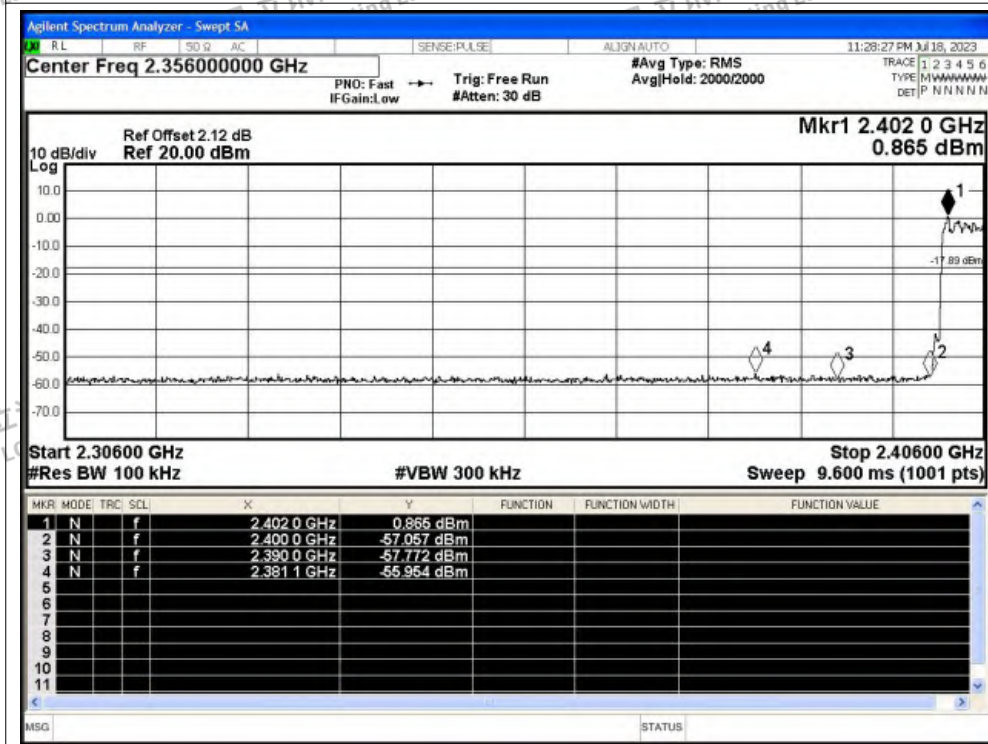




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

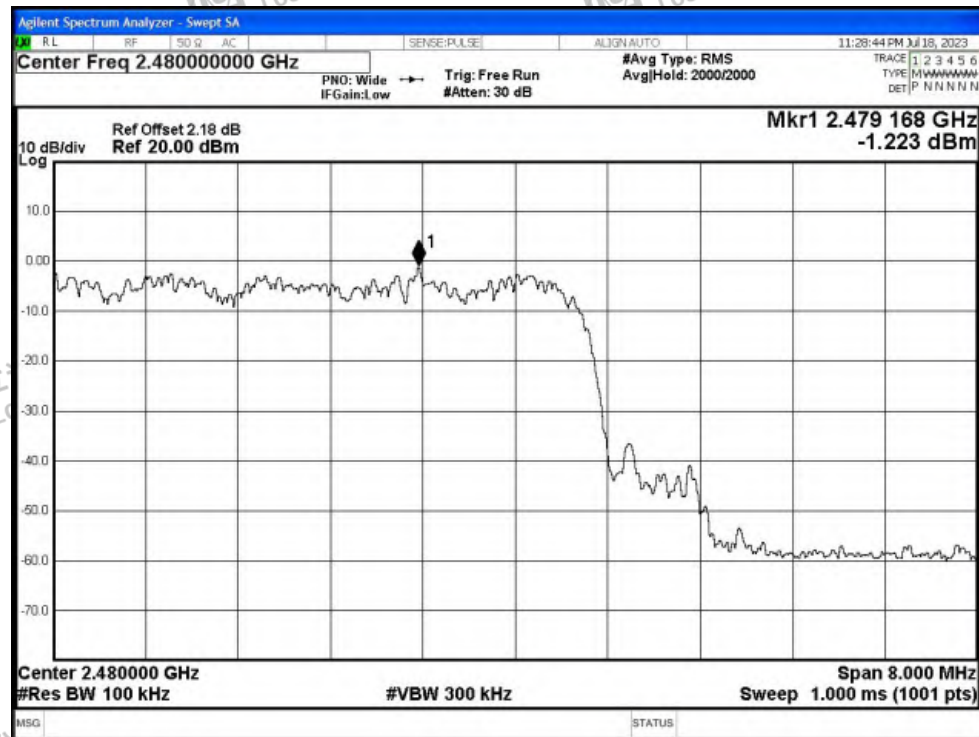

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

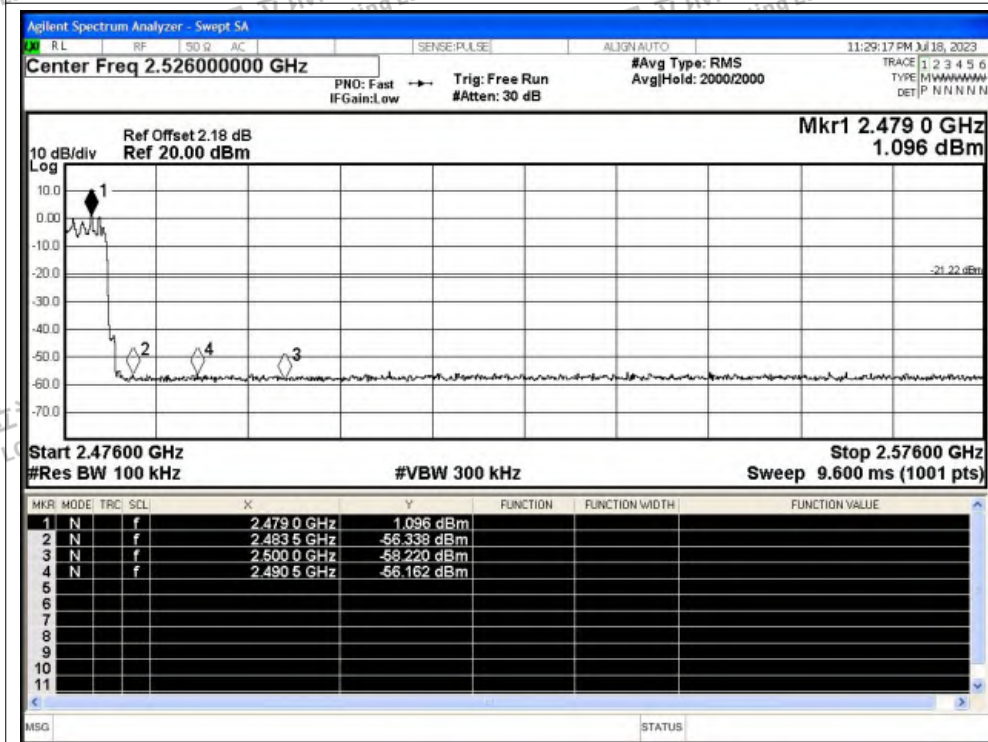




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

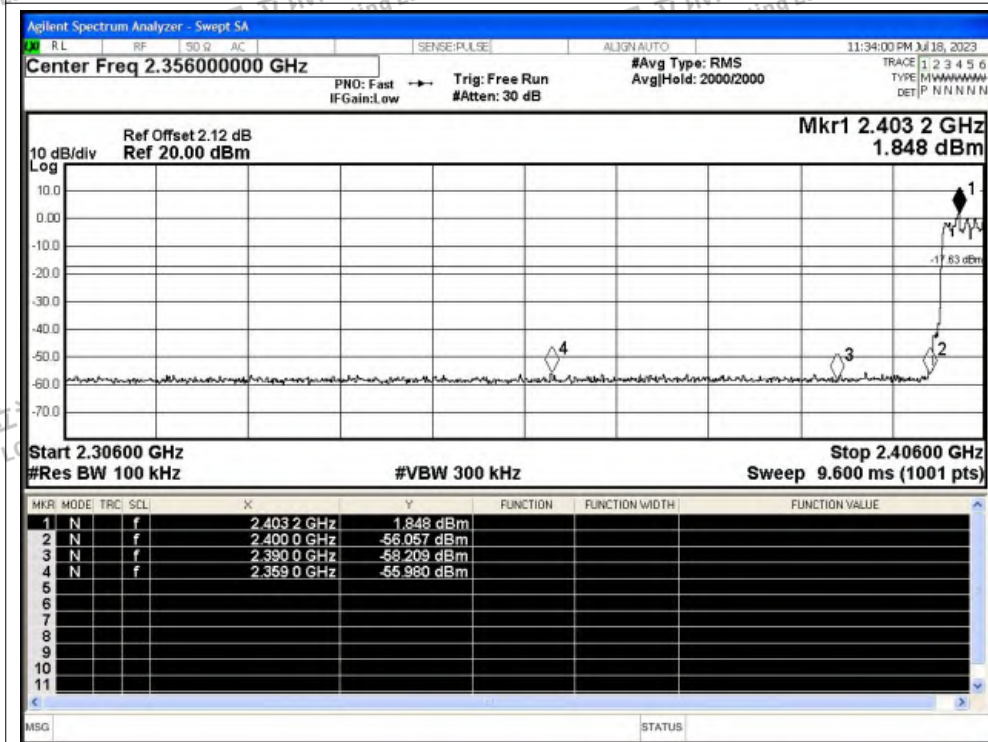




Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

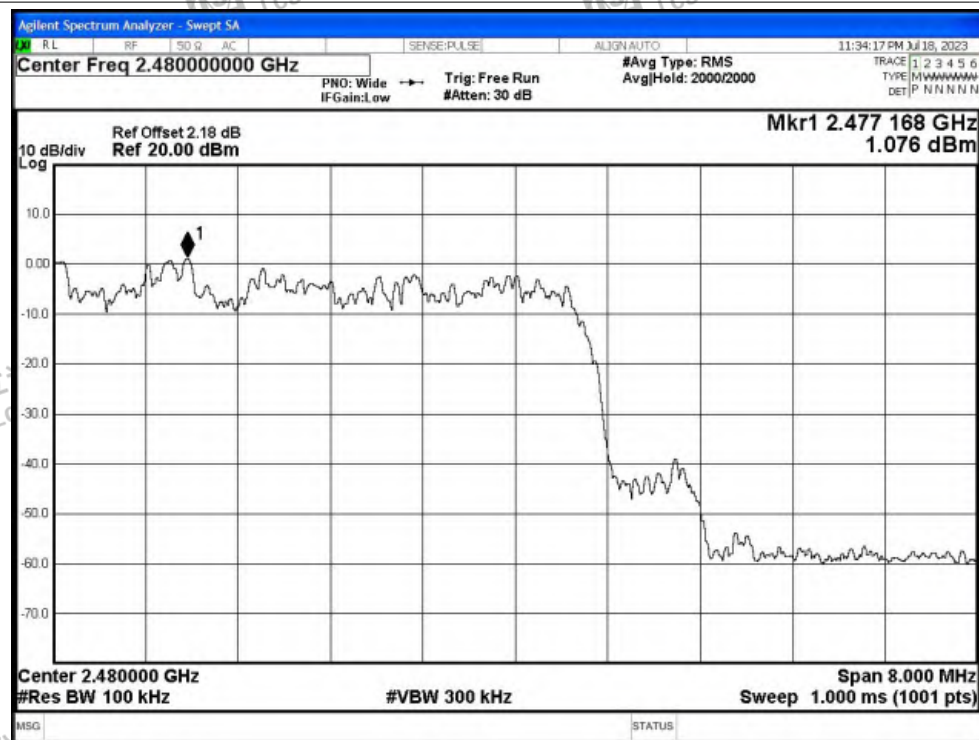

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

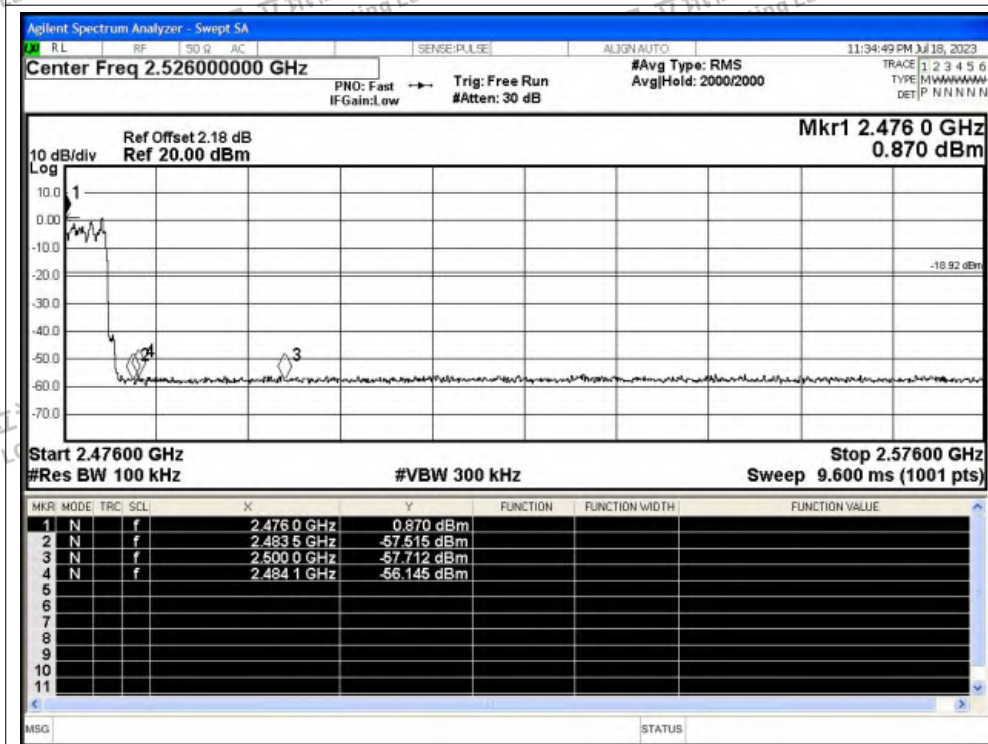



A.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-57.04	-20	Pass
NVNT	1-DH5	2441	Ant1	-59.03	-20	Pass
NVNT	1-DH5	2480	Ant1	-56.77	-20	Pass
NVNT	2-DH5	2402	Ant1	-56.61	-20	Pass
NVNT	2-DH5	2441	Ant1	-58.39	-20	Pass
NVNT	2-DH5	2480	Ant1	-55.76	-20	Pass
NVNT	3-DH5	2402	Ant1	-56.58	-20	Pass
NVNT	3-DH5	2441	Ant1	-58.13	-20	Pass
NVNT	3-DH5	2480	Ant1	-56.54	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

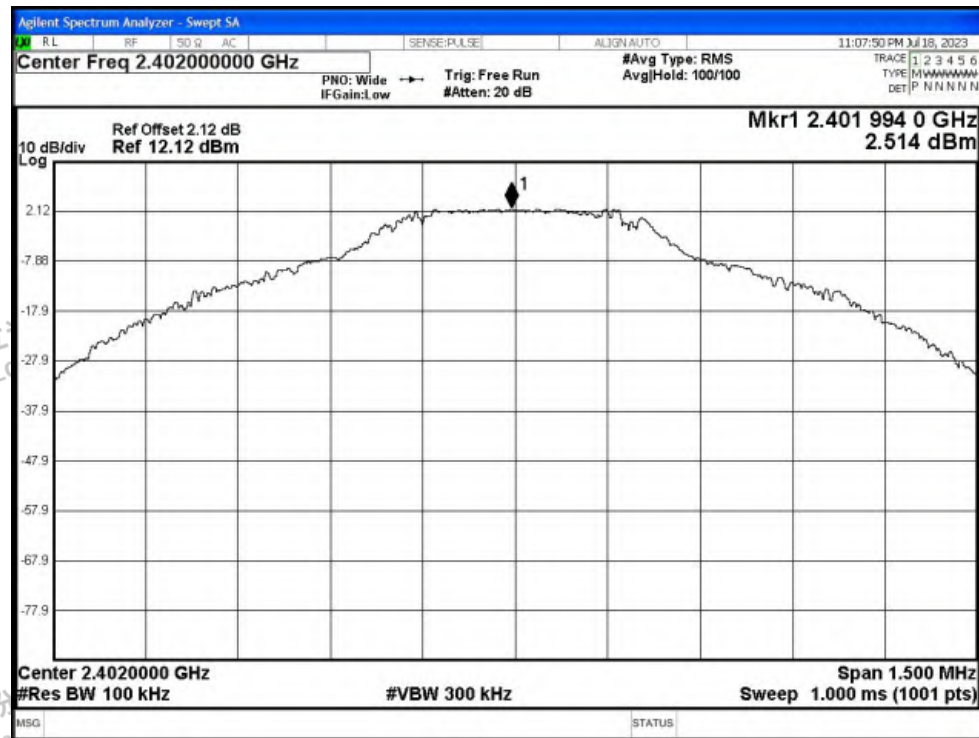


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

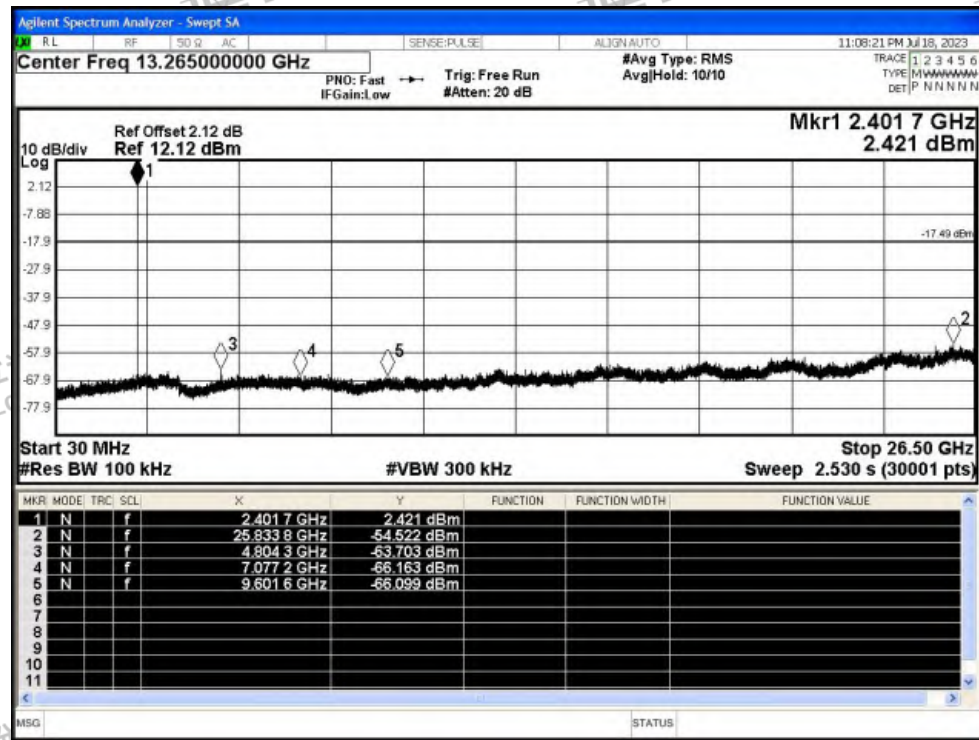




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref.

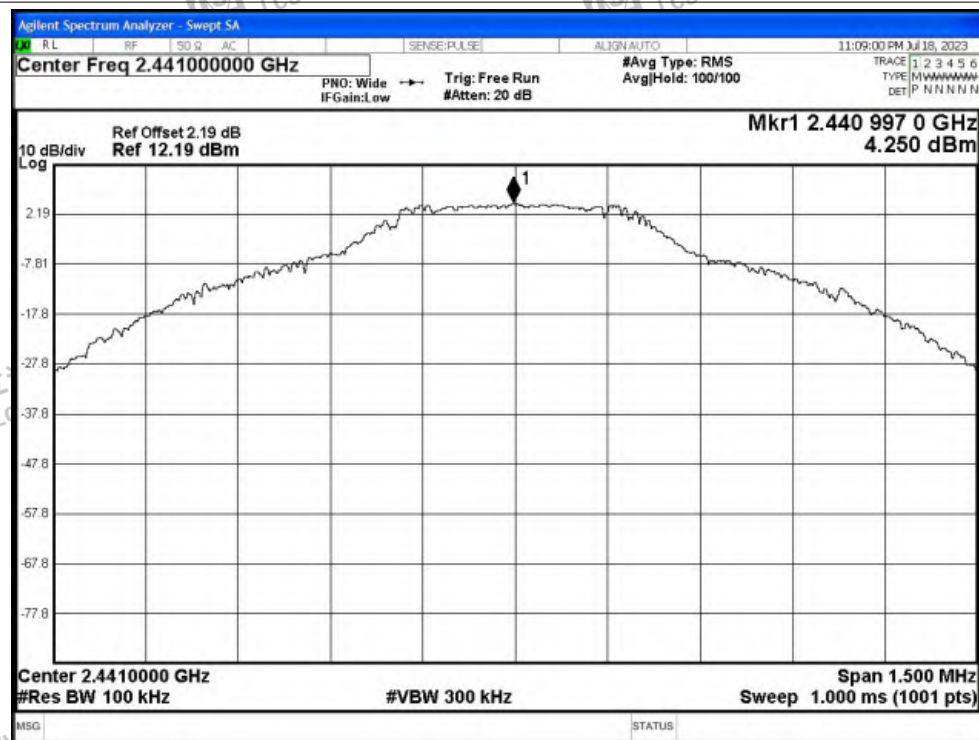


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

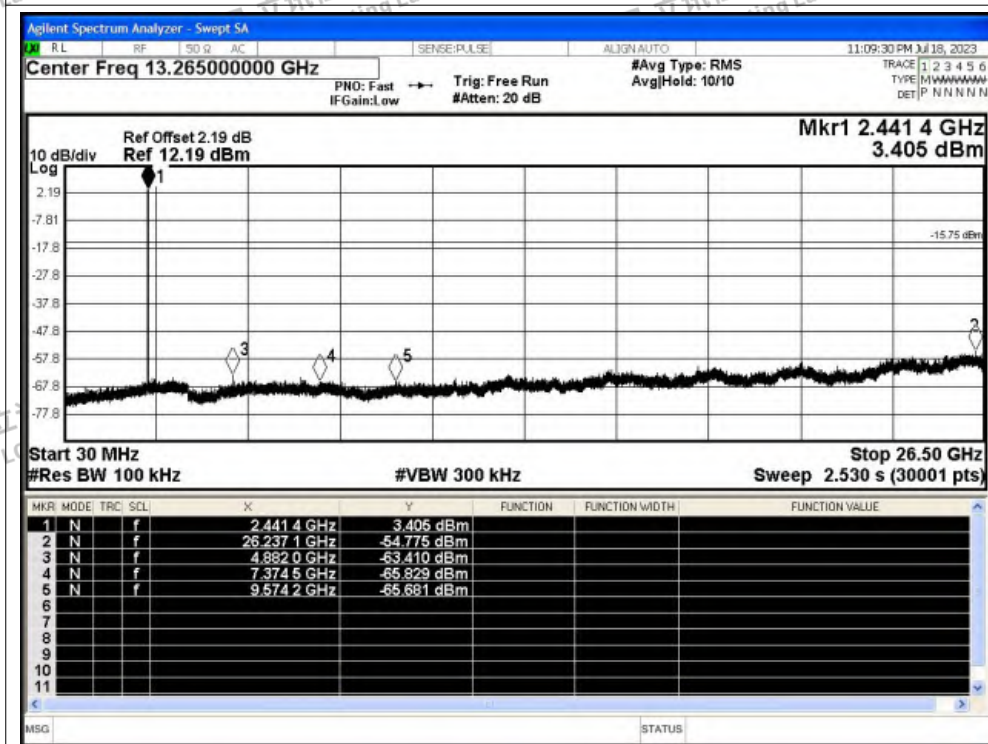




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

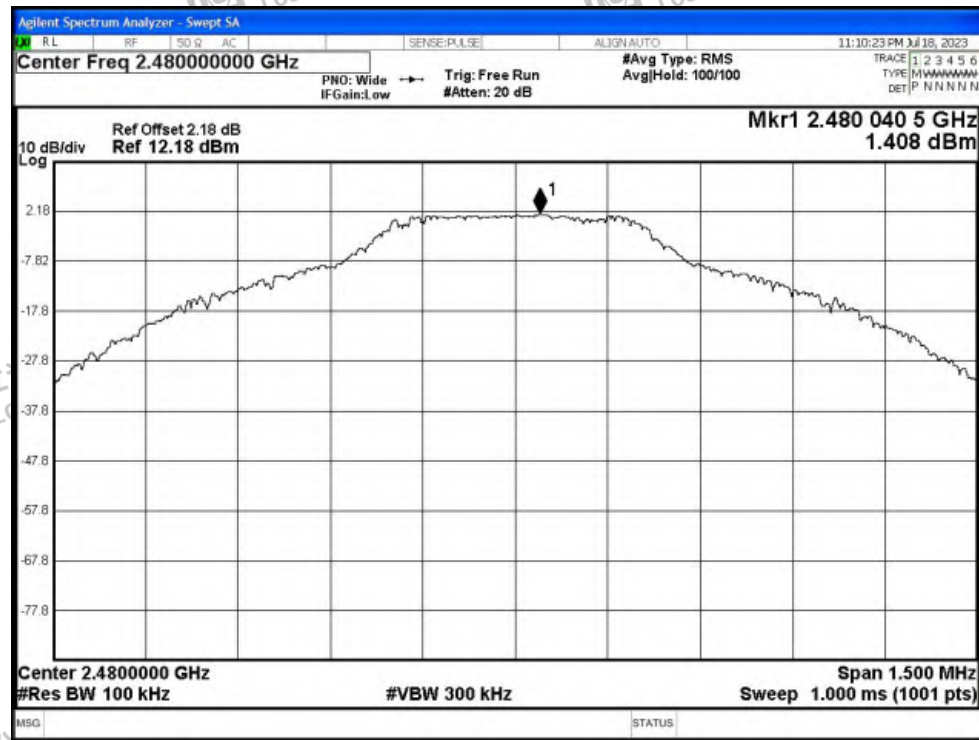

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

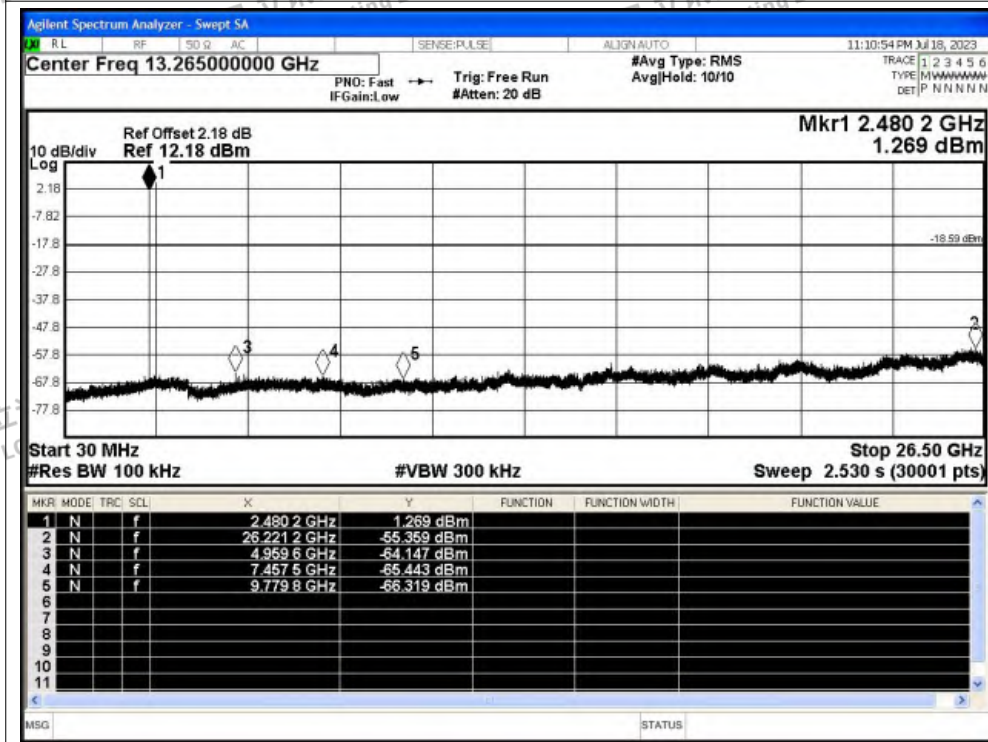

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref.

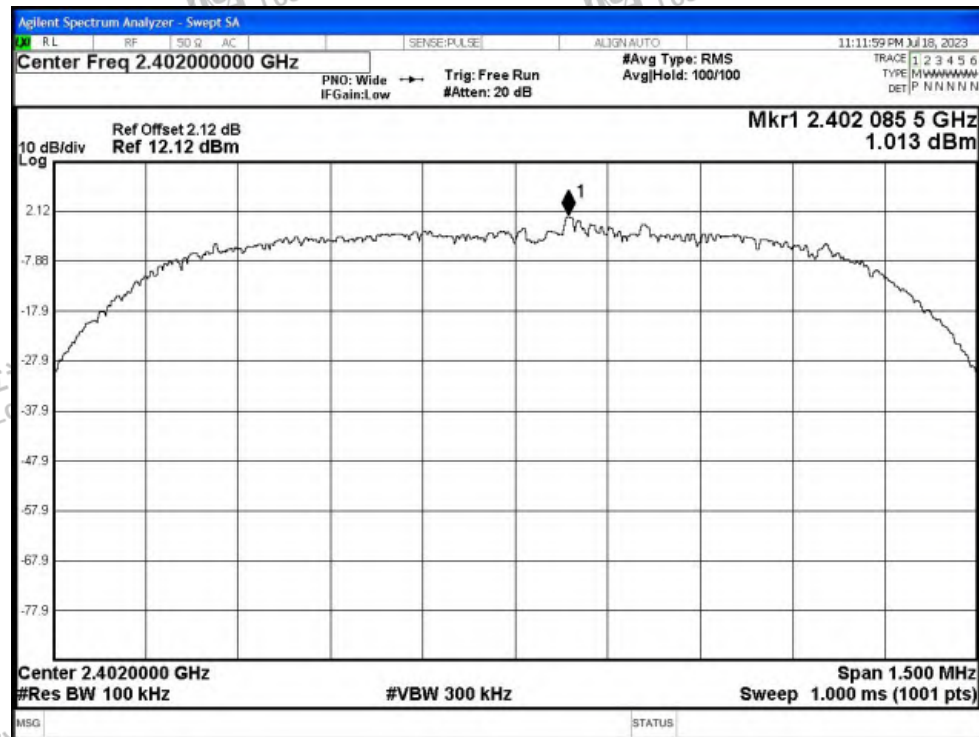


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

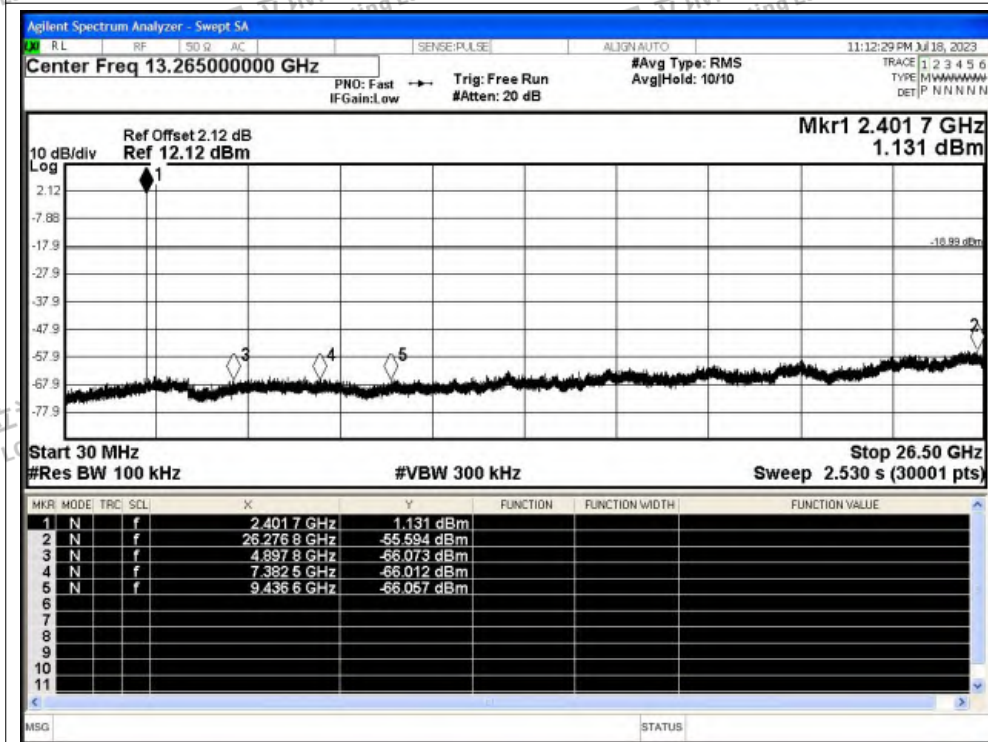




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref.

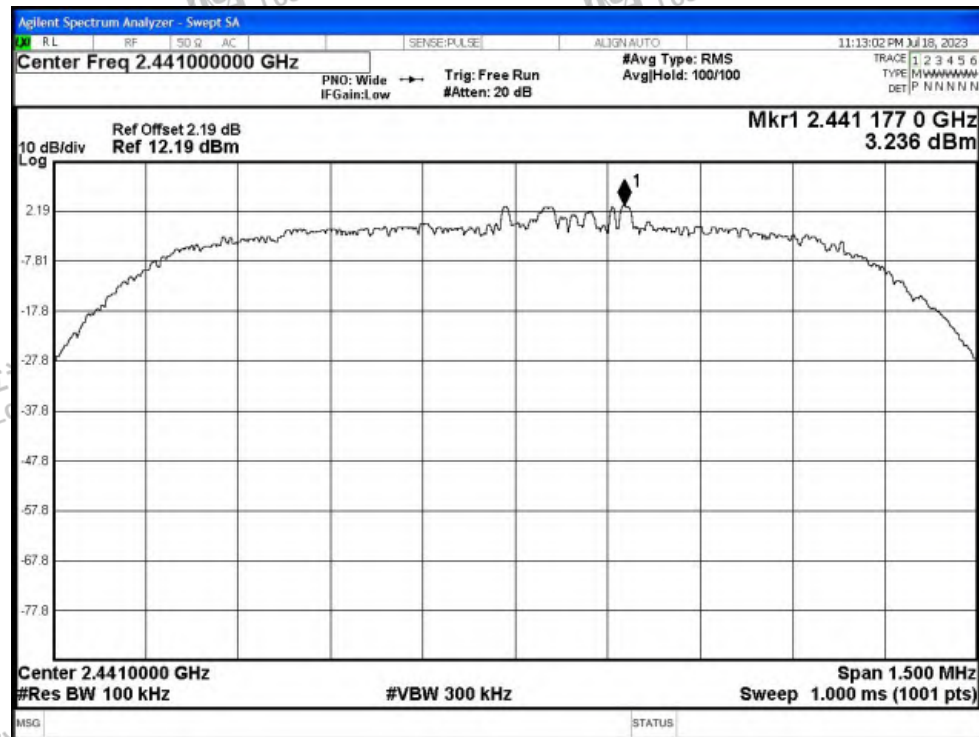


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

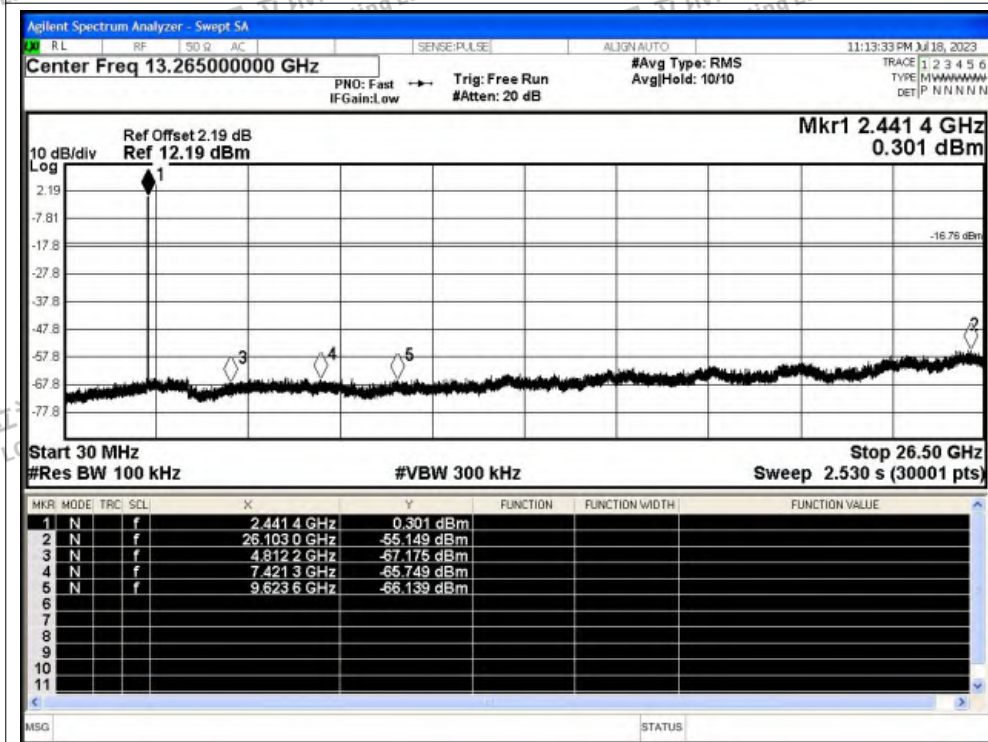


Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref.

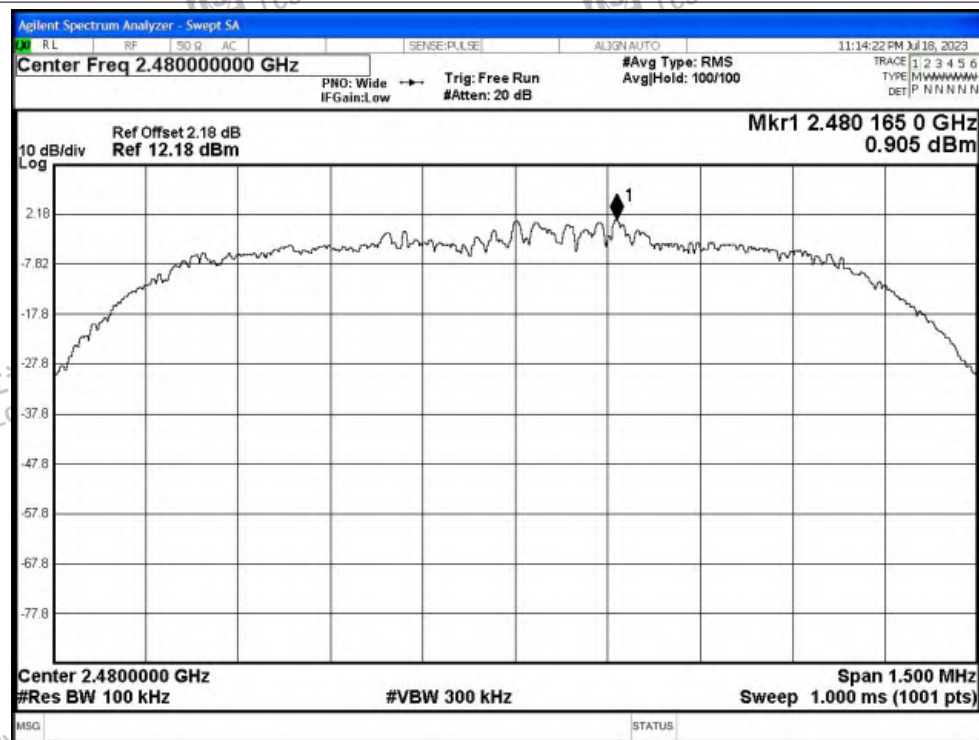


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

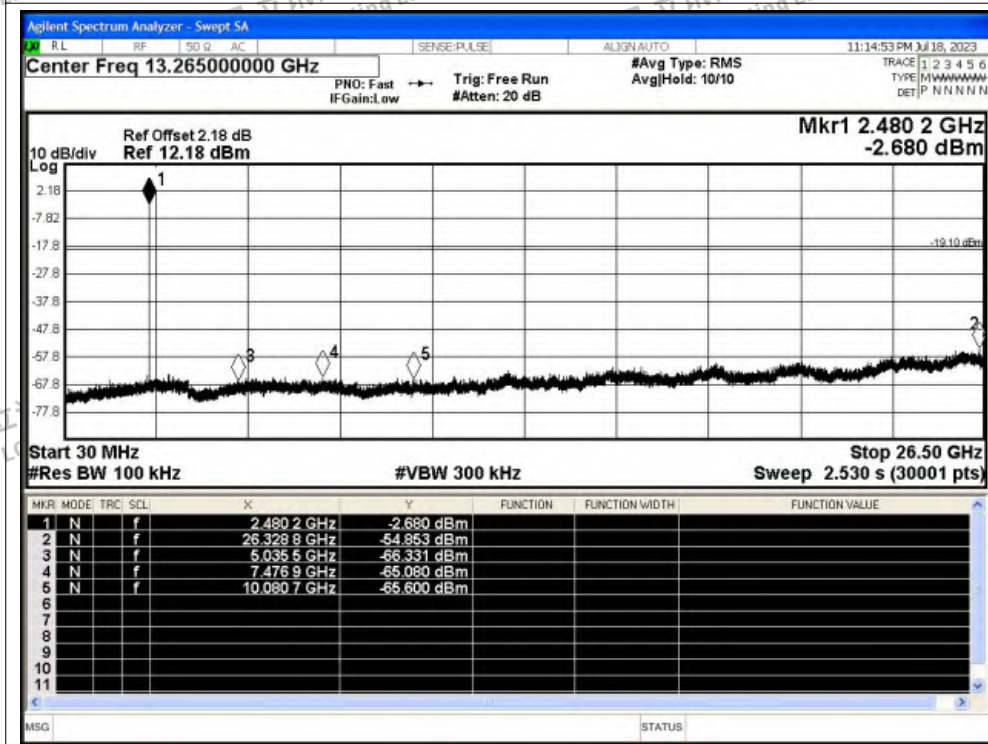




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref.

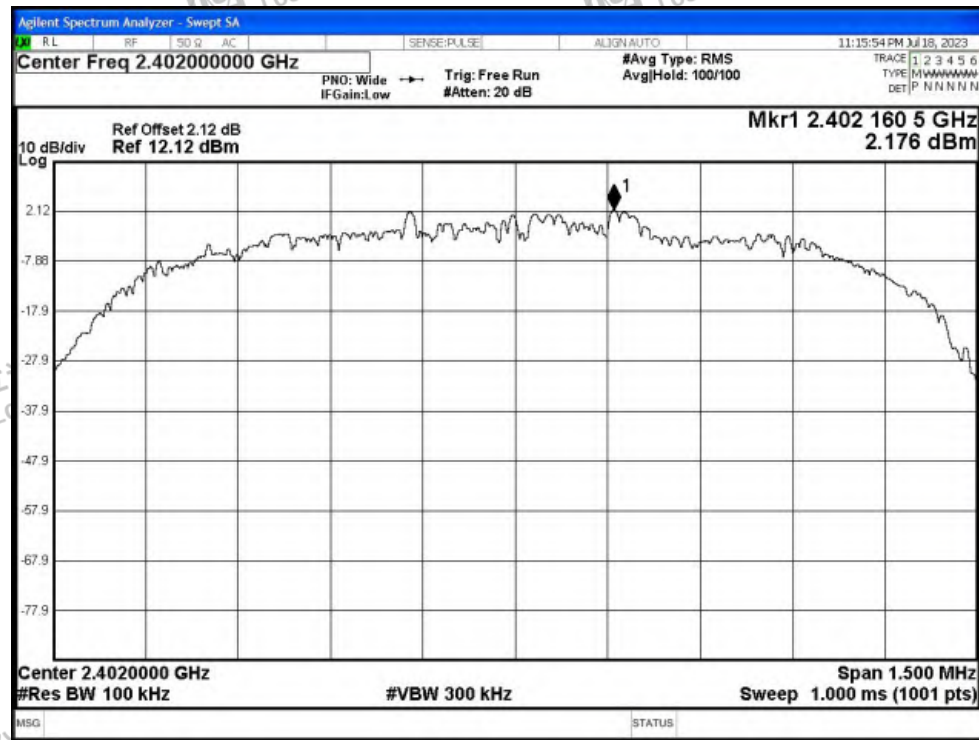

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

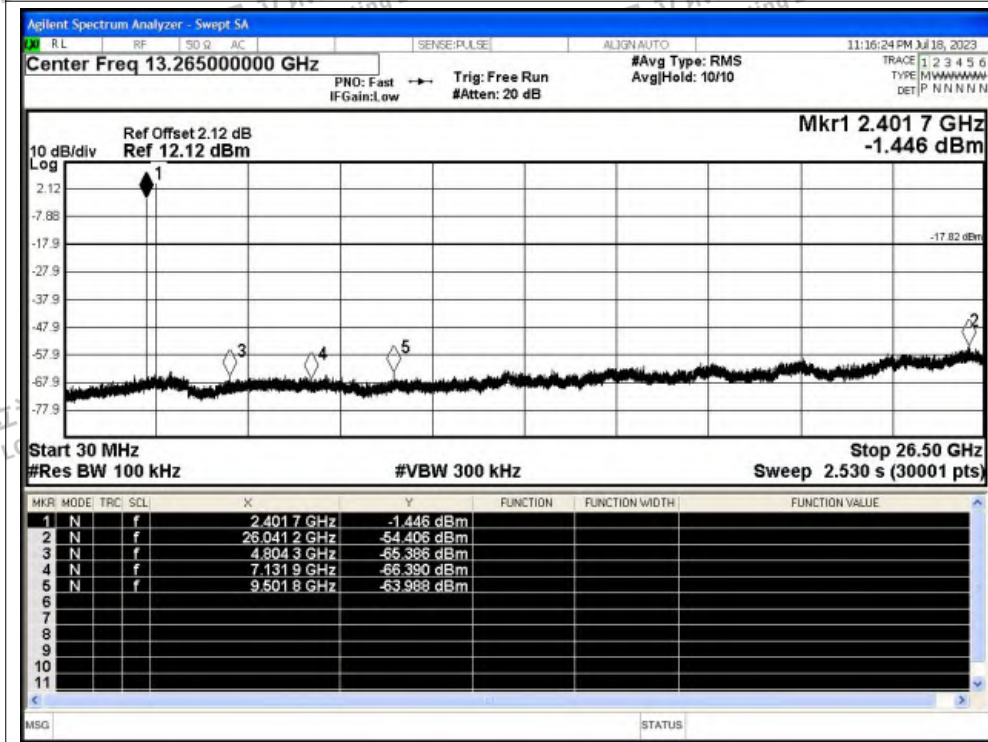




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref



Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

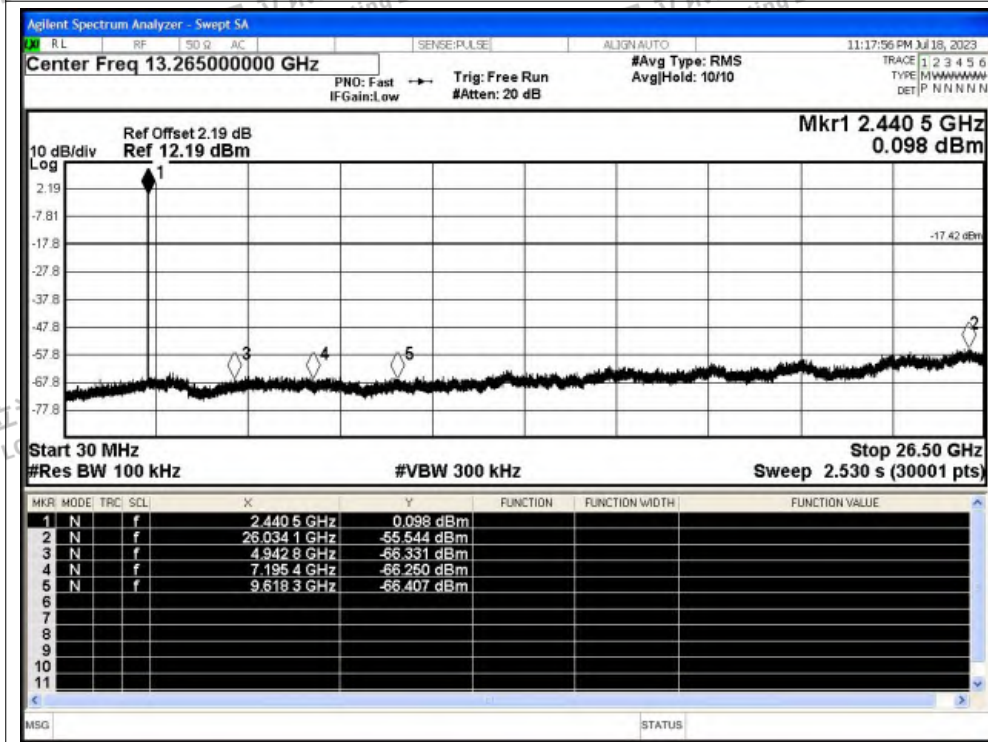




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref



Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

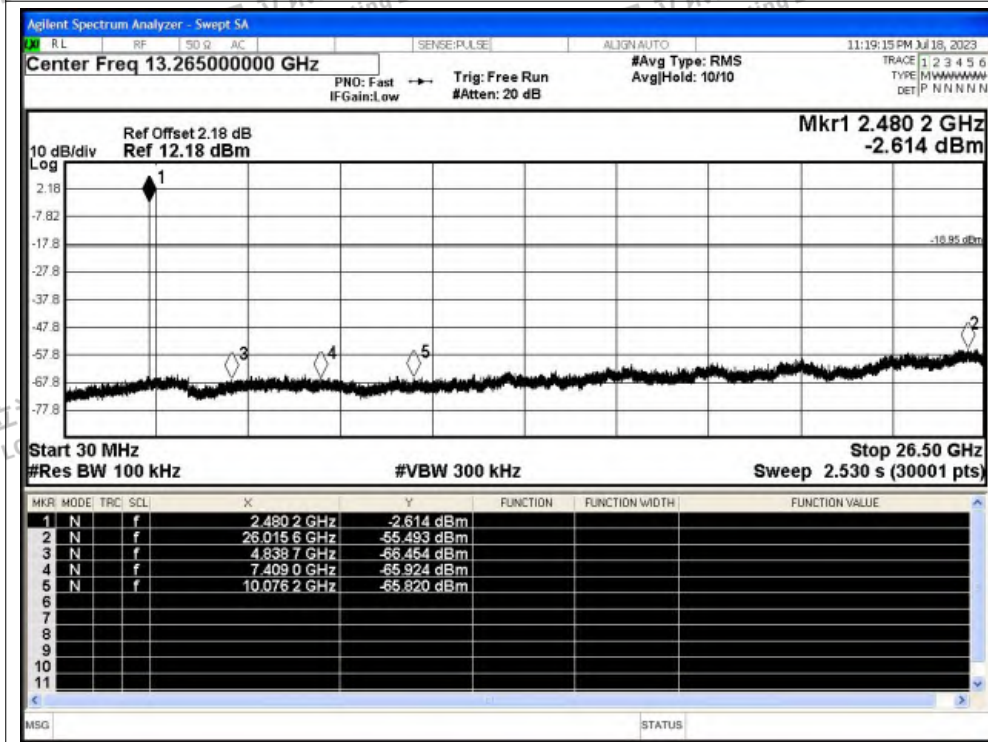

Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



A.8 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-50.55	2	46.71	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-57.91	2	39.35	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2383.536	-47.49	2	49.77	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2388.336	-57.49	2	39.77	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-50.34	2	46.92	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-57.5	2	39.76	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-51.18	2	46.08	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-54.86	2	42.4	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2485.048	-46.82	2	50.44	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.512	-54.86	2	42.4	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-49.85	2	47.41	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-57.35	2	39.91	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-50.89	2	46.37	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-58	2	39.26	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2384.4	-47.58	2	49.68	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2384.304	-57.46	2	39.8	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-51.29	2	45.97	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-57.52	2	39.74	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-49.3	2	47.96	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-54.66	2	42.6	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2487.736	-46.79	2	50.47	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.512	-54.66	2	42.6	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-49.19	2	48.07	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-57.28	2	39.98	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-50.38	2	46.88	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-57.99	2	39.27	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2369.328	-47.29	2	49.97	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2386.608	-57.48	2	39.78	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-50.32	2	46.94	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-57.61	2	39.65	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-49.93	2	47.33	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-54.66	2	42.6	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2489.32	-46.57	2	50.69	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.512	-54.66	2	42.6	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-50.43	2	46.83	Peak	74	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-57.36	2	39.9	Average	54	Pass
------	-------	------	------	------------	------	--------	---	------	---------	----	------



Test Graphs

Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Peak

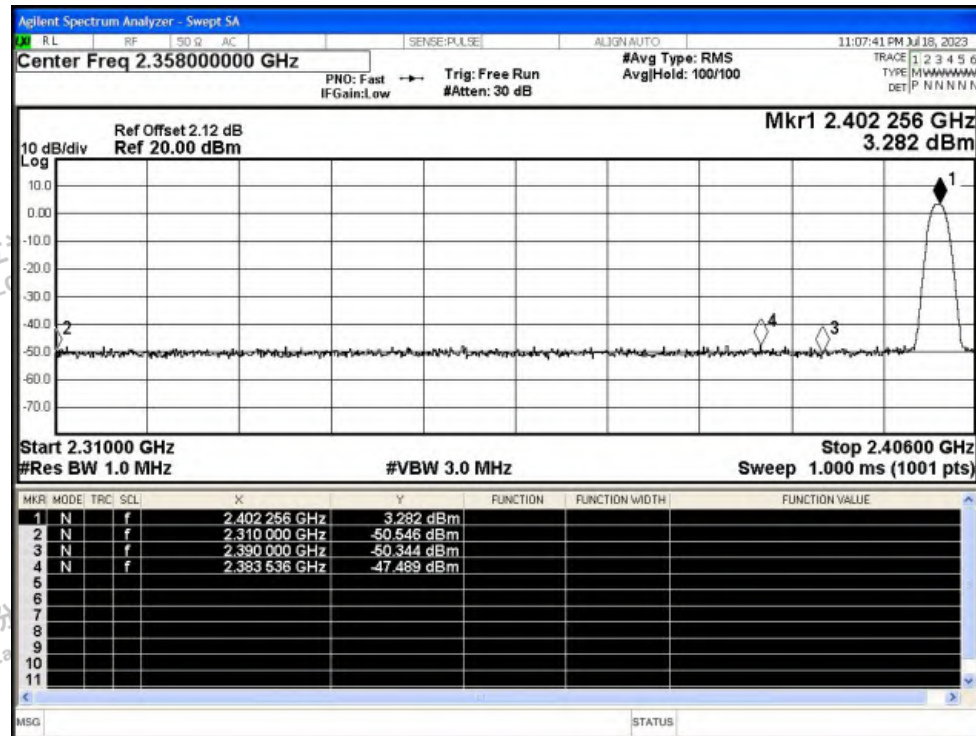

Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Average




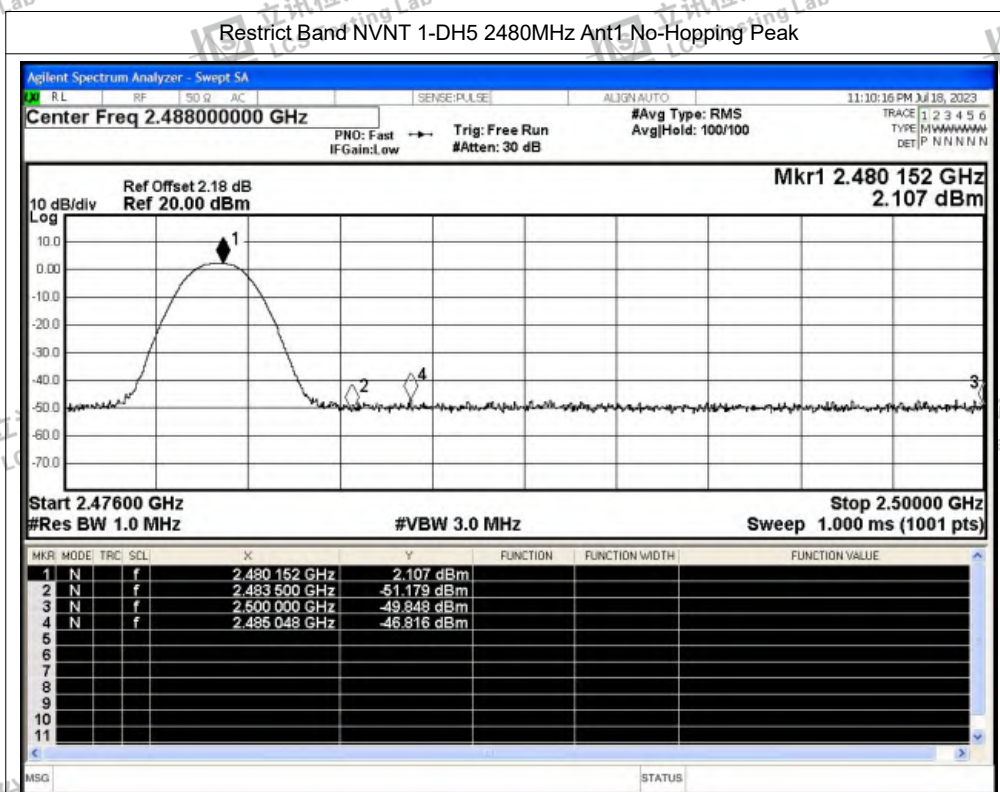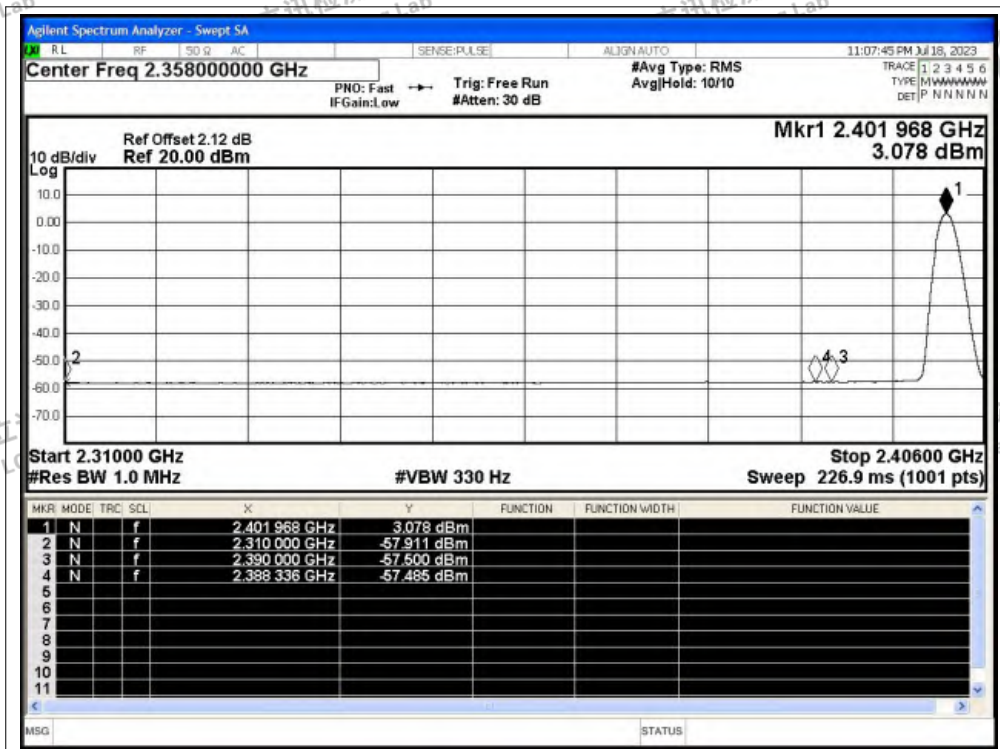

Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Average




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

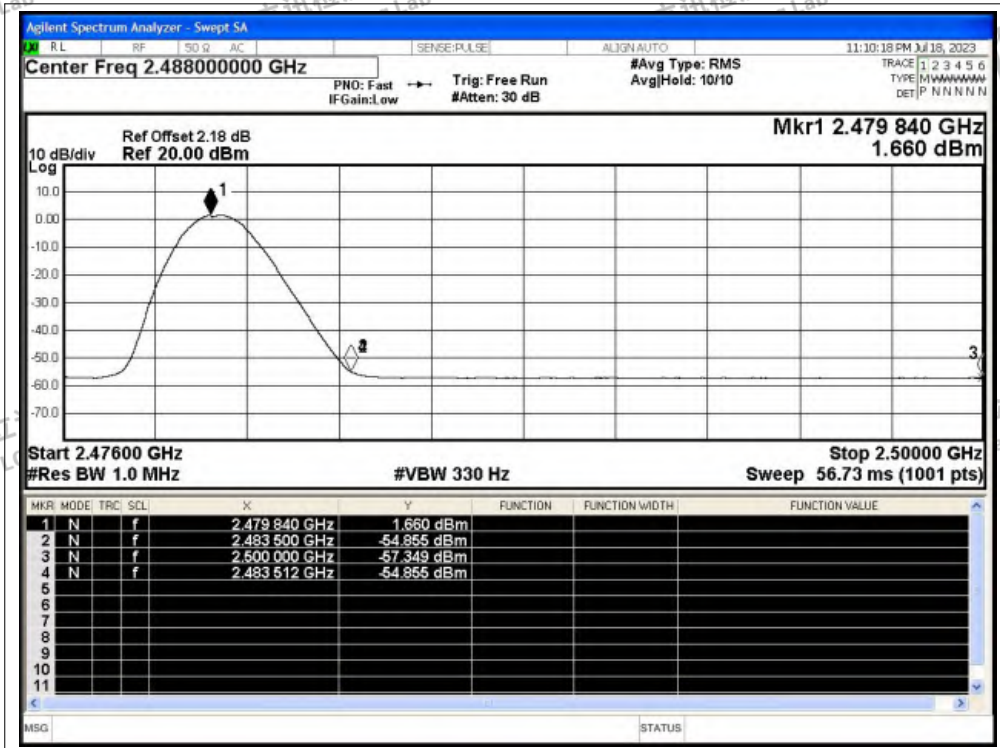




Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Peak

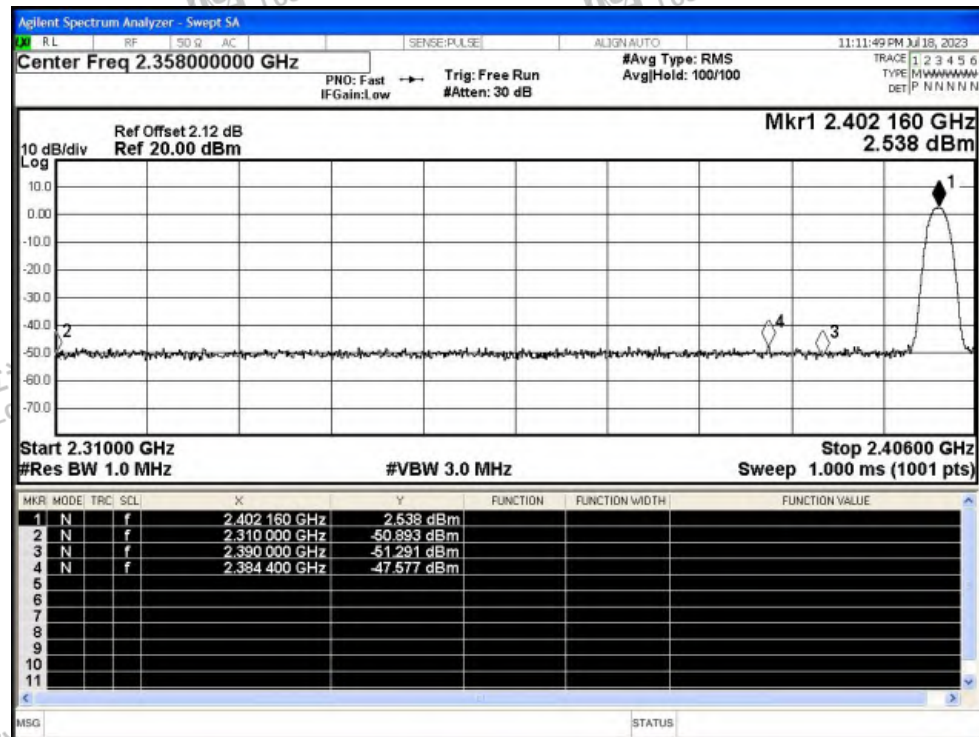


Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Average

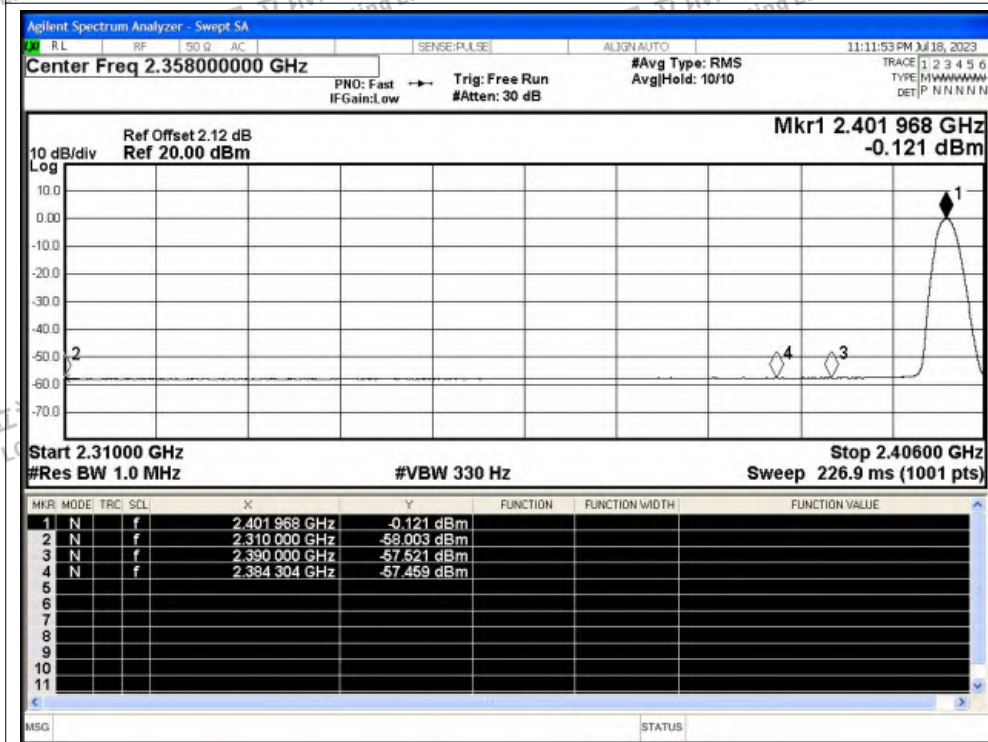




Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Peak

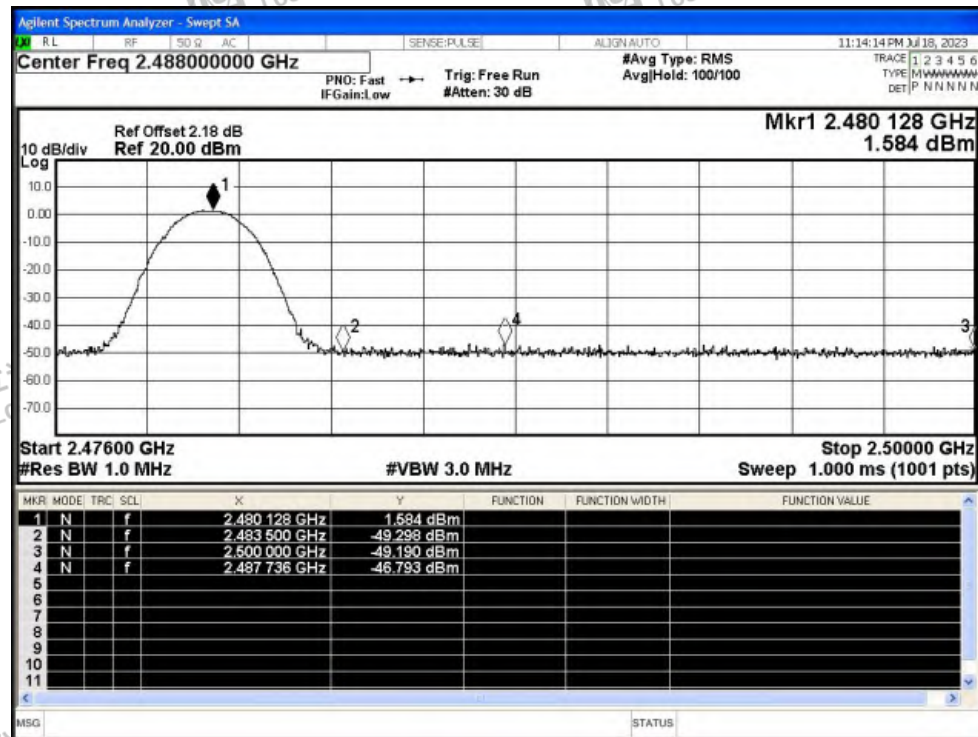


Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Average

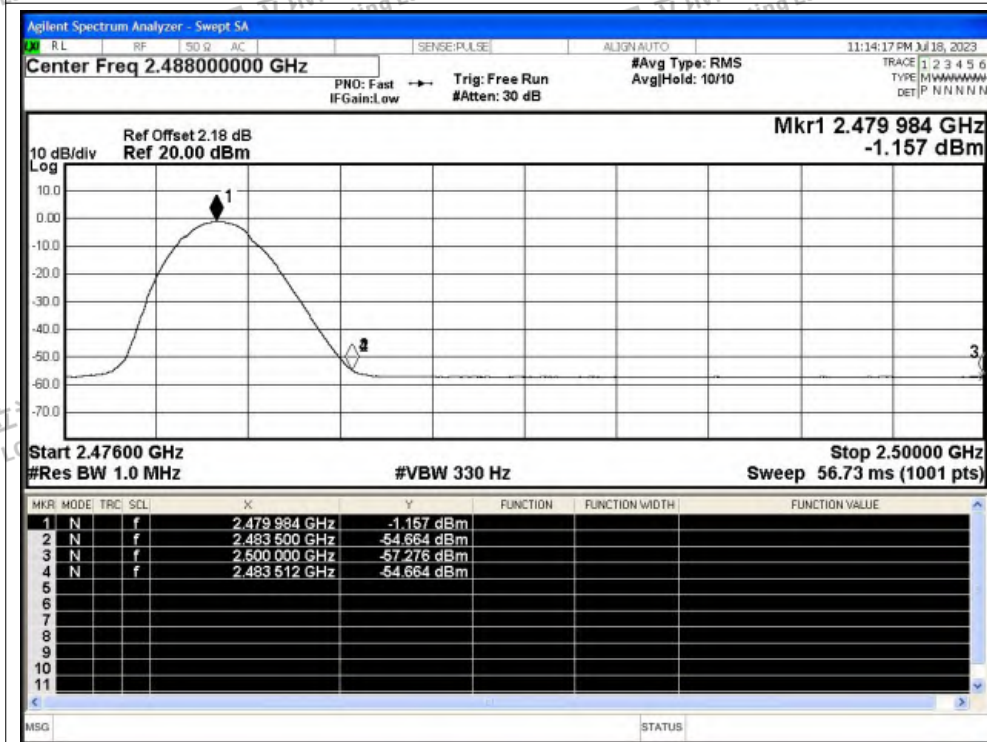




Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Peak

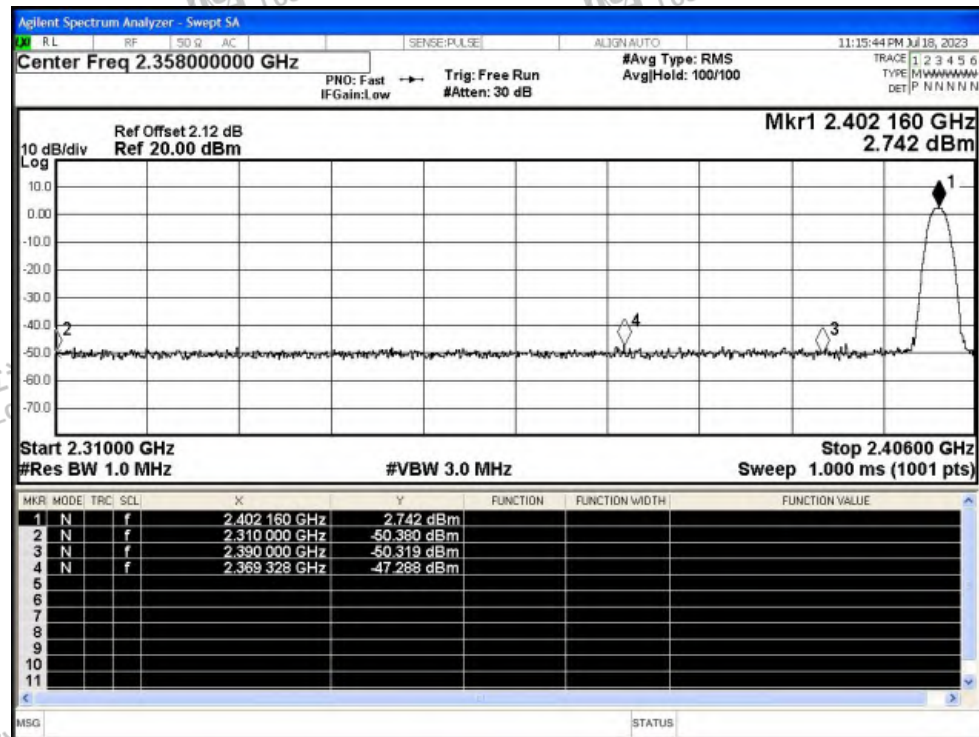


Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Average

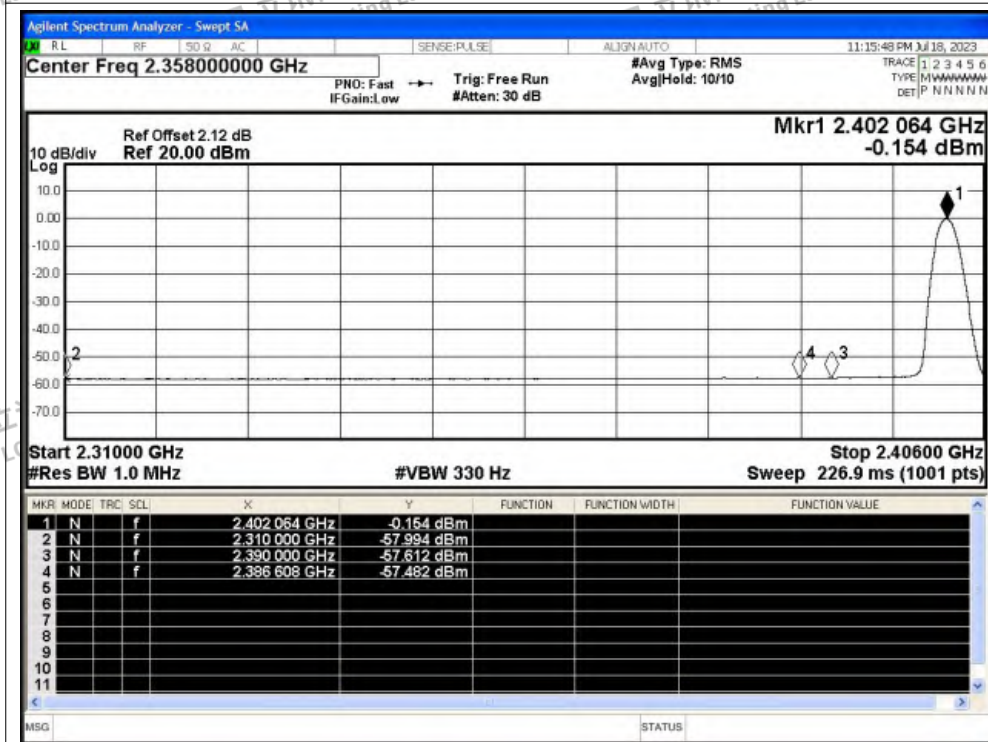



Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Peak

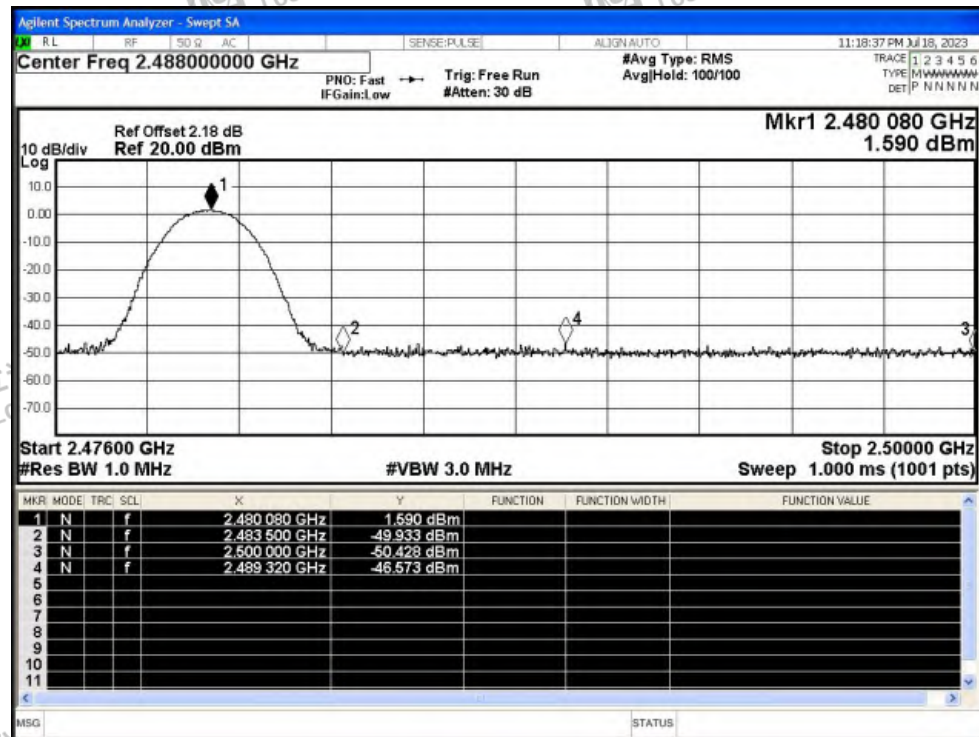

Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Average

